

客戶名稱 : 系統電子
CUSTOMER

Documnet No.: ENS000160400

Approval Sheet Rev.: A1

Spec. Rev. : P1

承認書

APPROVAL SHEET

產品品名/Product Model No. : WA-M-LB-01-128(WIFI Aux)

客戶料號/Customer No. : 354-0302020-021

案名/Model Name: Butterfly

發行日期/ Issue Date : 2022/1/24

承認日期/ Approved Date :

Approved by customer: (signing or stamping here)

簡弘期 李政輝
2022/1/25 2022.01.25



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

■ 350 苗栗縣竹南鎮公義里11鄰科義街11號 □ 428 台中市大雅區科雅路27號4樓

電話 : 037-585-555

電話 : 04-2560-6555

傳真 : 037-585-511

傳真 : 04-2560-5151

No. 11, Ke-Yi St., Chunan, Miaoli 350,
Taiwan, R.O.C.

4F, No. 27, Keya Road, Daya Dist., Taichung City
428, Taiwan, R.O.C.


Tel. : +886-37-585-555

Tel. : +886-4-25606555

Fax : +886-37-585-511

Fax : +886-4-25605151

1. Explanation of part number :

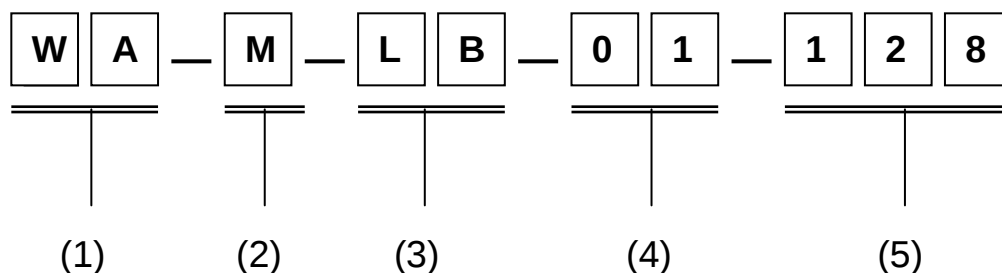

- (1) Product type : Wireless Antenna
- (2) Material : Metal
- (3) Frequency : 2400~2500;5150~5850 MHz
- (4) Coaxial Cable Type : White Coaxial Cable
- (5) Suffix : 128

2. Electrical Specification :

Those specifications were specially defined for **Butterfly** model, and all characteristics were measured under the model's handset testing.

2-1. Frequency Band :

Band Type	Frequency (MHz)
Dual-Band	2400-2500;5150~5850 MHz

2-2. Impedance :

50 ohm nominal


2-3. Matching circuit :

None

UNLESS OTHER SPECIFIED TOLERANCES ON :			INPAQ TECHNOLOGY CO., LTD.	
$X=\pm$ $X.X=\pm$ $X.XX=\pm$ $ANGLES=\pm$ $HOLEDIA=\pm$				
SCALE : N/A		UNIT : mm		
DRAWN BY:周敬晨		CHECKED BY:鄭榮謀		
DESIGNED BY:林易暄		APPROVED BY:張建焜		
TITLE : Embedded Dual-Band Antenna for WA-M-LB-01-128		DOCUMENT NO.	ENS000160400	SPEC REV
				P1

2-4. Return loss/VSWR :

Frequency(MHz)	2400	2450	2500	5150	5850
Aux VSWR(dB)	1.49	1.27	1.06	1.71	1.76

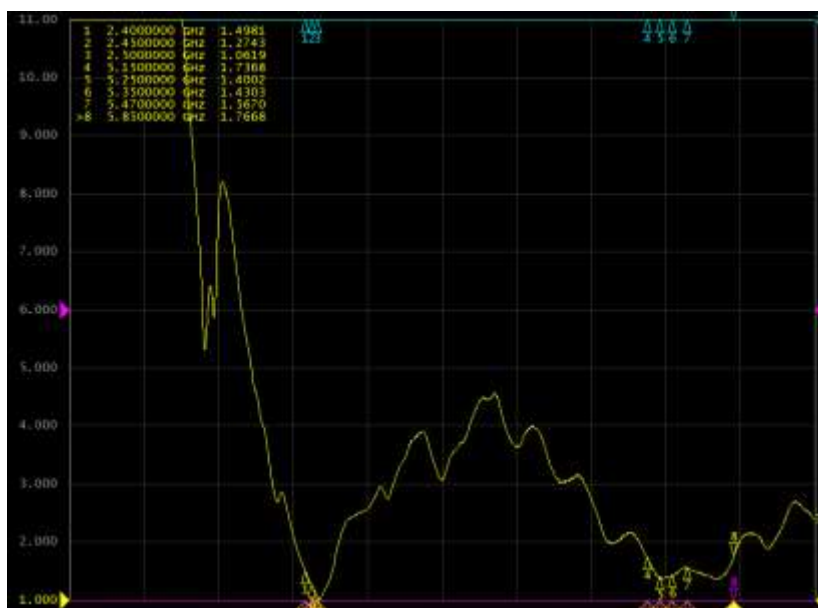

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : Embedded Dual-Band Antenna for
WA-M-LB-01-128

DOCUMENT
NO.

ENS000160400

SPEC REV.
P1

3. Antenna Drawing :

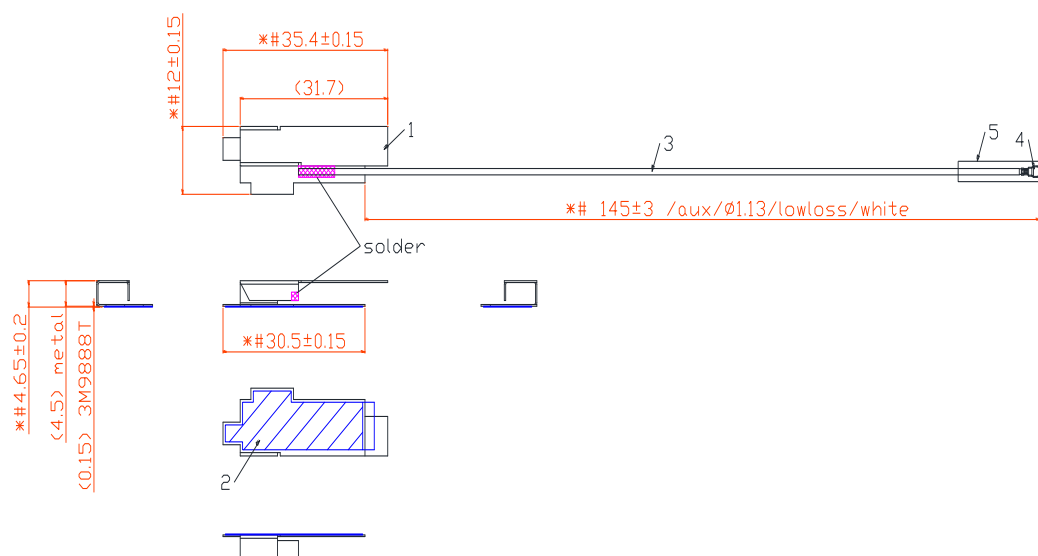

NOTE:

1. 工程圖上 * 為重點尺寸標註指示
Mark * are the key dimensions.
2. 工程圖上 # 為Cpk量測尺寸標註指示
Mark # are CPK dimensions.

REV.P3

ITEM	DESCRIPTION	MATERIAL SPECIFICATION	QUANTITY	UNIT	Supplier	UL File NO.
1	Metal	35.4x12x4.5mm	1	PCS	HA0278	N/A
2	Adhesive (3M9888T)	29.5x10.4x0.15mm	1	PCS	HA0026	N/A
3	Cable	OD 1.13 Low Loss White	1	PCS	HA0008	E318898
4	Connector	I-PEX MHF4-L I-PEX Equivalent(compatible)	1	PCS	HA0063	E213445
5	Tube	OD1.5*20mm	1	PCS	HA0059	N/A

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易喧

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Dual-Band Antenna for
WA-M-LB-01-128

DOCUMENT
NO.

ENS000160400


SPEC REV.
P1

4. Gain and Radiation Pattern

4-1.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-1.2 Chamber definition

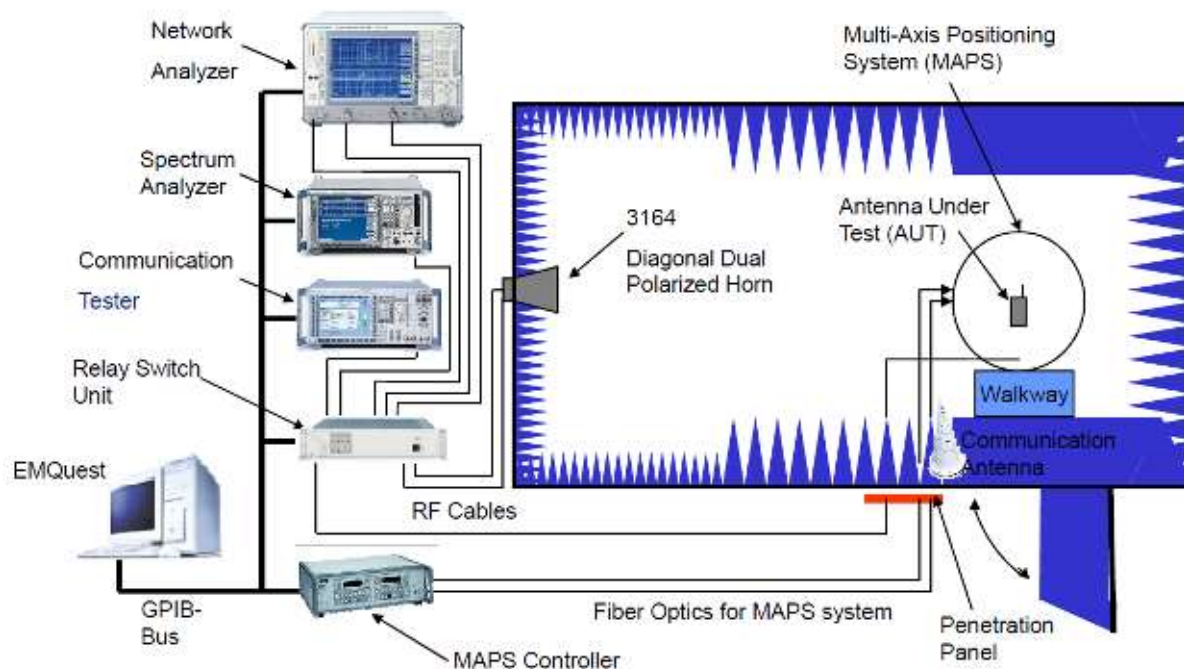

1. An anechoic chamber (10mx3mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quiet room region is 50cmx50cmx50cm at the center of rotator
3. The distance between DUT and standard antenna is 9.14m
4. Two measurement antennas is 3164-06 (300MHz - 6GHz) and 3164-05 (2 - 18GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Dual-Band Antenna for
 WA-M-LB-01-128

DOCUMENT
 NO.

ENS000160400

SPEC REV.
 P1

4-1.3 Gain data and radiation pattern

Antenna gain is marked (dBi) and is based on **STANDARD HORN** antenna. The data shows Peak-Gain and Efficiency.

Frequency (MHz)	Aux Gain Data	
	Peak Gain (dBi)	Efficiency (%)
2400	2.40	44.13
2450	2.68	47.19
2500	2.33	48.4
5150	3.56	40.32
5250	3.37	41.52
5350	4.10	43.09
5470	4.19	48.44
5600	3.50	45.71
5725	3.37	46.27
5780	3.21	47.19
5850	3.25	46.87

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Dual-Band Antenna for
WA-M-LB-01-128


DOCUMENT
NO.

ENS000160400

SPEC REV.
P1


2400-2500MHz radiation characteristic

Aux antenna: 2400 MHz

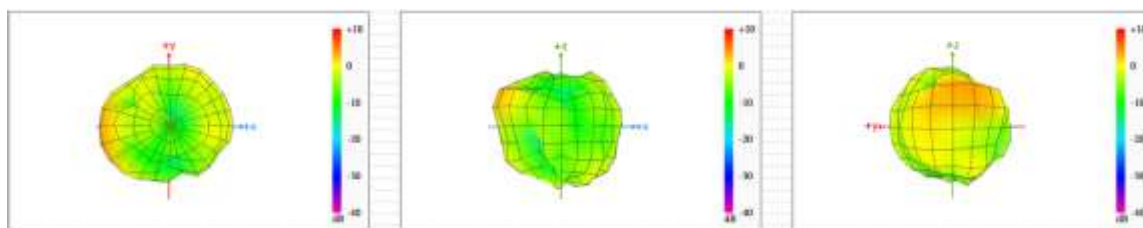


Center Frequency	2400 MHz
Three-dimensional (dBi) peak	2.40

Aux antenna: 2450 MHz

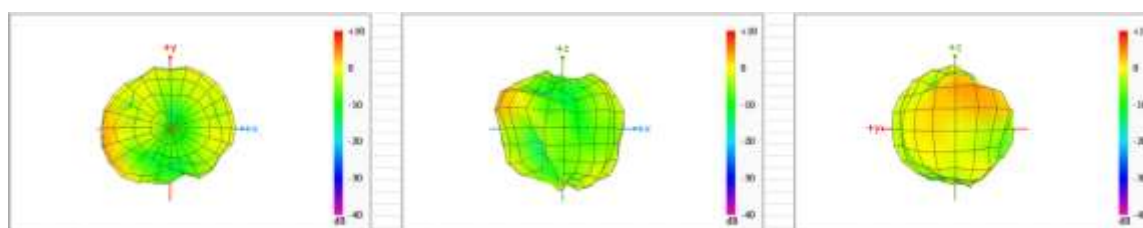

Center Frequency	2450 MHz
Three-dimensional (dBi) peak	2.68

Aux antenna: 2500 MHz

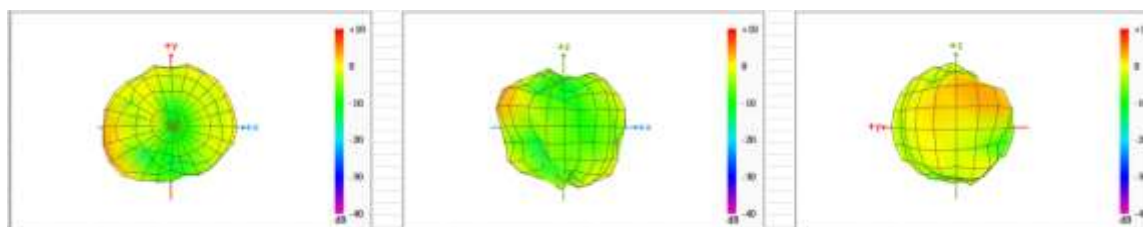

Center Frequency	2500 MHz
Three-dimensional (dBi) peak	2.33

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±

ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Dual-Band Antenna for
WA-M-LB-01-128


DOCUMENT
NO.

ENS000160400

SPEC REV.
P1


5150-5850MHz radiation characteristic

Aux antenna: 5150 MHz

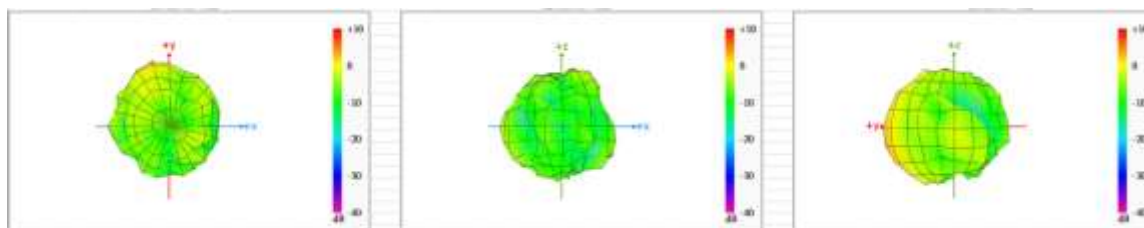


Center Frequency	5150 MHz
Three-dimensional (dBi) peak	3.56

Aux antenna: 5250 MHz

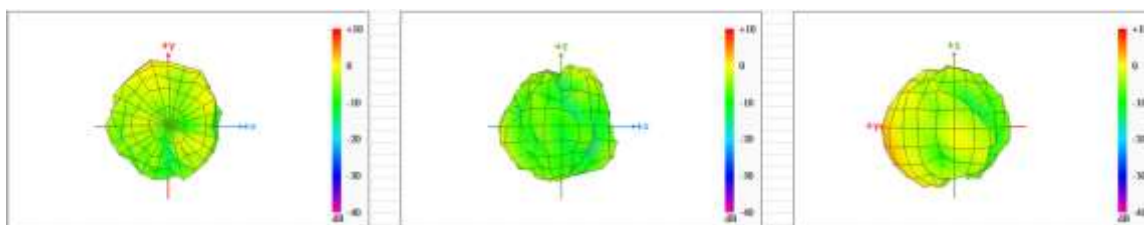

Center Frequency	5250 MHz
Three-dimensional (dBi) peak	3.37

Aux antenna: 5350 MHz

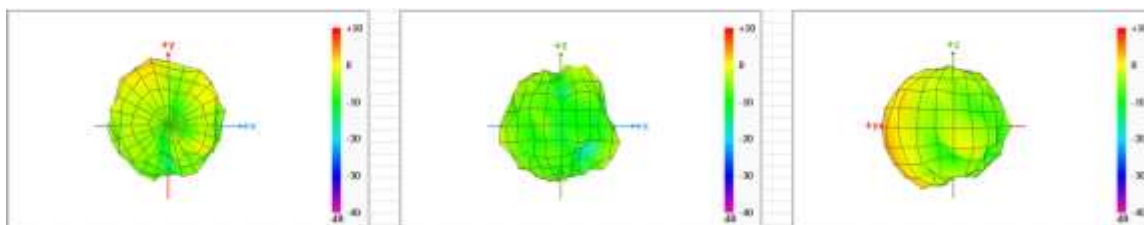

Center Frequency	5350 MHz
Three-dimensional (dBi) peak	4.10

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : Embedded Dual-Band Antenna for
 WA-M-LB-01-128

DOCUMENT
 NO.

ENS000160400


SPEC REV.
 P1

Aux antenna: 5470 MHz

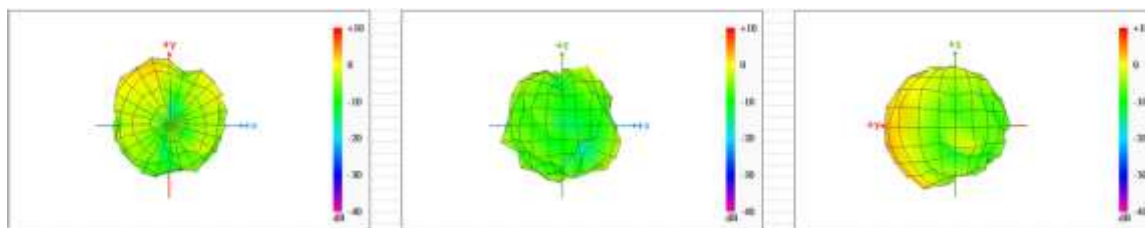


Center Frequency	5470 MHz
Three-dimensional (dBi) peak	4.19

Aux antenna: 5600 MHz

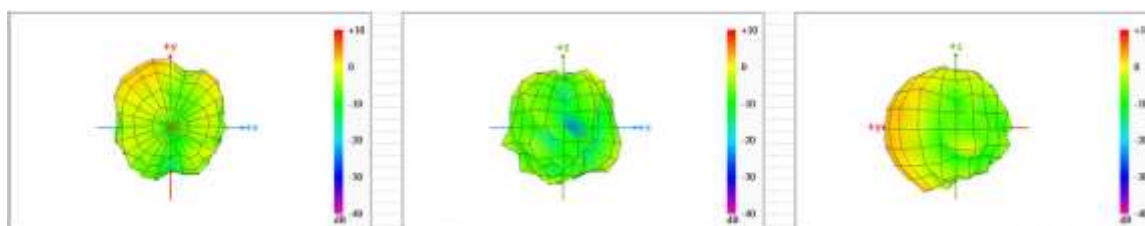

Center Frequency	5600 MHz
Three-dimensional (dBi) peak	3.50

Aux antenna: 5725 MHz

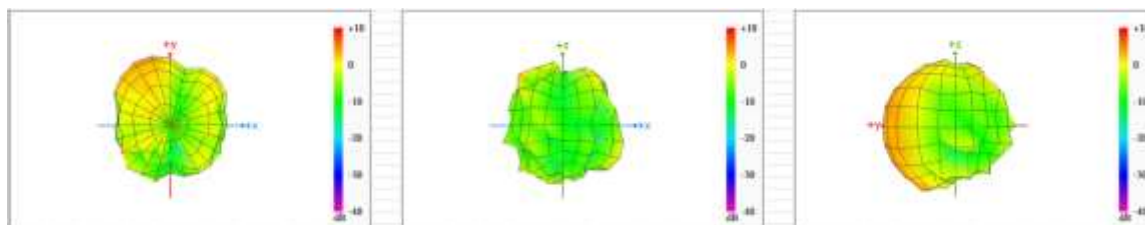

Center Frequency	5725 MHz
Three-dimensional (dBi) peak	3.37

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : Embedded Dual-Band Antenna for
 WA-M-LB-01-128

DOCUMENT
 NO.

ENS000160400


SPEC REV.
 P1

Aux antenna: 5785 MHz

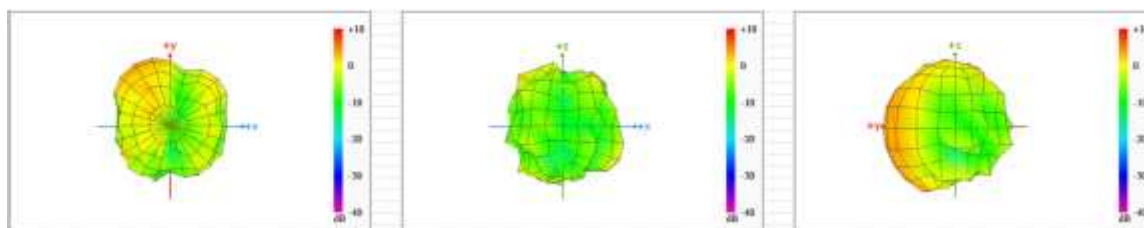

Center Frequency	5785 MHz
Three-dimensional (dBi) peak	3.21

Aux antenna: 5850 MHz

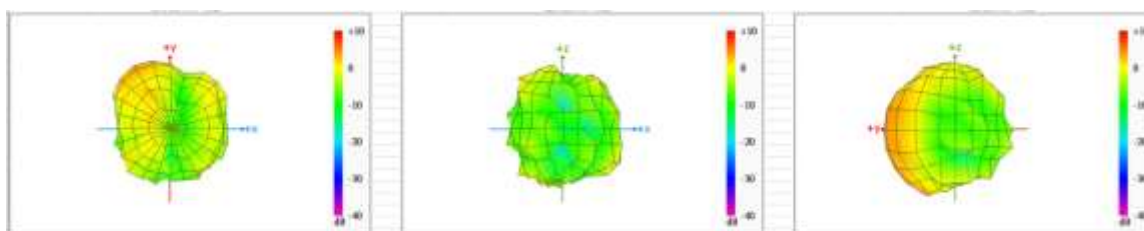

Center Frequency	5850 MHz
Three-dimensional (dBi) peak	3.25

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



INPAQ TECHNOLOGY CO., LTD.

SCALE : N/A

UNIT : mm

DRAWN BY:周敬晨

CHECKED BY:鄭榮謀

DESIGNED BY:林易暄

APPROVED BY:張建焜

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF
 INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED
 OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF
 APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : Embedded Dual-Band Antenna for
 WA-M-LB-01-128

DOCUMENT
 NO.

ENS000160400

SPEC REV.
 P1