

Photograph E-1 - Vertical Polarization (1-18 GHz)




Photograph E-2 - Vertical Polarization (18-26 GHz)



Photograph E-3 - Front of Radiated Emission Configuration







Photograph E-4 - Back of Radiated Emission Configuration

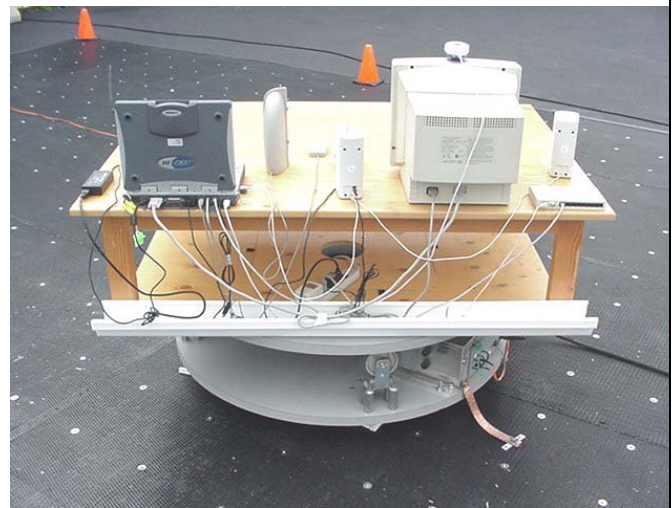

The worst-case data rate was determined from prescan investigations. Measurements were made at three channels throughout the band, Low Channel (2412 MHz), Mid Channel (2437 MHz), High Channel (2462 MHz) and for both Modes b and g for the band-edge measurements and for Mode b for the remaining measurements. The configuration used for all other measurements was Mode b, 1 mbps with a gain setting of 0.1.

Photograph F-1 - Horizontal Polarization (30MHz - 1 GHz)




Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							32 of 48

Photograph H-1 - AC Powerline Conducted Emission Configuration



Photograph H-2 - AC Powerline Conducted Emission Cable Placement



Applicant:	Itronix Corporation	Model:	IX260PNLA775BT	IC ID:	1943A-IX260Pe	FCC ID:	KBCIX260PNLA775BT
Rugged Laptop PC with Senao NL-3054MP 802.11b/g WLAN, Cirronet BT2022 Bluetooth, & AC775 GSM							
2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc.							43 of 48