

RF Exposure Report

Project Number: 4808444**Offer Number:** SUW-202107001262**Report Number:** 4808444EMC03**Revision Level:** 1**Client:** Persistent Systems LLC**Equipment Under Test:** Embedded Module (with RF-2150 Radio)**Host Model:** WR-5200**Module Model:** RF-2150**Module FCC ID:** 2AG3J-RF2150**Applicable Standards:** 47 C.F.R. §§ 2.1091**FCC KDB 447498 D01 General RF Exposure Guidance v06****FCC OET Bulletin 65****Report issued on:** 23 March 2023**Test Result:** Compliant

FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER: 3212.01

This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

Prepared by:

Martin Taylor, Project Engineer

Reviewed by:

Stephen Whalen, EMC Lab Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>. And for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/terms-e-document.aspx>.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for a maximum of 30 days only.

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	CLIENT INFORMATION.....	3
1.2	TEST LABORATORY	3
1.3	GENERAL INFORMATION OF EUT	3
1.4	OPERATING MODES AND CONDITIONS	3
2	RF EXPOSURE.....	4
2.1	TEST RESULT.....	4
2.2	TEST METHOD.....	4
2.3	EUT PHOTOGRAPHS (SHOWING EXAMPLE ANTENNA ARRANGEMENTS).....	5
2.4	SINGLE, DOUBLE, TRIPLE TRANSMISSION RF EXPOSURE LEVELS (mW/cm ²).....	7
3	REVISION HISTORY	16

1 General Information

1.1 Client Information

Name: Persistent Systems LLC
Address: 601 West 26th St, Suite 905
City, State, Zip, Country: New York, NY 10001, USA

1.2 Test Laboratory

Name: SGS North America, Inc.
Address: 620 Old Peachtree Road NW, Suite 100
City, State, Zip, Country: Suwanee, GA 30024, USA

Accrediting Body: A2LA
Type of lab: Testing Laboratory
Certificate Number: 3212.01
FCC Designation: US1126
ISED Registration: 9984A
CAB Identifier: US0186

1.3 General Information of EUT

Equipment Under Test: Embedded Module (with RF-2150 Radio)
Host Model: WR-5200
Serial Number: 58676
Module Model: RF-2150
Module FCC ID: 2AG3J-RF2150

Frequency Range: 2412 – 2462 MHz
Data Modes: WLAN IEEE 802.11b/g/n (DSSS, OFDM)
Antenna:
ANT-2005 (2.15 dBi)* – Antenna configuration 1
ANT-2012 (4.1 dBi)* – Antenna configuration 2
ANT-2010 (8.5 dBi)* – Antenna configuration 3

Max Output Power: Multiple values depending on antenna configuration and # of active chains

Rated Voltage: 12Vdc
Test Voltage: 12Vdc (supplied by AC adapter with 120Vac, 60Hz input)

Sample Received Date: 17 September 2018
Dates of testing: 19 September to 17 December 2018

**Data was not measured by SGS laboratory and therefore SGS is not responsible for accuracy. Data obtained via customer, specification sheet, previous regulatory filing or other.*

1.4 Operating Modes and Conditions

Evaluation was performed as specified in FCC KDB 558074 D01 v05r02 and FCC KDB 447498 D01 v06.

2 RF Exposure

2.1 Test Result

Test Description	Product Specific Standard	Test Result
RF Exposure	FCC Part 1.1310	Compliant

2.2 Test Method

Using the maximum power (including tune-up tolerances), the power density was calculated. Maximum antenna gains were used.

The formula below was used to calculate power density.

$$S = \frac{PG}{4\pi R^2} \quad \text{or} \quad S = \frac{EIRP}{4\pi R^2}$$

where:

S = power density (mW/cm²)

P = maximum sourced based average power delivered to antenna port (mW)

G = maximum numeric power gain of antenna relative to an isotropic radiator (dBi -> linear)

R = distance from reference point of antenna (cm)

$EIRP$ = equivalent (or effective) isotropically radiated power

A spreadsheet named "MPE-mobile.xls" from the FCC for Mobile Multi-transmitter MPE Estimation was used for estimating MPE limits for multiple antennas. This spreadsheet is referenced in KDB 447498 D01 General RF Exposure Guidance v06, section 7.2, which states, in part, the following: "Simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneously transmitting antennas incorporated in a host device is ≤ 1.0 , according to calculated/estimated, numerically modeled, or measured field strengths or power density." This spreadsheet is available at: <http://www.fcc.gov/oet/ea/presentations/files/oct05/MPE-mobile.xls>

In the spreadsheet, the power densities for each antenna are summed, and the results are plotted in percentage of the applicable frequency dependent MPE limit. A frequency of 2450 MHz was used in the spreadsheet, but in this case the MPE limit remains constant across the 2412-2462 MHz frequency range. The limit is shown below.

Limit: 1.0 mW/cm²

from FCC §1.1310(e)(1) Table 1 Limits for MPE (ii) Limits for General Population/Uncontrolled Exposure

2.3 EUT Photographs (showing example antenna arrangements)

3 high-gain (8.5dBi) antennas



3 medium-gain (4.1dBi) antennas




3 low-gain (2.15dBi) antennas




2.4 Single, Double, Triple Transmission RF Exposure Levels (mW/cm^2)

1 tx antenna @ 27.4dBm, gain = 8.5dBi

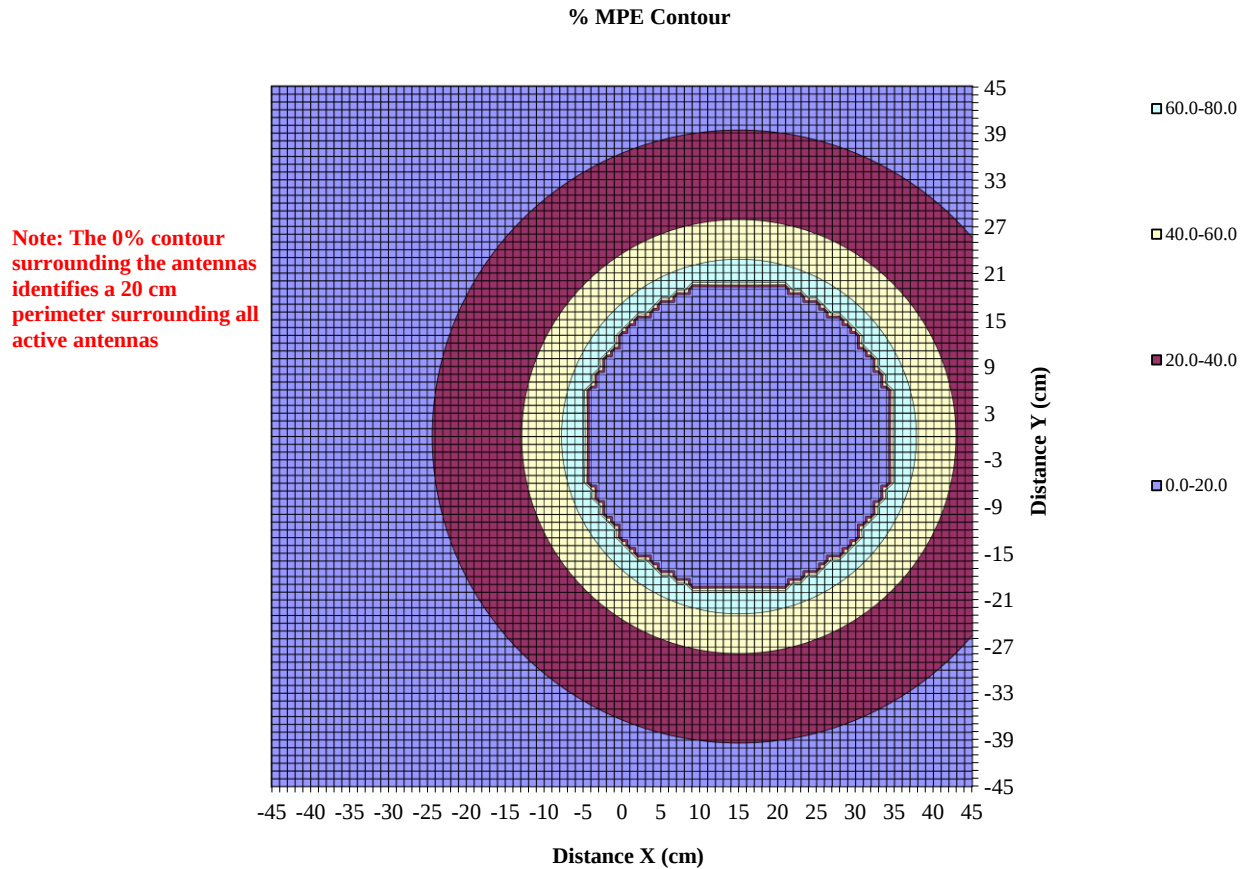


Maximum % of MPE limit at 20 cm separation distance: 77.5%

2 tx antennas @ 21.5dBm, gain for each = 8.5dBi

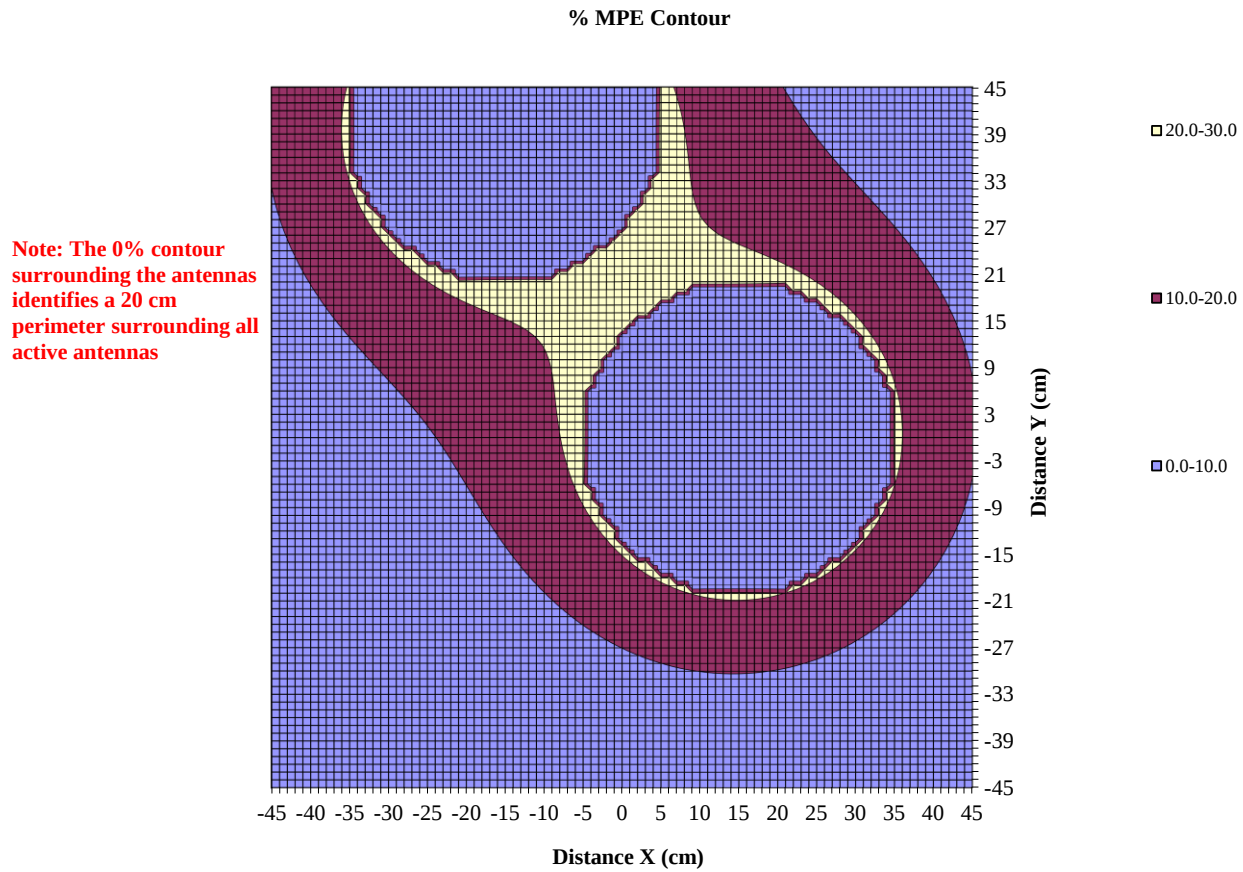


Maximum % of MPE limit at 20 cm separation distance: 28.7%

3 tx antennas @ 17.9dBm, gain for each = 8.5dBi

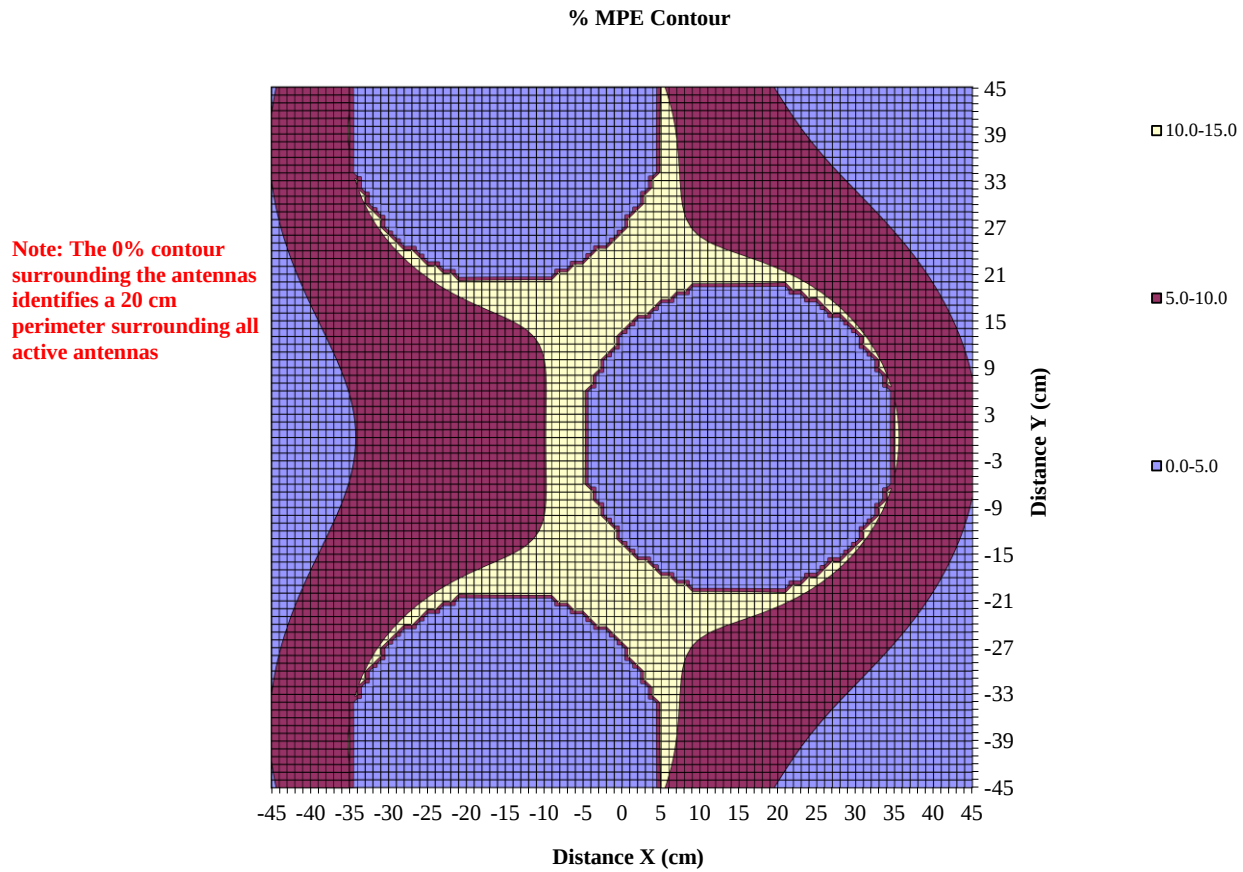


Maximum % of MPE limit at 20 cm separation distance: 13.6%

1 tx antenna @ 28.2dBm, gain = 4.1dBi

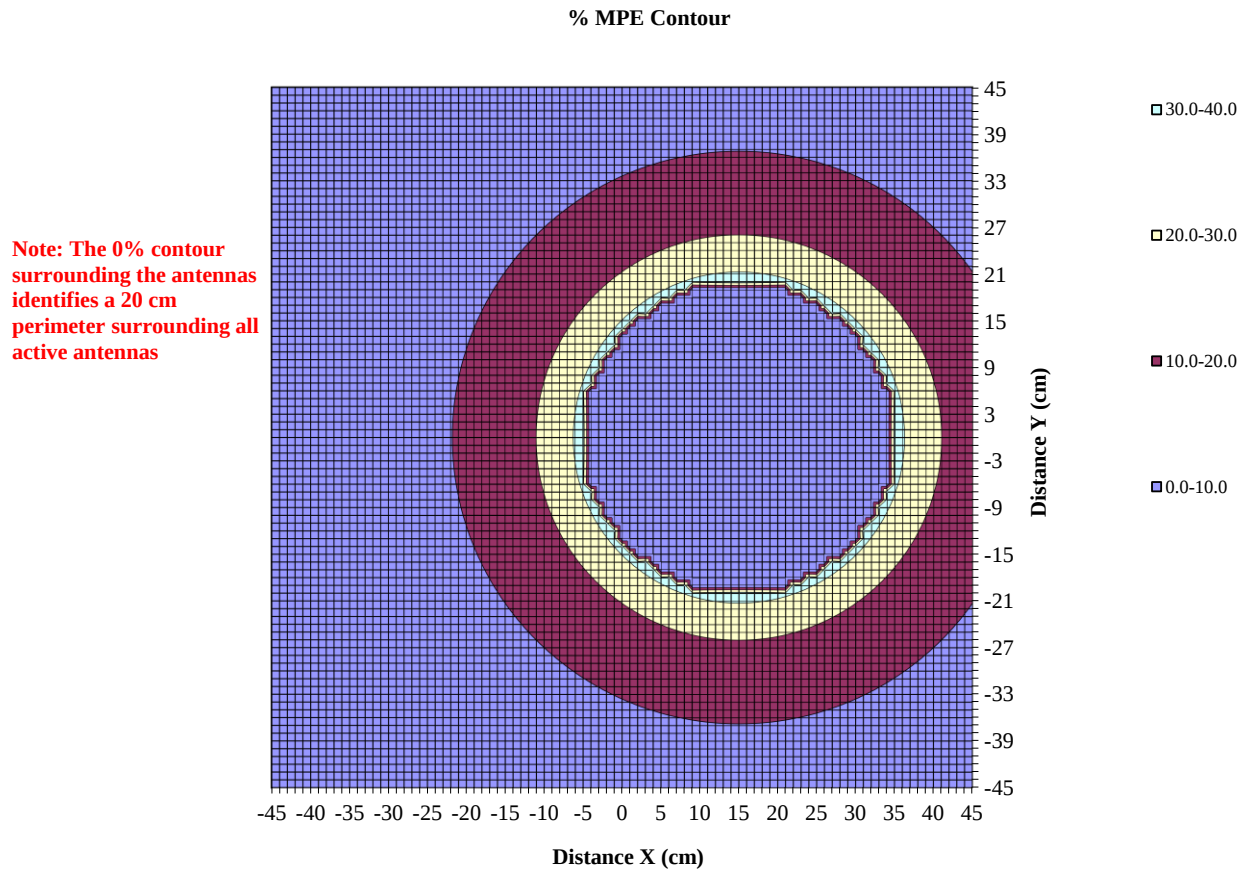


Maximum % of MPE limit at 20 cm separation distance: 33.8%

2 tx Antennas @ 25.8dBm, gain for each = 4.1dBi

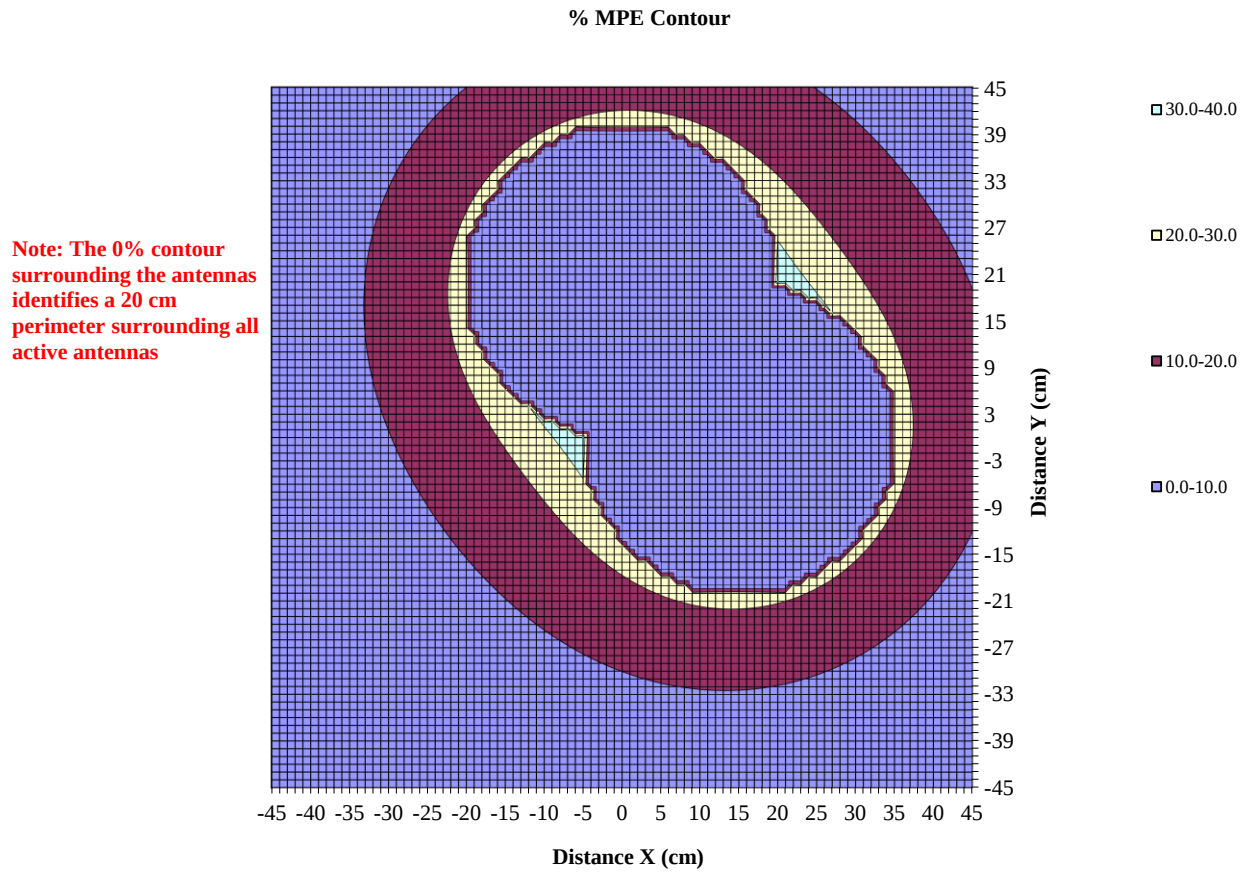


Maximum % of MPE limit at 20 cm separation distance: 37.7%

3 tx antennas @ 22.3dBm, gain for each = 4.1dBi

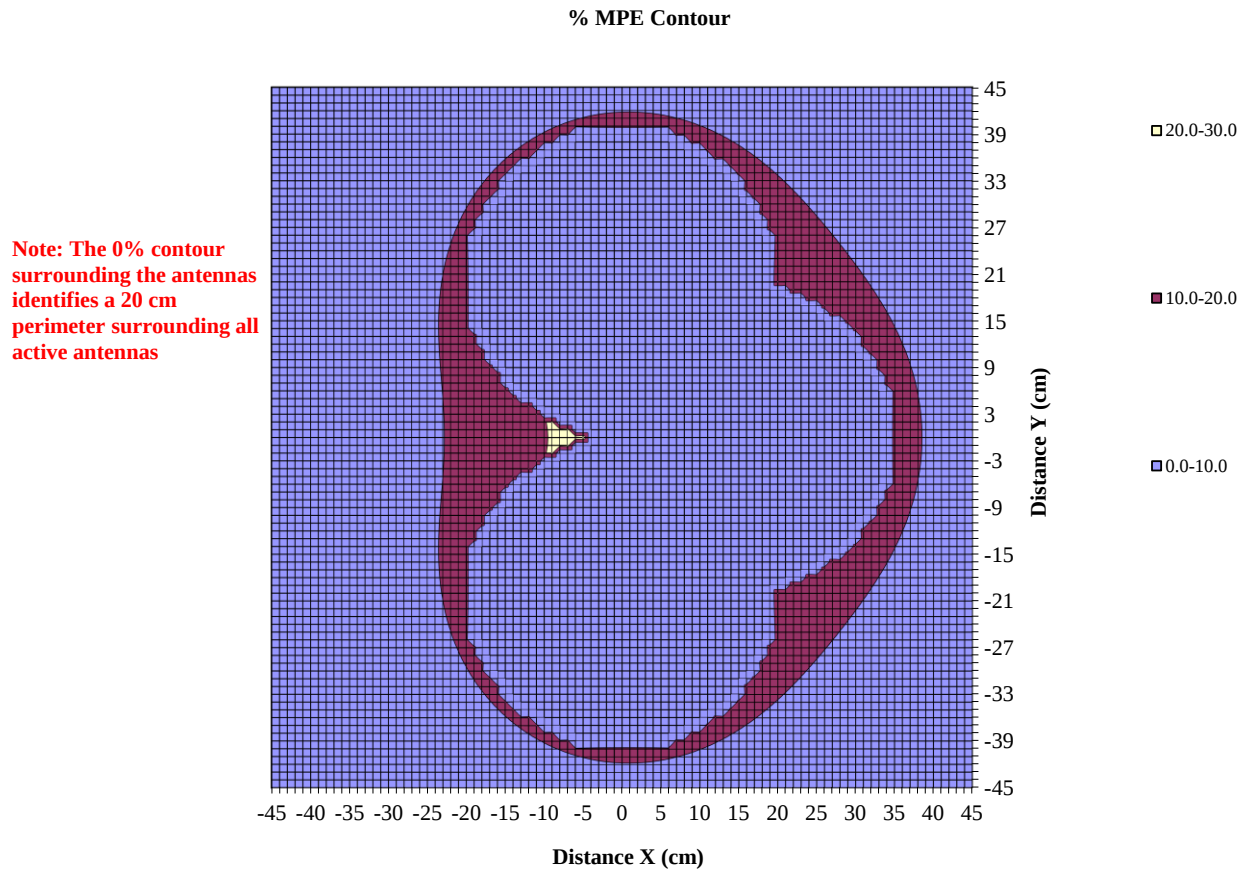


Maximum % of MPE limit at 20 cm separation distance: 25.1%

1 tx antenna @ 28.6dBm, gain = 2.15dBi

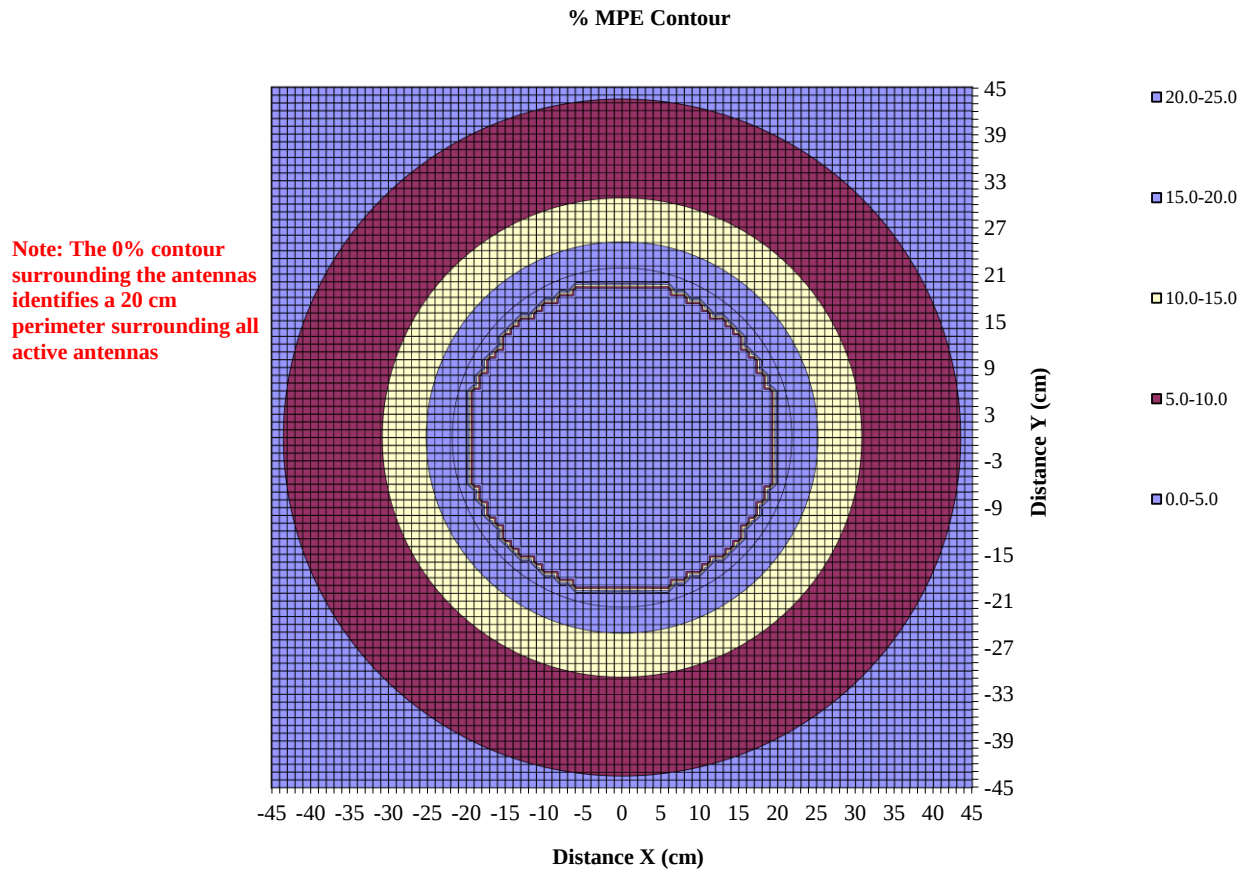

Maximum % of MPE limit at 20 cm separation distance: 23.6%

2 tx Antennas @ 26.8dBm, gain for each = 2.15dBi

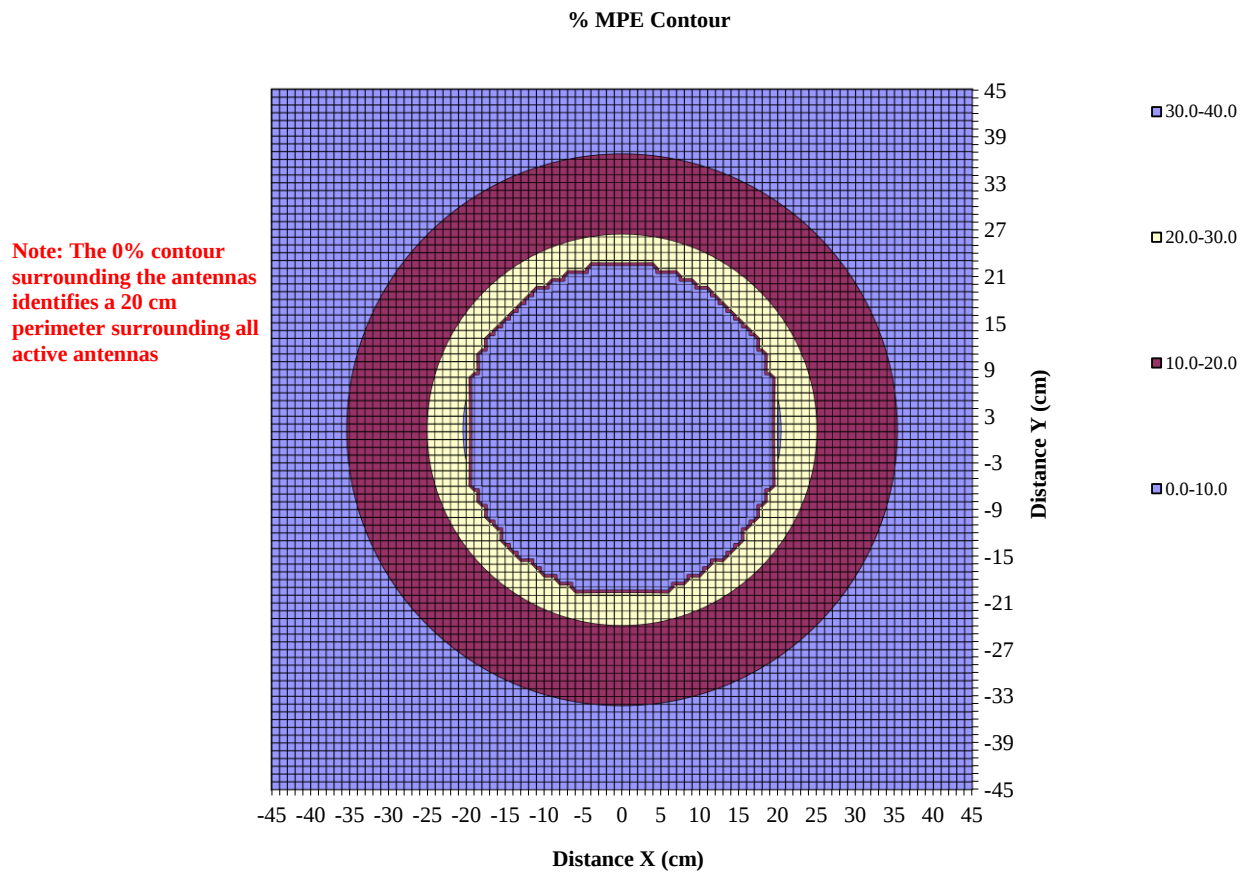


Maximum % of MPE limit at 20 cm separation distance: 31.1%

3 tx Antennas @ 24.3dBm, gain for each = 2.15dBi

% MPE Contour

Note: The 0% contour surrounding the antennas identifies a 20 cm perimeter surrounding all active antennas

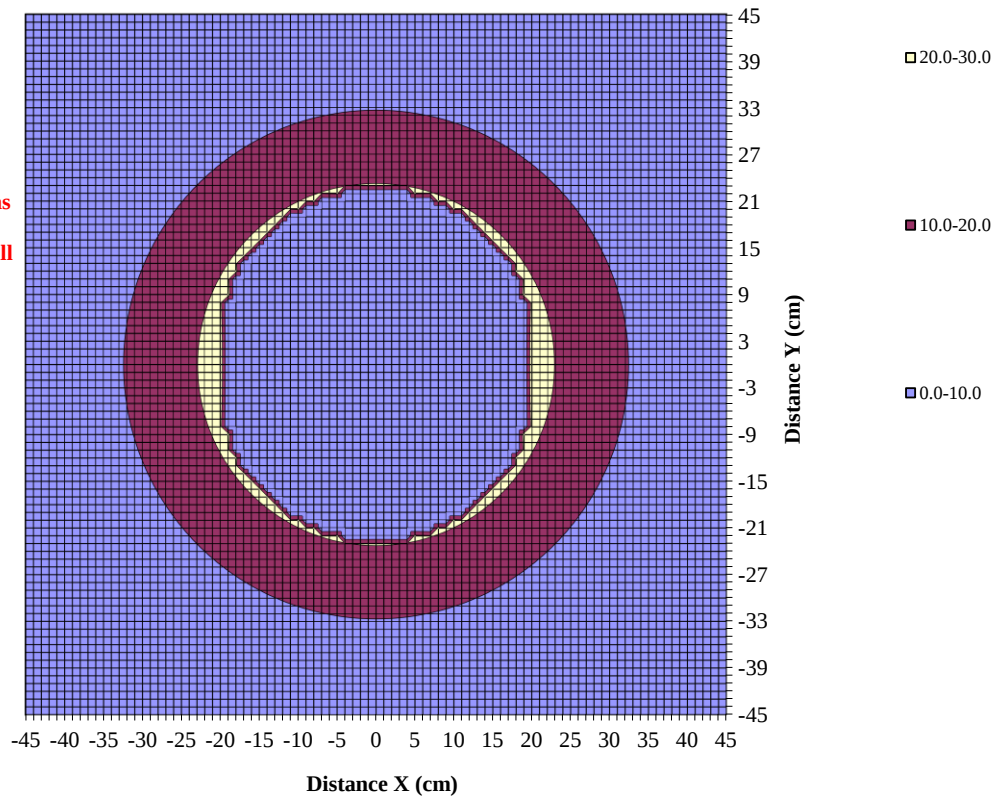

Maximum % of MPE limit at 20 cm separation distance: 26.1%

3 Revision History

Revision Level	Description of changes	Revision Date
0	Initial release	22 March 2023
1	Power density formula added in section 2.2	23 March 2023