



TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (1) of (109)

KCTL

1. Client

- Name : Intel Mobile Communications
- Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina
29210 USA
- Date of Receipt : FCC,IC : 2020-02-07

2. Use of Report : Class IV permissive change

3. Name of Product and Model : WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card

- Model Number : AX200D2WL
- Manufacturer and Country of Origin : Intel Mobile Communications / USA

4. Host Product Name : Notebook PC



- Host Model Number : NP767XCM
- Manufacturer : Samsung Electronics Co., Ltd

5. FCC ID Number : PD9AX200D2L
IC Certificate Number : 1000M-AX200D2L

6. Date of Test : 2020-03-05 ~ 2020-03-25

7. Test Standards : RSS-102 Issue 5 2015, IEC 62209-2 : 2010+A1 : 2019,
KDB Publication

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	 Name : Kyounghoo Min (Signature)	 Name : Jongwon Ma (Signature)

2020-03-30

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

Report revision history

Date	Revision	Page No
2020-03-30	Initial report	-


This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.

KCTL

CONTENTS

1. General information.....	4
2. Device information	5
3. Specific Absorption Rate	12
4. SAR Measurement Procedures.....	13
5. RF Exposure Limits	15
6. FCC SAR General Measurement Procedures.....	16
7. RF Average Conducted Output Power.....	19
8. System Verification	22
9. SAR Test Results	26
10. Simultaneous Transmission	29
11. SAR Measurement Variability.....	30
12. Measurement Uncertainty.....	31
13. Test Equipment Information	32
14. Test System Verification Results.....	33
15. Test Results	40
Appendixes List.....	54
Appendix A. Calibration certificate	55
Appendix B. SAR Tissue Specification.....	95
Appendix C. IEEE 802.11ax SAR Power	96
Appendix D. #Antenna Location & Distance.....	107
Appendix E. EUT Photo	108
Appendix F. Test Setup Photo.....	109
End of test report	109

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0013 Page (4) of (109)	
---	---	---

1. General information

Client : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Manufacturer : Intel Mobile Communications
 Address : 100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
 Contact Person : Steven Hackett / Steven.c.hackett@intel.com
 Laboratory : KCTL Inc.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 Industry Canada Registration No. : 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.

The information provided by the manufacturer is marked “#” in front of the section.

2. Device information

2.1 Basic description

Product Name		WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card		
Product Model Number		AX200D2WL		
Product Manufacturer		Intel Mobile Communications		
Host Product Name		Notebook PC		
Host Model Number		NP767XCM		
Host Manufacturer		Samsung Electronics Co., Ltd.		
Host Product Serial Number	Radiation	1CEL91ZN100246M		
	Conduction	1CEL91ZN100246M		
Device Overview		Band	Operating Modes	Tx Frequency (MHz)
		WLAN 2.4 GHz	Data	2 412.0 ~ 2 462.0
		U-NII-1	Data	5 180.0 ~ 5 240.0
		U-NII-2A	Data	5 260.0 ~ 5 320.0
		U-NII-2C	Data	5 500.0 ~ 5 720.0
		U-NII-3	Data	5 745.0 ~ 5 825.0
		Bluetooth	Data	2 402.0 ~ 2 480.0
TDWR Information		5.60 GHz ~ 5.65 GHz band (TDWR) is supported by the device.		

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported
		1g SAR (W/kg)
		Body
WLAN 2.4 GHz	DTS	0.89
U-NII-1	NII	1.09
U-NII-2A	NII	1.28
U-NII-2C	NII	1.09
U-NII-3	NII	1.29
Bluetooth	DSS/DTS	0.26
Simultaneous SAR per KDB 690783 D01v01r03		1.55

2.3 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

2.3.1 #Maximum WLAN and Bluetooth Output Power

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
WLAN 2.4 GHz	Main	802.11b	All Channel	14.00	15.00	Yes
		802.11g	All Channel	14.00	15.00	No
		802.11n(BW20)	All Channel	14.00	15.00	No
		802.11n(BW40)	All Channel	14.00	15.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	14.00	15.00	No
	Aux	802.11b	All Channel	14.00	15.00	Yes
		802.11g	All Channel	14.00	15.00	No
		802.11n(BW20)	All Channel	14.00	15.00	No
		802.11n(BW40)	All Channel	14.00	15.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	14.00	15.00	No
	MIMO	802.11n(BW20)	All Channel	11.50	12.50	No
		802.11n(BW40)	All Channel	11.50	12.50	Yes
		802.11ax - 20 MHz (SU_HE0)	All Channel	11.50	12.50	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	11.50	12.50	No

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (7) of (109)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-1	Main	802.11a	All Channel	14.00	15.00	No
		802.11n(BW20)	All Channel	14.00	15.00	No
		802.11n(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW20)	All Channel	14.00	15.00	No
		802.11ac(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW80)	All Channel	14.00	15.00	Yes
		802.11ac(BW160)	All Channel	14.00	15.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	14.00	15.00	No
	Aux	802.11a	All Channel	10.00	11.00	No
		802.11n(BW20)	All Channel	10.00	11.00	No
		802.11n(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW20)	All Channel	10.00	11.00	No
		802.11ac(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW80)	All Channel	10.00	11.00	No
		802.11ac(BW160)	All Channel	10.00	11.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	10.00	11.00	No
	MIMO	802.11n(BW20)	All Channel	9.50	10.50	No
		802.11n(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW20)	All Channel	9.50	10.50	No
		802.11ac(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW80)	All Channel	9.50	10.50	No
		802.11ac(BW160)	All Channel	9.50	10.50	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	9.50	10.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (8) of (109)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2A	Main	802.11a	All Channel	14.00	15.00	No
		802.11n(BW20)	All Channel	14.00	15.00	No
		802.11n(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW20)	All Channel	14.00	15.00	No
		802.11ac(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW80)	All Channel	14.00	15.00	Yes
		802.11ac(BW160)	All Channel	14.00	15.00	Yes
		802.11ax - 20 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	14.00	15.00	No
	Aux	802.11a	All Channel	10.00	11.00	No
		802.11n(BW20)	All Channel	10.00	11.00	No
		802.11n(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW20)	All Channel	10.00	11.00	No
		802.11ac(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW80)	All Channel	10.00	11.00	Yes
		802.11ac(BW160)	All Channel	10.00	11.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	10.00	11.00	No
	MIMO	802.11n(BW20)	All Channel	9.50	10.50	No
		802.11n(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW20)	All Channel	9.50	10.50	No
		802.11ac(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW80)	All Channel	9.50	10.50	Yes
		802.11ac(BW160)	All Channel	9.50	10.50	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	9.50	10.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (9) of (109)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-2C	Main	802.11a	All Channel	14.00	15.00	No
		802.11n(BW20)	All Channel	14.00	15.00	No
		802.11n(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW20)	All Channel	14.00	15.00	No
		802.11ac(BW40)	All Channel	14.00	15.00	No
		802.11ac(BW80)	All Channel	14.00	15.00	Yes
		802.11ac(BW160)	All Channel	14.00	15.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	14.00	15.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	14.00	15.00	No
	Aux	802.11a	All Channel	10.00	11.00	No
		802.11n(BW20)	All Channel	10.00	11.00	No
		802.11n(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW20)	All Channel	10.00	11.00	No
		802.11ac(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW80)	All Channel	10.00	11.00	Yes
		802.11ac(BW160)	All Channel	10.00	11.00	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	10.00	11.00	No
	MIMO	802.11n(BW20)	All Channel	9.50	10.50	No
		802.11n(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW20)	All Channel	9.50	10.50	No
		802.11ac(BW40)	All Channel	9.50	10.50	No
		802.11ac(BW80)	All Channel	9.50	10.50	Yes
		802.11ac(BW160)	All Channel	9.50	10.50	No
		802.11ax - 20 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	9.50	10.50	No
		802.11ax - 160 MHz (SU_HE0)	All Channel	9.50	10.50	No

This test report shall not be reproduced, except in full, without the written approval

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (10) of (109)



Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
U-NII-3	Main	802.11a	All Channel	16.00	17.00	No
		802.11n(BW20)	All Channel	16.00	17.00	No
		802.11n(BW40)	All Channel	16.00	17.00	No
		802.11ac(BW20)	All Channel	16.00	17.00	No
		802.11ac(BW40)	All Channel	16.00	17.00	No
		802.11ac(BW80)	All Channel	16.00	17.00	Yes
		802.11ax - 20 MHz (SU_HE0)	All Channel	16.00	17.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	15.00	16.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	15.00	16.00	No
	Aux	802.11a	All Channel	10.00	11.00	No
		802.11n(BW20)	All Channel	10.00	11.00	No
		802.11n(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW20)	All Channel	10.00	11.00	No
		802.11ac(BW40)	All Channel	10.00	11.00	No
		802.11ac(BW80)	All Channel	10.00	11.00	Yes
		802.11ax - 20 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	10.00	11.00	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	10.00	11.00	No
	MIMO	802.11n(BW20)	All Channel	11.00	12.00	No
		802.11n(BW40)	All Channel	11.00	12.00	No
		802.11ac(BW20)	All Channel	11.00	12.00	No
		802.11ac(BW40)	All Channel	11.00	12.00	No
		802.11ac(BW80)	All Channel	11.00	12.00	Yes
		802.11ax - 20 MHz (SU_HE0)	All Channel	11.00	12.00	No
		802.11ax - 40 MHz (SU_HE0)	All Channel	10.50	11.50	No
		802.11ax - 80 MHz (SU_HE0)	All Channel	10.50	11.50	No

Band	Ant.	Mode	Channel	Output Power (dB m)		
				Target	Max. Allowed	SAR Test
Bluetooth	Aux	BDR(GFSK)	All Channel	9.50	11.00	Yes
		EDR ($\pi/4$ DQPSK)	All Channel	5.50	7.00	No
		EDR(8DPSK)	All Channel	5.50	7.00	No
		LE(GFSK)	All Channel	5.50	7.00	No

2.4 SAR Test Configurations

2.4.1 #DUT Antenna Locations

A diagram showing the location of the device antennas can be found in Appendix D.

2.4.2 SAR Test Exclusion Considerations

Device Type	Band / Ant.	Device Edge for SAR Testing					
		Front	Rear	Left Edge	Right Edge	Top	Bottom
Notebook	WLAN & Bluetooth	No	Yes	No	No	No	No

2.5 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with the following published KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 616217 D04 SAR for laptop and tablets v01r02
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)
- RSS-102 Issue 5 2015
- IEC 62209-2 : 2010+A1 : 2019

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement


The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.


Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

If the zoom scan measured as defined below complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- 1) The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ($\Delta x, \Delta y$). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance z_{M1} . The minimum distance shall be recorded in the SAR test report
- 2) The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %. This ratio (in %) shall be recorded in the SAR test report.

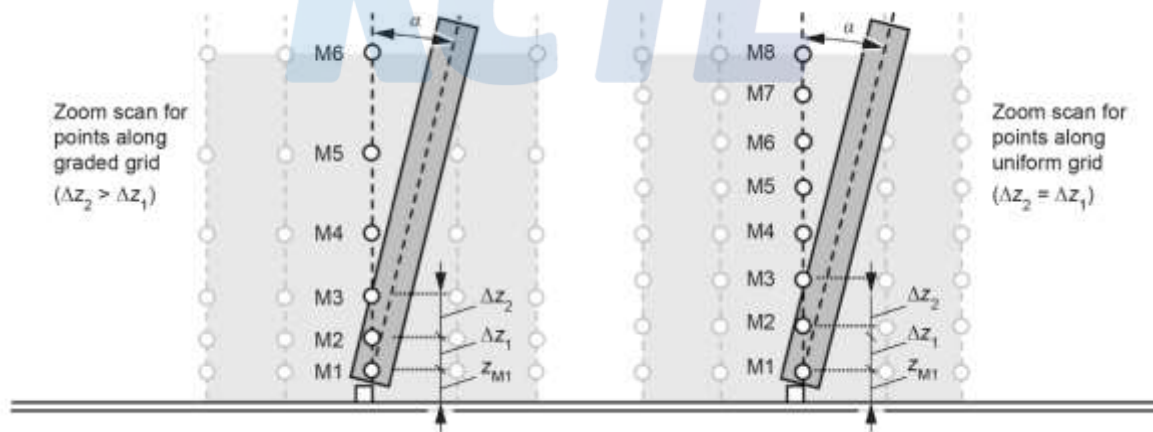

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0013 Page (14) of (109)	
---	--	---

			$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm}$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. FCC SAR General Measurement Procedures

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

6.2.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

6.2.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.

6.2.5 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.


2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0013 Page (18) of (109)	
---	---	---

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

6.2.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

KCTL

7. RF Average Conducted Output Power

7.1 WLAN Average Conducted Output Power

Band	Ant.	Mode	Conducted Powers (dBm)		
			Low	Mid.	High
WLAN 2.4 GHz	Main	802.11b	14.85	14.86	14.91
	Aux	802.11b	14.91	14.88	14.93
	MIMO (Main)	802.11n(BW40)	12.39	12.46	12.38
	MIMO (Aux)	802.11n(BW40)	12.49	12.31	12.30

Band	Ant.	Mode	Conducted Powers (dBm)		
			Low	Mid.	High
U-NII-1	Main	802.11ac(BW80)	-	14.86	-
U-NII-2A	Main	802.11ac(BW80)	-	14.90	-
	Main	802.11ac(BW160)	-	14.76	-
	Aux	802.11ac(BW80)	-	10.96	-
	MIMO (Main)	802.11ac(BW80)	-	10.49	-
	MIMO (Aux)	802.11ac(BW80)	-	10.29	-
U-NII-2C	Main	802.11ac(BW80)	14.88	14.79	14.78
	Aux	802.11ac(BW80)	10.82	10.88	10.98
	MIMO (Main)	802.11ac(BW80)	10.44	10.40	10.34
	MIMO (Aux)	802.11ac(BW80)	10.37	10.47	10.40
U-NII-3	Main	802.11ac(BW80)	-	16.88	-
	Aux	802.11ac(BW80)	-	10.89	-
	MIMO (Main)	802.11ac(BW80)	-	11.95	-
	MIMO (Aux)	802.11ac(BW80)	-	11.90	-

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported.

Power Measurement Setup



7.2 Bluetooth Average Conducted Output Power

Mode	Freq. [MHz]	Channel	Conducted Powers
			(dBm)
BDR_DH5 (1 Mbps)	2 402.0	0	9.16
	2 441.0	39	9.93
	2 480.0	78	9.43
EDR_2-DH5 (2 Mbps)	2 402.0	0	6.04
	2 441.0	39	6.60
	2 480.0	78	5.76
EDR_3-DH5 (3 Mbps)	2 402.0	0	6.00
	2 441.0	39	6.60
	2 480.0	78	5.77
LE (1M)	2 402.0	0	5.02
	2 440.0	19	5.05
	2 480.0	39	5.12
LE (2M)	2 402.0	0	5.01
	2 440.0	19	5.05
	2 480.0	39	5.13

7.3 Bluetooth Duty Factor

Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor
BDR(GFSK)	DH5	2.88	3.78	76.19	1.312

7.4 Bluetooth Power Measurement Setup




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (21) of (109)

KCTL

7.5 Bluetooth Duty Plot

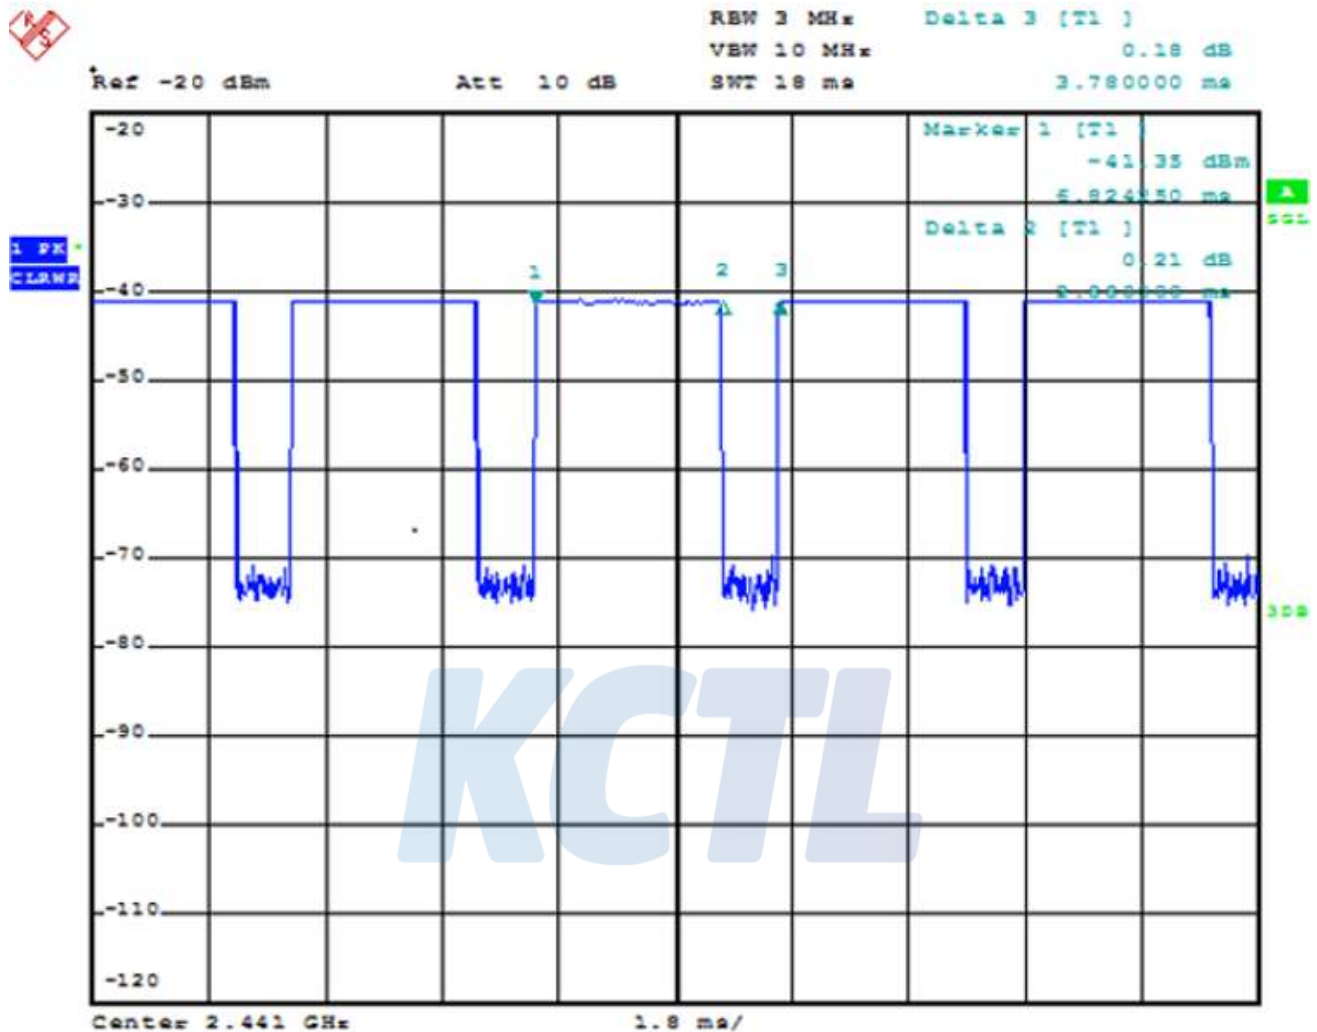

Date: 9.MAR.2020 23:56:25

8. System Verification

8.1 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. ($^\circ\text{C}$)
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2020-03-05	38.49	1.80	20.55
2 402.0	Recommended Limit		$39.28 \pm 5 \%$ (37.32 ~ 41.24)	$1.76 \pm 5 \%$ (1.67 ~ 1.85)	22 ± 2
	Measured	2020-03-05	38.58	1.75	20.55
2 412.0	Recommended Limit		$39.27 \pm 5 \%$ (37.31 ~ 41.23)	$1.77 \pm 5 \%$ (1.68 ~ 1.86)	22 ± 2
	Measured	2020-03-05	38.60	1.76	20.55
2 422.0	Recommended Limit		$39.25 \pm 5 \%$ (37.29 ~ 41.21)	$1.78 \pm 5 \%$ (1.69 ~ 1.87)	22 ± 2
	Measured	2020-03-05	38.56	1.77	20.55
2 437.0	Recommended Limit		$39.22 \pm 5 \%$ (37.26 ~ 41.18)	$1.79 \pm 5 \%$ (1.70 ~ 1.88)	22 ± 2
	Measured	2020-03-05	38.54	1.79	20.55
2 441.0	Recommended Limit		$39.22 \pm 5 \%$ (37.26 ~ 41.18)	$1.79 \pm 5 \%$ (1.70 ~ 1.88)	22 ± 2
	Measured	2020-03-05	38.52	1.79	20.55
2 452.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2020-03-05	38.48	1.81	20.55
2 462.0	Recommended Limit		$39.18 \pm 5 \%$ (37.22 ~ 41.14)	$1.81 \pm 5 \%$ (1.72 ~ 1.90)	22 ± 2
	Measured	2020-03-05	38.45	1.82	20.55
2 480.0	Recommended Limit		$39.16 \pm 5 \%$ (37.20 ~ 41.12)	$1.83 \pm 5 \%$ (1.74 ~ 1.92)	22 ± 2
	Measured	2020-03-05	38.39	1.83	20.55
2 450.0	Recommended Limit		$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	22 ± 2
	Measured	2020-03-24	39.93	1.82	21.13
2 402.0	Recommended Limit		$39.28 \pm 5 \%$ (37.32 ~ 41.24)	$1.76 \pm 5 \%$ (1.67 ~ 1.85)	22 ± 2
	Measured	2020-03-24	40.13	1.77	21.13
2 412.0	Recommended Limit		$39.27 \pm 5 \%$ (37.31 ~ 41.23)	$1.77 \pm 5 \%$ (1.68 ~ 1.86)	22 ± 2
	Measured	2020-03-24	40.09	1.78	21.13
2 422.0	Recommended Limit		$39.25 \pm 5 \%$ (37.29 ~ 41.21)	$1.78 \pm 5 \%$ (1.69 ~ 1.87)	22 ± 2
	Measured	2020-03-24	40.04	1.79	21.13
2 441.0	Recommended Limit		$39.22 \pm 5 \%$ (37.26 ~ 41.18)	$1.79 \pm 5 \%$ (1.70 ~ 1.88)	22 ± 2
	Measured	2020-03-24	39.99	1.81	21.13
2 437.0	Recommended Limit		$39.22 \pm 5 \%$ (37.26 ~ 41.18)	$1.79 \pm 5 \%$ (1.70 ~ 1.88)	22 ± 2
	Measured	2020-03-24	40.01	1.80	21.13

Freq. (MHz)	Limit/Measured		Permittivity (ρ)	Conductivity (σ)	Temp. (°C)
2 452.0	Recommended Limit		39.20 ± 5 % (37.24 ~ 41.16)	1.80 ± 5 % (1.71 ~ 1.89)	22 ± 2
	Measured	2020-03-24	39.92	1.82	21.13
2 462.0	Recommended Limit		39.18 ± 5 % (37.22 ~ 41.14)	1.81 ± 5 % (1.72 ~ 1.90)	22 ± 2
	Measured	2020-03-24	39.91	1.83	21.13
2 480.0	Recommended Limit		39.16 ± 5 % (37.20 ~ 41.12)	1.83 ± 5 % (1.74 ~ 1.92)	22 ± 2
	Measured	2020-03-24	39.83	1.85	21.13
5 200.0	Recommended Limit		36.00 ± 5 % (34.20 ~ 37.80)	4.66 ± 5 % (4.43 ~ 4.89)	22 ± 2
	Measured	2020-03-09	36.68	4.54	20.86
5 210.0	Recommended Limit		35.99 ± 5 % (34.19 ~ 37.79)	4.67 ± 5 % (4.44 ~ 4.90)	22 ± 2
	Measured	2020-03-09	36.66	4.54	20.86
5 300.0	Recommended Limit		35.90 ± 5 % (34.11 ~ 37.70)	4.76 ± 5 % (4.52 ~ 5.00)	22 ± 2
	Measured	2020-03-09	36.55	4.65	20.86
5 250.0	Recommended Limit		35.95 ± 5 % (34.15 ~ 37.75)	4.71 ± 5 % (4.47 ~ 4.95)	22 ± 2
	Measured	2020-03-09	36.48	4.59	20.86
5 290.0	Recommended Limit		35.91 ± 5 % (34.11 ~ 37.71)	4.75 ± 5 % (4.51 ~ 4.99)	22 ± 2
	Measured	2020-03-09	36.52	4.65	20.86
5 600.0	Recommended Limit		35.50 ± 5 % (33.73 ~ 37.28)	5.07 ± 5 % (4.82 ~ 5.32)	22 ± 2
	Measured	2020-03-10	36.09	4.95	20.93
5 530.0	Recommended Limit		35.61 ± 5 % (33.83 ~ 37.39)	5.00 ± 5 % (4.75 ~ 5.25)	22 ± 2
	Measured	2020-03-10	36.20	4.88	20.93
5 610.0	Recommended Limit		35.49 ± 5 % (33.72 ~ 37.26)	5.08 ± 5 % (4.83 ~ 5.33)	22 ± 2
	Measured	2020-03-10	36.11	4.96	20.93
5 690.0	Recommended Limit		35.41 ± 5 % (33.64 ~ 37.18)	5.16 ± 5 % (4.90 ~ 5.42)	22 ± 2
	Measured	2020-03-10	35.95	5.05	20.93
5 600.0	Recommended Limit		35.50 ± 5 % (33.73 ~ 37.28)	5.07 ± 5 % (4.82 ~ 5.32)	22 ± 2
	Measured	2020-03-25	34.84	5.19	20.96
5 530.0	Recommended Limit		35.61 ± 5 % (33.83 ~ 37.39)	5.00 ± 5 % (4.75 ~ 5.25)	22 ± 2
	Measured	2020-03-25	34.95	5.10	20.96
5 610.0	Recommended Limit		35.49 ± 5 % (33.72 ~ 37.26)	5.08 ± 5 % (4.83 ~ 5.33)	22 ± 2
	Measured	2020-03-25	34.83	5.20	20.96
5 690.0	Recommended Limit		35.41 ± 5 % (33.64 ~ 37.18)	5.16 ± 5 % (4.90 ~ 5.42)	22 ± 2
	Measured	2020-03-25	34.69	5.29	20.96
5 800.0	Recommended Limit		35.30 ± 5 % (33.54 ~ 37.07)	5.27 ± 5 % (5.01 ~ 5.53)	22 ± 2
	Measured	2020-03-06	35.30	5.26	21.02
5 775.0	Recommended Limit		35.33 ± 5 % (33.56 ~ 37.10)	5.25 ± 5 % (4.99 ~ 5.51)	22 ± 2
	Measured	2020-03-06	35.38	5.24	21.02


<Table 1. Measurement result of Tissue electric parameters>


8.2 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

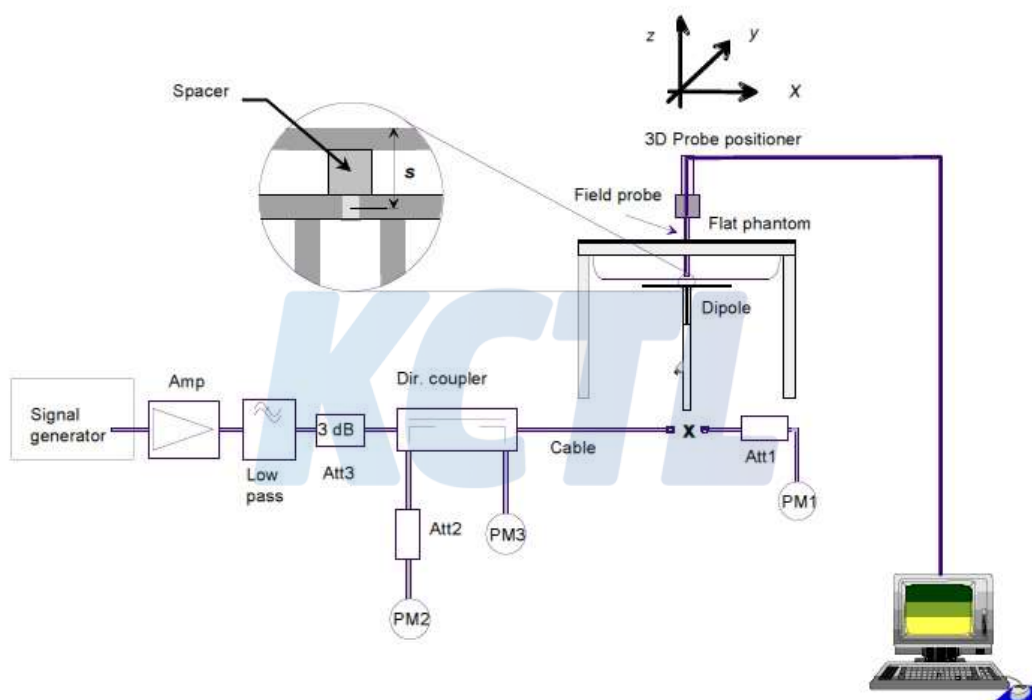

KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR20-SPF0013 Page (25) of (109)	
---	--	---

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Normalized to 1 W)		
D2450V2 SN: 895	EX3DV4 SN: 3865	2 450.0	HSL	Recommended Limit 1g (Normalized)		51.30 ± 10 % (46.17 ~ 56.43)
				Measured	2020-03-05	50.30
D2450V2 SN: 895	EX3DV4 SN: 3865	2 450.0	HSL	Recommended Limit 1g (Normalized)		51.30 ± 10 % (46.17 ~ 56.43)
				Measured	2020-03-24	53.60
D5GHzV2 SN: 1293	EX3DV4 SN: 3865	5 200.0	HSL	Recommended Limit 1g (Normalized)		79.30 ± 10 % (71.37 ~ 87.23)
				Measured	2020-03-09	82.20
D5GHzV2 SN: 1293	EX3DV4 SN: 3865	5 300.0	HSL	Recommended Limit 1g (Normalized)		81.10 ± 10 % (72.99 ~ 89.21)
				Measured	2020-03-09	79.90
D5GHzV2 SN: 1293	EX3DV4 SN: 3865	5 600.0	HSL	Recommended Limit 1g (Normalized)		82.60 ± 10 % (74.34 ~ 90.86)
				Measured	2020-03-10	80.50
D5GHzV2 SN: 1293	EX3DV4 SN: 3865	5 600.0	HSL	Recommended Limit 1g (Normalized)		82.60 ± 10 % (74.34 ~ 90.86)
				Measured	2020-03-25	82.40
D5GHzV2 SN: 1293	EX3DV4 SN: 3865	5 800.0	HSL	Recommended Limit 1g (Normalized)		79.30 ± 10 % (71.37 ~ 87.23)
				Measured	2020-03-06	83.20

<Table 2. System Verification Result>

9. SAR Test Results

9.1 Standalone Body SAR Test Results

WLAN 2.4 GHz													
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
802.11b	Main	Rear	0	2 412.0	14.85	15.00	1.035	1.005	8.0	36.2	0.831	0.865	
802.11b	Main	Rear	0	2 437.0	14.86	15.00	1.033	1.005	7.6	35.5	0.853	0.885	
802.11b	Main	Rear	0	2 462.0	14.91	15.00	1.021	1.005	6.7	37.1	0.757	0.777	
802.11b	Aux	Rear	0	2 412.0	14.91	15.00	1.021	1.005	7.2	37.3	0.597	0.613	
802.11b	Aux	Rear	0	2 437.0	14.88	15.00	1.028	1.005	7.1	37.3	0.633	0.654	2
802.11b	Aux	Rear	0	2 462.0	14.93	15.00	1.016	1.005	8.0	36.6	0.560	0.572	
802.11n (BW40)	MIMO	Rear	0	2 422.0	12.39 12.49	12.50	1.026	1.011	6.0	36.7	0.468	0.485	
802.11n (BW40)	MIMO	Rear	0	2 437.0	12.46 12.31	12.50	1.045	1.011	7.3	34.7	0.475	0.502	3
802.11n (BW40)	MIMO	Rear	0	2 452.0	12.38 12.30	12.50	1.047	1.011	7.1	39.8	0.434	0.460	
Repeated SAR Test													
802.11b	Main	Rear	0	2 437.0	14.86	15.00	1.033	1.005	7.6	36.1	0.857	0.890	1

U-NII-1													
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
802.11ac (BW80)	Main	Rear	0	5 210.0	14.86	15.00	1.033	1.011	5.6	59.4	1.000	1.044	
Repeated SAR Test													
802.11ac (BW80)	Main	Rear	0	5 210.0	14.86	15.00	1.033	1.011	6.1	59.5	1.040	1.086	4

Note:

UNII band 1 SAR was tested due to UNII band 2A Reported SAR > 1.2 W/kg.

U-NII-2A													
Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
802.11ac (BW80)	Main	Rear	0	5 290.0	14.90	15.00	1.023	1.011	5.7	58.6	1.180	1.221	
802.11ac (BW160)	Main	Rear	0	5 250.0	14.76	15.00	1.057	1.011	5.8	59.9	1.200	1.282	5
802.11ac (BW80)	Aux	Rear	0	5 290.0	10.96	11.00	1.009	1.011	4.8	64.9	0.975	0.995	
802.11ac (BW80)	MIMO	Rear	0	5 290.0	10.49 10.29	10.50	1.050	1.011	5.4	63.5	0.796	0.845	7
Repeated SAR Test													
802.11ac (BW160)	Main	Rear	0	5 250.0	14.76	15.00	1.057	1.011	5.7	60.5	1.200	1.282	
802.11ac (BW80)	Aux	Rear	0	5 290.0	10.96	11.00	1.009	1.011	5.6	64.3	0.997	1.017	6

Note:

802.11ac(BW160) SAR was tested due to ratio adjusted peak SAR > 1.2 W/kg.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (27) of (109)

**U-NII-2C**

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
802.11ac (BW80)	Main	Rear	0	5 530.0	14.88	15.00	1.028	1.011	6.1	58.2	1.000	1.039	8
802.11ac (BW80)	Main	Rear	0	5 610.0	14.79	15.00	1.050	1.011	4.7	59.0	0.804	0.853	
802.11ac (BW80)	Main	Rear	0	5 690.0	14.78	15.00	1.052	1.011	5.1	55.5	0.744	0.791	
802.11ac (BW80)	Aux	Rear	0	5 530.0	10.82	11.00	1.042	1.011	5.4	62.7	0.955	1.006	
802.11ac (BW80)	Aux	Rear	0	5 610.0	10.88	11.00	1.028	1.011	5.1	61.3	0.993	1.032	
802.11ac (BW80)	Aux	Rear	0	5 690.0	10.98	11.00	1.005	1.011	5.1	59.1	1.070	1.087	9
802.11ac (BW80)	MIMO	Rear	0	5 530.0	10.44 10.37	10.50	1.030	1.011	5.6	64.3	0.847	0.882	
802.11ac (BW80)	MIMO	Rear	0	5 610.0	10.40 10.47	10.50	1.023	1.011	4.0	61.4	0.817	0.845	
802.11ac (BW80)	MIMO	Rear	0	5 690.0	10.34 10.40	10.50	1.038	1.011	5.1	61.6	0.907	0.952	10
Repeated SAR Test													
802.11ac (BW80)	Main	Rear	0	5 530.0	14.88	15.00	1.028	1.011	5.1	57.7	1.000	1.039	
802.11ac (BW80)	Aux	Rear	0	5 690.0	10.98	11.00	1.005	1.011	4.8	62.6	1.050	1.067	
802.11ac (BW80)	MIMO	Rear	0	5 690.0	10.34 10.40	10.50	1.038	1.011	5.7	55.0	0.890	0.934	

U-NII-3

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
802.11ac (BW80)	Main	Rear	0	5 775.0	16.88	17.00	1.028	1.011	5.4	55.6	1.240	1.289	11
802.11ac (BW80)	Aux	Rear	0	5 775.0	10.89	11.00	1.026	1.011	4.5	62.4	1.020	1.058	
802.11ac (BW80)	MIMO	Rear	0	5 775.0	11.95 11.90	12.00	1.023	1.011	5.7	61.0	1.210	1.252	
Repeated SAR Test													
802.11ac (BW80)	Main	Rear	0	5 775.0	16.88	17.00	1.028	1.011	5.4	55.8	1.200	1.247	
802.11ac (BW80)	Aux	Rear	0	5 775.0	10.89	11.00	1.026	1.011	5.4	62.6	1.060	1.099	12
802.11ac (BW80)	MIMO	Rear	0	5 775.0	11.95 11.90	12.00	1.023	1.011	5.1	59.0	1.220	1.262	13

Bluetooth

Mode	Ant.	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Zoom require		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
									Step1 (mm)	Step2 (%)			
BDR_DH5	Rear	Rear	0	2 402.0	9.16	11.00	1.528	1.312	7.6	34.4	0.114	0.229	
BDR_DH5	Rear	Rear	0	2 441.0	9.93	11.00	1.279	1.312	7.1	34.8	0.090	0.151	
BDR_DH5	Rear	Rear	0	2 480.0	9.43	11.00	1.435	1.312	7.6	33.3	0.137	0.258	14

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIA002-004/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SPF0013
Page (28) of (109)



General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in FCC KDB Publication 447498 D01v06.
2. All modes of operation were investigated, and worst-case results are reported.
3. Battery is fully charged for all readings and the standard batteries are the only options.
4. Liquid tissue depth was at least 15 cm.
5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.

WLAN & Bluetooth Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4GHz WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is $\leq 1.2\text{W/kg}$, SAR is not required for UNII band1 $> 1.2\text{W/kg}$, both bands should be tested independently for SAR.
5. When SAR measurement is required for at least one of the bands(UNII-1 or UNII-2A) and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is $> 1.2\text{ W/kg}$, SAR is required for the 160 MHz channel.
6. When the maximum reported 1g averaged SAR is $\leq 0.8\text{ W/kg}$, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was $\leq 1.20\text{ W/kg}$ for 1g evaluations or all test channels were measured.
7. WLAN & Bluetooth transmission was verified using a spectrum analyzer

10. Simultaneous Transmission

10.1 #Simultaneous Transmission Configurations

No.	Scenario	Operation
1	WLAN 2.4 GHz Main + Bluetooth Aux	Yes
2	WLAN 5 GHz Main + Bluetooth Aux	Yes
3	WLAN 5 GHz Aux + Bluetooth Aux	Yes
4	WLAN 5 GHz MIMO (Main, Aux) + Bluetooth Aux	Yes

Notes:

- It does not to transmit simultaneously the Bluetooth and WLAN 2.4 GHz Aux.

10.2 Simultaneous Transmission Analysis

Exposure Condition /Position		WLAN				Bluetooth Aux	Summation			
		2.4 GHz Main	5 GHz Main	5 GHz Aux	5 GHz MIMO					
		[①]	[②]	[③]	[④]		[①+⑤]	[②+⑤]	[③+⑤]	[④+⑤]
Body	Rear	0.890	1.289	1.099	1.262	0.258	1.148	1.547	1.357	1.520

Notes:

- Simultaneous transmission SAR test exclusion considerations
Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

11. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Band	Mode	Ant.	Frequency (MHz)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1 g SAR (W/kg)	Ratio
WLAN 2.4 GHz	802.11b	Main	2 437.0	Rear	0	0.853	0.857	1.00
U-NII-1	802.11ac(BW80)	Main	5 210.0	Rear	0	1.000	1.040	1.04
U-NII-2A	802.11ac(BW160)	Main	5 250.0	Rear	0	1.200	1.200	1.00
	802.11ac(BW80)	Aux	5 290.0	Rear	0	0.975	0.997	1.02
U-NII-2C	802.11ac(BW80)	Main	5 530.0	Rear	0	1.000	1.000	1.00
	802.11ac(BW80)	Aux	5 690.0	Rear	0	1.070	1.050	1.02
	802.11ac(BW80)	MIMO	5 690.0	Rear	0	0.907	0.890	1.02
U-NII-3	802.11ac(BW80)	Main	5 775.0	Rear	0	1.240	1.200	1.03
	802.11ac(BW80)	Aux	5 775.0	Rear	0	1.020	1.060	1.04
	802.11ac(BW80)	MIMO	5 775.0	Rear	0	1.210	1.220	1.01

12. Measurement Uncertainty

All measurements and results are recorded and maintained at the laboratory performing the tests and measurement uncertainties are taken into account when comparing measurements to pass/ fail criteria.

Source of Uncertainty	Tol. Value (± %)	Prob. Dist.	Div.	C _i (1 g)	C _i (10 g)	Standard Uncertainty		V _i or V _{eff}
						± %, (1 g)	± %, (10 g)	
Measurement System								
Probe calibration	6.55	N	1.00	1.00	1.00	6.55	6.55	∞
Axial isotropy	4.70	R	1.73	0.70	0.70	1.90	1.90	∞
Hemispherical isotropy	9.60	R	1.73	0.70	0.70	3.88	3.88	∞
Boundary effect	2.00	R	1.73	1.00	1.00	1.15	1.15	∞
Linearity	4.70	R	1.73	1.00	1.00	2.71	2.71	∞
System detection limits	0.25	R	1.73	1.00	1.00	0.14	0.14	∞
Modulation response	4.80	R	1.73	1.00	1.00	2.77	2.77	∞
Readout electronics	0.30	N	1.00	1.00	1.00	0.30	0.30	∞
Response time	0.80	R	1.73	1.00	1.00	0.46	0.46	∞
Integration time	2.60	R	1.73	1.00	1.00	1.50	1.50	∞
RF ambient conditions – noise	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
RF ambient conditions – reflections	3.00	R	1.73	1.00	1.00	1.73	1.73	∞
Probe positioner mech. Tolerance	0.40	R	1.73	1.00	1.00	0.23	0.23	∞
Probe positioning with respect to phantom shell	6.70	R	1.73	1.00	1.00	3.87	3.87	∞
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	4.00	R	1.73	1.00	1.00	2.31	2.31	∞
Test sample related								
Test sample positioning	5.77	N	1.00	1.00	1.00	5.77	5.77	29
Device holder Uncertainty	3.97	N	1.00	1.00	1.00	3.97	3.97	5
Output power variation—SAR drift measurement	5.00	R	1.73	1.00	1.00	2.89	2.89	∞
SAR scaling	0.00	R	1.73	1.00	1.00	0.00	0.00	∞
Phantom and set-up								
Phantom shell uncertainty—shape, thickness, and permittivity	7.60	R	1.73	1.00	1.00	4.39	4.39	∞
Liquid conductivity deviation from target values	5.00	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid permittivity deviation from target values	5.00	R	1.73	0.60	0.49	1.73	1.41	∞
Liquid conductivity measurement	0.93	N	1.00	0.78	0.71	0.73	0.66	4
Liquid permittivity measurement	0.74	N	1.00	0.26	0.26	0.19	0.19	4
Liquid conductivity—temperature uncertainty	1.10	R	1.73	0.78	0.71	0.49	0.45	∞
Liquid permittivity—temperature uncertainty	1.16	R	1.73	0.23	0.26	0.15	0.17	∞
Combined standard uncertainty			RSS			13.81	13.70	413
Expanded uncertainty (95 % confidence interval)			k = 2			27.62	27.40	

13. Test Equipment Information

Test Platform	SPEAG DASY5 System			
Version	DASY52: 52.10.3.1513 / SEMCAD: 14.6.13 (7474)			
Location	KCTL Inc, 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F -2	-	-
DASY5 Robot	TX90XL	F12/5L7FA1/A/01	-	-
Phantom	2mm Oval Phantom ELI5	1178	-	-
Mounting Device	Laptop Holder	-	-	-
DAE	DAE4	1342	2019-05-23	2020-05-23
Probe	EX3DV4	3865	2019-08-28	2020-08-28
ESG Vector Signal Generator	E4438C	MY42080486	2019-05-13	2020-05-13
Dual Power Meter	E4419B	GB43312301	2019-05-13	2020-05-13
Power Sensor	8481H	3318A 19379	2019-05-13	2020-05-13
Power Sensor	8481H	3318A 19377	2019-05-13	2020-05-13
Attenuator	8491B 3dB	17387	2019-05-13	2020-05-13
Attenuator	8491B-6dB	MY39270294	2019-05-13	2020-05-13
Attenuator	8491B 10dB	29425	2019-05-13	2020-05-13
Power Amplifier	5190FE	1012	2019-05-14	2020-05-14
Dual Directional Coupler	772D	2839A00719	2019-05-13	2020-05-13
Low Pass Filter	LA-30N	40058	2019-05-13	2020-05-13
Low Pass Filter	LA-60N	40059	2019-05-13	2020-05-13
Dipole Validation Kits	D2450V2	895	2018-07-24	2020-07-24
Dipole Validation Kits	D5GHzV2	1293	2019-07-04	2021-07-04
Network Analyzer	E5071B	MY42403524	2020-02-27	2021-02-27
Dielectric Assessment Kit	DAK-3.5	1078	2019-05-22	2020-05-22
Humidity/Temp	MHB-382SD	23107	2019-05-16	2020-05-16
Spectrum Analyzer	FSP7	100289	2020-01-03	2021-01-03

14. Test System Verification Results

Date: 2020-03-05

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2020-03-05.da5:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2450 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/2450 MHz Verification Input Power 100 mW 2020-03-05/Area Scan (9x12x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 7.54 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2020-03-05/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 69.65 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 10.2 W/kg


SAR(1 g) = 5.03 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 8.36 W/kg

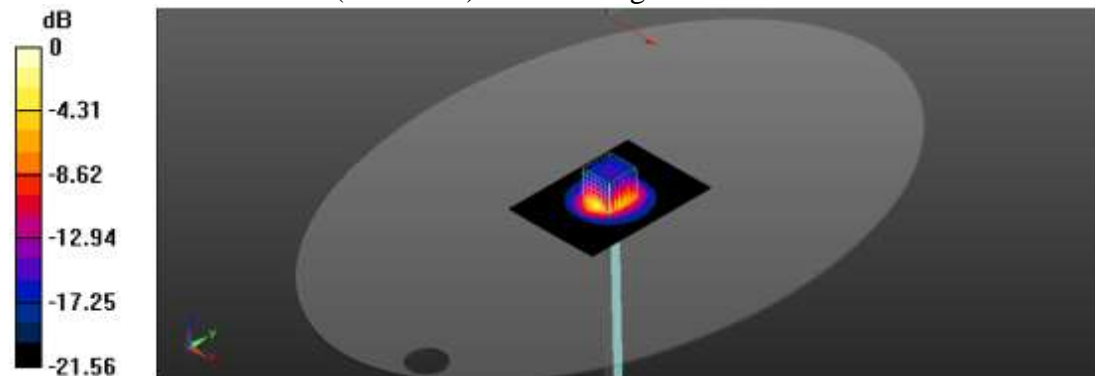

0 dB = 8.36 W/kg = 9.22 dBW/kg

Date: 2020-03-24

Test Laboratory: KCTL Inc.

File Name: [2450 MHz Verification Input Power 100 mW 2020-03-24.da5:0](#)**DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.816$ S/m; $\epsilon_r = 39.933$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2450 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/2450 MHz Verification Input Power 100 mW 2020-03-24/Area Scan (9x12x1):

Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 7.80 W/kg

Configuration/2450 MHz Verification Input Power 100 mW 2020-03-24/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 73.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 11.2 W/kg


SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 9.01 W/kg

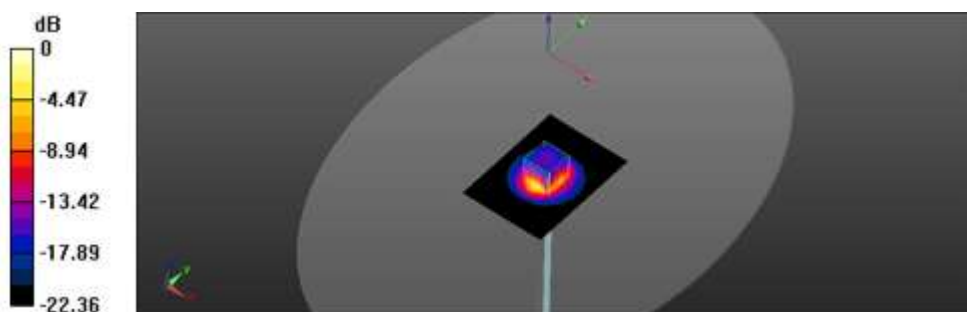

0 dB = 9.01 W/kg = 9.55 dBW/kg

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [5200 MHz Verification Input Power 100 mW 2020-03-09.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.536$ S/m; $\epsilon_r = 36.683$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.79, 4.79, 4.79) @ 5200 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/5200 MHz Verification Input Power 100 mW 2020-03-09/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.9 W/kg

Configuration/5200 MHz Verification Input Power 100 mW 2020-03-09/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 73.61 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

Maximum value of SAR (measured) = 20.5 W/kg

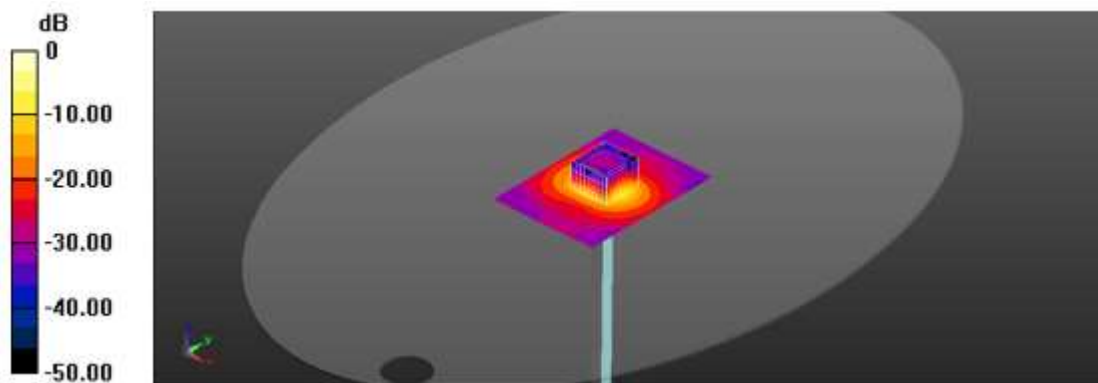

0 dB = 20.5 W/kg = 13.12 dBW/kg

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [5300 MHz Verification Input Power 100 mW 2020-03-09.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5300$ MHz; $\sigma = 4.653$ S/m; $\epsilon_r = 36.553$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.62, 4.62, 4.62) @ 5300 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/5300 MHz Verification Input Power 100 mW 2020-03-09/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 15.6 W/kg

Configuration/5300 MHz Verification Input Power 100 mW 2020-03-09/Zoom Scan**(9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.84 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 31.7 W/kg


SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 20.0 W/kg

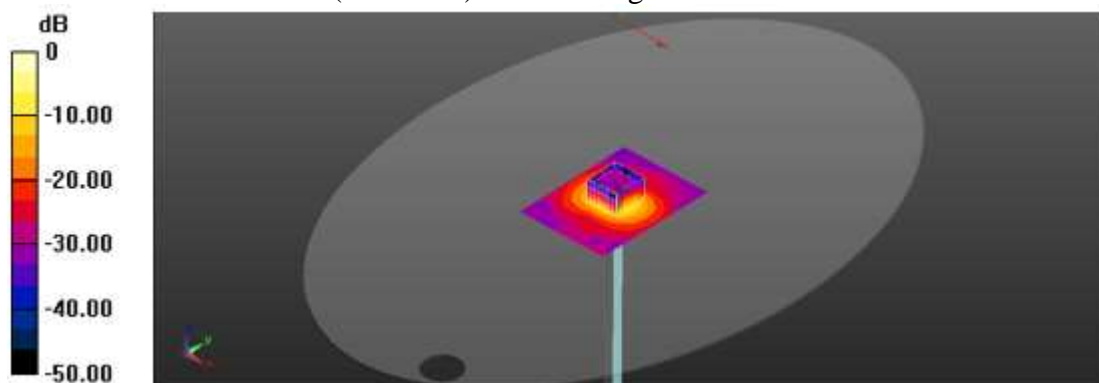

0 dB = 20.0 W/kg = 13.01 dBW/kg

Date: 2020-03-10

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2020-03-10.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.949$ S/m; $\epsilon_r = 36.093$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.4, 4.4, 4.4) @ 5600 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/5600 MHz Verification Input Power 100 mW 2020-03-10/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.7 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2020-03-10/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.91 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 33.2 W/kg

SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.8%

Maximum value of SAR (measured) = 20.4 W/kg

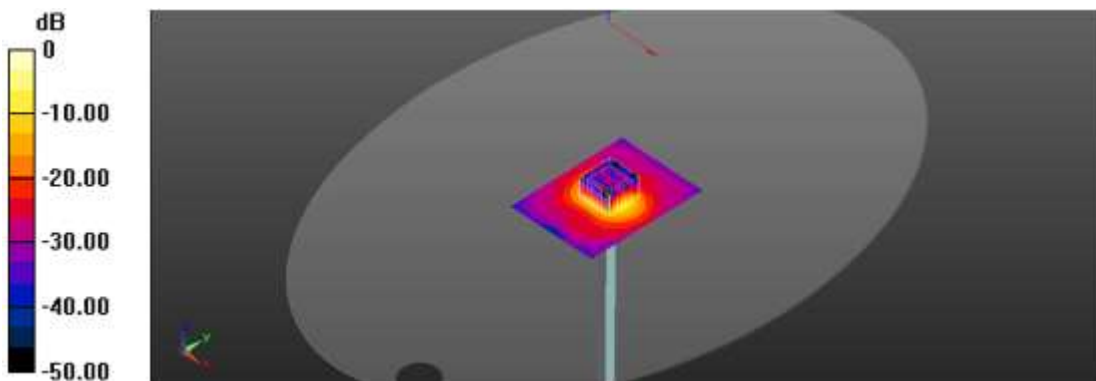

0 dB = 20.4 W/kg = 13.10 dBW/kg

Date: 2020-03-25

Test Laboratory: KCTL Inc.

File Name: [5600 MHz Verification Input Power 100 mW 2020-03-25.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.193$ S/m; $\epsilon_r = 34.839$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.4, 4.4, 4.4) @ 5600 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/5600 MHz Verification Input Power 100 mW 2020-03-25/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.0 W/kg

Configuration/5600 MHz Verification Input Power 100 mW 2020-03-25/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 65.28 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.39 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

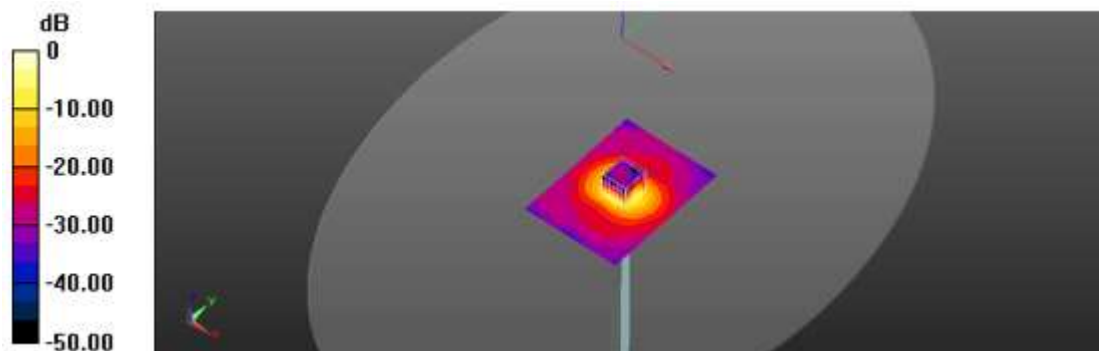

0 dB = 21.1 W/kg = 13.24 dBW/kg

Date: 2020-03-06

Test Laboratory: KCTL Inc.

File Name: [5800 MHz Verification Input Power 100 mW 2020-03-06.da5:0](#)**DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293**

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.261$ S/m; $\epsilon_r = 35.303$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.46, 4.46, 4.46) @ 5800 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/5800 MHz Verification Input Power 100 mW 2020-03-06/Area Scan (10x13x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 15.6 W/kg

Configuration/5800 MHz Verification Input Power 100 mW 2020-03-06/Zoom Scan**(7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.34 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 36.2 W/kg

SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 62%

Maximum value of SAR (measured) = 21.6 W/kg

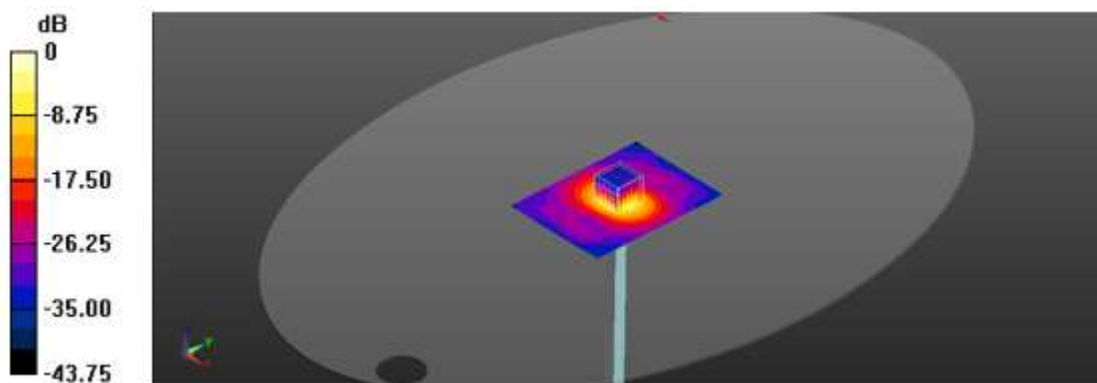

0 dB = 21.6 W/kg = 13.34 dBW/kg

15. Test Results

1)

Date: 2020-03-24

Test Laboratory: KCTL Inc.

File Name: [1. 802.11 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.007$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2437 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 b_Main_CH6_Rear 0mm Repeat/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 W/kg

Configuration/802.11 b_Main_CH6_Rear 0mm Repeat/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.74 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.45 W/kg


SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 36.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.70 W/kg

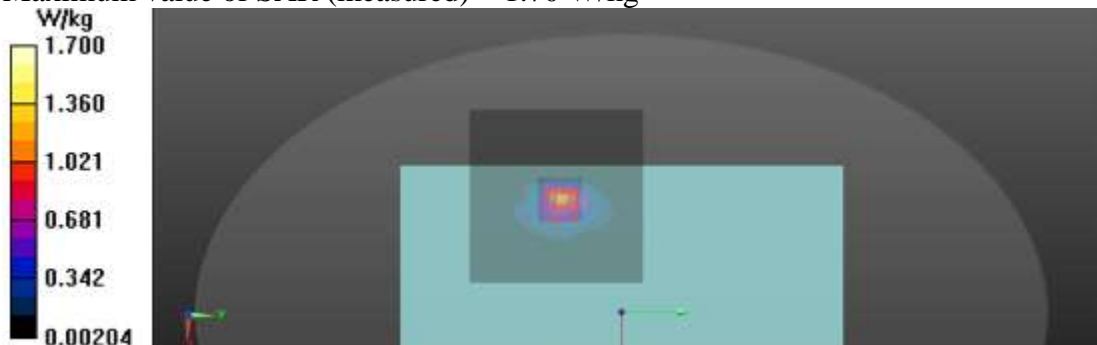

2)

Date: 2020-03-24

Test Laboratory: KCTL Inc.

File Name: [1. 802.11 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.007$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2437 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 b_Aux_CH6_Rear 0mm/Area Scan (11x11x1): Measurement grid:
dx=12mm, dy=12mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.14 W/kg

Configuration/802.11 b_Aux_CH6_Rear 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.35 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.251 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 37.3%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg



3)

Date: 2020-03-24

Test Laboratory: KCTL Inc.

File Name: [1. 802.11 Body.da53:0](#)

DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.007$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2437 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 n_HT40_MIMO_CH6_Rear 0mm/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.906 W/kg

Configuration/802.11 n_HT40_MIMO_CH6_Rear 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.84 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 34.7%

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.958 W/kg



4)

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [1. 5.2G VHT80 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5G WLAN (0); Frequency: 5210 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 4.539$ S/m; $\epsilon_r = 36.664$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.79, 4.79, 4.79) @ 5210 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Main_CH42_Rear 0mm Repeat/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.89 W/kg

Configuration/802.11 ac_VHT80_Main_CH42_Rear 0mm Repeat/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.43 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 5.16 W/kg


SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.87 W/kg

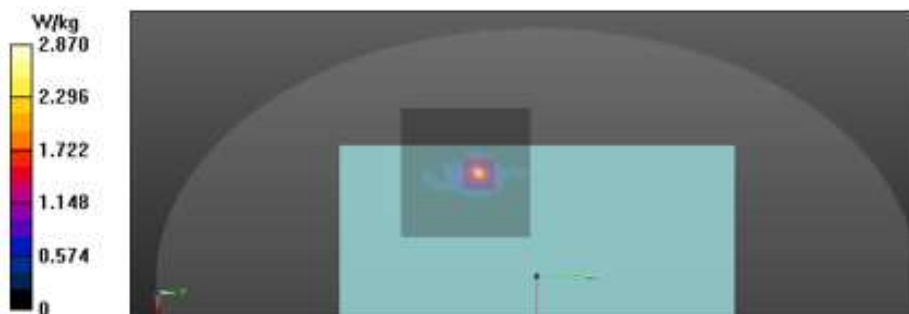

5)

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [1. 5.3G VHT160 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5G WLAN (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 36.482$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.79, 4.79, 4.79) @ 5250 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT160_Main_CH50_Rear 0mm/Area Scan (11x11x1): Measurement
grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.04 W/kg

Configuration/802.11 ac_VHT160_Main_CH50_Rear 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.02 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 3.34 W/kg



6)

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [2. 5.3G VHT80 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.518$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Aux_CH58_Rear 0mm Repeat/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.04 W/kg

Configuration/802.11 ac_VHT80_Aux_CH58_Rear 0mm Repeat/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.01 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 6.38 W/kg

SAR(1 g) = 0.997 W/kg; SAR(10 g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.79 W/kg



7)

Date: 2020-03-09

Test Laboratory: KCTL Inc.

File Name: [2. 5.3G VHT80 Body.da53:0](#)

DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M

Communication System: UID 0, 5GWLAN (0); Frequency: 5290 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5290 \text{ MHz}$; $\sigma = 4.65 \text{ S/m}$; $\epsilon_r = 36.518$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.62, 4.62, 4.62) @ 5290 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_MIMO_CH58_Rear 0mm/Area Scan (11x18x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 W/kg

Configuration/802.11 ac_VHT80_MIMO_CH58_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 15.68 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.73 W/kg


SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.5%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.34 W/kg

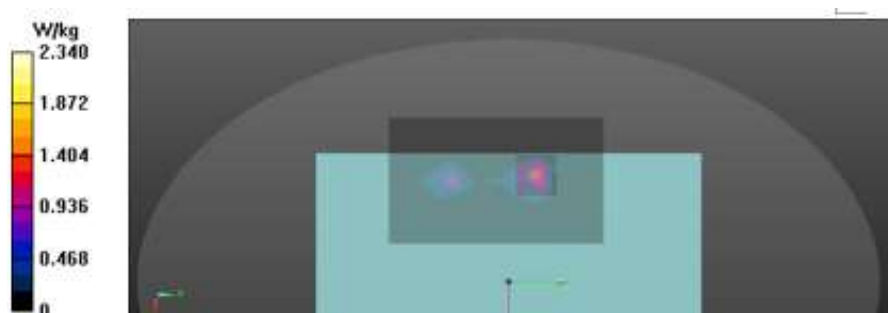

8)

Date: 2020-03-10

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G VHT80 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5GWLAN (0); Frequency: 5530 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.876$ S/m; $\epsilon_r = 36.198$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.58, 4.58, 4.58) @ 5530 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Main_CH106_Rear 0mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.85 W/kg

Configuration/802.11 ac_VHT80_Main_CH106_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.46 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 7.46 W/kg


SAR(1 g) = 1 W/kg; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.60 W/kg

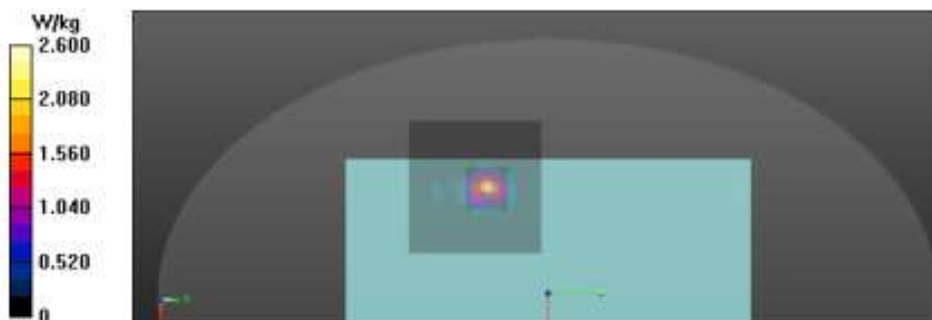

9)

Date: 2020-03-10

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G VHT80 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5G WLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.4, 4.4, 4.4) @ 5690 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Aux_CH138_Rear 0mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.63 W/kg

Configuration/802.11 ac_VHT80_Aux_CH138_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.77 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 5.70 W/kg


SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.275 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.93 W/kg

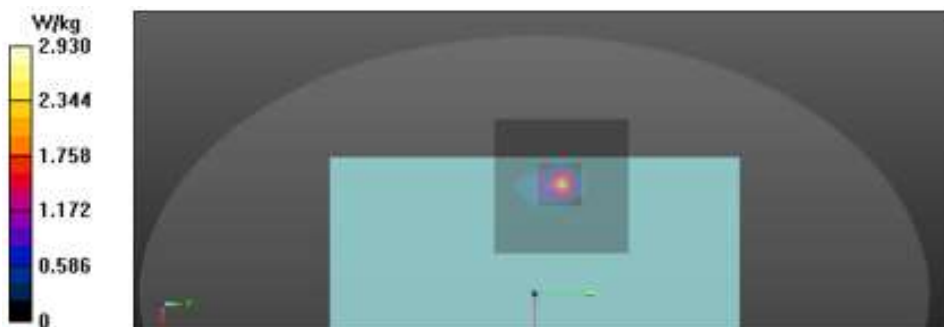

10)

Date: 2020-03-25

Test Laboratory: KCTL Inc.

File Name: [1. 5.6G VHT80 Body.da53:0](#)**DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, 5GWLAN (0); Frequency: 5690 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5690$ MHz; $\sigma = 5.288$ S/m; $\epsilon_r = 34.687$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.4, 4.4, 4.4) @ 5690 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_MIMO_CH138_Rear 0mm/Area Scan (11x18x1):

Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

Configuration/802.11 ac_VHT80_MIMO_CH138_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.49 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.89 W/kg

SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.62 W/kg



11)

Date: 2020-03-06

Test Laboratory: KCTL Inc.

File Name: 1. 5.8G VHT80 Body.da53:0

DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 35.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.46, 4.46, 4.46) @ 5775 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Main_CH155_Rear 0mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.93 W/kg

Configuration/802.11 ac_VHT80_Main_CH155_Rear 0mm/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 25.73 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 7.78 W/kg

SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 3.89 W/kg

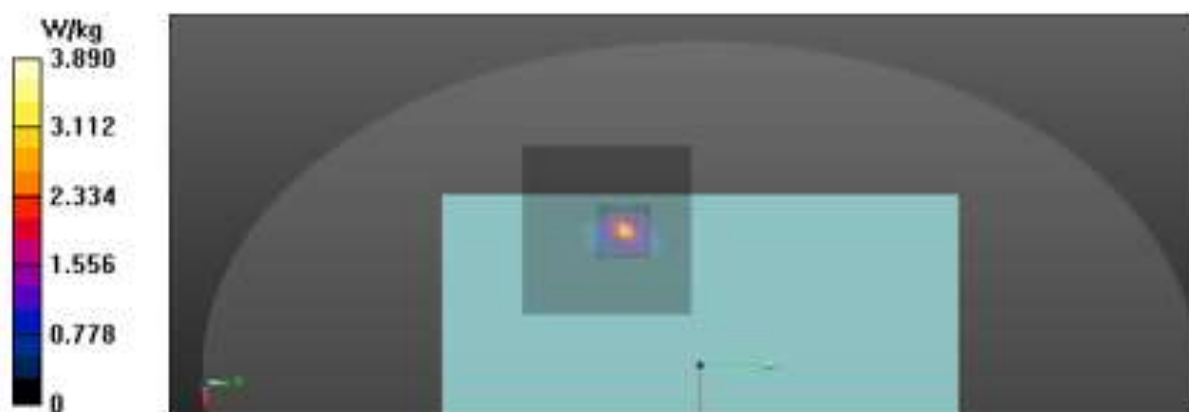

12)

Date: 2020-03-06

Test Laboratory: KCTL Inc.

File Name: 1. 5.8G VHT80 Body.da53:0

DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 35.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.46, 4.46, 4.46) @ 5775 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_Aux_CH155_Rear 0mm Repeat/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.89 W/kg

Configuration/802.11 ac_VHT80_Aux_CH155_Rear 0mm Repeat/Zoom Scan (9x9x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.64 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.57 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

Maximum value of SAR (measured) = 2.87 W/kg



13)

Date: 2020-03-06

Test Laboratory: KCTL Inc.

File Name: [1. 5.8G VHT80 Body.da53:0](#)

DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M

Communication System: UID 0, 5GWLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.237$ S/m; $\epsilon_r = 35.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(4.46, 4.46, 4.46) @ 5775 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/802.11 ac_VHT80_MIMO_CH155_Rear 0mm Repeat/Area Scan (11x18x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.56 W/kg

Configuration/802.11 ac_VHT80_MIMO_CH155_Rear 0mm Repeat/Zoom Scan (9x9x7)/Cube

0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.19 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 6.49 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 59%

Maximum value of SAR (measured) = 3.61 W/kg



14)

Date: 2020-03-24

Test Laboratory: KCTL Inc.

File Name: **2. Bluetooth_GFSK_DH5_Body.da53:0****DUT: NP767XCM, Type: Notebook, Serial: 1CEL91ZN100246M**

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.30017

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.849$ S/m; $\epsilon_r = 39.832$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3865; ConvF(7.84, 7.84, 7.84) @ 2480 MHz; ; Calibrated: 2019-08-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1342; Calibrated: 2019-05-23
- Phantom: ELI v5.0 sn1178; Type: QDOVA002AA; Serial: TP:1178
- Measurement SW: DASY52, Version 52.10 (3);

Configuration/Bluetooth_GFSK_DH5_CH78_Rear 0mm/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.199 W/kg

Configuration/Bluetooth_GFSK_DH5_CH78_Rear 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.83 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 33.3%

Maximum value of SAR (measured) = 0.284 W/kg

