



7MHz Channel Bandwidth (ANT 1)

Low Channel


QPSK

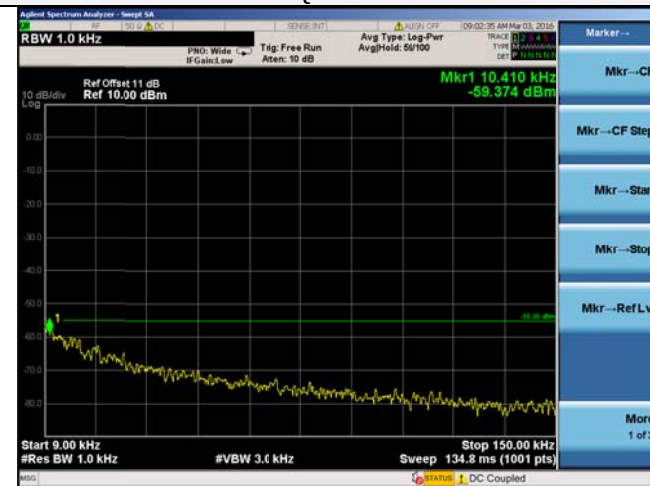


16QAM

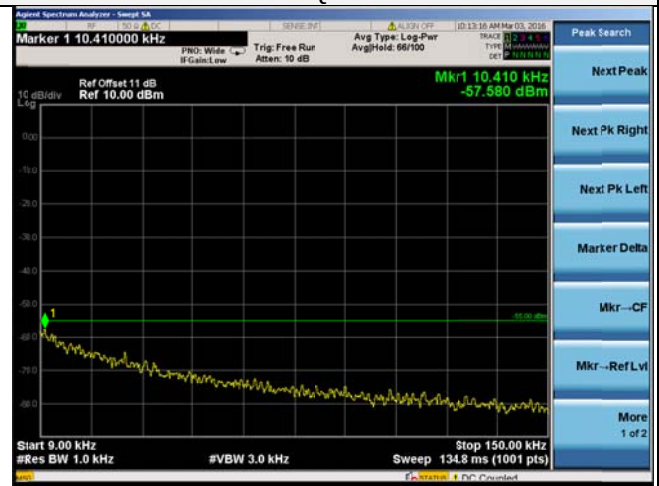

9KHz~150KHz

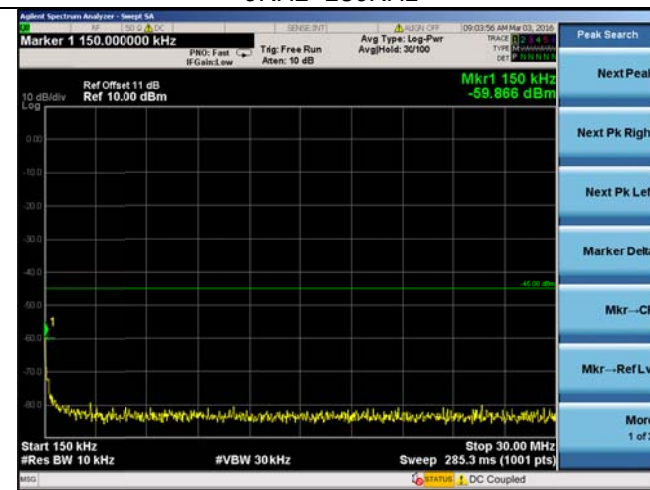

9KHz~150KHz

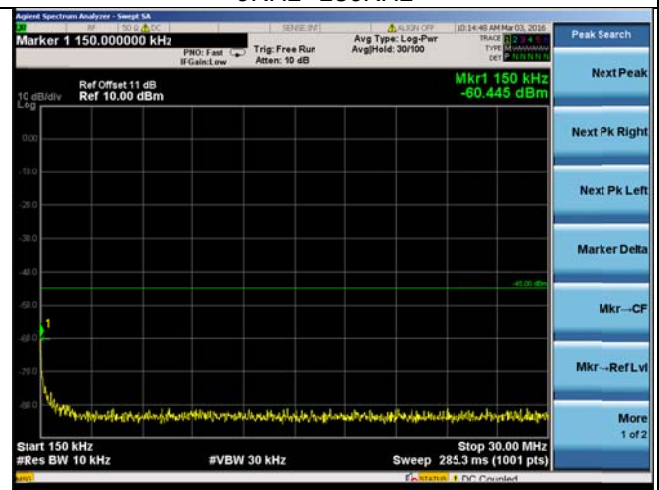

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


7MHz Channel Bandwidth (ANT 1)

Middle Channel


QPSK

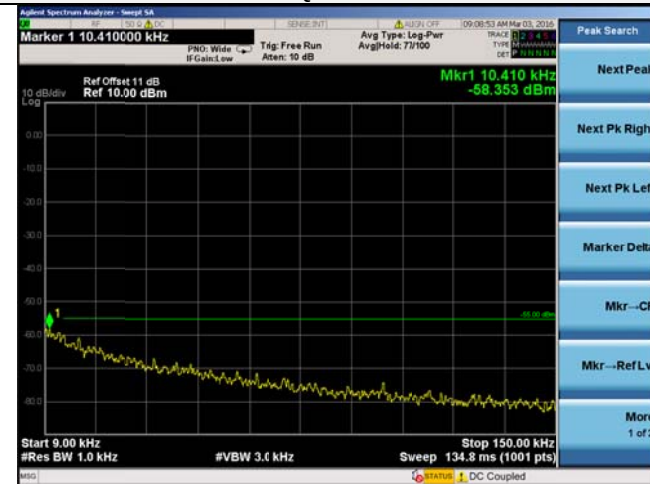


16QAM

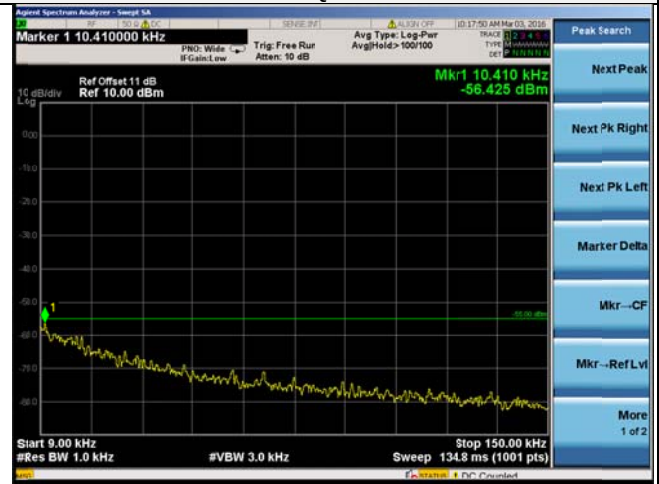

9KHz~150KHz

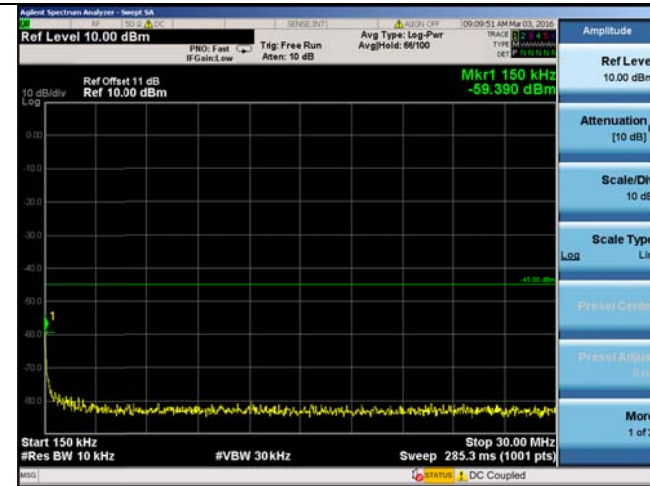

9KHz~150KHz

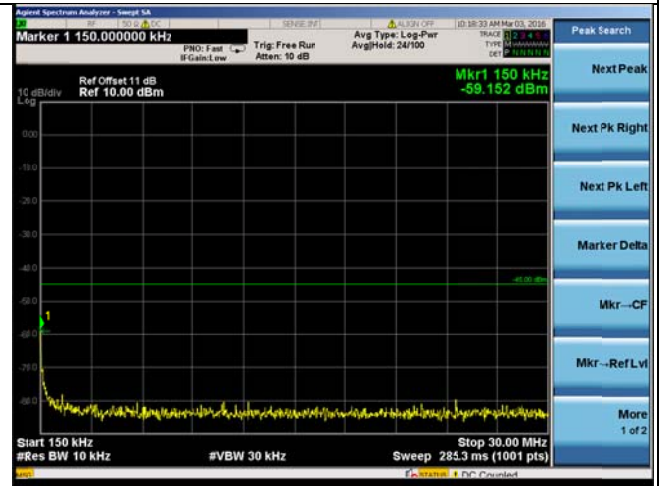

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz

7MHz Channel Bandwidth (ANT 1)

High Channel


QPSK

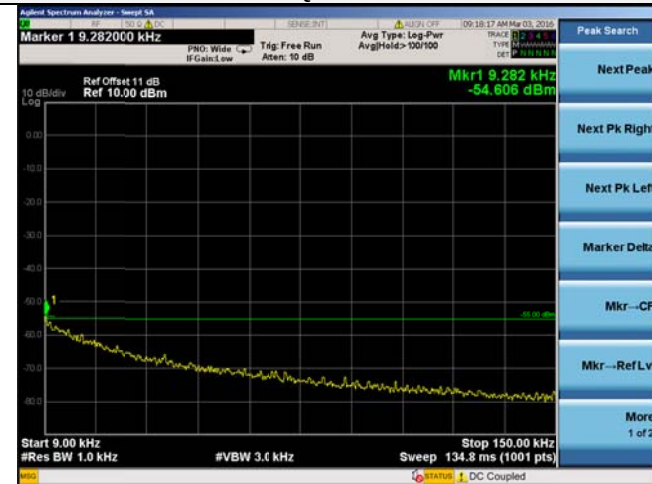


16QAM



9KHz~150KHz

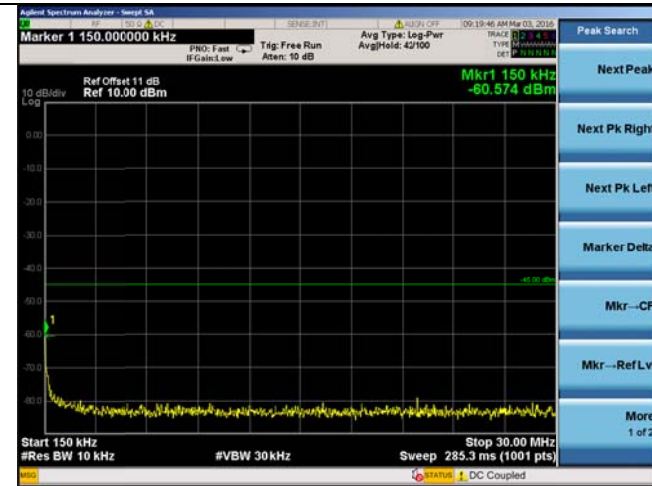

9KHz~150KHz

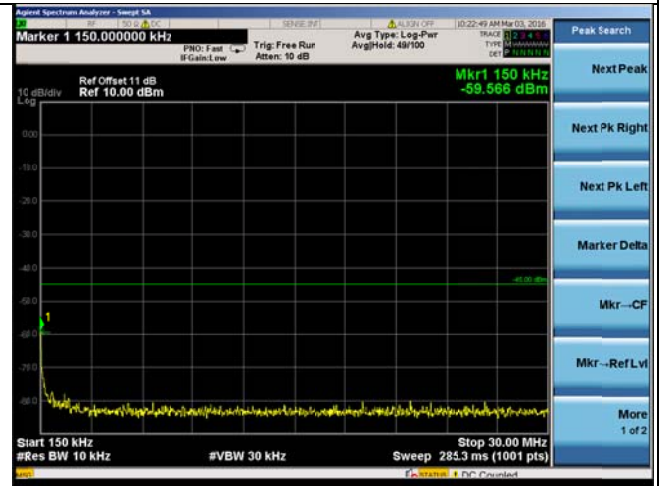

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 1)

Low Channel


QPSK

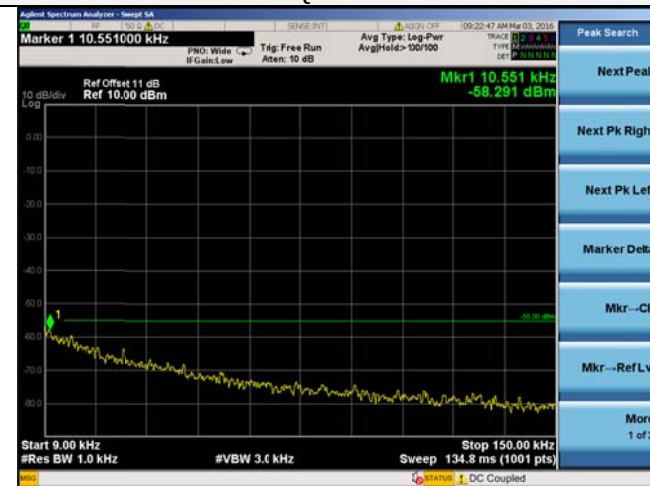


16QAM

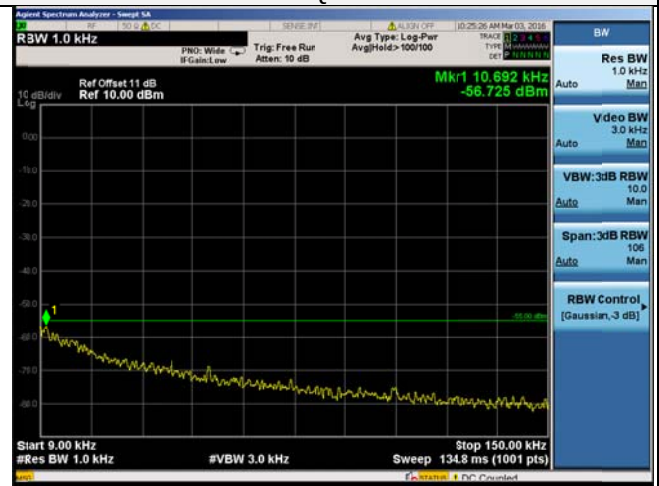

9KHz~150KHz

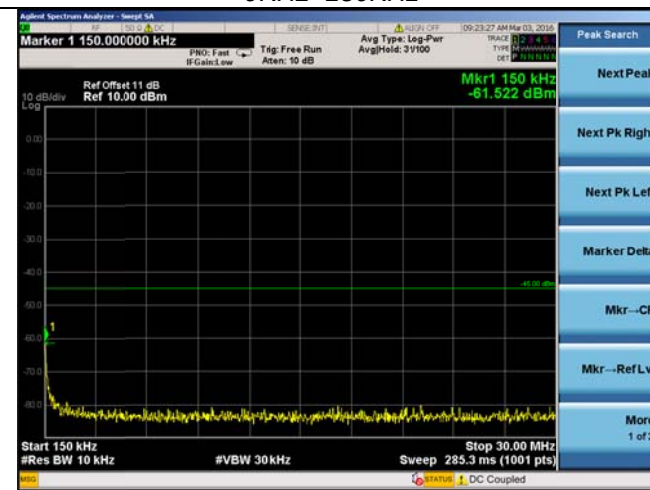

9KHz~150KHz

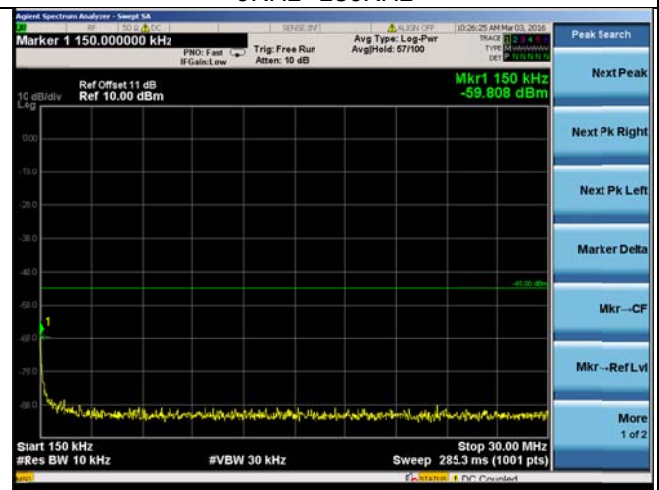

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 1)

Middle Channel


QPSK

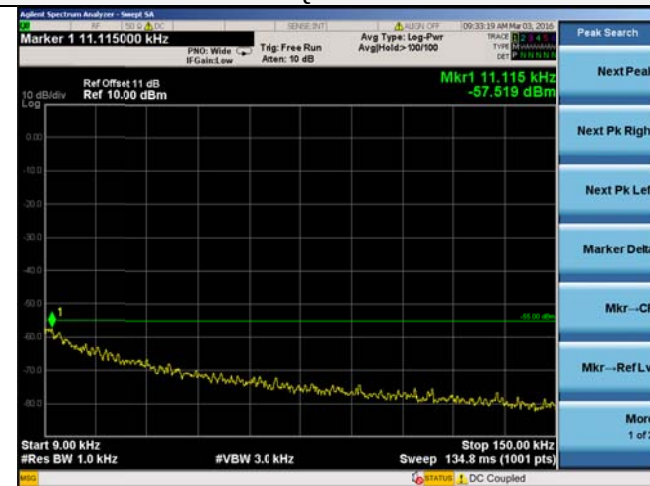


16QAM

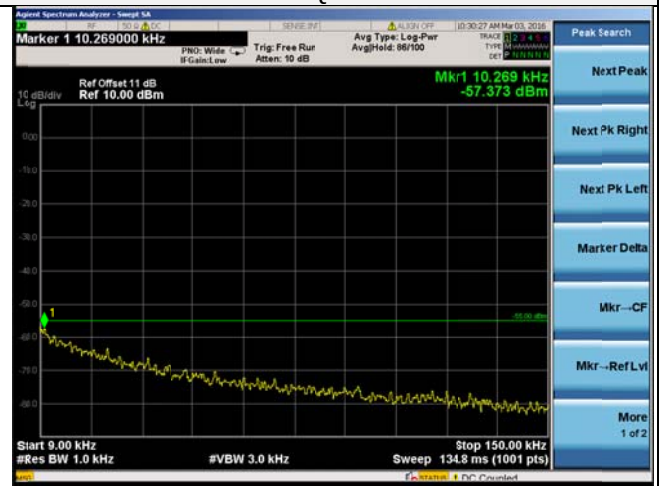


9KHz~150KHz

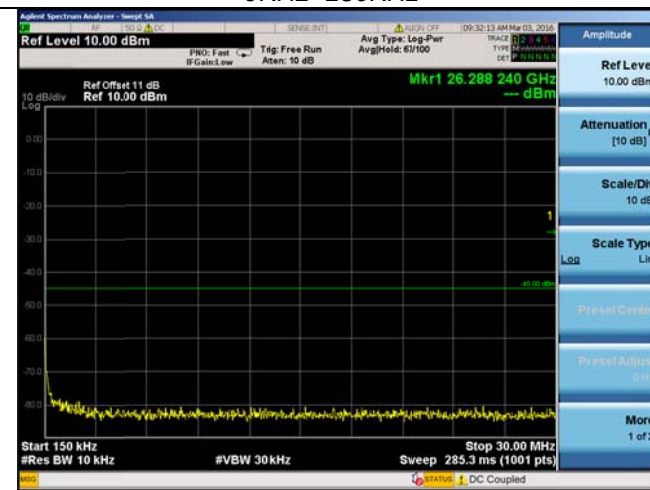

9KHz~150KHz

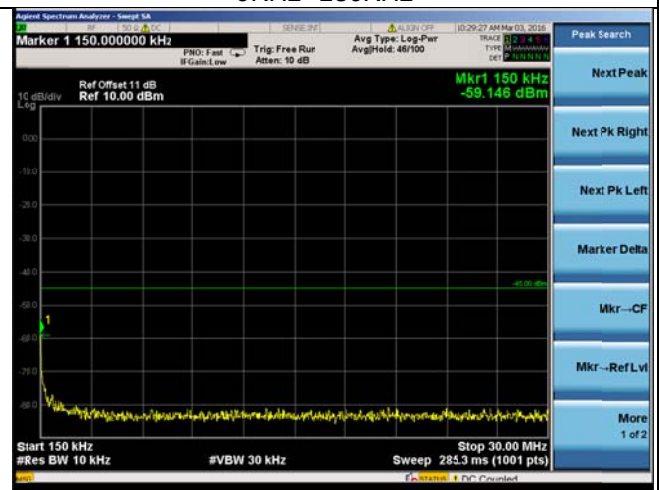

150KHz~30MHz

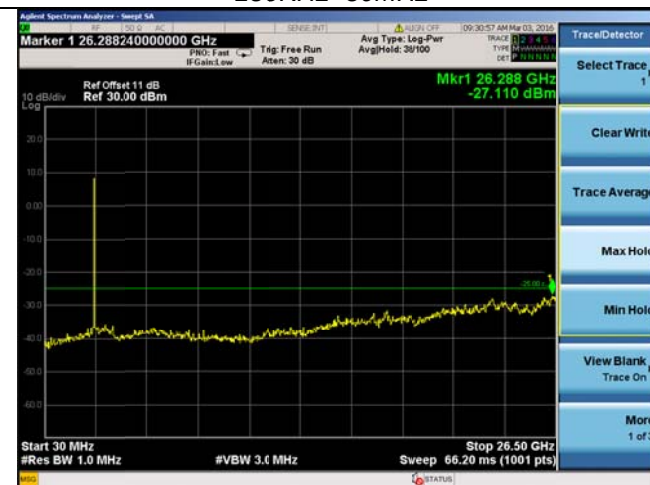

150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 1)

High Channel


QPSK

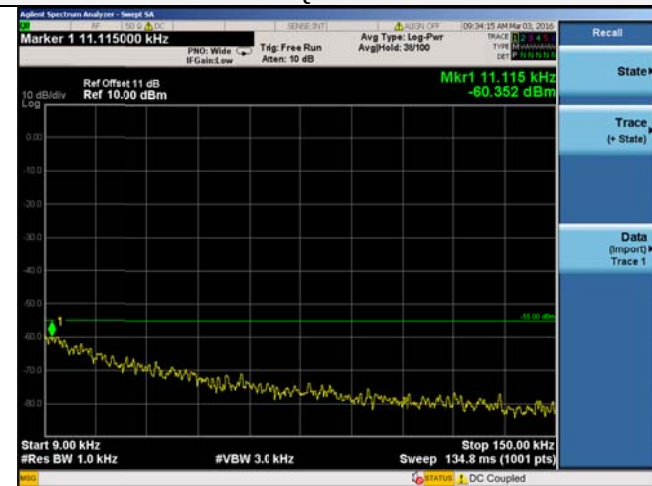

16QAM

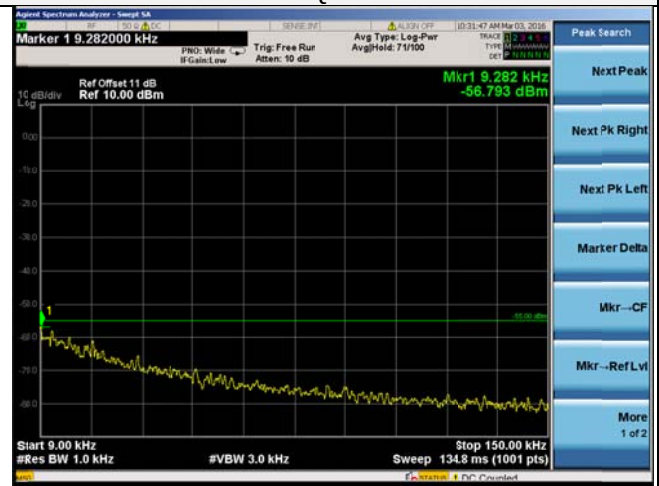


9KHz~150KHz

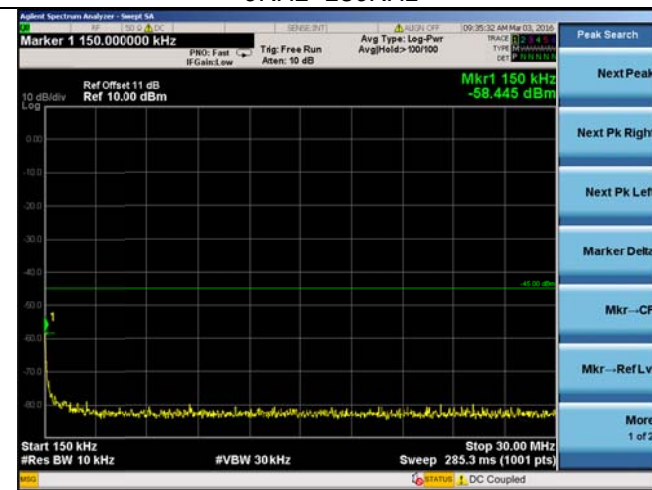

9KHz~150KHz



150KHz~30MHz

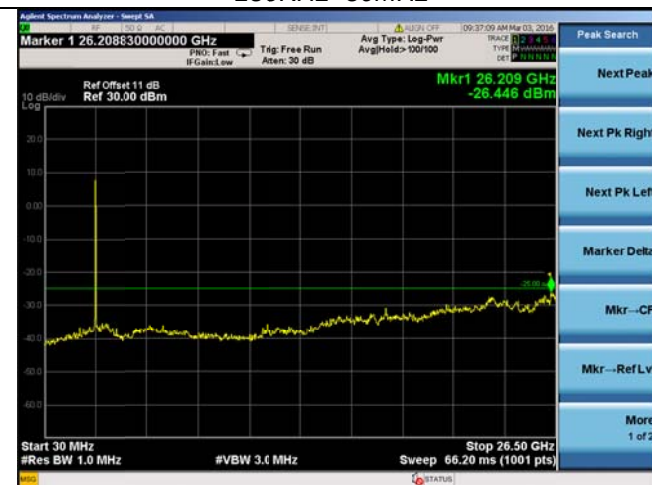

150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


10MHz Channel Bandwidth (ANT 1)

Low Channel


QPSK

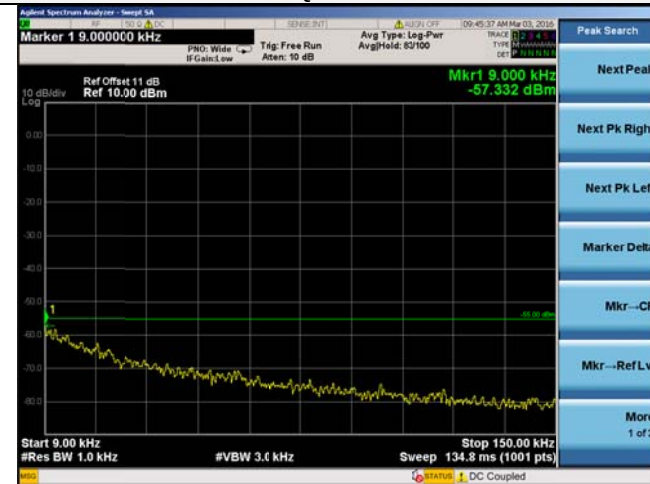


16QAM

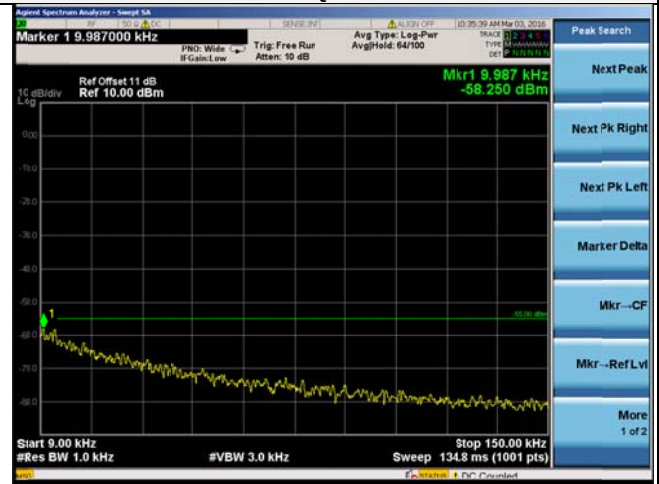

9KHz~150KHz

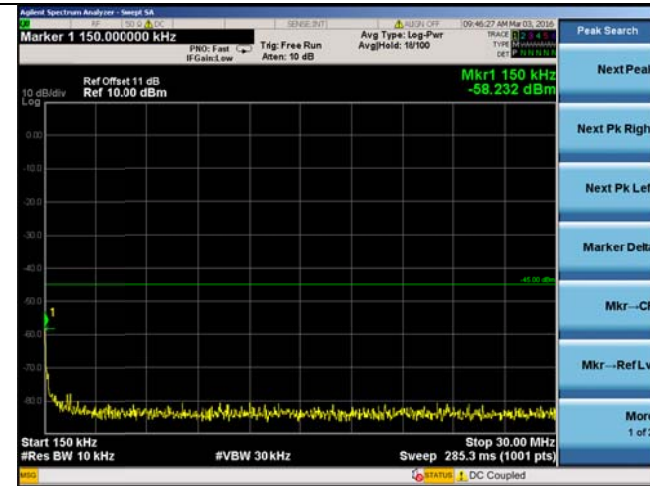

9KHz~150KHz

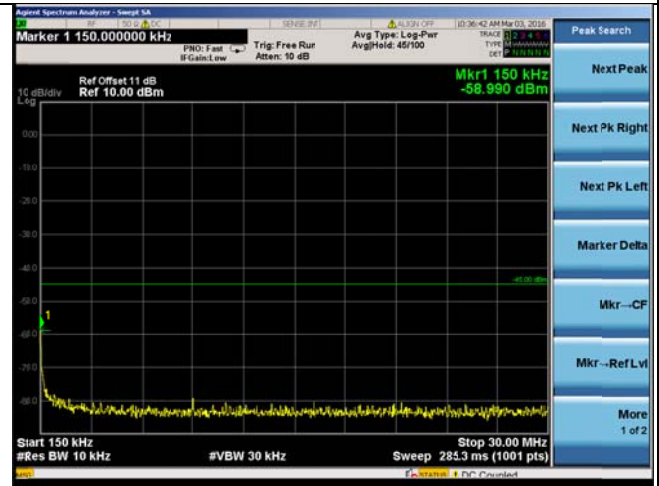

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz


30MHz~26.5GHz

10MHz Channel Bandwidth (ANT 1)
Middle Channel


QPSK

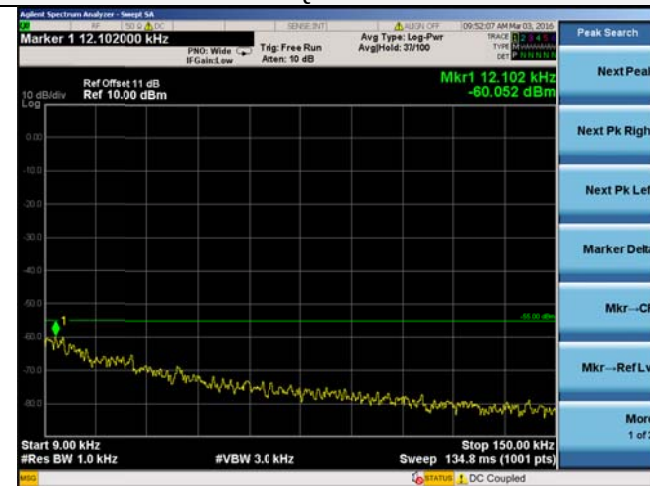


16QAM

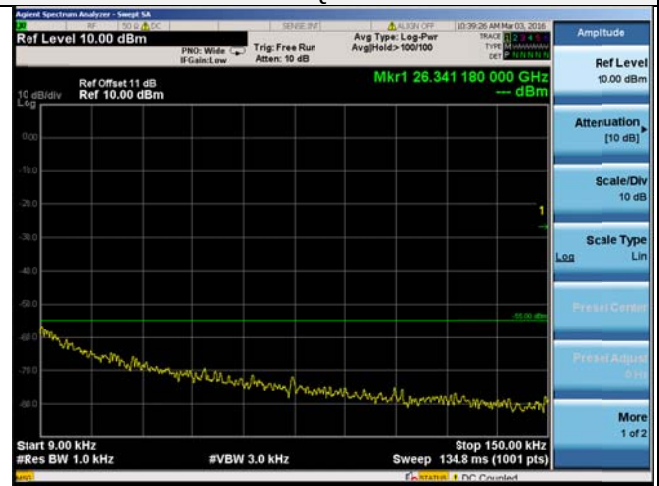

9KHz~150KHz

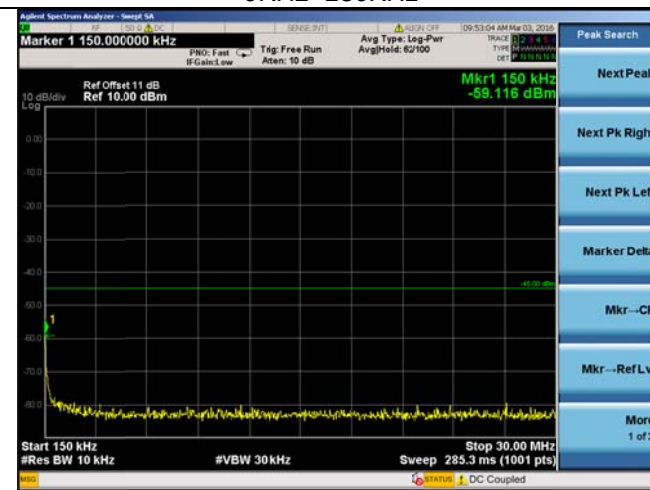

9KHz~150KHz

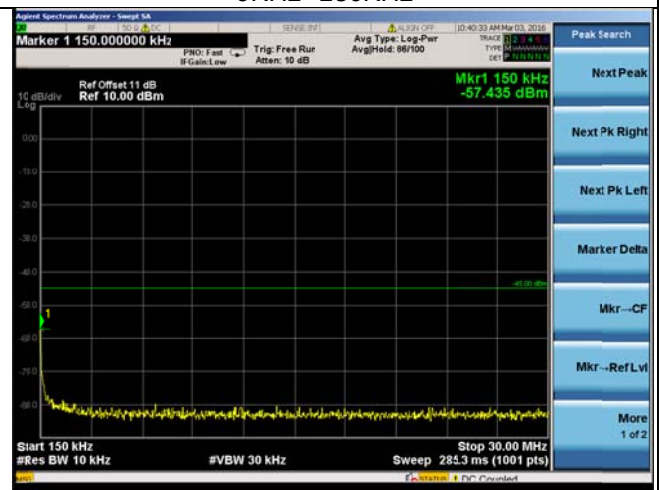

150KHz~30MHz







150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

10MHz Channel Bandwidth (ANT 1)
High Channel

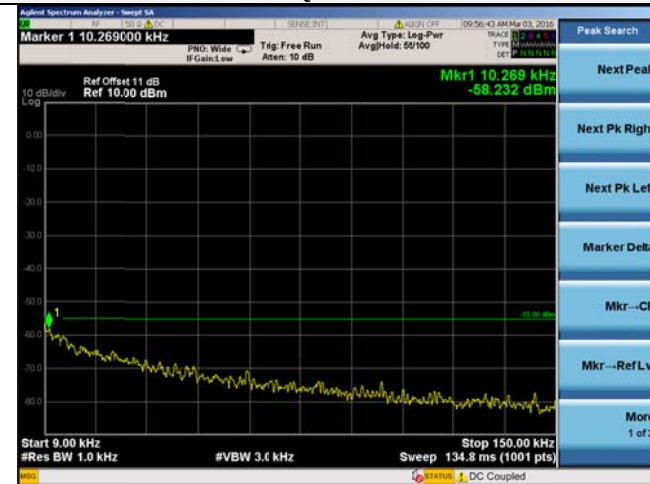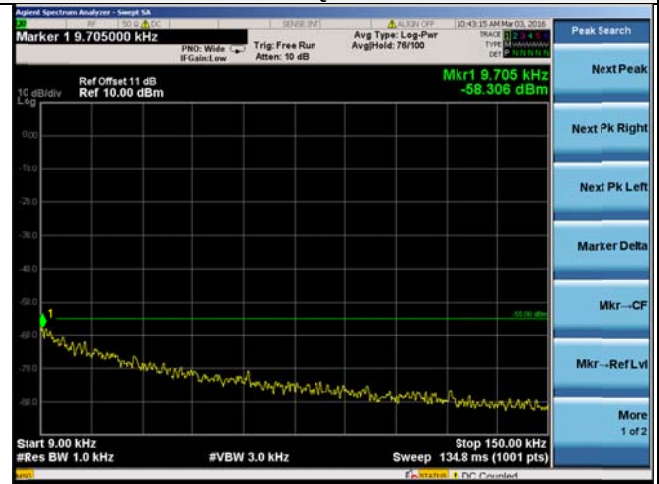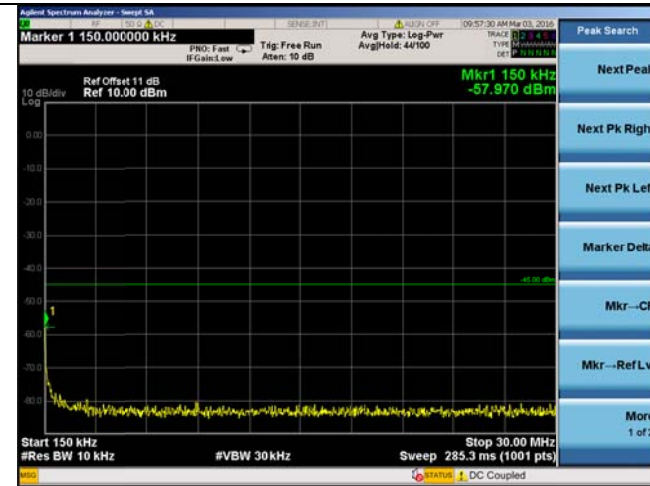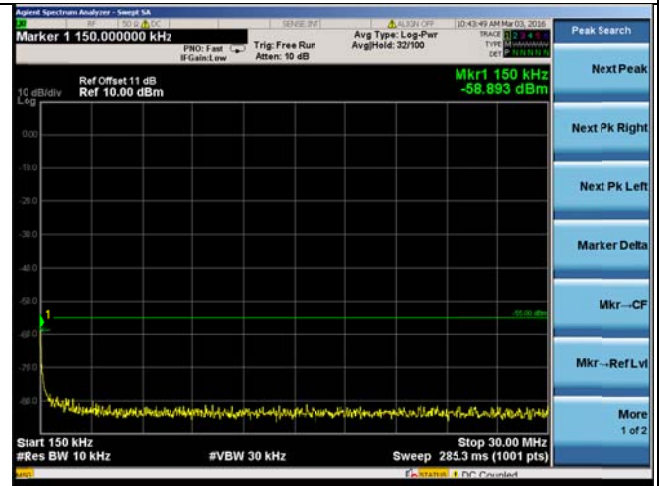QPSK**16QAM****9KHz~150KHz****9KHz~150KHz****150KHz~30MHz****150KHz~30MHz****30MHz~26.5GHz****30MHz~26.5GHz**


7MHz Channel Bandwidth (ANT 2)

Low Channel

QPSK




16QAM

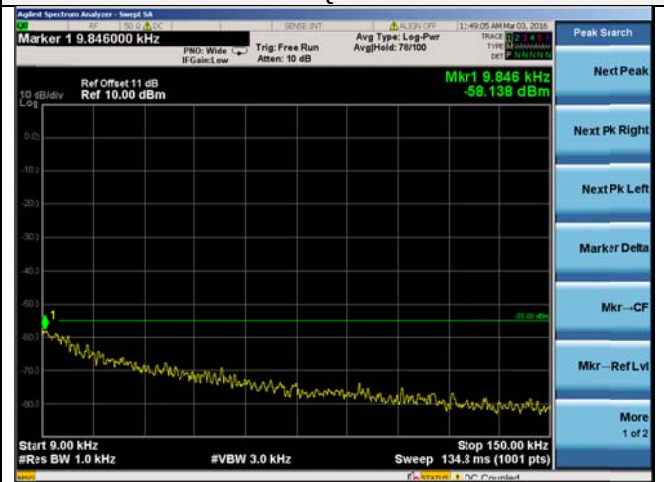

9KHz~150KHz



9KHz~150KHz

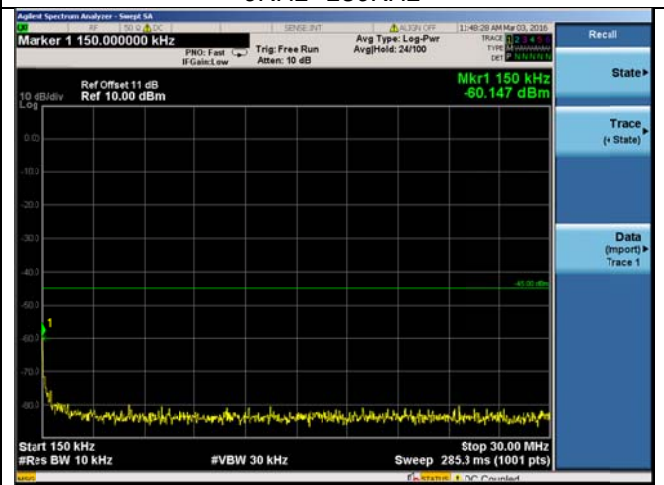

150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


7MHz Channel Bandwidth (ANT 2)

Middle Channel


QPSK

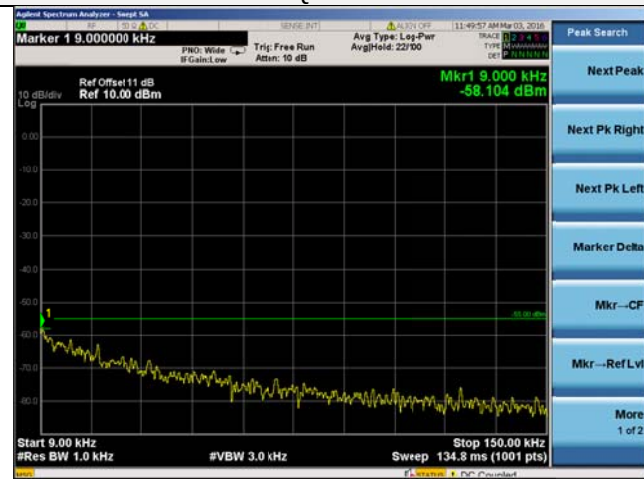


16QAM

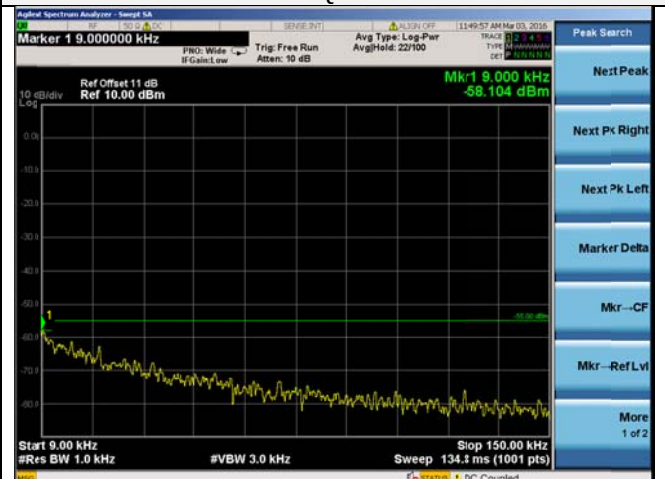

9KHz~150KHz

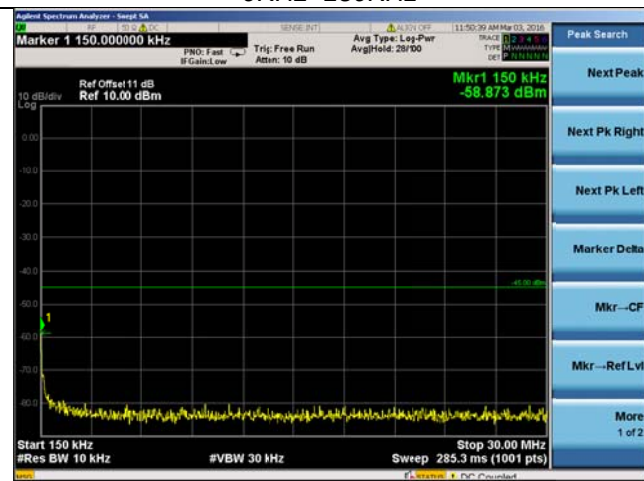

9KHz~150KHz

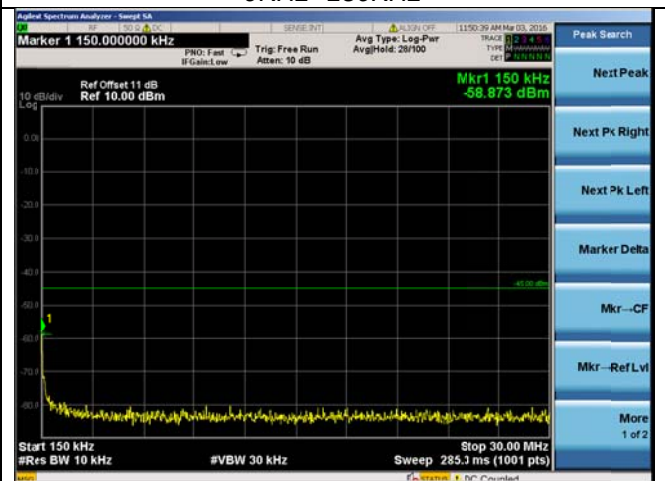

150KHz~30MHz



150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

7MHz Channel Bandwidth (ANT 2)

High Channel

QPSK



16QAM




9KHz~150KHz



9KHz~150KHz



150KHz~30MHz

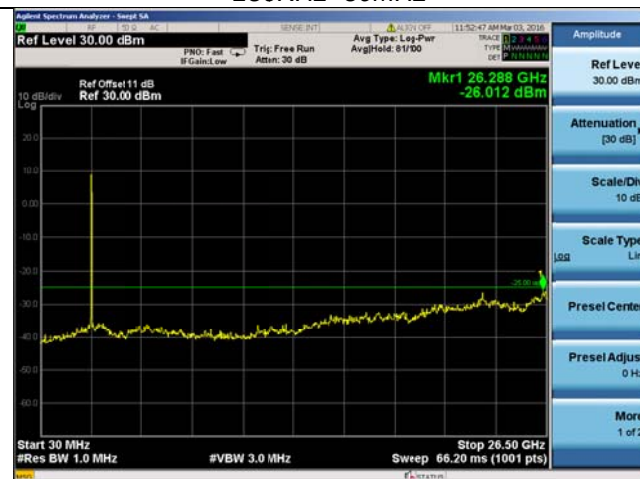

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 2)

Low Channel


QPSK



16QAM

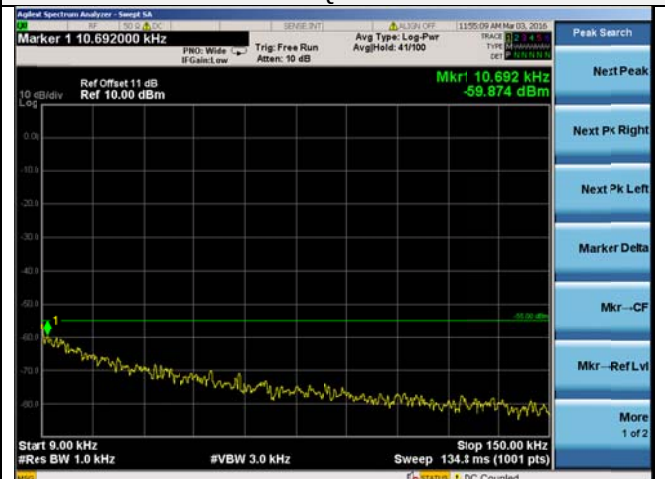

9KHz~150KHz

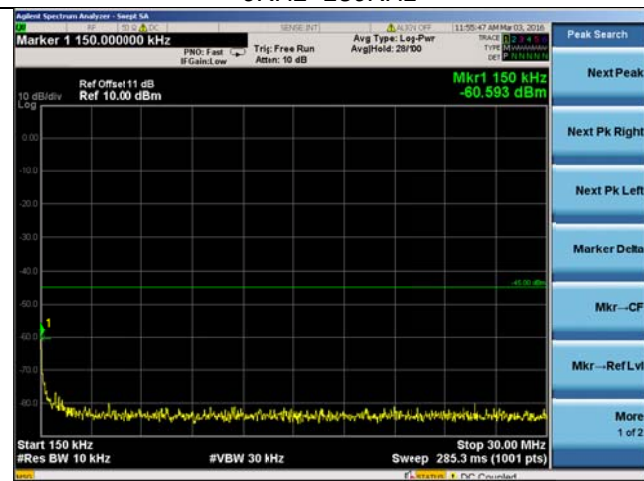

9KHz~150KHz



150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 2)

Middle Channel


QPSK

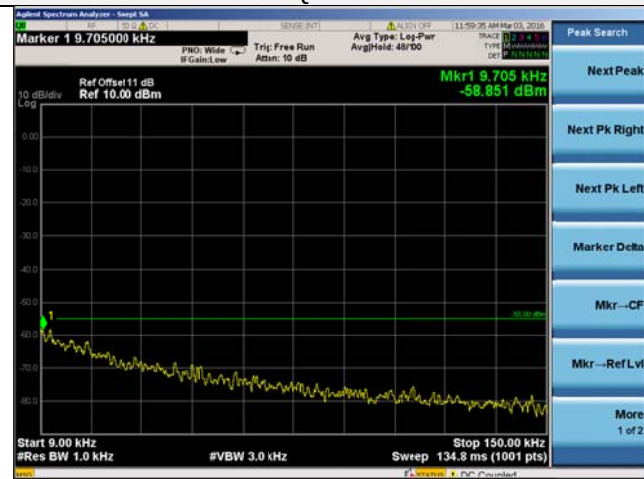


16QAM

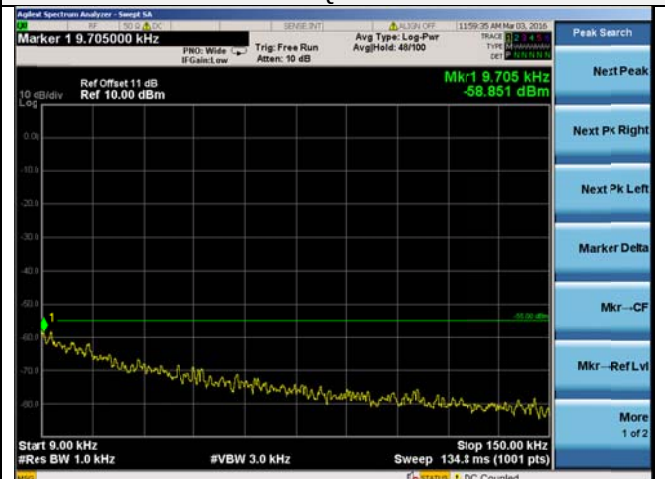


9KHz~150KHz

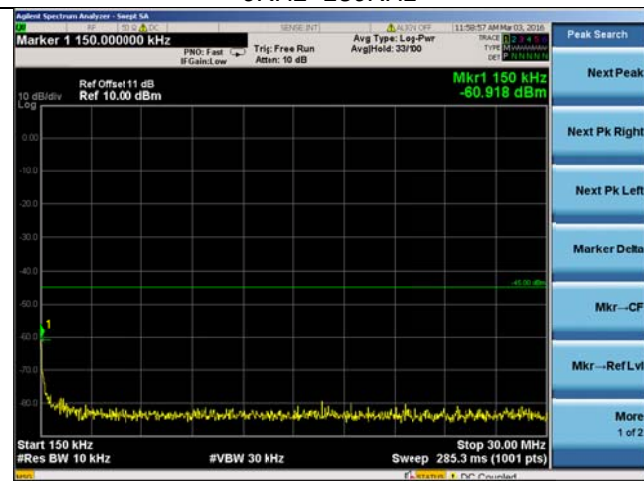

9KHz~150KHz

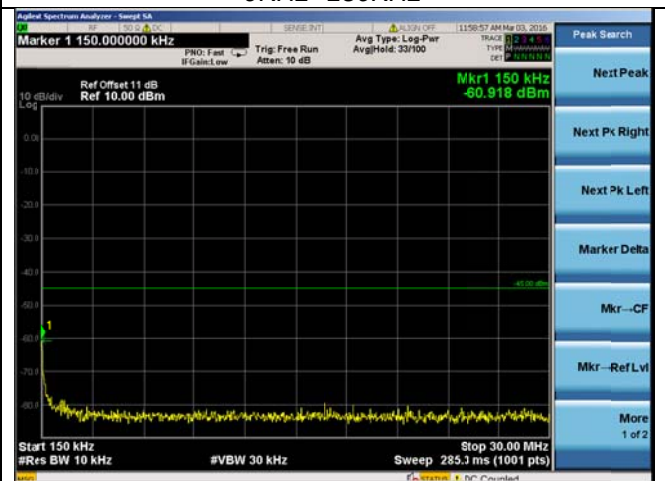

150KHz~30MHz

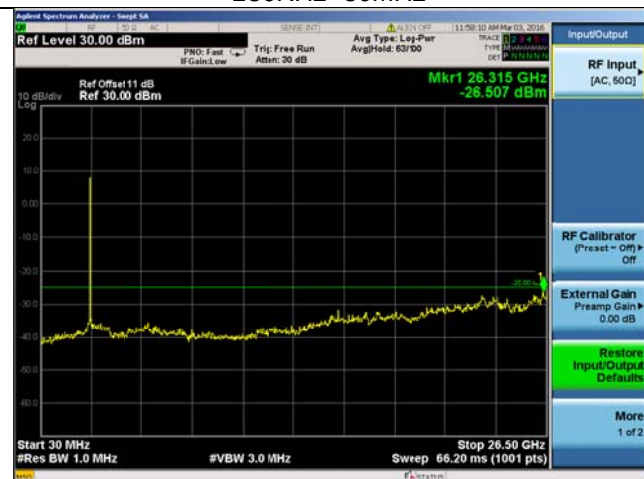

150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz


8.75MHz Channel Bandwidth (ANT 2)

High Channel


QPSK

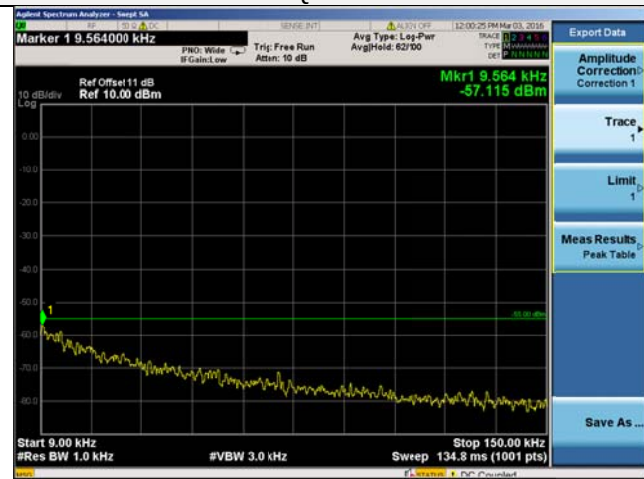

16QAM

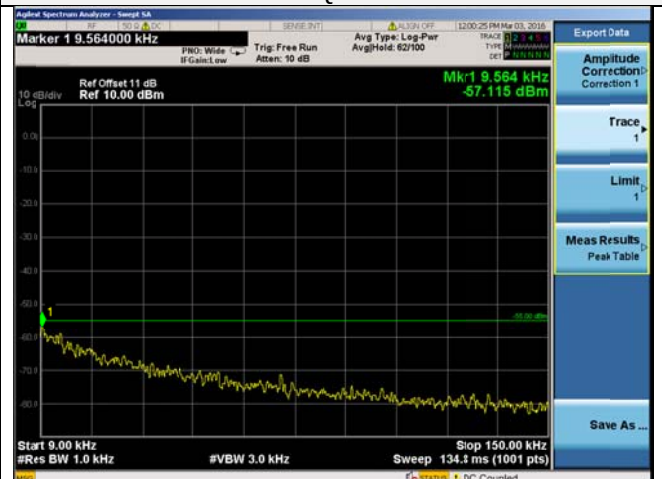


9KHz~150KHz

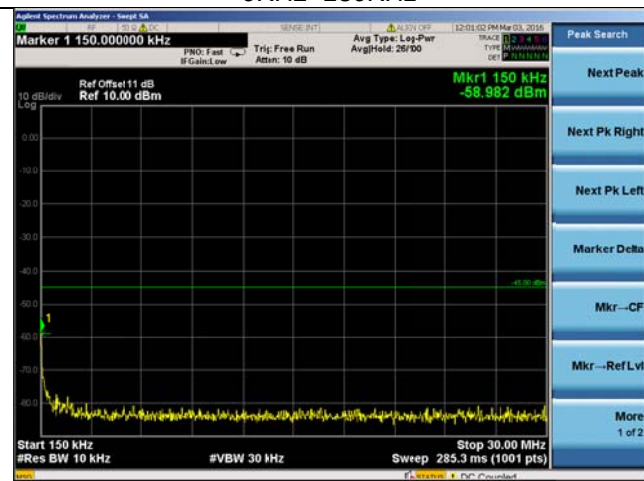

9KHz~150KHz



150KHz~30MHz

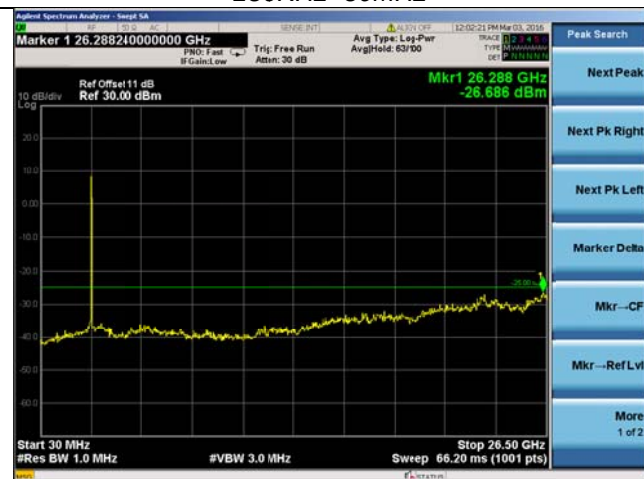

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

10MHz Channel Bandwidth (ANT 2)

Low Channel


QPSK



16QAM



9KHz~150KHz

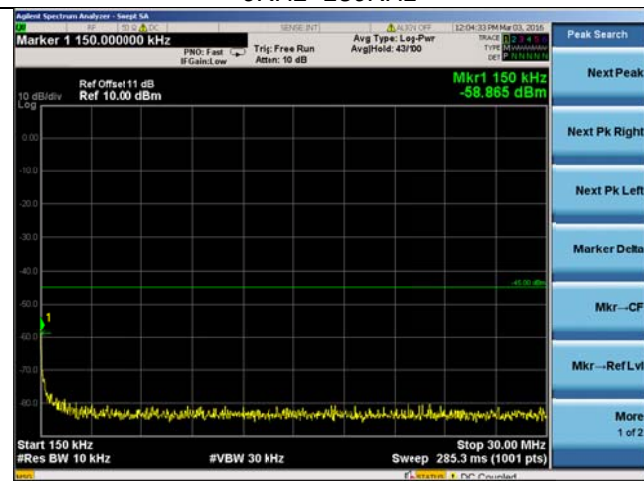

9KHz~150KHz



150KHz~30MHz



150KHz~30MHz




30MHz~26.5GHz


30MHz~26.5GHz

10MHz Channel Bandwidth (ANT 2)
Middle Channel

QPSK

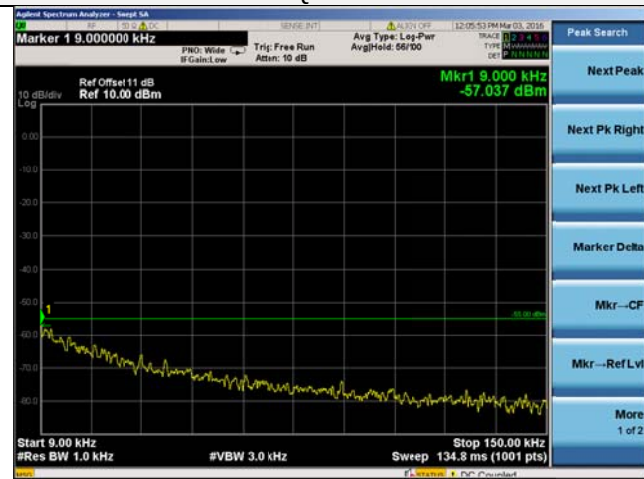

16QAM

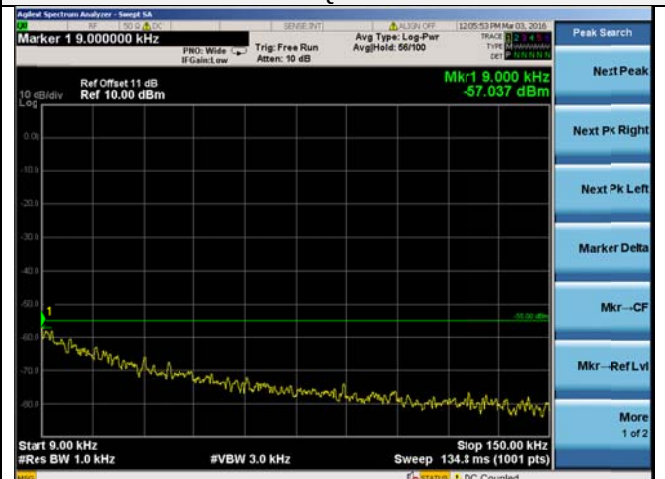


9KHz~150KHz



9KHz~150KHz



150KHz~30MHz

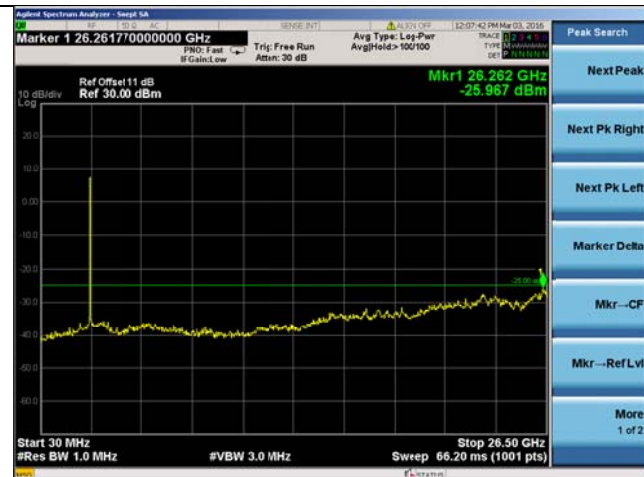

150KHz~30MHz




30MHz~26.5GHz


30MHz~26.5GHz

10MHz Channel Bandwidth (ANT 2)
High Channel


QPSK

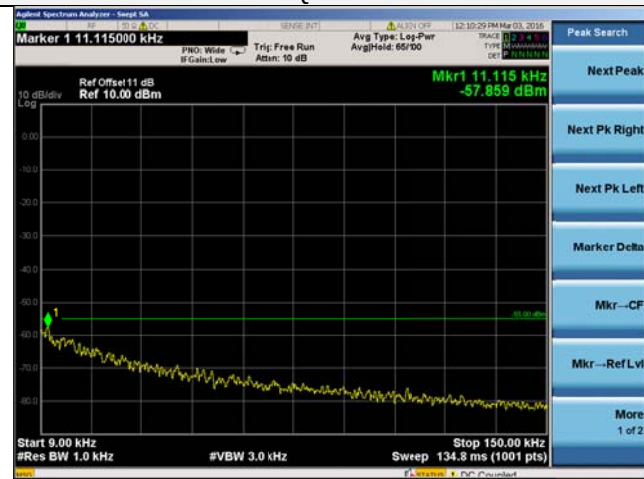

16QAM

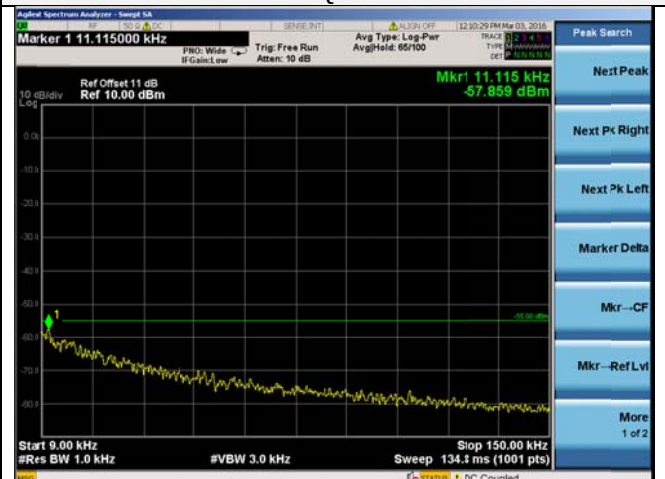

9KHz~150KHz

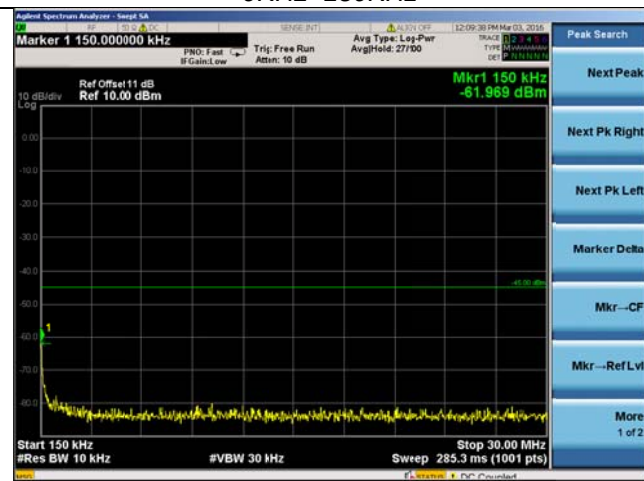

9KHz~150KHz



150KHz~30MHz



150KHz~30MHz



30MHz~26.5GHz


30MHz~26.5GHz

4.6. Radiated Spurious Emission

LIMIT

According to §27.53 (m): For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST CONFIGURATION

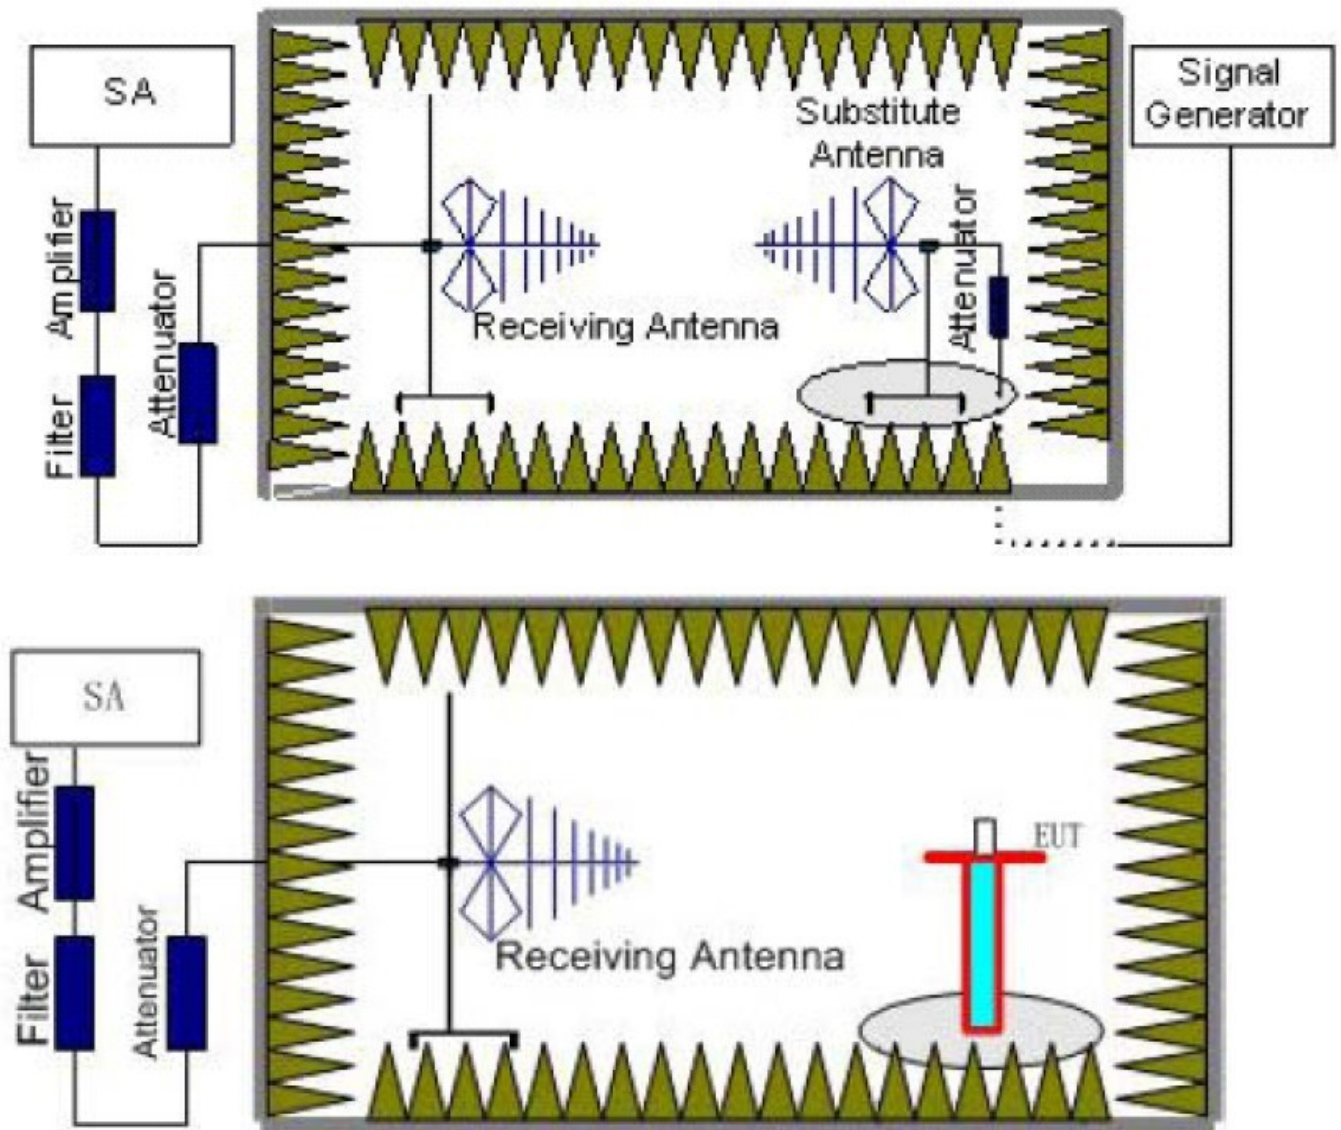

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated

through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
2500-2690MHz	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
	20~27	1 MHz	3 MHz	2

TEST LIMITS

According to 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
2500-2690MHz	Low	9KHz -27GHz	PASS
	Middle	9KHz -27GHz	PASS
	High	9KHz -27GHz	PASS

Radiated Measurement:

Remark:

1. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
2. We were not recorded other points as values lower than limits.
3. $Margin = Limit - EIRP$

For Single Antenna*Channel Bandwidth 7MHz_QPSK_Low Channel_ANT1*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-45.82	5.11	3.00	13.38	-37.55	-13.00	24.55	H
7510.50	-51.18	6.02	3.00	13.98	-43.22	-13.00	30.22	H
5007.00	-46.54	5.11	3.00	13.38	-38.27	-13.00	25.27	V
7510.50	-52.38	6.02	3.00	13.98	-44.42	-13.00	31.42	V

Channel Bandwidth 7MHz_QPSK_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-43.31	5.11	3.00	13.38	-35.04	-13.00	22.04	H
7785.00	-51.22	6.02	3.00	13.98	-43.26	-13.00	30.26	H
5190.00	-46.93	5.11	3.00	13.38	-38.66	-13.00	25.66	V
7785.00	-53.11	6.02	3.00	13.98	-45.15	-13.00	32.15	V

Channel Bandwidth 7MHz_QPSK_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-46.00	5.11	3.00	13.38	-37.37	-13.00	24.37	H
8059.50	-49.73	6.02	3.00	13.98	-44.46	-13.00	31.46	H
5373.00	-53.49	5.11	3.00	13.38	-38.66	-13.00	25.66	V
8059.50	-55.28	6.02	3.00	13.98	-45.83	-13.00	32.83	V

Channel Bandwidth 8.75MHz_QPSK_Low Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-48.36	5.11	3.00	13.38	-40.09	-13.00	27.09	H
7513.13	-52.74	6.02	3.00	13.98	-44.78	-13.00	31.78	H
5008.75	-47.53	5.11	3.00	13.38	-39.26	-13.00	26.26	V
7513.13	-54.74	6.02	3.00	13.98	-46.78	-13.00	33.78	V

Channel Bandwidth 8.75MHz_QPSK_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-47.17	5.11	3.00	13.38	-38.90	-13.00	25.90	H
7785.00	-52.05	6.02	3.00	13.98	-44.09	-13.00	31.09	H
5190.00	-50.10	5.11	3.00	13.38	-41.83	-13.00	28.83	V
7785.00	-52.22	6.02	3.00	13.98	-44.26	-13.00	31.26	V

Channel Bandwidth 8.75MHz_QPSK_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-46.49	5.11	3.00	13.38	-38.22	-13.00	25.22	H
8056.88	-51.79	6.02	3.00	13.98	-43.83	-13.00	30.83	H
5371.25	-50.06	5.11	3.00	13.38	-41.79	-13.00	28.79	V
8056.88	-53.30	6.02	3.00	13.98	-45.34	-13.00	32.34	V

Channel Bandwidth 10MHz_QPSK_Low Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-47.49	5.11	3.00	13.38	-39.22	-13.00	26.22	H
7515.00	-50.22	6.02	3.00	13.98	-42.26	-13.00	29.26	H
5010.00	-49.61	5.11	3.00	13.38	-41.34	-13.00	28.34	V
7515.00	-52.38	6.02	3.00	13.98	-44.42	-13.00	31.42	V

Channel Bandwidth 10MHz_QPSK_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-46.61	5.11	3.00	13.38	-38.34	-13.00	25.34	H
7785.00	-52.97	6.02	3.00	13.98	-45.01	-13.00	32.01	H
5190.00	-47.39	5.11	3.00	13.38	-39.12	-13.00	26.12	V
7785.00	-55.05	6.02	3.00	13.98	-47.09	-13.00	34.09	V

Channel Bandwidth 10MHz_QPSK_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-46.94	5.11	3.00	13.38	-38.67	-13.00	25.67	H
8055.00	-53.18	6.02	3.00	13.98	-45.22	-13.00	32.22	H
5370.00	-48.15	5.11	3.00	13.38	-39.88	-13.00	26.88	V
8055.00	-55.05	6.02	3.00	13.98	-47.09	-13.00	34.09	V

Channel Bandwidth 7MHz_16QAM_Low Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-47.50	5.11	3.00	13.38	-39.23	-13.00	26.23	H
7510.50	-51.82	6.02	3.00	13.98	-43.86	-13.00	30.86	H
5007.00	-49.64	5.11	3.00	13.38	-41.37	-13.00	28.37	V
7510.50	-54.24	6.02	3.00	13.98	-46.28	-13.00	33.28	V

Channel Bandwidth 7MHz_16QAM_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-46.09	5.11	3.00	13.38	-37.82	-13.00	24.82	H
7785.00	-49.86	6.02	3.00	13.98	-41.90	-13.00	28.90	H
5190.00	-47.93	5.11	3.00	13.38	-39.66	-13.00	26.66	V
7785.00	-53.16	6.02	3.00	13.98	-45.20	-13.00	32.20	V

Channel Bandwidth 7MHz_16QAM_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-47.44	5.11	3.00	13.38	-39.17	-13.00	26.17	H
8059.50	-50.86	6.02	3.00	13.98	-42.90	-13.00	29.90	H
5373.00	-50.84	5.11	3.00	13.38	-42.57	-13.00	29.57	V
8059.50	-52.86	6.02	3.00	13.98	-44.90	-13.00	31.90	V

Channel Bandwidth 8.75MHz_16QAM_Low Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-38.66	-45.29	3.00	-45.29	-38.66	-13.00	25.66	H
7513.13	-45.24	-48.91	3.00	-48.91	-45.24	-13.00	32.24	H
5008.75	-41.19	-51.75	3.00	-51.75	-41.19	-13.00	28.19	V
7513.13	-46.78	-52.42	3.00	-52.42	-46.78	-13.00	33.78	V

Channel Bandwidth 8.75MHz_16QAM_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-47.40	5.11	3.00	13.38	-39.13	-13.00	26.13	H
7785.00	-52.05	6.02	3.00	13.98	-44.09	-13.00	31.09	H
5190.00	-49.49	5.11	3.00	13.38	-41.22	-13.00	28.22	V
7785.00	-53.15	6.02	3.00	13.98	-45.19	-13.00	32.19	V

Channel Bandwidth 8.75MHz_16QAM_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-49.20	5.11	3.00	13.38	-40.93	-13.00	27.93	H
8056.88	-55.42	6.02	3.00	13.98	-47.46	-13.00	34.46	H
5371.25	-50.69	5.11	3.00	13.38	-42.42	-13.00	29.42	V
8056.88	-53.74	6.02	3.00	13.98	-45.78	-13.00	32.78	V

Channel Bandwidth 10MHz_16QAM_Low Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-50.17	5.11	3.00	13.38	-41.90	-13.00	28.90	H
7515.00	-52.33	6.02	3.00	13.98	-44.37	-13.00	31.37	H
5010.00	-51.50	5.11	3.00	13.38	-43.23	-13.00	30.23	V
7515.00	-53.85	6.02	3.00	13.98	-45.89	-13.00	32.89	V

Channel Bandwidth 10MHz_16QAM_Middle Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-48.07	5.11	3.00	13.38	-39.80	-13.00	26.80	H
7785.00	-52.33	6.02	3.00	13.98	-44.37	-13.00	31.37	H
5190.00	-50.50	5.11	3.00	13.38	-42.23	-13.00	29.23	V
7785.00	-53.33	6.02	3.00	13.98	-45.37	-13.00	32.37	V

Channel Bandwidth 10MHz_16QAM_High Channel_ANT1

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-50.47	5.11	3.00	13.38	-42.20	-13.00	29.20	H
8055.00	-53.08	6.02	3.00	13.98	-45.12	-13.00	32.12	H
5370.00	-51.50	5.11	3.00	13.38	-43.23	-13.00	30.23	V
8055.00	-55.51	6.02	3.00	13.98	-47.55	-13.00	34.55	V

Channel Bandwidth 7MHz_QPSK_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-46.53	5.11	3.00	13.38	-38.26	-13.00	25.26	H
7510.50	-50.67	6.02	3.00	13.98	-42.71	-13.00	29.71	H
5007.00	-49.51	5.11	3.00	13.38	-41.24	-13.00	28.24	V
7510.50	-52.99	6.02	3.00	13.98	-45.03	-13.00	32.03	V

Channel Bandwidth 7MHz_QPSK_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-42.92	5.11	3.00	13.38	-34.65	-13.00	21.65	H
7785.00	-50.05	6.02	3.00	13.98	-42.09	-13.00	29.09	H
5190.00	-45.94	5.11	3.00	13.38	-37.67	-13.00	24.67	V
7785.00	-52.32	6.02	3.00	13.98	-44.36	-13.00	31.36	V

Channel Bandwidth 7MHz_QPSK_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-46.35	5.11	3.00	13.38	-38.08	-13.00	25.08	H
8059.50	-50.18	6.02	3.00	13.98	-42.22	-13.00	29.22	H
5373.00	-49.51	5.11	3.00	13.38	-41.24	-13.00	28.24	V
8059.50	-53.77	6.02	3.00	13.98	-45.81	-13.00	32.81	V

Channel Bandwidth 8.75MHz_QPSK_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-47.06	5.11	3.00	13.38	-38.79	-13.00	25.79	H
7513.13	-51.09	6.02	3.00	13.98	-43.13	-13.00	30.13	H
5008.75	-50.29	5.11	3.00	13.38	-42.02	-13.00	29.02	V
7513.13	-53.92	6.02	3.00	13.98	-45.96	-13.00	32.96	V

Channel Bandwidth 8.75MHz_QPSK_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-45.30	5.11	3.00	13.38	-37.03	-13.00	24.03	H
7785.00	-50.20	6.02	3.00	13.98	-42.24	-13.00	29.24	H
5190.00	-48.63	5.11	3.00	13.38	-40.36	-13.00	27.36	V
7785.00	-53.11	6.02	3.00	13.98	-45.15	-13.00	32.15	V

Channel Bandwidth 8.75MHz_QPSK_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-47.04	5.11	3.00	13.38	-38.77	-13.00	25.77	H
8056.88	-50.41	6.02	3.00	13.98	-42.45	-13.00	29.45	H
5371.25	-48.93	5.11	3.00	13.38	-40.66	-13.00	27.66	V
8056.88	-53.03	6.02	3.00	13.98	-45.07	-13.00	32.07	V

Channel Bandwidth 10MHz_QPSK_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-46.63	5.11	3.00	13.38	-38.36	-13.00	25.36	H
7515.00	-48.21	6.02	3.00	13.98	-40.25	-13.00	27.25	H
5010.00	-50.04	5.11	3.00	13.38	-41.77	-13.00	28.77	V
7515.00	-51.28	6.02	3.00	13.98	-43.32	-13.00	30.32	V

Channel Bandwidth 10MHz_QPSK_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-45.05	5.11	3.00	13.38	-36.78	-13.00	23.78	H
7785.00	-49.21	6.02	3.00	13.98	-41.25	-13.00	28.25	H
5190.00	-48.33	5.11	3.00	13.38	-40.06	-13.00	27.06	V
7785.00	-53.40	6.02	3.00	13.98	-45.44	-13.00	32.44	V

Channel Bandwidth 10MHz_QPSK_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-45.94	5.11	3.00	13.38	-37.67	-13.00	24.67	H
8055.00	-50.16	6.02	3.00	13.98	-42.20	-13.00	29.20	H
5370.00	-48.40	5.11	3.00	13.38	-40.13	-13.00	27.13	V
8055.00	-53.49	6.02	3.00	13.98	-45.53	-13.00	32.53	V

Channel Bandwidth 7MHz_16QAM_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-49.62	5.11	3.00	13.38	-41.35	-13.00	28.35	H
7510.50	-50.14	6.02	3.00	13.98	-42.18	-13.00	29.18	H
5007.00	-51.64	5.11	3.00	13.38	-43.37	-13.00	30.37	V
7510.50	-53.01	6.02	3.00	13.98	-45.05	-13.00	32.05	V

Channel Bandwidth 7MHz_16QAM_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-46.51	5.11	3.00	13.38	-38.24	-13.00	25.24	H
7785.00	-50.31	6.02	3.00	13.98	-42.35	-13.00	29.35	H
5190.00	-49.63	5.11	3.00	13.38	-41.36	-13.00	28.36	V
7785.00	-53.04	6.02	3.00	13.98	-45.08	-13.00	32.08	V

Channel Bandwidth 7MHz_16QAM_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-48.28	5.11	3.00	13.38	-40.01	-13.00	27.01	H
8059.50	-50.61	6.02	3.00	13.98	-42.65	-13.00	29.65	H
5373.00	-51.40	5.11	3.00	13.38	-43.13	-13.00	30.13	V
8059.50	-52.93	6.02	3.00	13.98	-44.97	-13.00	31.97	V

Channel Bandwidth 8.75MHz_16QAM_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-47.36	-45.29	3.00	-45.29	-39.09	-13.00	26.09	H
7513.13	-50.28	-48.91	3.00	-48.91	-42.32	-13.00	29.32	H
5008.75	-49.91	-51.75	3.00	-51.75	-41.64	-13.00	28.64	V
7513.13	-53.48	-52.42	3.00	-52.42	-45.52	-13.00	32.52	V

Channel Bandwidth 8.75MHz_16QAM_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-48.22	5.11	3.00	13.38	-39.95	-13.00	26.95	H
7785.00	-51.21	6.02	3.00	13.98	-43.25	-13.00	30.25	H
5190.00	-50.39	5.11	3.00	13.38	-42.12	-13.00	29.12	V
7785.00	-54.12	6.02	3.00	13.98	-46.16	-13.00	33.16	V

Channel Bandwidth 8.75MHz_16QAM_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-48.44	5.11	3.00	13.38	-40.17	-13.00	27.17	H
8056.88	-53.47	6.02	3.00	13.98	-45.51	-13.00	32.51	H
5371.25	-51.39	5.11	3.00	13.38	-43.12	-13.00	30.12	V
8056.88	-55.04	6.02	3.00	13.98	-47.08	-13.00	34.08	V

Channel Bandwidth 10MHz_16QAM_Low Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-49.85	5.11	3.00	13.38	-41.58	-13.00	28.58	H
7515.00	-52.92	6.02	3.00	13.98	-44.96	-13.00	31.96	H
5010.00	-52.29	5.11	3.00	13.38	-44.02	-13.00	31.02	V
7515.00	-55.13	6.02	3.00	13.98	-47.17	-13.00	34.17	V

Channel Bandwidth 10MHz_16QAM_Middle Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-47.49	5.11	3.00	13.38	-39.22	-13.00	26.22	H
7785.00	-51.02	6.02	3.00	13.98	-43.06	-13.00	30.06	H
5190.00	-51.11	5.11	3.00	13.38	-42.84	-13.00	29.84	V
7785.00	-53.95	6.02	3.00	13.98	-45.99	-13.00	32.99	V

Channel Bandwidth 10MHz_16QAM_High Channel_ANT2

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-49.54	5.11	3.00	13.38	-41.27	-13.00	28.27	H
8055.00	-52.51	6.02	3.00	13.98	-44.55	-13.00	31.55	H
5370.00	-52.18	5.11	3.00	13.38	-43.91	-13.00	30.91	V
8055.00	-54.22	6.02	3.00	13.98	-46.26	-13.00	33.26	V

For MIMO

Channel Bandwidth 7MHz_QPSK_Low Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-34.55	5.11	3.00	13.38	-26.28	-13.00	13.28	H
7510.50	-38.10	6.02	3.00	13.98	-30.14	-13.00	17.14	H
5007.00	-37.66	5.11	3.00	13.38	-29.39	-13.00	16.39	V
7510.50	-40.81	6.02	3.00	13.98	-32.85	-13.00	19.85	V

Channel Bandwidth 7MHz_QPSK_Middle Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-31.61	5.11	3.00	13.38	-23.34	-13.00	10.34	H
7785.00	-36.14	6.02	3.00	13.98	-28.18	-13.00	15.18	H
5190.00	-33.84	5.11	3.00	13.38	-25.57	-13.00	12.57	V
7785.00	-39.18	6.02	3.00	13.98	-31.22	-13.00	18.22	V

Channel Bandwidth 7MHz_QPSK_High Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-38.36	5.11	3.00	13.38	-30.09	-13.00	17.09	H
8059.50	-43.11	6.02	3.00	13.98	-35.15	-13.00	22.15	H
5373.00	-42.71	5.11	3.00	13.38	-34.44	-13.00	21.44	V
8059.50	-47.22	6.02	3.00	13.98	-39.26	-13.00	26.26	V

Channel Bandwidth 8.75MHz_QPSK_Low Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-35.84	5.11	3.00	13.38	-27.57	-13.00	14.57	H
7513.13	-39.19	6.02	3.00	13.98	-31.23	-13.00	18.23	H
5008.75	-38.33	5.11	3.00	13.38	-30.06	-13.00	17.06	V
7513.13	-42.00	6.02	3.00	13.98	-34.04	-13.00	21.04	V

Channel Bandwidth 8.75MHz_QPSK_Middle Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-33.38	5.11	3.00	13.38	-25.11	-13.00	12.11	H
7785.00	-37.15	6.02	3.00	13.98	-29.19	-13.00	16.19	H
5190.00	-36.12	5.11	3.00	13.38	-27.85	-13.00	14.85	V
7785.00	-39.30	6.02	3.00	13.98	-31.34	-13.00	18.34	V

Channel Bandwidth 8.75MHz_QPSK_High Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-37.45	5.11	3.00	13.38	-29.18	-13.00	16.18	H
8056.88	-40.18	6.02	3.00	13.98	-32.22	-13.00	19.22	H
5371.25	-41.41	5.11	3.00	13.38	-33.14	-13.00	20.14	V
8056.88	-44.05	6.02	3.00	13.98	-36.09	-13.00	23.09	V

Channel Bandwidth 10MHz_QPSK_Low Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-37.15	5.11	3.00	13.38	-28.88	-13.00	15.88	H
7515.00	-39.03	6.02	3.00	13.98	-31.07	-13.00	18.07	H
5010.00	-38.82	5.11	3.00	13.38	-30.55	-13.00	17.55	V
7515.00	-42.00	6.02	3.00	13.98	-34.04	-13.00	21.04	V

Channel Bandwidth 10MHz_QPSK_Middle Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-35.68	5.11	3.00	13.38	-27.41	-13.00	14.41	H
7785.00	-38.12	6.02	3.00	13.98	-30.16	-13.00	17.16	H
5190.00	-39.09	5.11	3.00	13.38	-30.82	-13.00	17.82	V
7785.00	-41.29	6.02	3.00	13.98	-33.33	-13.00	20.33	V

Channel Bandwidth 10MHz_QPSK_High Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-39.70	5.11	3.00	13.38	-31.43	-13.00	18.43	H
8055.00	-41.57	6.02	3.00	13.98	-33.61	-13.00	20.61	H
5370.00	-42.15	5.11	3.00	13.38	-33.88	-13.00	20.88	V
8055.00	-44.10	6.02	3.00	13.98	-36.14	-13.00	23.14	V

Channel Bandwidth 7MHz_16QAM_Low Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5007.00	-38.18	5.11	3.00	13.38	-29.91	-13.00	16.91	H
7510.50	-40.84	6.02	3.00	13.98	-32.88	-13.00	19.88	H
5007.00	-42.41	5.11	3.00	13.38	-34.14	-13.00	21.14	V
7510.50	-43.53	6.02	3.00	13.98	-35.57	-13.00	22.57	V

Channel Bandwidth 7MHz_16QAM_Middle Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-36.75	5.11	3.00	13.38	-28.48	-13.00	15.48	H
7785.00	-38.39	6.02	3.00	13.98	-30.43	-13.00	17.43	H
5190.00	-39.48	5.11	3.00	13.38	-31.21	-13.00	18.21	V
7785.00	-42.13	6.02	3.00	13.98	-34.17	-13.00	21.17	V

Channel Bandwidth 7MHz_16QAM_High Channel_MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5373.00	-40.49	5.11	3.00	13.38	-32.22	-13.00	19.22	H
8059.50	-43.72	6.02	3.00	13.98	-35.76	-13.00	22.76	H
5373.00	-43.32	5.11	3.00	13.38	-35.05	-13.00	22.05	V
8059.50	-46.84	6.02	3.00	13.98	-38.88	-13.00	25.88	V

Channel Bandwidth 8.75MHz_16QAM _ Low Channel _ MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.75	-39.53	-45.29	3.00	-45.29	-31.26	-13.00	18.26	H
7513.13	-42.40	-48.91	3.00	-48.91	-34.44	-13.00	21.44	H
5008.75	-42.29	-51.75	3.00	-51.75	-34.02	-13.00	21.02	V
7513.13	-44.61	-52.42	3.00	-52.42	-36.65	-13.00	23.65	V

Channel Bandwidth 8.75MHz_16QAM _ Middle Channel _ MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-38.23	5.11	3.00	13.38	-29.96	-13.00	16.96	H
7785.00	-40.18	6.02	3.00	13.98	-32.22	-13.00	19.22	H
5190.00	-39.84	5.11	3.00	13.38	-31.57	-13.00	18.57	V
7785.00	-43.01	6.02	3.00	13.98	-35.05	-13.00	22.05	V

Channel Bandwidth 8.75MHz_16QAM _ High Channel _ MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5371.25	-40.28	5.11	3.00	13.38	-32.01	-13.00	19.01	H
8056.88	-41.92	6.02	3.00	13.98	-33.96	-13.00	20.96	H
5371.25	-43.01	5.11	3.00	13.38	-34.74	-13.00	21.74	V
8056.88	-44.07	6.02	3.00	13.98	-36.11	-13.00	23.11	V

Channel Bandwidth 10MHz_16QAM _ Low Channel _ MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-39.40	5.11	3.00	13.38	-31.13	-13.00	18.13	H
7515.00	-40.95	6.02	3.00	13.98	-32.99	-13.00	19.99	H
5010.00	-41.84	5.11	3.00	13.38	-33.57	-13.00	20.57	V
7515.00	-44.02	6.02	3.00	13.98	-36.06	-13.00	23.06	V

Channel Bandwidth 10MHz_16QAM _ Middle Channel _ MIMO

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-37.15	5.11	3.00	13.38	-28.88	-13.00	15.88	H
7785.00	-39.98	6.02	3.00	13.98	-32.02	-13.00	19.02	H
5190.00	-39.43	5.11	3.00	13.38	-31.16	-13.00	18.16	V
7785.00	-42.43	6.02	3.00	13.98	-34.47	-13.00	21.47	V

Channel Bandwidth 10MHz_16QAM _ High Channel _ MIMO


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5370.00	-42.03	5.11	3.00	13.38	-33.76	-13.00	20.76	H
8055.00	-43.01	6.02	3.00	13.98	-35.05	-13.00	22.05	H
5370.00	-43.89	5.11	3.00	13.38	-35.62	-13.00	22.62	V
8055.00	-44.96	6.02	3.00	13.98	-37.00	-13.00	24.00	V

4.7. Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

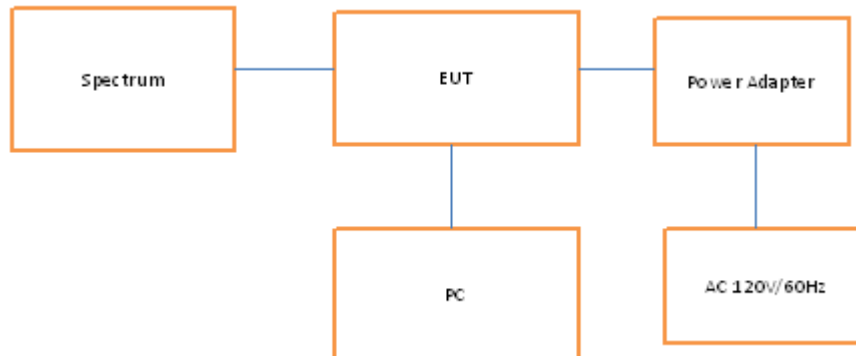

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode".

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the spectrum and controlled connection by spectirc test software on middle channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the spectrum and controlled connection by spectirc test software, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 10\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested each Channel Bandwidth of WIMAX and recorded worst case at 7MHz bandwidth (worst case of all bandwidths)
2. We tested at Antenna 1, Antenna 2 as single, also tested at MIMO, recorded worst case at MIMO.

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
AC 108	8.96	9.47	0.003649	0.003735	2.50
AC 120	-7.78	6.48	0.002497	0.001893	2.50
AC 132	6.48	-5.67	-0.002185	-0.000751	2.50

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	5.98	-2.74	0.002304	-0.001056	2.50
-20°	-9.64	-7.80	-0.003715	-0.003006	2.50
-10°	7.47	6.54	0.002879	0.002520	2.50
0°	4.04	-1.26	0.001557	-0.000486	2.50
10°	5.68	2.12	0.002189	0.000817	2.50
20°	-7.64	5.99	-0.002944	0.002308	2.50
30°	1.48	-1.10	0.000570	-0.000424	2.50
40°	-0.68	-9.84	-0.000262	-0.003792	2.50
50°	0.94	-4.21	0.036224	-0.001622	2.50

5. Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6. External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7. Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

******* End of Report *******