

SPECIFICATION FOR APPROVAL

DESCRIPTION : 內建天線 2.4GHz 1.13 +U.FL L=145mm

CUSTOMER DWG. NO. /PART NO : _____

KINSUN PROD. NO : 6670113050-145

DATE : 2013/08/26

PLEASE RETURN TO US ONE COPY OF “ SPECIFICATION FOR APPROVAL ” WITH YOUR APPROVED SIGNATURES

APPROVED SIGNATURES



慶陞工業股份有限公司
KINSUN INDUSTRIES INC.

桃園縣平鎮市關爺東路 32 號

TEL : 886-3-458-9558

<http://www.kinsun.com>

FAX : 886-3-458-3958

e-mail: infoa@kinsun.com

SGS

Certificate TW97/10964

The management system of

KINSUN INDUSTRIES INC.

NO. 32, GUANYE EAST ROAD, PINGJHEN CITY,
TAOYUAN HSIEN, TAIWAN

has been assessed and certified as meeting the requirements of

ISO 9001:2008


For the following activities

**Design and manufacture of connector for telecomm & ICT, RF-
Antenna, Stamping- parts.**

Further clarifications regarding the scope of this certificate and the applicability of
ISO 9001:2008 requirements may be obtained by consulting the organisation

This certificate is valid from 7 October 2010 until 13 October 2012 and
remains valid subject to satisfactory surveillance audits.
Re certification audit due before 27 September 2012
Issue 6. Certified since 13 October 1997

Authorised by

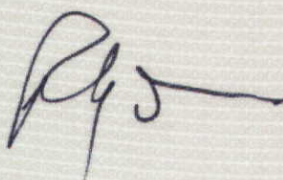


SGS United Kingdom Ltd Systems & Services Certification
Rossmore Business Park Ellesmere Port Cheshire CH65 3EN UK
t +44 (0)151 350-6666 f +44 (0)151 350-6600 www.sgs.com

SGS 9001-8 01 1109

Page 1 of 1



RoHS COMPLIANT

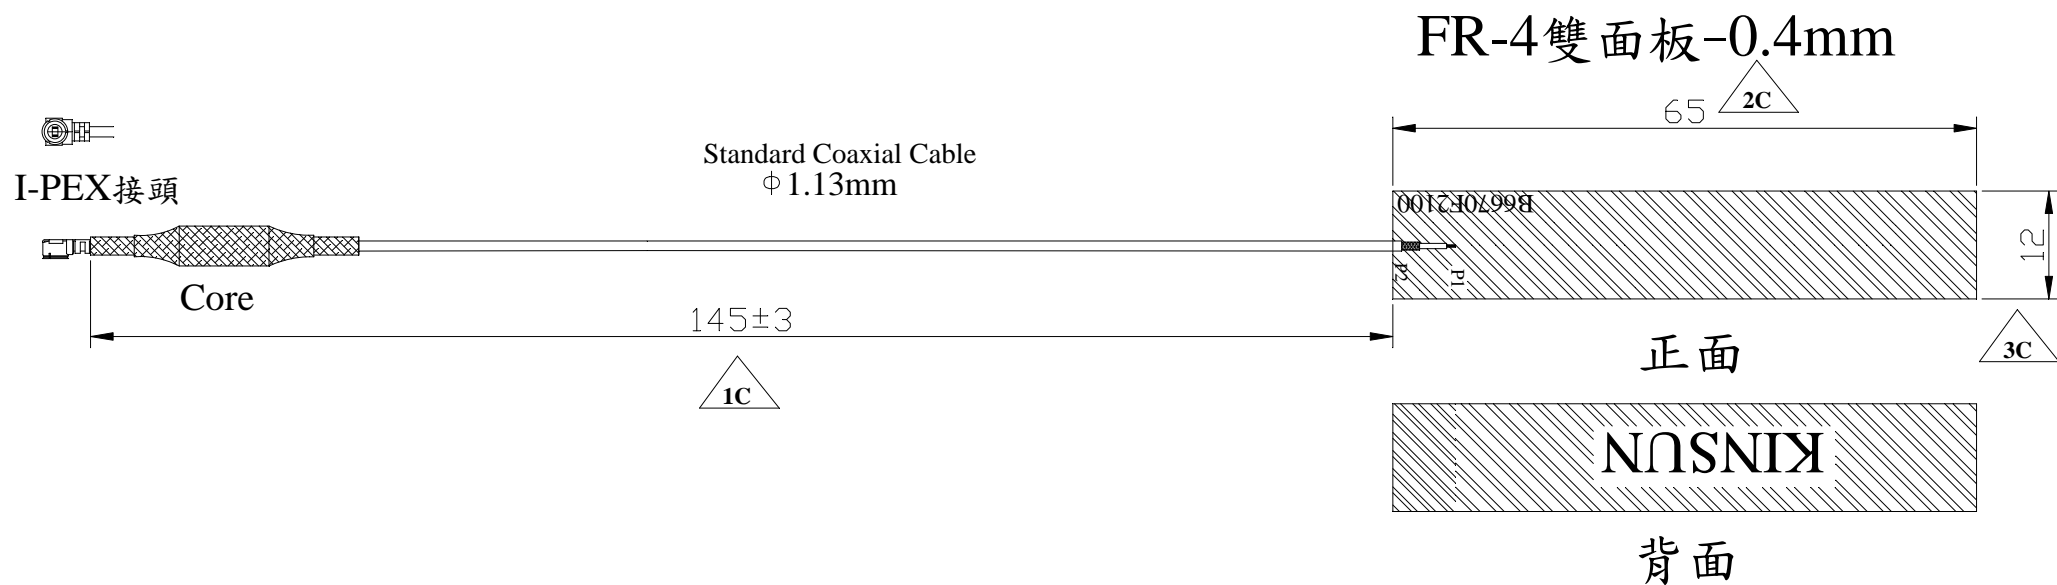

Frequency Rang :2.4~2.5GHz

Impedance :50 Ω

V.S.W.R : ≤ 2.0

Radiation :Direcrion

Peak Gain : $\leq 2.0\text{dBi}$


Polarization :Linear

設計 DR. Wind-Kuo 2009/12/09	核准 APPD. Jerry 2009/12/09	容許公差 .XXX .XX .X X ANG	TOLERANCE ± 0.10 ± 0.25 ± 0.38 ± 0.50 $\pm 3^\circ$	品名 ARTICLE 2.4GHz-PCB-PIFA-Core-I-PEX
版本說明 REVISION NOTE		圖號 DWG NO. 6670113050-145		單位 UNIT mm
修改 LOGO 方向		比例 SCALE 張數 SHEET 1/1		版本 REV. B
KINSUN				

Brand / Model : 6670113050-145

Remark : 2450MHz

Tested by : Wind-Kuo

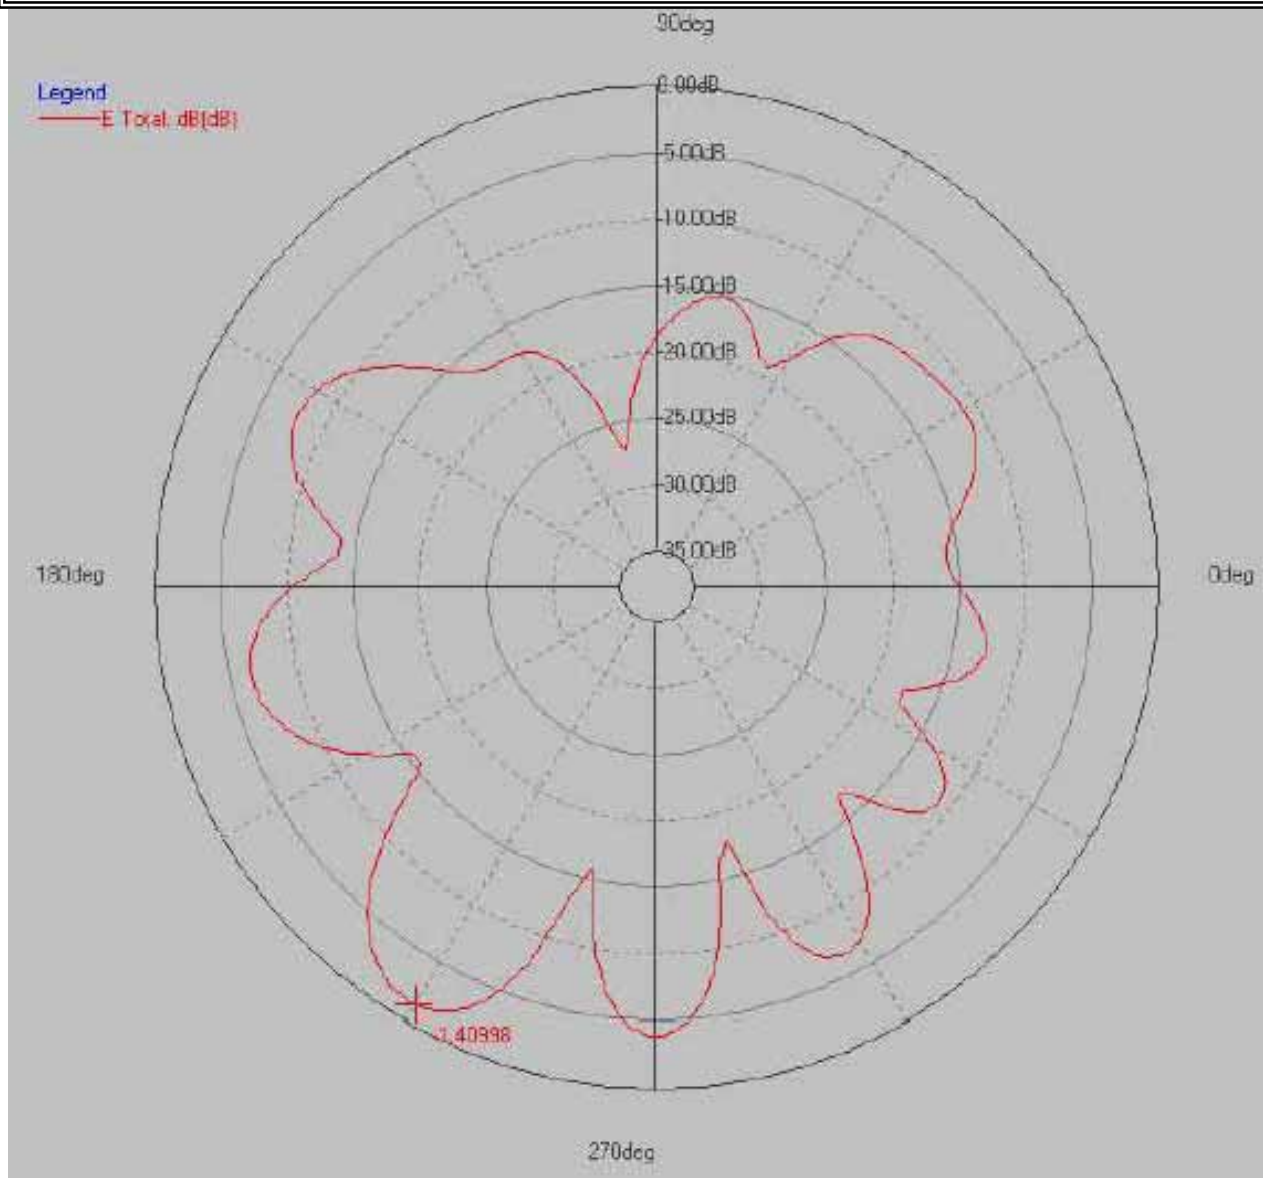

-- : Max. deg

*Unit : dBi

Frequency(MHz) : 2450.00

Pattern Field : E plane

Average Gain(dB) : -11.08dB

Maximum Gain(dB) : -1.41dB

Maximum Gain(degree) : -120.0


Minimum Gain(dB) : -27.31dB

Minimum Gain(degree) : 102.86

Brand / Model : 6670113050-145

Remark : 2450MHz

Tested by : Wind-Kuo

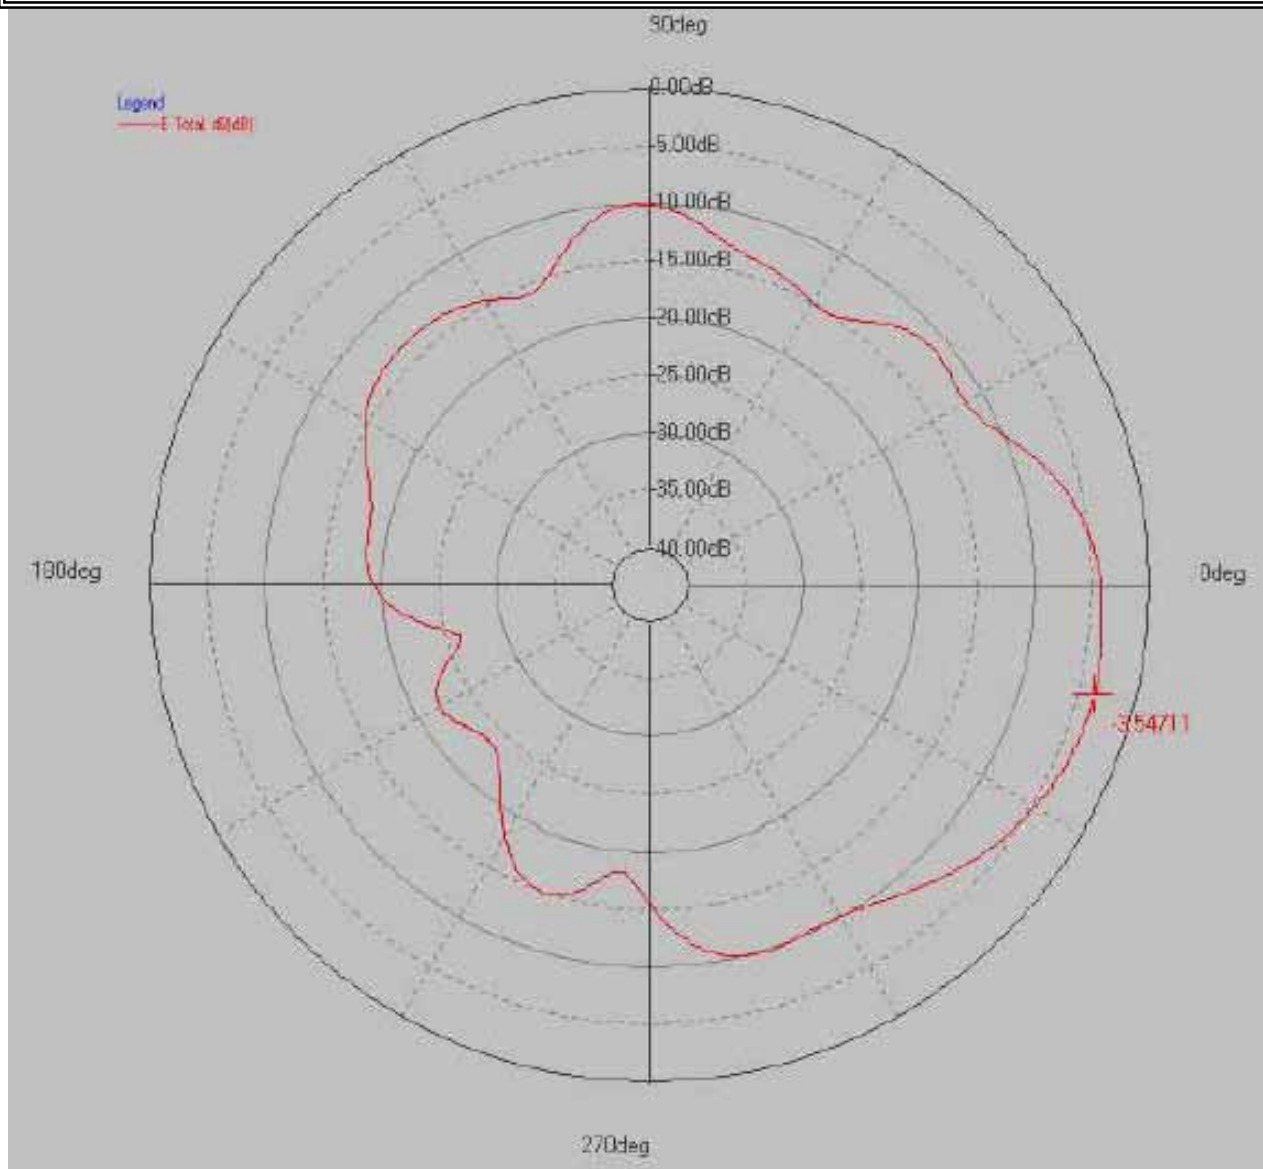

-- : Max. deg

*Unit : dBi

Frequency(MHz) : 2450.00

Pattern Field : H plane

Average Gain(dB) : -11.93dB

Maximum Gain(dB) : -3.55dB

Maximum Gain(degree) : 346.00

Minimum Gain(dB) : -26.80dB


Minimum Gain(degree) : 195.32

Brand / Model : 6670113050-145

Remark : 2450MHz

Tested by : Wind-Kuo

◎ S11

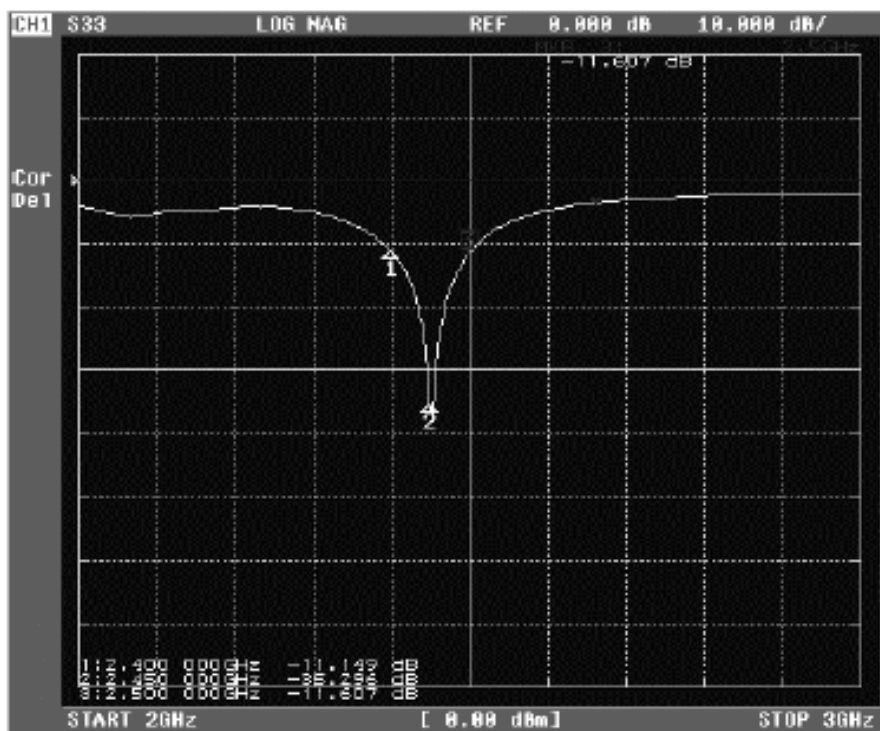

◎ VSWR

