

FCC Test Report

Report No.: 2405V58287ED

Applicant: Whoop International Trading Limited

Address: Flat-B 8/F Chong Gming Building 72 Cheung Sha Wan Road,
Kowloon Hong Kong China

Product Name: 4G smart watch

Product Model: FLEX

Multiple Models: N/A

Trade Mark: SUNTAK

FCC ID: 2AP7LWT003

Standards: FCC CFR Title 47 Part 15C (§15.247)

Test Date: 2024-07-24 to 2024-08-07

Test Result: Complied

Report Date: 2024-08-19

Reviewed by:

Abel chen

Approved by:

Jacob Kong

Abel Chen

Project Engineer

Jacob Kong

Manager

Prepared by:

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen,
Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced except in full, without the written approval of World Alliance Testing & Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-08-19	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	6
2.3	Interconnecting Cables.....	7
2.4	Block Diagram of Connection between EUT and AE	7
2.5	Test Setup.....	7
2.6	Test Procedure	9
2.7	Measurement Method.....	10
2.8	Measurement Equipment	11
3	Test Results	12
3.1	Test Summary.....	12
3.2	Limit	13
3.3	AC Line Conducted Emissions Test Data.....	14
3.4	Radiated emission Test Data.....	16
3.5	RF Conducted Test Data	31
3.5.1	20 dB Emission Bandwidth and 99% Occupied Bandwidth.....	31
3.5.2	Maximum Conducted Peak Output Power.....	31
3.5.3	Channel separation	32
3.5.4	Number of hopping Frequency	32
3.5.5	Time of occupancy (dwell time).....	32
3.5.6	100 kHz Bandwidth of Frequency Band Edge	33
4	Test Setup Photo.....	45
5	E.U.T Photo	46

1 General Information

1.1 Client Information

Applicant:	Whoop International Trading Limited
Address:	Flat-B 8/F Chong Gming Building 72 Cheung Sha Wan Road, Kowloon Hong Kong China
Manufacturer:	Shenzhen Teleone Technology Co., Ltd
Address:	Tower B 5/F, Shanshui Building, Nanshan Yungu Innovation Industry Park, 4093 Liuxian Avenue, Shenzhen, China

1.2 Product Description of EUT

The EUT is 4G smart watch that contains Classic Bluetooth, BLE, 2.4G WLAN, GSM/GPRS and LTE radios, this report covers the full testing of the Classic Bluetooth radio.

Sample Serial Number	2OQH-1 for CE&RE test, 2OQH-2 for RF conducted test (assigned by WATC)
Sample Received Date	2024-07-19
Sample Status	Good Condition
Frequency Range	2402MHz - 2480MHz
Maximum Conducted Peak Output Power	7.93dBm
Modulation Technology	GFSK, $\pi/4$ DQPSK, 8DPSK
Spatial Streams	SISO (1TX, 1RX)
Antenna Gain [#]	-4.52dBi
Power Supply	DC 5V from adapter or DC 3.85V from battery
Adapter Information	N/A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
Device Antenna information:	
The BLE antenna is an internal antenna which cannot replace by end-user, please see product internal photos for details.	

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2AP7LWT003
FCC Part 22H/24E/27, Equipment Class: PCT, FCC ID: 2AP7LWT003

1.5 Measurement Uncertainty

Parameter		Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
AC Power Lines Conducted Emissions		±3.14dB
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Emissions, Conducted		1.75dB
Conducted Power		0.74dB
Frequency Error		150Hz
Bandwidth		0.34%
Power Spectral Density		0.74dB
Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.		

1.6 Laboratory Location

World Alliance Testing & Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China

Tel: +86-755-29691511, Email: qa@watc.com.cn

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2013

2 Description of Measurement

2.1 Test Configuration

Operating channels:					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	76	2478
1	2403	40	2442	77	2479
...	...	...	...	78	2480
38	2440	...	...	/	/
According to ANSI C63.10-2013 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	39	2441	78	2480

Test Mode:				
Transmitting mode:		Keep the EUT in continuous transmitting with modulation		
Exercise software [#] :		Engineer mode		
Mode	Data rate	Power Level Setting [#]		
		Low Channel	Middle Channel	High Channel
GFSK	1Mbps	33	33	33
$\pi/4$ DQPSK	2Mbps	33	33	33
8DPSK	3Mbps	33	33	33
The exercise software and the maximum power setting that provided by manufacturer.				

Worst-Case Configuration:
For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report
For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.


2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
Huawei	Adapter	Unknown	Unknown

2.3 Interconnecting Cables

Manufacturer	Description	Length(m)	From	To
Unknown	USB Cable	1.0	Adapter	EUT


2.4 Block Diagram of Connection between EUT and AE



Note: for reference only, the actual connection setup used for testing please refer to the test photos.

2.5 Test Setup


1) Conducted emission measurement:

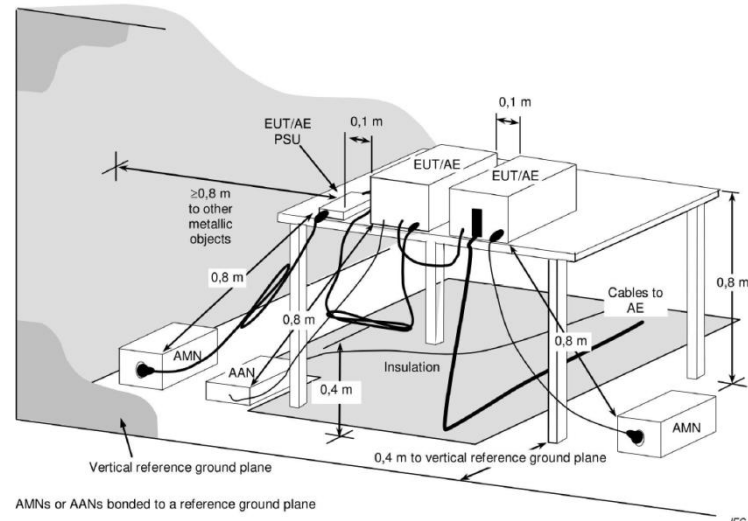


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:


Below 30MHz (3m SAC)

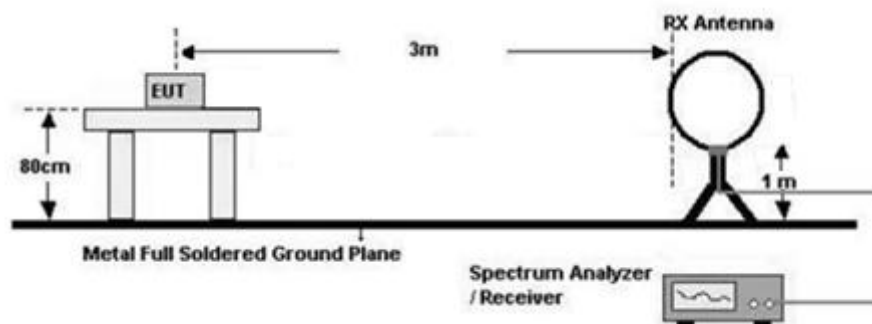


30MHz-1GHz (3m SAC)

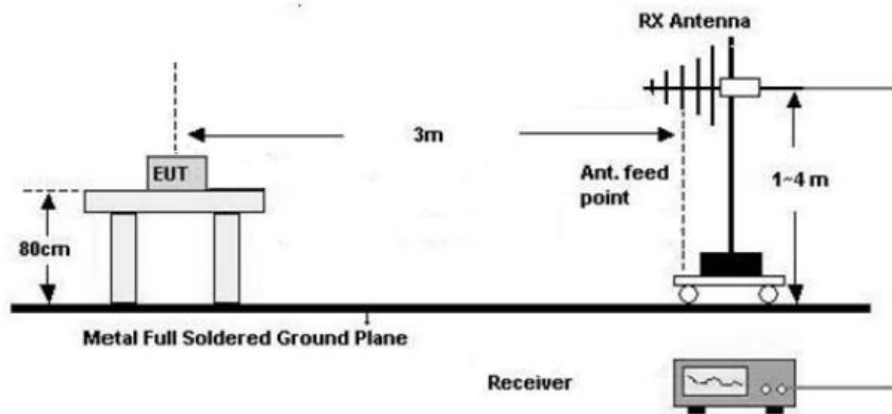


1GHz-18GHz(3m FAC)

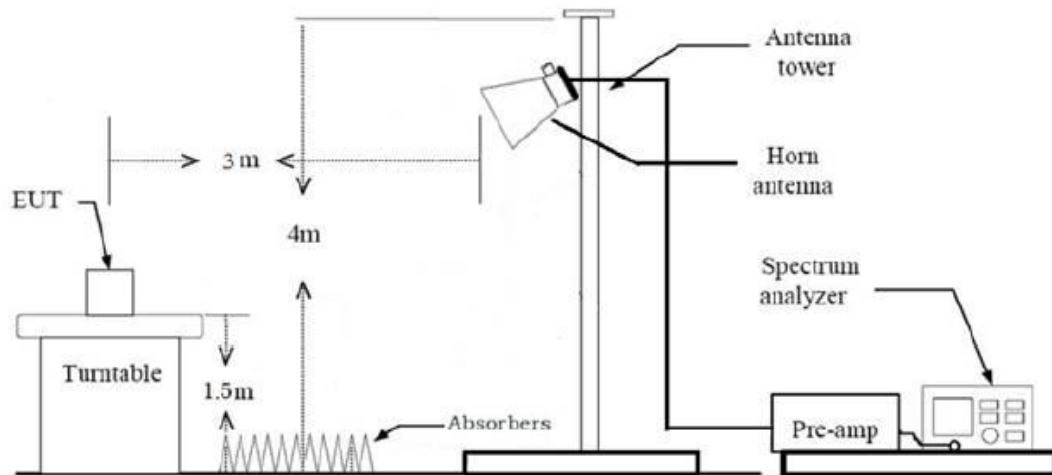

Above 18GHz (3m FAC)

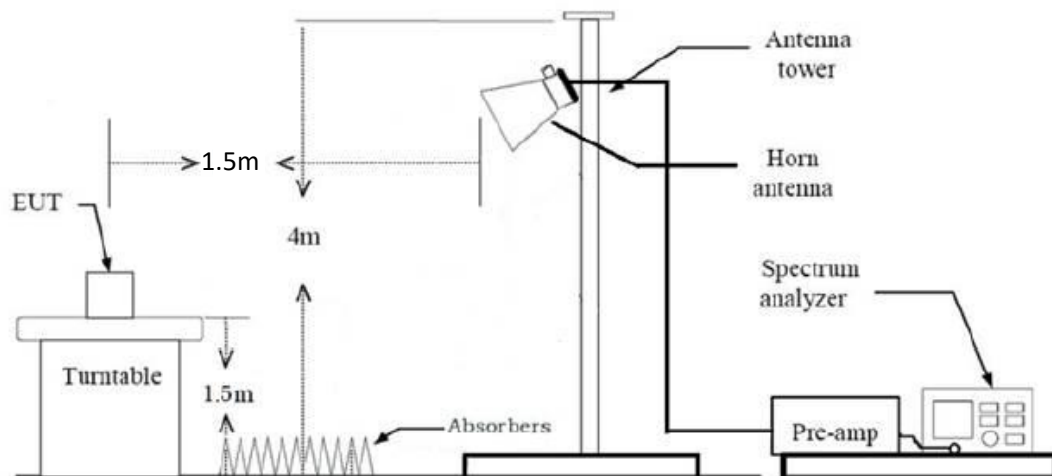

3) RF Conducted Test

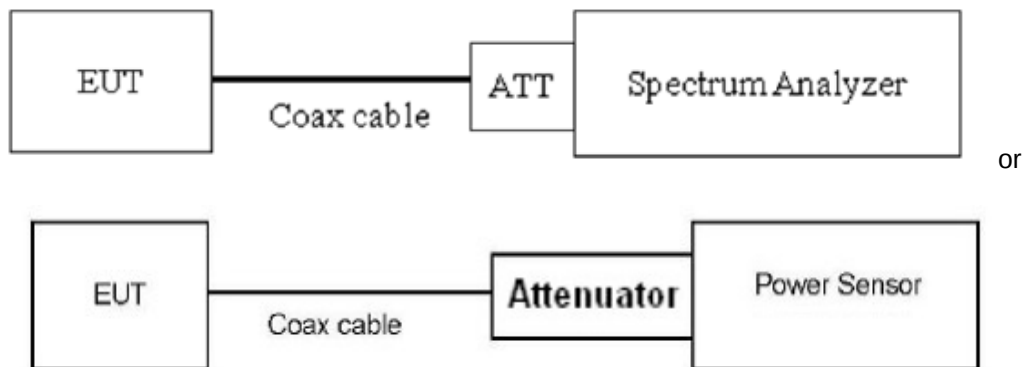

2.6 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above

18GHz).

2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 6.5dB (including 6.0 dB Attenuator and 0.5dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 0.5dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.7 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2013 Section 6.2
Maximum Conducted Output Power	ANSI C63.10-2013 Section 7.8.5
20 dB Emission Bandwidth	ANSI C63.10-2013 Section 6.9.2
99% Occupied Bandwidth	ANSI C63.10-2013 Section 6.9.3
Channel separation	ANSI C63.10-2013 Section 7.8.2
Number of hopping Frequency	ANSI C63.10-2013 Section 7.8.3
Time of occupancy (dwell time)	ANSI C63.10-2013 Section 7.8.4
100kHz Bandwidth of Frequency Band Edge	ANSI C63.10-2013 Section 7.8.7.2&6.10
Radiated emission	ANSI C63.10-2013 Section 7.8&6.3&6.4&6.5&6.6

2.8 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2024/6/4	2025/6/3
R&S	LISN	ENV216	101748	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.12	N/A	2024/6/6	2025/6/5
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2024/6/4	2025/6/3
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2024/6/4	2025/6/3
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2024/6/4	2025/6/3
COM-POWER	preamplifier	PAM-118A	18040152	2024/6/4	2025/6/3
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
BACL	Loop Antenna	1313-1A	4010611	2024/2/7	2027/2/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2026/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2026/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2026/7/9
Oulitong	Band Reject Filter	OBSF-2400-248 3.5-50N	OE02103119	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.9	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.13	N/A	2023/8/8	2024/8/7
N/A	Coaxial Cable	NO.14	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.15	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.16	N/A	2024/6/4	2025/6/3
N/A	Coaxial Cable	NO.17	N/A	2024/6/4	2025/6/3
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSU-26	200680/026	2024/6/4	2025/6/3
ANRITSU	USB Power Sensor	MA24418A	12620	2024/6/4	2025/6/3
narda	6dB attenuator	603-06-1	N/A	2024/6/4	2025/6/3

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary


FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247 (a)(1)	20dB Emission Bandwidth	Report only
-	99% Occupied Bandwidth	Report only
§15.247 (a)(1)	Channel separation	Compliance
§15.247 (a)(1)(iii)	Number of hopping Frequency	Compliance
§15.247 (a)(1)(iii)	Time of occupancy (dwell time)	Compliance
§15.247(b)(1)	Maximum Conducted Output Power	Compliance
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliance
§15.205, §15.209, §15.247(d)	Radiated emission	Compliance


3.2 Limit

Test items	Limit
AC Line Conducted Emissions	See details §15.207 (a)
Conducted Output Power	For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.
Channel separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Number of hopping Frequency	Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.
Time of occupancy (dwell time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Spurious Emissions, 100kHz Bandwidth of Frequency Band Edge	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.3 AC Line Conducted Emissions Test Data

Test Date:	2024-07-24	Test By:	Lirou Li
Environment condition:	Temperature: 23.3°C; Relative Humidity:62%; ATM Pressure: 101kPa		

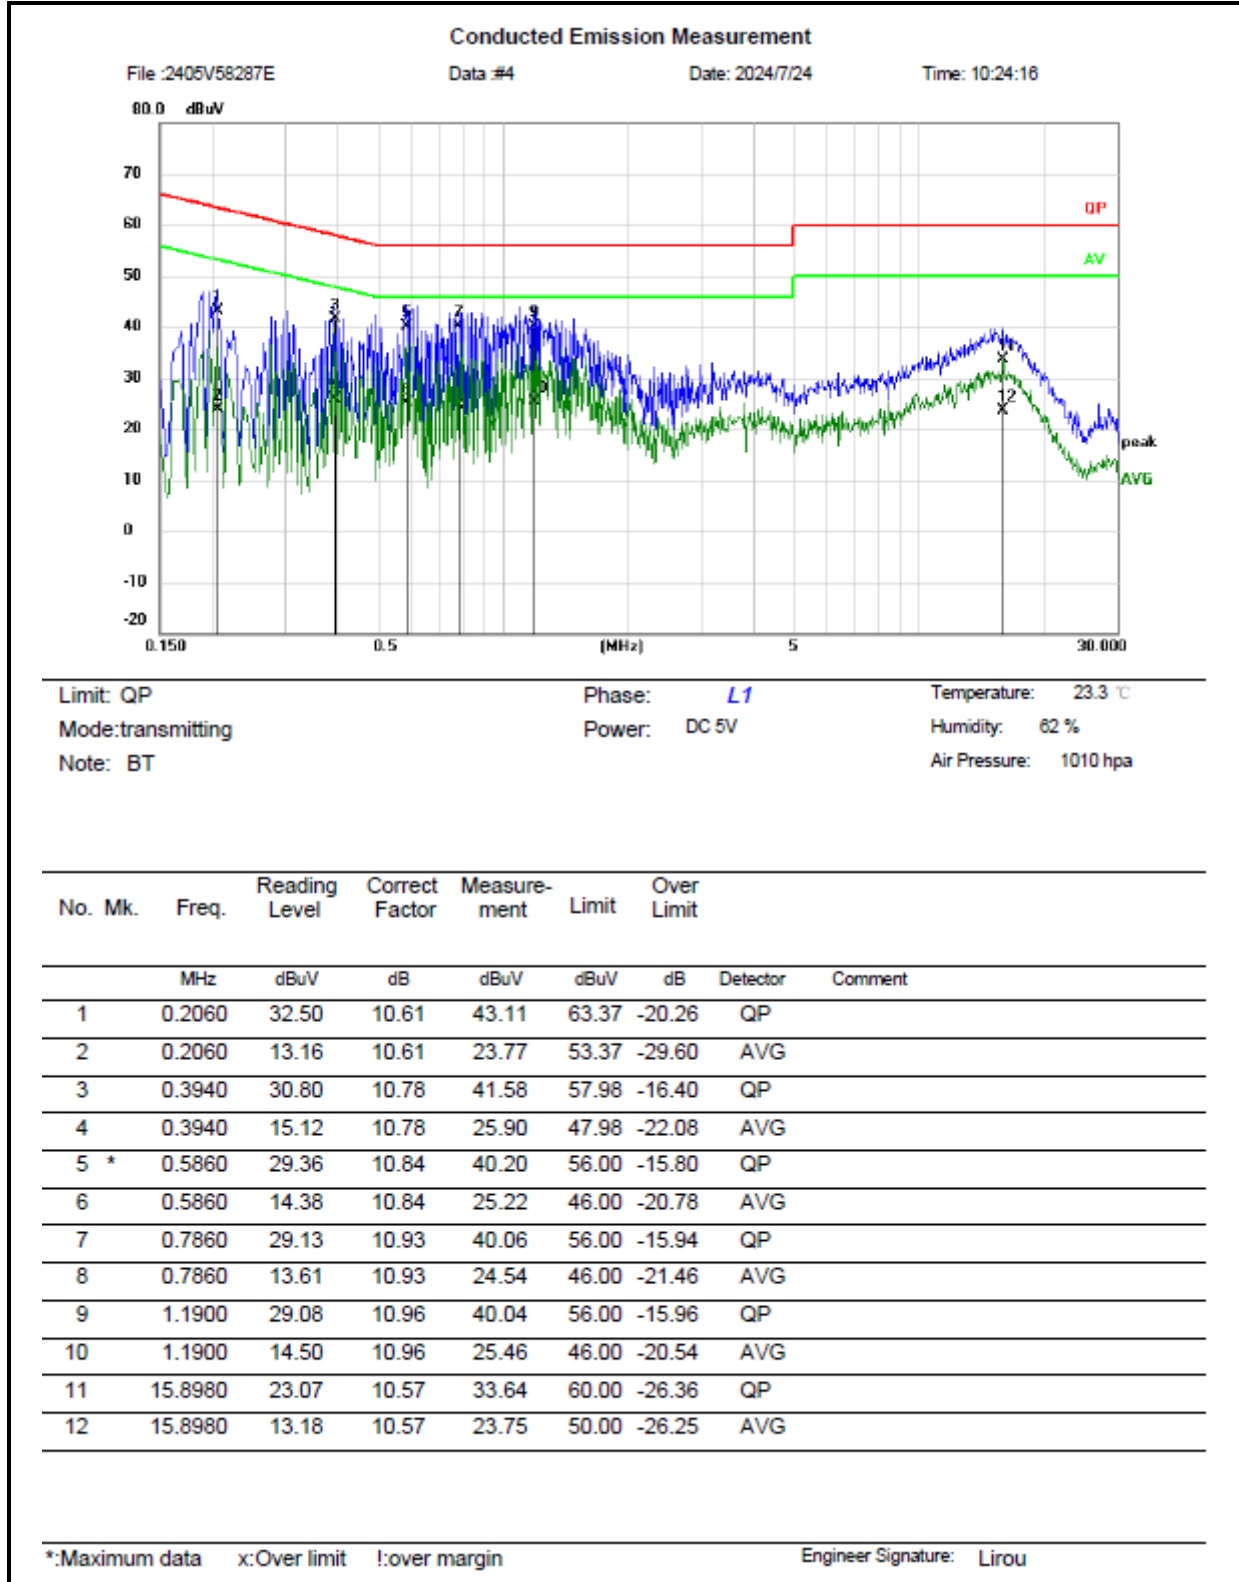

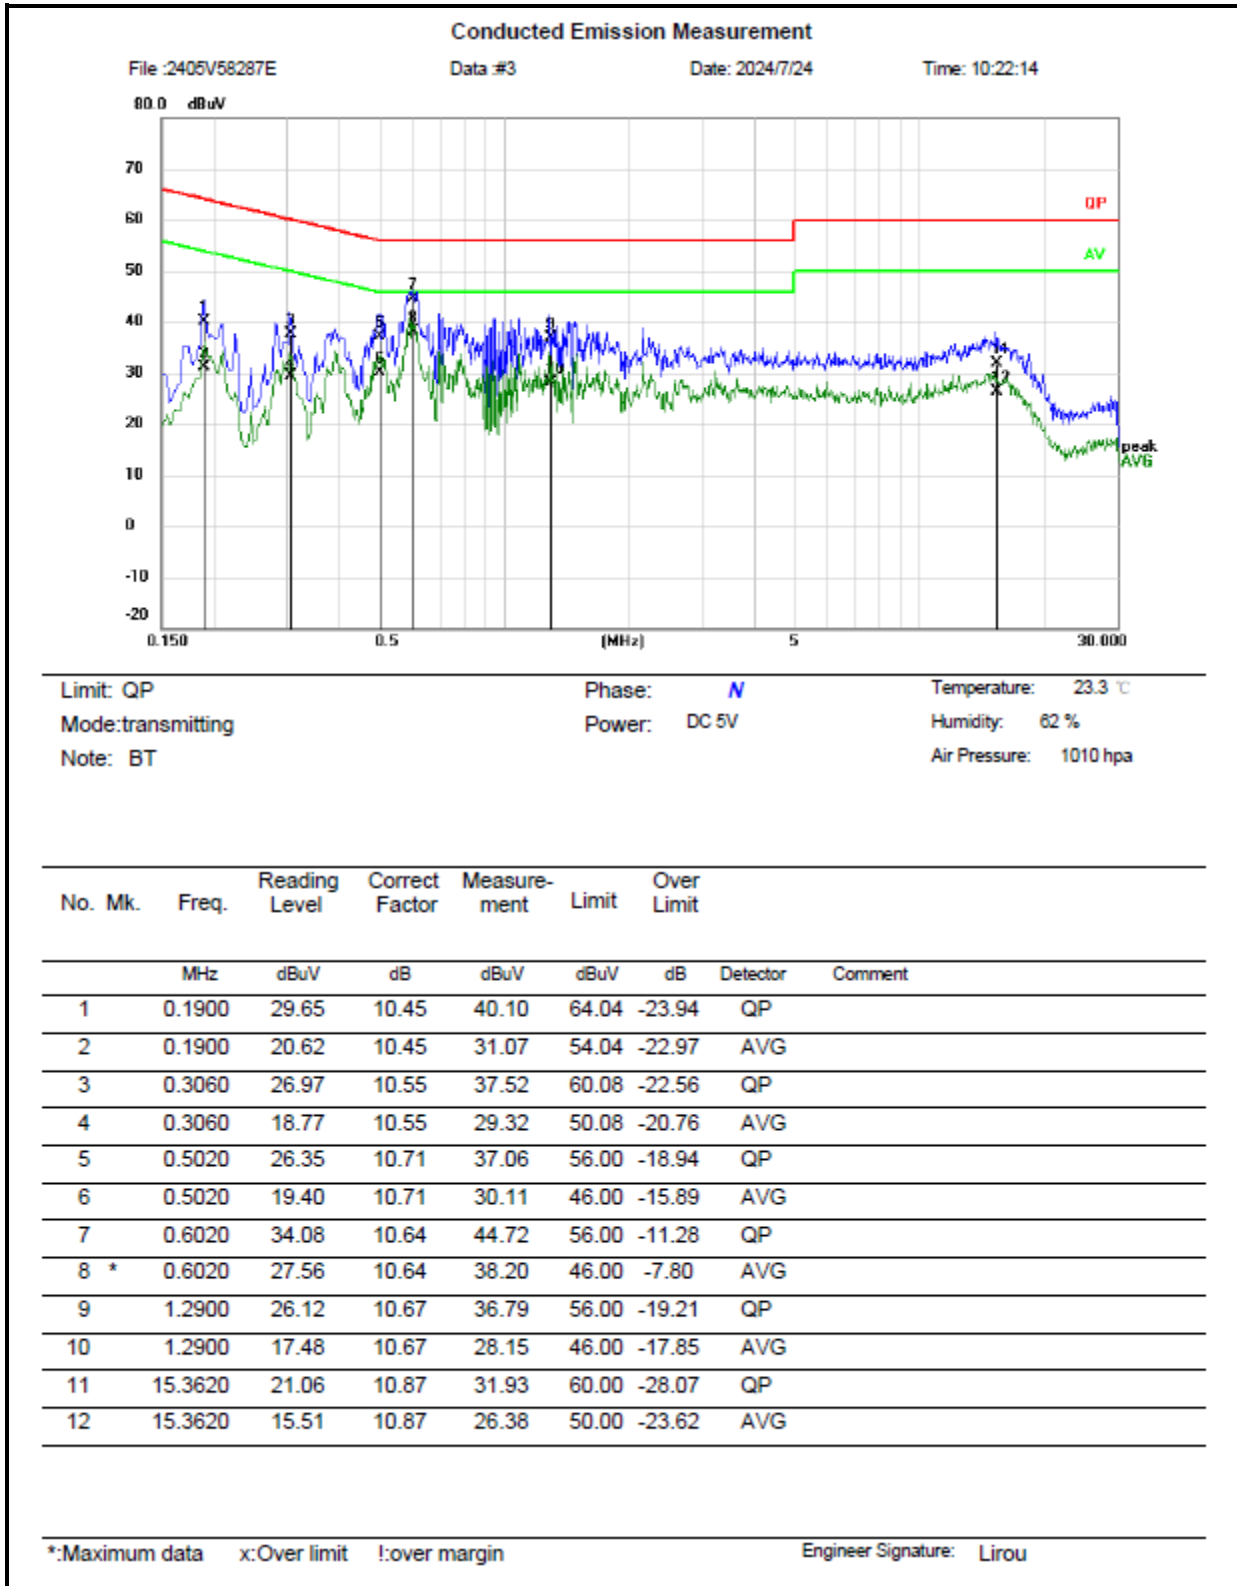

Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor(dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)

Over = Measurement – Limit

3.4 Radiated emission Test Data


9 kHz-30MHz:


Test Date:	2024-07-29	Test By:	Bard Huang
Environment condition:	Temperature: 24.6°C; Relative Humidity:64%; ATM Pressure: 100kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-07-29	Test By:	Bard Huang
Environment condition:	Temperature: 24.6°C; Relative Humidity:64%; ATM Pressure: 100kPa		

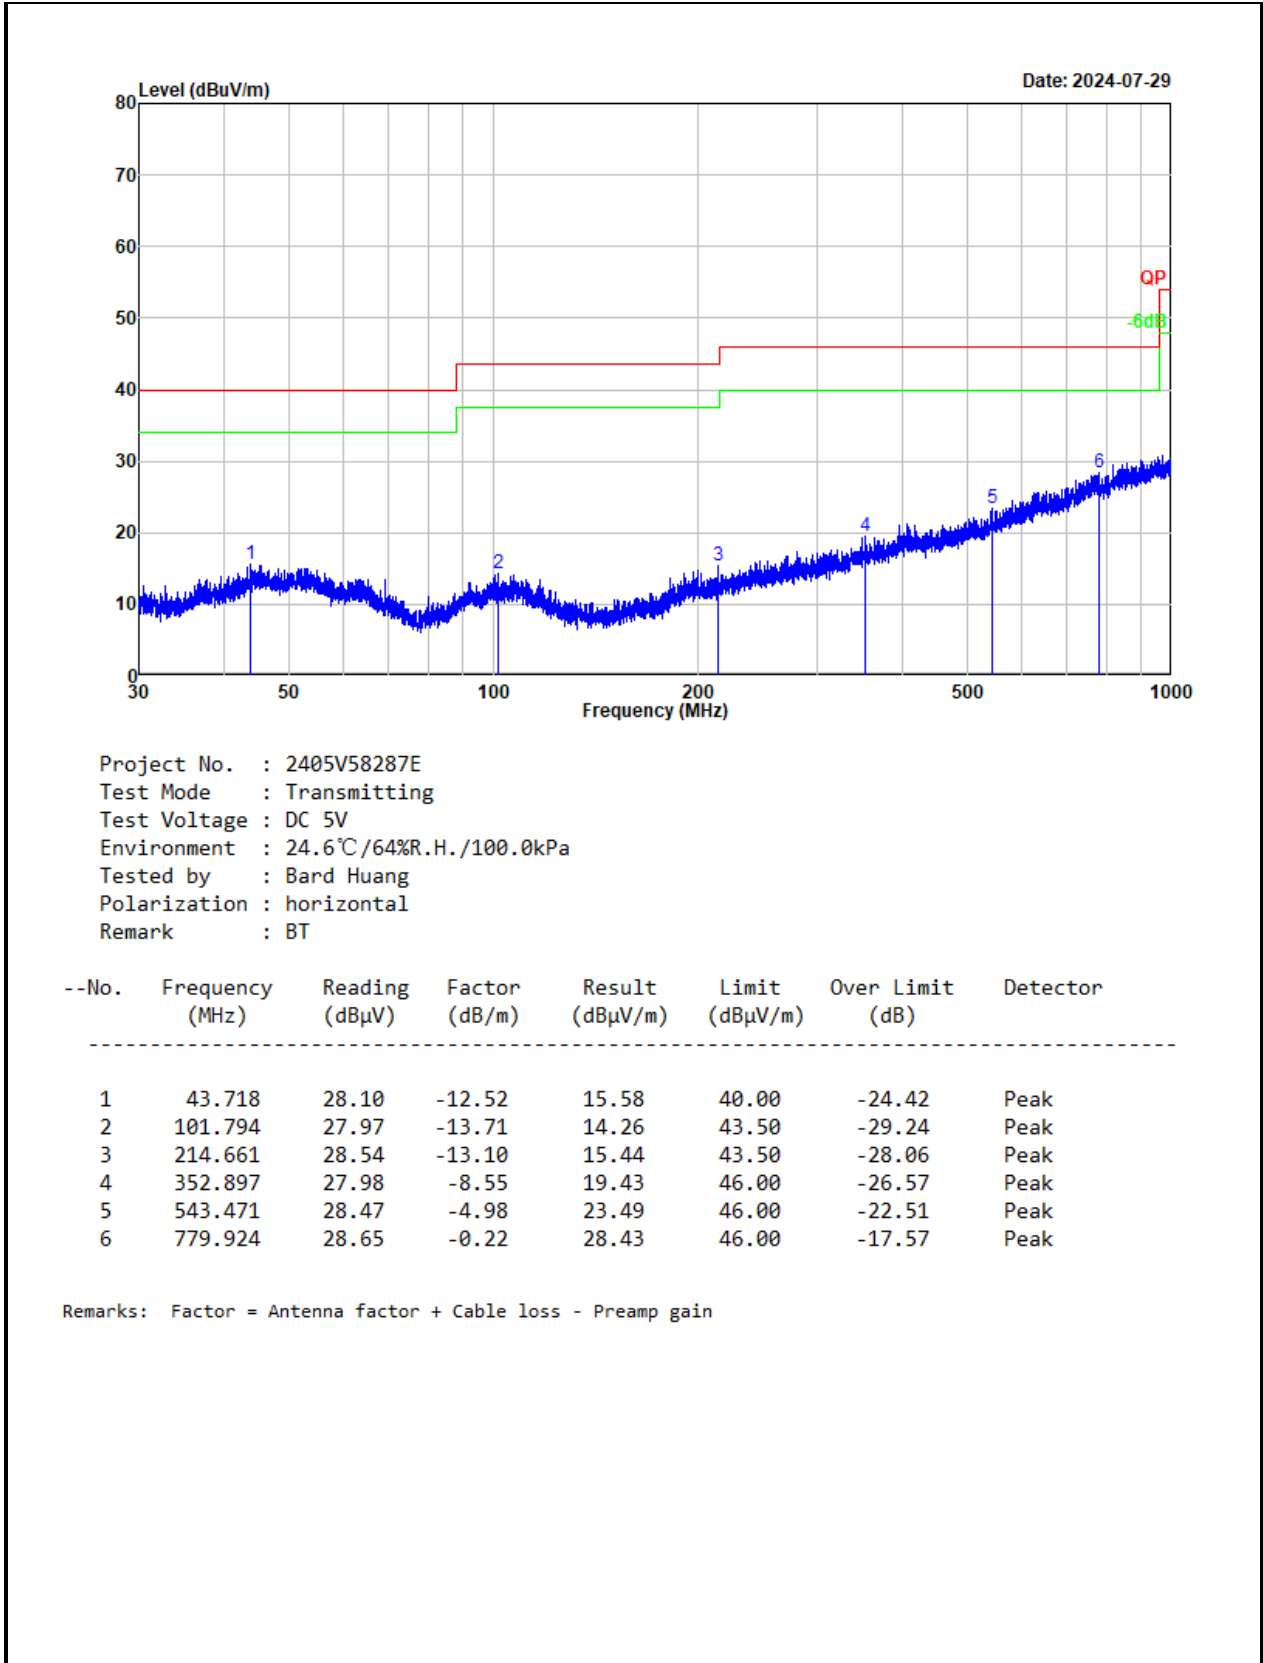

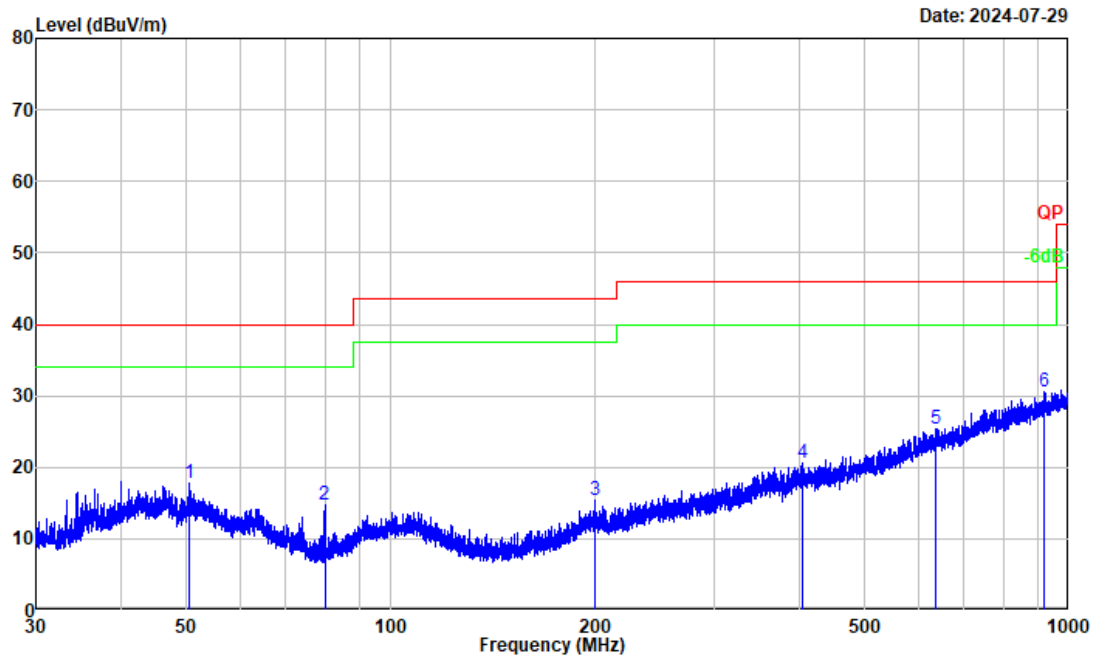

Project No. : 2405V58287E
Test Mode : Transmitting
Test Voltage : DC 5V
Environment : 24.6°C/64%R.H./100.0kPa
Tested by : Bard Huang
Polarization : vertical
Remark : BT

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	50.523	29.74	-12.04	17.70	40.00	-22.30	Peak
2	79.985	32.58	-17.79	14.79	40.00	-25.21	Peak
3	200.033	28.50	-13.16	15.34	43.50	-28.16	Peak
4	404.798	27.84	-7.30	20.54	46.00	-25.46	Peak
5	635.819	28.01	-2.70	25.31	46.00	-20.69	Peak
6	920.487	28.74	1.85	30.59	46.00	-15.41	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Result – Limit

Above 1GHz:

Test Date:	2024-07-29	Test By:	Bard Huang
Environment condition:	Temperature: 24.6°C; Relative Humidity:64%; ATM Pressure: 100kPa		

Frequency (MHz)	Reading level (dBμV)	Polar	Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
GFSK							
Low Channel							
2390.000	37.75	horizontal	7.18	44.93	54.00	-9.07	Average
2390.000	48.29	horizontal	7.18	55.47	74.00	-18.53	Peak
2390.000	37.49	vertical	7.18	44.67	54.00	-9.33	Average
2390.000	47.82	vertical	7.18	55.00	74.00	-19.00	Peak
4804.000	47.38	horizontal	-0.21	47.17	74.00	-26.83	Peak
4804.000	47.13	vertical	-0.21	46.92	74.00	-27.08	Peak
Middle Channel							
4882.000	47.04	horizontal	0.10	47.14	74.00	-26.86	Peak
4882.000	46.62	vertical	0.10	46.72	74.00	-27.28	Peak
High Channel							
2483.500	37.48	horizontal	7.25	44.73	54.00	-9.27	Average
2483.500	48.53	horizontal	7.25	55.78	74.00	-18.22	Peak
2483.500	37.78	vertical	7.25	45.03	54.00	-8.97	Average
2483.500	47.37	vertical	7.25	54.62	74.00	-19.38	Peak
4960.000	46.92	horizontal	0.28	47.20	74.00	-26.80	Peak
4960.000	47.43	vertical	0.28	47.71	74.00	-26.29	Peak
π/4 DQPSK							
Low Channel							
2390.000	36.34	horizontal	7.18	43.52	54.00	-10.48	Average
2390.000	48.29	horizontal	7.18	55.47	74.00	-18.53	Peak
2390.000	36.53	vertical	7.18	43.71	54.00	-10.29	Average
2390.000	47.37	vertical	7.18	54.55	74.00	-19.45	Peak
4804.000	47.41	horizontal	-0.21	47.20	74.00	-26.80	Peak
4804.000	48.07	vertical	-0.21	47.86	74.00	-26.14	Peak
Middle Channel							
4882.000	46.67	horizontal	0.10	46.77	74.00	-27.23	Peak
4882.000	47.00	vertical	0.10	47.10	74.00	-26.90	Peak
High Channel							
2483.642	36.93	horizontal	7.25	44.18	54.00	-9.82	Average

2483.642	51.36	horizontal	7.25	58.61	74.00	-15.39	Peak
2483.500	36.29	vertical	7.25	43.54	54.00	-10.46	Average
2483.500	47.74	vertical	7.25	54.99	74.00	-19.01	Peak
4960.000	46.88	horizontal	0.28	47.16	74.00	-26.84	Peak
4960.000	47.21	vertical	0.28	47.49	74.00	-26.51	Peak
8DPSK							
Low Channel							
2390.000	36.82	horizontal	7.18	44.00	54.00	-10.00	Average
2390.000	47.55	horizontal	7.18	54.73	74.00	-19.27	Peak
2390.000	36.73	vertical	7.18	43.91	54.00	-10.09	Average
2390.000	47.42	vertical	7.18	54.60	74.00	-19.40	Peak
4804.000	47.61	horizontal	-0.21	47.40	74.00	-26.60	Peak
4804.000	47.71	vertical	-0.21	47.50	74.00	-26.50	Peak
Middle Channel							
4882.000	46.93	horizontal	0.10	47.03	74.00	-26.97	Peak
4882.000	47.11	vertical	0.10	47.21	74.00	-26.79	Peak
High Channel							
2483.500	37.12	horizontal	7.25	44.37	54.00	-9.63	Average
2483.500	49.97	horizontal	7.25	57.22	74.00	-16.78	Peak
2483.500	36.63	vertical	7.25	43.88	54.00	-10.12	Average
2483.500	47.60	vertical	7.25	54.85	74.00	-19.15	Peak
4960.000	47.53	horizontal	0.28	47.81	74.00	-26.19	Peak
4960.000	46.69	vertical	0.28	46.97	74.00	-27.03	Peak

Remark:

Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain

Margin = Corrected Amplitude – Limit


For the test result of Peak below the Peak limit more than 20dB, which can compliance with the average limit, just the Peak level was recorded.


The emission levels of other frequencies that were lower than the limit 20dB, not show in test report.


For emissions in 18GHz-25GHz range, all emissions were investigated and in the noise floor level.


Test plot for example as below:


Worst Case

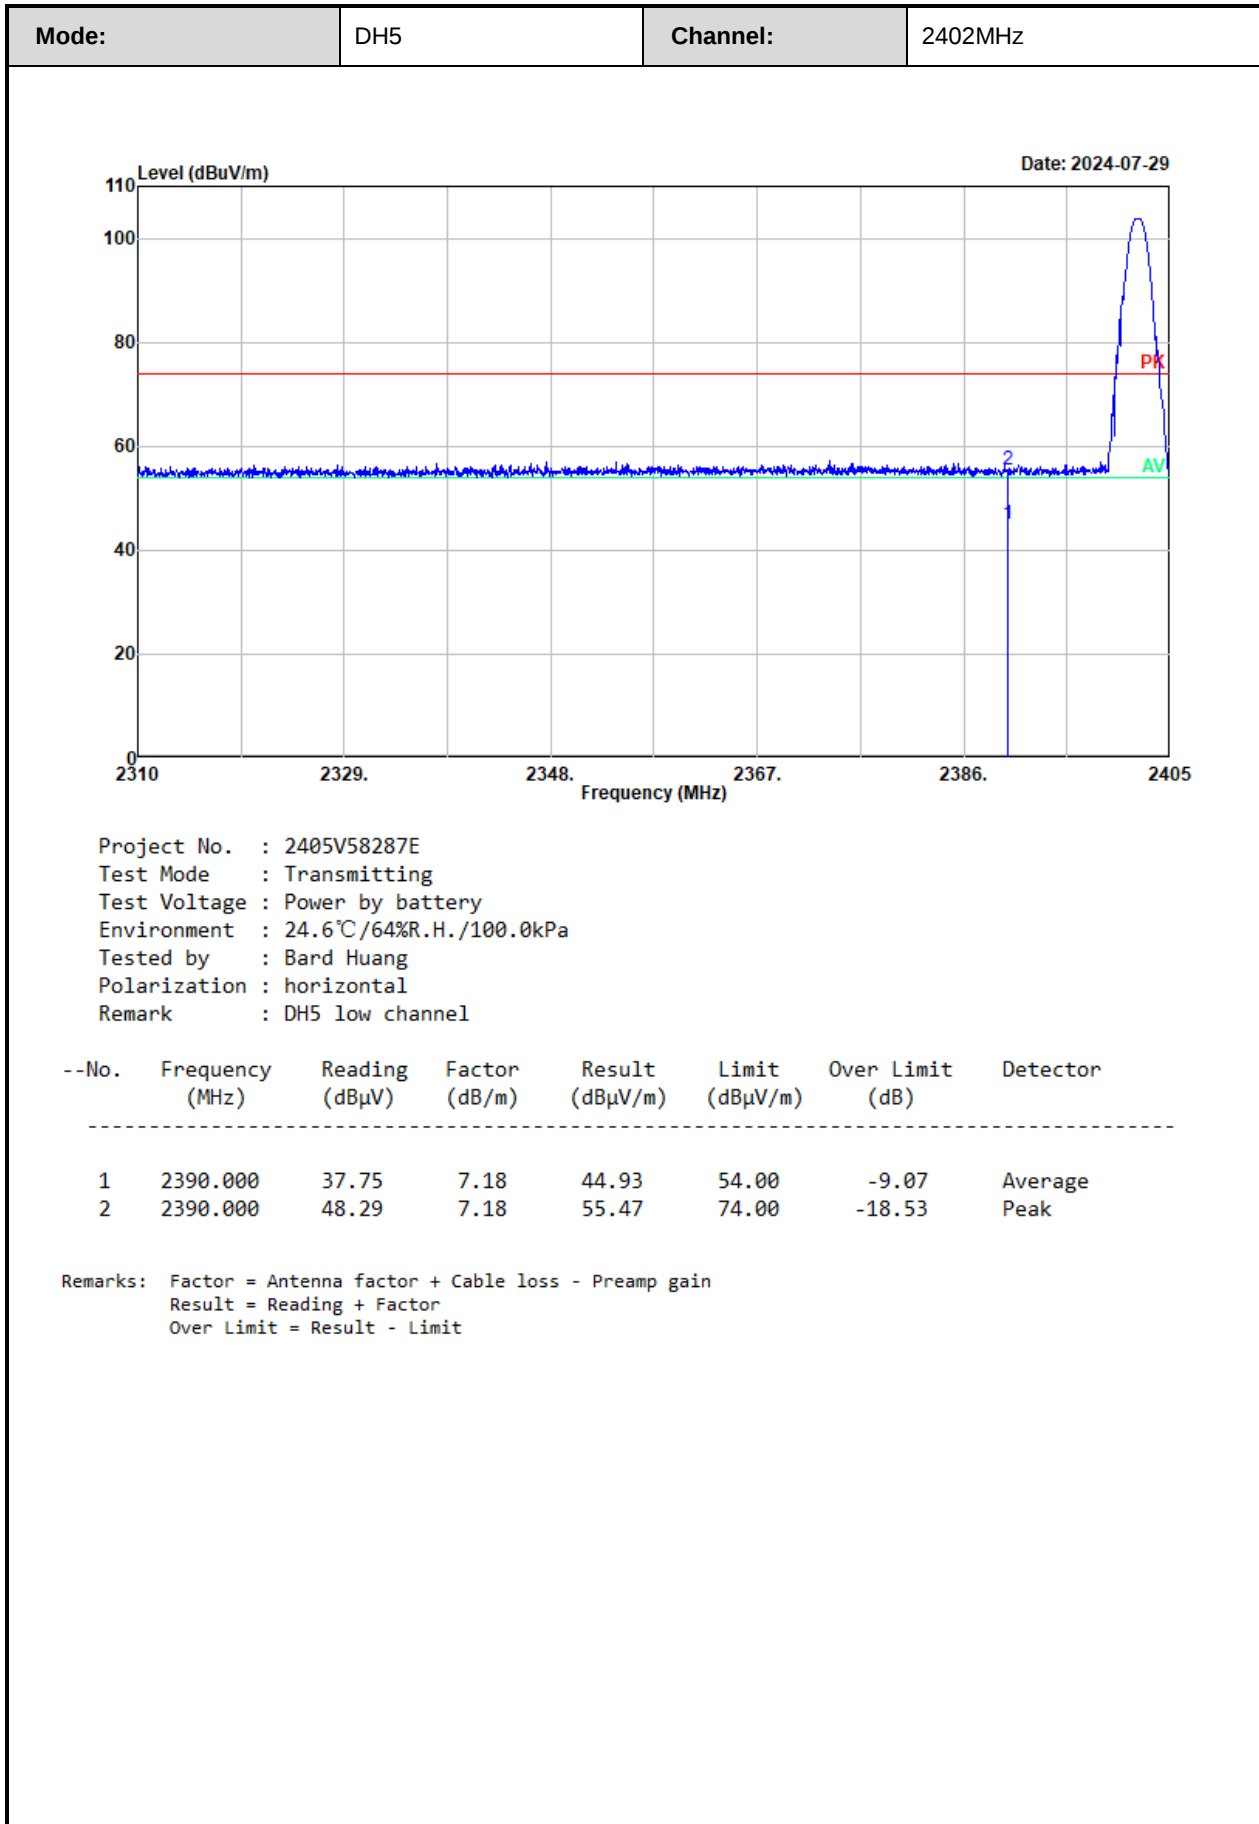


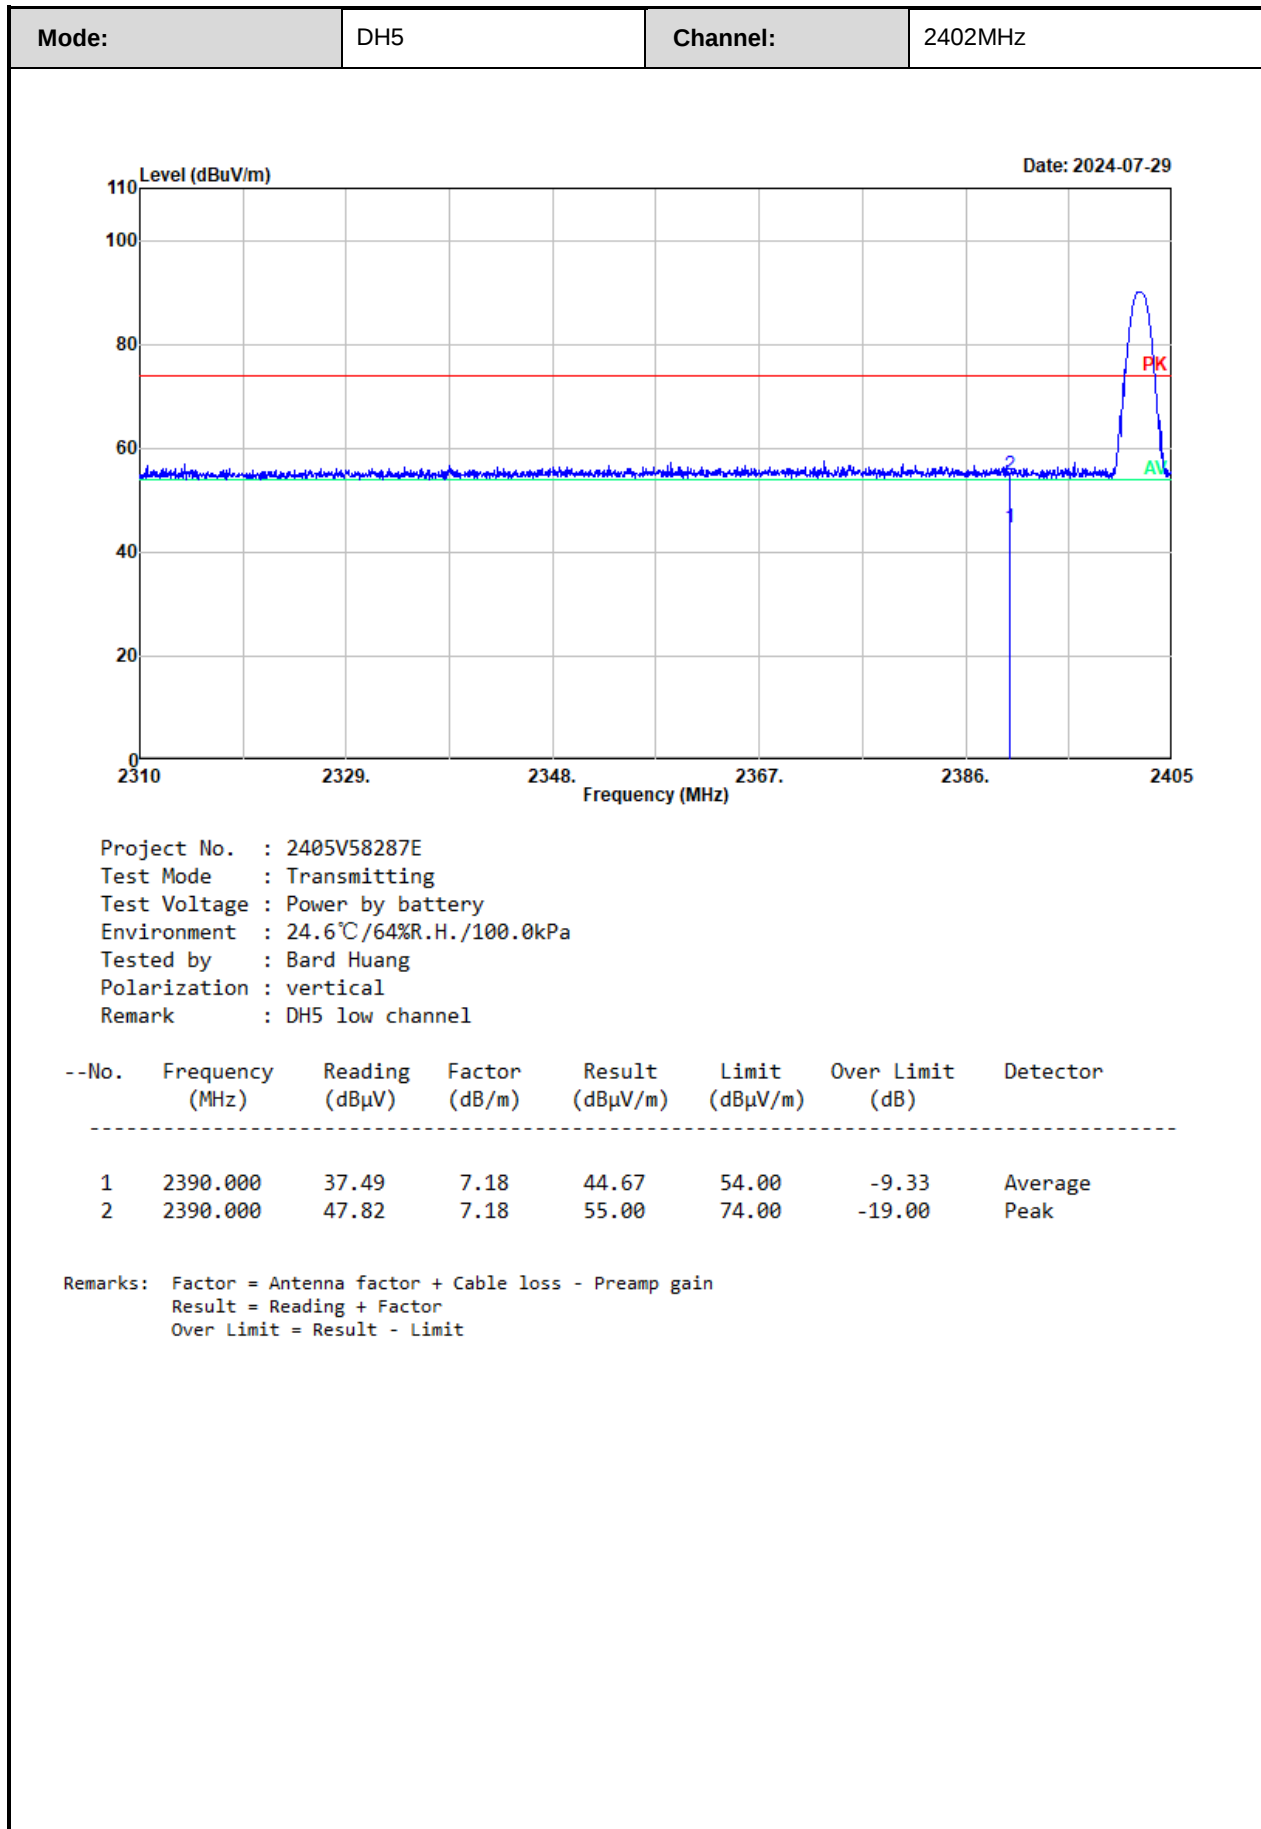


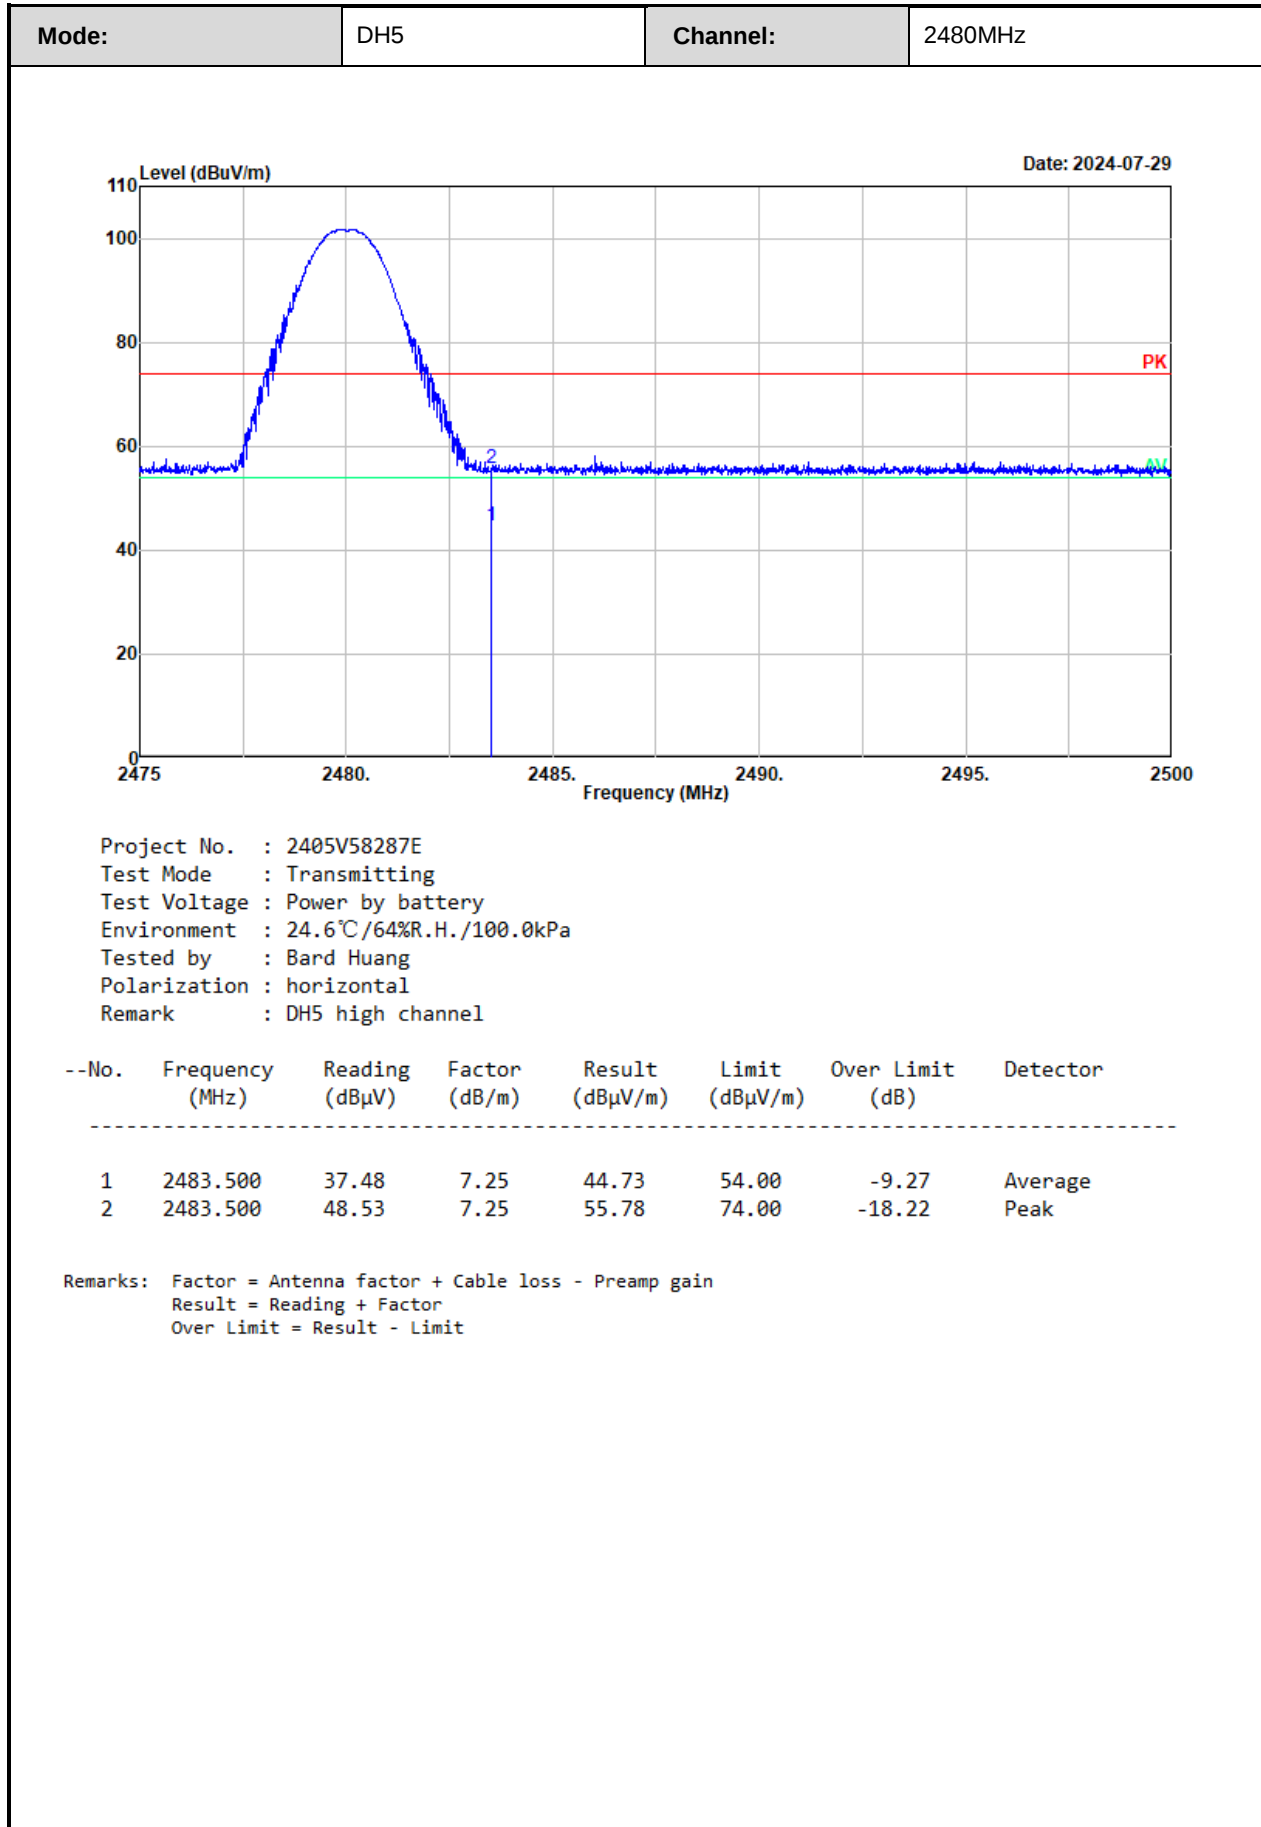


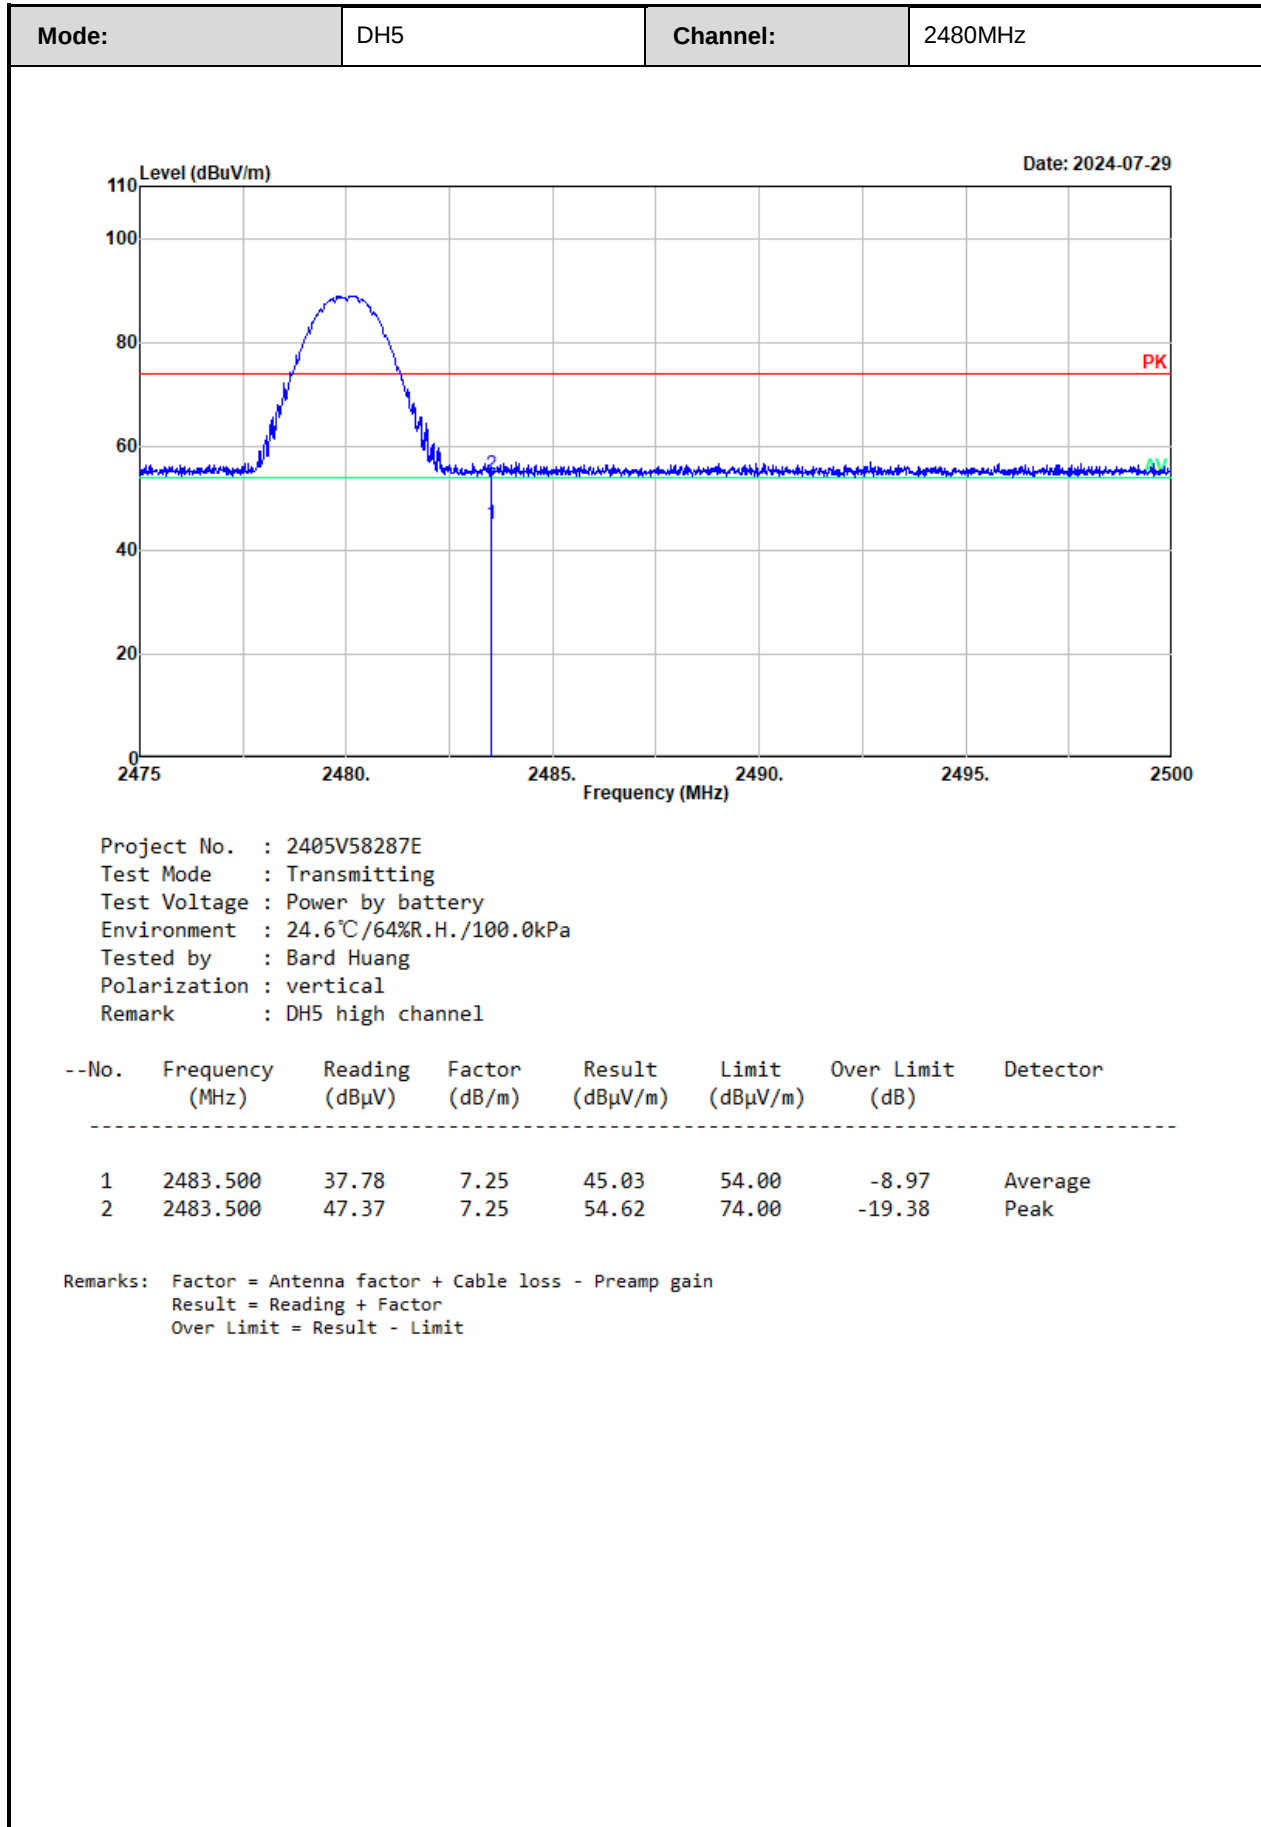


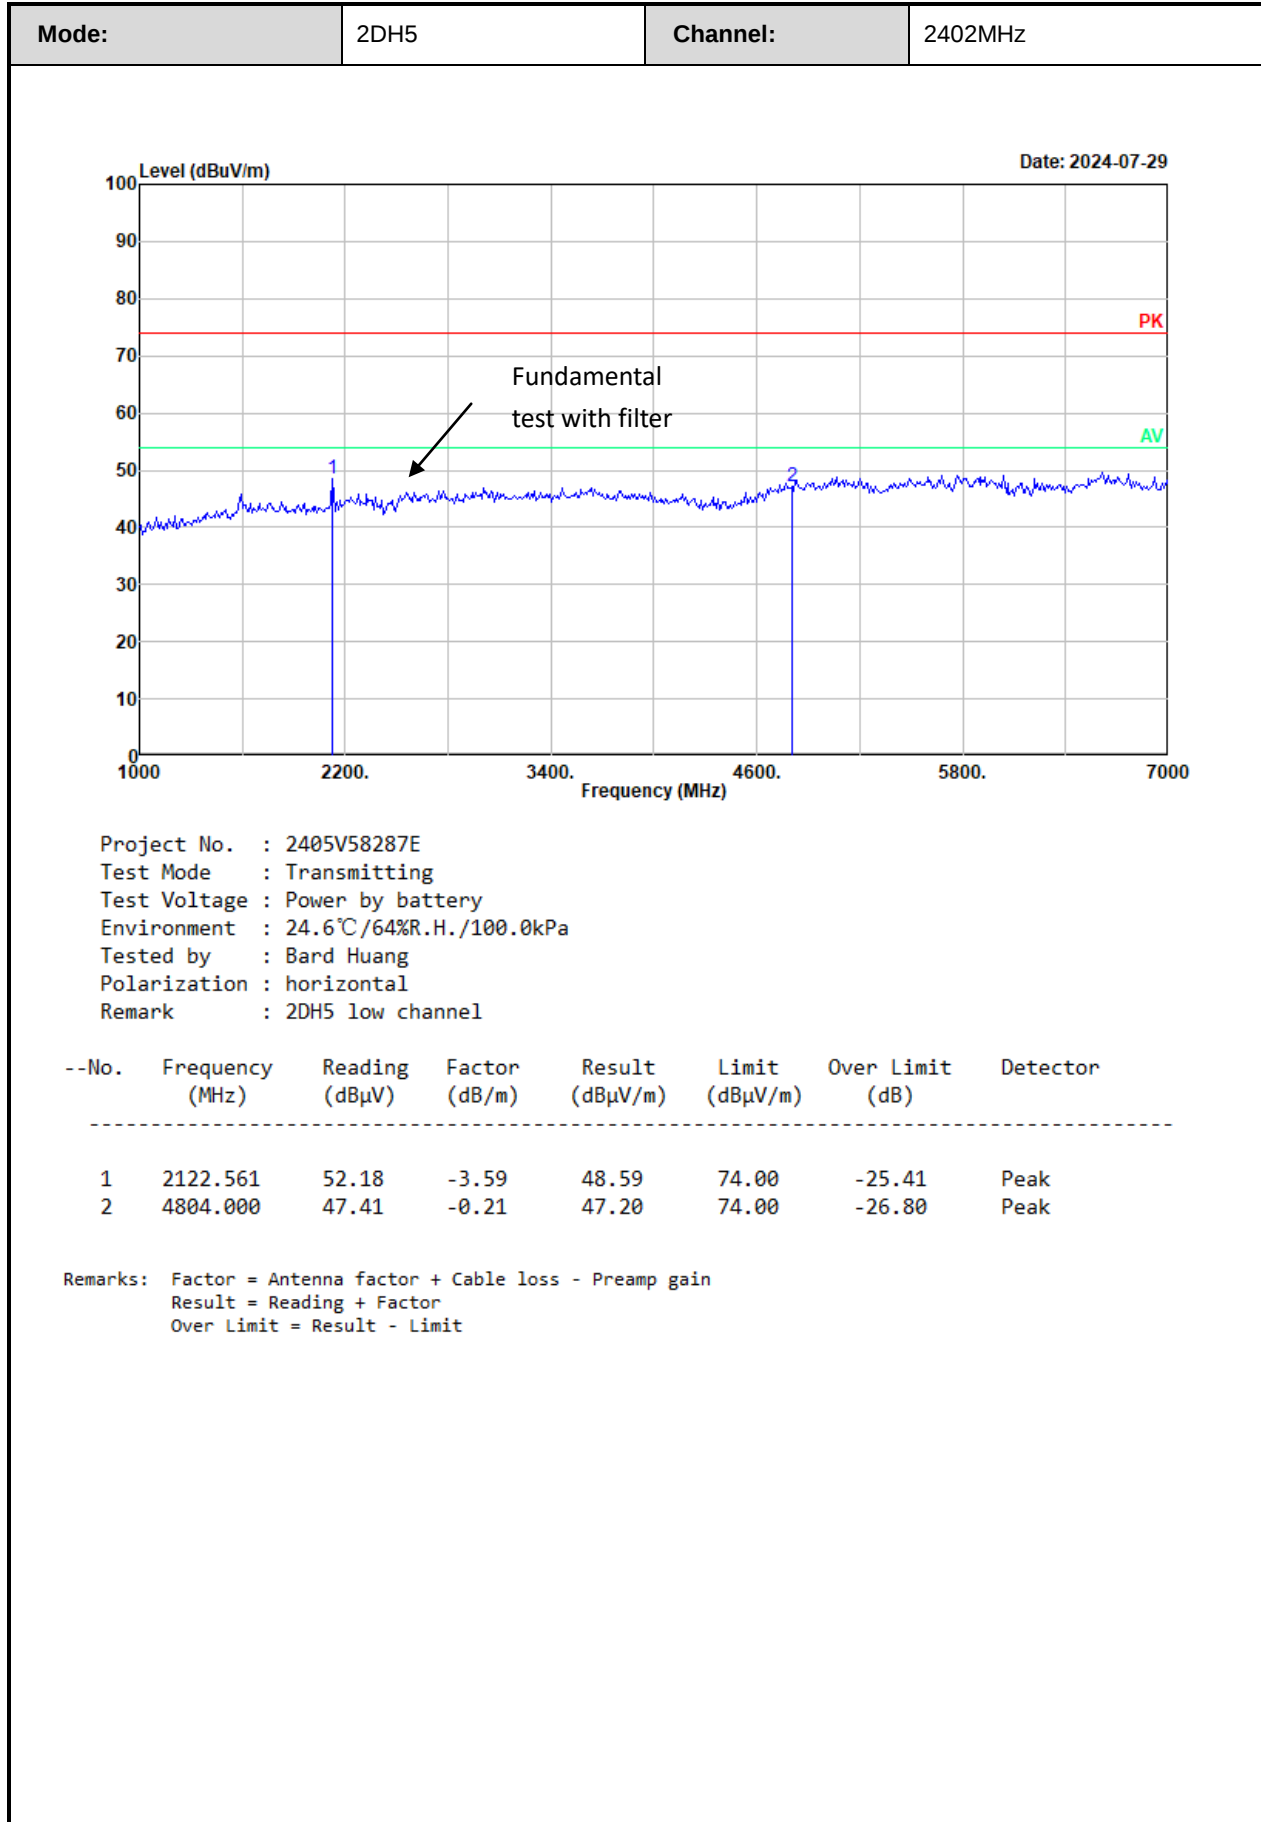


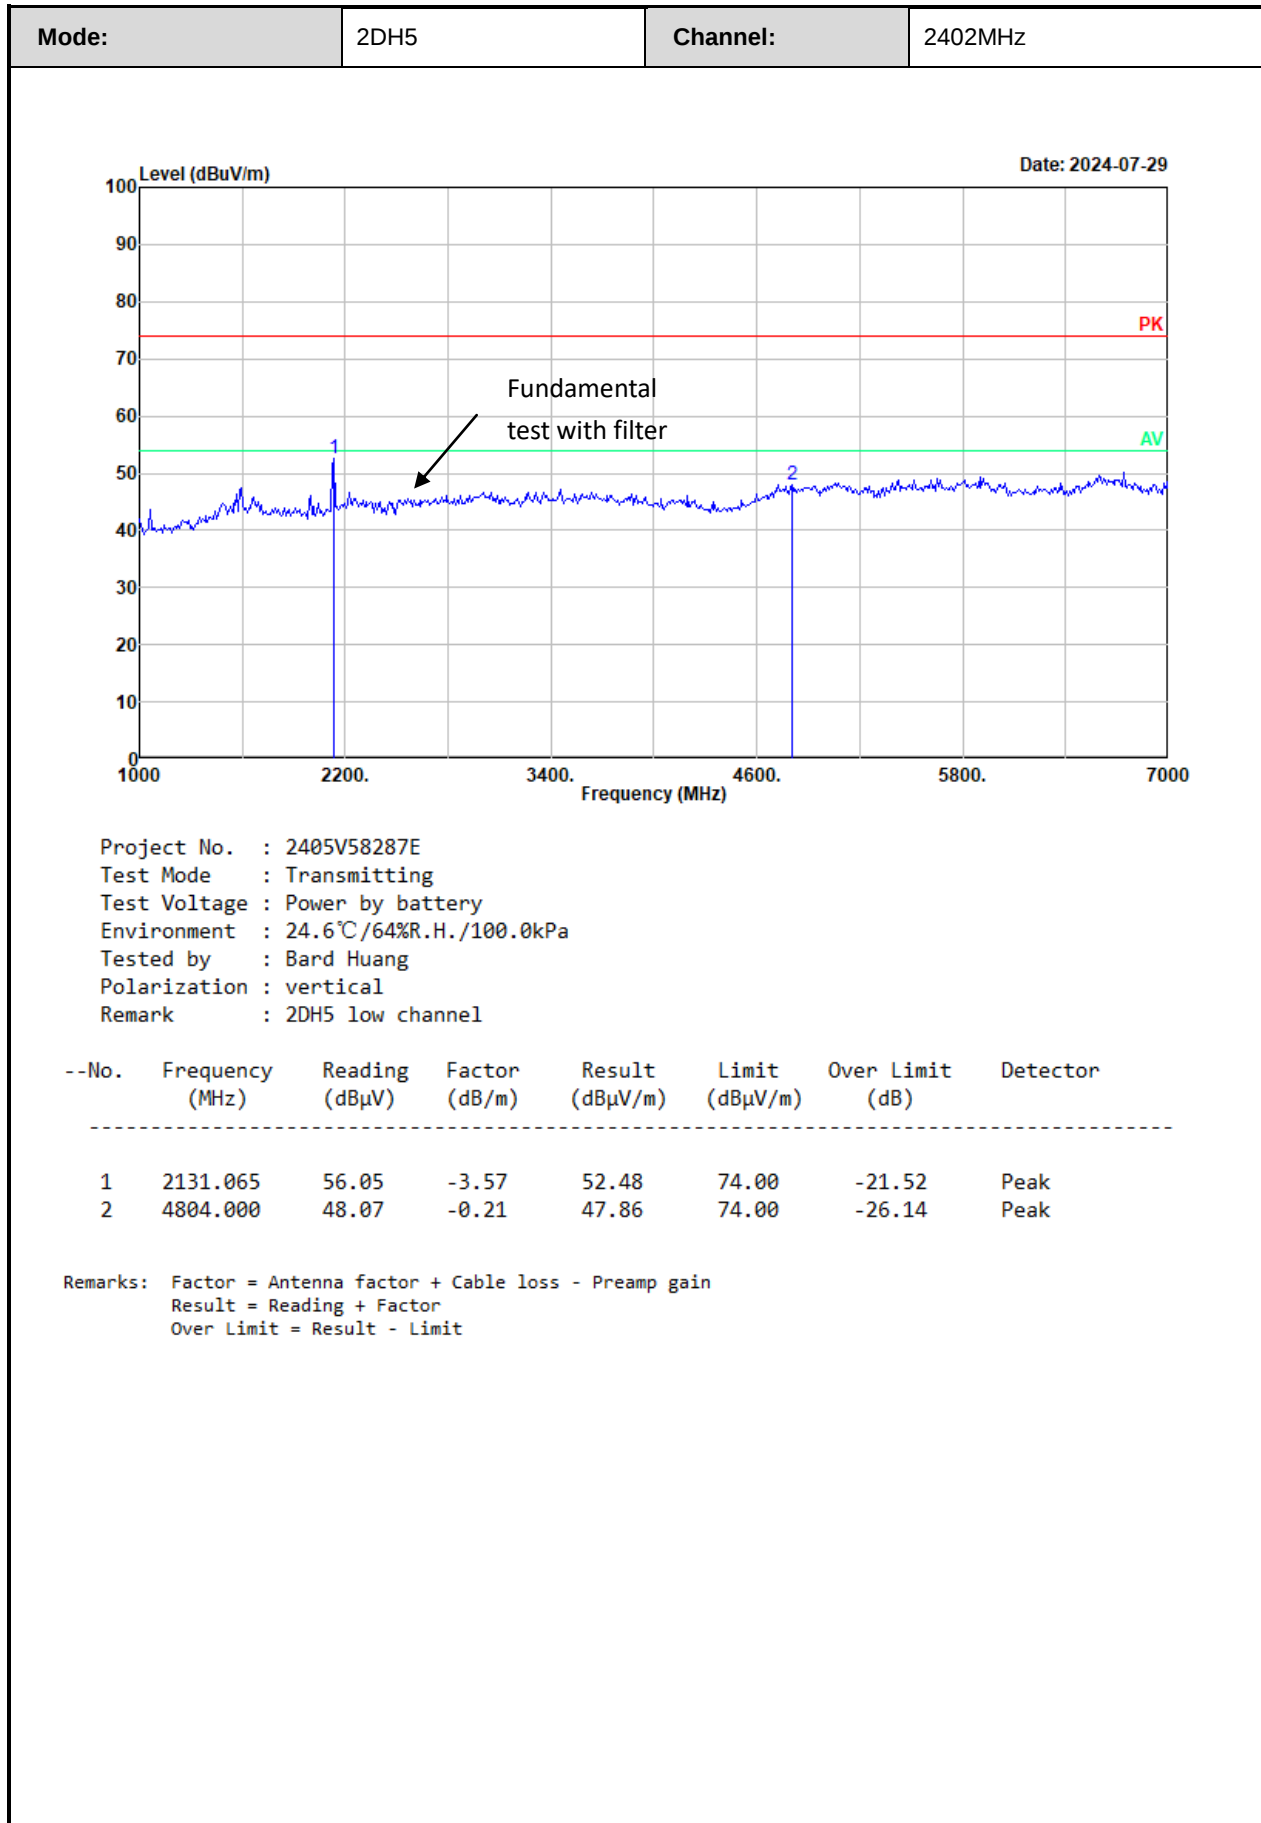

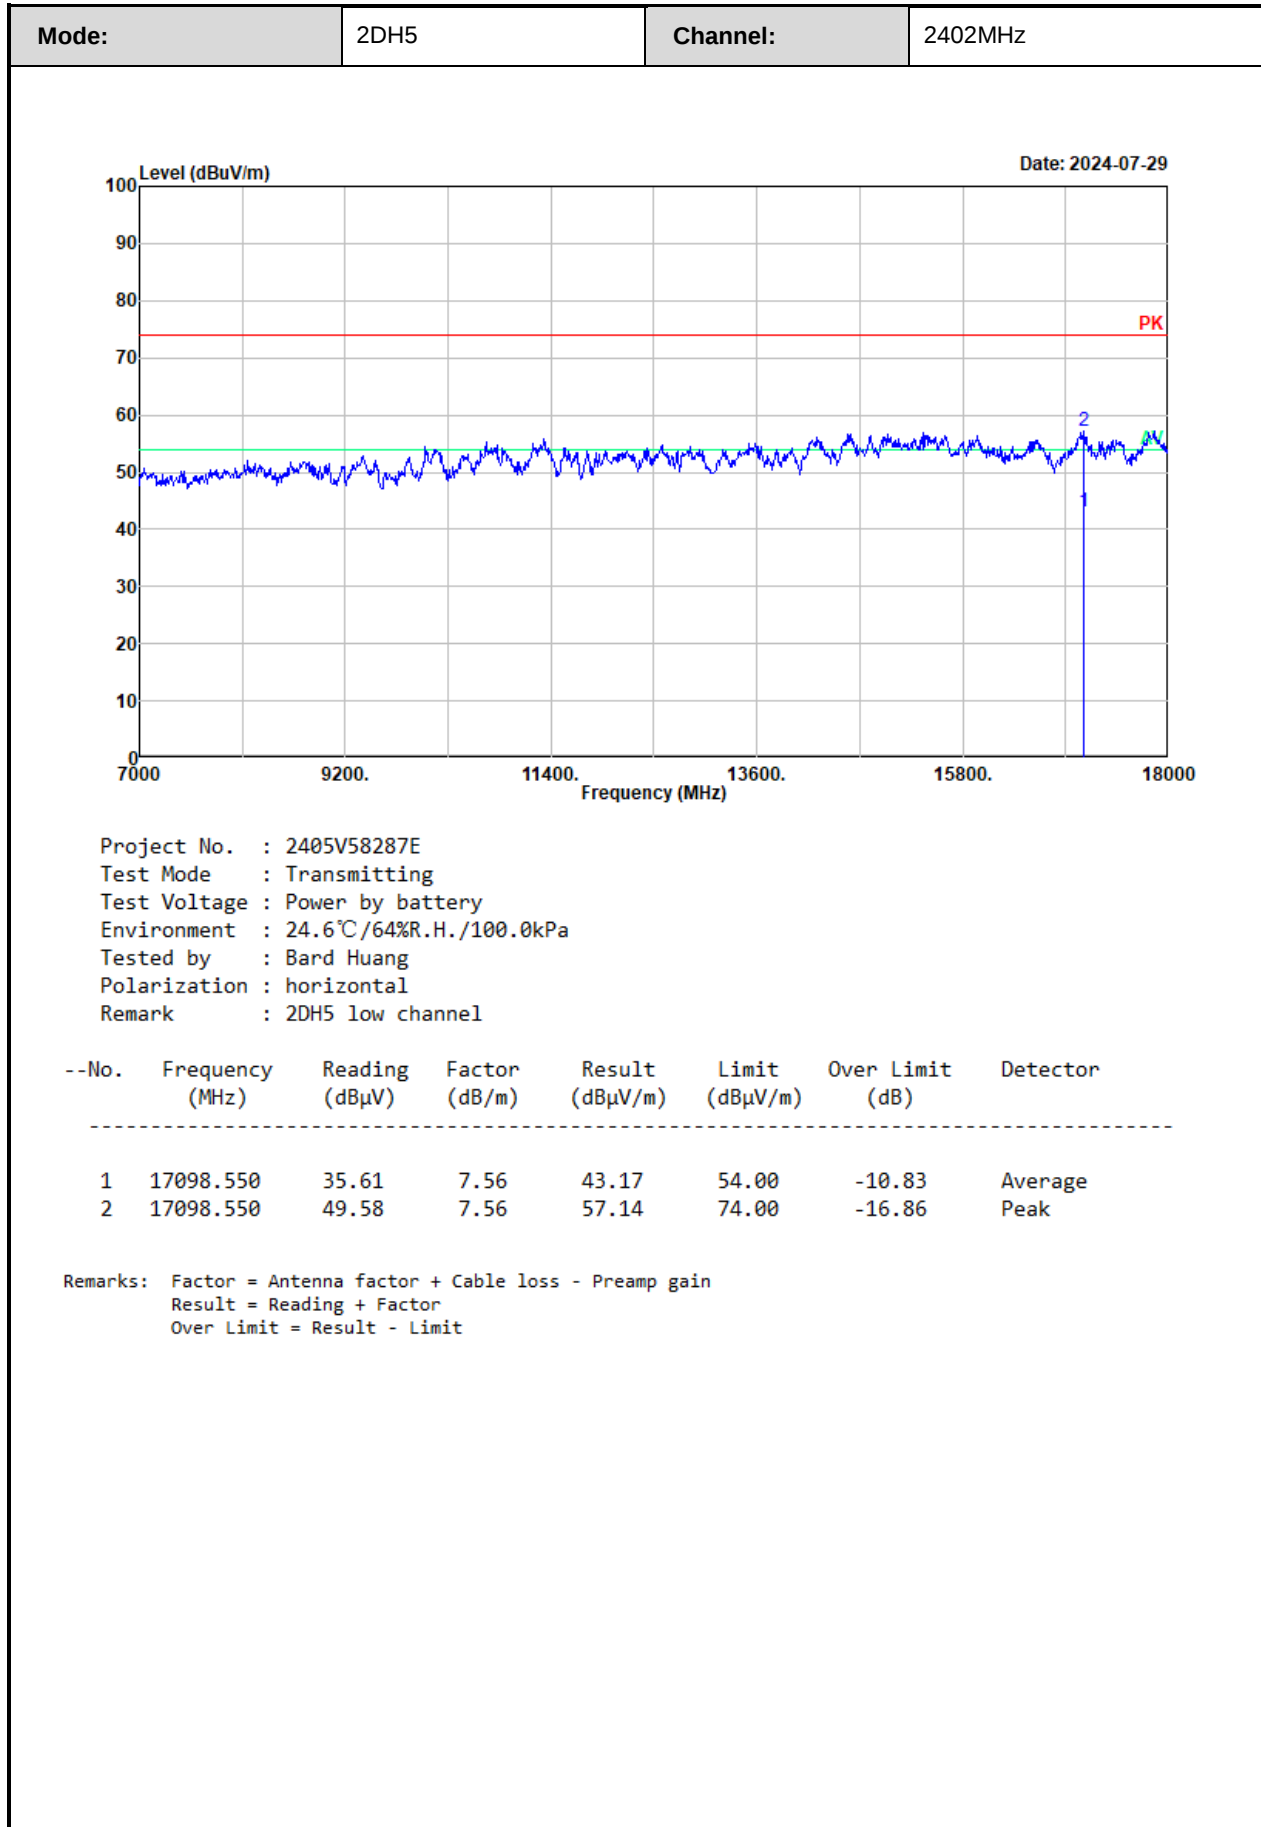

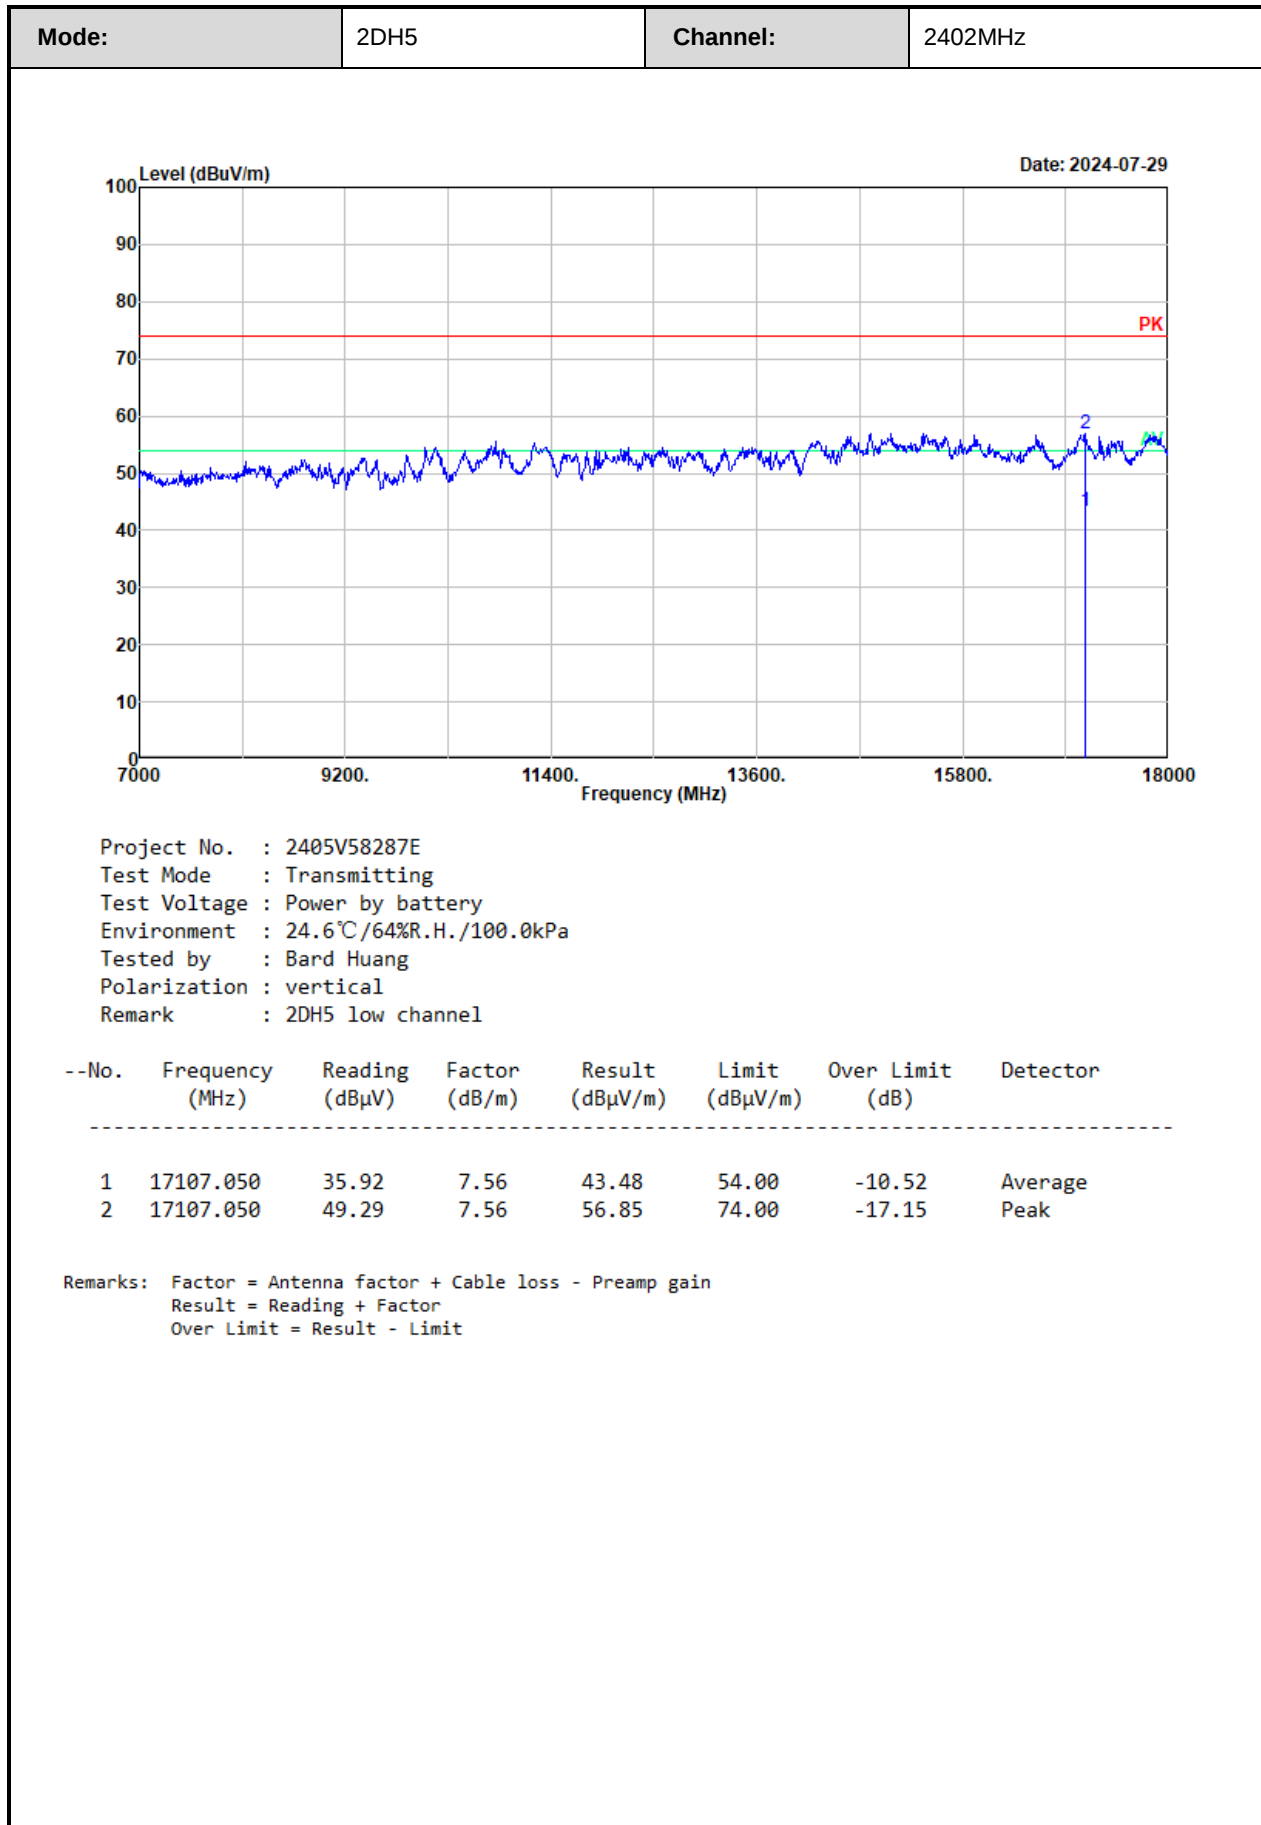

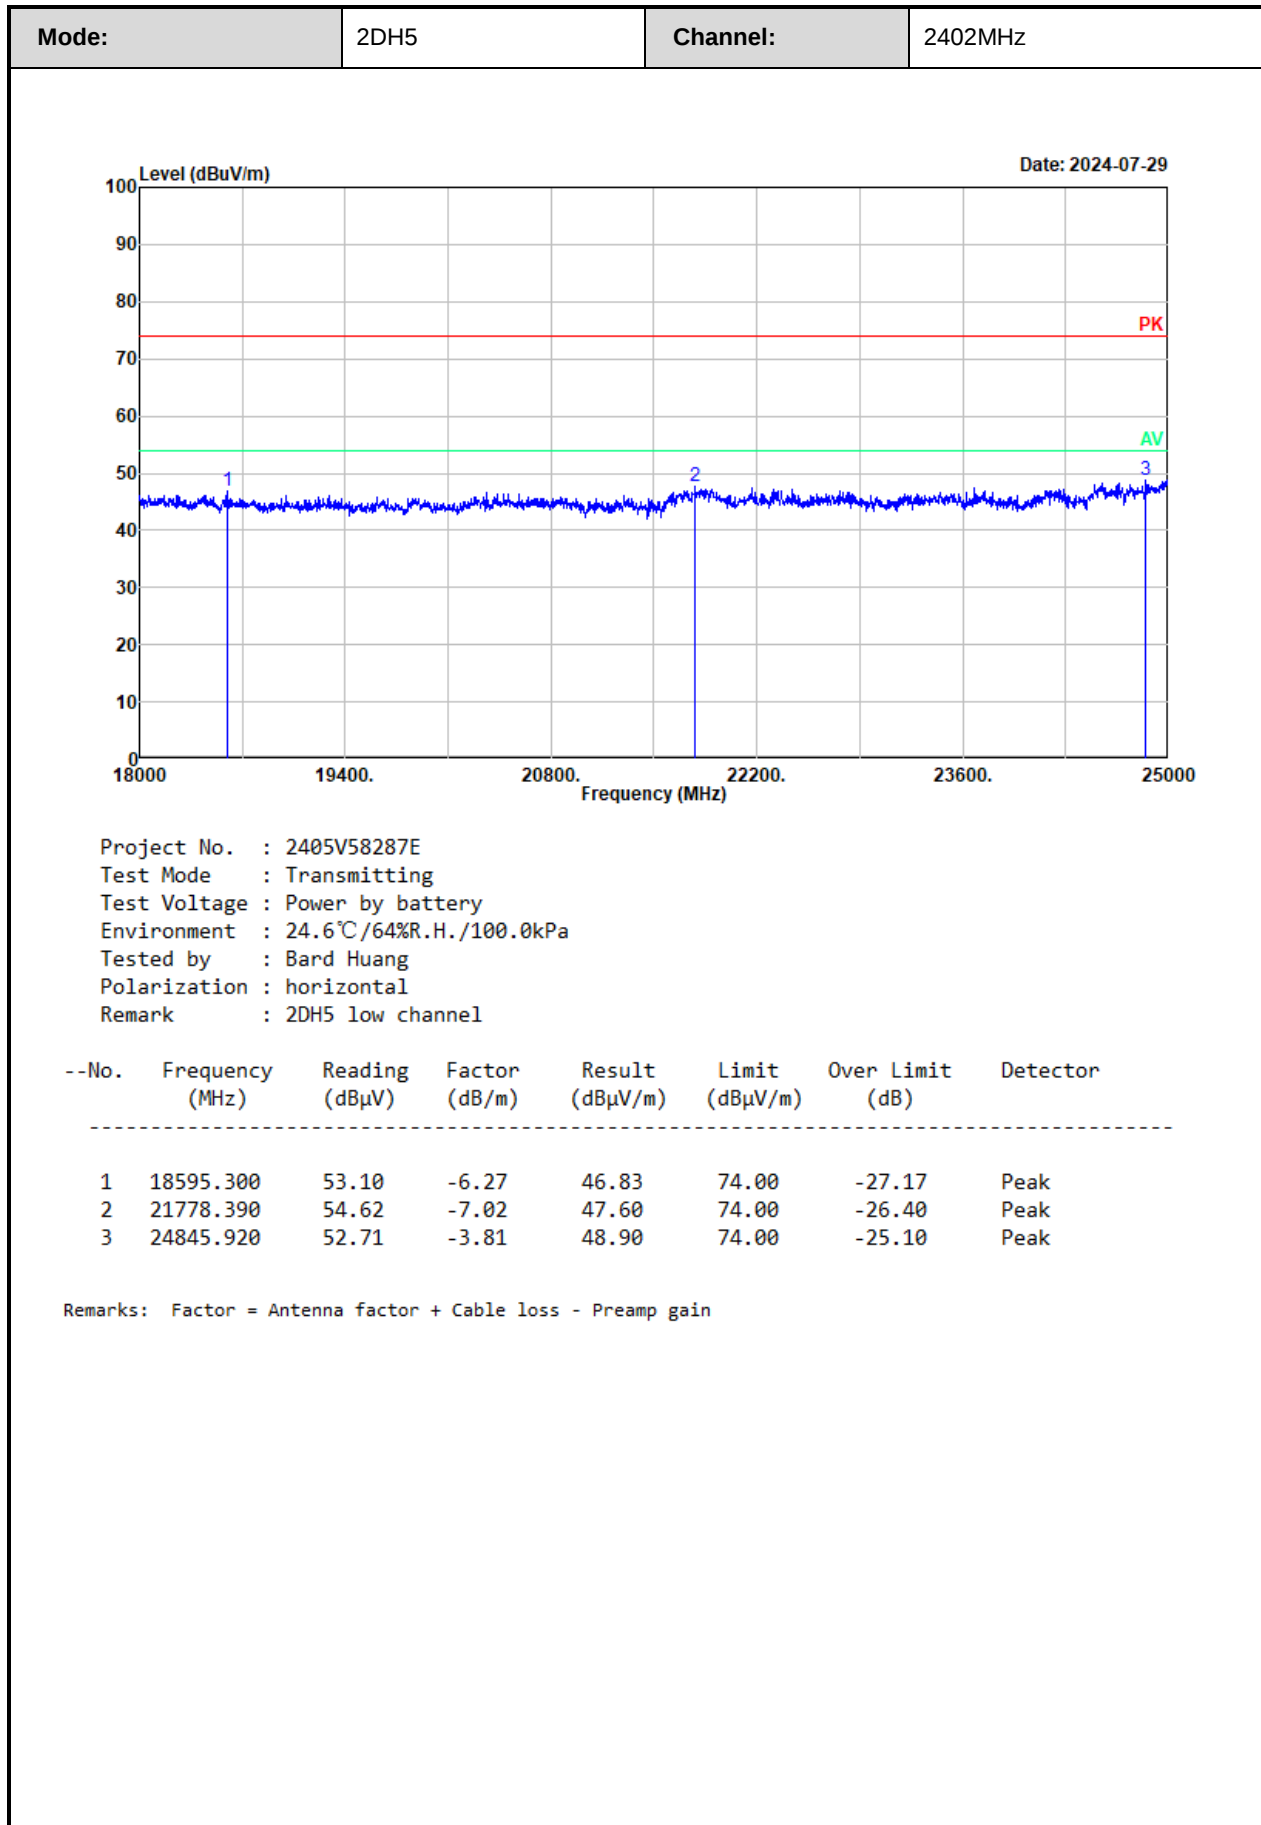

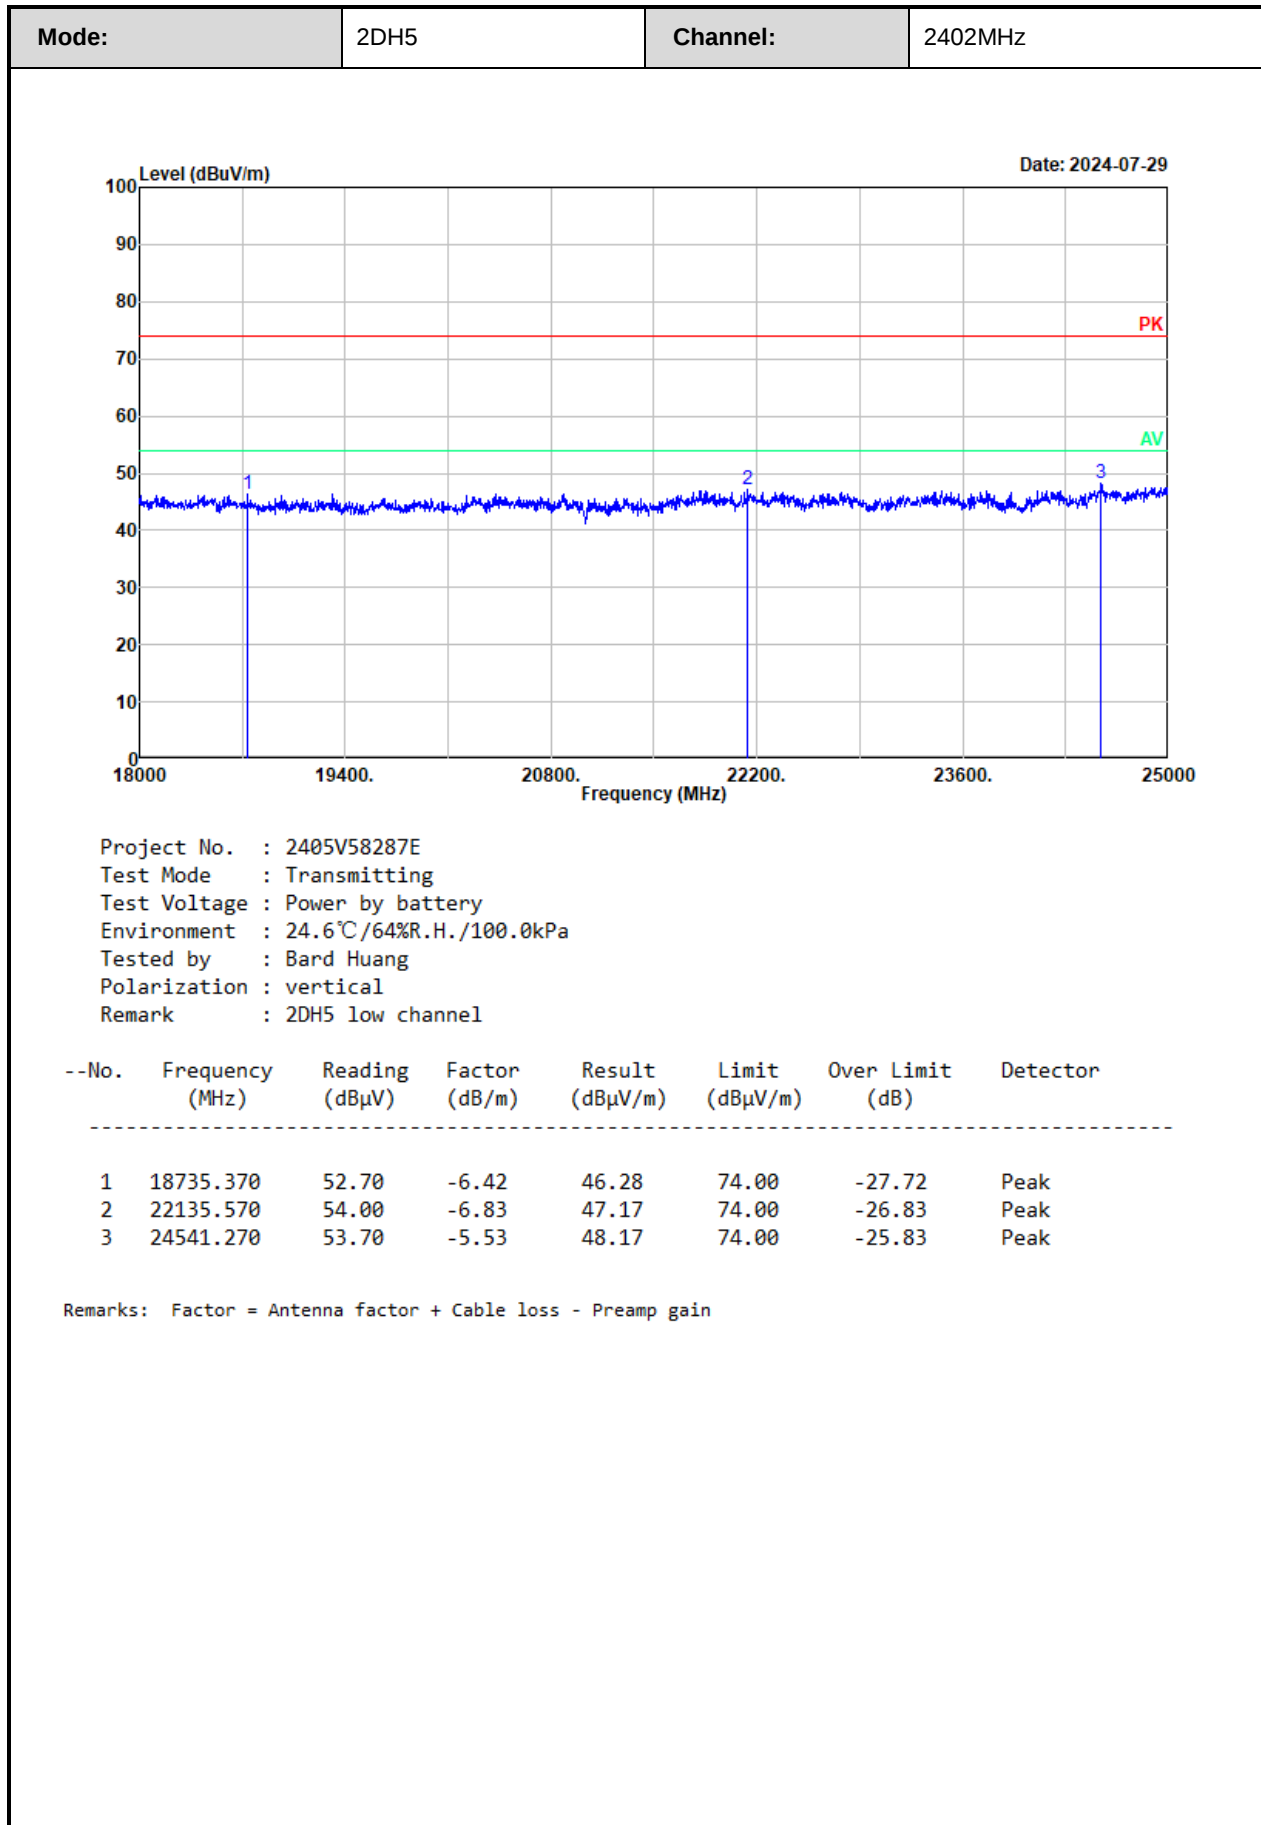

3.5 RF Conducted Test Data

Test Date:	2024-08-07	Test By:	Ryan Zhang
Environment condition:	Temperature: 23.3°C; Relative Humidity:60%; ATM Pressure: 100.5kPa		

3.5.1 20 dB Emission Bandwidth and 99% Occupied Bandwidth

Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
BDR Mode (GFSK)	Lowest	2402	0.904	0.840
	Middle	2441	0.904	0.840
	Highest	2480	0.900	0.836
EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.316	1.180
	Middle	2441	1.316	1.180
	Highest	2480	1.316	1.180
EDR Mode (8DPSK)	Lowest	2402	1.288	1.180
	Middle	2441	1.288	1.180
	Highest	2480	1.288	1.184

3.5.2 Maximum Conducted Peak Output Power

Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
BDR Mode (GFSK)	2402	5.52	21
	2441	5.18	21
	2480	5.93	21
EDR Mode ($\pi/4$ -DQPSK)	2402	5.45	21
	2441	6.61	21
	2480	7.52	21
EDR Mode (8DPSK)	2402	5.99	21
	2441	7.18	21
	2480	7.93	21

3.5.3 Channel separation

Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
BDR Mode (GFSK)	2402	1.002	0.603
	2441	1.002	0.603
	2480	1.002	0.600
EDR Mode ($\pi/4$ -DQPSK)	2402	0.996	0.877
	2441	1.002	0.877
	2480	1.002	0.877
EDR Mode (8DPSK)	2402	1.002	0.859
	2441	1.002	0.859
	2480	1.002	0.859

3.5.4 Number of hopping Frequency

Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
GFSK	2400-2483.5	79	≥ 15
$\pi/4$ -DQPSK	2400-2483.5	79	≥ 15
8DPSK	2400-2483.5	79	≥ 15

3.5.5 Time of occupancy (dwell time)

Test Modes	Packet Type	Test Frequency (MHz)	Pulse time (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.413	0.132	0.400
	DH3	2441	1.692	0.271	0.400
	DH5	2441	2.939	0.313	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.406	0.130	0.400
	2DH3	2441	1.678	0.268	0.400
	2DH5	2441	2.926	0.312	0.400
EDR Mode (8DPSK)	3DH1	2441	0.408	0.131	0.400
	3DH3	2441	1.675	0.268	0.400
	3DH5	2441	2.920	0.311	0.400

Note:

DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6s

DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6s


DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6s




3.5.6 100 kHz Bandwidth of Frequency Band Edge

EUT Operation Mode	Test Modes	Bandedge	Result (dB)	Limit (dB)
Non-Hopping	BDR Mode (GFSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot
	EDR Mode ($\pi/4$ -DQPSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot
	EDR Mode (8DPSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot
Hopping	BDR Mode (GFSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot
	EDR Mode ($\pi/4$ -DQPSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot
	EDR Mode (8DPSK)	Lower	Refer test plot	Refer test plot
		Upper	Refer test plot	Refer test plot







Test Plots:




20 dB Emission Bandwidth:

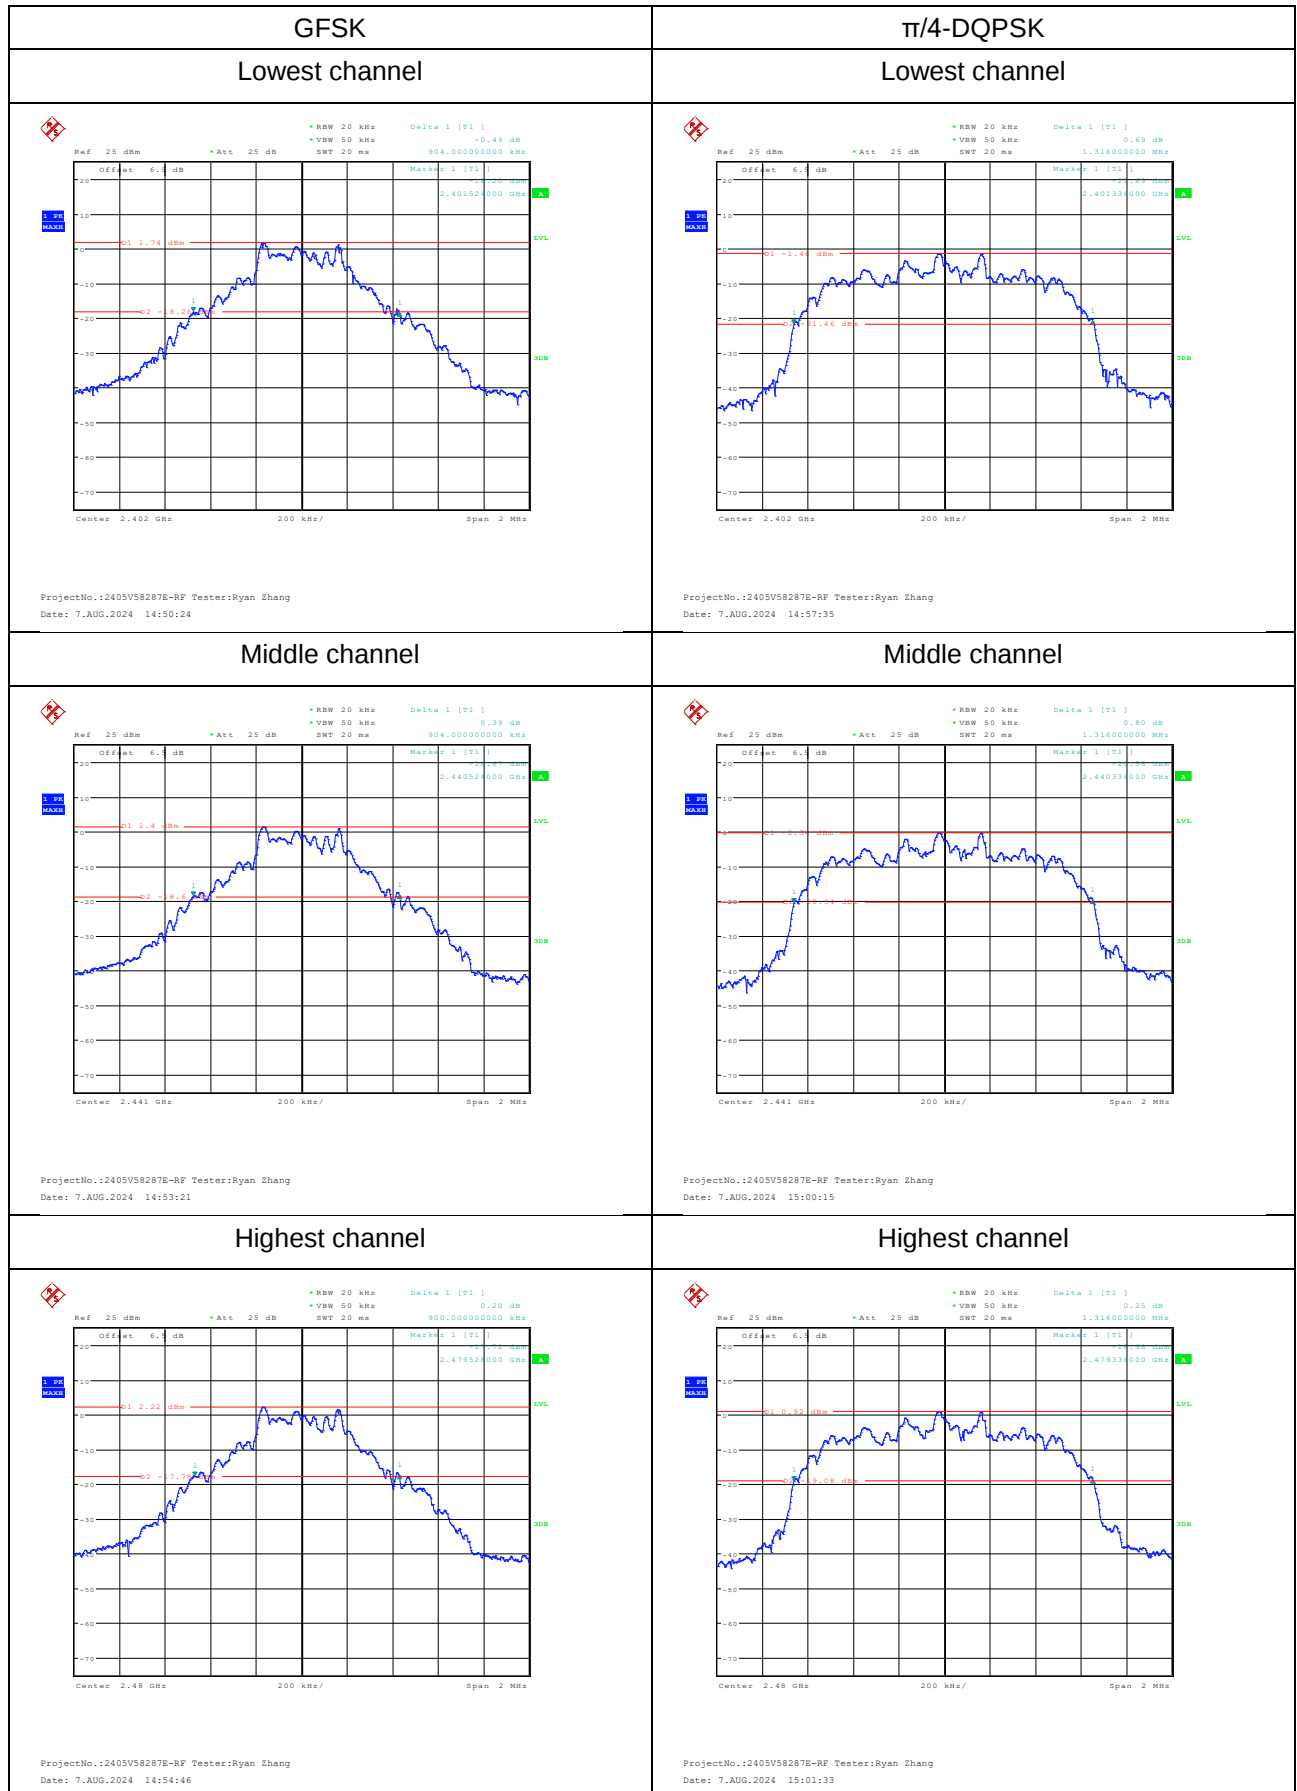




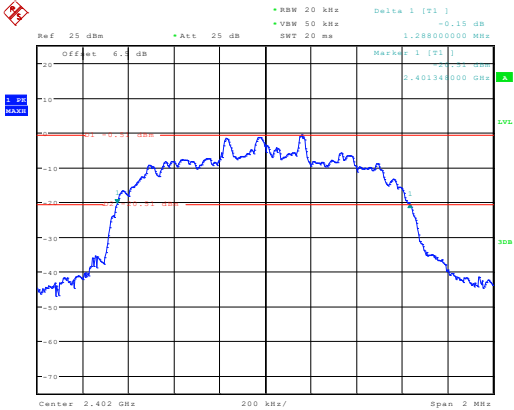
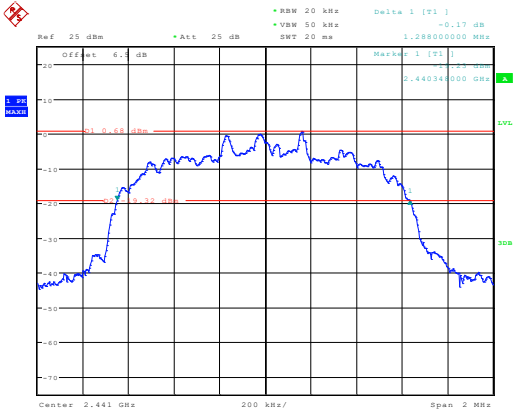
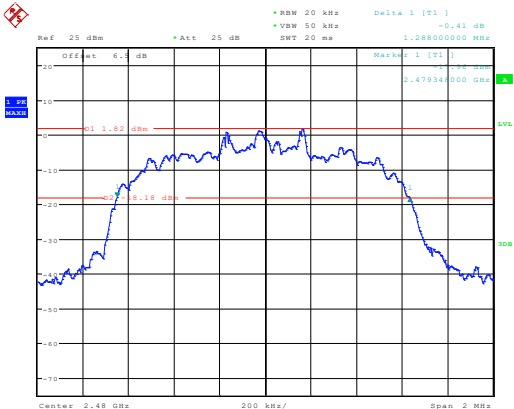
8DPSK	/
Lowest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:07:04	/
Middle channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:08:32	/
Highest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:09:49	/




99% Occupied Bandwidth:

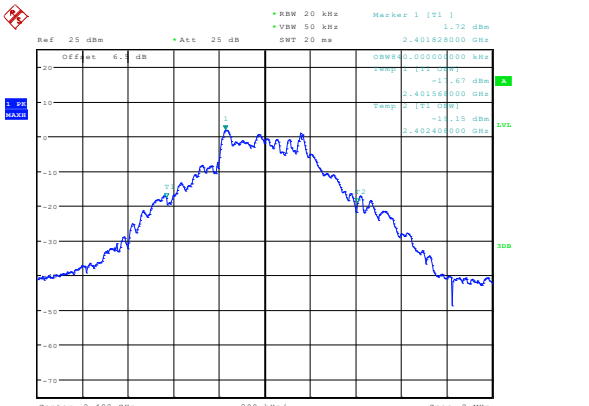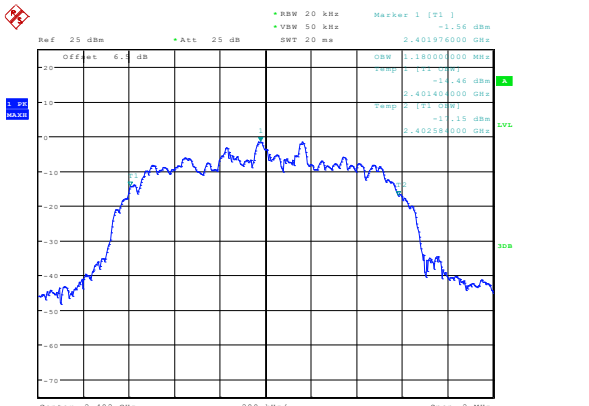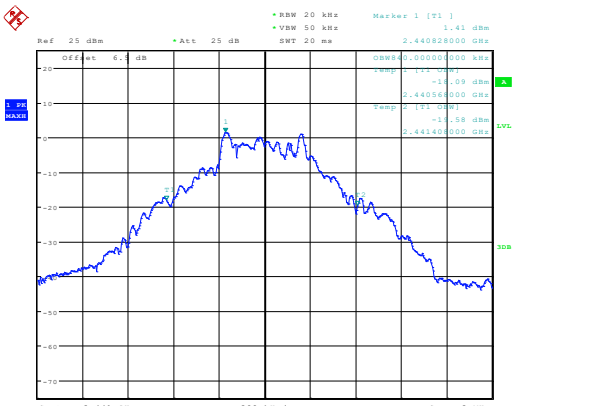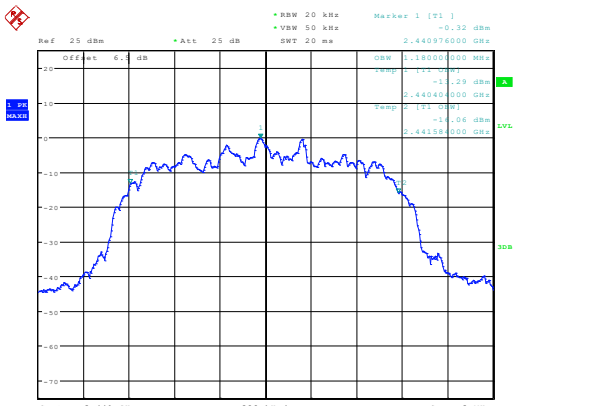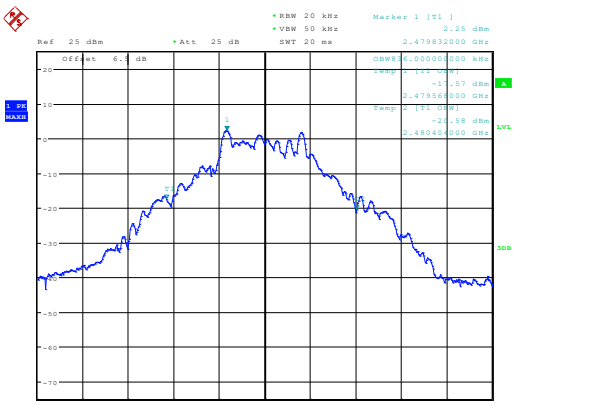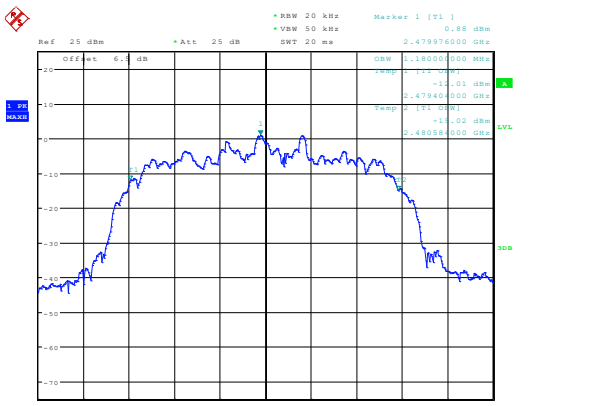GFSK	$\pi/4$ -DQPSK
Lowest channel	Lowest channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 14:50:34	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 14:57:46
Middle channel	Middle channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 14:53:31	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:00:26
Highest channel	Highest channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 14:54:56	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:01:44

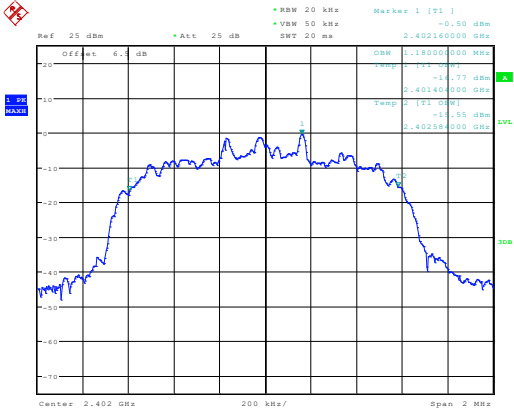
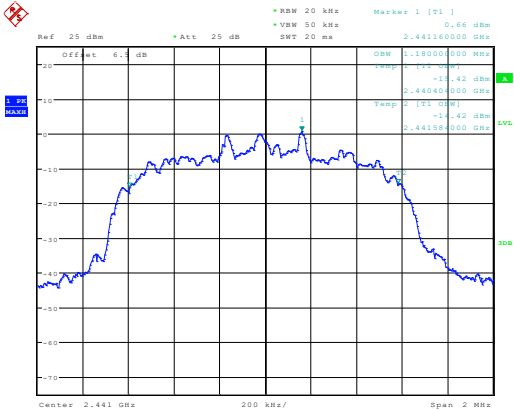
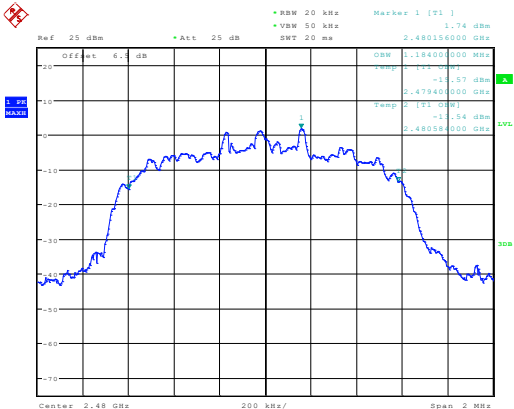
8DPSK	/
Lowest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:07:15	/
Middle channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:08:43	/
Highest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:10:00	/

Channel separation:

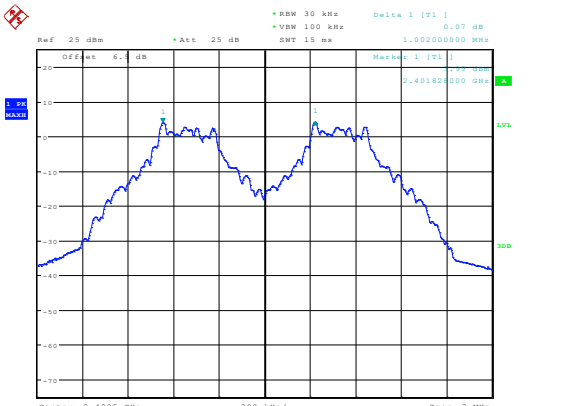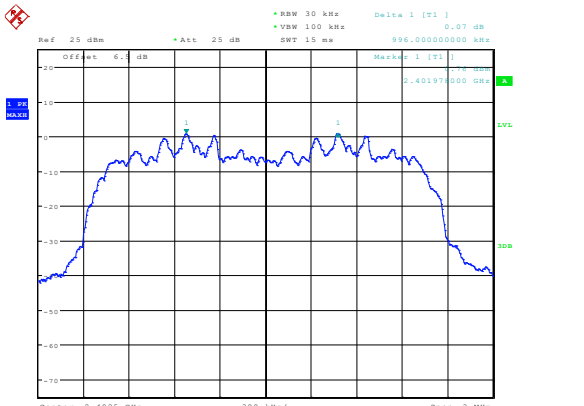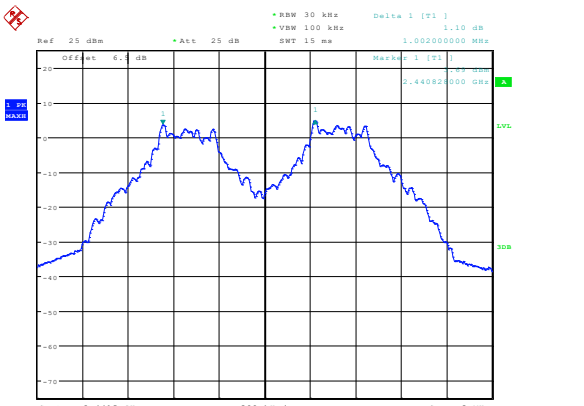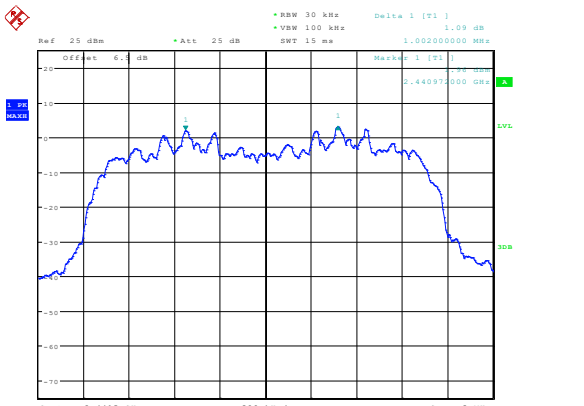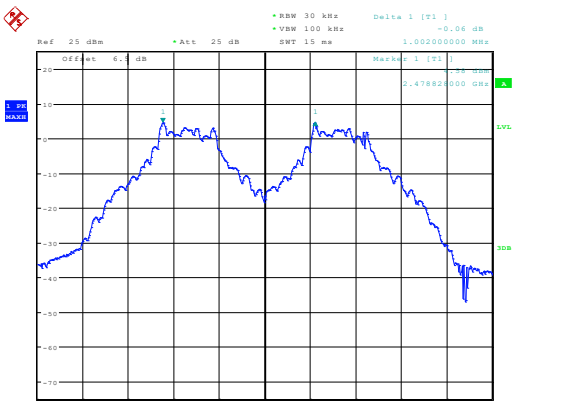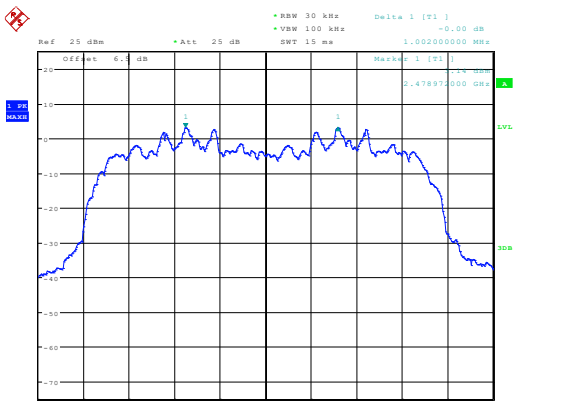
GFSK	$\pi/4$ -DQPSK
Lowest channel	Lowest channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:28:49	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:17:58
Middle channel	Middle channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:26:41	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:19:21
Highest channel	Highest channel
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:24:16	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:20:54

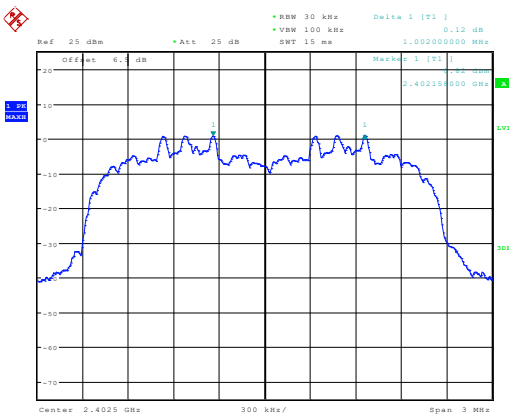
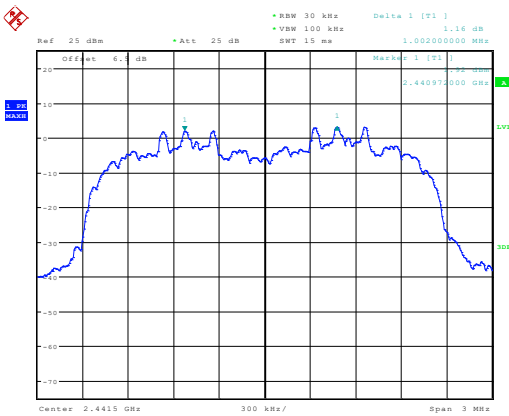
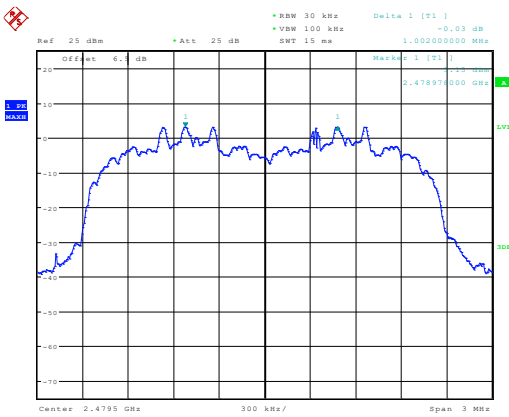
8DPSK	/
Lowest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:16:18	/
Middle channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:14:59	/
Highest channel	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:13:45	/

Number of hopping Frequency

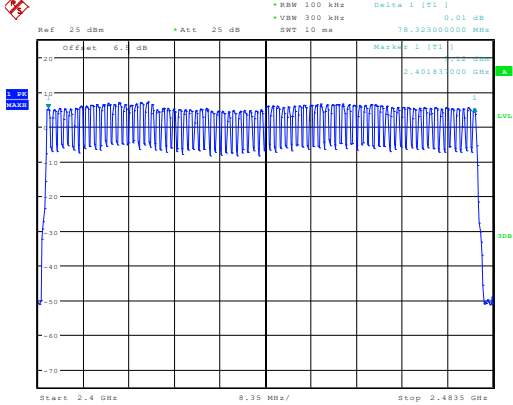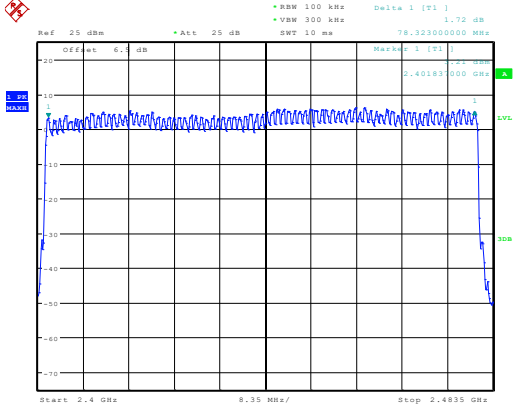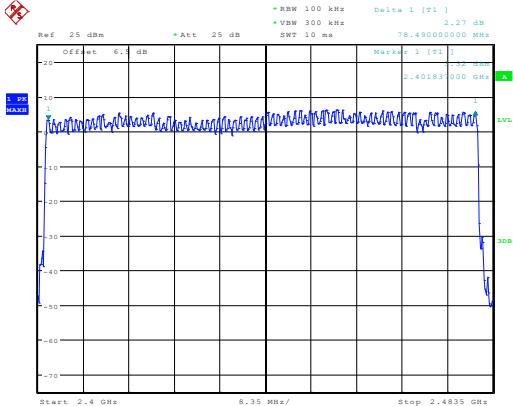GFSK	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 16:11:44	/
$\pi/4$ -DQPSK	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 16:06:02	/
8DPSK	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 15:52:16	/

Time of occupancy (dwell time)

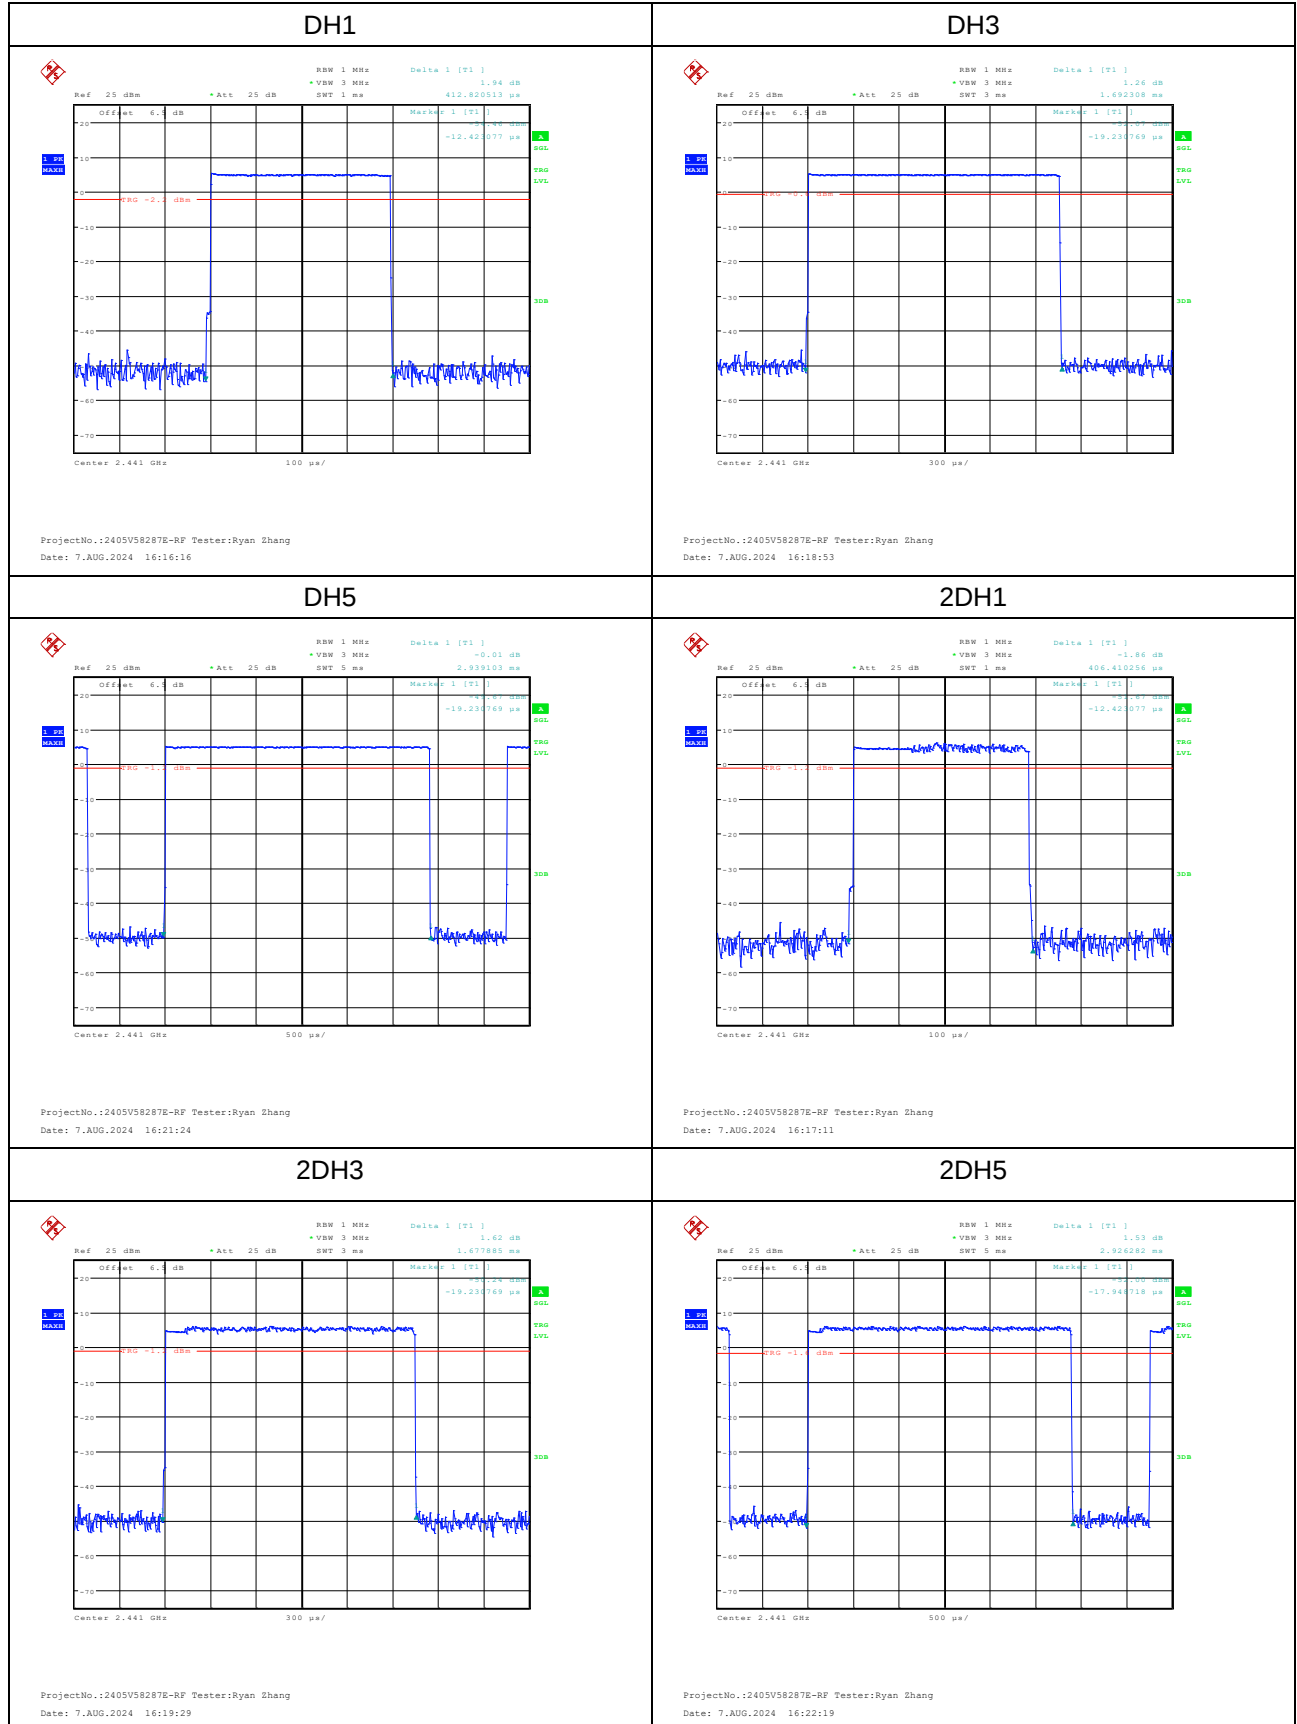


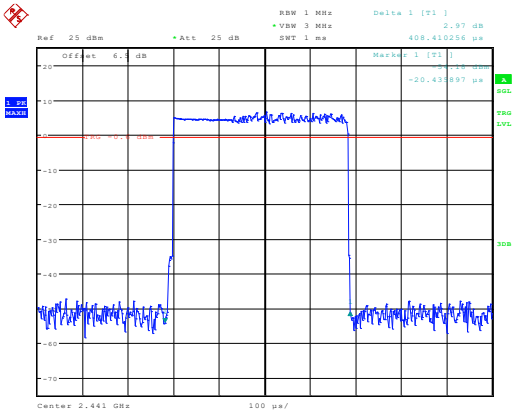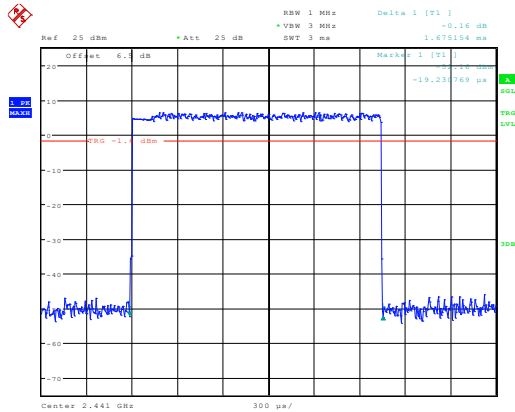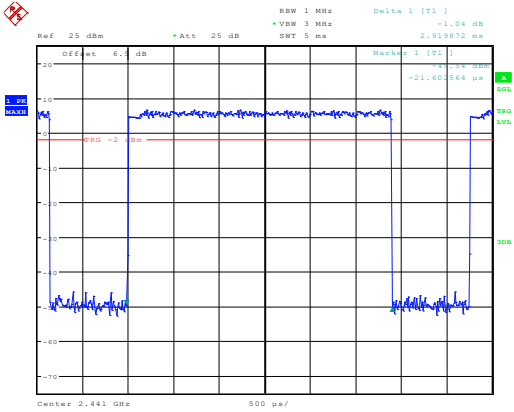3DH1	3DH3
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 16:17:50	 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 16:20:23
3DH5	/
 ProjectNo.:2405V58287E-RF Tester:Ryan Zhang Date: 7.AUG.2024 16:23:11	/

100kHz Bandwidth of Frequency Band Edge:


GFSK Non-Hopping

Lowest channel

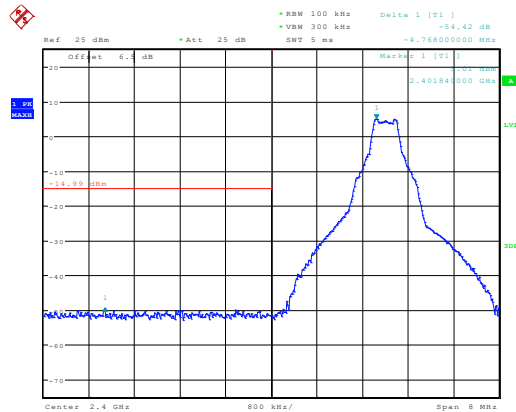

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 14:52:03


Highest channel

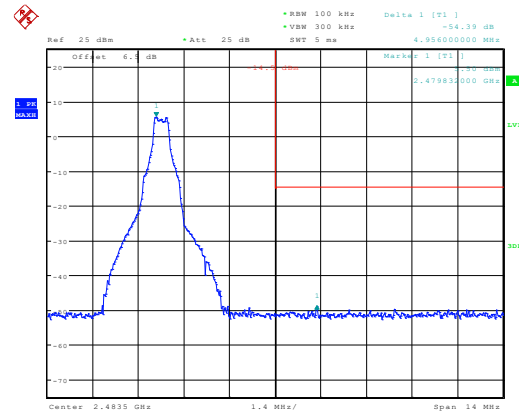

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 14:56:01


$\pi/4$ -DQPSK Non-Hopping

Lowest channel

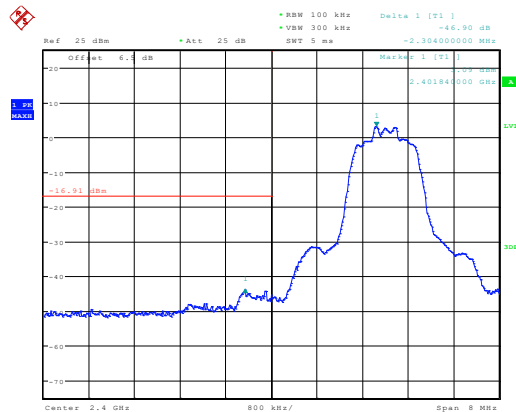

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 14:59:22


Highest channel

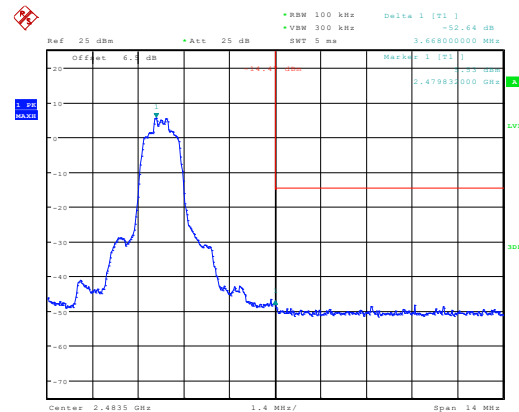

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:06:06


8DPSK Non-Hopping

Lowest channel

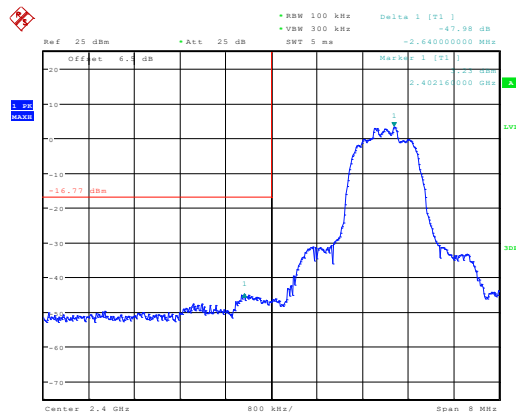

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:07:53


Highest channel

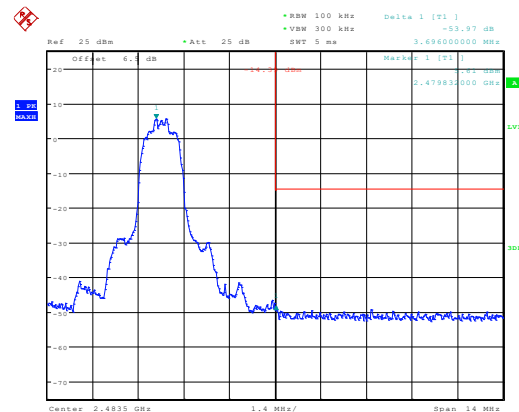

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:11:04


GFSK Hopping

Lowest channel

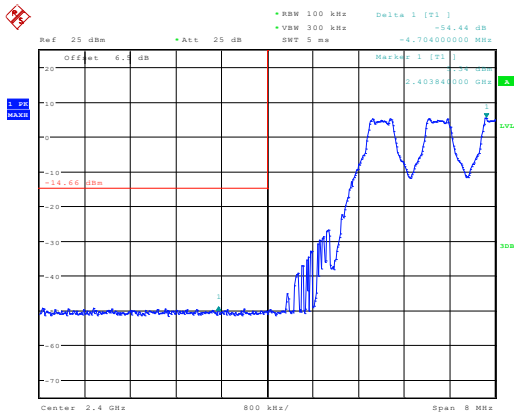

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:35:02


Highest channel

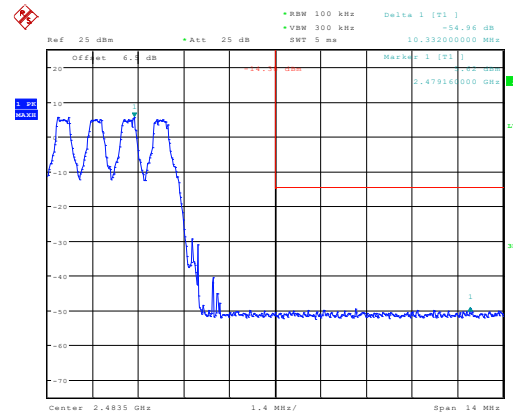

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:36:10


$\pi/4$ -DQPSK Hopping

Lowest channel

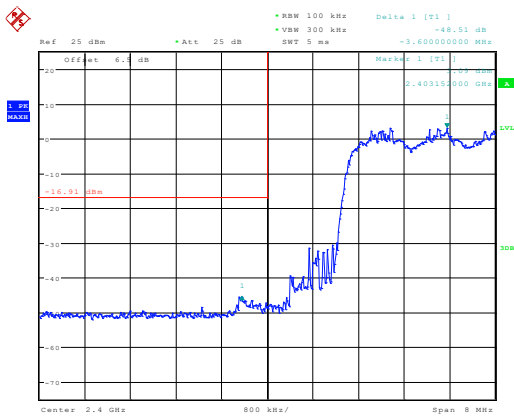

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:38:34


Highest channel

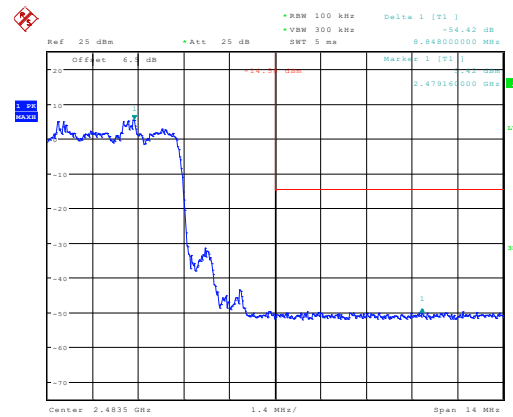

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:40:20


8DPSK Hopping

Lowest channel

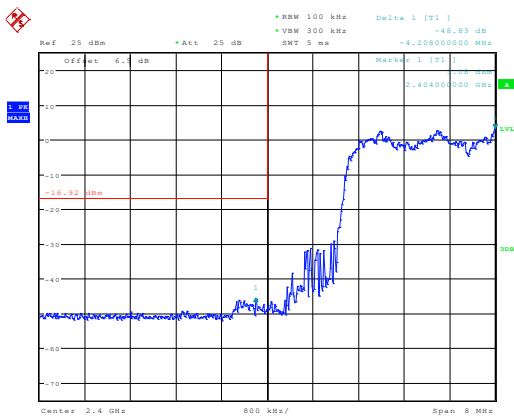

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:42:12

Highest channel

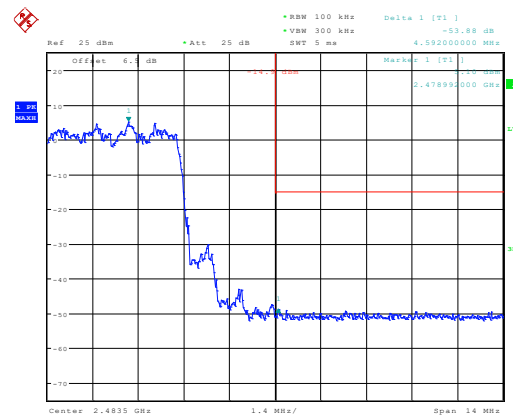

ProjectNo.:2405V58287E-RF Tester:Ryan Zhang
Date: 7.AUG.2024 15:44:29

4 Test Setup Photo

Please refer to the attachment 2405V58287E Test Setup photo.

5 E.U.T Photo

Please refer to the attachment 2405V58287E External photo and 2405V58287E Internal photo.

---End of Report---