



Hong Kong

FCC / IC – Test report

Report Number : **60/790.14.019.01** Date of Issue: September 23, 2014

Model : **PU26903,PU26902,AC00811,AC00812**

Product Type : **PulseOn Heart Rate Wrist Band**

Applicant : **Dayton Industrial Co. Ltd**

Address : **2-12 Kwai Fat Road,11-A Kwai Chung,New Territories,Hong Kong**

Production Facility : **Kendy Enterprise Ltd.**

Address : **2-12 Kwai Fat Road,11-A Kwai Chung,New Territories,Hong Kong**

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including Appendices : **48**

TÜV SÜD Hong Kong Ltd. is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Hong Kong Ltd. reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Hong Kong Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Hong Kong Ltd. issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.

1. Table of Contents

1.	Table of Contents	2
2.	Details about the Test Laboratory	4
3.	Description of the Equipment Under Test	5
4.	Summary of Test Standards	6
5.	Mode of Operation	6
6.	Assistant Equipment Used in Test	6
7.	Summary of Test Standards and Results	7
8.	General Remarks	8
9.	Test Results	9
8.1	Maximum Conducted Output Power Measurement	9
	Limit	9
	Test Setup	9
	Test Instruments	9
	Test Procedure	9
	Test Result	10
8.2	Conducted Emission Measurement	11
	Limit	11
	Test Instruments	11
	Test Setup	11
	Test Procedure	12
	Test Result	13
8.3	Radiated Interference Measurement	15
	Limit	15
	Test Instruments	15
	Setup	16
	Test Procedure	17
	Test Result	18
8.4	20dB Bandwidth & 99% OBW Measurement	20
	Limit	20
	Test Setup	20
	Test Instruments	20
	Test Procedure	20
	Test Result	21
	Test Graphs	22

8.5 Carrier Frequency Separation Measurement	23
Limit	23
Test Setup	23
Test Instruments	23
Test Procedure	23
Test Result	24
Test Graphs	24
8.6 Number of Hopping Measurement	25
Limit	25
Test Setup	25
Test Instruments	25
Test Procedure	25
Test Result	26
Test Graphs	26
8.7 Time of Occupancy (Dwell Time) Measurement	27
Limit	27
Test Setup	27
Test Instruments	27
Test Procedure	27
Test Result	28
Test Graphs	29
8.8 Out of Band Conducted Emissions Measurement	32
Limit	32
Test Setup	32
Test Instruments	32
Test Procedure	32
Test Graphs	33
8.9 Band Edges Measurement	42
Limit	42
Test Setup	42
Test Instruments	42
Test Procedure	43
Test Result	44
8.10 Antenna Measurement	48
Limit	48
Antenna Connector Construction	48

2. Details about the Test Laboratory

Details about the Test Laboratory

Test site 1

Company name: TÜV SÜD HONG KONG LTD.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin
HK.

Telephone: 852 2776 1323

Fax: 852 2776 1372

Test site 2

Company name: Shenzhen Academy of Metrology and Quality Inspection
No.4 TongFa Road, Xili Town Nanshan District, Shenzhen, China
Test Firm FCC Registration number: 994606

National Digital Electronic Product Test
No.4 TongFa Road, Xili Town Nanshan District, Shenzhen, China
IC Assigned Code: 11177A

3. Description of the Equipment Under Test

Description of the Equipment Under Test

Product:	PulseOn Heart Rate Wrist Band
Model no.:	PU26903
Serial number:	NIL
Options and accessories:	NIL
FCC ID:	O4GSP1
IC:	7666A-SP1
Rated Voltage:	3.7 VDC
Rated Current:	NIL
Rated Power:	NIL
Frequency:	2402-2480MHz
RF Transmission Frequency:	2402-2480MHz
Antenna gain:	0 dBi
No. of Operated Channel:	79
Modulation:	GFSK
Description of the EUT:	Battery operated –Internal rechargeable battery
Charging Rate:	DC 5V

4. Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C, Intentional Radiators, 10-1-12 Edition	PART 15 – RADIO FREQUENCY DEVICES Subpart C – Intentional Radiators
RSS-Gen Issue 3 December 2010	General Requirements and Information for the Certification of Radio Apparatus
RSS-210 Issue 8 December 2010	RSS-210 — Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment

5. Mode of Operation

All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GFSK Link Mode
--
--

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “X axis” position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

6. Assistant Equipment Used in Test

Assistant Equipment: Adapter for charging
Model: AC-6C
Brand :Nokia
Input: AC100-240V 50/60Hz 150mA
Output: DC 5V 550mA

7. Summary of Test Standards and Results

Emission Tests					
Test Condition	Pages	Test site	Test Result		
			Pass	Fail	N/A
Maximum Conducted Output Power	9	Site 2	☒	☐	☐
Conducted Emission Measurement	11	Site 2	☒	☐	☐
Radiated Interference Measurement	15	Site 2	☒	☐	☐
20dB RF Bandwidth	20	Site 2	☒	☐	☐
Carrier Frequency Separation	23	Site 2	☒	☐	☐
Number of Hopping	25	Site 2	☒	☐	☐
Time of Occupancy (Dwell Time)	27	Site 2	☒	☐	☐
Out of Band Conducted Spurious Emission	32	Site 2	☒	☐	☐
Band Edge Measurement	42	Site 2	☒	☐	☐
Antenna Requirement	48	Site 2	☒	☐	☐

8. General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: O4GSP1 complies with the FCC Part 15, Subpart C Rules.

All the configurations of the product were tested and only the worst test results are listed in the report.

SUMMARY:

All tests according to the regulations cited on page 7 were

- - Performed
- - **Not** Performed

The Equipment Under Test

- - **Fulfills** the general approval requirements.
- - **Does not** fulfill the general approval requirements.

Sample Received Date: September 10, 2014

Testing Start Date: September 17, 2014

Testing End Date: September 22, 2014

- TÜV SÜD HONG KONG LTD. -

Reviewed by:

Edmond FUNG



Prepared by:


CHAN Kwong Ngai

9. Test Results

8.1 Maximum Conducted Output Power Measurement Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

Test Setup

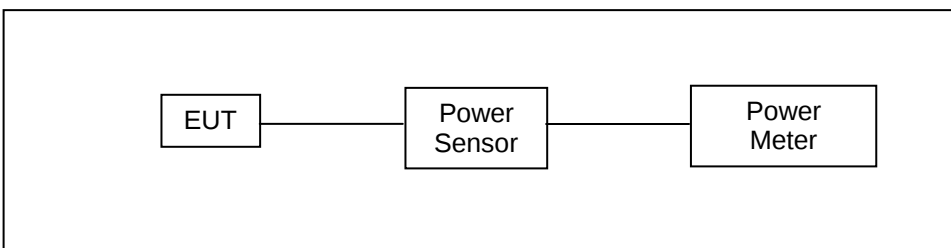

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Agilent	U2021XA	MY53180015	05/24/2014	(1)
USB Modular Simultaneous Data Acquisition	Agilent	U2531A	TW53353509	N.C.R.	

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

Test Result

Model Number	PU26903			
Test Item	Maximum Conducted Output Power			
Test Mode	Mode 1: GFSK Link Mode			
Date of Test	2014/09/20			
Frequency (MHz)	Packet Type	Peak Power		Limit (mW)
		(dBm)	(mW)	
2402	DH1	-5.12	0.308	< 1000
	DH3	-5.20	0.302	
	DH5	-5.08	0.310	
2441	DH1	0.33	1.079	
	DH3	0.19	1.045	
	DH5	0.14	1.033	
2480	DH1	-3.45	0.452	
	DH3	-3.60	0.437	
	DH5	-3.41	0.456	

Note: The relevant measured result has the offset with cable loss already.

8.2 Conducted Emission Measurement Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI30	SB3319	01/20/2014	(1)
LISN	R&S	ENV216	SB4357	01/20/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Setup

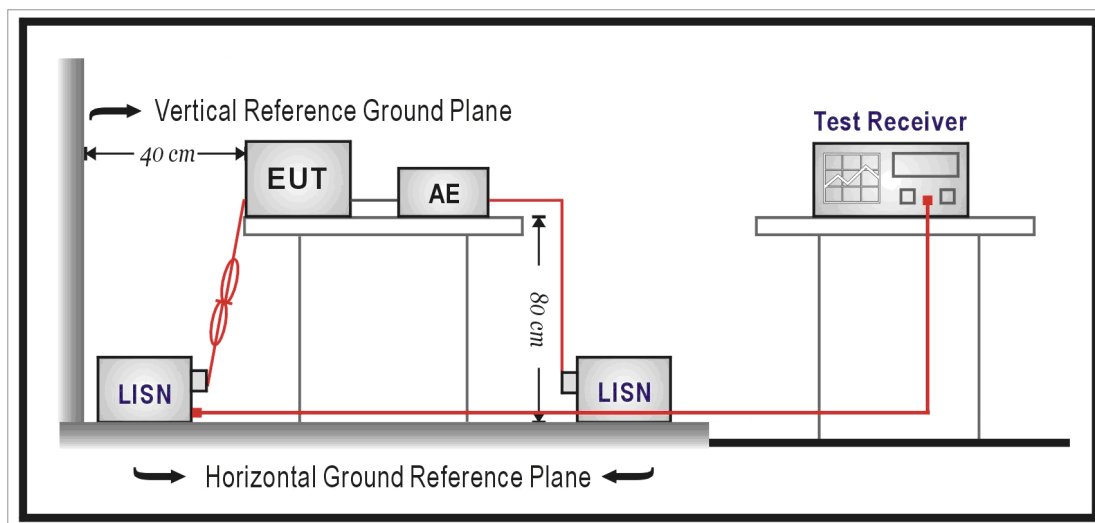

Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Description: Line			

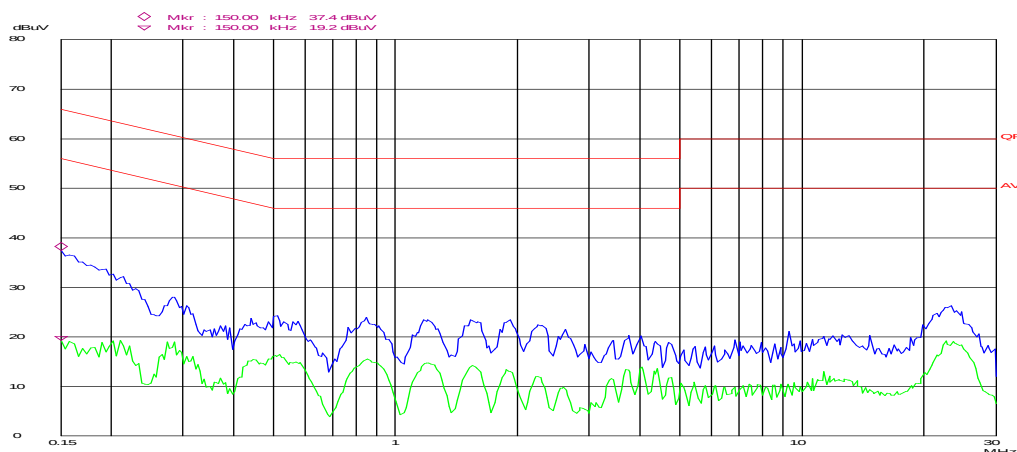

	Frequency (MHz)	Quasi-Peak		Average	
		Emission Level (dBμV)	Limits (dBμV)	Emission Level (dBμV)	Limits (dBμV)
Line	0.150	33.2	66	19.3	56
	23.085	20.7	60	16.2	50
	/	/	/	/	/
	/	/	/	/	/
	/	/	/	/	/
	/	/	/	/	/

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Description: Neutral			

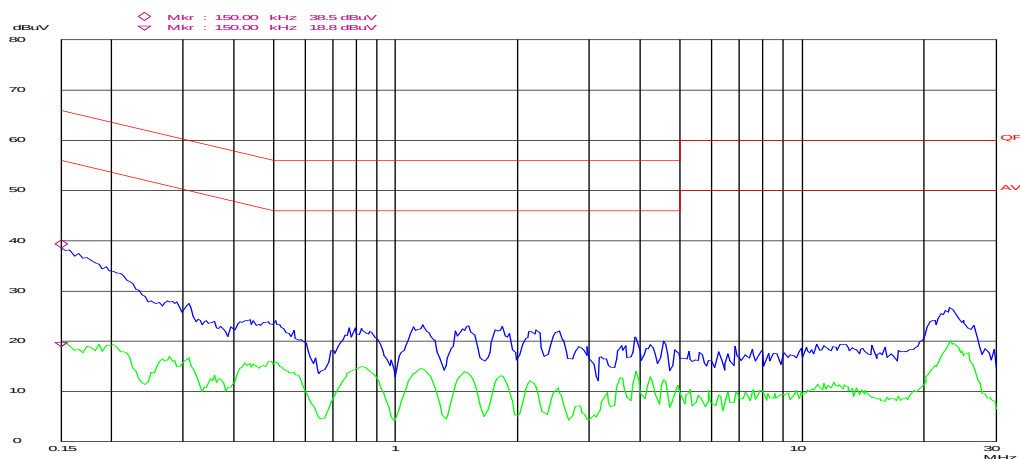

	Frequency (MHz)	Quasi-Peak		Average	
		Emission Level (dBμV)	Limits (dBμV)	Emission Level (dBμV)	Limits (dBμV)
Neutral	0.150	33.6	66	20.3	56
	23.085	21.1	60	15.9	50
	/	/	/	/	/
	/	/	/	/	/
	/	/	/	/	/
	/	/	/	/	/

8.3 Radiated Interference Measurement Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMI Test Receiver	R&S	ESU40	SB8501/09	05/16/2014	(1)
Bilog Antenna	SCHWARZBECK	VULB9163	SB8501/04	01/20/2014	(1)
Horn Antenna	R&S	HF906	SB3435	01/20/2014	(1)
3-dimensional loop antenna	SCHWARZBECK	HXYZ9170	9124	01/20/2014	(1)
Amplifier(1-18GHz)	R&S	--	SB3435/01	01/20/2014	(1)
Amplifier(18-40GHz)	R&S	--	SB3435/02	01/20/2014	(1)
Horn Antenna	Amplifier Research	AT4560	SB5392/02	05/16/2014	(1)
RF cable(0.4m)	Woken	/	S02-1404-09-065	05/11/2014	(1)
RF cable(3.5m)	Woken	/	S02-1404-09-047	05/11/2014	(1)
RF cable(1.2m)	Woken	/	S02-1404-09-052	05/11/2014	(1)
3m Semi-anechoic chamber	Albatross Projects	9X6X6	SB3450/01	10/12/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

Setup


9KHz-30MHz

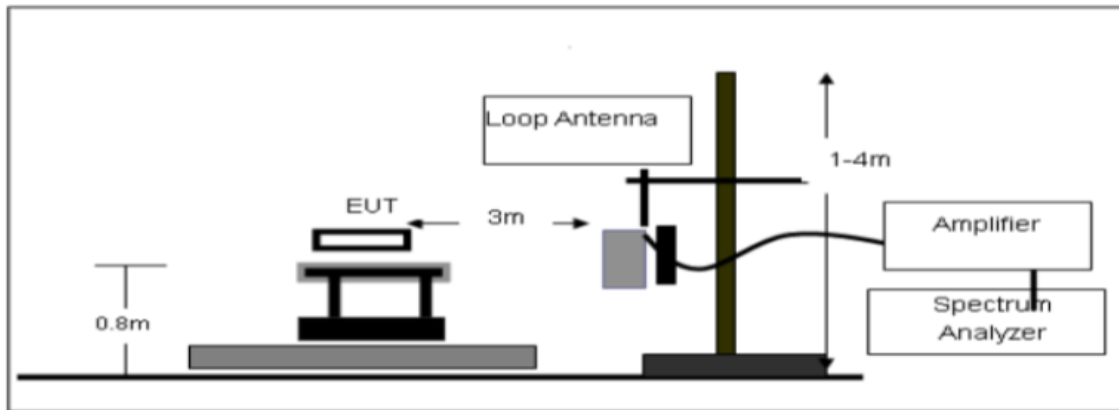

30MHz-1GHz

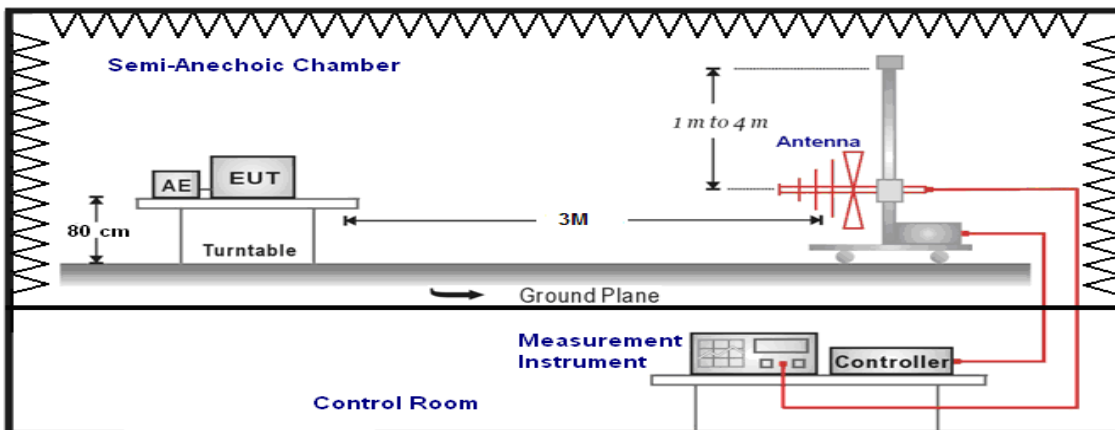

Above 1GHz

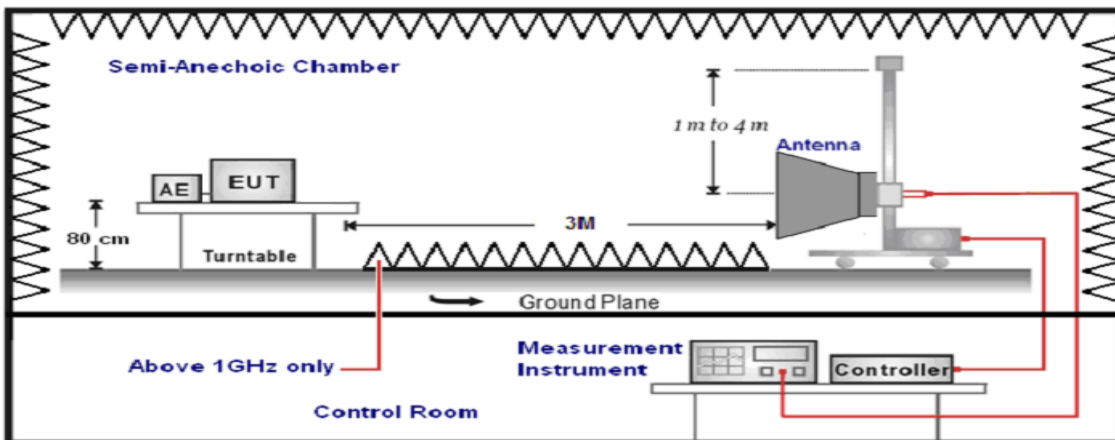

Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \quad \text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \quad \text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm


(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 3.7V DC
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19

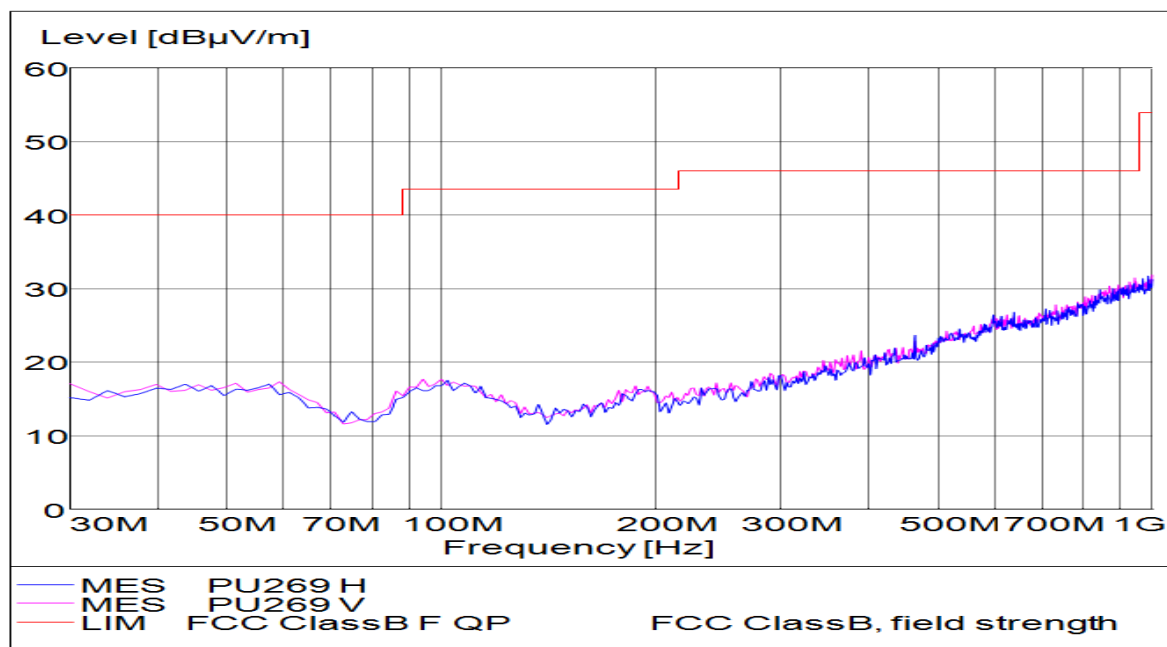

Frequency (MHz)	Correct Factor (dB/m)	Result (dB)	Limit (dBμV/m)	Margin (dB)	Remark	Ant.Polar. H / V
--	--	--	--	--	QP	H
--	--	--	--	--	QP	H
--	--	--	--	--	QP	H
--	--	--	--	--	QP	H
--	--	--	--	--	QP	H
--	--	--	--	--	QP	H
--	--	--	--	--	QP	V
--	--	--	--	--	QP	V
--	--	--	--	--	QP	V
--	--	--	--	--	QP	V
--	--	--	--	--	QP	V
--	--	--	--	--	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 3.7V DC	
Model Number:		PU26903		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		2014/09/19	
Frequency:		2402 MHz		Test By:			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4804	43.3	-5.4	37.9	74.0	36.1	peak	H
4804	32.9	-5.4	27.5	54.0	26.5	Average	H
7206	--	-2.7	--	74.0	--	peak	H
7206	--	-2.7	--	54.0	--	Average	H
4804	44.6	-5.4	39.2	74.0	34.8	peak	V
4804	34.8	-5.4	29.4	54.0	24.6	Average	V
7206	--	-2.7	--	74.0	--	peak	V
7206	--	-2.7	--	54.0	--	Average	V


Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 3.7V DC	
Model Number:		PU26903		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		2014/09/19	
Frequency:		2441 MHz		Test By:			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4882	44.9	-5.4	39.5	74.0	34.5	peak	H
4882	34.0	-5.4	28.6	54.0	25.4	Average	H
7323	--	-2.5	--	74.0	--	peak	H
7323	--	-2.5	--	54.0	--	Average	H
4882	45.6	-5.4	40.2	74.0	33.8	peak	V
4882	34.1	-5.4	28.7	54.0	25.3	Average	V
7323	--	-2.5	--	74.0	--	peak	V
7323	--	-2.5	--	54.0	--	Average	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 3.7V DC	
Model Number:		PU26903		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		2014/09/19	
Frequency:		2480 MHz		Test By:			
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
4960	44.5	-5.4	39.1	74.0	34.9	peak	H
4960	33	-5.4	27.6	54.0	26.4	Average	H
7440	--	-2.1	--	74.0	--	peak	H
7440	--	-2.1	--	54.0	--	Average	H
4960	43.2	-5.4	37.8	74.0	36.2	peak	V
4960	33.7	-5.4	28.3	54.0	25.7	Average	V
7440	--	-2.1	--	74.0	--	peak	V
7440	--	-2.1	--	54.0	--	Average	V

8.4 20dB Bandwidth & 99% OBW Measurement Limit

N/A

Test Setup

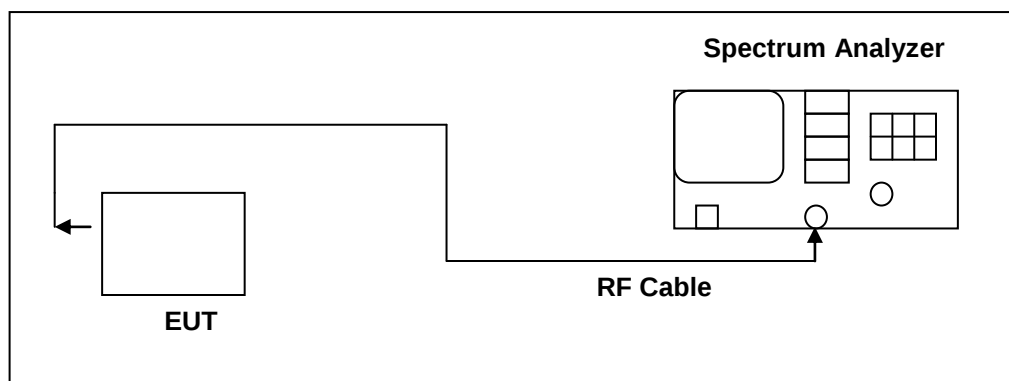

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:




1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW $\geq$ 1% of the 20dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Test Result

Model Number	PU26903		
Test Item	20dB Bandwidth & 99% OBW		
Test Mode	Mode 1: GFSK Link Mode		
Date of Test	2014/09/20	Test Site	TE02
Frequency (MHz)	20dB Bandwidth (MHz)	99% OBW (MHz)	Limit (MHz)
2402	0.979	0.874	-----
2441	0.968	0.878	-----
2480	1.026	0.893	-----


Test Graphs

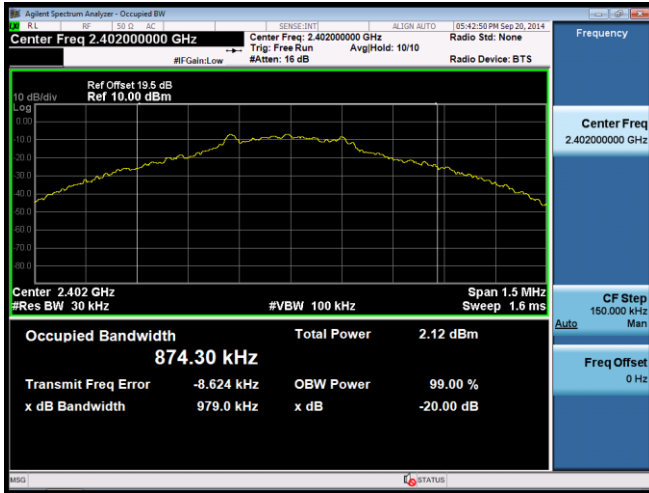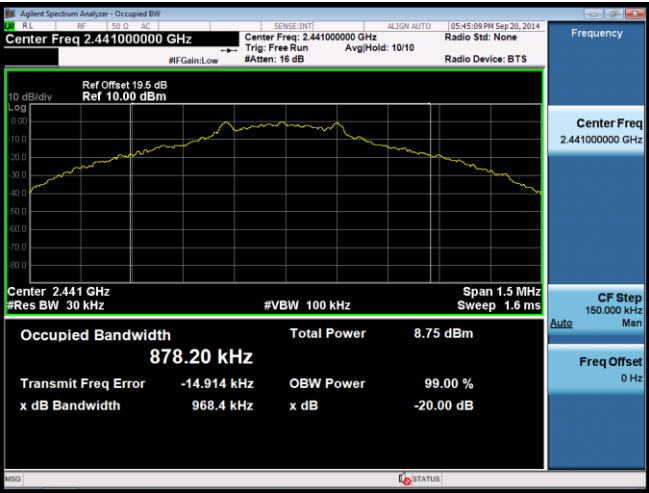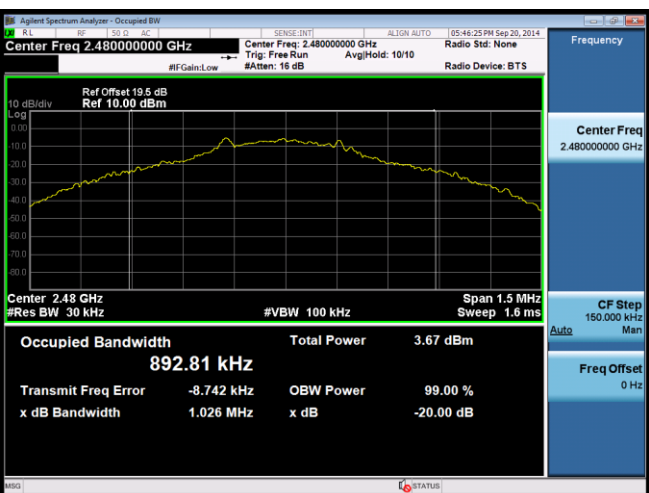Mode 1: GFSK Link Mode	
2402	
2441	
2480	

8.5 Carrier Frequency Separation Measurement Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth.

Test Setup

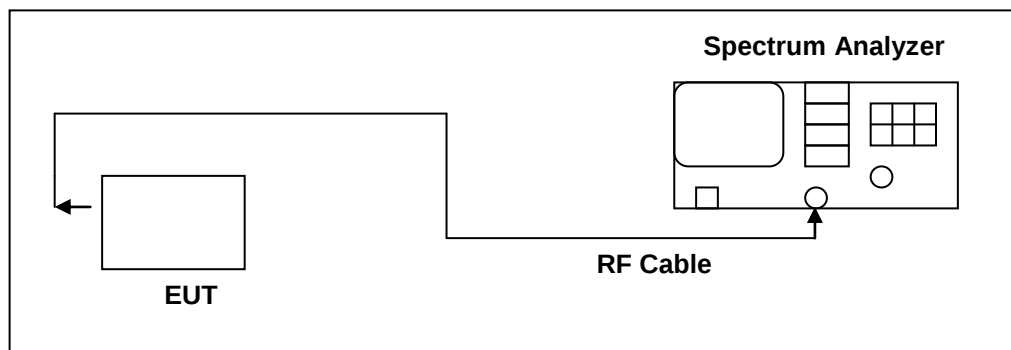

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:


1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Test Result

Model Number	PU26903		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 1: GFSK Link Mode		
Date of Test	2014/09/20	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2441	1.004	> 0.684	


Test Graphs

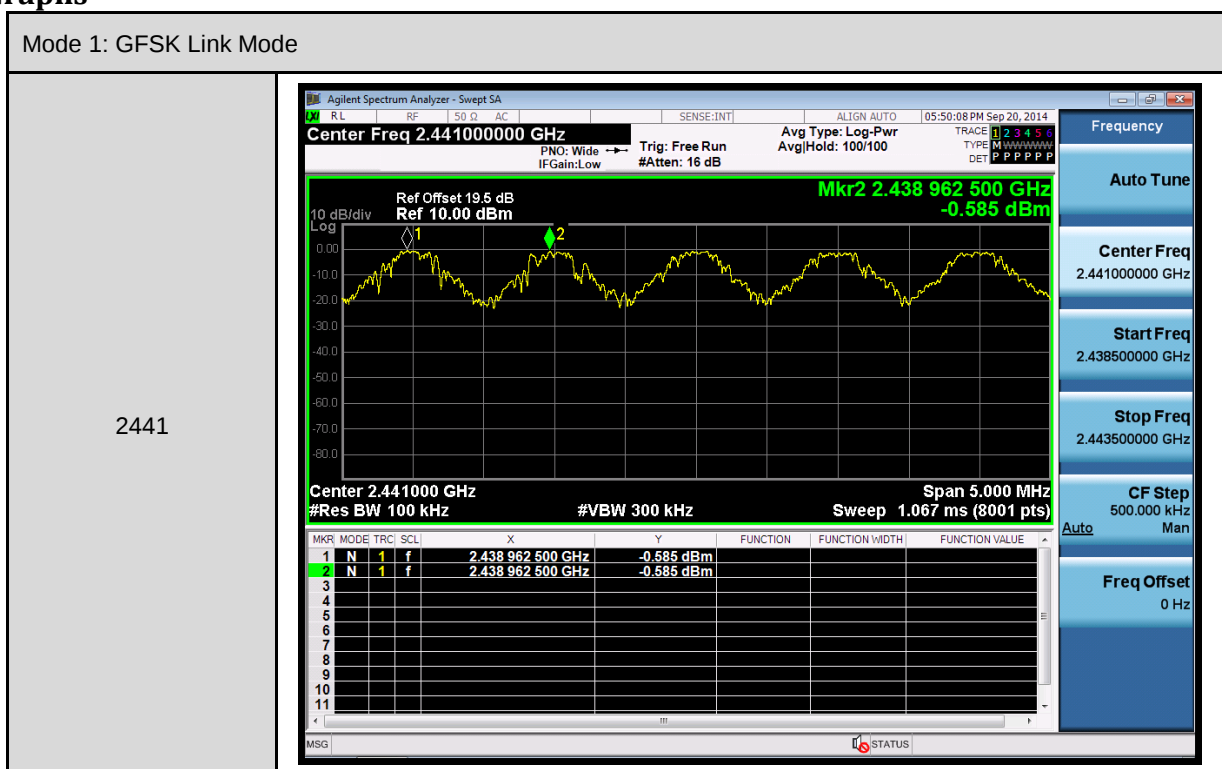

8.6 Number of Hopping Measurement Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Setup

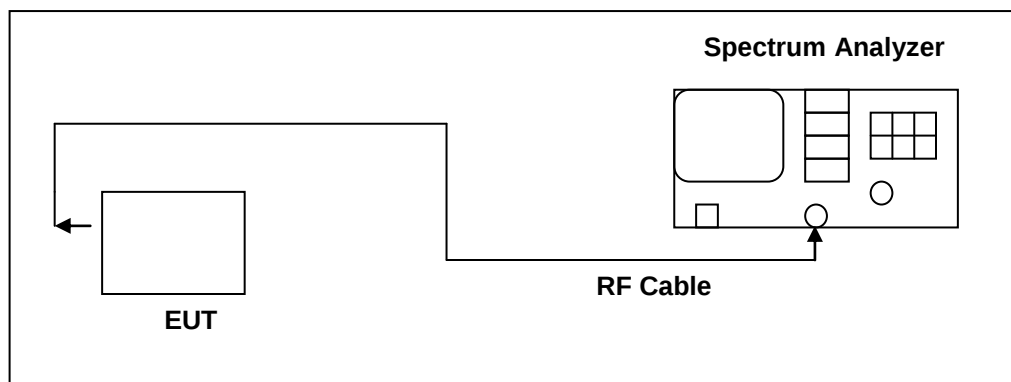

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:


1. Span = the frequency band of operation
2. RBW $\geq$ 1% of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.

Test Result

Model Number	PU26903		
Test Item	Number of Hopping		
Test Mode	Mode 1: GFSK Link Mode		
Date of Test	2014/09/20	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)		Limit (ch)
2402 - 2480	79		> 15


Test Graphs

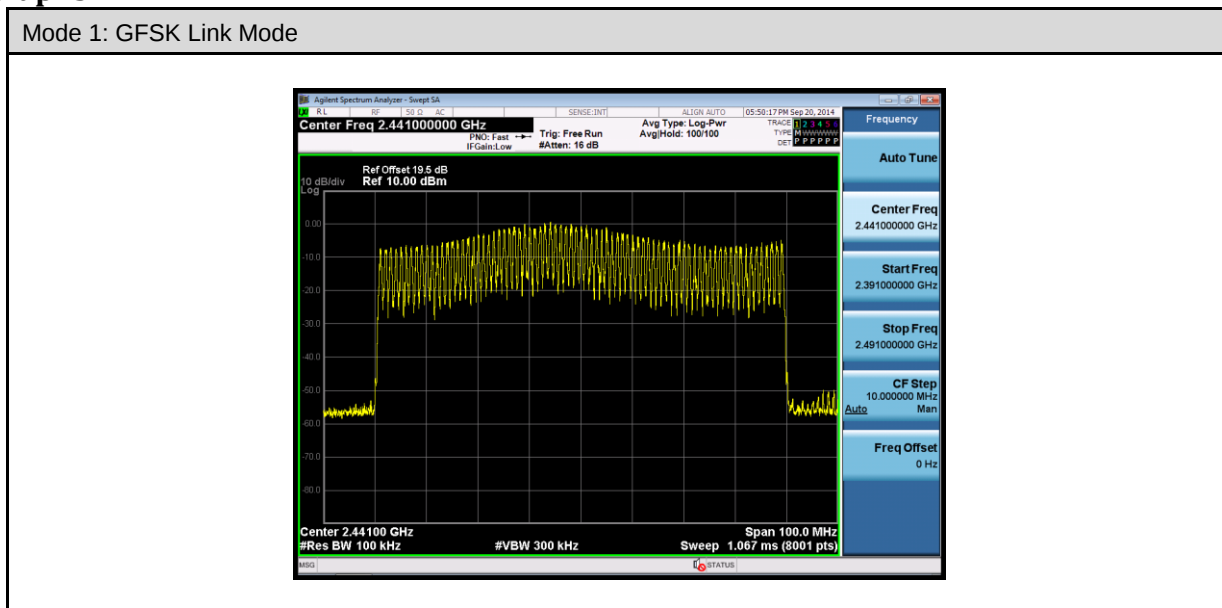

8.7 Time of Occupancy (Dwell Time) Measurement Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Setup

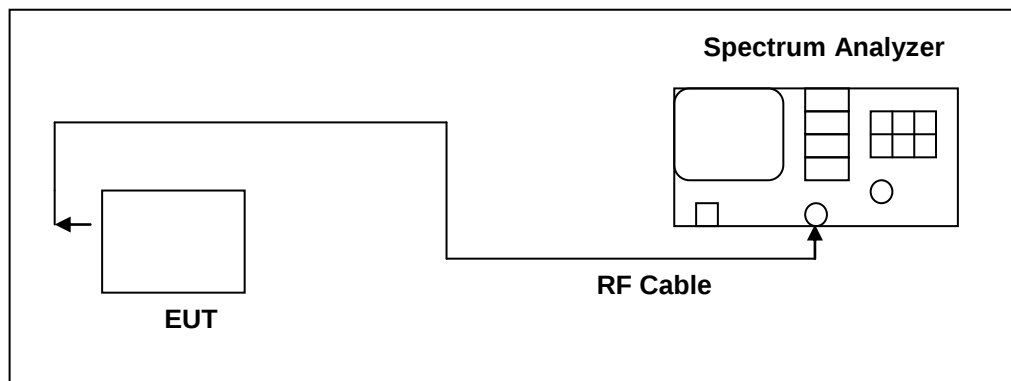

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Test Result



Chart

Model Number	PU26903		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 1: GFSK Link Mode		
Date of Test	2014/09/20	Test Site	TE02
DH1			
Length of per burst(ms)	0.503 ms		
Number of burst in 5 seconds	51		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
Dwell Times	31.6/5*51*0.503 =162.127		
LIMIT(msec)	< = 400		
DH3			
Length of per burst(ms)	1.720		
Number of burst in 5 seconds	21		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
Dwell Times	31.6/5*21*1.720 =228.278		
LIMIT(msec)	< = 400		
DH5			
Length of per burst(ms)	2.970		
Number of burst in 5 seconds	18		
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
Dwell Times	31.6/5*18*2.970 =337.867		
LIMIT(msec)	< = 400		

Test Graphs



Mode 1: GFSK Link Mode

DH1

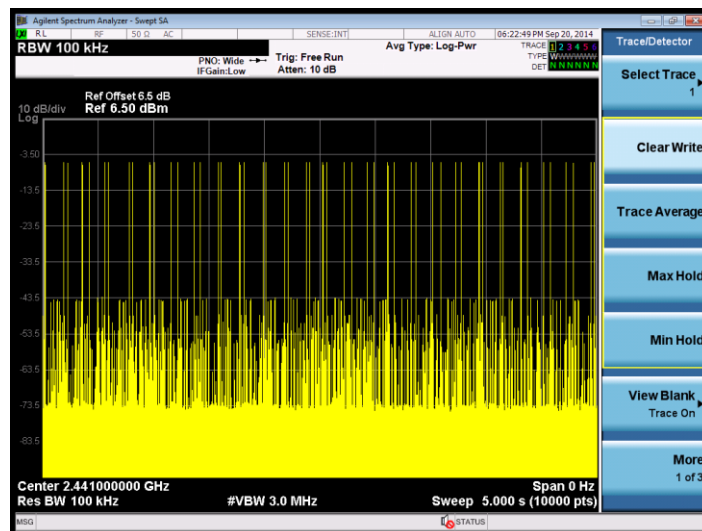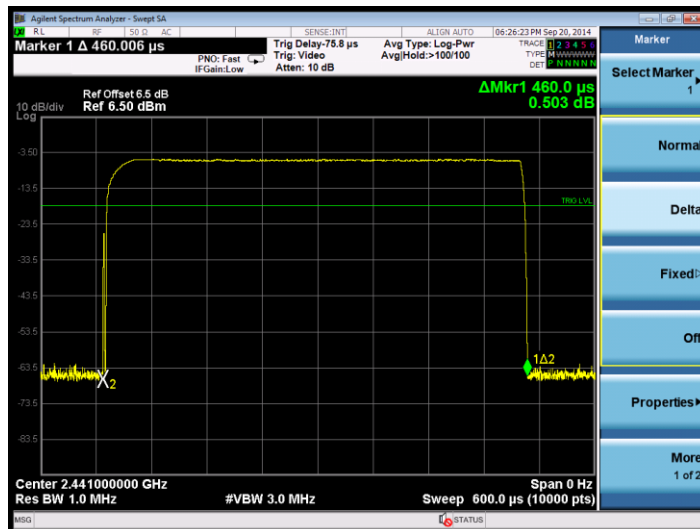



Mode 1: GFSK Link Mode

DH3

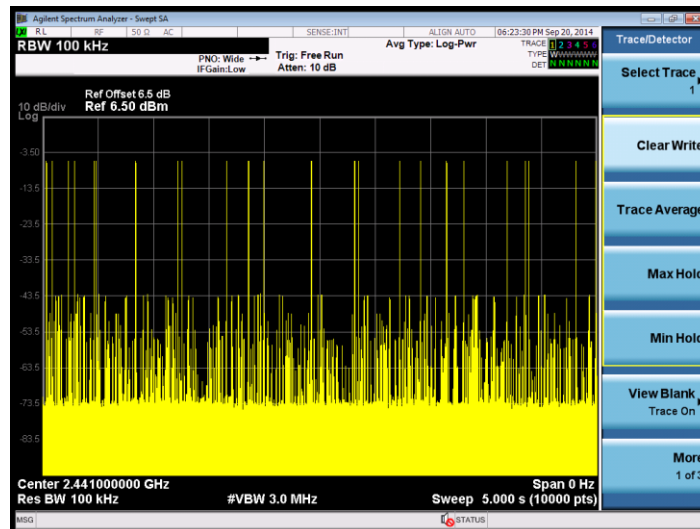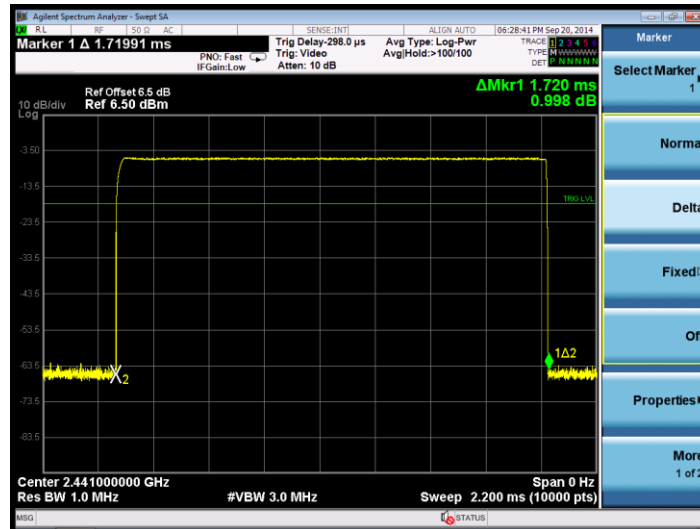

Mode 1: GFSK Link Mode

DH5

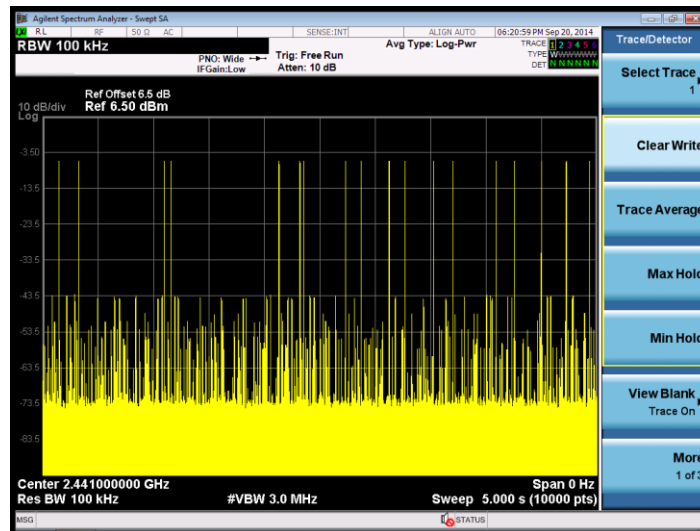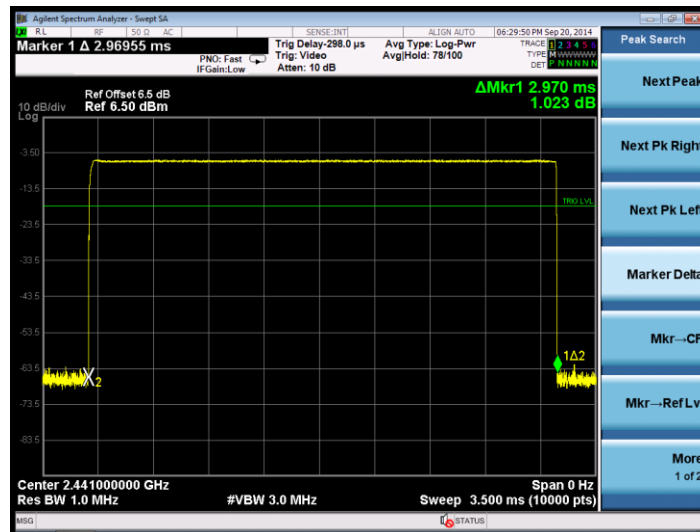


8.8 Out of Band Conducted Emissions Measurement

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Test Setup

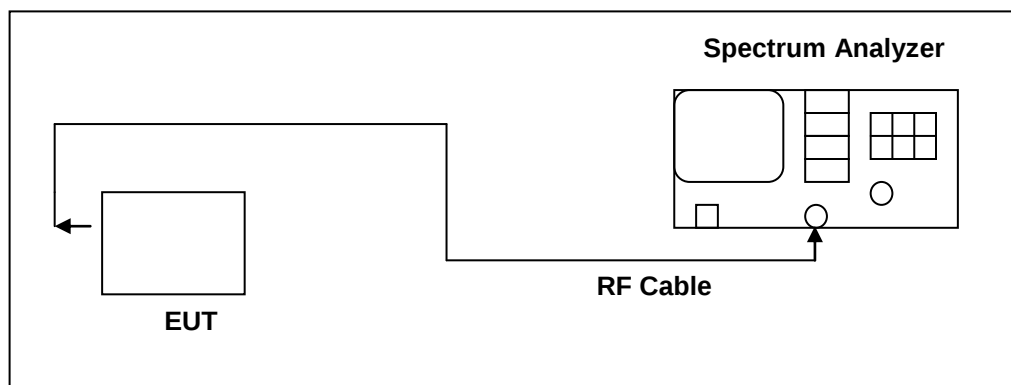

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	N9020A	MY53420615	05/12/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.



Test Procedure



Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.



All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

Test Graphs


Low channel: 2402MHz

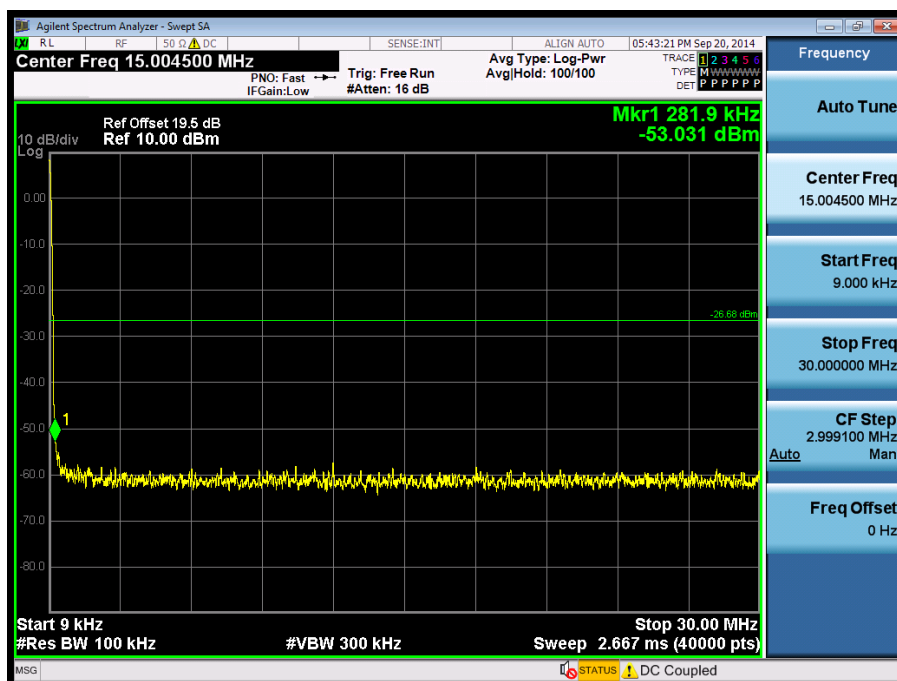
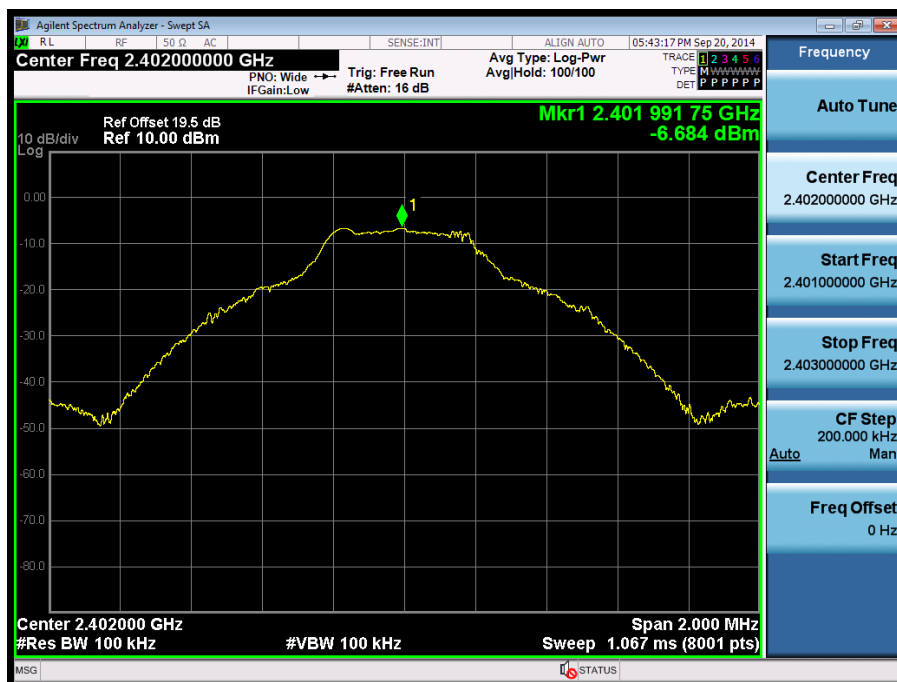


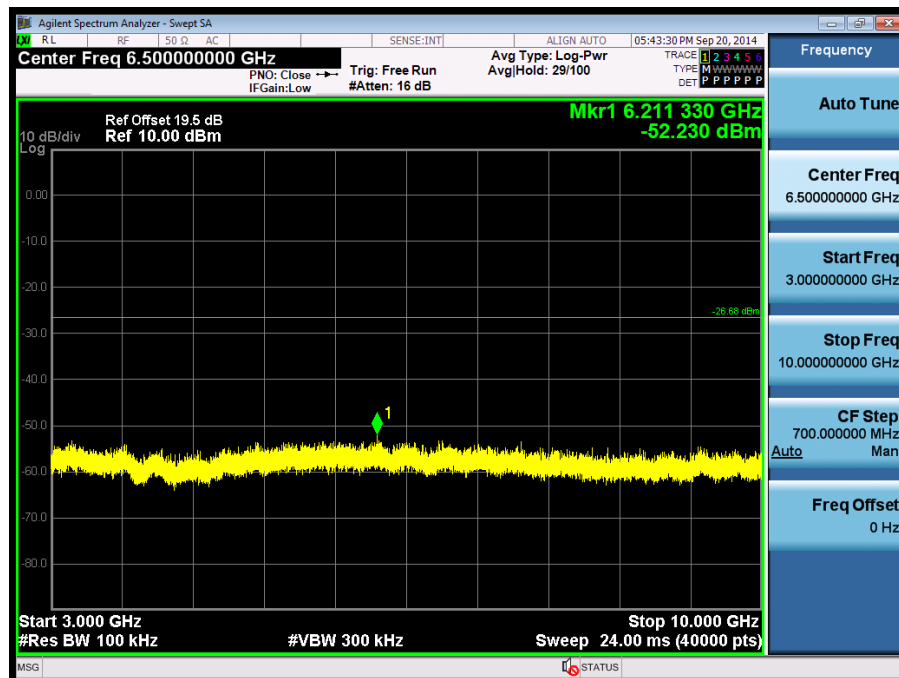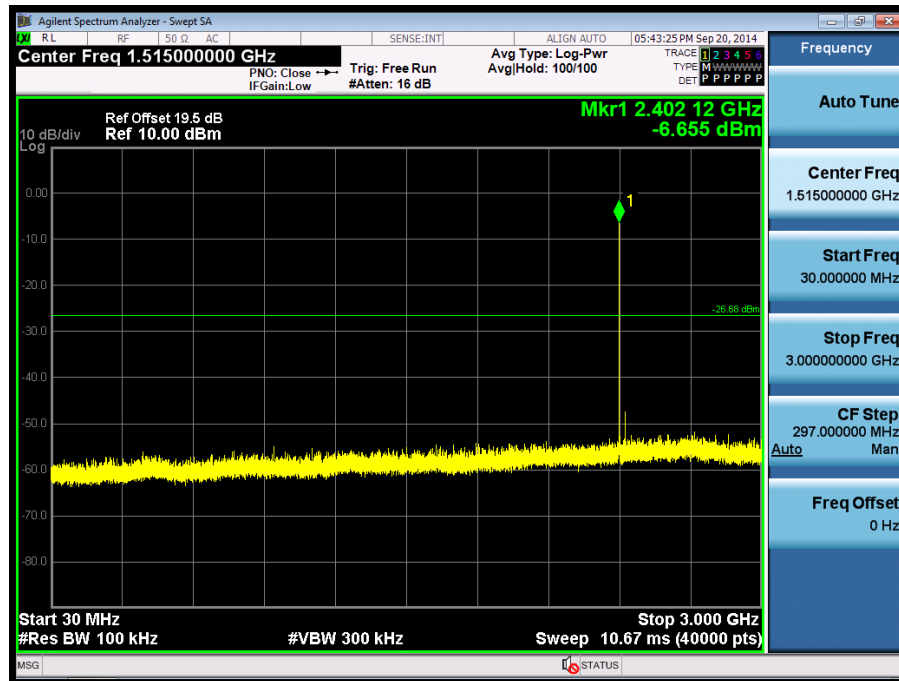


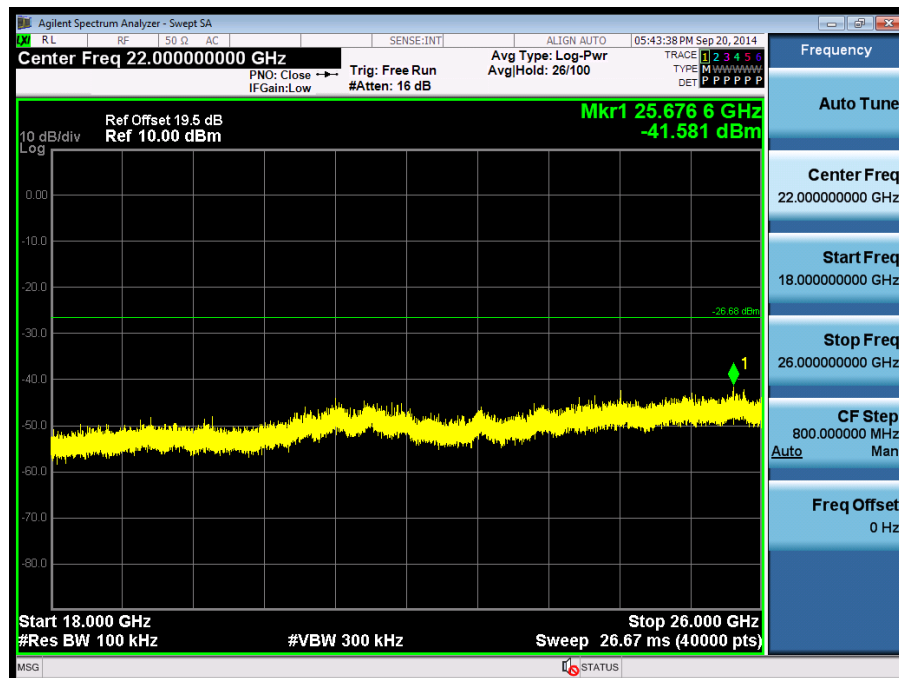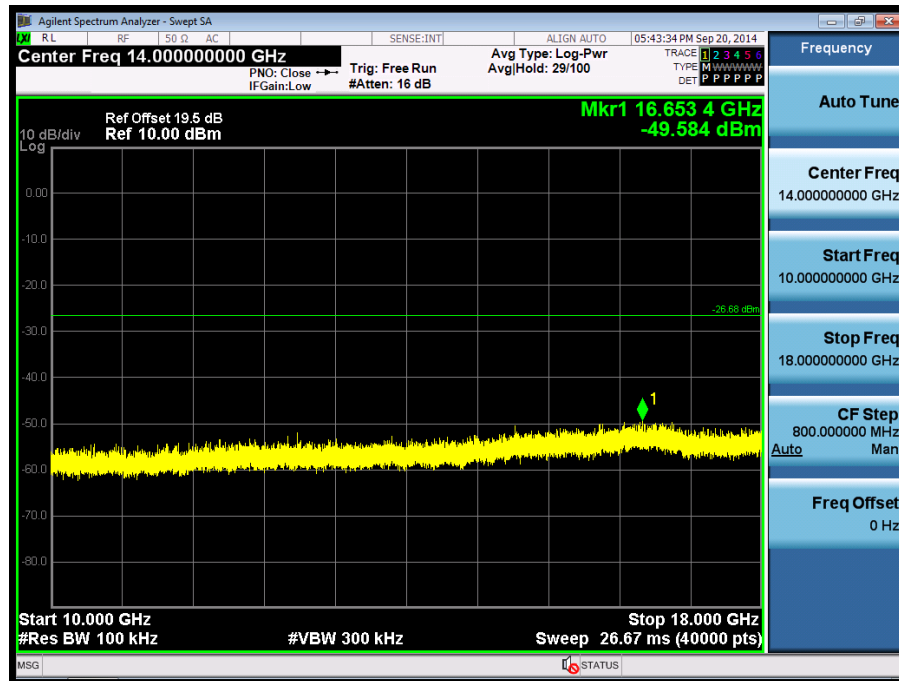



Middle channel: 2441MHz


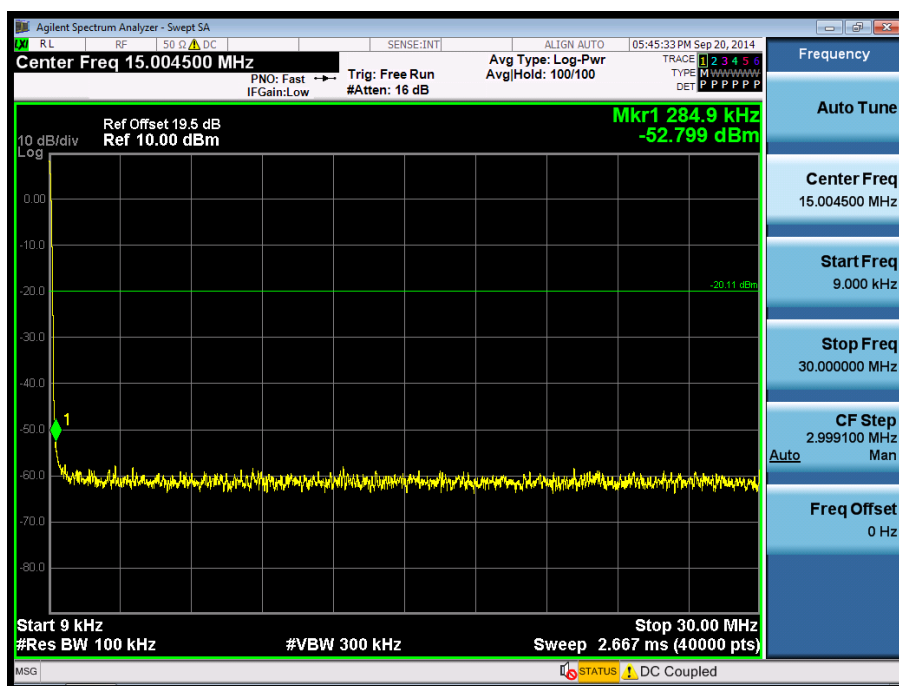


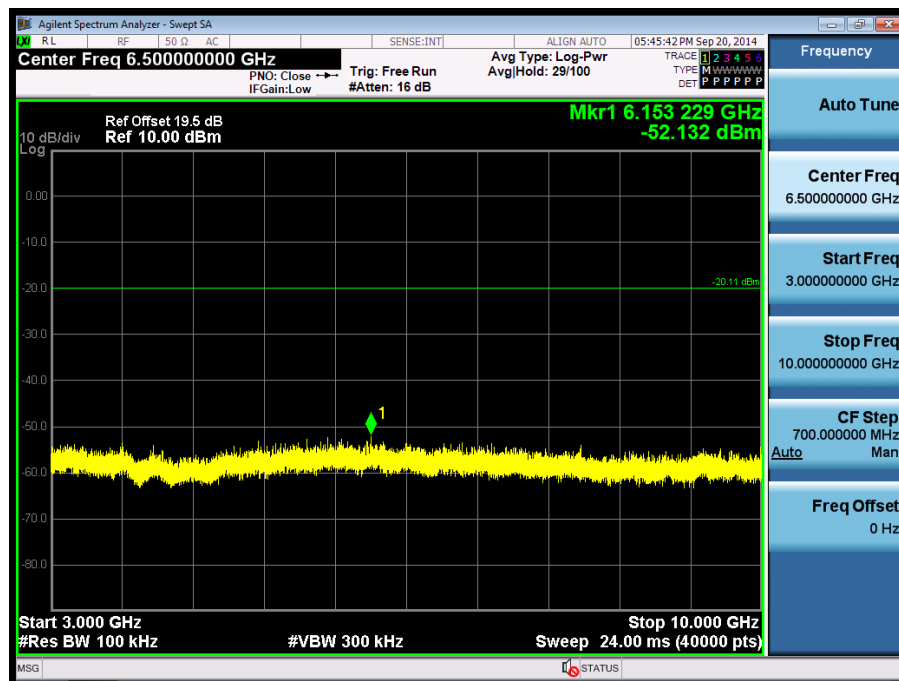
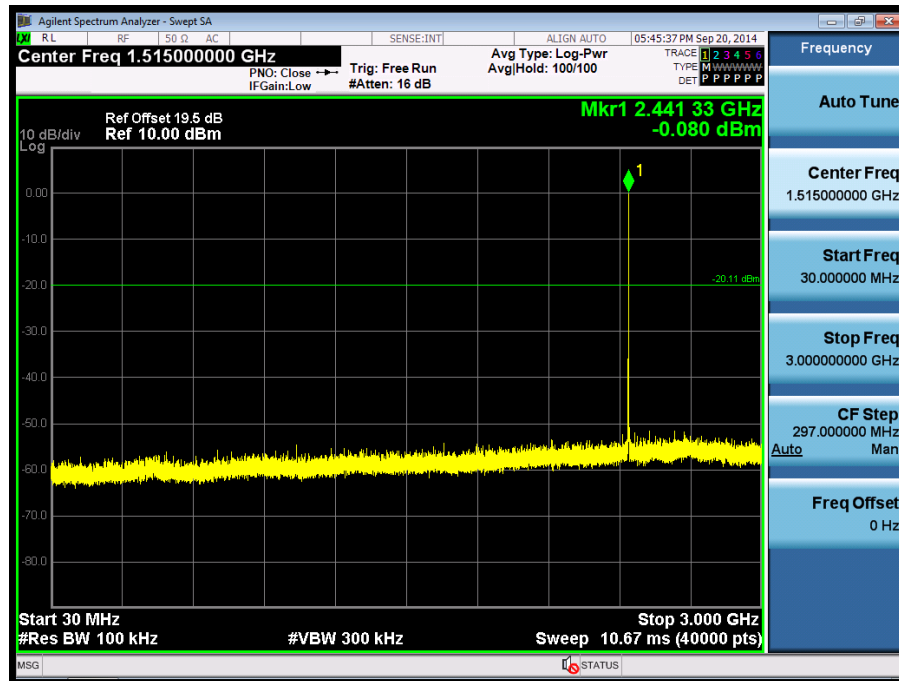


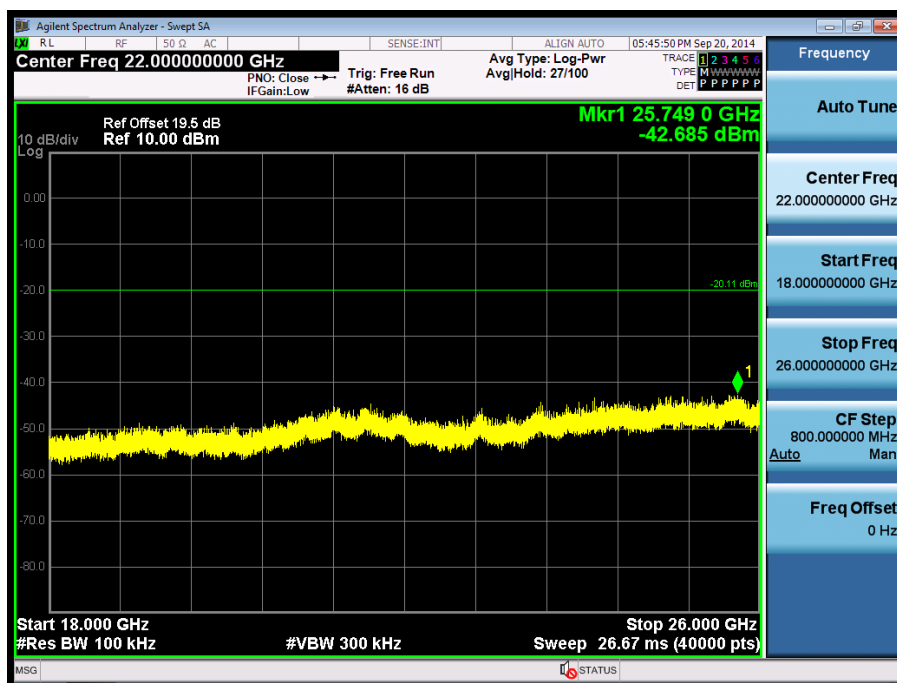

Middle channel: 2441MHz

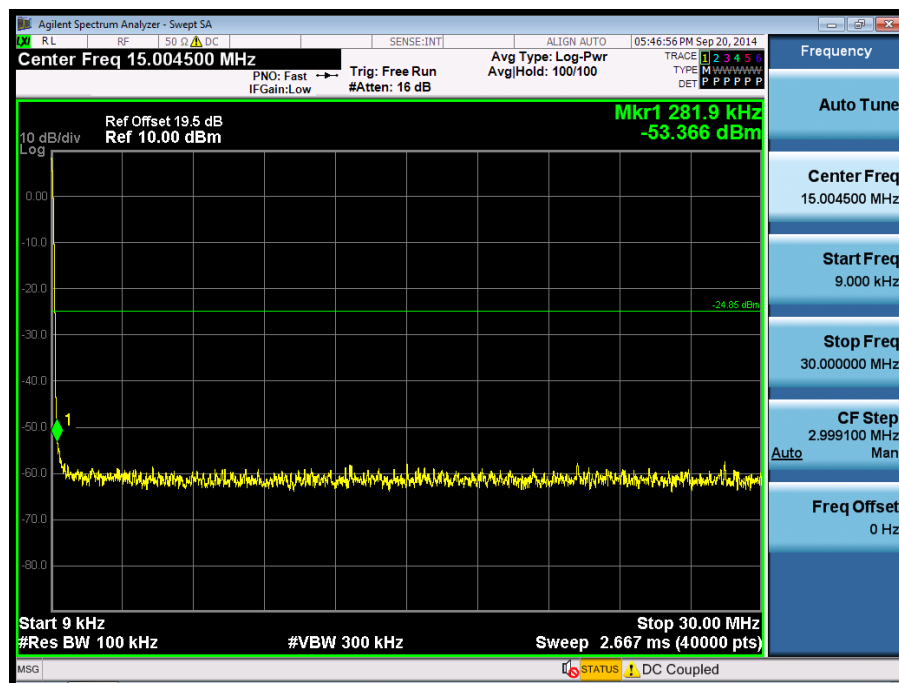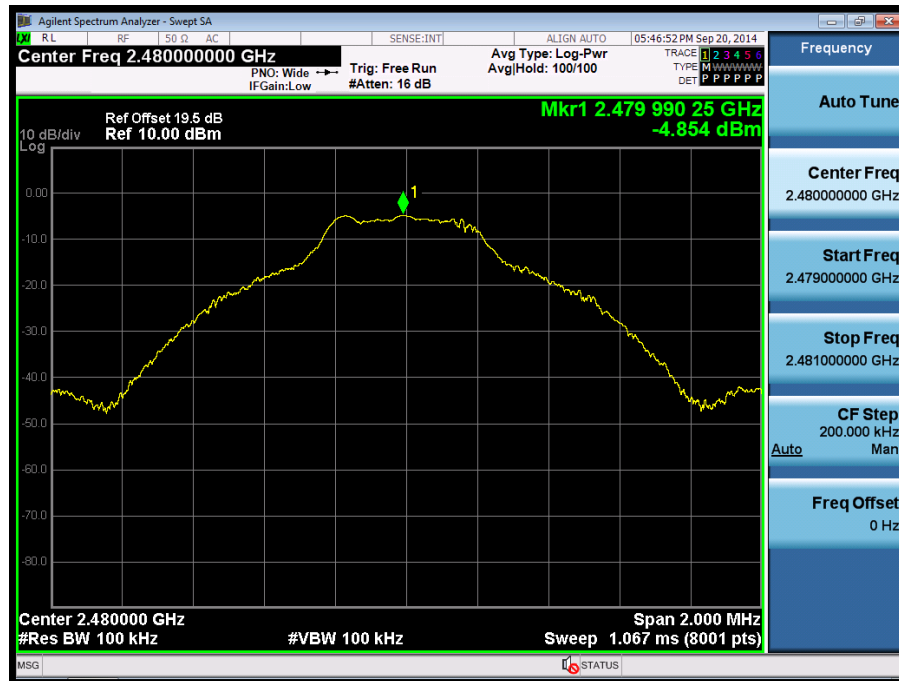

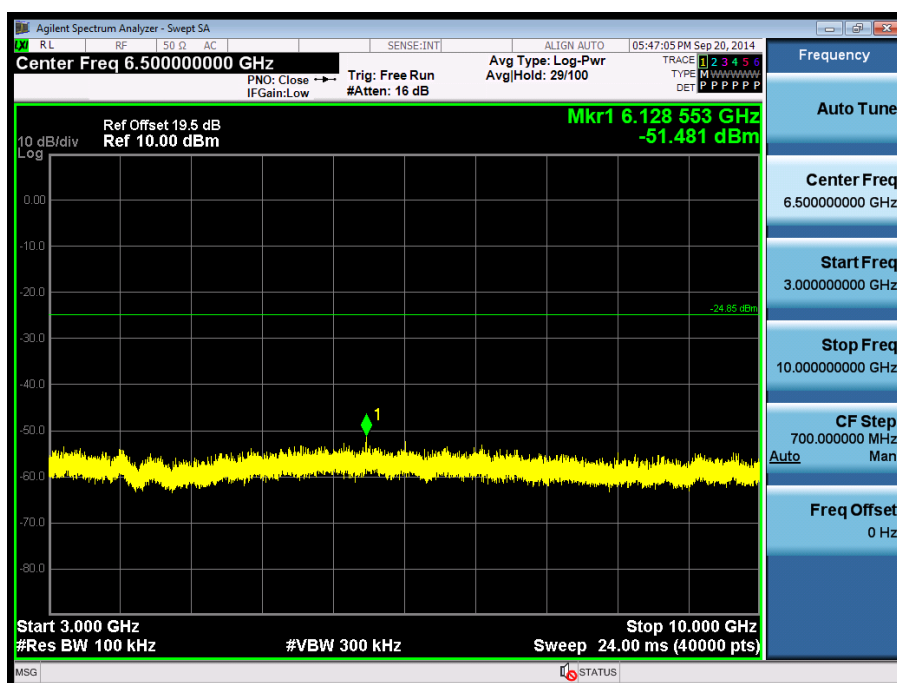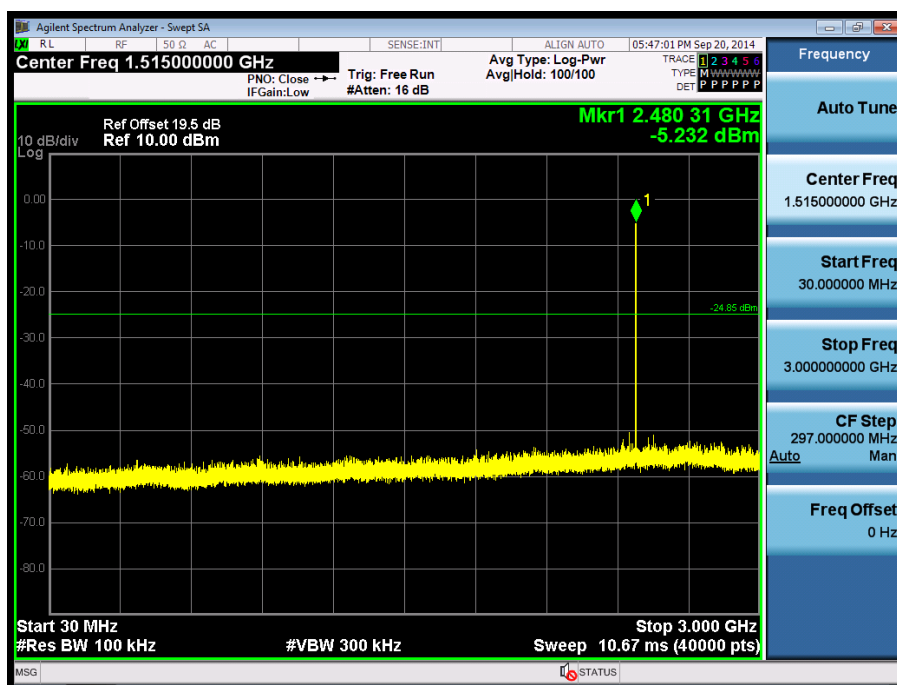


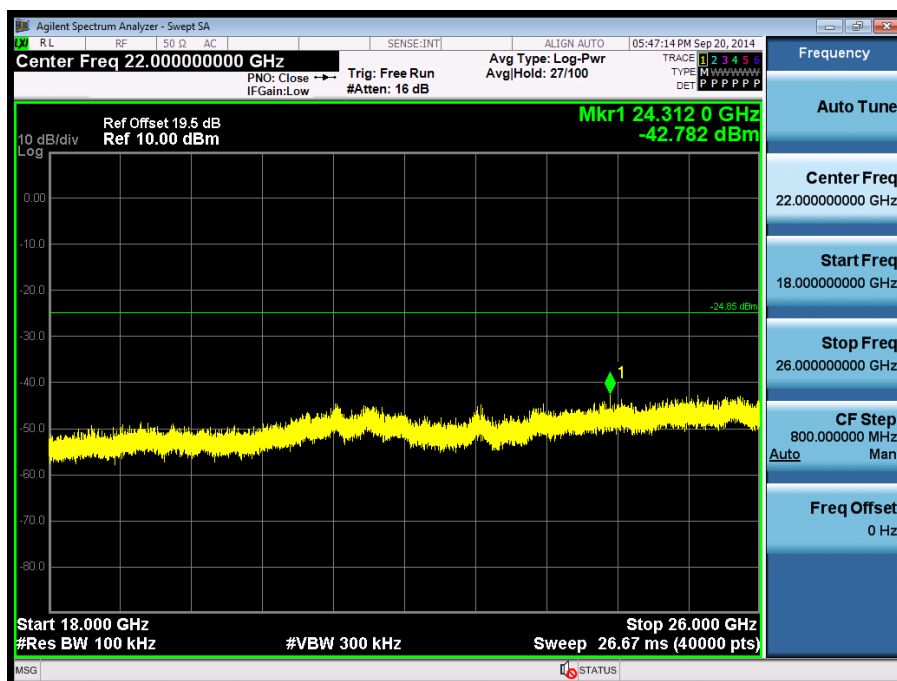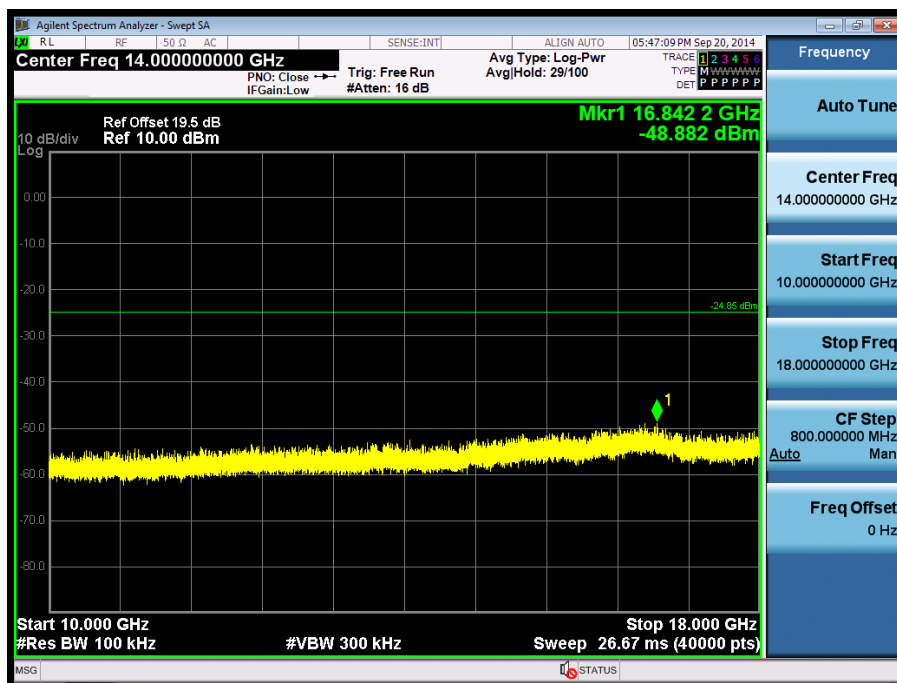

8.9 Band Edges Measurement Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Test Setup

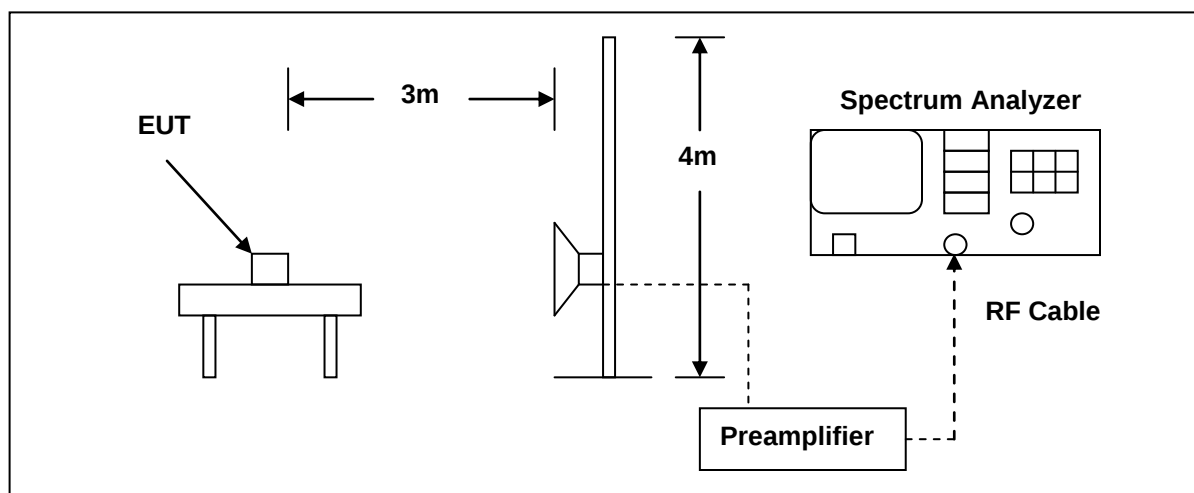

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
EMI Test Receiver	R&S	ESU40	SB8501/09	05/16/2014	(1)
Bilog Antenna	Schwarzbeck	Schwarzbeck	SB8501/04	01/20/2014	(1)
Horn Antenna	R&S	HF906	SB3435	01/20/2014	(1)
Amplifier(1-18GHz)	R&S	--	SB3435/01	01/20/2014	(1)
Amplifier(18-40GHz)	R&S	--	SB3435/02	01/20/2014	(1)
Horn Antenna	Amplifier Research	AT4560	SB5392/02	05/16/2014	(1)
RF cable(0.4m)	Woken	/	S02-1404-09-065	05/11/2014	(1)
RF cable(3.5m)	Woken	/	S02-1404-09-047	05/11/2014	(1)
RF cable(1.2m)	Woken	/	S02-1404-09-052	05/11/2014	(1)
3m Semi-anechoic chamber	Albatross Projects	9X6X6	SB3450/01	10/12/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.


The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

Test Result

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 3.7V DC
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Frequency:	2402 MHz	Test By:	
Ant.Polar.:	Horizontal		


FCC Electric Field Strength 2.4GHz Bandedge-PK

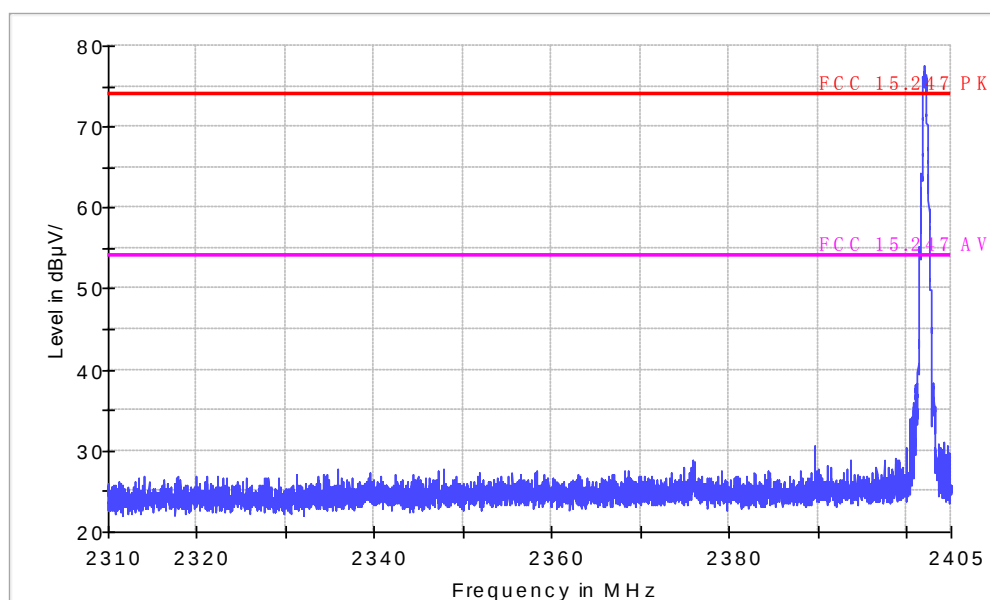

Channel	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2402MHz	2389	31.5	74.00	42.5	peak	H
	2389	22.7	54.00	31.3	Average	H

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 3.7V DC
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Frequency:	2402 MHz	Test By:	
Ant.Polar.:	Vertical		


FCC Electric Field Strength 2.4GHz Bandedge-PK

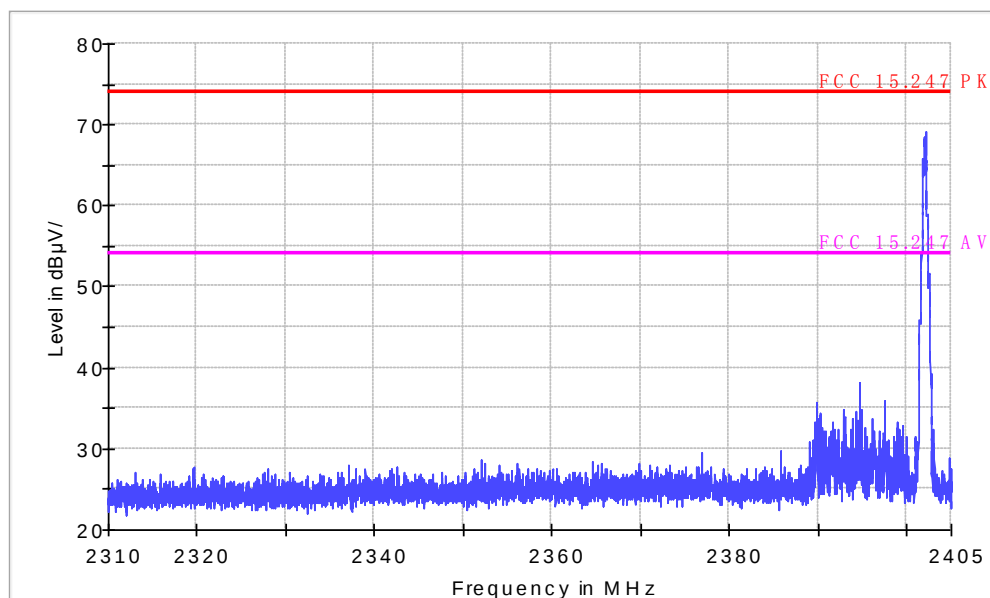

Channel	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2402MHz	2394	38.3	74.00	35.7	peak	V
	2394	26.7	54.00	27.3	Average	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 3.7V DC
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Frequency:	2480 MHz	Test By:	
Ant.Polar.:	Horizontal		


FCC Electric Field Strength 2.4GHz Bandedge-PK

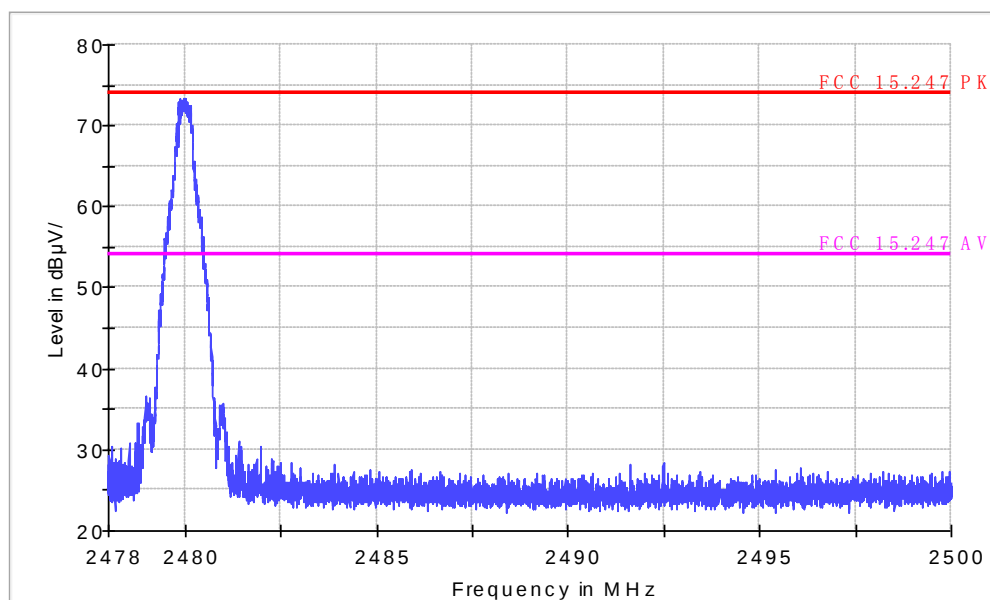

Channel	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2480MHz	2483.5	35.9	74.00	38.1	peak	H
	2483.5	24.6	54.00	29.4	Average	H

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 3.7V DC
Model Number:	PU26903	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	2014/09/19
Frequency:	2480 MHz	Test By:	
Ant.Polar.:	Vertical		

FCC Electric Field Strength 2.4GHz Bandedge-PK

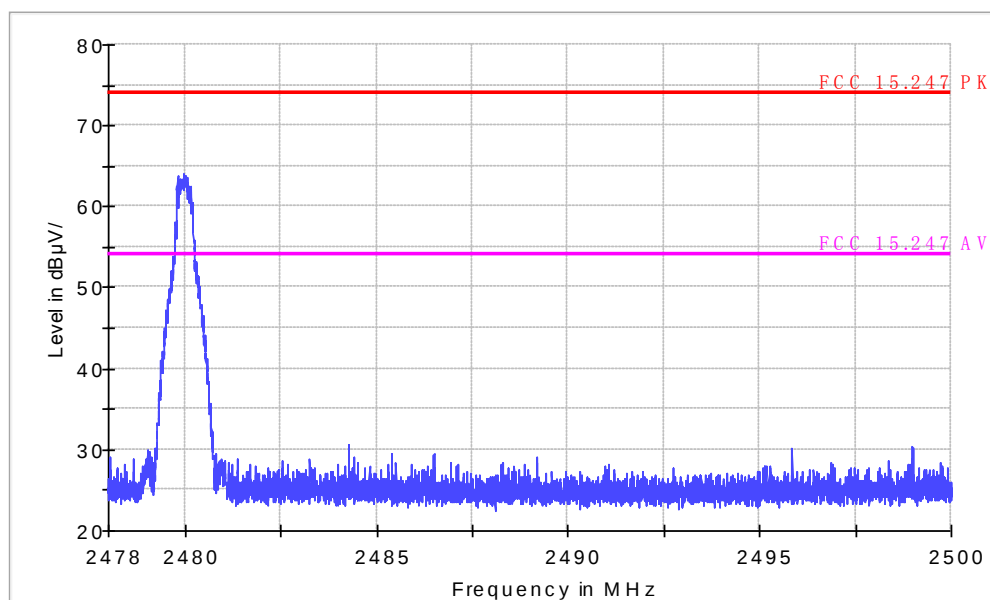

Channel	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2480MHz	2483.5	29.8	74.00	44.2	peak	V
	2483.5	21.6	54.00	32.4	Average	V

8.10 Antenna Measurement Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connector Construction

The antenna used in this product is an integrated PCB monopole antenna. And the maximum Gain of this antenna is 0.0 dBi.