



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No......: **CTC20221783E04**

FCC ID.....: **WNA-HP46E-R**

Applicant.....: **Shenzhen Skyworth Digital Technology Co.,LTD**

Address.....: 14/F,Block A,Skyworth Building,Gaoxin Ave.1.S.,Nanshan District,Shenzhen,China

Manufacturer 1.....: **Shenzhen Skyworth Digital Technology Co.,LTD**

Address.....: 14/F,Block A,Skyworth Building,Gaoxin Ave.1.S.,Nanshan District,Shenzhen,China

Product Name.....: **4K UHD Streaming TV Box**

Trade Mark.....: STRONG, SKYWORTH, MECOOL, THOMSON

Model/Type reference: Leap-S3

Listed Model(s): LEAP-S3, HP46E, HP4618, KM7 PLUS, THA 200, THA200

Standard: **FCC Part 15, Subpart E 15. 407**

Date of receipt of test sample...: Oct. 11, 2022

Date of testing.....: Oct. 11, 2022 ~ Oct. 28, 2022

Date of issue.....: Nov. 30, 2022

Result.....: **PASS**

Compiled by:

(Printed name+signature)

Lucy Lan

Lucy Lan

Supervised by:

(Printed name+signature)

Eric Zhang

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

Totti Zhao

Testing Laboratory Name.....: **CTC Laboratories, Inc.**

Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION.....	3
1.3. TEST DESCRIPTION.....	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. ACCESSORY EQUIPMENT INFORMATION	10
2.4. OPERATION STATE.....	10
2.5. MEASUREMENT INSTRUMENTS LIST	12
3. TEST ITEM AND RESULTS	13
3.1. CONDUCTED EMISSION.....	13
3.2. RADIATED EMISSION	16
3.3. BAND EDGE EMISSIONS	92
3.4. BANDWIDTH TEST	175
3.5. OUTPUT POWER TEST	177
3.6. POWER SPECTRAL DENSITY TEST	179
3.7. FREQUENCY STABILITY MEASUREMENT	181
3.8. ANTENNA REQUIREMENT.....	182
APPENDIX A1: EMISSION BANDWIDTH	183
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	225
APPENDIX A3: MIN EMISSION BANDWIDTH	267
APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER	279
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY.....	282
APPENDIX D: FREQUENCY STABILITY.....	325
APPENDIX E: DUTY CYCLE	333



1. TEST SUMMARY

1.1. Test Standards


The tests were performed according to following standards:

[FCC Part 15, Subpart E\(15.407\)](#) — for 802.11a/n/ac, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[RSS-Gen](#) — General Requirements for Compliance of Radio Apparatus

1.2. Report version

Revised No.	Date of issue	Description
01	Nov. 30, 2022	Original




1.3. Test Description

FCC Part 15 Subpart E (15.407)			
Test Item	Test require	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Alicia Liu
Conducted Emission	15.207	Pass	Alicia Liu
Band Edge Emissions	15.407(b)	Pass	Alicia Liu
26dB Bandwidth & 99% Bandwidth	15.407(a) (5)	Pass	Alicia Liu
6dB Bandwidth (only for UNII-3)	15.407(e)	Pass	Alicia Liu
Peak Output Power	15.407(a)	Pass	Alicia Liu
Power Spectral Density	15.407(a)	Pass	Alicia Liu
Transmitter Radiated Spurious Emission	15.407(b) & 15.209	Pass	Alicia Liu
Frequency Stability	15.407(g)	Pass	Alicia Liu
Dynamic Frequency Selection (DFS)	15.407(h)	Pass	Alicia Liu

Note:

1. "N/A" is not applicable. The measurement uncertainty is not included in the test result.
2. Dynamic Frequency Selection (DFS), please reference to the test report No.: CTC20221783E05



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)


Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.6. Environmental conditions

Normal Condition	Temperature	22 °C ~ 28°C
	Relative humidity	50% ~ 65%
	Voltage	The equipment shall be the nominal voltage for which the equipment was designed.
Extreme Condition	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer

Normal Condition	T _N =Normal Temperature	22 °C ~ 28°C
Extreme Condition	T _L =Lower Temperature	0 °C
	T _H =Higher Temperature	45 °C






2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Skyworth Digital Technology Co.,LTD
Address:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
Manufacturer :	Shenzhen Skyworth Digital Technology Co.,LTD
Address:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S.,Nanshan District, Shenzhen, China
Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Branch Factory
Address:	2-5F,Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China




2.2. General Description of EUT


Product Name:	4K UHD Streaming TV Box
Trade Mark:	STRONG, SKYWORTH, MECOOL, THOMSON
Model/Type reference:	Leap-S3
Listed Model(s):	LEAP-S3, HP46E, HP4618, KM7 PLUS, THA 200, THA200
Model Difference:	All these models are identical in the same PCB, layout and electrical circuit, Different is trade mark and model number.
Power supply:	DC12V 1A from AC/DC Adapter
Adapter model 1:	RJ-SKY120100U60S ^{Note1} Input: 100-240V~ 50/60Hz 0.5A Output: 12Vdc/1A
Adapter model 2:	YS-SKY120100U00P ^{Note2} Input: 100-240V~ 50/60Hz 0.5A Output: 12Vdc/1A
Hardware version:	54024
Software version:	P2.0.3_20220929
Antenna 1 & 2 type:	PCBA Antenna
Antenna 1 & 2 gain:	2.2dBi

Note:

1. RJ-SKY120100AXXS, (A = E or B , stands for different plug, E means for Europe plug, B means for UK plug, M or U means for US plug. XX = 00-99. stands for customer code)
2. YS-SKY120100N0XP (N = E, B , 1 character indicate difference plug type: E denote EU plug, B denote UK plug, X = 0-9, 1 digit, only for marketing purpose, no impact on safety)



Technical index for 5G WIFI					
Operation Band:	☒ U-NII-1	☒ U-NII-2A	☒ U-NII-2C		☒ U-NII-3
Operation Frequency Range:	U-NII-1:	5150MHz~5250MHz			
	U-NII-2A:	5250MHz~5350MHz			
	U-NII-2C:	5470MHz~5600MHz; 5650MHz~5725MHz			
	U-NII-3:	5725MHz~5850MHz			
Support bandwidth:	802.11a	☒ 20MHz			
	802.11n	☒ 20MHz	☒ 40MHz		
	802.11ac	☒ 20MHz	☒ 40MHz	☒ 80MHz	☐ 160MHz
Modulation:	802.11a: OFDM (BIT/SK, QPSK, BPSK, 16QAM) 802.11n: OFDM (BIT/SK, QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (BIT/SK, QPSK, BPSK, 16QAM, 64QAM, 256QAM)				
Bit Rate of Transmitter:	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 300Mbps 802.11ac: at most 866.7 Mbps				




2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
Displayer	EW3270-T	EW3270U	BenQ
Cable Information			
Name	Shielded Type	Ferrite Core	Length
LAN Cable	Without	Without	1.5M
HDMI Cable	Without	Without	1.5M
Test Software Information			
Name	Versions	/	/
WLAN TEST	/	/	/

2.4. Operation state

Operation Frequency List:

Band (MHz)	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII-2A	52	5260	54	5270	58	5290
	56	5280				
	60	5300	62	5310		
	64	5320				
U-NII-2C	100	5500	102	5510	106	5530
	104	5520				
	108	5540	110	5550		
	112	5560				
	116	5580	134	5670		
	132	5660				
	136	5680				
	140	5700				
U-NII-3	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825				



Test channel is below:

Operating Band	Test Channel	20MHz		40MHz		80MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH _L	36	5180	38	5190	/	/
	CH _M	40	5200	/	/	42	5210
	CH _H	48	5240	46	5230	/	/
U-NII-2A	CH _L	52	5260	54	5270	/	/
	CH _M	56	5280	/	/	58	5290
	CH _H	64	5320	62	5310	/	/
U-NII-2C	CH _L	100	5500	102	5510	/	/
	CH _M	116	5580	110	5550	106	5530
	CH _H	140	5700	134	5670	/	/
U-NII-3	CH _L	149	5745	151	5755	/	/
	CH _M	157	5785	/	/	155	5775
	CH _H	165	5825	159	5795	/	/


Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS0
802.11ac(VHT20)/ 802.11ac(VHT40)/ 802.11ac(VHT80)	VHT-MCS0

Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Keysight	N9020A	MY46471737	Dec.23, 2022
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2023
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec.23, 2022
4	Signal Generator	Agilent	E8257D	MY46521908	Dec.23, 2022
5	Power Sensor	Agilent	U2021XA	MY5365004	Mar. 15, 2023
6	Power Sensor	Agilent	U2021XA	MY5365006	Mar. 15, 2023
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Mar. 15, 2023
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec.23, 2022
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec.23, 2022
10	Climate Chamber	ESPEC	MT3065	/	Dec.23, 2022
11	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Log-Bicon Antenna	Schwarzbeck	CBL6141A	4180	Dec. 23, 2022
2	Ultra-Broadband Antenna	ShwarzBeck	BBHA9170	25841	Dec. 23, 2022
3	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Mar. 30, 2023
4	Test Receiver	Keysight	N9038A	MY56400071	Dec. 23, 2022
5	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 23, 2022
6	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 23, 2022
7	Pre-Amplifier	R&S	SCU-26	10033	Dec. 23, 2022
8	Pre-Amplifier	R&S	SCU-40	10030	Dec. 23, 2022
9	3m chamber 3	YIHENG	EE106	/	Sep. 09, 2023

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 23, 2022
2	LISN	R&S	ENV216	101113	Dec. 23, 2022
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 23, 2022
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 23, 2022
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 23, 2022

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

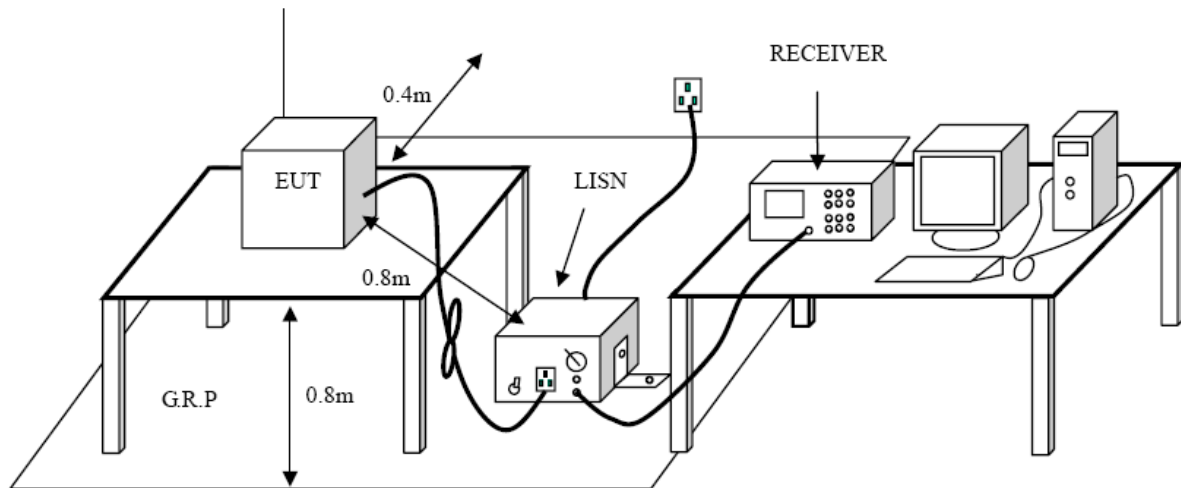

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Results**

Test Voltage:	AC 120V/60 Hz
Terminal:	Line

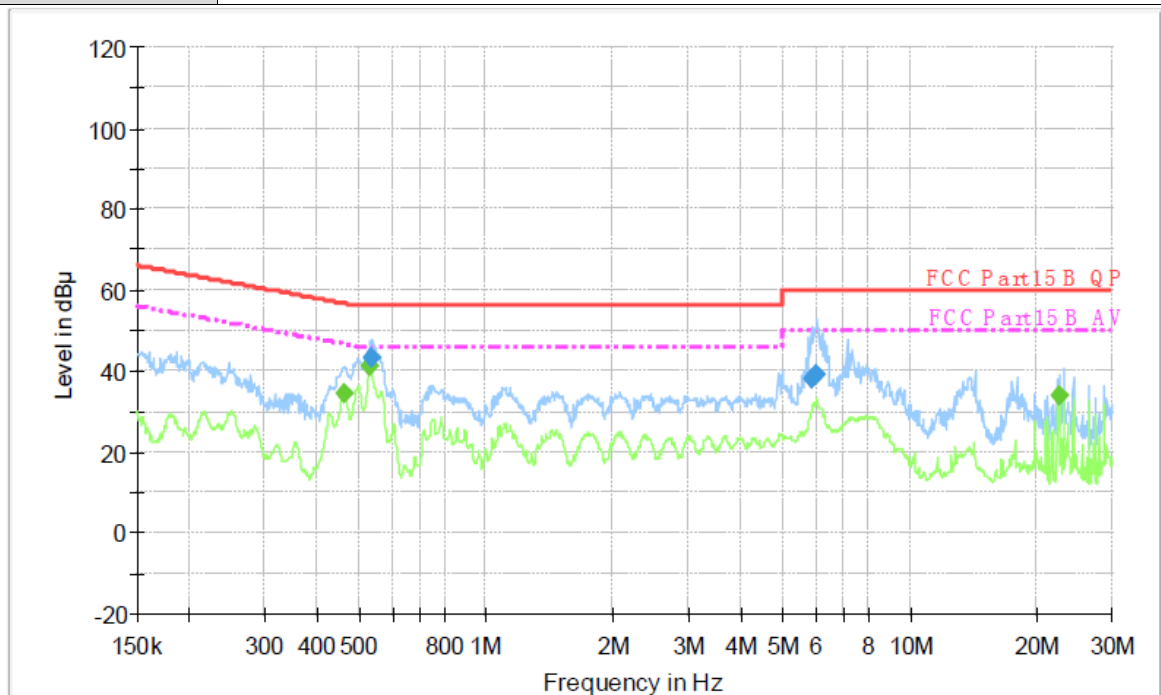**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBu V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)	Comment
0.540270	43.5	1000.00	9.000	On	L1	9.7	12.5	56.0	
5.856520	37.9	1000.00	9.000	On	L1	9.7	22.1	60.0	
6.022490	39.1	1000.00	9.000	On	L1	9.7	20.9	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBu V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)	Comment
0.462380	34.6	1000.00	9.000	On	L1	9.7	12.0	46.6	
0.533840	41.2	1000.00	9.000	On	L1	9.7	4.8	46.0	
22.575370	34.2	1000.00	9.000	On	L1	10.1	15.8	50.0	

Emission Level= Read Level+ Correct Factor



Test Voltage:	AC 120V/60 Hz
Terminal:	Neutral

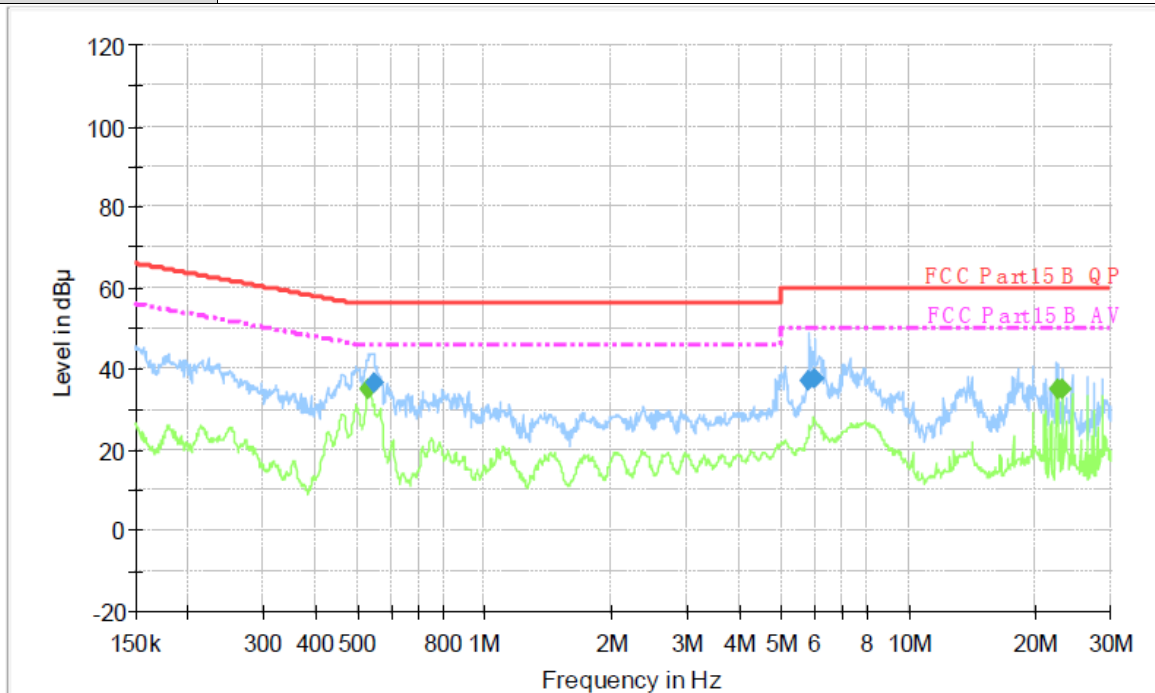

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBu V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)	Comment
0.546780	36.8	1000.00	9.000	On	N	10.0	19.2	56.0	
5.833190	37.0	1000.00	9.000	On	N	10.0	23.0	60.0	
6.022490	37.5	1000.00	9.000	On	N	10.0	22.5	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBu V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBu V)	Comment
0.531710	35.1	1000.00	9.000	On	N	10.0	10.9	46.0	
22.575370	35.0	1000.00	9.000	On	N	10.0	15.0	50.0	
23.122620	34.9	1000.00	9.000	On	N	10.0	15.2	50.0	

Emission Level= Read Level+ Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBUV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBUV/m)= 20log Emission Level (uV/m).

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)


Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBUV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field


strength: $E = \frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


Test Configuration

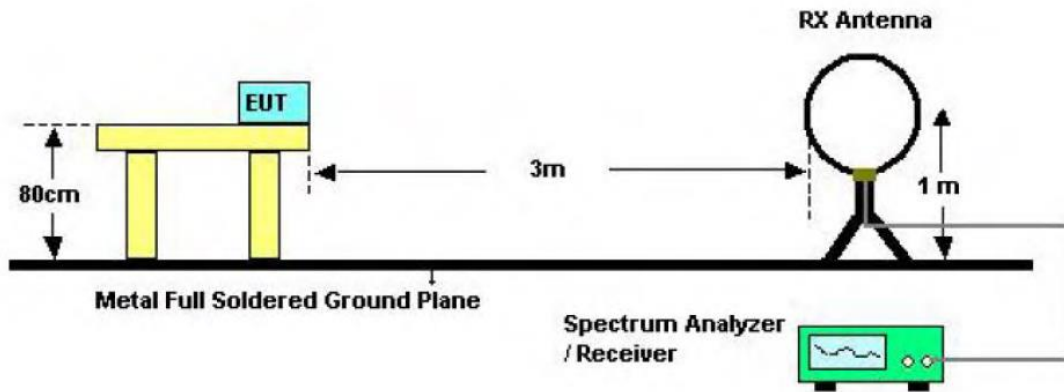

Below 30MHz Test Setup

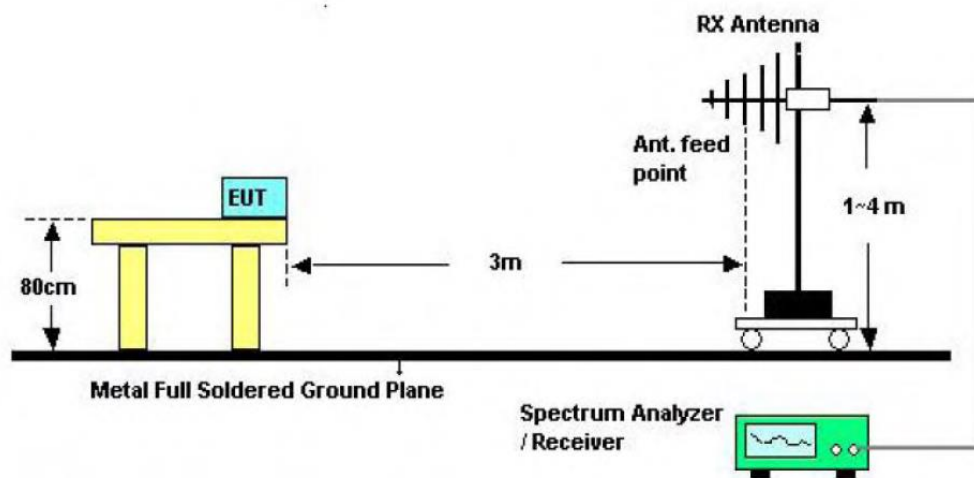

Below 1000MHz Test Setup

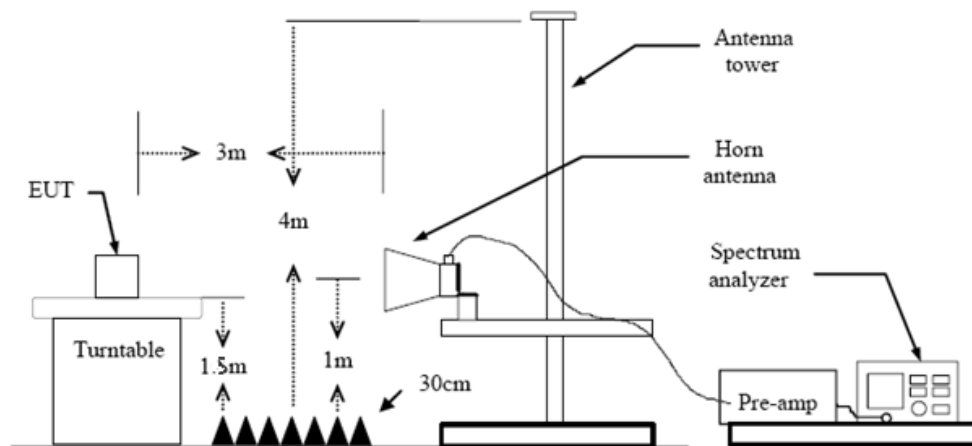

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.



3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz

Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported

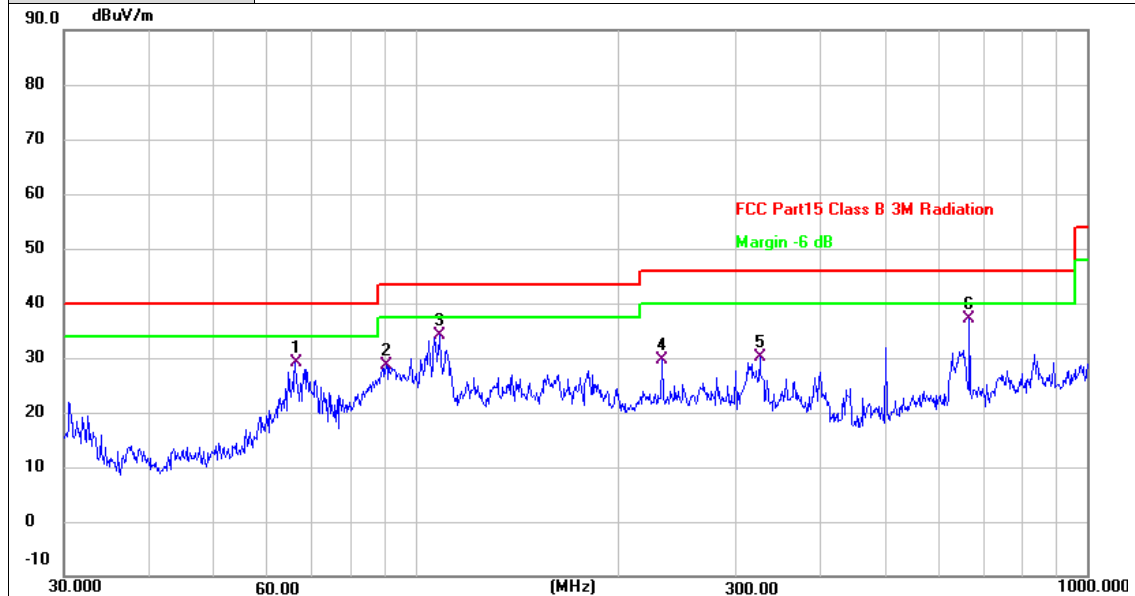

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	66.2661	48.80	-19.78	29.02	40.00	-10.98	QP
2	90.5374	50.41	-21.72	28.69	43.50	-14.81	QP
3	108.6470	54.50	-20.26	34.24	43.50	-9.26	QP
4	233.3486	48.78	-19.21	29.57	46.00	-16.43	QP
5	325.5958	46.58	-16.57	30.01	46.00	-15.99	QP
6 *	668.1422	46.74	-9.51	37.23	46.00	-8.77	QP


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported

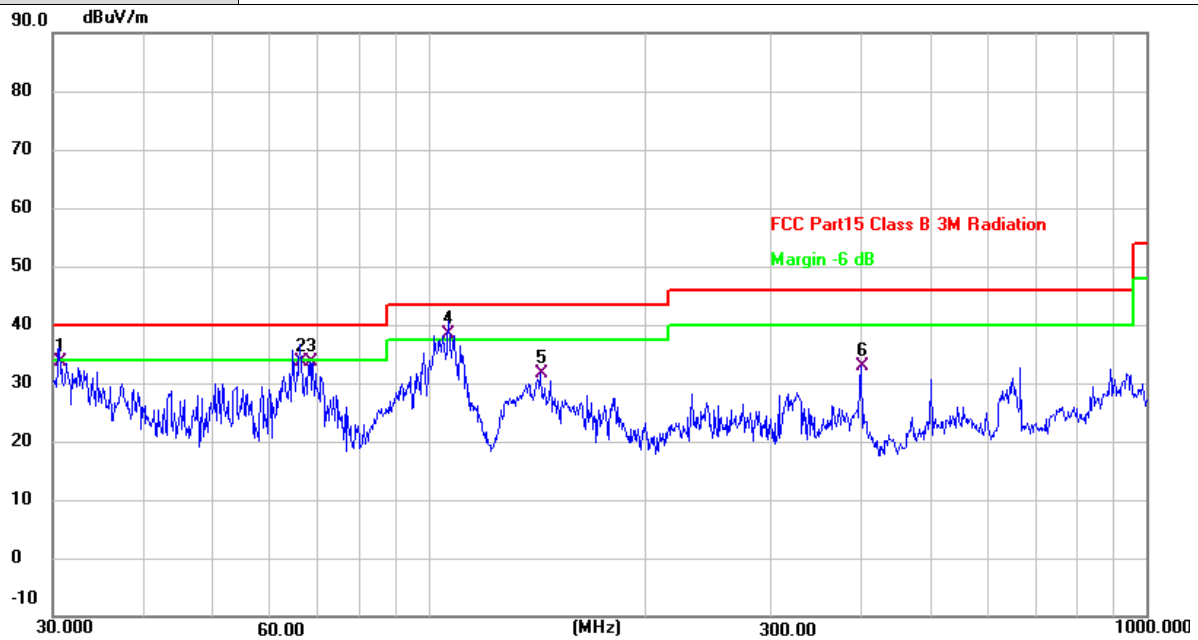


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.6379	51.83	-18.22	33.61	40.00	-6.39	QP
2	66.2662	53.52	-19.78	33.74	40.00	-6.26	QP
3	68.3908	53.76	-20.18	33.58	40.00	-6.42	QP
4 *	106.7587	58.81	-20.41	38.40	43.50	-5.10	QP
5	143.3261	48.80	-17.09	31.71	43.50	-11.79	QP
6	400.4319	47.67	-14.83	32.84	46.00	-13.16	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Above 1GHz

Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.601	41.85	13.60	55.45	74.00	-18.55	peak
2 *	10360.129	27.20	13.60	40.80	54.00	-13.20	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.471	42.76	13.60	56.36	74.00	-17.64	peak
2 *	10359.839	28.74	13.60	42.34	54.00	-11.66	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10399.361	41.54	13.67	55.21	74.00	-18.79	peak
2 *	10400.078	27.91	13.67	41.58	54.00	-12.42	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10399.531	42.20	13.67	55.87	74.00	-18.13	peak
2 *	10400.279	28.30	13.67	41.97	54.00	-12.03	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10479.308	27.73	13.80	41.53	54.00	-12.47	AVG
2	10479.743	42.18	13.80	55.98	74.00	-18.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.403	42.47	13.80	56.27	74.00	-17.73	peak
2 *	10480.292	28.12	13.80	41.92	54.00	-12.08	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10359.336	41.61	13.60	55.21	74.00	-18.79	peak
2 *	10359.783	26.83	13.60	40.43	54.00	-13.57	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.419	27.62	13.60	41.22	54.00	-12.78	AVG
2	10360.213	40.77	13.60	54.37	74.00	-19.63	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10400.156	40.60	13.67	54.27	74.00	-19.73	peak
2 *	10400.459	26.49	13.67	40.16	54.00	-13.84	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10399.606	40.29	13.67	53.96	74.00	-20.04	peak
2 *	10400.526	26.14	13.67	39.81	54.00	-14.19	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10479.661	26.61	13.80	40.41	54.00	-13.59	AVG
2	10480.590	41.61	13.80	55.41	74.00	-18.59	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.335	41.51	13.80	55.31	74.00	-18.69	peak
2 *	10480.474	26.00	13.80	39.80	54.00	-14.20	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.744	27.31	13.60	40.91	54.00	-13.09	AVG
2	10360.634	40.76	13.59	54.35	74.00	-19.65	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.282	41.77	13.60	55.37	74.00	-18.63	peak
2 *	10359.413	27.82	13.60	41.42	54.00	-12.58	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.519	39.94	13.67	53.61	74.00	-20.39	peak
2 *	10400.871	25.94	13.67	39.61	54.00	-14.39	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.353	27.47	13.67	41.14	54.00	-12.86	AVG
2	10399.655	41.29	13.67	54.96	74.00	-19.04	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10479.769	27.05	13.80	40.85	54.00	-13.15	AVG
2	10480.400	40.64	13.80	54.44	74.00	-19.56	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10479.510	27.66	13.80	41.46	54.00	-12.54	AVG
2	10480.915	41.58	13.80	55.38	74.00	-18.62	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10380.071	39.29	13.63	52.92	74.00	-21.08	peak
2 *	10380.559	24.61	13.63	38.24	54.00	-15.76	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.805	25.98	13.63	39.61	54.00	-14.39	AVG
2	10379.935	40.55	13.63	54.18	74.00	-19.82	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10458.289	25.09	13.77	38.86	54.00	-15.14	AVG
2	10458.533	39.45	13.77	53.22	74.00	-20.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10459.579	25.66	13.77	39.43	54.00	-14.57	AVG
2	10460.381	40.96	13.77	54.73	74.00	-19.27	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.088	26.11	13.60	39.71	54.00	-14.29	AVG
2	10359.457	40.31	13.60	53.91	74.00	-20.09	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.197	41.63	13.60	55.23	74.00	-18.77	peak
2 *	10359.577	27.77	13.60	41.37	54.00	-12.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10399.588	40.35	13.67	54.02	74.00	-19.98	peak
2 *	10399.603	25.99	13.67	39.66	54.00	-14.34	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.389	27.68	13.67	41.35	54.00	-12.65	AVG
2	10399.667	42.01	13.67	55.68	74.00	-18.32	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.045	40.93	13.80	54.73	74.00	-19.27	peak
2 *	10479.250	26.93	13.80	40.73	54.00	-13.27	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.126	42.13	13.80	55.93	74.00	-18.07	peak
2 *	10480.249	27.41	13.80	41.21	54.00	-12.79	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.477	25.03	13.63	38.66	54.00	-15.34	AVG
2	10379.765	39.22	13.63	52.85	74.00	-21.15	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.977	26.11	13.63	39.74	54.00	-14.26	AVG
2	10380.344	39.85	13.63	53.48	74.00	-20.52	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10459.242	25.51	13.77	39.28	54.00	-14.72	AVG
2	10459.574	39.91	13.77	53.68	74.00	-20.32	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10460.054	40.78	13.77	54.55	74.00	-19.45	peak
2 *	10460.269	25.58	13.77	39.35	54.00	-14.65	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10419.842	24.47	13.70	38.17	54.00	-15.83	AVG
2	10419.997	39.37	13.70	53.07	74.00	-20.93	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10419.645	40.84	13.70	54.54	74.00	-19.46	peak
2 *	10420.043	26.08	13.70	39.78	54.00	-14.22	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.728	41.42	13.89	55.31	74.00	-18.69	peak
2 *	10519.737	25.94	13.89	39.83	54.00	-14.17	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.501	50.25	13.89	64.14	74.00	-9.86	peak
2 *	10520.459	35.55	13.89	49.44	54.00	-4.56	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.623	40.39	13.97	54.36	74.00	-19.64	peak
2 *	10559.891	25.61	13.97	39.58	54.00	-14.42	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10559.001	35.70	13.97	49.67	54.00	-4.33	AVG
2	10559.571	50.23	13.97	64.20	74.00	-9.80	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10639.494	40.29	14.16	54.45	74.00	-19.55	peak
2 *	10639.654	25.97	14.16	40.13	54.00	-13.87	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.734	49.70	14.16	63.86	74.00	-10.14	peak
2 *	10640.433	35.23	14.16	49.39	54.00	-4.61	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.899	40.21	13.89	54.10	74.00	-19.90	peak
2 *	10520.317	24.91	13.89	38.80	54.00	-15.20	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10519.008	29.66	13.89	43.55	54.00	-10.45	AVG
2	10519.573	43.49	13.89	57.38	74.00	-16.62	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.474	38.08	13.97	52.05	74.00	-21.95	peak
2 *	10560.321	24.17	13.97	38.14	54.00	-15.86	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.361	42.37	13.97	56.34	74.00	-17.66	peak
2 *	10559.403	27.35	13.97	41.32	54.00	-12.68	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10639.257	38.64	14.15	52.79	74.00	-21.21	peak
2 *	10640.341	24.69	14.16	38.85	54.00	-15.15	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.579	26.92	14.16	41.08	54.00	-12.92	AVG
2	10639.758	41.92	14.16	56.08	74.00	-17.92	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.284	39.35	13.89	53.24	74.00	-20.76	peak
2 *	10520.385	25.22	13.89	39.11	54.00	-14.89	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10519.635	36.17	13.89	50.06	54.00	-3.94	AVG
2	10520.221	48.19	13.89	62.08	74.00	-11.92	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10560.169	37.88	13.97	51.85	74.00	-22.15	peak
2 *	10560.750	23.24	13.98	37.22	54.00	-16.78	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10559.222	46.55	13.97	60.52	74.00	-13.48	peak
2 *	10559.822	35.03	13.97	49.00	54.00	-5.00	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10640.497	23.83	14.16	37.99	54.00	-16.01	AVG
2	10640.618	38.32	14.16	52.48	74.00	-21.52	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10640.079	36.41	14.16	50.57	54.00	-3.43	AVG
2	10640.161	47.90	14.16	62.06	74.00	-11.94	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10540.229	23.61	13.93	37.54	54.00	-16.46	AVG
2	10540.853	38.57	13.93	52.50	74.00	-21.50	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10540.582	34.13	13.93	48.06	54.00	-5.94	AVG
2	10540.835	46.87	13.93	60.80	74.00	-13.20	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.736	38.30	14.11	52.41	74.00	-21.59	peak
2 *	10620.096	23.55	14.11	37.66	54.00	-16.34	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.714	43.18	14.11	57.29	74.00	-16.71	peak
2 *	10620.406	30.38	14.11	44.49	54.00	-9.51	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10519.018	25.17	13.89	39.06	54.00	-14.94	AVG
2	10520.483	39.74	13.89	53.63	74.00	-20.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10519.699	36.83	13.89	50.72	54.00	-3.28	AVG
2	10520.533	49.29	13.89	63.18	74.00	-10.82	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10559.929	23.67	13.97	37.64	54.00	-16.36	AVG
2	10560.586	38.89	13.97	52.86	74.00	-21.14	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10559.977	35.61	13.97	49.58	54.00	-4.42	AVG
2	10560.962	48.17	13.98	62.15	74.00	-11.85	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10640.253	23.79	14.16	37.95	54.00	-16.05	AVG
2	10640.514	38.10	14.16	52.26	74.00	-21.74	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.683	36.22	14.16	50.38	54.00	-3.62	AVG
2	10640.797	48.39	14.16	62.55	74.00	-11.45	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10539.364	23.54	13.93	37.47	54.00	-16.53	AVG
2	10540.540	39.07	13.93	53.00	74.00	-21.00	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10539.475	47.87	13.93	61.80	74.00	-12.20	peak
2 *	10539.477	36.12	13.93	50.05	54.00	-3.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.801	38.71	14.16	52.87	74.00	-21.13	peak
2 *	10639.939	23.99	14.16	38.15	54.00	-15.85	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10619.537	30.98	14.11	45.09	54.00	-8.91	AVG
2	10620.350	43.66	14.11	57.77	74.00	-16.23	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac (VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10579.951	38.04	14.02	52.06	74.00	-21.94	peak
2 *	10580.385	23.29	14.02	37.31	54.00	-16.69	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10580.488	28.46	14.02	42.48	54.00	-11.52	AVG
2	10580.815	40.91	14.02	54.93	74.00	-19.07	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11000.779	38.81	14.97	53.78	74.00	-20.22	peak
2 *	11000.860	24.95	14.97	39.92	54.00	-14.08	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10999.515	43.37	14.97	58.34	74.00	-15.66	peak
2 *	11000.426	29.17	14.97	44.14	54.00	-9.86	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11160.098	38.98	14.98	53.96	74.00	-20.04	peak
2 *	11160.805	24.47	14.98	39.45	54.00	-14.55	AVG
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11160.030	25.88	14.98	40.86	54.00	-13.14	AVG
2	11160.795	39.64	14.98	54.62	74.00	-19.38	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11400.171	35.73	14.99	50.72	74.00	-23.28	peak
2 *	11400.554	21.19	14.99	36.18	54.00	-17.82	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.721	22.38	14.99	37.37	54.00	-16.63	AVG
2	11400.337	37.30	14.99	52.29	74.00	-21.71	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.385	24.36	14.97	39.33	54.00	-14.67	AVG
2	11000.909	38.30	14.97	53.27	74.00	-20.73	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.395	27.38	14.97	42.35	54.00	-11.65	AVG
2	10999.590	41.88	14.97	56.85	74.00	-17.15	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.427	22.78	14.98	37.76	54.00	-16.24	AVG
2	11160.759	38.03	14.98	53.01	74.00	-20.99	peak
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11159.475	40.38	14.98	55.36	74.00	-18.64	peak
2 *	11159.715	26.24	14.98	41.22	54.00	-12.78	AVG
Remarks:							
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor							
2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11400.128	20.69	14.99	35.68	54.00	-18.32	AVG
2	11400.995	36.04	14.99	51.03	74.00	-22.97	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11400.540	36.56	14.99	51.55	74.00	-22.45	peak
2 *	11400.886	21.82	14.99	36.81	54.00	-17.19	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.093	39.25	14.97	54.22	74.00	-19.78	peak
2 *	11000.228	23.67	14.97	38.64	54.00	-15.36	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10999.515	41.20	14.97	56.17	74.00	-17.83	peak
2 *	10999.798	28.64	14.97	43.61	54.00	-10.39	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11159.041	22.75	14.98	37.73	54.00	-16.27	AVG
2	11159.397	37.30	14.98	52.28	74.00	-21.72	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.513	26.66	14.98	41.64	54.00	-12.36	AVG
2	11159.617	39.53	14.98	54.51	74.00	-19.49	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.629	20.61	14.99	35.60	54.00	-18.40	AVG
2	11400.832	36.03	14.99	51.02	74.00	-22.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.795	21.85	14.99	36.84	54.00	-17.16	AVG
2	11400.523	37.14	14.99	52.13	74.00	-21.87	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11019.042	22.45	14.97	37.42	54.00	-16.58	AVG
2	11020.338	38.40	14.97	53.37	74.00	-20.63	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11019.170	24.12	14.97	39.09	54.00	-14.91	AVG
2	11020.158	38.20	14.97	53.17	74.00	-20.83	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11099.795	36.46	14.98	51.44	74.00	-22.56	peak
2 *	11100.175	22.04	14.98	37.02	54.00	-16.98	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11099.117	25.47	14.98	40.45	54.00	-13.55	AVG
2	11099.592	38.65	14.98	53.63	74.00	-20.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11339.161	21.44	14.99	36.43	54.00	-17.57	AVG
2	11340.241	37.03	14.99	52.02	74.00	-21.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11340.535	37.09	14.99	52.08	74.00	-21.92	peak
2 *	11340.721	22.48	14.99	37.47	54.00	-16.53	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11000.160	23.95	14.97	38.92	54.00	-15.08	AVG
2	11000.635	38.01	14.97	52.98	74.00	-21.02	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.609	28.71	14.97	43.68	54.00	-10.32	AVG
2	11000.703	42.59	14.97	57.56	74.00	-16.44	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11160.697	22.58	14.98	37.56	54.00	-16.44	AVG
2	11160.957	37.24	14.98	52.22	74.00	-21.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.669	27.84	14.98	42.82	54.00	-11.18	AVG
2	11159.898	40.44	14.98	55.42	74.00	-18.58	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11399.954	36.71	14.99	51.70	74.00	-22.30	peak
2 *	11400.457	20.73	14.99	35.72	54.00	-18.28	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.159	22.16	14.99	37.15	54.00	-16.85	AVG
2	11400.491	36.78	14.99	51.77	74.00	-22.23	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11019.055	37.42	14.97	52.39	74.00	-21.61	peak
2 *	11019.234	22.55	14.97	37.52	54.00	-16.48	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11019.053	38.11	14.97	53.08	74.00	-20.92	peak
2 *	11020.633	24.48	14.97	39.45	54.00	-14.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11099.845	22.00	14.98	36.98	54.00	-17.02	AVG
2	11100.040	36.35	14.98	51.33	74.00	-22.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11099.382	26.14	14.98	41.12	54.00	-12.88	AVG
2	11100.031	39.88	14.98	54.86	74.00	-19.14	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11339.076	21.34	14.99	36.33	54.00	-17.67	AVG
2	11340.657	36.17	14.99	51.16	74.00	-22.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11340.638	24.09	14.99	39.08	54.00	-14.92	AVG
2	11340.649	36.88	14.99	51.87	74.00	-22.13	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11059.952	37.71	14.98	52.69	74.00	-21.31	peak
2 *	11060.707	22.00	14.98	36.98	54.00	-17.02	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11060.241	37.87	14.98	52.85	74.00	-21.15	peak
2 *	11060.823	22.37	14.98	37.35	54.00	-16.65	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11220.586	22.34	14.98	37.32	54.00	-16.68	AVG
2	11220.794	37.82	14.98	52.80	74.00	-21.20	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11220.467	38.49	14.98	53.47	74.00	-20.53	peak
2 *	11220.671	23.73	14.98	38.71	54.00	-15.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.705	39.45	15.00	54.45	74.00	-19.55	peak
2 *	11489.714	25.40	15.00	40.40	54.00	-13.60	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.509	39.78	15.01	54.79	74.00	-19.21	peak
2 *	11490.833	26.24	15.01	41.25	54.00	-12.75	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.948	38.80	15.06	53.86	74.00	-20.14	peak
2 *	11570.610	24.96	15.07	40.03	54.00	-13.97	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.448	39.31	15.06	54.37	74.00	-19.63	peak
2 *	11569.875	24.94	15.06	40.00	54.00	-14.00	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11649.184	39.12	15.13	54.25	74.00	-19.75	peak
2 *	11650.187	25.33	15.14	40.47	54.00	-13.53	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11650.492	25.30	15.14	40.44	54.00	-13.56	AVG
2	11650.739	39.24	15.14	54.38	74.00	-19.62	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.136	24.99	15.01	40.00	54.00	-14.00	AVG
2	11490.377	41.98	15.01	56.99	74.00	-17.01	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.030	25.42	14.99	40.41	54.00	-13.59	AVG
2	11490.519	39.67	15.01	54.68	74.00	-19.32	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11570.381	24.84	15.07	39.91	54.00	-14.09	AVG
2	11570.563	39.33	15.07	54.40	74.00	-19.60	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11569.465	24.74	15.06	39.80	54.00	-14.20	AVG
2	11570.376	40.42	15.07	55.49	74.00	-18.51	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11649.931	25.15	15.13	40.28	54.00	-13.72	AVG
2	11650.143	39.67	15.14	54.81	74.00	-19.19	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.301	25.25	15.13	40.38	54.00	-13.62	AVG
2	11650.462	39.86	15.14	55.00	74.00	-19.00	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.357	25.39	15.00	40.39	54.00	-13.61	AVG
2	11489.888	39.75	15.00	54.75	74.00	-19.25	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.037	26.21	14.99	41.20	54.00	-12.80	AVG
2	11490.009	40.62	15.01	55.63	74.00	-18.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11569.157	24.78	15.06	39.84	54.00	-14.16	AVG
2	11569.459	39.31	15.06	54.37	74.00	-19.63	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.538	39.17	15.06	54.23	74.00	-19.77	peak
2 *	11570.215	25.02	15.07	40.09	54.00	-13.91	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11650.404	25.17	15.14	40.31	54.00	-13.69	AVG
2	11650.744	39.13	15.14	54.27	74.00	-19.73	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.285	39.62	15.13	54.75	74.00	-19.25	peak
2 *	11650.965	25.20	15.14	40.34	54.00	-13.66	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11509.051	39.10	15.00	54.10	74.00	-19.90	peak
2 *	11509.877	25.00	15.00	40.00	54.00	-14.00	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11509.803	24.96	15.00	39.96	54.00	-14.04	AVG
2	11509.984	39.63	15.00	54.63	74.00	-19.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11589.539	39.00	15.08	54.08	74.00	-19.92	peak
2 *	11589.730	24.75	15.08	39.83	54.00	-14.17	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11590.098	39.80	15.09	54.89	74.00	-19.11	peak
2 *	11590.717	24.60	15.09	39.69	54.00	-14.31	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.945	25.29	15.00	40.29	54.00	-13.71	AVG
2	11490.368	39.42	15.01	54.43	74.00	-19.57	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11489.203	26.13	15.00	41.13	54.00	-12.87	AVG
2	11490.839	40.14	15.01	55.15	74.00	-18.85	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11569.082	24.71	15.06	39.77	54.00	-14.23	AVG
2	11569.835	39.38	15.06	54.44	74.00	-19.56	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.175	39.36	15.06	54.42	74.00	-19.58	peak
2 *	11570.863	24.98	15.07	40.05	54.00	-13.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11649.572	38.93	15.13	54.06	74.00	-19.94	peak
2 *	11650.405	25.02	15.14	40.16	54.00	-13.84	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.547	25.13	15.13	40.26	54.00	-13.74	AVG
2	11650.865	40.56	15.14	55.70	74.00	-18.30	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11509.683	24.76	15.00	39.76	54.00	-14.24	AVG
2	11510.512	39.68	15.01	54.69	74.00	-19.31	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.775	40.02	15.00	55.02	74.00	-18.98	peak
2 *	11509.892	24.94	15.00	39.94	54.00	-14.06	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac (HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11590.375	24.77	15.09	39.86	54.00	-14.14	AVG
2	11590.846	39.45	15.09	54.54	74.00	-19.46	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11589.015	25.03	15.08	40.11	54.00	-13.89	AVG
2	11590.179	39.01	15.09	54.10	74.00	-19.90	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11549.198	39.70	15.04	54.74	74.00	-19.26	peak
2 *	11550.095	24.96	15.05	40.01	54.00	-13.99	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11549.271	39.51	15.04	54.55	74.00	-19.45	peak
2 *	11550.099	24.97	15.05	40.02	54.00	-13.98	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)/ RSS-247 6.2.1.2 & RSS-247 6.2.4.2


Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

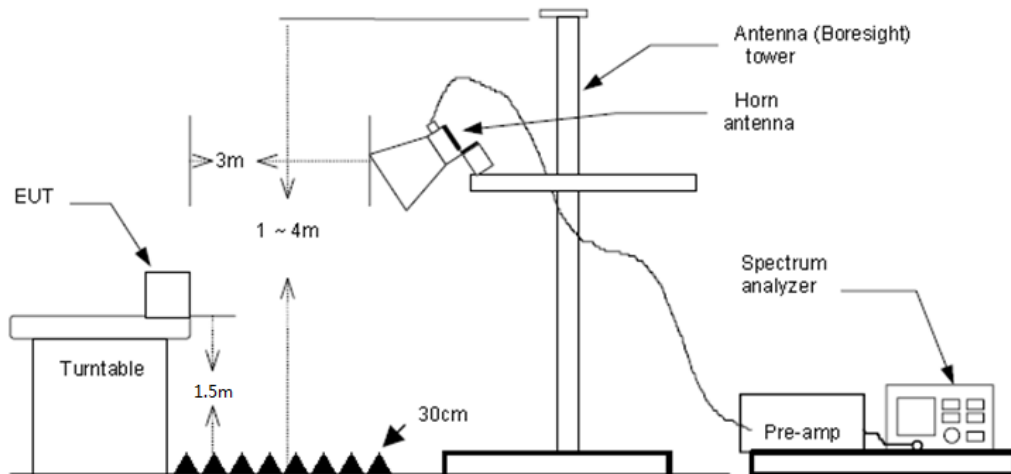

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:



RBW=1MHz, VBW=3MHz PEAK detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Appendix E: Duty Cycle

Test Mode

Please refer to the clause 2.4.


Test Results

Pre-scan all antenna, only show the test data for worse case antenna on the test report.

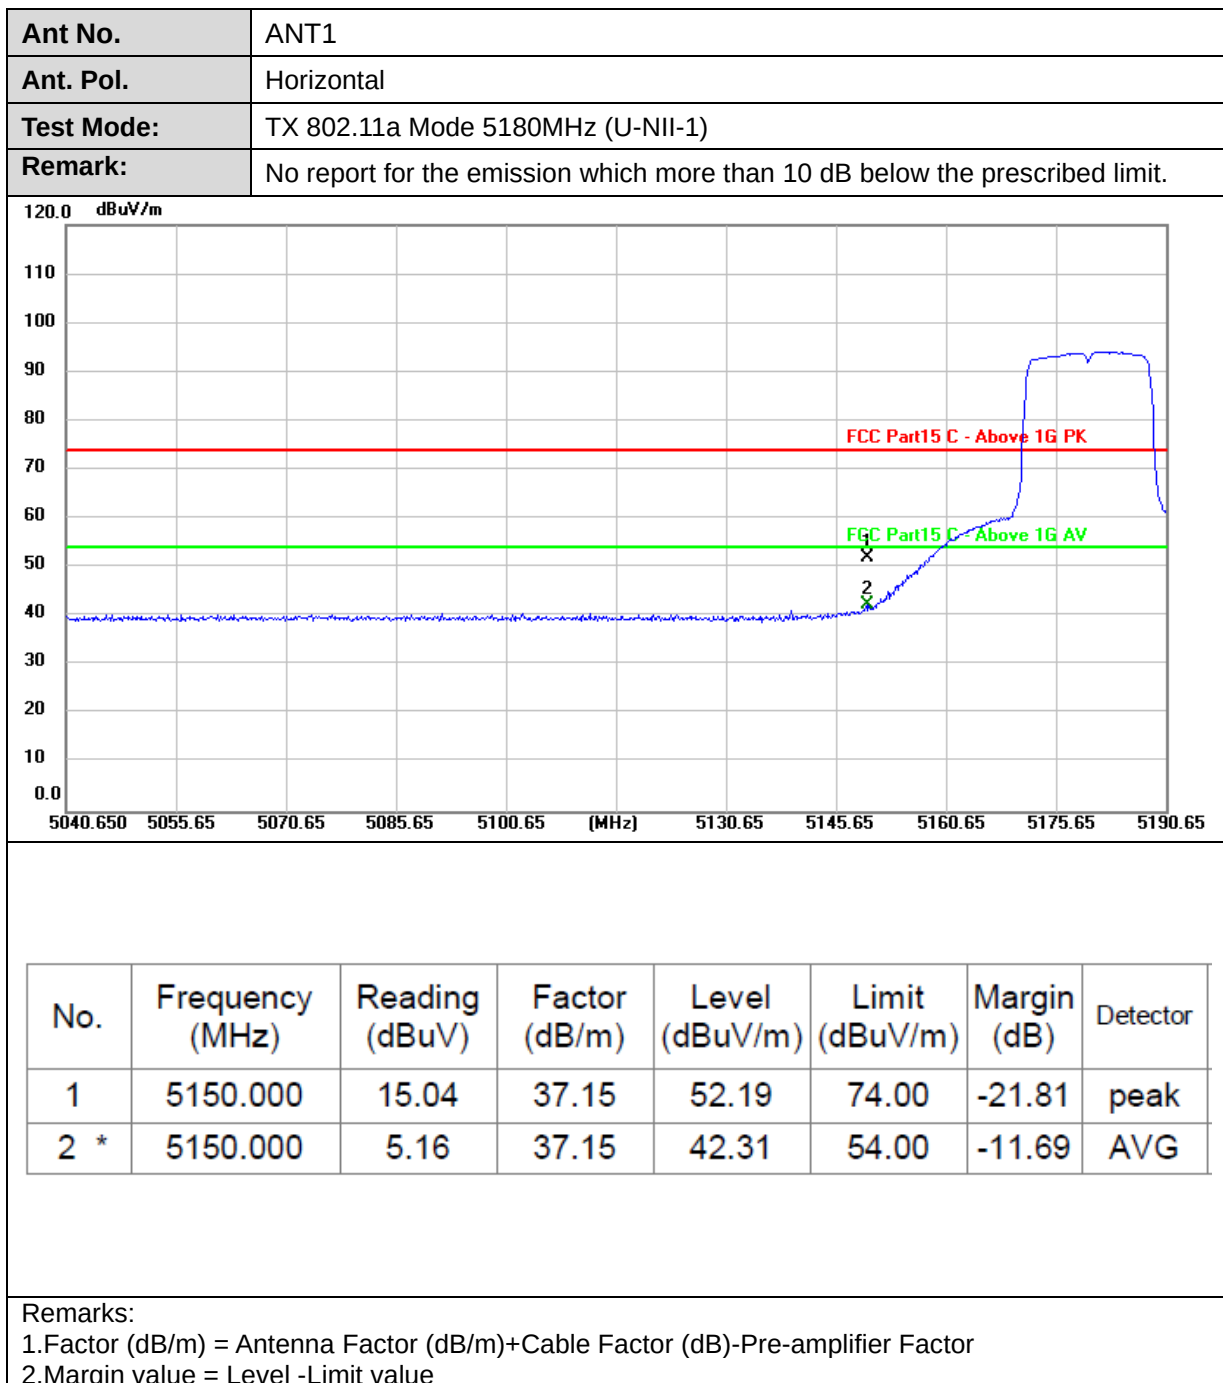



Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

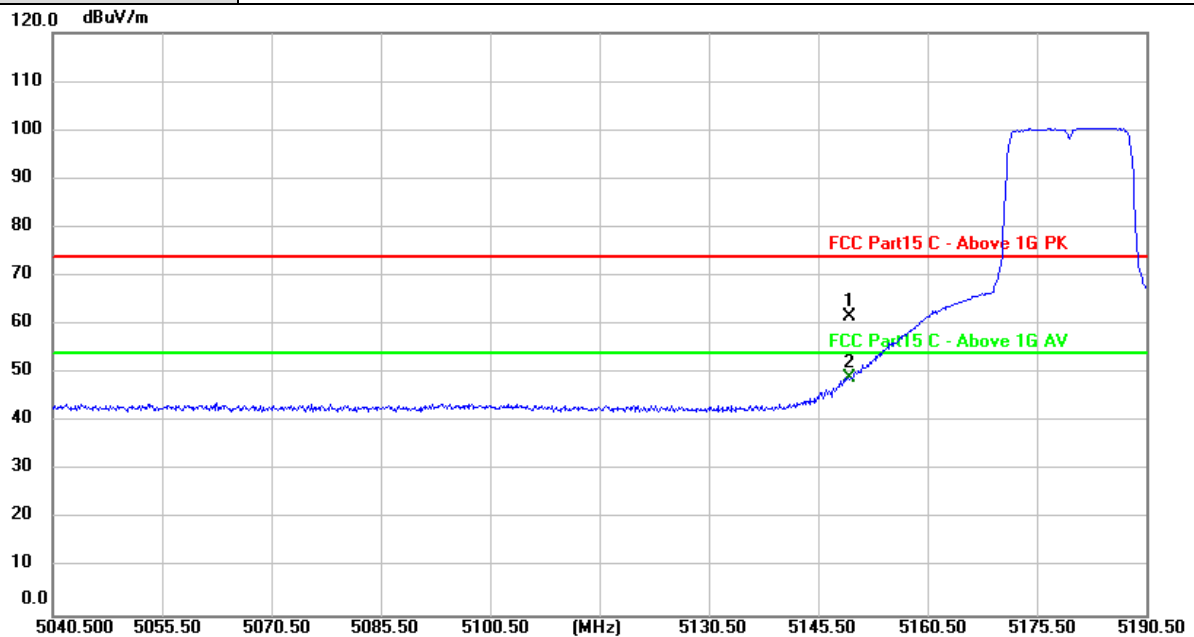


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	24.51	37.15	61.66	74.00	-12.34	peak
2 *	5150.000	12.02	37.15	49.17	54.00	-4.83	AVG

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

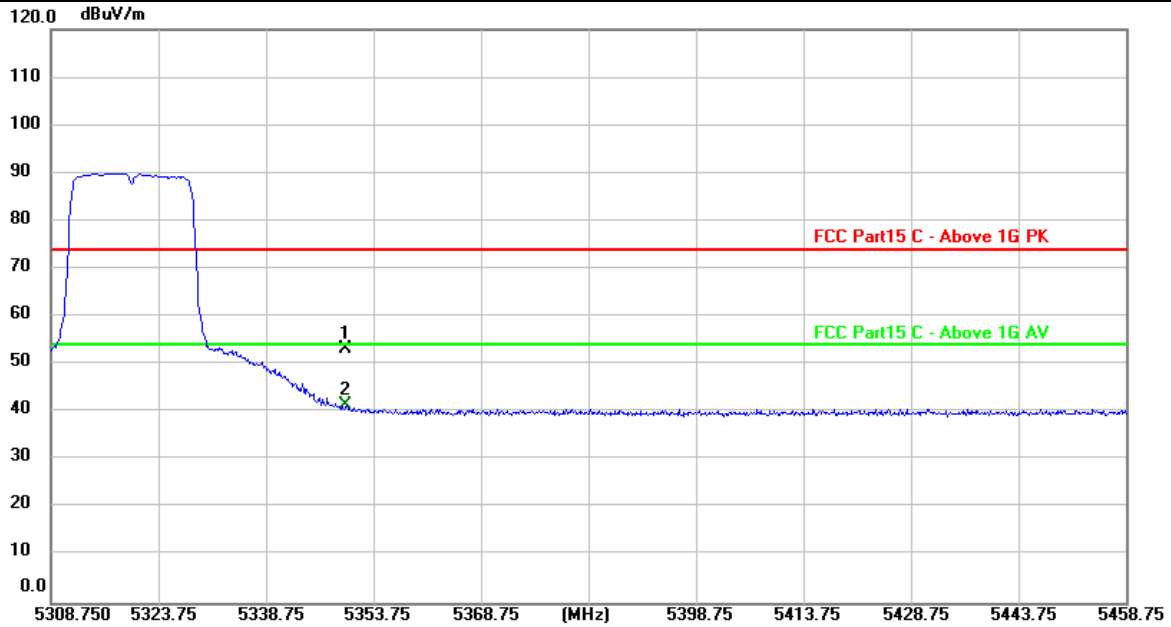

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	15.87	37.41	53.28	74.00	-20.72	peak
2 *	5350.000	4.01	37.41	41.42	54.00	-12.58	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

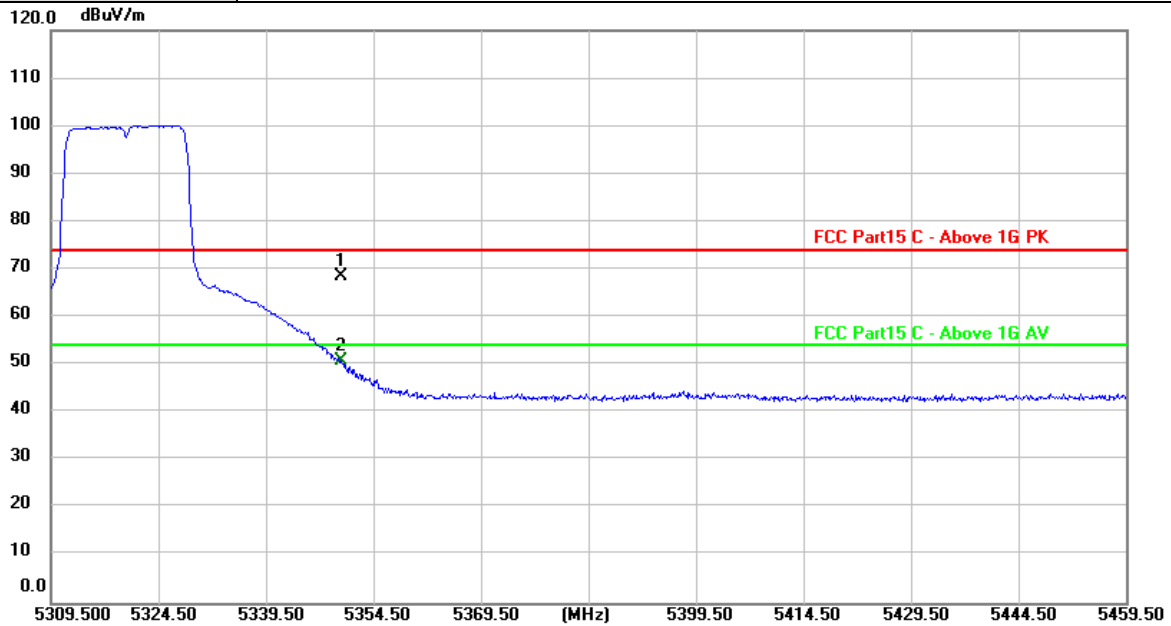

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	31.28	37.41	68.69	74.00	-5.31	peak
2 *	5350.000	13.35	37.41	50.76	54.00	-3.24	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value