

TEST REPORT

Product : Extreme Crosslander -Rechargeable
Radio Controlled Stunt Car

Trade mark : LEXIBOOK

Model/Type reference : RC49 RC50 (remote)

Serial Number : N/A

Report Number : EED32P80671501

FCC ID : UU8-RC49

Date of Issue : Jun. 28, 2023

Test Standards : 47 CFR Part 15 Subpart C

Test result : PASS

Prepared for:

Lexibook America

**C/O Pramex International 1251 Avenue of the Americas,3rd Fl.,New
York,10020,United States**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Frazer Li

Frazer Li

Reviewed by:

Tom Chen

Tom Chen

Approved by:

Aaron Ma

Aaron Ma

Date:

Jun. 28, 2023



Check No.: 3832100523

1 Version

Version No.	Date	Description
00	Jun. 28, 2023	Original

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15 Subpart C Section 15.249 (a)	ANSI C63.10-2013	PASS
Spurious Emissions	47 CFR Part 15 Subpart C Section 15.249 (a)/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.249(a)/15.205	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.215 (c)	ANSI C63.10-2013	PASS

Remark:

N/A: The product is power by battery.

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	7
4.4 DESCRIPTION OF SUPPORT UNITS	7
4.5 TEST LOCATION	7
4.6 DEVIATION FROM STANDARDS	7
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
5 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	11
6.1 ANTENNA REQUIREMENT	11
6.2 RADIATED SPURIOUS EMISSIONS	12
6.3 20dB BANDWIDTH	27
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	30
APPENDIX 2 PHOTOGRAPHS OF EUT	32

4 General Information

4.1 Client Information

Applicant:	Lexibook America
Address of Applicant:	C/O Pramex International 1251 Avenue of the Americas,3rd Fl.,New York,10020,United States
Manufacturer:	Lexibook America
Address of Manufacturer:	C/O Pramex International 1251 Avenue of the Americas,3rd Fl.,New York,10020,United States

4.2 General Description of EUT

Product Name:	Extreme Crosslander -Rechargeable Radio Controlled Stunt Car	
Model No.:	RC49 RC50 (remote)	
Trade mark:	LEXIBOOK	
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location	
Test Power Grade:	Default	
Test Software of EUT:	RF Test	
Operation Frequency:	2405MHz ~2475MHz	
Number of Channel:	33	
Modulation:	GFSK	
Antenna Type:	Internal Antenna	
Antenna Gain:	0.17dBi	
Power Supply:	Remote control:	DC 3.0V (2*1.5V*AAA)
Test Voltage:	DC 3.0V	
Sample Received Date:	May 10, 2023	
Sample tested Date:	May 10, 2023 to May 18, 2023	

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	11	2425	21	2452	31	2473
2	2406	12	2427	22	2453	32	2474
3	2407	13	2428	23	2454	33	2475
4	2408	14	2430	24	2456		
5	2409	15	2435	25	2459		
6	2410	16	2437	26	2462		
7	2411	17	2439	27	2469		
8	2414	18	2442	28	2470		
9	2418	19	2445	29	2471		
10	2422	20	2446	30	2472		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2405MHz ~2475MHz	Channel 1	Channel 17	Channel 33
		2405MHz	2439MHz	2475MHz

4.3 Test Environment and Mode

Operating Environment:	
Temperature:	22~25.0 ℃
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

4.4 Description of Support Units

The EUT has been tested independently.

4.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Other Information Requested by the Customer

None.

4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

5 Equipment List

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05/22/2022	05/21/2025
Receiver	R&S	ESCI7	100938-003	09/28/2022	09/27/2023
Spectrum Analyzer	R&S	FSV40	101200	07/29/2022	07/28/2023
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/22/2022	05/21/2025
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/15/2021	04/14/2024
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/23/2022	12/23/2023
Horn Antenna	A.H.SYSTEM S	SAS-574	374	05/29/2021	05/28/2024
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/15/2021	04/14/2024
Preamplifier	Agilent	11909A	12-1	03/28/2023	03/27/2024
Preamplifier	CD	PAP-1840-60	6041.6042	07/05/2022	07/04/2023
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	02-27-2023	02-26-2024
Spectrum Analyzer	Keysight	N9020B	MY57111112	02-21-2023	02-20-2024
Spectrum Analyzer	Keysight	N9030B	MY57140871	02-21-2023	02-20-2024
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-15-2021	04-14-2024
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-13-2023	04-12-2024
Preamplifier	EMCI	EMC001330	980563	03-28-2023	03-27-2024
Preamplifier	JS Tonscend	TAP-011858	AP21B806112	07-29-2022	07-28-2023
Communication test set	R&S	CMW500	102898	12-23-2022	12-22-2023
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-11-2023	04-10-2024
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2021	01-08-2024
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	Please see Internal photos
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.17dBi.	

6.2 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15C Section 15.249 and 15.209 and 15.205

Test Method: ANSI C63.10

Test Site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10kHz	Average

Limit:
(Spurious Emissions)

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Limit:
(Field strength of the fundamental signal)

Frequency	Limit (dBμV/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

Test Setup:

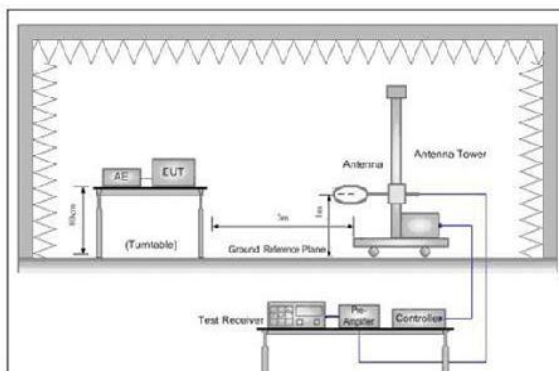


Figure 1. Below 30MHz

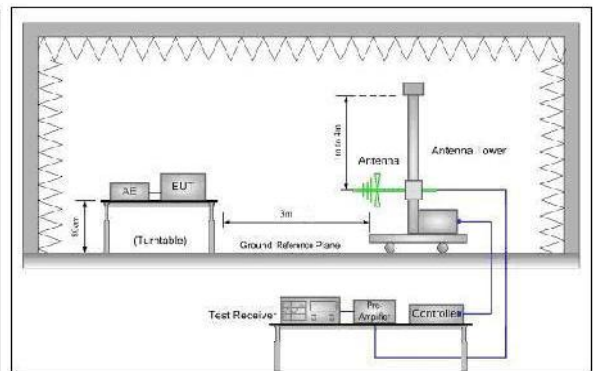


Figure 2. 30MHz to 1GHz

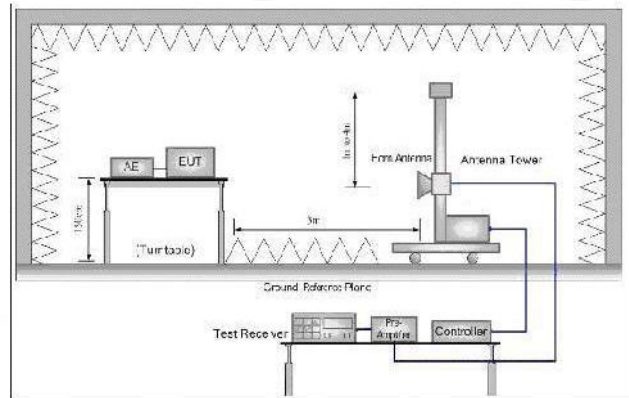


Figure 3. Above 1GHz

Test Procedure:

Below 1GHz test procedure as below:

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 metre to 1.5 metre (Above 18GHz the distance is 1 meter and table is 1.5 metre).

Test the EUT in the lowest channel, middle channel, the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.

Repeat above procedures until all frequencies measured were complete.

Transmitting mode

Test Mode:

Test Results:

Pass

Field Strength Of The Fundamental Signal:

Test mode: Transmitting (lowest channel)								
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
2405.0558	13.83	74.63	88.46	114.00	-25.54	Pass	H	PK
2405.0838	13.83	73.83	87.66	94.00	-6.34	Pass	H	AV
2405.0558	13.83	71.52	85.35	114.00	-28.65	Pass	V	PK
2405.1958	13.83	70.88	84.71	94.00	-9.29	Pass	V	AV


Test mode: Transmitting (middle channel)								
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
2400.0308	4.80	76.12	80.92	114.00	-33.08	Pass	H	PK
2400.2360	4.80	75.80	80.60	94.00	-13.40	Pass	H	AV
2400.1206	4.80	73.22	78.02	114.00	-35.98	Pass	V	PK
2400.0687	4.80	72.18	76.98	94.00	-17.02	Pass	V	AV

Test mode: Transmitting (highest channel)								
Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
2475.0608	6.49	84.27	90.76	114.00	-23.24	Pass	H	PK
2475.5249	6.50	82.98	89.48	94.00	-4.52	Pass	H	AV
2475.4089	6.50	78.80	85.30	114.00	28.70	Pass	V	PK
2475.3508	6.50	78.10	84.60	94.00	-9.40	Pass	V	AV

Spurious Emissions:


30MHz-1GHz:

Test mode:	Transmitting (lowest channel)	Vertical
------------	-------------------------------	----------

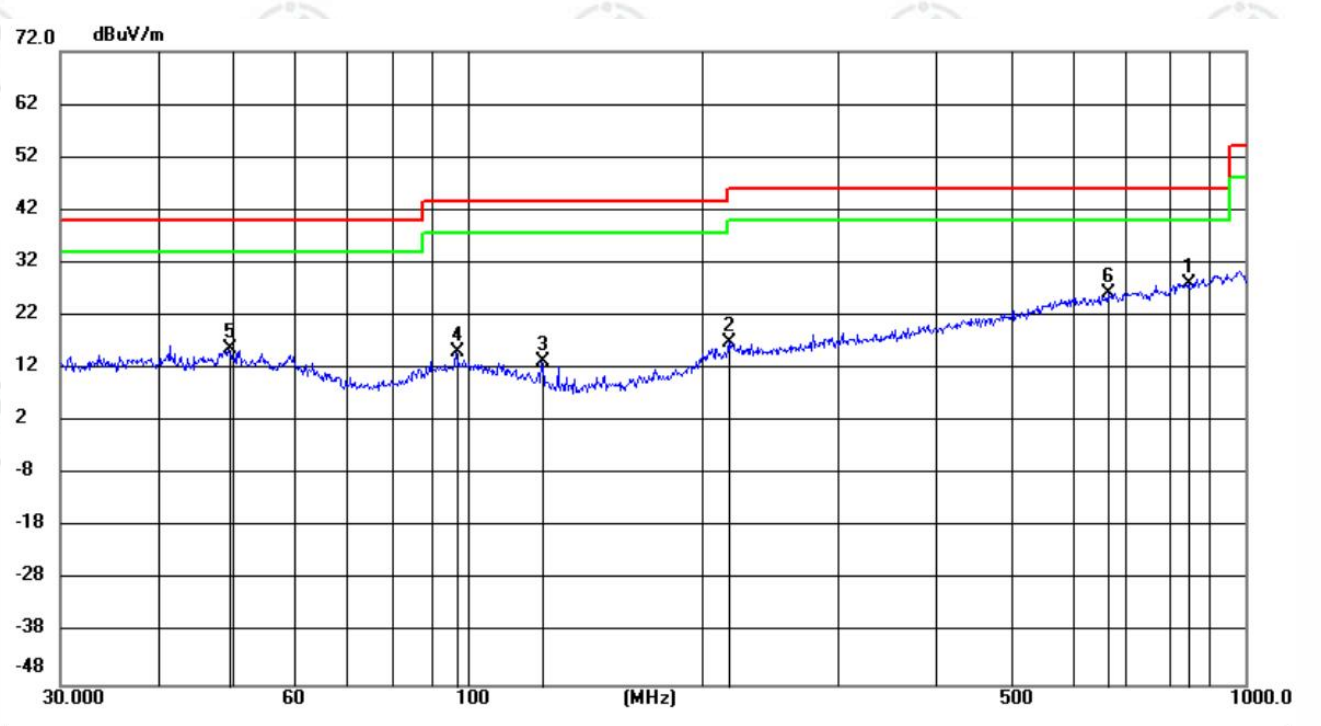


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	847.0161	0.82	27.34	28.16	46.00	-17.84	peak			
2		217.5443	2.69	14.39	17.08	46.00	-28.92	peak			
3		124.9627	3.02	10.44	13.46	43.50	-30.04	peak			
4		97.0637	1.40	13.65	15.05	43.50	-28.45	peak			
5		49.4720	1.52	14.28	15.80	40.00	-24.20	peak			
6		667.5568	1.73	24.52	26.25	46.00	-19.75	peak			

Test mode:	Transmitting (lowest channel)	Horizontal
------------	-------------------------------	------------

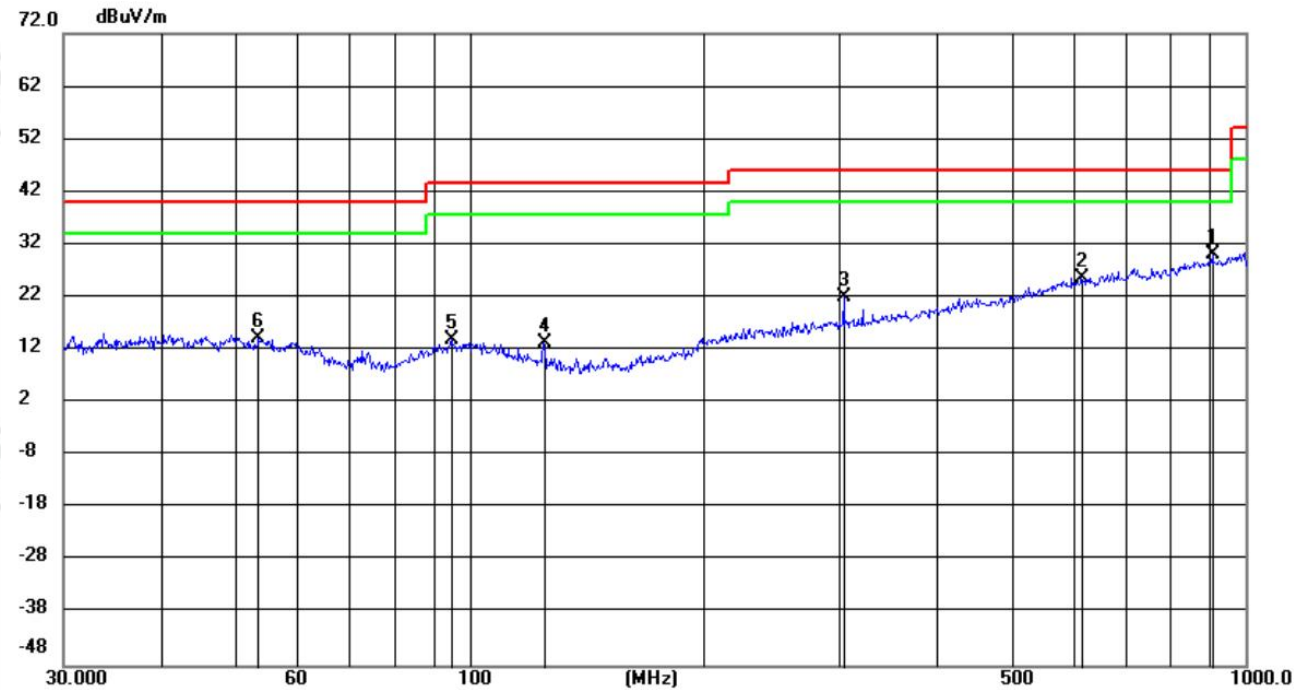


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	907.9139	1.72	28.46	30.18	46.00	-15.82	peak	199	219
2		614.4296	1.56	24.14	25.70	46.00	-20.30	peak	199	352
3		304.1830	4.59	17.34	21.93	46.00	-24.07	peak	100	360
4		124.9846	2.93	10.43	13.36	43.50	-30.14	peak	100	188
5		94.9430	0.53	13.35	13.88	43.50	-29.62	peak	199	352
6		53.5052	0.16	14.02	14.18	40.00	-25.82	peak	100	359

Test mode:	Transmitting (middle channel)	Vertical
------------	-------------------------------	----------

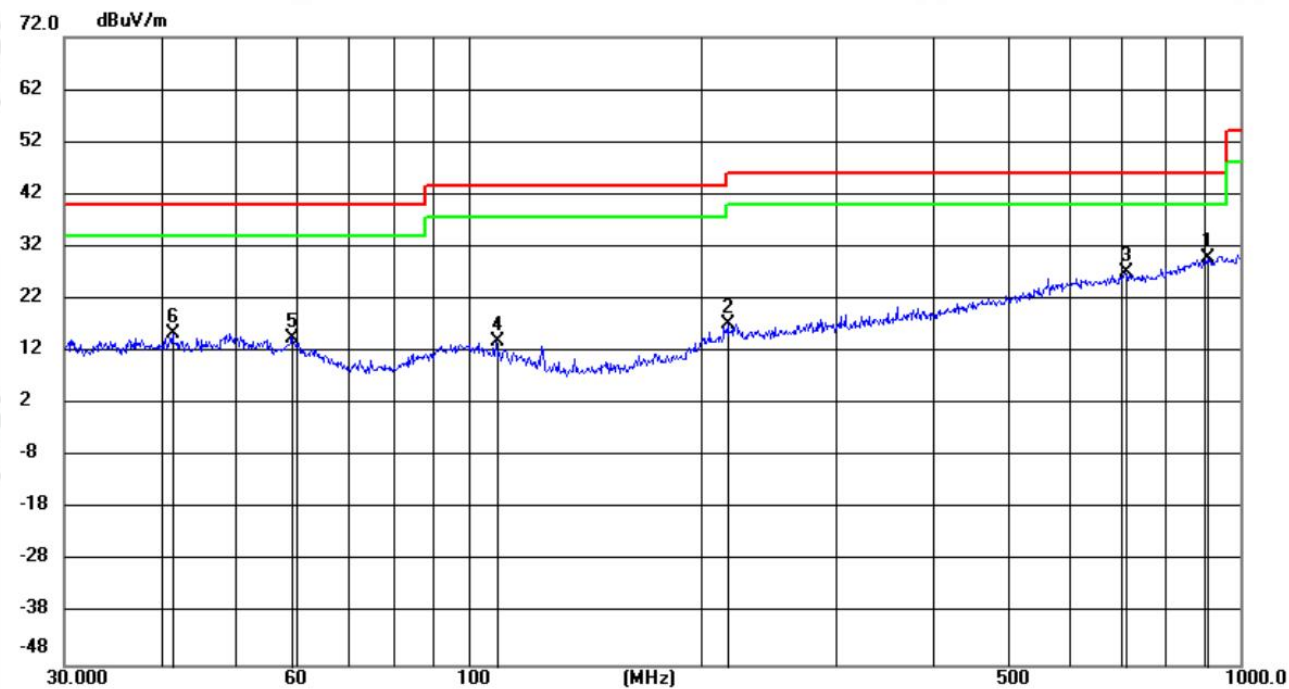


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	908.8695	1.49	28.47	29.96	46.00	-16.04	peak	200	188	
2		217.0490	2.91	14.37	17.28	46.00	-28.72	peak	200	17	
3		710.8005	2.36	24.93	27.29	46.00	-18.71	peak	100	158	
4		108.6851	1.19	12.81	14.00	43.50	-29.50	peak	100	352	
5		59.1909	1.08	13.62	14.70	40.00	-25.30	peak	100	291	
6		41.5013	0.88	14.49	15.37	40.00	-24.63	peak	100	352	

Test mode:	Transmitting (middle channel)	Horizontal
------------	-------------------------------	------------

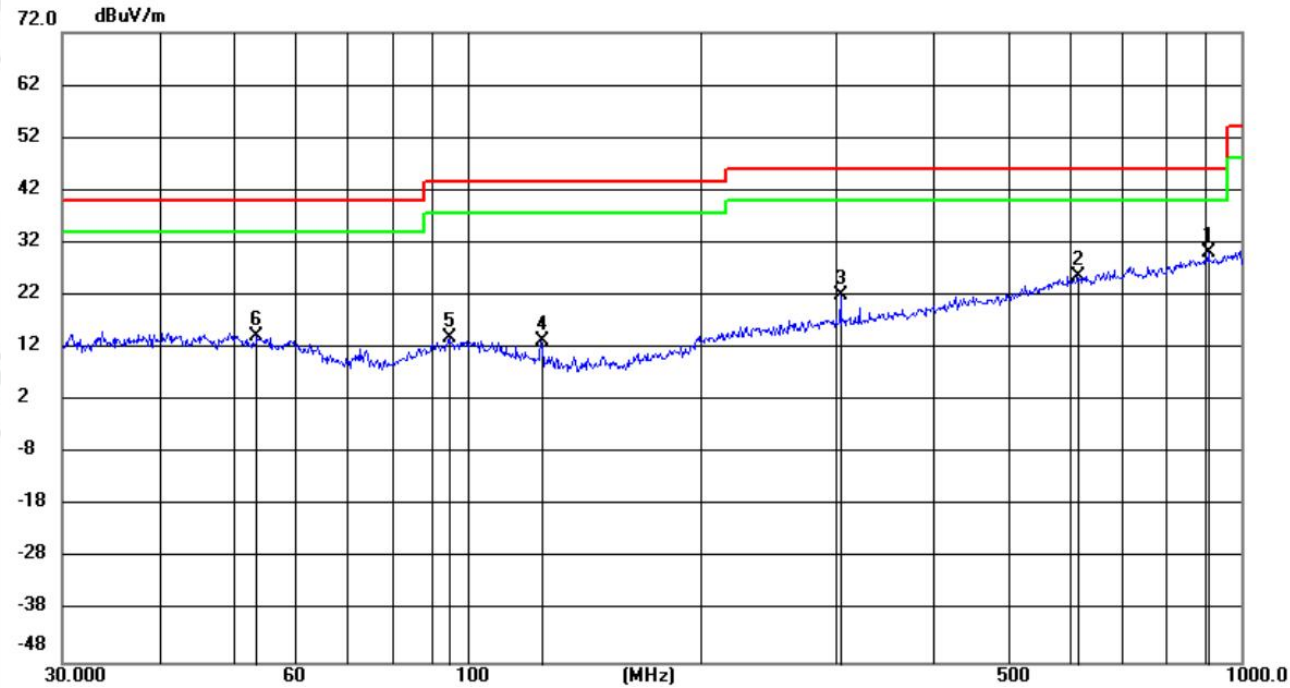


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	907.9139	1.72	28.46	30.18	46.00	-15.82	peak	199	219	
2		614.4296	1.56	24.14	25.70	46.00	-20.30	peak	199	352	
3		304.1830	4.59	17.34	21.93	46.00	-24.07	peak	100	360	
4		124.9846	2.93	10.43	13.36	43.50	-30.14	peak	100	188	
5		94.9430	0.53	13.35	13.88	43.50	-29.62	peak	199	352	
6		53.5052	0.16	14.02	14.18	40.00	-25.82	peak	100	359	

Test mode:	Transmitting (highest channel)	Vertical
------------	--------------------------------	----------

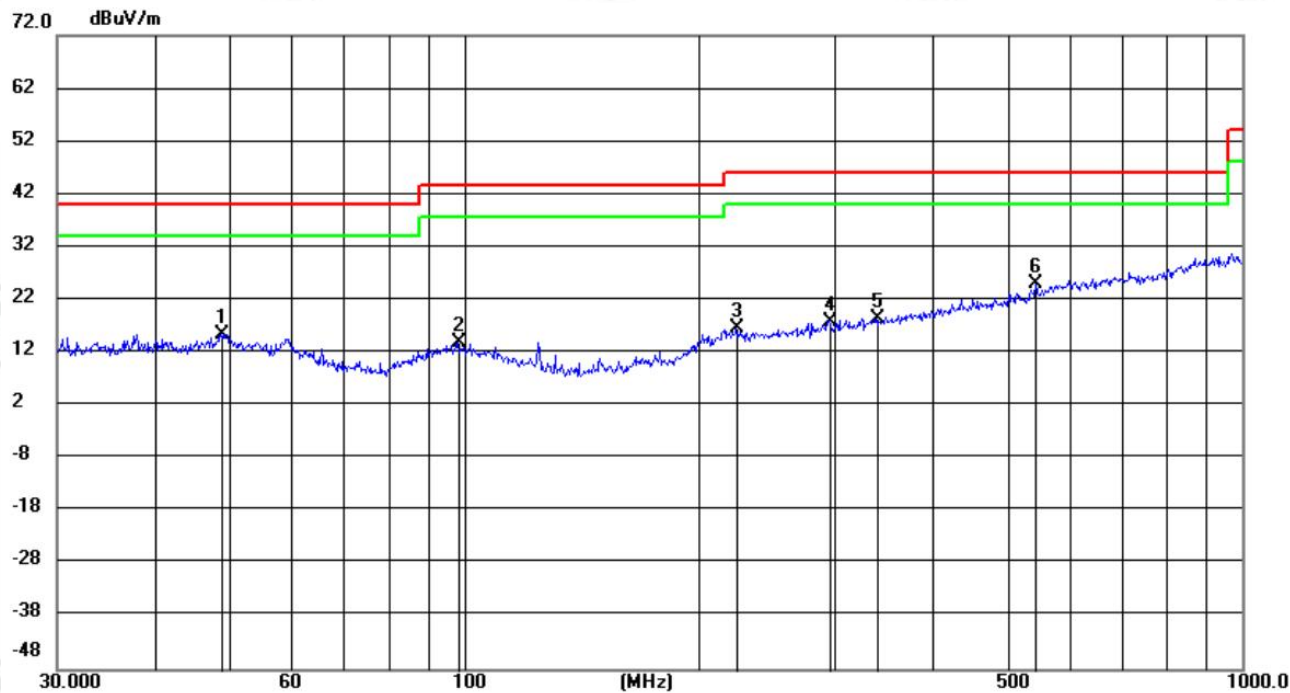

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		48.7744	1.27	14.30	15.57	40.00	-24.43	peak	100	199
2		98.3658	0.03	13.83	13.86	43.50	-29.64	peak	200	249
3		223.9296	1.90	14.61	16.51	46.00	-29.49	peak	100	352
4		294.7848	0.93	17.07	18.00	46.00	-28.00	peak	100	23
5		338.4594	0.46	18.07	18.53	46.00	-27.47	peak	200	320
6	*	543.2742	2.54	22.62	25.16	46.00	-20.84	peak	200	299

Test mode:	Transmitting(highest channel)	Horizontal
------------	-------------------------------	------------

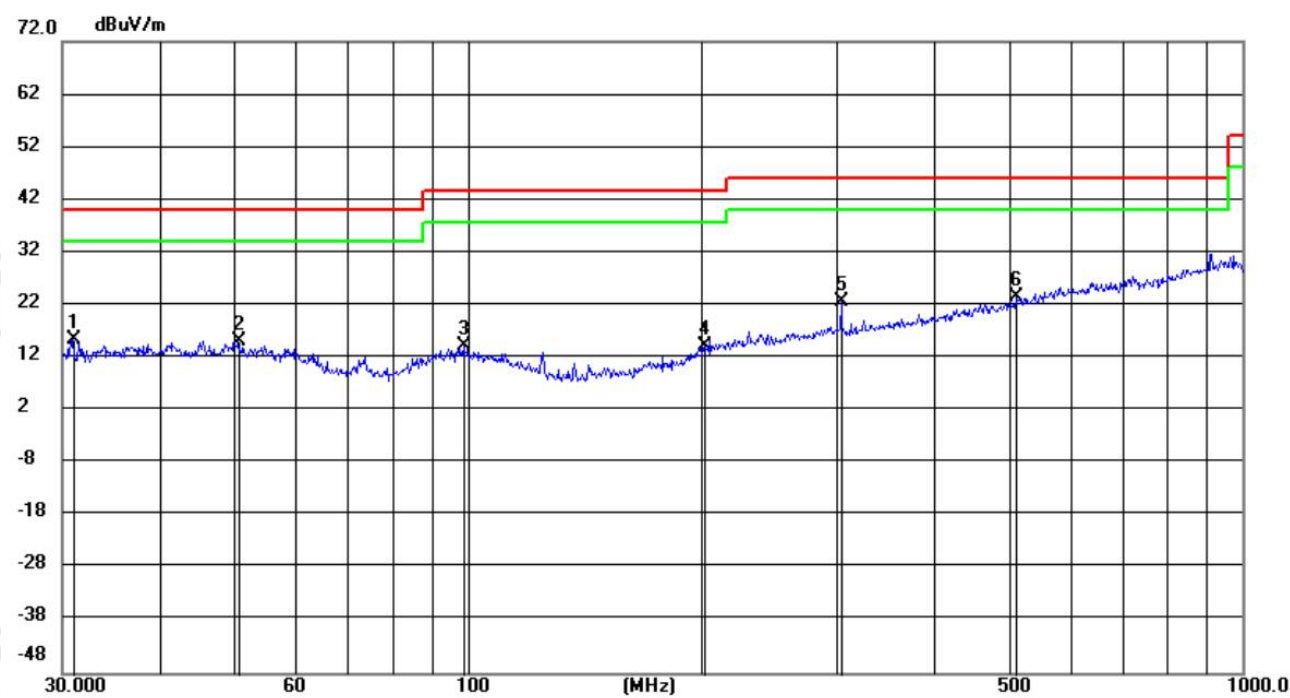

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		30.9835	2.60	12.94	15.54	40.00	-24.46	peak	199	117
2		50.6392	0.82	14.23	15.05	40.00	-24.95	peak	100	208
3		99.0928	0.21	13.92	14.13	43.50	-29.37	peak	100	238
4		202.4906	0.30	13.87	14.17	43.50	-29.33	peak	199	352
5		304.2363	5.26	17.34	22.60	46.00	-23.40	peak	199	352
6	*	511.2074	1.64	21.82	23.46	46.00	-22.54	peak	100	117

Above 1GHz:

Test mode:			Transmitting (lowest channel)						
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1259.826	0.96	39.10	40.06	74.00	33.94	PASS	Horizontal	PK
2	1663.4663	2.70	38.46	41.16	74.00	32.84	PASS	Horizontal	PK
3	4811.1207	-16.23	63.60	47.37	74.00	26.63	PASS	Horizontal	PK
4	7215.281	-11.81	52.47	40.66	74.00	33.34	PASS	Horizontal	PK
5	9130.4087	-8.45	50.13	41.68	74.00	32.32	PASS	Horizontal	PK
6	12574.6383	-4.29	48.34	44.05	74.00	29.95	PASS	Horizontal	PK
7	1192.4192	0.80	39.71	40.51	74.00	33.49	PASS	Vertical	PK
8	1963.0963	4.36	37.41	41.77	74.00	32.23	PASS	Vertical	PK
9	5042.1361	-15.76	51.92	36.16	74.00	37.84	PASS	Vertical	PK
10	7215.281	-11.81	59.87	48.06	74.00	25.94	PASS	Vertical	PK
11	9620.4414	-7.41	48.74	41.33	74.00	32.67	PASS	Vertical	PK
12	12523.6349	-4.66	48.38	43.72	74.00	30.28	PASS	Vertical	PK


Test mode:			Transmitting (middle channel)						
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1317.0317	1.12	39.77	40.89	74.00	33.11	PASS	Horizontal	PK
2	1796.4796	3.27	38.62	41.89	74.00	32.11	PASS	Horizontal	PK
3	4881.1254	-16.21	67.41	51.20	74.00	22.80	PASS	Horizontal	PK
4	7323.2882	-11.65	51.79	40.14	74.00	33.86	PASS	Horizontal	PK
5	9222.4148	-7.89	48.68	40.79	74.00	33.21	PASS	Horizontal	PK
6	14383.7589	0.95	45.33	46.28	74.00	27.72	PASS	Horizontal	PK
7	1269.0269	0.98	39.38	40.36	74.00	33.64	PASS	Vertical	PK
8	1844.0844	3.61	38.62	42.23	74.00	31.77	PASS	Vertical	PK
9	4882.1255	-16.21	62.62	46.41	74.00	27.59	PASS	Vertical	PK
10	6773.2516	-12.43	50.91	38.48	74.00	35.52	PASS	Vertical	PK
11	9201.4134	-7.88	49.54	41.66	74.00	32.34	PASS	Vertical	PK
12	11703.5802	-6.25	49.64	43.39	74.00	30.61	PASS	Vertical	PK

Test mode:			Transmitting (highest channel)						
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1446.0446	1.43	39.57	41.00	74.00	33.00	PASS	Horizontal	PK
2	1977.8978	4.43	38.28	42.71	74.00	31.29	PASS	Horizontal	PK
3	4951.1301	-16.01	60.76	44.75	74.00	29.25	PASS	Horizontal	PK
4	7084.2723	-11.62	50.21	38.59	74.00	35.41	PASS	Horizontal	PK
5	11911.5941	-5.76	49.06	43.30	74.00	30.70	PASS	Horizontal	PK
6	14347.7565	0.36	45.36	45.72	74.00	28.28	PASS	Horizontal	PK
7	1528.8529	1.71	38.18	39.89	74.00	34.11	PASS	Vertical	PK
8	1998.8999	4.54	38.04	42.58	74.00	31.42	PASS	Vertical	PK
9	4951.1301	-16.01	67.26	51.25	74.00	22.75	PASS	Vertical	PK
10	7427.2952	-11.39	57.59	46.20	74.00	27.80	PASS	Vertical	PK
11	11718.5812	-6.23	48.59	42.36	74.00	31.64	PASS	Vertical	PK
12	16246.8831	1.29	46.66	47.95	74.00	26.05	PASS	Vertical	PK

Restricted bands:

EUT_Name	Extreme Crosslander -Rechargeable Radio Controlled Stunt Car	Test_Model	RC49 RC50 (remote)
Test_Mode	Transmitting (lowest channel)	Test_Frequency	2405MHz
Tset_Engineer	yusongwei	Test_Date	2023/05/12
Remark			

Test Graph

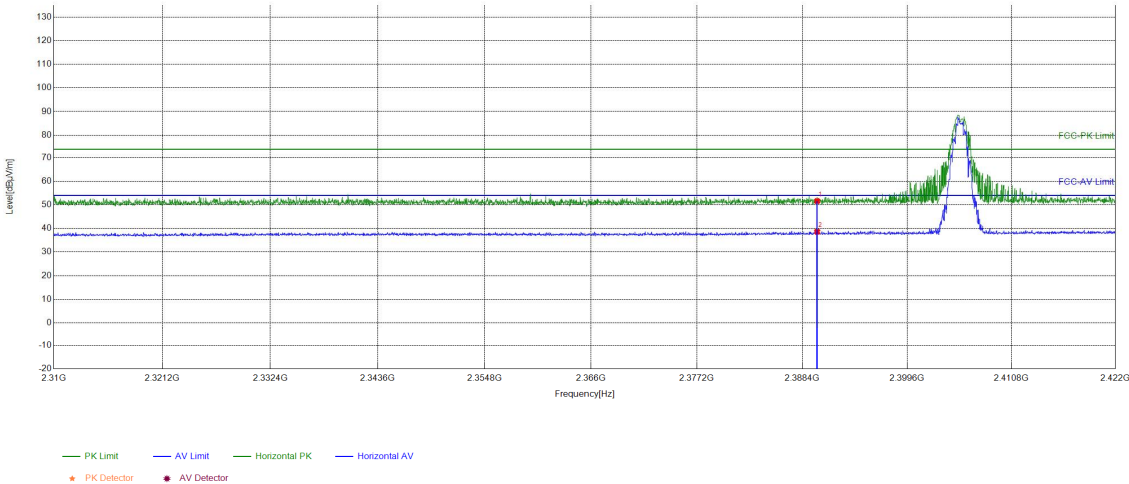


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	13.75	37.86	51.61	74.00	22.39	PASS	Horizontal	PK
2	2390	13.75	24.88	38.63	54.00	15.37	PASS	Horizontal	AV

EUT_Name	Extreme Crosslander -Rechargeable Radio Controlled Stunt Car	Test_Model	RC49 RC50 (remote)
Test_Mode	Transmitting (lowest channel)	Test_Frequency	2405MHz
Tset_Engineer	yusongwei	Test_Date	2023/05/12
Remark			


Test Graph

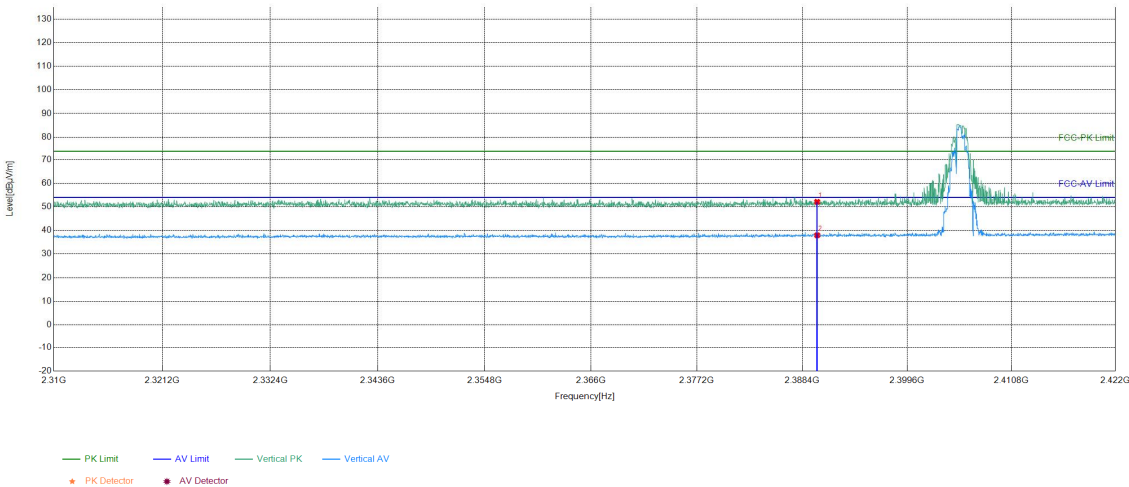

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	13.75	38.36	52.11	74.00	21.89	PASS	Vertical	PK
2	2390	13.75	24.20	37.95	54.00	16.05	PASS	Vertical	AV

EUT_Name	Extreme Crosslander -Rechargeable Radio Controlled Stunt Car	Test_Model	RC49 RC50 (remote)
Test_Mode	Transmitting (highest channel)	Test_Frequency	2475MHz
Tset_Engineer	yusongwei	Test_Date	2023/05/12
Remark			

Test Graph

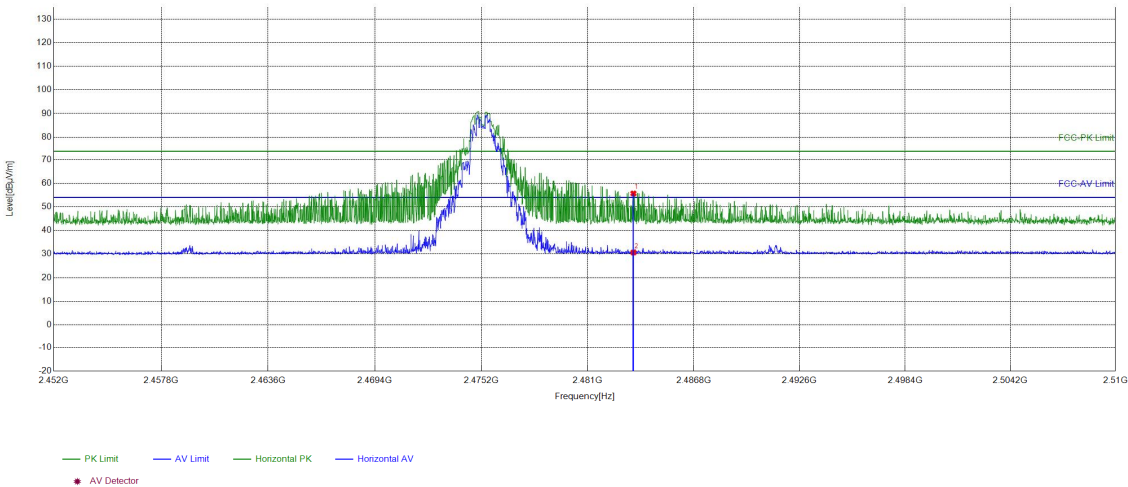


Suspected List

NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	49.12	55.69	74.00	18.31	PASS	Horizont	PK
2	2483.5	6.57	24.07	30.64	54.00	23.36	PASS	Horizont	AV

EUT_Name	Extreme Crosslander -Rechargeable Radio Controlled Stunt Car	Test_Model	RC49 RC50 (remote)
Test_Mode	Transmitting (highest channel)	Test_Frequency	2475MHz
Tset_Engineer	yusongwei	Test_Date	2023/05/12
Remark			

Test Graph

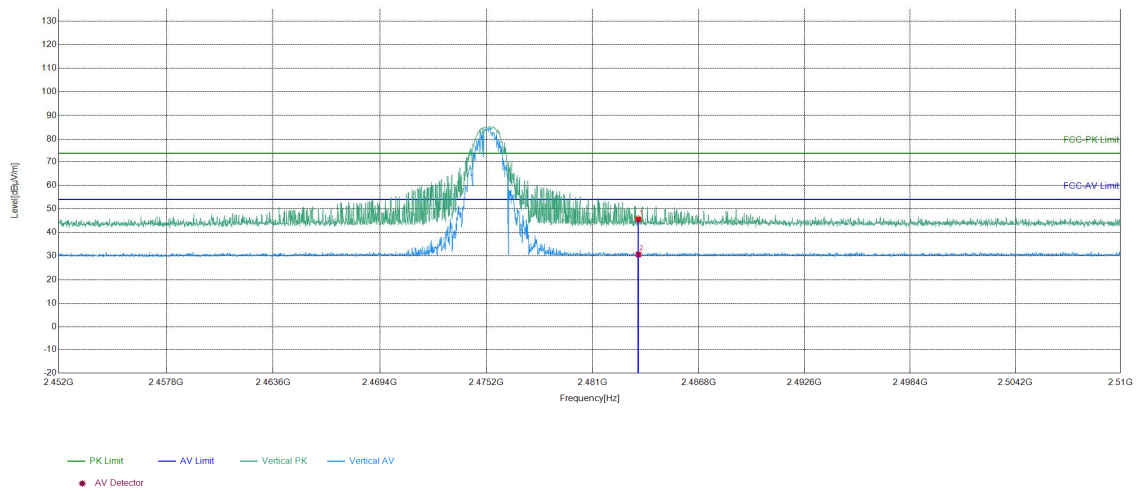

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	6.57	39.01	45.58	74.00	28.42	PASS	Vertical	PK
2	2483.5	6.57	24.07	30.64	54.00	23.36	PASS	Vertical	AV

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Correct Factor
 Correct Factor = Antenna Factor + Cable Factor - Preamplifier Factor
- Scan from 9kHz to 25GHz, The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

6.3 20dB Bandwidth


Test Requirement:

47 CFR Part 15C Section 15.215

Test Method:

ANSI C63.10: 2013

Test Setup:

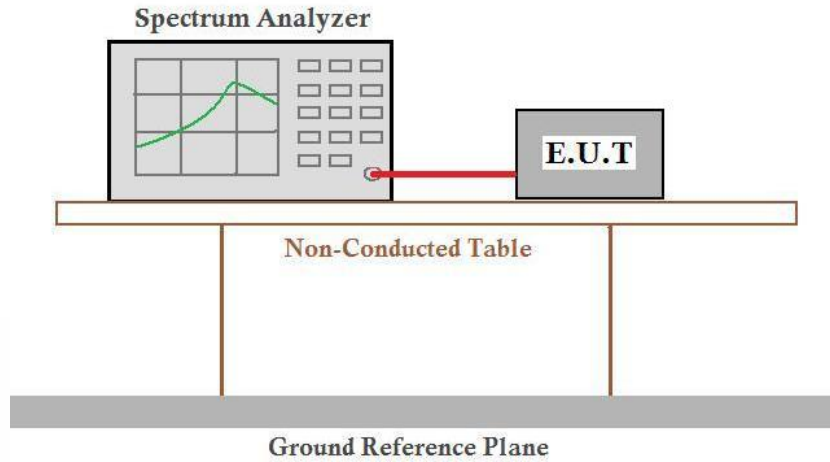

Test Procedure:

Remark: Offset=Cable loss+ attenuation factor.

1) The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

2) Set to the maximum power setting and enable the EUT transmit continuously.

3) Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a test channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$;

Sweep = auto; Detector function = peak; Trace = max hold.

4) Measure and record the results in the test report.

Limit:

N/A

Test Mode:

Transmitter mode

Test Results:

Pass


Measurement Data

Test Channel	20dB bandwidth (MHz)	Results
Lowest	1.2069	Pass
Middle	1.2156	Pass
Highest	1.2243	Pass

Test plot as follows:

Test channel:


Lowest

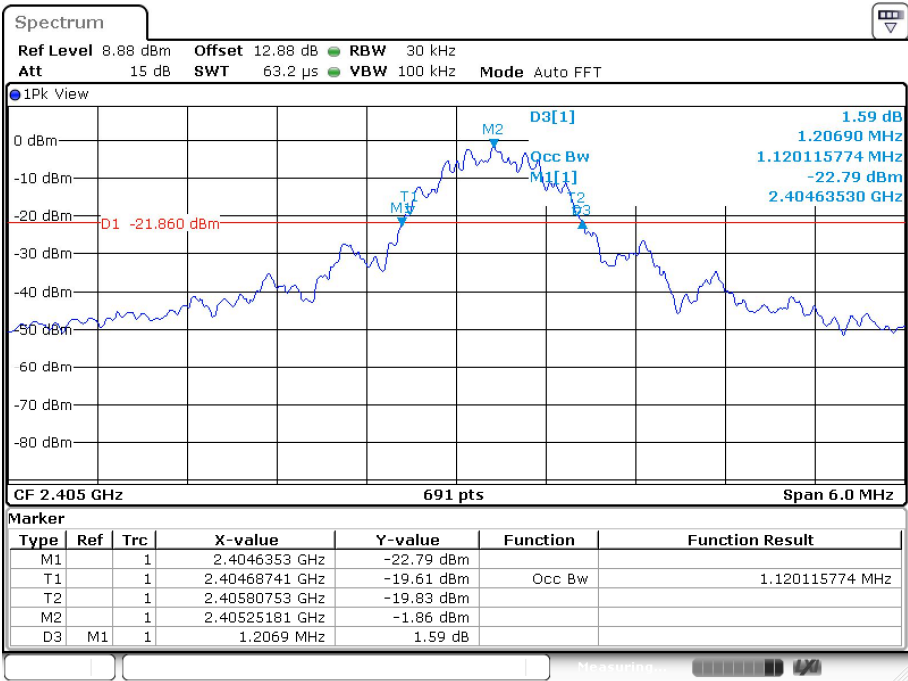

Date: 12.MAY.2023 16:02:04


Test channel:

Middle

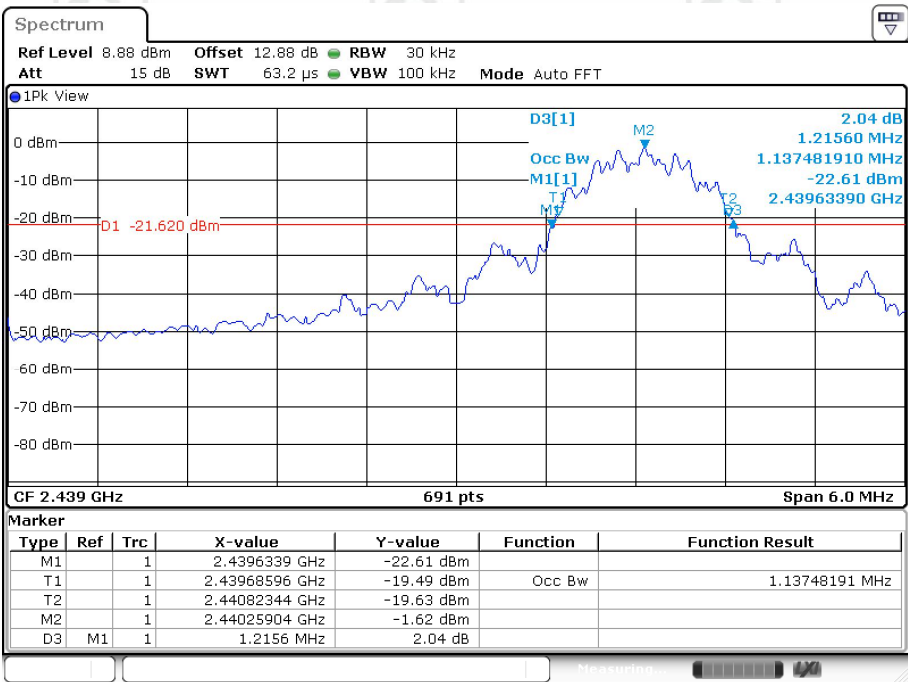

Date: 12.MAY.2023 16:03:00

Test channel:	Highest
---------------	---------

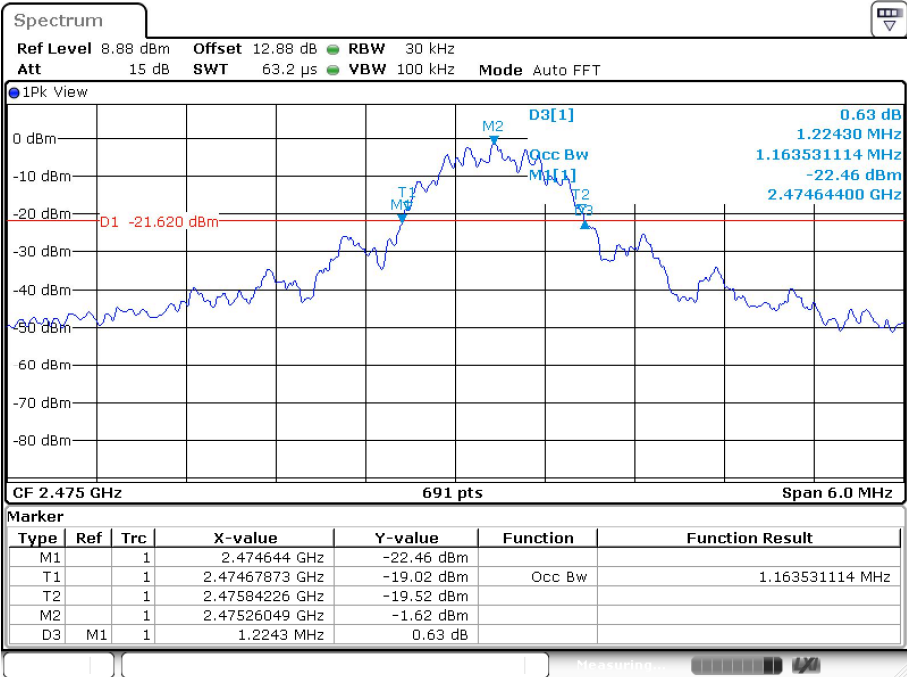

Date: 12.MAY.2023 16:03:44