



REPORT No.: SZ15100039W02

FCC RF TEST REPORT

APPLICANT : Shenzhen Medica Technology Development Co., Ltd

PRODUCT NAME : Nox Smart Sleep Light

MODEL NAME : N101

TRADE NAME : Sleepace

BRAND NAME : Sleepace

FCC ID : 2ADION100

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2015-12-28



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 AC ADAPTER DESCRIPTION	5
1.3 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.3.1 IDENTIFICATION OF ALL USED EUTs	6
1.4 TEST STANDARDS AND RESULTS	6
1.4.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST RESULT	8
2.3 BANDWIDTH	9
2.3.1 REQUIREMENT	9
2.3.2 TEST DESCRIPTION	9
2.3.3 TEST RESULT	9
2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE	14
2.4.1 REQUIREMENT	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST RESULT	14
2.5 POWER SPECTRAL DENSITY (PSD)	21
2.5.1 REQUIREMENT	21
2.5.2 TEST DESCRIPTION	21
2.5.3 TEST RESULT	22
2.6 RESTRICTED FREQUENCY BANDS	26
2.6.1 REQUIREMENT	26
2.6.2 TEST DESCRIPTION	26



REPORT No.: SZ15100039W02

2.6.3	TEST RESULT.....	27
2.7	CONDUCTED EMISSION.....	33
2.7.1	REQUIREMENT.....	33
2.7.2	TEST DESCRIPTION	33
2.8	RADIATED EMISSION	36
2.8.1	REQUIREMENT.....	36
2.8.2	TEST DESCRIPTION	37
2.8.3	TEST RESULT.....	39
ANNEX A GENERAL INFORMATION.....		46

Change History		
Issue	Date	Reason for change
1.0	2015-12-28	First edition



REPORT No.: SZ15100039W02

TEST REPORT DECLARATION

Applicant	Shenzhen Medica Technology Development Co., Ltd
Applicant Address	2F Building A, Tongfang Information Harbor, No. 11, East Langshan Road, Nanshan District, Shenzhen, P.R. China
Manufacturer	Shenzhen Medica Technology Development Co., Ltd
Manufacturer Address	2F Building A, Tongfang Information Harbor, No. 11, East Langshan Road, Nanshan District, Shenzhen, P.R. China
Product Name	Nox Smart Sleep Light
Model Name	N101
Brand Name	Sleepace
HW Version	V1.3
SW Version	V2.82
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-11-25 to 2015-12-10
Test Result	PASS

Tested by : Zou Jian
Zou Jian (Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun (RF Manager)

Approved by : Zeng Dexin
Zeng Dexin (Chief Engineer)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Shenzhen Medica Technology Development Co., Ltd
Address:	2F Building A, Tongfang Information Harbor, No. 11, East Langshan Road, Nanshan District, Shenzhen, P.R. China

1.2 AC Adapter Description

AC adapter	
Brand Name:	AQUILSTAR
Model No.:	ASSA53A-120150
Rated Input:	~ 100-240V, 50/60Hz, 600mA
Rated Output:	≡ 12V, 1500mA

1.3 Equipment under Test (EUT) Description

Brand Name:	Sleepace
Trade Name:	Sleepace
Model Name:	N101
Frequency Range:	802.11b/g: 2.412GHz - 2.462GHz
Channel Number:	802.11b/g: 11
Modulation Type:	DSSS, OFDM
Antenna Type:	FPCB Antenna
Antenna Gain:	0dBi
Power setting of EUT	b:2 g:2

NOTE1:The EUT is a Nox Smart Sleep Light, it contains WIFI operating at 2.4GHz ISM; it supports 802.11b, 802.11g and they are all tested in this report.

NOTE2:For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

NOTE3:The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.



1.3.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V1.3	V2.82

1.4 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and the worst configure results are as below:

No.	Section	Description	Worst configure (data rate)	Test Date	Result
1	15.203	Antenna Requirement	N.A	N.A	<u>PASS</u>
2	15.247(b)	Peak Output Power	1M/6M	Dec 02, 2015	<u>PASS</u>
3	15.247(a)	Bandwidth	1M/6M	Dec 02, 2015	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	1M/6M	Dec 02, 2015	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	1M/6M	Dec 09, 2015	<u>PASS</u>
6	15.209 ,15.247(d)	Radiated Emission	1M/6M	Dec 09, 2015	<u>PASS</u>
7	15.207	Conducted Emission	1M/6M	Dec 09, 2015	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	1M/6M	Dec 02, 2015	<u>PASS</u>

Note1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note2: We used a RF cable with a SMA-Female connector for conduct test and the cable loss has been calculated in the test result.

1.4.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

Antenna Type	Antenna Gain	Antenna connector
FPCB	0dBi	ipex

The EUT have two antenna, only the antenna which the antenna type is FPCB work.

2.2 Maximum conducted (average) Output Power


2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test Setup:

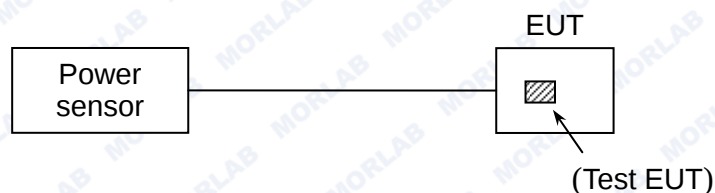

The EUT (Equipment under the test) which is coupled to the Power sensor, the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power sensor.

B. Equipments List:

Please reference ANNEX A(1.4).



2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak and average power of the EUT. During the test, the EUT configured in continuously transmitted state(the duty cycle $\geq 98\%$).

2.2.3.1 802.11b Test Mode

Peak Power:

Channel	Frequency (MHz)	Maximum Peak Output Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	16.47	0.04436	30	1	PASS
6	2437	16.35	0.04315			PASS
11	2462	16.03	0.04009			PASS

Average Power:

Channel	Frequency (MHz)	Maximum average Output Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	13.18	0.0208	30	1	PASS
6	2437	13.21	0.0209			PASS
11	2462	12.89	0.0195			PASS

2.2.3.2 802.11g Test mode

Peak Power:

Channel	Frequency (MHz)	Measured Peak Output Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.17	0.01309	30	1	PASS
6	2437	11.21	0.01321			PASS
11	2462	10.86	0.01219			PASS

Average Power:

Channel	Frequency (MHz)	Maximum average Output Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	8.24	0.0067	30	1	PASS
6	2437	8.32	0.0068			PASS
11	2462	8.07	0.0064			PASS


2.3 Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

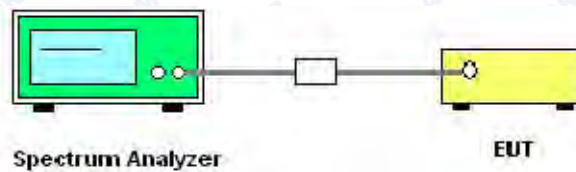

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the EUT.




REPORT No.: SZ15100039W02

2.3.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	10.081	≥ 500	PASS
6	2437	9.782	≥ 500	PASS
11	2462	9.580	≥ 500	PASS


B. Test Plots

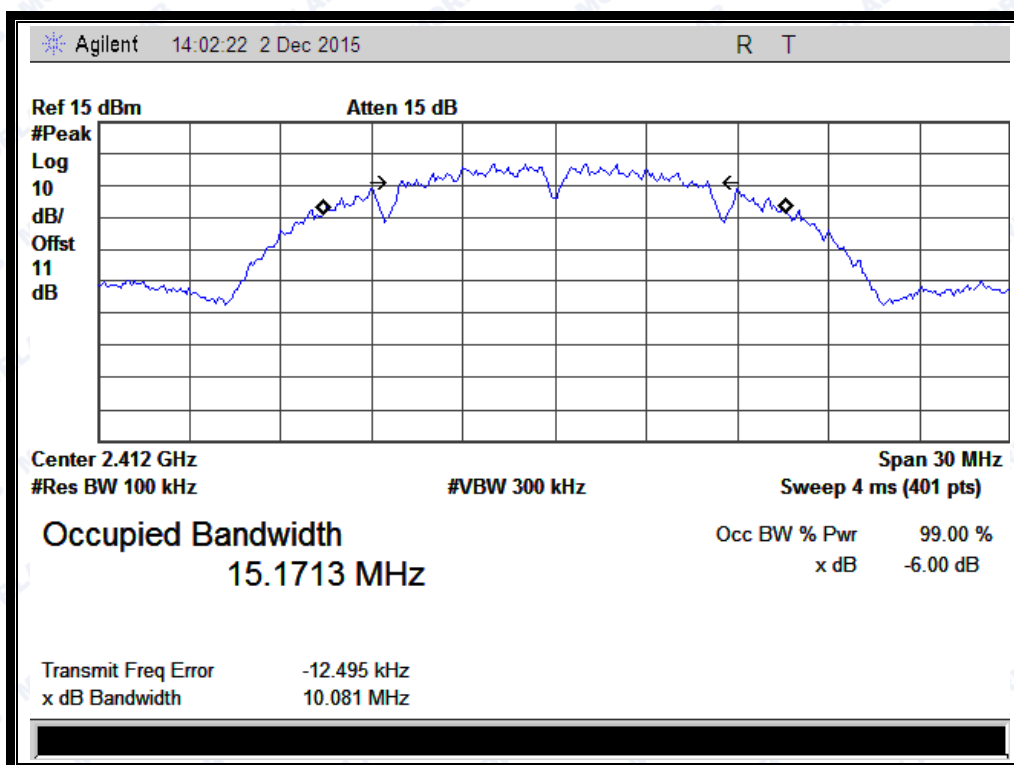


(Channel 1: 2412MHz @ 802.11b)



REPORT No.: SZ15100039W02

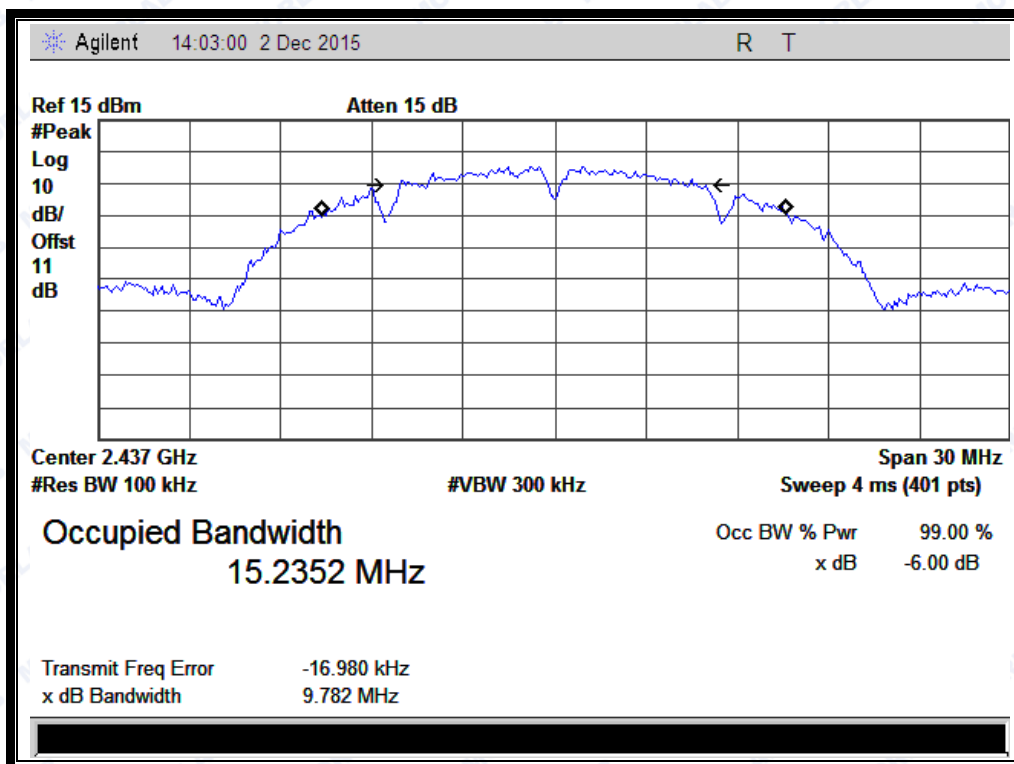

(Channel 6: 2437 MHz @ 802.11b)

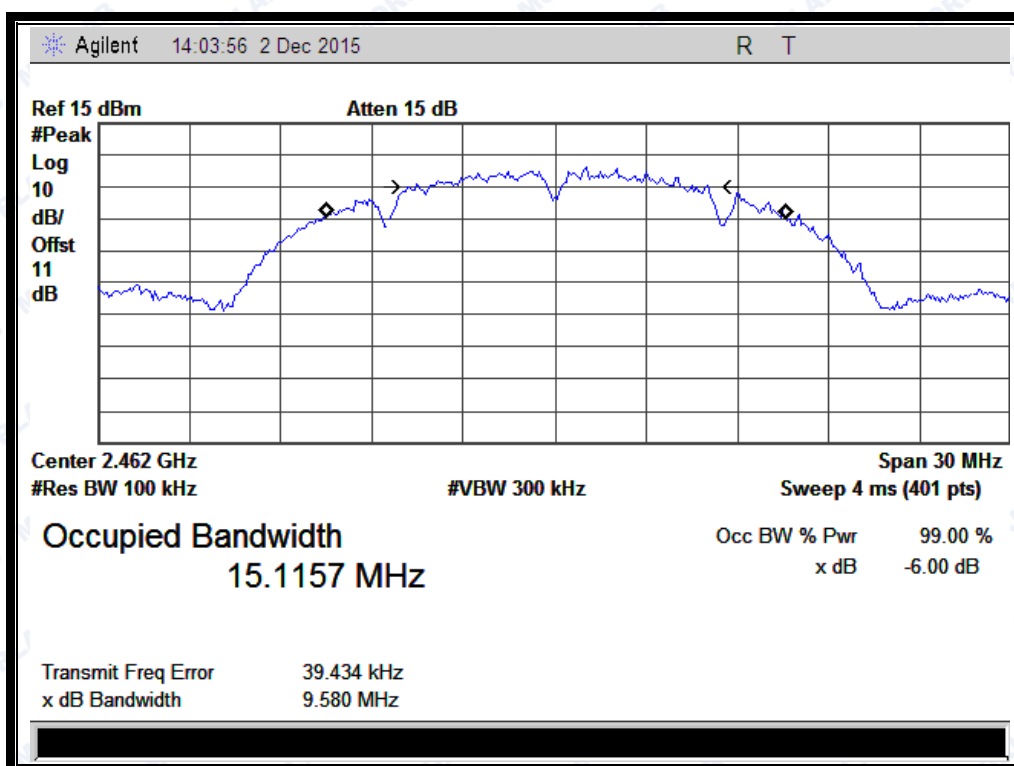

(Channel 11: 2462MHz @ 802.11b)




REPORT No.: SZ15100039W02

2.3.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.395	≥500	PASS
6	2437	16.408	≥500	PASS
11	2462	16.377	≥500	PASS


B. Test Plots:

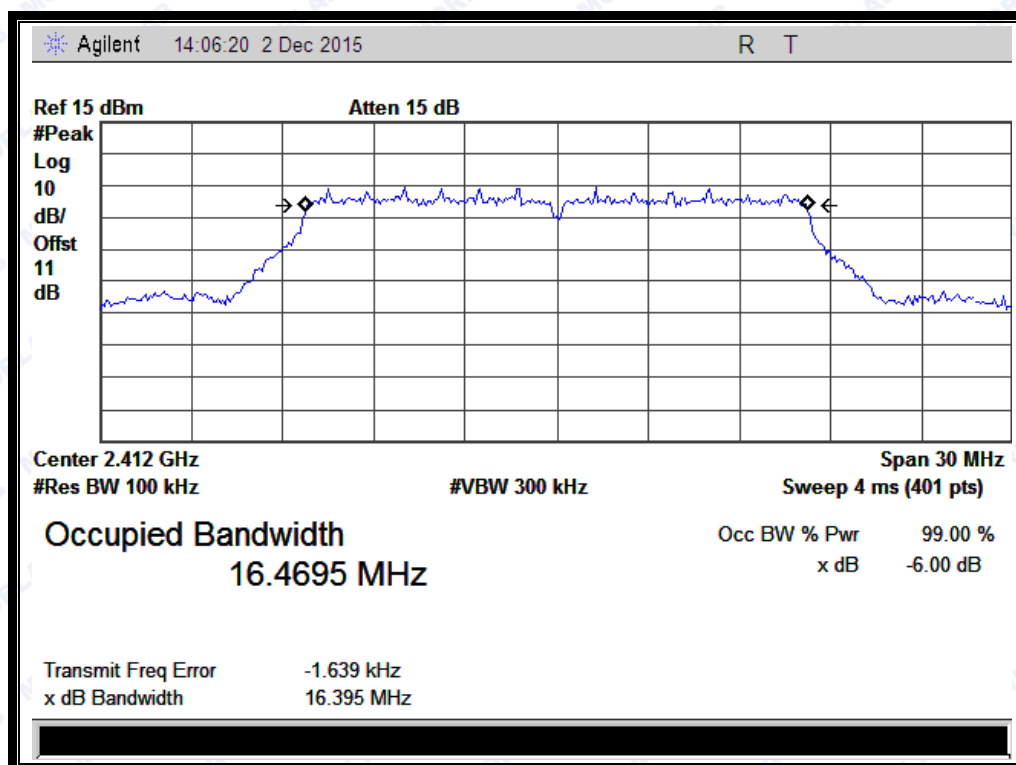


(Channel 1: 2412MHz @ 802.11g)



REPORT No.: SZ15100039W02

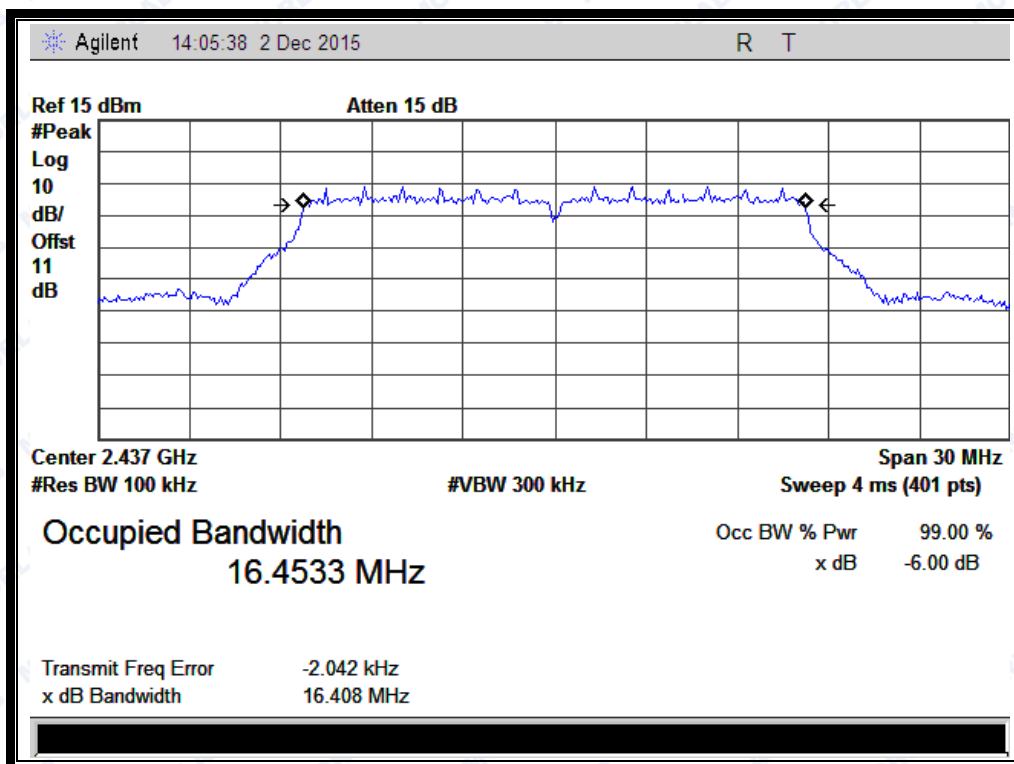

(Channel 6: 2437MHz @ 802.11g)

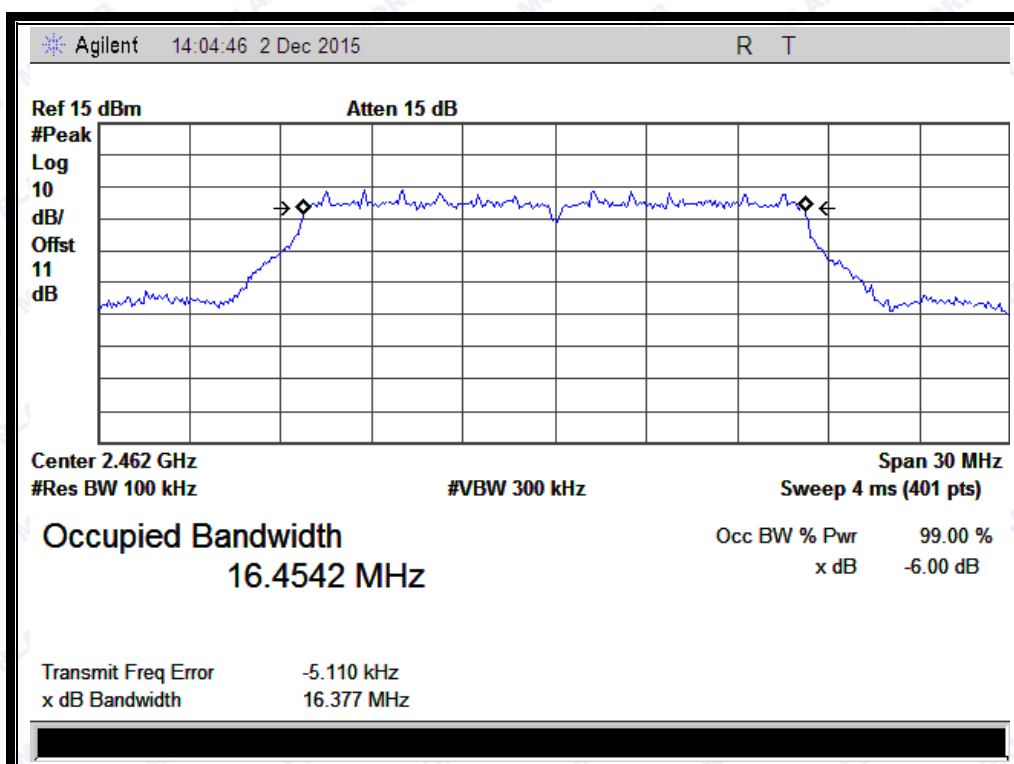

(Channel 11: 2462MHz @ 802.11g)


2.4 Conducted Spurious Emissions and Band Edge

2.4.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

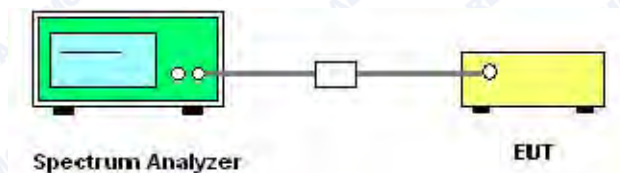

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.




REPORT No.: SZ15100039W02

2.4.3.1 802.11b Test mode**A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-36.17	1.47	-18.53	PASS
6	2437	-38.62	-0.34	-20.34	PASS
11	2462	-39.67	-0.94	-20.94	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

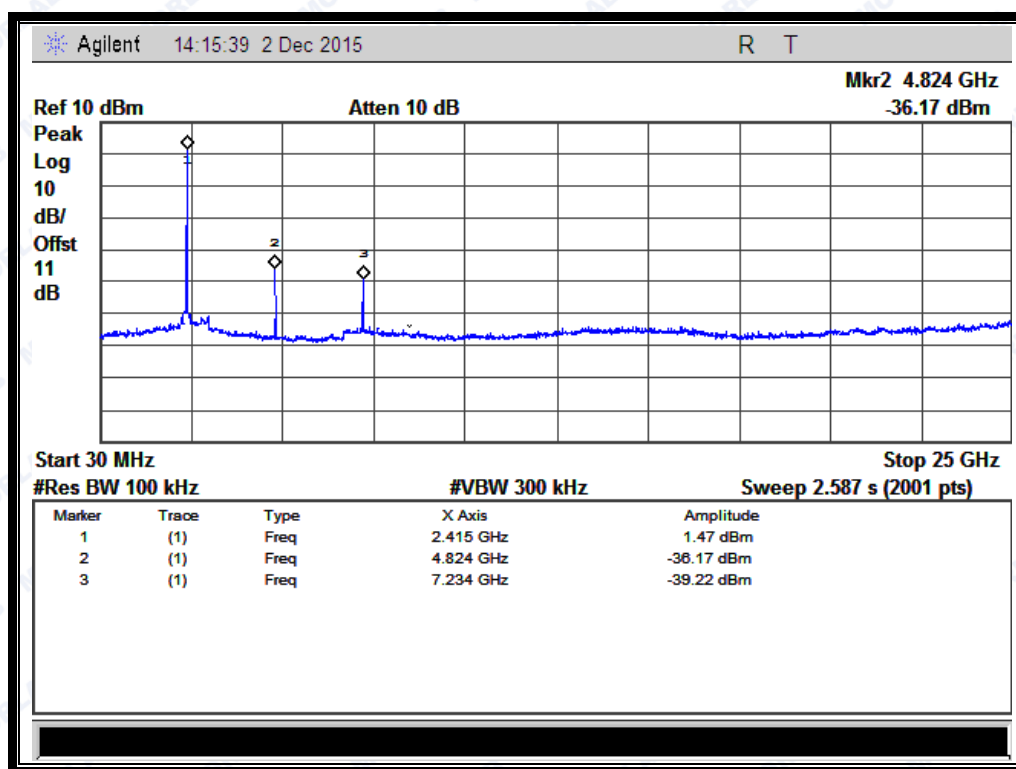


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15100039W02

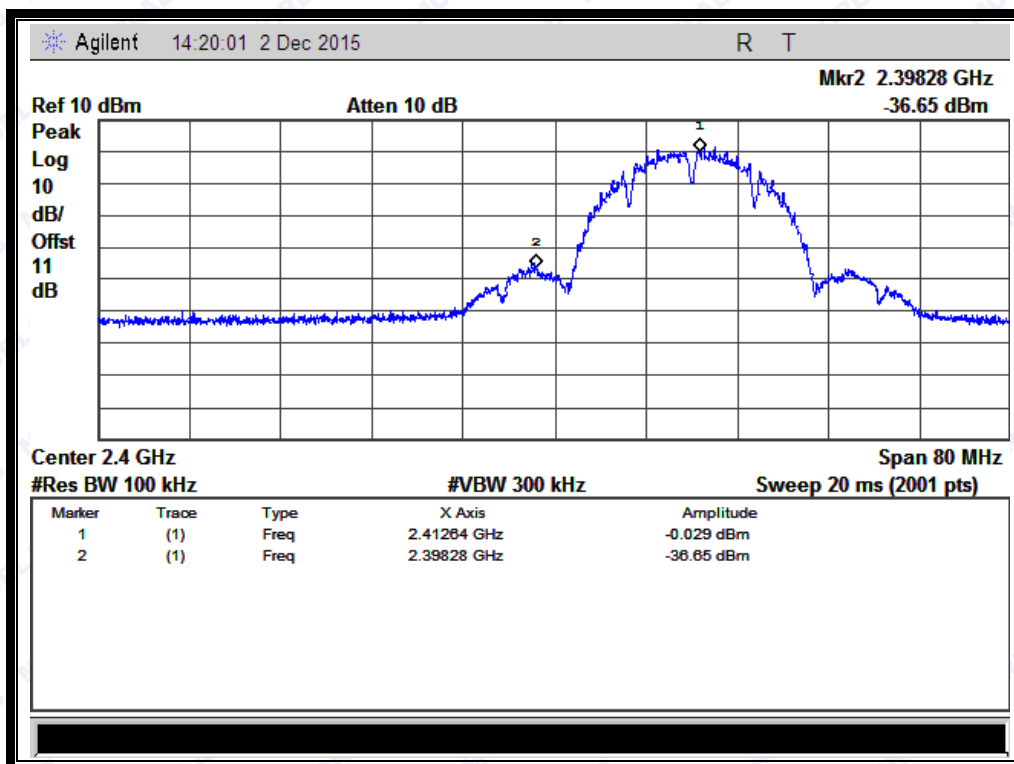


(Band Edge @ Channel = 1)

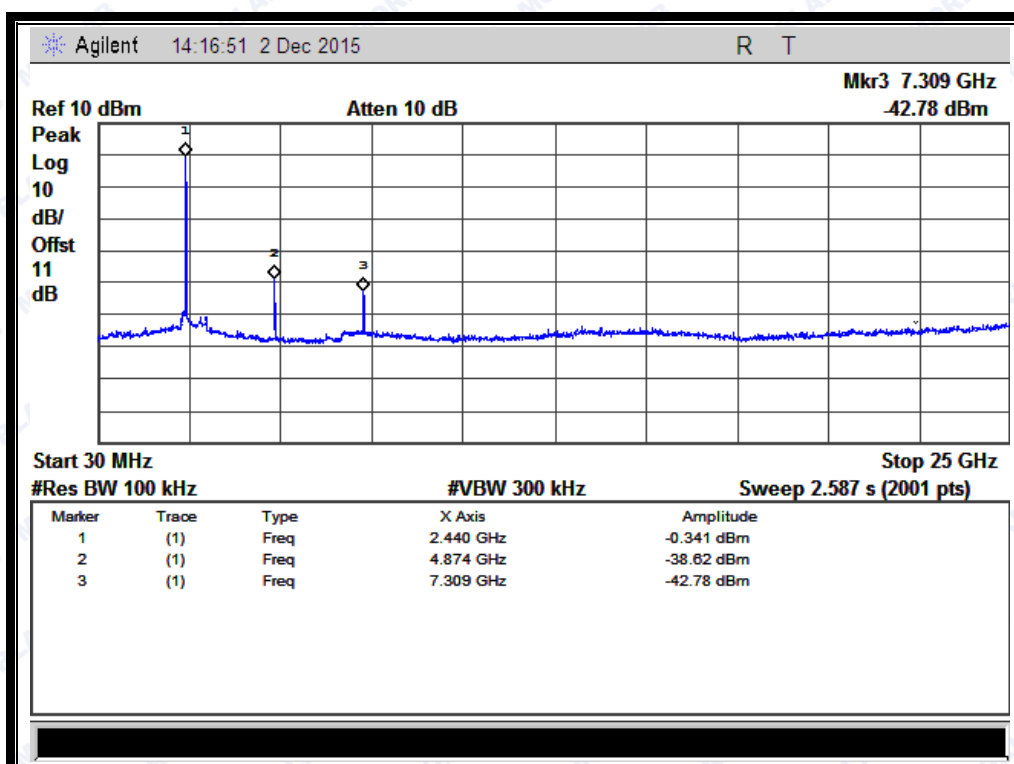


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15100039W02

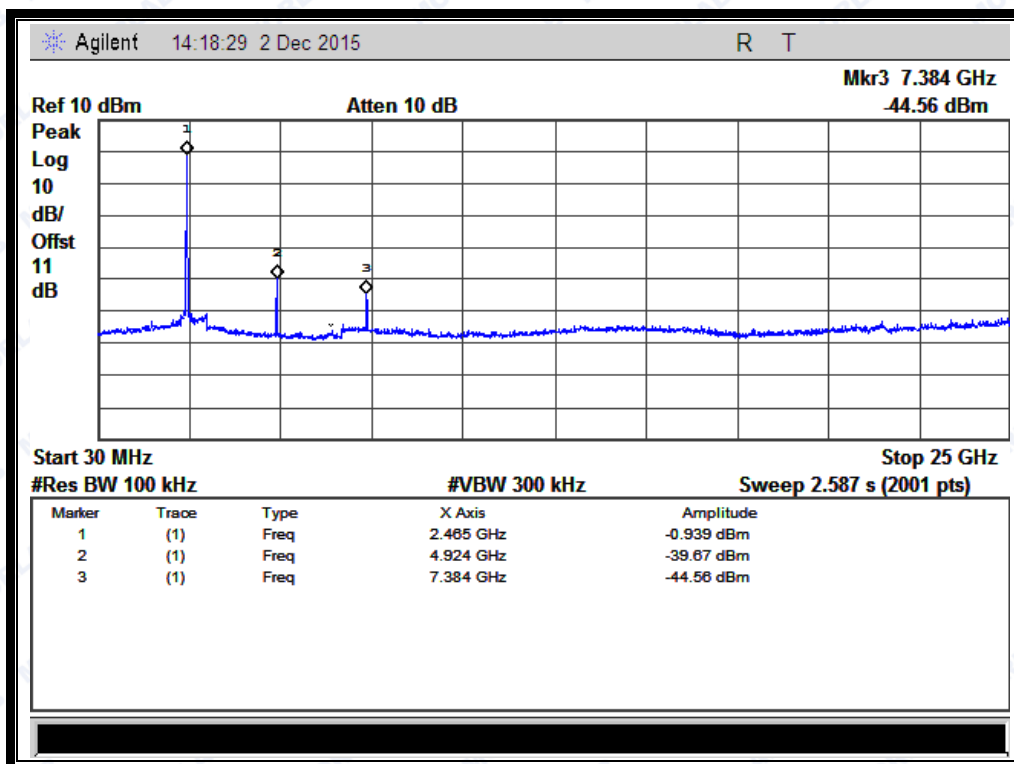

(Channel = 11, 30MHz to 25GHz)

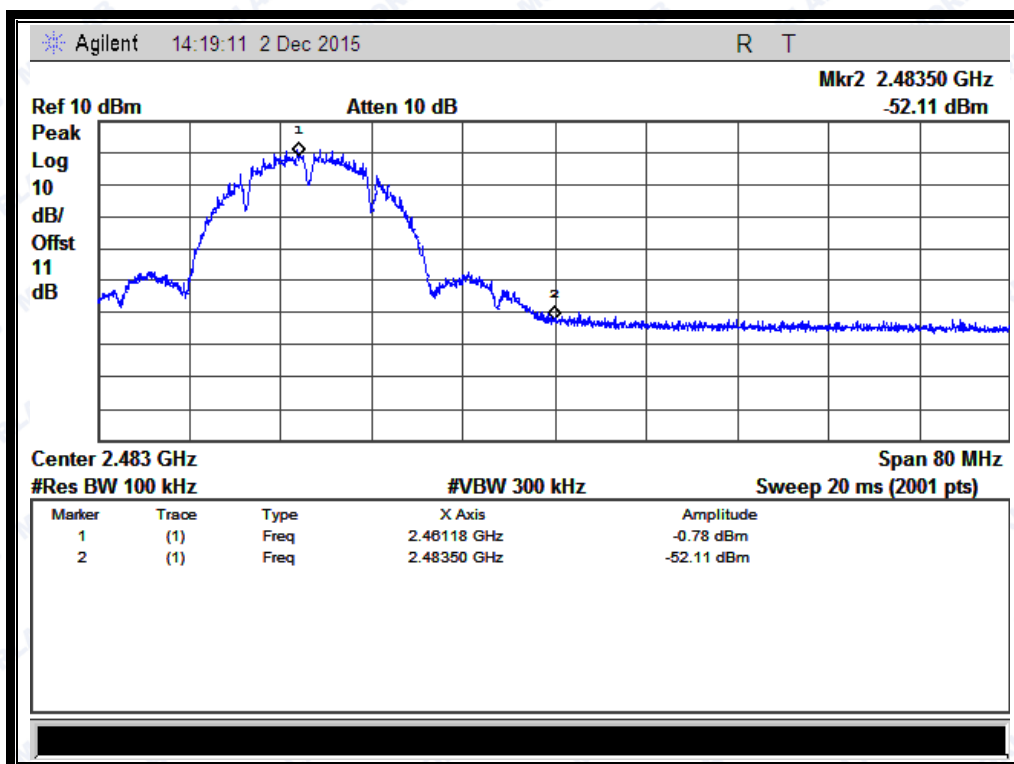

(Band Edge @ Channel = 11)



REPORT No.: SZ15100039W02


2.4.3.2 802.11g Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-49.1	-5.84	-25.84	PASS
6	2437	-50.86	-8.69	-28.69	PASS
11	2462	-50.42	-6.47	-26.47	PASS

B. Test Plots:


Note: the power of the EUT transmitting frequency should be ignored.

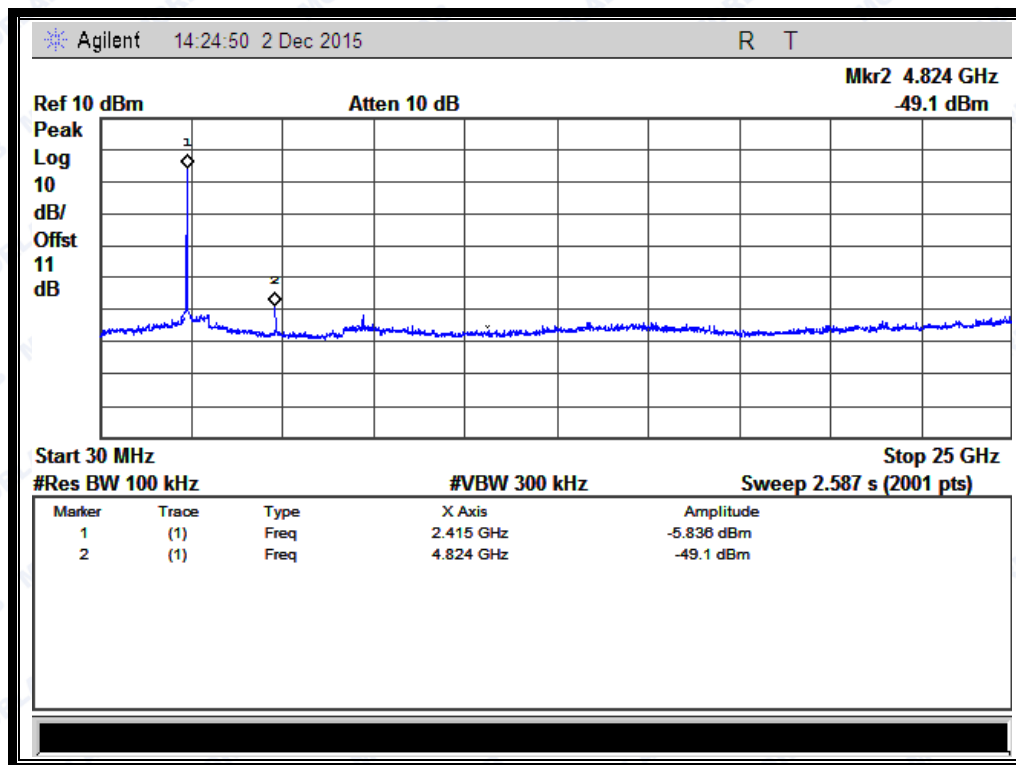


(Channel = 1, 30MHz to 25GHz)



REPORT No.: SZ15100039W02

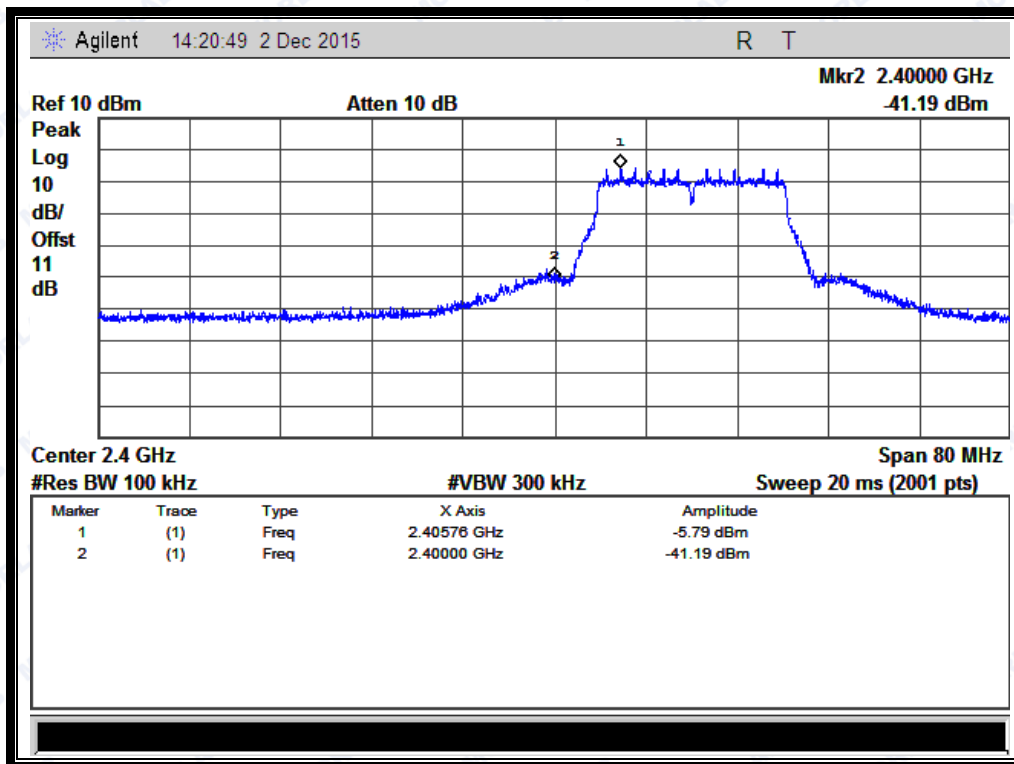


(Band Edge @ Channel = 1)

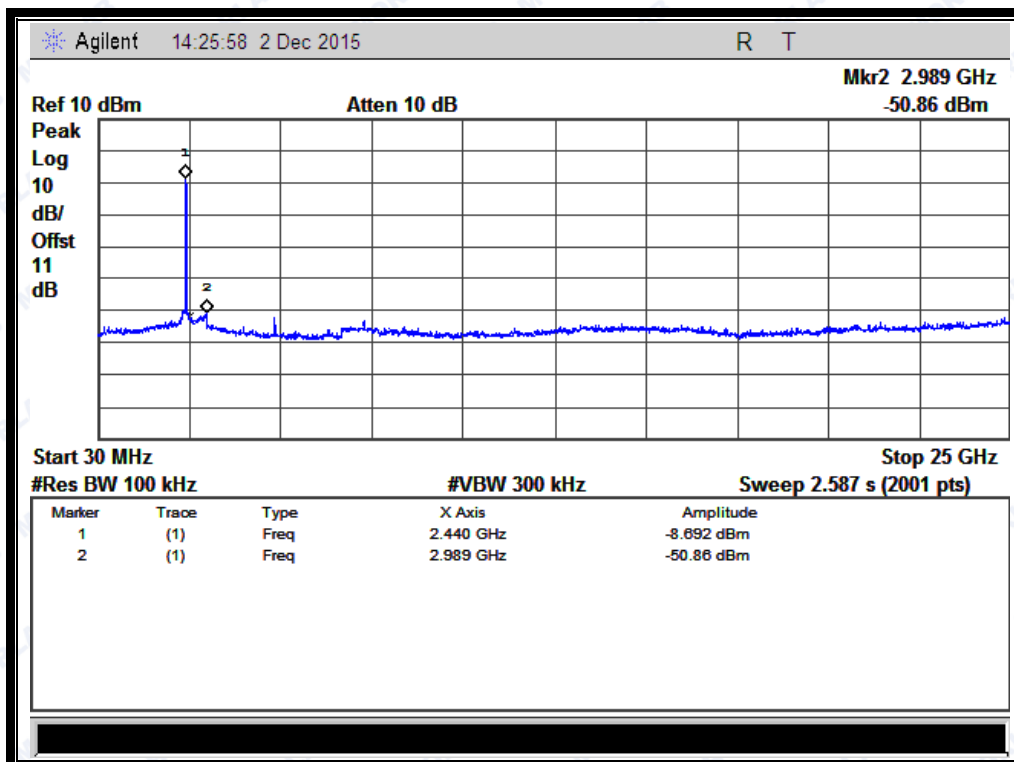


(Channel = 6, 30MHz to 25GHz)



REPORT No.: SZ15100039W02

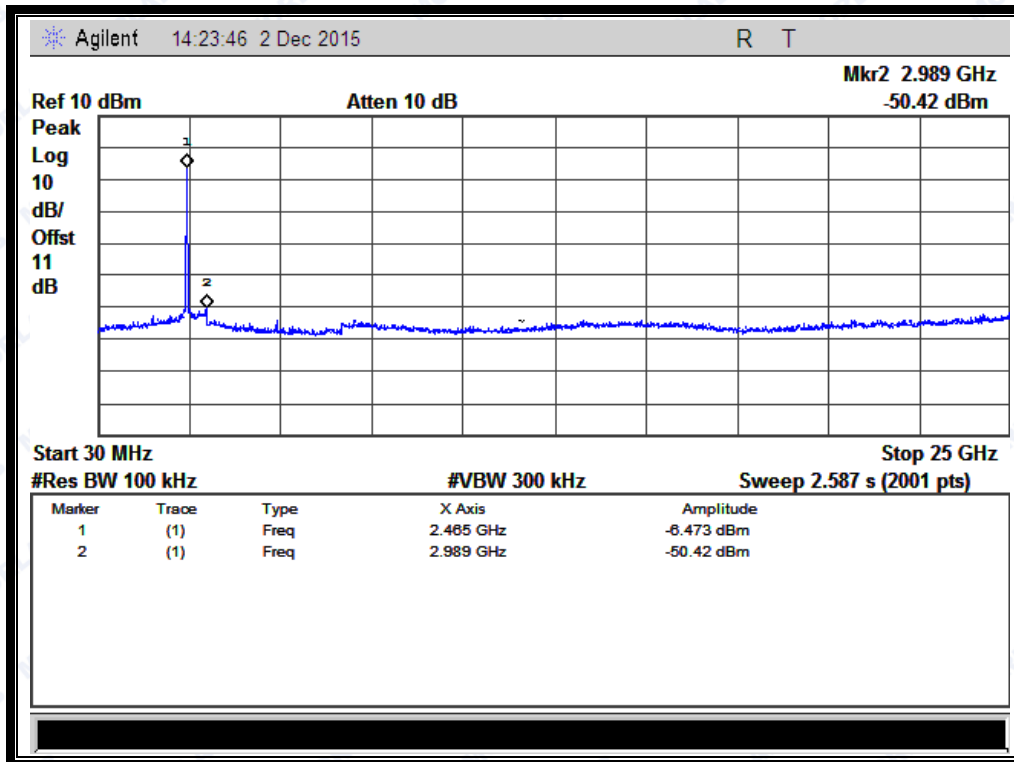

(Channel = 11, 30MHz to 25GHz)

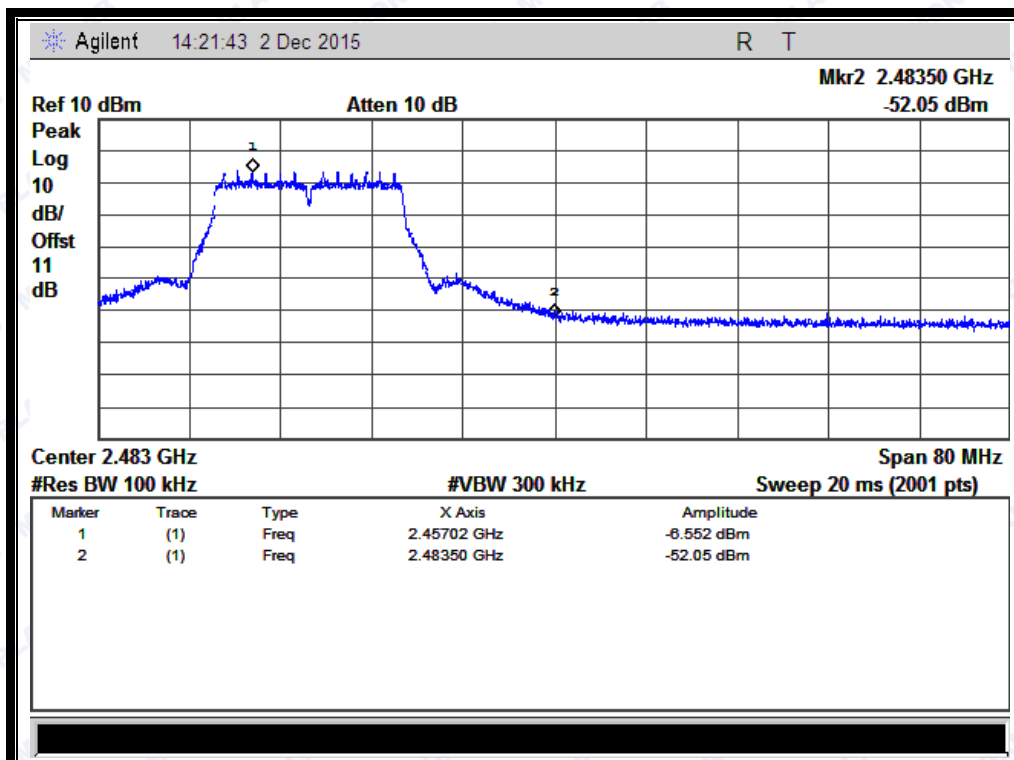

(Band Edge @ Channel = 11)


2.5 Power spectral density (PSD)

2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.5.2 Test Description

A. Test Set:

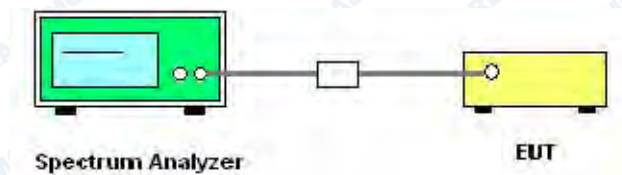

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please reference ANNEX A(1.4).



REPORT No.: SZ15100039W02


2.5.3 Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-11.4	8	PASS
6	2437	-4.39	8	PASS
11	2462	-12.43	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

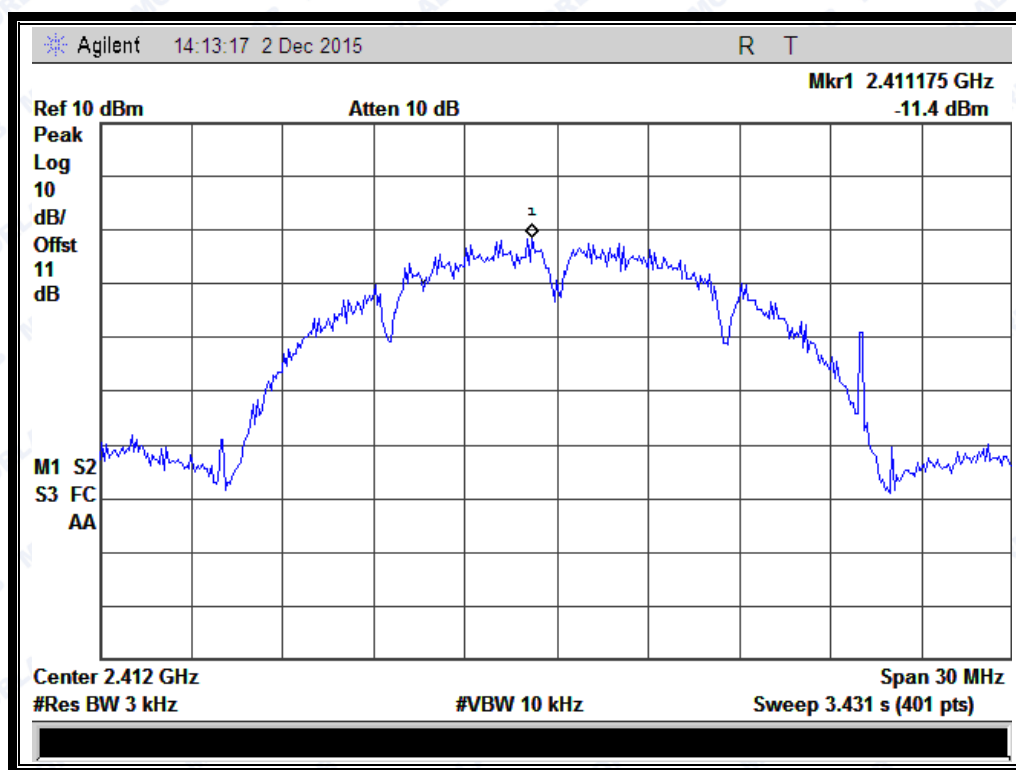


(Channel = 1 @ 802.11b)



REPORT No.: SZ15100039W02

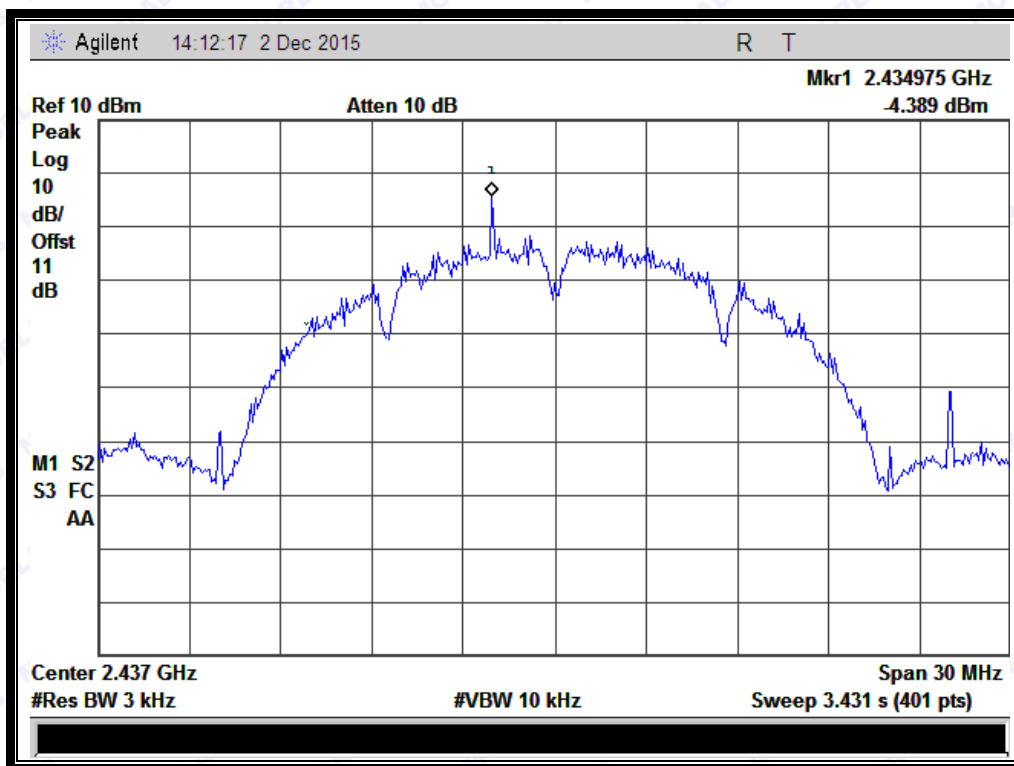

(Channel = 6 @ 802.11b)

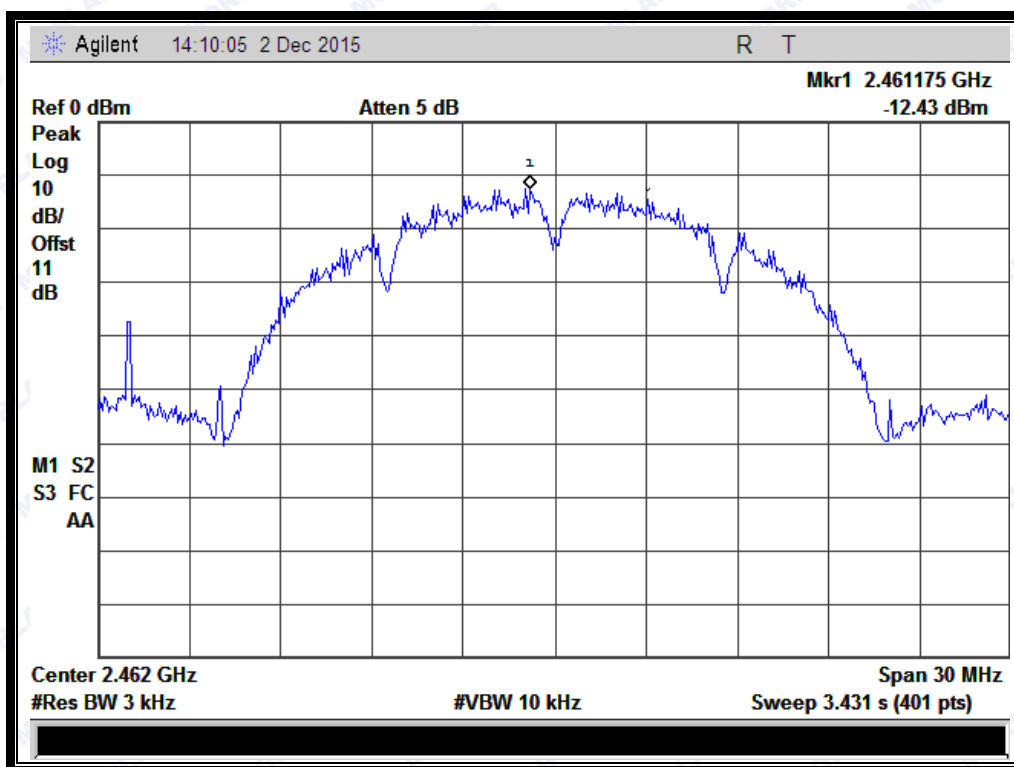

(Channel = 11 @ 802.11b)




2.5.3.2 802.11g Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-21.28	8	PASS
6	2437	-22.49	8	PASS
11	2462	-23.04	8	PASS
Measurement uncertainty: ± 1.3 dB				


B. Test Plots:

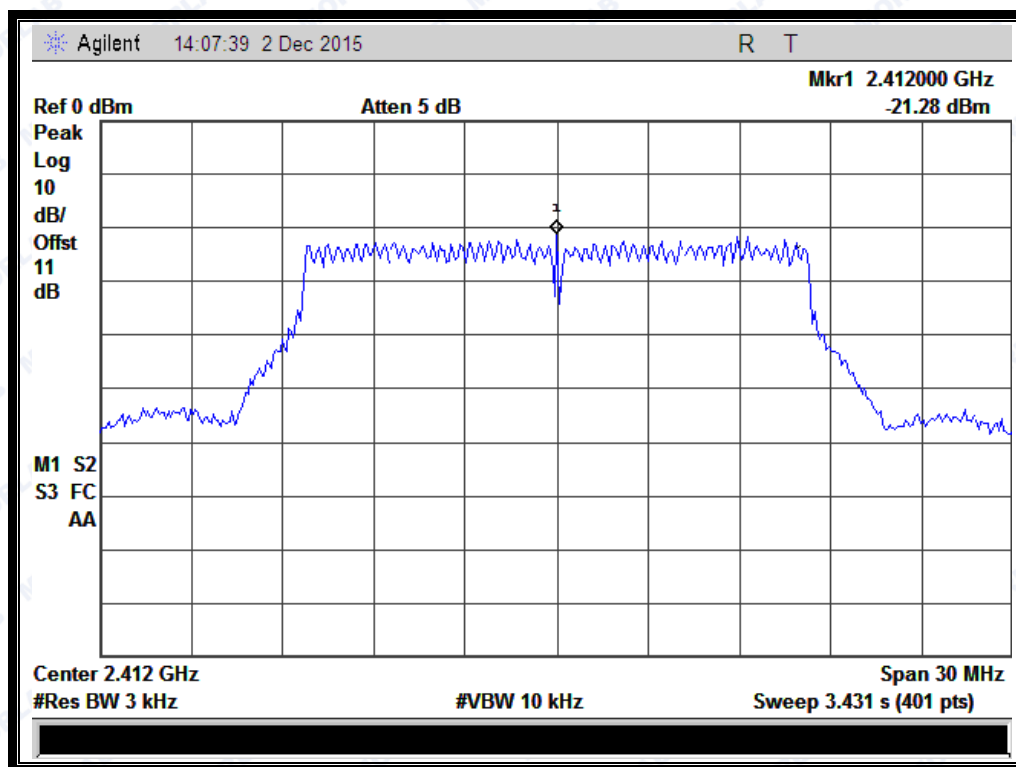


(Channel = 1 @ 802.11g)



REPORT No.: SZ15100039W02

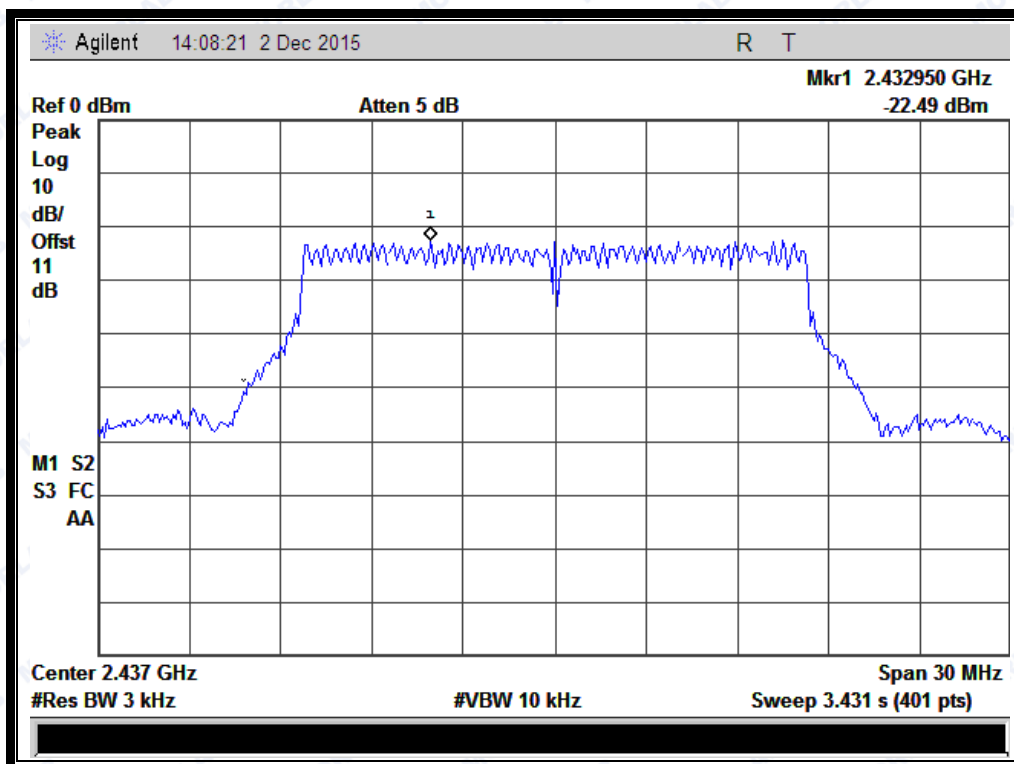

(Channel = 6 @ 802.11g)

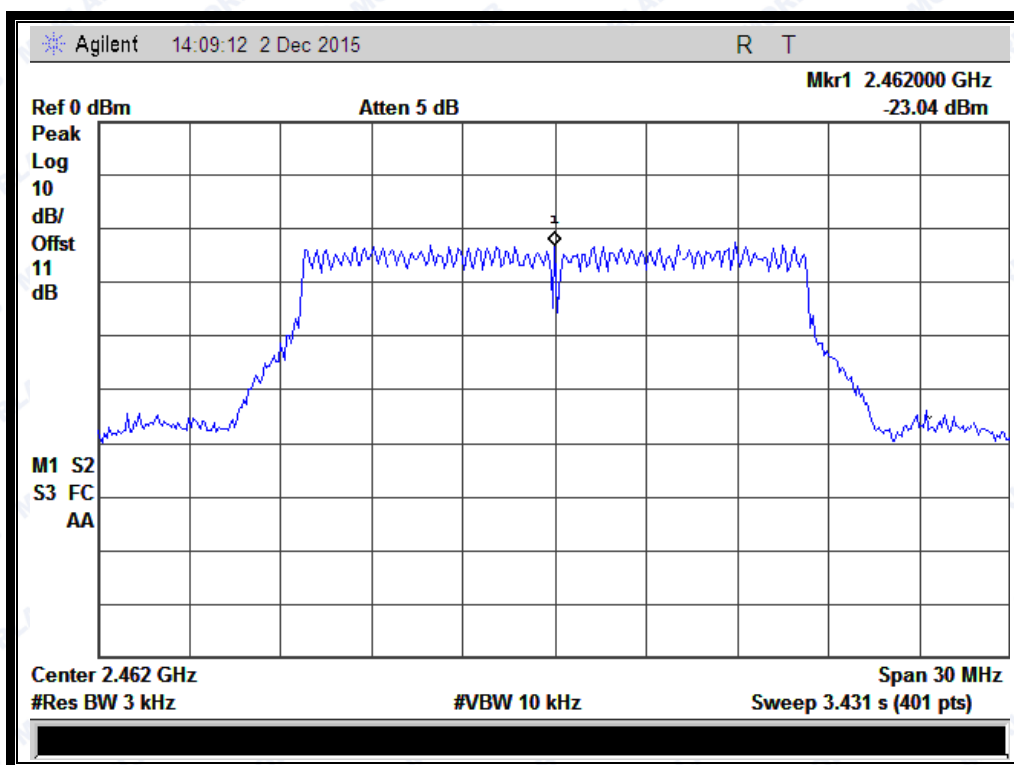

(Channel = 11 @ 802.11g)


2.6 Restricted Frequency Bands

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.6.2 Test Description

A. Test Setup

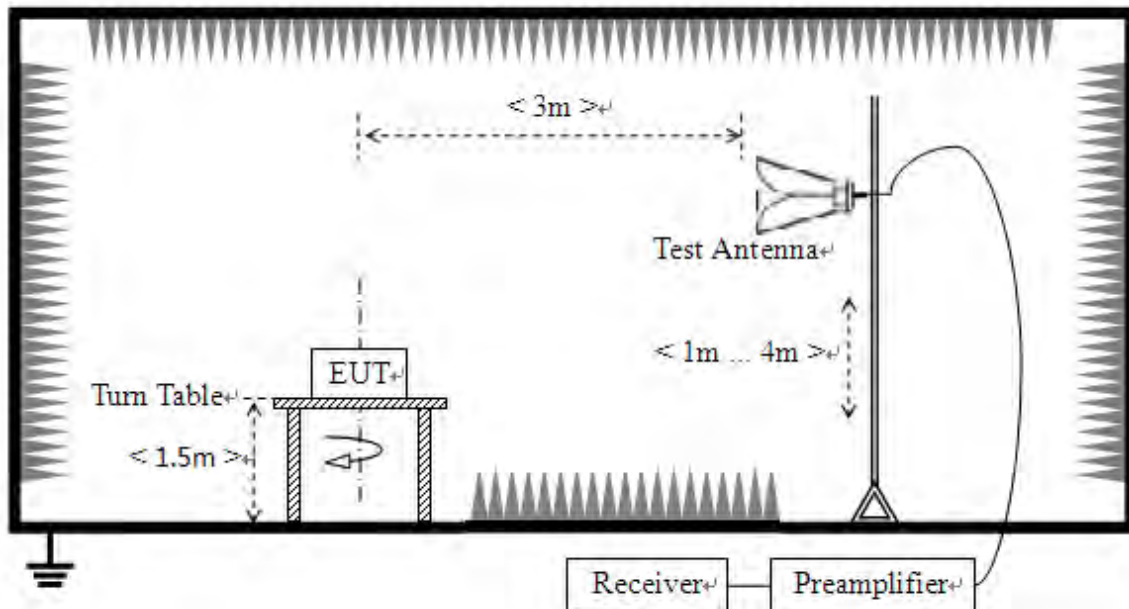

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).



2.6.3 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2359.32	PK	44.74	-33.63	32.56	43.67	74	Pass
1	2360.95	AV	34.06	-33.63	32.56	32.99	54	Pass
11	2485.26	PK	42.85	-33.18	32.5	42.17	74	Pass
11	2484.53	AV	33.80	-33.18	32.5	33.12	54	Pass


B. Test Plots:



REPORT No.: SZ15100039W02

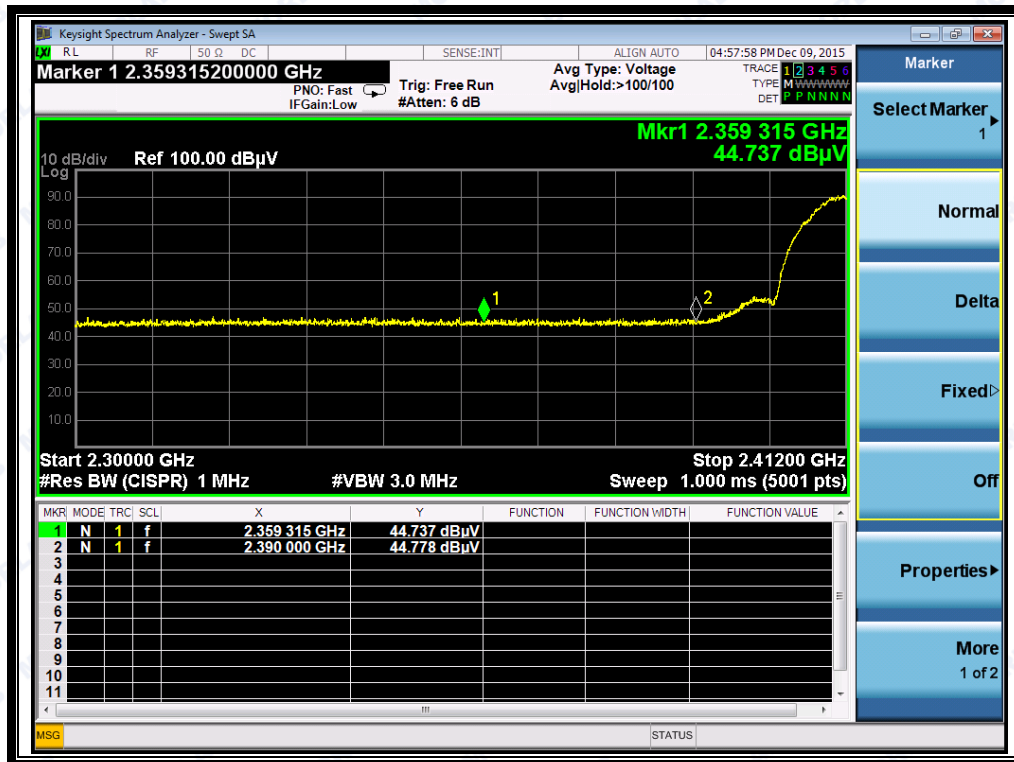

(Plot A1: Channel = 1 PEAK @ 802.11b)

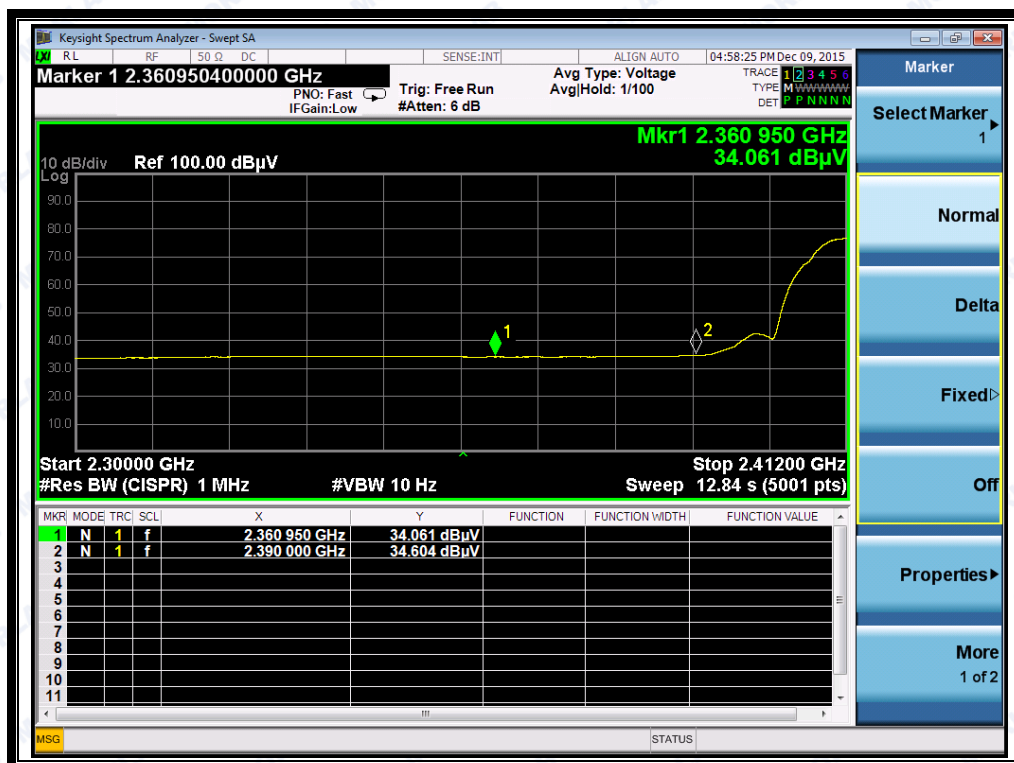

(Plot A2: Channel = 1 AVG @ 802.11b)



REPORT No.: SZ15100039W02



(Plot B1: Channel = 11 PEAK @ 802.11b)



(Plot B2: Channel = 11 AVG @ 802.11b)



REPORT No.: SZ15100039W02


2.6.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2363.37	PK	45.59	-33.63	32.56	44.52	74	Pass
1	2366.15	AV	34.16	-33.63	32.56	33.09	54	Pass
11	2484.27	PK	43.64	-33.18	32.5	42.96	74	Pass
11	2484.61	AV	33.90	-33.18	32.5	33.22	54	Pass


B. Test Plots:

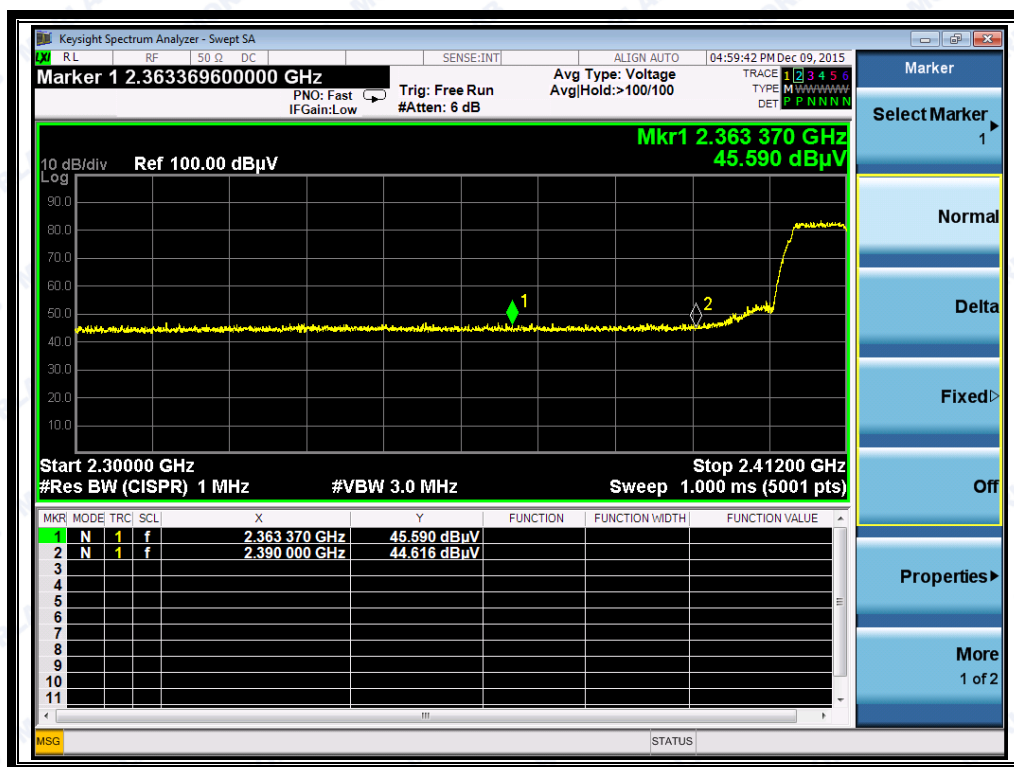


(Plot C1: Channel = 1 PEAK @ 802.11g)



REPORT No.: SZ15100039W02

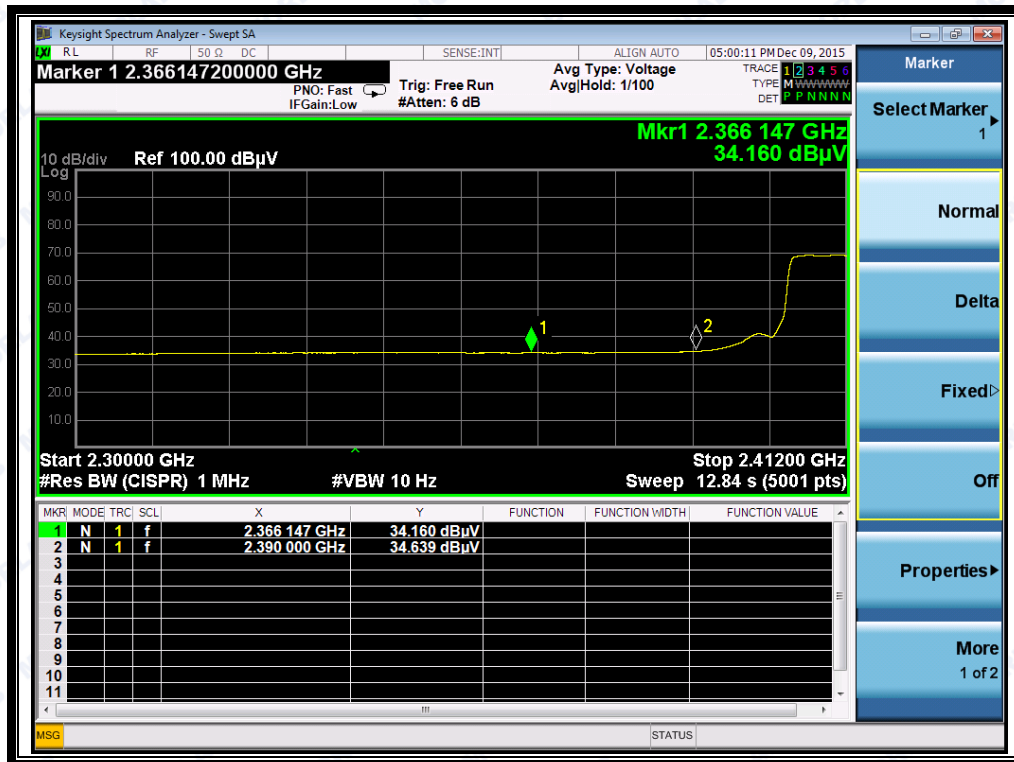


(Plot C2: Channel = 1 AVG @ 802.11g)

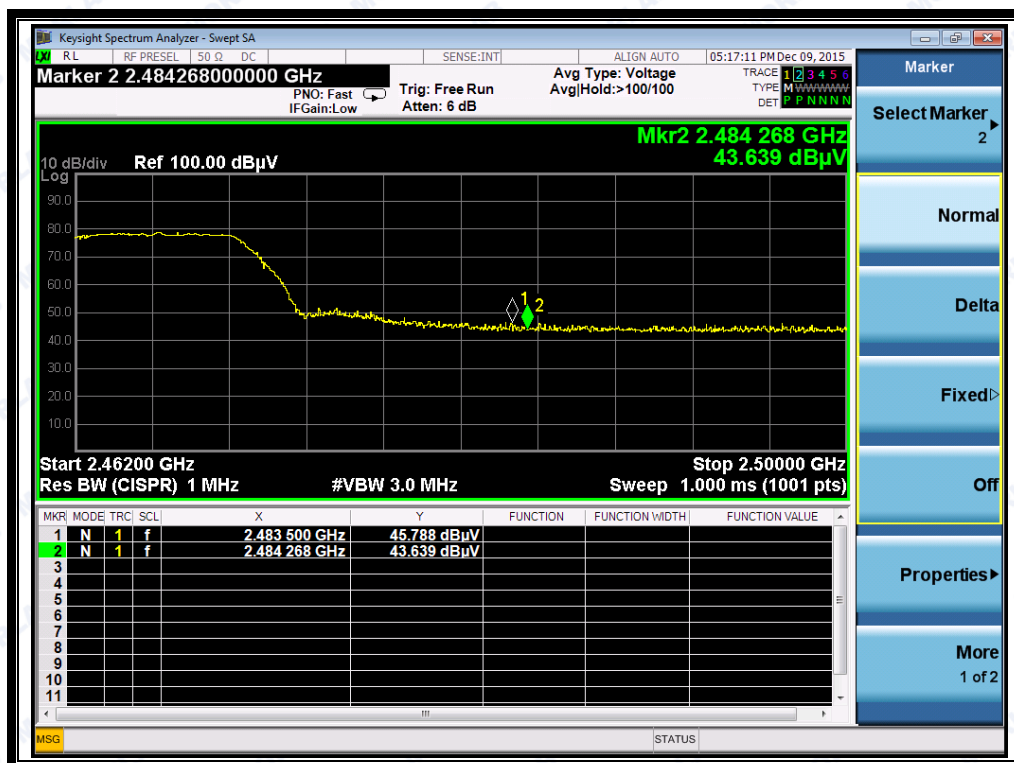

(Plot D1: Channel = 11 PEAK @ 802.11g)



REPORT No.: SZ15100039W02

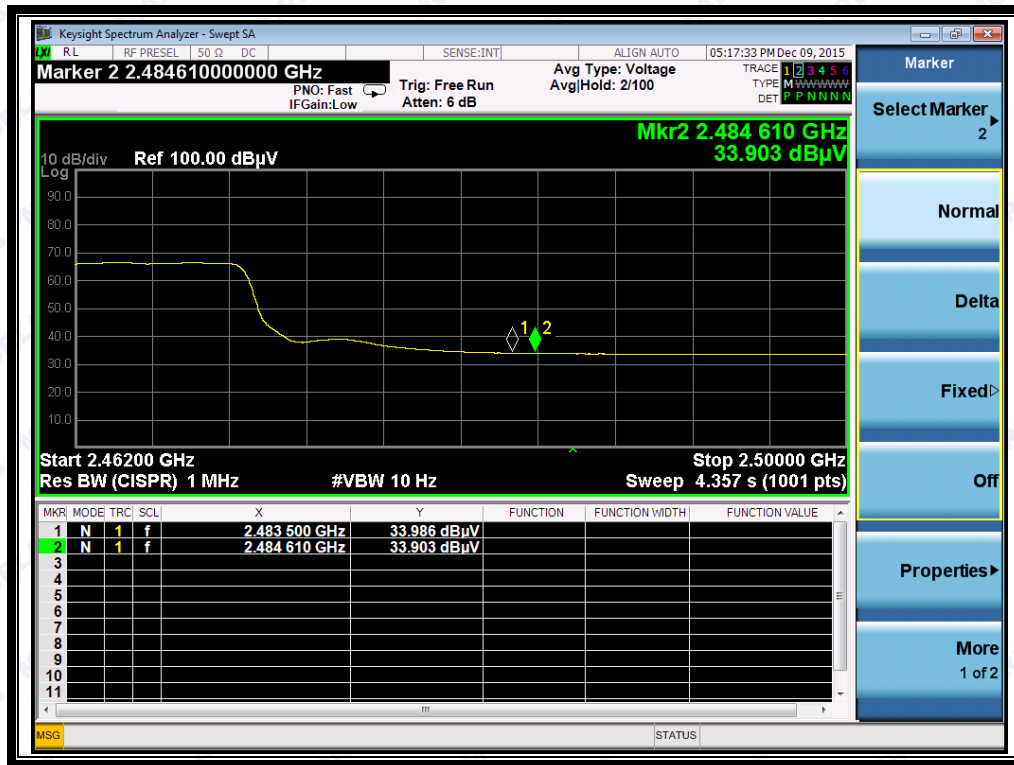

(Plot D2: Channel = 11 AVG @ 802.11g)

2.7 Conducted Emission

2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2 Test Description

A. Test Setup:

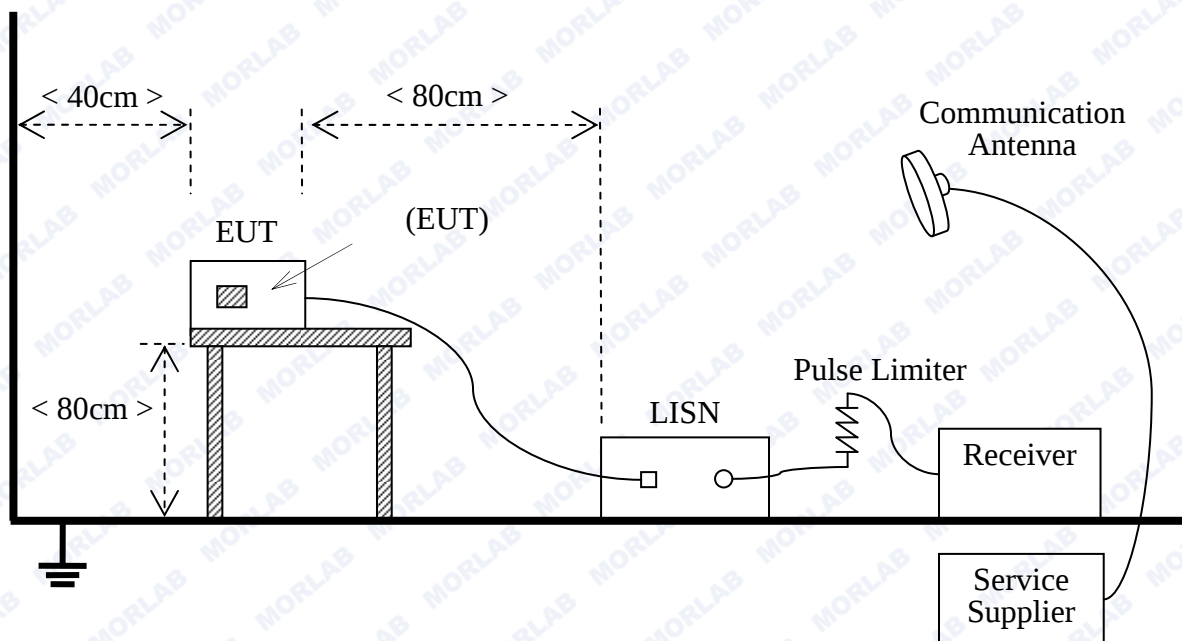

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10-2013.

During the test, supplied the voltage of the AC adapter was AC 120V 60Hz.

B. Equipments List:

Please reference ANNEX A(1.4).




2.7.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


B. Test Plots:

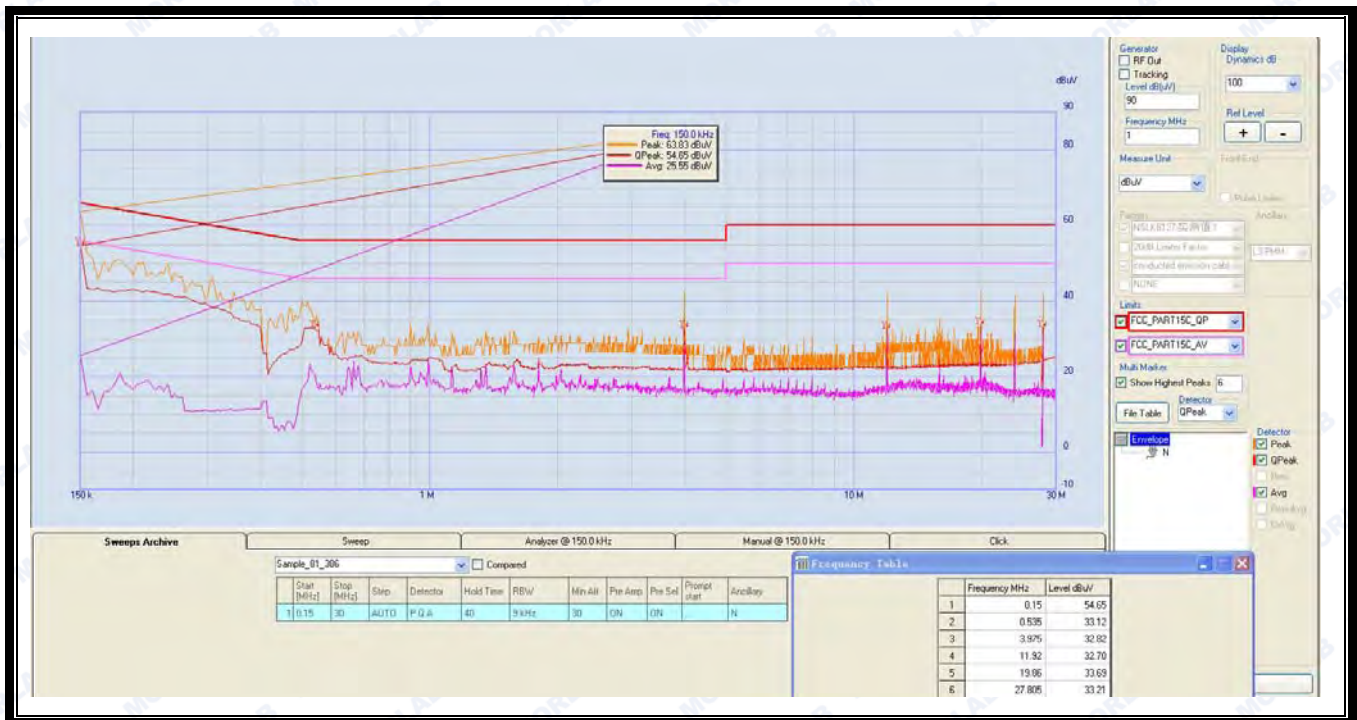

(Plot A: L Phase)



REPORT No.: SZ15100039W02

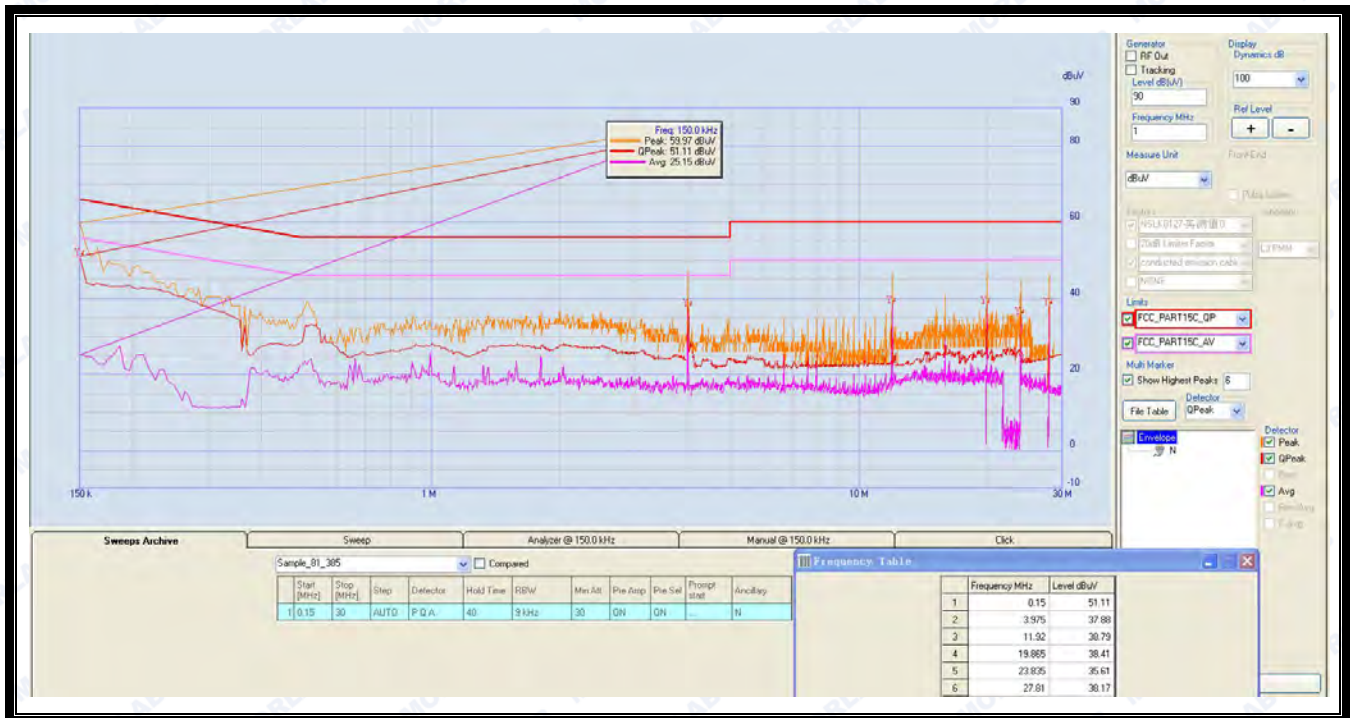

(Plot B: N Phase)



2.8 Radiated Emission

2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

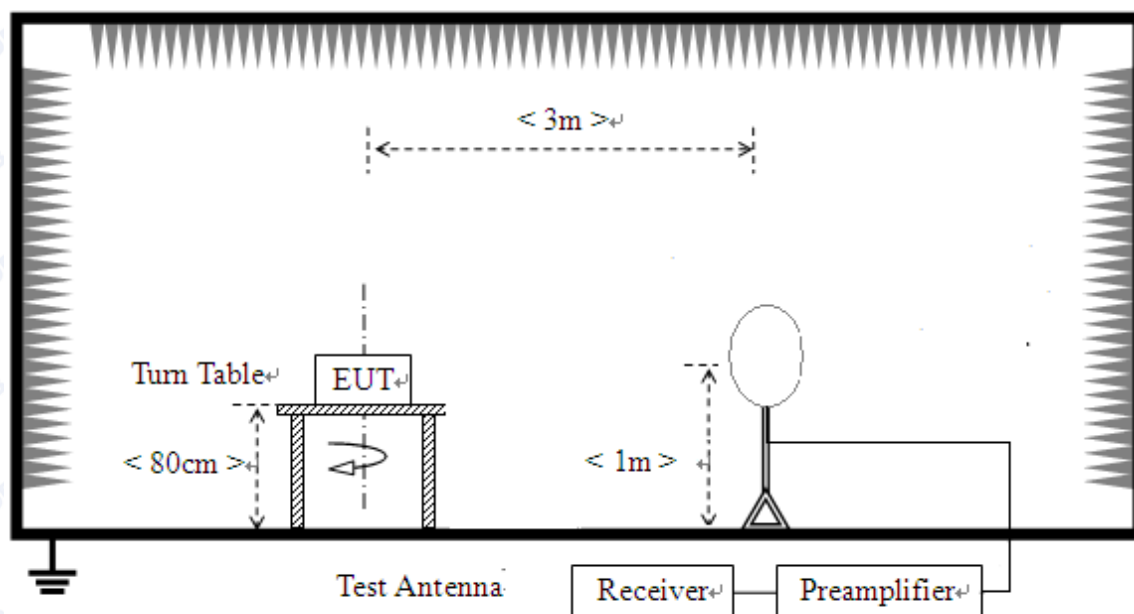

- 2) For radiated emissions from 30MHz to 1GHz

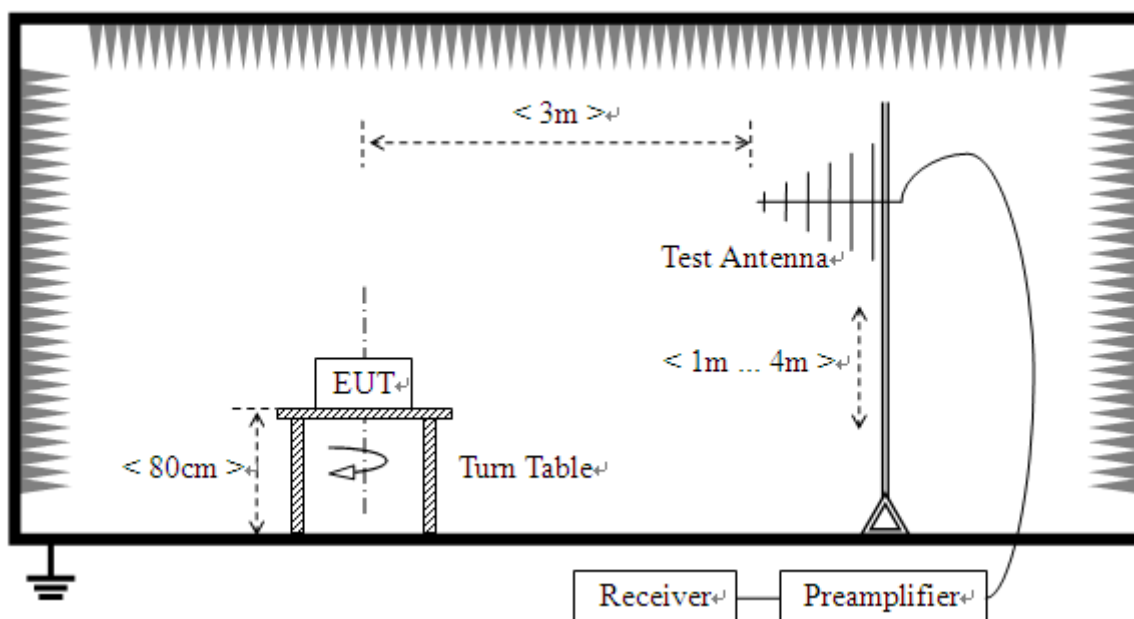

3) For radiated emissions above 1GHz

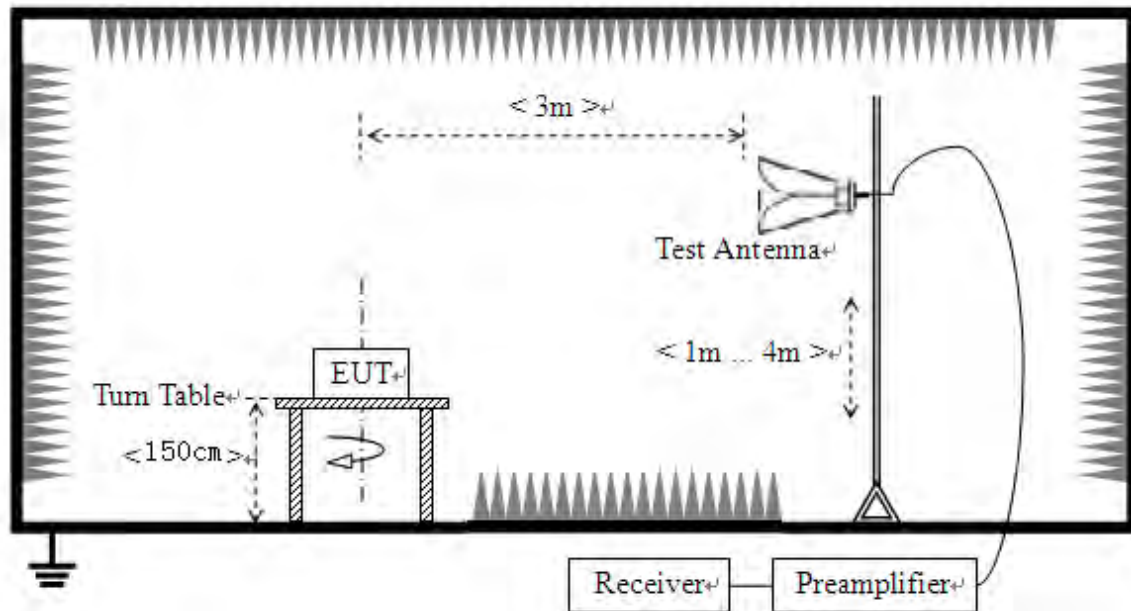

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10-2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10-2013.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of



the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.4).

2.8.3 Test Result

According to ANSI C63.10-2013, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.




REPORT No.: SZ15100039W02


2.8.3.1 802.11b Test mode

A. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

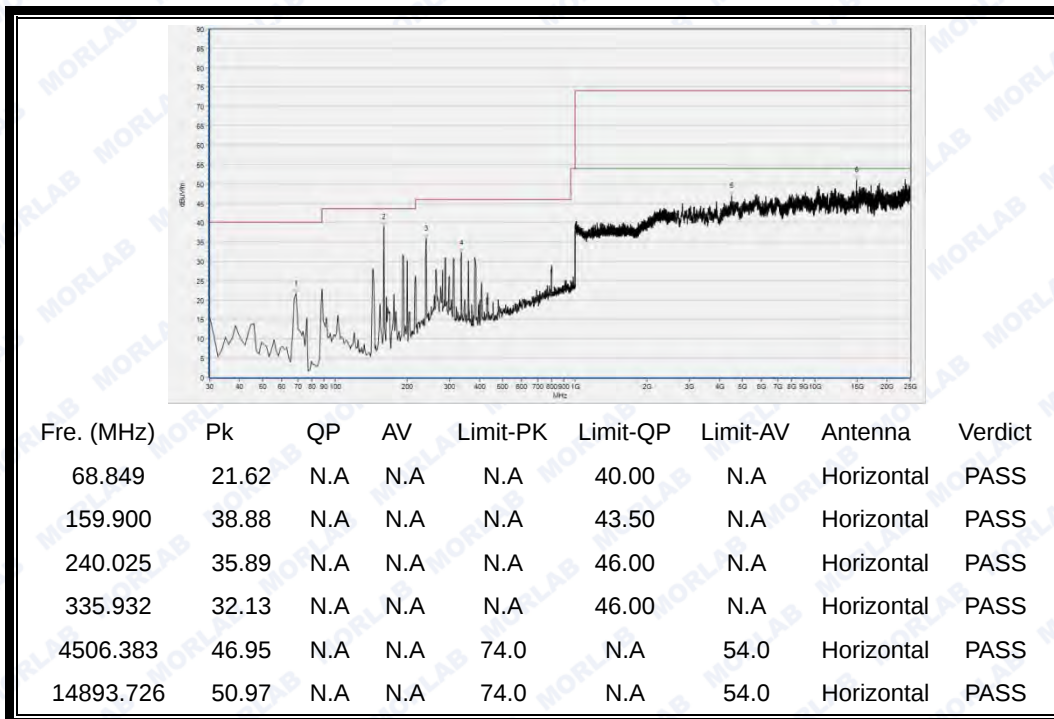

(Antenna Horizontal, 30MHz to 25GHz)

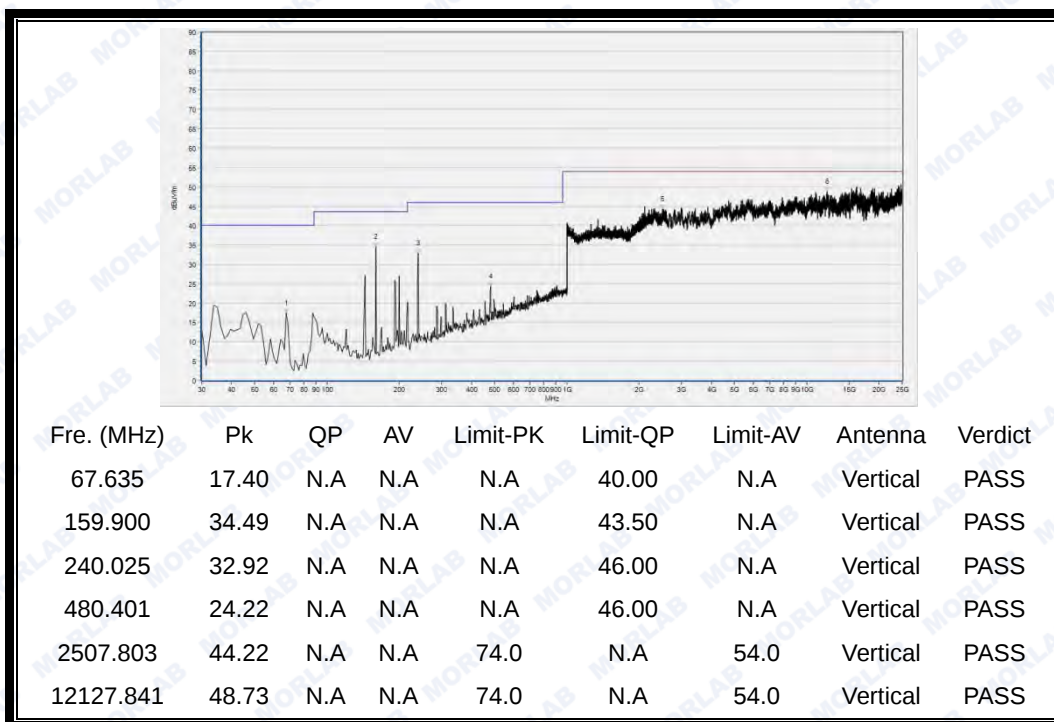


(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15100039W02

Plot for Channel = 6

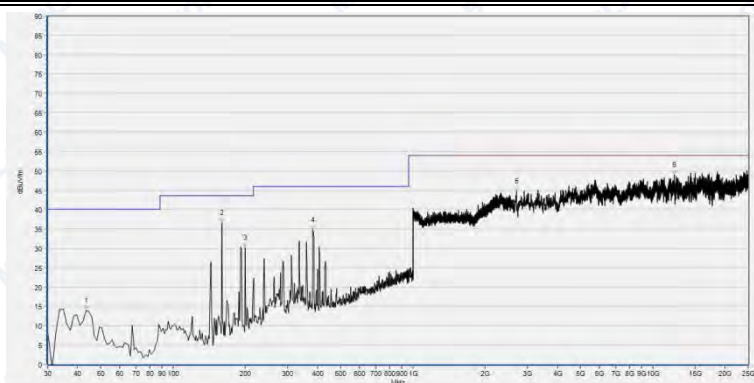

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.354	13.95	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
159.900	36.61	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
199.962	30.09	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
383.279	34.71	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2697.763	44.72	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12282.633	48.89	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

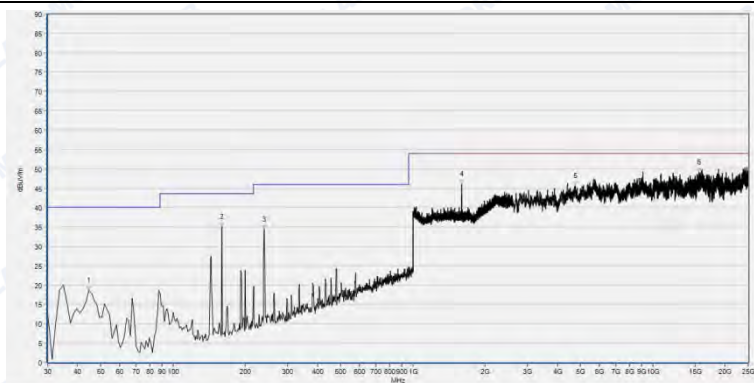


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.568	18.53	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
159.900	34.98	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
240.025	34.41	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1597.999	46.13	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4763.011	45.52	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
15610.656	49.16	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15100039W02

Plot for Channel = 11

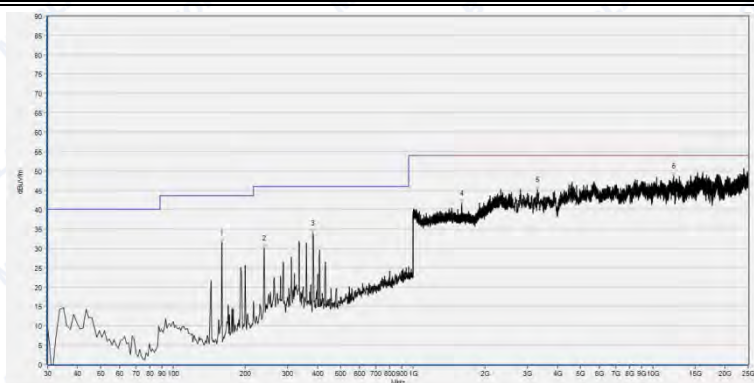

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
159.900	31.57	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
240.025	29.93	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
383.279	33.84	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
1594.158	41.59	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
3312.857	45.07	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12201.164	48.60	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

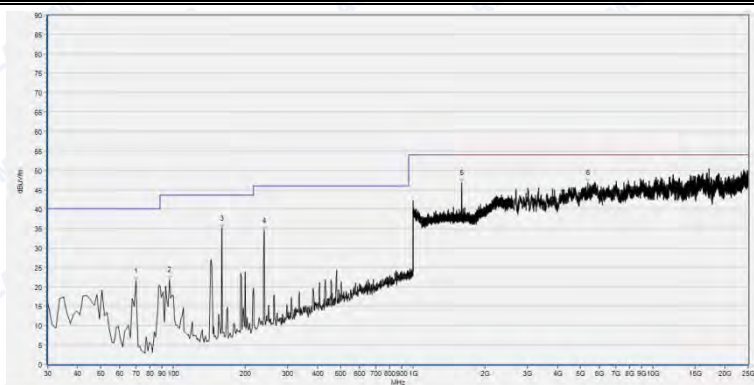


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
70.063	21.45	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
96.771	21.83	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
159.900	35.04	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
240.025	34.31	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1594.798	46.80	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5374.032	46.72	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15100039W02

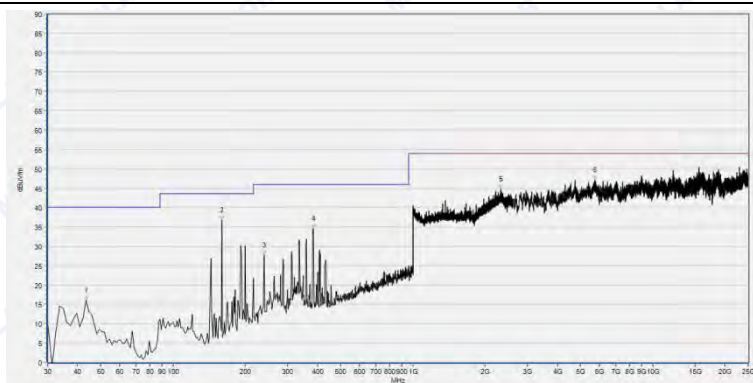2.8.3.2 802.11g Test mode**A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 1

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
43.354	16.11	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
159.900	36.64	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
240.025	27.70	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
384.493	34.56	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2330.452	44.75	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5728.423	47.14	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

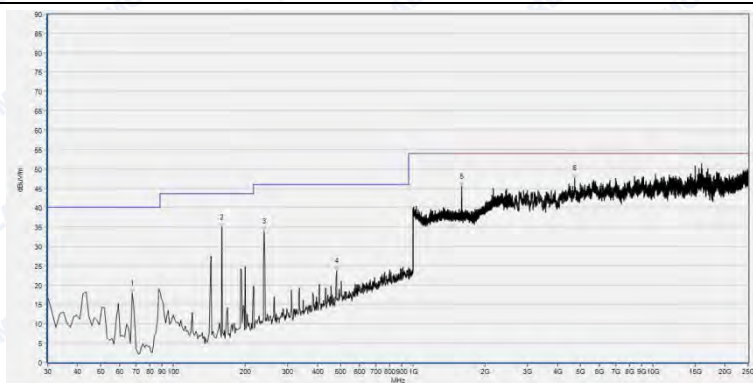


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
67.635	17.90	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
159.900	34.93	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
240.025	33.81	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
480.401	23.64	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
1593.517	45.40	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4722.277	47.59	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15100039W02

Plot for Channel = 6

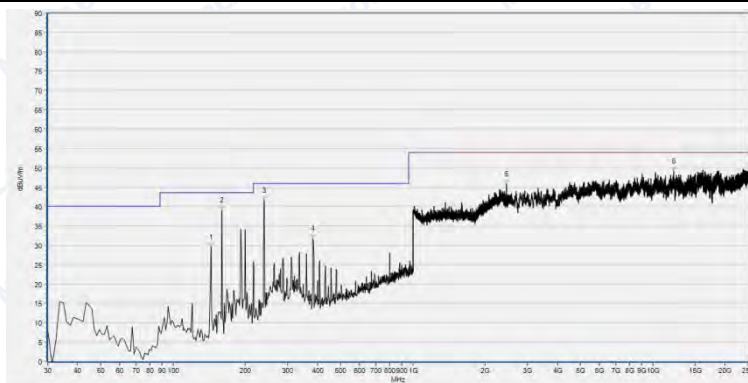

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
144.118	29.50	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
159.900	39.01	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
240.025	41.52	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
383.279	31.62	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2457.863	45.74	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
12201.164	49.09	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

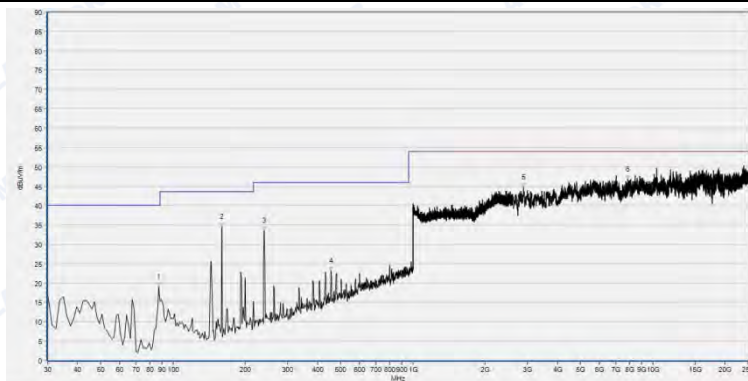


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
87.059	18.92	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
159.900	34.59	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
240.025	33.53	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
456.120	23.21	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2889.216	44.69	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
7879.214	46.84	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ15100039W02

Plot for Channel = 11

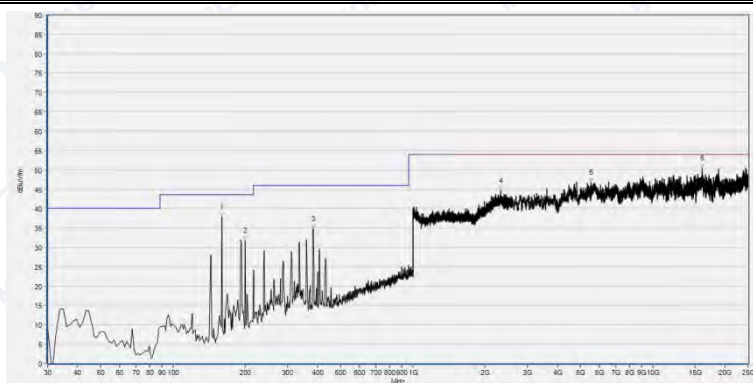

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
159.900	37.89	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
199.962	31.74	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
384.493	34.64	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2322.769	44.59	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5541.044	46.74	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
16030.224	50.52	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

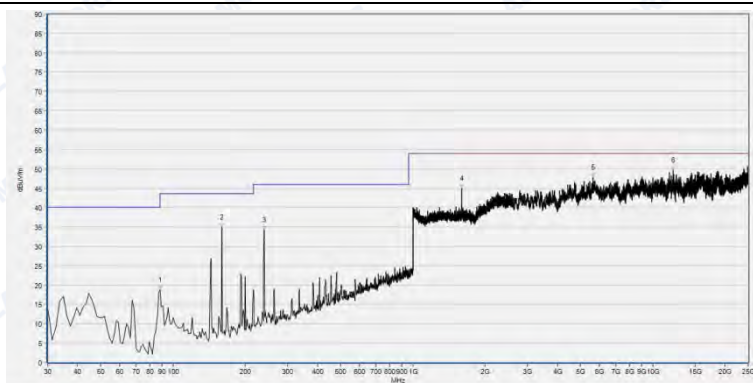

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
88.273	18.84	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
159.900	34.91	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
240.025	34.26	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
1594.798	44.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5622.513	47.77	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12135.988	49.58	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



REPORT No.: SZ15100039W02

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.03.28	2016.03.27
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2015.03.28	2016.03.27
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	595WX11007	PMM9010	Narda S.T.S/PMM	2015.05.07	2016.05.06
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.06.18	2016.06.17
3	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.05.07	2016.05.06
4	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	N.A	Asus	N.A	N.A
2	USB to RS232 conveter	N.A	DT-1005	DTECH	N.A	N.A

1.5.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25



REPORT No.: SZ15100039W02

1.5.5 Radiated Test Equipments

Radiated Test Equipments

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB4536084 6	8960-E5515 C	Agilent	2015.05.07	2016.05.06
2	Receiver	MY5413001 6	N9038A	Agilent	2015.05.07	2016.05.06
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2015.05.14	2016.05.13
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2015.03.31	2016.03.30
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2015.02.26	2016.02.25
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2015.02.26	2016.02.25
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2015.02.26	2016.02.25

1.5.6 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000- S015L	CMI-COM	2015.02.26	2016.02.25

1.5.7 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2015.05.14	2016.05.13

***** END OF REPORT *****