



Full

TEST REPORT

No. I18D00119-SRD05

For

Client : Shanghai Sunmi Technology Co.,Ltd.

Production : POS System

Model Name : L1521, L1522, L1523

FCC ID : 2AH25T2

Hardware Version: V1.02

Software Version: 1.0.16, 1.0.17

Issued date: 2018-08-15

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

Test Laboratory:

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I18D00119-SRD05	00	2018-08-15	Initial creation of test report

CONTENTS

1. TEST LABORATORY.....	5
1.1. TESTING LOCATION.....	5
1.2. TESTING ENVIRONMENT.....	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE.....	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. SUMMARY OF TEST RESULTS.....	9
5.1. NOTES.....	10
5.2. STATEMENTS.....	10
6. TEST RESULT.....	11
6.1. MEASUREMENT METHOD.....	11
6.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED.....	12
6.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	12
6.4. OCCUPIED 6DB BANDWIDTH(CONDUCTED).....	14
6.5. TRANSMITTER SPURIOUS EMISSION.....	18
6.6. BAND EDGES COMPLIANCE.....	75
6.7. AC POWERLINE CONDUCTED EMISSION.....	84



RF Test Report

Report No.: I18D00119-SRD05

7. TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS.....	87
8. TEST ENVIRONMENT.....	88
ANNEX A. ACCREDITATION CERTIFICATE.....	89

1. Test Laboratory

1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301

1.2. Testing Environment

Normal Temperature:	15-35℃
Extreme Temperature:	-10/+55℃
Relative Humidity:	20-75%


1.3. Project data

Project Leader:	Yu Anlu
Testing Start Date:	2018-05-14
Testing End Date:	2018-08-06


1.4. Signature



Yang Dejun
(Prepared this test report)



Shi Hongqi
(Reviewed this test report)



Zheng Zhongbin
Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address: Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu
District, Shanghai, China
Postcode: 200433
Telephone: 18721763396

2.2. Manufacturer Information

Company Name: Shanghai Sunmi Technology Co.,Ltd.
Address: Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu
District, Shanghai, China
Postcode: 200433
Telephone: 18721763396

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

EUT Description	POS System
Model name	L1521, L1522, L1523
WLAN Frequency Range	ISM Bands: 5725MHz~5850MHz
WLAN type of modulation	OFDM
Extreme Temperature	-10/+55℃
Nominal Voltage	24V
Extreme High Voltage	25V
Extreme Low Voltage	23V

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

First Supply

EUT ID*	Model Name	SN or IMEI	HW Version	SW Version	Date of receipt
N02	L1523	N/A	V1.02	1.0.16	2018-06-28
N04	L1523	N/A	V1.02	1.0.16	2018-06-28
N03	L1522	N/A	V1.02	1.0.17	2018-06-28
N05	L1521	N/A	V1.02	1.0.16	2018-06-28

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; Subpart E—Unlicensed National Information Infrastructure Devices	2017
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013

5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Power Spectral Density	15.407	/	P
Occupied 6dB Bandwidth	15.403	/	P
Band edge compliance	15.407	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407	/	P
AC Powerline Conducted Emission	15.407	/	P

Please refer to section 6 for detail.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

Test Conditions

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25℃
Voltage	Vnom	3.8V
Humidity	Hnom	47%

5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

5.2. Statements

The L1521, L1522, 1523, supporting BT/BLE/ WIFI, manufactured by Shanghai Sunmi Technology Co.,Ltd.,which is a new product for testing.

Note: The project has three prototypes, L1521, L1522, L1523.The L1523 we tested all the test items. The other two we only tested worse case.


ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

6. Test result

6.1. Measurement Method

6.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

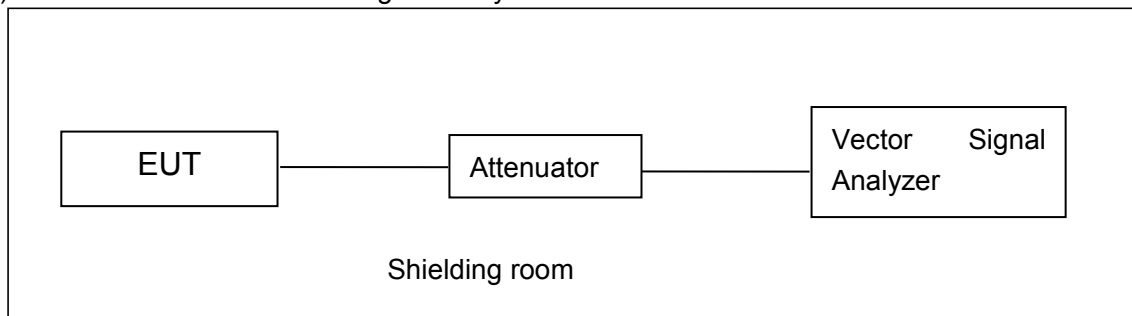


6.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

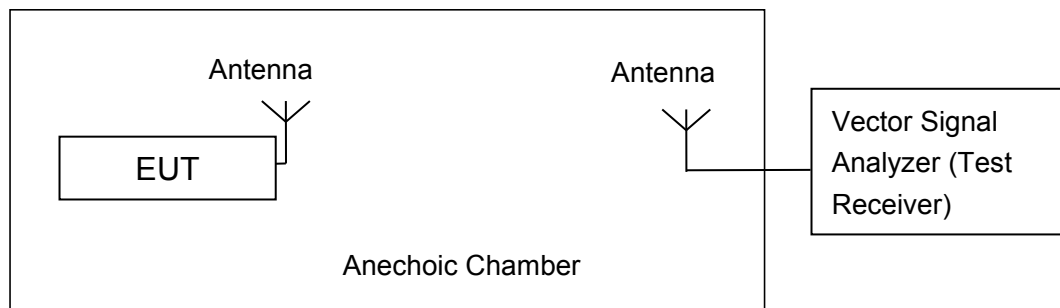

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

6.2. Maximum Average Output Power-Conducted

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

802.11a mode

U-NII-3

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		5745MHz(Ch149)	5785MHz(Ch157)	5825MHz(Ch165)
802.11a	6	12.67	12.40	12.45

The data rate 6Mbps is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20 mode

U-NII-3

Mode	Data Rate(Index)	Teat Result(dBm)		
		5745MHz	5785MHz	5825MHz
802.11n(20MHz)	MCS0	10.87	10.62	10.83

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40 mode

U-NII-3

Mode	Data Rate(Index)	Teat Result(dBm)		
		5755MHz	/	5795MHz
802.11n(40MHz)	MCS0	11.15	/	11.01

The data rate MCS0 is selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

6.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/500kHz)	Conclusion
802.11a	149	-3.725	P
	157	-7.546	P
	165	-2.907	P
802.11n HT20	149	-9.809	P
	157	-4.754	P
	165	-5.036	P
802.11n HT40	151	-9.625	P
	159	-14.800	P

Conclusion: PASS

6.4. Occupied 6dB Bandwidth(conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (MHz)		conclusion
802.11a	149	Fig.1	16.43	P
	157	Fig.2	16.43	P
	165	Fig.3	16.51	P
802.11n HT20	149	Fig.4	17.63	P
	157	Fig.5	17.63	P
	165	Fig.6	17.71	P
802.11n HT40	151	Fig.7	35.34	P
	159	Fig.8	35.42	P

Conclusion: PASS

Test graphs as below:



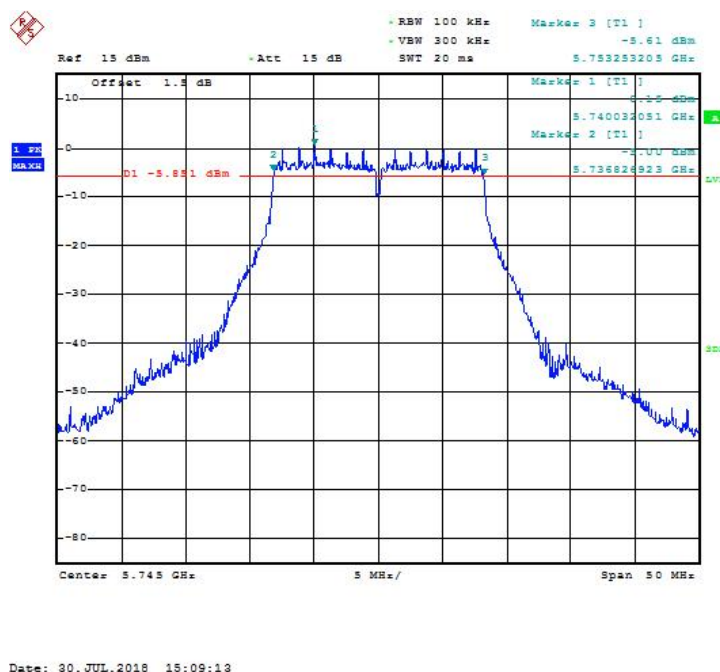


Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)

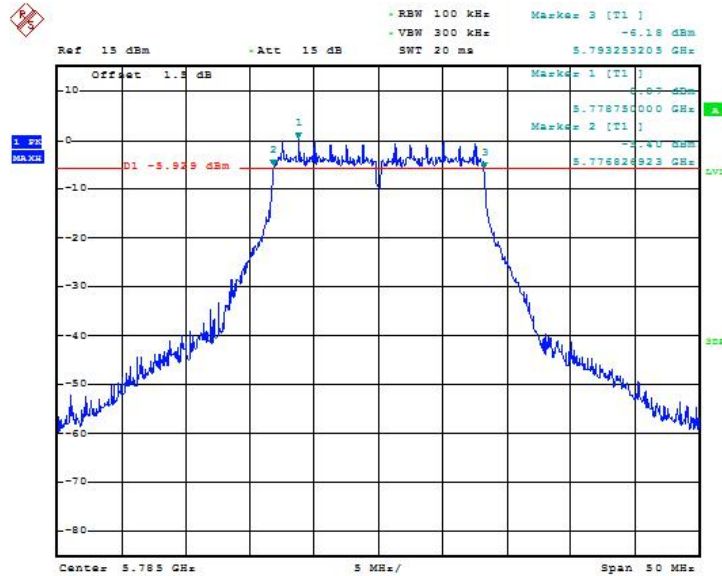


Date: 30.JUL.2018 15:09:58

Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)

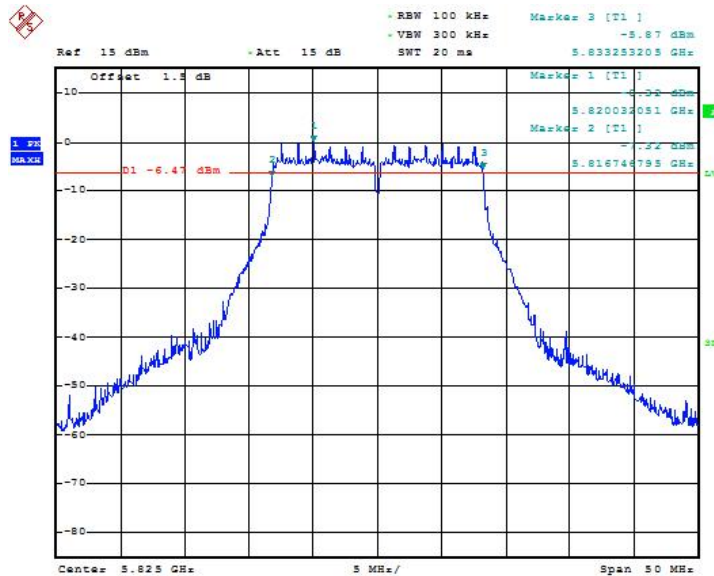


Date: 30.JUL.2018 15:10:41

Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)

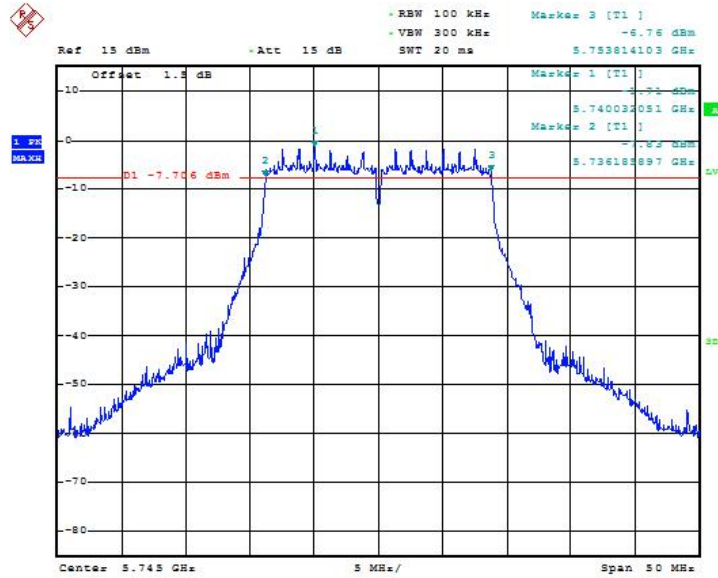


Date: 30.JUL.2018 15:11:42

Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

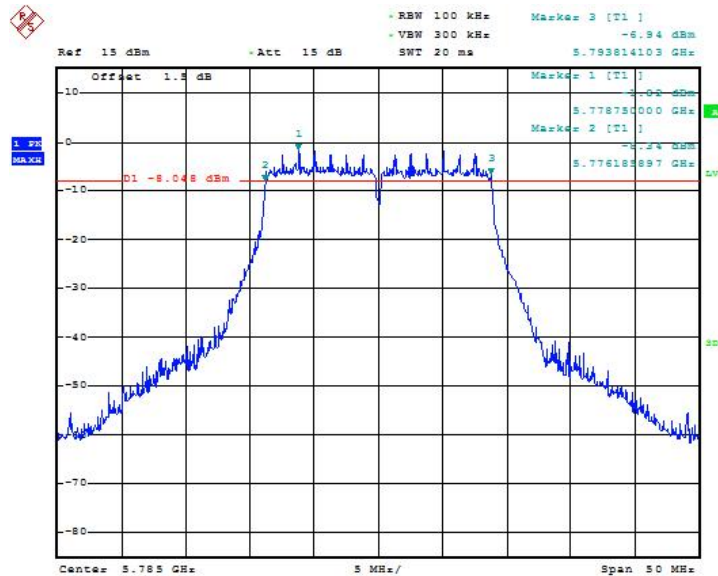


Date: 30.JUL.2018 15:12:34

Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)

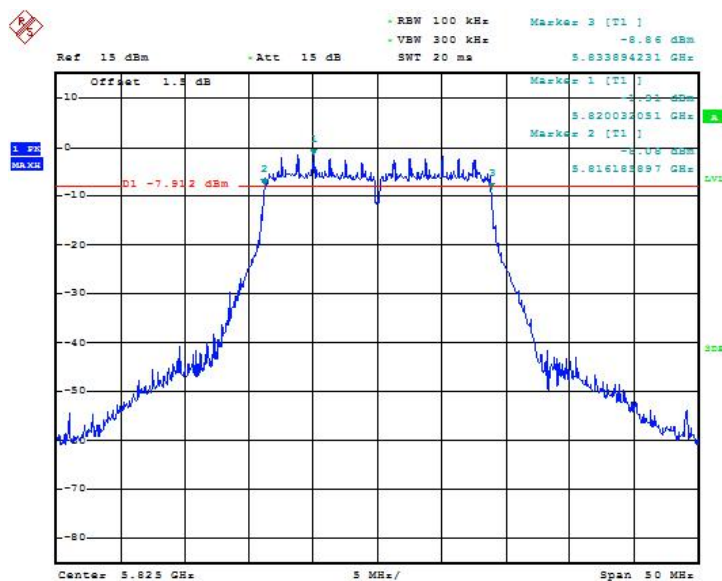


Date: 30.JUL.2018 15:13:21

Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)

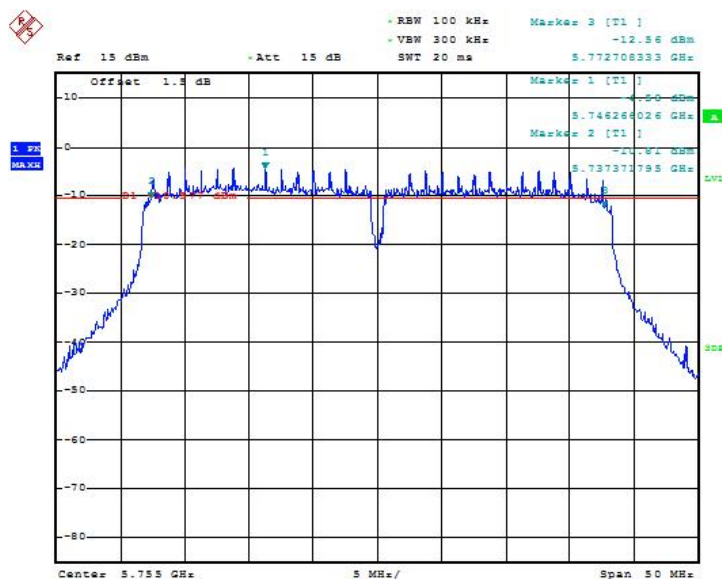

Date: 7.AUG.2018 14:01:31

Fig. 7 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)

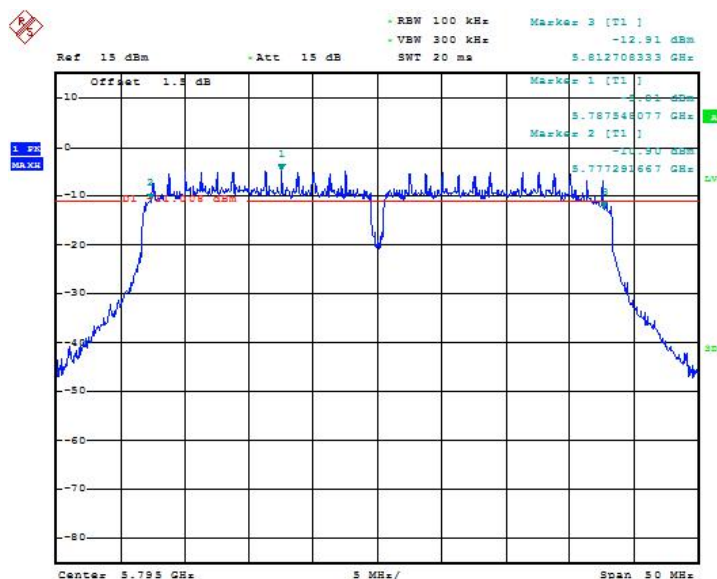

Date: 7.AUG.2018 14:02:25

Fig. 8 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)

6.5. Transmitter Spurious Emission

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 1GHz	0.63
1GHz ≤ f ≤ 5.6GHz	1.55
5.6GHz ≤ f ≤ 40GHz	1.86

6.5.1 Transmitter Spurious Emission - Conducted

Measurement Results:

802.11a mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11a	149	30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 5.6 GHz	Fig.10	P
		5.9 GHz ~ 40 GHz	Fig.11	P
	157	30 MHz ~ 1 GHz	Fig.12	P
		1 GHz ~ 5.6 GHz	Fig.13	P
		5.9 GHz ~ 40 GHz	Fig.14	P
	165	30 MHz ~ 1 GHz	Fig.15	P
		1 GHz ~ 5.6 GHz	Fig.16	P
		5.9 GHz ~ 40 GHz	Fig.17	P

802.11n-HT20 mode


MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT20	149	30 MHz ~ 1 GHz	Fig.18	P
		1 GHz ~ 5.6 GHz	Fig.19	P
		5.9 GHz ~ 40 GHz	Fig.20	P
	157	30 MHz ~ 1 GHz	Fig.21	P
		1 GHz ~ 5.6 GHz	Fig.22	P
		5.9 GHz ~ 40 GHz	Fig.23	P
	165	30 MHz ~ 1 GHz	Fig.24	P
		1 GHz ~ 5.6 GHz	Fig.25	P
		5.9 GHz ~ 40 GHz	Fig.26	P

802.11n-HT40 mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n HT40	151	30 MHz ~ 1 GHz	Fig.27	P
		1 GHz ~ 5.6 GHz	Fig.28	P
		5.9 GHz ~ 40 GHz	Fig.29	P
	159	30 MHz ~ 1 GHz	Fig.30	P
		1 GHz ~ 5.6 GHz	Fig.31	P
		5.9 GHz ~ 40 GHz	Fig.32	P


Conclusion: PASS

Test graphs as below:

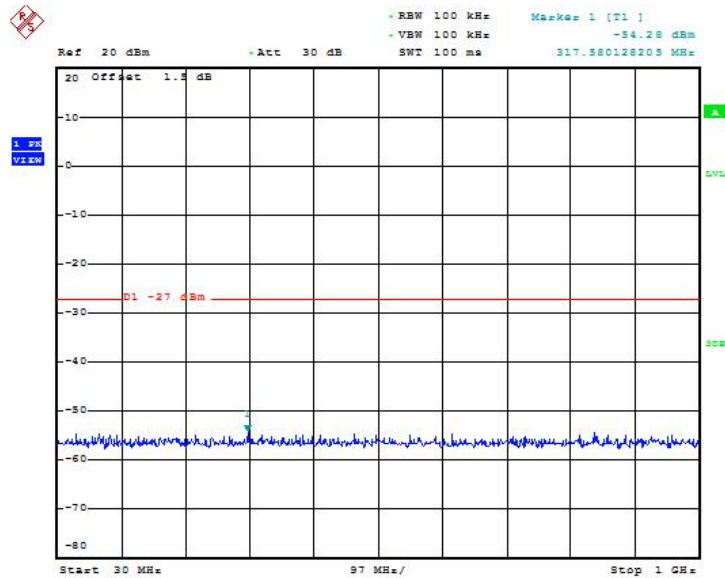


Date: 30.JUL.2018 17:04:04

Fig. 9 Conducted Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

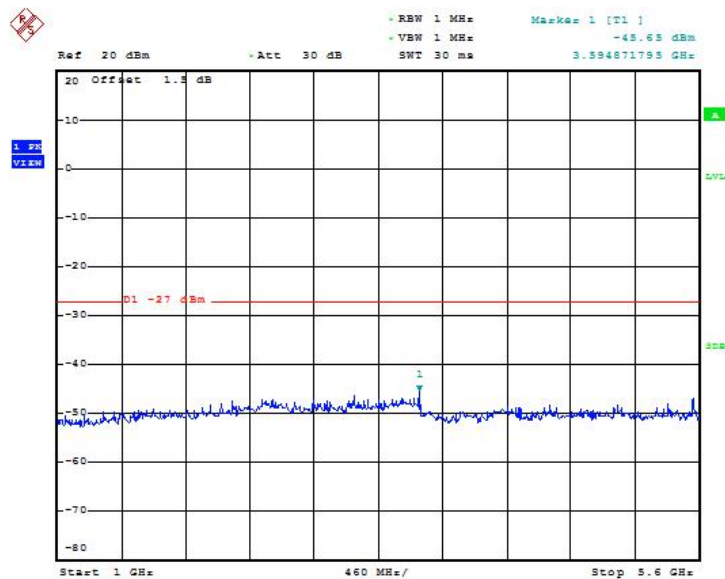


Date: 30.JUL.2018 17:04:33

Fig. 10 Conducted Spurious Emission (802.11a, Ch149, 1 GHz -5.6 GHz)

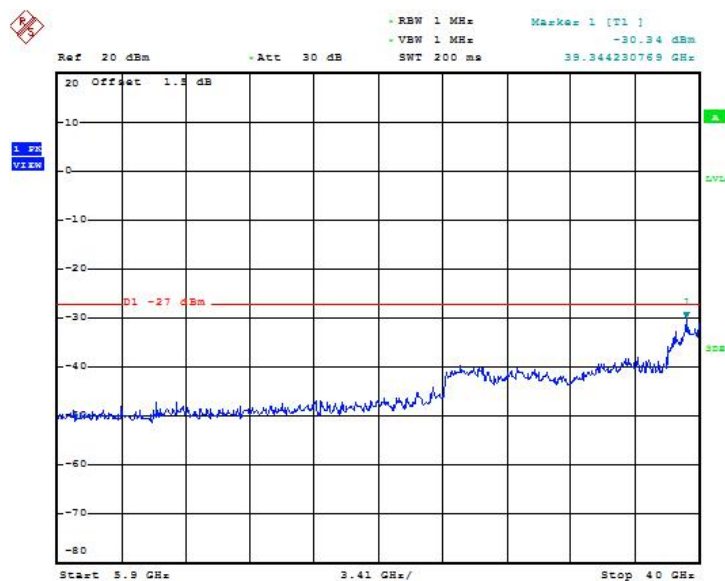


Date: 30.JUL.2018 17:05:03

Fig. 11 Conducted Spurious Emission (802.11a, Ch149, 5.9 GHz-40 GHz)

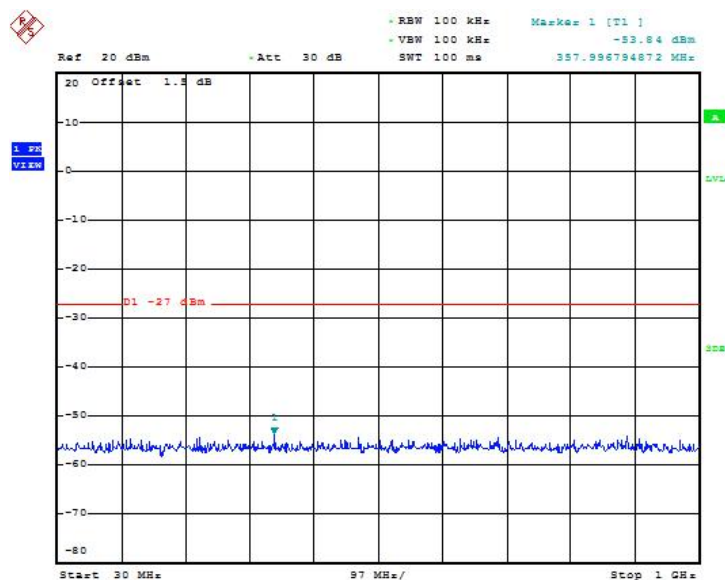


Date: 30.JUL.2018 17:06:39

Fig. 12 Conducted Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

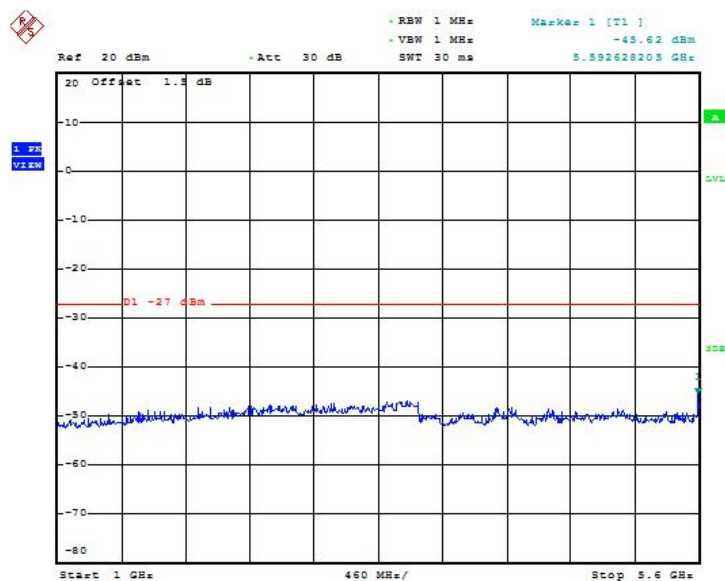


Date: 30.JUL.2018 17:07:09

Fig. 13 Conducted Spurious Emission (802.11a, Ch157, 1 GHz -5.6 GHz)

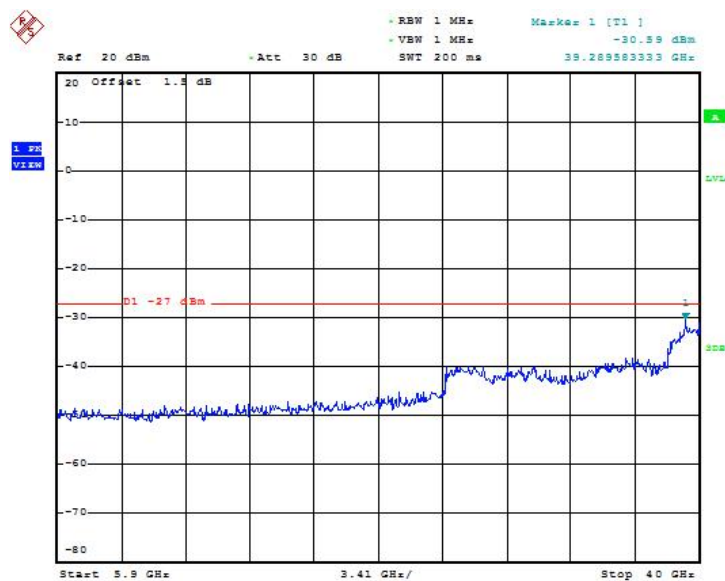


Date: 30.JUL.2018 17:10:11

Fig. 14 Conducted Spurious Emission (802.11a, Ch157, 5.9 GHz-40 GHz)

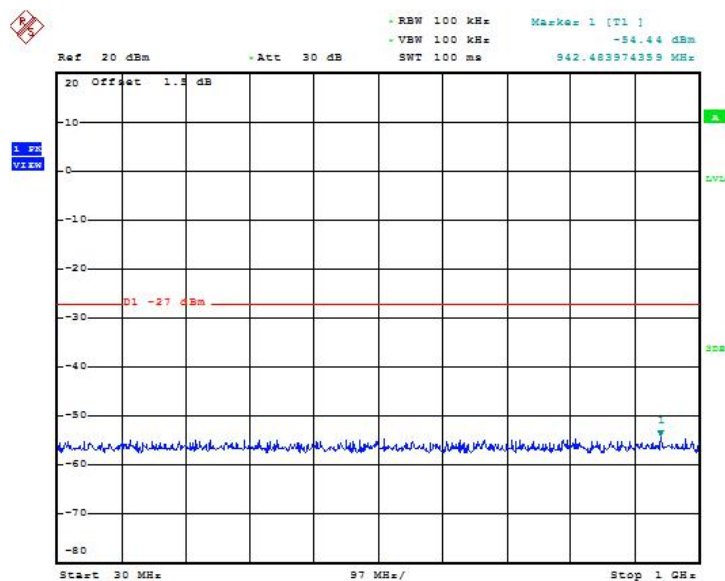


Date: 30.JUL.2018 17:09:13

Fig. 15 Conducted Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)

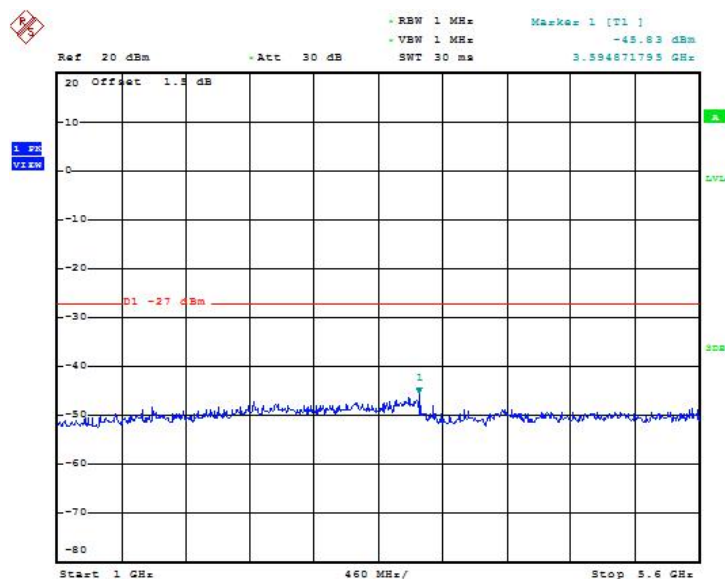


Date: 30.JUL.2018 17:09:42

Fig. 16 Conducted Spurious Emission (802.11a, Ch165, 1 GHz -5.6 GHz)

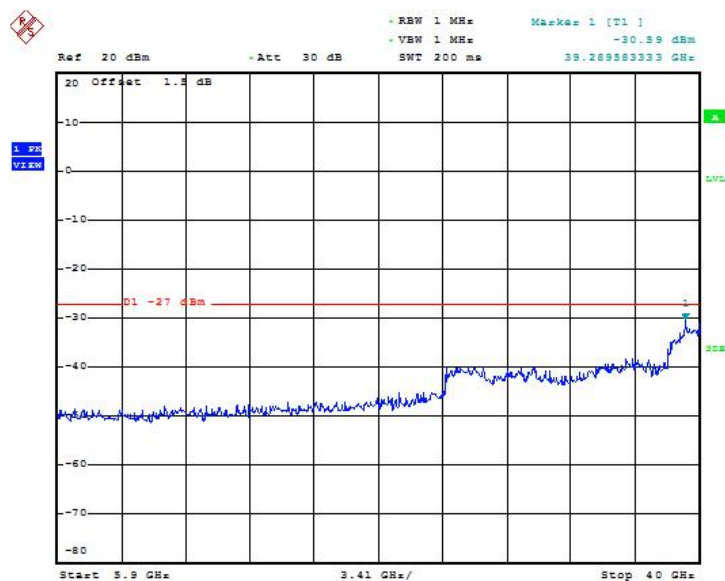


Date: 30.JUL.2018 17:10:11

Fig. 17 Conducted Spurious Emission (802.11a, Ch165, 5.9 GHz-40 GHz)

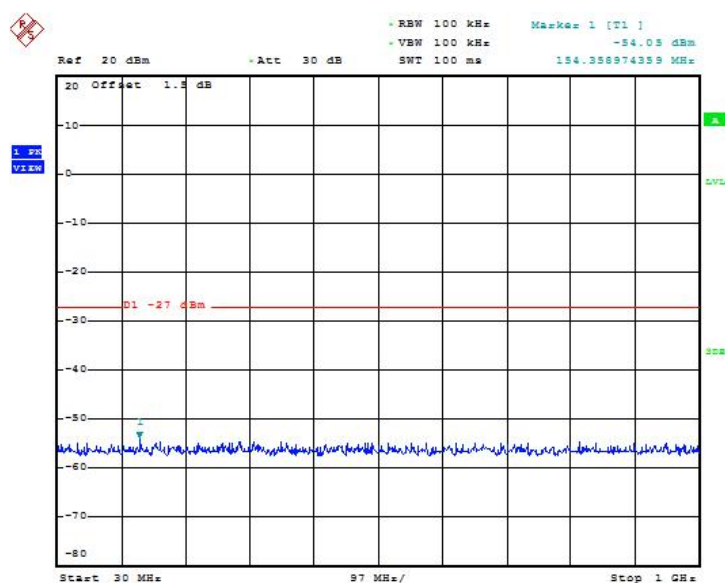


Date: 30.JUL.2018 17:11:57

Fig. 18 Conducted Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

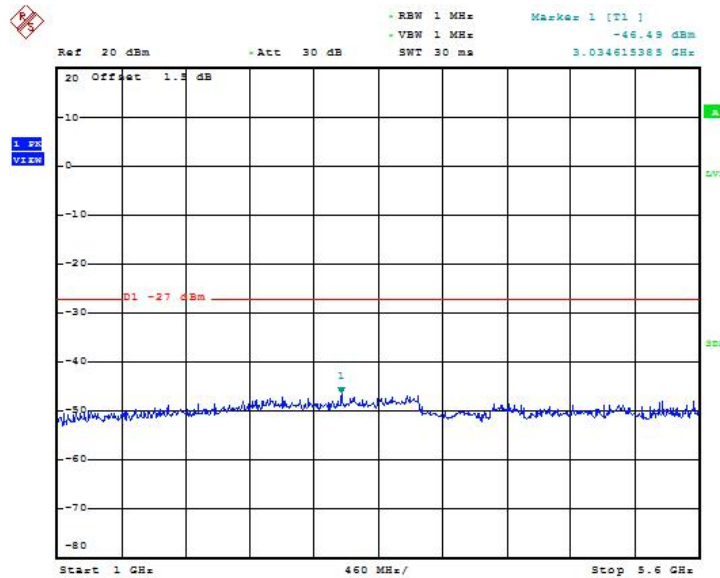


Date: 30.JUL.2018 17:12:26

Fig. 19 Conducted Spurious Emission (802.11n-HT20, Ch149, 1 GHz -5.6 GHz)

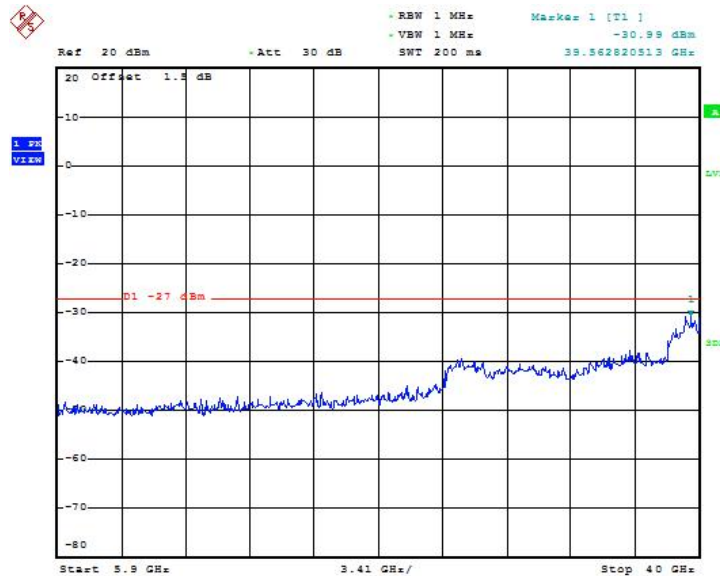


Date: 30.JUL.2018 17:12:56

Fig. 20 Conducted Spurious Emission (802.11n-HT20, Ch149, 5.9 GHz-40 GHz)

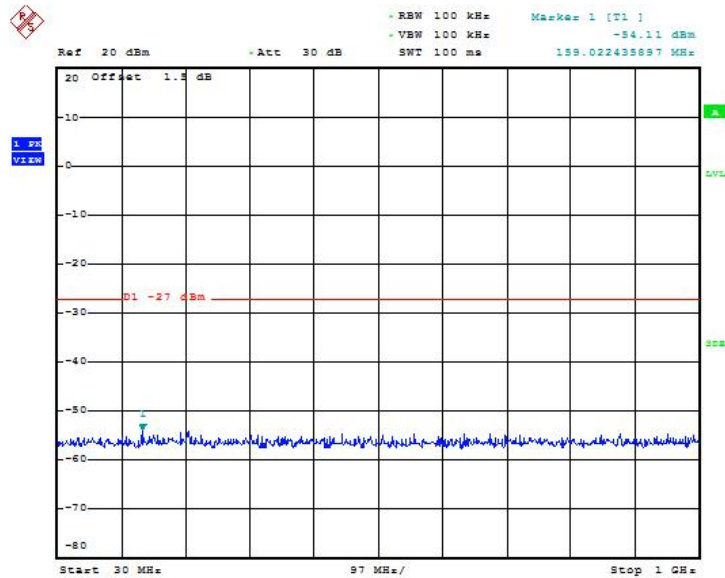


Date: 30.JUL.2018 17:14:31

Fig. 21 Conducted Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

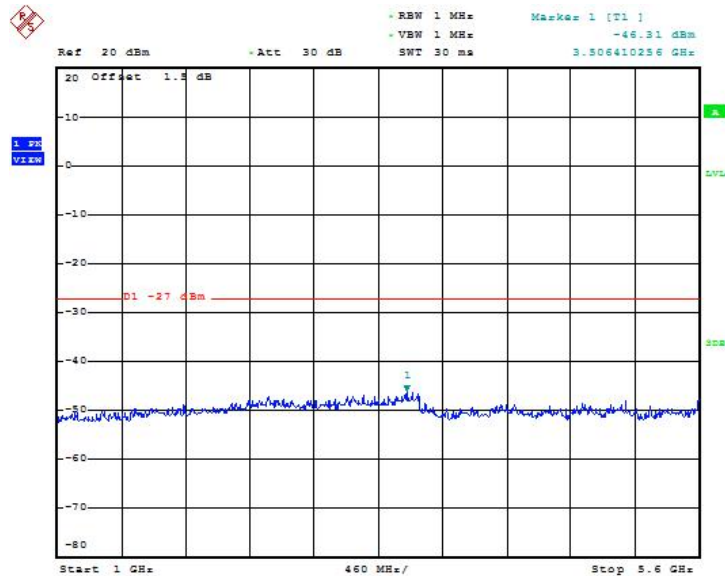


Date: 30.JUL.2018 17:15:00

Fig. 22 Conducted Spurious Emission (802.11n-HT20, Ch157, 1 GHz -5.6 GHz)

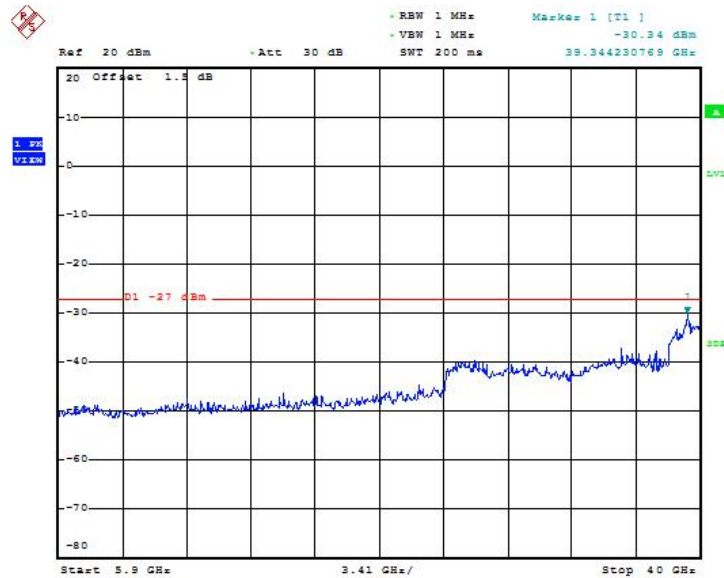


Date: 30.JUL.2018 17:15:30

Fig. 23 Conducted Spurious Emission (802.11n-HT20, Ch157, 5.9 GHz-40 GHz)

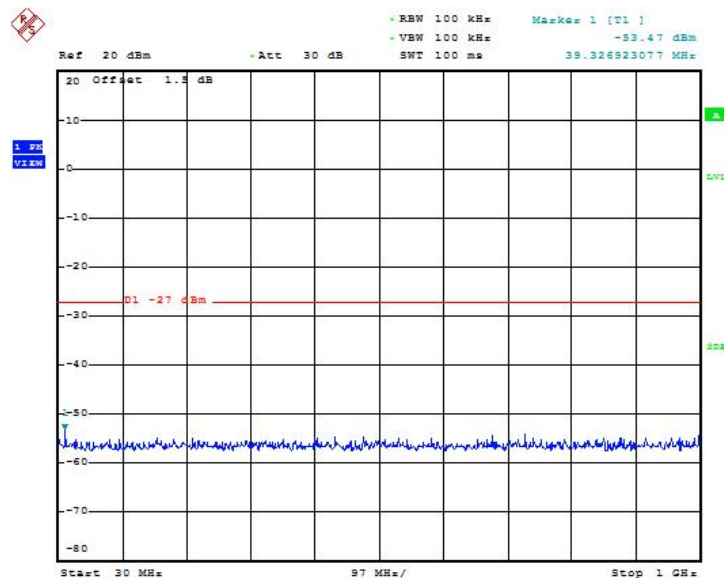


Date: 30.JUL.2018 17:16:58

Fig. 24 Conducted Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)

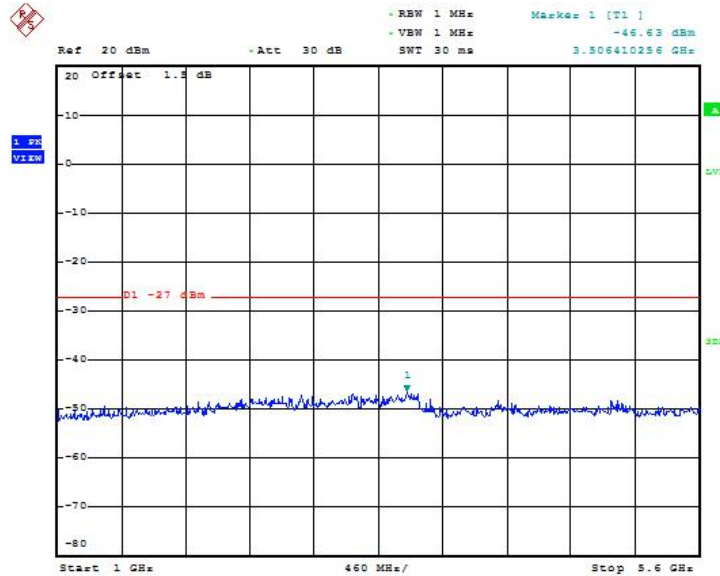


Date: 30.JUL.2018 17:17:28

Fig. 25 Conducted Spurious Emission (802.11n-HT20, Ch165, 1 GHz -5.6 GHz)

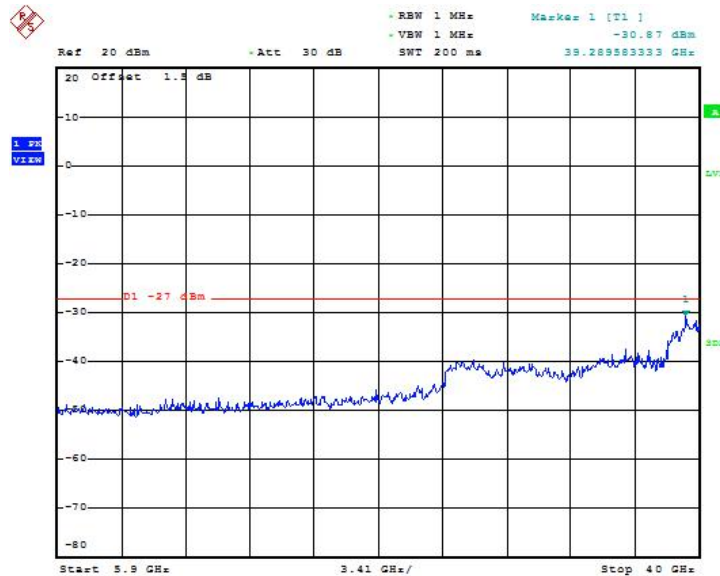


Date: 30.JUL.2018 17:17:57

Fig. 26 Conducted Spurious Emission (802.11n-HT20, Ch165, 5.9 GHz-40 GHz)

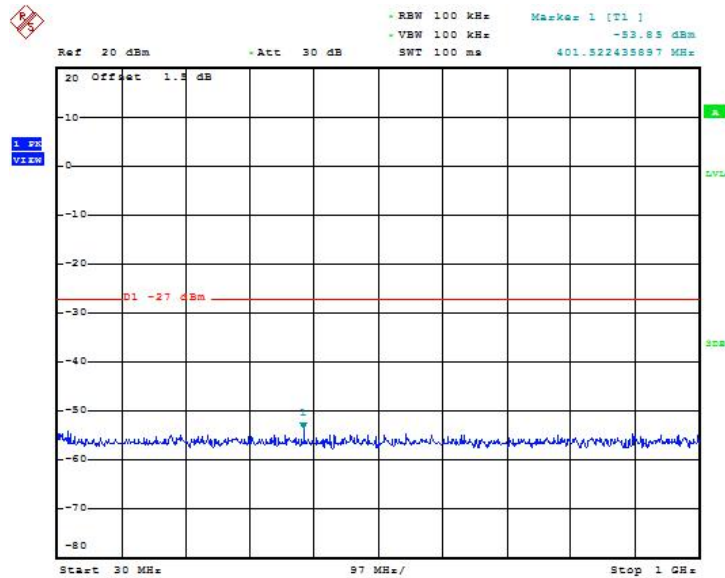


Date: 7.AUG.2018 14:29:49

Fig. 27 Conducted Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)

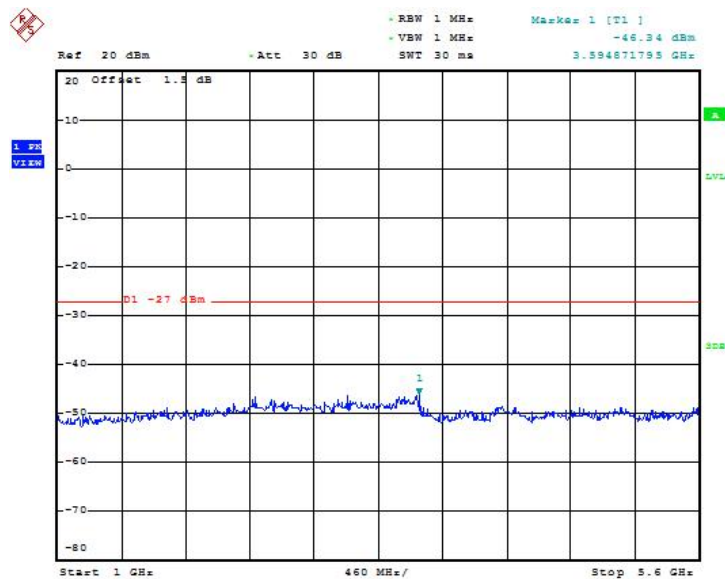


Date: 7.AUG.2018 14:30:18

Fig. 28 Conducted Spurious Emission (802.11n-HT40, Ch151, 1 GHz -5.6 GHz)

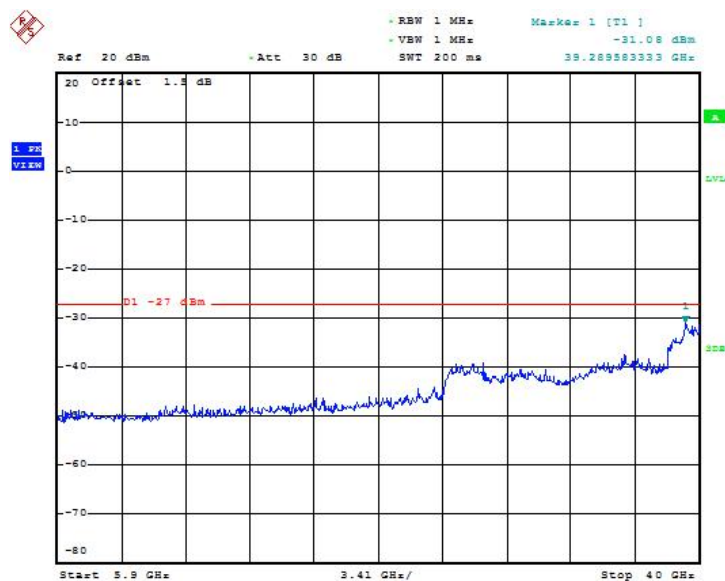


Date: 7.AUG.2018 14:30:48

Fig. 29 Conducted Spurious Emission (802.11n-HT40, Ch151, 5.9 GHz-40 GHz)

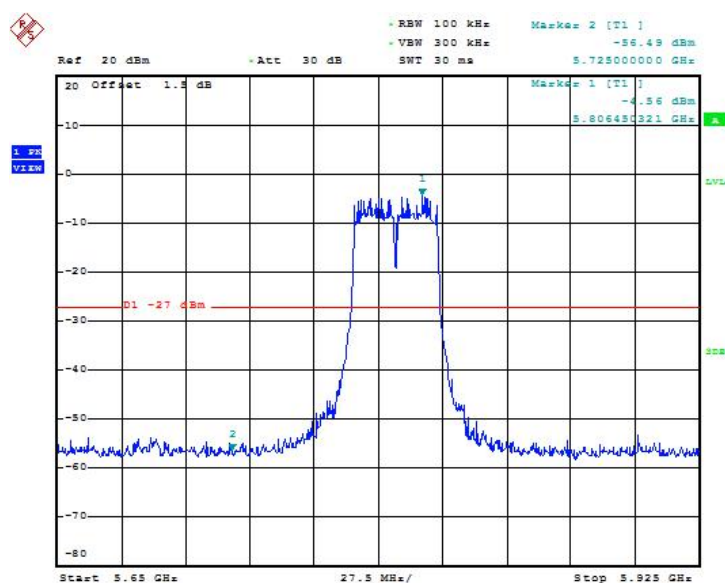


Date: 7.AUG.2018 14:31:50

Fig. 30 Conducted Spurious Emission (802.11n-HT40, Ch159, 30 MHz-1 GHz)

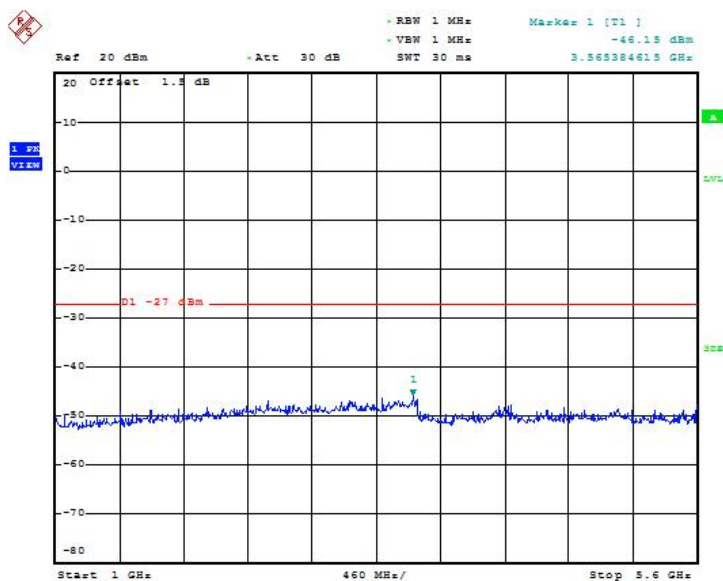

Date: 7.AUG.2018 14:32:52

Fig. 31 Conducted Spurious Emission (802.11n-HT40, Ch159, 1 GHz -5.6 GHz)

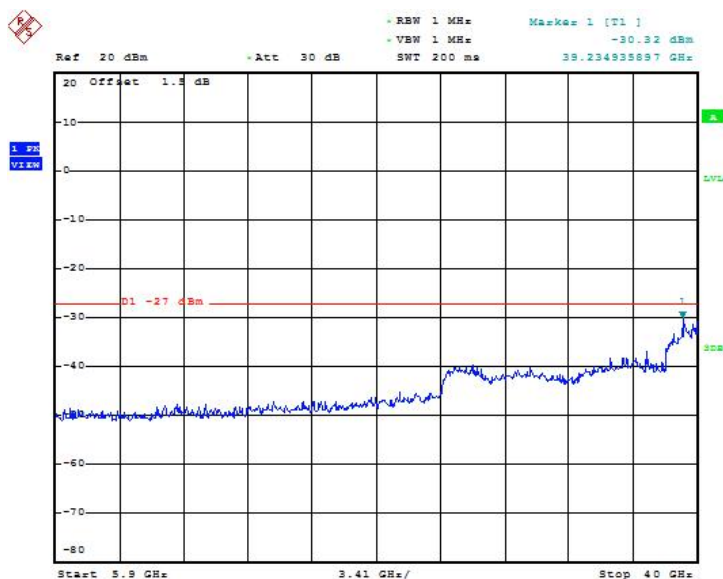

Date: 7.AUG.2018 14:33:22

Fig. 32 Conducted Spurious Emission (802.11n-HT40, Ch159, 5.9 GHz-40 GHz)

6.5.2 Transmitter Spurious Emission - Radiated

Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
$f \leq 1\text{GHz}$	3.9

f>1GHz	4.3
--------	-----

Measurement Results:
L1523
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	30 MHz ~1 GHz	Fig.33	P
		1 GHz ~ 8 GHz	Fig.34	P
		8 GHz ~ 18 GHz	Fig.35	P
		18 GHz ~ 26.5 GHz	Fig.36	P
		26.5 GHz~ 40 GHz	Fig.37	P
	157(5785MHz)	30 MHz ~1 GHz	Fig.38	P
		1 GHz ~ 8 GHz	Fig.39	P
		8 GHz ~ 18 GHz	Fig.40	P
		18 GHz ~ 26.5 GHz	Fig.41	P
		26.5 GHz~ 40 GHz	Fig.42	P
	165(5825MHz)	30 MHz ~1 GHz	Fig.43	P
		1 GHz ~ 8 GHz	Fig.44	P
		8 GHz ~ 18 GHz	Fig.45	P
		18 GHz ~ 26.5 GHz	Fig.46	P
		26.5 GHz~ 40 GHz	Fig.47	P

802.11n-HT20 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	149(5745MHz)	30 MHz ~1 GHz	Fig.48	P
		1 GHz ~ 8 GHz	Fig.49	P
		8 GHz ~ 18 GHz	Fig.50	P
		18 GHz ~ 26.5 GHz	Fig.51	P
		26.5 GHz~ 40 GHz	Fig.52	P
	157(5785MHz)	30 MHz ~1 GHz	Fig.53	P
		1 GHz ~ 8 GHz	Fig.54	P
		8 GHz ~ 18 GHz	Fig.55	P
		18 GHz ~ 26.5 GHz	Fig.56	P
		26.5 GHz~ 40 GHz	Fig.57	P
	165(5825MHz)	30 MHz ~1 GHz	Fig.58	P
		1 GHz ~ 8 GHz	Fig.59	P
		8 GHz ~ 18 GHz	Fig.60	P
		18 GHz ~ 26.5 GHz	Fig.61	P
		26.5 GHz~ 40 GHz	Fig.62	P

802.11n-HT40 mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n	151(5755MHz)	30 MHz ~1 GHz	Fig.63	P

(HT40)		1 GHz ~ 8 GHz	Fig.64	P
		8 GHz ~ 18 GHz	Fig.65	P
		18 GHz ~ 26.5 GHz	Fig.66	P
		26.5 GHz~ 40 GHz	Fig.67	P
	159(5795MHz)	30 MHz ~1 GHz	Fig.68	P
		1 GHz ~ 8 GHz	Fig.69	P
		8 GHz ~ 18 GHz	Fig.70	P
		18 GHz ~ 26.5 GHz	Fig.71	P
		26.5 GHz~ 40 GHz	Fig.72	P

L1522
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	30 MHz ~1 GHz	Fig.73	P
		1 GHz ~ 8 GHz	Fig.74	P
		8 GHz ~ 18 GHz	Fig.75	P
		18 GHz ~ 26.5 GHz	Fig.76	P
		26.5 GHz~ 40 GHz	Fig.77	P

L1521
802.11a mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11a	149(5745MHz)	30 MHz ~1 GHz	Fig.78	P
		1 GHz ~ 8 GHz	Fig.79	P
		8 GHz ~ 18 GHz	Fig.80	P
		18 GHz ~ 26.5 GHz	Fig.81	P
		26.5 GHz~ 40 GHz	Fig.82	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

L1523
802.11a

Channel 149(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
33.9	24.68	-22	46.68	V
51.0	26.3	-20.3	46.6	V

67.8	26.36	-24.5	50.86	V
105.0	22	-23.6	45.6	H
212.9	32.16	-24	56.16	H
298.8	27.49	-22	49.49	V

Channel 149(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
4593.0	43.39	2.4	40.99	H
5370.2	47.6	4.1	43.5	H
5990.4	44.46	4.6	39.86	H
6830.2	45.92	6.7	39.22	H
7367.4	46.36	7.3	39.06	H
7723.4	47.11	8.3	38.81	V

Channel 149(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
11651.0	52.39	15.2	37.19	V
13106.0	53.68	17.8	35.88	V
14080.0	53.33	19.3	34.03	V
15132.8	54.22	20.6	33.62	H
15868.8	55.78	21.9	33.88	H
17277.0	56.35	24.2	32.15	V

Channel 149(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
15132.8	42.35	20.6	21.75	H
15868.8	43.46	21.9	21.56	H
17277.0	44.65	24.2	20.45	V

Channel 149(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19207.0	39.69	-5.7	45.39	H
20574.6	42.11	-4.4	46.51	H

21599.8	42.36	-3.4	45.76	V
22803.4	43.68	-2.9	46.58	V
24100.4	44.65	-2.8	47.45	H
25475.8	45.25	-2.9	48.15	V

Channel 149(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
28071.4	44.54	-0.2	44.74	V
30698.5	44.05	0	44.05	H
32627.6	43.77	0.4	43.37	V
34319.2	45.55	1.7	43.85	H
35659.8	46.2	1.4	44.8	H
38496.1	47.64	2.6	45.04	V

Channel 157(30MHz ~ 1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.0	24.29	-22	46.29	V
42.6	26.74	-20.6	47.34	V
50.9	26.54	-20.3	46.84	V
104.8	25.67	-23.5	49.17	H
179.6	28.43	-25.9	54.33	H
240.4	19.86	-23.5	43.36	H

Channel 157(1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4485.2	44.65	2.3	42.35	V
5375.0	49.16	4.1	45.06	H
5996.4	49.31	4.6	44.71	V
6745.4	46.6	6.7	39.9	V
7460.0	46.26	7.3	38.96	V
7938.8	47.53	9	38.53	V

Channel 157(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
10605.2	49.6	13	36.6	H
12525.4	52.62	16.6	36.02	H
13747.2	54.85	18.8	36.05	H
14934.8	53.73	20.1	33.63	V
16064.8	56.12	22.5	33.62	H
17669.4	56.93	24.4	32.53	H

Channel 157(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
13747.2	42.16	18.8	23.36	H
16064.8	44	22.5	21.5	H
17669.4	45.09	24.4	20.69	H

Channel 157(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19183.2	39.53	-5.6	45.13	V
20588.2	39.15	-4.4	43.55	V
21410.2	42.55	-3.5	46.05	V
22947.8	45.09	-3	48.09	V
24105.6	43.51	-2.8	46.31	H
24936.0	45.23	-2.4	47.63	H

Channel 157(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27948.6	44.6	-0.3	44.9	V
29428.2	41.85	-0.8	42.65	H
30961.8	45.34	0.5	44.84	H
33449.8	45.49	1.2	44.29	H
35523.4	46.23	1.5	44.73	H
36927.4	46.34	1.7	44.64	H

Channel 165(30MHz ~ 1GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
34.0	24.61	-22	46.61	V
51.0	26.83	-20.3	47.13	V
68.0	26.59	-24.5	51.09	V
104.7	25.23	-23.5	48.73	H
211.1	31.28	-24.1	55.38	H
300.8	29.38	-21.9	51.28	V

Channel 165(1GHz ~ 8GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
5381.4	49	4.1	44.9	V
5997.4	46.22	4.6	41.62	V
6591.6	46.15	6.3	39.85	H
7037.2	46.98	7.3	39.68	V
7399.8	46.53	7.2	39.33	H
7750.6	47.83	8.4	39.43	V

Channel 165(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
9233.8	48.93	10.5	38.43	V
10739.0	50.63	12.9	37.73	V
12531.0	52.56	16.6	35.96	H
14538.8	53.82	19.2	34.62	V
16009.8	56.12	22.4	33.72	H
17977.0	57.7	24.8	32.9	V

Channel 165(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
16009.8	43.81	22.4	21.41	H
17977.0	44.89	24.8	20.09	V

Channel 165(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
-----------------	-----------------------	-----------	---------------------	----------

19523.2	39.32	-5.3	44.62	V
20466.7	42.25	-4.3	46.55	V
21590.4	42.59	-3.4	45.99	H
22956.4	44.83	-3	47.83	V
24247.5	43.48	-2.9	46.38	H
25502.1	45.58	-2.9	48.48	V

Channel 165(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27882.4	43.9	-0.4	44.3	V
29614.4	42.29	-0.7	42.99	V
31088.6	44.41	0.7	43.71	H
33420.1	44.59	1.1	43.49	V
35650.3	46.5	1.4	45.1	V
36830.2	46.83	2.2	44.63	V

802.11n-HT20

Channel 149(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.8	23.07	-22	45.07	V
50.7	26.18	-20.2	46.38	V
68.2	27.55	-24.6	52.15	V
104.5	24.93	-23.5	48.43	H
135.9	23.8	-27.8	51.6	H
177.9	29.03	-25.8	54.83	H

Channel 149(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2989.8	56.76	-1.2	57.96	H
4237.4	44.05	1.6	42.45	H
4978.4	49.22	2.2	47.02	H
5556.6	51.93	4.6	47.33	H

5939.8	51.47	4.7	46.77	H
7339.6	46.47	7.3	39.17	H

Channel 149(1GHz ~ 8GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2989.8	28.09	-1.2	29.29	H

Channel 149(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
10104.8	49.6	11.7	37.9	V
11646.6	51.96	15.2	36.76	V
13679.8	54.13	18.7	35.43	V
15182.0	54.64	20.7	33.94	V
16393.0	55.26	22.9	32.36	V
17866.6	56.54	24.4	32.14	V

Channel 149(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
13679.8	42.13	18.7	23.43	V
15182.0	42.51	20.7	21.81	V
16393.0	43.15	22.9	20.25	V
17866.6	44.23	24.4	19.83	V

Channel 149(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19250.4	39.48	-5.7	45.18	V
20748.0	41.48	-4.3	45.78	H
22168.4	44.25	-2.9	47.15	H
23443.4	43.78	-2.7	46.48	V
24545.0	44.62	-2.6	47.22	V
25982.4	46.27	-2	48.27	H

Channel 149(26.5GHz ~ 40GHz)

Frequency	Result	ARpl (dB)	PMea	Polarity
-----------	--------	-----------	------	----------

(MHz)	(dBμV/m)		(dBμV/m)	
27766.3	44.06	-0.5	44.56	H
30118.0	43.45	-1.1	44.55	H
32631.7	43.98	0.4	43.58	H
34016.8	46.29	1.5	44.79	V
35427.6	46.82	1.6	45.22	H
36804.6	45.82	2.3	43.52	V

Channel 157(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.4	25.18	-22	47.18	V
50.8	21.26	-20.2	41.46	V
104.9	25.43	-23.5	48.93	H
138.9	20.42	-28	48.42	H
205.3	29.03	-24.4	53.43	H
696.5	29.36	-13.1	42.46	H

Channel 157(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2989.0	50.38	-1.2	51.58	V
4008.2	44.13	0.8	43.33	H
4993.0	52.66	2.2	50.46	V
6605.4	45.88	6.4	39.48	H
7044.4	45.73	7.3	38.43	V
7584.8	46.56	7.6	38.96	H

Channel 157(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
10874.0	49.13	13	36.13	H
12110.6	50.95	15.2	35.75	H
13193.0	52.86	17.9	34.96	V
14950.8	54.36	20.2	34.16	V

16005.0	56.73	22.3	34.43	V
17655.0	57.04	24.4	32.64	H

Channel 157(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
14950.8	41.87	20.2	21.67	V
16005.0	43.76	22.3	21.46	V
17655.0	45.01	24.4	20.61	H

Channel 157(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19012.4	40.43	-5.5	45.93	H
20359.6	39.94	-4.6	44.54	V
21438.2	43.16	-3.5	46.66	H
22624.0	45.07	-2.8	47.87	V
23488.4	44.74	-2.7	47.44	H
24419.2	45.04	-2.7	47.74	H

Channel 157(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27720.4	43.96	-0.6	44.56	H
29505.1	42.21	-0.7	42.91	H
31276.3	44.27	0.3	43.97	H
33372.8	45.16	1.1	44.06	V
35628.7	46.97	1.4	45.57	V
38824.2	49.34	3.5	45.84	H

Channel 165(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.4	21.89	-22	43.89	V
50.8	26.8	-20.2	47	V
105.0	25.37	-23.6	48.97	H
136.9	23.05	-27.8	50.85	H

213.6	29.98	-24	53.98	H
300.5	27.95	-21.9	49.85	V

Channel 165(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
5381.6	48.99	4.1	44.89	V
5997.6	43.57	4.6	38.97	V
6597.6	46.55	6.3	40.25	V
7027.6	46.52	7.3	39.22	H
7465.4	47.51	7.3	40.21	V
7766.0	47.99	8.5	39.49	H

Channel 165(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
10006.6	49.88	11.3	38.58	H
11659.0	52.4	15.1	37.3	H
12581.0	53.23	16.7	36.53	H
13683.8	54.89	18.7	36.19	V
14980.0	54.32	20.2	34.12	V
16008.2	55.98	22.4	33.58	H

Channel 165(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
13683.8	42.12	18.7	23.42	V
14980.0	41.74	20.2	21.54	V
16008.2	43.78	22.4	21.38	H

Channel 165(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19312.4	39.59	-5.8	45.39	H
20598.4	41.86	-4.4	46.26	V
21574.2	42.83	-3.4	46.23	H
22901.1	43.9	-3	46.9	H

23998.4	43.49	-2.8	46.29	V
25367.0	44.84	-2.6	47.44	H

Channel 165(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27816.2	44.05	-0.4	44.45	V
30051.8	42.97	-1.2	44.17	V
31863.6	43.69	0.4	43.29	H
34483.9	46.34	1.1	45.24	H
36905.8	47.48	1.8	45.68	V
38880.8	48.81	3.7	45.11	H

802.11n-HT40

Channel 151(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
37.7	32.74	-21.4	54.14	V
101.5	24.06	-23.6	47.66	H
135.1	32.44	-27.7	60.14	H
178.1	30	-25.8	55.8	H
294.8	29.64	-22.1	51.74	H
748.8	26.02	-12.2	38.22	H

Channel 151(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2987.8	41.48	-1.2	42.68	V
5385.2	50.5	4.2	46.3	H
6482.2	45.84	6	39.84	H
6625.8	46.69	6.4	40.29	V
7078.0	46.38	7.3	39.08	H
7421.6	46.6	7.2	39.4	H

Channel 151(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
-----------------	-----------------	-----------	---------------	----------

10026.8	49.32	11.4	37.92	H
11209.0	50.7	13.8	36.9	V
13073.0	52.63	17.8	34.83	V
14107.8	53.12	19.4	33.72	H
15631.6	55.13	21.5	33.63	H
17099.0	57.64	24	33.64	H

Channel 151(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
15631.6	42.94	21.5	21.44	H
17099.0	45	24	21	H

Channel 151(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
19223.2	41	-5.7	46.7	V
19948.2	39.93	-5	44.93	V
20960.6	40.85	-4.1	44.95	H
21604.8	44.21	-3.4	47.61	H
22702.2	44.46	-2.8	47.26	V
24329.1	43.51	-2.8	46.31	V

Channel 151(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27841.9	44.5	-0.4	44.9	H
30778.2	46.01	0.2	45.81	H
33741.4	45.49	1.4	44.09	H
35499.1	46.92	1.5	45.42	V
36932.8	46.21	1.7	44.51	V
38836.3	49.84	3.6	46.24	H

Channel 159(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.3	24.23	-22	46.23	V

101.5	23.53	-23.6	47.13	H
135.1	32.62	-27.7	60.32	H
177.0	30.25	-26	56.25	H
294.1	31.08	-22.1	53.18	H
696.7	28.82	-13.1	41.92	H

Channel 159(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
3097.8	42.35	-0.9	43.25	H
6303.6	45.6	5.6	40	H
6654.2	46.98	6.5	40.48	V
7069.8	46.3	7.3	39	V
7354.2	46	7.3	38.7	H
7764.8	47.13	8.5	38.63	V

Channel 159(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
10432.8	49.56	12.9	36.66	H
12102.2	50.7	15.2	35.5	H
13682.2	54.04	18.7	35.34	V
14959.2	53.63	20.2	33.43	H
16301.6	55.83	22.7	33.13	V
17665.2	57.71	24.4	33.31	V

Channel 159(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
13682.2	42.13	18.7	23.43	V
16301.6	43.57	22.7	20.87	V
17665.2	45.04	24.4	20.64	V

Channel 159(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
-----------------	-----------------	-----------	---------------	----------

19061.6	39.7	-5.5	45.2	V
20115.6	40.24	-4.8	45.04	V
21292.9	41.58	-3.6	45.18	V
22210.0	43.78	-3	46.78	H
23157.0	44.32	-2.9	47.22	V
24272.2	44.26	-2.9	47.16	V

Channel 159(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
27690.7	44.27	-0.6	44.87	H
29968.2	42.87	-1.4	44.27	V
31252.0	44.76	0.4	44.36	H
33389.0	45.31	1.1	44.21	V
35590.9	47.25	1.4	45.85	V
37437.7	44.75	0.9	43.85	H

L1522
802.11a

Channel 149(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.5	17.9	-22	39.9	V
73.2	27.45	-25.8	53.25	H
114.8	32.43	-24.8	57.23	H
177.1	32.33	-25.9	58.23	H
303.4	30.95	-21.8	52.75	H
457.6	32.43	-18.1	50.53	V

Channel 149(1GHz ~ 8GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2998.4	47.44	-1.3	48.74	H
3850.8	42.36	0.4	41.96	H
4990.4	47.11	2.2	44.91	V

6526.4	45.72	6.1	39.62	V
7120.2	46.69	7.3	39.39	H
7783.6	47.97	8.5	39.47	V

Channel 149(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
14941.6	54.4	20.1	34.3	H
12564.8	52.97	16.7	36.27	H
13677.2	53.95	18.7	35.25	H
11841.0	51.39	15	36.39	H
10303.2	49.48	12.3	37.18	H
16307.4	55.5	22.7	32.8	H

Channel 149(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
14941.6	42	20.1	21.9	H
16307.4	43.5	22.7	20.8	H

Channel 149(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19609.0	40.78	-5.2	45.98	V
20760.8	40.79	-4.3	45.09	H
21647.4	42.8	-3.4	46.2	H
22584.0	43.45	-2.9	46.35	H
24007.0	44.19	-2.8	46.99	H
25354.2	44.47	-2.6	47.07	V

Channel 149(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27729.8	44.4	-0.6	45	H
30844.3	45.32	0.3	45.02	V
32442.7	43.65	0.5	43.15	H
33960.1	45.79	1.5	44.29	V

35839.3	46.38	1	45.38	H
36918.0	47.17	1.8	45.37	V

L1521
802.11a

Channel 149(30MHz ~ 1GHz)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
34.2	18.27	-22	40.27	V
49.1	24.84	-20	44.84	V
74.4	25.5	-26.1	51.6	H
179.9	32.1	-25.8	57.9	H
303.8	29.42	-21.8	51.22	H
698.7	26.46	-13	39.46	H

Channel 149(1GHz ~ 8GHz)(Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2530.8	39.73	-2.2	41.93	H
2987.8	57.52	-1.2	58.72	V
3573.8	42.19	-0.1	42.29	V
4198.0	44.15	1.4	42.75	V
4989.8	52.82	2.2	50.62	V
7446.0	46.16	7.3	38.86	V

Channel 149(1GHz ~ 8GHz)(Average)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2987.8	29.71	-1.2	30.91	V

Channel 149(8GHz ~ 18GHz) (Peak)

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
10337.0	49.36	12.4	36.96	V
11818.0	51.63	15.1	36.53	H
13110.4	53.79	17.8	35.99	H

14017.0	53.97	19.1	34.87	H
15057.4	54.18	20.4	33.78	V
16291.0	56.23	22.6	33.63	H

Channel 149(8GHz ~ 18GHz) (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
15057.4	42.02	20.4	21.62	V
16291.0	43.76	22.6	21.16	H

Channel 149(18GHz ~ 26.5GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
19413.6	39.91	-5.5	45.41	H
20635.0	42.64	-4.4	47.04	H
22087.6	43.3	-3.1	46.4	H
23383.0	44.76	-2.6	47.36	H
24642.8	45.77	-2.4	48.17	V
25779.2	44.9	-2.1	47	V

Channel 149(26.5GHz ~ 40GHz)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
27674.5	45.02	-0.7	45.72	V
29534.8	43	-0.6	43.6	H
31195.3	44.85	0.5	44.35	V
32873.4	43.46	0.8	42.66	H
35501.8	46.6	1.5	45.1	V
37370.2	44.48	0.8	43.68	H

L1523

Test graphs as below:

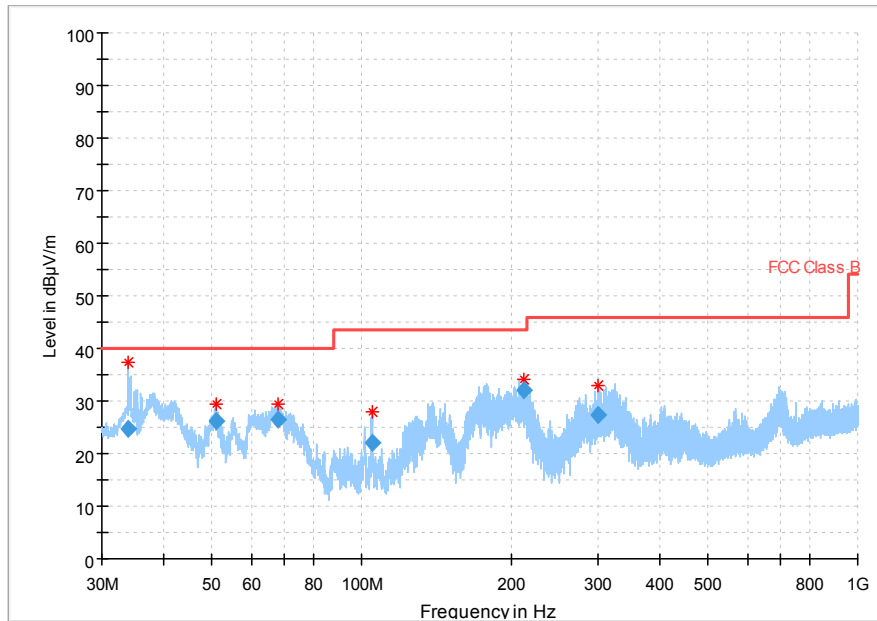


Fig. 33 Radiated Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

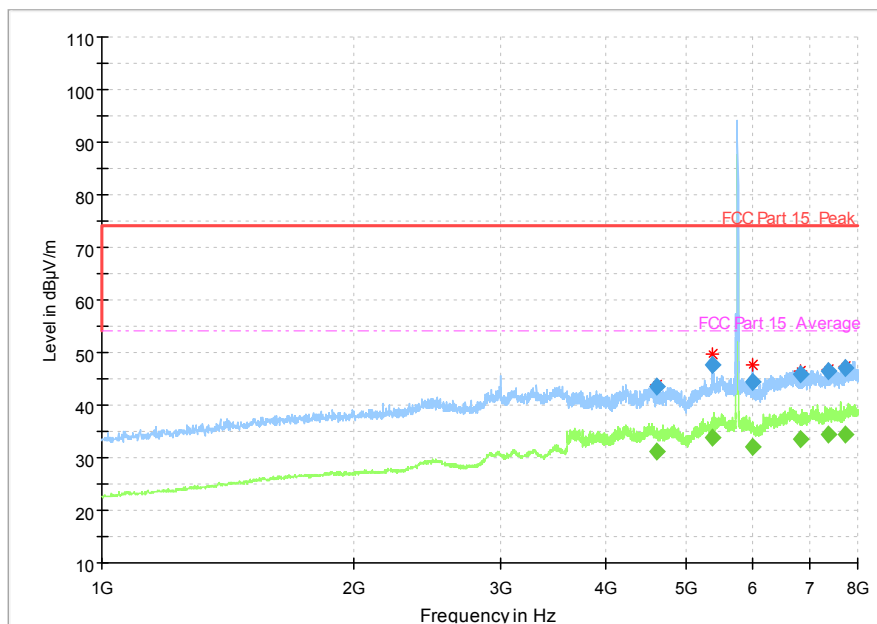


Fig. 34 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-8 GHz)

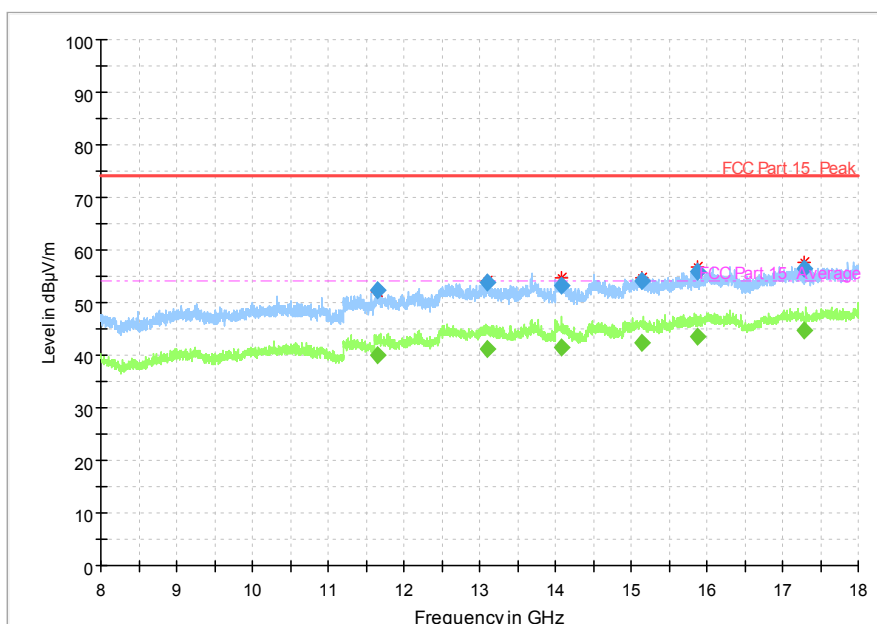


Fig. 35 Radiated Spurious Emission (802.11a, Ch149, 8 GHz-18 GHz)

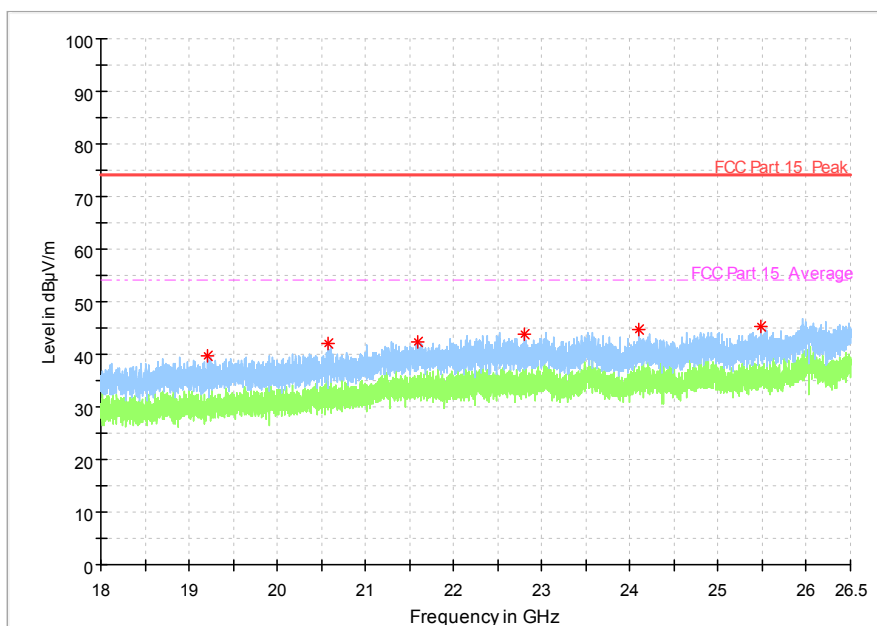


Fig. 36 Radiated Spurious Emission (802.11a, Ch149, 18 GHz-26.5 GHz)

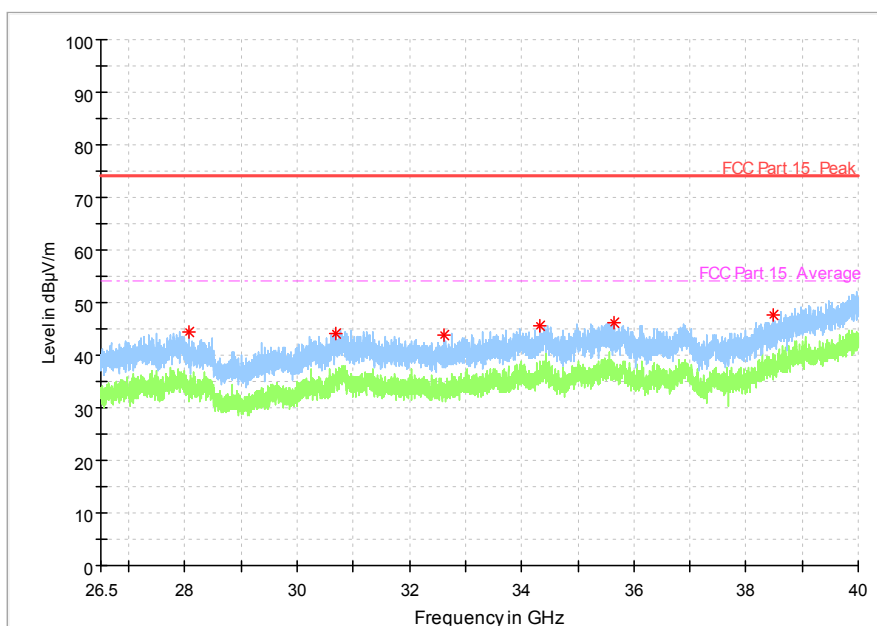


Fig. 37 Radiated emission: 802.11n, (802.11a, Ch149, 26.5 GHz - 40 GHz)

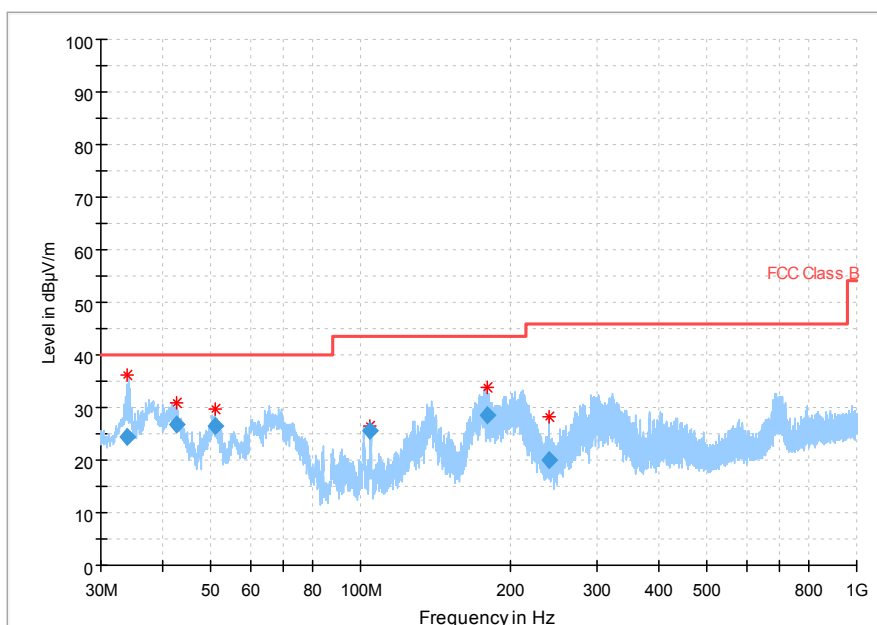


Fig. 38 Radiated Spurious Emission (802.11a, Ch157, 30 MHz-1 GHz)

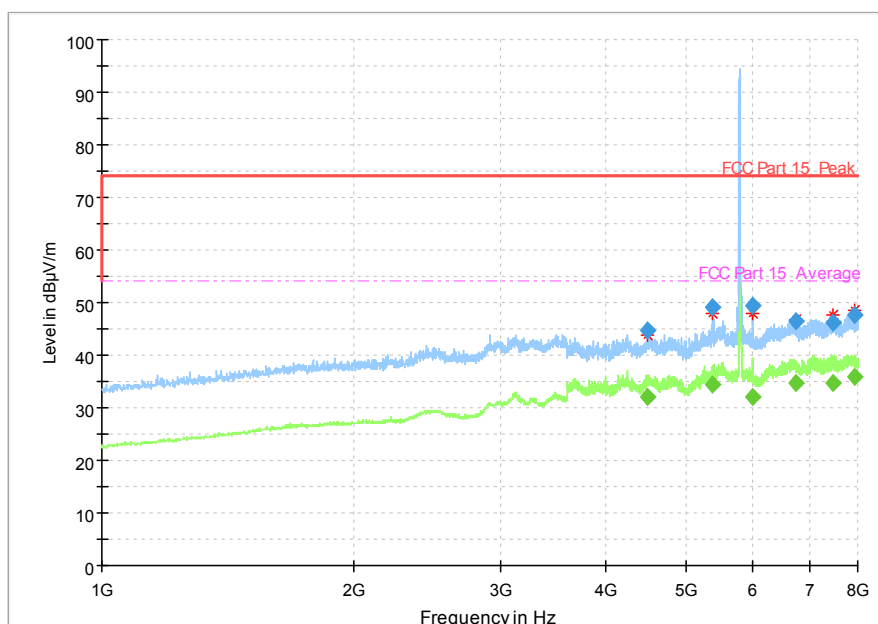


Fig. 39 Radiated Spurious Emission (802.11a, Ch157, 1 GHz-8 GHz)

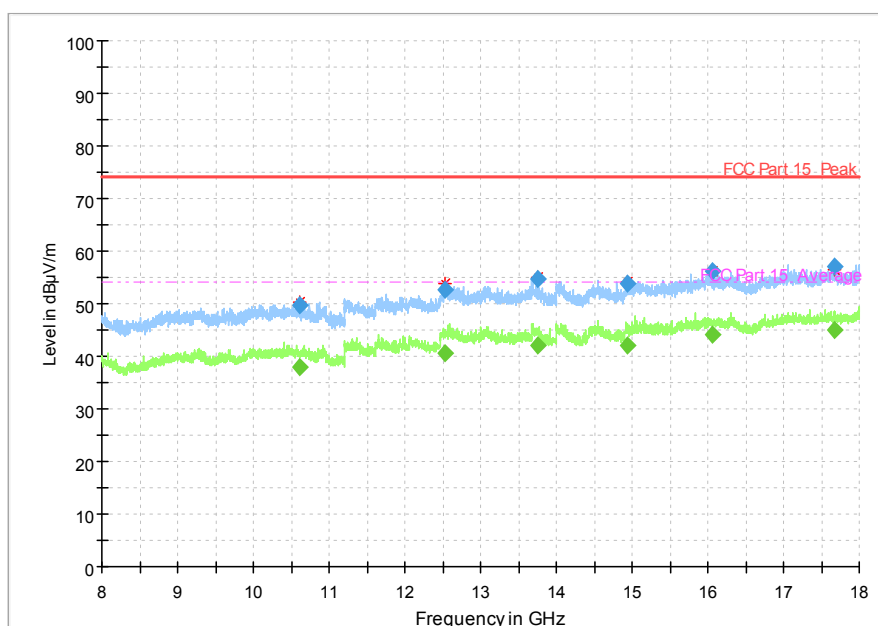


Fig. 40 Radiated Spurious Emission (802.11a, Ch157, 8 GHz-18 GHz)

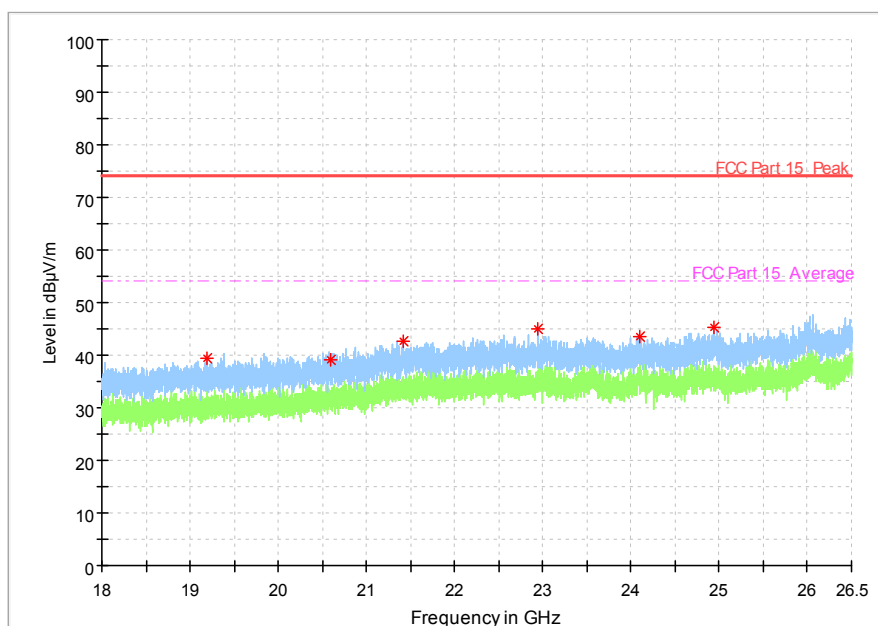


Fig. 41 Radiated Spurious Emission (802.11a, Ch157, 18 GHz-26.5 GHz)

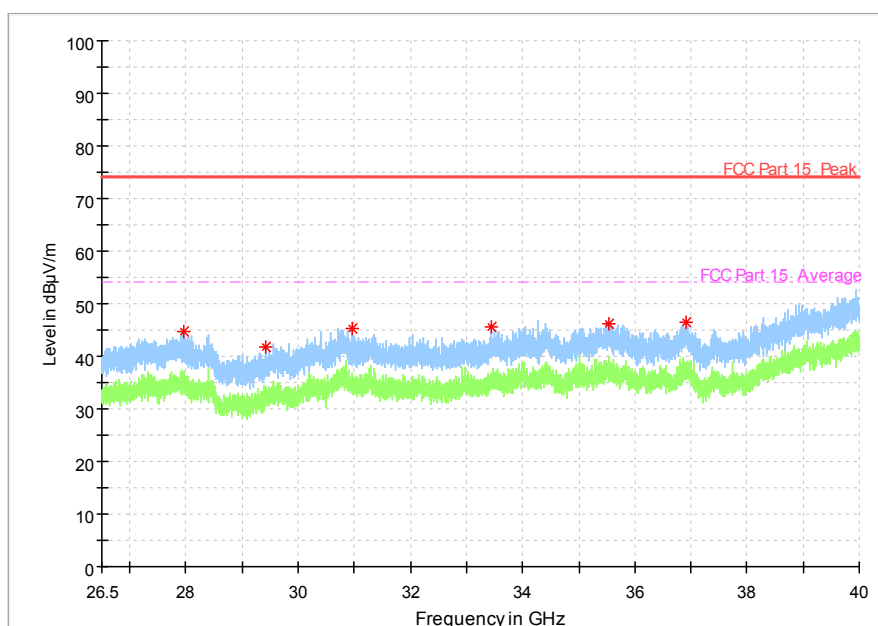


Fig. 42 Radiated emission: 802.11n, (802.11a, Ch157, 26.5 GHz - 40 GHz)

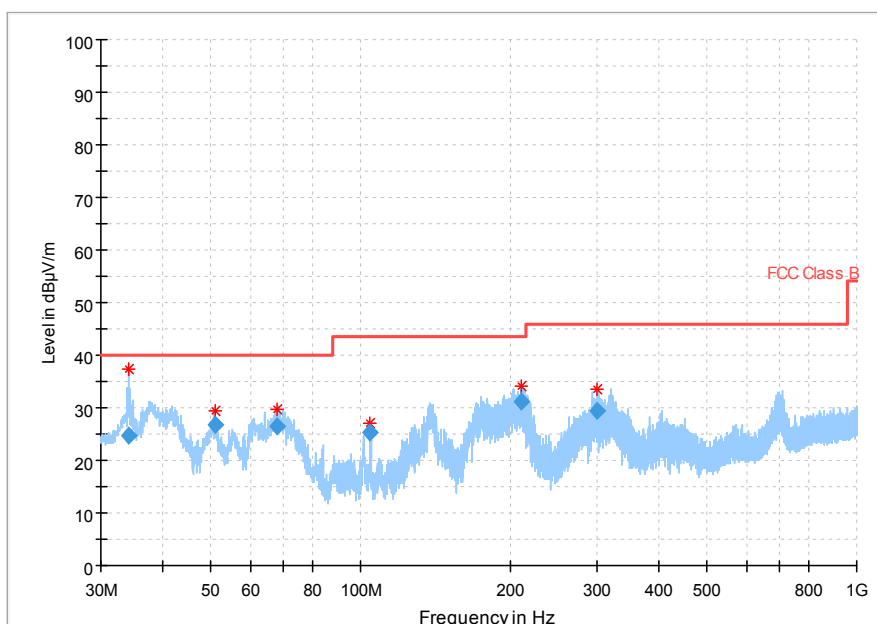


Fig. 43 Radiated Spurious Emission (802.11a, Ch165, 30 MHz-1 GHz)

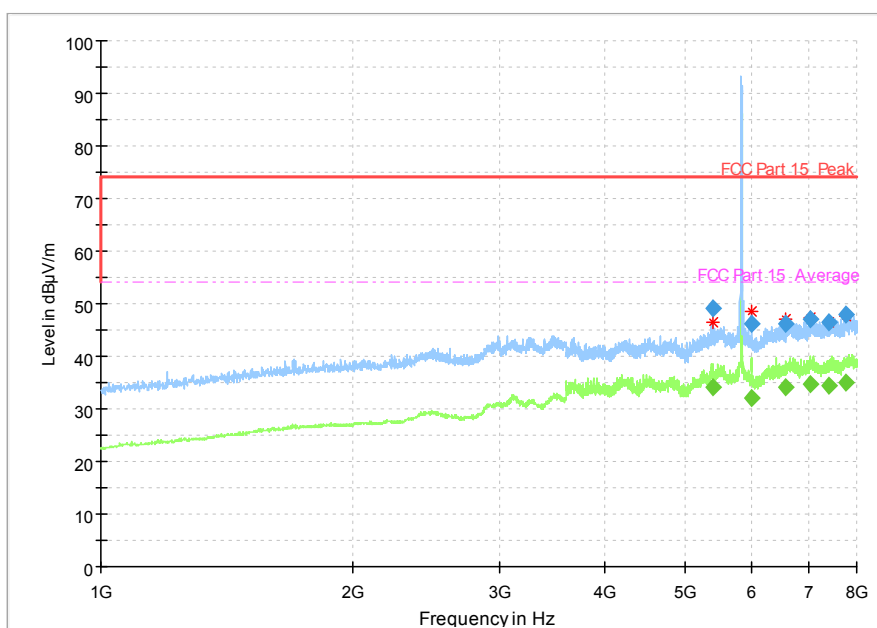


Fig. 44 Radiated Spurious Emission (802.11a, Ch165, 1 GHz-8 GHz)

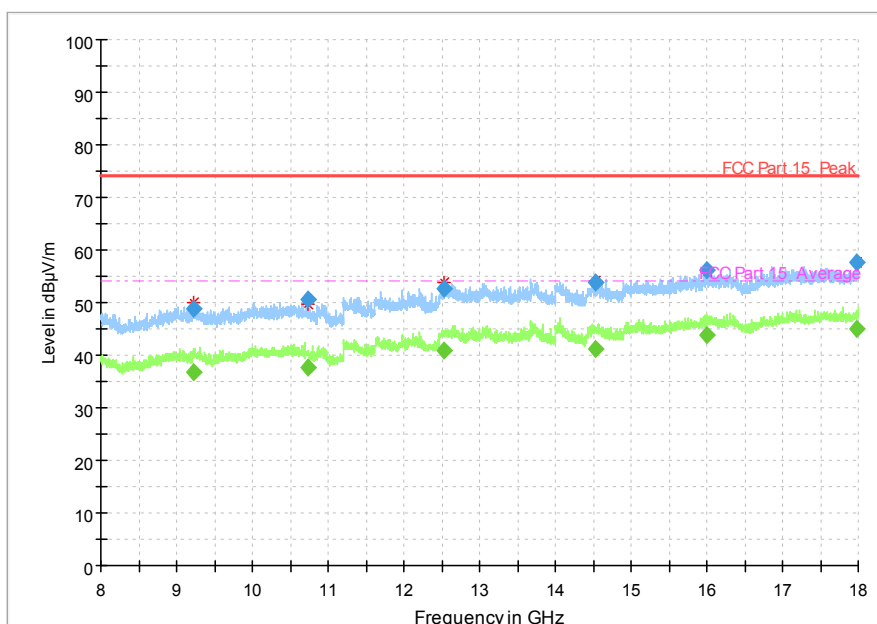


Fig. 45 Radiated Spurious Emission (802.11a, Ch165, 8 GHz-18 GHz)

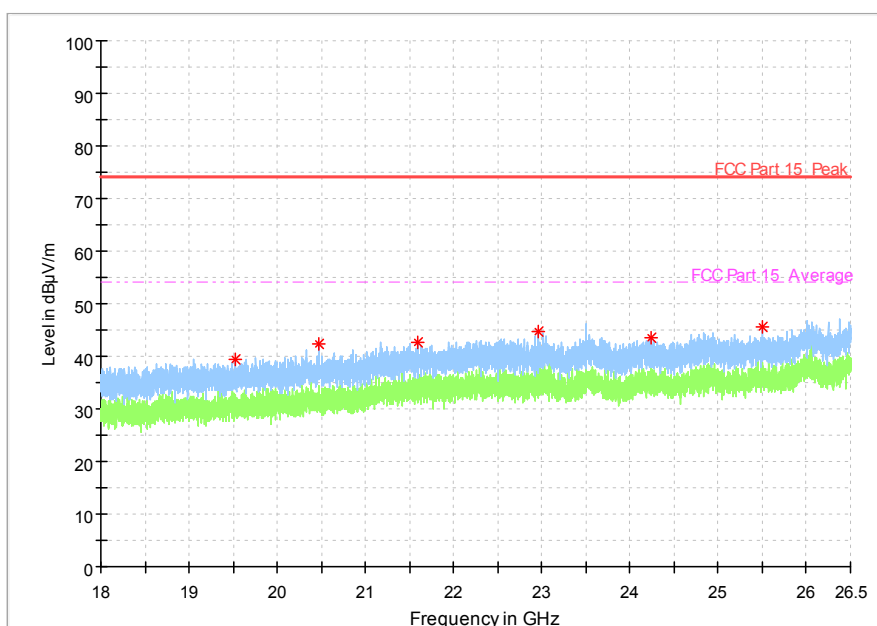


Fig. 46 Radiated Spurious Emission (802.11a, Ch165, 18 GHz-26.5 GHz)

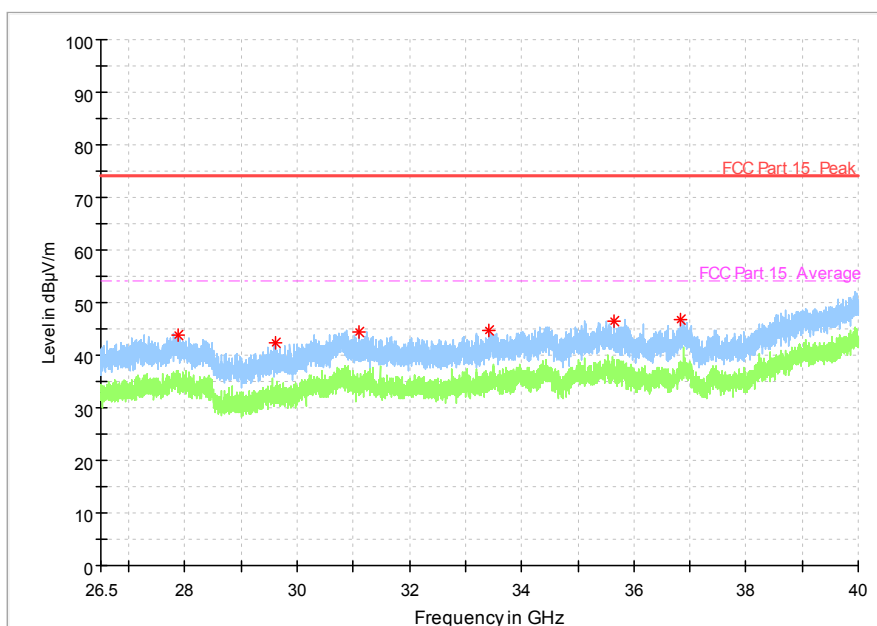


Fig. 47 Radiated emission: 802.11n, (802.11a, Ch165, 26.5 GHz - 40 GHz)

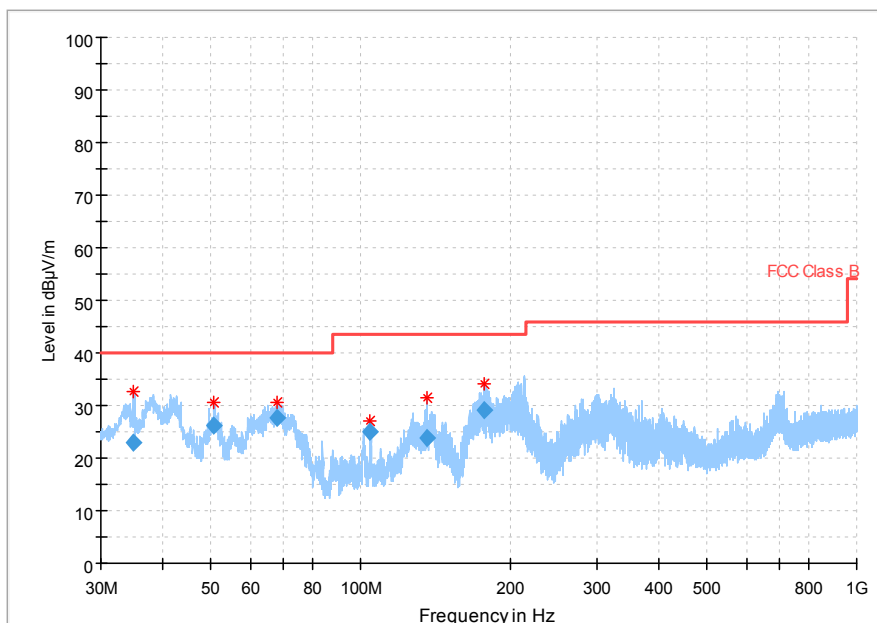


Fig. 48 Radiated Spurious Emission (802.11n-HT20, Ch149, 30 MHz-1 GHz)

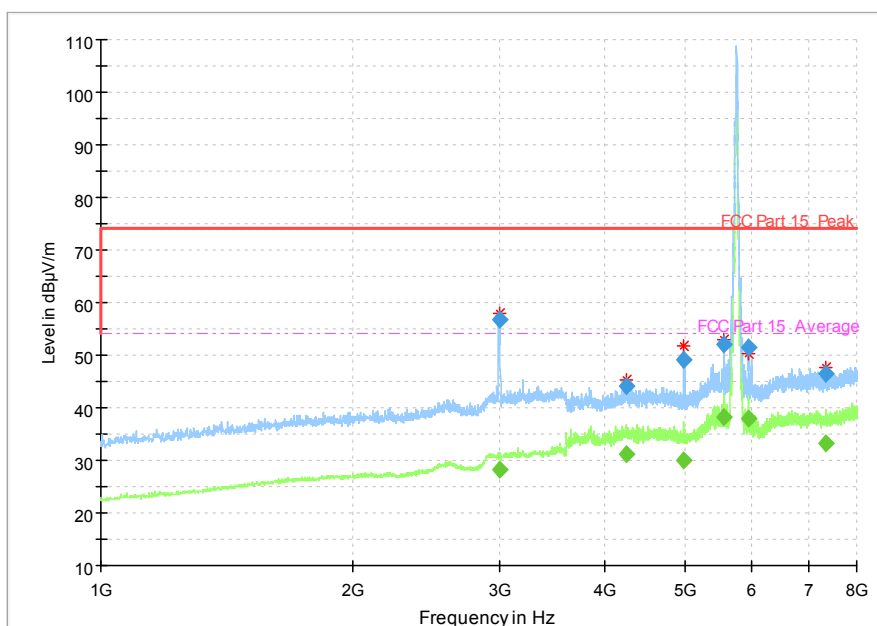


Fig. 49 Radiated Spurious Emission (802.11n-HT20, Ch149, 1 GHz-8 GHz)

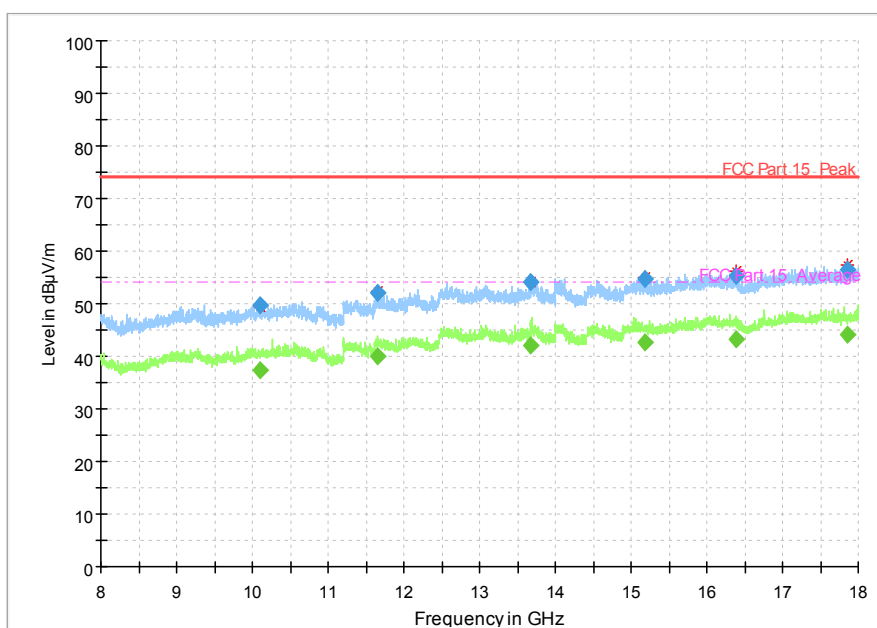


Fig. 50 Radiated Spurious Emission (802.11n-HT20, Ch149, 8 GHz-18 GHz)

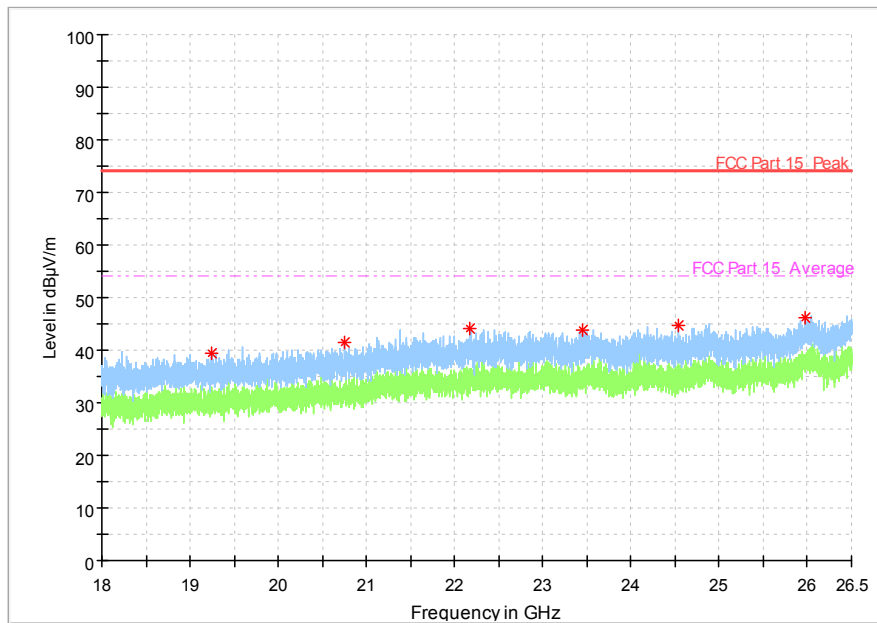


Fig. 51 Radiated Spurious Emission (802.11n-HT20, Ch149, 18 GHz-26.5 GHz)

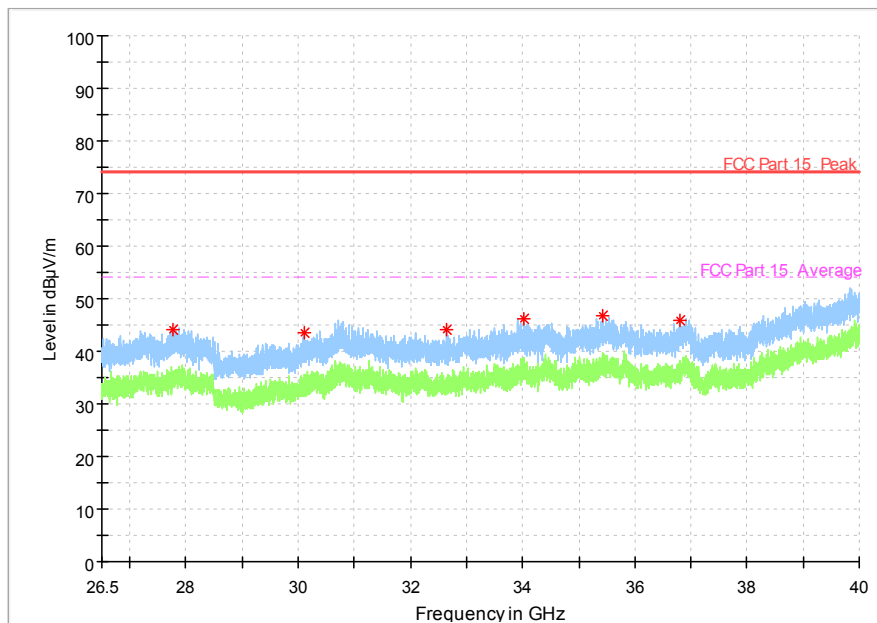


Fig. 52 Radiated emission: 802.11n, (802.11n-HT20, Ch149, 26.5 GHz - 40 GHz)

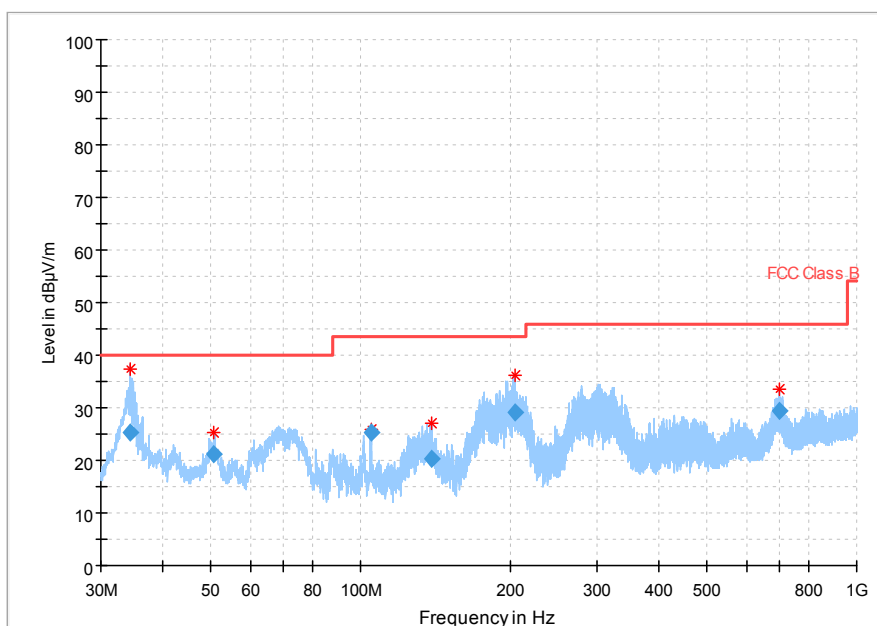


Fig. 53 Radiated Spurious Emission (802.11n-HT20, Ch157, 30 MHz-1 GHz)

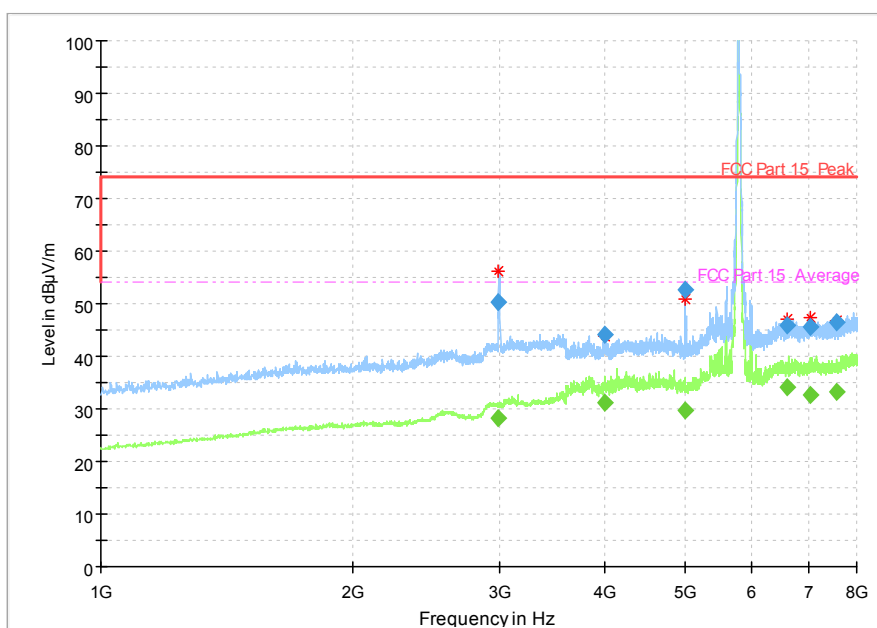


Fig. 54 Radiated Spurious Emission (802.11n-HT20, Ch157, 1 GHz-8 GHz)

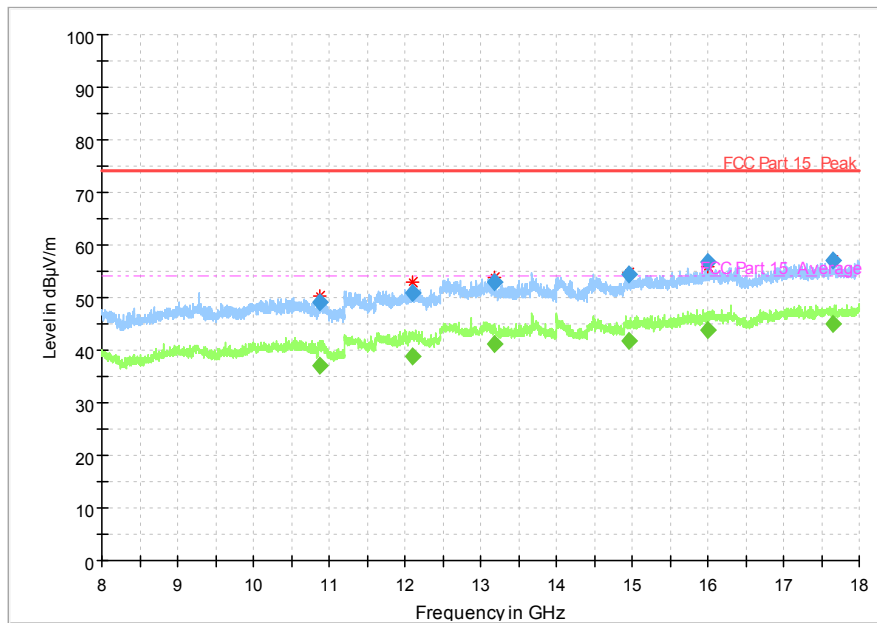


Fig. 55 Radiated Spurious Emission (802.11n-HT20, Ch157, 8 GHz-18 GHz)

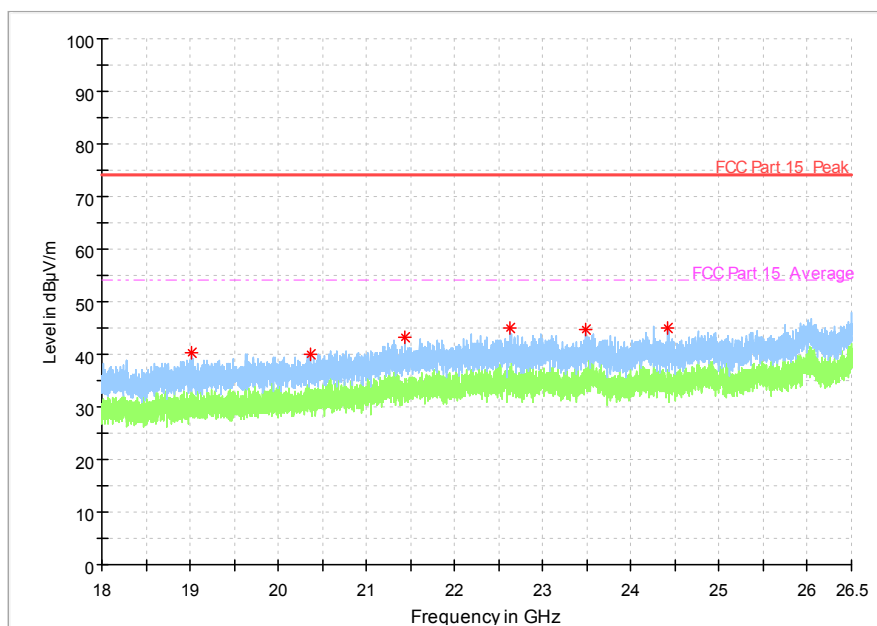


Fig. 56 Radiated Spurious Emission (802.11n-HT20, Ch157, 18 GHz-26.5 GHz)

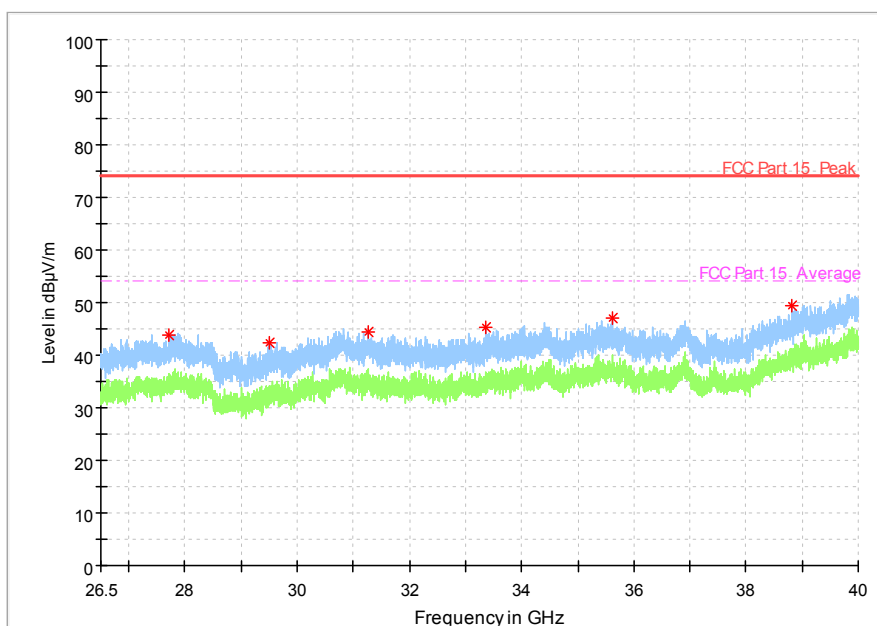


Fig. 57 Radiated emission: 802.11n, (802.11n-HT20, Ch157, 26.5 GHz - 40 GHz)

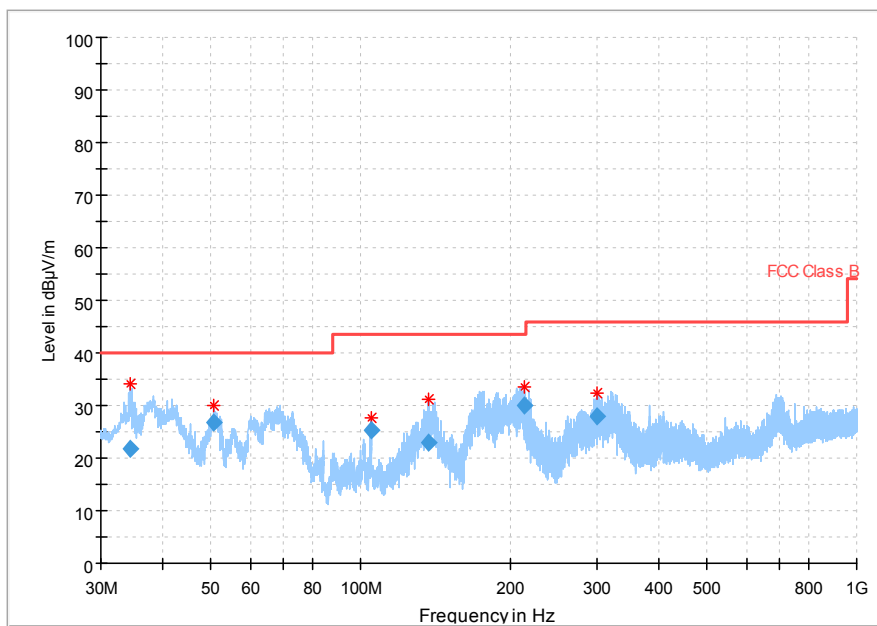


Fig. 58 Radiated Spurious Emission (802.11n-HT20, Ch165, 30 MHz-1 GHz)

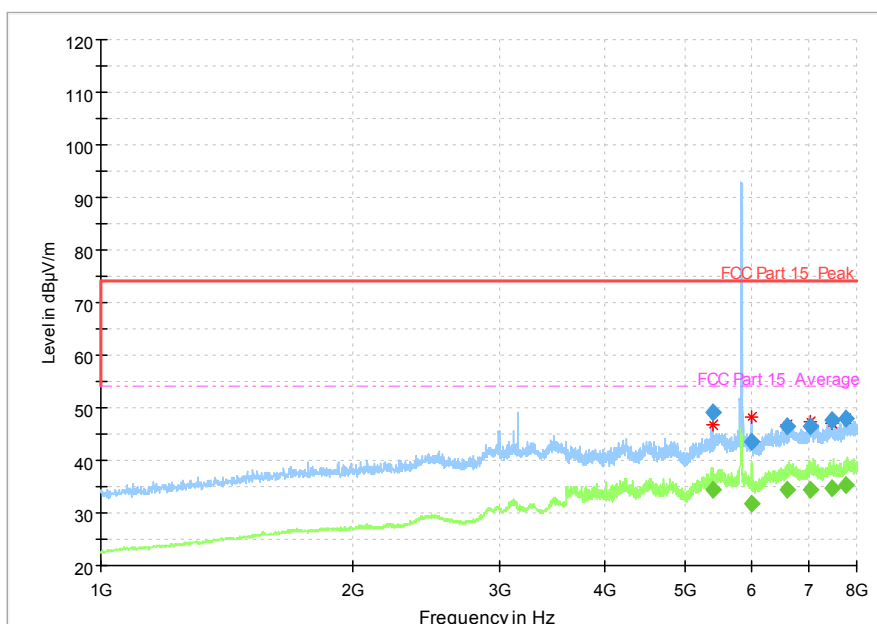


Fig. 59 Radiated Spurious Emission (802.11n-HT20, Ch165, 1 GHz-8 GHz)

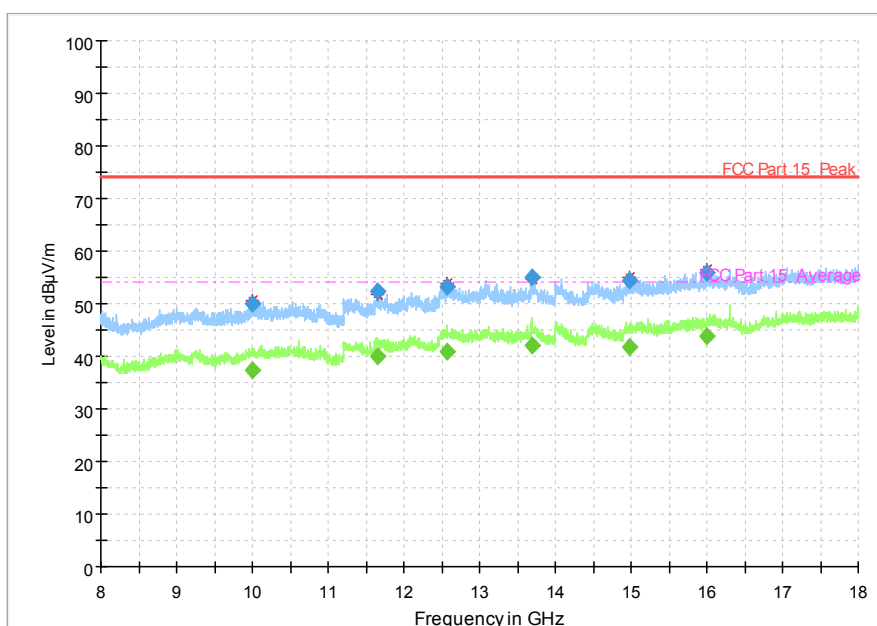


Fig. 60 Radiated Spurious Emission (802.11n-HT20, Ch165, 8 GHz-18 GHz)

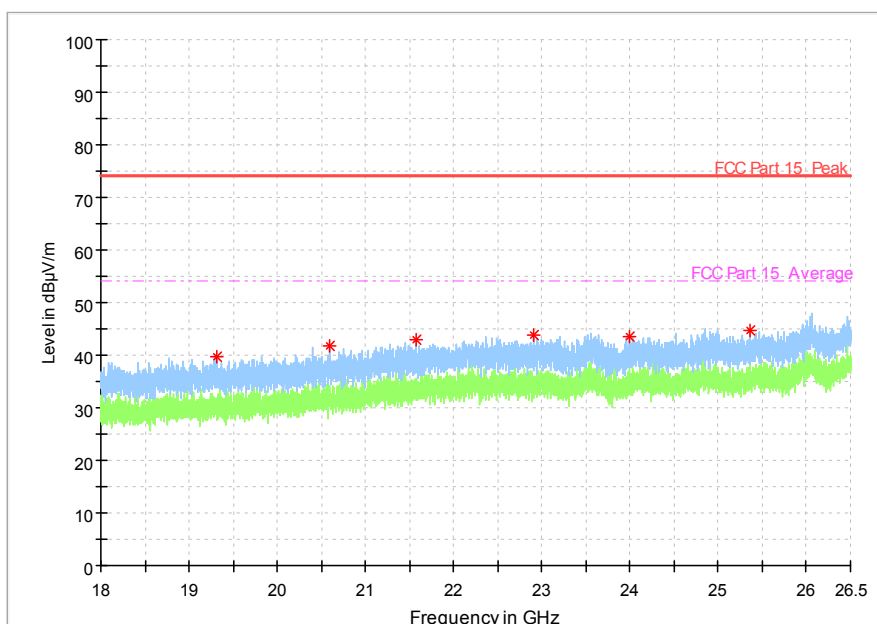


Fig. 61 Radiated Spurious Emission (802.11n-HT20, Ch165, 18 GHz-26.5 GHz)

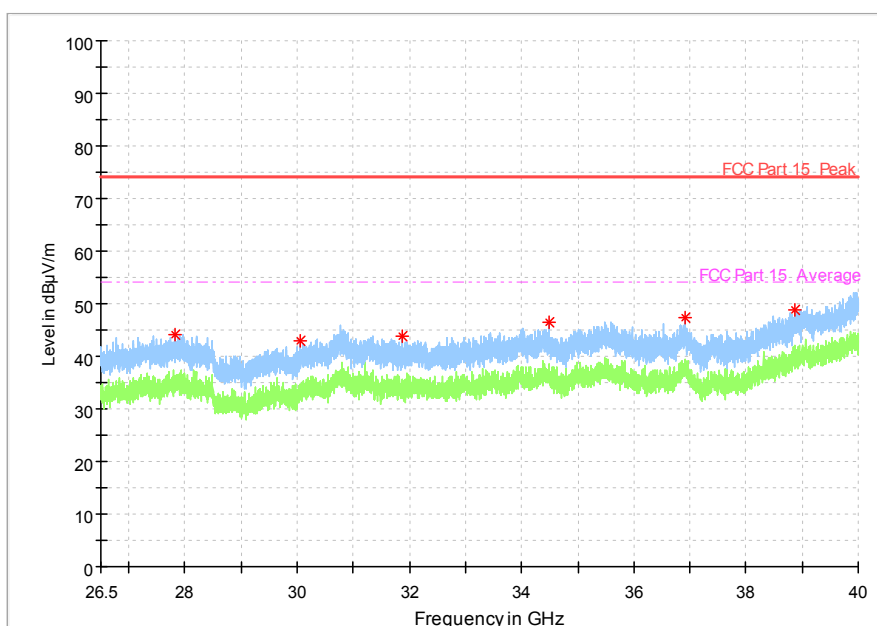


Fig. 62 Radiated emission: 802.11n, (802.11n-HT20, Ch165, 26.5 GHz - 40 GHz)

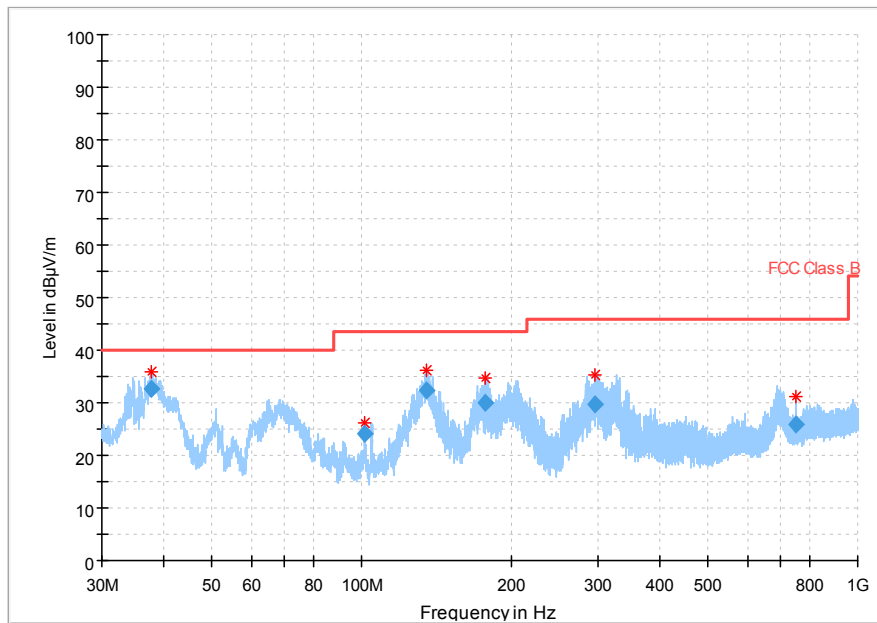


Fig. 63 Radiated Spurious Emission (802.11n-HT40, Ch151, 30 MHz-1 GHz)

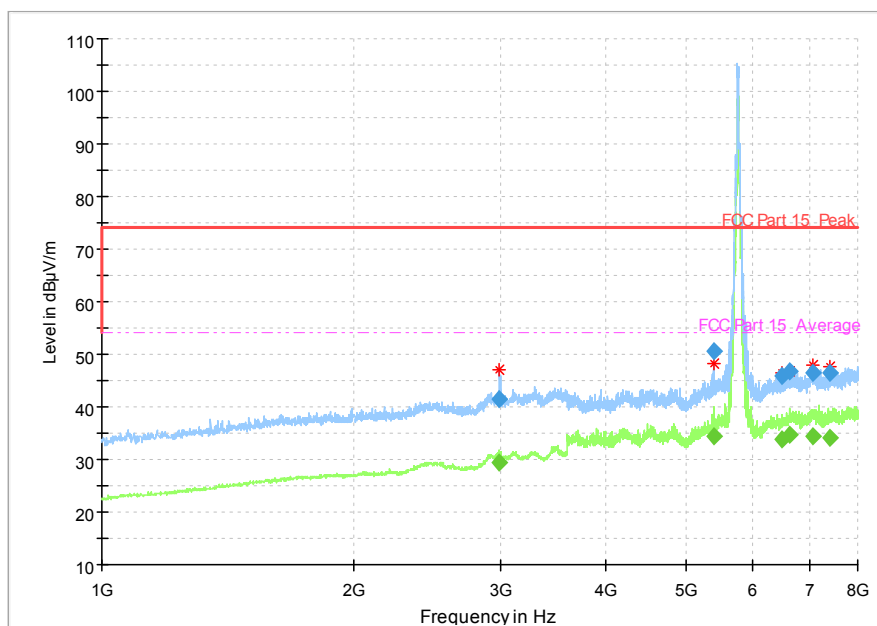


Fig. 64 Radiated Spurious Emission (802.11n-HT40, Ch151, 1 GHz-8 GHz)

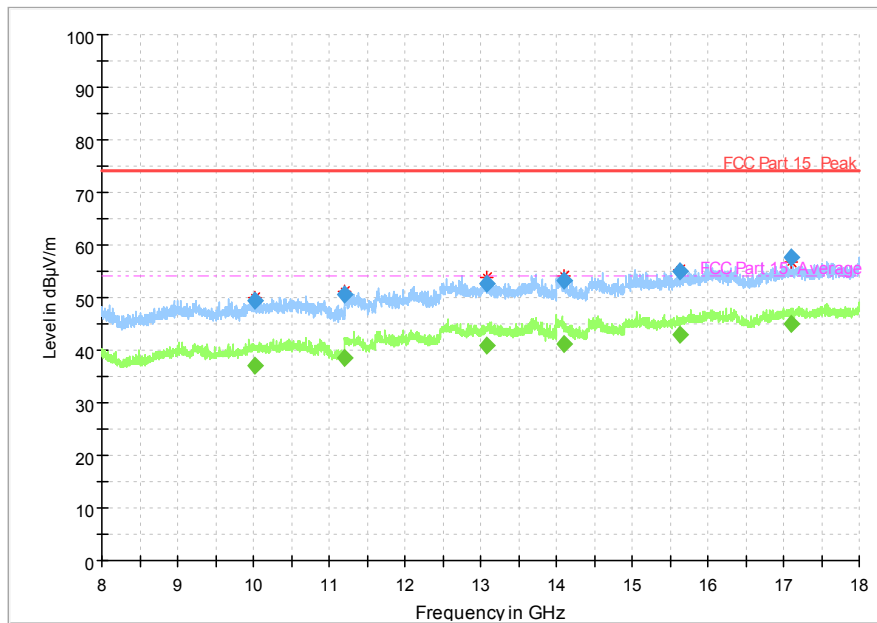


Fig. 65 Radiated Spurious Emission (802.11n-HT40, Ch151, 8 GHz-18 GHz)

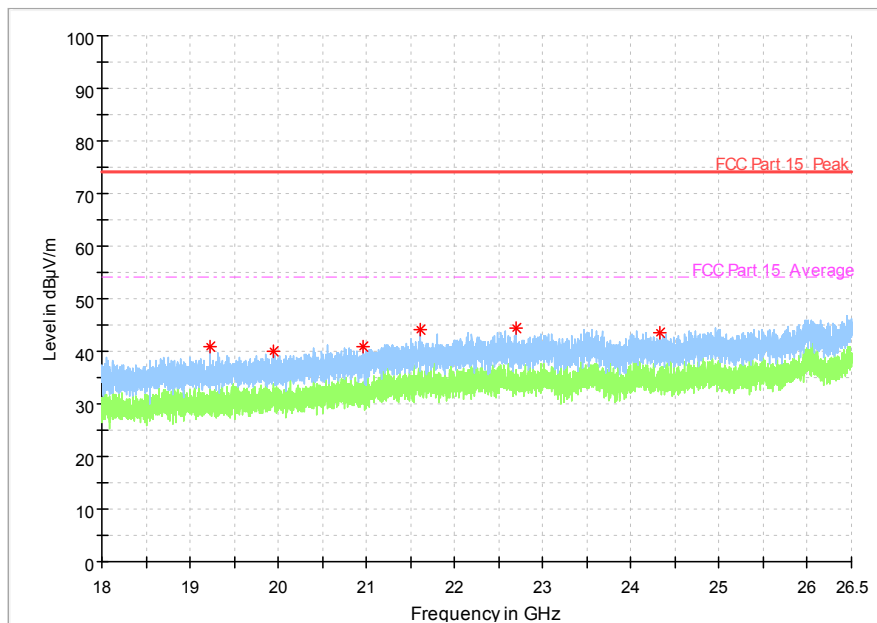


Fig. 66 Radiated Spurious Emission (802.11n-HT40, Ch151, 18 GHz-26.5 GHz)

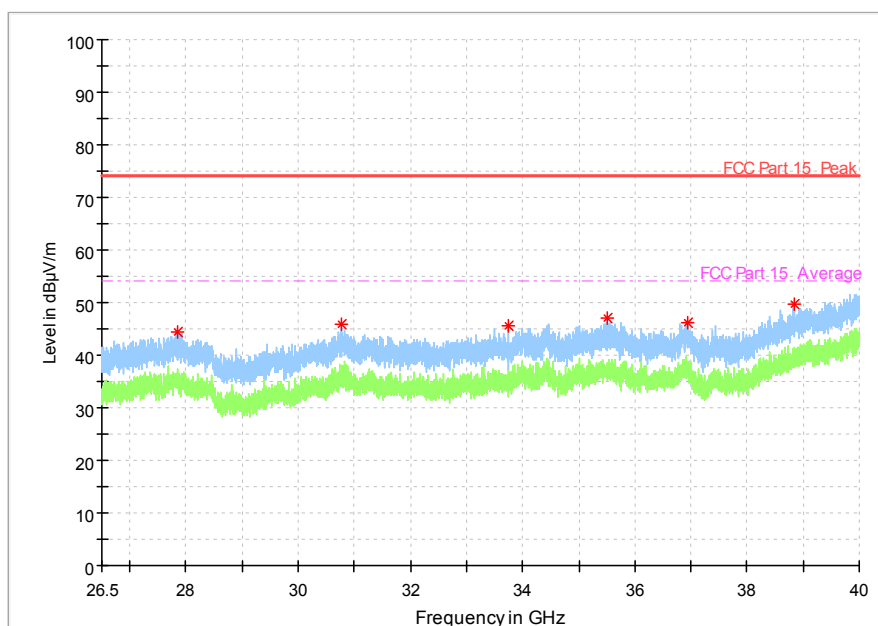


Fig. 67 Radiated emission: 802.11n, (802.11n-HT40, Ch151, 26.5 GHz - 40 GHz)

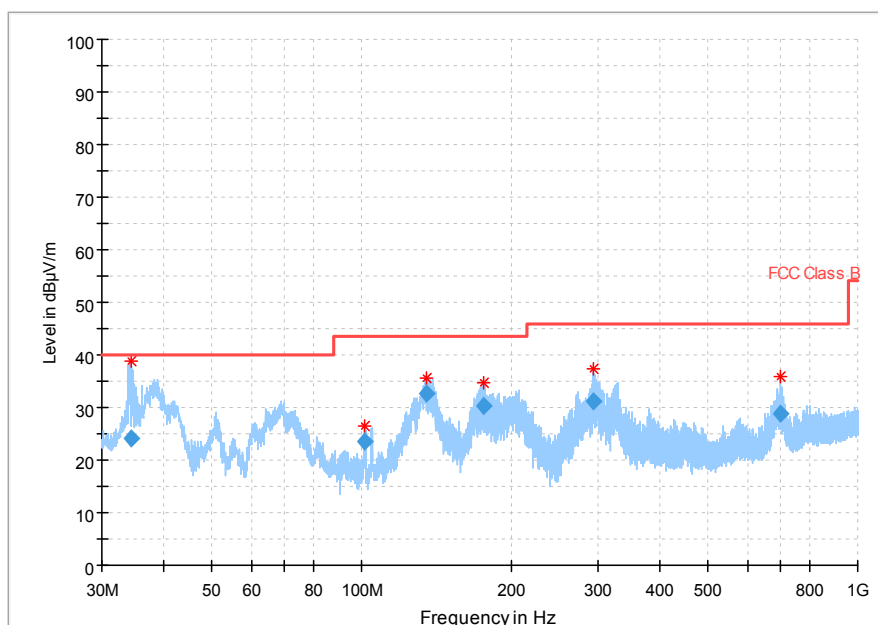


Fig. 68 Radiated Spurious Emission (802.11n-HT40, Ch159, 30 MHz-1 GHz)

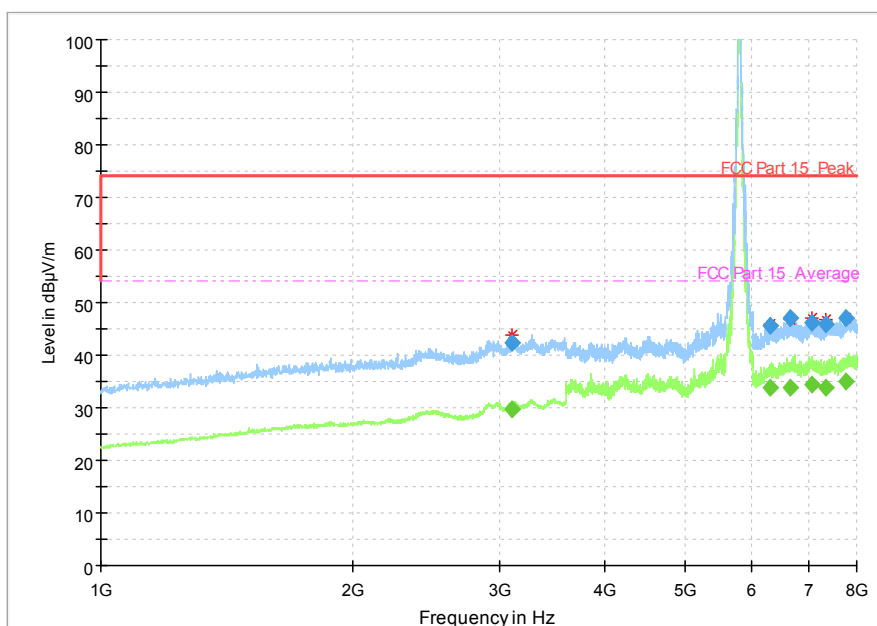


Fig. 69 Radiated Spurious Emission (802.11n-HT40, Ch159, 1 GHz-8 GHz)

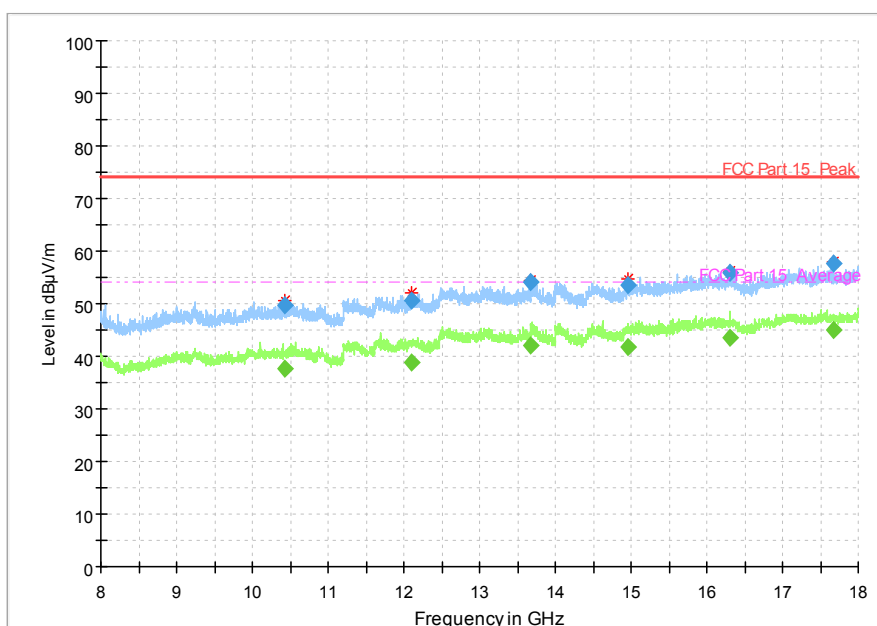


Fig. 70 Radiated Spurious Emission (802.11n-HT40, Ch159, 8 GHz-18 GHz)

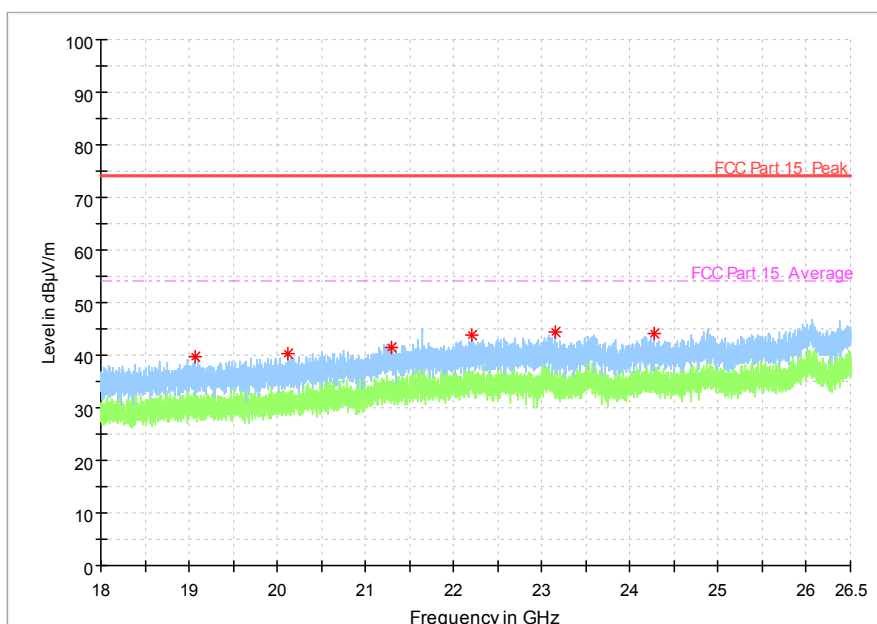


Fig. 71 Radiated Spurious Emission (802.11n-HT40, Ch159, 18 GHz-26.5 GHz)

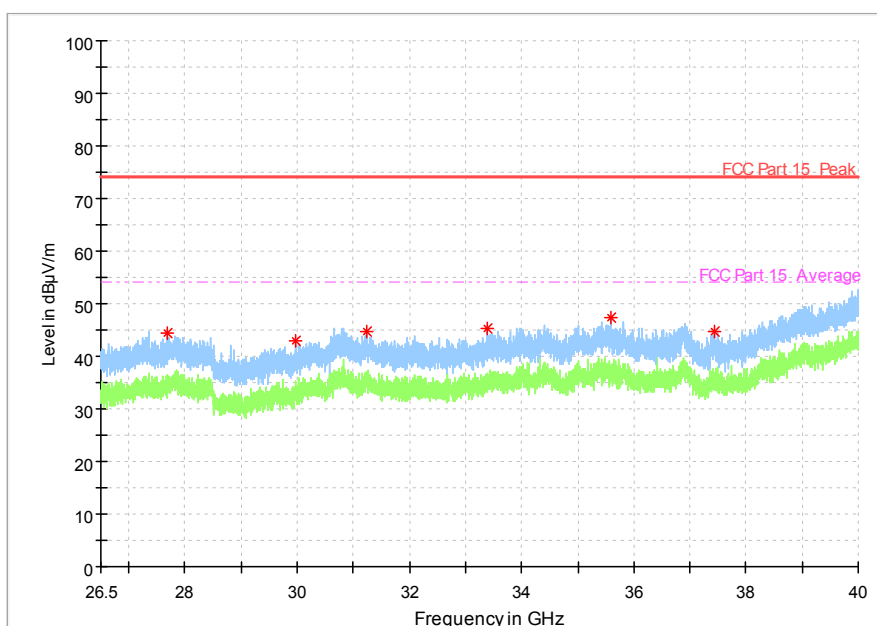


Fig. 72 Radiated emission: 802.11n, (802.11n-HT40, Ch159, 26.5 GHz - 40 GHz)
L1522

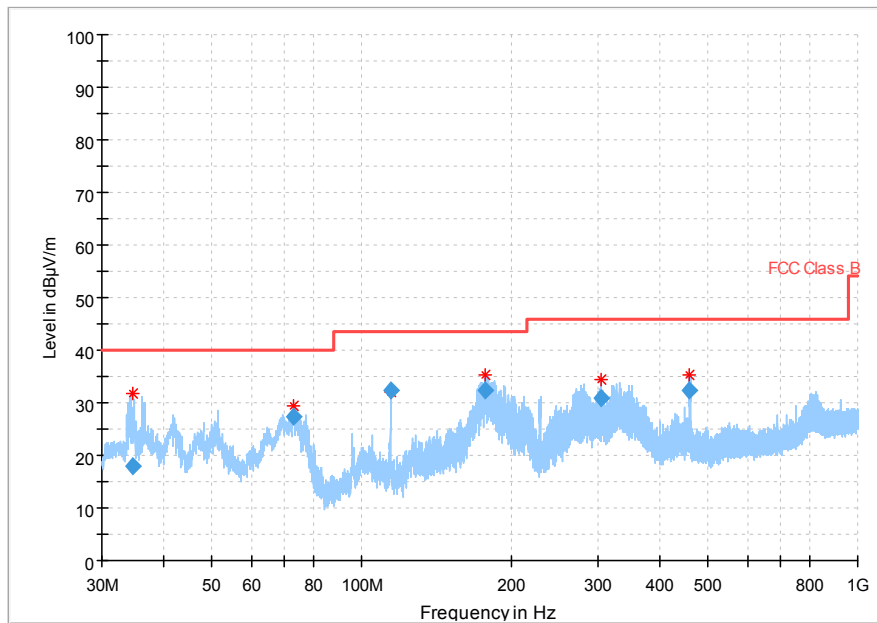


Fig. 73 Radiated Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

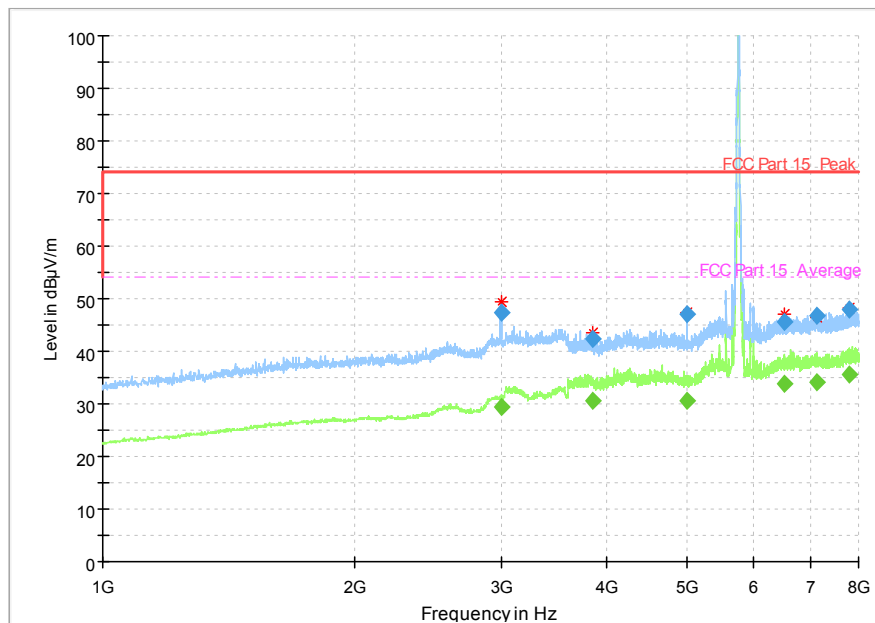


Fig. 74 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-8 GHz)

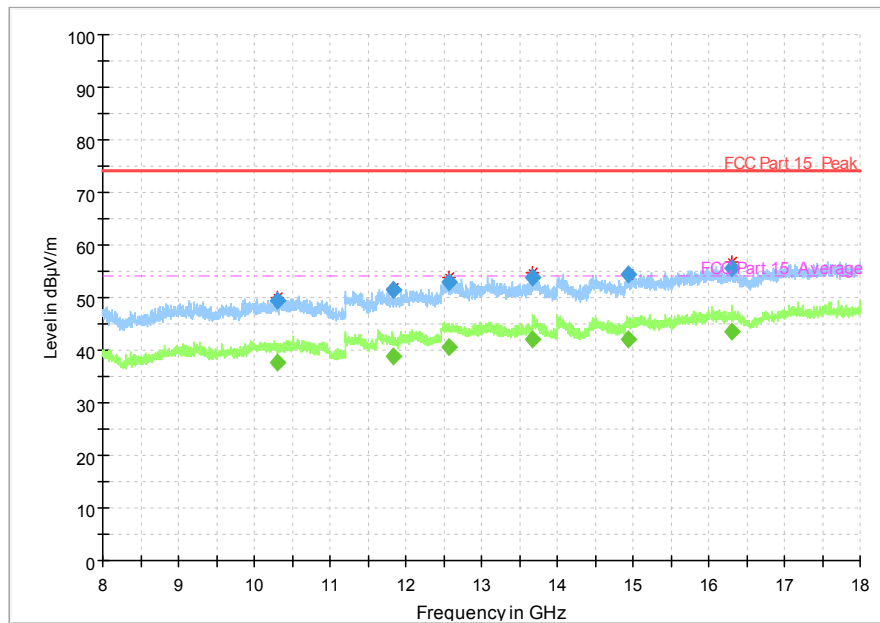


Fig. 75 Radiated Spurious Emission (802.11a, Ch149, 8 GHz-18 GHz)

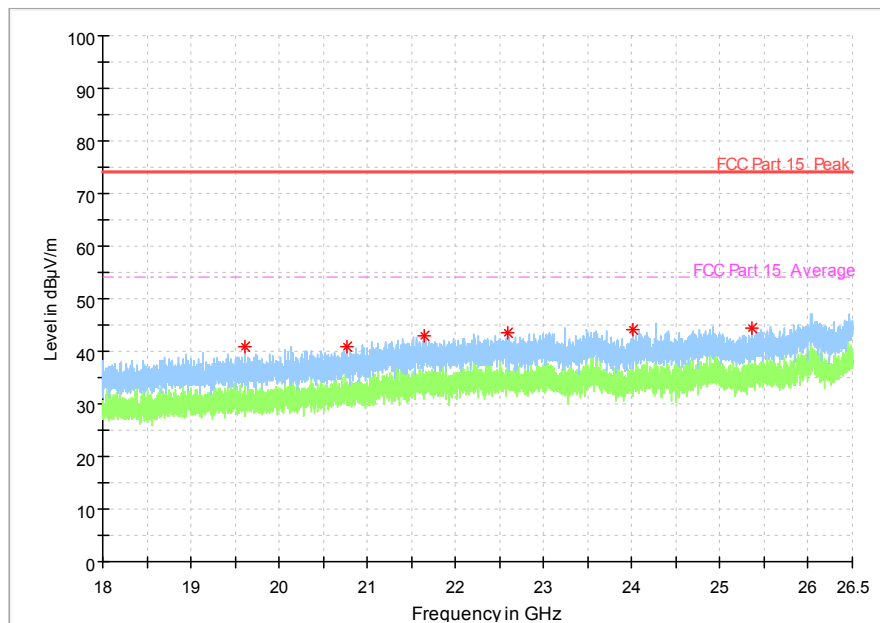


Fig. 76 Radiated Spurious Emission (802.11a, Ch149, 18 GHz-26.5 GHz)

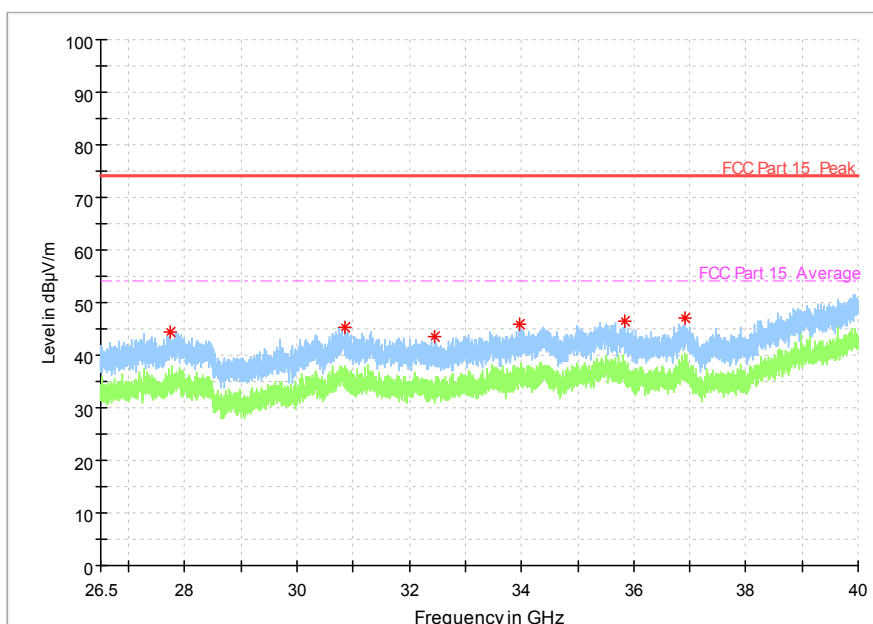


Fig. 77 Radiated Spurious Emission (802.11a, Ch149, 26.5 GHz-40 GHz)

L1521

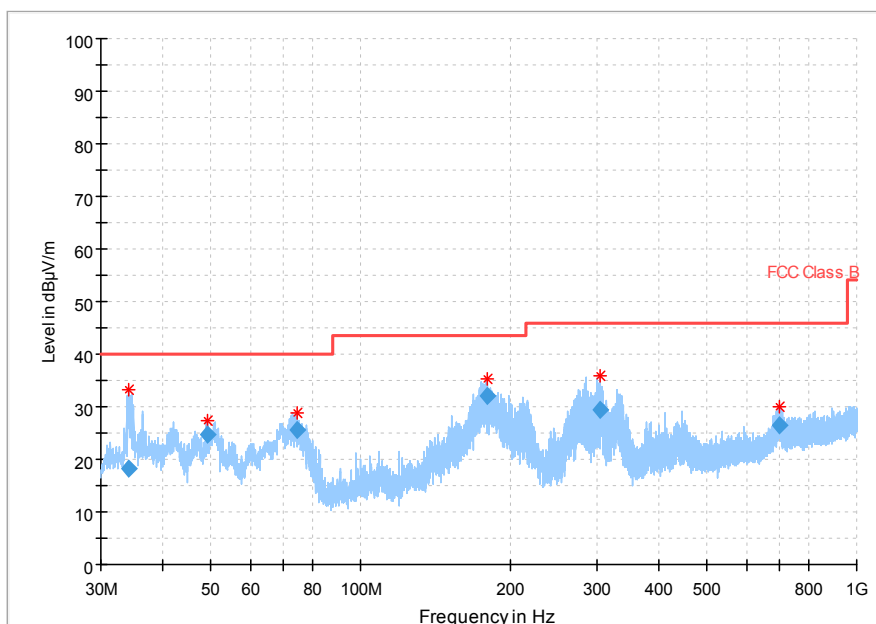


Fig. 78 Radiated Spurious Emission (802.11a, Ch149, 30 MHz-1 GHz)

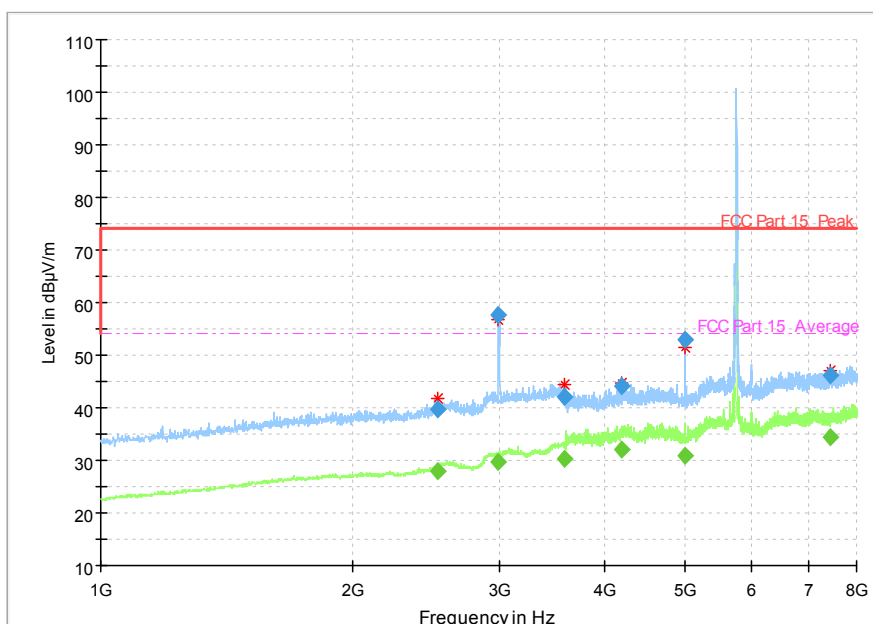


Fig. 79 Radiated Spurious Emission (802.11a, Ch149, 1 GHz-8 GHz)

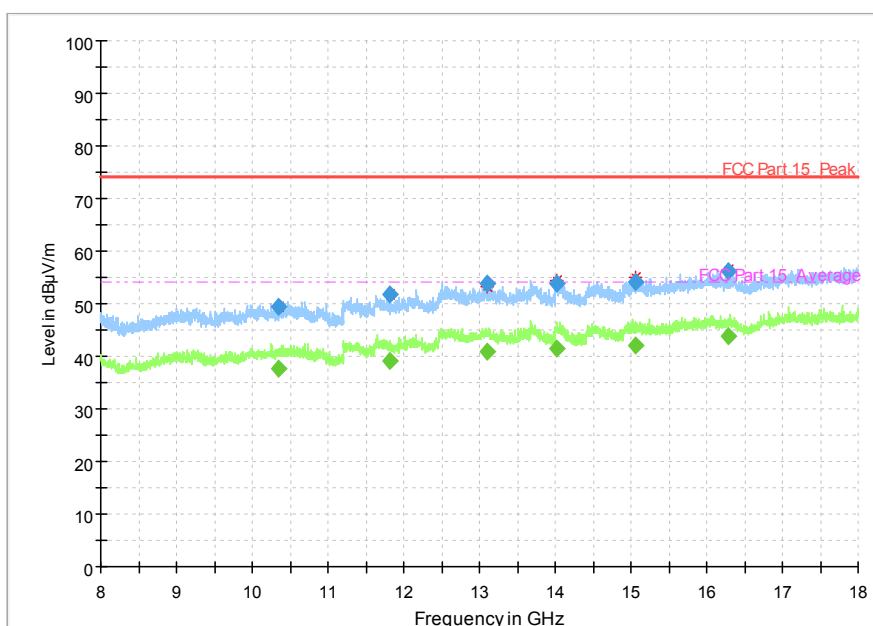


Fig. 80 Radiated Spurious Emission (802.11a, Ch149, 8 GHz-18 GHz)

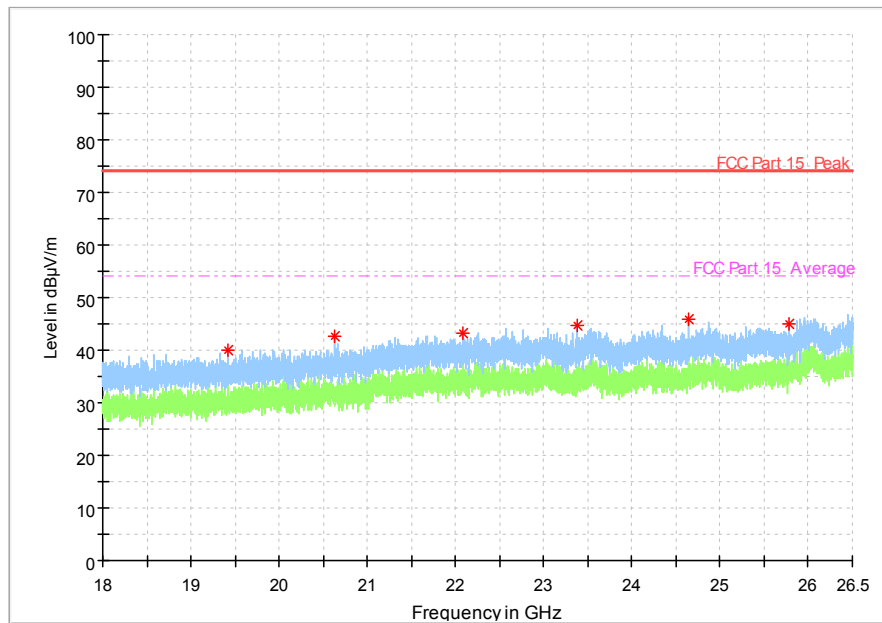


Fig. 81 Radiated Spurious Emission (802.11a, Ch149, 18 GHz-26.5 GHz)

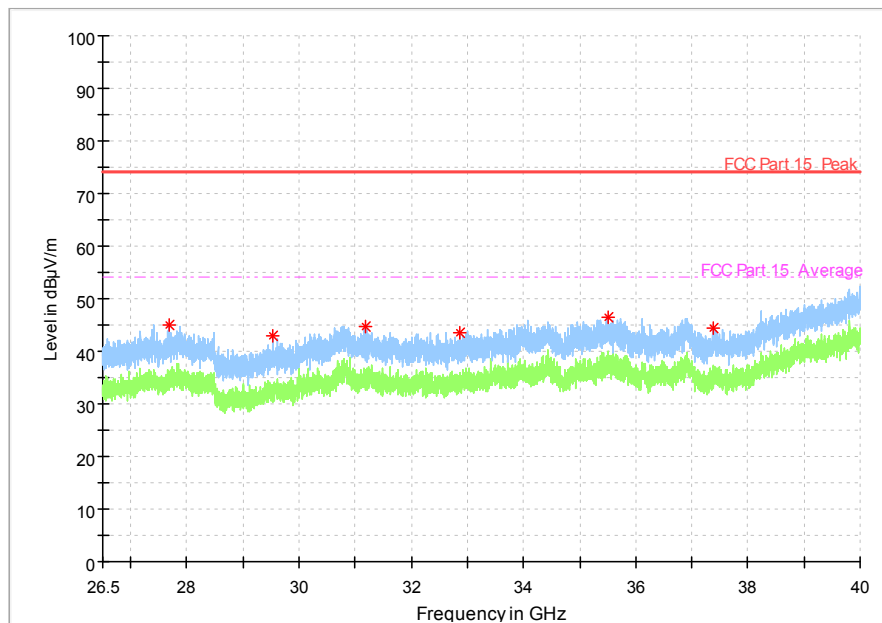


Fig. 82 Radiated Spurious Emission (802.11a, Ch149, 26.5 GHz-40 GHz)

6.6. Band Edges Compliance

Band Edges - Radiated

Measurement Limit:

- (1) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	frequency	Test Results	Conclusion
802.11a	5745 MHz	Fig.83	P
	5825 MHz	Fig.84	P
802.11n HT20	5745 MHz	Fig.85	P
	5825 MHz	Fig.86	P
802.11n HT40	5755 MHz	Fig.87	P
	5795 MHz	Fig.88	P

Conclusion: PASS

L1522

Measurement Result:

Mode	frequency	Test Results	Conclusion
802.11a	5745 MHz	Fig.89	P
	5825 MHz	Fig.90	P


L1521

Measurement Result:


Mode	frequency	Test Results	Conclusion
802.11a	5745 MHz	Fig.91	P
	5825 MHz	Fig.92	P

L1523

Test graphs as below:

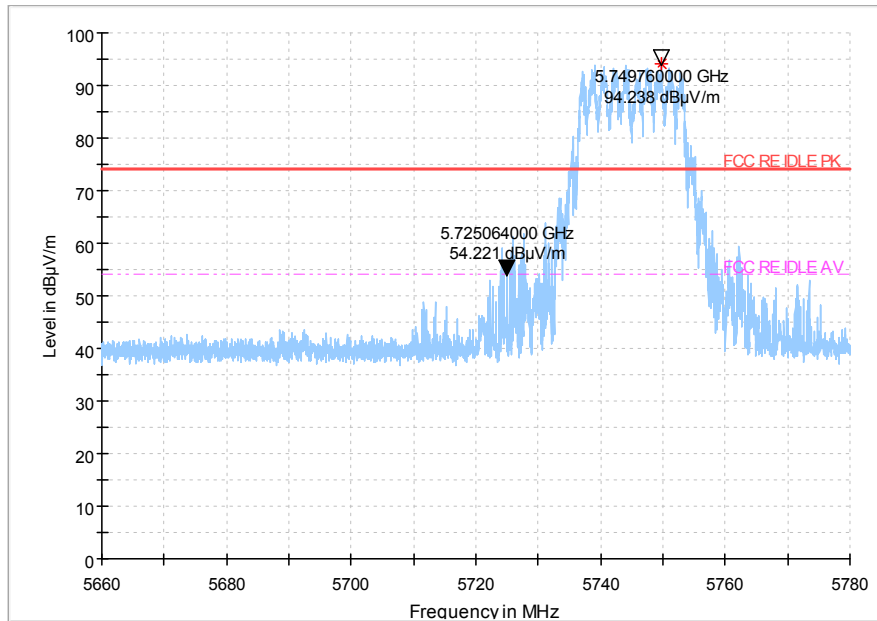


Peak

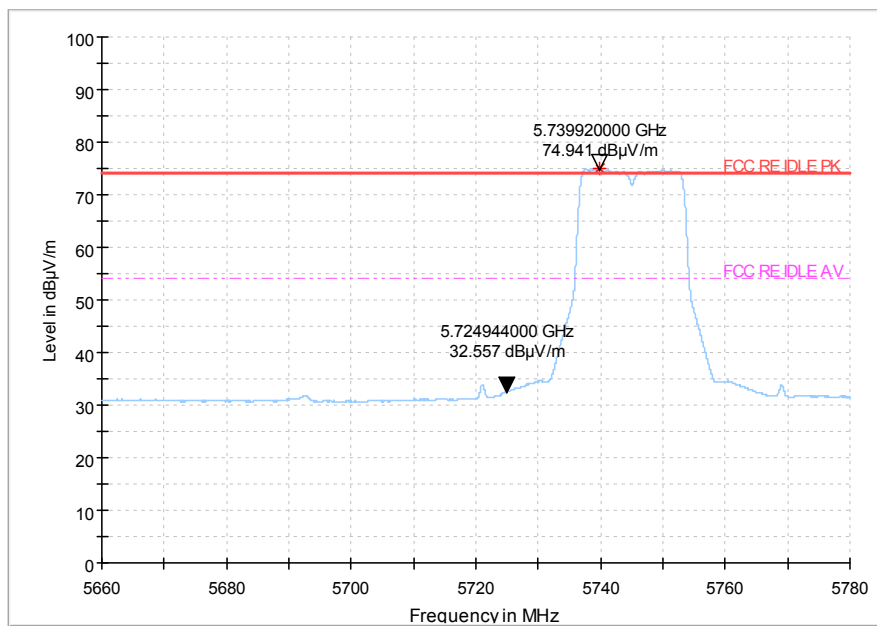


Average

Fig. 83 Band Edges (802.11a, 5745MHz)

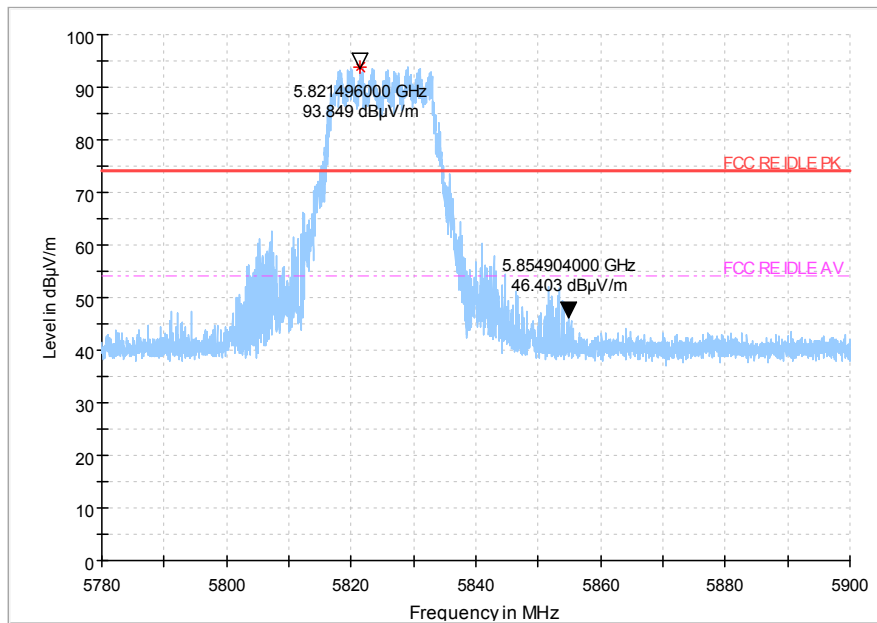


Peak

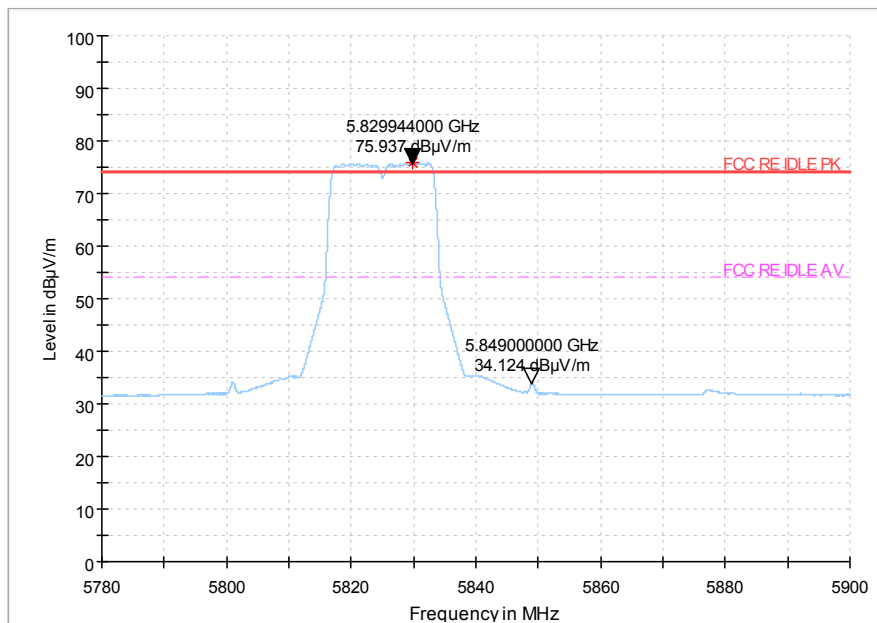


Average

Fig. 84 Band Edges (802.11a, 5850MHz)

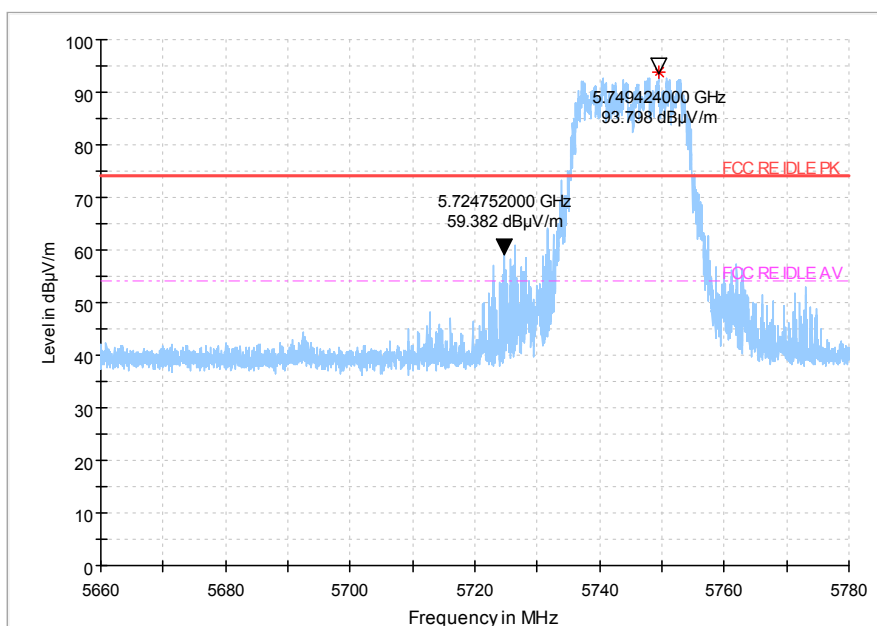


Peak

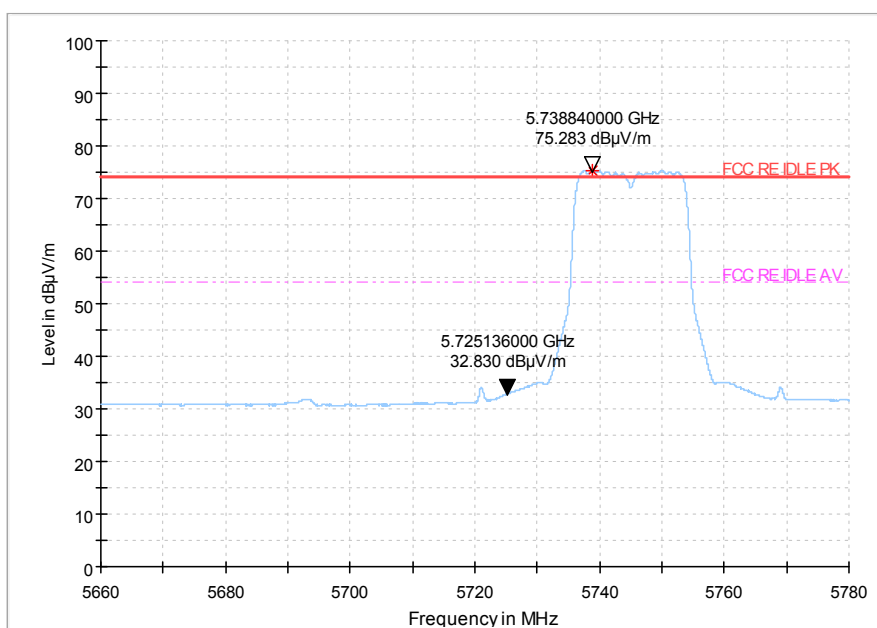


Average

Fig. 85 Band Edges (802.11n-HT20, 5745MHz)

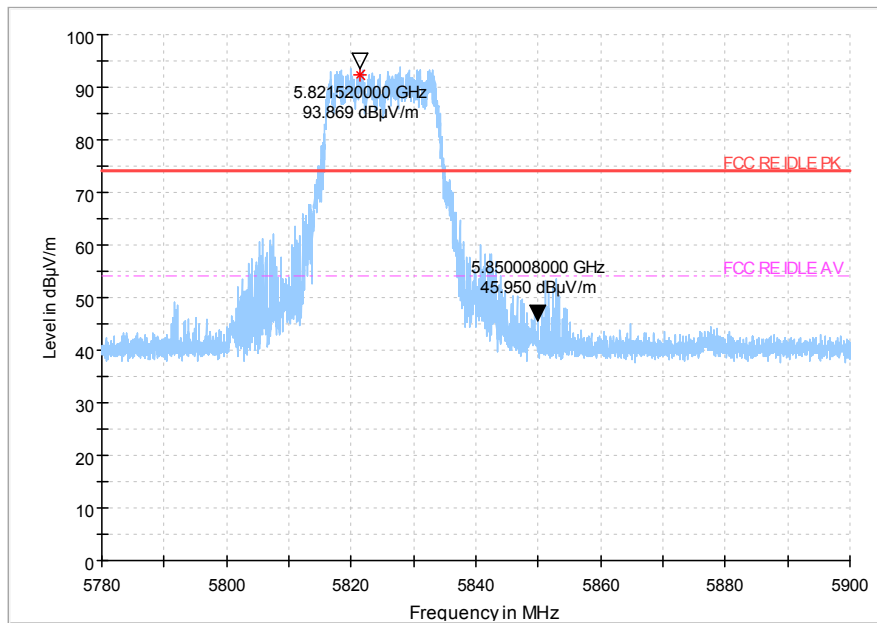


Peak

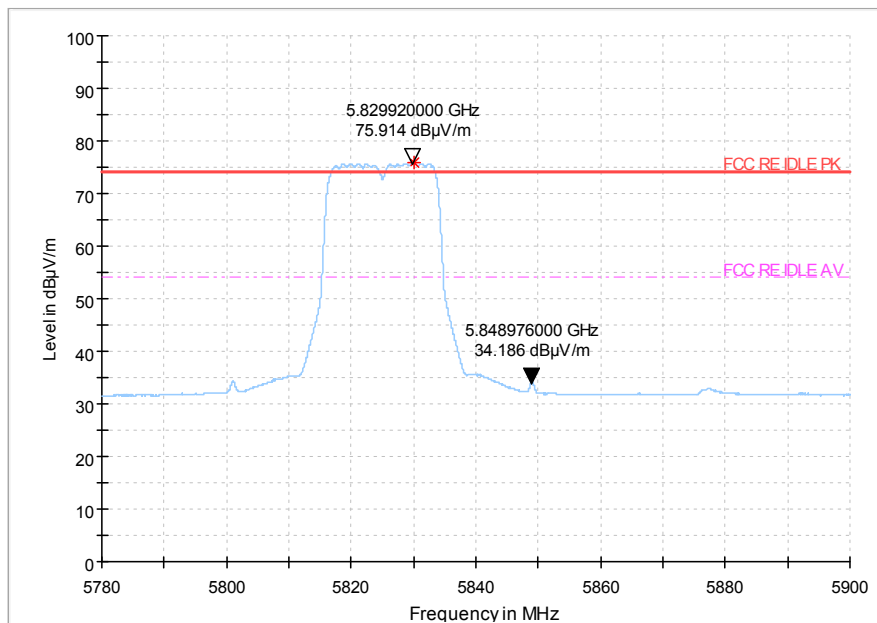


Average

Fig. 86 Band Edges (802.11n-HT20, 5825MHz)

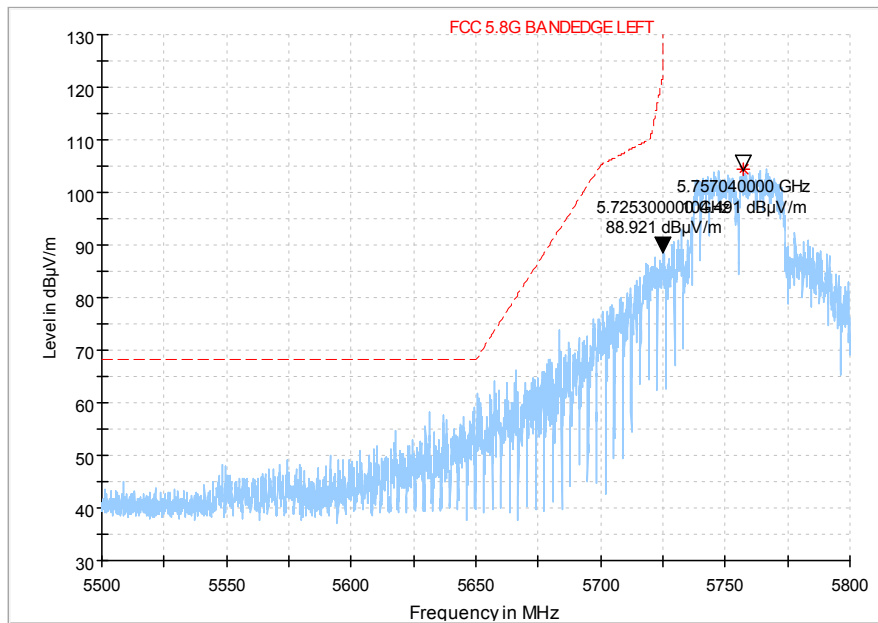


Peak

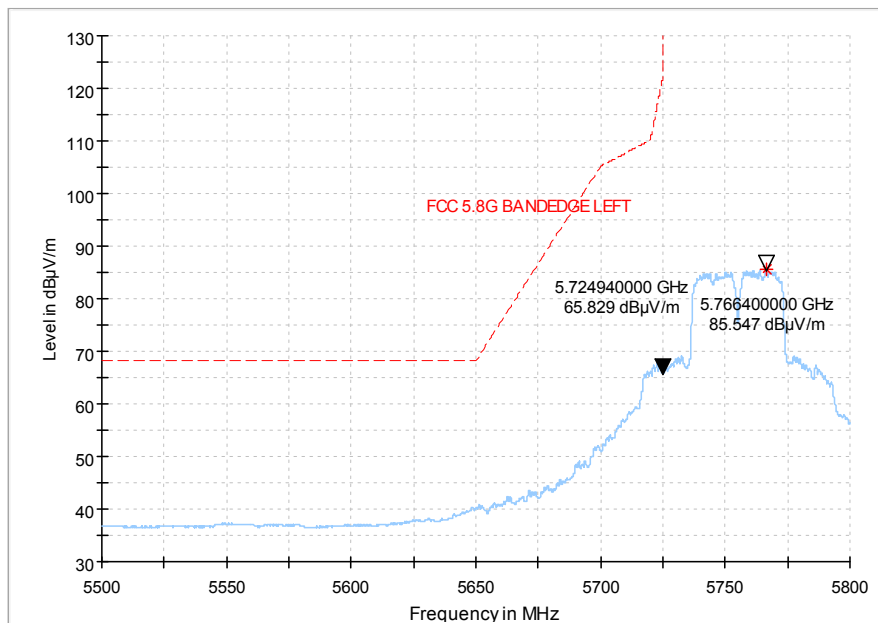


Average

Fig. 87 Band Edges (802.11n-HT40, 5755MHz)

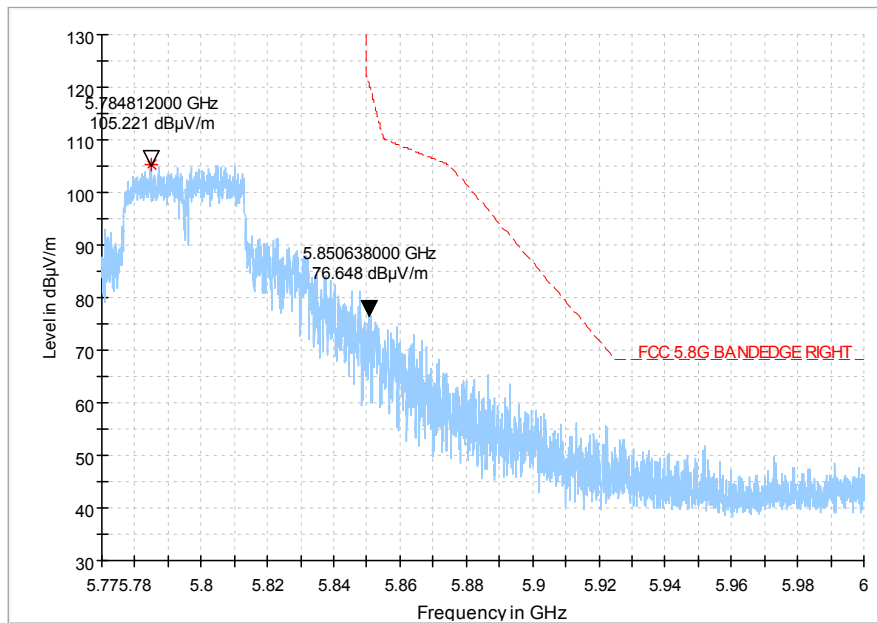


Peak

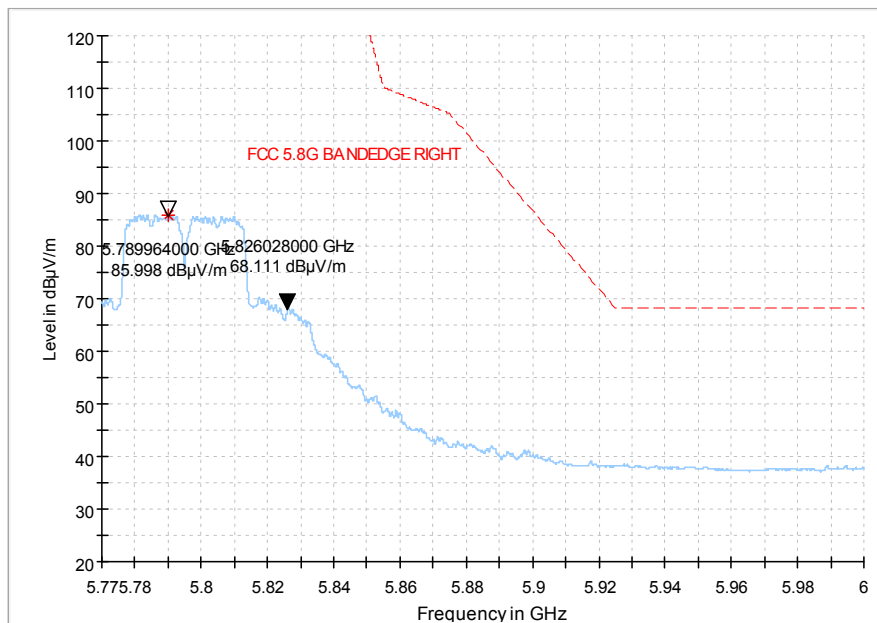


Average

Fig. 88 Band Edges (802.11n-HT40, 5795MHz)

L1522

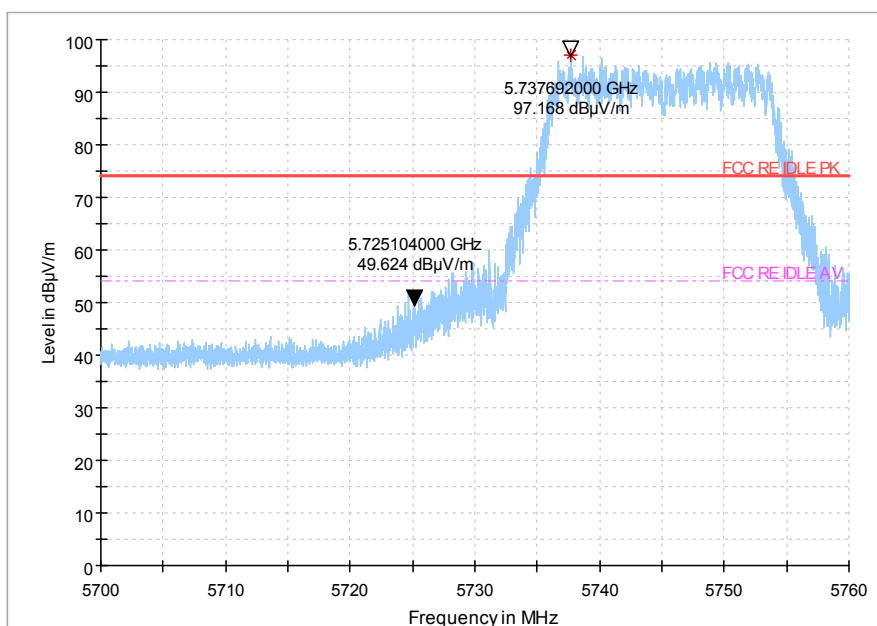


Peak

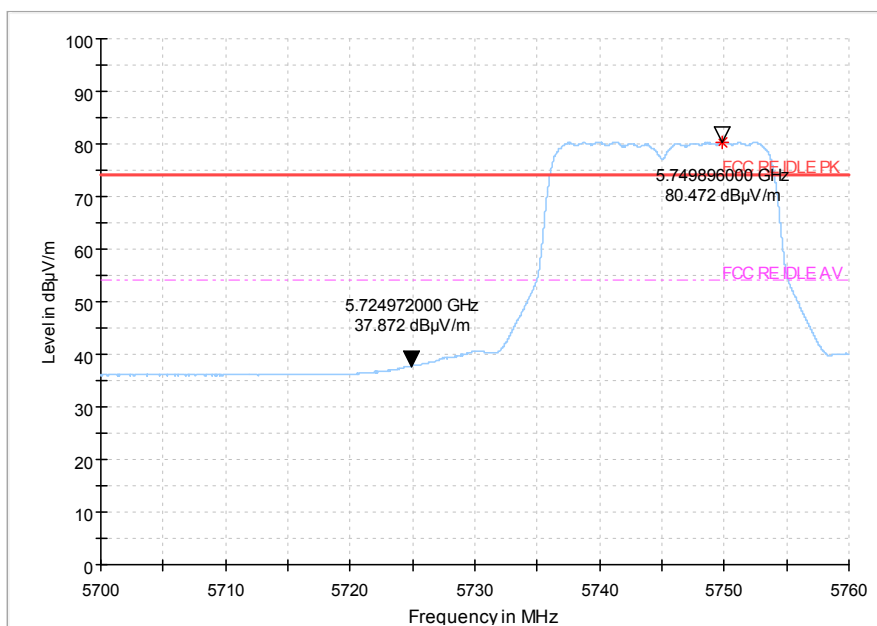


Average

Fig. 89 Band Edges (802.11n20, 5745MHz)

L1521

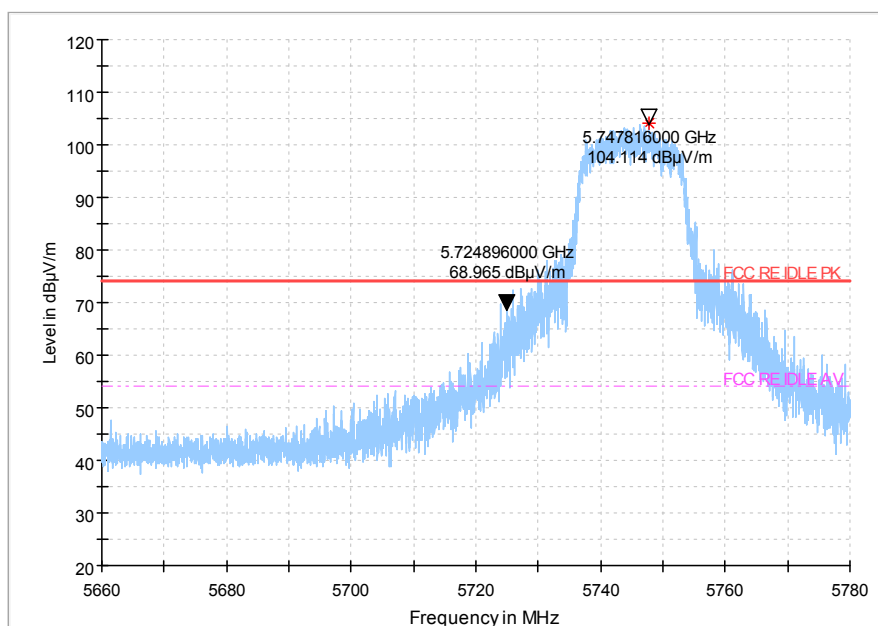

Peak

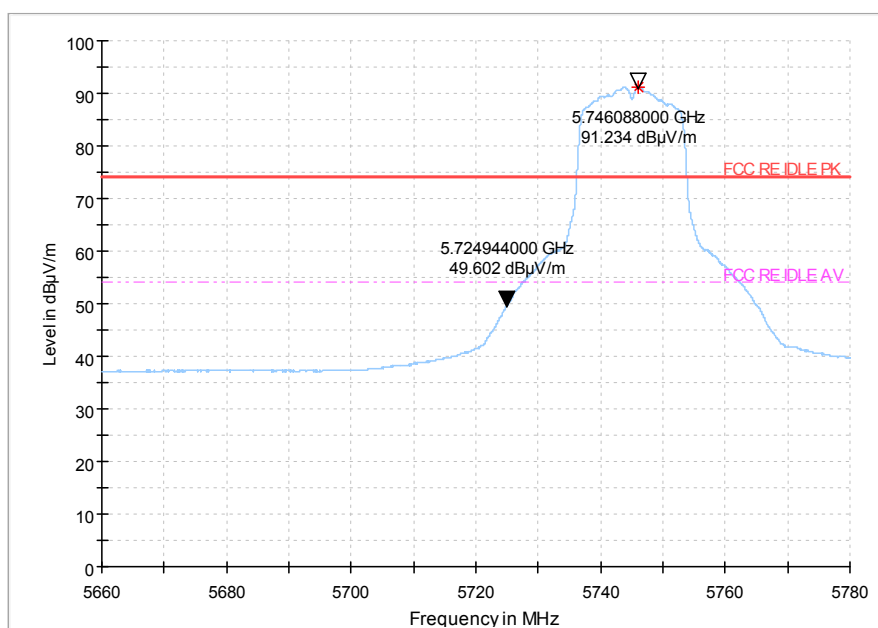

Average

Fig. 90 Band Edges (802.11a, 5745MHz)

6.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
-------------	----------------

East China Institute of Telecommunications
TEL: +86 21 63843300 FAX: +86 21 63843301

Page Number : 84 of 89
Report Issued Date : Aug.15. 2018

110	60
-----	----

Measurement uncertainty:

Expanded measurement uncertainty for this test item is $U = 3.2\text{dB}$, $k=2$.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.79		P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.79		P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.10 .

Conclusion: PASS

Test graphs as below:

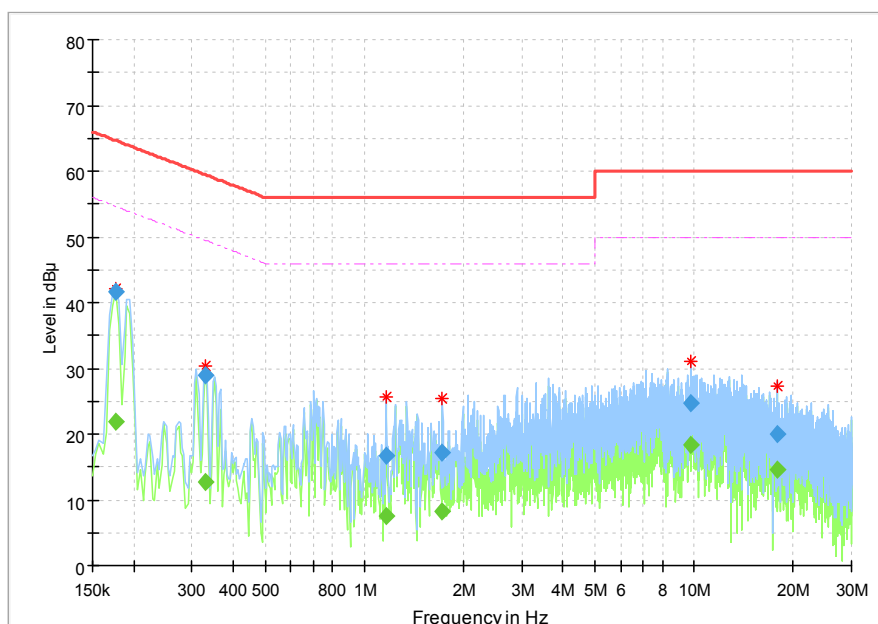


Fig. 91 AC Powerline Conducted Emission-802.11a

Measurement Result 1:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.176119	---	21.80	54.67	32.87	1000.0	9.000	L1	ON	9.7
0.176119	41.68	---	64.67	22.99	1000.0	9.000	L1	ON	9.7
0.329100	---	12.65	49.47	36.82	1000.0	9.000	N	ON	9.7
0.329100	28.90	---	59.47	30.57	1000.0	9.000	N	ON	9.7
1.164900	16.69	---	56.00	39.31	1000.0	9.000	L1	ON	9.7
1.164900	---	7.64	46.00	38.36	1000.0	9.000	L1	ON	9.7
1.724588	---	8.12	46.00	37.88	1000.0	9.000	L1	ON	9.7
1.724588	17.12	---	56.00	38.88	1000.0	9.000	L1	ON	9.7
9.784088	24.63	---	60.00	35.37	1000.0	9.000	N	ON	9.8
9.784088	---	18.30	50.00	31.70	1000.0	9.000	N	ON	9.8
17.824931	---	14.61	50.00	35.39	1000.0	9.000	L1	ON	9.9
17.824931	19.89	---	60.00	40.11	1000.0	9.000	L1	ON	9.9

7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal Analyzer	FSQ40	200063	Rohde&Schwarz	2017-12-17	1 Year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2018-05-11	1 Year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2018-05-11	1 Year
2	EMI Test Receiver	ESU40	100307	R&S	2018-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double-ridged Waveguide Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2018-05-11	1 Year

Anechoic chamber

Fully anechoic chamber by Frankonia German.

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Accreditation Certificate

*****END OF REPORT*****