

# FCC RADIO TEST REPORT

## FCC ID: 2ABYN055

**Product :** UHF Compact Wireless Microphone System  
(Transmitter)

**Trade Name :** Godox

**Model Name :** WMicS2 TX2

**Family Model :** N/A

**Report No. :** S22091301607001

### Prepared for

GODOX PHOTO EQUIPMENT CO.,LTD

1st to 4th Floor, Building 2/1st to 4th Floor, Building 4 ,Yaochuan Industrial  
Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103  
China

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name** ..... GODOX PHOTO EQUIPMENT CO.,LTD  
**Address** ..... 1st to 4th Floor, Building 2/1st to 4th Floor, Building 4 ,Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, 518103 China  
**Manufacture's Name**... GODOX Photo Equipment Co.,Ltd.  
**Address** ..... 4th Floor of Building 1, 1st to 4 th Floor of Building 2, 4th Floor of Building 3,1st to 4th Floor of Building 4, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China

**Product description**

**Product name**..... UHF Compact Wireless Microphone System (Transmitter)  
**Model and/or type reference** ..... WMicS2 TX2  
**Family Model**..... N/A


**Standards** ..... FCC CFR47 Part 74

**Test procedure** ..... TIA-603-E: 2016 and KDB 206256 D01 Wireless Microphone Certification v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Test Sample Number** .....: S220913016003  
**Date of Test**..... :  
**Date (s) of performance of tests**..... : Nov 10. 2022 ~ Dec 30. 2022  
**Date of Issue** .....: Jan 09. 2023  
**Test Result**.....: **Pass**

Testing Engineer :   
 \_\_\_\_\_  
 (Mary Hu)

Authorized Signatory :   
 \_\_\_\_\_  
 (Alex Li)

**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 FACILITIES AND ACCREDITATIONS	6
1.1 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMISSION TEST</b>	<b>14</b>
3.1 RADIATED EMISSION MEASUREMENT	14
3.1.1 APPLICABLE STANDARD	14
3.1.2 CONFORMANCE LIMIT	14
3.1.3 MEASURING INSTRUMENTS	14
3.1.4 TEST CONFIGURATION	14
3.1.5 TEST SETUP	14
3.1.6 TEST PROCEDURE	15
3.1.7 TEST RESULTS (BETWEEN 9KHZ – 30MHZ)	16
3.1.8 TEST RESULTS (BETWEEN 30MHZ– 1GHZ)	17
3.1.9 TEST RESULTS (ABOVE 1000 MHZ)	23
<b>4 . RF OUTPUT POWER</b>	<b>29</b>
4.1 CONDUCTED OUTPUT POWER	29
4.1.1 APPLIED PROCEDURES / LIMIT	29
4.1.2 TEST PROCEDURE	29
4.1.3 TEST SETUP	29
4.1.4 EUT OPERATION CONDITIONS	29
4.1.5 TEST RESULTS	30
<b>5 . MODULATION CHARACTERISTICS</b>	<b>32</b>
5.1 APPLIED PROCEDURES / LIMIT	32
5.2 TEST PROCEDURE	32
5.3 EUT OPERATION CONDITIONS	32

**Table of Contents**

	<b>Page</b>
5.4 TEST RESULTS	33
<b>6 . OCCUPIED BANDWIDTH OF EMISSION</b>	<b>36</b>
6.1 APPLIED PROCEDURES / LIMIT	36
6.2 TEST PROCEDURE	36
6.3 DEVIATION FROM STANDARD	36
6.4 TEST SETUP	36
6.5 EUT OPERATION CONDITIONS	36
6.6 TEST RESULT	37
<b>7 . SPURIOUS EMISSIONS AT ANTENNA TERMINALS</b>	<b>39</b>
7.1 TEST PROCEDURE	39
7.2 EUT OPERATION CONDITIONS	39
7.3 TEST RESULTS	40
<b>8 . FREQUENCY STABILITY</b>	<b>45</b>
8.1 STANDARD REQUIREMENT	45
8.2 TEST CONFIGURATION	45
8.3 TEST PROCEDURE	45
8.4 TEST RESULT	46
<b>9 . NECESSARY BANDWIDTH (BN) FOR ANALOGUE SYSTEMS</b>	<b>48</b>
9.1 APPLIED PROCEDURES / LIMIT	48
9.2 TEST PROCEDURE	49
9.3 DEVIATION FROM STANDARD	49
9.4 TEST SETUP	49
9.5 EUT OPERATION CONDITIONS	50
9.6 TEST RESULT	50

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC CFR47 Part 74			
Standard Section	Test Item	Judgment	Remark
74.861(e)(1)(ii)	RF Output Power	PASS	
2.1047(a)	Modulation Characteristics	PASS	
2.1049(c)(1)	Occupied Bandwidth	PASS	
2.1053 & 74.861(e)(6)	Radiated Emissions	PASS	
2.1051	Spurious emissions at antenna terminals	PASS	
2.1055(a)(1)	Frequencies Stability	PASS	
74.861(e) (7)	Necessary bandwidth	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Requirement for Radio Equipment on Certification:

1. RF output Power  
For transmitters, the power output shall be measured at the RF output terminals.
2. Modulation Characteristics  
For Voice Modulated Communication Equipment, a curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted.
3. Occupied Bandwidth  
For radiotelephone transmitter, other than single sideband or indenpent sideband transmitter, where modulated by a 2.5KHz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.
4. Spurious Emission at Antenna Terminals  
The radio frequency voltage or power generated within the equipment and appearing on a spurious Frequency shall be checked at the equipment output terminal when properly loaded with a suitable artificial antenna.
5. Field Strength of Spurious Emission  
Measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediate ciruit elements under normal condition of installation and operation.
6. Frequencies Tolerance  
The frequency stability shall be measured with variation of ambient temperature.  
The frequency stability shall be measured with variation of primary supply voltage.

### 1.1 FACILITIES AND ACCREDITATIONS

All measurement facilities used to collect the measurement data are located at  
 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen  
 518126 P.R. China

The sites are constructed in conformance with the requirements of ANSI C63.7, TIA-603-E: 2016 and CISPR  
 Publication 22.

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with  
 CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized  
 International Standard ISO/IEC 17025:2005 General requirements for  
 the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined  
 scope and the operation of a laboratory quality management system  
 (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang  
 Street, Bao'an District, Shenzhen 518126 P.R. China.

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a  
 standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of  
 approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	UHF Compact Wireless Microphone System (Transmitter)	
Trade Name	Godox	
Model Name	WMicS2 TX2	
Family Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a UHF Compact Wireless Microphone System (Transmitter)	
	Operation Frequency:	514.56 MHz~553.92MHz
	Modulation Type:	FM
	Equipment category	Analogue systems
	Antenna Designation:	External Antenna
Antenna Gain (dBi)	TX:1.60dBi	
Ratings	Built-in Li-ion battery: 3.8 V, 770mAh, Type-C Input: 5V ---0.4A	
Adapter	N/A	
Battery	DC 3.8 V, 770mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	
Hardware Version	TX:20210423H31	
Software Version	V1.0	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

The transmitting frequency as follow:

Frequency (MHz)	
514.56	534.65
514.97	535.06
515.38	535.47
.....	.....
.....	.....
.....	.....
.....	.....
.....	.....
.....	.....
533.01	553.10
533.42	553.51
533.83	553.92

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	TX(514.56MHz/ 534.65MHz / 553.92MHz)

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX(514.56MHz/ 534.65MHz / 553.92MHz)


For Conduction Emission	
Final Test Mode	Description
Mode 1	TX(514.56MHz/ 534.65MHz / 553.92MHz)

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

For Radiated Test Cases

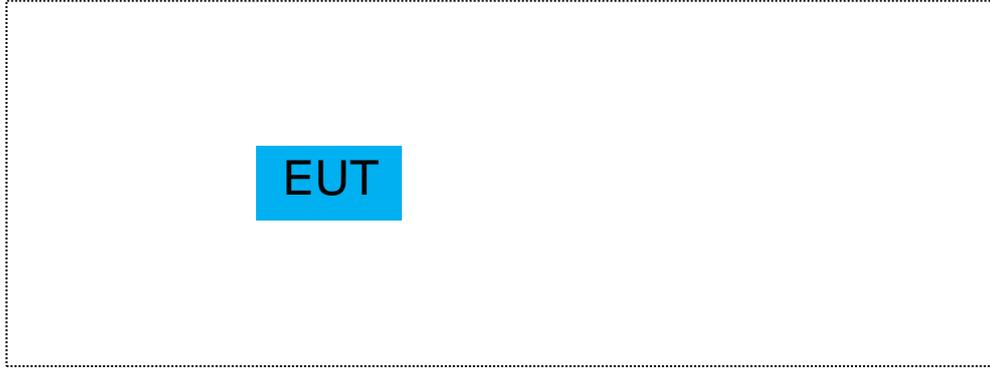

For Conducted Test Cases

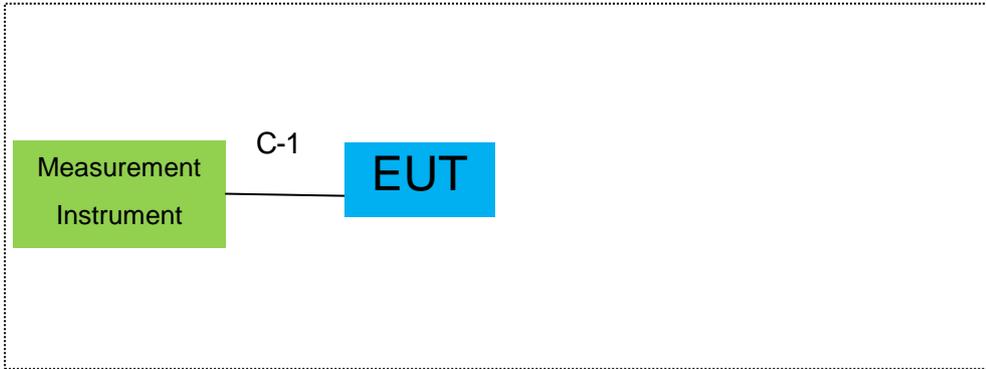

Note: Use new battery during the test.

## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	UHF Compact Wireless Microphone System (Transmitter)	Godox	WMicS2 TX2	N/A	EUT

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	RF Cable	YES	NO	0.1m

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2022.03.30	2023.03.29	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2022.06.16	2023.06.15	1 year
3	Spectrum Analyzer	R&S	FSV40	101417	2022.06.16	2023.06.15	1 year
4	Test Receiver	R&S	ESPI7	101318	2022.04.06	2023.04.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31	2023.03.30	1 year
8	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	2022.11.07	2023.11.06	1 year
9	Amplifier	EMC	EMC051835SE	980246	2022.06.17	2023.06.16	1 year
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	055	2022.11.04	2023.11.03	1 year
11	Power Meter	DARE	RPR3006W	15100041SN084	2022.06.16	2023.06.15	1 year
12	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2022.06.17	2025.06.16	3 year
16	Filter	TRILTHIC	2400MHz	29	2022.03.30	2023.03.29	1 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2022.04.06	2023.04.05	1 year
2	LISN	R&S	ENV216	101313	2022.04.06	2023.04.05	1 year
3	LISN	EMCO	3816/2	00042990	2022.04.06	2023.04.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2023.05.10	3 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.05.11	2023.05.10	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2022.07.06	2023.07.05	1 year

### 3. EMISSION TEST

#### 3.1 RADIATED EMISSION MEASUREMENT

##### 3.1.1 Applicable standard

According to FCC §74.861 (e) (6) (iii) and ANSI/TIA-603-E-2016 Section 2.2.12

##### 3.1.2 Conformance limit

On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43 + 10\log$  (mean output power in watts) dB.


##### 3.1.3 Measuring instruments


The Measuring equipment is listed in the section 6.3 of this test report.

##### 3.1.4 Test configuration

According to the ANSI/TIA-603-E-2016 test method, The Receiver or Spectrum was scanned from 9 KHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz The resolution bandwidth is set as outlined in Part FCC §74.861 (e) (6) (iii).

##### 3.1.5 Test setup

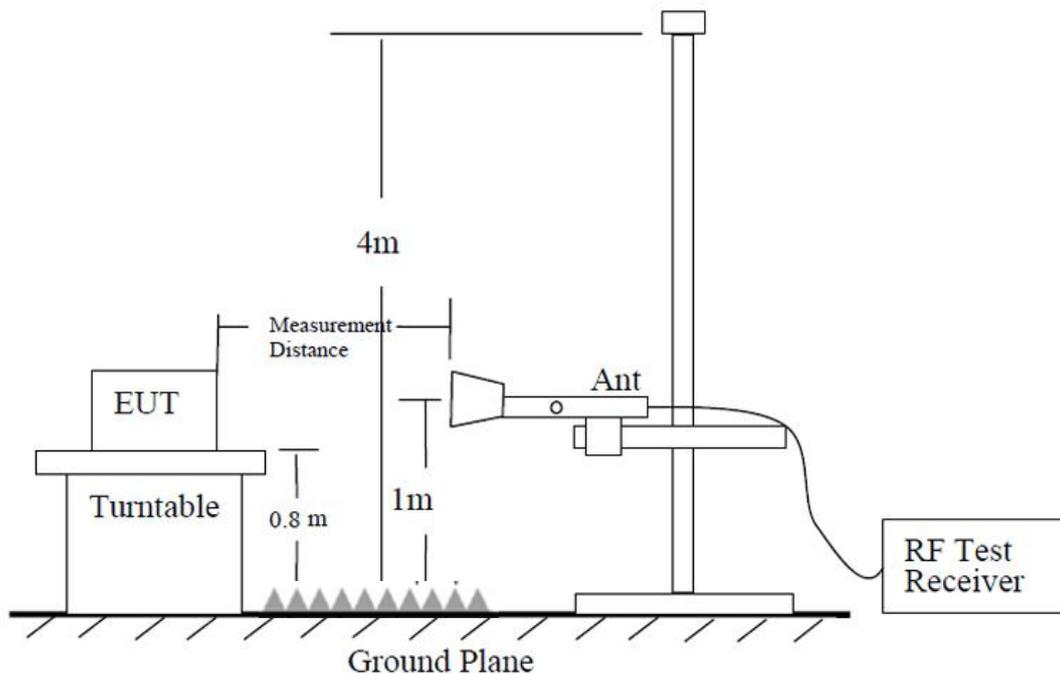

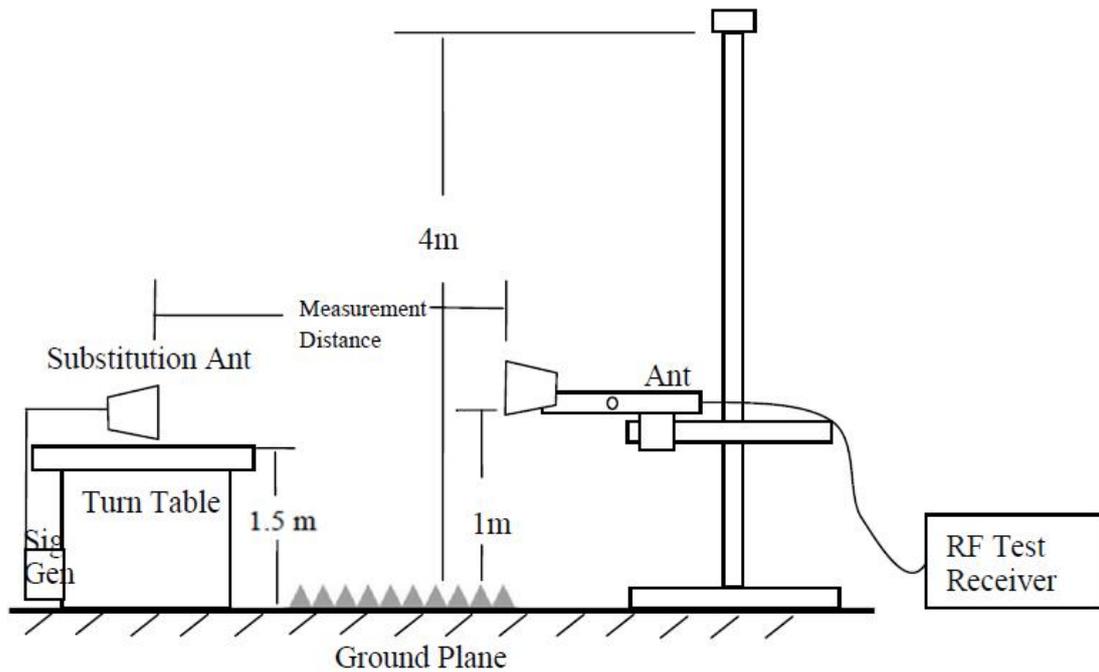

### 3.1.6 Test procedure

1. EUT was placed on a 0.8 meter (For frequency above 1G, EUT should be placed on 1.5m) high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (SG Level) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source (SG Level) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Cable Loss), the Substitution Antenna Gain should be recorded after test.

The measurement results are obtained as described below:

Power(EIRP)= SG Level- Cable Loss+ Antenna Gain

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.

### 3.1.7 Test results (between 9KHz – 30MHz)

EUT:	UHF Compact Wireless Microphone System (Transmitter)	Model Name. :	WMicS2 TX2
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	N/A
Test Mode :	N/A	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. For Frequency 9kHz~30MHz:  
 Distance extrapolation factor =40log(Specific distance/ test distance)(dB);  
 Limit line=Specific limits(dBuV) + distance extrapolation factor.  
 For Frequency above 30MHz:  
 Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


### 3.1.8 Test results (between 30MHz– 1GHz)

EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(514.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.1054	-100.55	25.81	-74.74	-36.00	-38.74	QP
V	119.8556	-96.55	18.82	-77.73	-36.00	-41.73	QP
V	167.8243	-97.09	17.32	-79.77	-36.00	-43.77	QP
V	294.1137	-98.69	19.94	-78.75	-36.00	-42.75	QP
V	455.9058	-96.79	23.97	-72.82	-36.00	-36.82	QP
V	706.6997	-100.08	28.08	-72.00	-54.00	-18.00	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

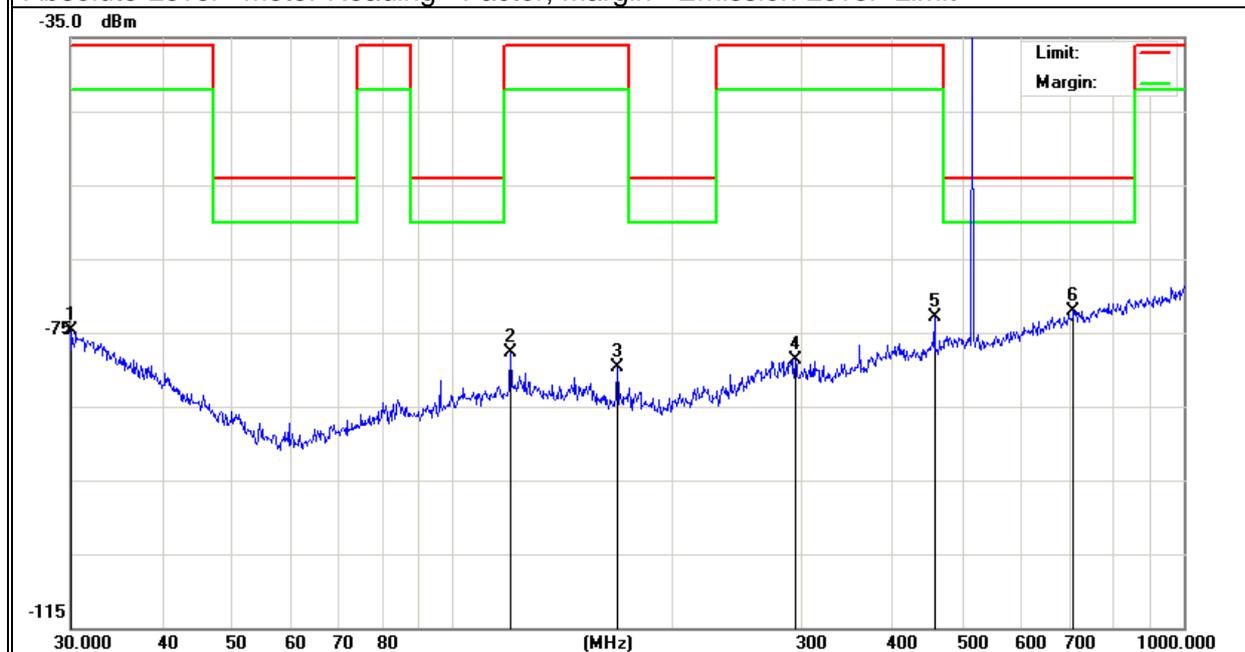


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(514.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	84.1100	-94.44	16.24	-78.20	-36.00	-42.20	QP
H	119.8556	-91.79	18.82	-72.97	-36.00	-36.97	QP
H	180.0165	-89.61	16.78	-72.83	-54.00	-18.83	QP
H	360.4476	-94.45	22.20	-72.25	-36.00	-36.25	QP
H	665.8034	-100.39	27.48	-72.91	-54.00	-18.91	QP
H	842.1295	-99.16	30.07	-69.09	-54.00	-15.09	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

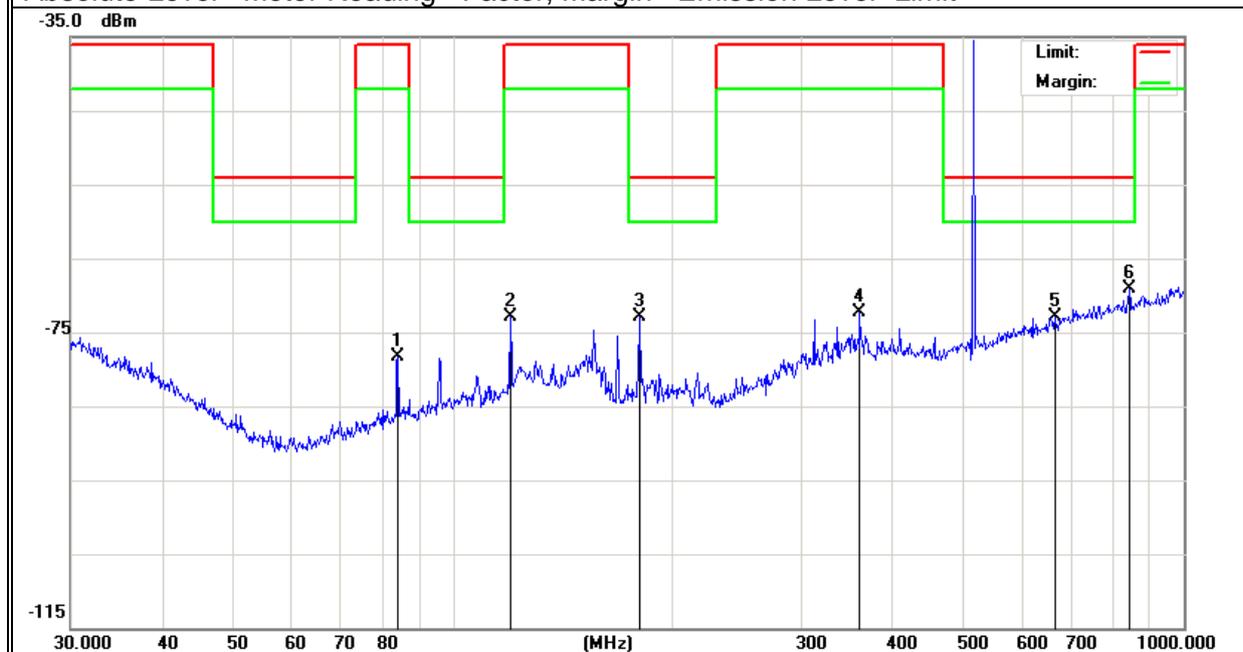


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(534.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.7313	-100.36	24.95	-75.41	-36.00	-39.41	QP
V	119.8555	-97.29	18.82	-78.47	-36.00	-42.47	QP
V	167.8242	-96.10	17.32	-78.78	-36.00	-42.78	QP
V	360.4476	-99.29	22.20	-77.09	-36.00	-41.09	QP
V	455.9057	-97.96	23.97	-73.99	-36.00	-37.99	QP
V	993.0113	-100.27	31.64	-68.63	-36.00	-32.63	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

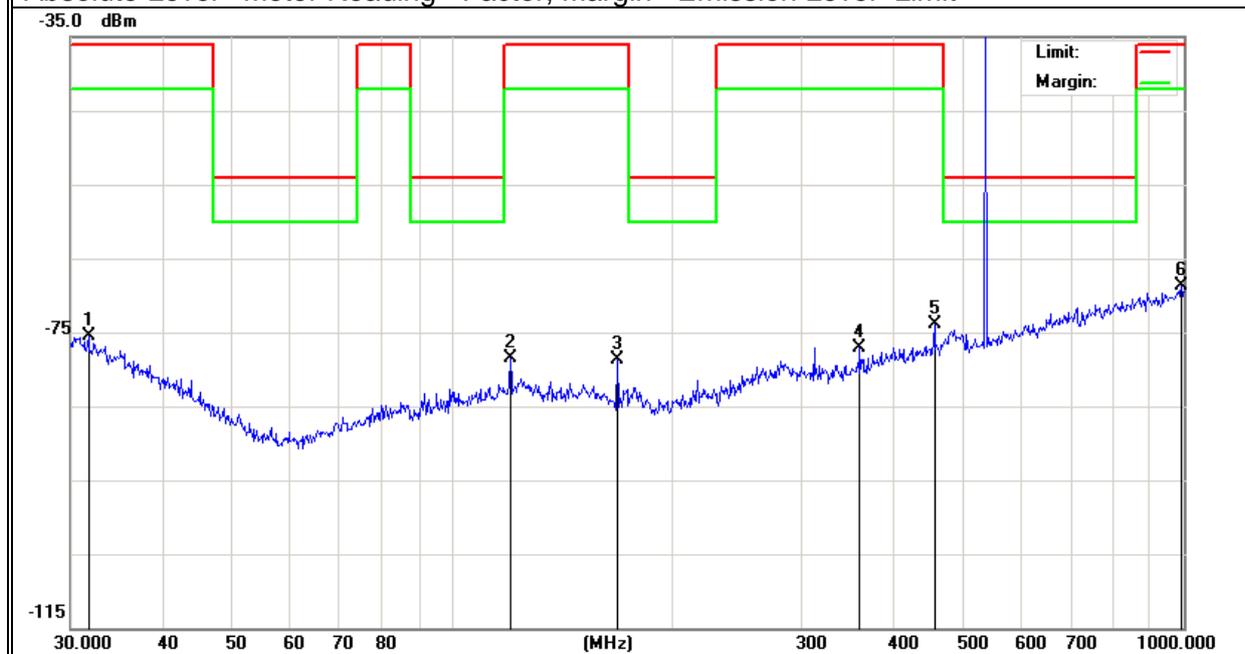


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(534.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.8535	-101.33	25.82	-75.51	-36.00	-39.51	QP
H	107.8876	-98.14	18.32	-79.82	-54.00	-25.82	QP
H	192.4182	-95.66	16.18	-79.48	-54.00	-25.48	QP
H	360.4476	-94.33	22.20	-72.13	-36.00	-36.13	QP
H	627.2738	-99.24	26.58	-72.66	-54.00	-18.66	QP
H	724.2611	-99.53	28.39	-71.14	-54.00	-17.14	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

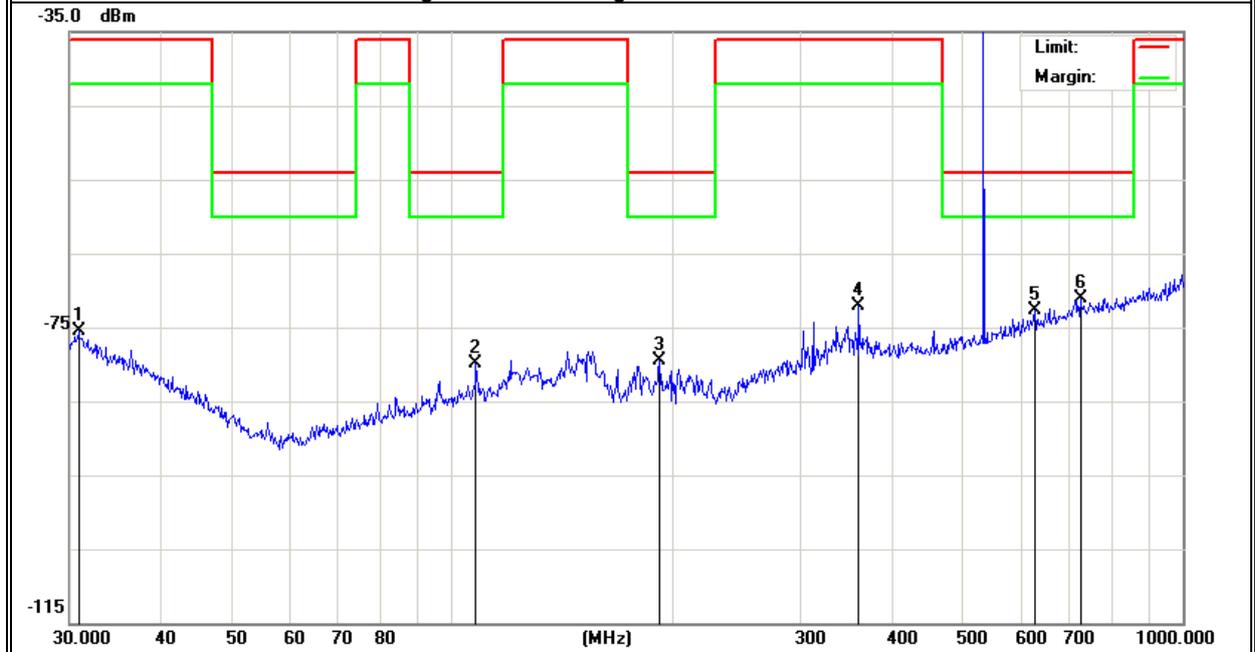


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(553.92MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	31.5095	-99.97	25.22	-74.75	-36.00	-38.75	QP
V	96.0986	-98.13	17.47	-80.66	-54.00	-26.66	QP
V	119.8556	-97.57	18.82	-78.75	-36.00	-42.75	QP
V	167.8243	-95.75	17.32	-78.43	-36.00	-42.43	QP
V	324.4561	-93.97	20.44	-73.53	-36.00	-37.53	QP
V	455.9058	-97.58	23.97	-73.61	-36.00	-37.61	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

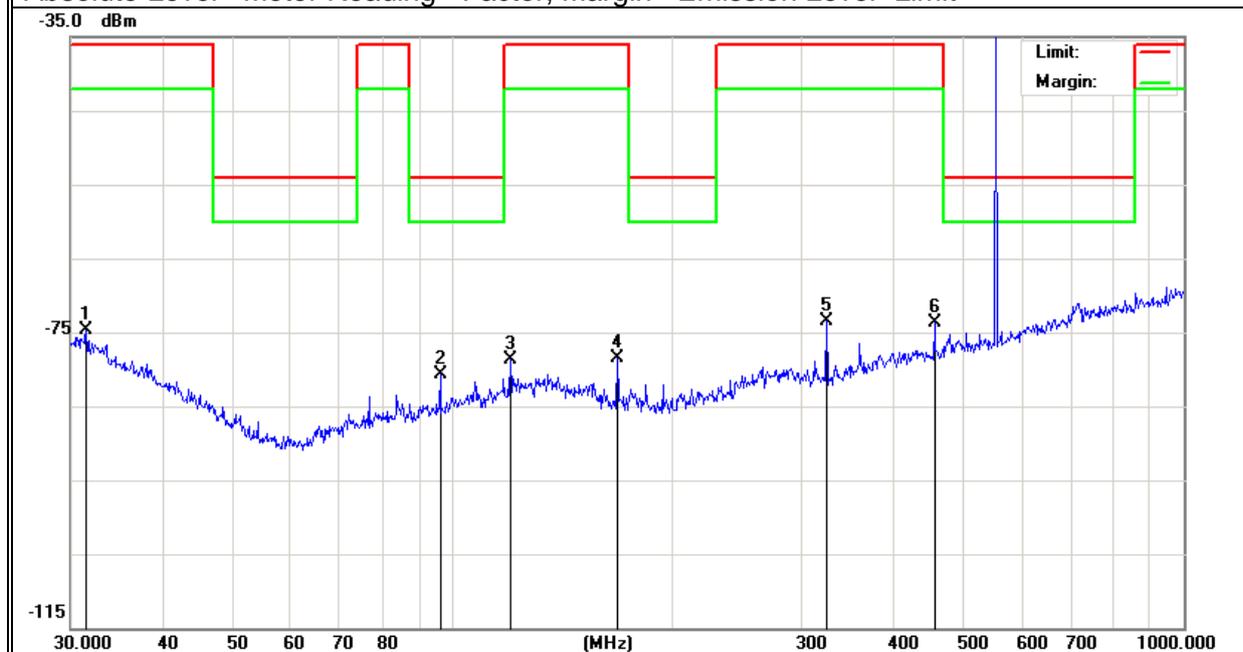


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(553.92MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	83.8156	-95.45	16.13	-79.32	-36.00	-43.32	QP
H	119.8556	-90.69	18.82	-71.87	-36.00	-35.87	QP
H	167.8243	-91.91	17.32	-74.59	-36.00	-38.59	QP
H	312.1794	-91.53	20.29	-71.24	-36.00	-35.24	QP
H	360.4476	-93.28	22.20	-71.08	-36.00	-35.08	QP
H	982.6200	-99.95	31.41	-68.54	-36.00	-32.54	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

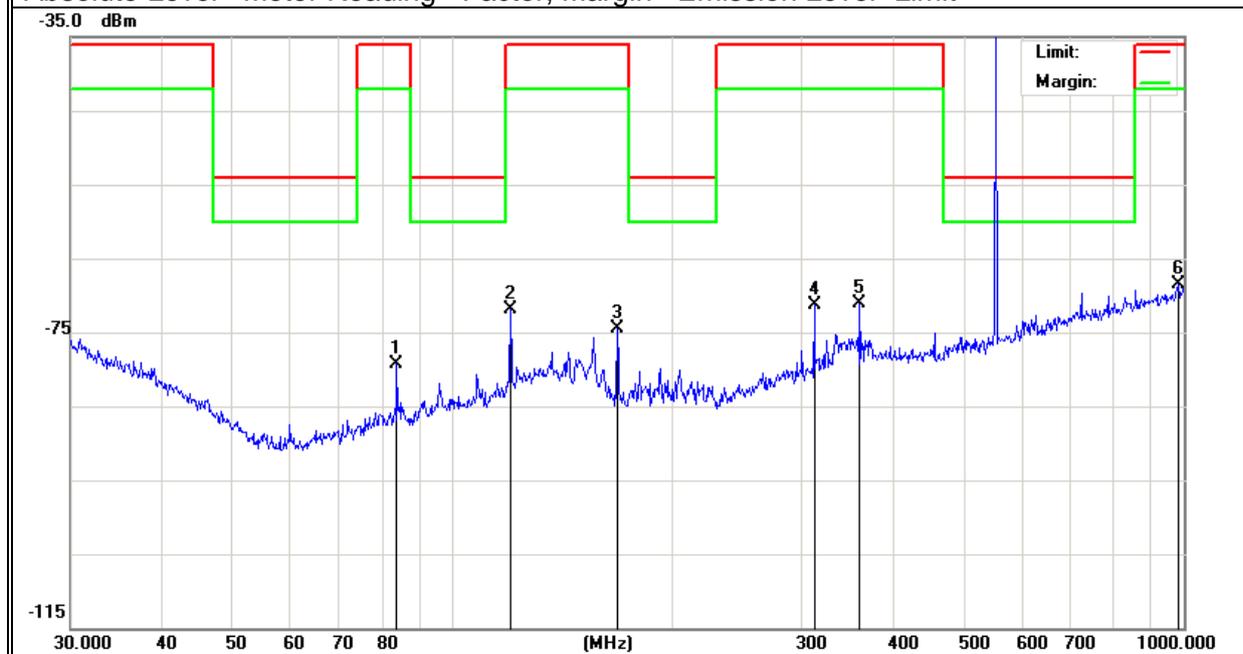


### 3.1.9 Test results (above 1000 MHz)

EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(514.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	3996.250	-70.09	25.57	-44.52	-30.00	-14.52	QP
V	4965.625	-70.87	27.56	-43.31	-30.00	-13.31	QP
V	5406.250	-71.85	29.76	-42.09	-30.00	-12.09	QP
V	7521.250	-71.70	30.45	-41.25	-30.00	-11.25	QP
V	8431.875	-71.46	30.58	-40.88	-30.00	-10.88	QP
V	9812.500	-72.29	31.63	-40.66	-30.00	-10.66	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

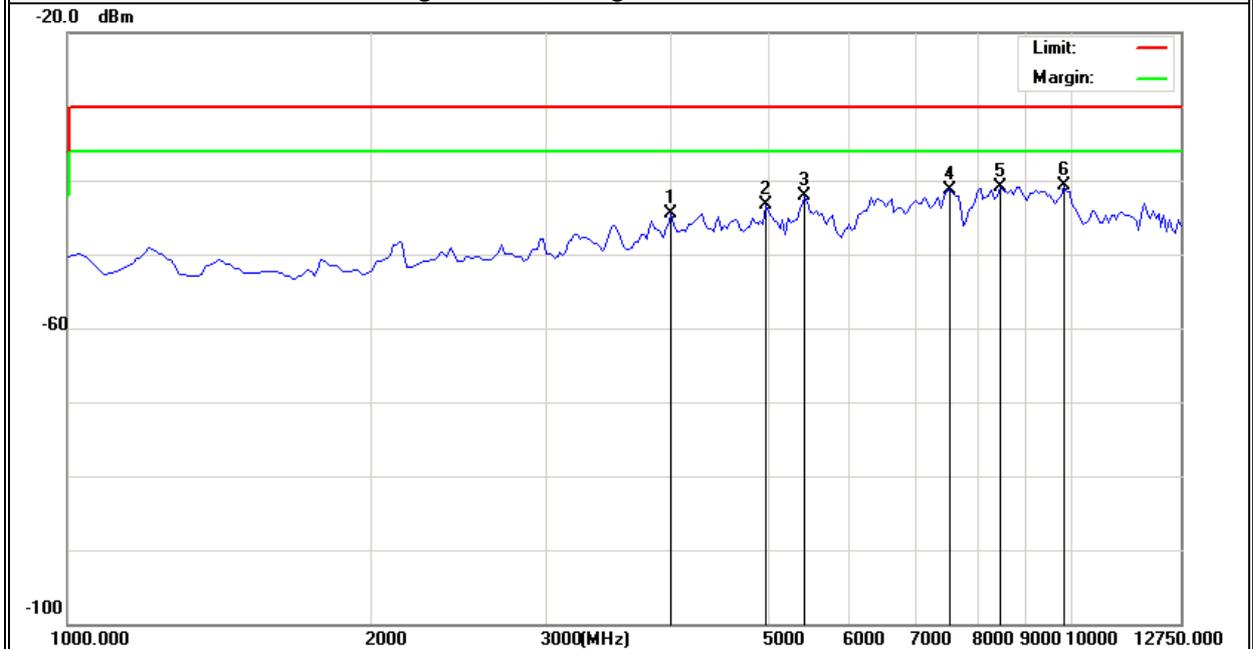


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(514.56MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	2968.125	-69.86	21.92	-47.94	-30.00	-17.94	QP
H	3878.750	-70.01	24.85	-45.16	-30.00	-15.16	QP
H	5406.250	-71.97	29.76	-42.21	-30.00	-12.21	QP
H	6346.250	-71.95	29.84	-42.11	-30.00	-12.11	QP
H	7433.125	-70.29	29.77	-40.52	-30.00	-10.52	QP
H	9283.750	-72.07	31.34	-40.73	-30.00	-10.73	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

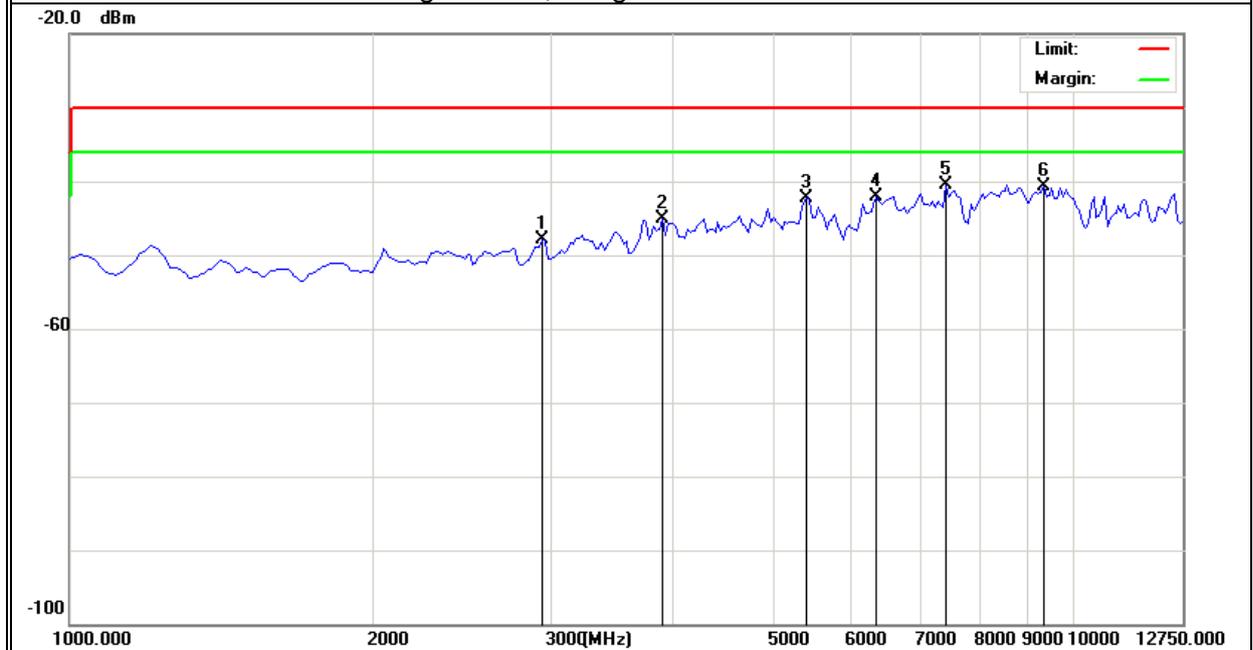


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(534.65MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	3496.875	-70.82	25.13	-45.69	-30.00	-15.69	QP
V	4231.250	-68.26	24.10	-44.16	-30.00	-14.16	QP
V	5376.875	-72.41	29.43	-42.98	-30.00	-12.98	QP
V	7580.000	-72.23	30.90	-41.33	-30.00	-11.33	QP
V	9195.625	-72.50	31.40	-41.10	-30.00	-11.10	QP
V	9900.625	-72.04	30.72	-41.32	-30.00	-11.32	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

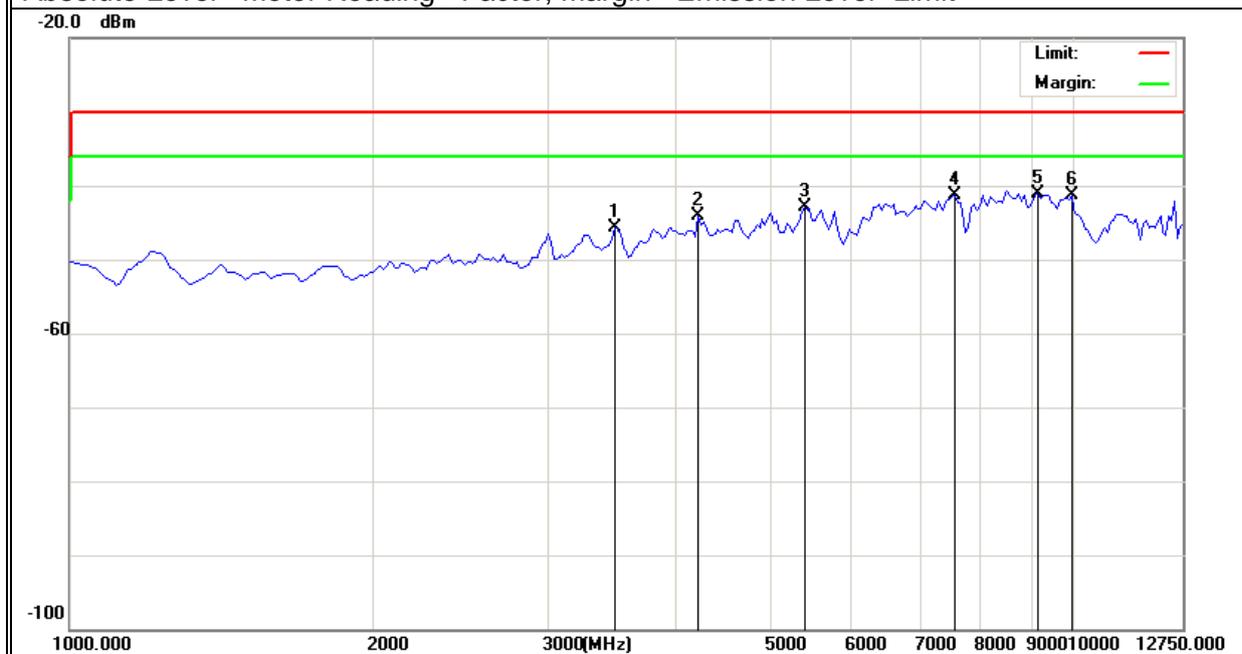


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(534.65MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	3996.250	-70.14	25.57	-44.57	-30.00	-14.57	QP
H	4995.000	-71.53	27.89	-43.64	-30.00	-13.64	QP
H	5376.875	-72.49	29.43	-43.06	-30.00	-13.06	QP
H	6698.750	-71.50	29.54	-41.96	-30.00	-11.96	QP
H	7550.625	-70.86	30.68	-40.18	-30.00	-10.18	QP
H	9225.000	-71.72	31.41	-40.31	-30.00	-10.31	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

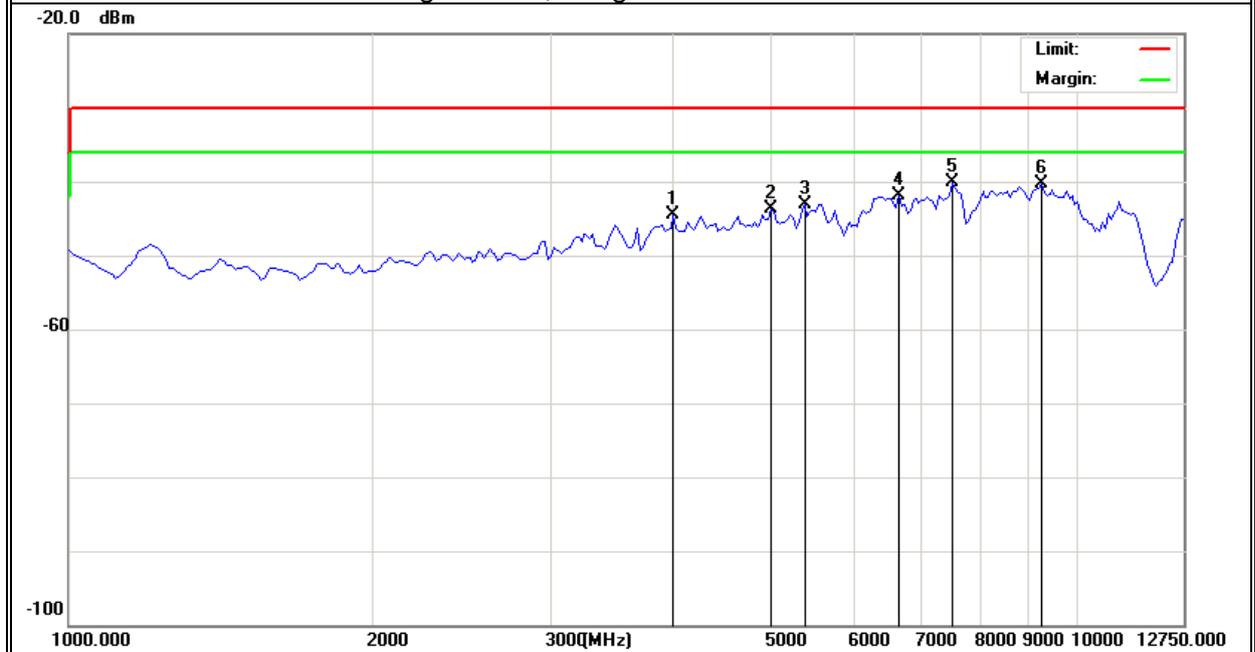


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(553.92MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	5024.375	-72.24	27.76	-44.48	-30.00	-14.48	QP
V	5406.250	-71.14	29.76	-41.38	-30.00	-11.38	QP
V	6405.000	-71.46	29.95	-41.51	-30.00	-11.51	QP
V	8050.000	-71.78	30.00	-41.78	-30.00	-11.78	QP
V	9342.500	-72.52	31.26	-41.26	-30.00	-11.26	QP
V	10458.750	-66.63	25.63	-41.00	-30.00	-11.00	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

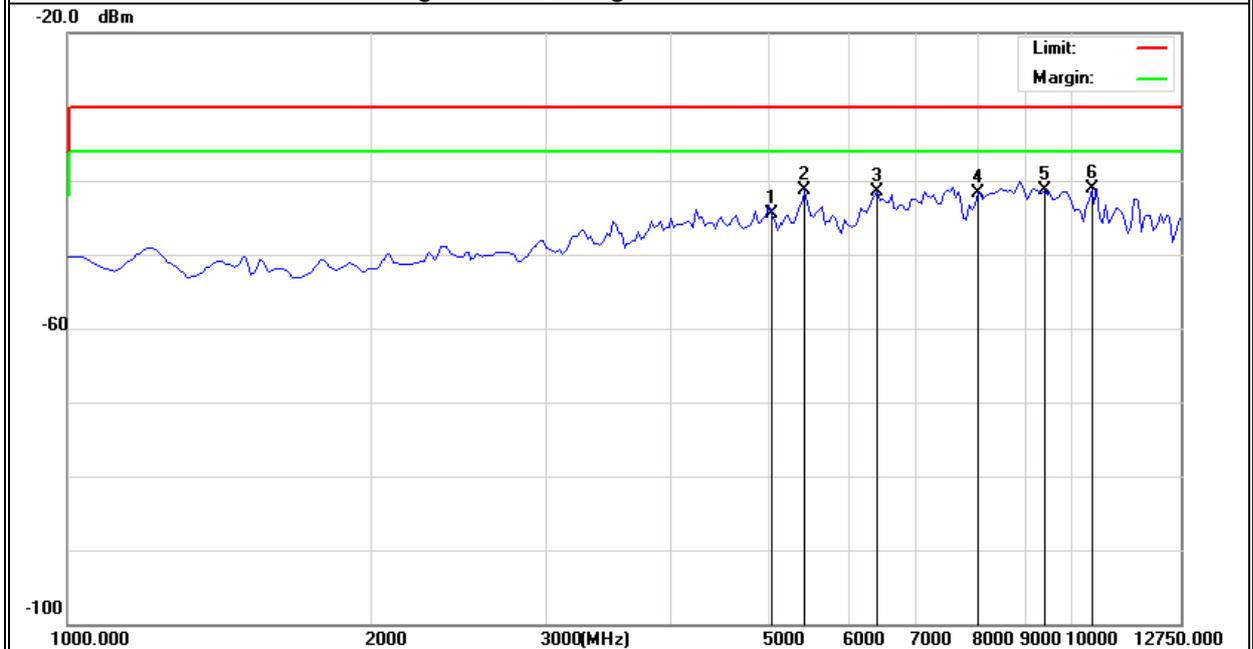


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	20 °C	Relative Humidity :	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(553.92MHz)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	4818.750	-68.56	25.97	-42.59	-30.00	-12.59	QP
V	5376.875	-70.58	29.43	-41.15	-30.00	-11.15	QP
V	7198.125	-69.82	29.84	-39.98	-30.00	-9.98	QP
V	8549.375	-71.55	30.81	-40.74	-30.00	-10.74	QP
V	9195.625	-71.98	31.40	-40.58	-30.00	-10.58	QP
V	9812.500	-72.66	31.63	-41.03	-30.00	-11.03	QP

**Remark:**

Absolute Level= Meter Reading+ Factor, Margin= Emission Level- Limit

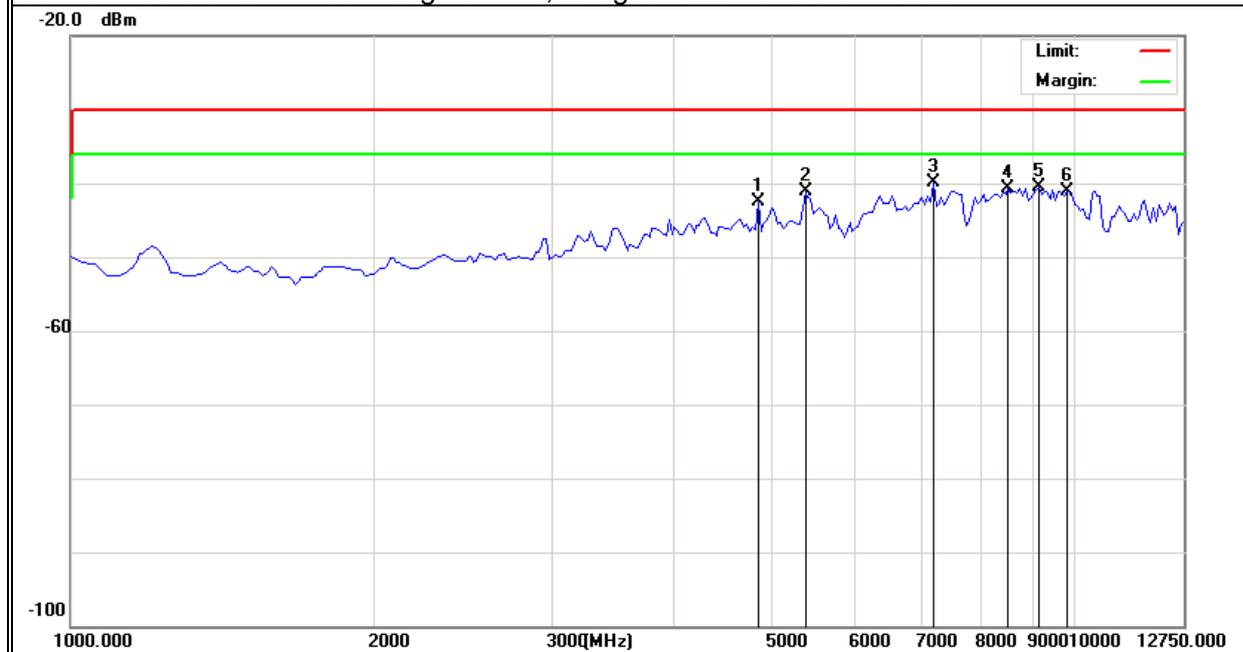

## 4. RF OUTPUT POWER

### 4.1 Conducted Output Power

#### 4.1.1 APPLIED PROCEDURES / LIMIT

Test requirement: FCC CFR47 Part 74 Section 74.861(e)(1)(ii)

Limit: According to Part 74.861(e)(1)(ii), the output power shall not exceed 250mW (23.98 dBm).

#### 4.1.2 TEST PROCEDURE

The maximum peak output power was measured with a spectrum analyzer connected to the antenna terminal (conducted measurement) while EUT was operating in normal situation.

Detector: Peak (worst case)

Sweep time: Auto /

Resolution bandwidth: > emission bandwidth

Video bandwidth: > resolution bandwidth

Span: > 2 times emissions bandwidth

Trace mode: Max. hold

EUT configuration: Peak:  
Unmodulated carrier

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX		

Test Frequency (MHz)	Conducted Output Power (PK) (dBm)	Cable loss (dBi)	Maximum Conducted Output Power(PK) (dBm)	LIMIT dBm
514.56	-9.478	1	-8.478	23.98
534.65	-10.057	1	-9.057	23.98
553.92	-10.805	1	-9.805	23.98

Test plot for TX L Fre.

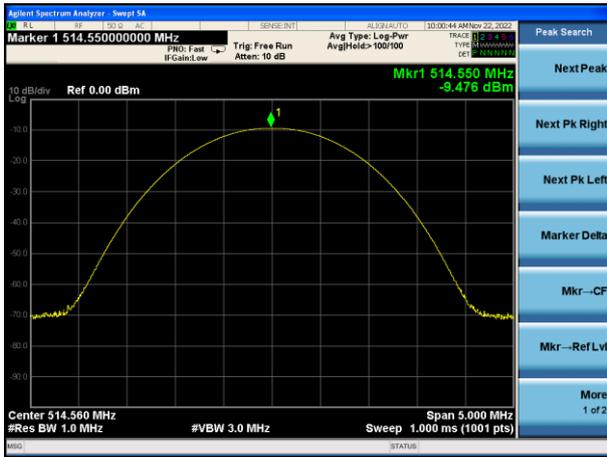

Test plot for TX M Fre.

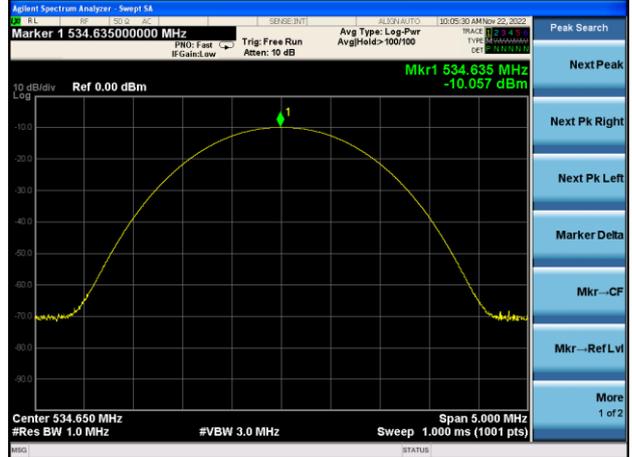

Test plot for TX H Fre.



N/A

N/A

## 5. MODULATION CHARACTERISTICS

### 5.1 APPLIED PROCEDURES / LIMIT

Test requirement: FCC CFR47 Part 2 Section 2.1047(a)

Test method: According to ANSI/TIA-603-E 2016 section 2.2.3,

Requirement: According to Part 2.1047(a), for Voice Modulated Communication Equipment, the frequency response of the audio modulating circuit over a range of 100Hz to 5000Hz shall be measured.

### 5.2 TEST PROCEDURE

(a) Test Configuration


(b) Audio Frequency Response:

- 1) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- 2) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF .
- 3) Set the audio frequency generator to the desired test frequency between 100 Hz and 5000 Hz.
- 4) Record the test receiver deviation reading as DEVFREQ .
- 5) Calculate the audio frequency response at the present frequency as:  
 $\text{audio frequency response} = 20\lg(\text{DEVFREQ} / \text{DEVREF})$
- 6) Repeat steps 4) through 5) for all the desired test frequencies.

(c) Modulation Limiting:

- 1) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation.
- 2) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level.
- 3) With the level from the audio frequency generator held constant at the level obtained in step e), slowly vary the audio frequency from 300 Hz to 3000Hz and observe the steady-state deviation. Record the maximum deviation.
- 4) Set the test receiver to measure peak negative deviation and repeat steps 1) through 3).
- 5) The values recorded in steps 3) and 4) are the modulation limiting.

#### TEST SETUP

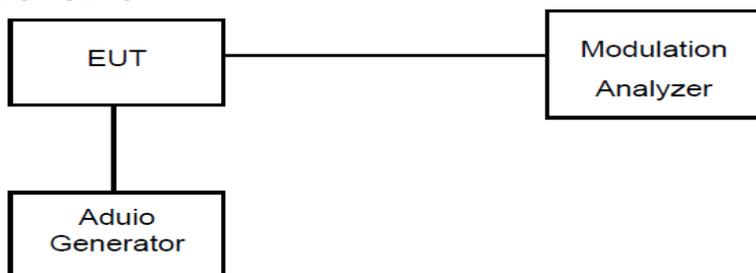



### 5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 5.4 TEST RESULTS

EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX		



TX 514.56MHz

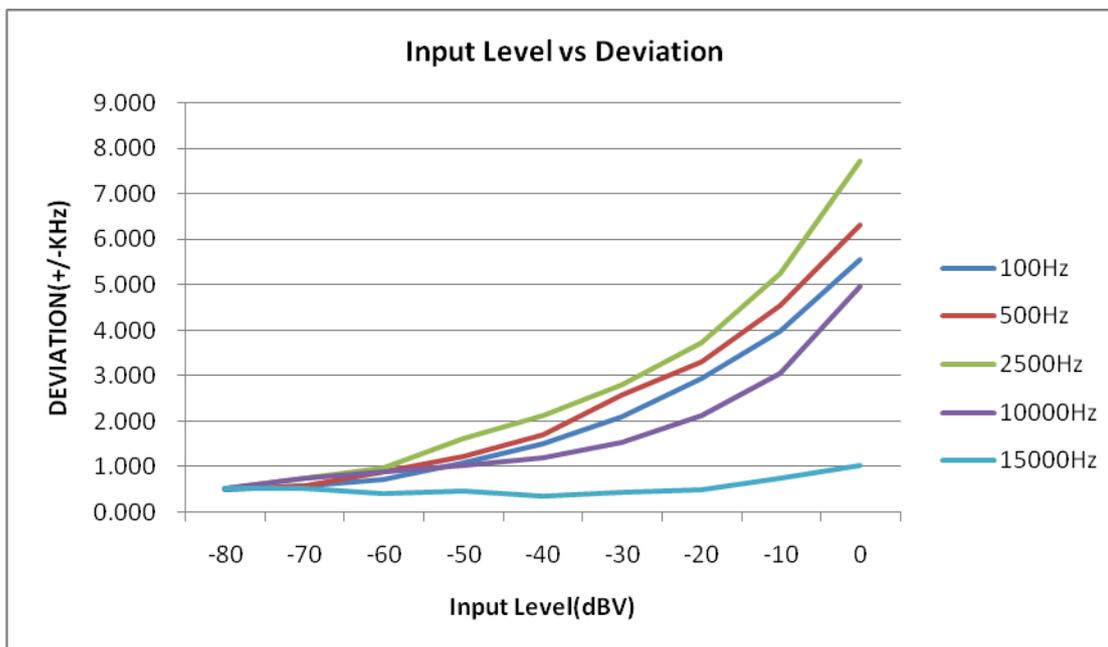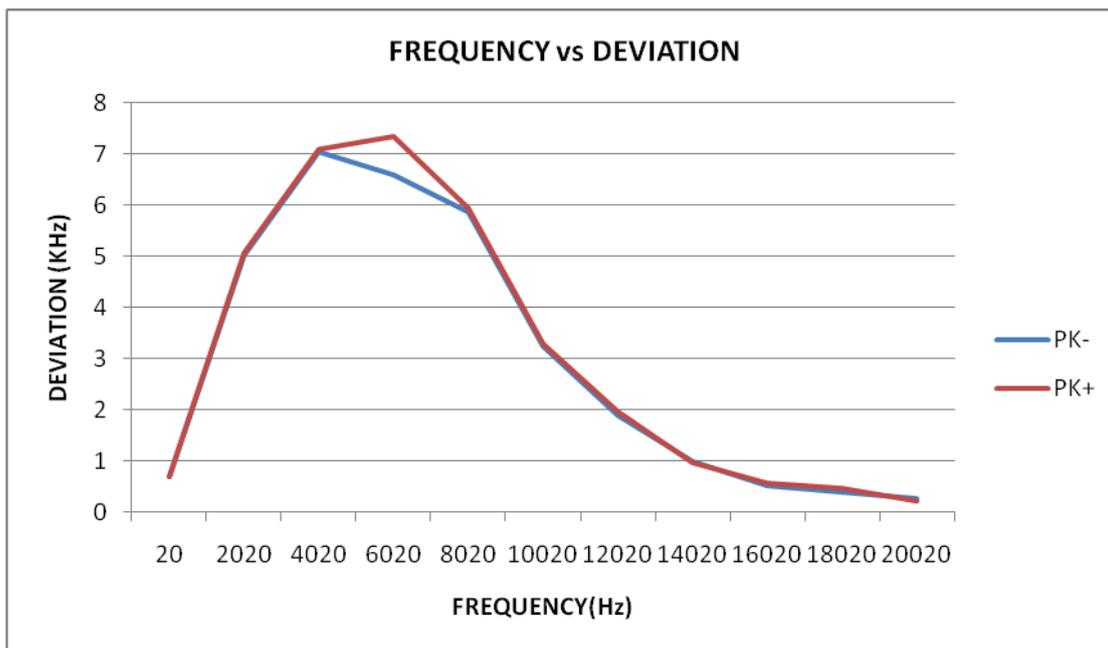

TX 534.65MHz

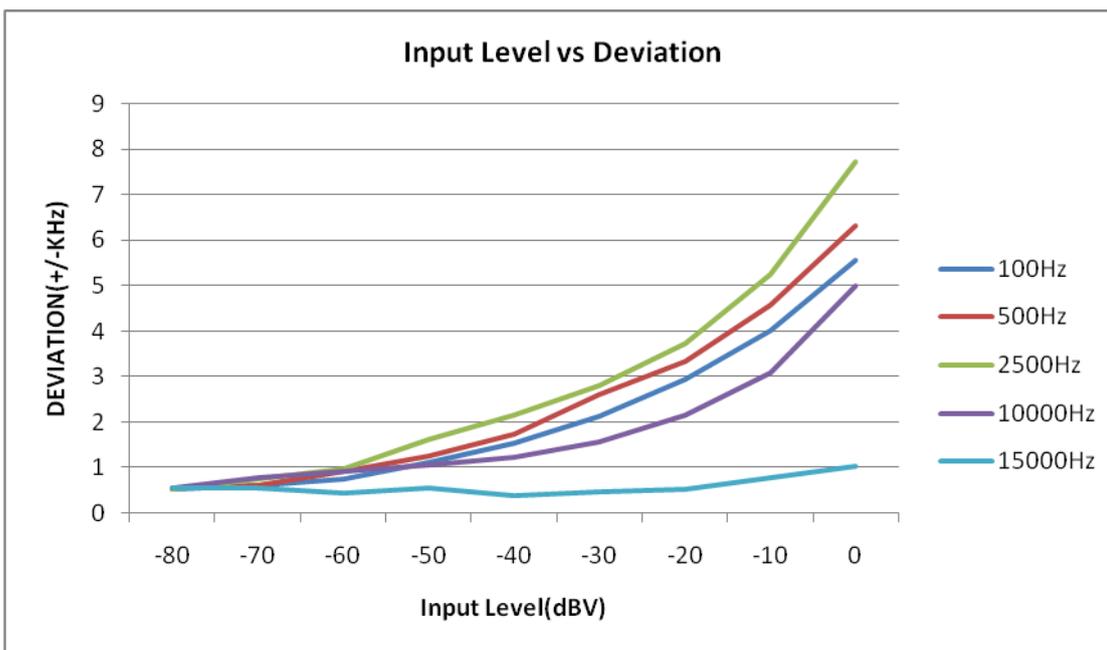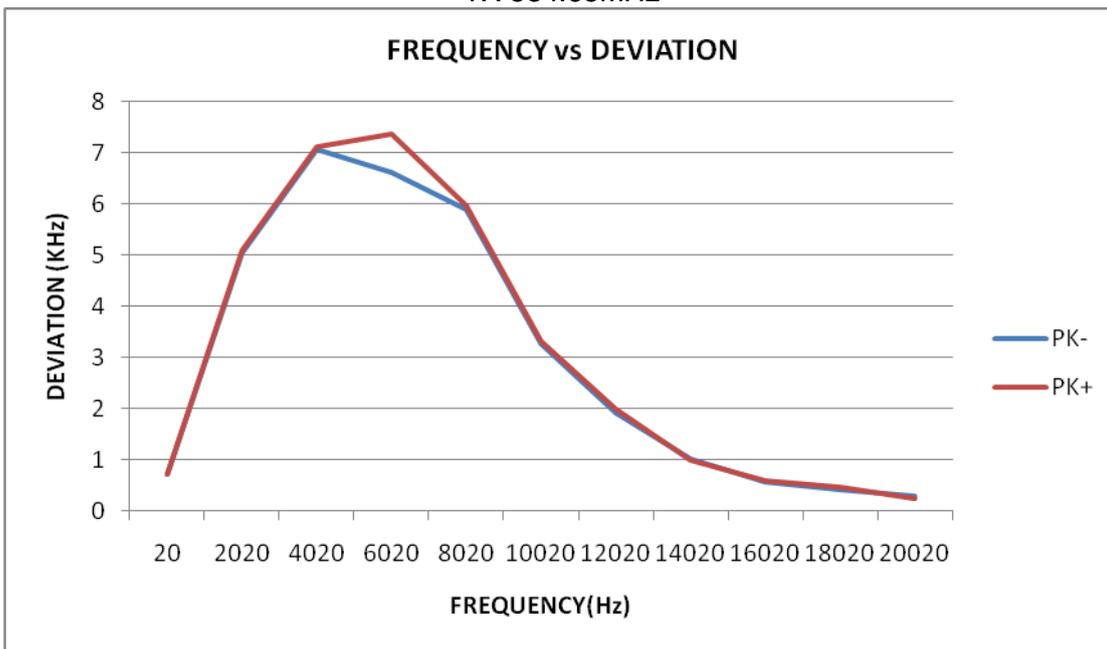

TX 553.92MHz

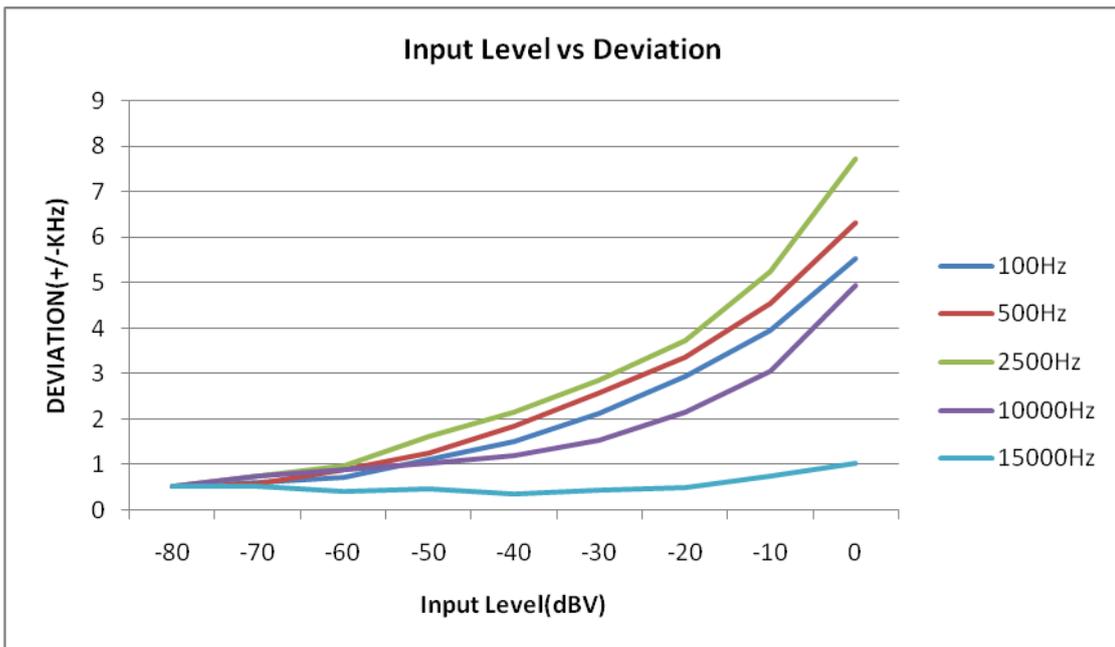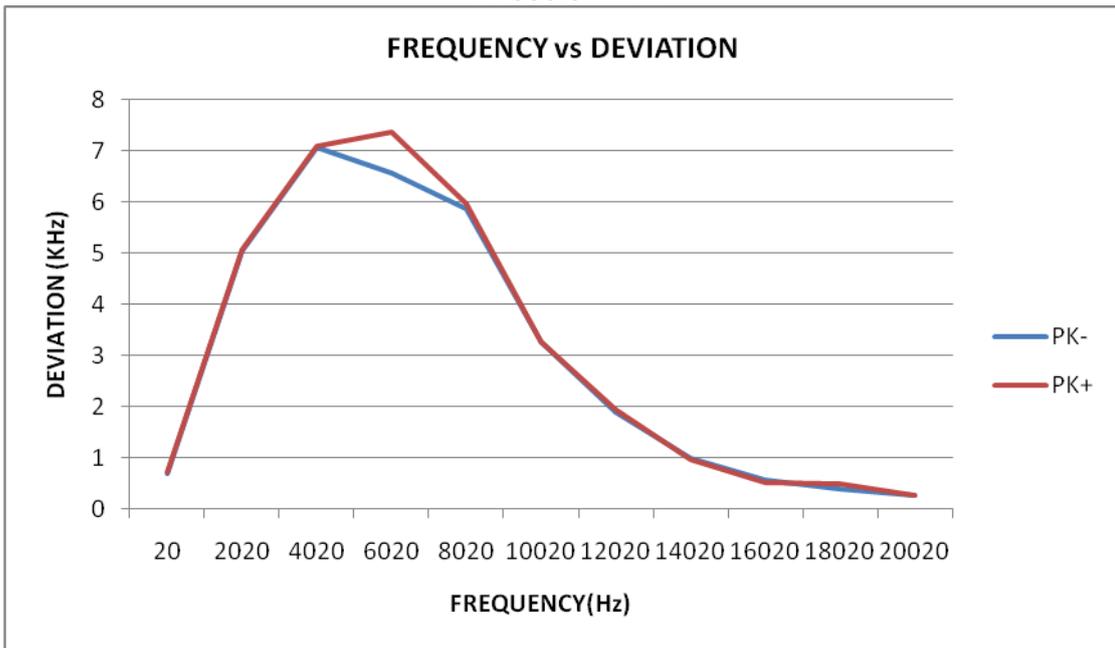

## 6. OCCUPIED BANDWIDTH OF EMISSION

### 6.1 APPLIED PROCEDURES / LIMIT

Test requirement: FCC CFR47 Part 2 Section 2.1049©(1)

Limit: According to FCC 74.861 (e)(5), the frequency emission bandwidth shall not exceed 200 kHz.

Occupied bandwidth 99%. Other than single sideband or independent sideband transmitters - when modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation.

The input level shall be established at the frequency of maximum response of the audio modulating circuit.

### 6.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and set it to any one convenient frequency within its operating range.

Detector: Peak

Sweep time: Auto /

Resolution bandwidth: 1 % to 5 % of the occupied bandwidth

Video bandwidth: 3 x resolution bandwidth

Span: > 2 times emissions bandwidth

Analyzer function: 99% power occupied bandwidth function

Trace mode: Max. hold

EUT configuration: Modulated signal with max. frequency deviation

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.6 TEST RESULT**


EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX		

Frequency	99% Bandwidth (2.5kHz tone)	Limit (kHz)	Result
514.56 MHz	55.326	200	PASS
534.65 MHz	55.293	200	PASS
553.92 MHz	55.309	200	PASS


### Test plot for L TX-2.5 kHz

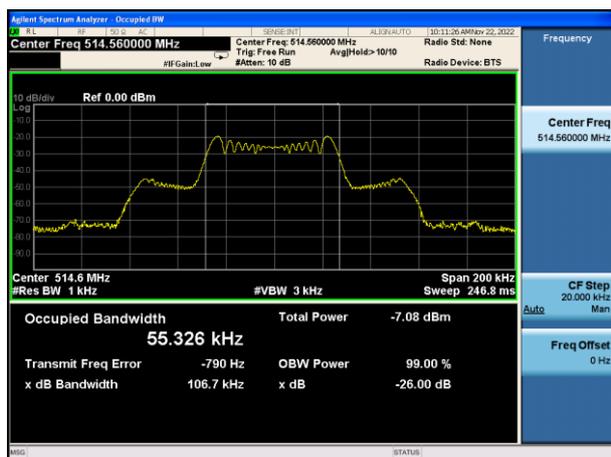

### Test plot for M TX-2.5 kHz

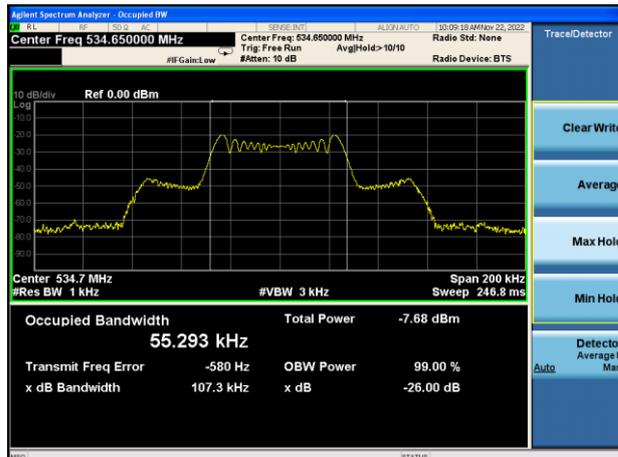

### Test plot for H TX-2.5 kHz

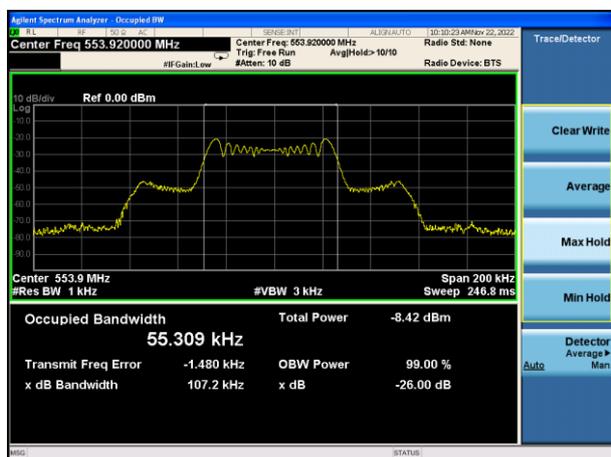

N/A


N/A




### 7.3 TEST RESULTS

EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX		


Test plot for L TX - 1 kHz

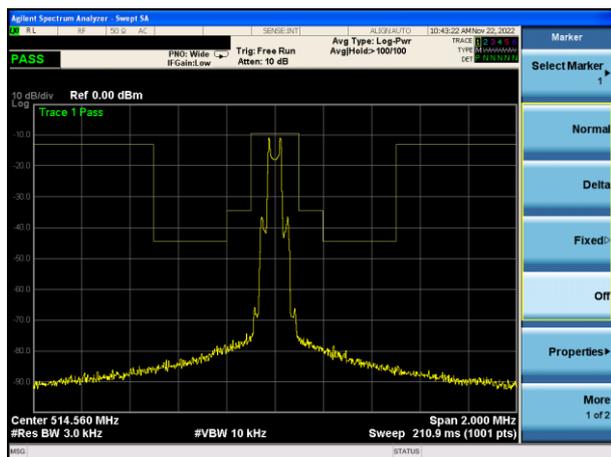


Test plot for L TX - 2.5 kHz

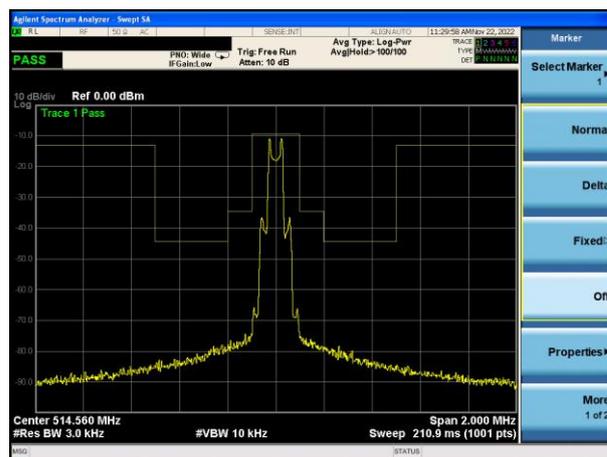


Test plot for M TX - 1 kHz

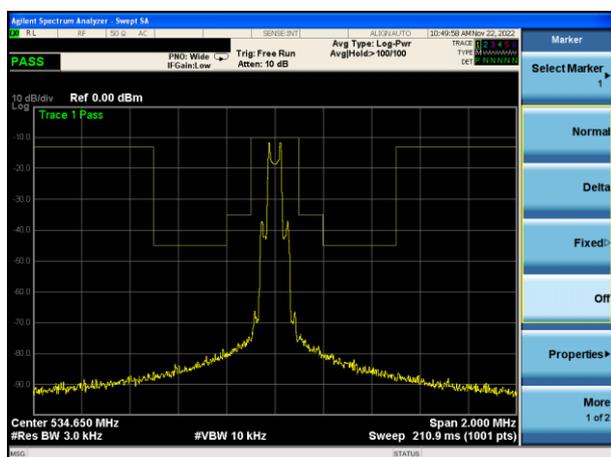


Test plot for M TX - 2.5 kHz

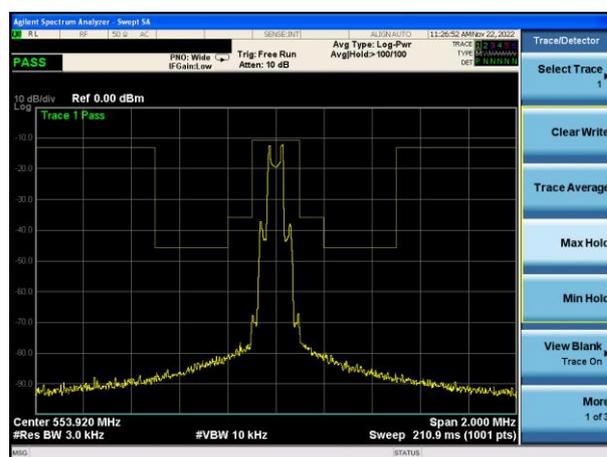

Test plot for H TX - 1 kHz

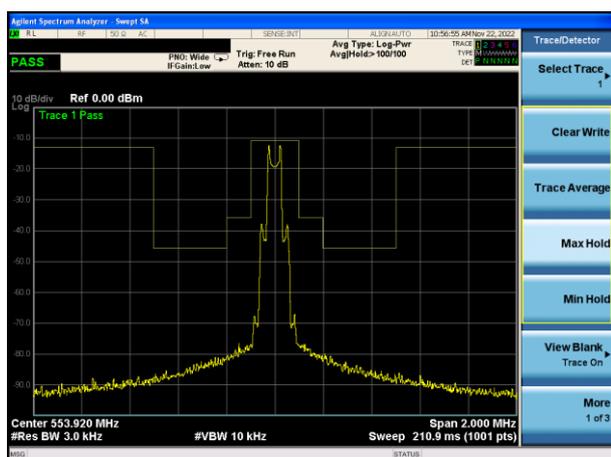


Test plot for H TX - 2.5 kHz

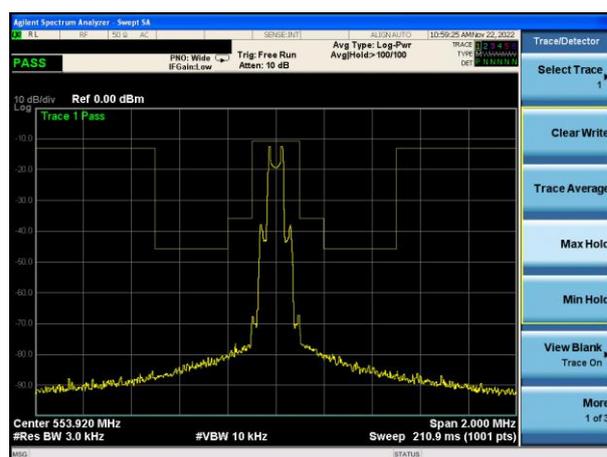


### Conducted Spurious Emissions


Frequency (MHz)	Antenna	Range (MHz)	Spur Freq (MHz)	Peak (dBm)	RMS (dBm)	Limit (dBm)	Verdict
514.56	Ant1	30 -47	41.50	-75.57	NA	-36	Pass
514.56	Ant1	47 -74	62.91	-76.02	NA	-54	Pass
514.56	Ant1	74 -87.5	79.02	-75.62	NA	-36	Pass
514.56	Ant1	87.5 -118	87.72	-74.95	NA	-54	Pass
514.56	Ant1	118 -174	121.88	-75.07	NA	-36	Pass
514.56	Ant1	174 -230	217.06	-73.74	NA	-54	Pass
514.56	Ant1	230 -470	406.67	-74.47	NA	-36	Pass
514.56	Ant1	470 -694	514.56	-17.38	-17	-54	N/A
514.56	Ant1	694 -1000	978.14	-73.89	NA	-36	Pass
514.56	Ant1	1000 -2398	1028.50	-48.92	NA	-30	Pass
514.56	Ant1	2485.5 -12750	6770.00	-44.32	NA	-30	Pass
534.65	Ant1	30 -47	45.10	-75.58	NA	-36	Pass
534.65	Ant1	47 -74	65.80	-75.80	NA	-54	Pass
534.65	Ant1	74 -87.5	75.75	-75.45	NA	-36	Pass
534.65	Ant1	87.5 -118	117.50	-75.23	NA	-54	Pass
534.65	Ant1	118 -174	170.45	-75.13	NA	-36	Pass
534.65	Ant1	174 -230	213.45	-75.10	NA	-54	Pass
534.65	Ant1	230 -470	353.20	-74.20	NA	-36	Pass
534.65	Ant1	470 -694	534.65	-16.44	-16.09	-54	N/A
534.65	Ant1	694 -1000	987.60	-73.14	NA	-36	Pass
534.65	Ant1	1000 -2398	1069.00	-45.66	NA	-30	Pass
534.65	Ant1	2485.5 -12750	6973.50	-44.39	NA	-30	Pass
553.92	Ant1	30 -47	40.85	-75.24	NA	-36	Pass
553.92	Ant1	47 -74	49.95	-73.47	NA	-54	Pass
553.92	Ant1	74 -87.5	74.65	-76.86	NA	-36	Pass
553.92	Ant1	87.5 -118	112.75	-75.03	NA	-54	Pass
553.92	Ant1	118 -174	168.00	-73.56	NA	-36	Pass
553.92	Ant1	174 -230	217.80	-74.48	NA	-54	Pass
553.92	Ant1	230 -470	421.30	-74.24	NA	-36	Pass
553.92	Ant1	470 -694	553.92	-15.71	-15.33	-54	N/A
553.92	Ant1	694 -1000	998.50	-73.57	NA	-36	Pass
553.92	Ant1	1000 -2398	2173.50	-53.31	NA	-30	Pass
553.92	Ant1	2485.5 -12750	6985.50	-44.77	NA	-30	Pass

Test Graphs  
Tx. Spurious NVNT 1-DH5 514.56MHz Ant1

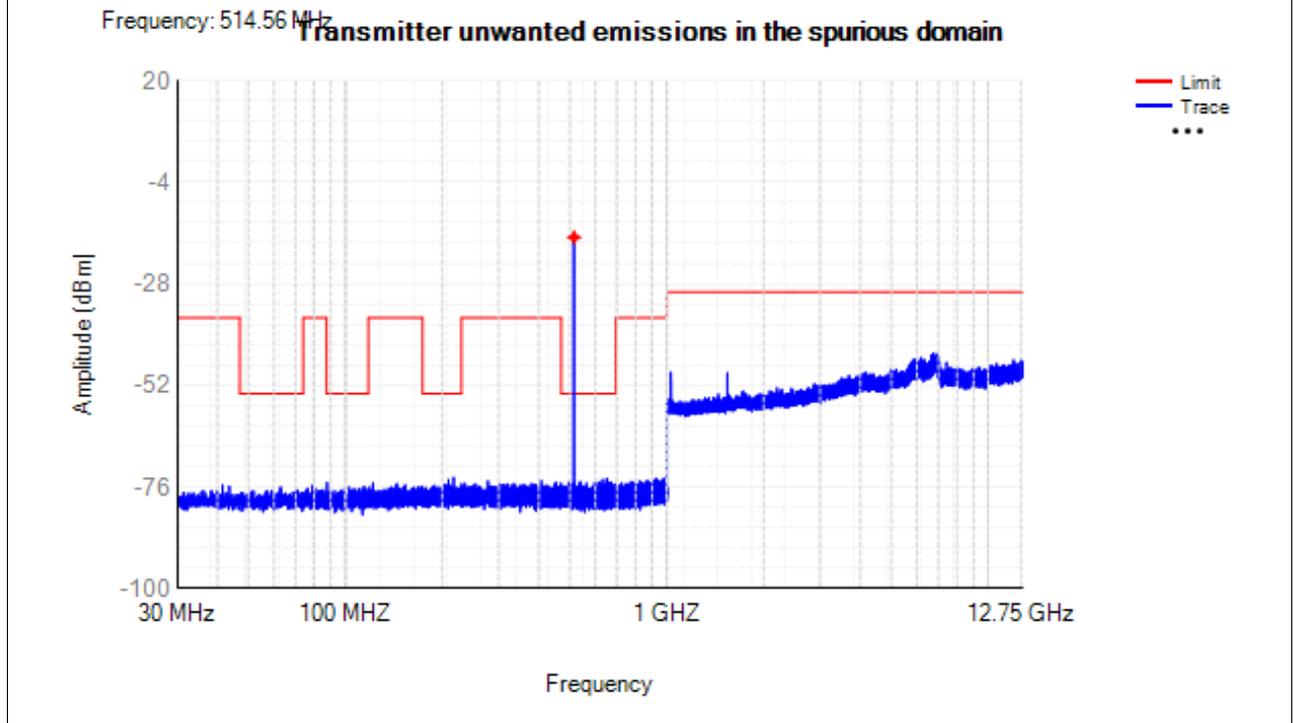

Tx. Spurious NVNT 1-DH5 534.65MHz Ant1

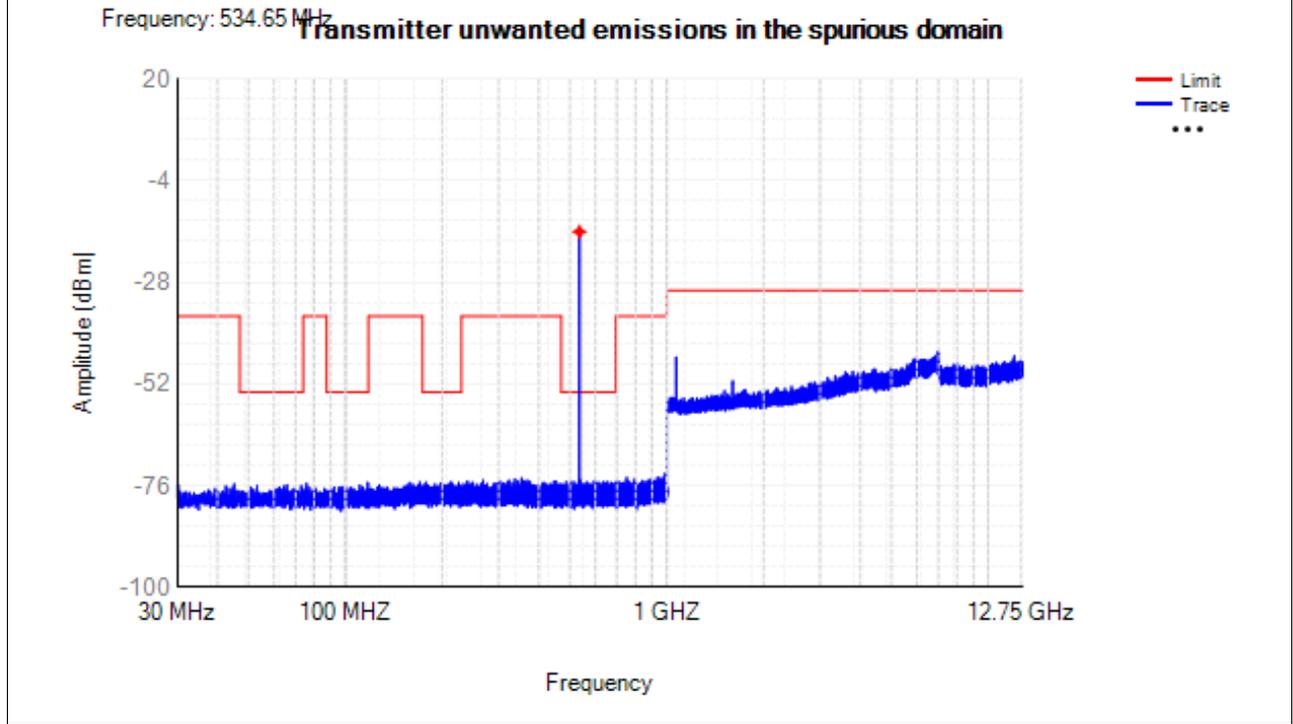

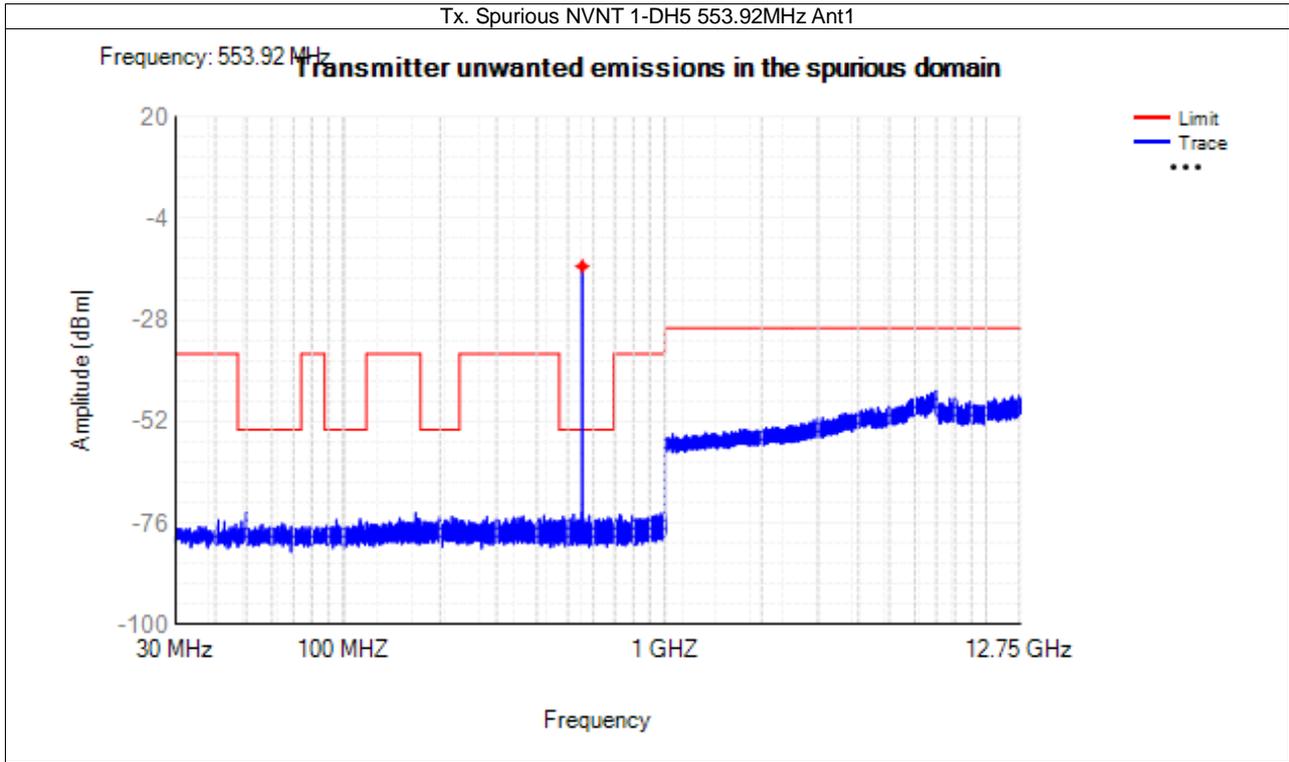

## 8. FREQUENCY STABILITY


### 8.1 STANDARD REQUIREMENT

Test requirement: FCC CFR47 Part 2 Section 2.1055(a)(a)

Test method: ANSI/TIA-603-E: 2016 section 2.2.2

Limit: According to FCC 74.86(e)(4), the frequency tolerance of the transmitter shall be 0.005 percent.

### 8.2 TEST CONFIGURATION

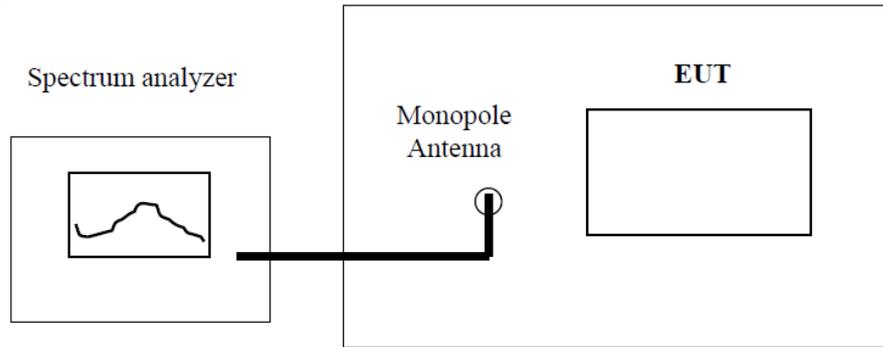

### 8.3 TEST PROCEDURE

#### A) Frequency stability versus input voltage

1. An external variable DC power supply was connected to the battery terminals of the equipment under test.
2. For hand carried, battery powered equipment primary supply voltage was reduced to the battery operating end point as specified by the manufacturer. The output frequency was recorded for each battery voltage.

Detector:	Peak
Sweep time:	Auto /
Resolution bandwidth:	1 Hz / 10 Hz / 100 Hz
Video bandwidth:	3 x resolution bandwidth
Span:	wide enough to follow the frequency drift
Trace mode:	clear/write/view
EUT configuration:	CW signal or MC with measurement method description

#### B) Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measured at an environmental chamber, Install new batteries in the EUT.
2. Turn on EUT and set SA center frequency to the EUT operation frequency, then set SA RBW to 30kHz, VBW to 100kHz and frequency span to 500 kHz. Record this frequency to be a reference.
3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measurement frequencies.

### 8.4 TEST RESULT

a) Frequency stability versus input voltage

Power Supply	Reference Frequency (MHz)	Environment Temperature (°C)	Frequency Measured	Frequency Tolerance (ppm)
DC 3.15V	514.56	20	514.5603	0.58302
DC 4.25V	514.56	20	514.5602	0.38868
DC 3.15V	534.65	20	534.6501	0.18704
DC 4.25V	534.65	20	534.6504	0.74815
DC 3.15V	553.92	20	553.9209	1.62478
DC 4.25V	553.92	20	553.9204	0.72213

b) Frequency stability versus environmental temperature  
514.56MHz

Environment Temperature(°C)	Power Supply	Frequency Deviation measured with time Elapse(30 minutes)	
		MHz	ppm
50	DC 3.8V	514.5606	1.16604
40	DC 3.8V	514.5609	1.74907
30	DC 3.8V	514.5608	1.55473
20	DC 3.8V	514.561	1.94341
10	DC 3.8V	514.5604	0.77736
0	DC 3.8V	514.5602	0.38868
-10	DC 3.8V	514.5605	0.97170
-20	DC 3.8V	514.5607	1.36039
-30	DC 3.8V	514.5601	0.19434

534.65MHz

Environment Temperature(°C)	Power Supply	Frequency Deviation measured with time Elapse(30 minutes)	
		MHz	ppm
50	DC 3.8V	534.6503	0.56111
40	DC 3.8V	534.6504	0.74815
30	DC 3.8V	534.6501	0.18704
20	DC 3.8V	534.6510	1.87038
10	DC 3.8V	534.6502	0.37408
0	DC 3.8V	534.6503	0.56111
-10	DC 3.8V	534.6507	1.30927
-20	DC 3.8V	534.6502	0.37408
-30	DC 3.8V	534.6507	1.30927

553.92MHz

Environment Temperature(°C)	Power Supply	Frequency Deviation measured with time Elapse(30 minutes)	
		MHz	ppm
50	DC 3.8V	553.9206	1.08319
40	DC 3.8V	553.9203	0.54159
30	DC 3.8V	553.9207	1.26372
20	DC 3.8V	553.9204	0.72213
10	DC 3.8V	553.9207	1.26372
0	DC 3.8V	553.9208	1.44425
-10	DC 3.8V	553.9205	0.90266
-20	DC 3.8V	553.9202	0.36106
-30	DC 3.8V	553.9201	0.18053

## 9. NECESSARY BANDWIDTH (BN) FOR ANALOGUE SYSTEMS

### 9.1 APPLIED PROCEDURES / LIMIT

Test requirement: FCC 74.861 (e)(7)

Figure 3 shows the spectrum mask for all analogue systems in the band. The -90 dBc point shall be  $\pm 1$  MHz from  $f_c$  measured with an average detector. To comply, a measured value shall fall below the mask limit as shown in figure 3.

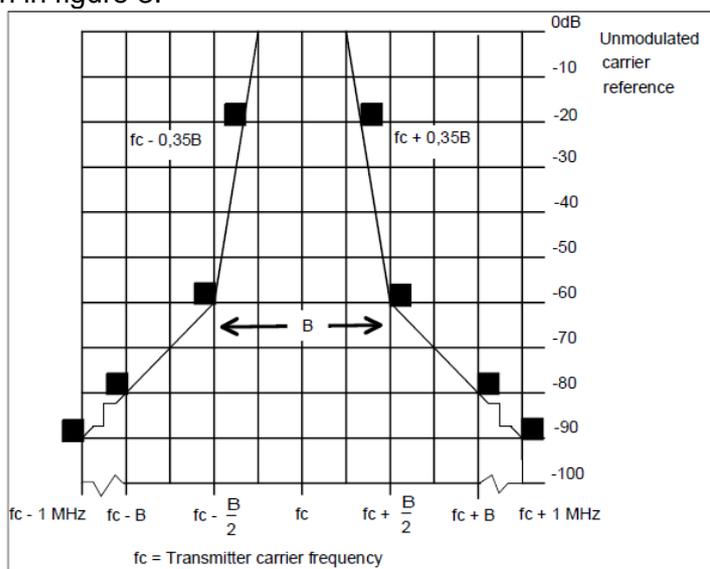


Figure 3: Spectrum mask for analogue systems in all bands

### 9.2 TEST PROCEDURE

The arrangement of test equipment as shown in figure B.1 shall be used. Note that the noise meter conforms to (quasi peak) without weighting filter (flat).

With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be adjusted to 8 dB below the limiting threshold (-8 dB (lim)) as declared by the manufacturer. The corresponding audio output level from the demodulator shall be measured and recorded.

The input impedance of the noise meter shall be sufficiently high to avoid more than 0,1 dB change in input level when the meter is switched between input and output.

The audio input level shall be increased by 20 dB, i.e. to +12 dB (lim), and the corresponding change in output level shall be measured.

It shall be checked that the audio output level has increased by  $\leq 10$  dB.

If this condition is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8 dB (lim).

Measure the input level at the transmitter required to give +12 dB (lim).

The LF generator shall be replaced with the weighted noise source to Recommendation ITU-R BS.559-2 [1], band-limited to 15 kHz as described in IEC 60244-13 [2], and the level shall be adjusted such that the measured input to the transmitter corresponds to +12 dB (lim).

If the transmitter incorporates any ancillary coding or signalling channels (e.g. pilot-tones), these shall be enabled prior to any spectral measurements.

If the transmitter incorporates more than one audio input, e.g. stereo systems, the second and subsequent channels shall be simultaneously driven from the same noise source, attenuated to a level of -6 dB (lim).


The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:

- centre frequency:  $f_c$ : Transmitter (Tx) nominal frequency;
- dispersion (Span):  $f_c - 1$  MHz to  $f_c + 1$  MHz;
- Resolution BandWidth (RBW): 1 kHz;
- Video BandWidth (VBW): 1 kHz;
- detector: Peak hold.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

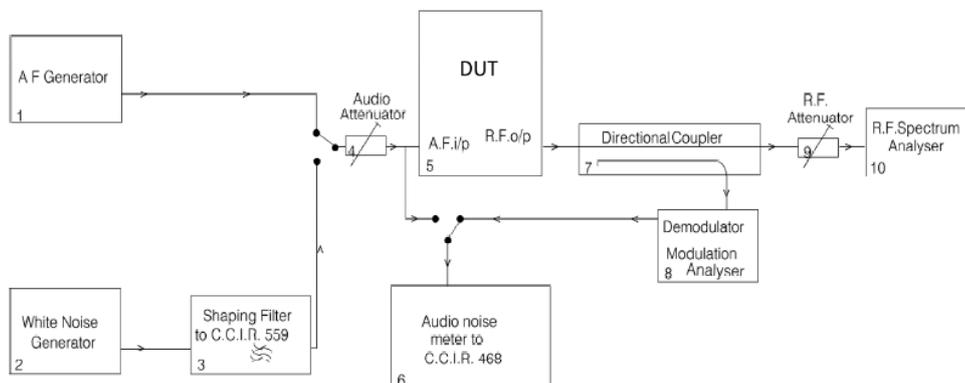

NOTE: If the DUT incorporates ancillary coding or signalling channels, for example, pilot tone, etc. these should be switched on prior to measuring the transmitter RF output spectrum.

### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


### 9.6 TEST RESULT

EUT :	UHF Compact Wireless Microphone System (Transmitter)	Model Name :	WMicS2 TX2
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX		


B=200kHz

#### 514.56MHz Test Plot


The carrier without modulation

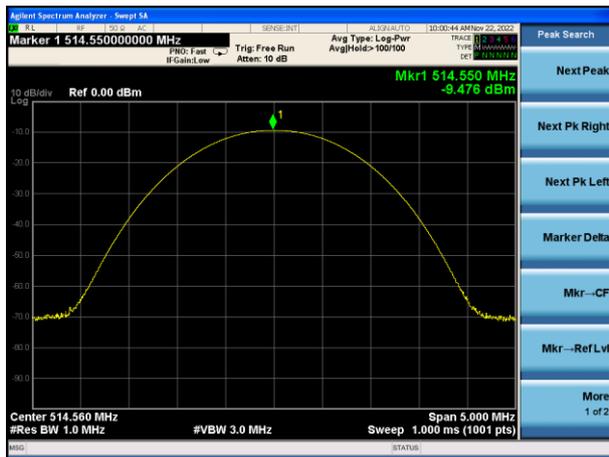


Test Plot-The Peak figure with modulation

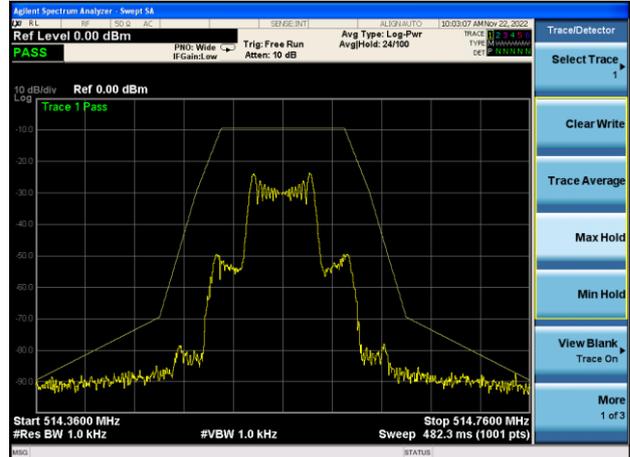

The Average figure with modulation (fc-1MHz~fc-B)

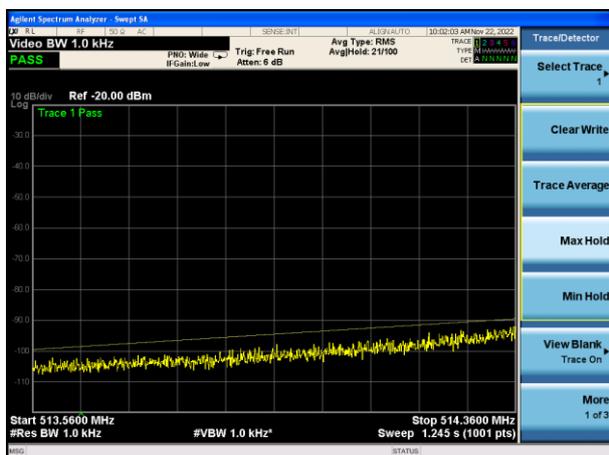


The Average figure with modulation (fc+B ~ fc+1MHz)

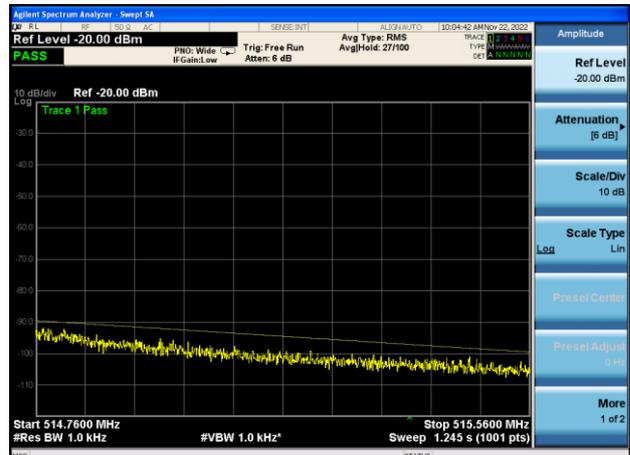


### 534.65MHz Test Plot


The carrier without modulation

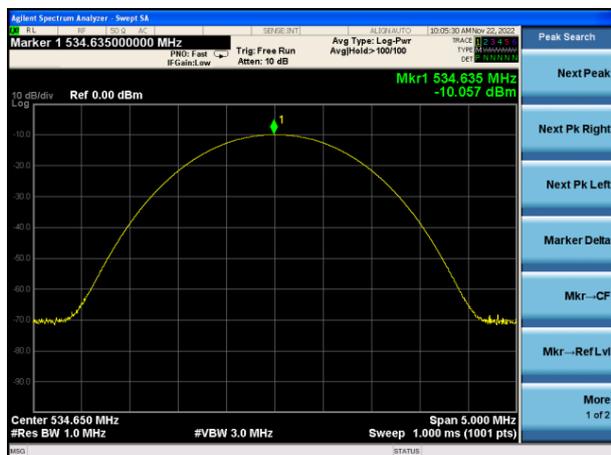


Test Plot-The Peak figure with modulation

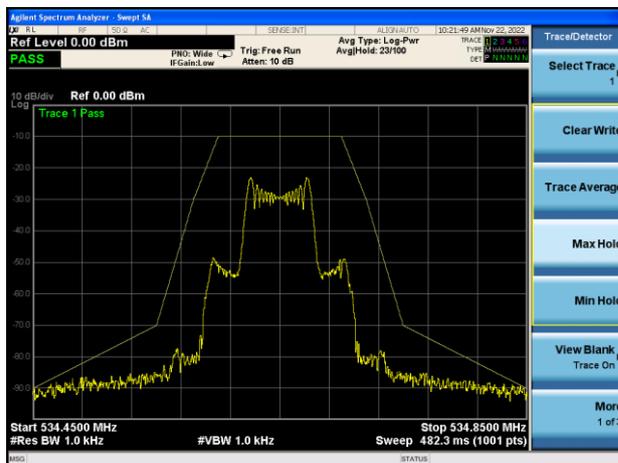

The Average figure with modulation  
(fc-1MHz~fc-B)

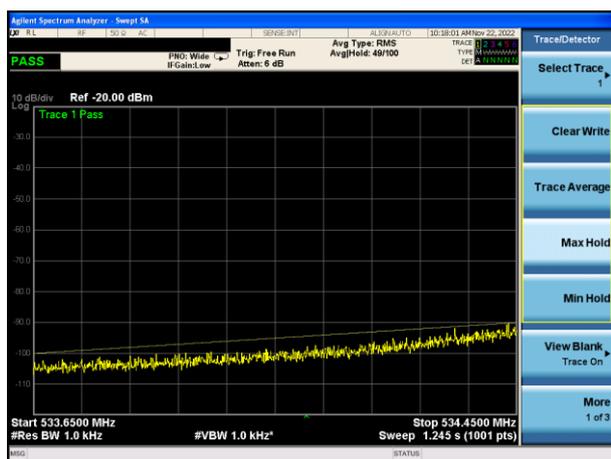


The Average figure with modulation  
(fc+B ~ fc+1MHz)

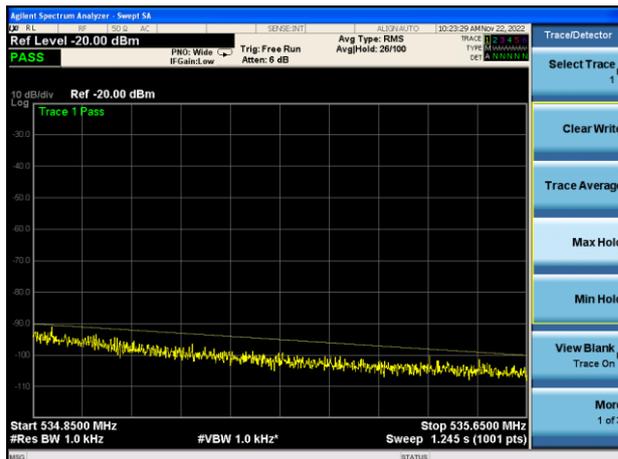


### 553.92MHz MHz Test Plot


The carrier without modulation

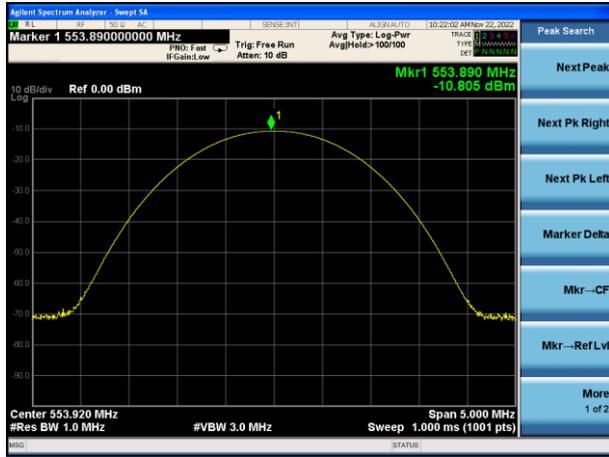


Test Plot-The Peak figure with modulation

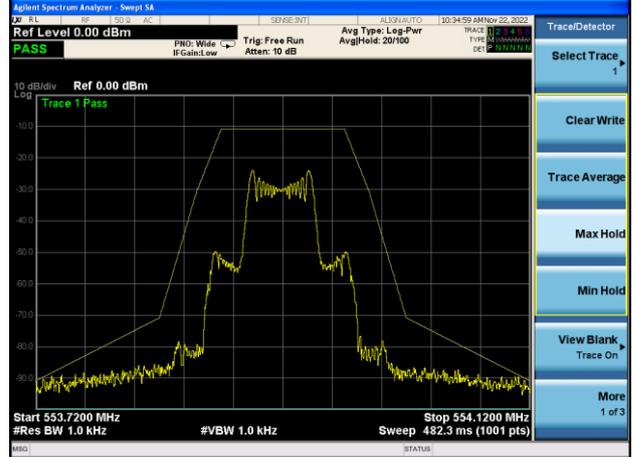

The Average figure with modulation  
(fc-1MHz~fc-B)

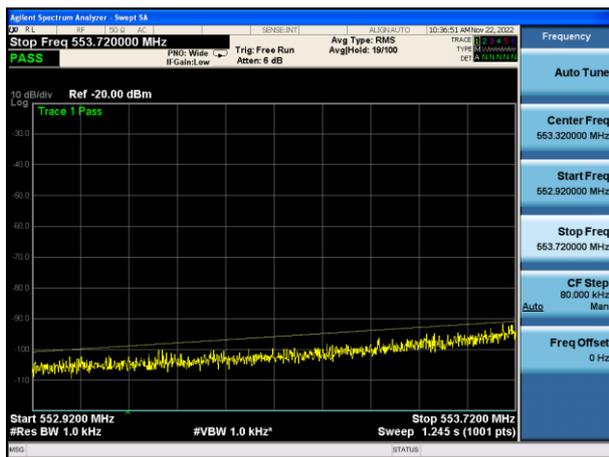

The Average figure with modulation  
(fc+B ~ fc+1MHz)

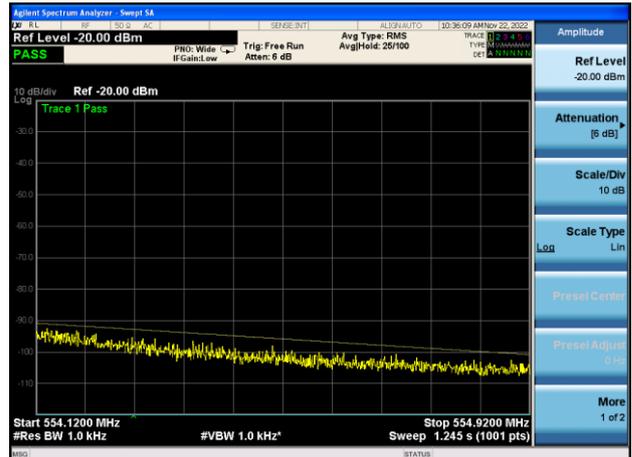

----- End of Report -----