

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1049

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 41.489$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91; Calibrated: 2021-05-31 Electronics: DAE4 Sn1392
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-23; Ambient Temp: 20.8; Tissue Temp: 21.3

750 MHz System Verification (250 mW)


Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.43 W/kg

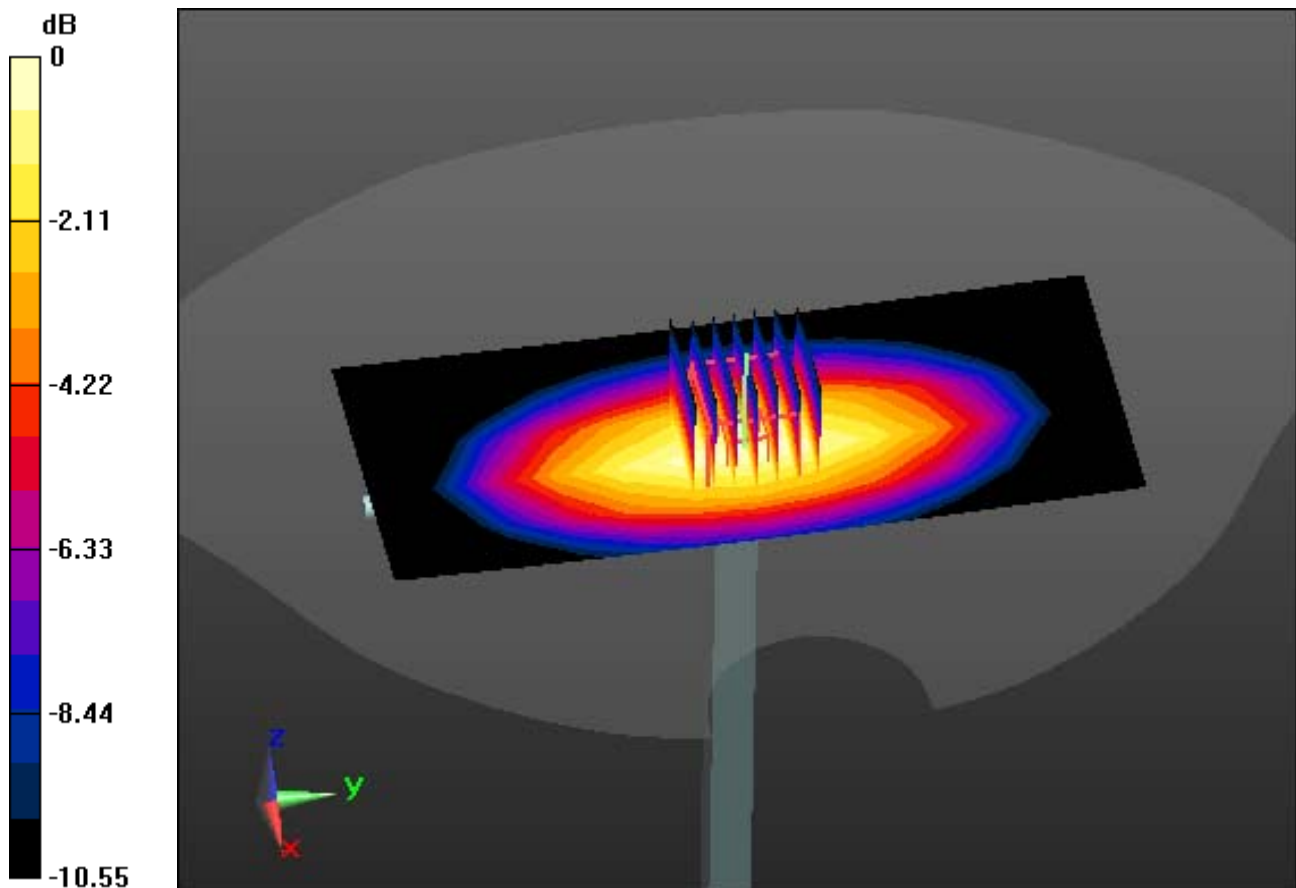

DT&C Co., Ltd.

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d138

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.785$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

835 MHz System Verification (250 mW)


Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.52 W/kg

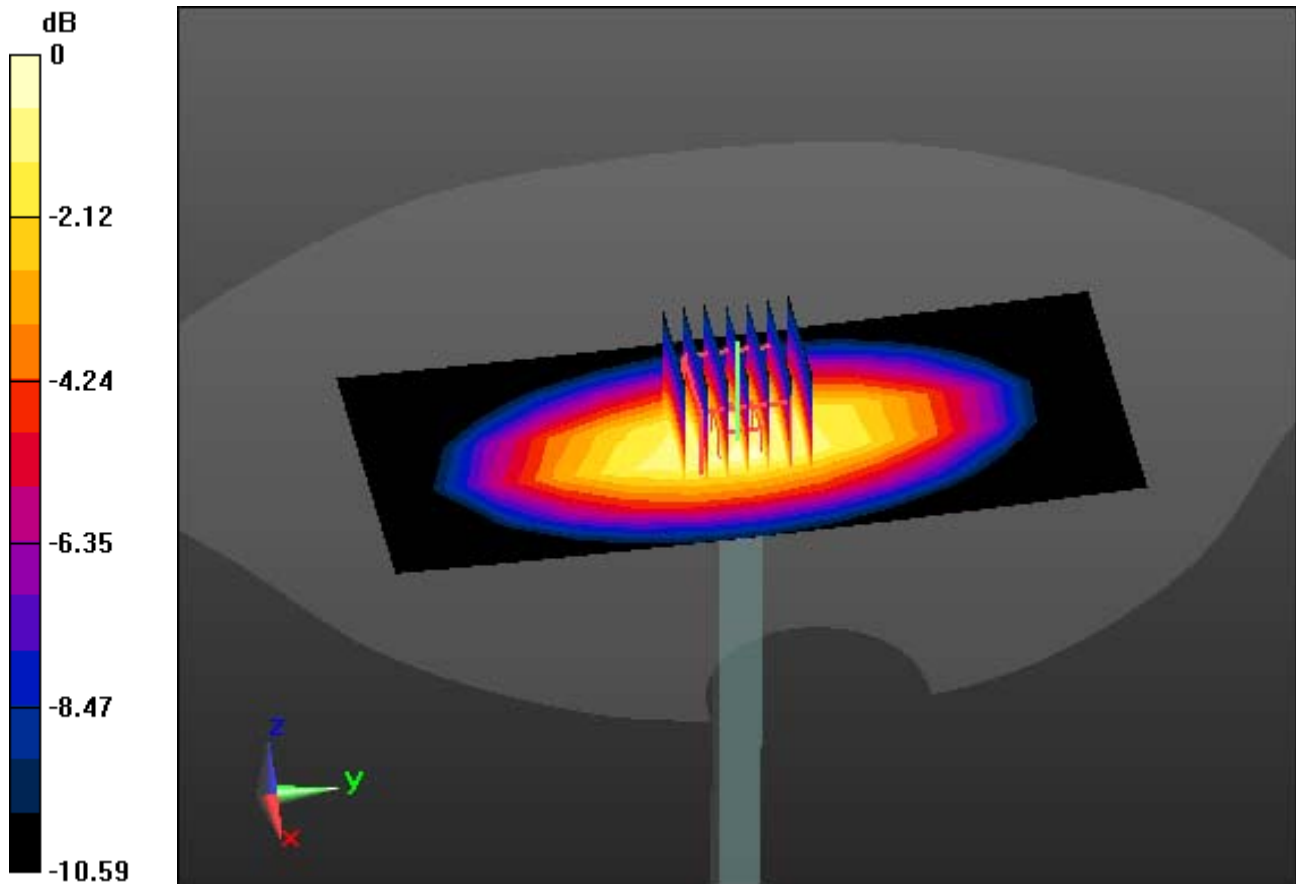

0 dB = 2.59 W/kg

DT&C Co., Ltd.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d158

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 38.681$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 2021-01-27 Electronics: DAE4 Sn1391
Sensor-Surface: 3mm (Mechanical Surface Detection)
Phantom: SAM-twin right_2013_09_24; Type: QD000P40CD; Serial: TP:1783
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-22; Ambient Temp: 21.2; Tissue Temp: 21.6

1900 MHz System Verification (100 mW)


Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 7.15 W/kg

SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.15 W/kg

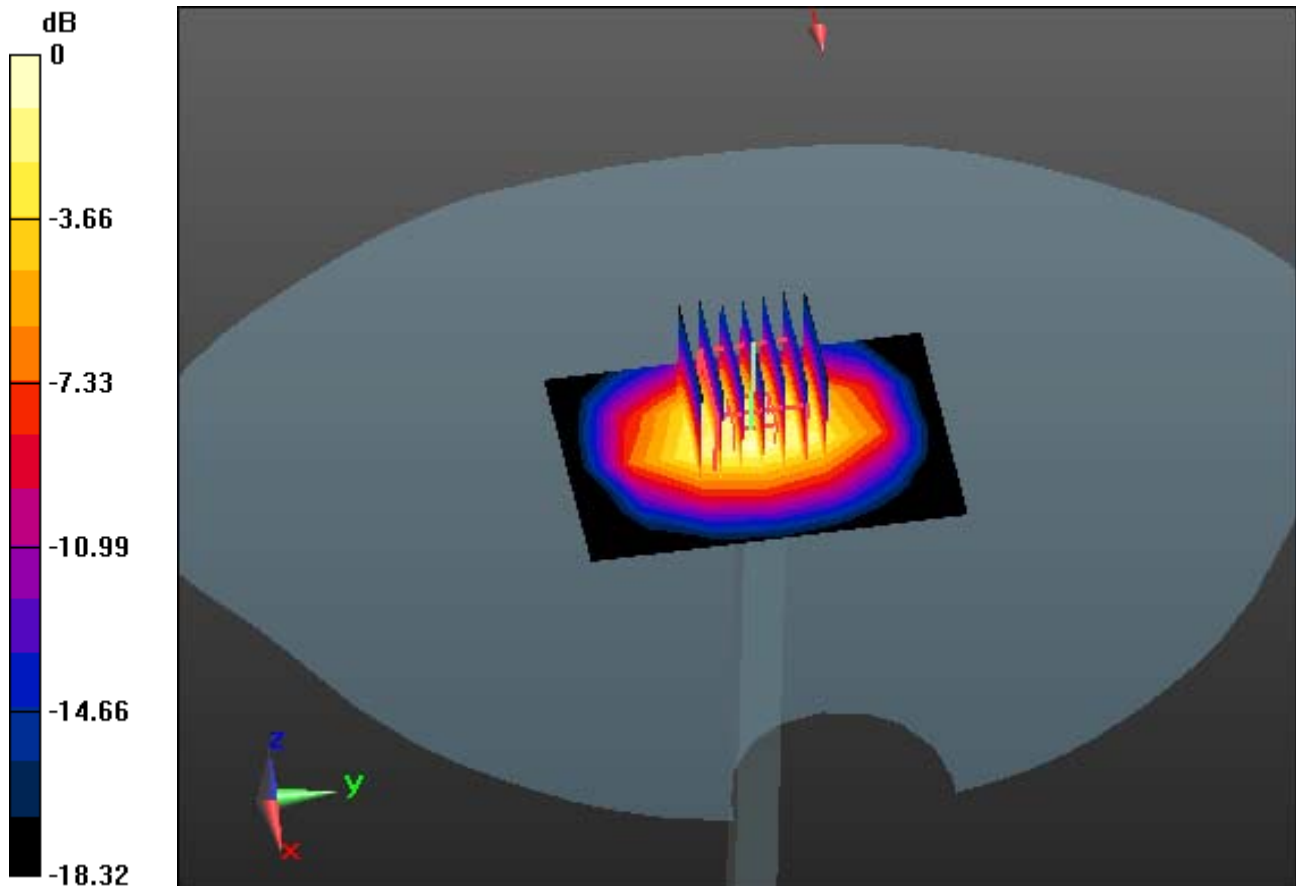

0 dB = 5.06 W/kg

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 39.914$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.61, 7.61, 7.61); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-18; Ambient Temp: 22.4; Tissue Temp: 22.5

2450 MHz System Verification (100mW)


Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.02 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.17 W/kg; SAR(10 g) = 2.33 W/kg

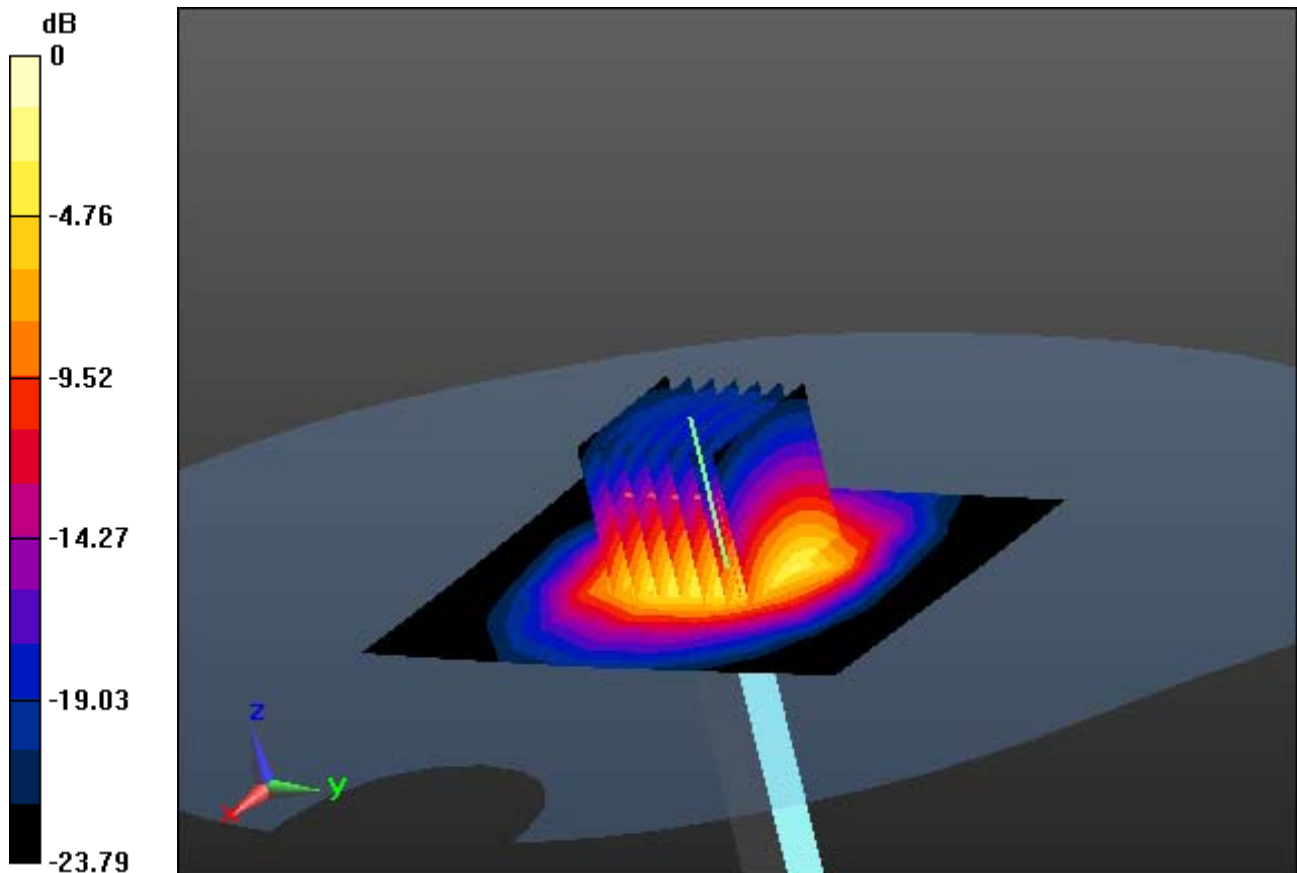

0 dB = 7.89 W/kg

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 4.682$ S/m; $\epsilon_r = 36.344$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.97, 4.97, 4.97); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-20; Ambient Temp: 20.8; Tissue Temp: 20.5

5300 MHz System Verification (100mW)


Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.09 dB

Peak SAR (extrapolated) = 33.8 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.28 W/kg

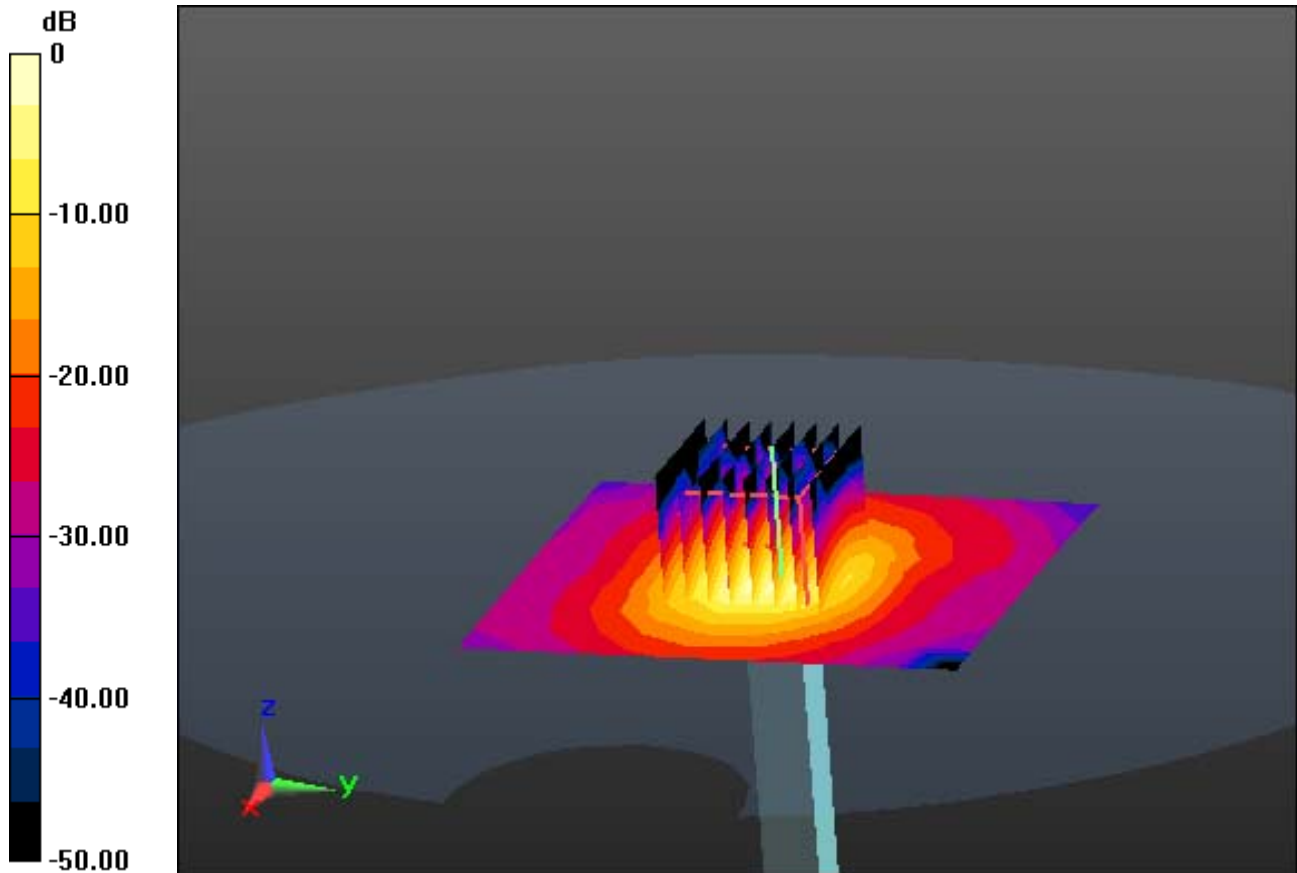

DT&C Co., Ltd.

DUT: Dipole 5000 MHz; Type: D5GHzV2; Serial: D5GHzV2 - SN:1103

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.163$ S/m; $\epsilon_r = 36.827$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.66, 4.66, 4.66); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-21; Ambient Temp: 21.5; Tissue Temp: 21.4

5600 MHz System Verification (100mW)


Area Scan (9x10x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 35.3 W/kg

SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.41 W/kg

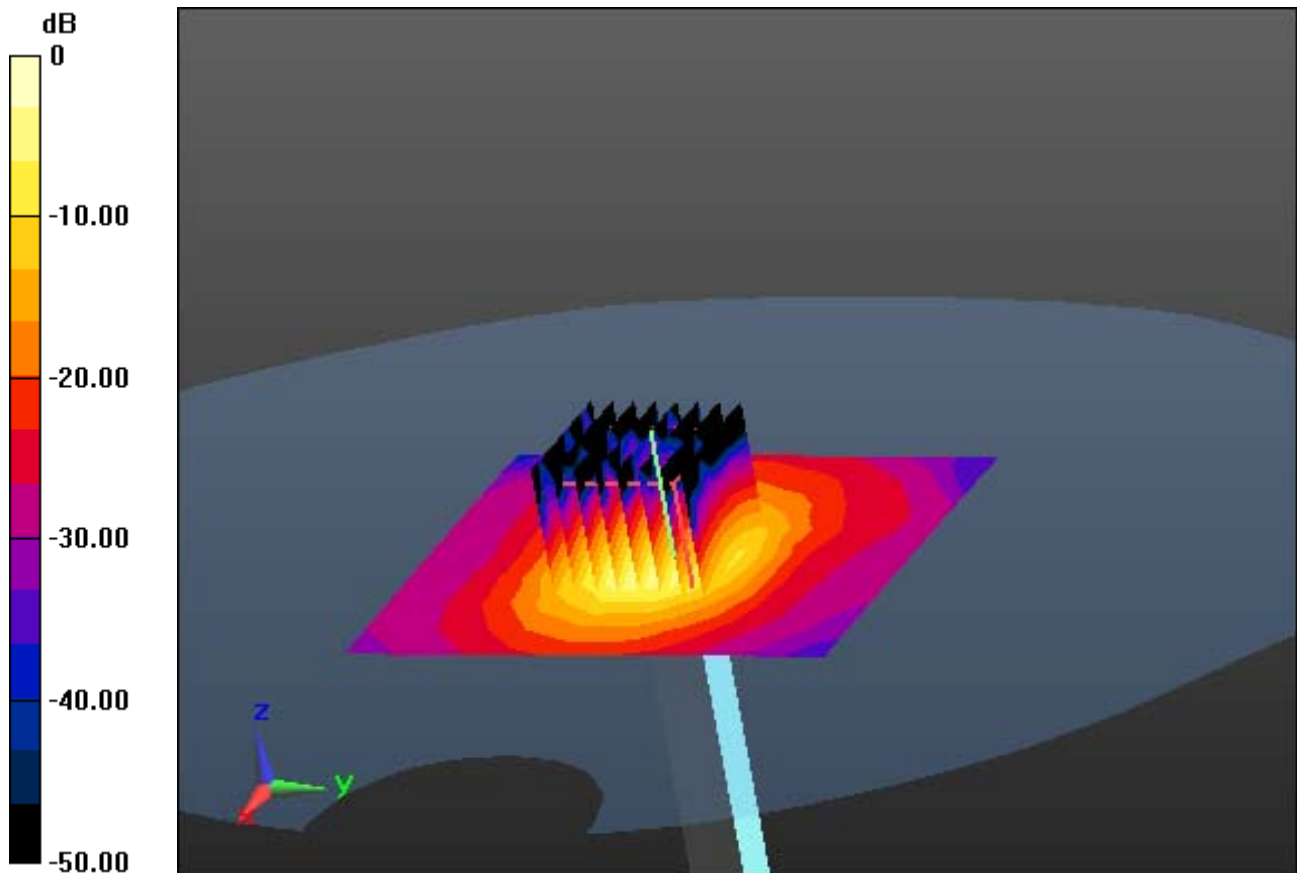

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.764$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.399 W/kg

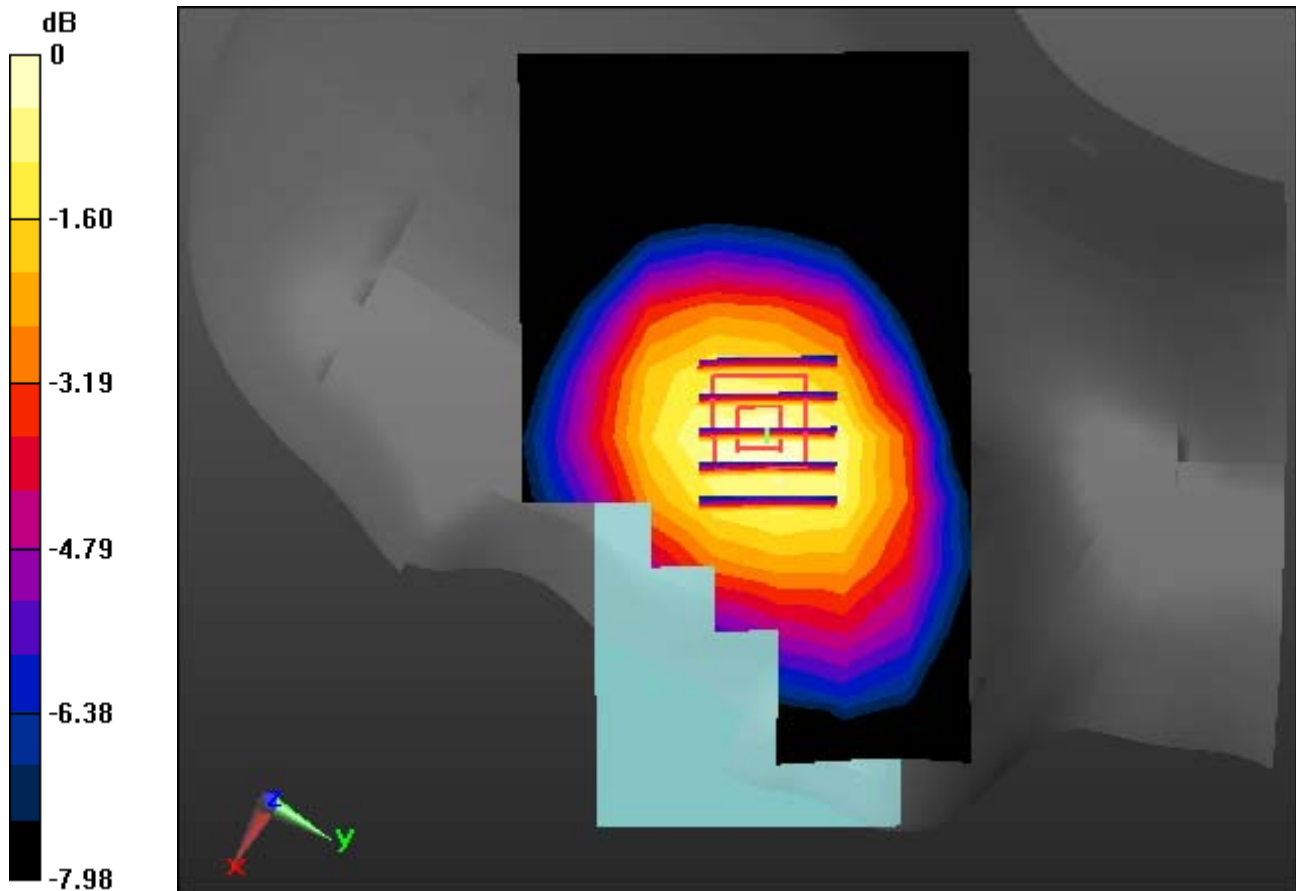

0 dB = 0.584 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, GSM 850_12 (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

Right Touch, GSM850 GPRS 4 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.406 W/kg

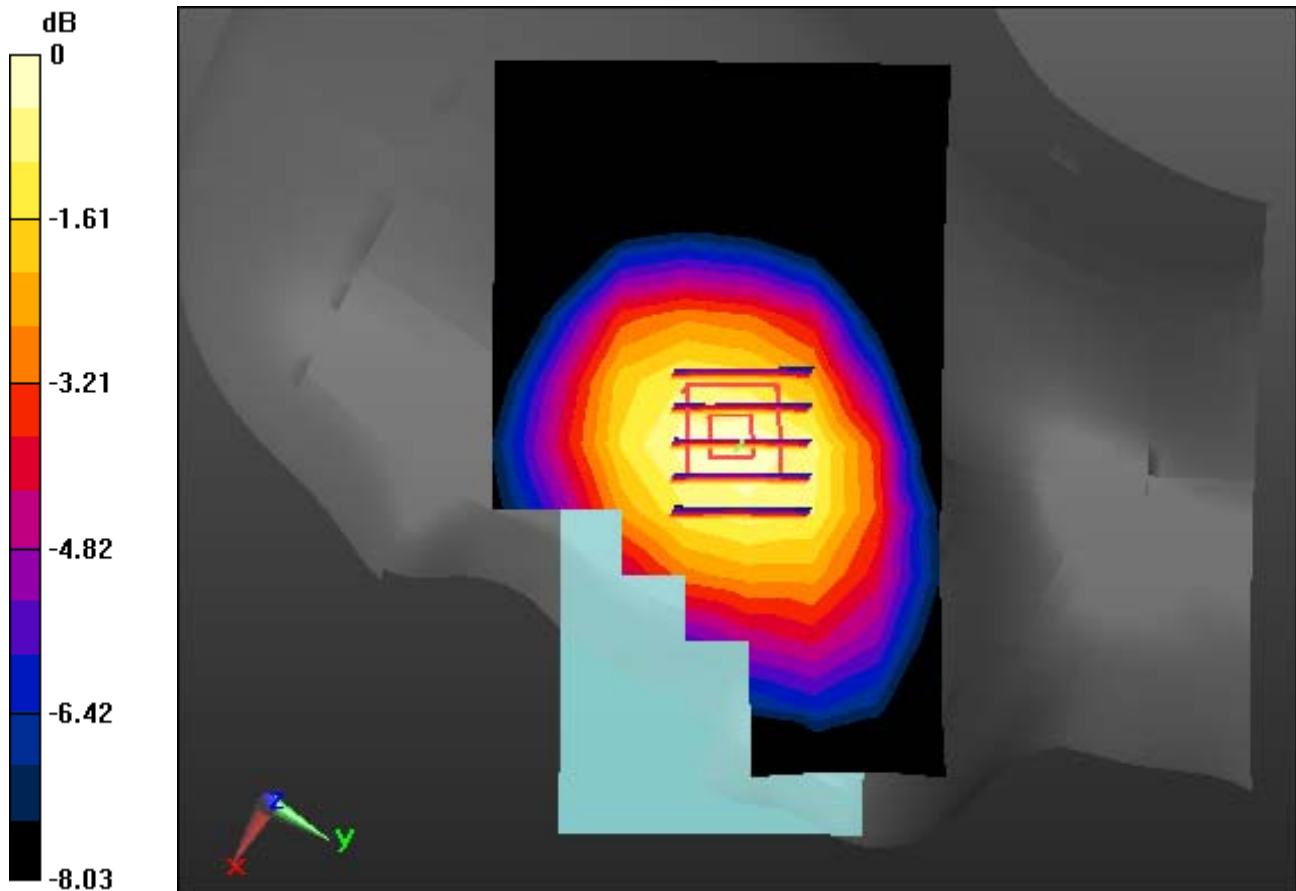

0 dB = 0.596 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, PCS 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 38.761$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 2021-01-27 Electronics: DAE4 Sn1391
Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2013_09_24; Type: QD000P40CD; Serial: TP:1783

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-22; Ambient Temp: 21.2; Tissue Temp: 21.6

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.201 W/kg

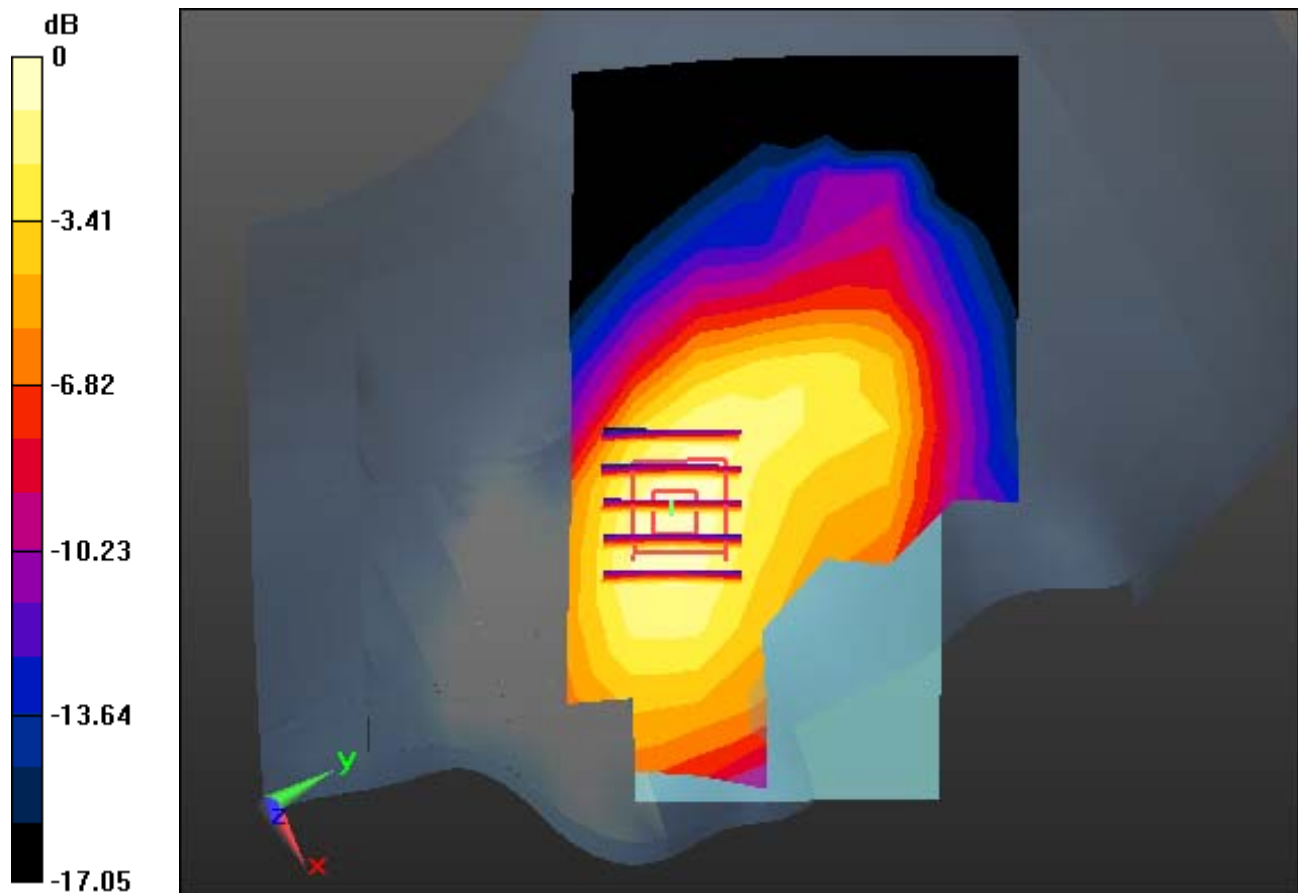

0 dB = 0.385 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, PCS1900_4Tx (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 38.761$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 2021-01-27 Electronics: DAE4 Sn1391

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2013_09_24; Type: QD000P40CD; Serial: TP:1783

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-22; Ambient Temp: 21.2; Tissue Temp: 21.6

Left Touch, PCS1900 GPRS 4 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.488 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.193 W/kg

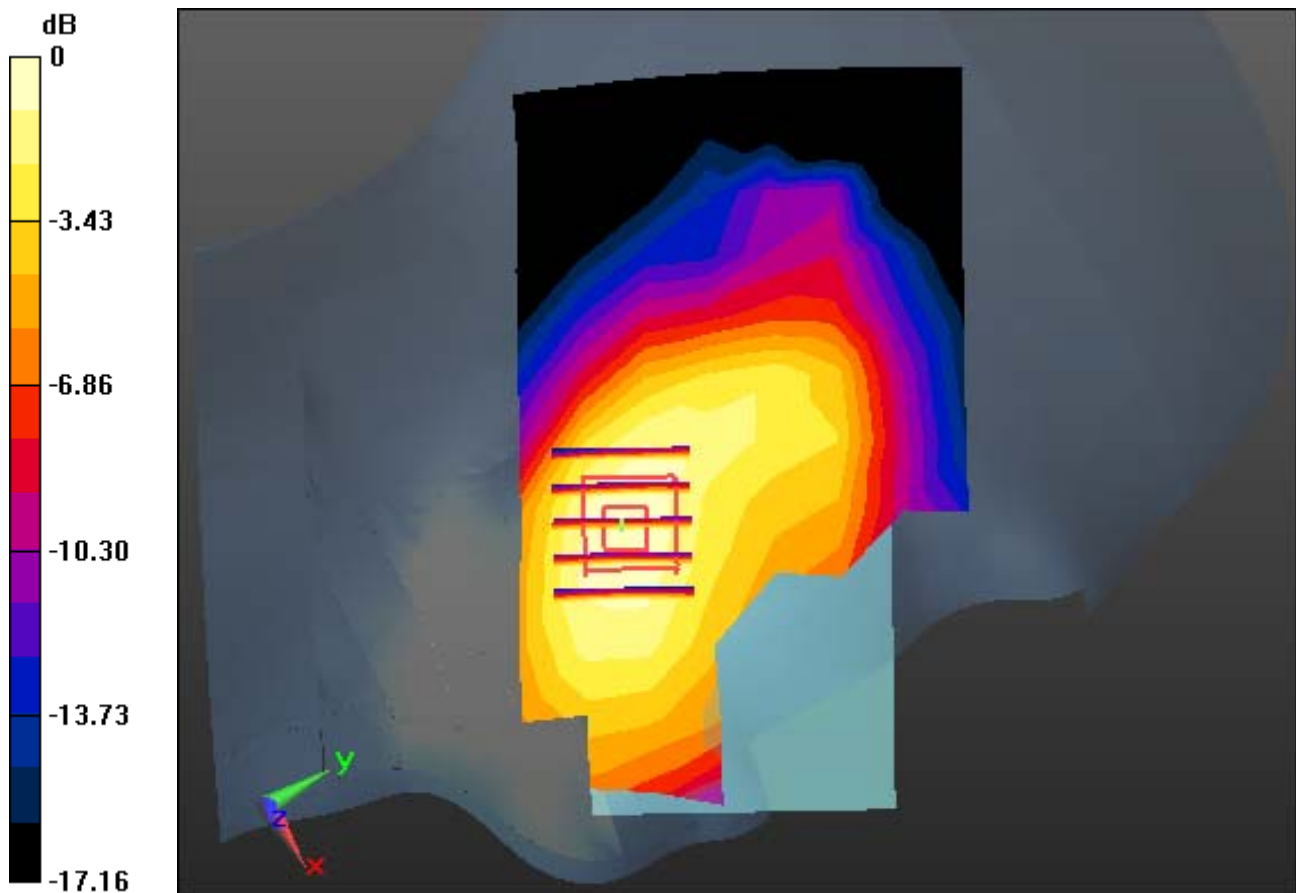

0 dB = 0.366 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.764$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

Right Touch, WCDMA850 Ch. 4183, Ant Internal, Standard Battery


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.305 W/kg

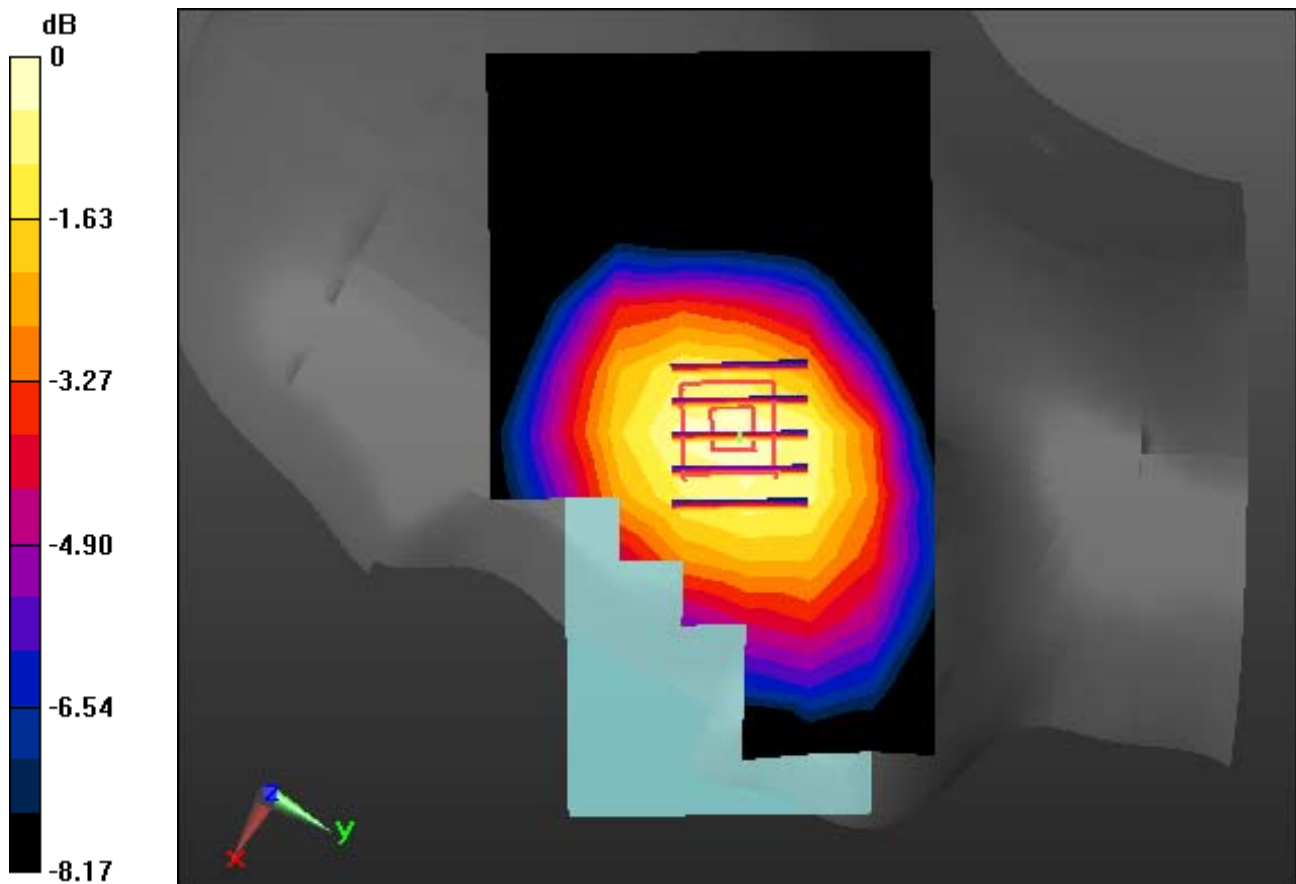

0 dB = 0.451 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, LTE Band 17 FCC (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.775$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-23; Ambient Temp: 20.8; Tissue Temp: 21.3

Right Touch, LTE Band 17 Ch. 23790 Ant Internal, Standard Battery

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.060 W/kg

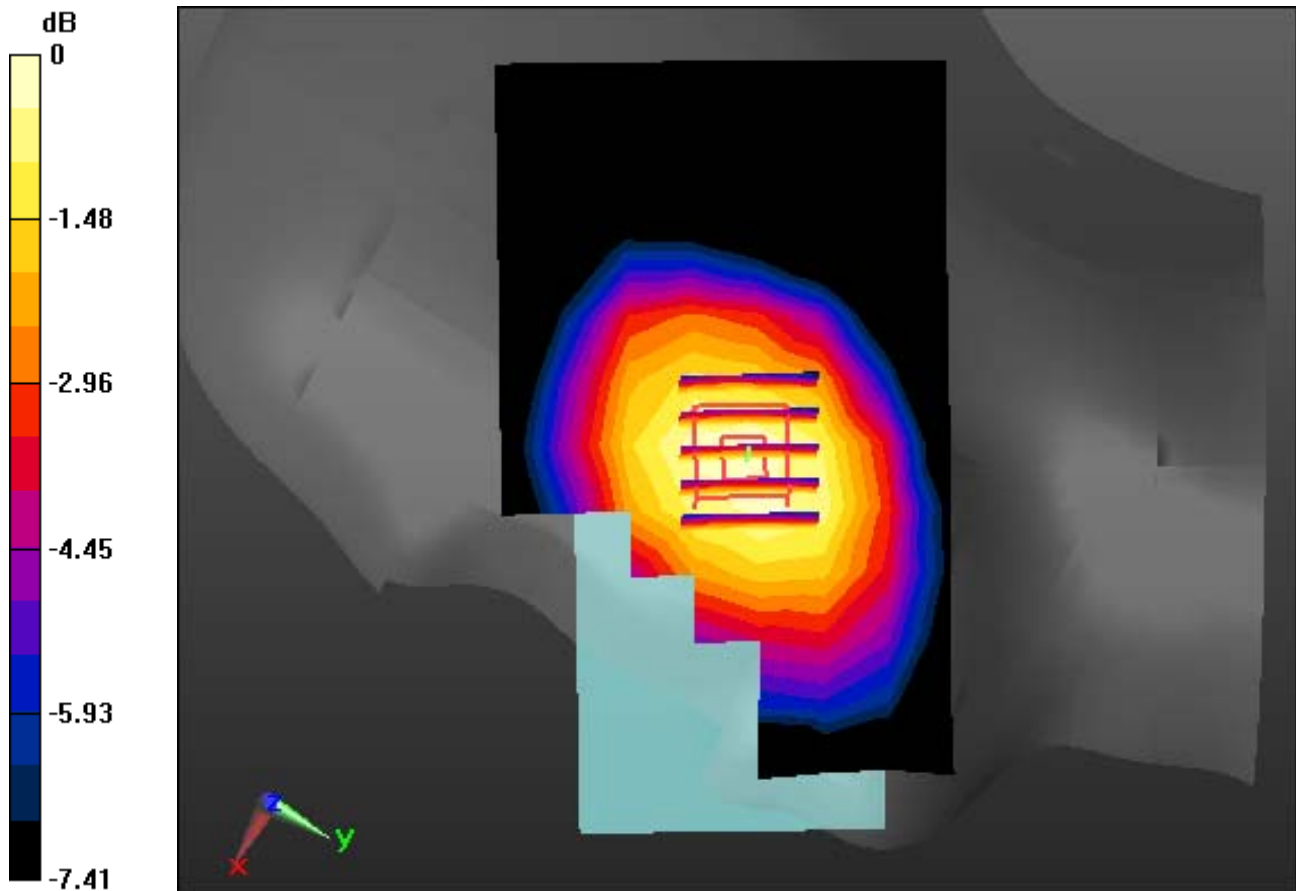

0 dB = 0.0840 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.764$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

1 cm space from Body, Rear, GSM850, Ch. 190, Ant Internal


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.391 W/kg

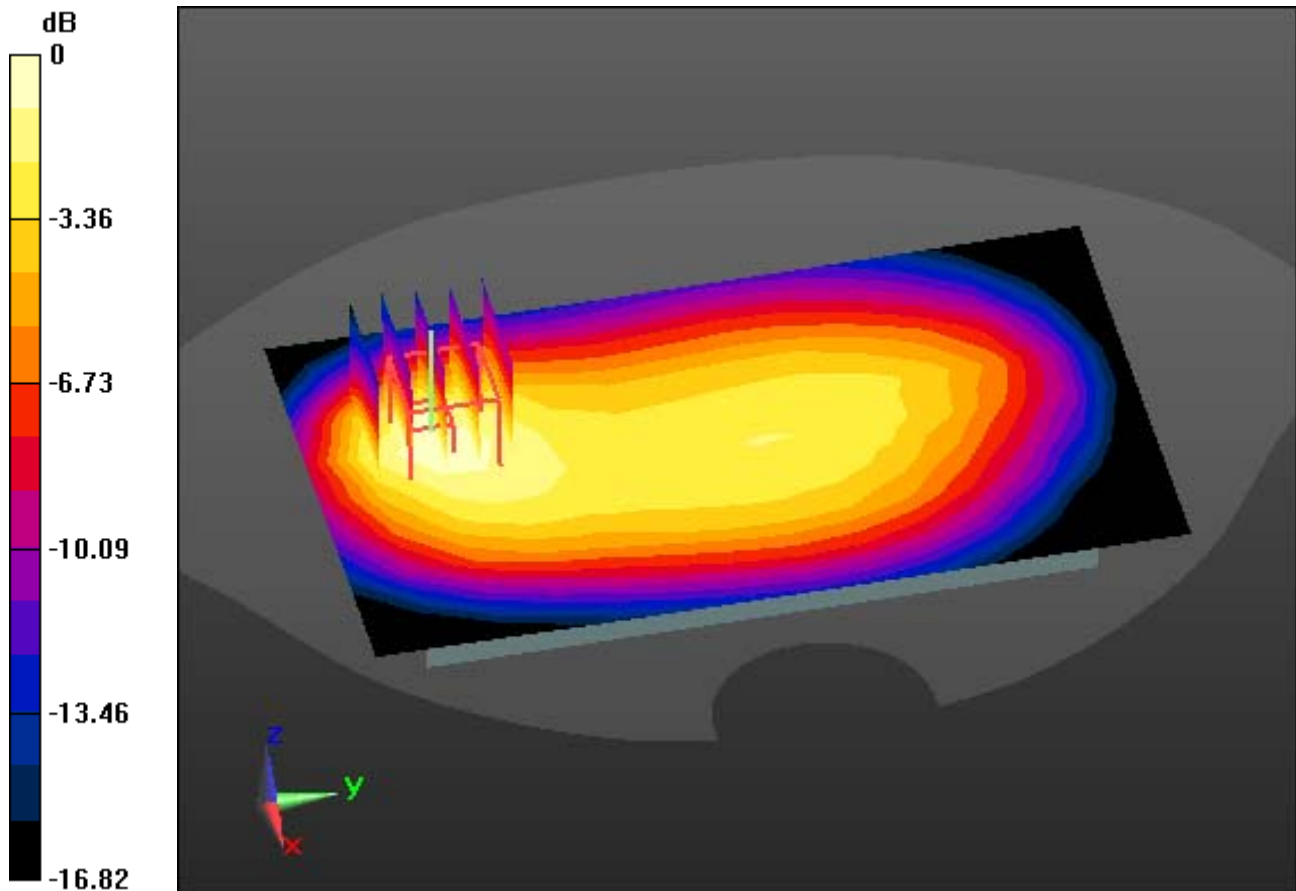

0 dB = 0.807 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, GSM 850_12 (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

1 cm space from Body, Rear, GSM850 GPRS 4 Tx , Ch. 190, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.423 W/kg

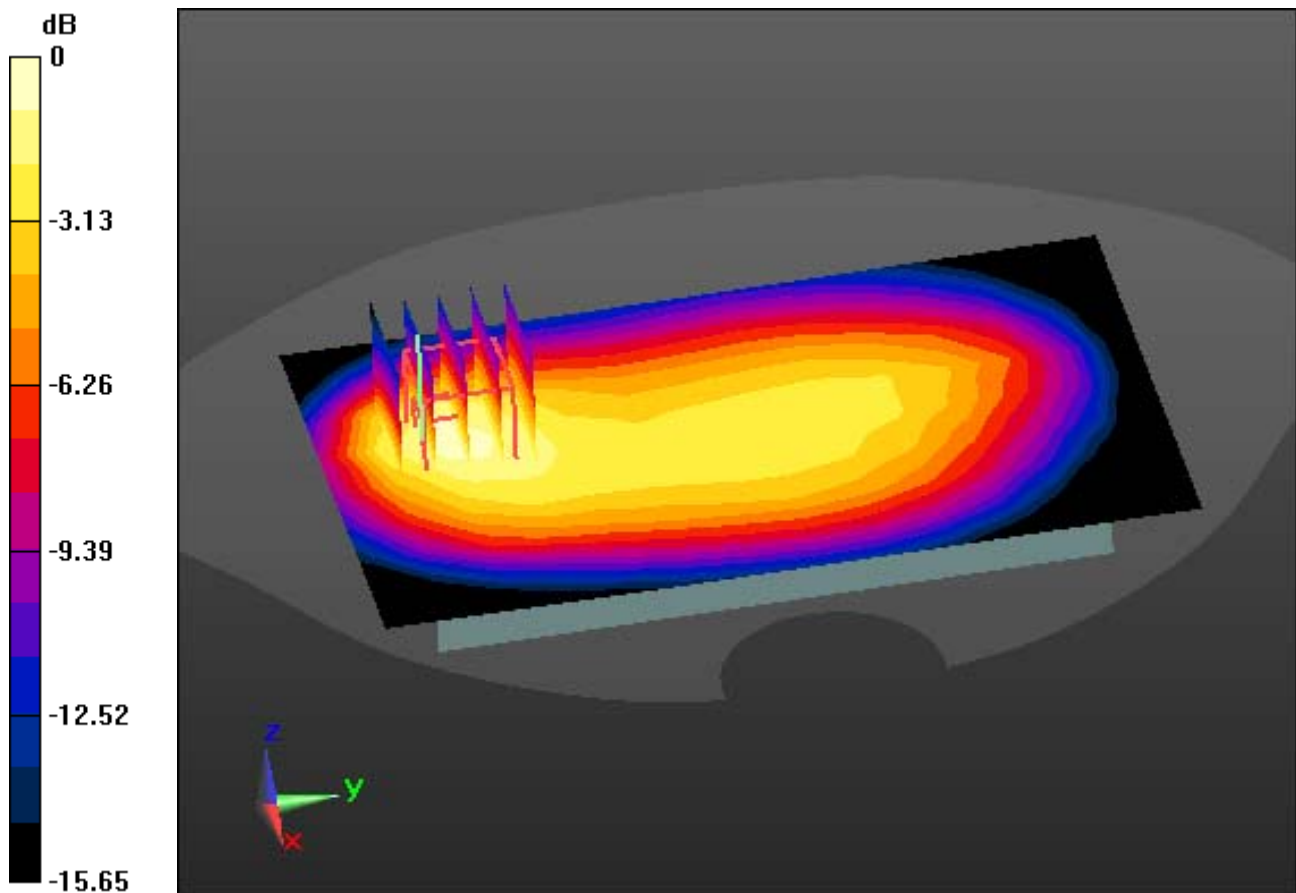

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, PCS 1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 38.761$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 2021-01-27 Electronics: DAE4 Sn1391

Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2013_09_24; Type: QD000P40CD; Serial: TP:1783

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-22; Ambient Temp: 21.2; Tissue Temp: 21.6

1 cm space from Body, Front, PCS1900, Ch. 661, Ant Internal


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.327 W/kg

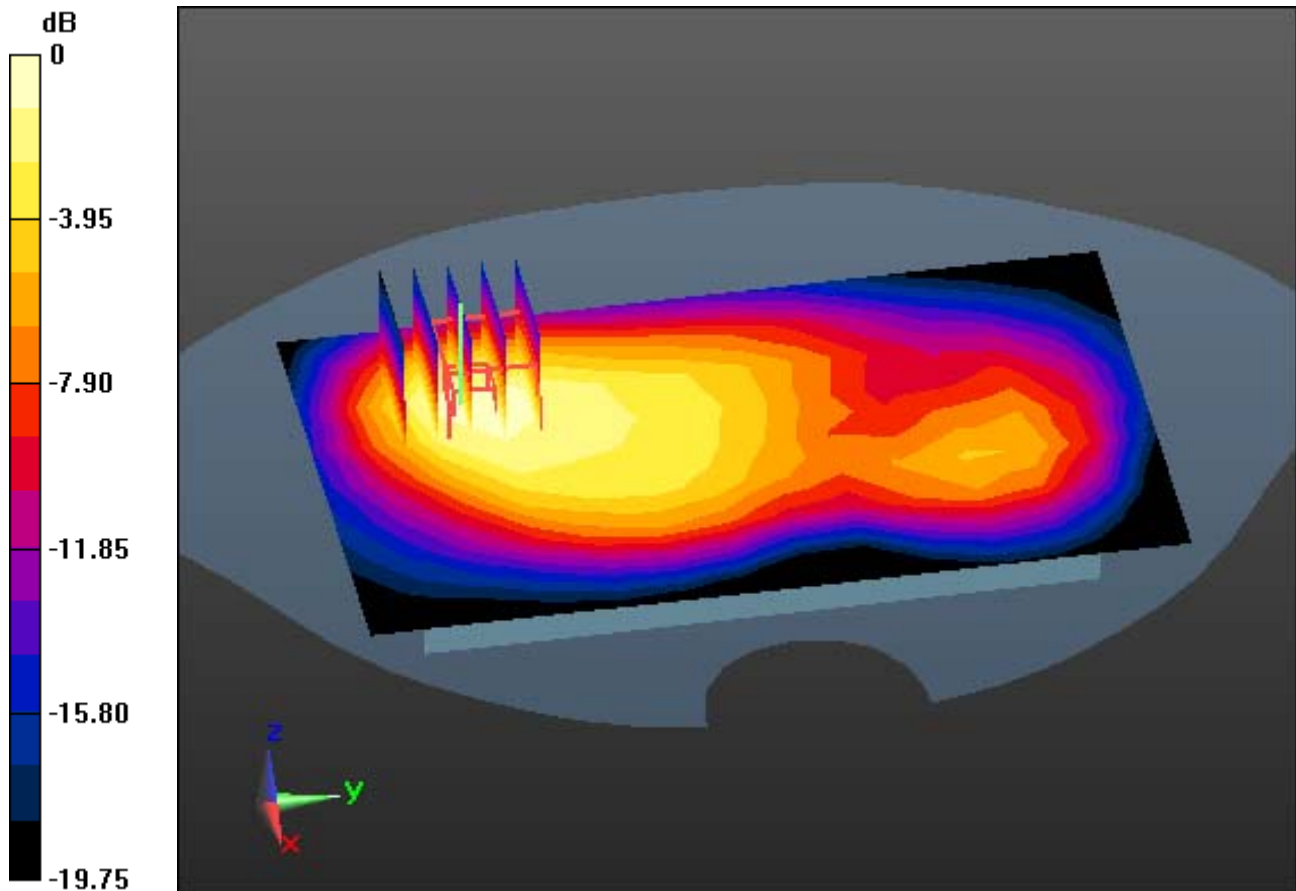

0 dB = 0.699 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, PCS1900_4Tx (0); Frequency: 1880 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 38.761$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: ES3DV3 - SN3327; ConvF(5.13, 5.13, 5.13); Calibrated: 2021-01-27 Electronics: DAE4 Sn1391
Sensor-Surface: 3mm (Mechanical Surface Detection)

Phantom: SAM-twin right_2013_09_24; Type: QD000P40CD; Serial: TP:1783

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-22; Ambient Temp: 21.2; Tissue Temp: 21.6

1 cm space from Body, Front, PCS1900 GPRS 4 Tx , Ch. 661, Ant Internal


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.982 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.312 W/kg

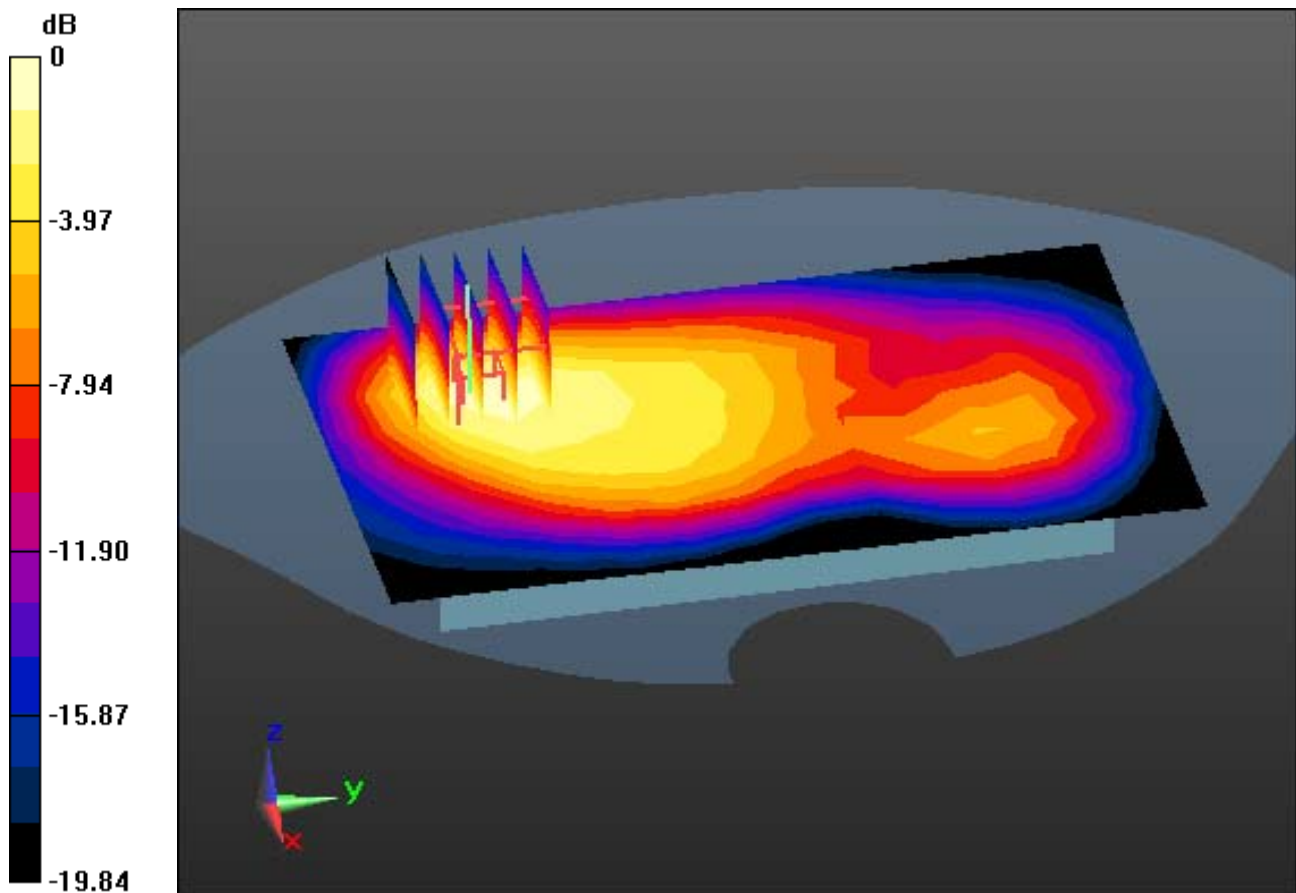

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, WCDMA 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.56, 9.56, 9.56); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-21; Ambient Temp: 21.0; Tissue Temp: 21.2

1 cm space from Body, Rear, WCDMA850 Ch. 4183, Ant Internal


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.945 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.352 W/kg

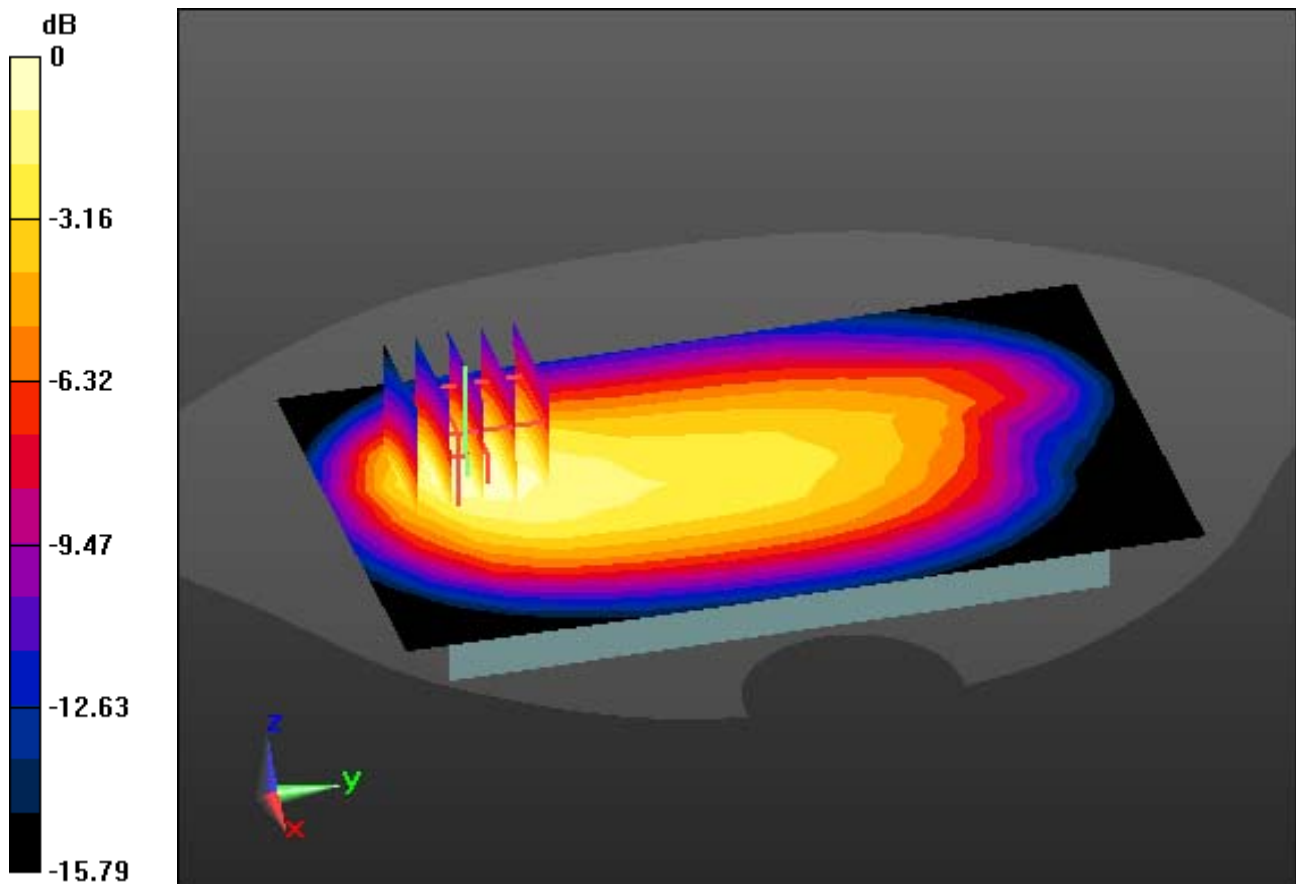

0 dB = 0.722 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, LTE Band 17 FCC (0); Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.775$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3866; ConvF(9.91, 9.91, 9.91); Calibrated: 2021-05-31 Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2021-06-23; Ambient Temp: 20.8; Tissue Temp: 21.3

1 cm space from Body, Rear, LTE Band 17 Ch. 23790, Ant Internal

Mode : BandWidth 10 MHz, QPSK, RB Size: 1


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.127 W/kg

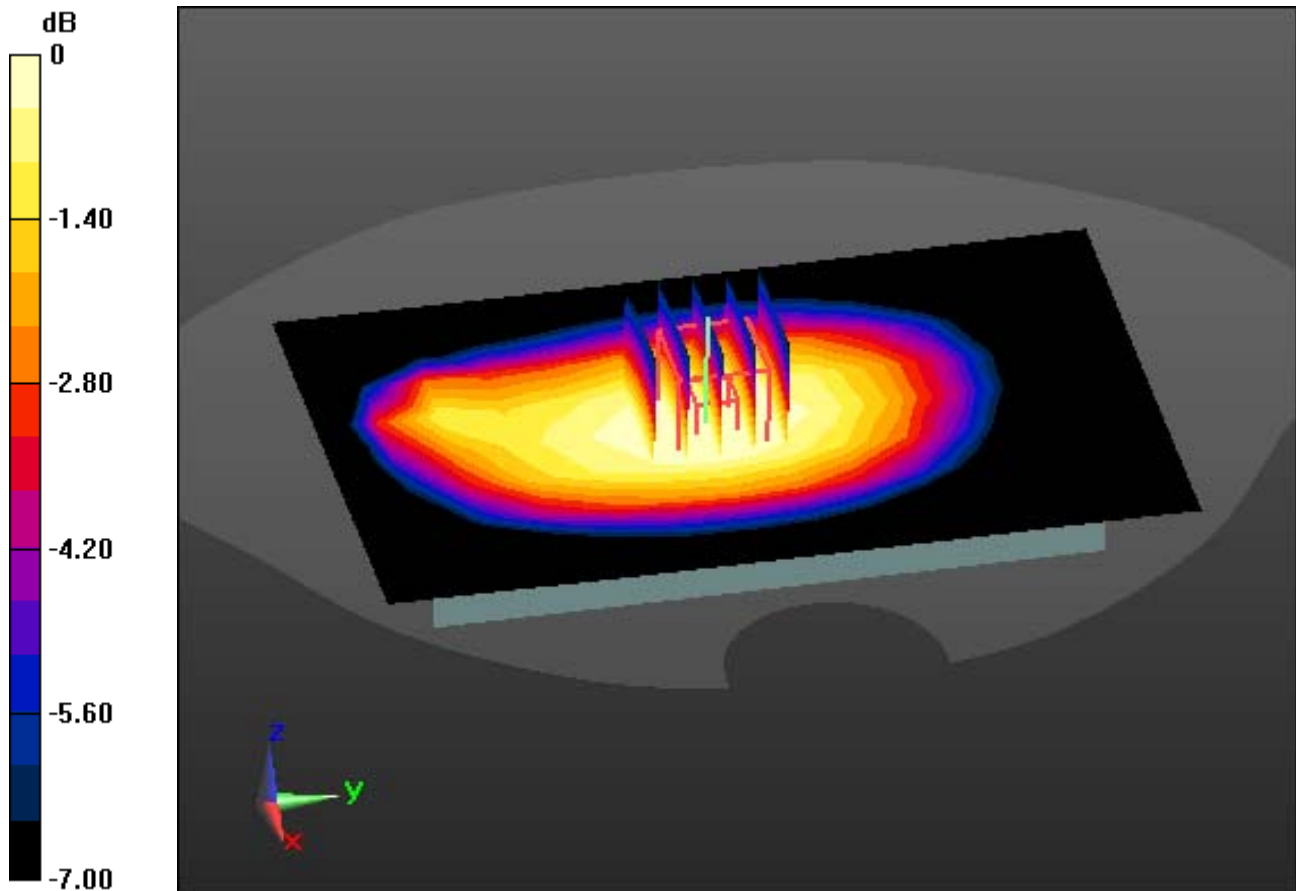

0 dB = 0.183 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.773$ S/m; $\epsilon_r = 40.035$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.61, 7.61, 7.61); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Left Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.229 W/kg

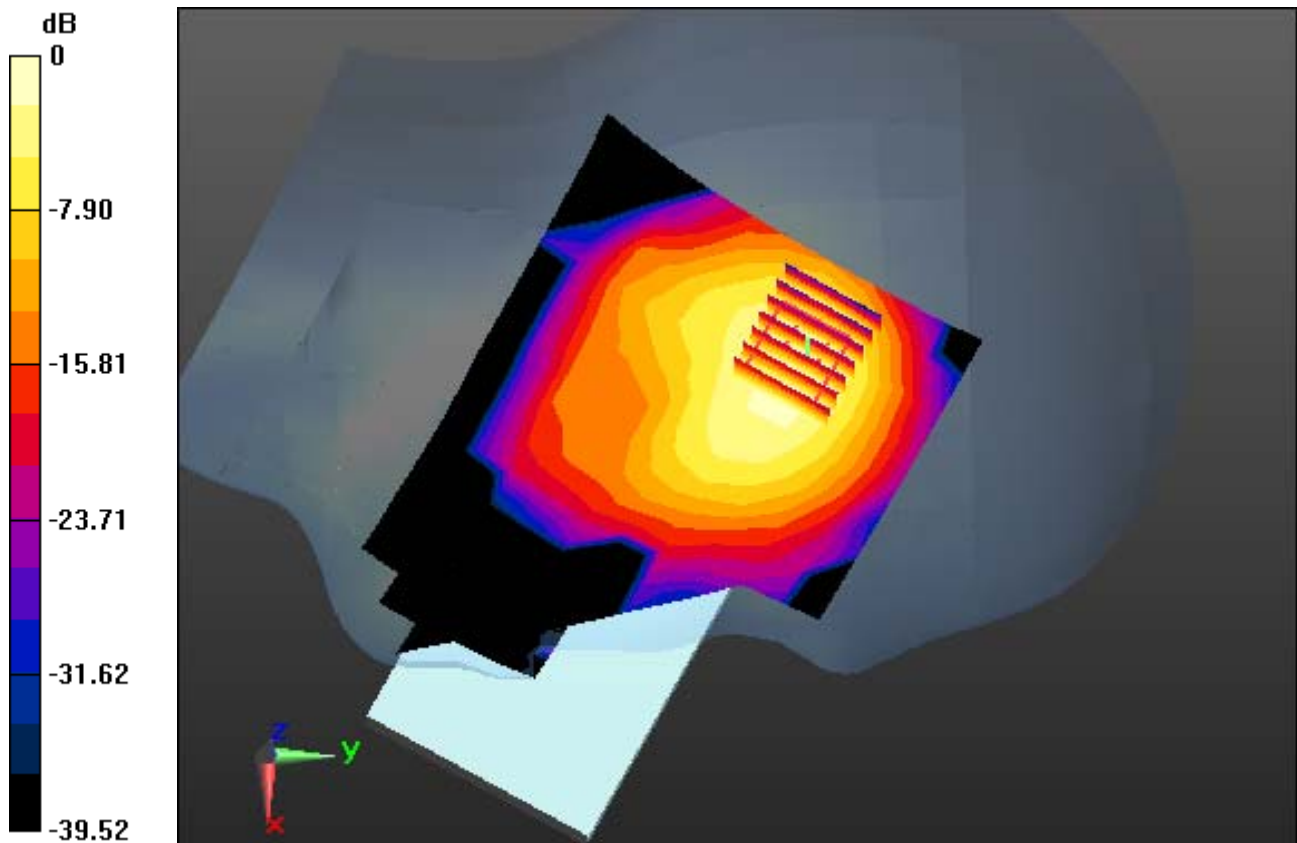

0 dB = 0.783 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN 5.3G(802.11a/n/ac) (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290 \text{ MHz}$; $\sigma = 4.668 \text{ S/m}$; $\epsilon_r = 36.368$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.97, 4.97, 4.97); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-20; Ambient Temp: 20.8; Tissue Temp: 20.5

Left Touch, W-LAN(802.11ac VHT80) Ch. 58, Ant Internal, Standard Battery


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.105 W/kg

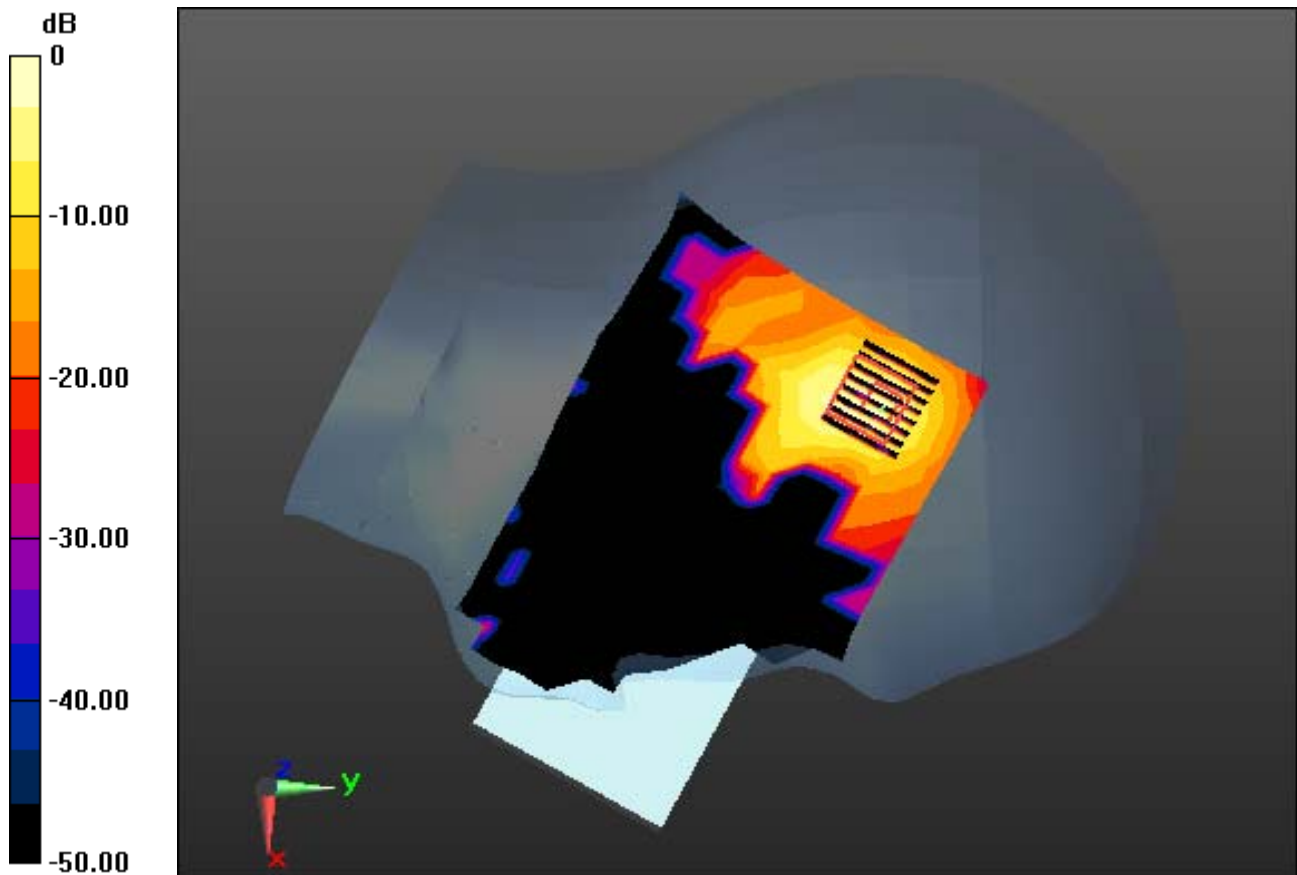

0 dB = 0.881 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN 5.6G(802.11a/n/ac) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.171 \text{ S/m}$; $\epsilon_r = 36.809$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.66, 4.66, 4.66); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-21; Ambient Temp: 21.5; Tissue Temp: 21.4

Left Touch, W-LAN(802.11ac VHT80) Ch. 122, Ant Internal, Standard Battery


Area Scan (13x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.60 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.210 W/kg

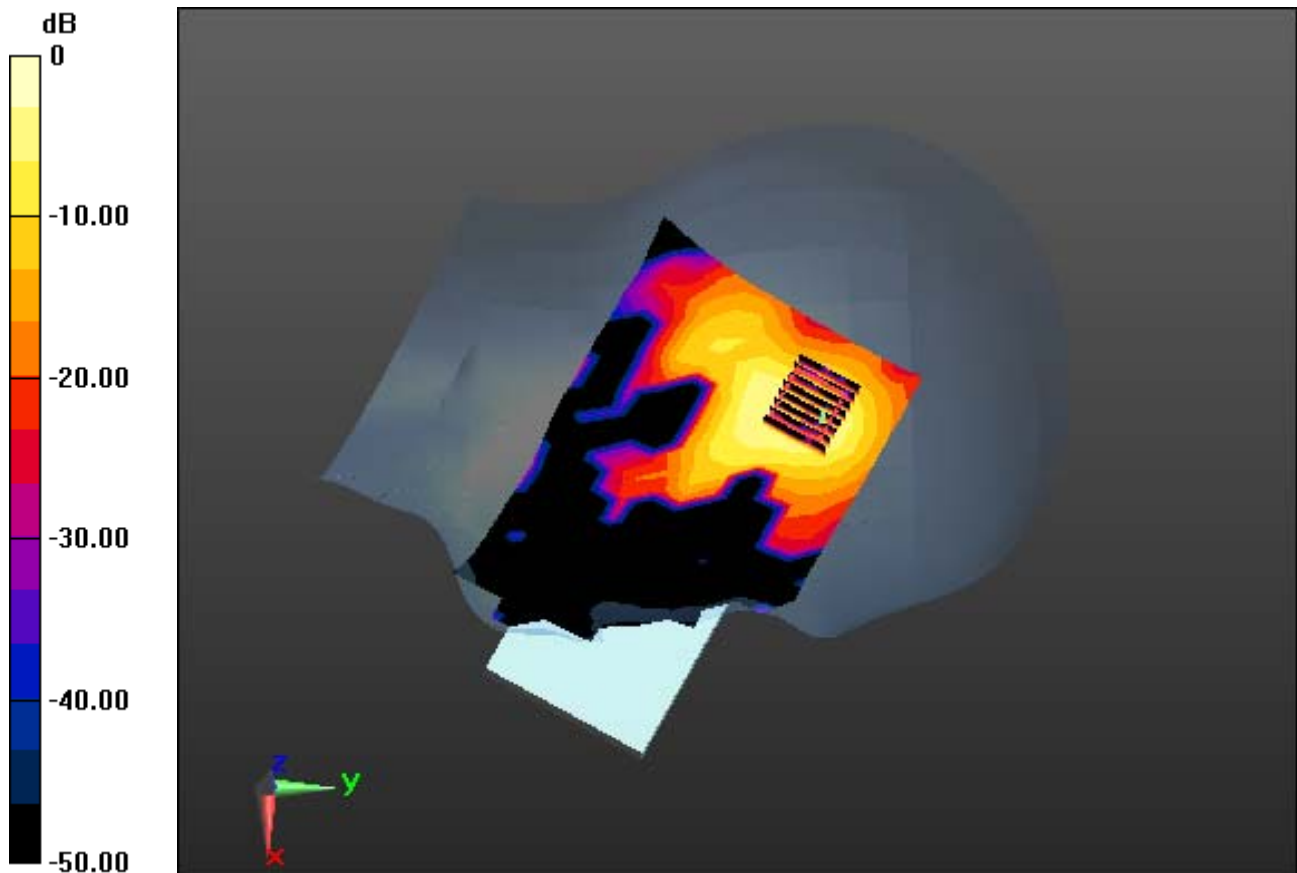

0 dB = 1.47 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 39.94$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.61, 7.61, 7.61); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-18; Ambient Temp: 22.4; Tissue Temp: 22.5

Left Touch, Bluetooth 1Mbps Ch. 39, Ant Internal, Standard Battery


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.041 W/kg

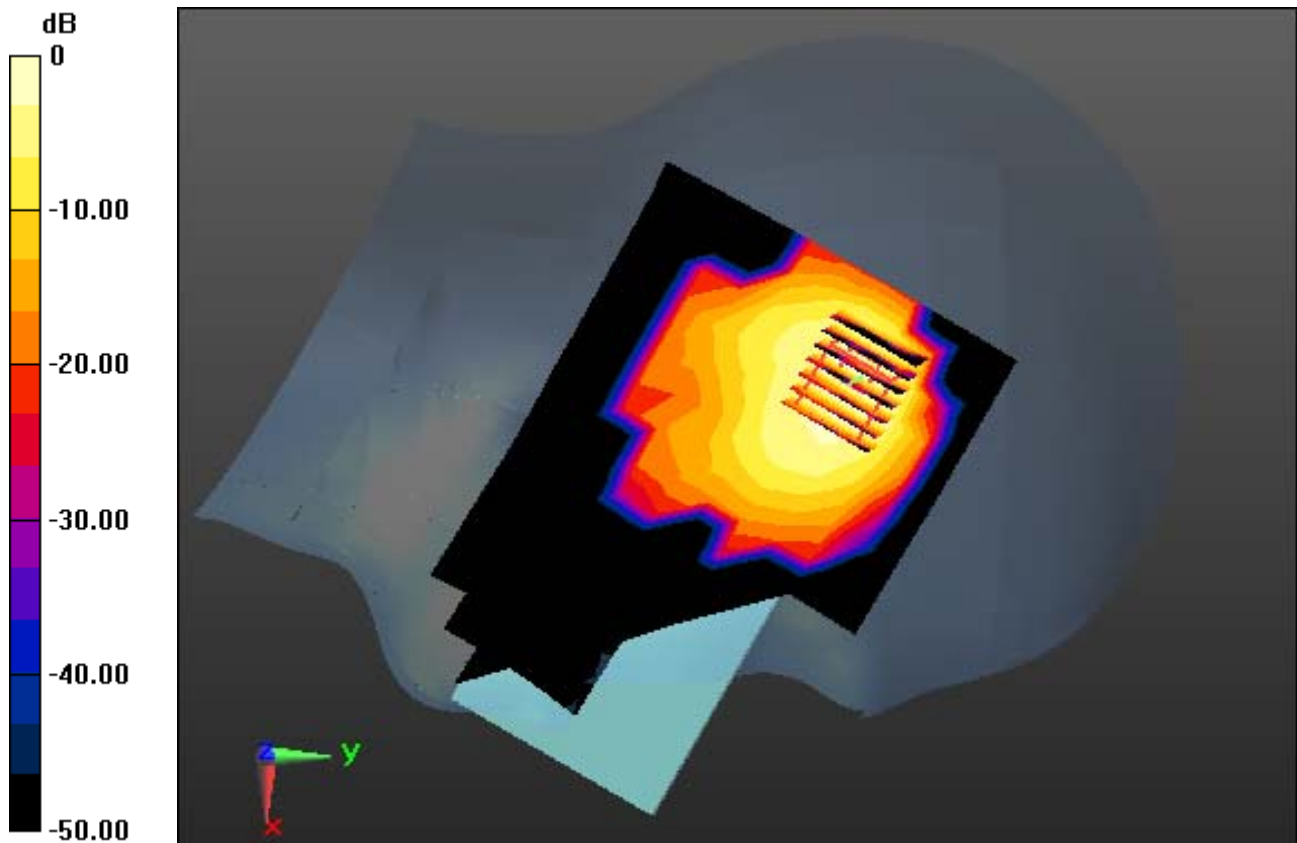

0 dB = 0.155 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.773 \text{ S/m}$; $\epsilon_r = 40.035$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.61, 7.61, 7.61); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-18; Ambient Temp: 22.4; Tissue Temp: 22.5

1 cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal


Area Scan (12x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.063 W/kg

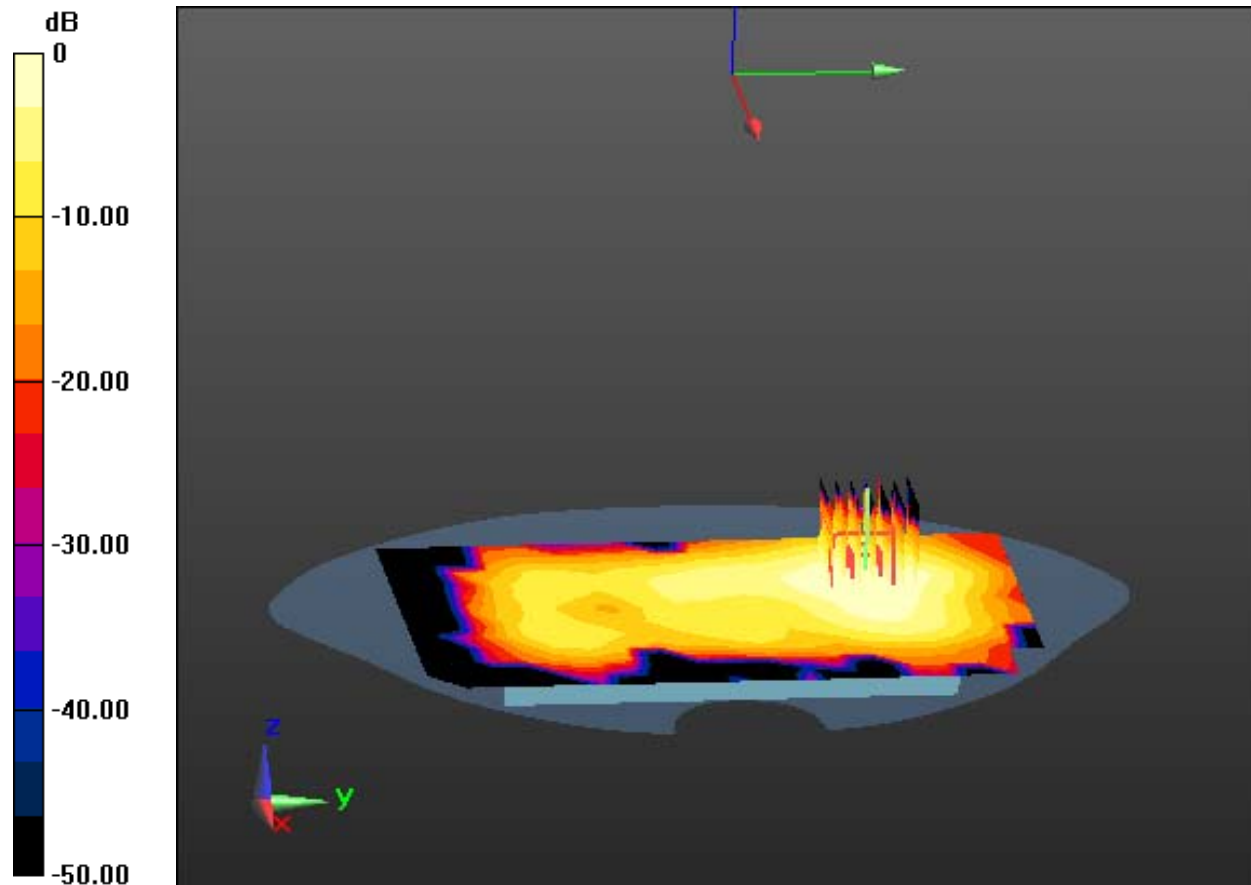

0 dB = 0.189 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN 5.3G(802.11a/n/ac) (0); Frequency: 5290 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.668$ S/m; $\epsilon_r = 36.368$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.97, 4.97, 4.97); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-20; Ambient Temp: 20.8; Tissue Temp: 20.5

1 cm space from Body, Rear, W-LAN(802.11ac VHT80) Ch. 58, Ant Internal


Area Scan (15x23x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm, Graded Ratio:1.4

Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.081 W/kg

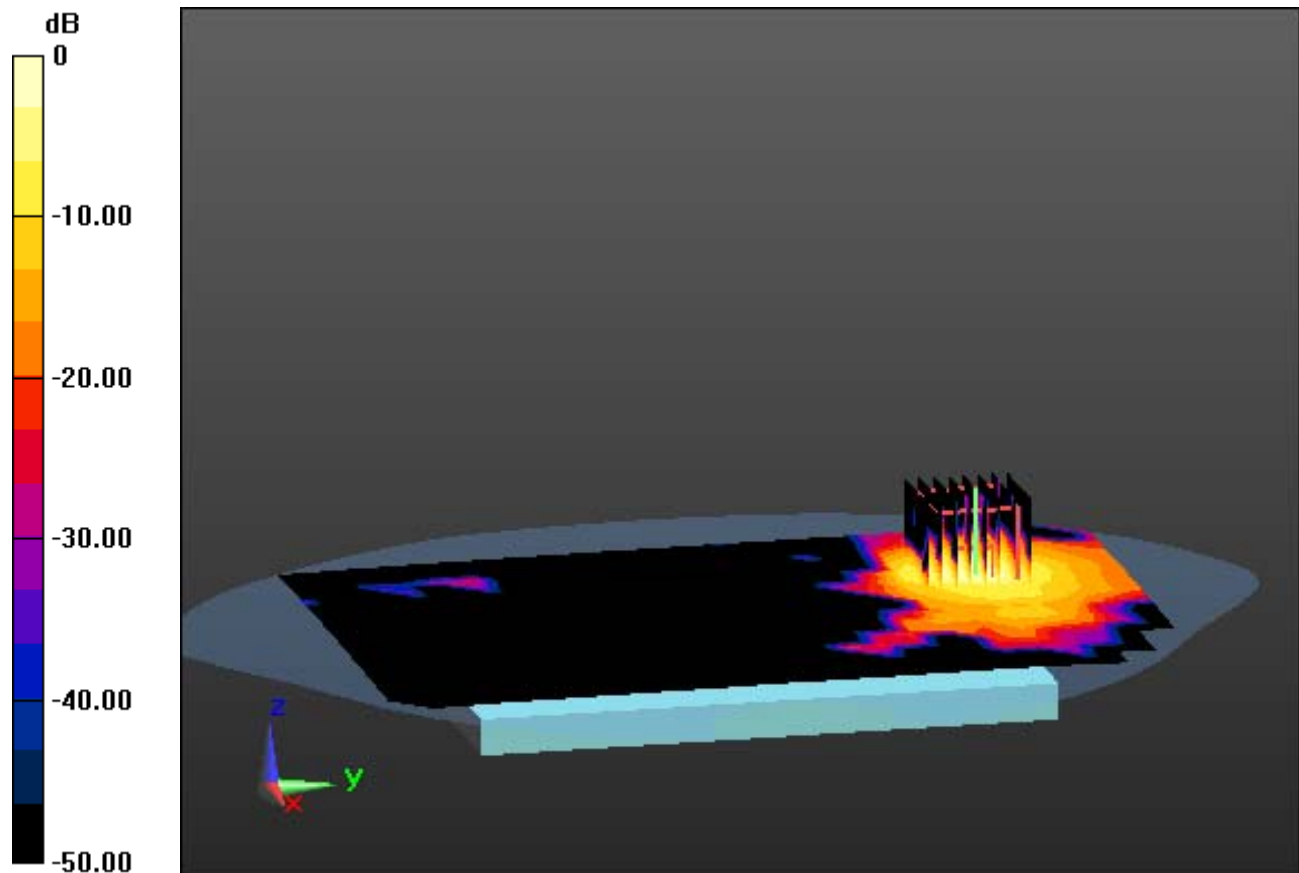

0 dB = 0.621 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, W-LAN 5.6G(802.11a/n/ac) (0); Frequency: 5610 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5610 \text{ MHz}$; $\sigma = 5.171 \text{ S/m}$; $\epsilon_r = 36.809$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(4.66, 4.66, 4.66); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Phantom: SAMwith CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-21; Ambient Temp: 21.5; Tissue Temp: 21.4

1 cm space from Body, Rear, W-LAN(802.11ac VHT80) Ch. 122, Ant Internal


Area Scan (15x23x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$, Graded Ratio:1.4

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.128 W/kg

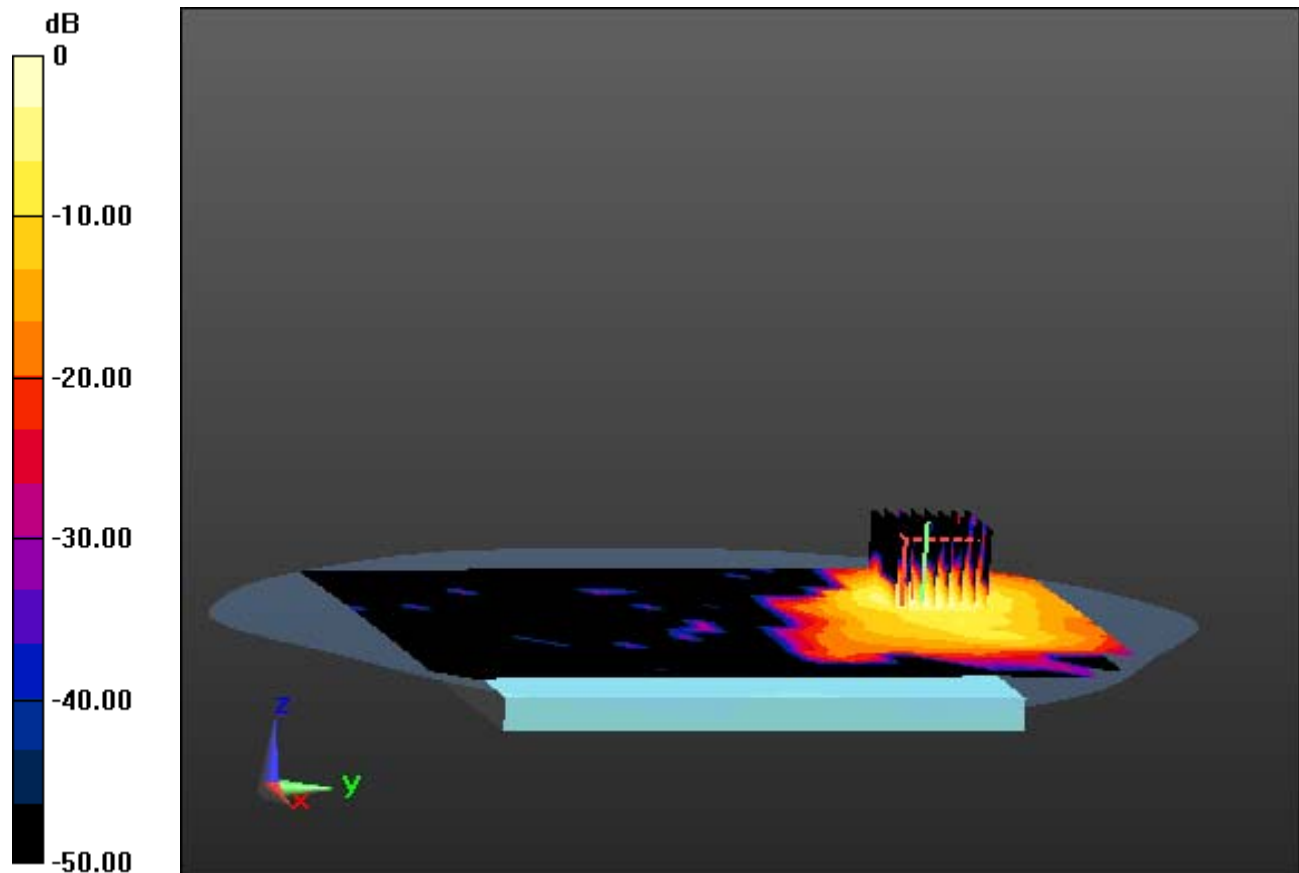

0 dB = 0.946 W/kg

DT&C Co., Ltd.

DUT: CB70; Type: Bar

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.807 \text{ S/m}$; $\epsilon_r = 39.94$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.61, 7.61, 7.61); Calibrated: 8/27/2019; Electronics: DAE4 Sn1392

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: SAM with CRP v5.0(Right); Type: QD000P40CD; Serial: 1220

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Test Date: 2019-11-18; Ambient Temp: 22.4; Tissue Temp: 22.5

1 cm space from Body, Rear, Bluetooth 1Mbps Ch. 39, Ant Internal


Area Scan (12x19x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00713 W/kg

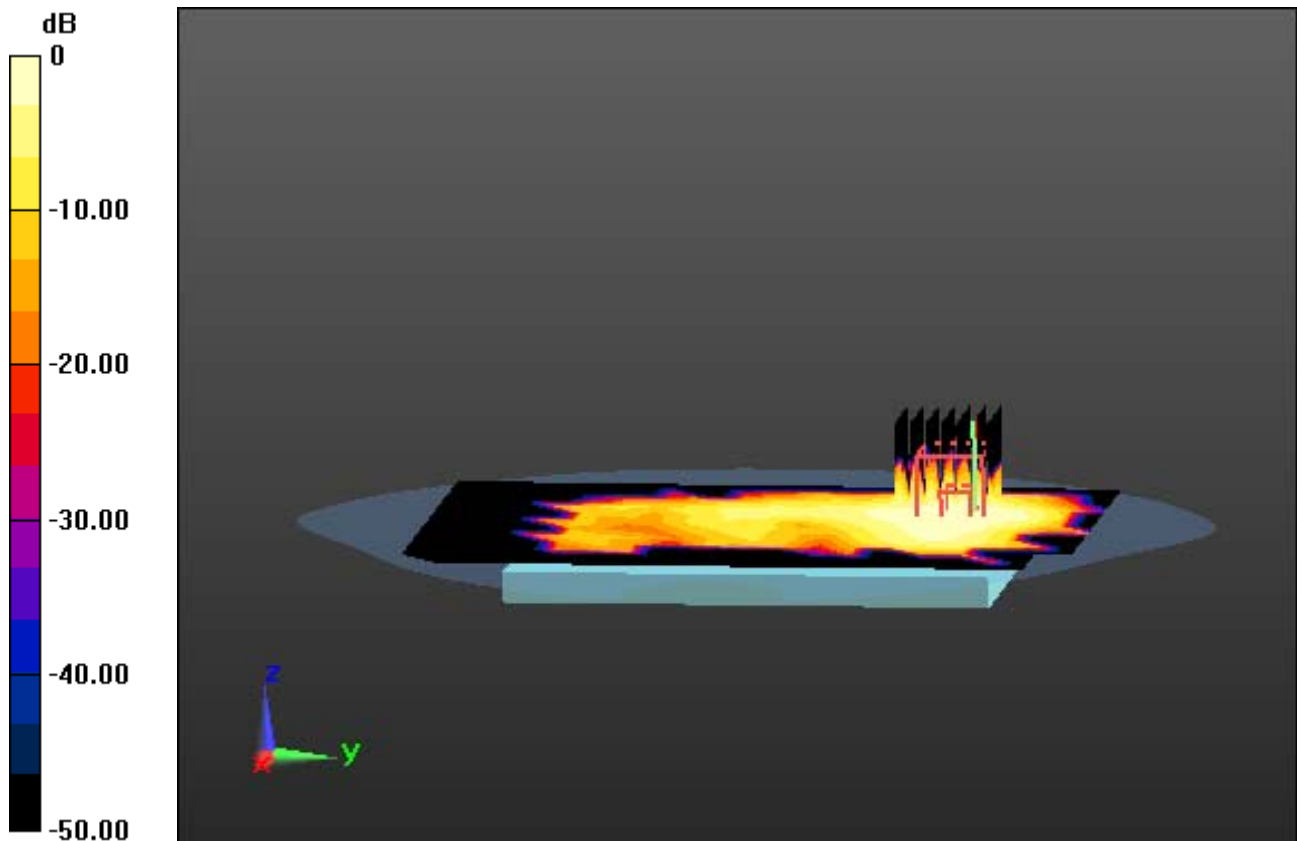

0 dB = 0.0309 W/kg