


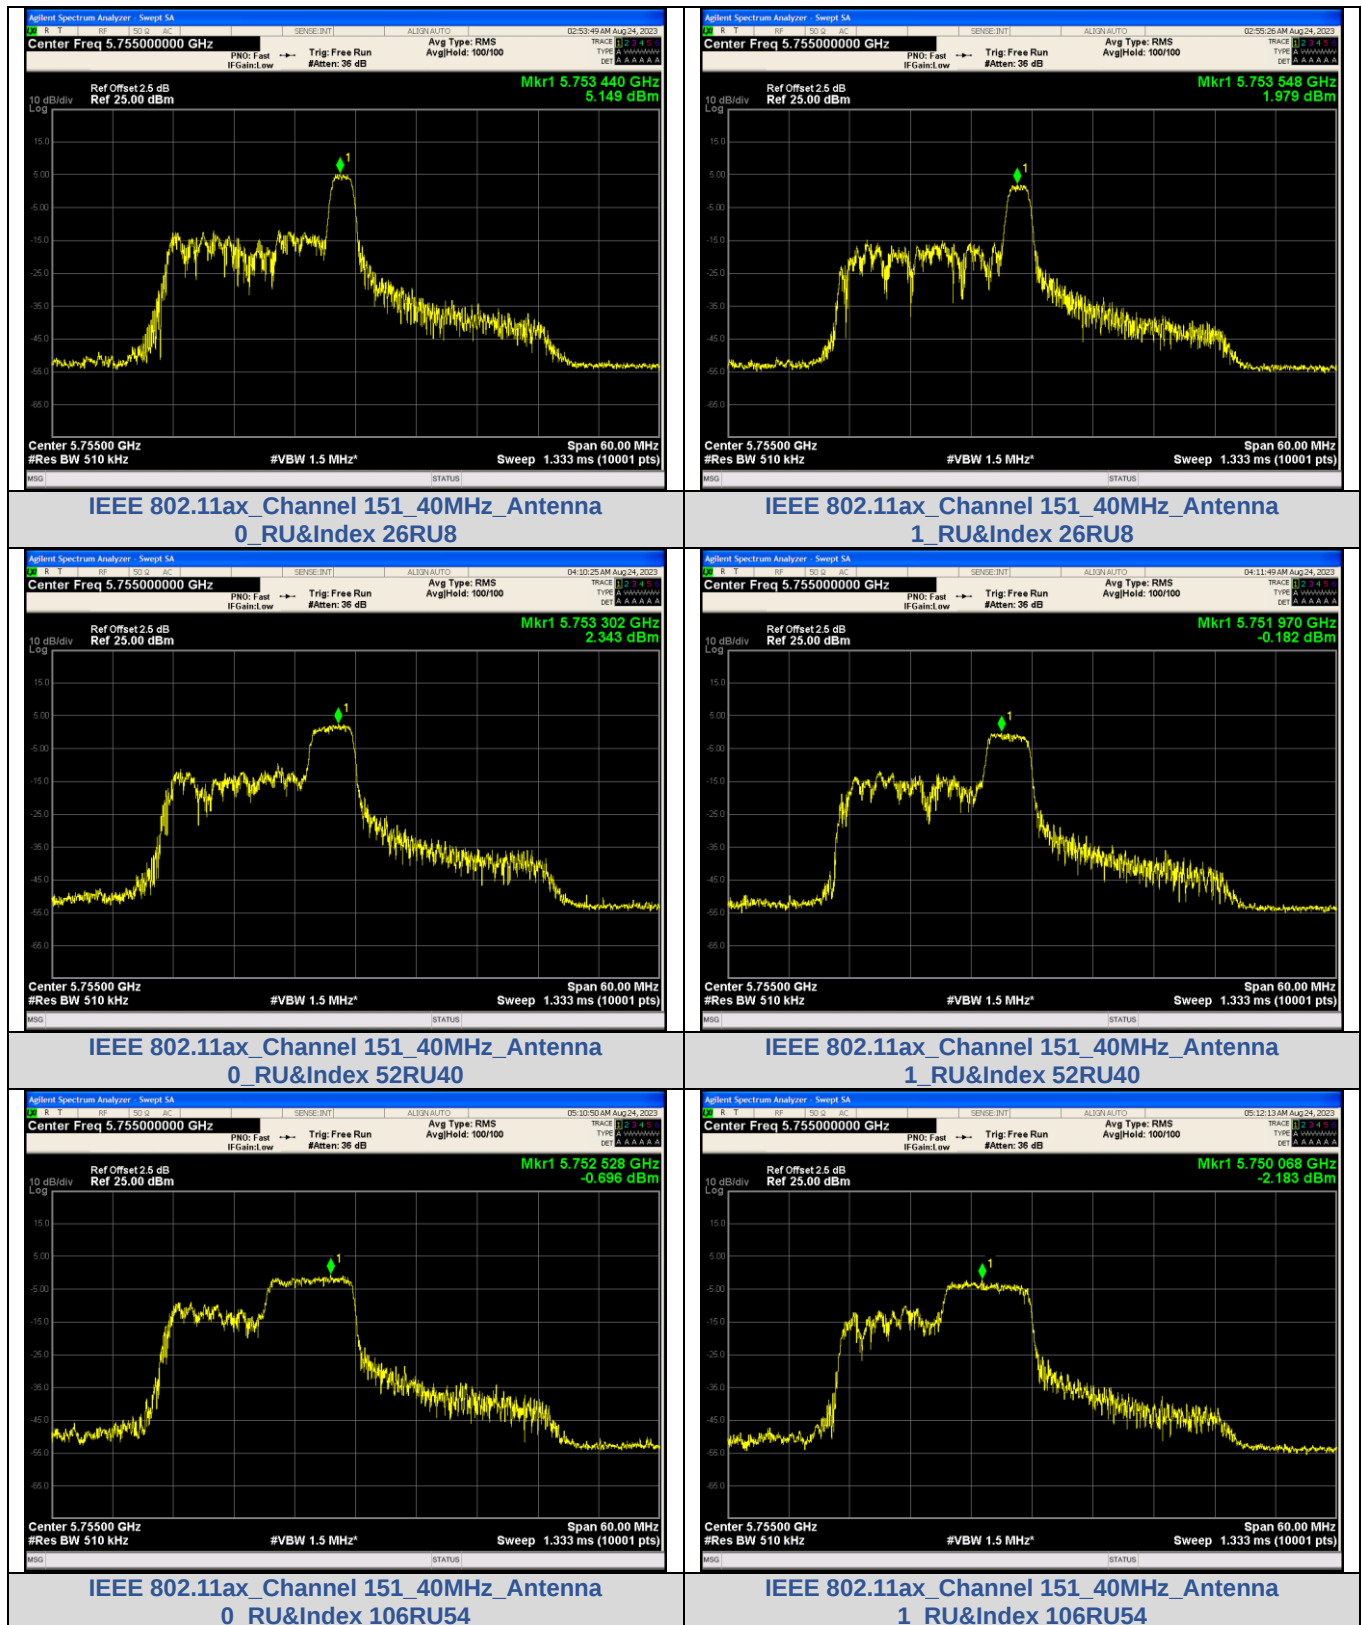

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

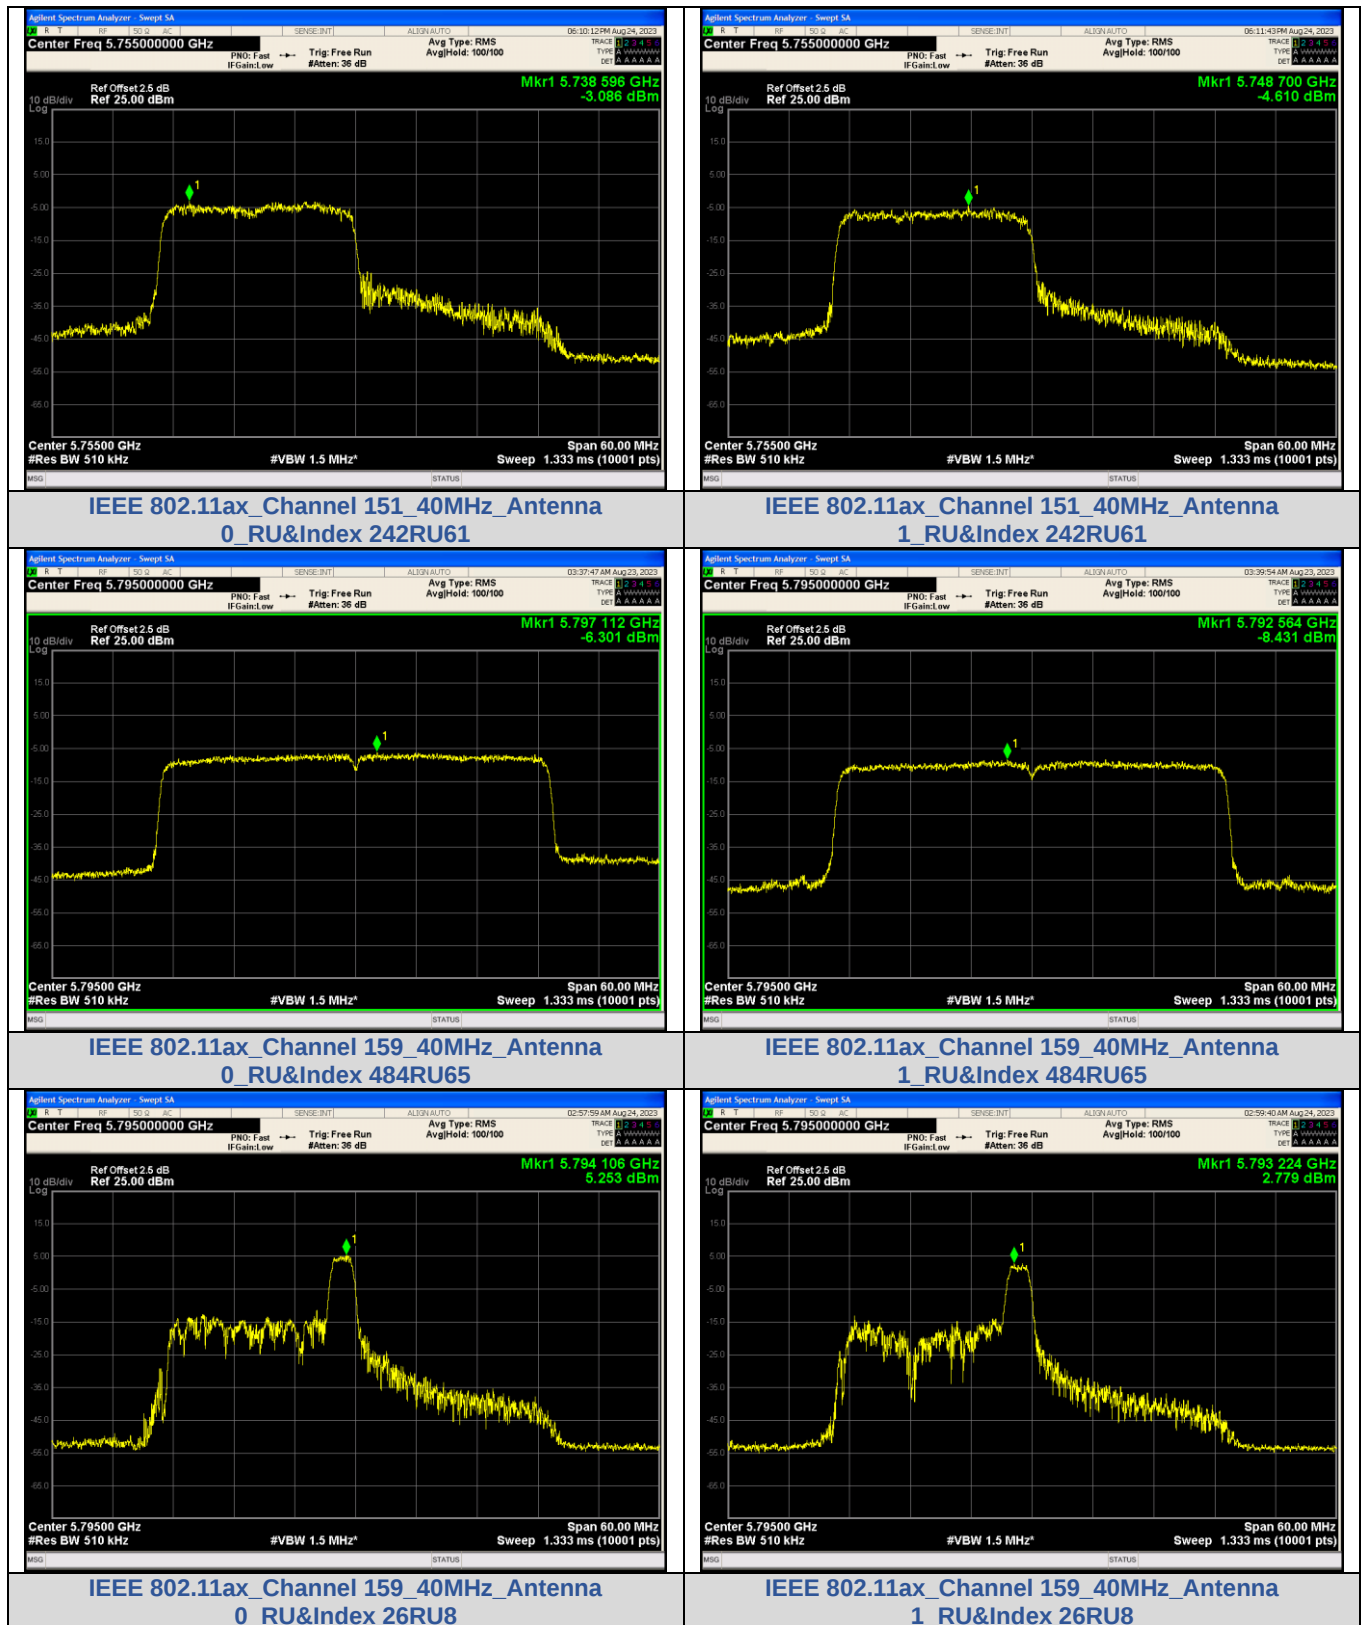


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

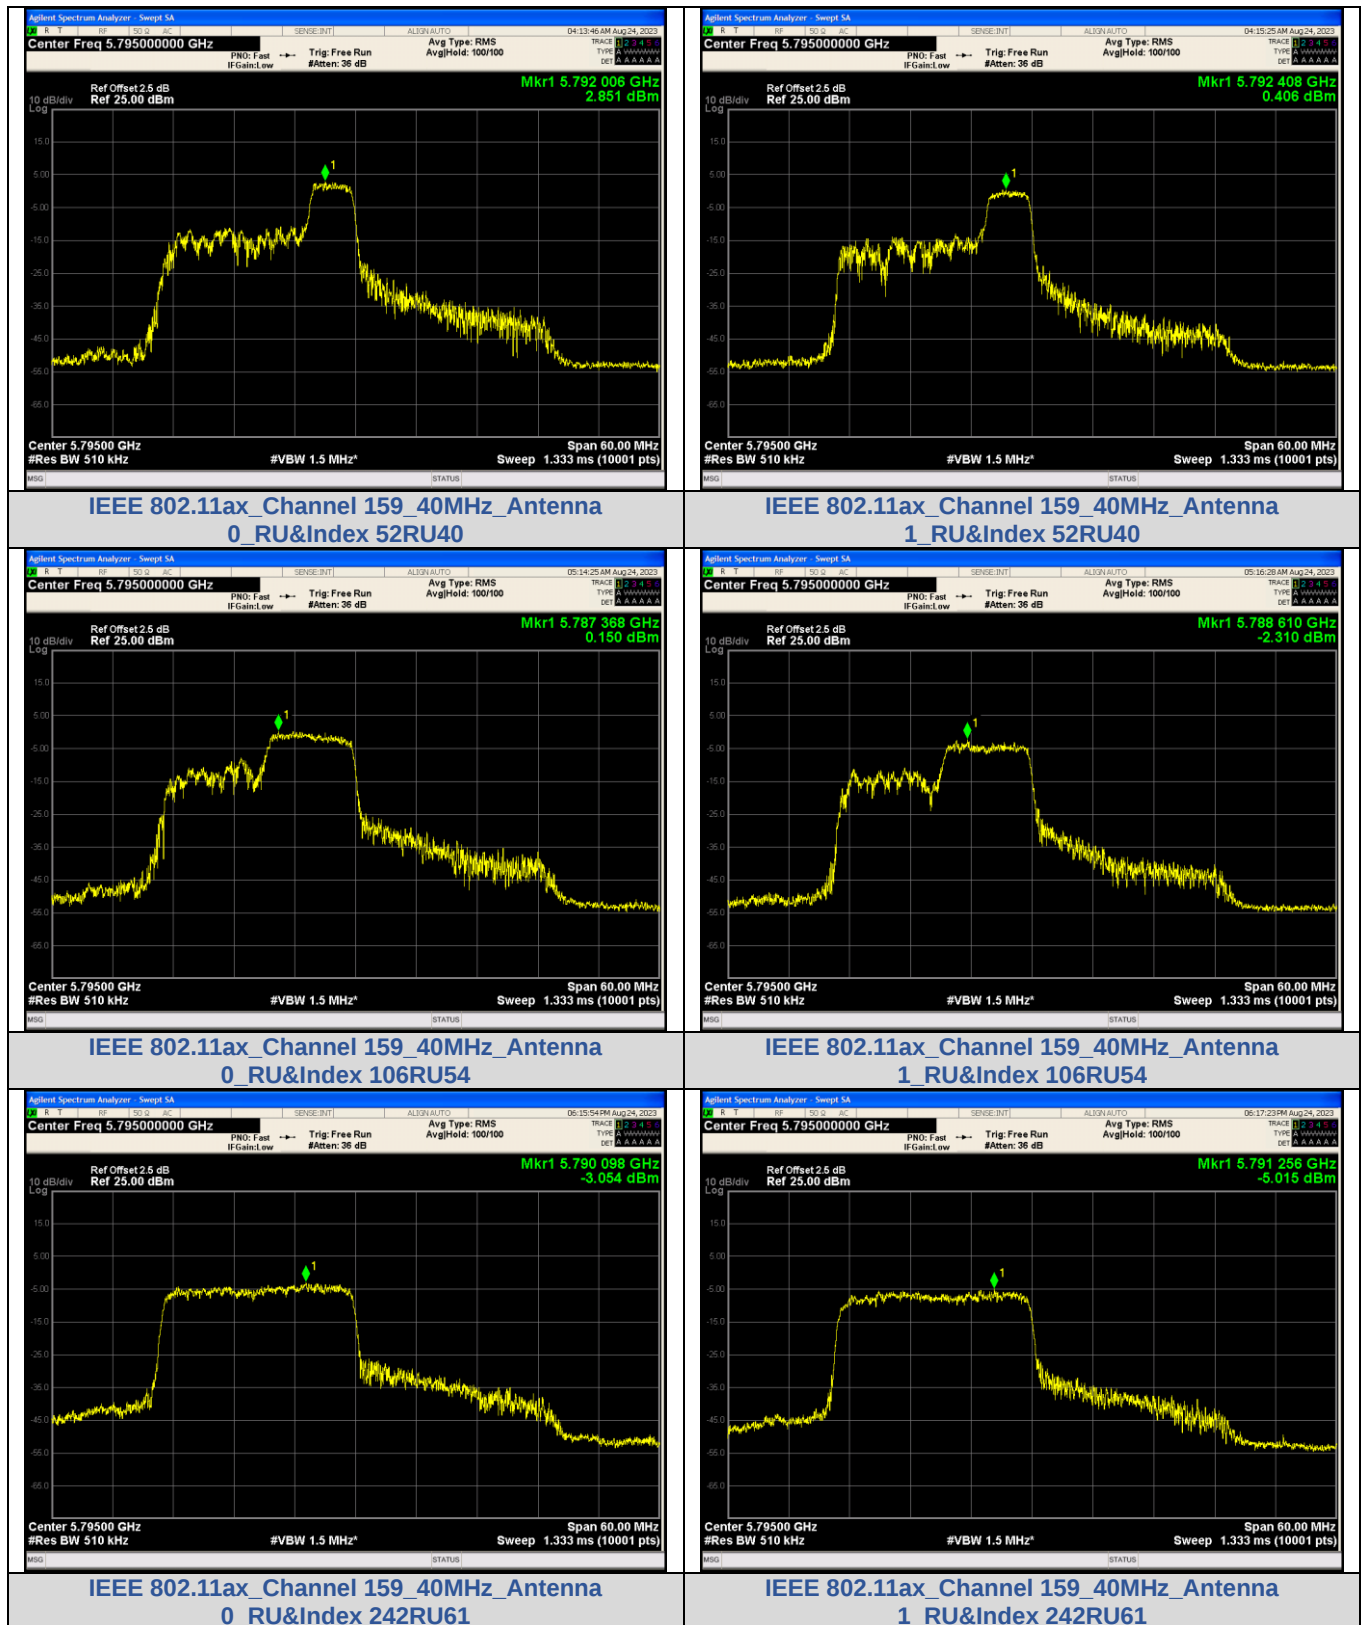


CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

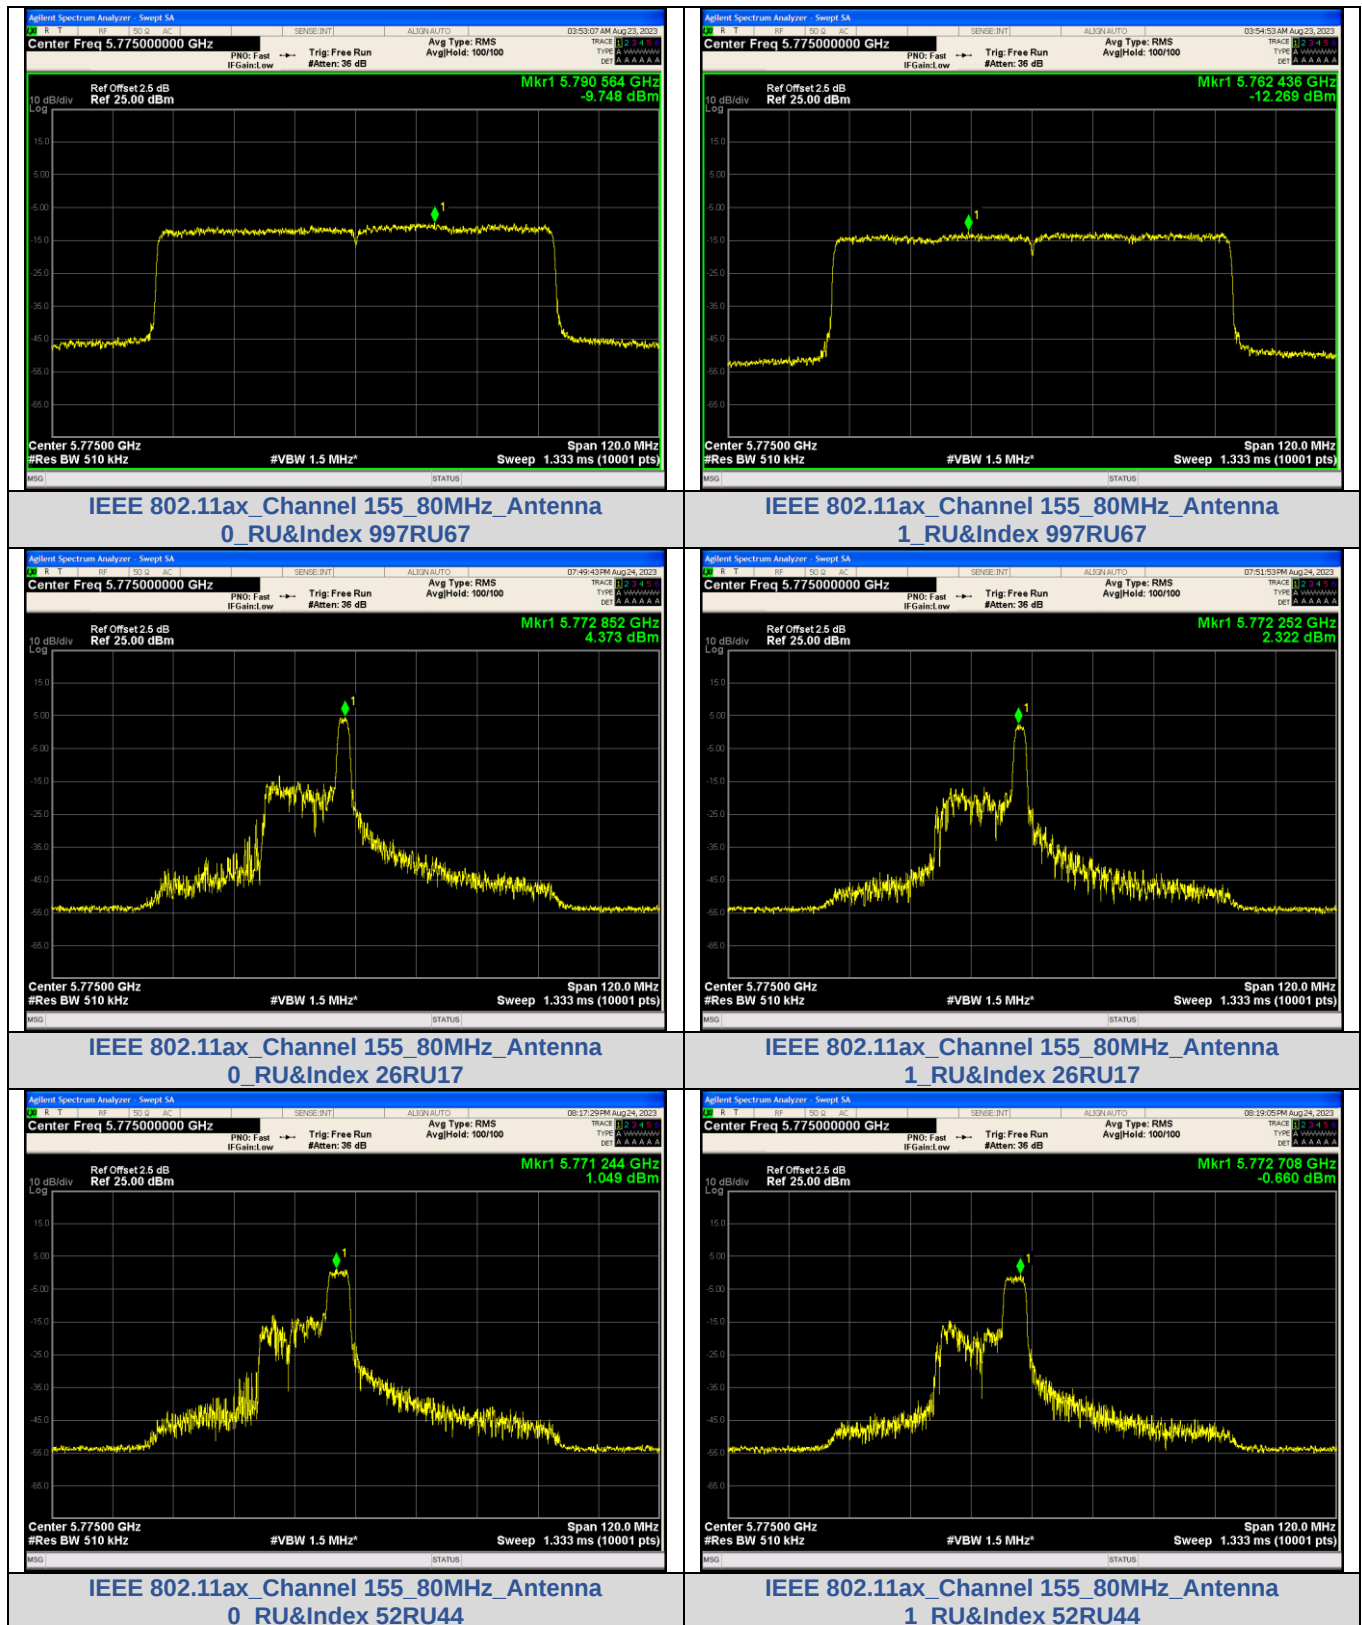

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>

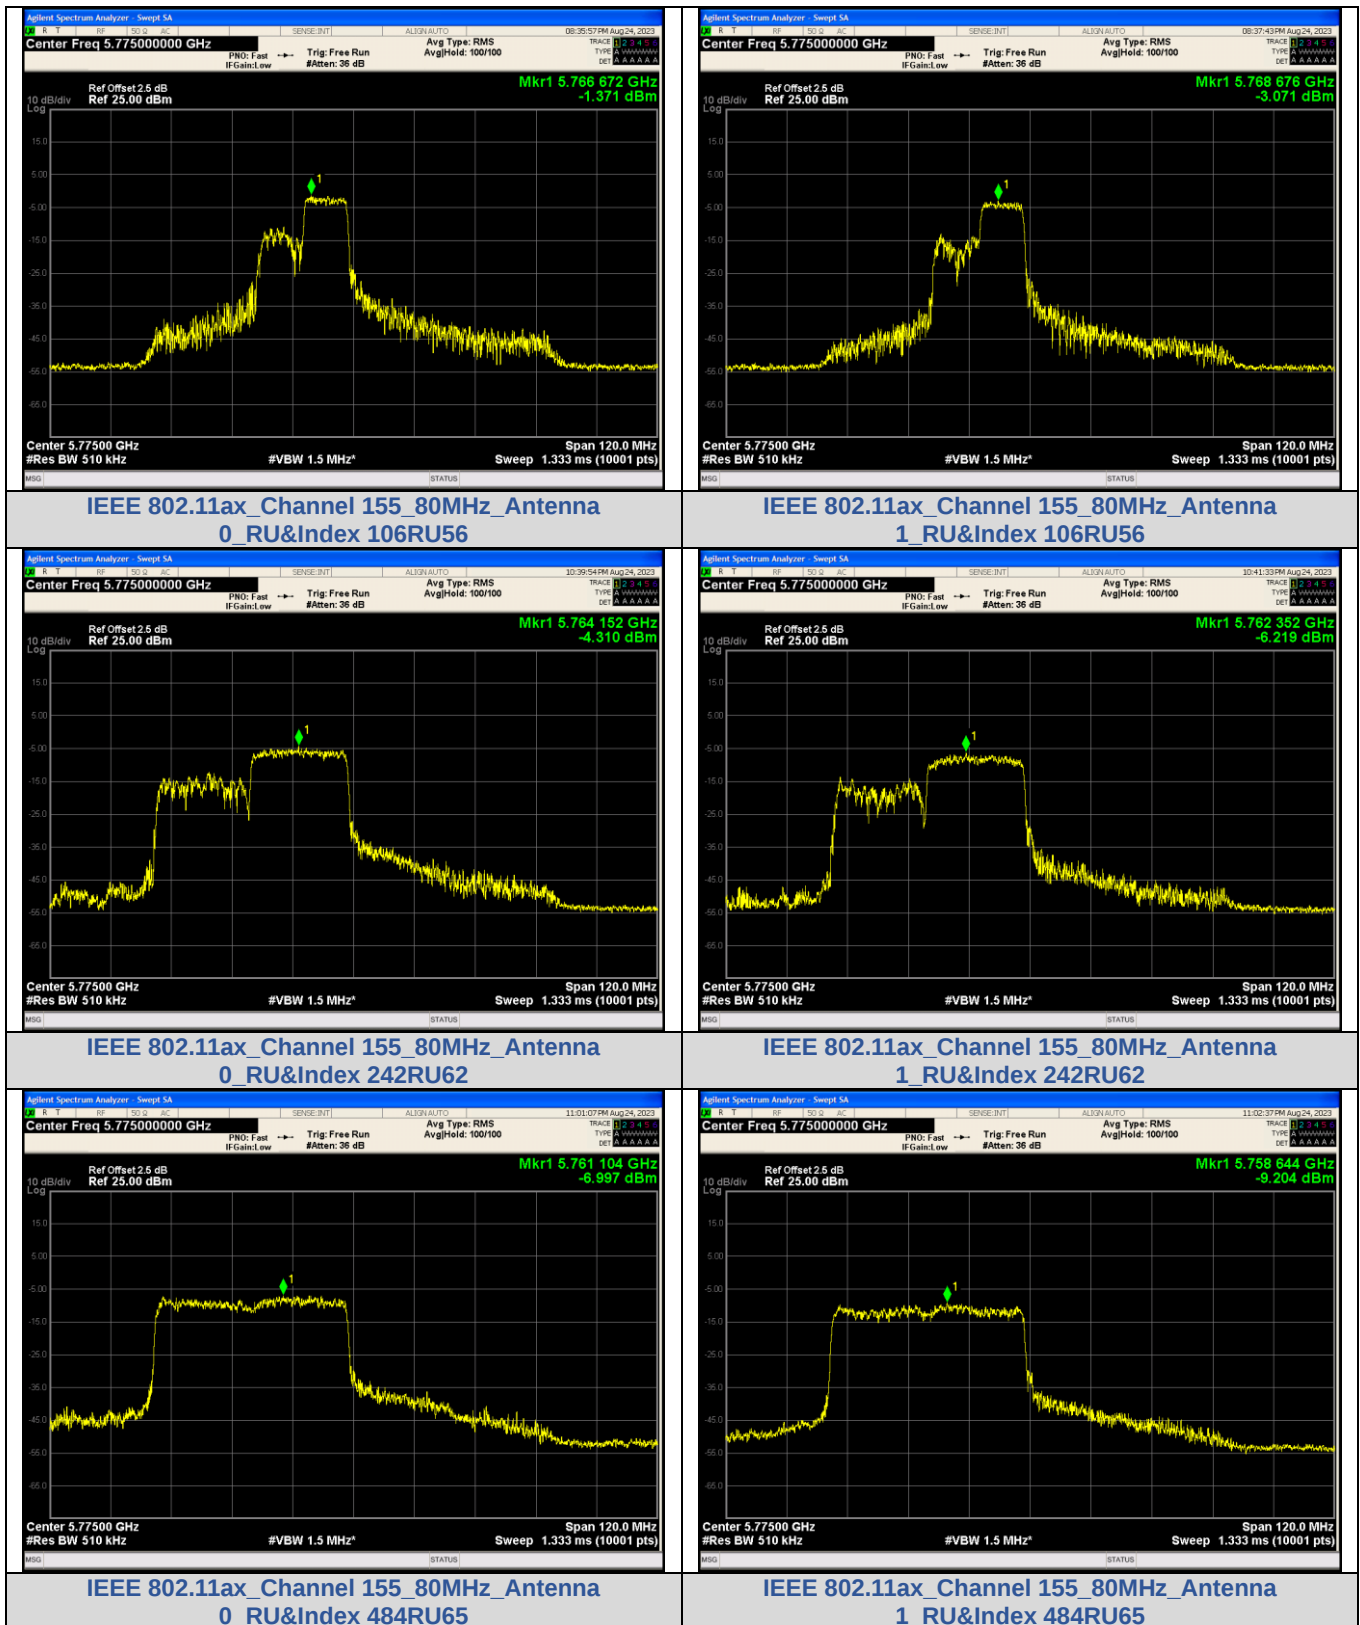

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>




### 3.7. Frequency Stability

#### Limit

FCC CFR Title 47 Part 15 Subpart E Section 15.407(g)

| Test Item           | Limit                                                                                                                                                    | Frequency Range (MHz) |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Frequency Stability | Specified in the user's manual, the transmitter center frequency tolerance shall be $\pm 20$ ppm maximum for the 5 GHz band (IEEE 802.11n specification) | 5150~5250             |
|                     |                                                                                                                                                          | 5250~5350             |
|                     |                                                                                                                                                          | 5500~5700             |
|                     |                                                                                                                                                          | 5725~5850             |

#### Test Configuration

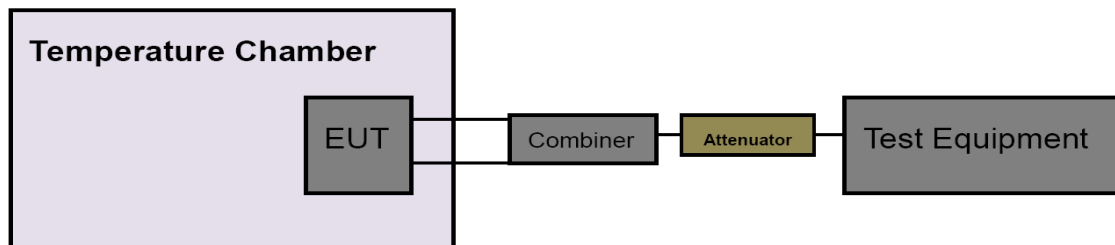

#### Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyzer center frequency to transmitting frequency.
- (3) Set the span to encompass the entire emissions bandwidth (EBW) of the signal.
- (4) Set the RBW to: 8MHz, VBW=8MHz with peak detector and max hold settings.
- (5) The test extreme voltage is to change the primary supply voltage from 230V to 110V percent of the nominal value.
- (6) Extreme temperature is -10°C~40°C

NOTE: The EUT was set to continuously transmitting in continuously un-modulation transmitting mode.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

| Condition | Mode | Ch. | Antenna | Center Frequency (MHz) | Calculated Value of Center Frequency(MHz) | Result (ppm) | Limit (ppm) | State |
|-----------|------|-----|---------|------------------------|-------------------------------------------|--------------|-------------|-------|
| NT/NV     | 20M  | 36  | 0       | 5180.0                 | 5179.984618                               | -2.97        | 20          | PASS  |
|           |      |     | 1       | 5180.0                 | 5179.978568                               | -4.14        |             | PASS  |
|           |      | 40  | 0       | 5200.0                 | 5199.967318                               | -6.29        |             | PASS  |
|           |      |     | 1       | 5200.0                 | 5199.963143                               | -7.09        |             | PASS  |
|           |      | 48  | 0       | 5240.0                 | 5239.966555                               | -6.38        |             | PASS  |
|           |      |     | 1       | 5240.0                 | 5239.960943                               | -7.45        |             | PASS  |
|           | 40M  | 38  | 0       | 5190.0                 | 5189.963768                               | -6.98        |             | PASS  |
|           |      |     | 1       | 5190.0                 | 5189.957905                               | -8.11        |             | PASS  |
|           |      | 46  | 0       | 5230.0                 | 5229.961593                               | -7.34        |             | PASS  |
|           |      |     | 1       | 5230.0                 | 5229.957830                               | -8.06        |             | PASS  |
|           | 80M  | 42  | 0       | 5210.0                 | 5209.967568                               | -6.22        |             | PASS  |
|           |      |     | 1       | 5210.0                 | 5209.964518                               | -6.81        |             | PASS  |
| LT/NV     | 20M  | 36  | 0       | 5180.0                 | 5179.973043                               | -5.2         |             | PASS  |
|           |      |     | 1       | 5180.0                 | 5179.971918                               | -5.42        |             | PASS  |
|           |      | 40  | 0       | 5200.0                 | 5199.961443                               | -7.41        |             | PASS  |
|           |      |     | 1       | 5200.0                 | 5199.960568                               | -7.58        |             | PASS  |
|           |      | 48  | 0       | 5240.0                 | 5239.958230                               | -7.97        |             | PASS  |
|           |      |     | 1       | 5240.0                 | 5239.957518                               | -8.11        |             | PASS  |
|           | 40M  | 38  | 0       | 5190.0                 | 5189.956555                               | -8.37        |             | PASS  |
|           |      |     | 1       | 5190.0                 | 5189.955755                               | -8.53        |             | PASS  |
|           |      | 46  | 0       | 5230.0                 | 5229.956405                               | -8.34        |             | PASS  |
|           |      |     | 1       | 5230.0                 | 5229.955893                               | -8.43        |             | PASS  |
|           | 80M  | 42  | 0       | 5210.0                 | 5209.963055                               | -7.09        |             | PASS  |
|           |      |     | 1       | 5210.0                 | 5209.962593                               | -7.18        |             | PASS  |
| HT/NV     | 20M  | 36  | 0       | 5180.0                 | 5179.970681                               | -5.66        |             | PASS  |
|           |      |     | 1       | 5180.0                 | 5179.969918                               | -5.81        |             | PASS  |
|           |      | 40  | 0       | 5200.0                 | 5199.959918                               | -7.71        |             | PASS  |
|           |      |     | 1       | 5200.0                 | 5199.959568                               | -7.78        |             | PASS  |
|           |      | 48  | 0       | 5240.0                 | 5239.957055                               | -8.2         |             | PASS  |
|           |      |     | 1       | 5240.0                 | 5239.956718                               | -8.26        |             | PASS  |
|           | 40M  | 38  | 0       | 5190.0                 | 5189.955568                               | -8.56        |             | PASS  |
|           |      |     | 1       | 5190.0                 | 5189.955018                               | -8.67        |             | PASS  |
|           |      | 46  | 0       | 5230.0                 | 5229.955518                               | -8.51        |             | PASS  |
|           |      |     | 1       | 5230.0                 | 5229.955218                               | -8.56        |             | PASS  |
|           | 80M  | 42  | 0       | 5210.0                 | 5209.961755                               | -7.34        |             | PASS  |
|           |      |     | 1       | 5210.0                 | 5209.961418                               | -7.41        |             | PASS  |
| -10°C/NV  | 20M  | 36  | 0       | 5180.0                 | 5179.969180                               | -5.95        |             | PASS  |
|           |      |     | 1       | 5180.0                 | 5179.968393                               | -6.1         |             | PASS  |
|           |      | 40  | 0       | 5200.0                 | 5199.958843                               | -7.91        |             | PASS  |
|           |      |     | 1       | 5200.0                 | 5199.958618                               | -7.96        |             | PASS  |
|           |      | 48  | 0       | 5240.0                 | 5239.956205                               | -8.36        |             | PASS  |
|           |      |     | 1       | 5240.0                 | 5239.956018                               | -8.39        |             | PASS  |
|           | 40M  | 38  | 0       | 5190.0                 | 5189.954980                               | -8.67        |             | PASS  |
|           |      |     | 1       | 5190.0                 | 5189.954930                               | -8.68        |             | PASS  |
|           |      | 46  | 0       | 5230.0                 | 5229.954868                               | -8.63        |             | PASS  |
|           |      |     | 1       | 5230.0                 | 5229.954730                               | -8.66        |             | PASS  |
|           | 80M  | 42  | 0       | 5210.0                 | 5209.961118                               | -7.46        |             | PASS  |
|           |      |     | 1       | 5210.0                 | 5209.960980                               | -7.49        |             | PASS  |
| 0°C/NV    | 20M  | 36  | 0       | 5180.0                 | 5179.967818                               | -6.21        |             | PASS  |
|           |      |     | 1       | 5180.0                 | 5179.967330                               | -6.31        |             | PASS  |
|           |      | 40  | 0       | 5200.0                 | 5199.958280                               | -8.02        |             | PASS  |
|           |      |     | 1       | 5200.0                 | 5199.958105                               | -8.06        |             | PASS  |
|           |      | 48  | 0       | 5240.0                 | 5239.955868                               | -8.42        |             | PASS  |
|           |      |     | 1       | 5240.0                 | 5239.955693                               | -8.46        |             | PASS  |
|           | 40M  | 38  | 0       | 5190.0                 | 5189.954855                               | -8.7         |             | PASS  |
|           |      |     | 1       | 5190.0                 | 5189.954768                               | -8.72        |             | PASS  |
|           |      | 46  | 0       | 5230.0                 | 5229.954618                               | -8.68        |             | PASS  |
|           |      |     | 1       | 5230.0                 | 5229.954518                               | -8.7         |             | PASS  |
|           | 80M  | 42  | 0       | 5210.0                 | 5209.960855                               | -7.51        |             | PASS  |
|           |      |     | 1       | 5210.0                 | 5209.960743                               | -7.53        |             | PASS  |
| 10°C/NV   | 20M  | 36  | 0       | 5180.0                 | 5179.966655                               | -6.44        |             | PASS  |

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



|         |     |    |   |        |             |       |      |
|---------|-----|----|---|--------|-------------|-------|------|
|         |     | 40 | 1 | 5180.0 | 5179.966180 | -6.53 | PASS |
|         |     |    | 0 | 5200.0 | 5199.957893 | -8.1  | PASS |
|         |     | 48 | 1 | 5200.0 | 5199.957805 | -8.11 | PASS |
|         |     |    | 0 | 5240.0 | 5239.955593 | -8.47 | PASS |
|         |     |    | 1 | 5240.0 | 5239.955468 | -8.5  | PASS |
|         | 40M | 38 | 0 | 5190.0 | 5189.954668 | -8.73 | PASS |
|         |     |    | 1 | 5190.0 | 5189.954618 | -8.74 | PASS |
|         |     | 46 | 0 | 5230.0 | 5229.954368 | -8.73 | PASS |
|         |     |    | 1 | 5230.0 | 5229.954380 | -8.72 | PASS |
|         | 80M | 42 | 0 | 5210.0 | 5209.960405 | -7.6  | PASS |
|         |     |    | 1 | 5210.0 | 5209.960255 | -7.63 | PASS |
| 20°C/NV | 20M | 36 | 0 | 5180.0 | 5179.965805 | -6.6  | PASS |
|         |     |    | 1 | 5180.0 | 5179.964718 | -6.81 | PASS |
|         |     | 40 | 0 | 5200.0 | 5199.957655 | -8.14 | PASS |
|         |     |    | 1 | 5200.0 | 5199.957130 | -8.24 | PASS |
|         |     | 48 | 0 | 5240.0 | 5239.955405 | -8.51 | PASS |
|         |     |    | 1 | 5240.0 | 5239.955280 | -8.53 | PASS |
|         | 40M | 38 | 0 | 5190.0 | 5189.954580 | -8.75 | PASS |
|         |     |    | 1 | 5190.0 | 5189.954480 | -8.77 | PASS |
|         |     | 46 | 0 | 5230.0 | 5229.954318 | -8.73 | PASS |
|         |     |    | 1 | 5230.0 | 5229.954168 | -8.76 | PASS |
|         | 80M | 42 | 0 | 5210.0 | 5209.960205 | -7.64 | PASS |
|         |     |    | 1 | 5210.0 | 5209.960130 | -7.65 | PASS |
| 30°C/NV | 20M | 36 | 0 | 5180.0 | 5179.964268 | -6.9  | PASS |
|         |     |    | 1 | 5180.0 | 5179.962718 | -7.2  | PASS |
|         |     | 40 | 0 | 5200.0 | 5199.957130 | -8.24 | PASS |
|         |     |    | 1 | 5200.0 | 5199.957130 | -8.24 | PASS |
|         |     | 48 | 0 | 5240.0 | 5239.955180 | -8.55 | PASS |
|         |     |    | 1 | 5240.0 | 5239.954980 | -8.59 | PASS |
|         | 40M | 38 | 0 | 5190.0 | 5189.954243 | -8.82 | PASS |
|         |     |    | 1 | 5190.0 | 5189.954293 | -8.81 | PASS |
|         |     | 46 | 0 | 5230.0 | 5229.954043 | -8.79 | PASS |
|         |     |    | 1 | 5230.0 | 5229.954005 | -8.79 | PASS |
|         | 80M | 42 | 0 | 5210.0 | 5209.960093 | -7.66 | PASS |
|         |     |    | 1 | 5210.0 | 5209.959980 | -7.68 | PASS |
| 40°C/NV | 20M | 36 | 0 | 5180.0 | 5179.962455 | -7.25 | PASS |
|         |     |    | 1 | 5180.0 | 5179.962105 | -7.32 | PASS |
|         |     | 40 | 0 | 5200.0 | 5199.957055 | -8.26 | PASS |
|         |     |    | 1 | 5200.0 | 5199.956793 | -8.31 | PASS |
|         |     | 48 | 0 | 5240.0 | 5239.954955 | -8.6  | PASS |
|         |     |    | 1 | 5240.0 | 5239.954943 | -8.6  | PASS |
|         | 40M | 38 | 0 | 5190.0 | 5189.954255 | -8.81 | PASS |
|         |     |    | 1 | 5190.0 | 5189.954305 | -8.8  | PASS |
|         |     | 46 | 0 | 5230.0 | 5229.953918 | -8.81 | PASS |
|         |     |    | 1 | 5230.0 | 5229.953843 | -8.83 | PASS |
|         | 80M | 42 | 0 | 5210.0 | 5209.959830 | -7.71 | PASS |
|         |     |    | 1 | 5210.0 | 5209.959493 | -7.77 | PASS |



| Condition | Mode | Ch. | Antenna | Center Frequency (MHz) | Calculated Value of Center Frequency(MHz) | Result (ppm) | Limit (ppm) | State |
|-----------|------|-----|---------|------------------------|-------------------------------------------|--------------|-------------|-------|
| NT/NV     | 20M  | 149 | 0       | 5745.0                 | 5744.960505                               | -6.87        | 20          | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.954755                               | -7.88        |             | PASS  |
|           |      | 157 | 0       | 5785.0                 | 5784.956805                               | -7.47        |             | PASS  |
|           |      |     | 1       | 5785.0                 | 5784.952080                               | -8.28        |             | PASS  |
|           |      | 165 | 0       | 5825.0                 | 5824.956718                               | -7.43        |             | PASS  |
|           |      |     | 1       | 5825.0                 | 5824.952405                               | -8.17        |             | PASS  |
|           | 40M  | 151 | 0       | 5755.0                 | 5754.955818                               | -7.68        |             | PASS  |
|           |      |     | 1       | 5755.0                 | 5754.951980                               | -8.34        |             | PASS  |
|           |      | 159 | 0       | 5795.0                 | 5794.983893                               | -2.78        |             | PASS  |
|           |      |     | 1       | 5795.0                 | 5794.978868                               | -3.65        |             | PASS  |
|           | 80M  | 155 | 0       | 5775.0                 | 5774.963418                               | -6.33        |             | PASS  |
|           |      |     | 1       | 5775.0                 | 5774.958255                               | -7.23        |             | PASS  |
| LT/NV     | 20M  | 149 | 0       | 5745.0                 | 5744.953230                               | -8.14        |             | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.951918                               | -8.37        |             | PASS  |
|           |      | 157 | 0       | 5785.0                 | 5784.951055                               | -8.46        |             | PASS  |
|           |      |     | 1       | 5785.0                 | 5784.950318                               | -8.59        |             | PASS  |
|           |      | 165 | 0       | 5825.0                 | 5824.950693                               | -8.46        |             | PASS  |
|           |      |     | 1       | 5825.0                 | 5824.949705                               | -8.63        |             | PASS  |
|           | 40M  | 151 | 0       | 5755.0                 | 5754.950768                               | -8.55        |             | PASS  |
|           |      |     | 1       | 5755.0                 | 5754.950080                               | -8.67        |             | PASS  |
|           |      | 159 | 0       | 5795.0                 | 5794.977743                               | -3.84        |             | PASS  |
|           |      |     | 1       | 5795.0                 | 5794.965618                               | -5.93        |             | PASS  |
|           | 80M  | 155 | 0       | 5775.0                 | 5774.956668                               | -7.5         |             | PASS  |
|           |      |     | 1       | 5775.0                 | 5774.955905                               | -7.64        |             | PASS  |
| HT/NV     | 20M  | 149 | 0       | 5745.0                 | 5744.951418                               | -8.46        |             | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.951055                               | -8.52        |             | PASS  |
|           |      | 157 | 0       | 5785.0                 | 5784.949855                               | -8.67        |             | PASS  |
|           |      |     | 1       | 5785.0                 | 5784.949705                               | -8.69        |             | PASS  |
|           |      | 165 | 0       | 5825.0                 | 5824.949317                               | -8.7         |             | PASS  |
|           |      |     | 1       | 5825.0                 | 5824.949242                               | -8.71        |             | PASS  |
|           | 40M  | 151 | 0       | 5755.0                 | 5754.949792                               | -8.72        |             | PASS  |
|           |      |     | 1       | 5755.0                 | 5754.949080                               | -8.85        |             | PASS  |
|           |      | 159 | 0       | 5795.0                 | 5794.964568                               | -6.11        |             | PASS  |
|           |      |     | 1       | 5795.0                 | 5794.964105                               | -6.19        |             | PASS  |
|           | 80M  | 155 | 0       | 5775.0                 | 5774.955330                               | -7.74        |             | PASS  |
|           |      |     | 1       | 5775.0                 | 5774.954755                               | -7.83        |             | PASS  |
| -10°C/NV  | 20M  | 149 | 0       | 5745.0                 | 5744.950693                               | -8.58        |             | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.950555                               | -8.61        |             | PASS  |
|           |      | 157 | 0       | 5785.0                 | 5784.949230                               | -8.78        |             | PASS  |
|           |      |     | 1       | 5785.0                 | 5784.949142                               | -8.79        |             | PASS  |
|           |      | 165 | 0       | 5825.0                 | 5824.948880                               | -8.78        |             | PASS  |
|           |      |     | 1       | 5825.0                 | 5824.948655                               | -8.81        |             | PASS  |
|           | 40M  | 151 | 0       | 5755.0                 | 5754.948980                               | -8.87        |             | PASS  |
|           |      |     | 1       | 5755.0                 | 5754.948830                               | -8.89        |             | PASS  |
|           |      | 159 | 0       | 5795.0                 | 5794.963418                               | -6.31        |             | PASS  |
|           |      |     | 1       | 5795.0                 | 5794.962993                               | -6.39        |             | PASS  |
|           | 80M  | 155 | 0       | 5775.0                 | 5774.954105                               | -7.95        |             | PASS  |
|           |      |     | 1       | 5775.0                 | 5774.953705                               | -8.02        |             | PASS  |
| 0°C/NV    | 20M  | 149 | 0       | 5745.0                 | 5744.950430                               | -8.63        |             | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.950205                               | -8.67        |             | PASS  |
|           |      | 157 | 0       | 5785.0                 | 5784.949080                               | -8.8         |             | PASS  |
|           |      |     | 1       | 5785.0                 | 5784.948967                               | -8.82        |             | PASS  |
|           |      | 165 | 0       | 5825.0                 | 5824.948542                               | -8.83        |             | PASS  |
|           |      |     | 1       | 5825.0                 | 5824.948492                               | -8.84        |             | PASS  |
|           | 40M  | 151 | 0       | 5755.0                 | 5754.948767                               | -8.9         |             | PASS  |
|           |      |     | 1       | 5755.0                 | 5754.948655                               | -8.92        |             | PASS  |
|           |      | 159 | 0       | 5795.0                 | 5794.962518                               | -6.47        |             | PASS  |
|           |      |     | 1       | 5795.0                 | 5794.961680                               | -6.61        |             | PASS  |
|           | 80M  | 155 | 0       | 5775.0                 | 5774.953255                               | -8.09        |             | PASS  |
|           |      |     | 1       | 5775.0                 | 5774.953180                               | -8.11        |             | PASS  |
| 10°C/NV   | 20M  | 149 | 0       | 5745.0                 | 5744.950043                               | -8.7         |             | PASS  |
|           |      |     | 1       | 5745.0                 | 5744.949967                               | -8.71        |             | PASS  |

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and

Accreditation Administration of the People's Republic of China : <http://yz.cnca.cn>



|         |     |     |   |        |             |       |      |
|---------|-----|-----|---|--------|-------------|-------|------|
|         |     | 157 | 0 | 5785.0 | 5784.948817 | -8.85 | PASS |
|         |     |     | 1 | 5785.0 | 5784.948842 | -8.84 | PASS |
|         |     | 165 | 0 | 5825.0 | 5824.948355 | -8.87 | PASS |
|         |     |     | 1 | 5825.0 | 5824.948280 | -8.88 | PASS |
|         | 40M | 151 | 0 | 5755.0 | 5754.948592 | -8.93 | PASS |
|         |     |     | 1 | 5755.0 | 5754.948542 | -8.94 | PASS |
|         |     | 159 | 0 | 5795.0 | 5794.960743 | -6.77 | PASS |
|         |     |     | 1 | 5795.0 | 5794.960393 | -6.83 | PASS |
|         | 80M | 155 | 0 | 5775.0 | 5774.953143 | -8.11 | PASS |
|         |     |     | 1 | 5775.0 | 5774.953168 | -8.11 | PASS |
| 20°C/NV | 20M | 149 | 0 | 5745.0 | 5744.949855 | -8.73 | PASS |
|         |     |     | 1 | 5745.0 | 5744.949642 | -8.77 | PASS |
|         |     | 157 | 0 | 5785.0 | 5784.948717 | -8.86 | PASS |
|         |     |     | 1 | 5785.0 | 5784.948642 | -8.88 | PASS |
|         |     | 165 | 0 | 5825.0 | 5824.948242 | -8.89 | PASS |
|         |     |     | 1 | 5825.0 | 5824.948180 | -8.9  | PASS |
|         | 40M | 151 | 0 | 5755.0 | 5754.948467 | -8.95 | PASS |
|         |     |     | 1 | 5755.0 | 5754.948217 | -9.0  | PASS |
|         |     | 159 | 0 | 5795.0 | 5794.960205 | -6.87 | PASS |
|         |     |     | 1 | 5795.0 | 5794.959893 | -6.92 | PASS |
|         | 80M | 155 | 0 | 5775.0 | 5774.952855 | -8.16 | PASS |
|         |     |     | 1 | 5775.0 | 5774.952580 | -8.21 | PASS |
| 30°C/NV | 20M | 149 | 0 | 5745.0 | 5744.949517 | -8.79 | PASS |
|         |     |     | 1 | 5745.0 | 5744.949417 | -8.8  | PASS |
|         |     | 157 | 0 | 5785.0 | 5784.948405 | -8.92 | PASS |
|         |     |     | 1 | 5785.0 | 5784.948380 | -8.92 | PASS |
|         |     | 165 | 0 | 5825.0 | 5824.948080 | -8.91 | PASS |
|         |     |     | 1 | 5825.0 | 5824.947855 | -8.95 | PASS |
|         | 40M | 151 | 0 | 5755.0 | 5754.948167 | -9.01 | PASS |
|         |     |     | 1 | 5755.0 | 5754.948142 | -9.01 | PASS |
|         |     | 159 | 0 | 5795.0 | 5794.959705 | -6.95 | PASS |
|         |     |     | 1 | 5795.0 | 5794.959455 | -7.0  | PASS |
|         | 80M | 155 | 0 | 5775.0 | 5774.952568 | -8.21 | PASS |
|         |     |     | 1 | 5775.0 | 5774.952530 | -8.22 | PASS |
| 40°C/NV | 20M | 149 | 0 | 5745.0 | 5744.949392 | -8.81 | PASS |
|         |     |     | 1 | 5745.0 | 5744.949317 | -8.82 | PASS |
|         |     | 157 | 0 | 5785.0 | 5784.948417 | -8.92 | PASS |
|         |     |     | 1 | 5785.0 | 5784.948405 | -8.92 | PASS |
|         |     | 165 | 0 | 5825.0 | 5824.947842 | -8.95 | PASS |
|         |     |     | 1 | 5825.0 | 5824.947905 | -8.94 | PASS |
|         | 40M | 151 | 0 | 5755.0 | 5754.948205 | -9.0  | PASS |
|         |     |     | 1 | 5755.0 | 5754.948180 | -9.0  | PASS |
|         |     | 159 | 0 | 5795.0 | 5794.958955 | -7.08 | PASS |
|         |     |     | 1 | 5795.0 | 5794.958805 | -7.11 | PASS |
|         | 80M | 155 | 0 | 5775.0 | 5774.952418 | -8.24 | PASS |
|         |     |     | 1 | 5775.0 | 5774.952005 | -8.31 | PASS |



### 3.8. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### Test Result

Complies



### 3.9. Dynamic Frequency Selection

#### Requirement

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement                     | Operational Mode |                                |                             |
|---------------------------------|------------------|--------------------------------|-----------------------------|
|                                 | Master           | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period            | Yes              | Not required                   | Yes                         |
| DFS Detection Threshold         | Yes              | Not required                   | Yes                         |
| Channel Availability Check Time | Yes              | Not required                   | Not required                |
| U-NII Detection Bandwidth       | Yes              | Not required                   | Yes                         |

Table 2: Applicability of DFS requirements during normal operation

| Requirement                       | Operational Mode                             |                                |
|-----------------------------------|----------------------------------------------|--------------------------------|
|                                   | Master Device or Client with Radar Detection | Client Without Radar Detection |
| DFS Detection Threshold           | Yes                                          | Not required                   |
| Channel Closing Transmission Time | Yes                                          | Yes                            |
| Channel Move Time                 | Yes                                          | Yes                            |
| U-NII Detection Bandwidth         | Yes                                          | Not required                   |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
|-------------------------------------------------------------------|----------------------------------------------|------------------------------------------------------|
| U-NII Detection Bandwidth and Statistical Performance Check       | All BW modes must be tested                  | Not required                                         |
| Channel Move Time and Channel Closing Transmission Time           | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests                                                   | Any single BW mode                           | Not required                                         |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Limit**

## 1. DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

| Maximum Transmit Power                                                       | Value (See Notes 1, 2, and 3) |
|------------------------------------------------------------------------------|-------------------------------|
| EIRP $\geq$ 200 milliwatt                                                    | -64 dBm                       |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                 | -62 dBm                       |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm                       |

Note 1: This is the level at the input of the receiver assuming a 0dBi receive antenna.  
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

## 2. DFS Response Requirements

Table 4: DFS Response Requirement Values

| Parameter                         | Value                                                                                                  |
|-----------------------------------|--------------------------------------------------------------------------------------------------------|
| Non-occupancy period              | Minimum 30 minutes                                                                                     |
| Channel Availability Check Time   | 60 seconds                                                                                             |
| Channel Move Time                 | 10 seconds See Note 1.                                                                                 |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| U-NII Detection Bandwidth         | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.                                |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Radar Test Waveforms**

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.



Table 5 Short Pulse Radar Test Waveforms

| Radar Type                                                                                                                           | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                                                                     | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                    | 1                  | 1428                                                                                                                                                          | 18                                                                                                                                   | See Note 1                                 | See Note 1               |
| 1                                                                                                                                    | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | $\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$ | 60%                                        | 30                       |
|                                                                                                                                      |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                                                                      |                                            |                          |
| 2                                                                                                                                    | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                                                                                | 60%                                        | 30                       |
| 3                                                                                                                                    | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                                                                                | 60%                                        | 30                       |
| 4                                                                                                                                    | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                                                                                | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                          |                    |                                                                                                                                                               |                                                                                                                                      | 80%                                        | 120                      |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                                                                      |                                            |                          |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066 μsec is selected, the number of pulses

$$\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\}$$

would be Round up  $\{17.2\} = 18$ .

Table 5a - Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|------------------------------------------------|------------------------------------------|
| 1                                 | 1930.5                                         | 518                                      |
| 2                                 | 1858.7                                         | 538                                      |
| 3                                 | 1792.1                                         | 558                                      |
| 4                                 | 1730.1                                         | 578                                      |
| 5                                 | 1672.2                                         | 598                                      |
| 6                                 | 1618.1                                         | 618                                      |
| 7                                 | 1567.4                                         | 638                                      |
| 8                                 | 1519.8                                         | 658                                      |



| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|------------------------------------------------|------------------------------------------|
| 9                                 | 1474.9                                         | 678                                      |
| 10                                | 1432.7                                         | 698                                      |
| 11                                | 1392.8                                         | 718                                      |
| 12                                | 1355                                           | 738                                      |
| 13                                | 1319.3                                         | 758                                      |
| 14                                | 1285.3                                         | 778                                      |
| 15                                | 1253.1                                         | 798                                      |
| 16                                | 1222.5                                         | 818                                      |
| 17                                | 1193.3                                         | 838                                      |
| 18                                | 1165.6                                         | 858                                      |
| 19                                | 1139                                           | 878                                      |
| 20                                | 1113.6                                         | 898                                      |
| 21                                | 1089.3                                         | 918                                      |
| 22                                | 1066.1                                         | 938                                      |
| 23                                | 326.2                                          | 3066                                     |

Table 6 – Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|--------------------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30                       |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Table 7 – Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30                       |

For the Frequency Hopping Radar Type, the same Burst parameters are used for each wave form. The hopping sequence is different for each wave form and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250–5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

## Calibration of Radar Waveform

### Radar Waveform Calibration Procedure


- 1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- 2) The interference Radar Detection Threshold Level is  $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$  that had been taken into account the output power range and antenna gain.
- 3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset  $-1.0\text{dB}$  to compensate RF cable loss  $1.0\text{dB}$ .
- 4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar waveform.

### Conducted Calibration Setup

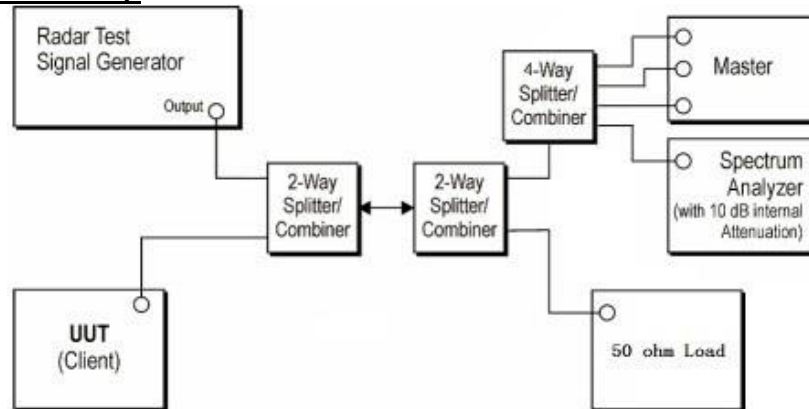

### Test Configuration

#### Setup for Client with injection at the Master

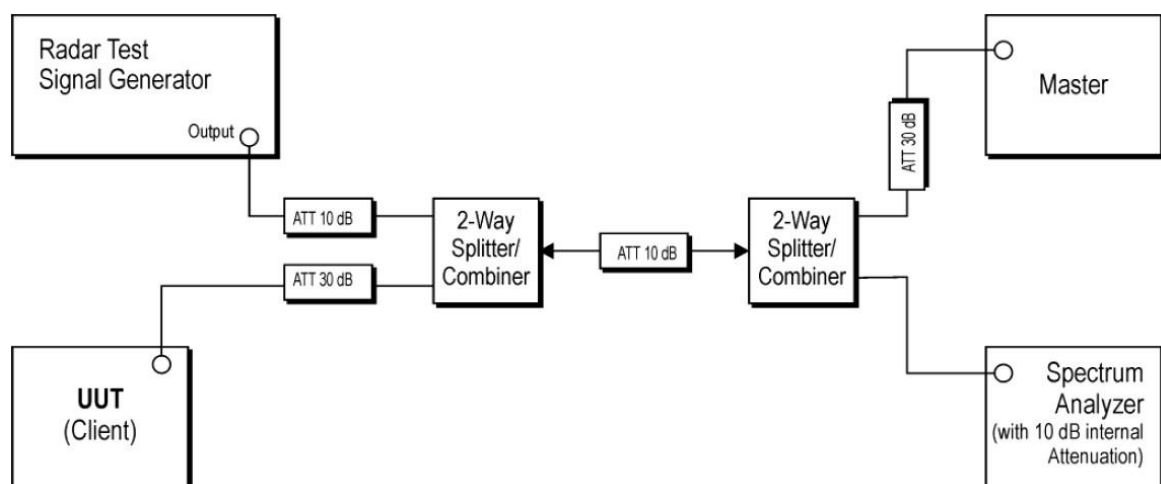



### Test Procedure

1. The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device
3. A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
5. When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type
7. Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (0.3ms) = S (12000ms) / B (4000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C (ms) = N \times Dwell (0.3ms)$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
8. Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

### Test Mode

Please refer to the clause 2.4.

### Test Result

☐ Passed

☒ Not Applicable

\*\*\*\*\*THE END\*\*\*\*\*