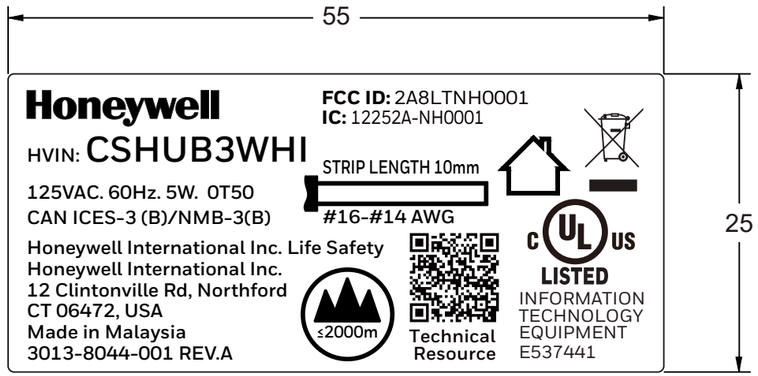

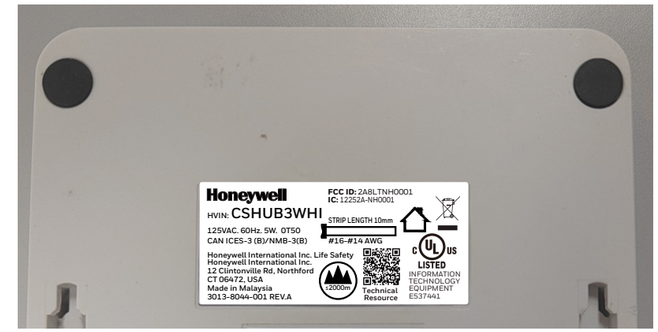

1. MATERIAL: MATT WHITE POLYESTER FILM, AND PERMANENT PRESSURE-SENSITIVE ACRYLIC ADHESIVE BACKING, 8 LK LINER.
2. MUST BE A UL RECOGNIZED COMPONENT LABLE. PER UL MARKING AND LABELING SYSTEM PGJI2, FOR APPLICATION ON ABS, AT A TEMPERATURE RANGE OF -50°F TO 200°F .
3. LABELS TO BE SUPPLIED ON CONTINUOUS RELEASE LINER IN ROLL FORM. SCRAP TO BE REMOVED.
4. ALL PRINTING TO BE BLACK (PMS PROCESS BLACK C). USING INDELIBLE INK.
5. ALL TOLERANCE +/-0.5MM UNLESS OTHER SPECIFICATION.
6. KEY: CUT————
7. THIS PRODUCT MUST BE PRODUCED USING COMPLIANT MATERIALS AND PROCESSES PER ES 50040083.

NOT RELEASED

REV.	DATE	E.O.	REV.	DATE	E.O.
A	06-28-2021	0165149			

DIMENSIONS & TOLERANCES PER ANSI Y14.5M-1994 & ECC ENGINEERING STANDARDS

MAT'L. MAT'L. SPEC. (1)
OR ( )

FUNCTIONAL DIMENSIONING:
ALL DIMENSIONED AND UNDIMENSIONED GEOMETRY AND TOLERANCING ON THIS DRAWING IS DEFINED AND CONTROLLED BY THE DATABASE FILE. KEY INFORMATION IS REPRESENTED BY THIS DRAWING CONTAINING FUNCTIONAL DIMENSIONS.
CONTROLLED BY DATABASE FILE:

FIRST USED ON CSHUB3WHI
DIMENSIONS ARE IN: ☐ INCHES ■ MILLIMETERS
THIRD ANGLE PROJECTION

DRAFT CALLOUTS
INDICATES DECREASING DIMENSION
INDICATES INCREASING DIMENSION

–TOLERANCE UNLESS NOTED–
MACHINED S ±5° FORMED S +2° -1°

MILLIMETERS				INCHES	
OVER		INCLUDING			
0	TO	6	± 0.1	.0	± .02
6	TO	30	± 0.2	.00	± .01
30	TO	100	± 0.3	.000	± .010
100	TO	300	± 0.5		
300	TO	1000	± 0.8		

DWN. YUNA 13-SEP-2023
DES. YUNA WU
NEXT ASS'Y
REFERENCE
DEV. NO. 90130
HONEYWELL CONFIDENTIAL AND PROPRIETARY
SIZE B

Honeywell
ENVIRONMENTAL & COMBUSTION CONTROLS
NAME
LABEL, NAMEPLATE
PART NO. 3013-8044-001
REV. A
SCALE 2:1
SHT 1 OF 1

DOC. FORMAT 1-11
ILLUSTRATOR ARCHIVE REF.NO. 3013-8044-001_A.ai (MAC)