



**FCC 47 CFR PART 15 SUBPART C**

**TEST REPORT**

*For*

**Infrared Ear Thermometer**

**MODEL NUMBER: YHT208**

**PROJECT NUMBER: 4791571893**

**REPORT NUMBER: 4791571893-1**

**FCC ID: 2A2JJ-YHT208**

**ISSUE DATE: Dec. 30, 2024**

*Prepared for*

**JIANGSU YUYUE MEDICAL EQUIPMENT & SUPPLY CO., LTD.**

*Prepared by*

**UL-CCIC COMPANY LIMITED**

**No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China**

**Tel: +86 512-6808 6400**

**Fax: +86 512-6808 4099**

**Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	12/30/2024	Initial Issue	

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	7
4.2. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. CHANNEL LIST .....	9
5.4. TEST CHANNEL CONFIGURATION.....	9
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	9
5.6. DESCRIPTION OF AVAILABLE ANTENNAS .....	10
5.7. THE WORSE CASE CONFIGURATIONS .....	10
5.8. TEST ENVIRONMENT .....	10
5.9. DESCRIPTION OF TEST SETUP.....	11
5.10. MEASURING INSTRUMENT AND SOFTWARE USED.....	13
<b>6. MEASUREMENT METHODS .....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
7.1. ON TIME AND DUTY CYCLE.....	15
7.2. 6 dB BANDWIDTH.....	17
7.3. CONDUCTED OUTPUT POWER.....	22
7.4. POWER SPECTRAL DENSITY .....	24
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	29
<b>8. RADIATED TEST RESULTS.....</b>	<b>44</b>
8.1. LIMITS AND PROCEDURE .....	44
8.2. TEST ENVIRONMENT .....	50
8.3. RESTRICTED BANDEDGE .....	50
8.4. SPURIOUS EMISSIONS .....	59
<b>9. ANTENNA REQUIREMENTS.....</b>	<b>91</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: JIANGSU YUYUE MEDICAL EQUIPMENT & SUPPLY CO., LTD.  
Address: No.1 Baisheng Road, Development Zone, Danyang, Jiangsu  
212300 CHINA.

### Manufacturer Information

Company Name: JIANGSU YUYUE MEDICAL EQUIPMENT & SUPPLY CO., LTD.  
Address: No.1 Baisheng Road, Development Zone, Danyang, Jiangsu  
212300 CHINA.

### Factory Information

Company Name: JIANGSU YUYUE MEDICAL EQUIPMENT & SUPPLY CO., LTD.  
Address: No.1 Baisheng Road, Development Zone, Danyang, Jiangsu  
212300 CHINA.


### EUT Description

Product Name: Infrared Ear Thermometer  
Model Number: YHT208  
Series Model Number: /  
Model Difference: /  
Sample Number: 7870870-S001  
Data of Receipt Sample: Dec. 02, 2024  
Test Date: Dec. 02, 2024~ Dec. 29, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6 dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (2)	PASS
2	Conducted Power	FCC 15.247 (b) (3)	PASS
3	Power Spectral Density	FCC 15.247 (e)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
6	Conducted Emission Test for AC Power Port	FCC 15.207	N/A (See Note 1)
7	Antenna Requirement	FCC 15.203	PASS
Note: 1. The EUE was powered by battery. 2. The measurement result for the sample received is < Pass > according to < ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15C > when < Simple Acceptance > decision rule is applied.			

Prepared By:




Tom Tang

Reviewed By:



Emily Wang

Authorized By:



Kevin Shen

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, FCC 47 CFR Part 2, FCC 47 CFR Part 15, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<b>A2LA (Certificate No.: 4829.01)</b> <b>UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</b> <b>FCC (FCC Designation No.: CN1247)</b> <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b> <b>IC (IC Designation No.: 25056; CAB No.: CN0073)</b> <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS.

Note 3: The test anechoic chamber in UL-CCIC COMPANY LIMITED had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.1dB
DTS Bandwidth	1.9%
Maximum Conducted Output Power	1.3dB
Maximum Power Spectral Density Level	1.5dB
Band-edge Compliance	1.9%
Unwanted Emissions in Non-restricted Freq Bands	9kHz-30MHz: $\pm 0.90$ dB 30MHz-1GHz: $\pm 1.5$ dB 1GHz-12.75GHz: $\pm 1.9$ dB 12.75GHz-26.5GHz: $\pm 2.1$ dB
Radiation Emission test (include Fundamental emission) (9kHz-30MHz)	3.4dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	3.4dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	3.5dB (1GHz-18GHz)
	3.9dB (18GHz-26.5GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment:	Infrared Ear Thermometer	
Model Name:	YHT208	
Technology:	Bluetooth - Low Energy	
Transmit Frequency Range:	2402 MHz ~ 2480 MHz	
Modulation:	GFSK	
Data Rate:	LE 1M	1 Mbps
	LE 2M	2 Mbps
Test Software of EUT:	SSCOM V5.13.1 (manufacturer declare)	
Antenna Type:	PCB Antenna	
Antenna Gain:	-1.72 dBi	
	Note: This data is provided by customer and our lab isn't responsible for this data.	



## 5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max Output Power(dBm)
BLE 1M	2402-2480	0-39[40]	0.99
BLE 2M	2402-2480	0-39[40]	1.03

## 5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel		Frequency
GFSK	Low Channel	CH 0	2402MHz
	Middle Channel	CH 19	2440MHz
	High Channel	CH 39	2480MHz

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		SSCOM V5.13.1		
Modulation Type	Transmit Antenna Number	Test Channel		
		LCH	MCH	HCH
GFSK	1	default	default	default

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2400-2483.5	PCB Antenna	-1.72 dBi

Note: This data is provided by customer and our lab isn't responsible for this data.

Test Mode	Transmit and Receive Mode	Description
BLE 1M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
BLE 2M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.

## 5.7. THE WORSE CASE CONFIGURATIONS

For BLE module, the product only supports 1 Mbps and 2 Mbps, both the two data rate were tested and the test result was recorded in this report.

## 5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	101kPa	
Temperature	TN	23 ~ 28°C
Voltage:	VL	N/A
	VN	DC 3.0V
	VH	N/A

Note: VL= Lower Extreme Test Voltage  
VN= Nominal Voltage  
VH= Upper Extreme Test Voltage  
TN= Normal Temperature

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Description
1	Laptop	ThinkPad	E580	Supplied by UL Lab
	Fixed Frequency Board	/	/	Supplied by UL Lab

### I/O PORT


Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	USB-TTL	USB	100cm Length	/

### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

**TEST SETUP**

The EUT can work in an engineer mode with a software through a laptop.

**SETUP DIAGRAM FOR TESTS**

## 5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	126700	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	126701	2023-11-25	2024-11-02	2025-11-01
Conducted Emissions Test (Software)							
Used	Description		Manufacturer		Name	Version	
<input checked="" type="checkbox"/>	Software for Conducted Emissions Test		R&S		EMC32	9.25.00	
Radiated Emissions Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR7	222993	2023-04-08	2024-03-23	2025-03-22
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR26	126703	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV3044	222992	2023-04-08	2024-03-23	2025-03-22
<input checked="" type="checkbox"/>	Receiver Antenna (9kHz-30MHz)	Schwarzbeck	FMZB 1513	155456	2021-06-03	2024-05-27	2027-05-26
<input checked="" type="checkbox"/>	Receiver Antenna (30MHz-1GHz)	Schwarzbeck	VULB 9168	171952	2021-07-05	2024-07-04	2027-07-03
<input checked="" type="checkbox"/>	Receiver Antenna (1GHz-18GHz)	R&S	HF907	126705	2019-01-27	2022-02-28	2025-02-27
<input checked="" type="checkbox"/>	Receiver Antenna (18GHz-26.5GHz)	Schwarzbeck	BBHA9170	126706	2019-02-29	2022-02-28	2025-02-27
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	Tonscned	TAP01018050	224539	2023-10-10	2024-10-10	2025-10-09
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	R&S	SCU-18D	2023-11-25	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Pre-amplification (To 26.5GHz)	R&S	SCU-26D	2023-11-25	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCGV12-2375-2400-2485-2510-40SS	1	2023-12-18	2024-12-17	2025-12-16
<input checked="" type="checkbox"/>	High Pass Filter	COM-MW	ZBF13-3-18G-01	2	2023-12-18	2024-12-17	2025-12-16
Radiated Emissions Test (Software)							
Used	Description		Manufacturer		Name	Version	
<input checked="" type="checkbox"/>	Software for Radiated Emissions Test		Tonscend		JS32-RE	5.0.0.2	
Antenna Port Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	155368	2023-04-08	2024-03-23	2025-03-22
<input checked="" type="checkbox"/>	Power Meter	MWT	MW100-RFCB	221694	2023-04-08	2024-03-23	2025-03-22
<input checked="" type="checkbox"/>	Attenuator	PASTERNAK	PE7087-6	1624	2023-04-08	2024-03-23	2025-03-22
Antenna Port Test (Software)							
Used	Description		Manufacturer		Name	Version	
<input checked="" type="checkbox"/>	Software for Antenna Port Test		Tonscend		JS1120-3 Test System	V3.2.22	

## 6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth and 99% Occupied Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	8.2
2	Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	8.3.1.3
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test for AC Power Port	ANSI C63.10-2013	6.2

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

FCC KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.0V

#### TEST RESULTS TABLE

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final VBW (kHz)
BLE 1M	100	100	1	100	0	0.01	0.01
BLE 2M	100	100	1	100	0	0.01	0.01

Note: 1) Duty Cycle Correction Factor=10log(1/x).  
 2) Where: x is Duty Cycle (Linear)  
 3) Where: T is On Time (transmit duration)

## TEST GRAPHS

### BLE 1M ON TIME AND DUTY CYCLE MID CHANNEL



### BLE 2M ON TIME AND DUTY CYCLE MID CHANNEL





## 7.2. 6 dB BANDWIDTH

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Frequency Span	Peak
Detector	For 6 dB Bandwidth: 100 kHz For 99% Occupied Bandwidth: 1% to 5% of the occupied bandwidth
RBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth: $\geq 3 \times \text{RBW}$
VBW	Max hold
Trace	Max hold
Sweep	Auto couple

a) Use the 99% power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

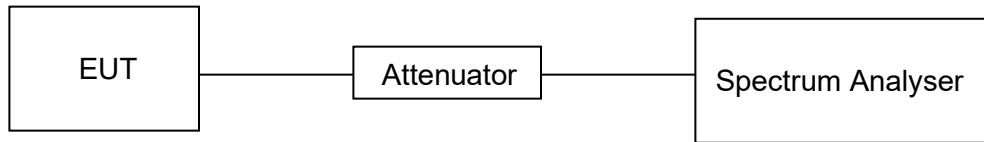
**TEST SETUP****TEST ENVIRONMENT**


Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.0V

**TEST RESULTS TABLE**

Test Mode	Test Channel	6dB bandwidth (MHz)	Result
BLE 1M	LCH	0.696	Pass
	MCH	0.708	Pass
	HCH	0.716	Pass
BLE 2M	LCH	1.264	Pass
	MCH	1.296	Pass
	HCH	1.316	Pass



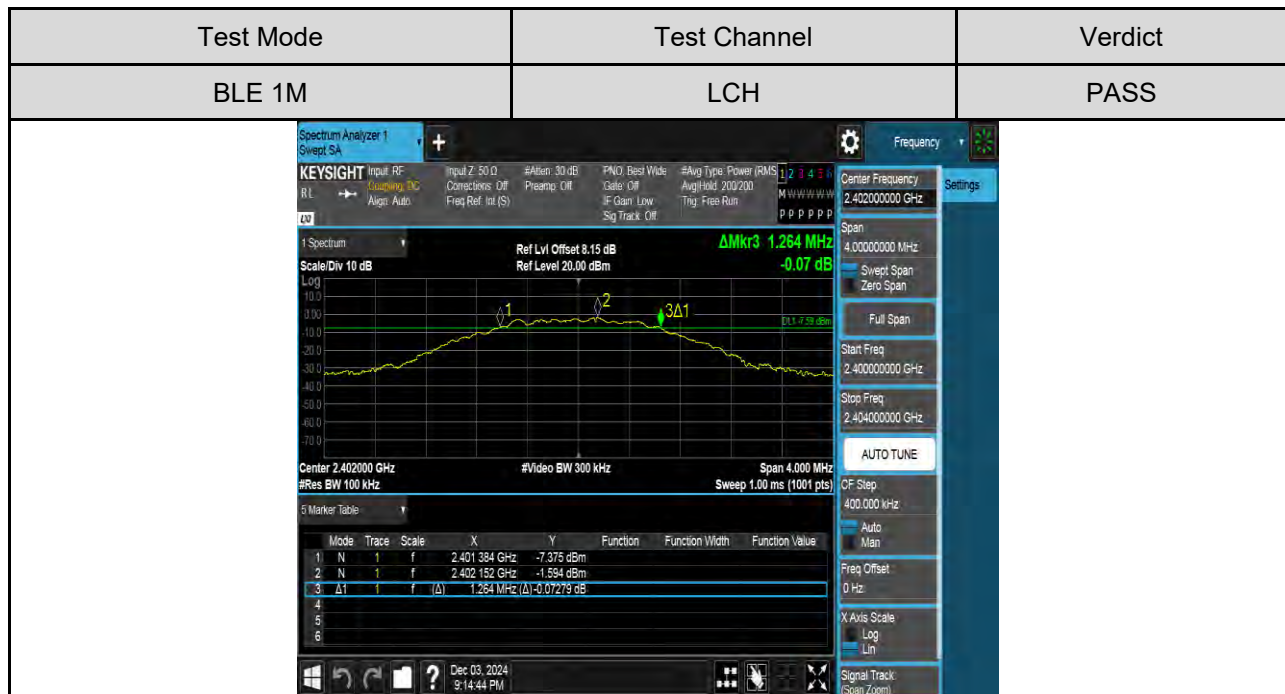

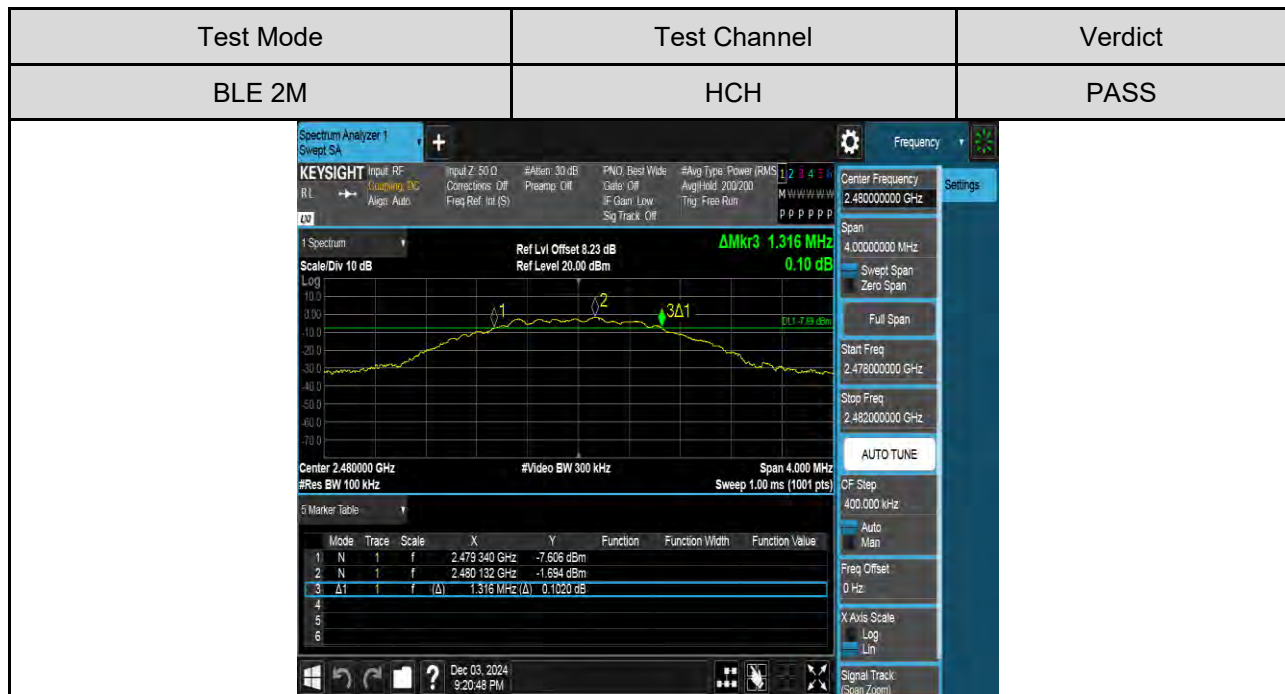

### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5


#### TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.  
Measure the power of each channel.  
PK Detector used for PK result.

#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.0V

#### TEST SETUP



**TEST RESULTS TABLE**

Test Mode	Test Channel	Maximum Conducted Output Power (PK)	LIMIT
		dBm	dBm
BLE 1M	LCH	0.74	30
	MCH	0.99	30
	HCH	0.89	30
BLE 2M	LCH	0.78	30
	MCH	1.03	30
	HCH	0.90	30



## 7.4. POWER SPECTRAL DENSITY

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.0V

### TEST SETUP






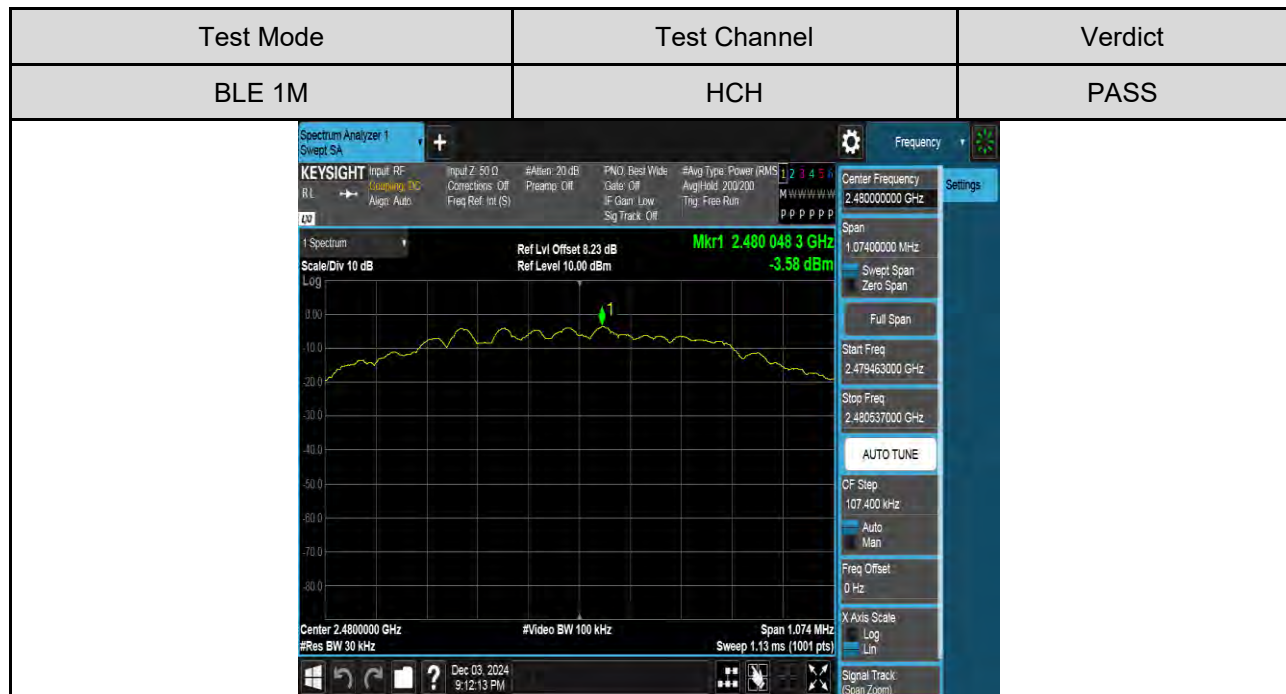
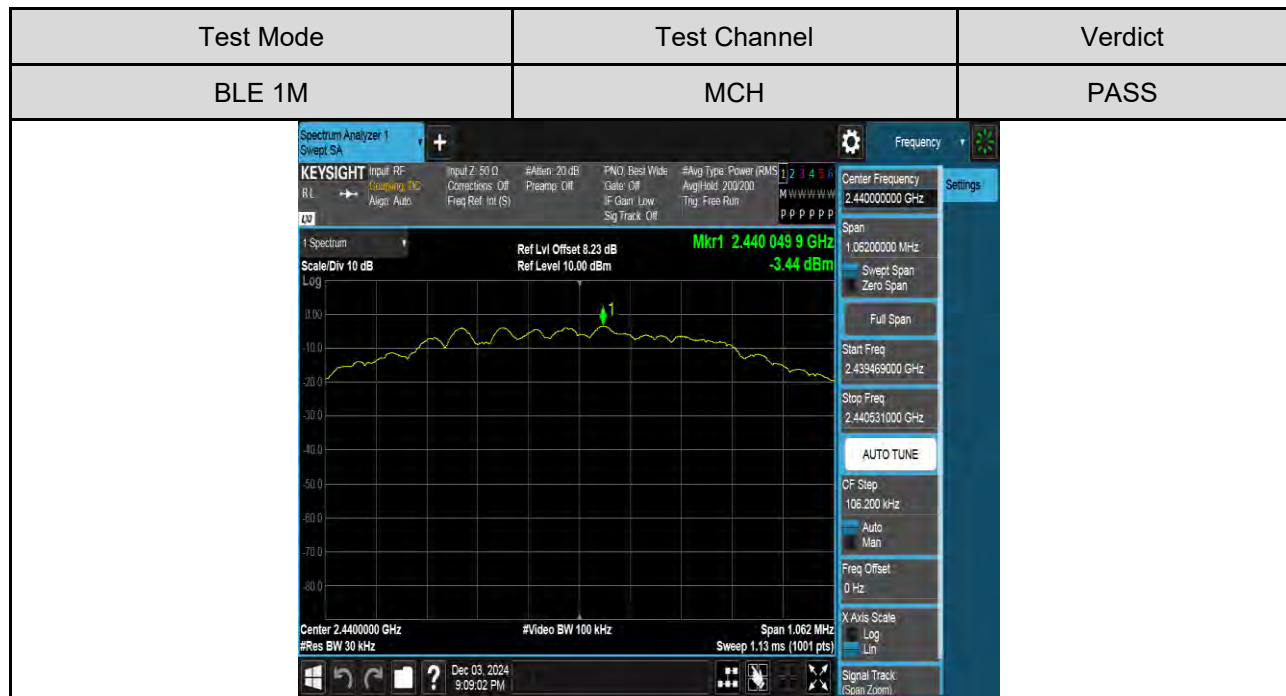
### TEST RESULTS TABLE


Test Mode	Test Channel	Maximum Peak power spectral density (dBm/30kHz)	Result
BLE 1M	LCH	-3.57	Pass
	MCH	-3.44	Pass
	HCH	-3.58	Pass
BLE 2M	LCH	-5.43	Pass
	MCH	-5.23	Pass
	HCH	-5.52	Pass


### TEST GRAPHS


Test Mode	Test Channel	Verdict
BLE 1M	LCH	PASS



Test Mode	Test Channel	Verdict
BLE 2M	LCH	PASS
		

Test Mode	Test Channel	Verdict
BLE 2M	MCH	PASS
		

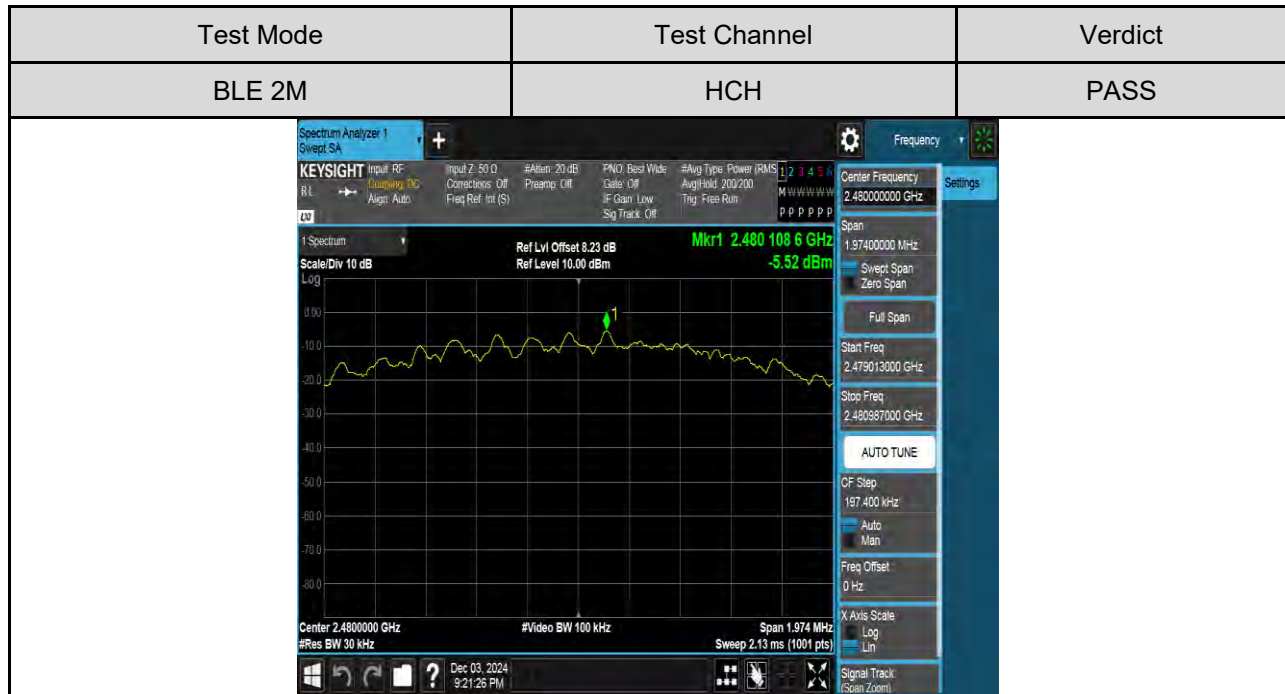

## 7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

### TEST SETUP



## TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.0V

## PART 1: REFERENCE LEVEL MEASUREMENT

### TEST RESULTS TABLE

Test Mode	Test Channel	Result[dBm]
BLE 1M	LCH	-0.30
	MCH	-0.09
	HCH	-0.17
BLE 2M	LCH	-1.77
	MCH	-1.58
	HCH	-1.78

## TEST GRAPHS

















**PART 2: CONDUCTED BANDEDGE****TEST RESULTS TABLE**

Test Mode	Test Channel	Result	Verdict
BLE 1M	LCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
BLE 2M	LCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS

### TEST GRAPHS

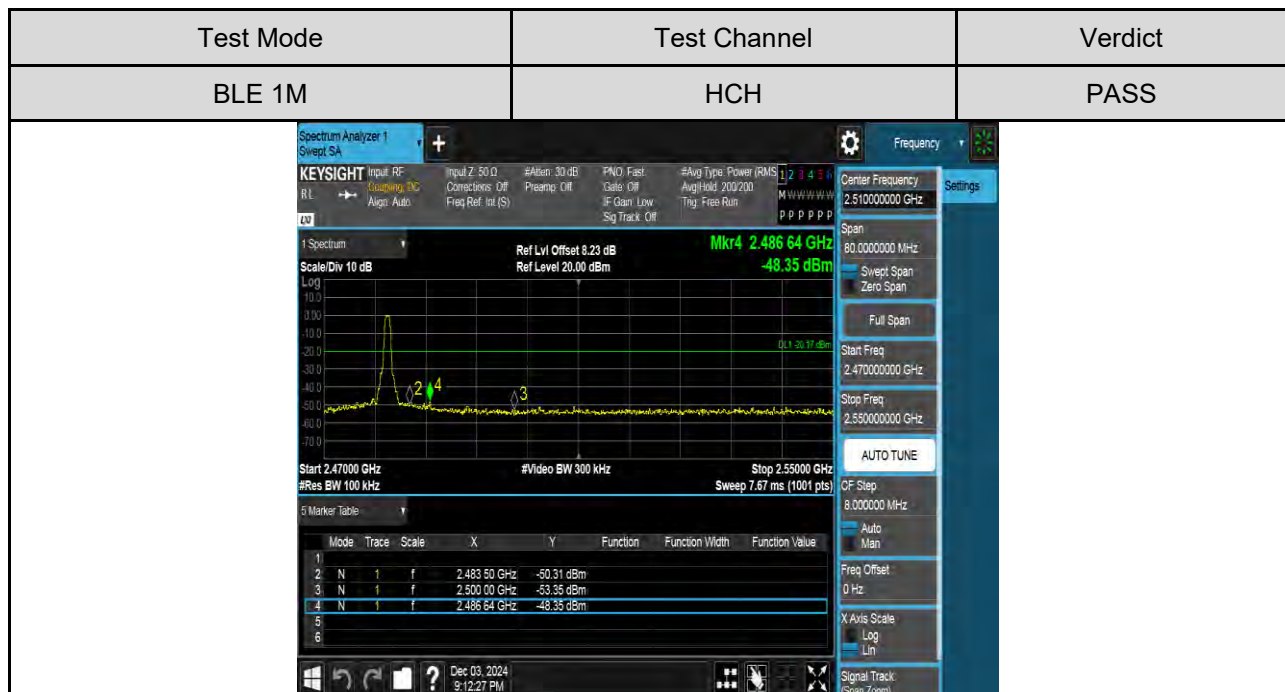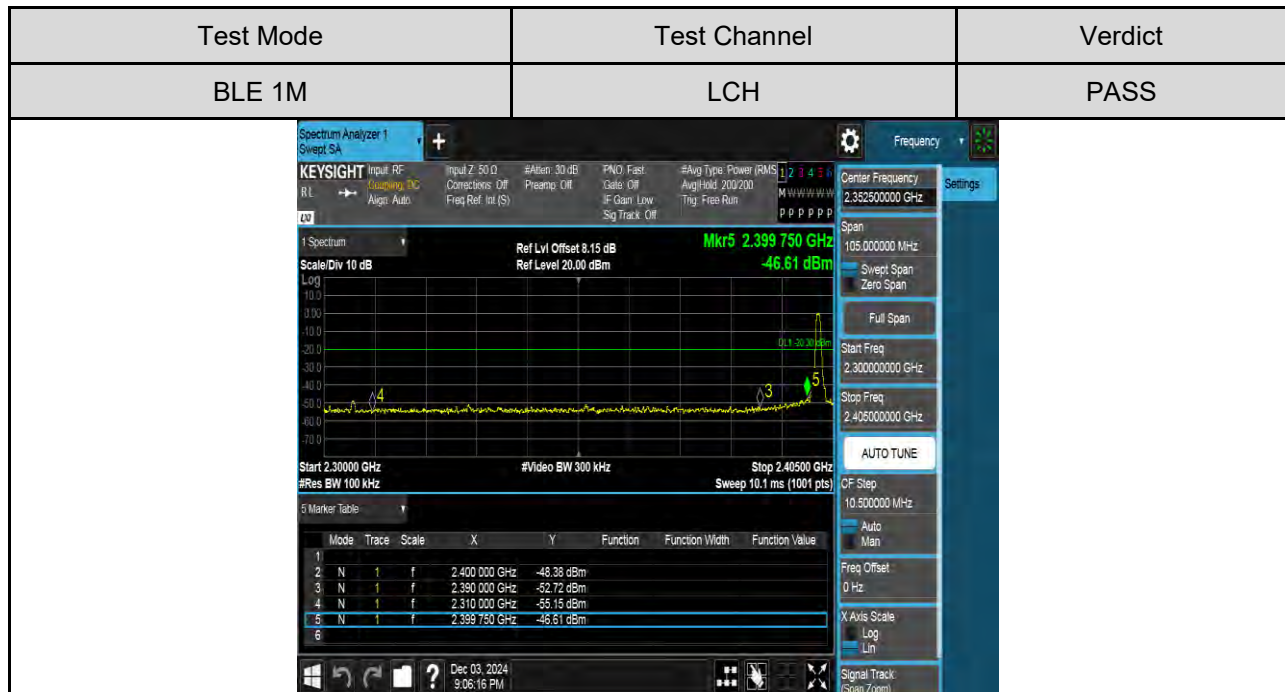

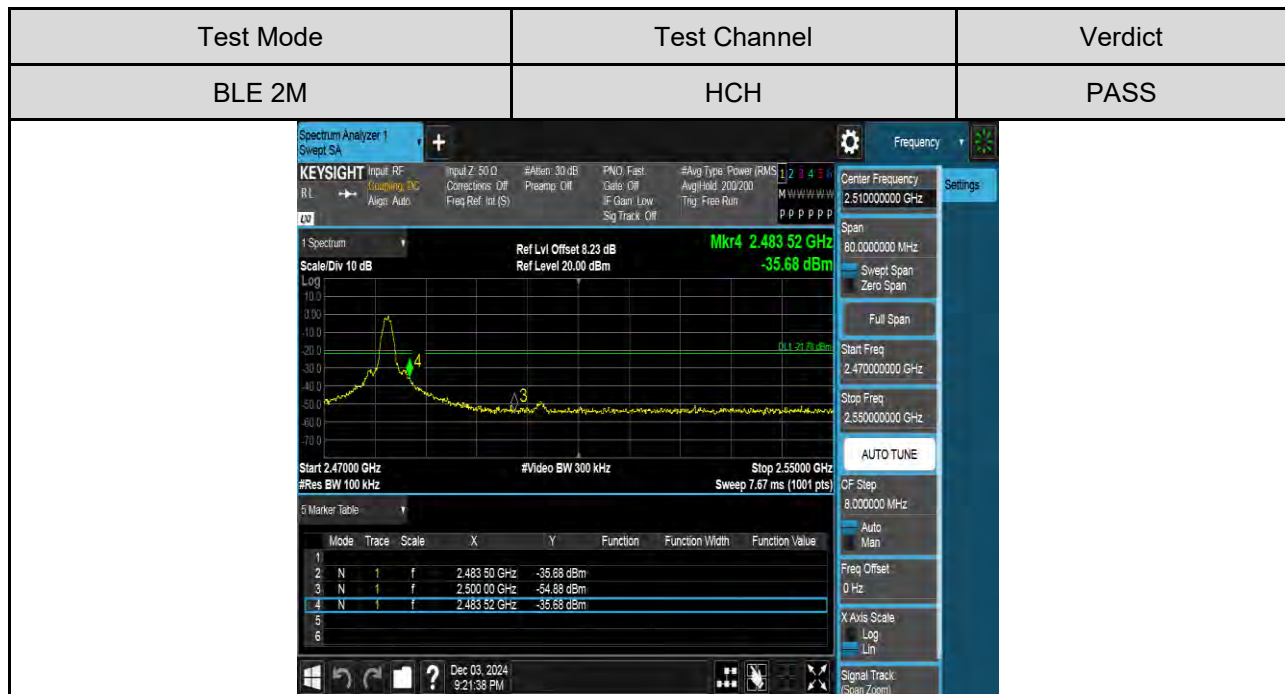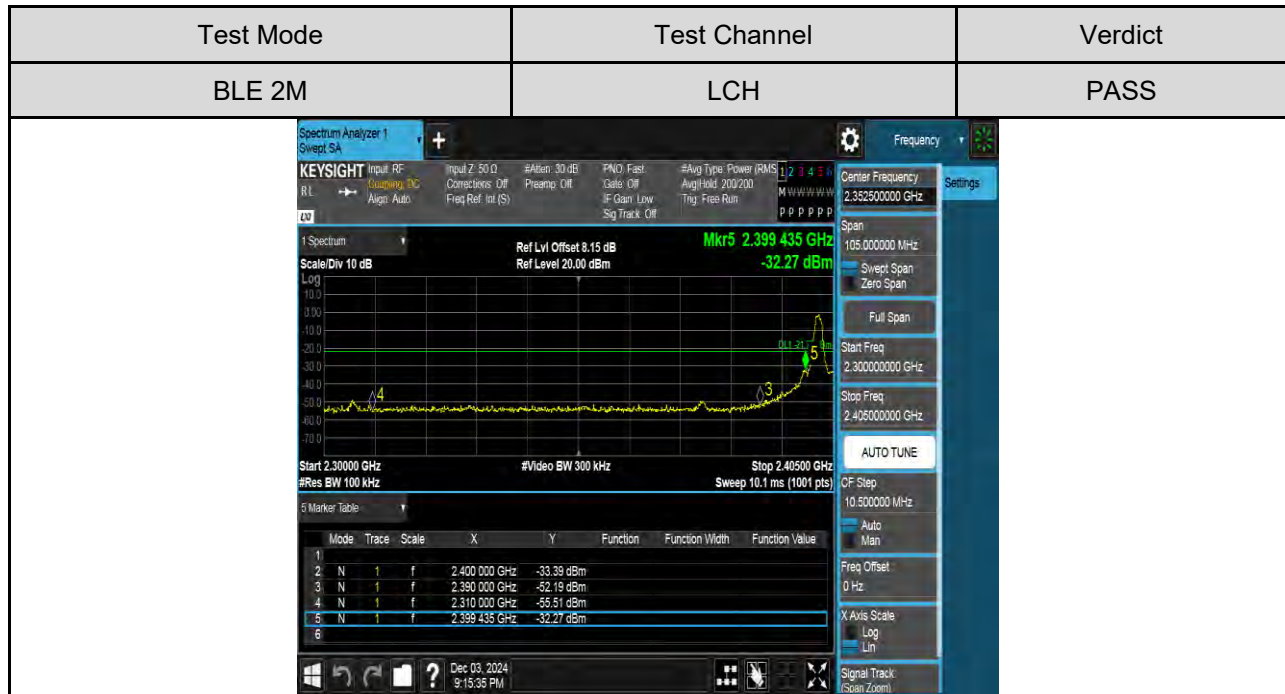


**PART 3: CONDUCTED SPURIOUS EMISSION****TEST RESULTS TABLE**

Test Mode	Test Channel	Result	Verdict
BLE 1M	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
BLE 2M	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS

## TEST GRAPHS

Test Mode	Channel	Verdict
BLE 1M	LCH	PASS

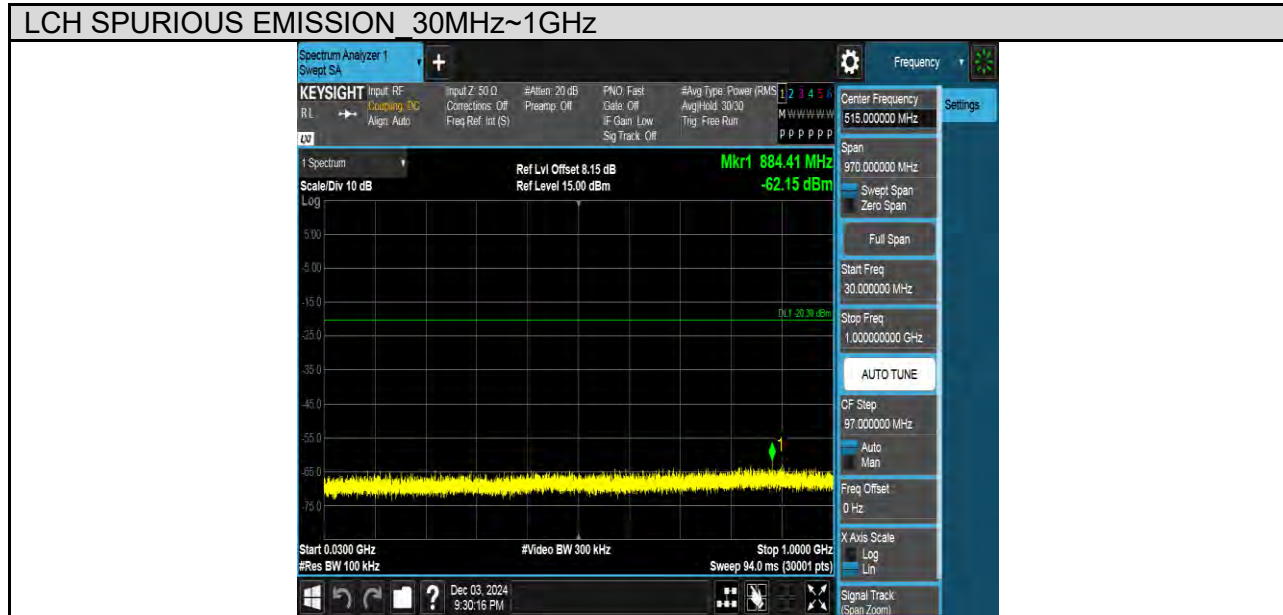



Test Mode	Channel	Verdict
BLE 1M	MCH	PASS

#### MCH SPURIOUS EMISSION 30MHz~1GHz




#### MCH SPURIOUS EMISSION 1GHz~26.5GHz



Test Mode	Channel	Verdict
BLE 1M	HCH	PASS

### HCH SPURIOUS EMISSION 30MHz~1GHz

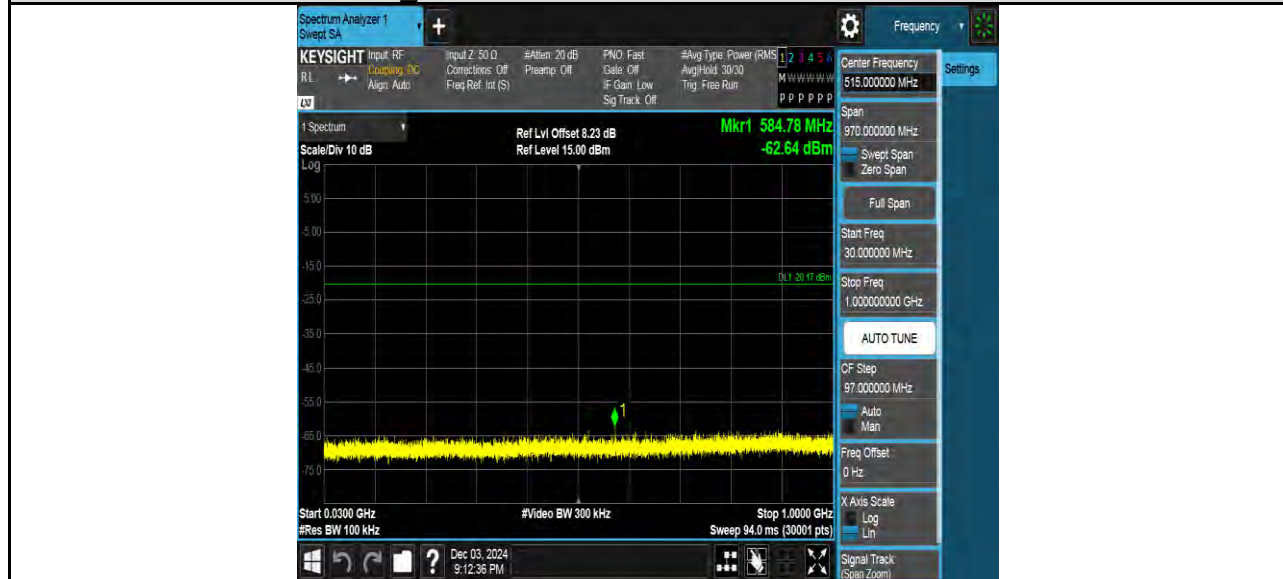


### HCH SPURIOUS EMISSION 1GHz~26.5GHz





Test Mode	Channel	Verdict
BLE 2M	LCH	PASS

#### LCH SPURIOUS EMISSION 30MHz~1GHz

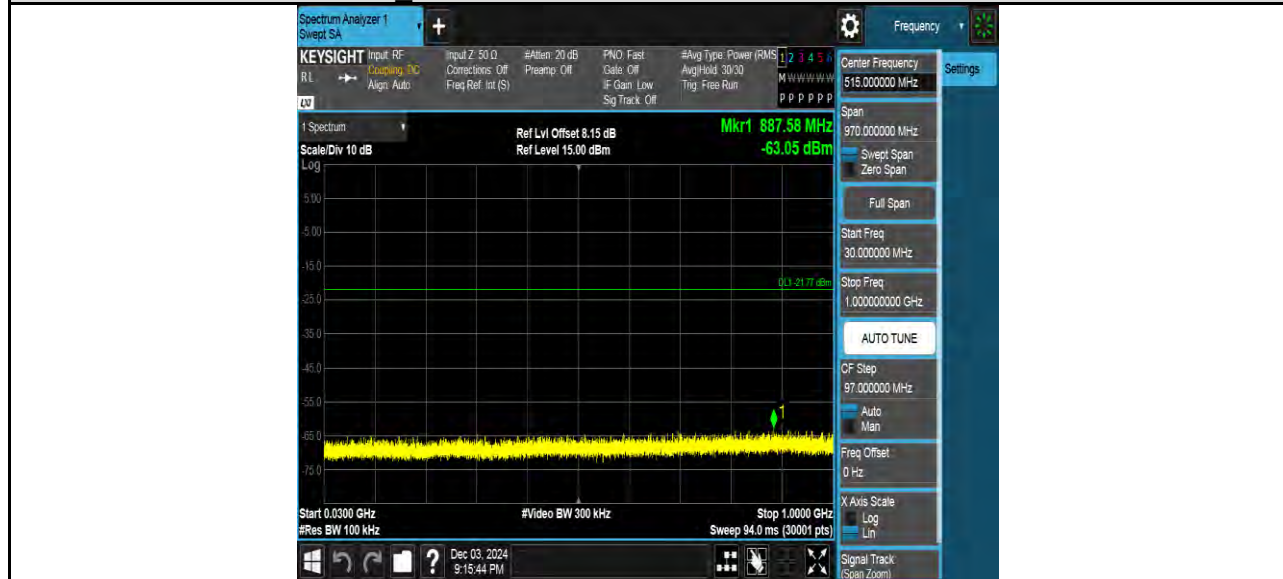


#### LCH SPURIOUS EMISSION 1GHz~26.5GHz



Test Mode	Channel	Verdict
BLE 2M	MCH	PASS

### MCH SPURIOUS EMISSION 30MHz~1GHz

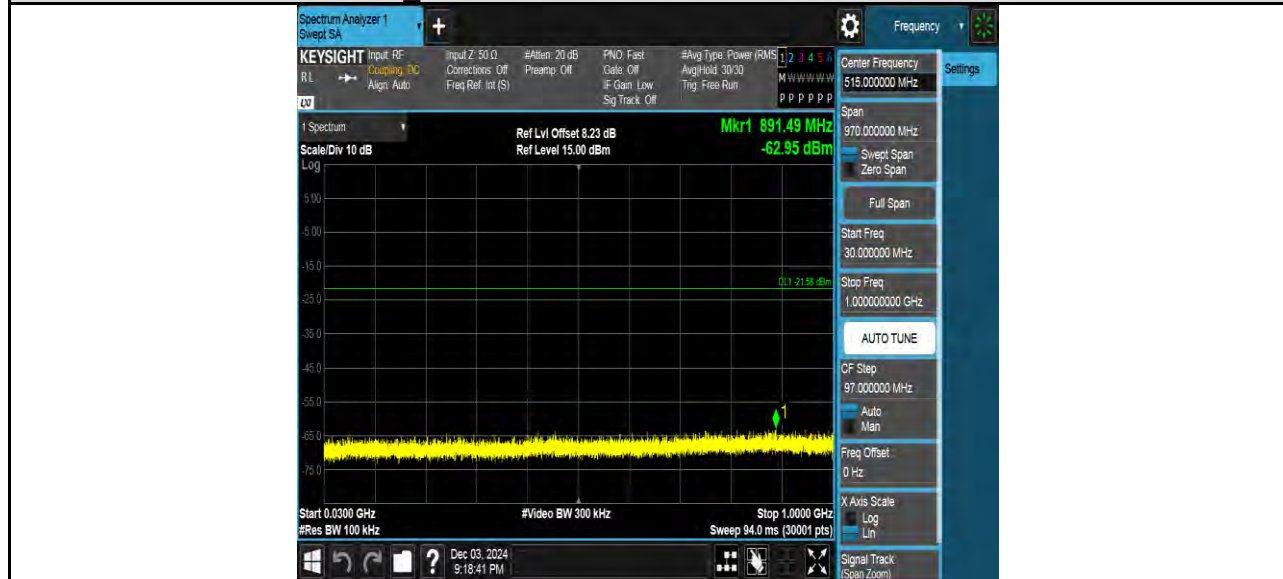


### MCH SPURIOUS EMISSION 1GHz~26.5GHz



Test Mode	Channel	Verdict
BLE 2M	HCH	PASS

#### HCH SPURIOUS EMISSION 30MHz~1GHz

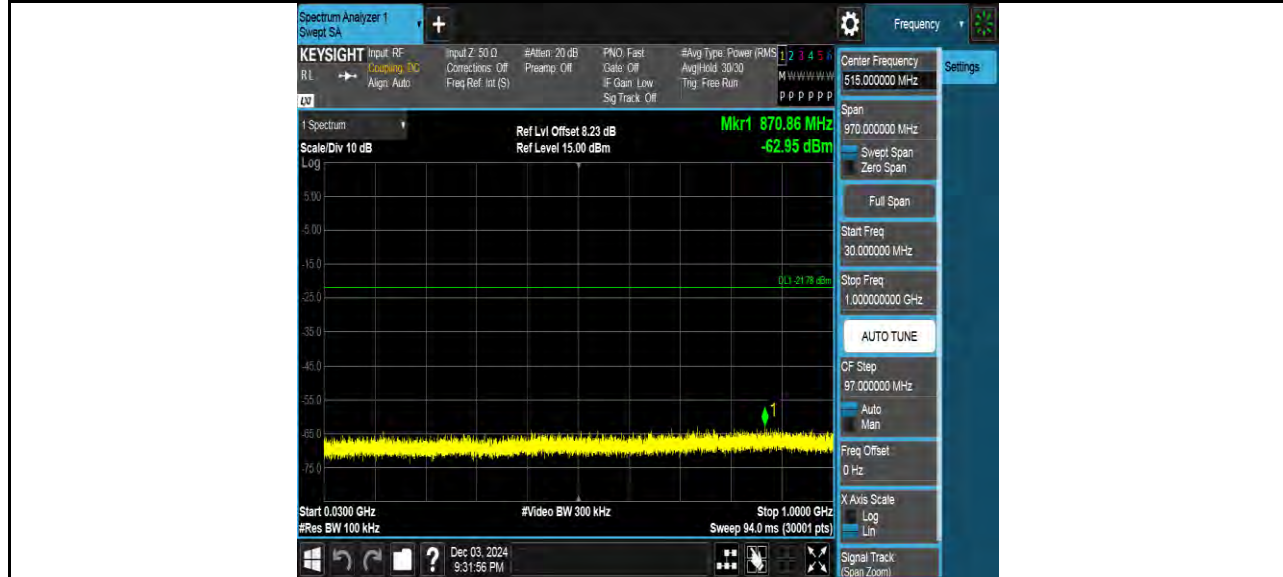

#### HCH SPURIOUS EMISSION 1GHz~26.5GHz



## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B) (9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

## Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

## Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			


Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c



## TEST SETUP AND PROCEDURE

Below 30MHz

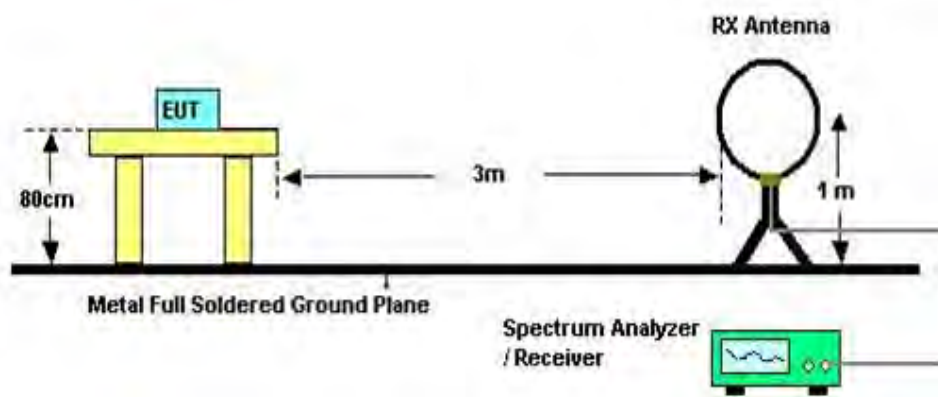


The setting of the spectrum analyser

RBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
VBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report  
(Photographs of the Test Configuration)
8. The limits in FCC 47 CFR, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377  $\Omega$ . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to  $Y - 51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

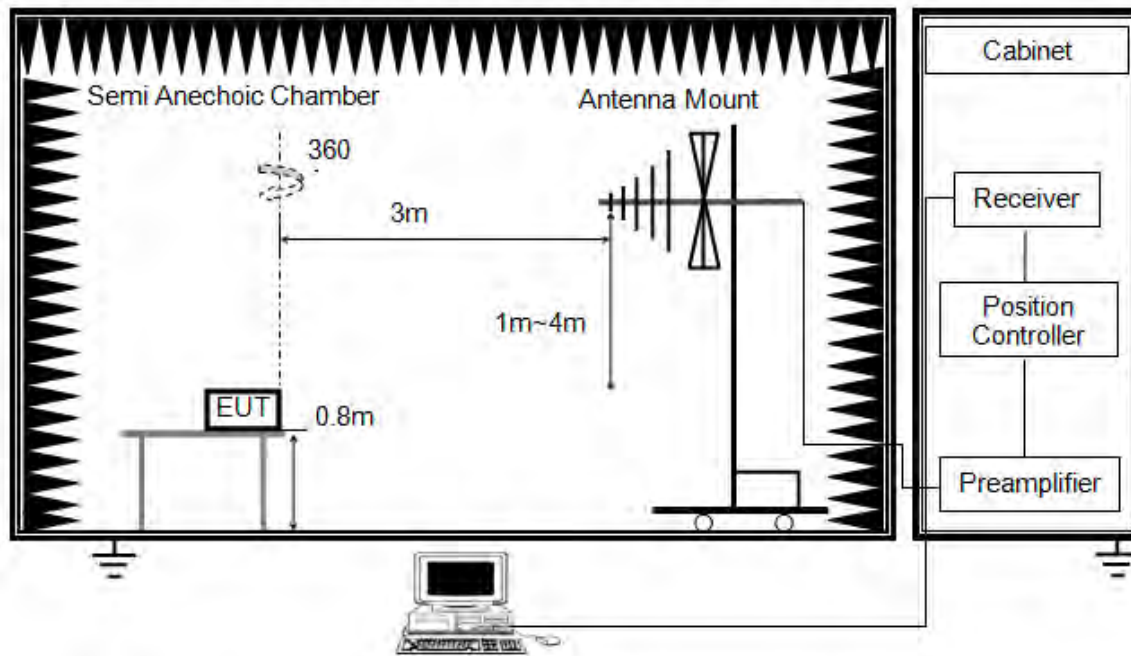


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12 mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

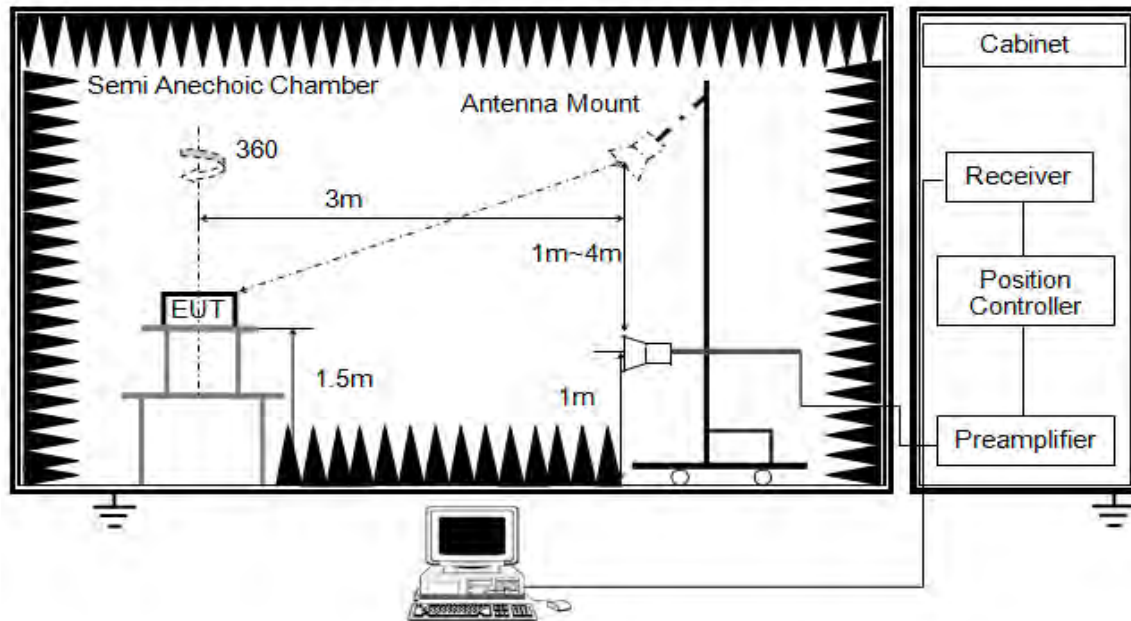


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK:3 MHz AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth  $\geq 1/T$  but not less than the setting list in section 7.1 when use peak detector, max hold to be run for at least  $[50 \cdot (1/\text{Duty Cycle})]$  traces for average measurements. For the Duty Cycle need to refer the results in section 7.1.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)



X axis, Y axis, Z axis positions:

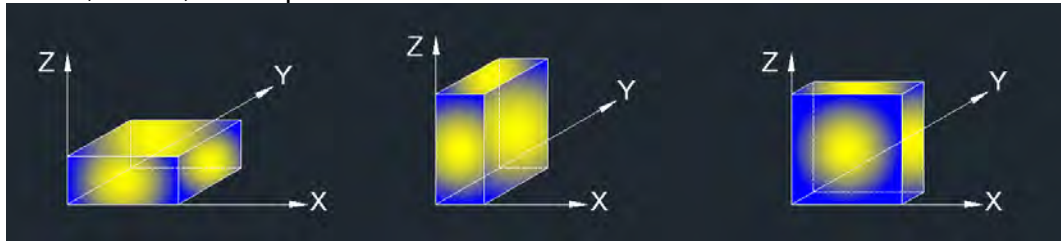

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

## 8.2. TEST ENVIRONMENT

Temperature	20°C	Relative Humidity	47%
Atmosphere Pressure	102kPa	Test Voltage	DC 3.0V


## 8.3. RESTRICTED BANDEDGE

### TEST RESULT TABLE

Test Mode	Channel	P <sub>uw</sub> (dBm)	Verdict
BLE 1M	LCH	<Limit	PASS
	HCH	<Limit	PASS
BLE 2M	LCH	<Limit	PASS
	HCH	<Limit	PASS

## TEST GRAPHS

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS

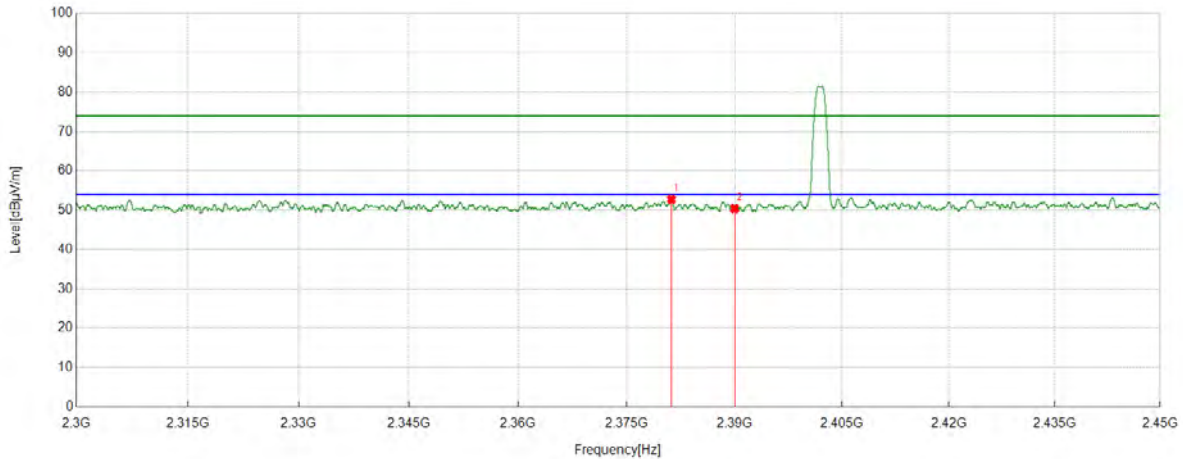


### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	2381.2164	39.15	13.59	52.74	74.00	21.26	Horizontal
2	2390.0000	36.91	13.48	50.39	74.00	23.61	Horizontal

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS

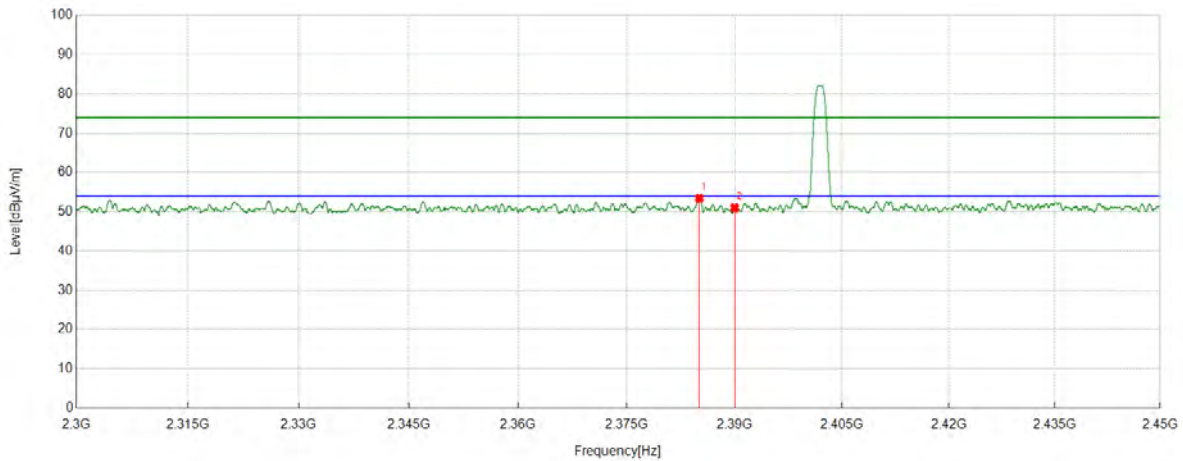


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2385.0981	39.91	13.54	53.45	74.00	20.55	Vertical
2	2390.0000	37.49	13.48	50.97	74.00	23.03	Vertical

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS

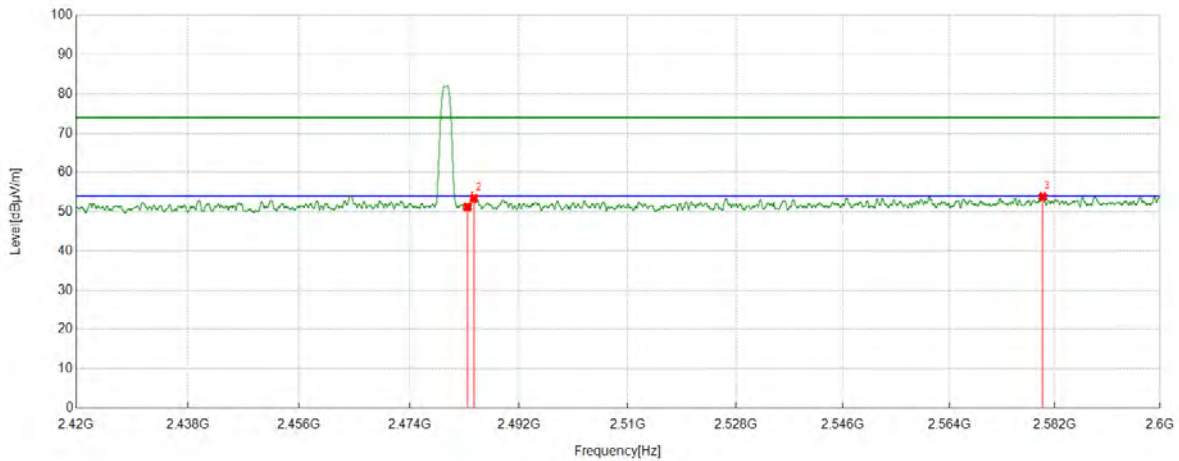


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	36.98	14.25	51.23	74.00	22.77	Horizontal
2	2484.5606	39.17	14.27	53.44	74.00	20.56	Horizontal
3	2579.905	39.07	14.76	53.83	74.00	20.17	Horizontal

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS

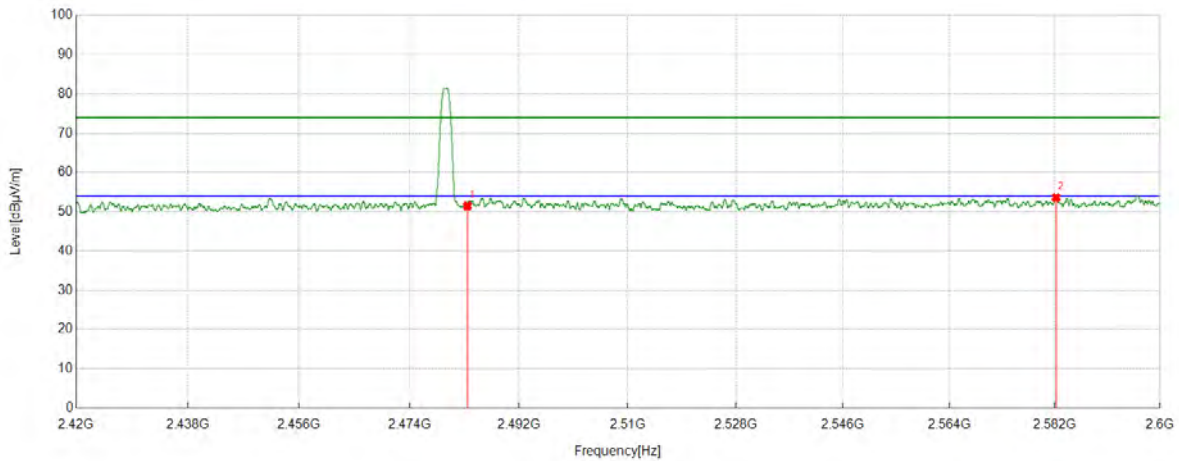


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	37.22	14.25	51.47	74.00	22.53	Vertical
2	2582.1778	38.82	14.77	53.59	74.00	20.41	Vertical

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS

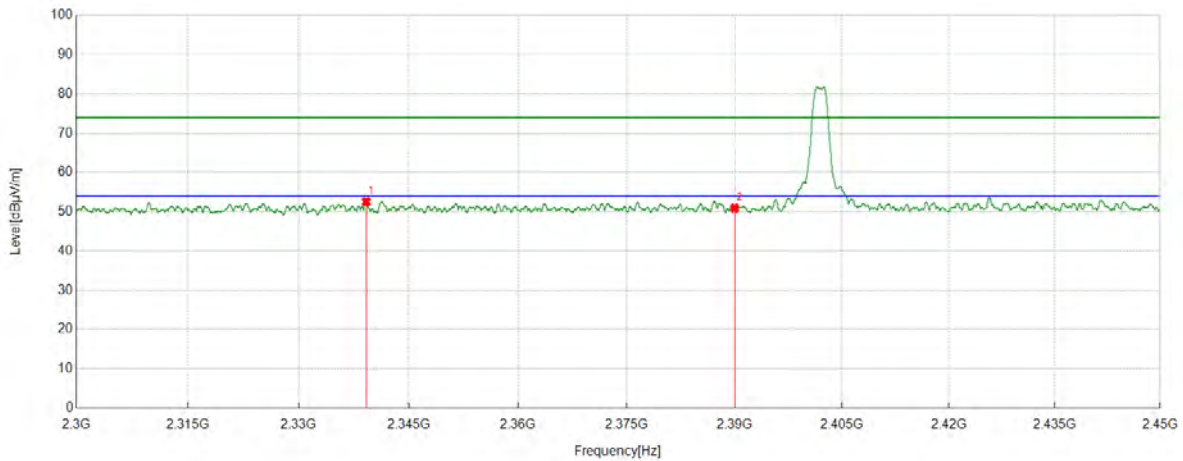


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2339.2299	39.07	13.44	52.51	74.00	21.49	Horizontal
2	2390.0000	37.45	13.48	50.93	74.00	23.07	Horizontal

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS

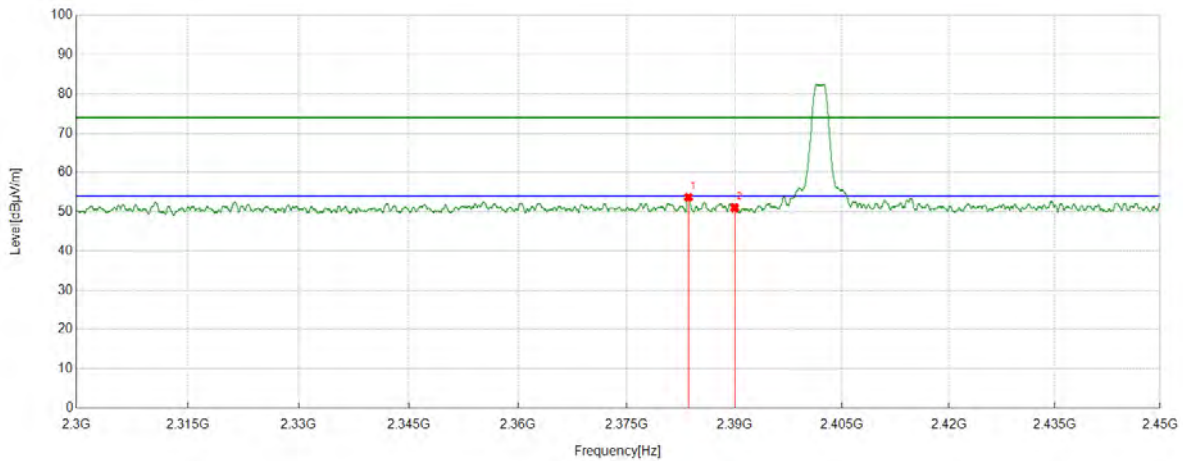


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2383.5792	40.13	13.55	53.68	74.00	20.32	Vertical
2	2390.0000	37.53	13.48	51.01	74.00	22.99	Vertical

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS

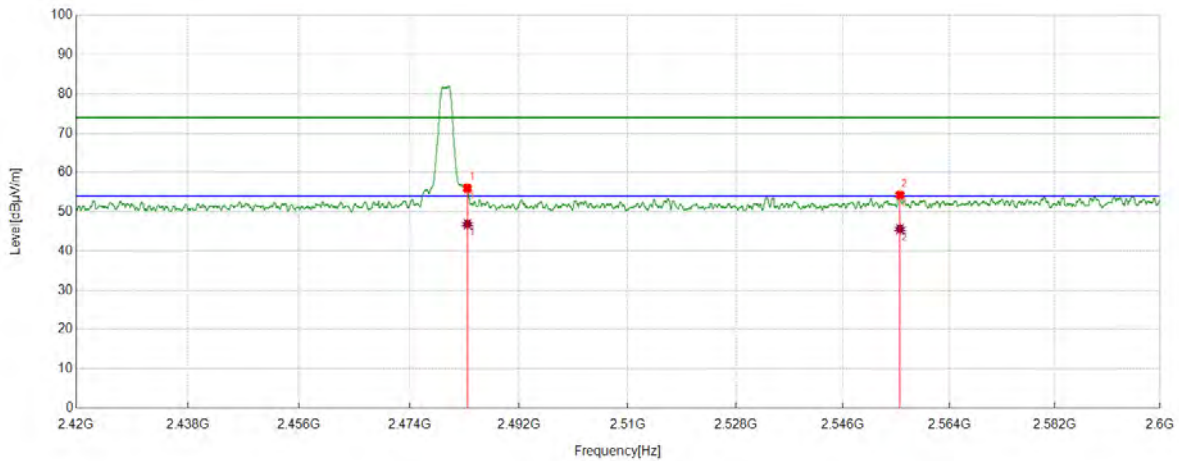

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.74	14.25	55.99	74.00	18.01	Horizontal
2	2555.6245	39.70	14.56	54.26	74.00	19.74	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	32.55	14.25	46.80	54.00	7.20	Horizontal
2	2555.6245	31.02	14.56	45.58	54.00	8.42	Horizontal

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS

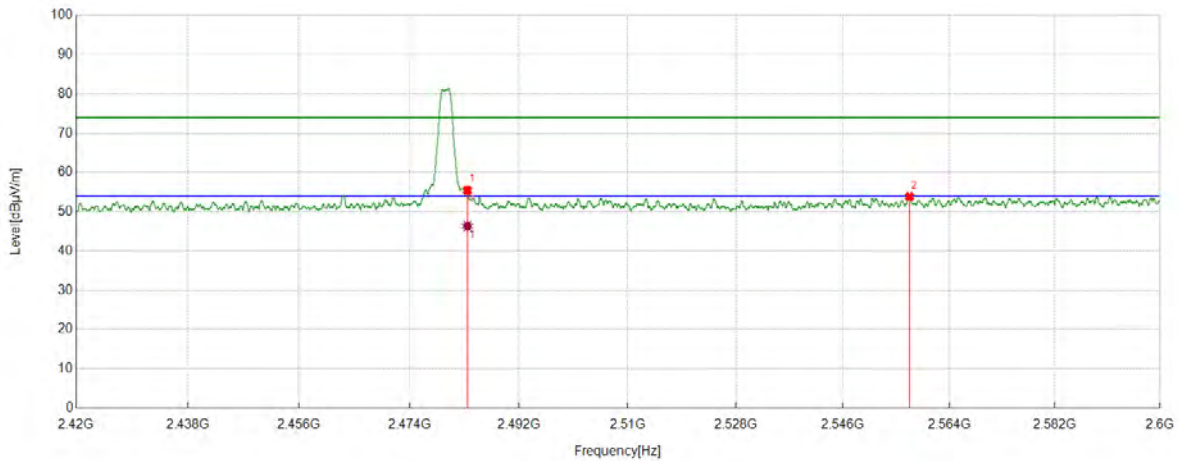

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.23	14.25	55.48	74.00	18.52	Vertical
2	2557.2447	39.32	14.54	53.86	74.00	20.14	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	32.07	14.25	46.32	54.00	7.68	Vertical

- Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## 8.4. SPURIOUS EMISSIONS

### TEST RESULTS TABLE

#### 1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
BLE 2M	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE	MCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE	MCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE	MCH	<Limit	PASS


Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

### Part 1: 1GHz~6.5GHz

#### HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS

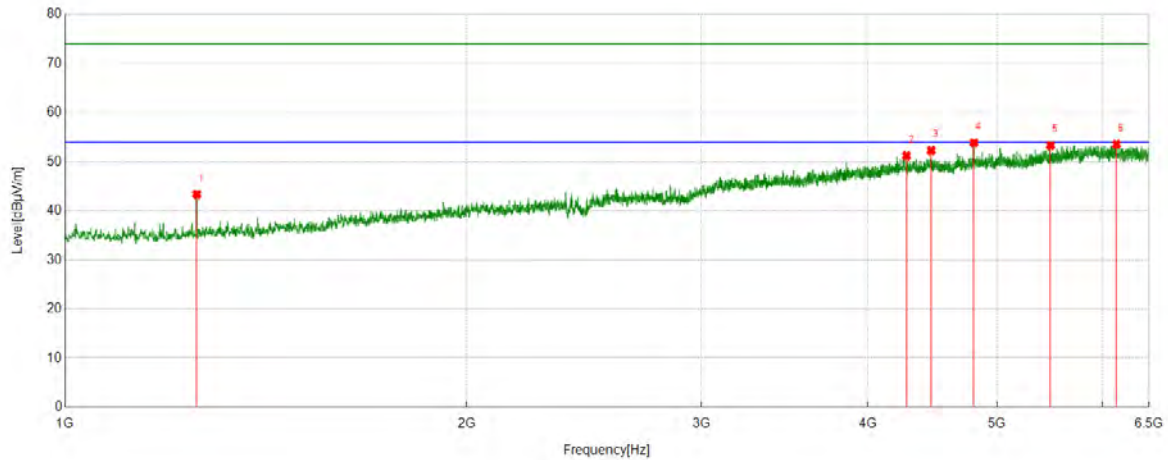


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.91	-1.57	43.34	74.00	30.66	Horizontal
2	4276.347	37.37	13.83	51.20	74.00	22.80	Horizontal
3	4461.9952	37.39	14.86	52.25	74.00	21.75	Horizontal
4	4803.7255	38.35	15.49	53.84	74.00	20.16	Horizontal
5	5483.0604	36.64	16.65	53.29	74.00	20.71	Horizontal
6	6144.5181	35.11	18.42	53.53	74.00	20.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS

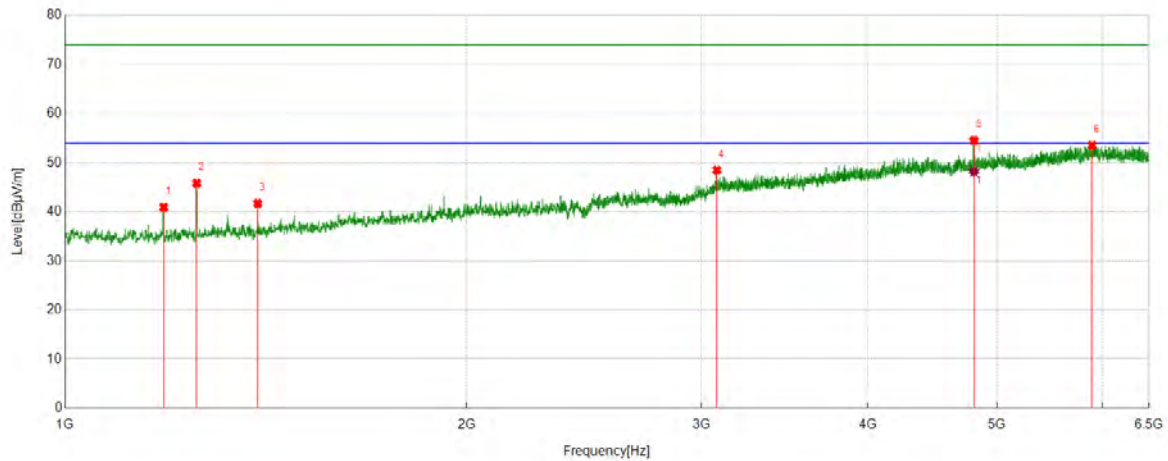

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	42.89	-2.00	40.89	74.00	33.11	Vertical
2	1255.0944	47.37	-1.57	45.80	74.00	28.20	Vertical
3	1394.6743	43.03	-1.35	41.68	74.00	32.32	Vertical
4	3082.0103	38.45	10.02	48.47	74.00	25.53	Vertical
5	4804.4131	39.05	15.46	54.51	74.00	19.49	Vertical
6	5891.4864	35.55	17.97	53.52	74.00	20.48	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4804.4131	32.71	15.46	48.17	54.00	5.83	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

4. Peak: Peak detector.

5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS

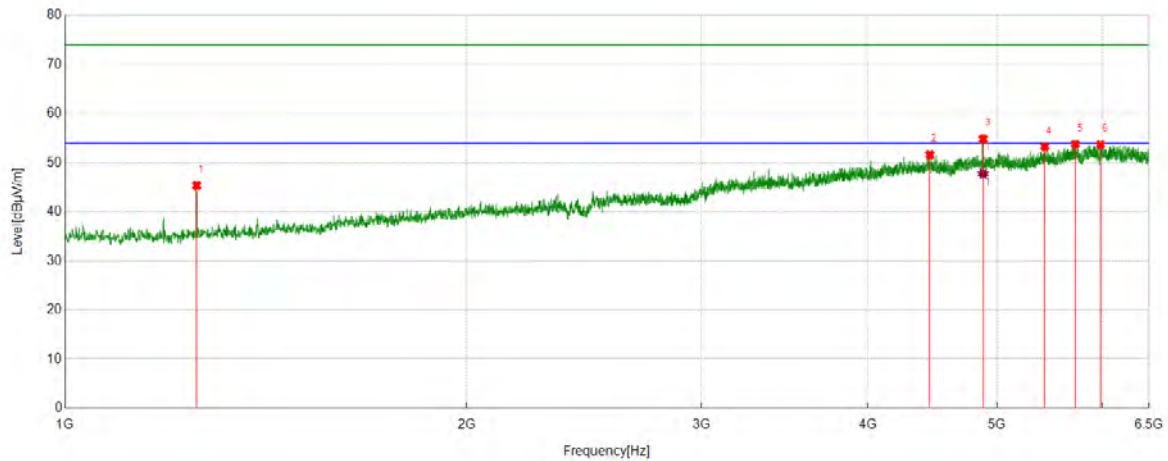

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	46.92	-1.57	45.35	74.00	28.65	Horizontal
2	4452.369	37.20	14.41	51.61	74.00	22.39	Horizontal
3	4880.7351	39.67	15.19	54.86	74.00	19.14	Horizontal
4	5429.4287	35.69	17.56	53.25	74.00	20.75	Horizontal
5	5723.7155	36.22	17.54	53.76	74.00	20.24	Horizontal
6	5977.4347	35.34	18.32	53.66	74.00	20.34	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4880.7351	32.51	15.19	47.70	54.00	6.30	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

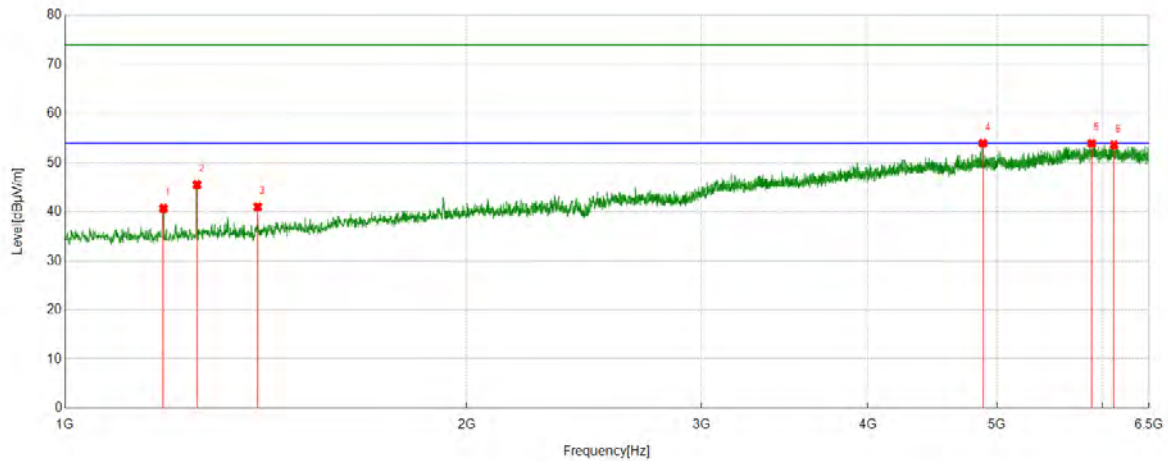


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1184.9606	42.67	-1.97	40.70	74.00	33.30	Vertical
2	1255.782	47.10	-1.57	45.53	74.00	28.47	Vertical
3	1394.6743	42.34	-1.35	40.99	74.00	33.01	Vertical
4	4879.3599	38.75	15.19	53.94	74.00	20.06	Vertical
5	5887.3609	36.03	17.89	53.92	74.00	20.08	Vertical
6	6118.3898	35.39	18.21	53.60	74.00	20.40	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS

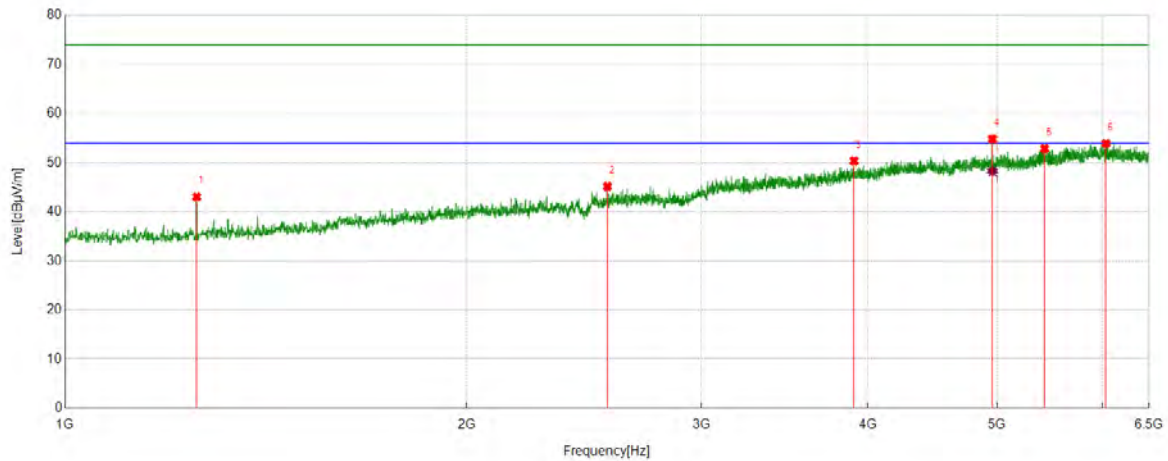

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	44.60	-1.57	43.03	74.00	30.97	Horizontal
2	2551.1939	39.39	5.77	45.16	74.00	28.84	Horizontal
3	3905.7382	37.82	12.53	50.35	74.00	23.65	Horizontal
4	4960.4951	39.33	15.50	54.83	74.00	19.17	Horizontal
5	5427.3659	35.35	17.46	52.81	74.00	21.19	Horizontal
6	6034.5043	35.97	17.92	53.89	74.00	20.11	Horizontal

#### AV Result:


No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	4960.4951	32.77	15.50	48.27	54.00	5.73	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- Peak: Peak detector.
- For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
- Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS

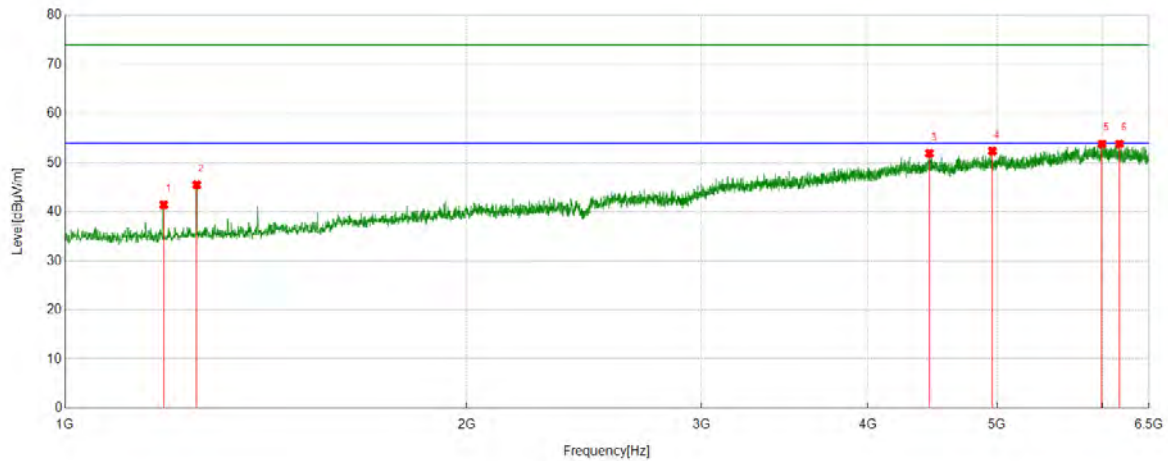


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	43.41	-2.00	41.41	74.00	32.59	Vertical
2	1255.0944	47.08	-1.57	45.51	74.00	28.49	Vertical
3	4448.2435	37.55	14.33	51.88	74.00	22.12	Vertical
4	4959.8075	36.81	15.51	52.32	74.00	21.68	Vertical
5	5992.5616	35.51	18.30	53.81	74.00	20.19	Vertical
6	6176.8346	34.97	18.84	53.81	74.00	20.19	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS

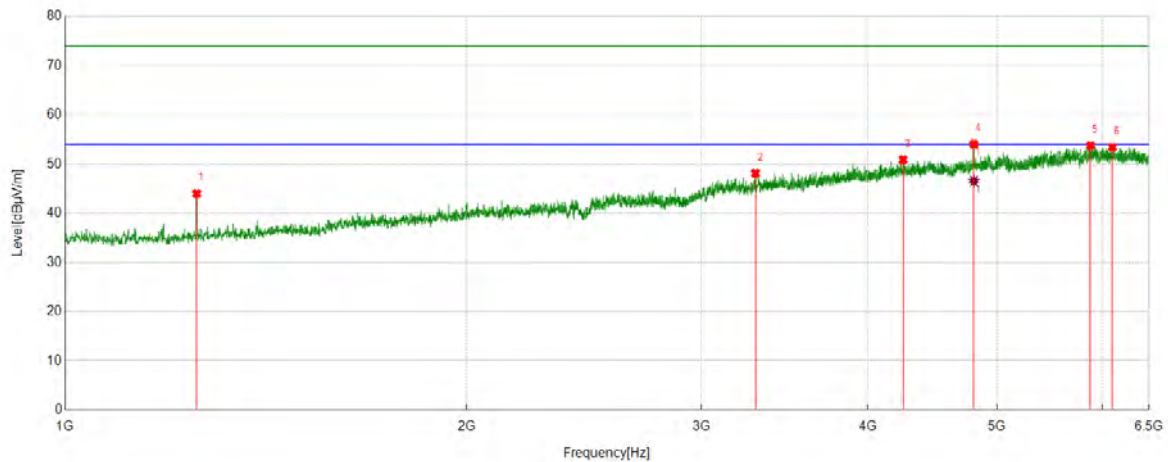

#### PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	45.56	-1.57	43.99	74.00	30.01	Horizontal
2	3294.4743	38.11	9.97	48.08	74.00	25.92	Horizontal
3	4250.9064	36.89	13.97	50.86	74.00	23.14	Horizontal
4	4803.7255	38.52	15.49	54.01	74.00	19.99	Horizontal
5	5874.9844	35.93	17.79	53.72	74.00	20.28	Horizontal
6	6101.2002	35.05	18.33	53.38	74.00	20.62	Horizontal

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4803.7255	31.05	15.49	46.54	54.00	7.46	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS

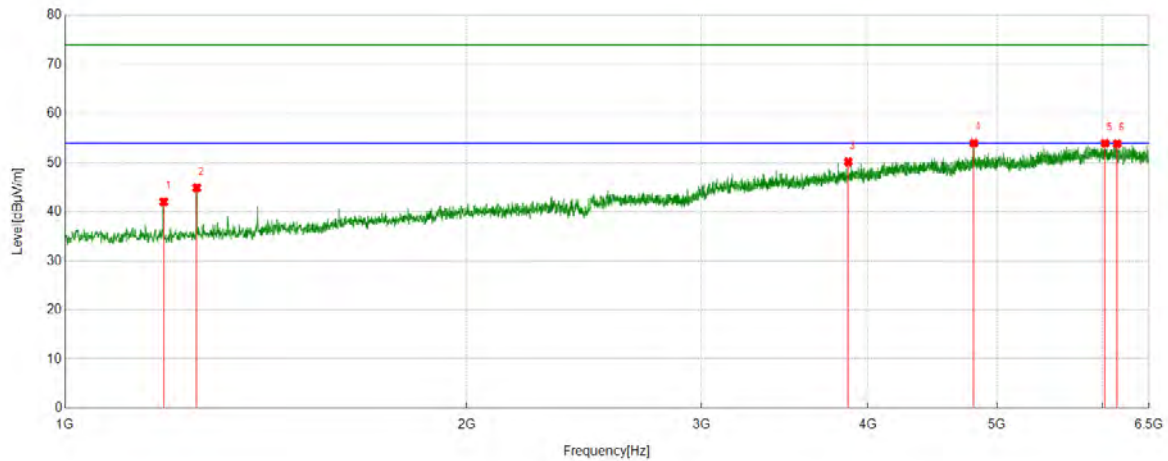


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	43.99	-2.00	41.99	74.00	32.01	Vertical
2	1255.0944	46.46	-1.57	44.89	74.00	29.11	Vertical
3	3866.5458	38.03	12.14	50.17	74.00	23.83	Vertical
4	4803.7255	38.49	15.49	53.98	74.00	20.02	Vertical
5	6025.5657	36.00	17.95	53.95	74.00	20.05	Vertical
6	6152.0815	35.31	18.54	53.85	74.00	20.15	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Horizontal	PASS

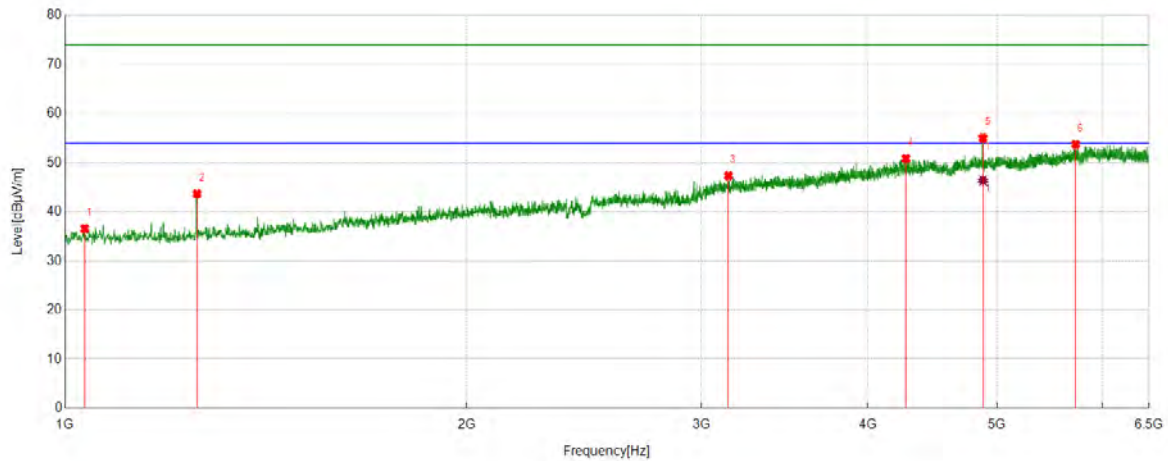

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1034.3793	38.04	-1.51	36.53	74.00	37.47	Horizontal
2	1255.782	45.24	-1.57	43.67	74.00	30.33	Horizontal
3	3143.893	37.84	9.46	47.30	74.00	26.70	Horizontal
4	4271.5339	36.90	13.92	50.82	74.00	23.18	Horizontal
5	4879.3599	39.83	15.19	55.02	74.00	18.98	Horizontal
6	5726.4658	36.29	17.44	53.73	74.00	20.27	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4879.3599	31.18	15.19	46.37	54.00	7.63	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Vertical	PASS

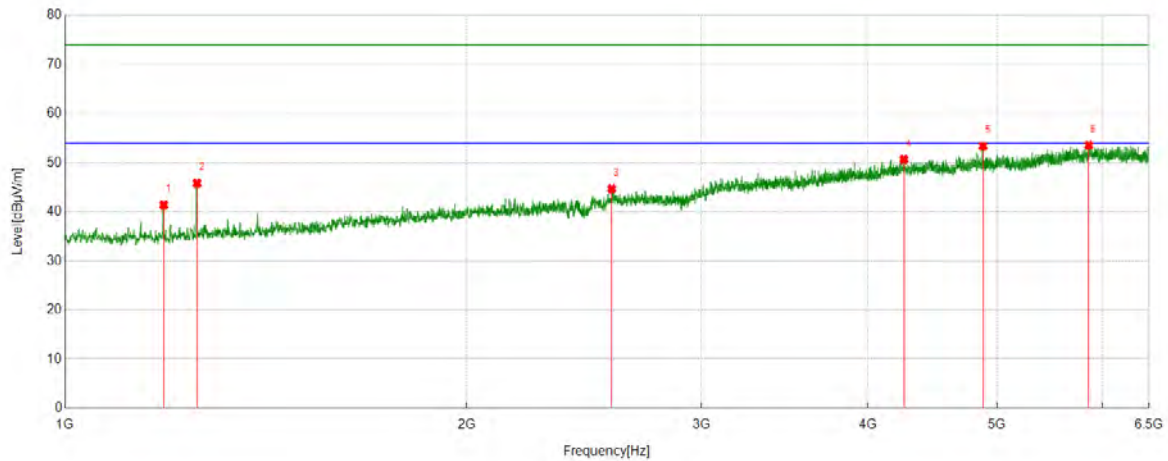


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	43.36	-2.00	41.36	74.00	32.64	Vertical
2	1255.782	47.37	-1.57	45.80	74.00	28.20	Vertical
3	2570.4463	39.01	5.67	44.68	74.00	29.32	Vertical
4	4256.4071	36.67	14.00	50.67	74.00	23.33	Vertical
5	4879.3599	38.17	15.19	53.36	74.00	20.64	Vertical
6	5858.4823	35.71	17.83	53.54	74.00	20.46	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS

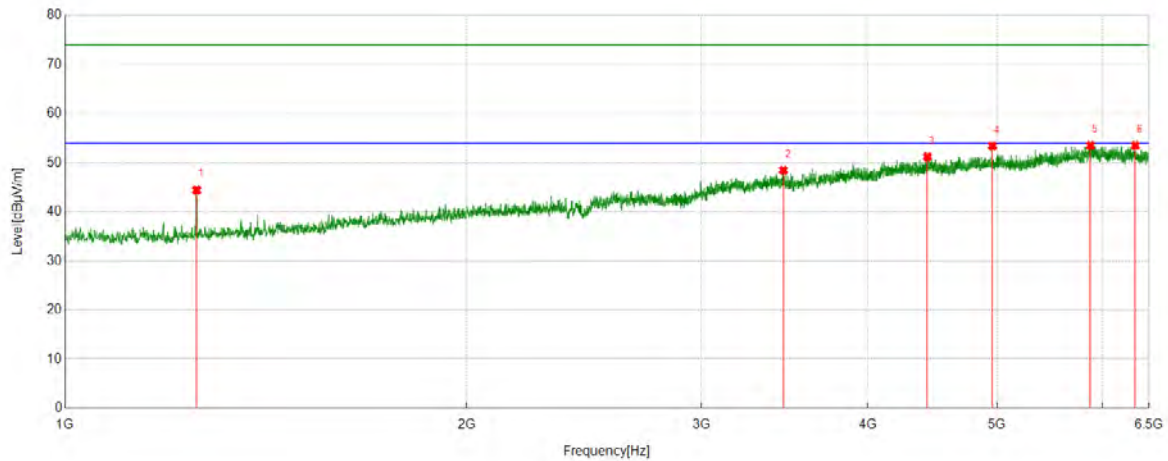


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1255.0944	46.01	-1.57	44.44	74.00	29.56	Horizontal
2	3456.7446	37.56	10.88	48.44	74.00	25.56	Horizontal
3	4433.1166	37.04	14.14	51.18	74.00	22.82	Horizontal
4	4960.4951	37.89	15.50	53.39	74.00	20.61	Horizontal
5	5874.9844	35.70	17.79	53.49	74.00	20.51	Horizontal
6	6348.0435	34.36	19.14	53.50	74.00	20.50	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS

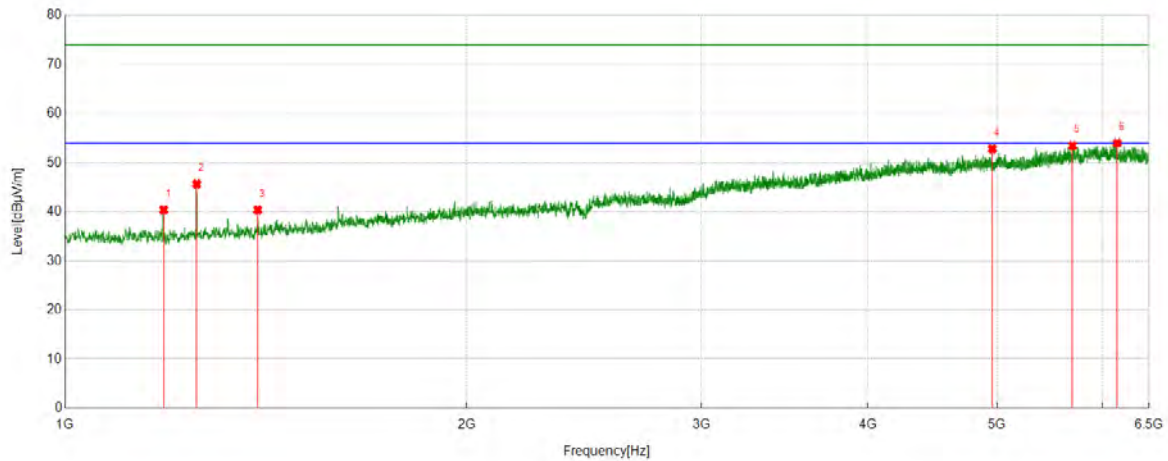

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	1185.6482	42.38	-2.00	40.38	74.00	33.62	Vertical
2	1255.0944	47.23	-1.57	45.66	74.00	28.34	Vertical
3	1394.6743	41.71	-1.35	40.36	74.00	33.64	Vertical
4	4959.1199	37.28	15.49	52.77	74.00	21.23	Vertical
5	5696.212	36.02	17.43	53.45	74.00	20.55	Vertical
6	6152.0815	35.44	18.54	53.98	74.00	20.02	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



## Part 2: 6.5GHz~18GHz

### HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS

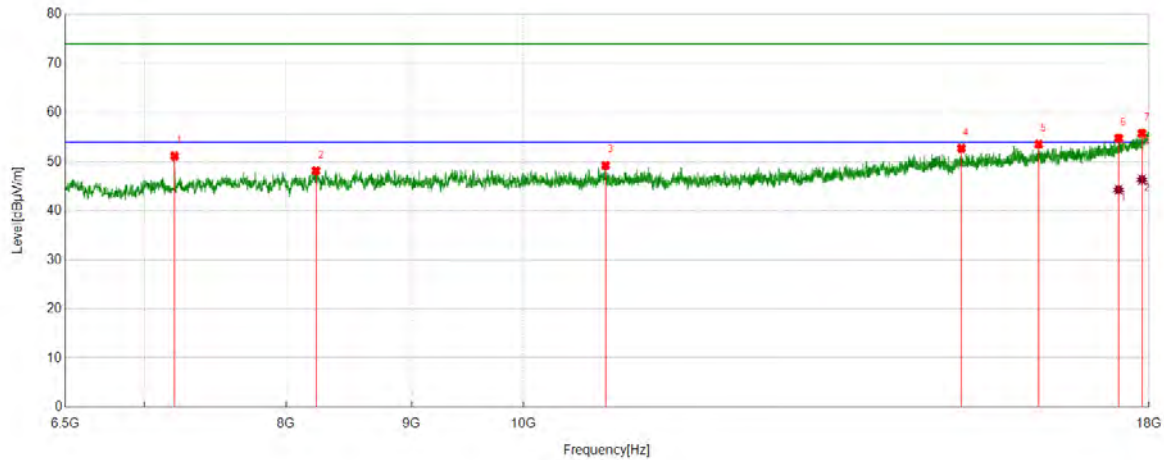

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7204.4631	47.41	3.74	51.15	74.00	22.85	Horizontal
2	8228.091	42.03	6.10	48.13	74.00	25.87	Horizontal
3	10801.5377	42.20	7.01	49.21	74.00	24.79	Horizontal
4	15091.5739	39.48	13.22	52.70	74.00	21.30	Horizontal
5	16227.3409	38.19	15.36	53.55	74.00	20.45	Horizontal
6	17492.4991	37.15	17.64	54.79	74.00	19.21	Horizontal
7	17880.6726	36.59	19.19	55.78	74.00	18.22	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17492.4991	26.65	17.64	44.29	54.00	9.71	Horizontal
2	17880.6726	27.14	19.19	46.33	54.00	7.67	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.

4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS

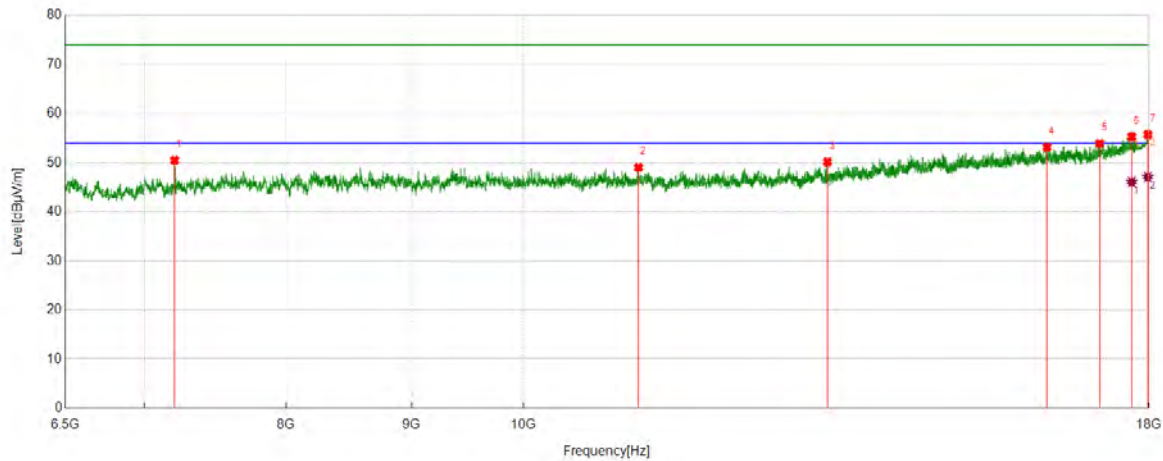

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7204.4631	46.76	3.74	50.50	74.00	23.50	Vertical
2	11140.8301	41.77	7.26	49.03	74.00	24.97	Vertical
3	13304.5381	40.06	10.11	50.17	74.00	23.83	Vertical
4	16356.7321	38.12	15.02	53.14	74.00	20.86	Vertical
5	17184.8356	37.29	16.59	53.88	74.00	20.12	Vertical
6	17709.5887	36.94	18.36	55.30	74.00	18.70	Vertical
7	17979.8725	35.93	19.81	55.74	74.00	18.26	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17709.5887	27.68	18.36	46.04	54.00	7.96	Vertical
2	17979.8725	27.25	19.81	47.06	54.00	6.94	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS

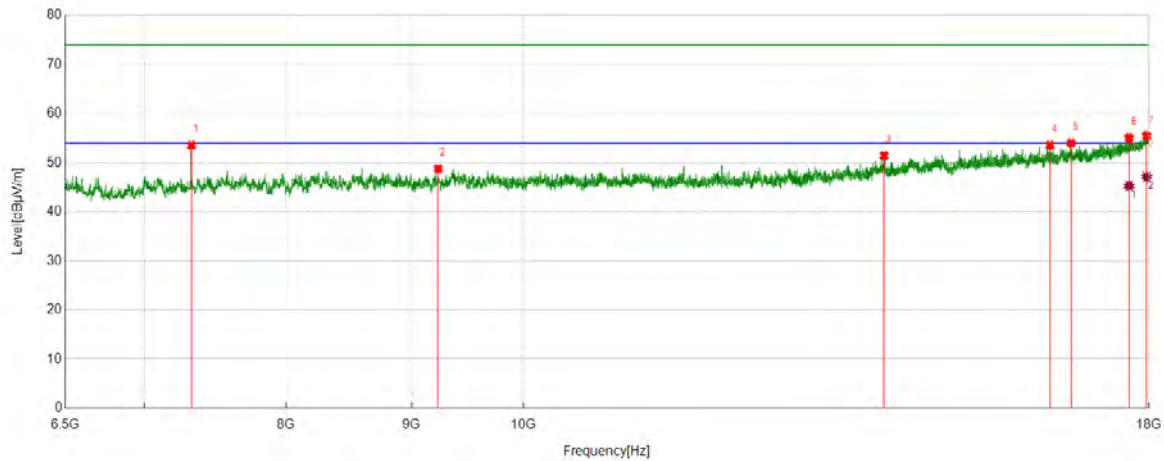

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7319.4774	49.72	3.81	53.53	74.00	20.47	Horizontal
2	9228.7161	42.74	6.01	48.75	74.00	25.25	Horizontal
3	14033.4417	39.47	11.94	51.41	74.00	22.59	Horizontal
4	16398.4248	38.54	15.02	53.56	74.00	20.44	Horizontal
5	16729.0911	37.83	16.17	54.00	74.00	20.00	Horizontal
6	17666.4583	36.97	18.07	55.04	74.00	18.96	Horizontal
7	17961.1826	35.86	19.63	55.49	74.00	18.51	Horizontal


#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17666.4583	27.20	18.07	45.27	54.00	8.73	Horizontal
2	17961.1826	27.45	19.63	47.08	54.00	6.92	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

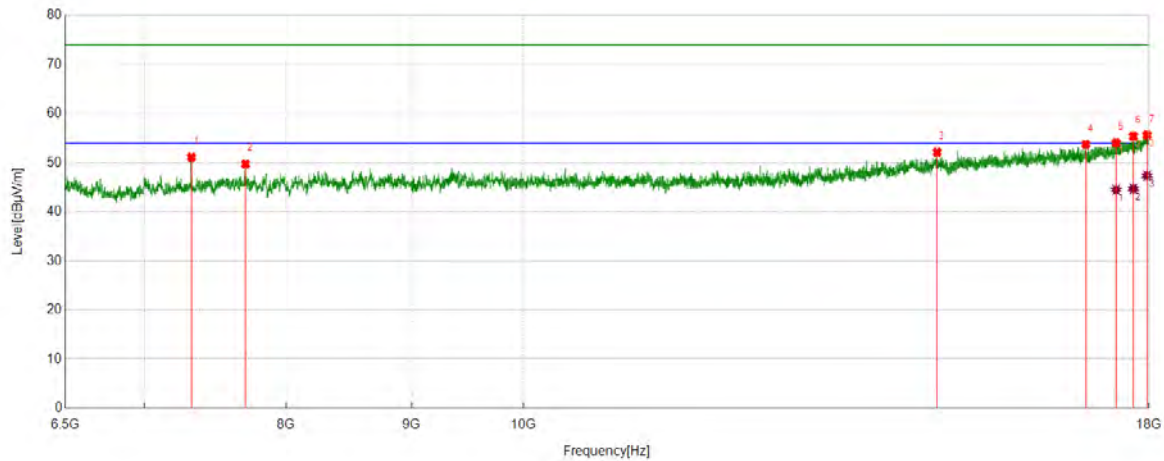

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7319.4774	47.30	3.81	51.11	74.00	22.89	Vertical
2	7700.4626	44.11	5.60	49.71	74.00	24.29	Vertical
3	14749.4062	39.26	12.86	52.12	74.00	21.88	Vertical
4	16961.9952	37.62	16.11	53.73	74.00	20.27	Vertical
5	17452.244	36.43	17.60	54.03	74.00	19.97	Vertical
6	17736.9046	36.86	18.53	55.39	74.00	18.61	Vertical
7	17966.9334	36.00	19.63	55.63	74.00	18.37	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17452.244	26.89	17.60	44.49	54.00	9.51	Vertical
2	17736.9046	26.17	18.53	44.70	54.00	9.30	Vertical
3	17966.9334	27.70	19.63	47.33	54.00	6.67	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS

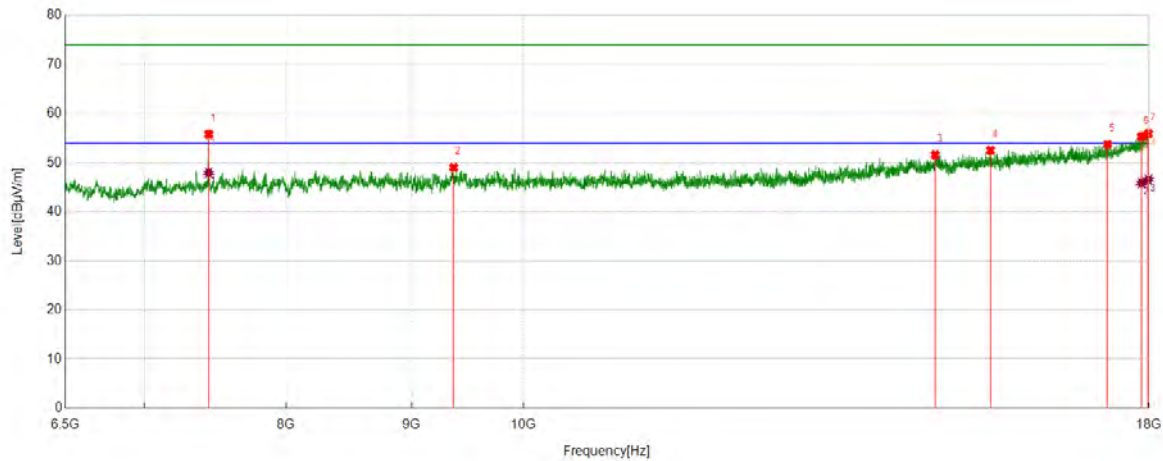

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7438.8049	51.60	4.21	55.81	74.00	18.19	Horizontal
2	9363.858	42.55	6.47	49.02	74.00	24.98	Horizontal
3	14723.5279	38.77	12.81	51.58	74.00	22.42	Horizontal
4	15508.5011	38.64	13.85	52.49	74.00	21.51	Horizontal
5	17312.7891	36.73	17.00	53.73	74.00	20.27	Horizontal
6	17873.4842	36.13	19.19	55.32	74.00	18.68	Horizontal
7	17989.9362	36.14	19.80	55.94	74.00	18.06	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7438.8049	43.70	4.21	47.91	54.00	6.09	Horizontal
2	17873.4842	26.66	19.19	45.85	54.00	8.15	Horizontal
3	17989.9362	26.73	19.80	46.53	54.00	7.47	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS

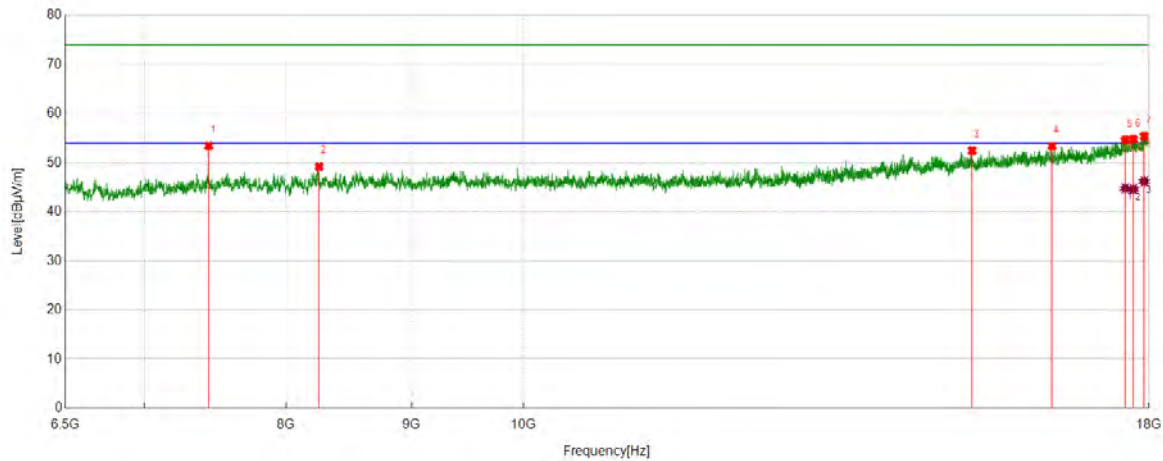

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7438.8049	49.19	4.21	53.40	74.00	20.60	Vertical
2	8252.5316	42.92	6.26	49.18	74.00	24.82	Vertical
3	15242.5303	39.03	13.40	52.43	74.00	21.57	Vertical
4	16432.9291	37.91	15.42	53.33	74.00	20.67	Vertical
5	17601.7627	36.60	18.03	54.63	74.00	19.37	Vertical
6	17736.9046	36.25	18.53	54.78	74.00	19.22	Vertical
7	17919.4899	36.04	19.36	55.40	74.00	18.60	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17601.7627	26.76	18.03	44.79	54.00	9.21	Vertical
2	17736.9046	26.09	18.53	44.62	54.00	9.38	Vertical
3	17919.4899	26.82	19.36	46.18	54.00	7.82	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS

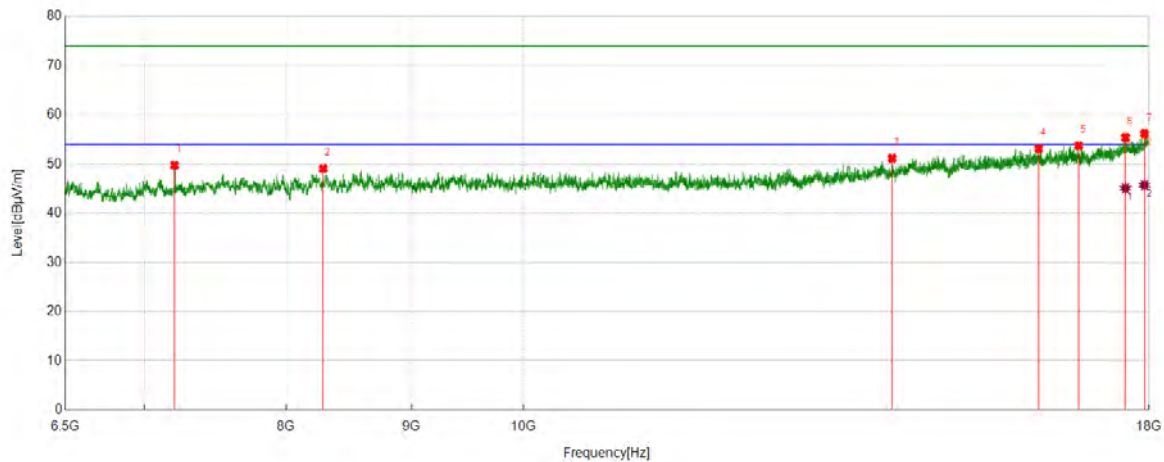

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7204.4631	46.00	3.74	49.74	74.00	24.26	Horizontal
2	8284.1605	42.78	6.28	49.06	74.00	24.94	Horizontal
3	14139.83	39.07	12.08	51.15	74.00	22.85	Horizontal
4	16227.3409	37.77	15.36	53.13	74.00	20.87	Horizontal
5	16848.4186	37.60	16.13	53.73	74.00	20.27	Horizontal
6	17606.0758	37.33	18.05	55.38	74.00	18.62	Horizontal
7	17923.803	36.79	19.36	56.15	74.00	17.85	Horizontal


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17606.0758	27.04	18.05	45.09	54.00	8.91	Horizontal
2	17923.803	26.34	19.36	45.70	54.00	8.30	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS

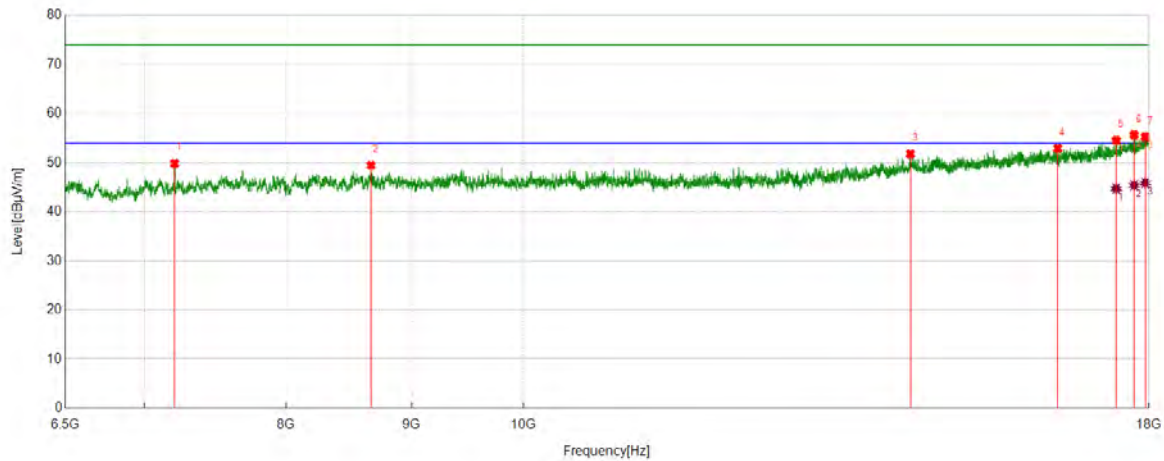

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7204.4631	46.12	3.74	49.86	74.00	24.14	Vertical
2	8665.1456	43.23	6.24	49.47	74.00	24.53	Vertical
3	14384.2355	39.02	12.74	51.76	74.00	22.24	Vertical
4	16520.6276	37.00	15.87	52.87	74.00	21.13	Vertical
5	17453.6817	36.93	17.60	54.53	74.00	19.47	Vertical
6	17749.8437	37.05	18.61	55.66	74.00	18.34	Vertical
7	17936.7421	35.84	19.42	55.26	74.00	18.74	Vertical

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17453.6817	27.12	17.60	44.72	54.00	9.28	Vertical
2	17749.8437	26.79	18.61	45.40	54.00	8.60	Vertical
3	17936.7421	26.44	19.42	45.86	54.00	8.14	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Horizontal	PASS

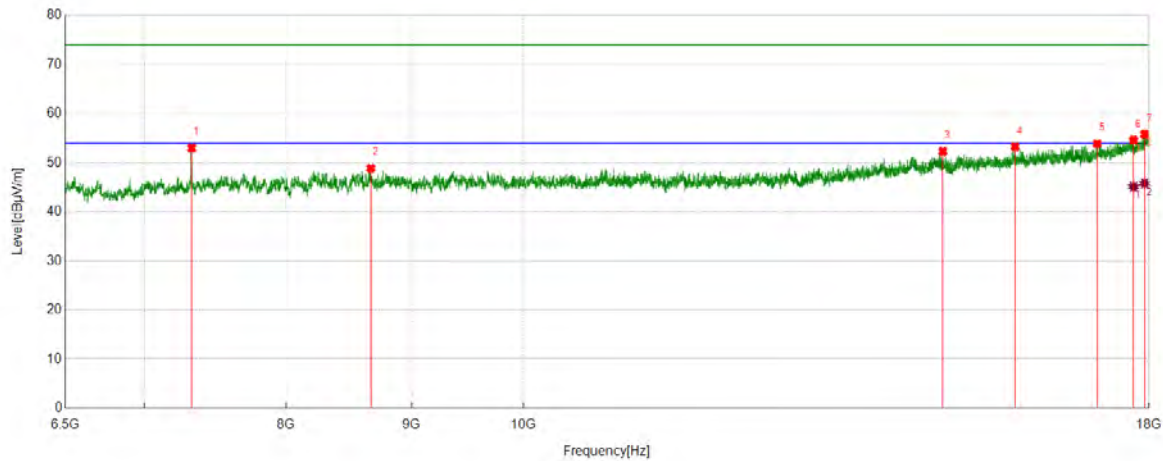

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7320.9151	49.16	3.80	52.96	74.00	21.04	Horizontal
2	8663.708	42.53	6.30	48.83	74.00	25.17	Horizontal
3	14828.4786	39.37	12.89	52.26	74.00	21.74	Horizontal
4	15872.234	38.56	14.69	53.25	74.00	20.75	Horizontal
5	17144.5806	37.44	16.42	53.86	74.00	20.14	Horizontal
6	17741.2177	36.05	18.55	54.60	74.00	19.40	Horizontal
7	17925.2407	36.43	19.37	55.80	74.00	18.20	Horizontal


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17741.2177	26.56	18.55	45.11	54.00	8.89	Horizontal
2	17925.2407	26.41	19.37	45.78	54.00	8.22	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Vertical	PASS

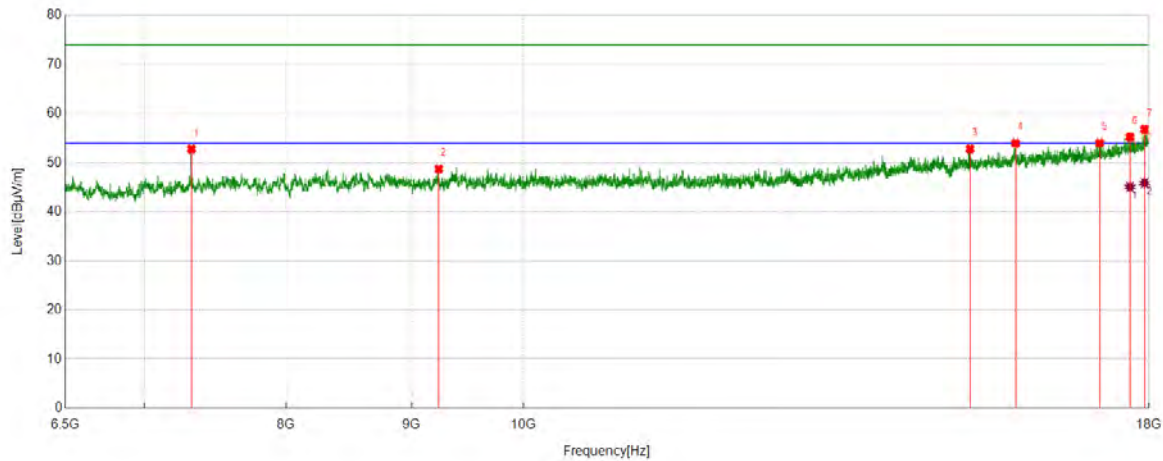

#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7319.4774	48.93	3.81	52.74	74.00	21.26	Vertical
2	9234.4668	42.64	6.07	48.71	74.00	25.29	Vertical
3	15213.7767	39.32	13.44	52.76	74.00	21.24	Vertical
4	15879.4224	39.23	14.73	53.96	74.00	20.04	Vertical
5	17183.3979	37.40	16.59	53.99	74.00	20.01	Vertical
6	17680.8351	37.12	18.12	55.24	74.00	18.76	Vertical
7	17923.803	37.40	19.36	56.76	74.00	17.24	Vertical


#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	17680.8351	26.95	18.12	45.07	54.00	8.93	Vertical
2	17923.803	26.48	19.36	45.84	54.00	8.16	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS

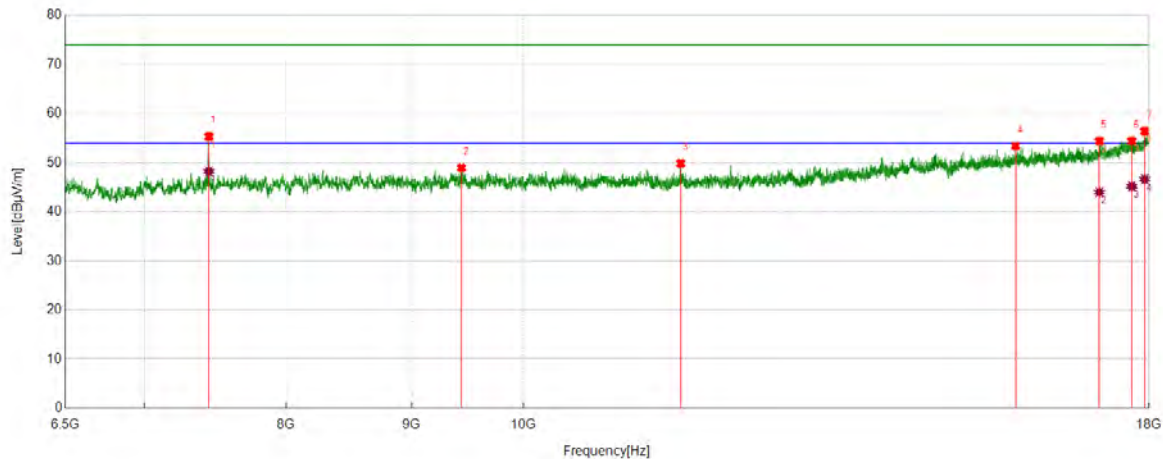

#### PK Result:


No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7440.2425	51.15	4.20	55.35	74.00	18.65	Horizontal
2	9434.3043	42.34	6.60	48.94	74.00	25.06	Horizontal
3	11592.2615	42.13	7.74	49.87	74.00	24.13	Horizontal
4	15879.4224	38.65	14.73	53.38	74.00	20.62	Horizontal
5	17179.0849	37.82	16.57	54.39	74.00	19.61	Horizontal
6	17711.0264	36.06	18.37	54.43	74.00	19.57	Horizontal
7	17926.6783	37.04	19.37	56.41	74.00	17.59	Horizontal

#### AV Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	7440.2425	44.00	4.20	48.20	54.00	5.80	Horizontal
2	17179.0849	27.41	16.57	43.98	54.00	10.02	Horizontal
3	17711.0264	26.83	18.37	45.20	54.00	8.80	Horizontal
4	17926.6783	27.25	19.37	46.62	54.00	7.38	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS

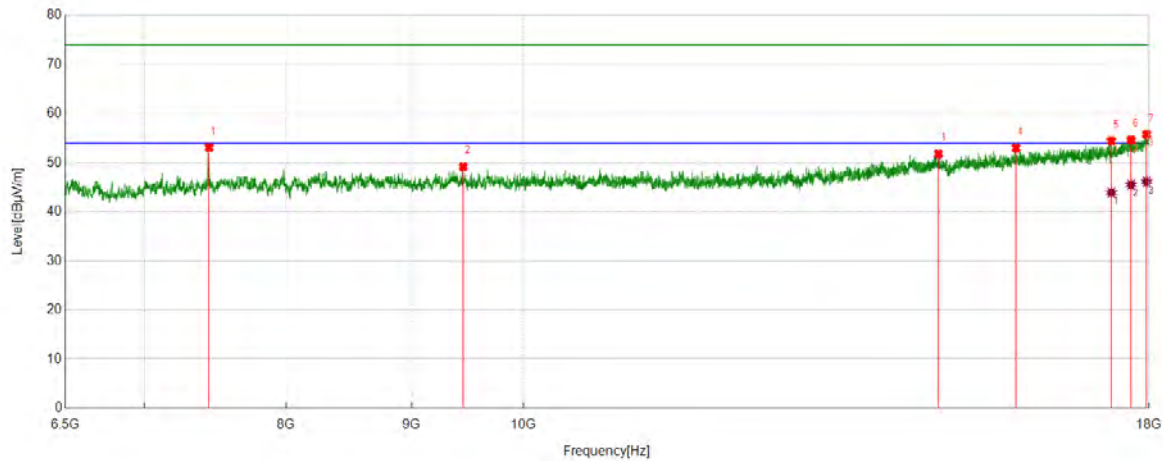

#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7441.6802	48.90	4.18	53.08	74.00	20.92	Vertical
2	9448.6811	42.57	6.60	49.17	74.00	24.83	Vertical
3	14769.5337	38.83	12.93	51.76	74.00	22.24	Vertical
4	15885.1731	38.30	14.64	52.94	74.00	21.06	Vertical
5	17374.6093	37.09	17.34	54.43	74.00	19.57	Vertical
6	17699.5249	36.37	18.27	54.64	74.00	19.36	Vertical
7	17959.745	36.13	19.63	55.76	74.00	18.24	Vertical

#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17374.6093	26.56	17.34	43.90	54.00	10.10	Vertical
2	17699.5249	27.23	18.27	45.50	54.00	8.50	Vertical
3	17959.745	26.48	19.63	46.11	54.00	7.89	Vertical


Note: 1. Measurement = Reading Level + Correct Factor.

2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### Part 3: 18GHz~26.5GHz

#### SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS

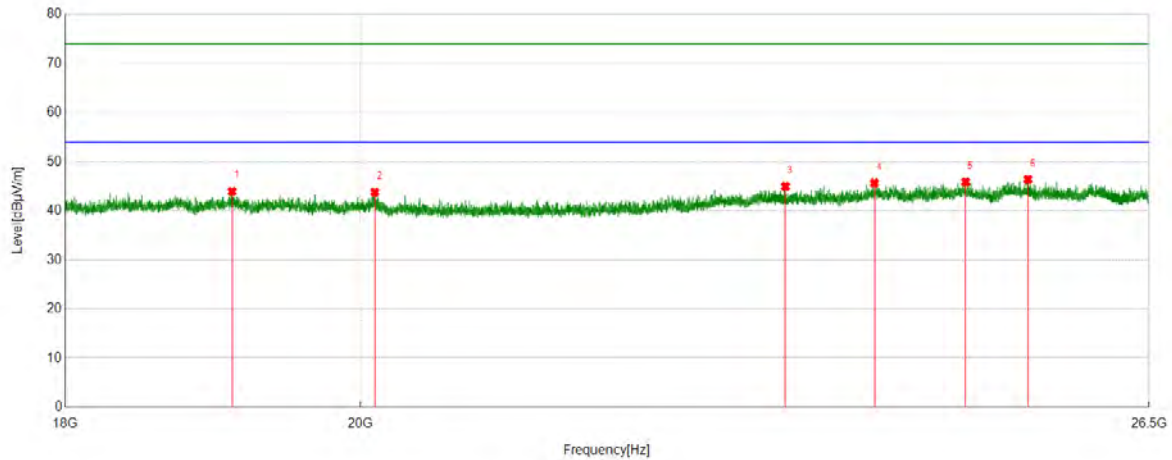


#### PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	19105.1105	49.82	-5.90	43.92	74.00	30.08	Horizontal
2	20103.1103	48.93	-5.16	43.77	74.00	30.23	Horizontal
3	23275.6276	48.31	-3.34	44.97	74.00	29.03	Horizontal
4	24027.1027	48.29	-2.63	45.66	74.00	28.34	Horizontal
5	24821.9322	49.21	-3.36	45.85	74.00	28.15	Horizontal
6	25379.588	49.64	-3.27	46.37	74.00	27.63	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

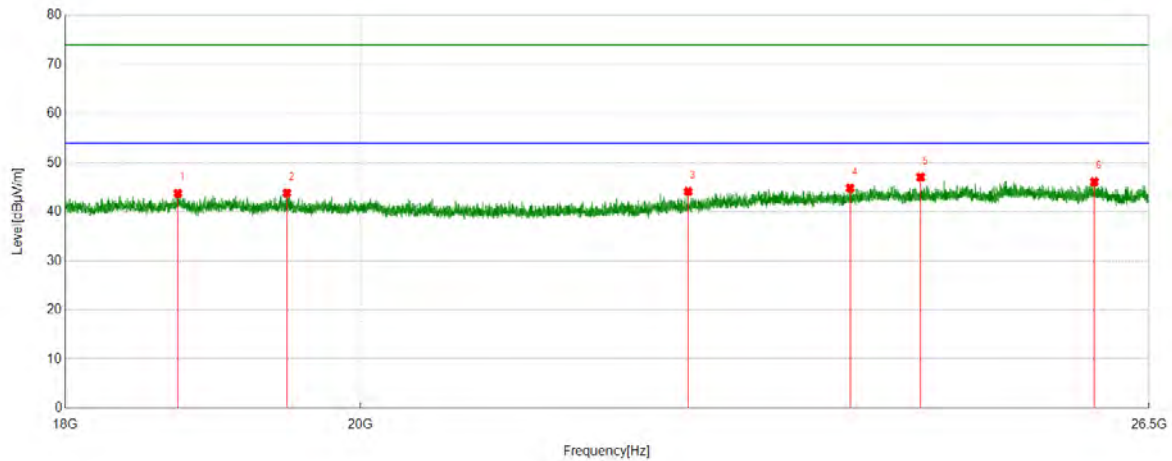

PK Result:

No.	Frequency [MHz]	Reading Level [dBuV/m]	Correct Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
1	18738.7239	49.97	-6.23	43.74	74.00	30.26	Vertical
2	19481.6982	49.29	-5.47	43.82	74.00	30.18	Vertical
3	22481.6482	48.86	-4.74	44.12	74.00	29.88	Vertical
4	23818.8319	47.70	-2.89	44.81	74.00	29.19	Vertical
5	24426.6427	49.99	-2.94	47.05	74.00	26.95	Vertical
6	25987.3987	48.80	-2.69	46.11	74.00	27.89	Vertical


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



#### Part 4: 30MHz~1GHz

##### SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)


Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS

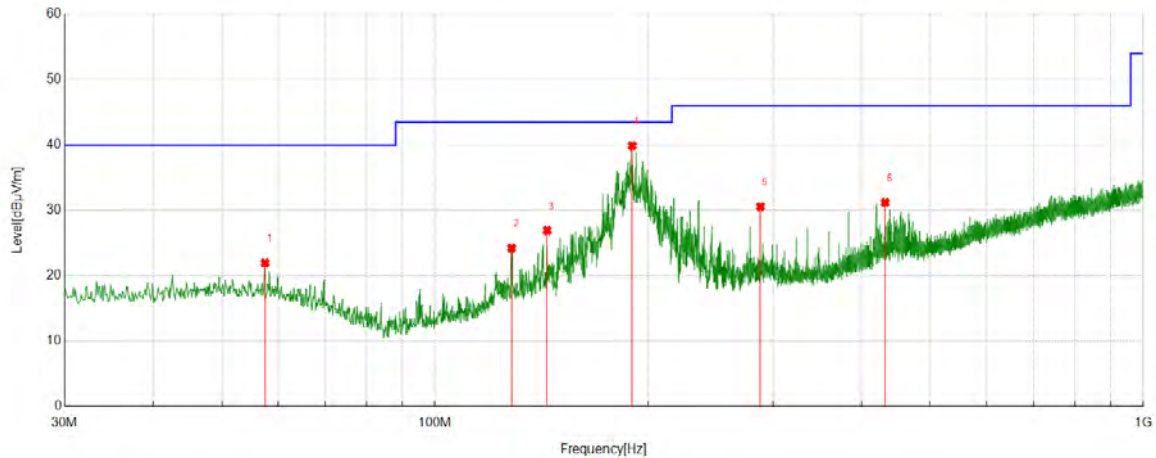

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	57.5508	1.72	20.22	21.94	40.00	18.06	Peak
2	128.2708	5.46	18.76	24.22	43.50	19.28	Peak
3	143.9864	6.60	20.30	26.90	43.50	16.60	Peak
4	189.872	22.18	17.70	39.88	43.50	3.62	Peak
5	288.0458	9.76	20.79	30.55	46.00	15.45	Peak
6	432.1052	6.52	24.67	31.19	46.00	14.81	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

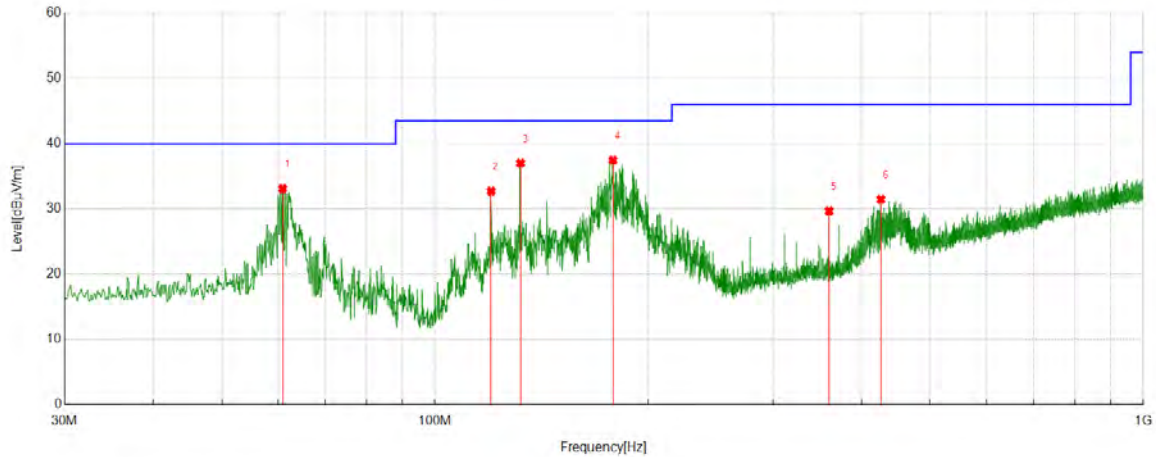


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBμV/m]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
1	60.9461	13.39	19.70	33.09	40.00	6.91	Peak
2	120.025	15.00	17.71	32.71	43.50	10.79	Peak
3	132.0542	17.86	19.16	37.02	43.50	6.48	Peak
4	178.3278	18.45	19.01	37.46	43.50	6.04	Peak
5	360.027	7.30	22.37	29.67	46.00	16.33	Peak
6	426.0906	7.04	24.41	31.45	46.00	14.55	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

### Part 5: 9kHz~30MHz

#### SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)


Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	9kHz~150kHz	PASS

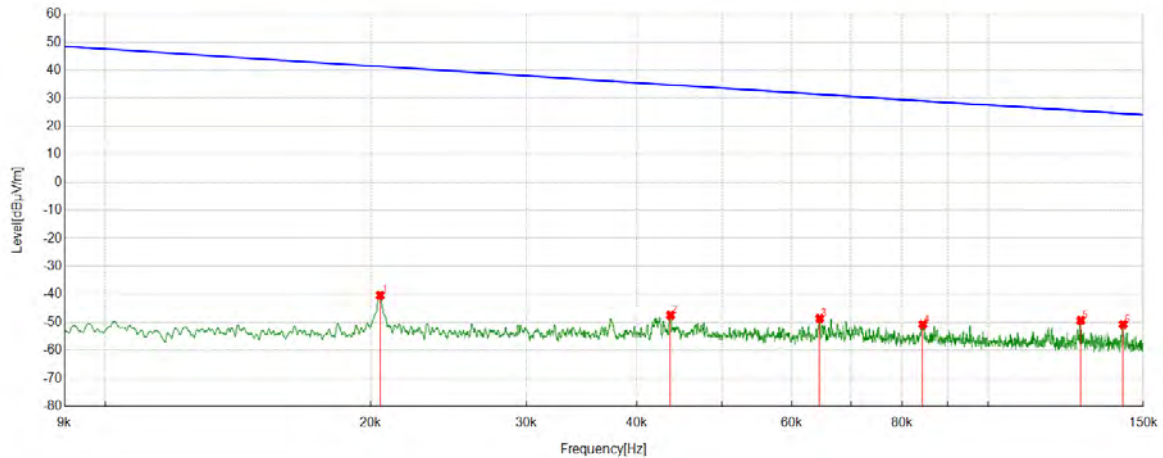

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0205	21.38	-61.74	-40.36	41.37	81.73	Peak
2	0.0437	14.12	-61.60	-47.48	34.78	82.26	Peak
3	0.0645	13.02	-61.61	-48.59	31.41	80.00	Peak
4	0.0844	10.86	-61.63	-50.77	29.08	79.85	Peak
5	0.1274	12.36	-61.72	-49.36	25.50	74.86	Peak
6	0.1423	10.95	-61.73	-50.78	24.54	75.32	Peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
  3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	150kHz~490kHz	PASS

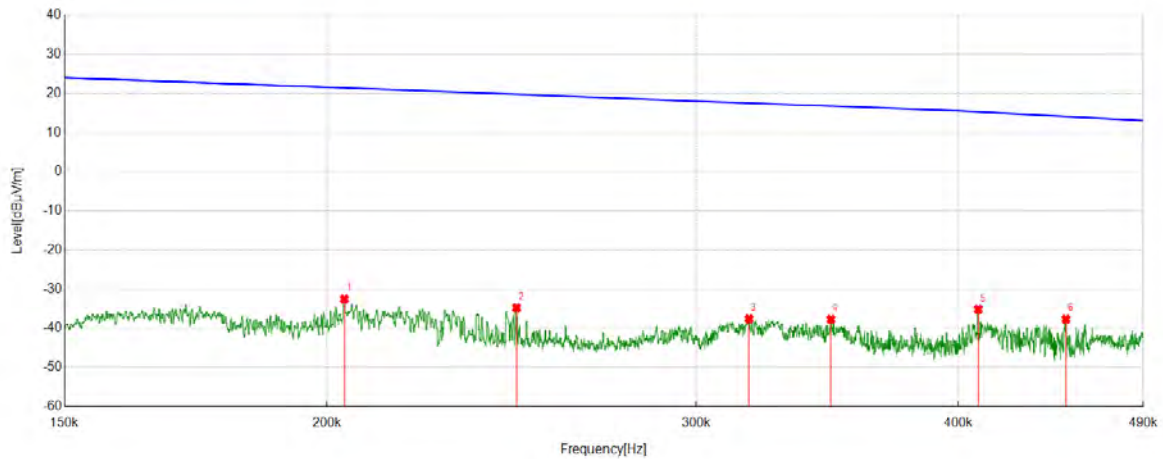

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBμV/m]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
1	0.2039	29.22	-61.77	-32.55	21.41	53.96	Peak
2	0.2463	26.98	-61.79	-34.81	19.77	54.58	Peak
3	0.3179	24.26	-61.82	-37.56	17.56	55.12	Peak
4	0.3478	24.15	-61.83	-37.68	16.78	54.46	Peak
5	0.4088	26.68	-61.84	-35.16	15.30	50.46	Peak
6	0.4501	24.20	-61.86	-37.66	14.12	51.78	Peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	490kHz~30MHz	PASS

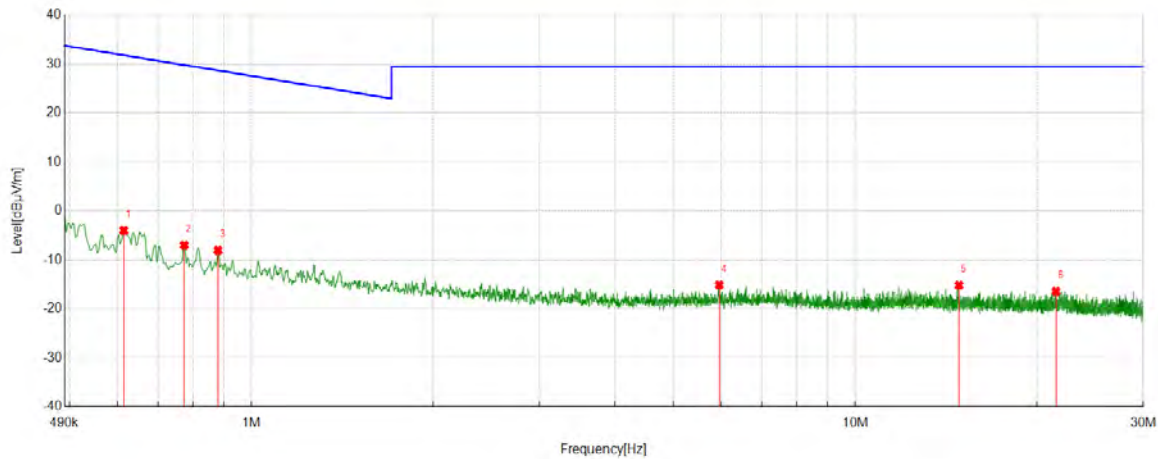

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBμV/m]	[dB]	[dBμV/m]	[dBμV/m]	[dB]	
1	0.614	17.86	-21.89	-4.03	31.84	35.87	Peak
2	0.7733	14.85	-21.87	-7.02	29.83	36.85	Peak
3	0.8796	13.78	-21.87	-8.09	28.72	36.81	Peak
4	5.9499	6.71	-21.85	-15.14	29.54	44.68	Peak
5	14.854	6.35	-21.56	-15.21	29.54	44.75	Peak
6	21.4973	4.96	-21.45	-16.49	29.54	46.03	Peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

## 9. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

**END OF REPORT**