


Site: AC1	Time: 2018/06/08 - 07:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

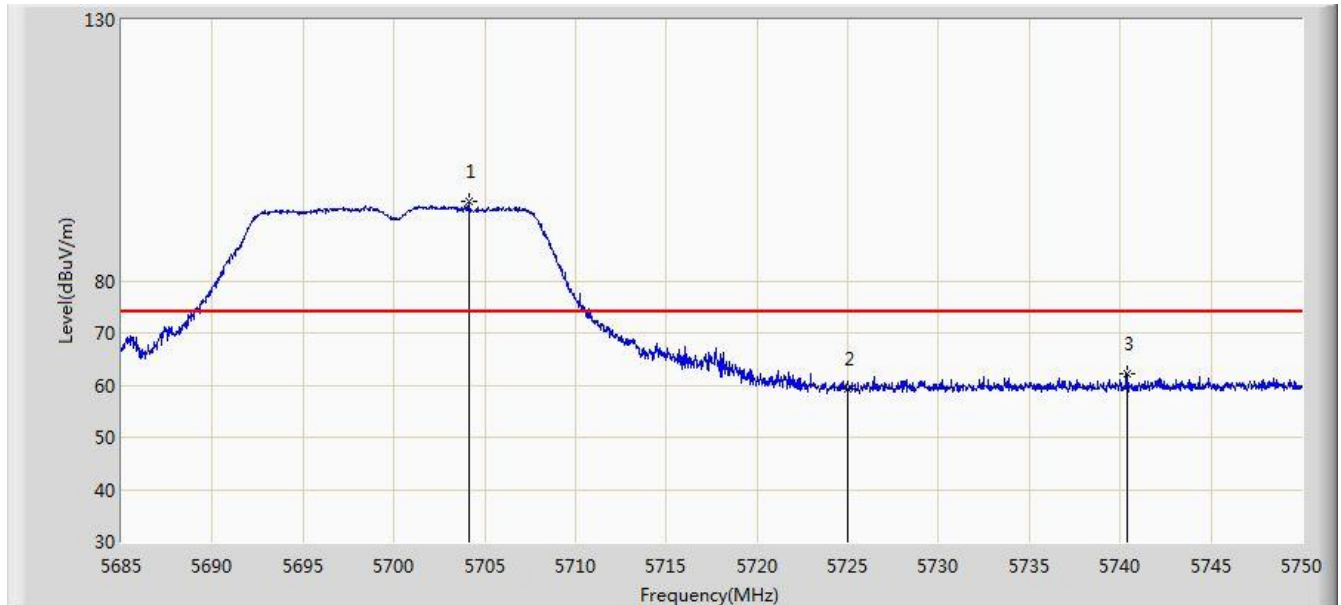


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5704.110	95.156	87.961	N/A	N/A	7.196	PK
2			5725.000	59.194	51.866	-14.806	74.000	7.328	PK
3			5740.348	62.234	54.841	-11.766	74.000	7.393	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

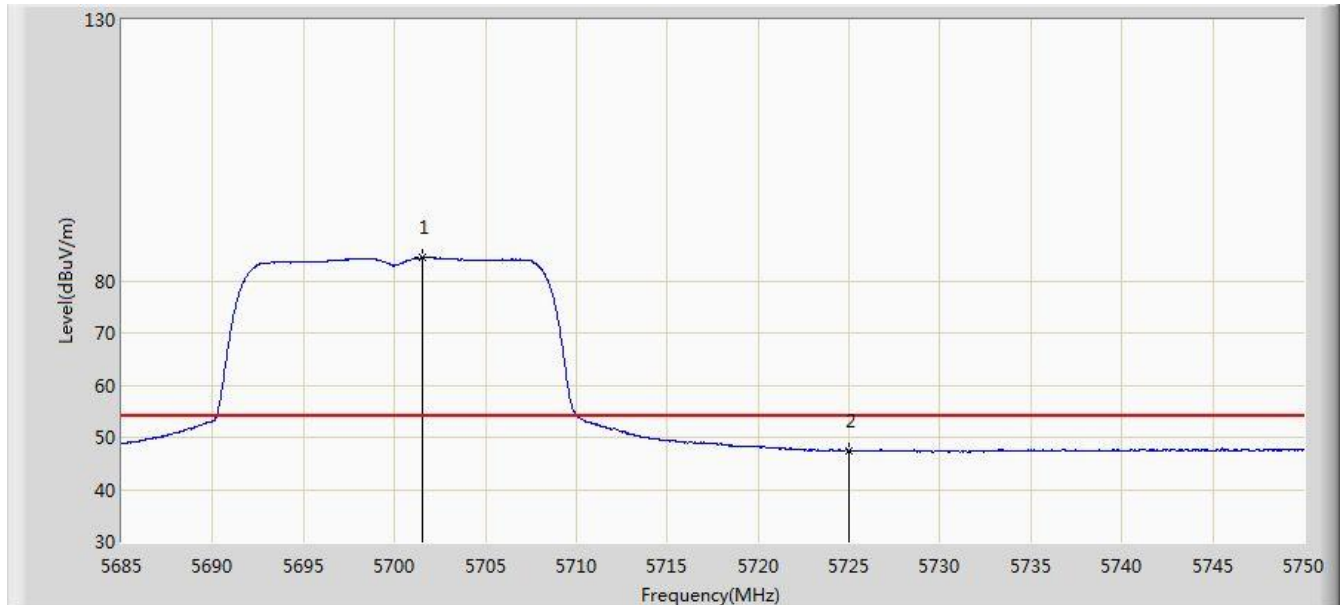


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5701.510	84.427	77.251	N/A	N/A	7.175	AV
2			5725.000	47.395	40.067	-6.605	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

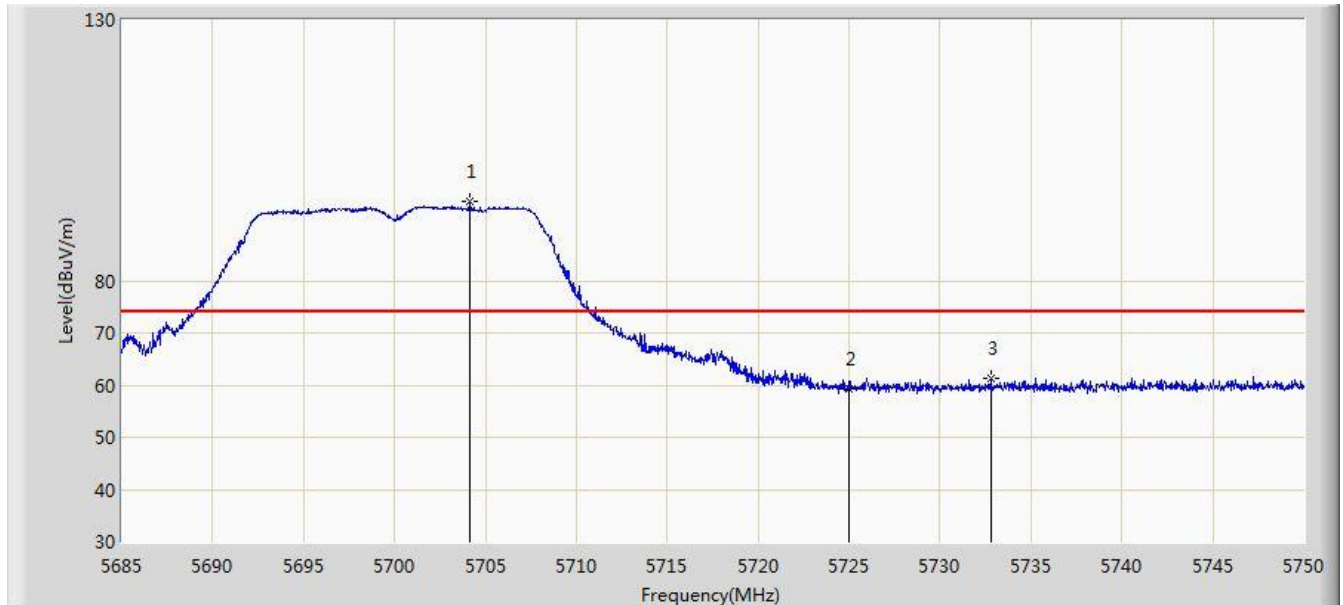


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5704.175	95.075	87.879	N/A	N/A	7.196	PK
2			5725.000	59.417	52.089	-14.583	74.000	7.328	PK
3			5732.775	61.228	53.866	-12.772	74.000	7.363	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5700MHz	

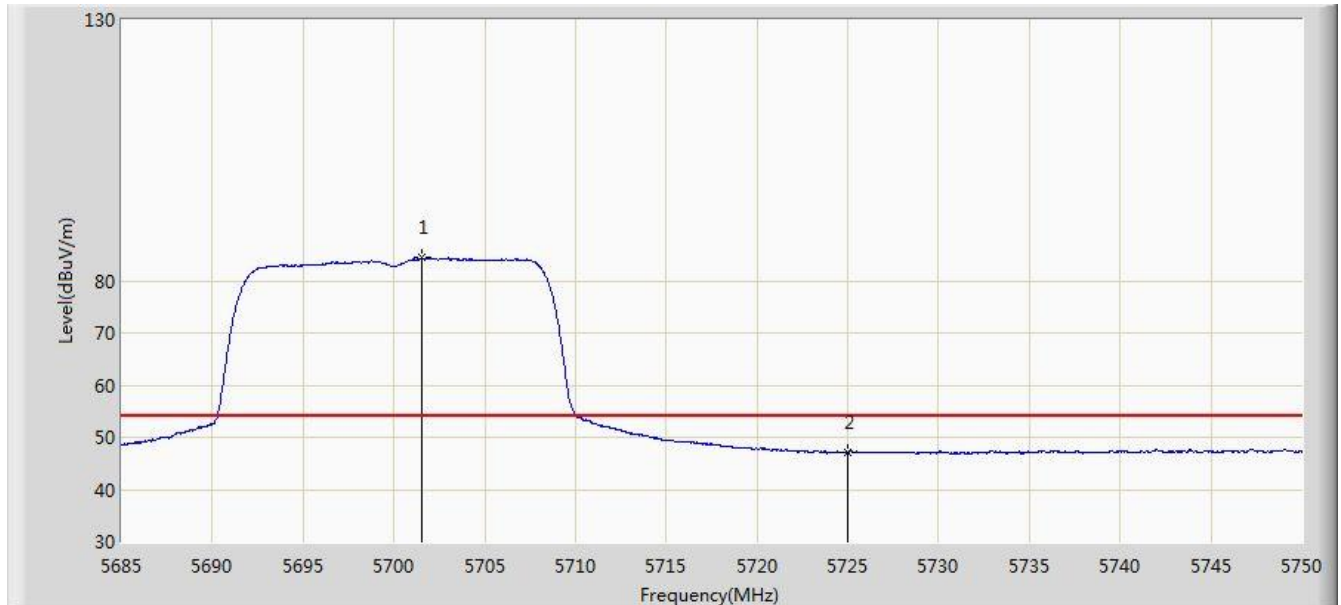


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5701.575	84.375	77.199	N/A	N/A	7.176	AV
2			5725.000	47.129	39.801	-6.871	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:22
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5745MHz	

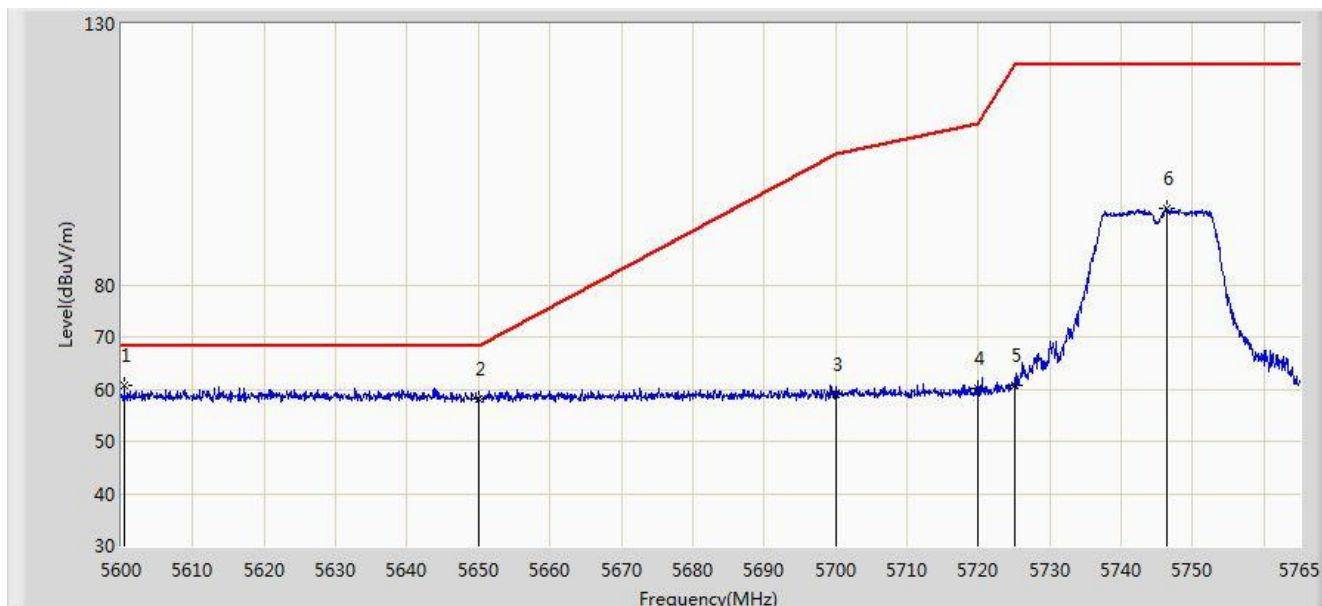


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5600.413	60.835	53.855	-7.365	68.200	6.981	PK
2			5650.000	58.209	51.204	-9.991	68.200	7.005	PK
3			5700.000	59.047	51.882	-46.153	105.200	7.165	PK
4			5720.000	60.051	52.752	-50.749	110.800	7.299	PK
5			5725.000	60.655	53.327	-61.545	122.200	7.328	PK
6			5746.355	94.567	87.161	N/A	N/A	7.406	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:24
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5745MHz	

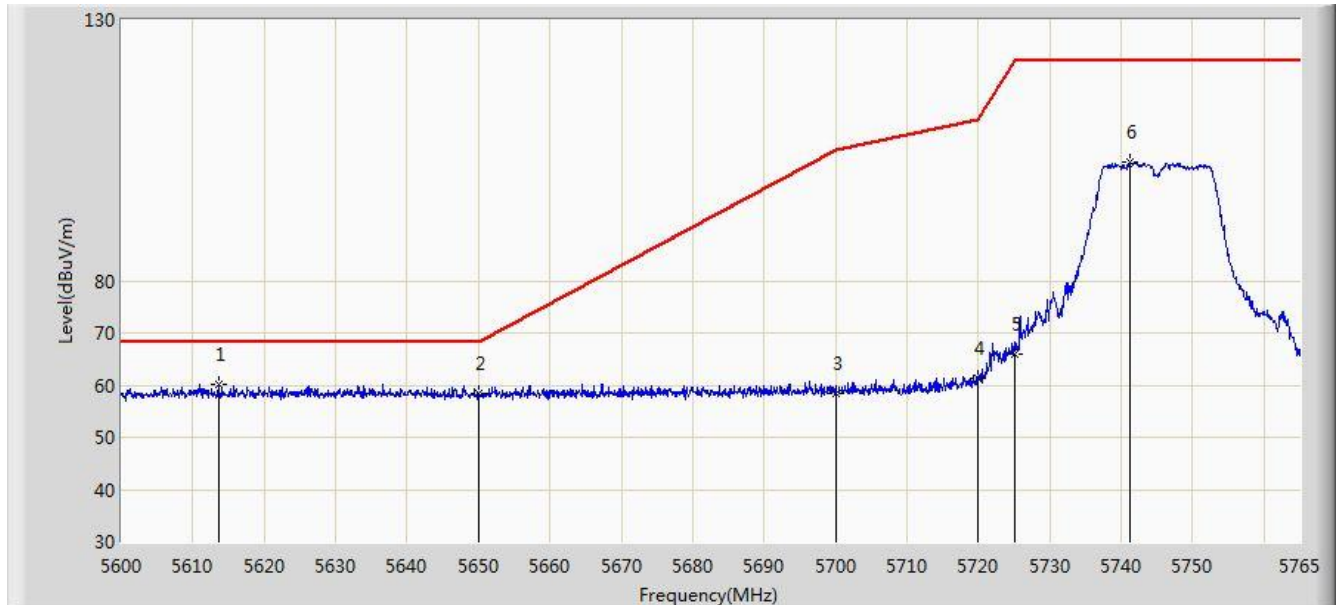


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5613.612	60.282	53.290	-7.918	68.200	6.991	PK
2			5650.000	58.499	51.494	-9.701	68.200	7.005	PK
3			5700.000	58.301	51.136	-46.899	105.200	7.165	PK
4			5720.000	61.260	53.961	-49.540	110.800	7.299	PK
5			5725.000	65.985	58.657	-56.215	122.200	7.328	PK
6			5741.240	102.770	95.373	N/A	N/A	7.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:34
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5825MHz	

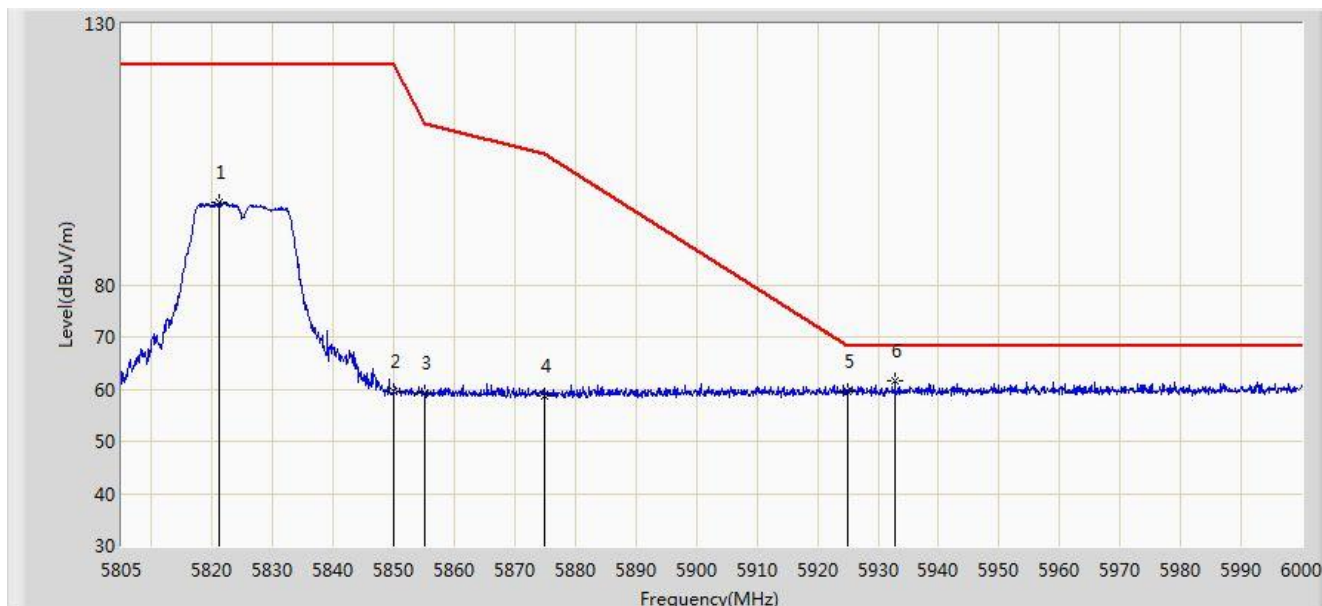


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.185	95.748	88.051	N/A	N/A	7.697	PK
2			5850.000	59.501	51.602	-62.699	122.200	7.899	PK
3			5855.000	59.299	51.393	-51.501	110.800	7.905	PK
4			5875.000	58.682	50.774	-46.518	105.200	7.909	PK
5			5925.000	59.667	51.634	-8.533	68.200	8.033	PK
6			5932.822	61.568	53.497	-6.632	68.200	8.071	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:37
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11a at Channel 5825MHz	

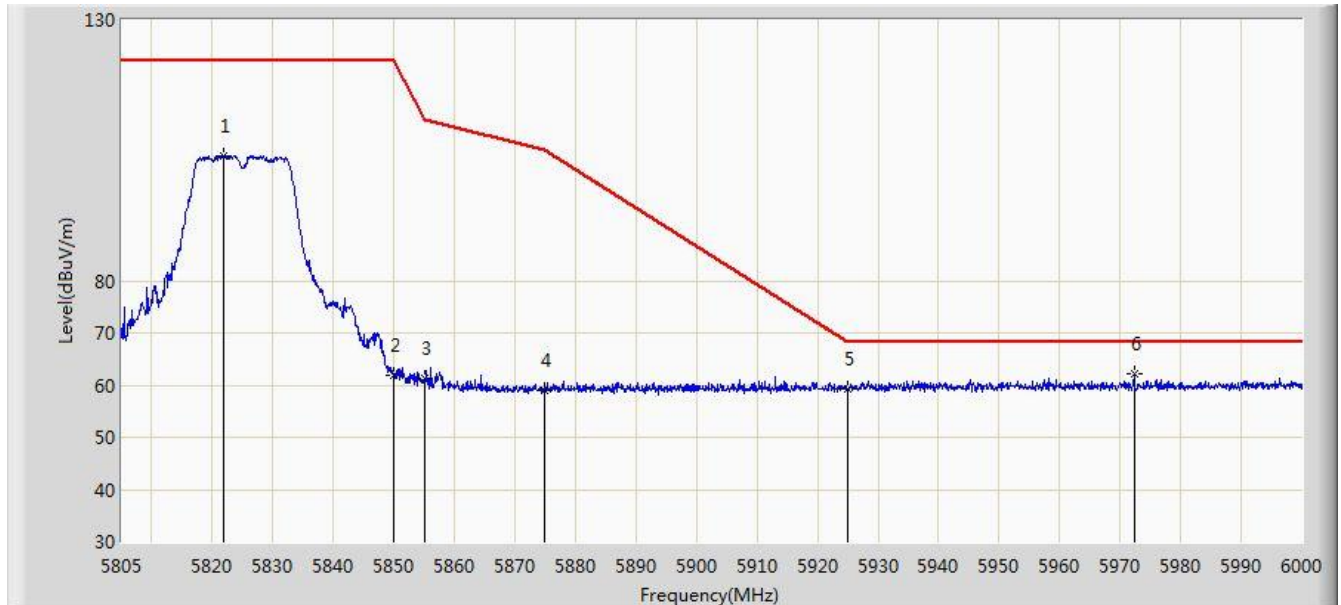


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.770	104.047	96.343	N/A	N/A	7.704	PK
2			5850.000	61.904	54.005	-60.296	122.200	7.899	PK
3			5855.000	61.231	53.325	-49.569	110.800	7.905	PK
4			5875.000	58.860	50.952	-46.340	105.200	7.909	PK
5			5925.000	59.378	51.345	-8.822	68.200	8.033	PK
6			5972.310	62.116	54.032	-6.084	68.200	8.085	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

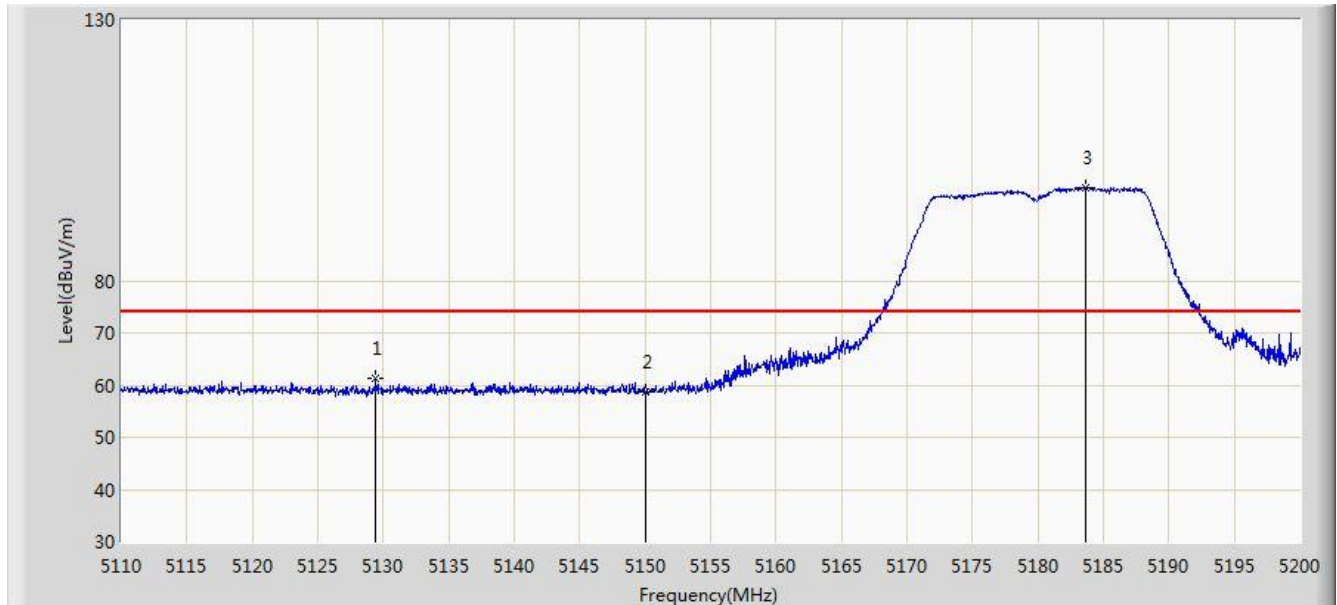


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.440	61.193	55.118	-12.807	74.000	6.075	PK
2			5150.000	58.752	52.629	-15.248	74.000	6.123	PK
3			5183.620	97.965	91.893	N/A	N/A	6.072	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

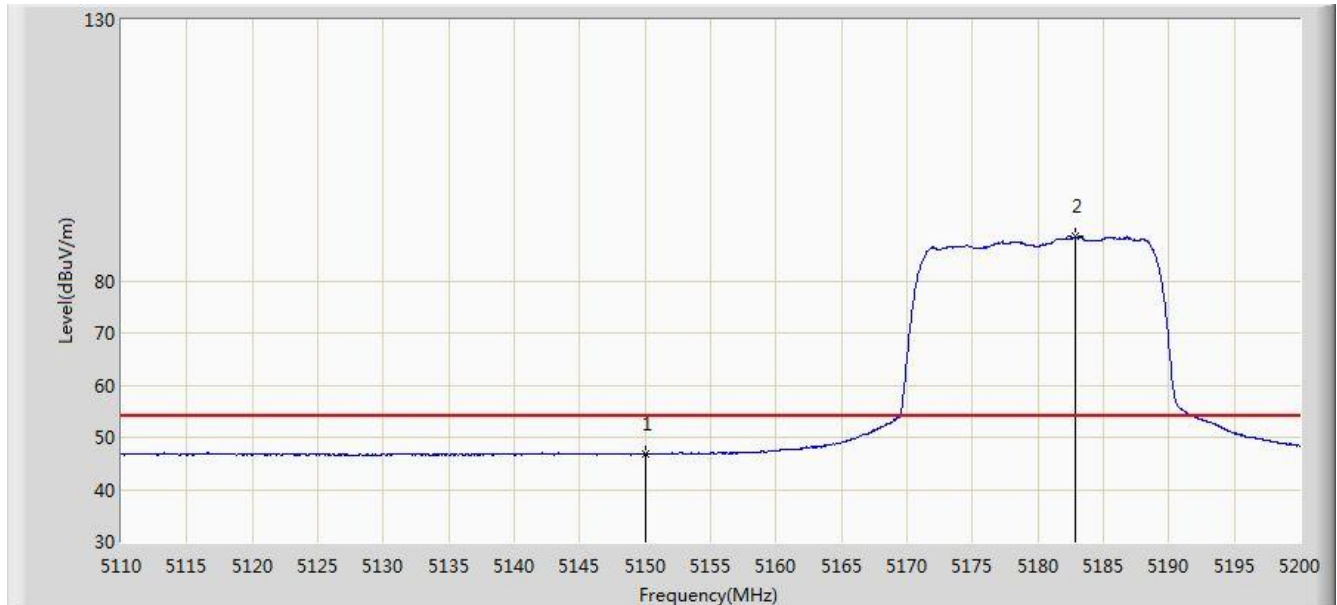


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.776	40.653	-7.224	54.000	6.123	AV
2			5182.855	88.506	82.428	N/A	N/A	6.078	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

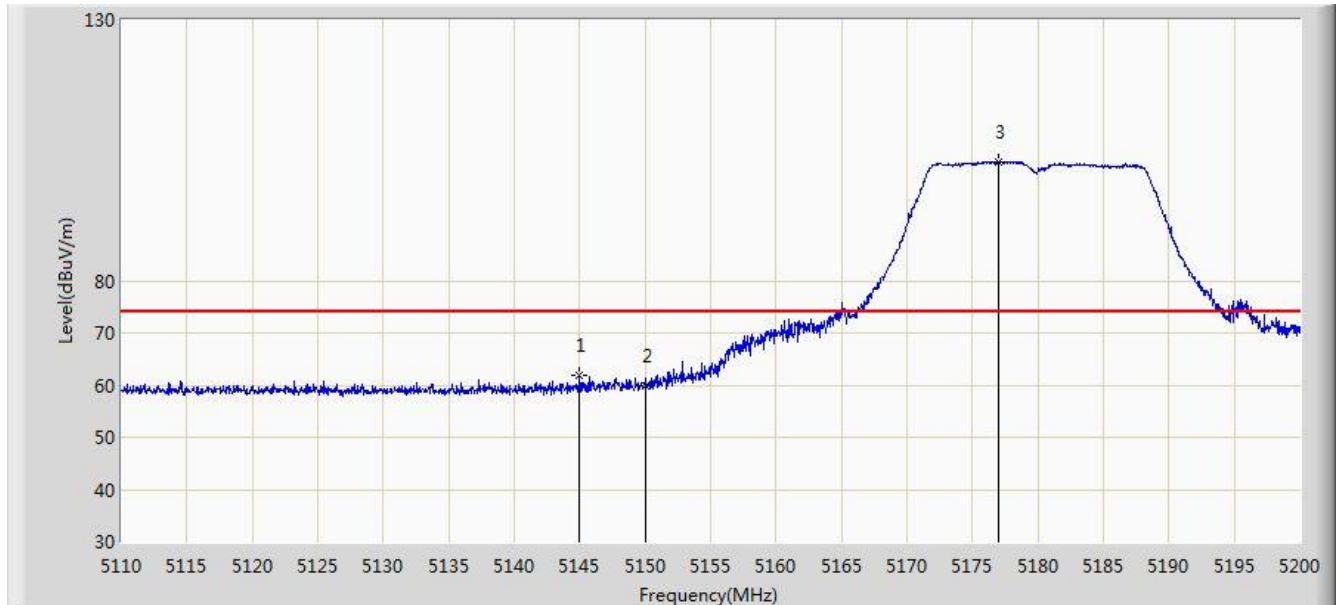


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.010	61.940	55.830	-12.060	74.000	6.111	PK
2			5150.000	59.942	53.819	-14.058	74.000	6.123	PK
3			5176.960	102.897	96.798	N/A	N/A	6.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 03:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

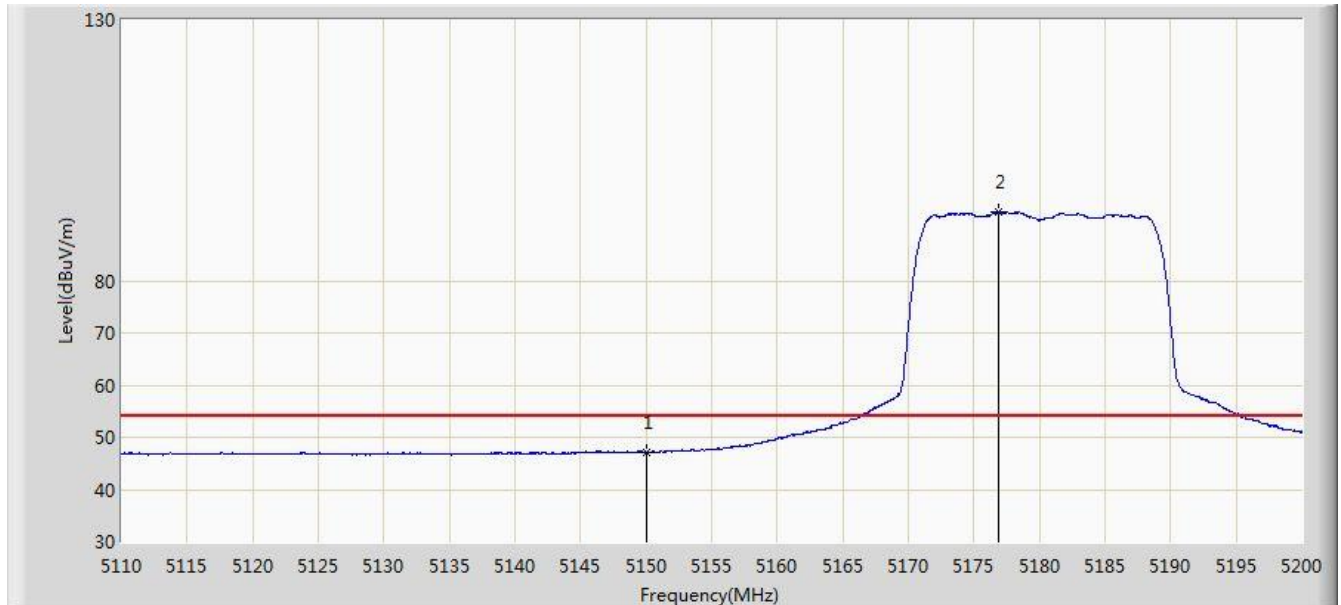


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.145	41.022	-6.855	54.000	6.123	AV
2			5176.870	93.241	87.142	N/A	N/A	6.099	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

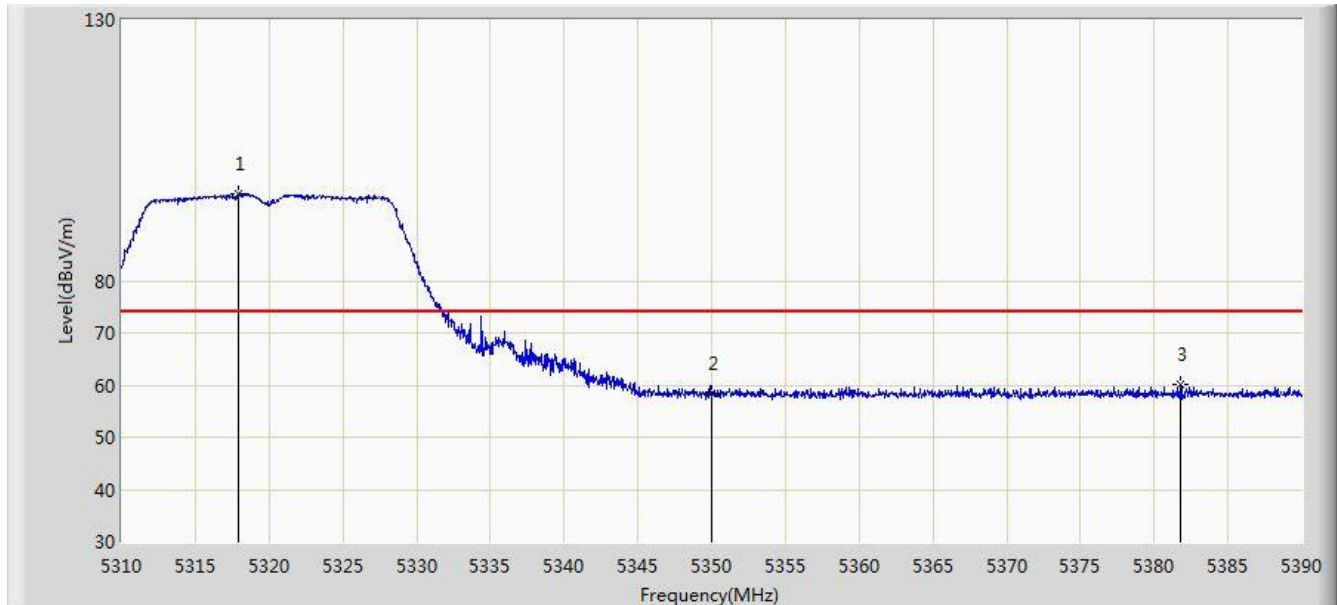


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5317.920	96.624	90.900	N/A	N/A	5.724	PK
2			5350.000	58.475	52.492	-15.525	74.000	5.983	PK
3			5381.800	60.217	54.085	-13.783	74.000	6.131	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

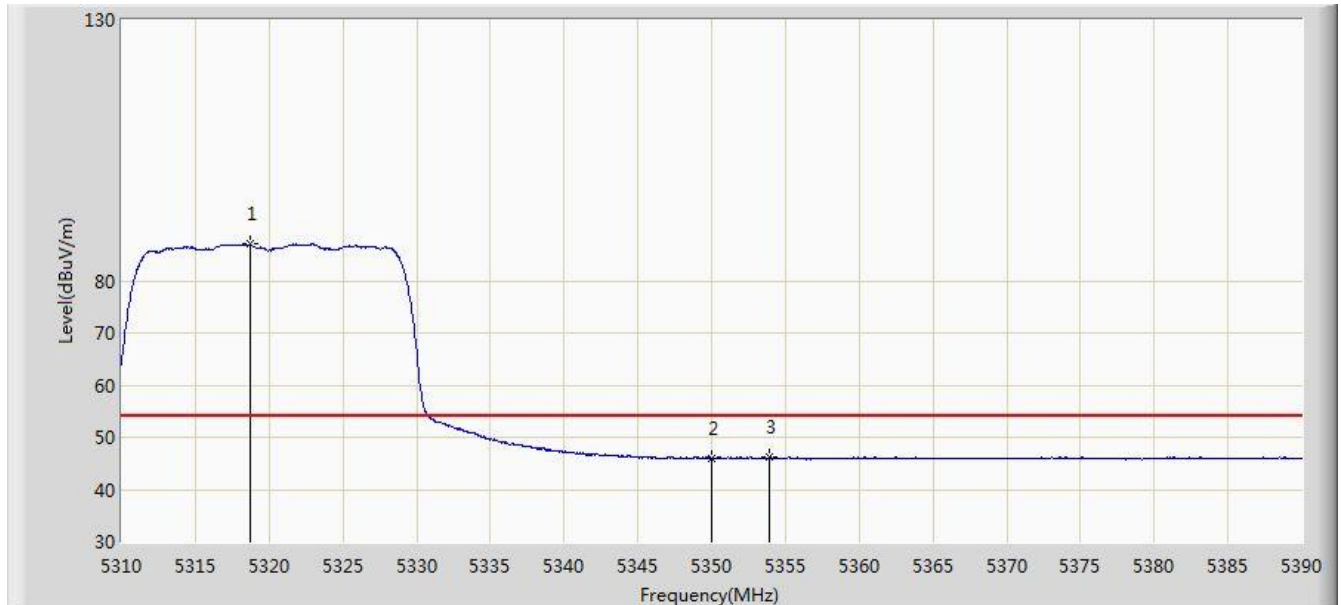


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5318.680	86.990	81.261	N/A	N/A	5.728	AV
2			5350.000	46.012	40.029	-7.988	54.000	5.983	AV
3			5353.920	46.326	40.314	-7.674	54.000	6.012	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

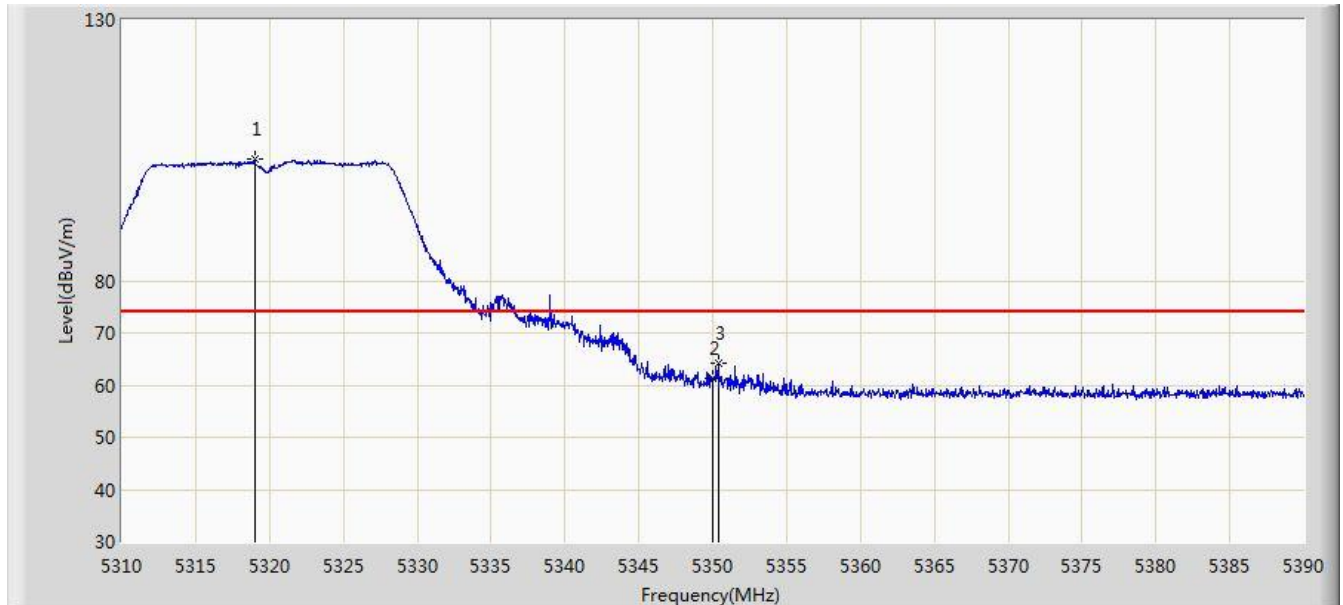


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5319.000	103.255	97.524	N/A	N/A	5.730	PK
2			5350.000	61.379	55.396	-12.621	74.000	5.983	PK
3			5350.360	64.168	58.181	-9.832	74.000	5.987	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

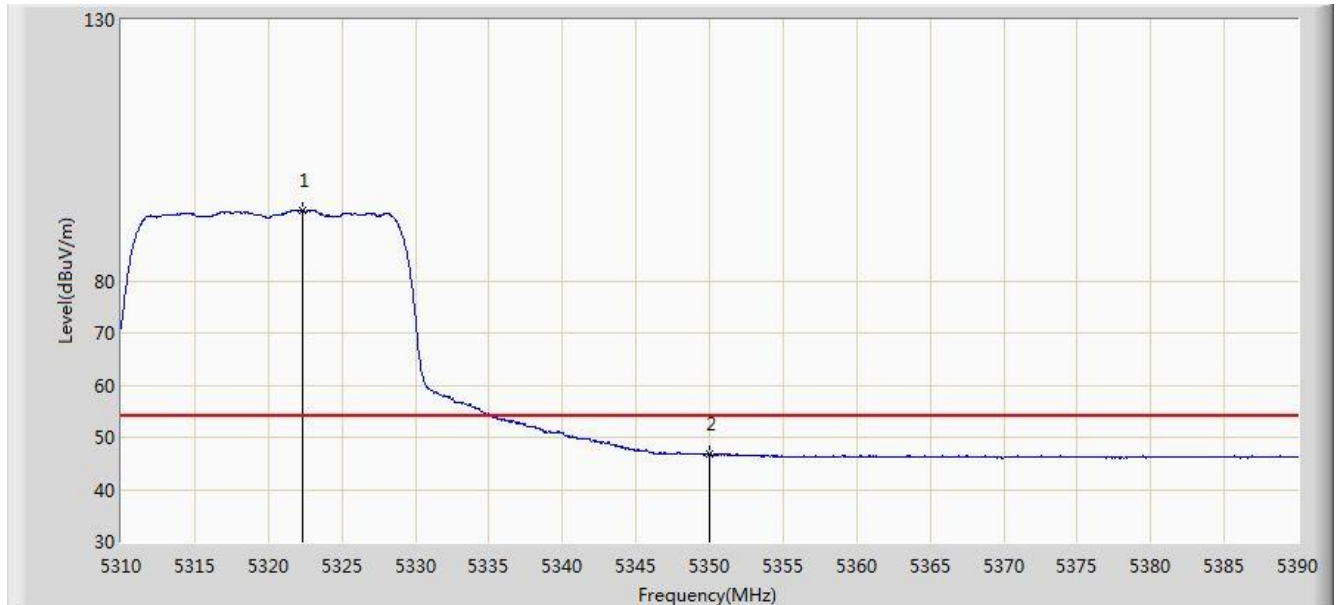


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.320	93.520	87.767	N/A	N/A	5.752	AV
2			5350.000	46.798	40.815	-7.202	54.000	5.983	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MH	

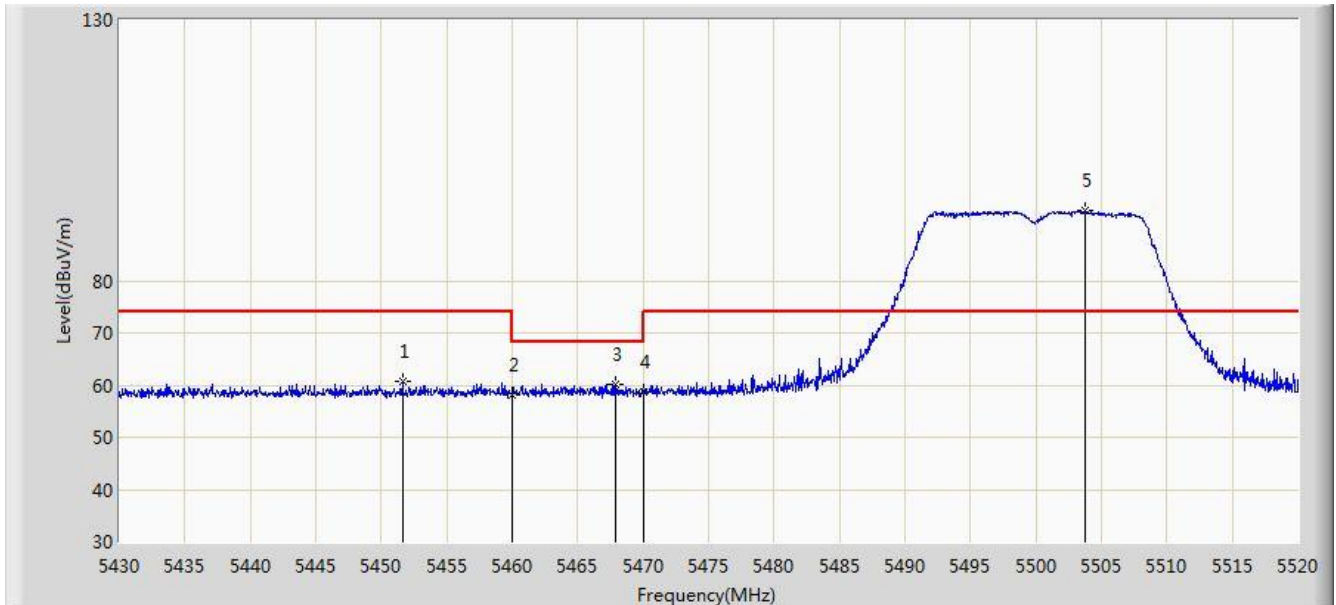


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.600	60.689	53.932	-13.311	74.000	6.756	PK
2			5460.000	58.183	51.381	-15.817	74.000	6.802	PK
3			5467.845	60.247	53.411	-7.953	68.200	6.836	PK
4			5470.000	58.553	51.708	-9.647	68.200	6.845	PK
5			5503.755	93.340	86.527	N/A	N/A	6.812	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

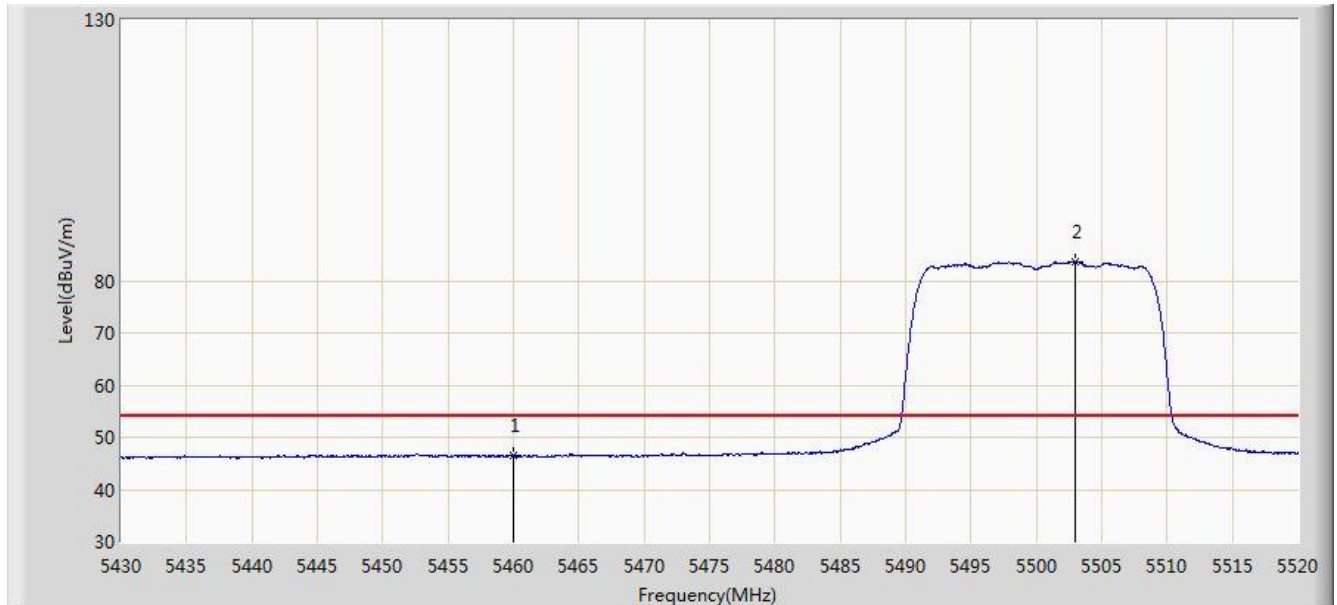


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.489	39.687	-7.511	54.000	6.802	AV
2			5502.945	83.762	76.948	N/A	N/A	6.815	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

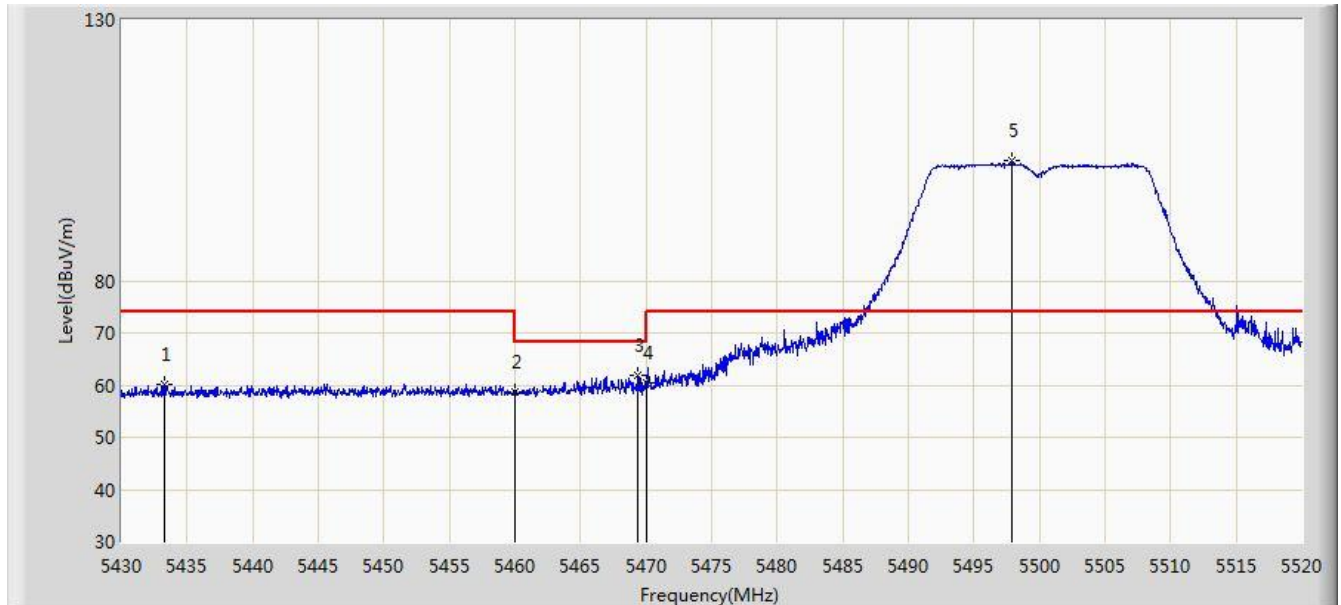


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5433.240	60.140	53.500	-13.860	74.000	6.640	PK
2			5460.000	58.809	52.007	-15.191	74.000	6.802	PK
3			5469.375	61.926	55.084	-6.274	68.200	6.842	PK
4			5470.000	60.479	53.634	-7.721	68.200	6.845	PK
5			5497.860	103.095	96.272	N/A	N/A	6.823	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

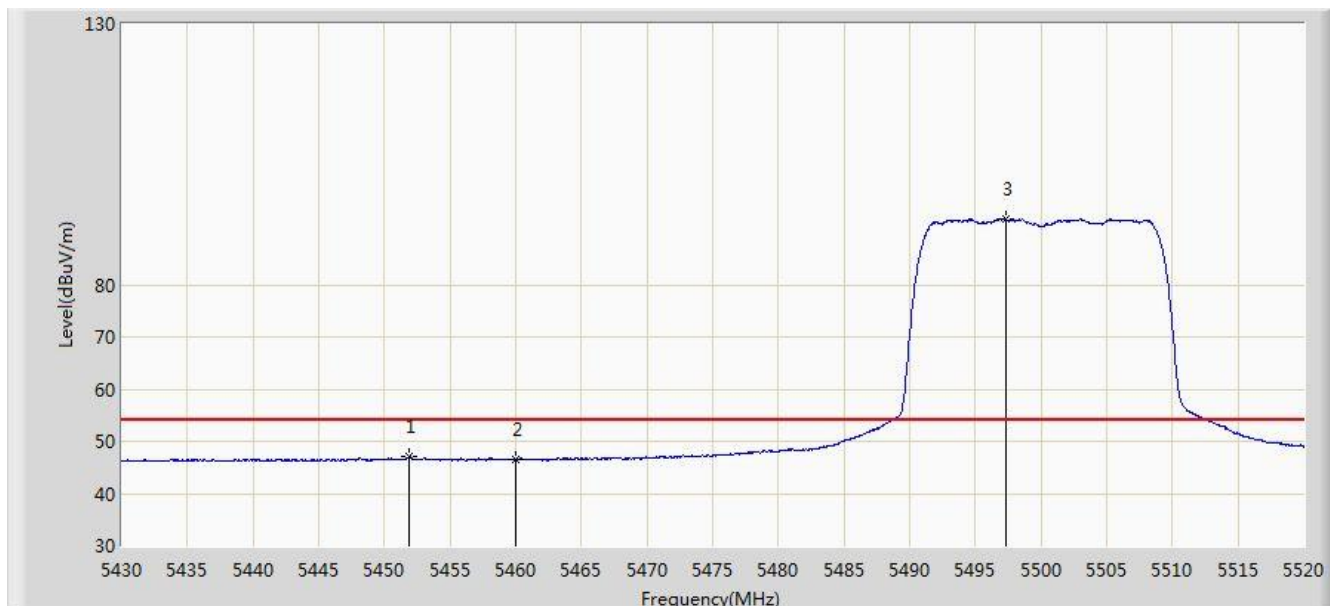


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.915	46.972	40.213	-7.028	54.000	6.759	AV
2			5460.000	46.455	39.653	-7.545	54.000	6.802	AV
3			5497.320	92.689	85.865	N/A	N/A	6.824	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

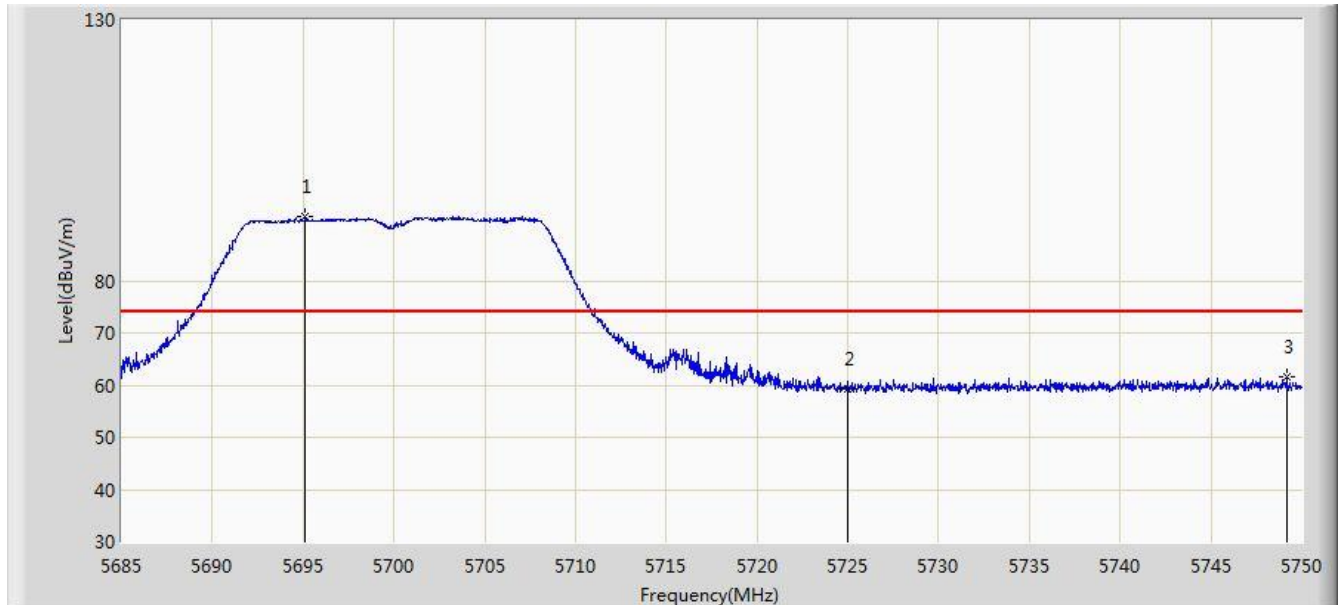


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5695.140	92.462	85.329	N/A	N/A	7.133	PK
2			5725.000	59.152	51.824	-14.848	74.000	7.328	PK
3			5749.155	61.571	54.163	-12.429	74.000	7.407	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

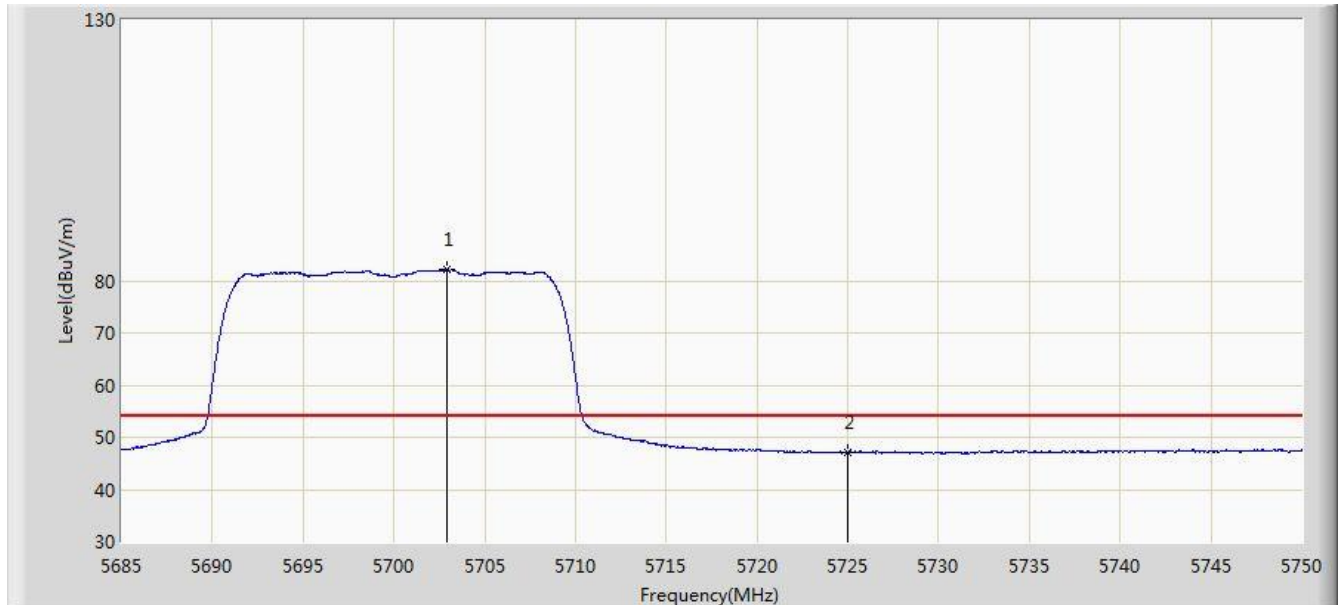


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5702.908	82.138	74.953	N/A	N/A	7.185	AV
2			5725.000	47.054	39.726	-6.946	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

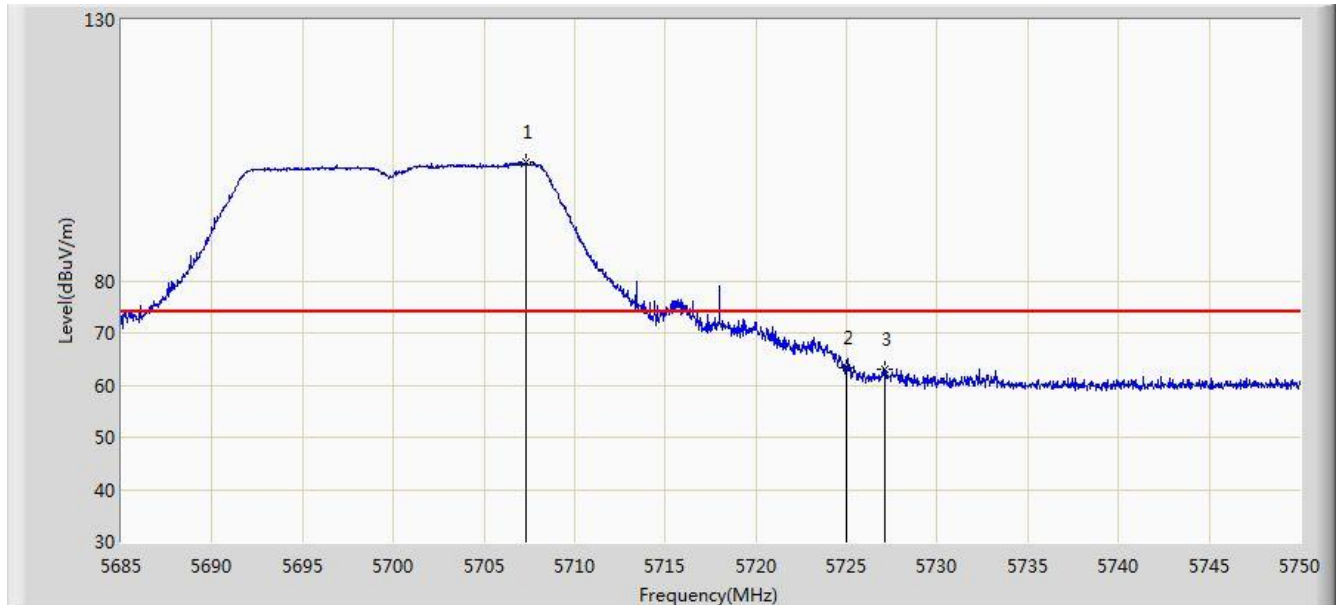


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5707.328	102.828	95.605	N/A	N/A	7.223	PK
2			5725.000	63.358	56.030	-10.642	74.000	7.328	PK
3			5727.120	63.161	55.823	-10.839	74.000	7.339	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

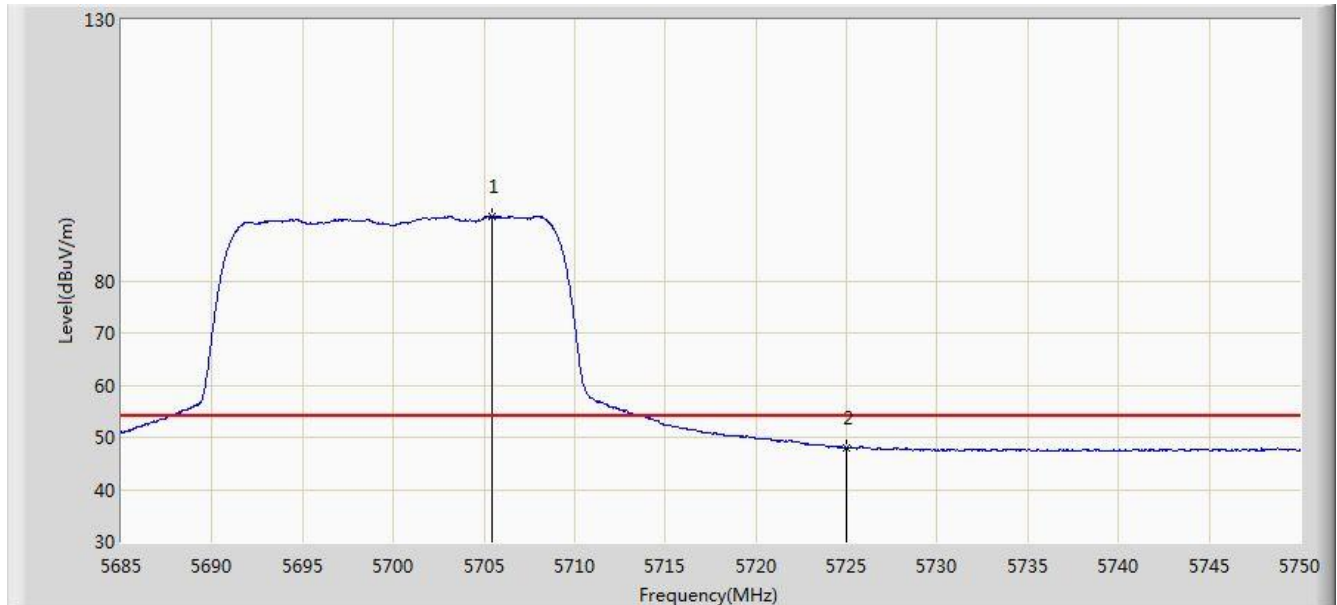


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5705.410	92.363	85.157	N/A	N/A	7.207	AV
2			5725.000	48.023	40.695	-5.977	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:09
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

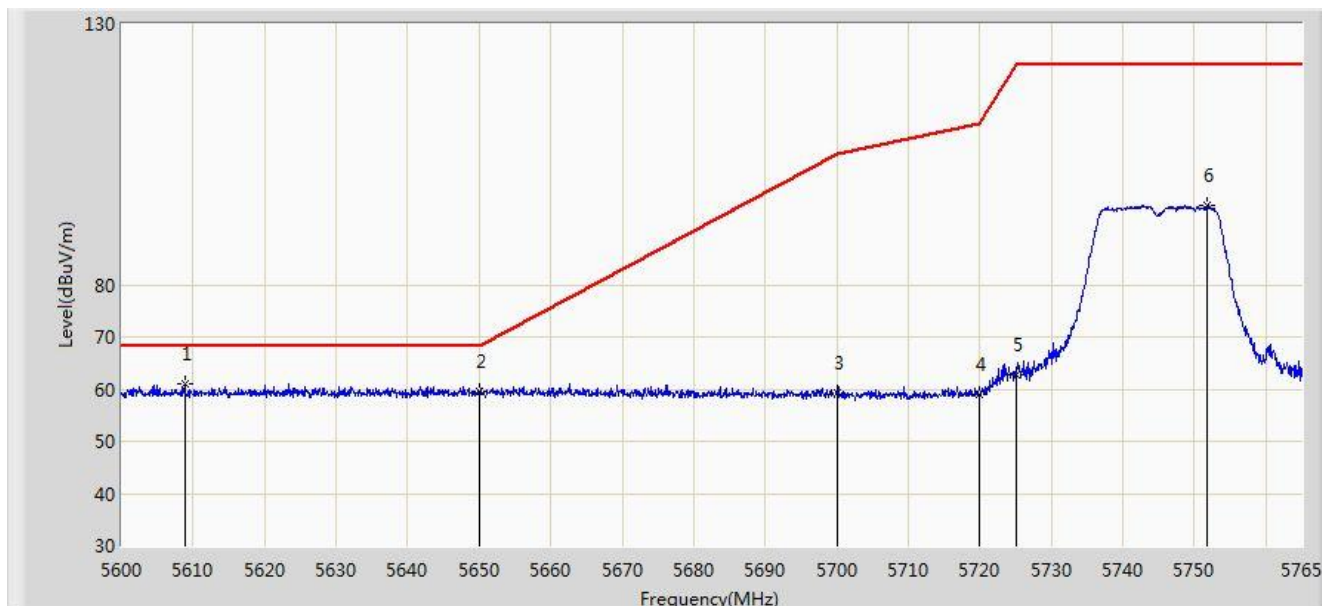


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5608.828	60.886	54.211	-7.314	68.200	6.675	PK
2			5650.000	59.470	52.487	-8.730	68.200	6.983	PK
3			5700.000	59.319	52.341	-45.881	105.200	6.978	PK
4			5720.000	58.898	51.784	-51.902	110.800	7.114	PK
5			5725.000	62.626	55.461	-59.574	122.200	7.165	PK
6			5751.800	95.268	87.868	N/A	N/A	7.400	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

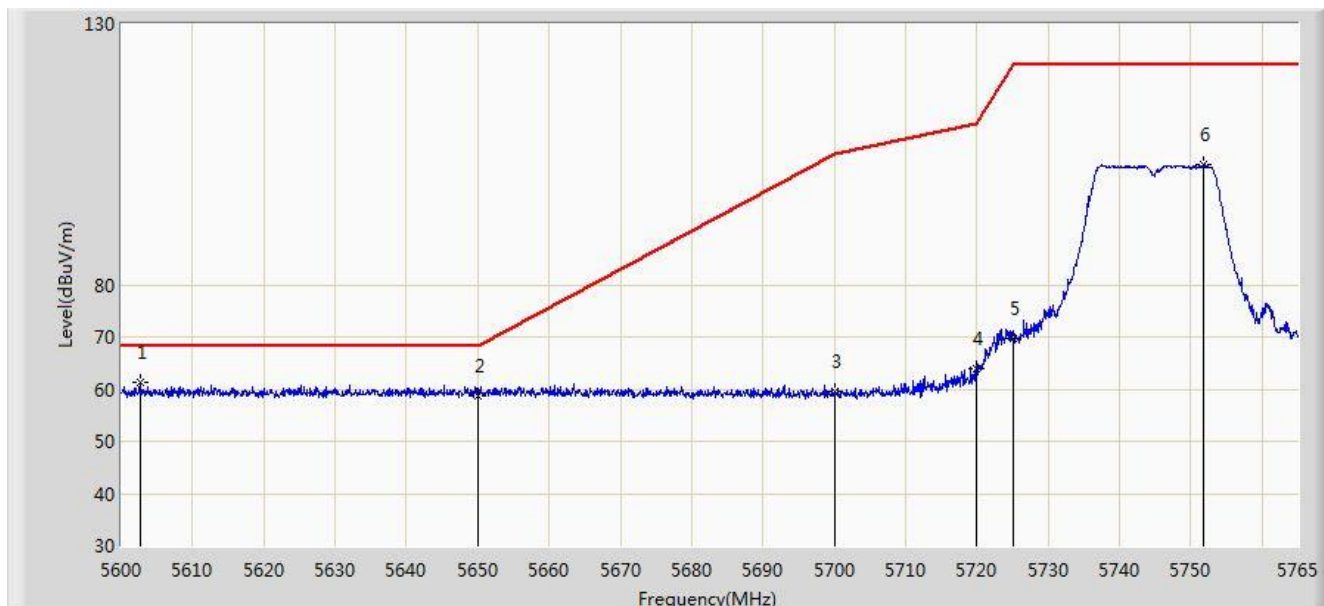


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5602.723	61.322	54.652	-6.878	68.200	6.669	PK
2			5650.000	58.689	51.706	-9.511	68.200	6.983	PK
3			5700.000	59.458	52.480	-45.742	105.200	6.978	PK
4			5720.000	63.870	56.756	-46.930	110.800	7.114	PK
5			5725.000	69.569	62.404	-52.631	122.200	7.165	PK
6			5751.717	103.006	95.607	N/A	N/A	7.399	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:46
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

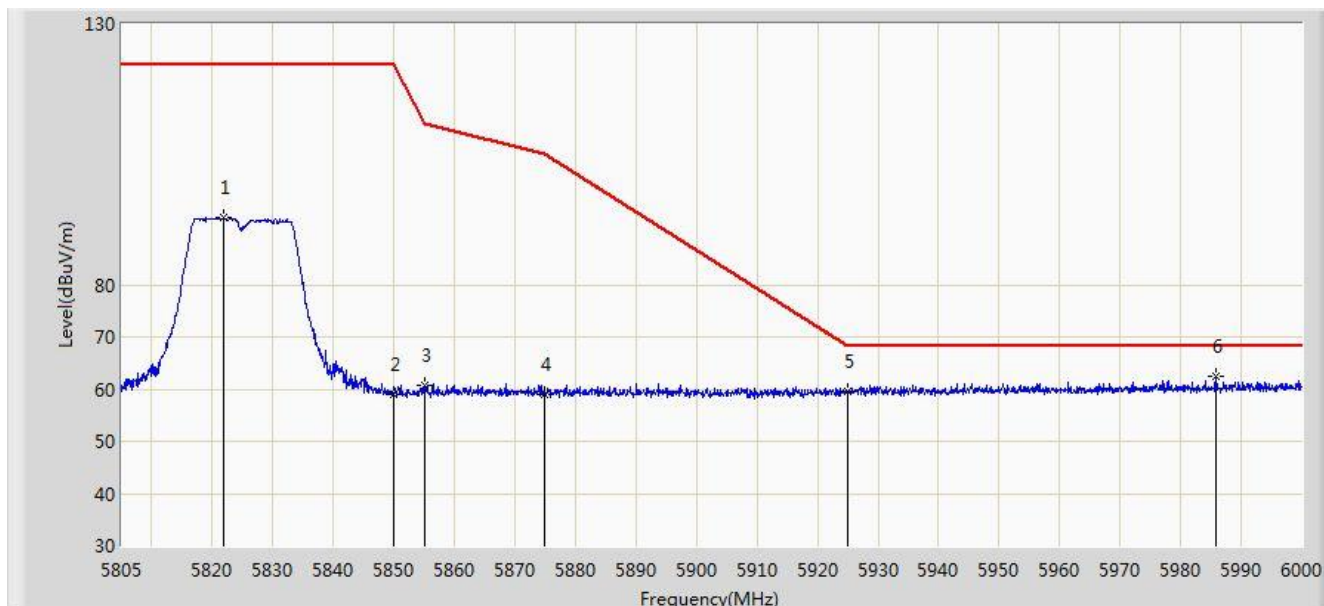


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5821.770	92.827	85.183	N/A	N/A	7.643	PK
2			5850.000	58.997	51.224	-63.203	122.200	7.774	PK
3			5855.000	60.660	52.884	-50.140	110.800	7.775	PK
4			5875.000	59.072	51.254	-46.128	105.200	7.818	PK
5			5925.000	59.508	51.689	-8.692	68.200	7.819	PK
6			5985.862	62.379	54.466	-5.821	68.200	7.913	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:49
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

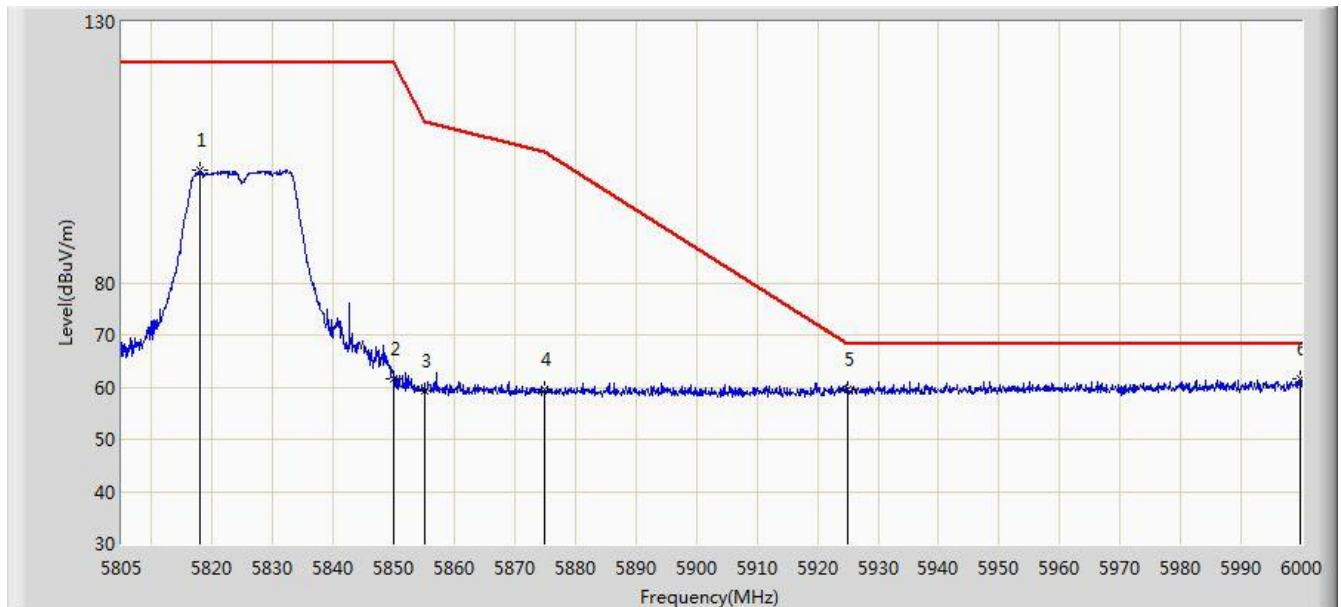


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5817.870	101.531	93.905	N/A	N/A	7.626	PK
2			5850.000	61.692	53.919	-60.508	122.200	7.774	PK
3			5855.000	59.393	51.617	-51.407	110.800	7.775	PK
4			5875.000	59.599	51.781	-45.601	105.200	7.818	PK
5			5925.000	59.675	51.856	-8.525	68.200	7.819	PK
6			5999.708	61.536	53.576	-6.664	68.200	7.960	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

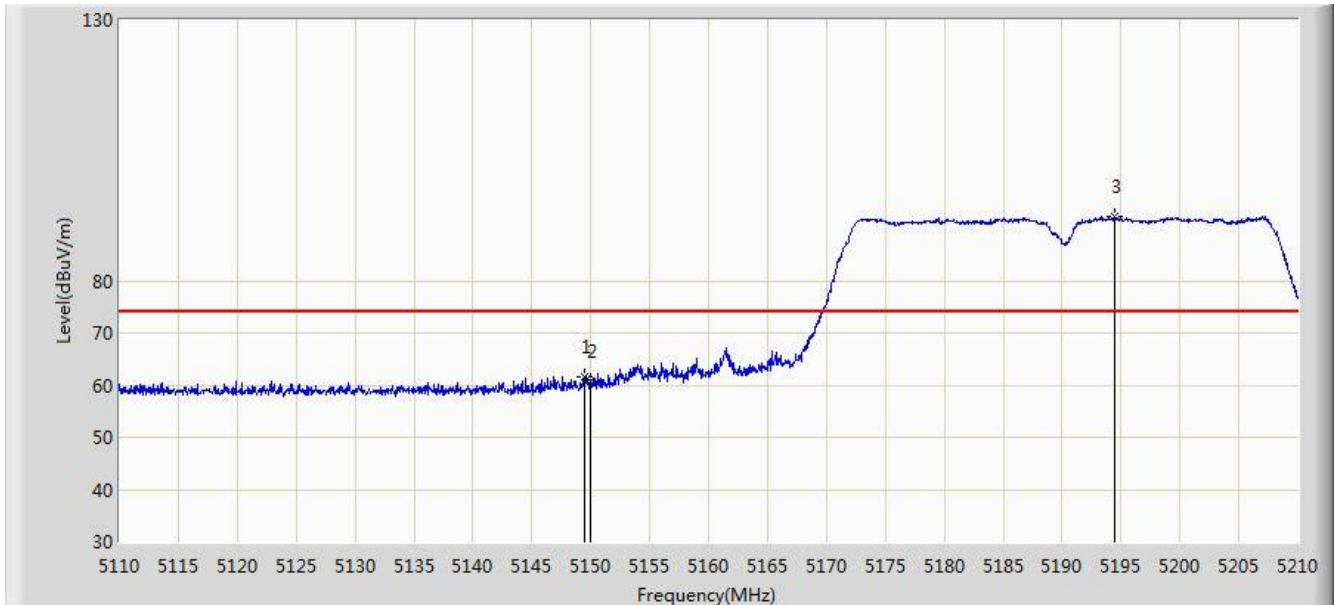


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.450	61.670	55.109	-12.330	74.000	6.561	PK
2			5150.000	60.716	54.154	-13.284	74.000	6.562	PK
3			5194.400	92.356	85.999	N/A	N/A	6.357	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

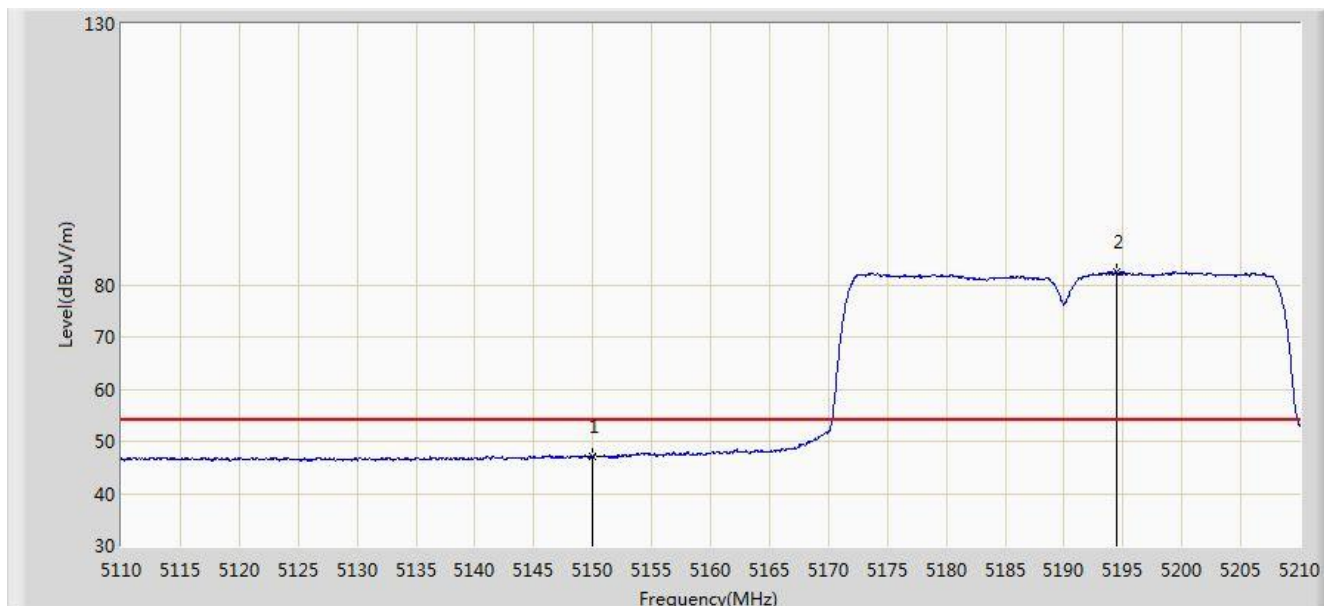


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.010	40.448	-6.990	54.000	6.562	AV
2			5194.400	82.531	76.174	N/A	N/A	6.357	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

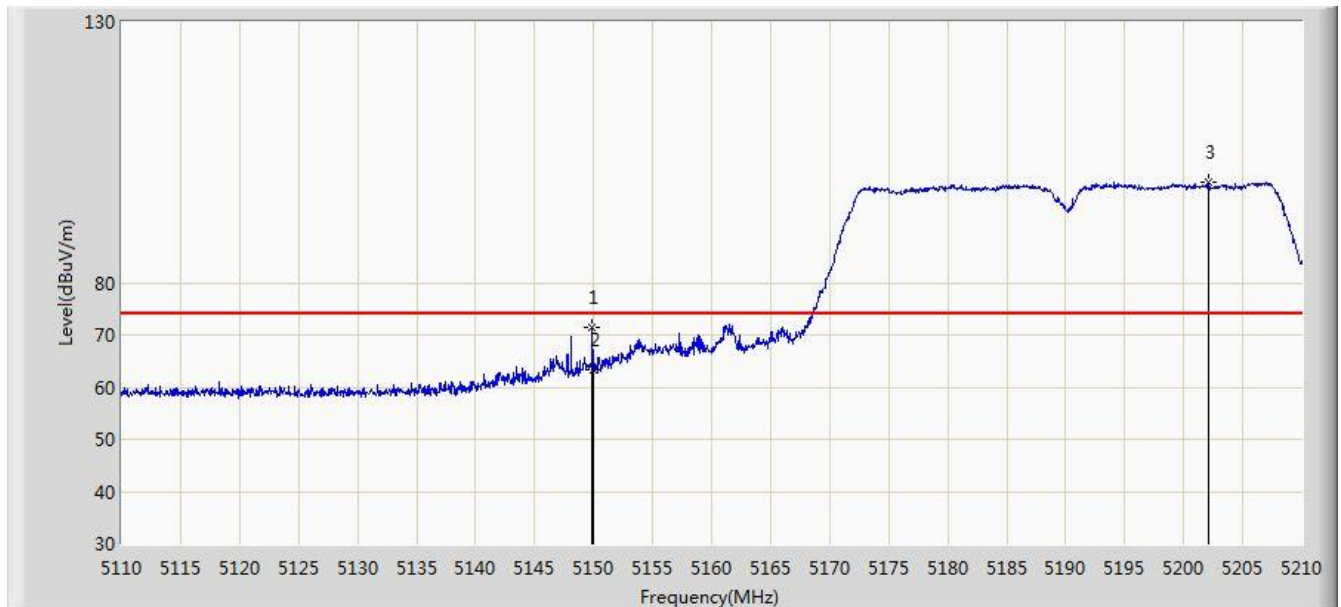


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.900	71.581	65.019	-2.419	74.000	6.562	PK
2			5150.000	63.421	56.859	-10.579	74.000	6.562	PK
3			5202.050	99.251	92.910	N/A	N/A	6.341	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 07:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

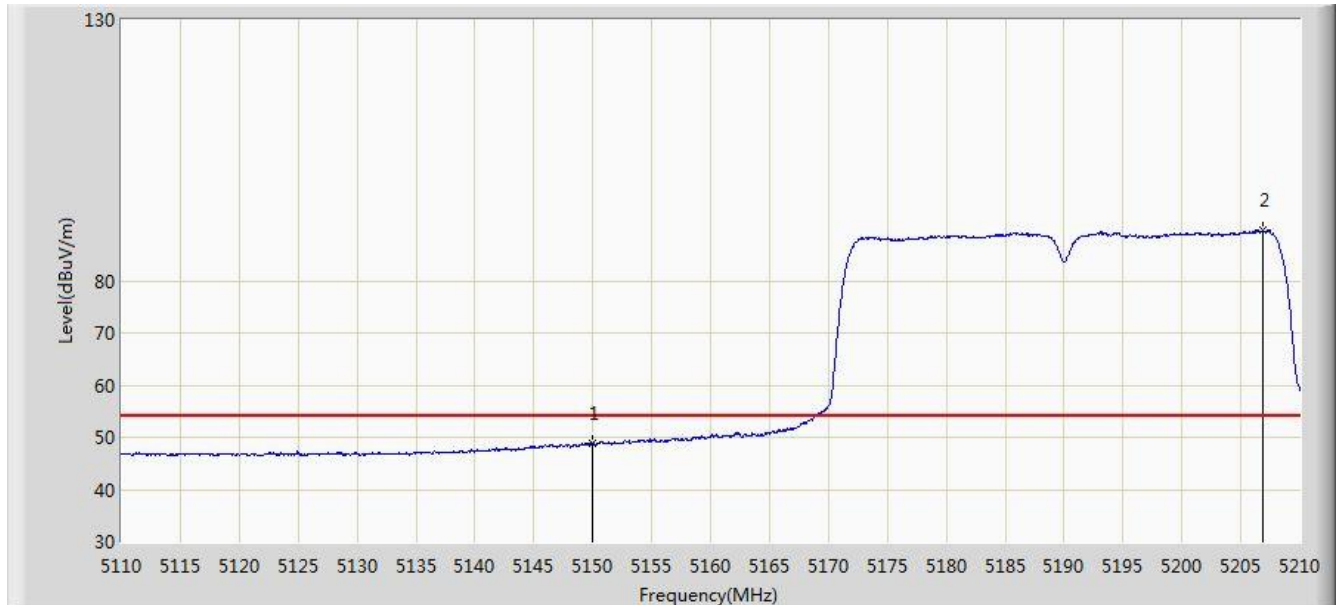


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.887	42.325	-5.113	54.000	6.562	AV
2			5206.900	89.625	83.268	N/A	N/A	6.357	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

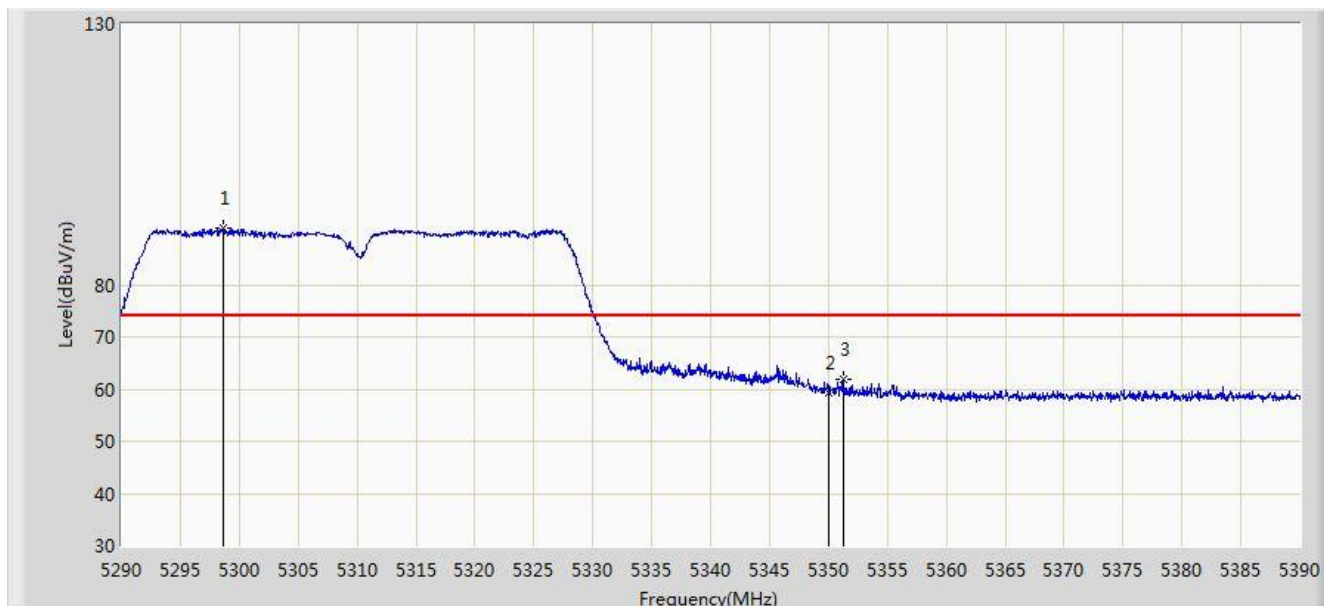


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5298.600	90.809	84.551	N/A	N/A	6.257	PK
2			5350.000	59.325	52.865	-14.675	74.000	6.460	PK
3			5351.250	61.958	55.491	-12.042	74.000	6.467	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

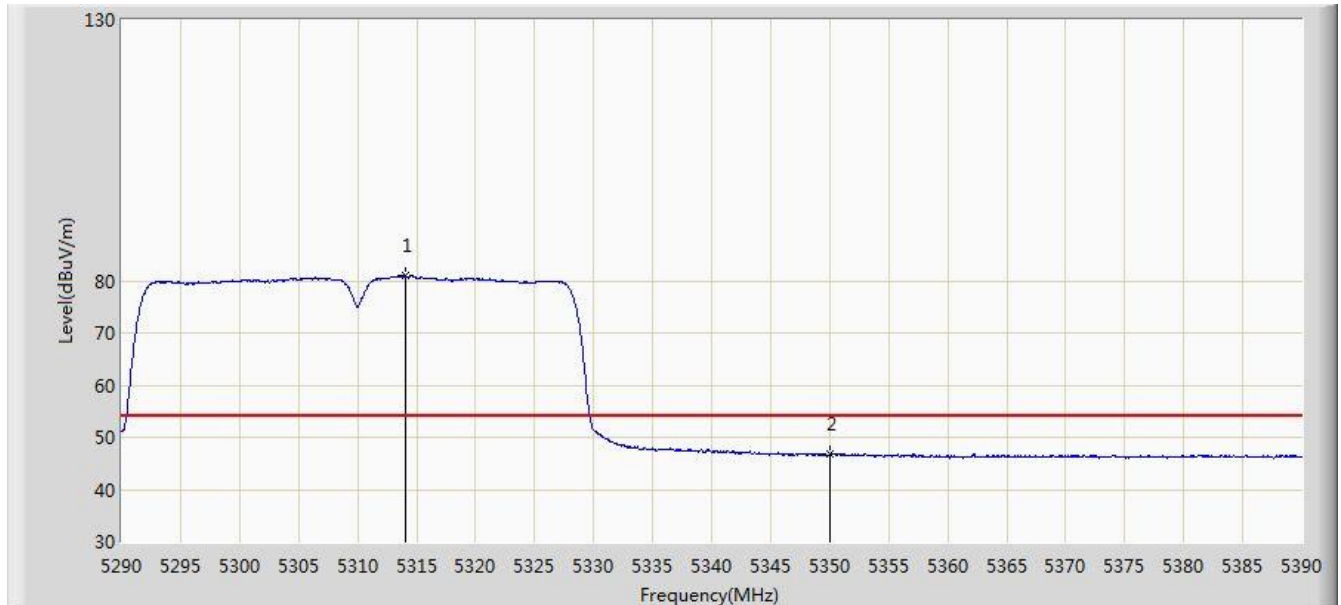


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5314.000	80.994	74.720	N/A	N/A	6.274	AV
2			5350.000	46.697	40.237	-7.303	54.000	6.460	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

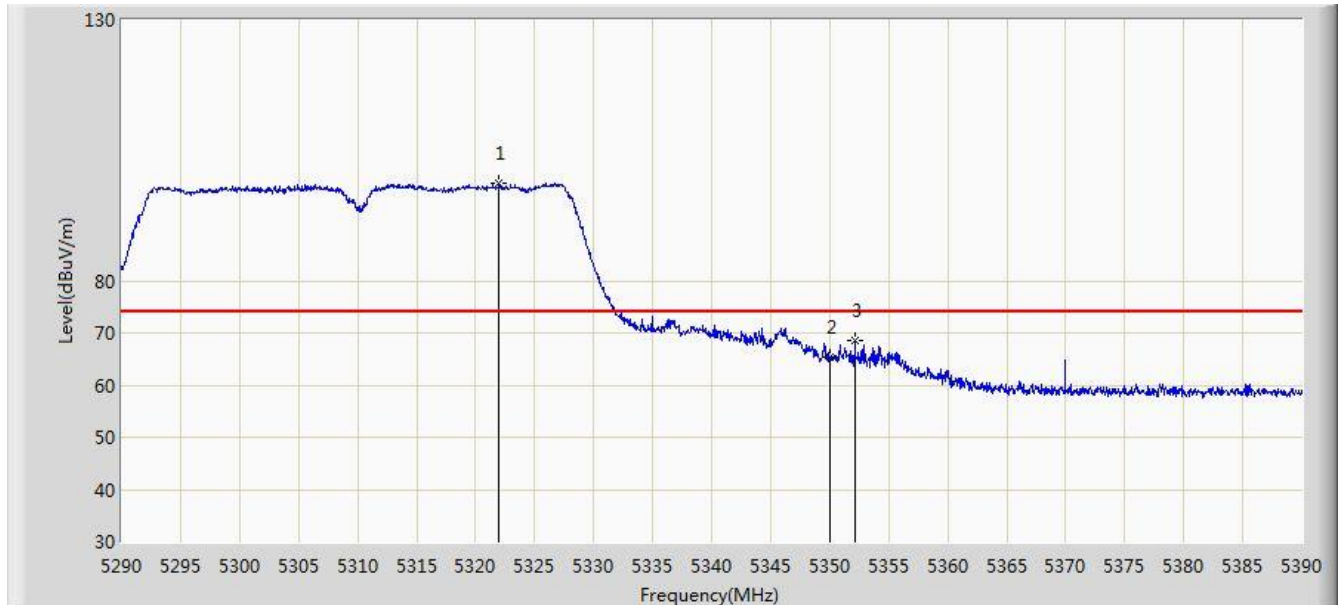


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.000	98.831	92.526	N/A	N/A	6.305	PK
2			5350.000	65.330	58.870	-8.670	74.000	6.460	PK
3			5352.150	68.614	62.143	-5.386	74.000	6.471	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

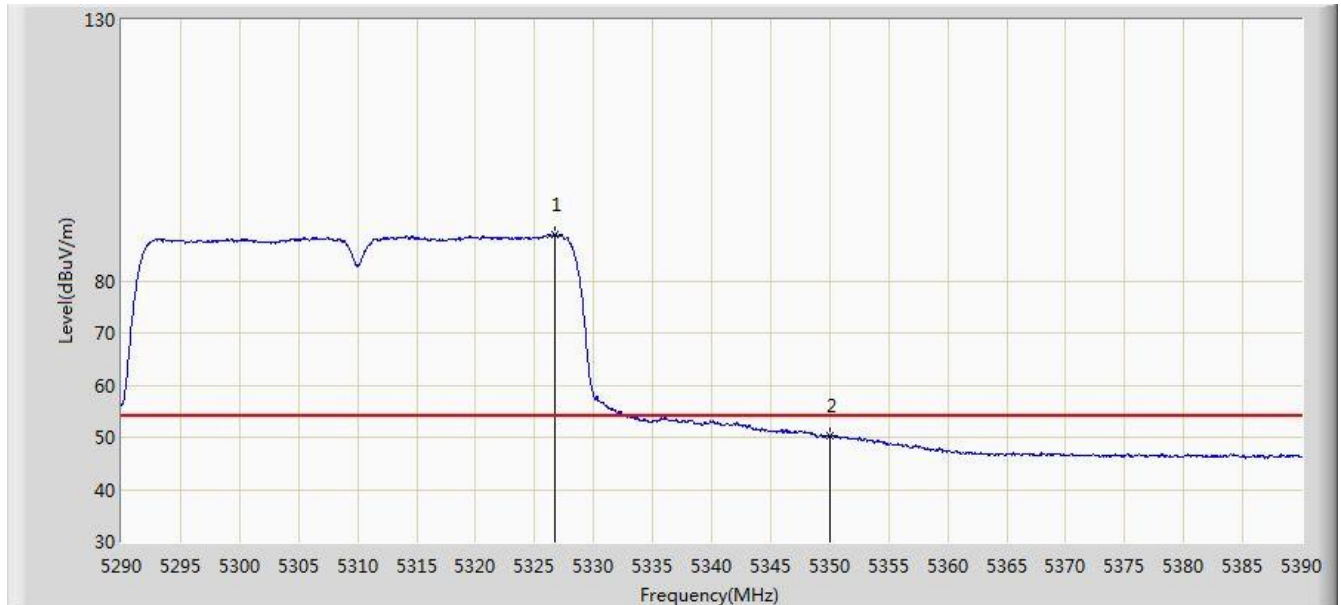


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5326.750	88.752	82.420	N/A	N/A	6.331	AV
2			5350.000	50.173	43.713	-3.827	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

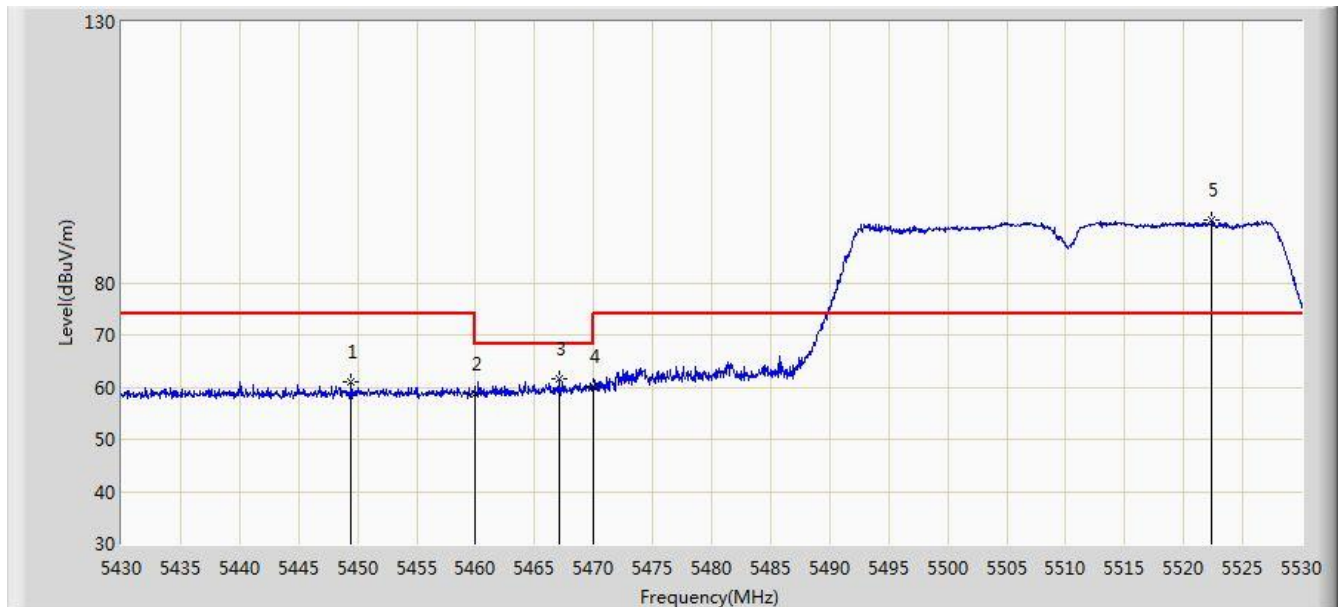


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5449.450	61.038	54.298	-12.962	74.000	6.740	PK
2			5460.000	58.836	52.034	-15.164	74.000	6.802	PK
3			5467.050	61.594	54.762	-6.606	68.200	6.832	PK
4			5470.000	60.238	53.393	-7.962	68.200	6.845	PK
5			5522.400	92.064	85.248	N/A	N/A	6.815	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

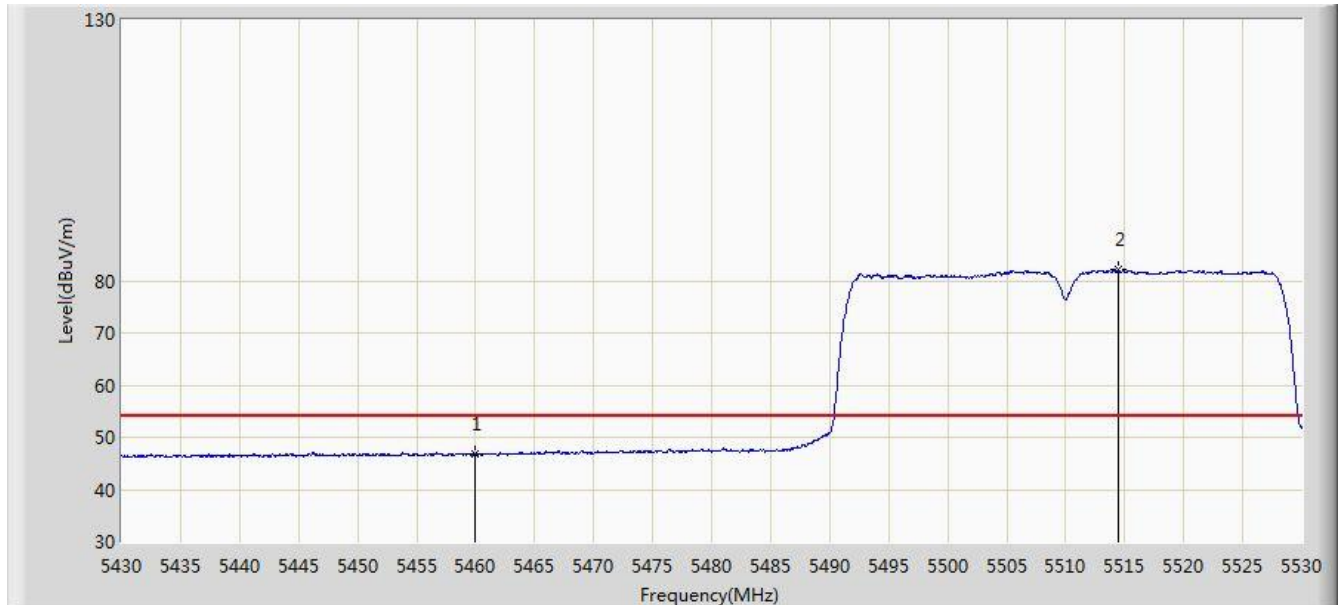


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.820	40.018	-7.180	54.000	6.802	AV
2			5514.450	82.210	75.397	N/A	N/A	6.813	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

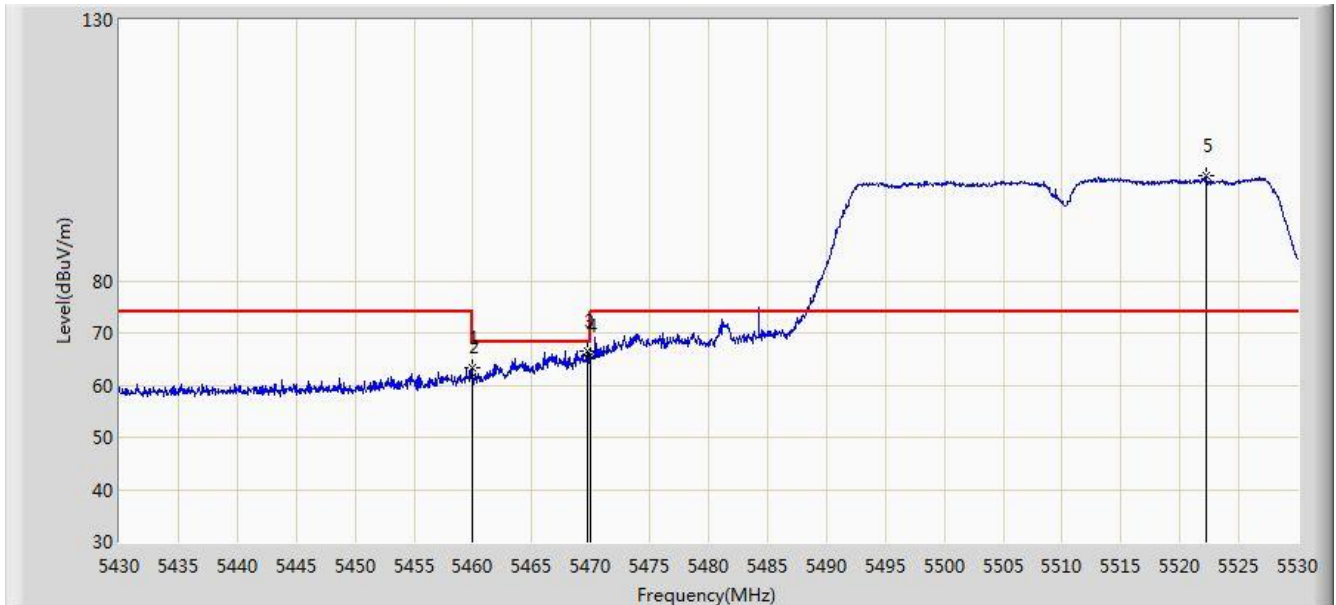


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.900	63.346	56.545	-10.654	74.000	6.802	PK
2			5460.000	61.730	54.928	-12.270	74.000	6.802	PK
3			5469.750	66.660	59.816	-1.540	68.200	6.844	PK
4			5470.000	65.585	58.740	-2.615	68.200	6.845	PK
5			5522.200	100.011	93.196	N/A	N/A	6.815	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5510MHz	

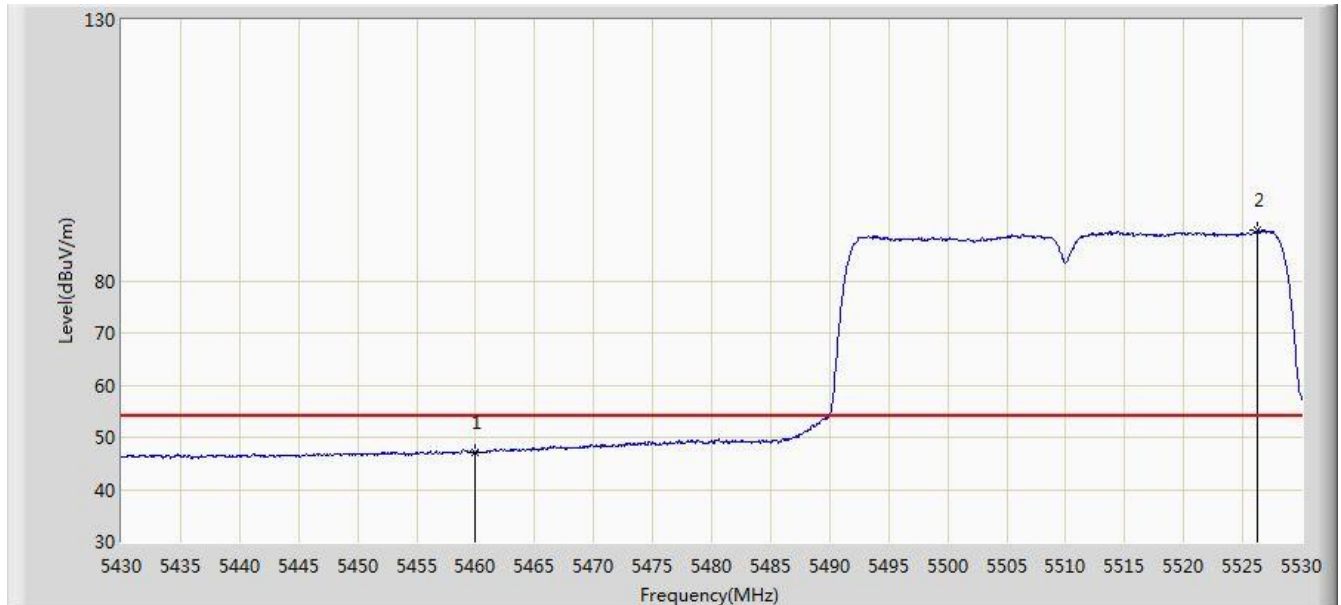


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.140	40.338	-6.860	54.000	6.802	AV
2			5526.300	89.641	82.806	N/A	N/A	6.834	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

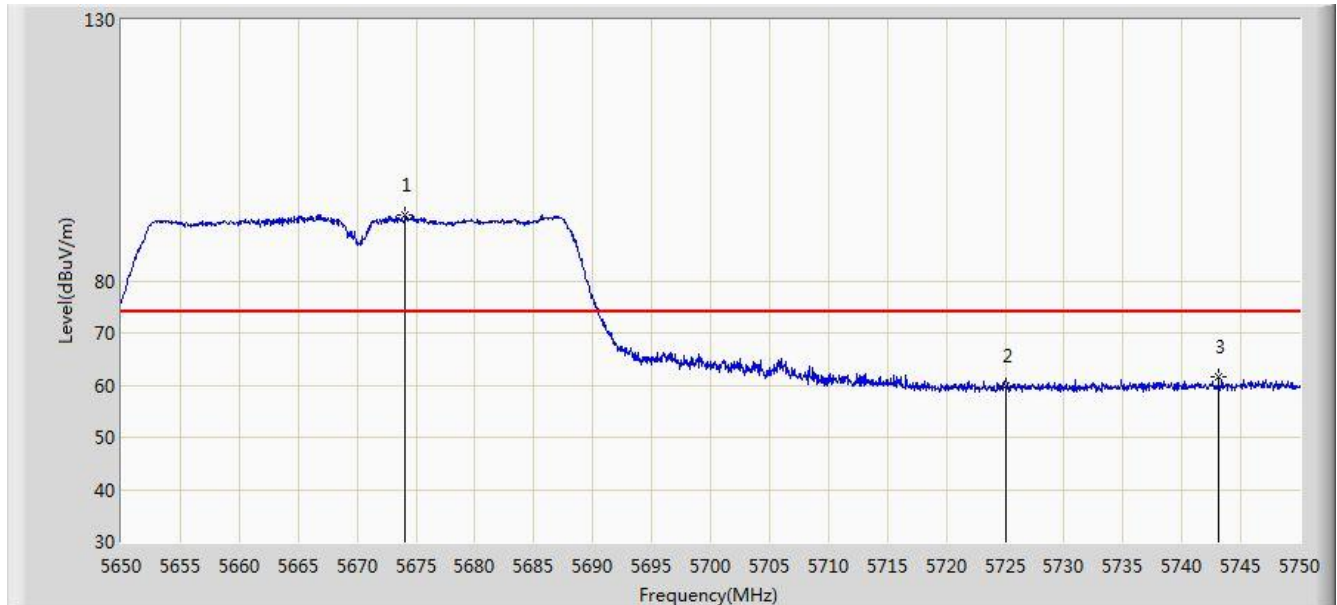


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5674.050	92.753	85.699	N/A	N/A	7.054	PK
2			5725.000	59.896	52.568	-14.104	74.000	7.328	PK
3			5743.100	61.455	54.052	-12.545	74.000	7.404	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

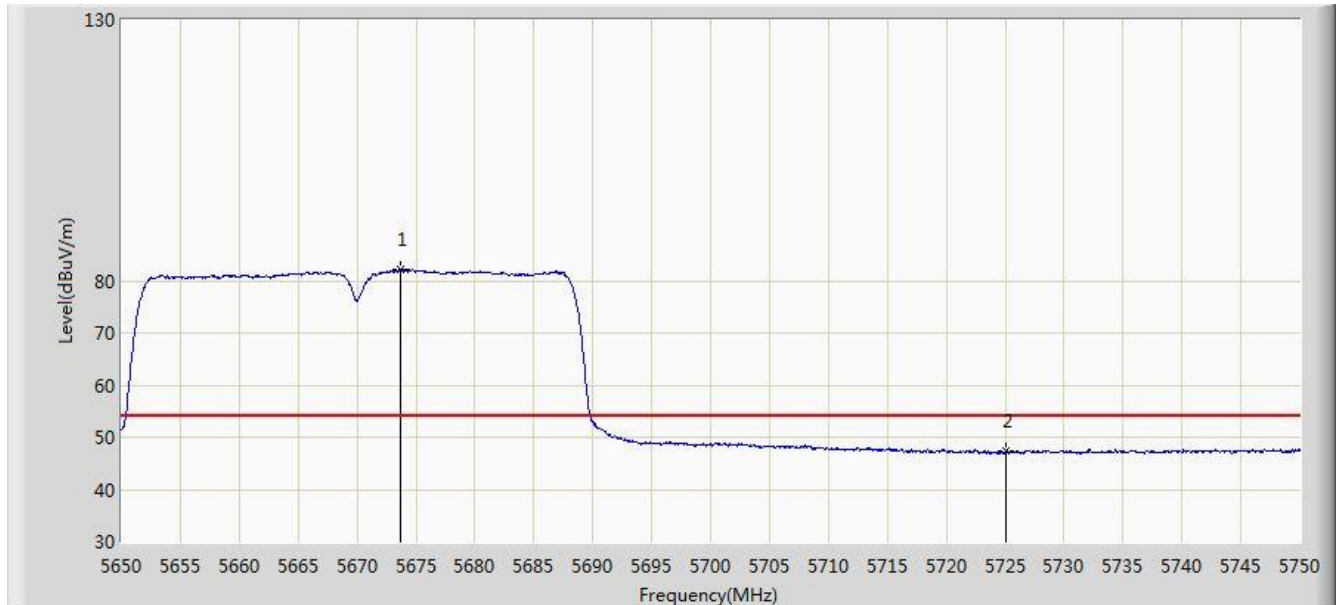


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5673.700	82.224	75.170	N/A	N/A	7.053	AV
2			5725.000	47.262	39.934	-6.738	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

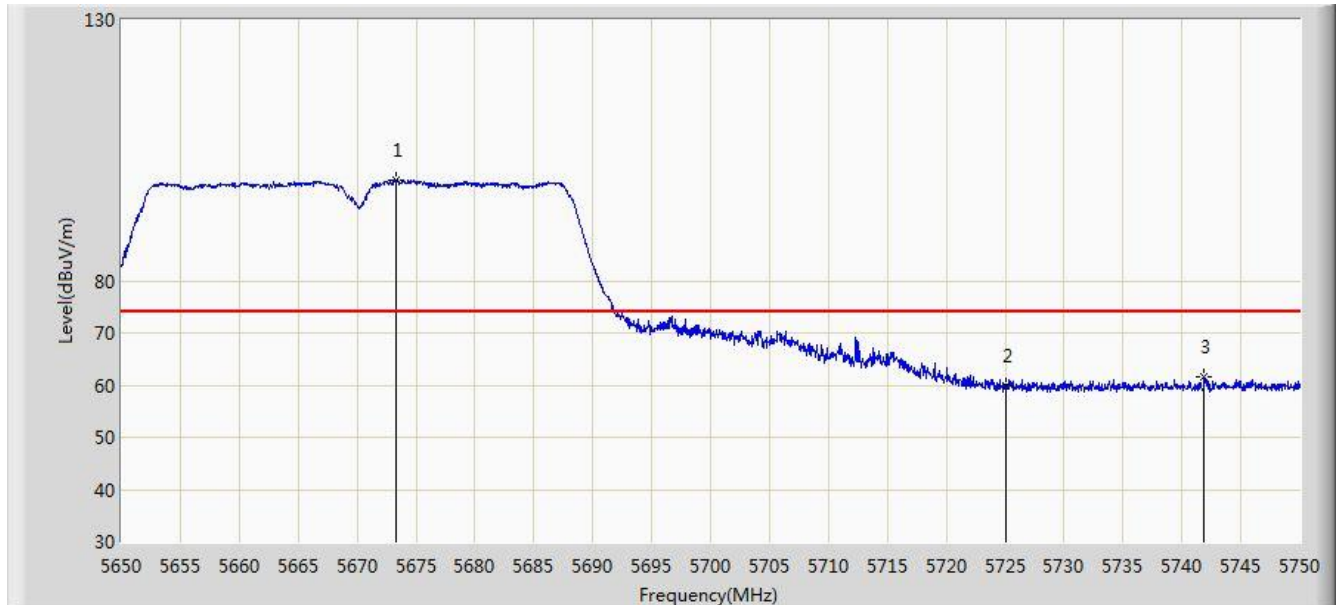


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5673.350	99.275	92.222	N/A	N/A	7.053	PK
2			5725.000	59.753	52.425	-14.247	74.000	7.328	PK
3			5741.900	61.497	54.098	-12.503	74.000	7.398	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

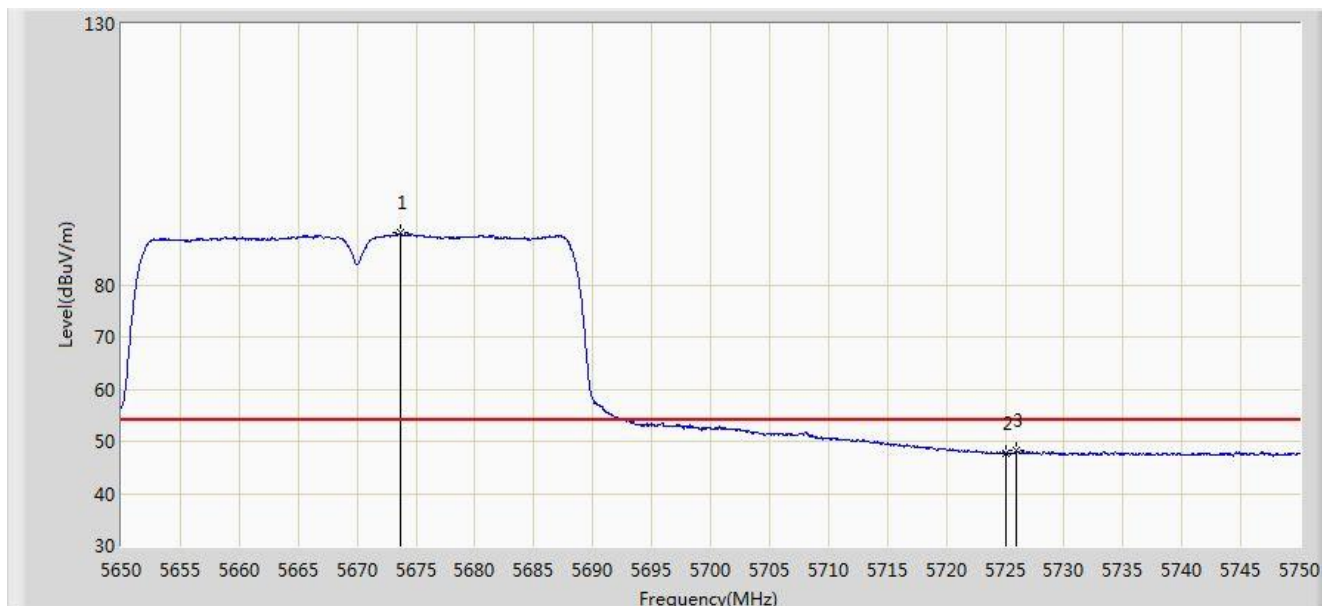


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5673.650	89.876	82.822	N/A	N/A	7.053	AV
2			5725.000	47.626	40.298	-6.374	54.000	7.328	AV
3			5726.000	48.271	40.937	-5.729	54.000	7.334	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:27
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

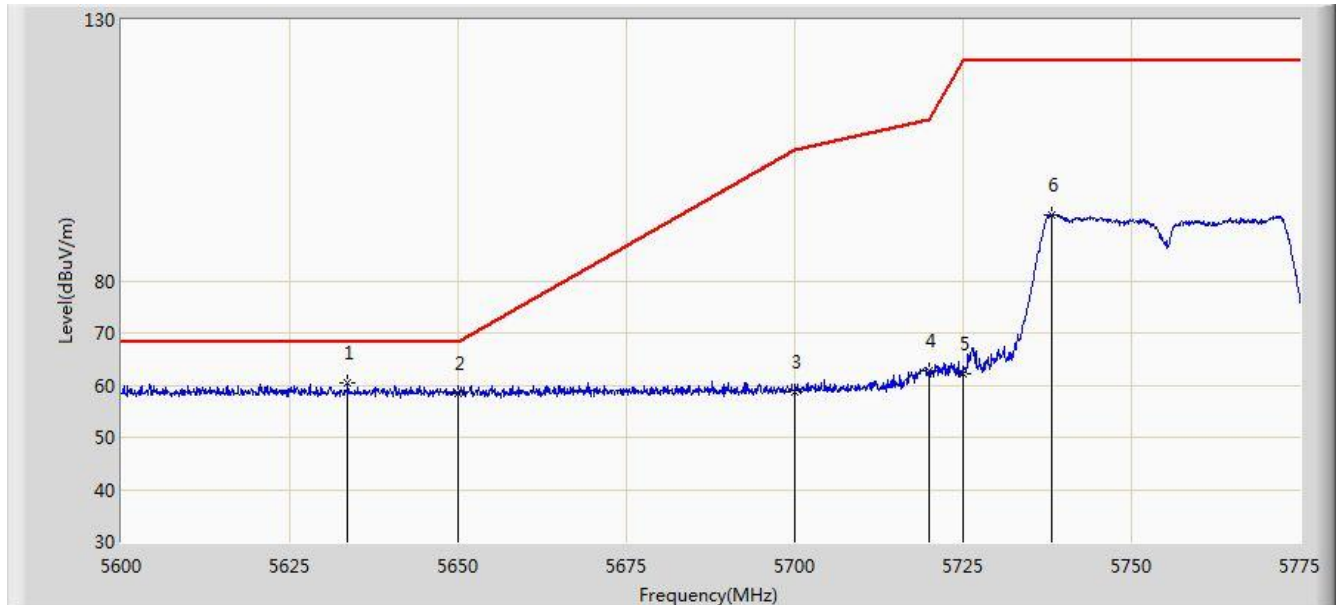


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5633.600	60.438	53.440	-7.762	68.200	6.998	PK
2			5650.000	58.410	51.405	-9.790	68.200	7.005	PK
3			5700.000	58.769	51.604	-46.431	105.200	7.165	PK
4			5720.000	62.679	55.380	-48.121	110.800	7.299	PK
5			5725.000	62.253	54.925	-59.947	122.200	7.328	PK
6			5738.163	92.731	85.346	N/A	N/A	7.385	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:32
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

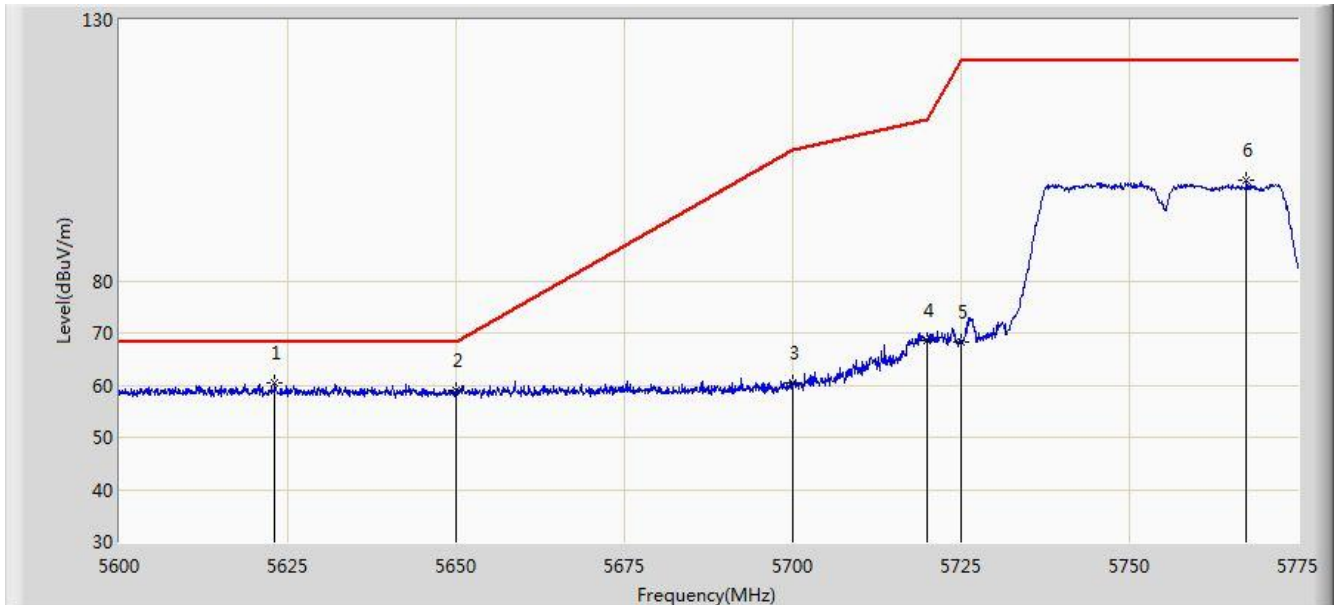


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5623.100	60.548	53.535	-7.652	68.200	7.013	PK
2			5650.000	58.864	51.859	-9.336	68.200	7.005	PK
3			5700.000	60.468	53.303	-44.732	105.200	7.165	PK
4			5720.000	68.663	61.364	-42.137	110.800	7.299	PK
5			5725.000	68.133	60.805	-54.067	122.200	7.328	PK
6			5767.388	99.148	91.709	N/A	N/A	7.440	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:36
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

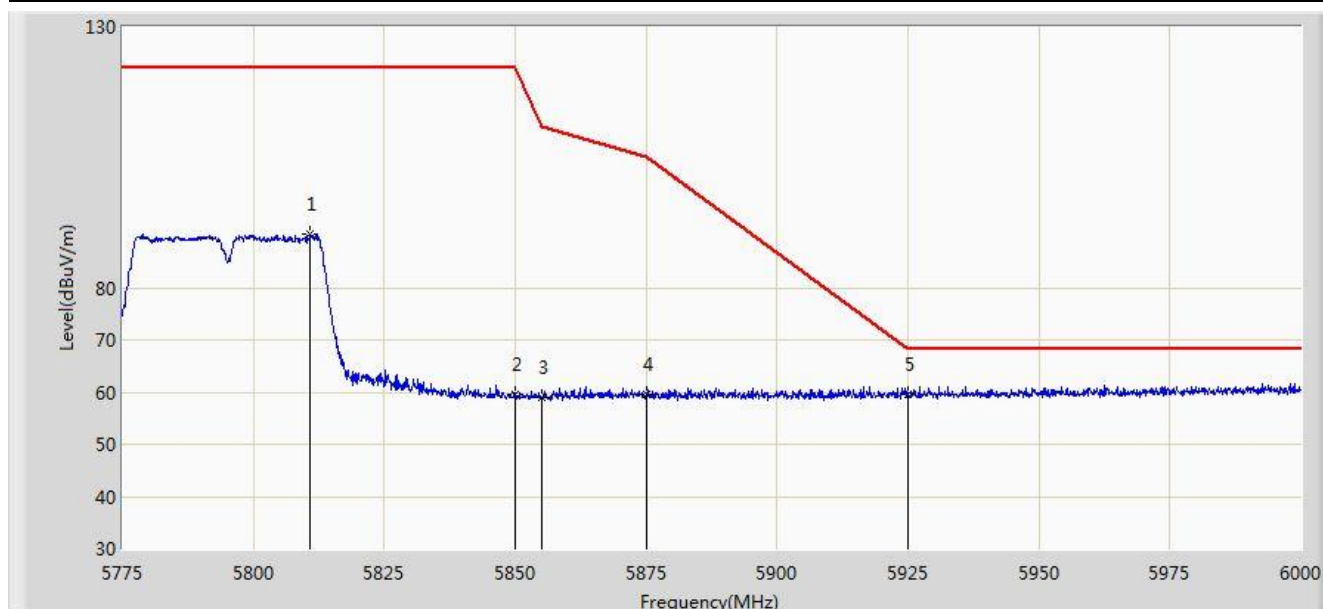


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5810.888	90.327	82.733	N/A	N/A	7.594	PK
2			5850.000	59.535	51.762	-62.665	122.200	7.774	PK
3			5855.000	59.012	51.236	-51.788	110.800	7.775	PK
4			5875.000	59.680	51.862	-45.520	105.200	7.818	PK
5			5925.000	59.531	51.712	-8.669	68.200	7.819	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:41
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

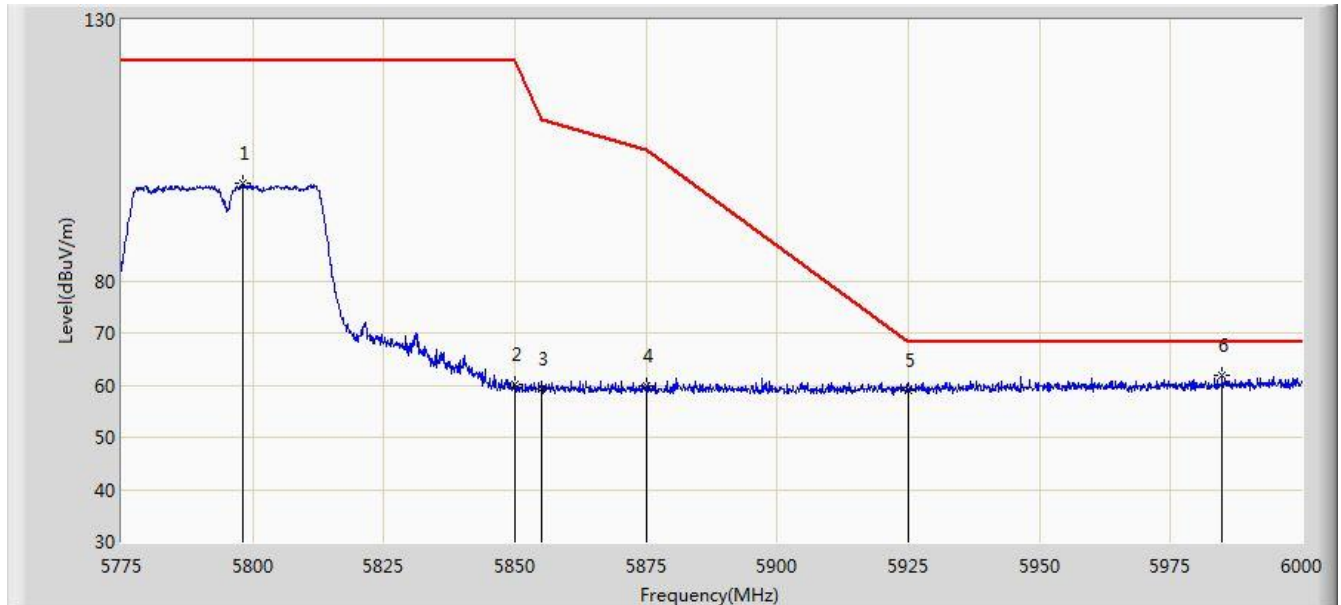


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5798.062	98.791	91.240	N/A	N/A	7.551	PK
2			5850.000	60.078	52.305	-62.122	122.200	7.774	PK
3			5855.000	59.291	51.515	-51.509	110.800	7.775	PK
4			5875.000	59.713	51.895	-45.487	105.200	7.818	PK
5			5925.000	59.062	51.243	-9.138	68.200	7.819	PK
6			5984.812	61.746	53.838	-6.454	68.200	7.908	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

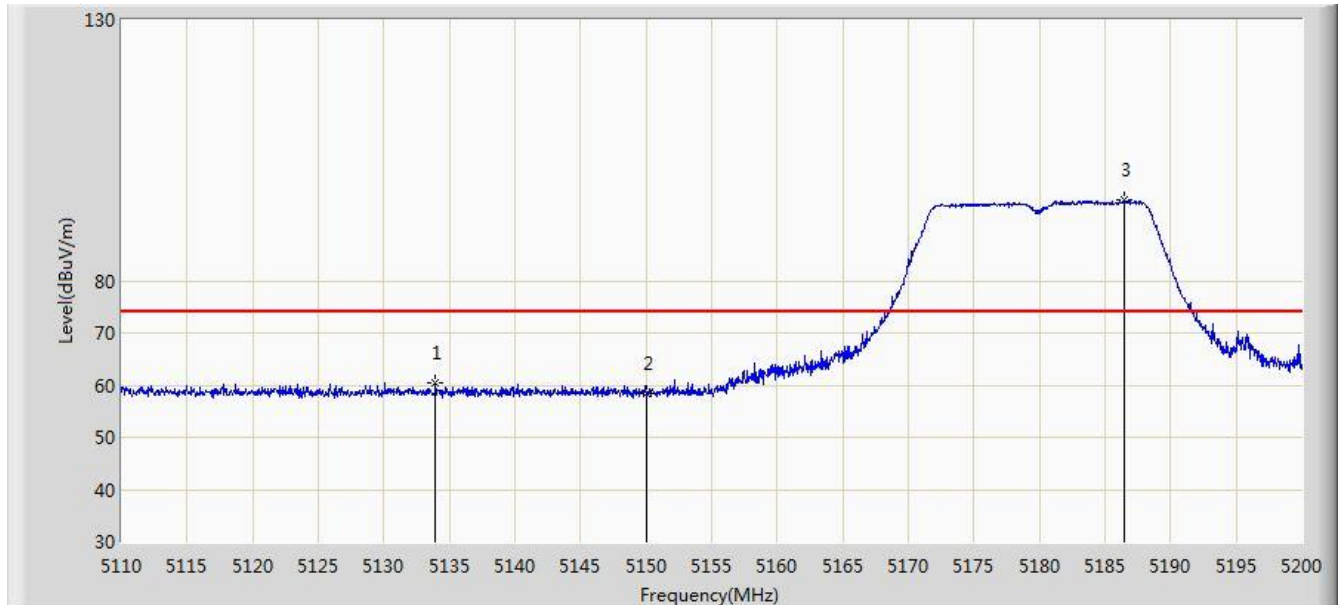


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.940	60.420	53.782	-13.580	74.000	6.639	PK
2			5150.000	58.304	51.742	-15.696	74.000	6.562	PK
3			5186.500	95.420	89.018	N/A	N/A	6.402	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

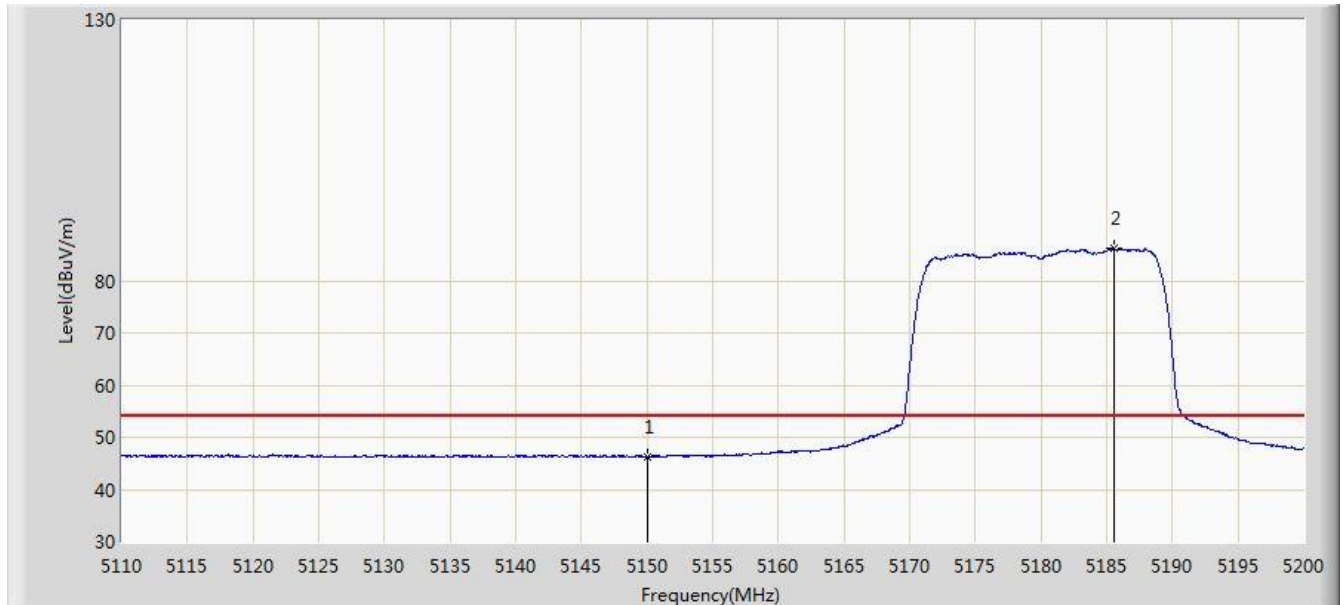


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.270	39.708	-7.730	54.000	6.562	AV
2			5185.600	86.237	79.830	N/A	N/A	6.407	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

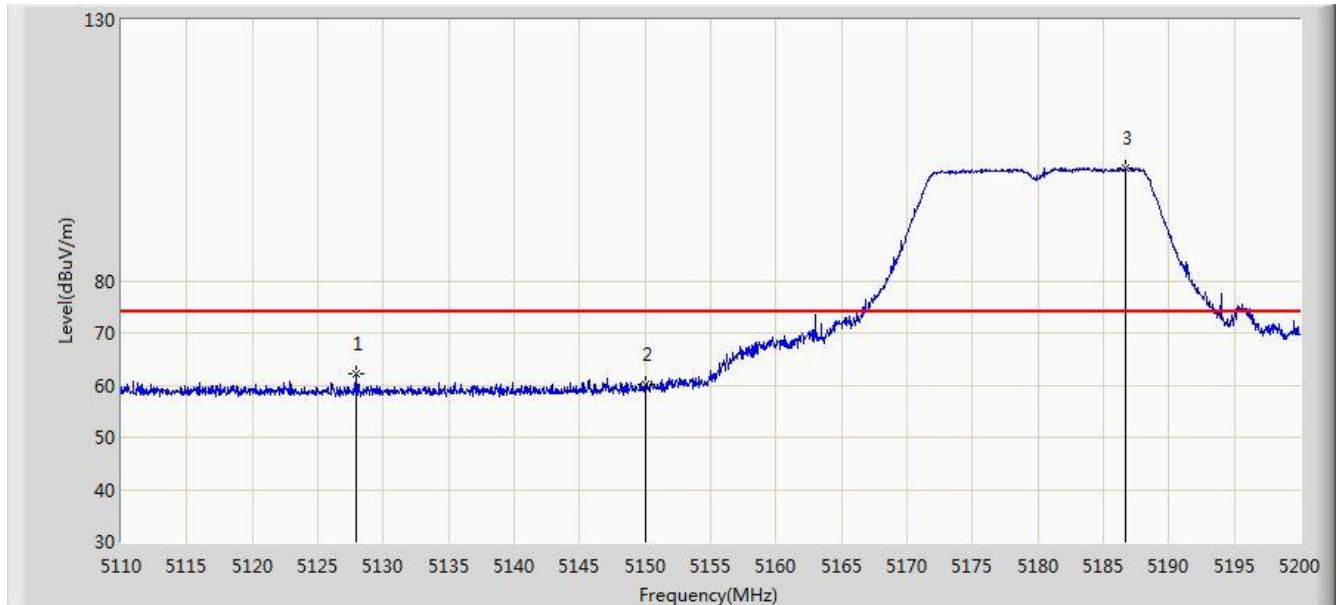


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.910	62.059	55.407	-11.941	74.000	6.652	PK
2			5150.000	60.007	53.445	-13.993	74.000	6.562	PK
3			5186.680	101.735	95.334	N/A	N/A	6.401	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/08 - 08:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

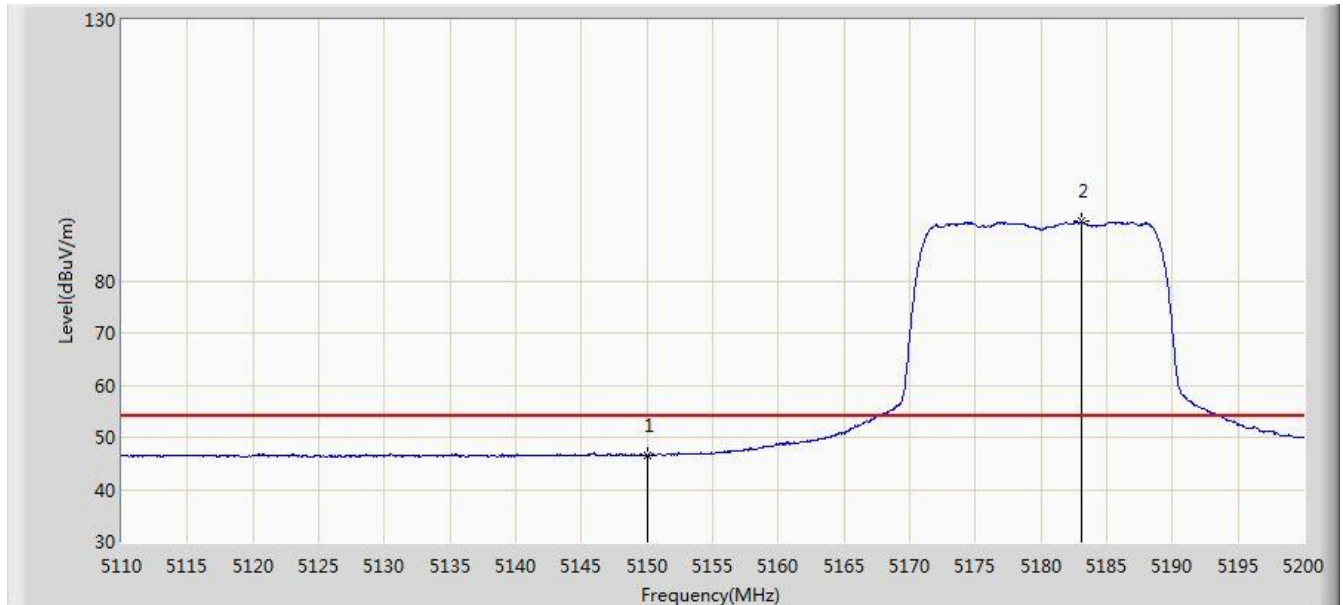


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.664	40.102	-7.336	54.000	6.562	AV
2			5183.035	91.351	84.929	N/A	N/A	6.422	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

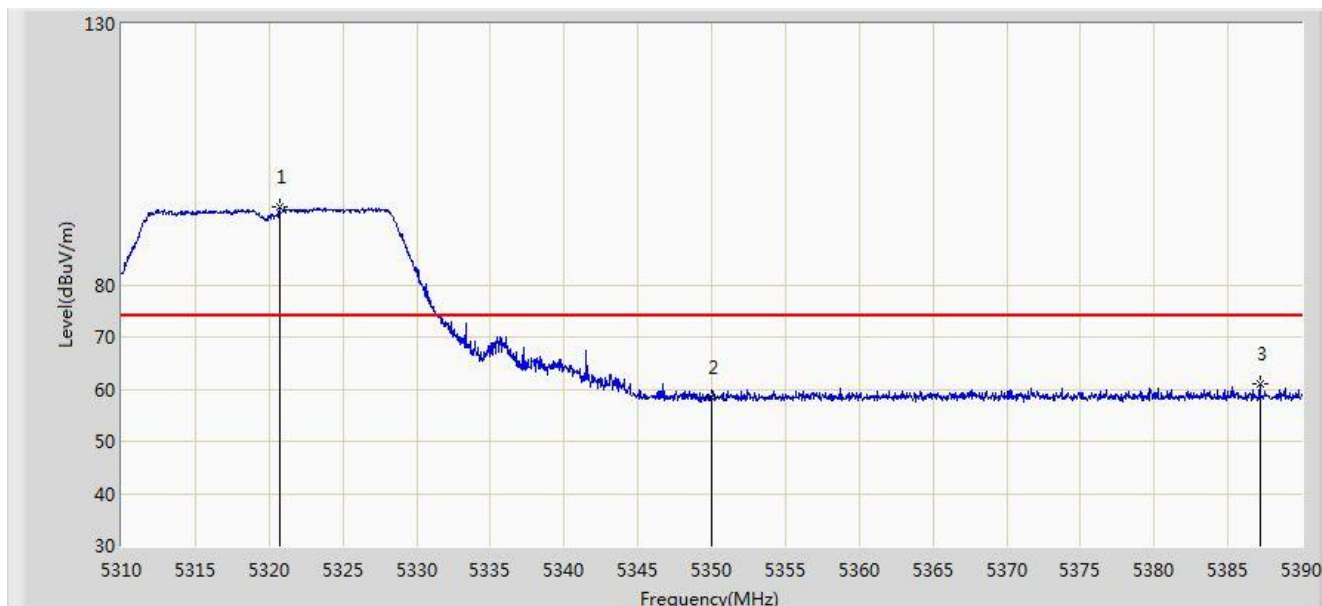


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5320.680	94.988	88.691	N/A	N/A	6.297	PK
2			5350.000	58.365	51.905	-15.635	74.000	6.460	PK
3			5387.160	60.923	54.372	-13.077	74.000	6.551	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

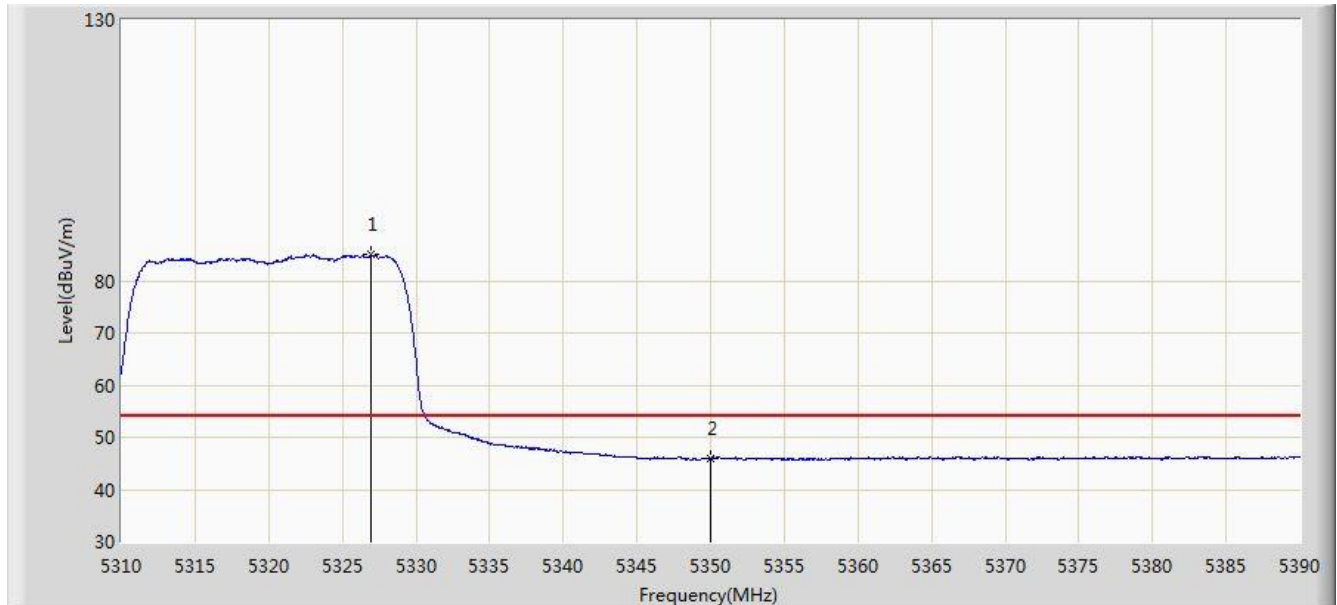


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5326.960	85.007	78.674	N/A	N/A	6.333	AV
2			5350.000	46.079	39.619	-7.921	54.000	6.460	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

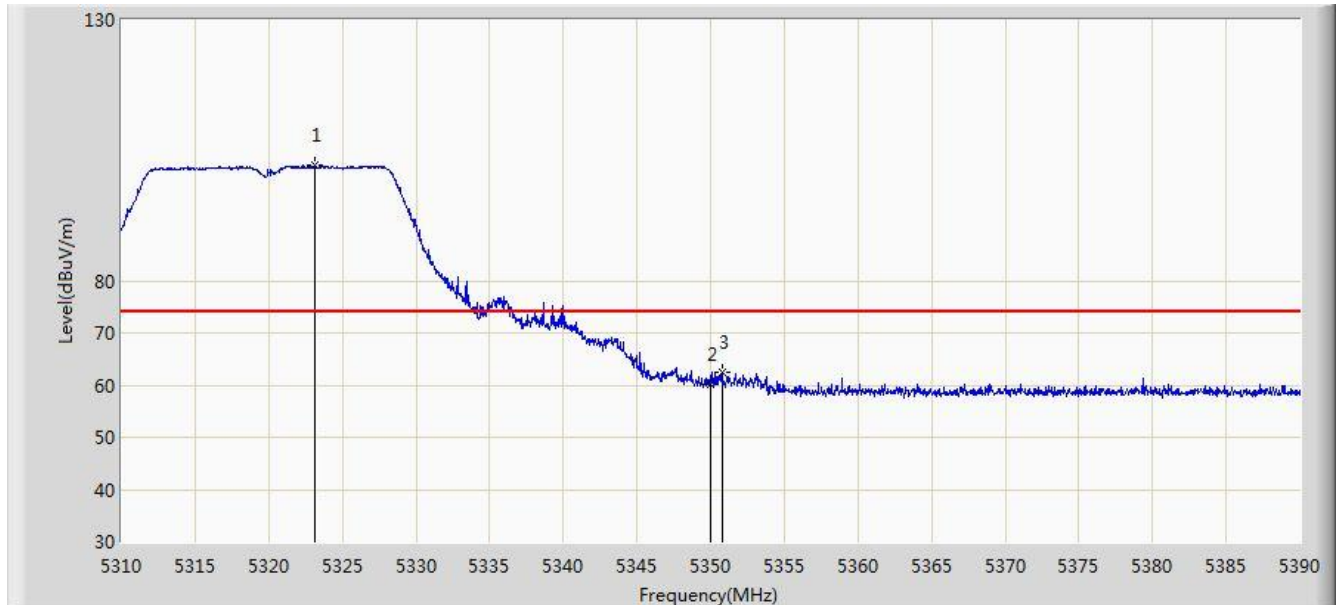


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5323.160	102.070	95.759	N/A	N/A	6.311	PK
2			5350.000	60.248	53.788	-13.752	74.000	6.460	PK
3			5350.800	62.418	55.954	-11.582	74.000	6.463	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

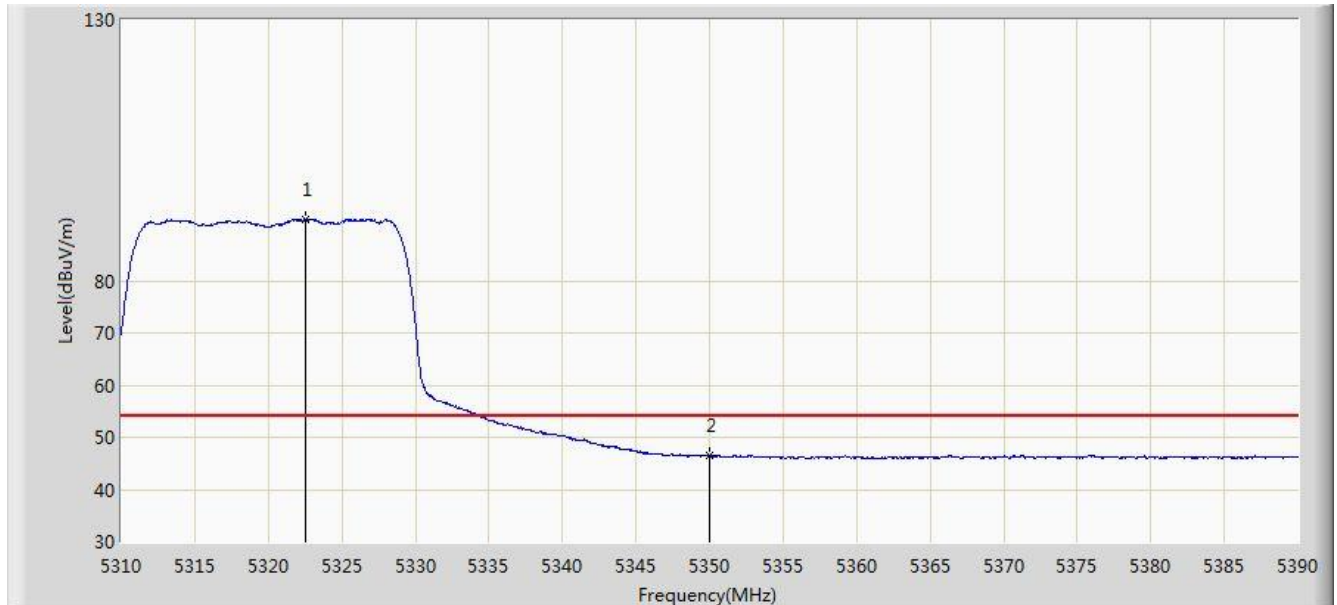


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.520	91.850	85.542	N/A	N/A	6.308	AV
2			5350.000	46.470	40.010	-7.530	54.000	6.460	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

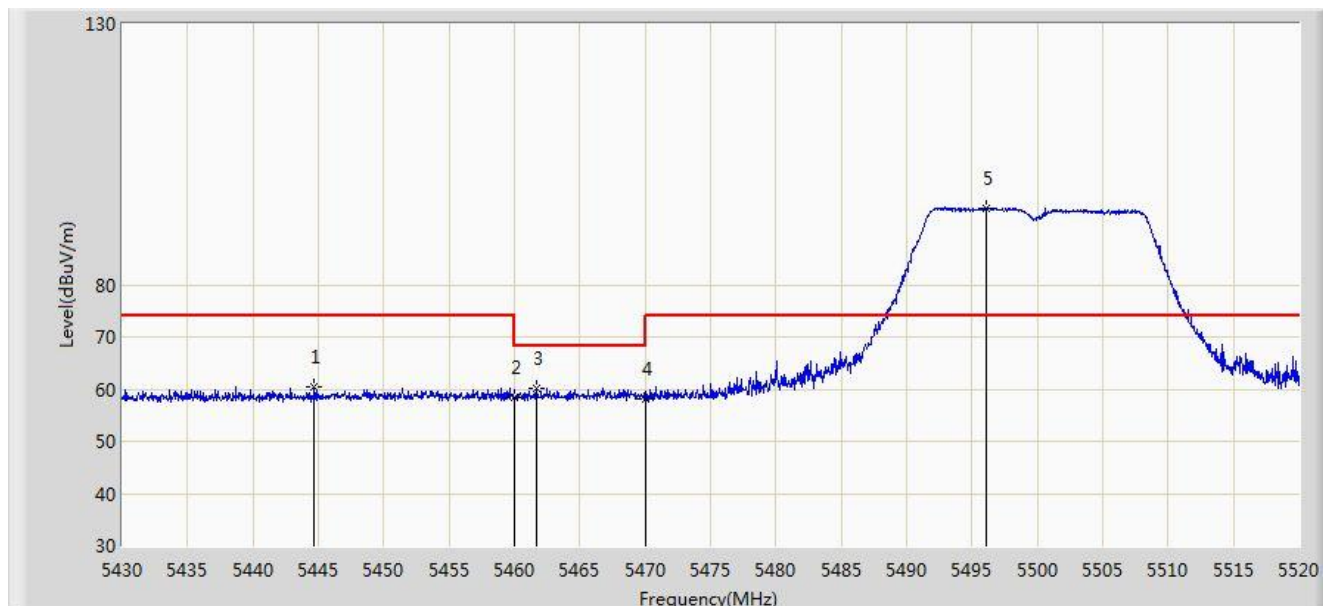


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5444.670	60.551	53.847	-13.449	74.000	6.703	PK
2			5460.000	58.376	51.574	-15.624	74.000	6.802	PK
3			5461.725	60.099	53.290	-8.101	68.200	6.809	PK
4			5470.000	57.988	51.143	-10.212	68.200	6.845	PK
5			5496.060	94.768	87.942	N/A	N/A	6.826	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

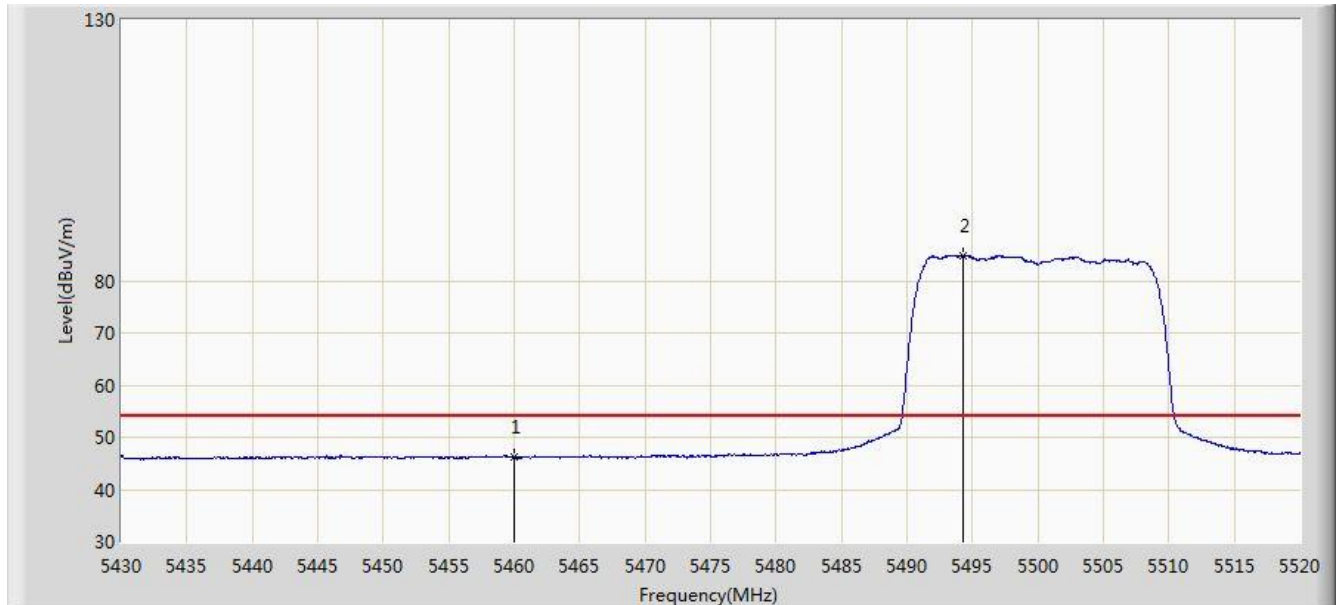


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.217	39.415	-7.783	54.000	6.802	AV
2			5494.305	84.894	78.065	N/A	N/A	6.829	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

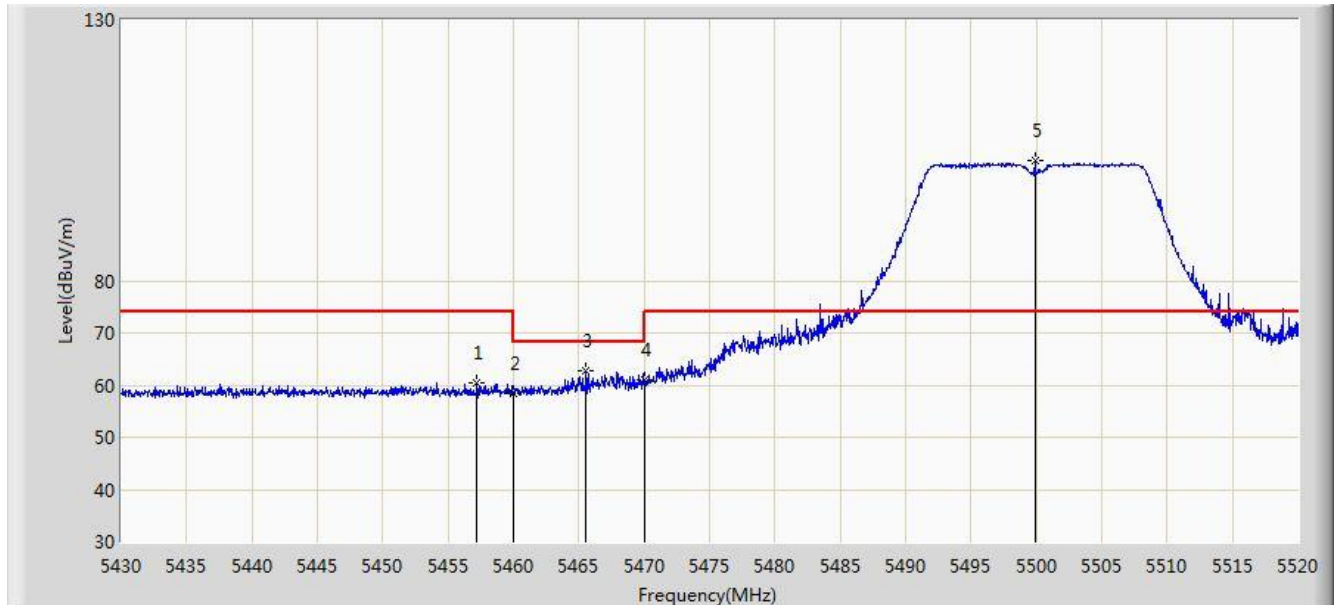


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.225	60.570	53.780	-13.430	74.000	6.790	PK
2			5460.000	58.474	51.672	-15.526	74.000	6.802	PK
3			5465.550	62.624	55.798	-5.576	68.200	6.826	PK
4			5470.000	60.911	54.066	-7.289	68.200	6.845	PK
5			5499.885	103.042	96.223	N/A	N/A	6.820	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

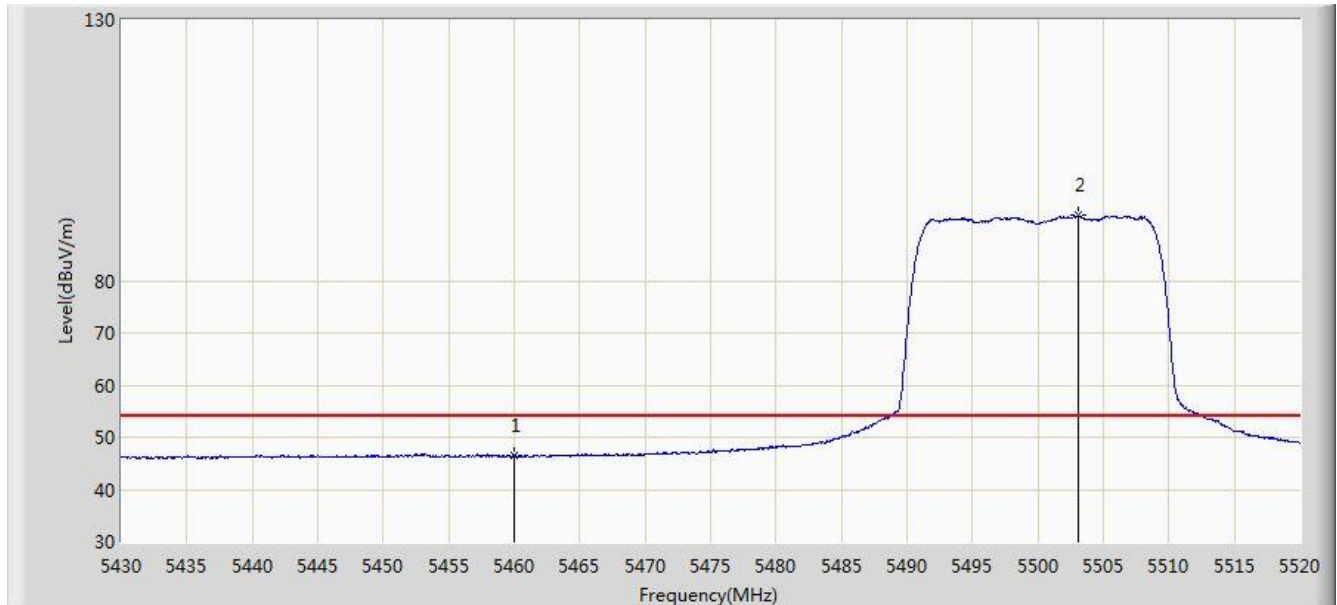


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.377	39.575	-7.623	54.000	6.802	AV
2			5503.080	92.494	85.680	N/A	N/A	6.814	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 02:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

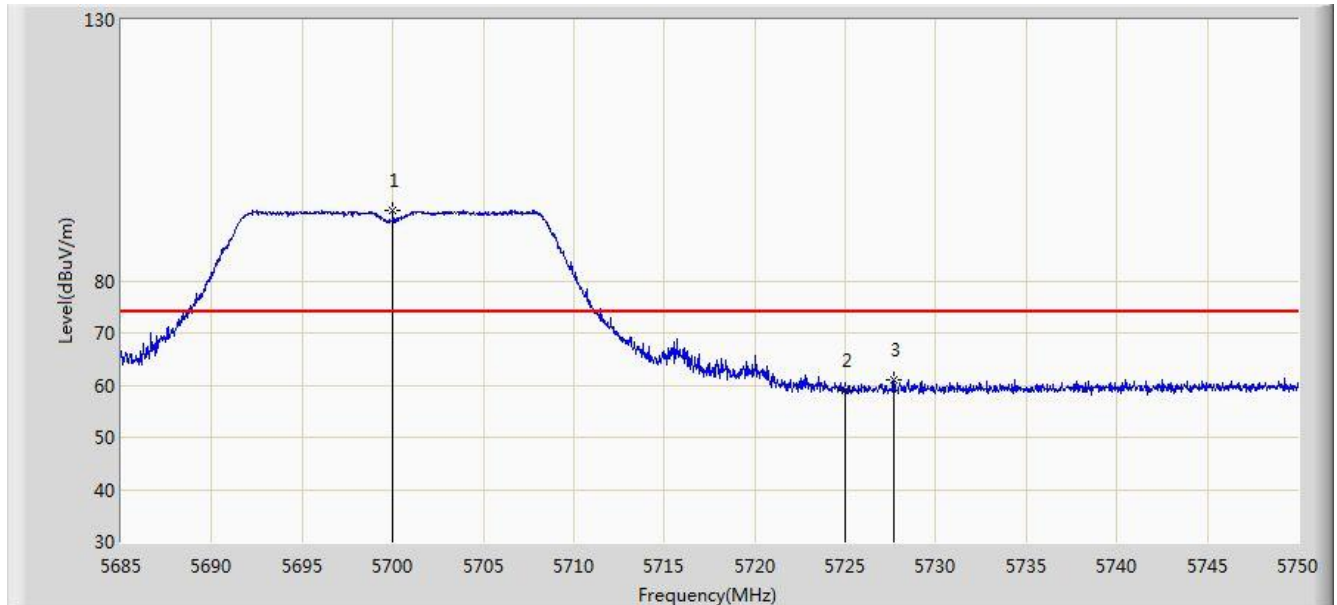


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5700.015	93.554	86.389	N/A	N/A	7.165	PK
2			5725.000	58.912	51.584	-15.088	74.000	7.328	PK
3			5727.672	61.052	53.711	-12.948	74.000	7.340	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

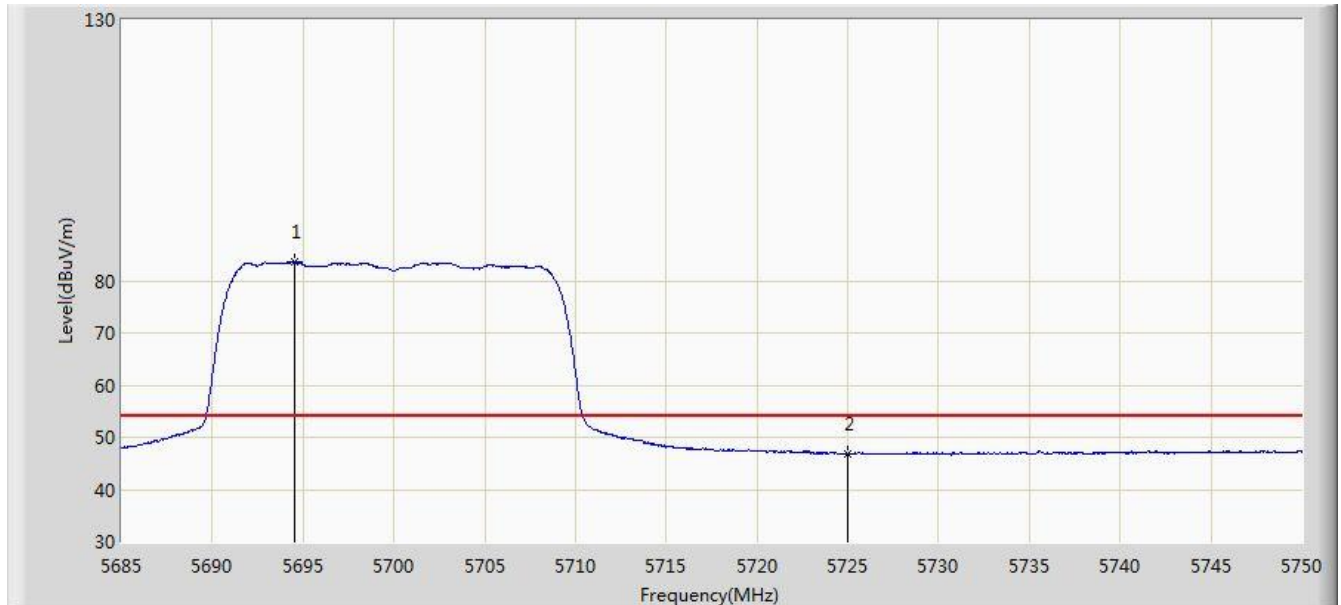


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5694.522	83.596	76.468	N/A	N/A	7.128	AV
2			5725.000	46.821	39.493	-7.179	54.000	7.328	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

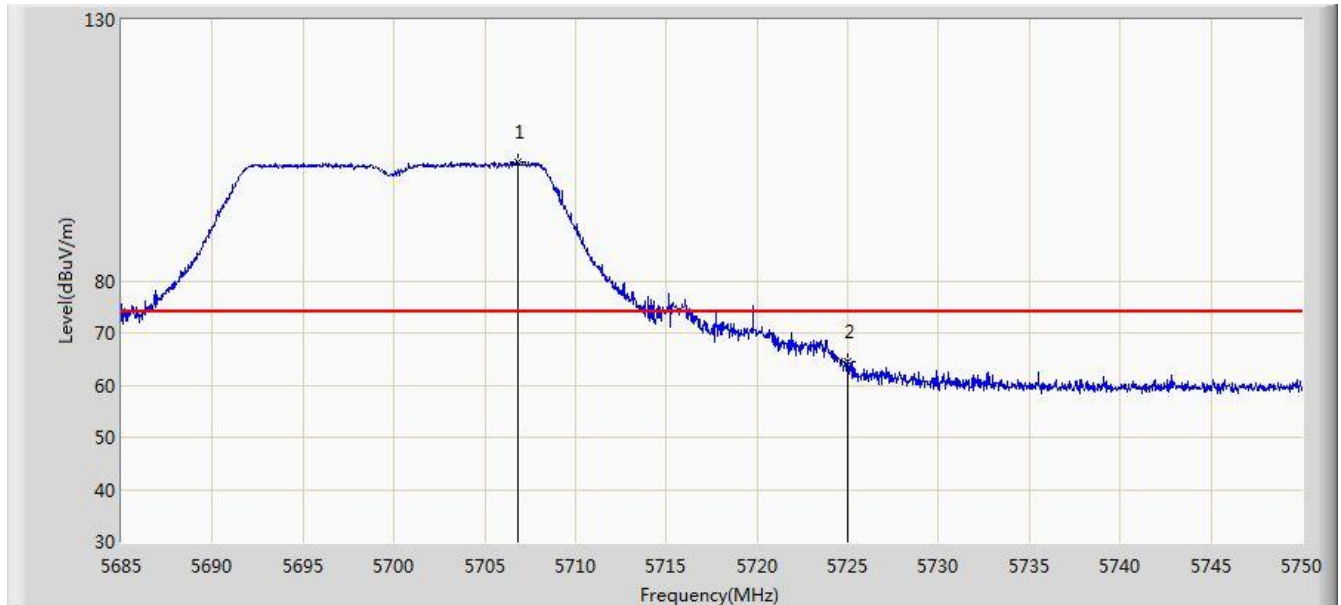


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5706.808	102.837	95.619	N/A	N/A	7.219	PK
2			5725.000	64.385	57.057	-9.615	74.000	7.328	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

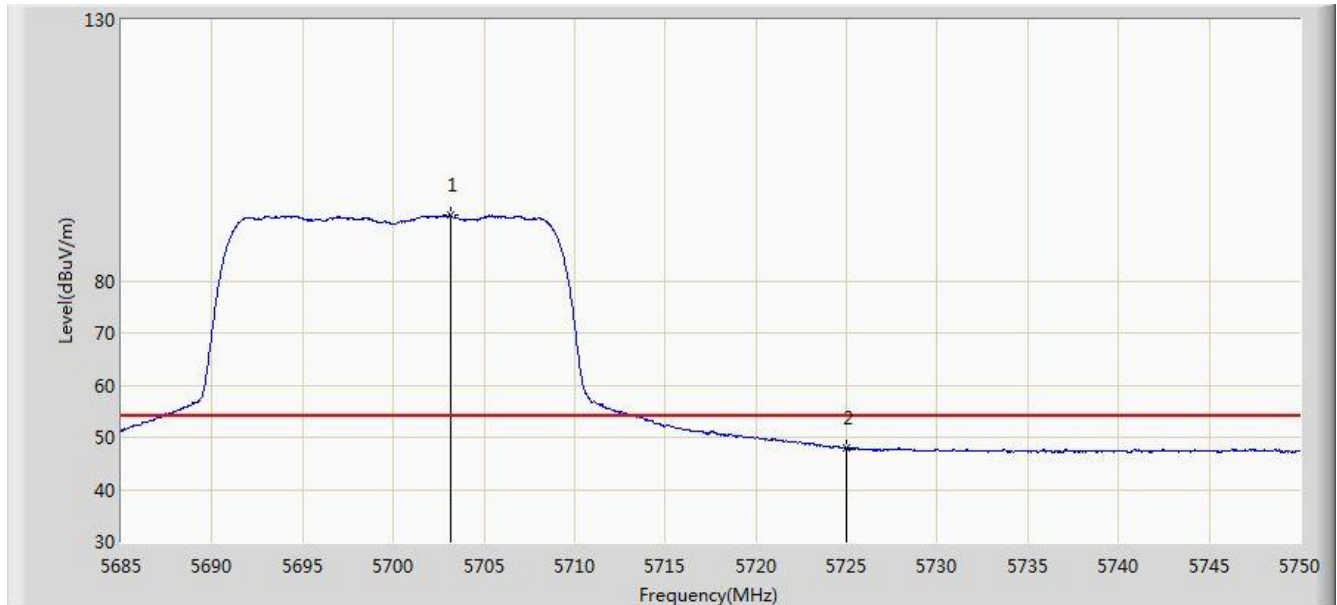


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5703.167	92.632	85.445	N/A	N/A	7.187	AV
2			5725.000	47.895	40.567	-6.105	54.000	7.328	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:07
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

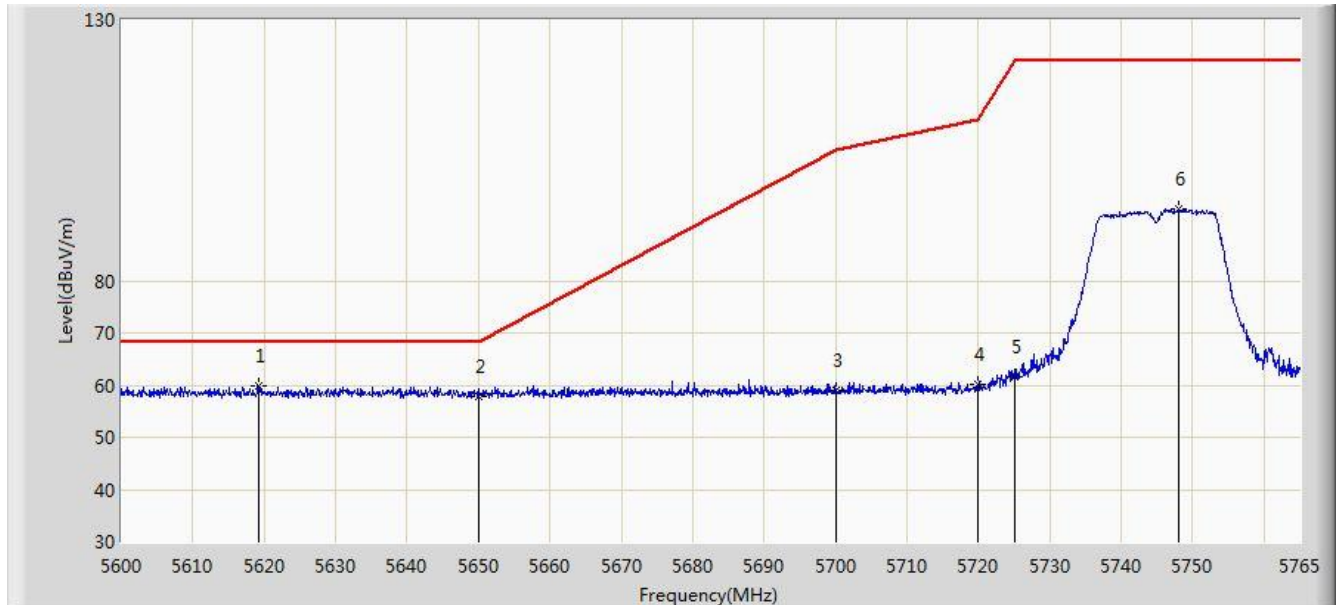


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5619.223	59.900	52.896	-8.300	68.200	7.004	PK
2			5650.000	57.707	50.702	-10.493	68.200	7.005	PK
3			5700.000	59.012	51.847	-46.188	105.200	7.165	PK
4			5720.000	60.271	52.972	-50.529	110.800	7.299	PK
5			5725.000	61.545	54.217	-60.655	122.200	7.328	PK
6			5748.005	93.721	86.314	N/A	N/A	7.406	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

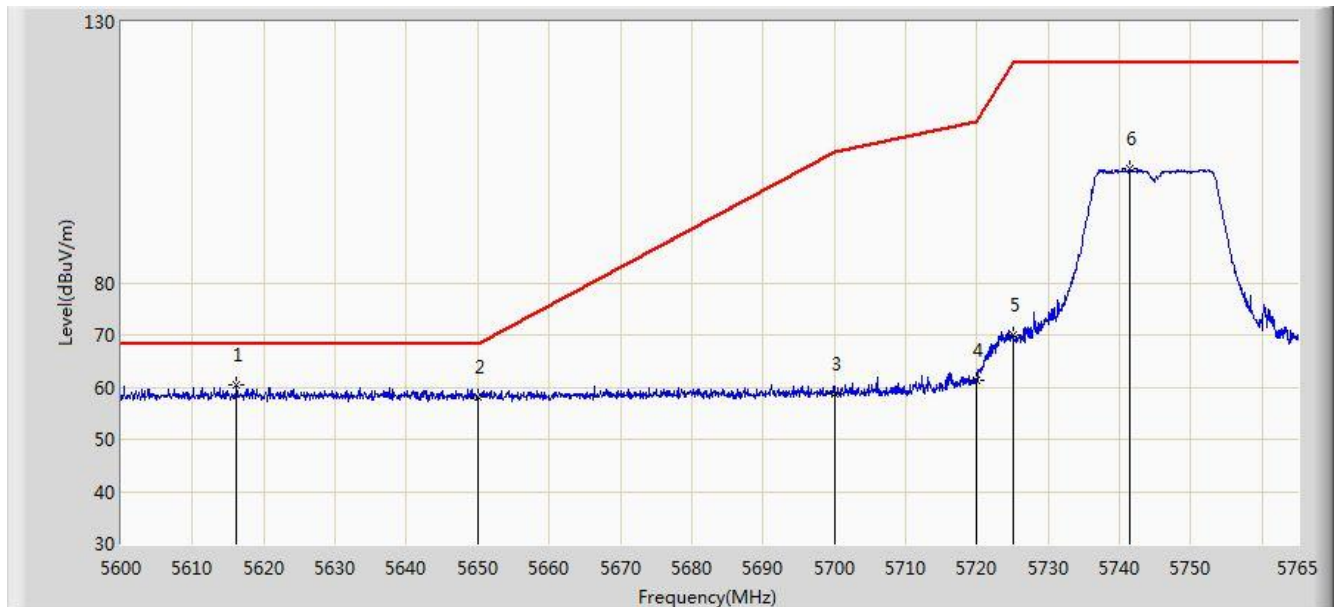


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5616.170	60.456	53.459	-7.744	68.200	6.998	PK
2			5650.000	58.135	51.130	-10.065	68.200	7.005	PK
3			5700.000	58.643	51.478	-46.557	105.200	7.165	PK
4			5720.000	61.193	53.894	-49.607	110.800	7.299	PK
5			5725.000	69.910	62.582	-52.290	122.200	7.328	PK
6			5741.405	101.881	94.484	N/A	N/A	7.398	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

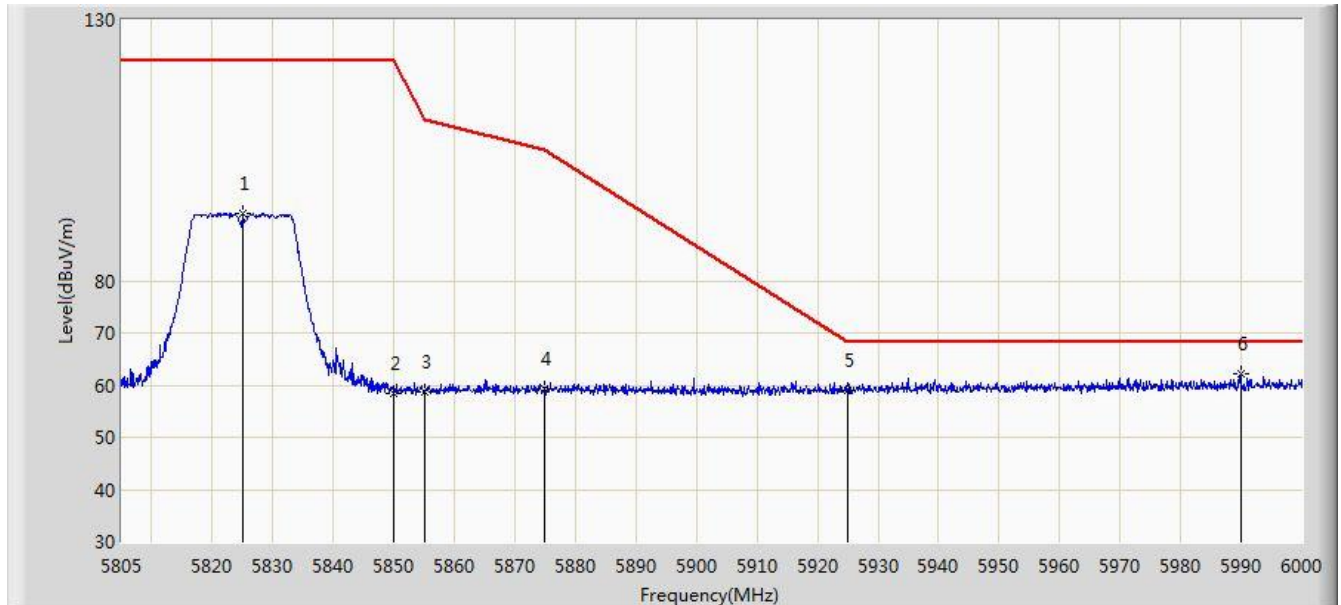


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.987	93.035	85.377	N/A	N/A	7.659	PK
2			5850.000	58.401	50.628	-63.799	122.200	7.774	PK
3			5855.000	58.568	50.792	-52.232	110.800	7.775	PK
4			5875.000	59.408	51.590	-45.792	105.200	7.818	PK
5			5925.000	59.118	51.299	-9.082	68.200	7.819	PK
6			5989.958	62.234	54.302	-5.966	68.200	7.932	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:16
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

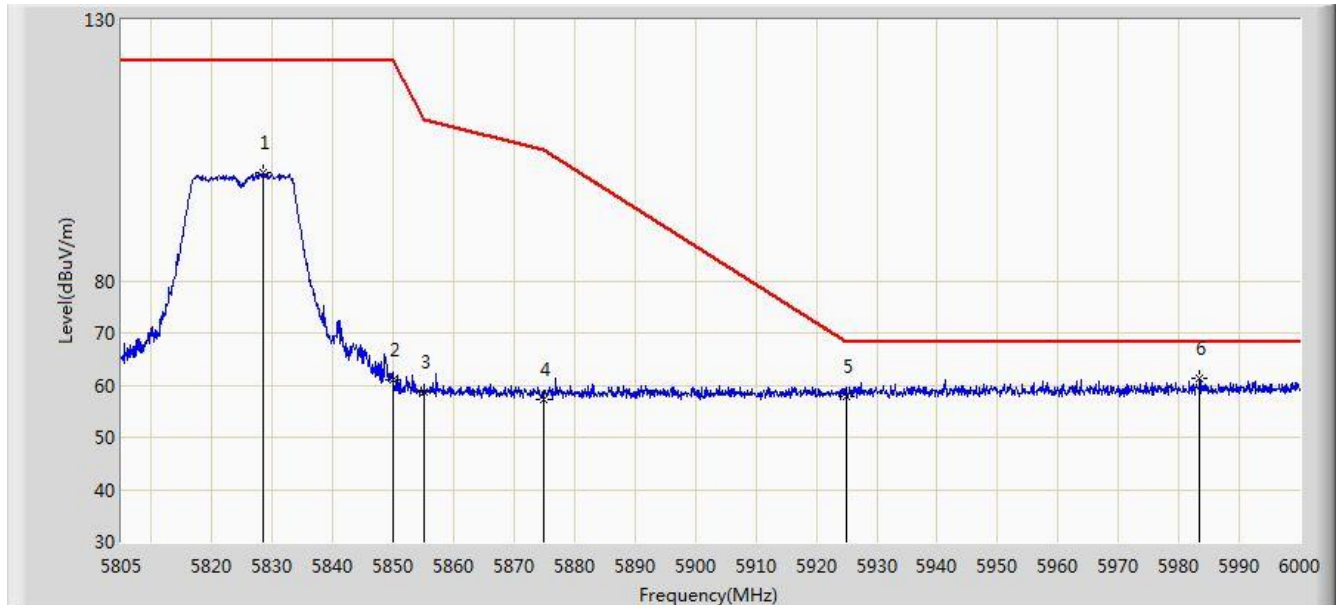


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5828.400	100.580	92.906	N/A	N/A	7.674	PK
2			5850.000	60.897	53.124	-61.303	122.200	7.774	PK
3			5855.000	58.751	50.975	-52.049	110.800	7.775	PK
4			5875.000	57.220	49.402	-47.980	105.200	7.818	PK
5			5925.000	57.964	50.145	-10.236	68.200	7.819	PK
6			5983.425	61.220	53.319	-6.980	68.200	7.902	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

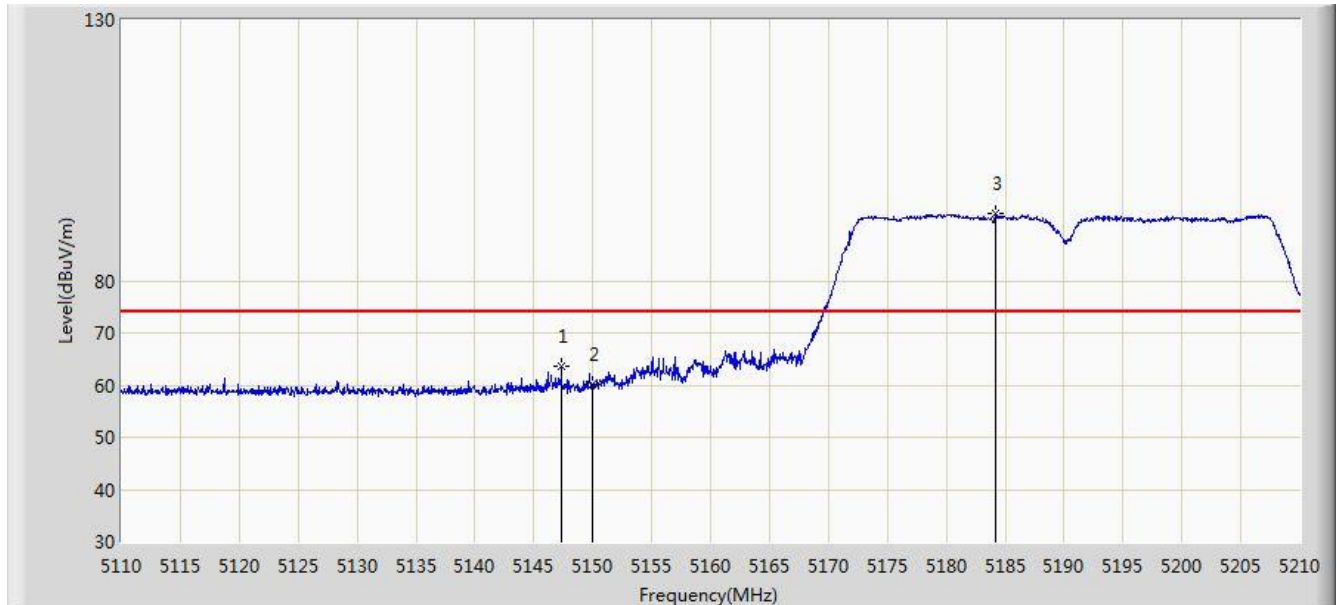


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.350	63.542	56.979	-10.458	74.000	6.563	PK
2			5150.000	60.071	53.509	-13.929	74.000	6.562	PK
3			5184.200	92.955	86.540	N/A	N/A	6.416	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

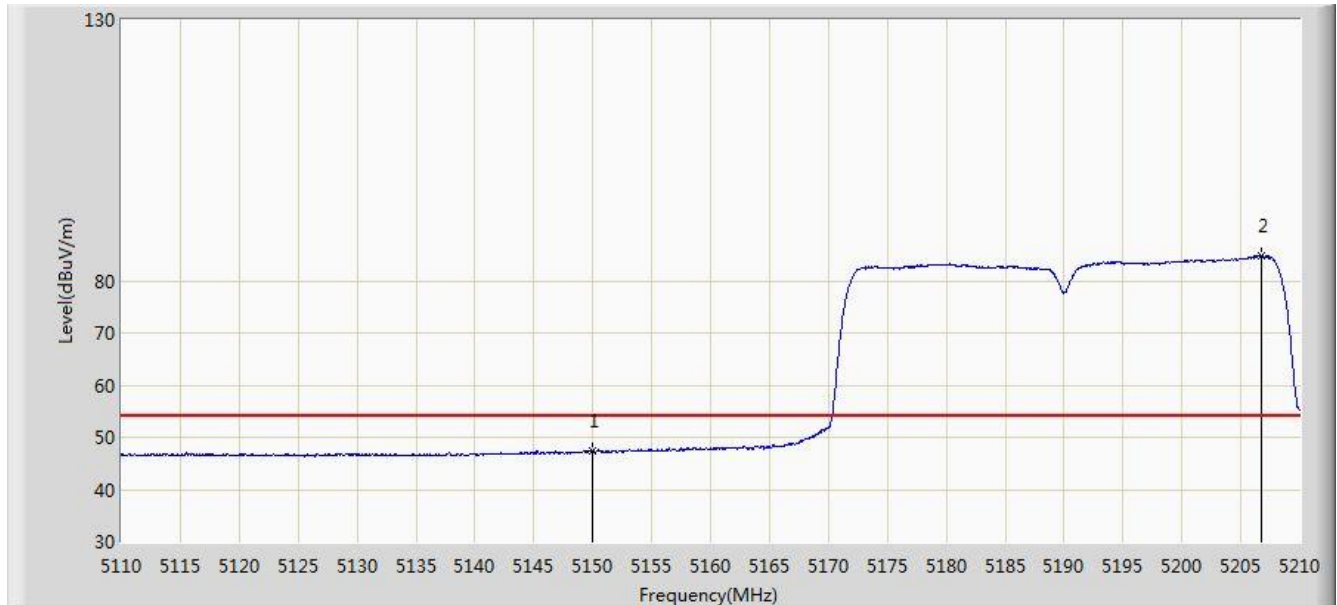


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.442	40.880	-6.558	54.000	6.562	AV
2			5206.700	84.830	78.473	N/A	N/A	6.356	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

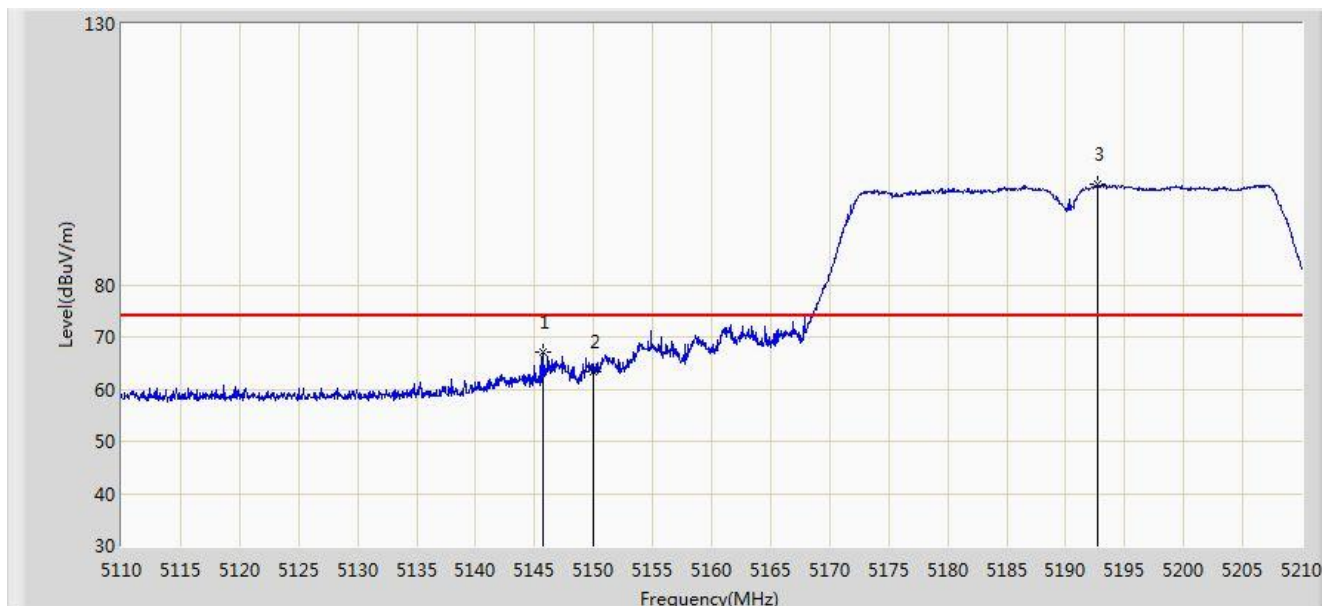


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5145.750	67.177	60.605	-6.823	74.000	6.572	PK
2			5150.000	63.382	56.820	-10.618	74.000	6.562	PK
3			5192.650	99.151	92.785	N/A	N/A	6.366	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

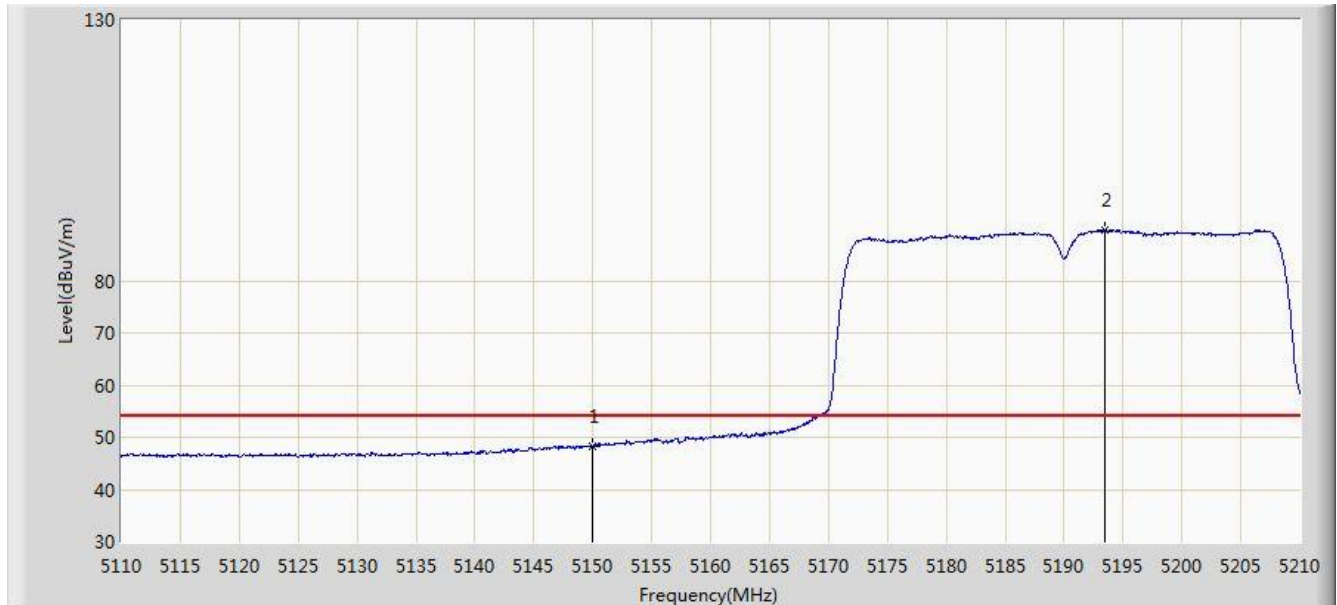


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.321	41.759	-5.679	54.000	6.562	AV
2			5193.400	89.845	83.483	N/A	N/A	6.363	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

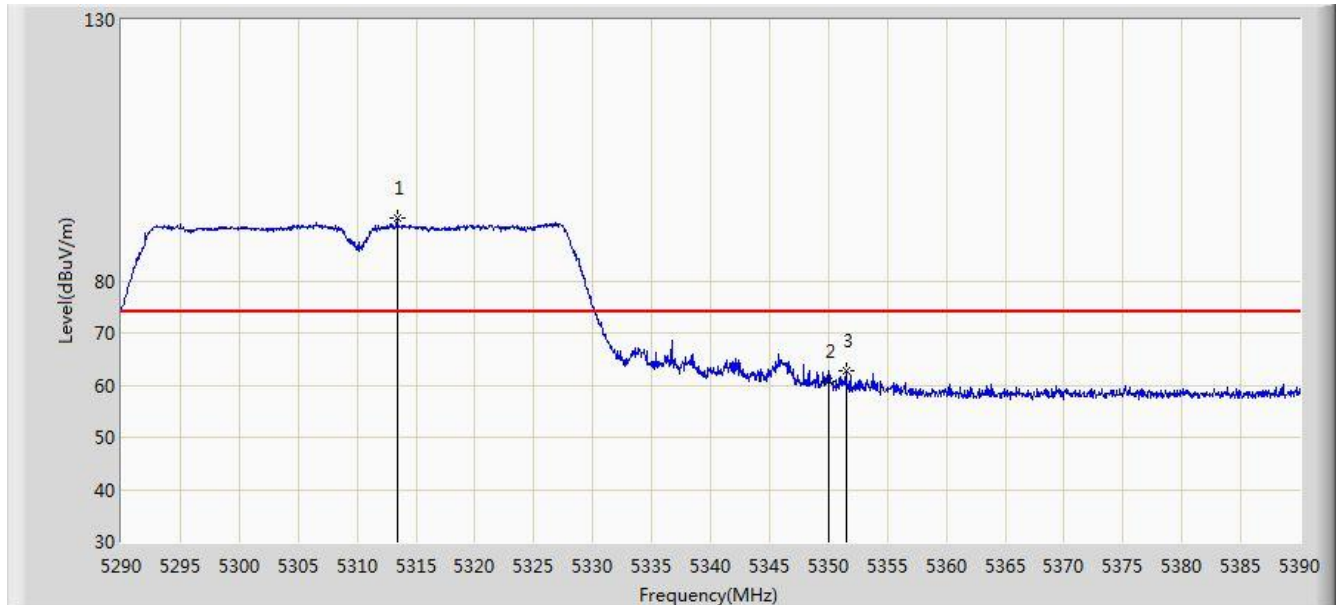


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5313.400	91.915	85.642	N/A	N/A	6.274	PK
2			5350.000	60.633	54.173	-13.367	74.000	6.460	PK
3			5351.500	62.653	56.185	-11.347	74.000	6.468	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

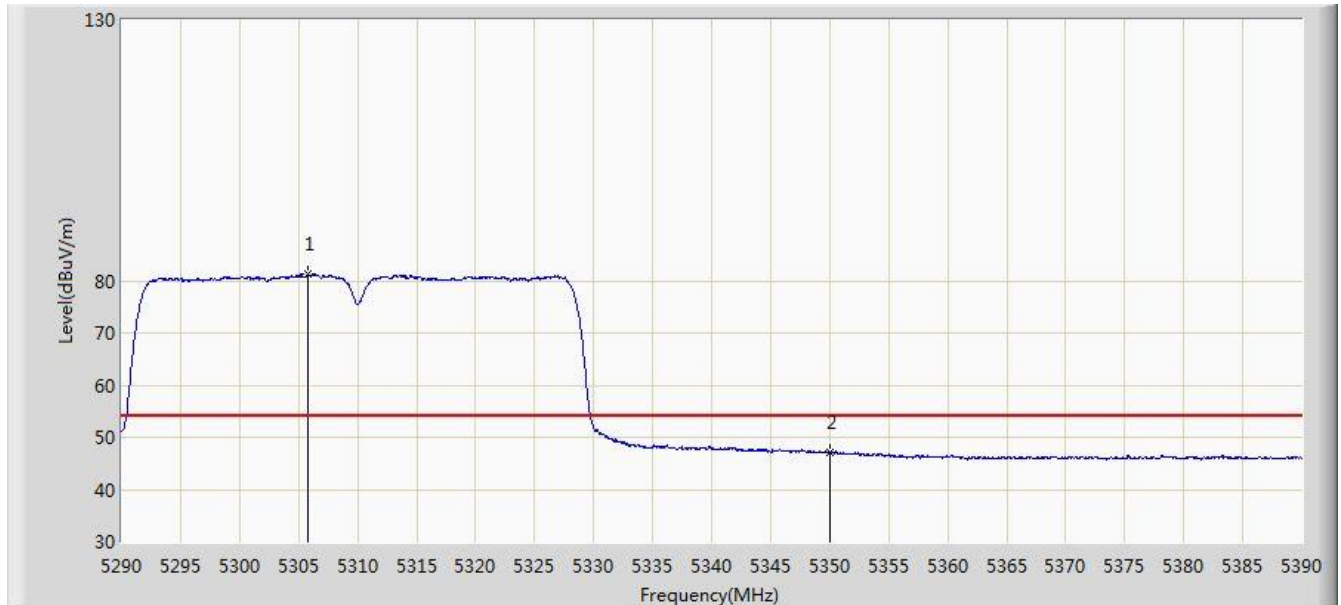


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5305.800	81.244	74.980	N/A	N/A	6.265	AV
2			5350.000	46.964	40.504	-7.036	54.000	6.460	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

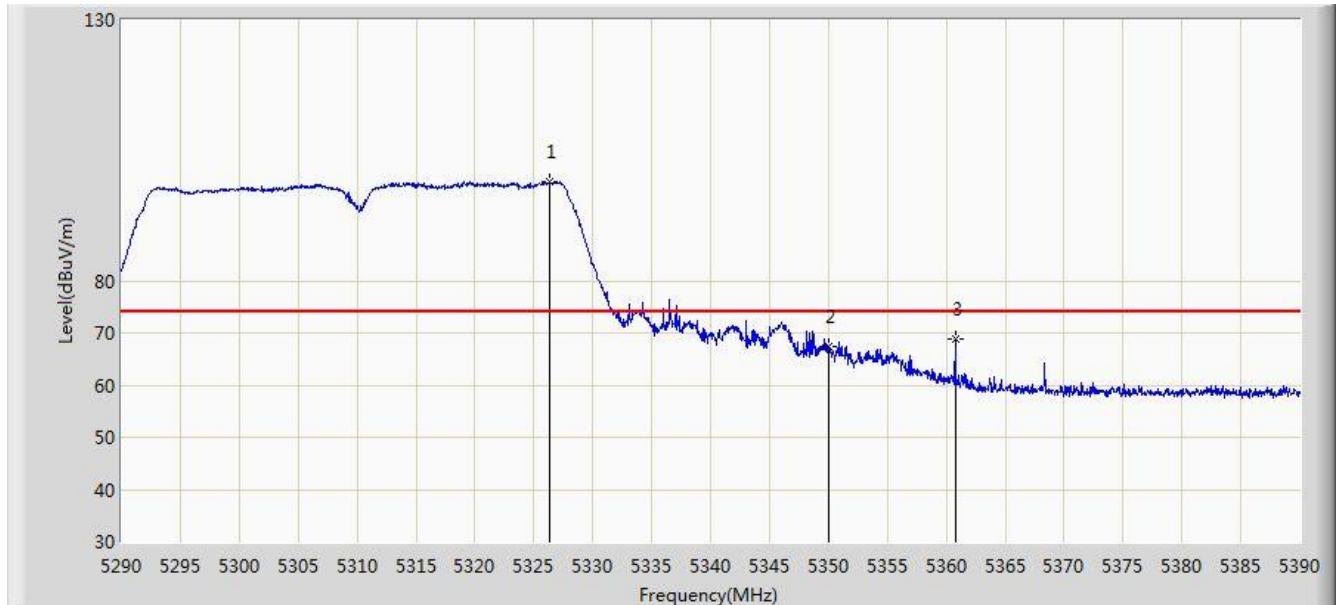


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5326.350	98.969	92.639	N/A	N/A	6.330	PK
2			5350.000	67.348	60.888	-6.652	74.000	6.460	PK
3			5360.750	68.719	62.218	-5.281	74.000	6.501	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

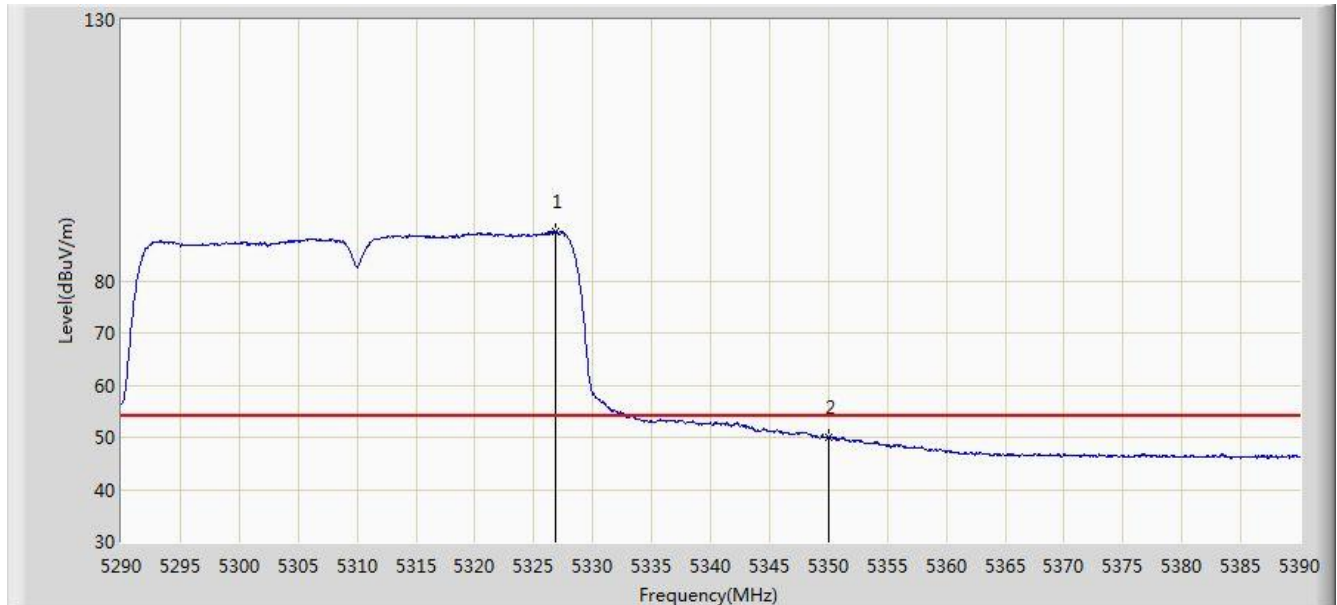


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5326.800	89.463	83.131	N/A	N/A	6.333	AV
2			5350.000	50.034	43.574	-3.966	54.000	6.460	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

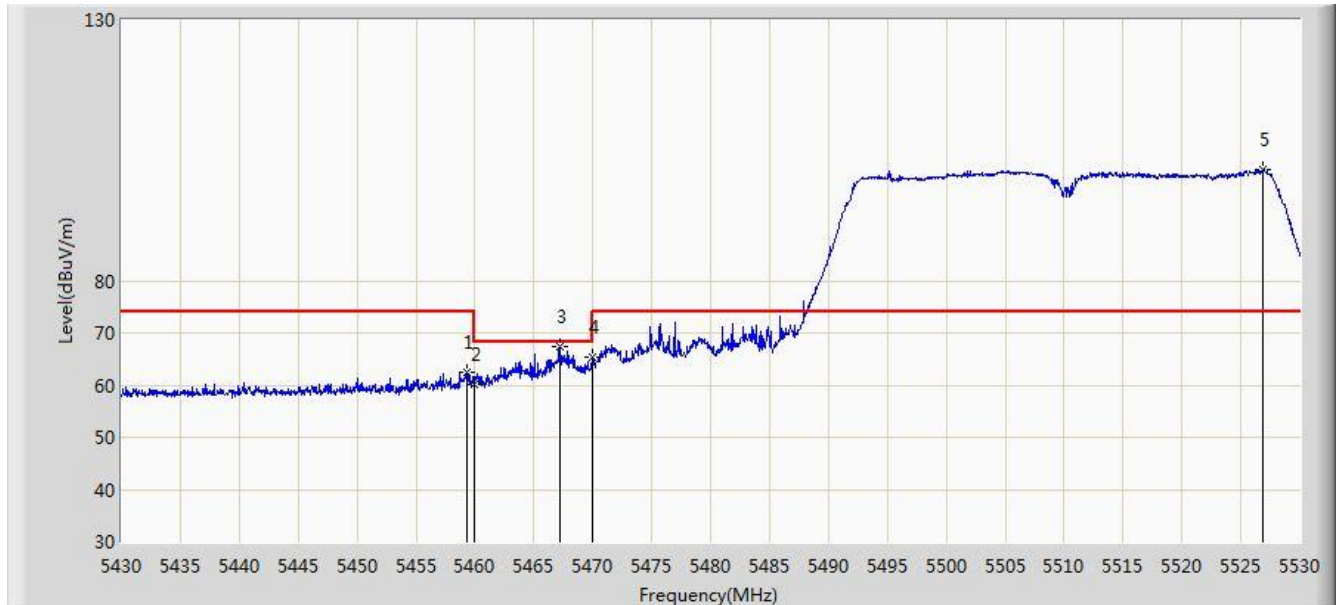


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.350	62.380	55.927	-11.620	74.000	6.452	PK
2			5460.000	60.160	53.707	-13.840	74.000	6.452	PK
3			5467.250	67.330	60.879	-0.870	68.200	6.450	PK
4			5470.000	65.504	59.054	-2.696	68.200	6.451	PK
5			5526.900	101.403	94.839	N/A	N/A	6.564	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

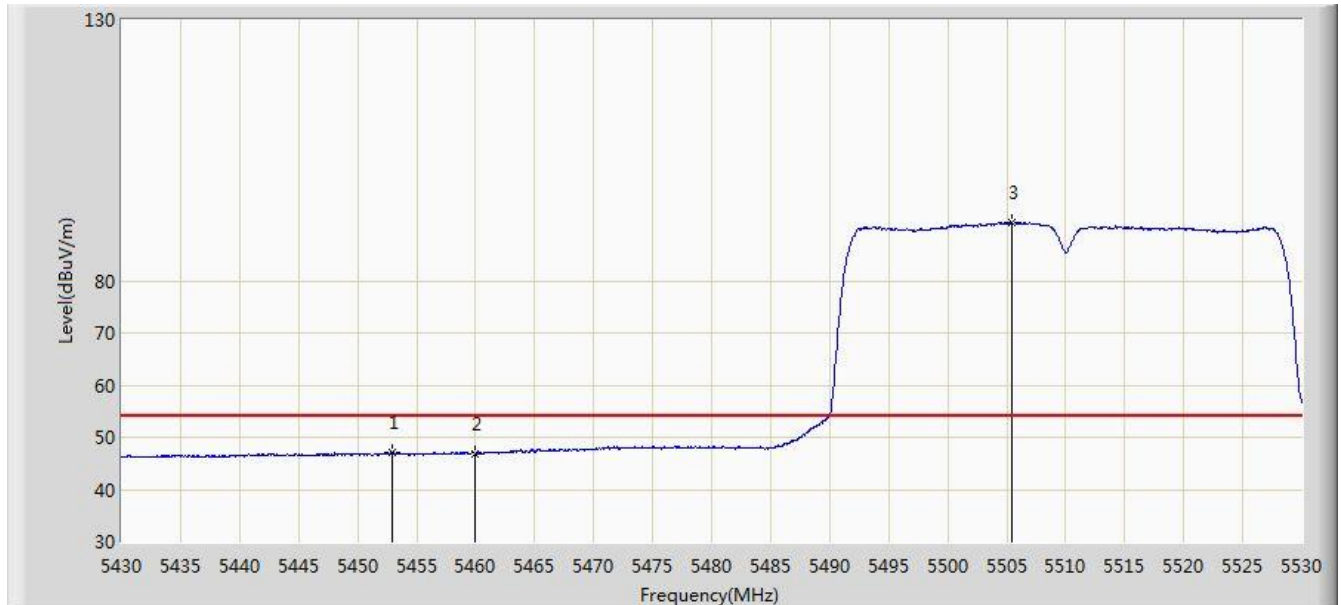


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.900	47.145	40.700	-6.855	54.000	6.446	AV
2			5460.000	46.831	40.378	-7.169	54.000	6.452	AV
3			5505.450	91.163	84.735	N/A	N/A	6.427	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

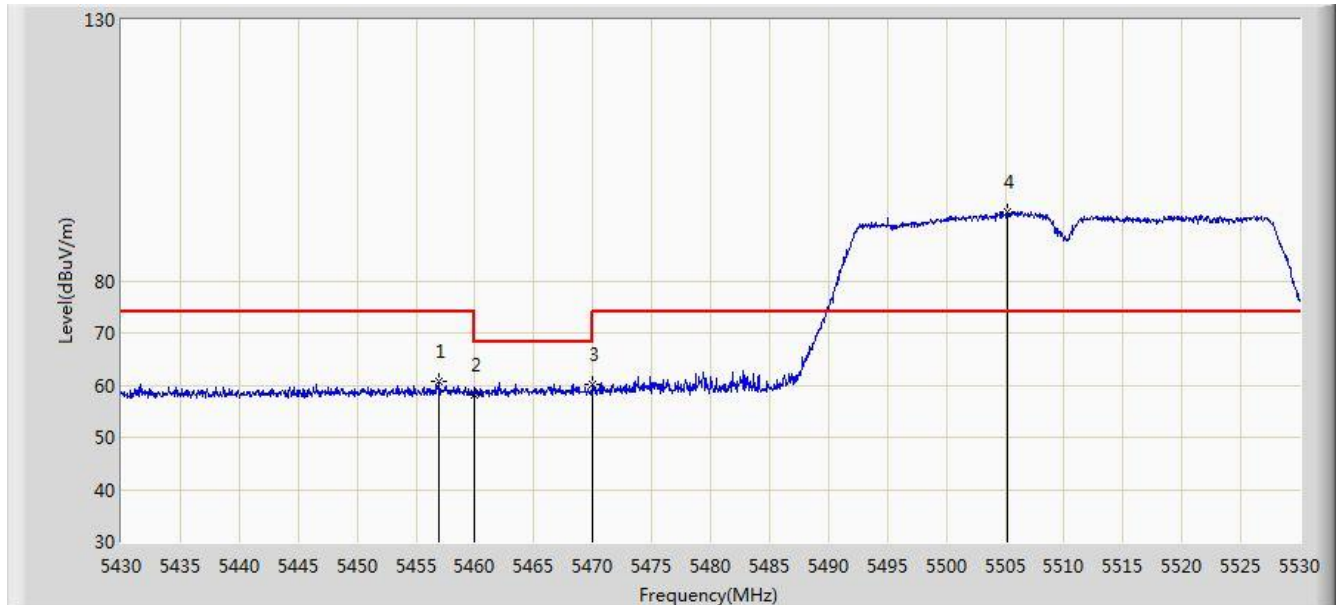


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.000	60.607	54.154	-13.393	74.000	6.453	PK
2			5460.000	58.004	51.551	-15.996	74.000	6.452	PK
3			5470.000	60.137	53.687	-8.063	68.200	6.451	PK
4			5505.150	93.263	86.836	N/A	N/A	6.426	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

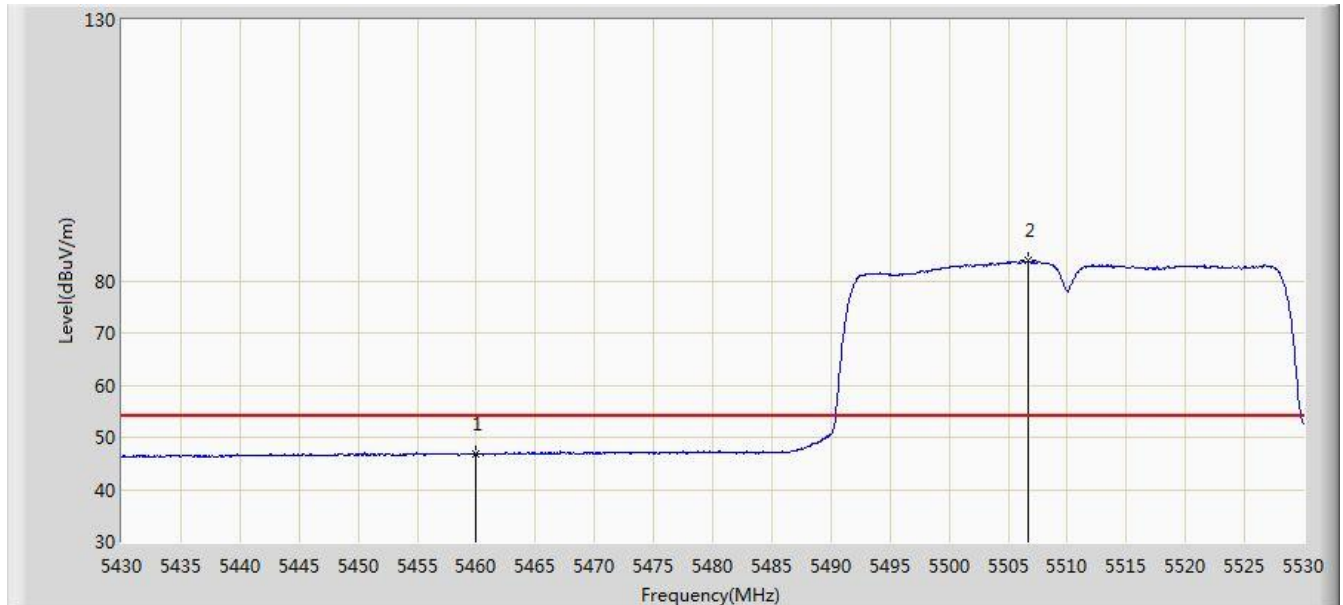


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.704	40.251	-7.296	54.000	6.452	AV
2			5506.700	83.817	77.382	N/A	N/A	6.435	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

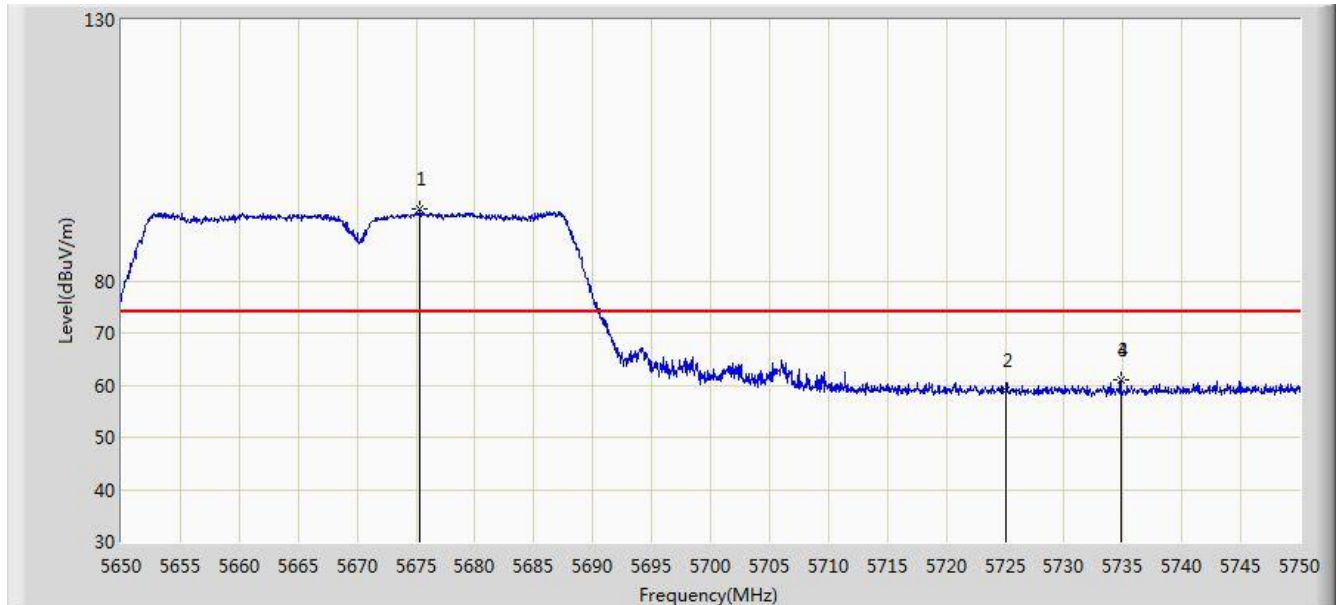


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5675.350	93.676	86.680	N/A	N/A	6.996	PK
2			5725.000	58.955	51.790	-15.045	74.000	7.165	PK
3			5734.800	60.924	53.663	-13.076	74.000	7.262	PK
4			5734.800	60.924	53.663	-13.076	74.000	7.262	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

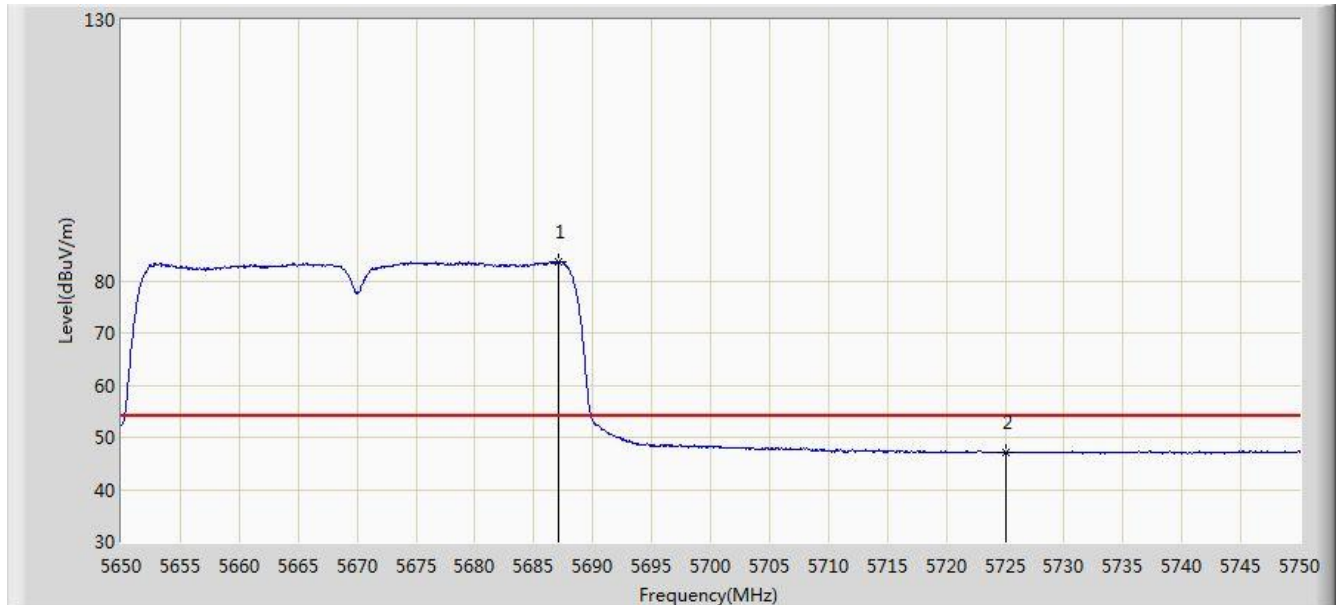


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5687.100	83.715	76.741	N/A	N/A	6.974	AV
2			5725.000	47.045	39.880	-6.955	54.000	7.165	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

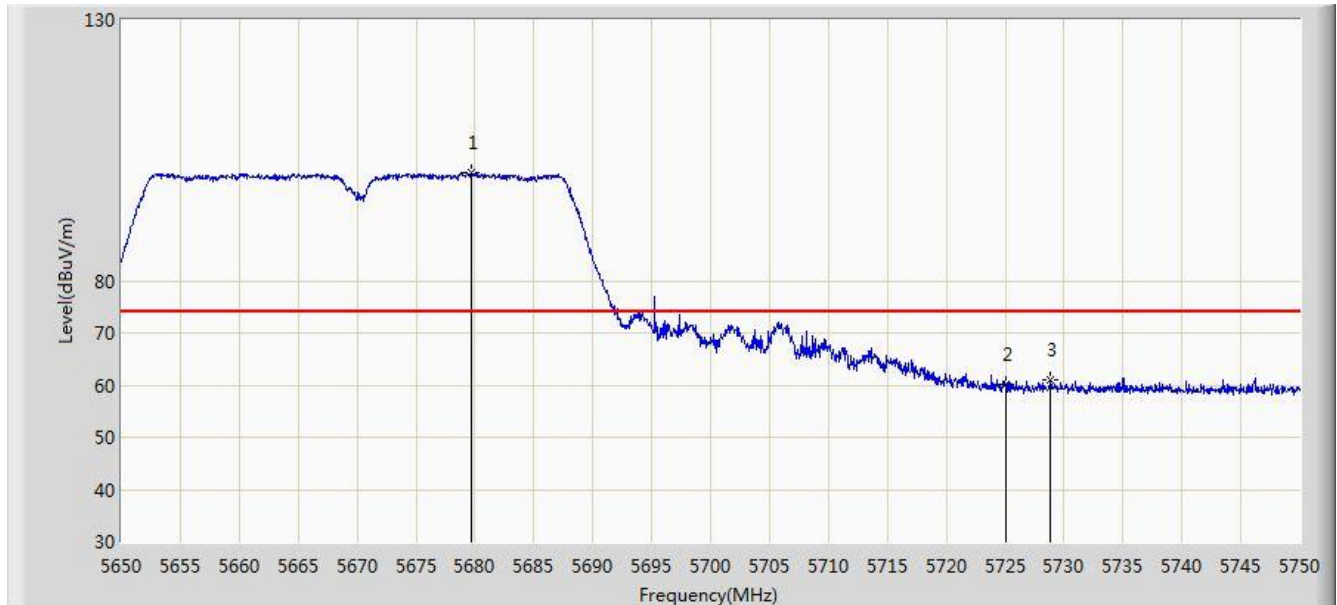


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5679.750	100.618	93.630	N/A	N/A	6.988	PK
2			5725.000	60.231	53.066	-13.769	74.000	7.165	PK
3			5728.850	61.070	53.867	-12.930	74.000	7.203	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

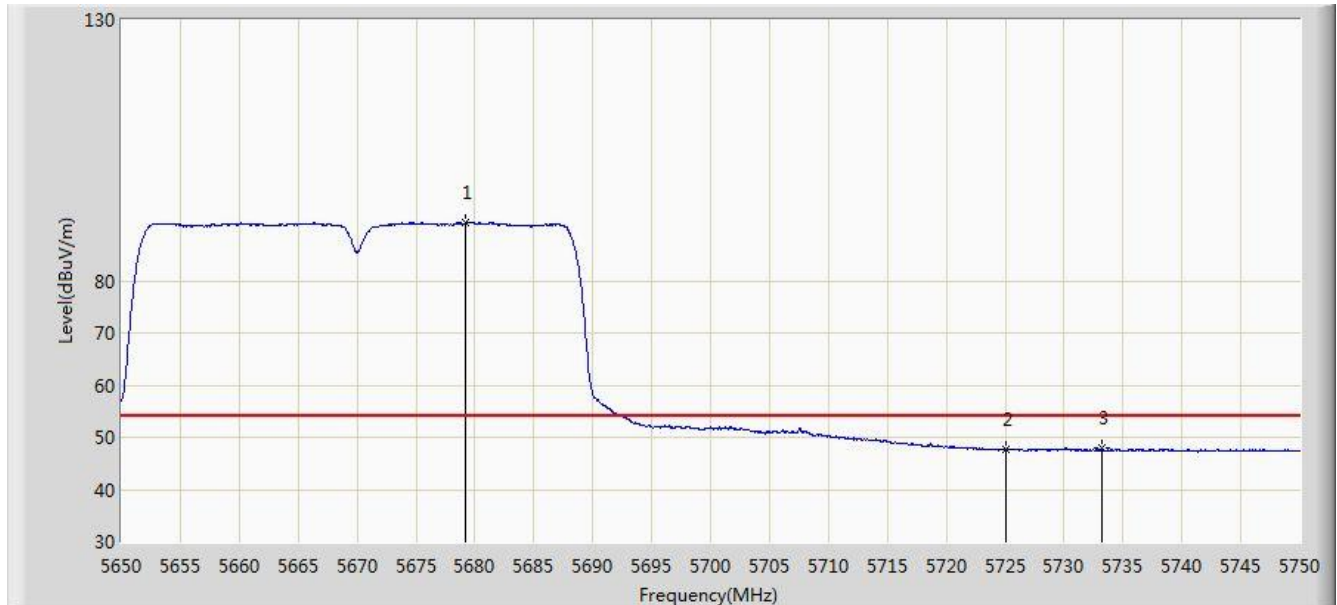


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5679.200	91.154	84.165	N/A	N/A	6.989	AV
2			5725.000	47.674	40.509	-6.326	54.000	7.165	AV
3			5733.150	47.852	40.607	-6.148	54.000	7.245	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:36
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

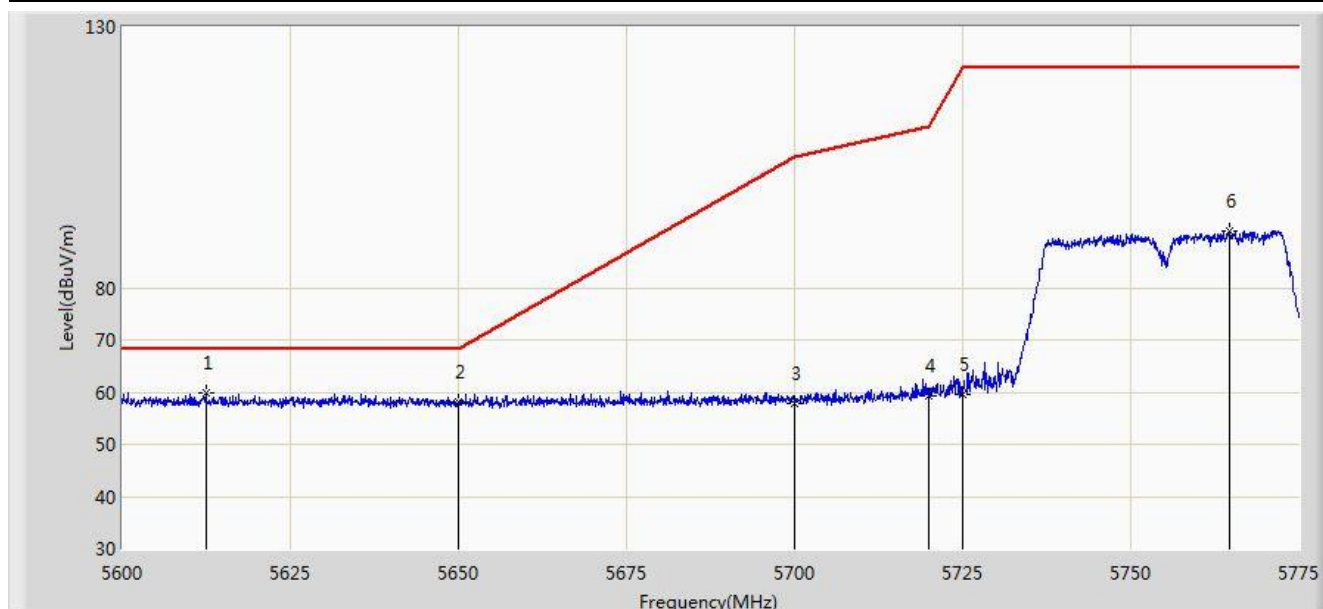


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5612.425	59.796	52.807	-8.404	68.200	6.989	PK
2			5650.000	58.033	51.028	-10.167	68.200	7.005	PK
3			5700.000	57.811	50.646	-47.389	105.200	7.165	PK
4			5720.000	59.362	52.063	-51.438	110.800	7.299	PK
5			5725.000	59.519	52.191	-62.681	122.200	7.328	PK
6			5764.675	90.848	83.418	N/A	N/A	7.430	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:38
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

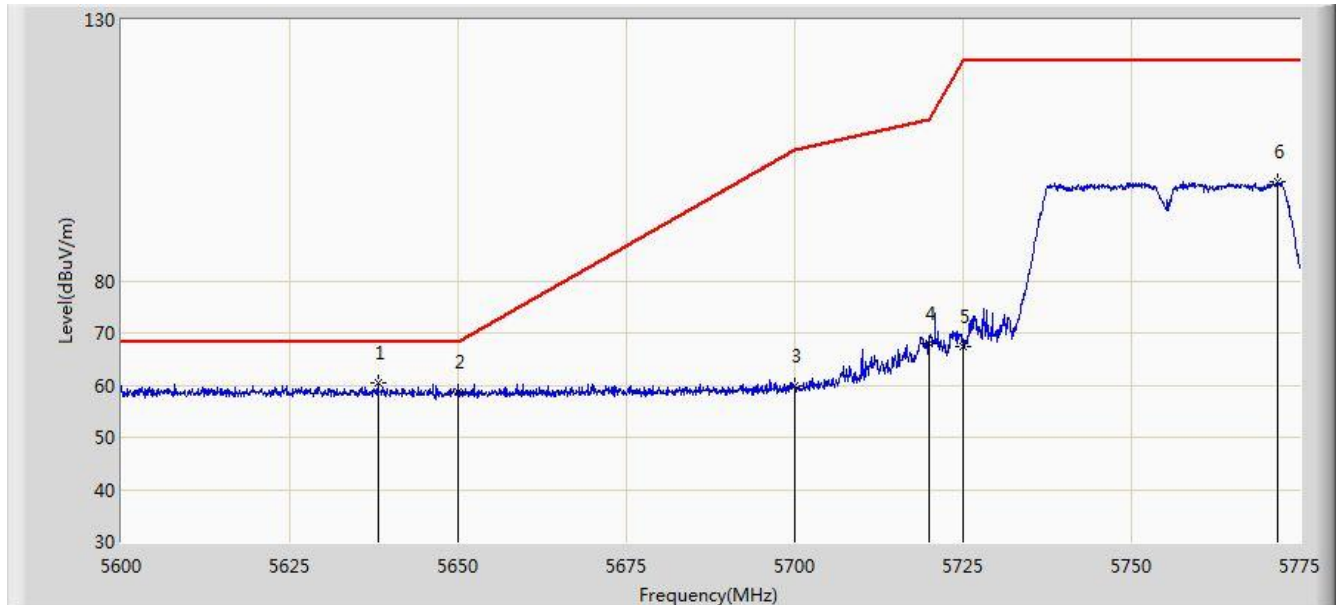


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5638.062	60.312	53.322	-7.888	68.200	6.990	PK
2			5650.000	58.679	51.674	-9.521	68.200	7.005	PK
3			5700.000	59.732	52.567	-45.468	105.200	7.165	PK
4			5720.000	68.085	60.786	-42.715	110.800	7.299	PK
5			5725.000	67.460	60.132	-54.740	122.200	7.328	PK
6			5771.763	98.969	91.514	N/A	N/A	7.455	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:41
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

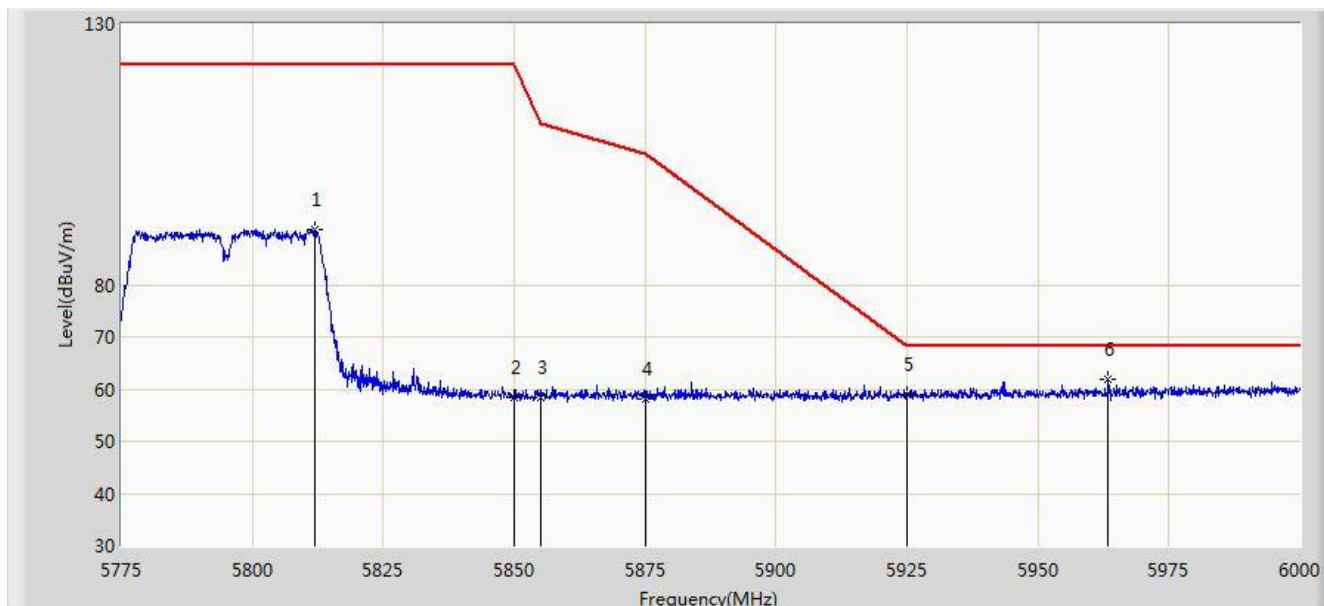


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5811.900	90.665	83.066	N/A	N/A	7.598	PK
2			5850.000	58.404	50.631	-63.796	122.200	7.774	PK
3			5855.000	58.346	50.570	-52.454	110.800	7.775	PK
4			5875.000	58.243	50.425	-46.957	105.200	7.818	PK
5			5925.000	58.986	51.167	-9.214	68.200	7.819	PK
6			5963.437	61.773	53.912	-6.427	68.200	7.860	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:44
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

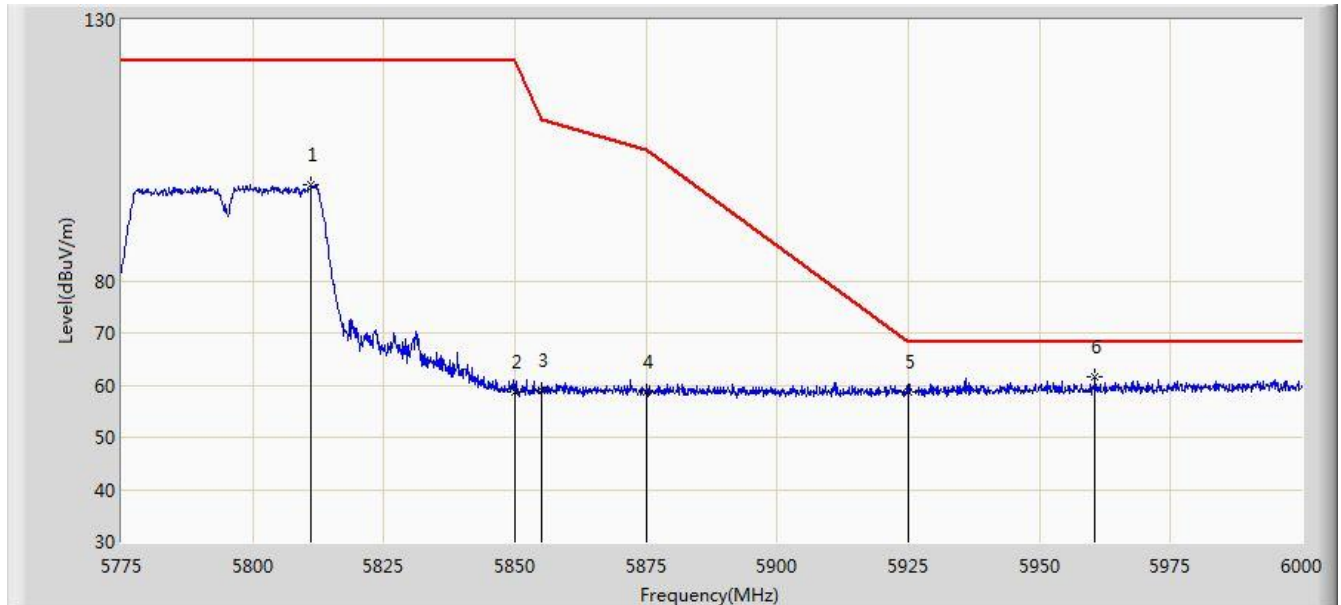


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5811.112	98.382	90.787	N/A	N/A	7.595	PK
2			5850.000	58.744	50.971	-63.456	122.200	7.774	PK
3			5855.000	59.062	51.286	-51.738	110.800	7.775	PK
4			5875.000	58.639	50.821	-46.561	105.200	7.818	PK
5			5925.000	58.615	50.796	-9.585	68.200	7.819	PK
6			5960.513	61.493	53.636	-6.707	68.200	7.856	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

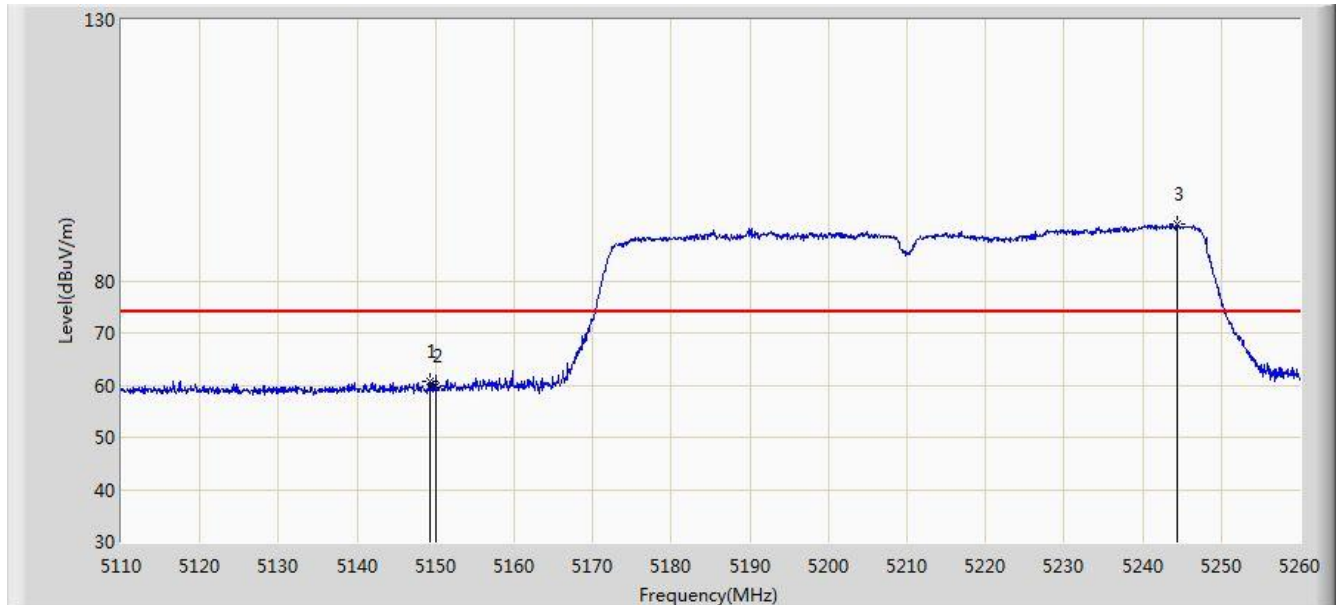


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.225	60.670	54.549	-13.330	74.000	6.121	PK
2			5150.000	59.982	53.859	-14.018	74.000	6.123	PK
3			5244.475	90.952	85.172	N/A	N/A	5.780	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

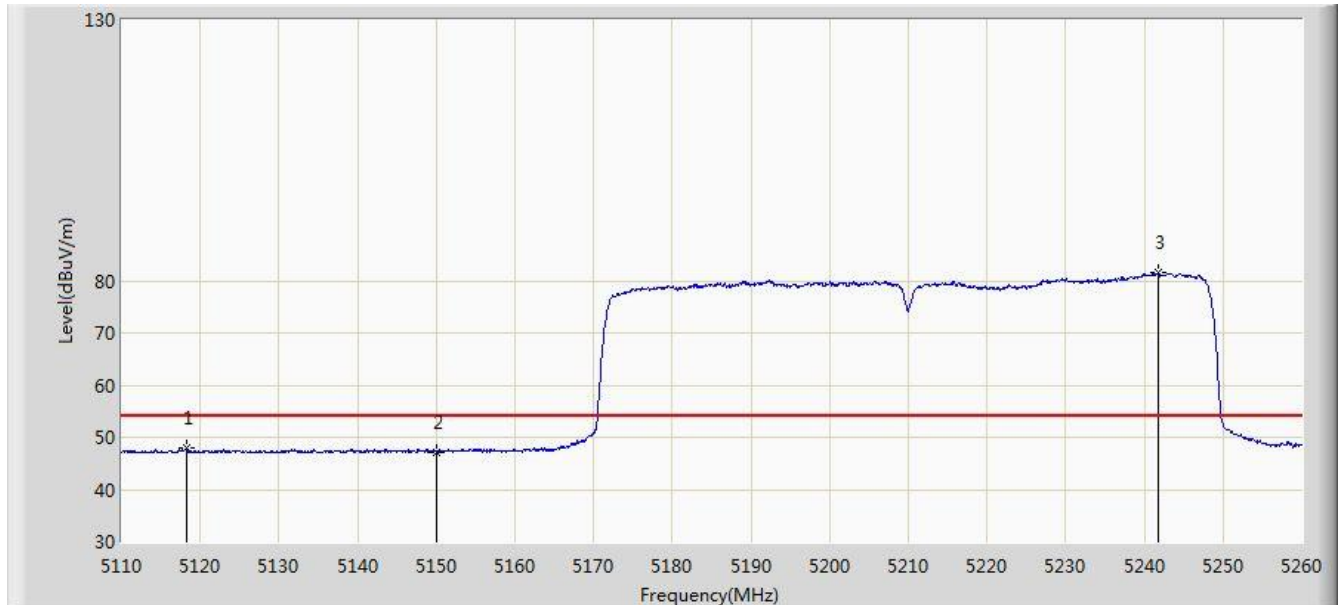


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5118.325	47.859	41.731	-6.141	54.000	6.128	AV
2			5150.000	47.175	41.052	-6.825	54.000	6.123	AV
3			5241.700	81.458	75.682	N/A	N/A	5.777	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

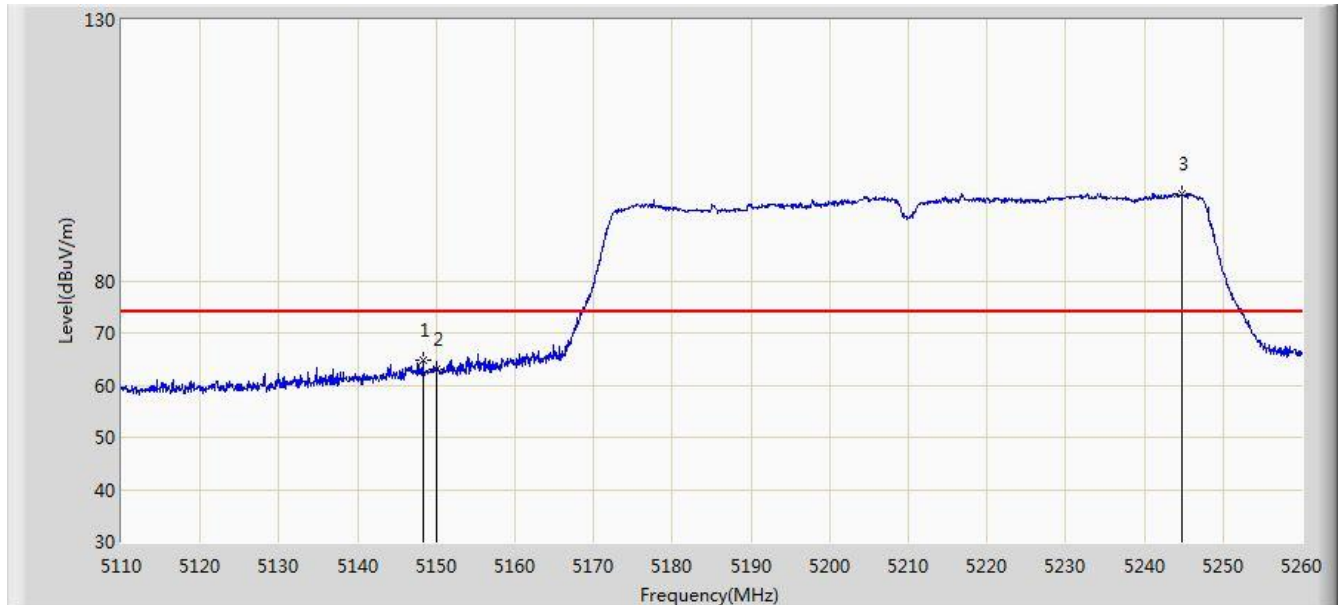


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.325	64.756	58.637	-9.244	74.000	6.119	PK
2			5150.000	63.153	57.030	-10.847	74.000	6.123	PK
3			5244.775	96.742	90.962	N/A	N/A	5.780	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

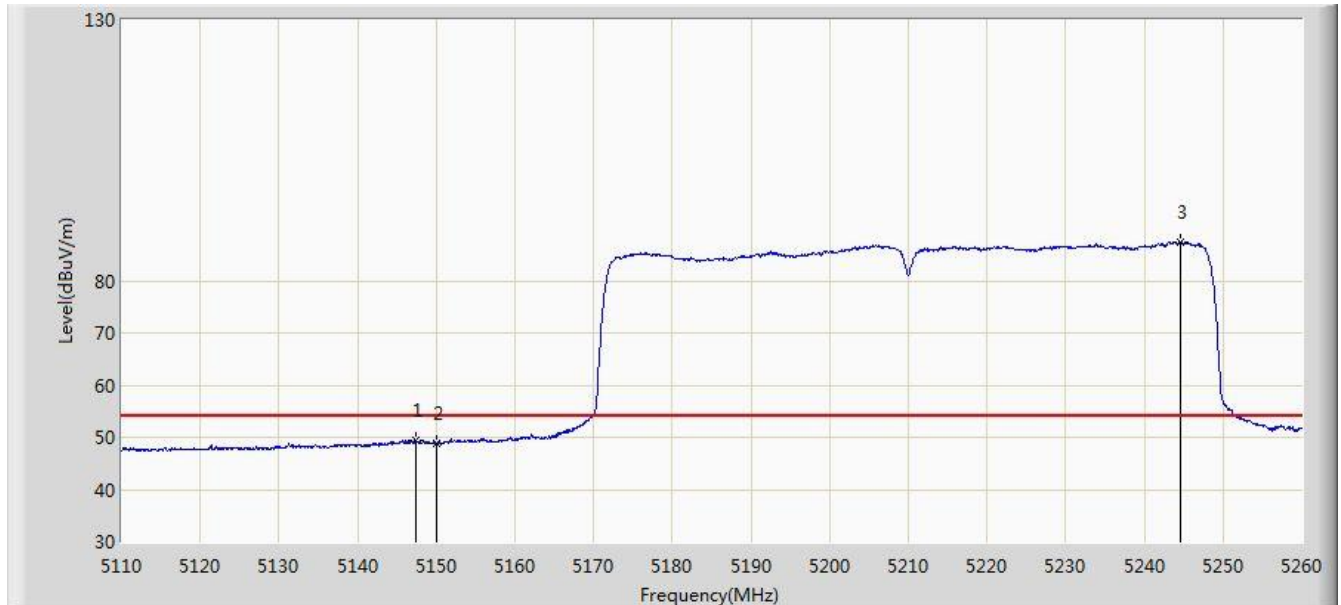


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5147.350	49.504	43.387	-4.496	54.000	6.117	AV
2			5150.000	48.866	42.743	-5.134	54.000	6.123	AV
3			5244.625	87.491	81.711	N/A	N/A	5.780	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 03:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

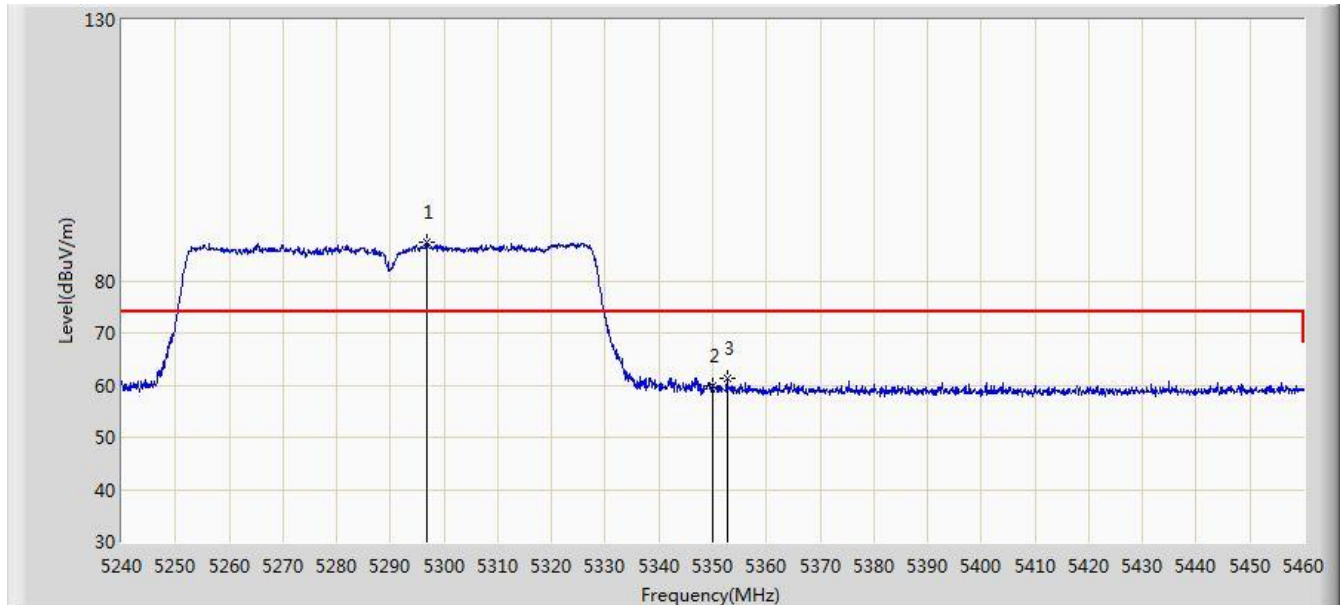


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5296.760	87.346	81.088	N/A	N/A	6.257	PK
2			5350.000	59.988	53.528	-14.012	74.000	6.460	PK
3			5352.640	61.384	54.911	-12.616	74.000	6.473	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 04:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

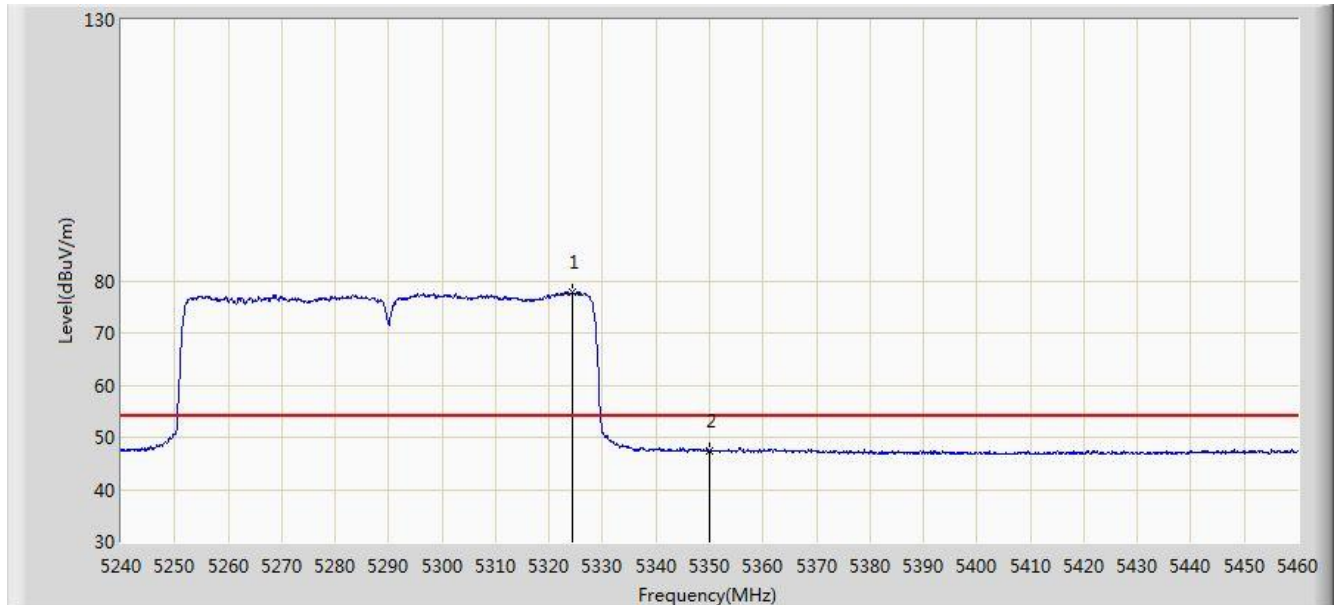


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5324.480	77.874	71.555	N/A	N/A	6.319	AV
2			5350.000	47.320	40.860	-6.680	54.000	6.460	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 04:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

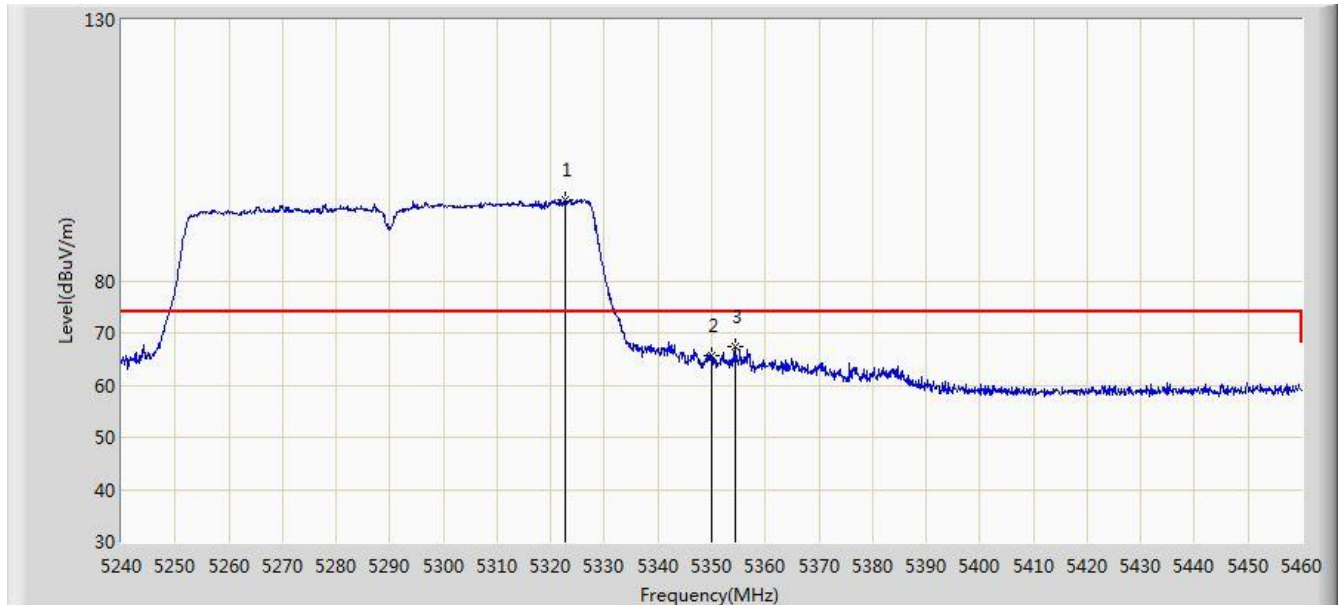


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5322.610	95.594	89.286	N/A	N/A	6.308	PK
2			5350.000	65.647	59.187	-8.353	74.000	6.460	PK
3			5354.290	67.281	60.802	-6.719	74.000	6.479	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 04:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

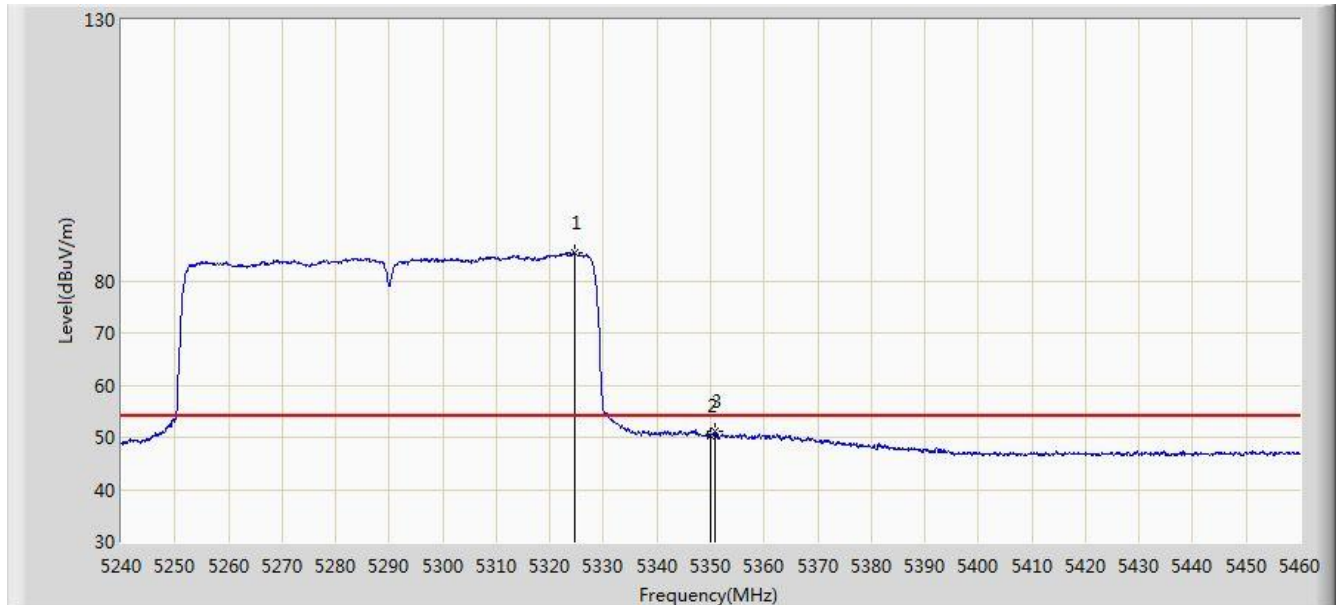


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5324.700	85.300	78.980	N/A	N/A	6.320	AV
2			5350.000	50.276	43.816	-3.724	54.000	6.460	AV
3			5350.880	51.127	44.662	-2.873	54.000	6.465	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

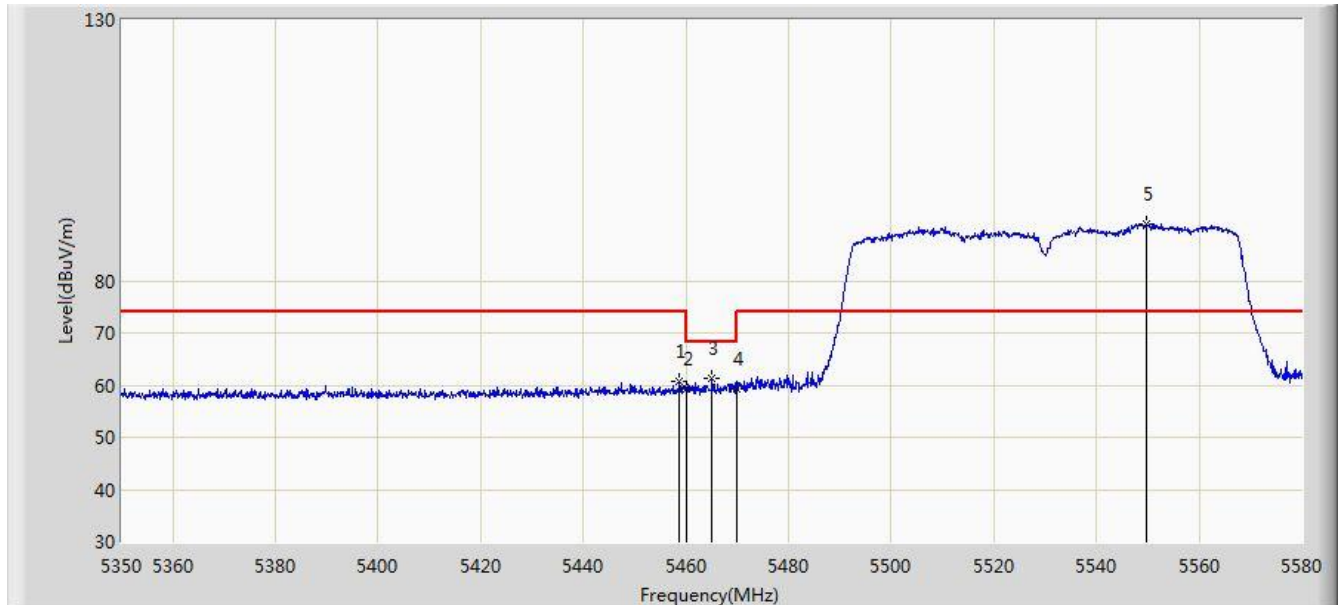


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.790	60.668	54.215	-13.332	74.000	6.453	PK
2			5460.000	59.183	52.730	-14.817	74.000	6.452	PK
3			5465.115	61.413	54.962	-6.787	68.200	6.452	PK
4			5470.000	59.201	52.751	-8.999	68.200	6.451	PK
5			5549.870	90.967	84.224	N/A	N/A	6.743	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 04:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

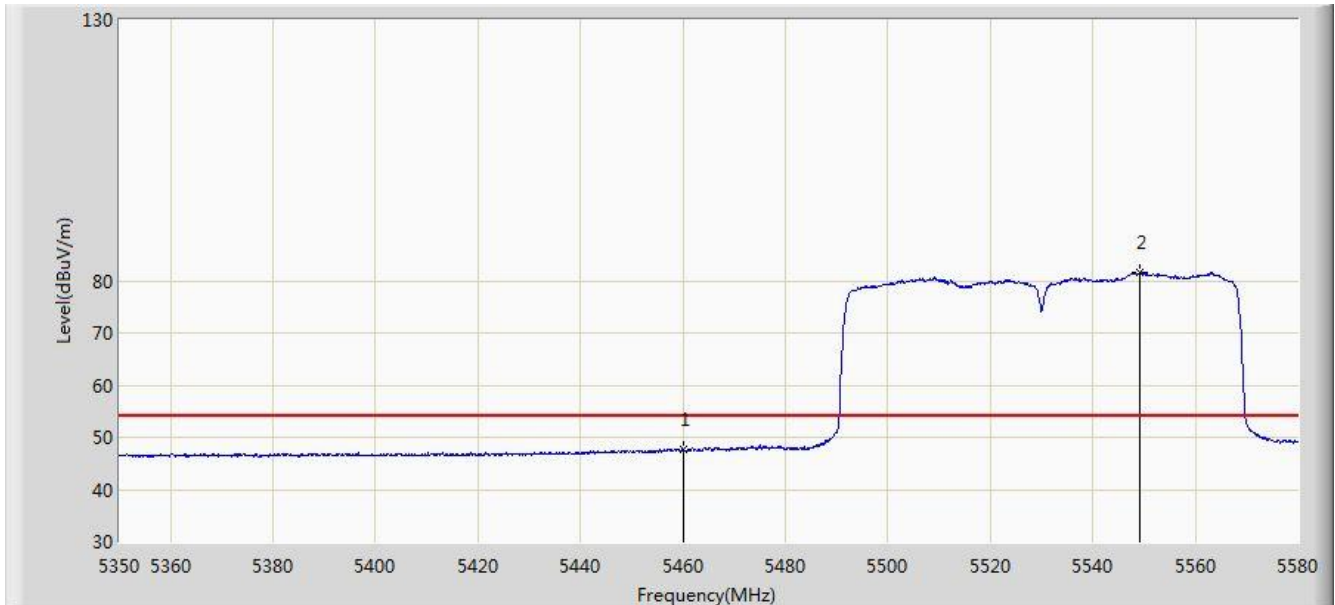


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.548	41.095	-6.452	54.000	6.452	AV
2			5549.180	81.579	74.839	N/A	N/A	6.739	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 05:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

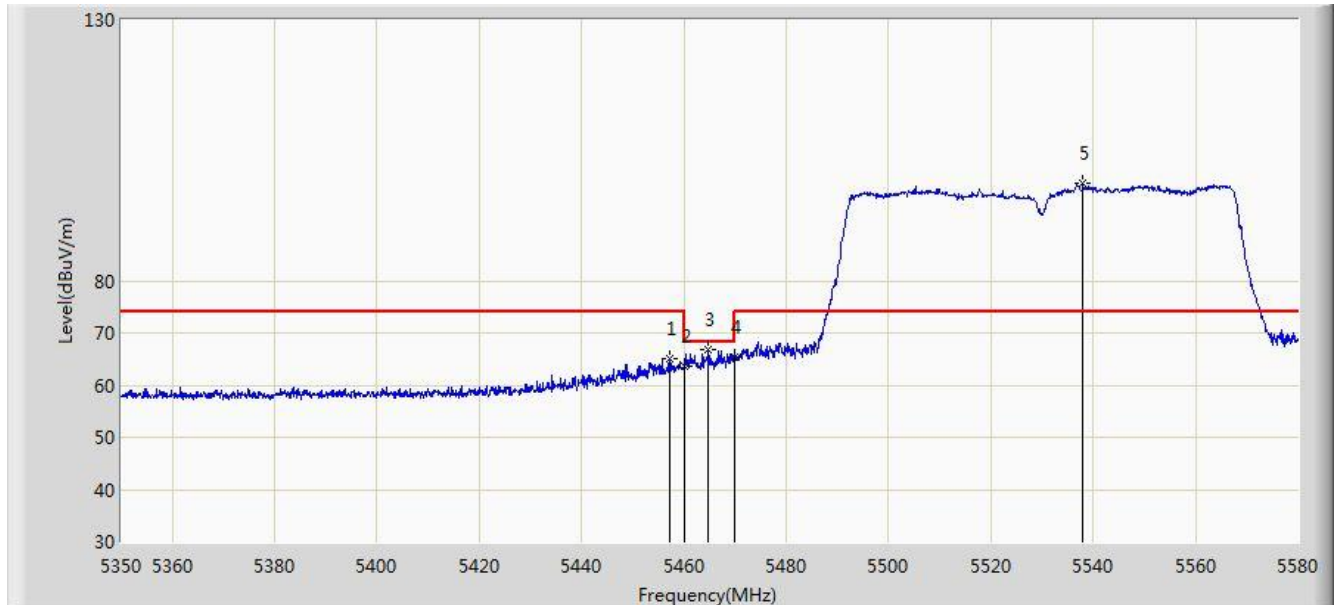


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5457.180	65.149	58.696	-8.851	74.000	6.453	PK
2			5460.000	63.504	57.051	-10.496	74.000	6.452	PK
3			5464.770	66.702	60.250	-1.498	68.200	6.451	PK
4			5470.000	65.366	58.916	-2.834	68.200	6.451	PK
5			5538.025	98.681	92.005	N/A	N/A	6.676	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/06 - 05:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

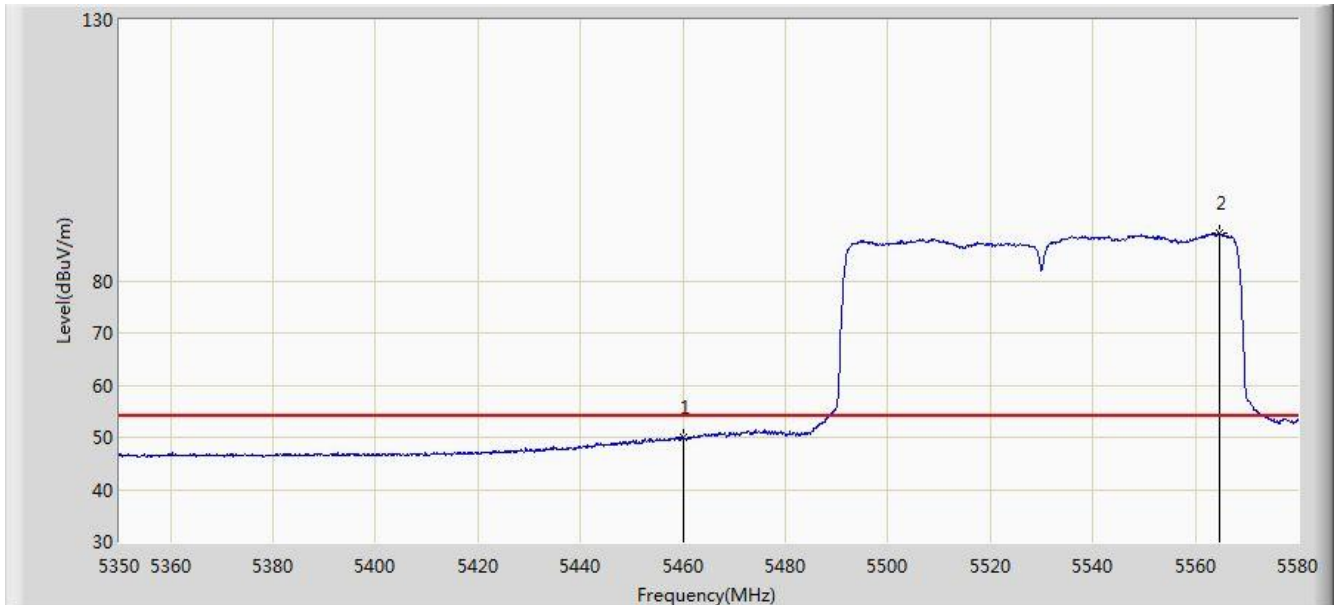


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	49.862	43.409	-4.138	54.000	6.452	AV
2			5564.705	89.262	82.471	N/A	N/A	6.791	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 06:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

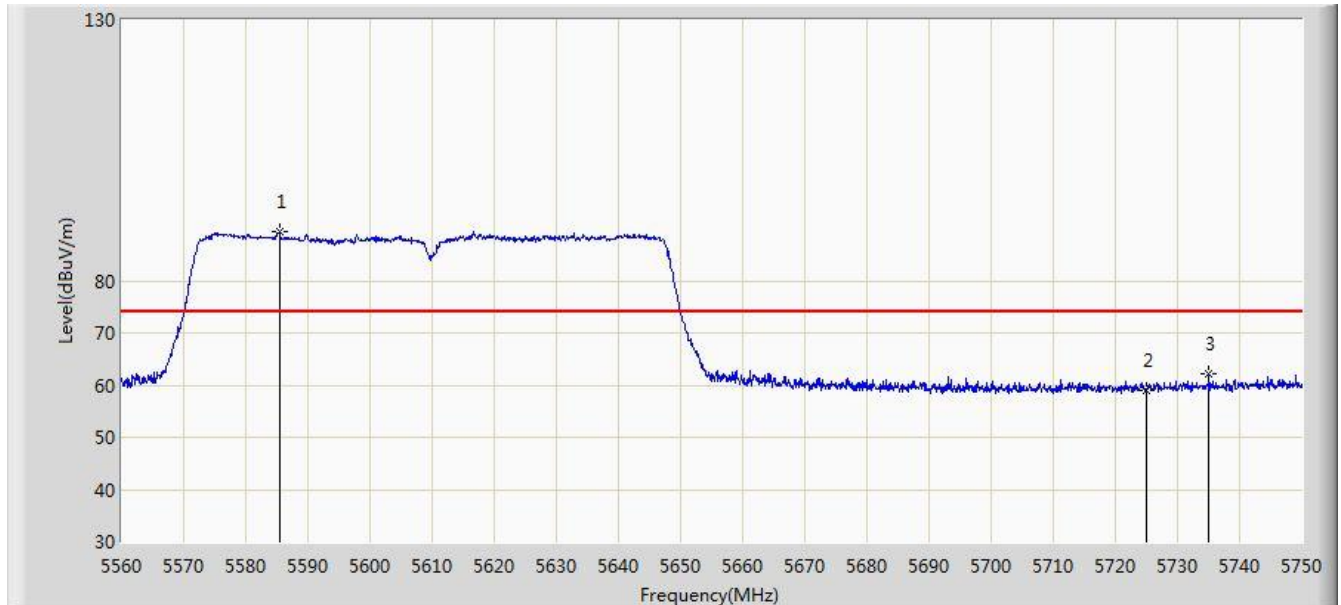


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5585.365	89.395	82.427	N/A	N/A	6.968	PK
2			5725.000	59.103	51.775	-14.897	74.000	7.328	PK
3			5735.085	62.179	54.807	-11.821	74.000	7.372	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 06:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

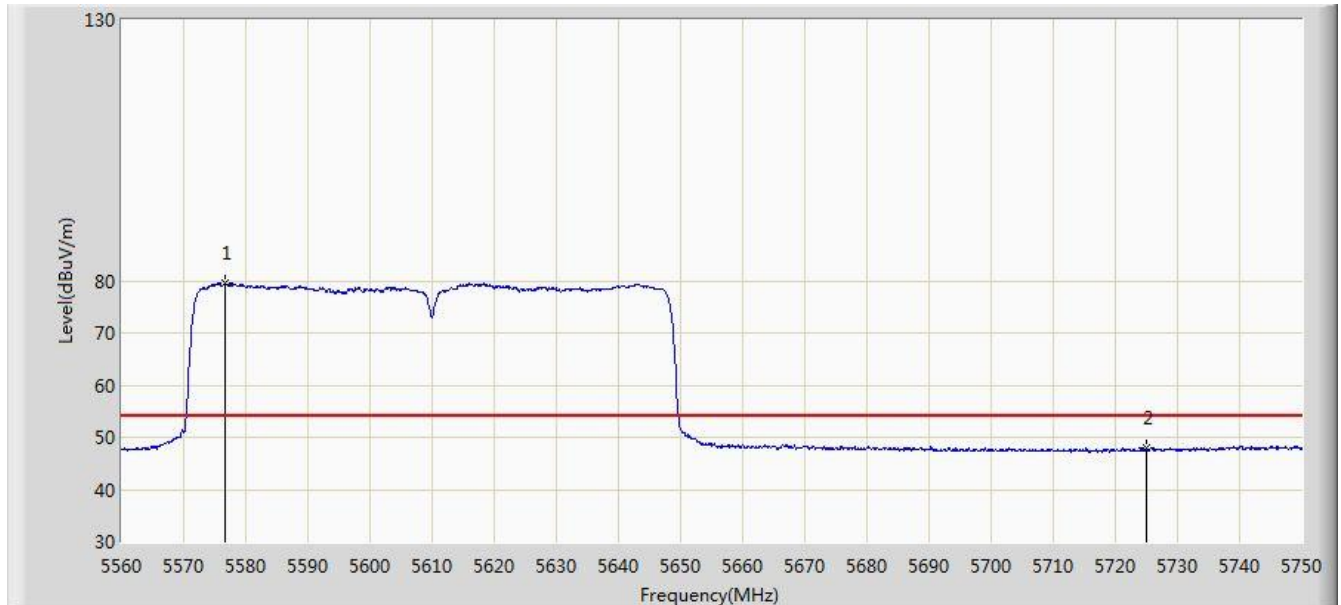


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5576.720	79.464	72.537	N/A	N/A	6.928	AV
2			5725.000	47.829	40.501	-6.171	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 06:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

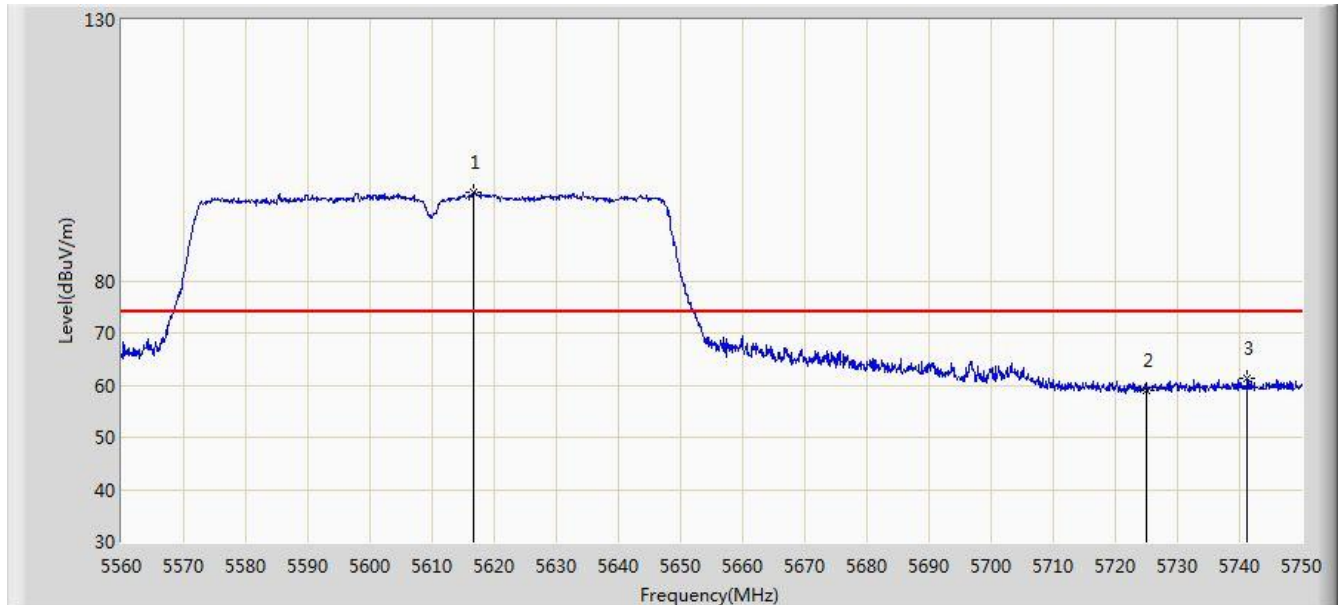


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5616.715	96.900	89.902	N/A	N/A	6.998	PK
2			5725.000	59.059	51.731	-14.941	74.000	7.328	PK
3			5741.260	61.302	53.905	-12.698	74.000	7.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 06:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

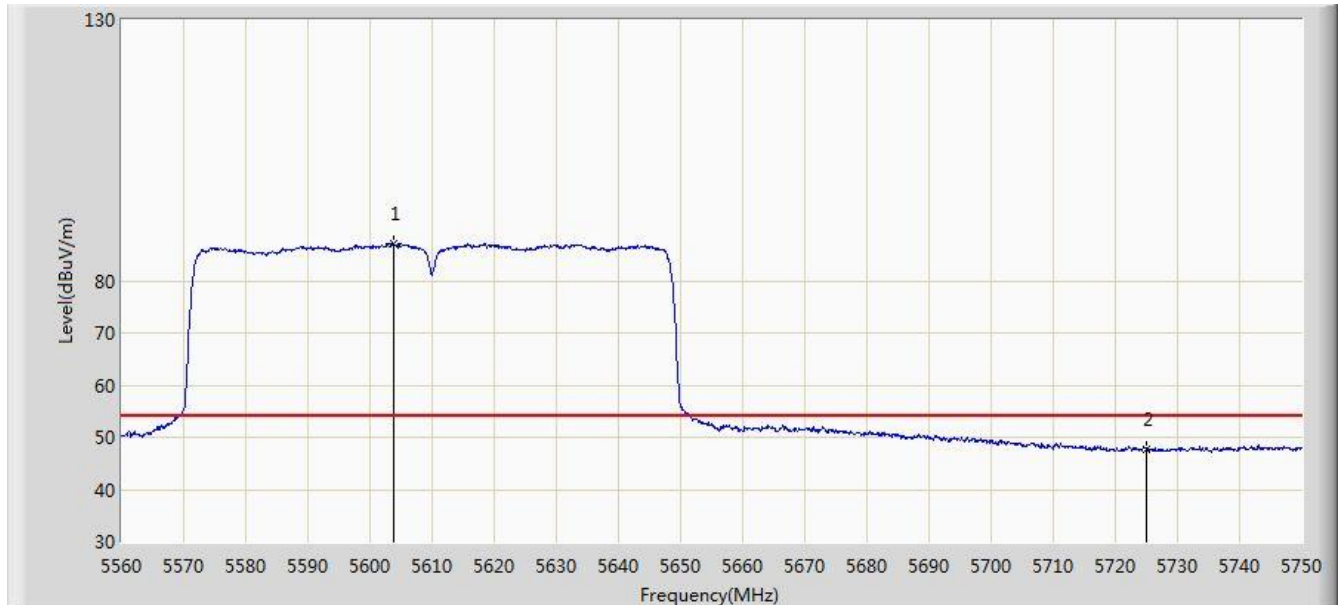


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5603.795	87.192	80.213	N/A	N/A	6.979	AV
2			5725.000	47.625	40.297	-6.375	54.000	7.328	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 04:08
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

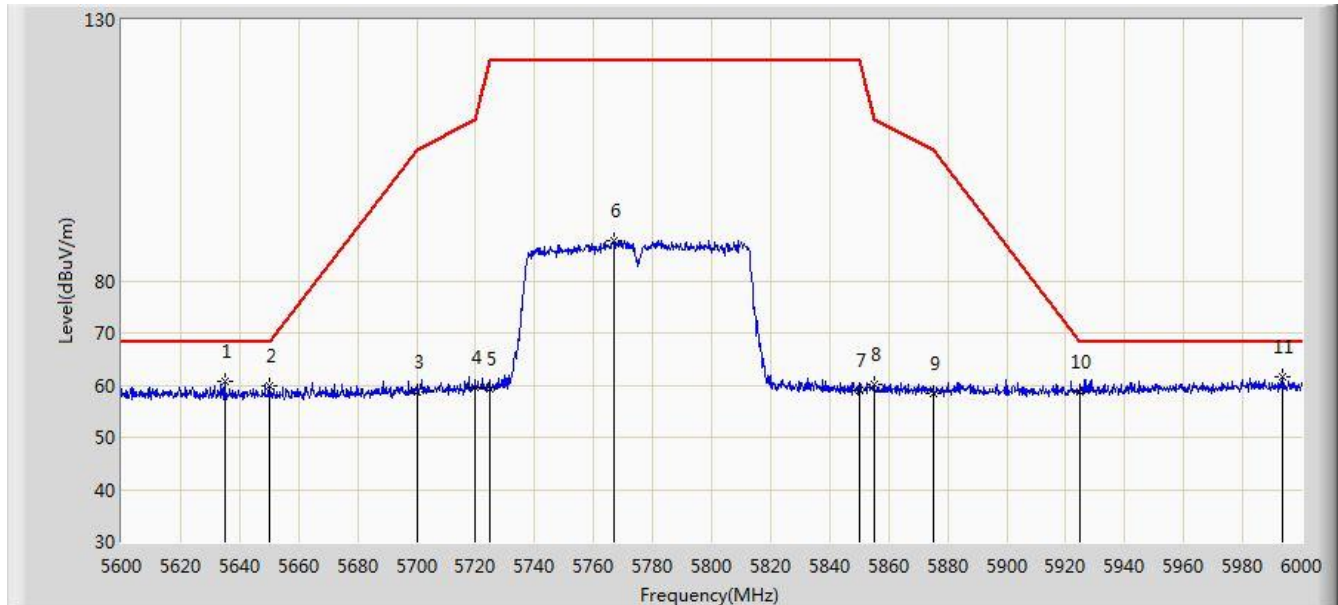


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5635.000	60.844	53.848	-7.356	68.200	6.996	PK
2			5650.000	59.777	52.772	-8.423	68.200	7.005	PK
3			5700.000	58.650	51.485	-46.550	105.200	7.165	PK
4			5720.000	59.574	52.275	-51.226	110.800	7.299	PK
5			5725.000	59.277	51.949	-62.923	122.200	7.328	PK
6			5766.800	87.795	80.358	N/A	N/A	7.437	PK
7			5850.000	59.043	51.270	-63.157	122.200	7.774	PK
8			5855.000	60.022	52.246	-50.778	110.800	7.775	PK
9			5875.000	58.456	50.638	-46.744	105.200	7.818	PK
10			5925.000	58.678	50.859	-9.522	68.200	7.819	PK
11			5993.400	61.651	53.703	-6.549	68.200	7.948	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2018/06/09 - 04:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Hunk Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: DOLPHIN CT40	Power: By Battery
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

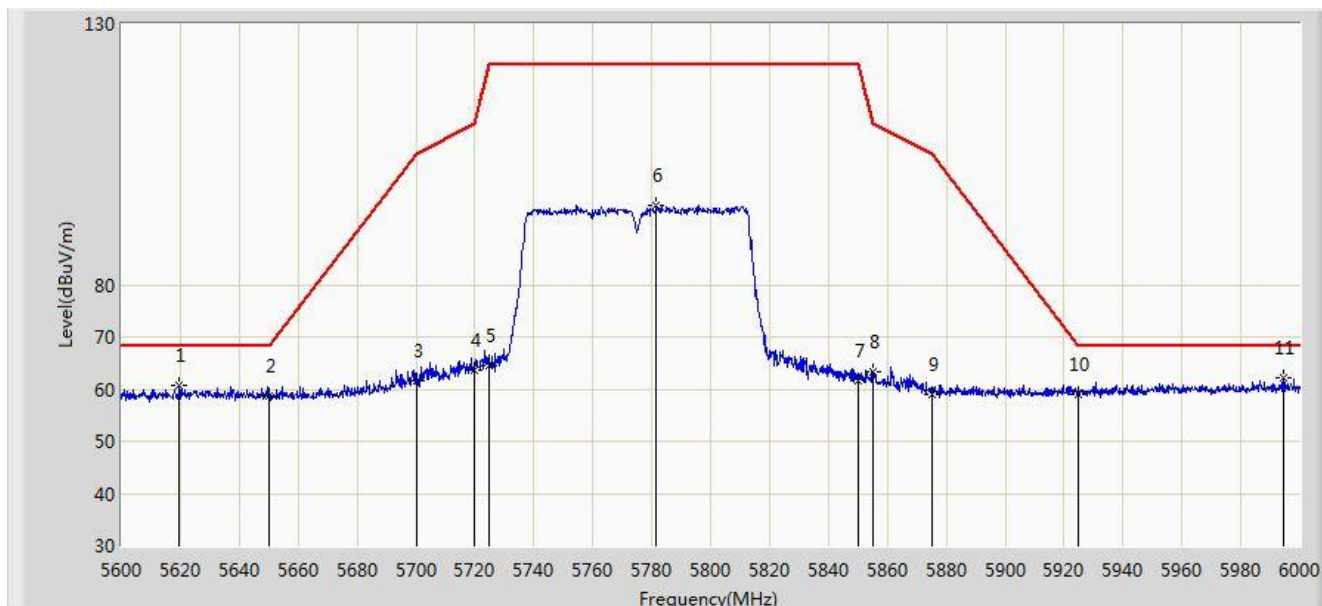

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5619.600	60.684	53.679	-7.516	68.200	7.004	PK
2			5650.000	58.676	51.671	-9.524	68.200	7.005	PK
3			5700.000	61.649	54.484	-43.551	105.200	7.165	PK
4			5720.000	63.734	56.435	-47.066	110.800	7.299	PK
5			5725.000	64.578	57.250	-57.622	122.200	7.328	PK
6			5781.600	95.328	87.838	N/A	N/A	7.490	PK
7			5850.000	61.528	53.755	-60.672	122.200	7.774	PK
8			5855.000	63.336	55.560	-47.464	110.800	7.775	PK
9			5875.000	58.908	51.090	-46.292	105.200	7.818	PK
10			5925.000	59.043	51.224	-9.157	68.200	7.819	PK
11			5994.600	62.130	54.176	-6.070	68.200	7.955	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

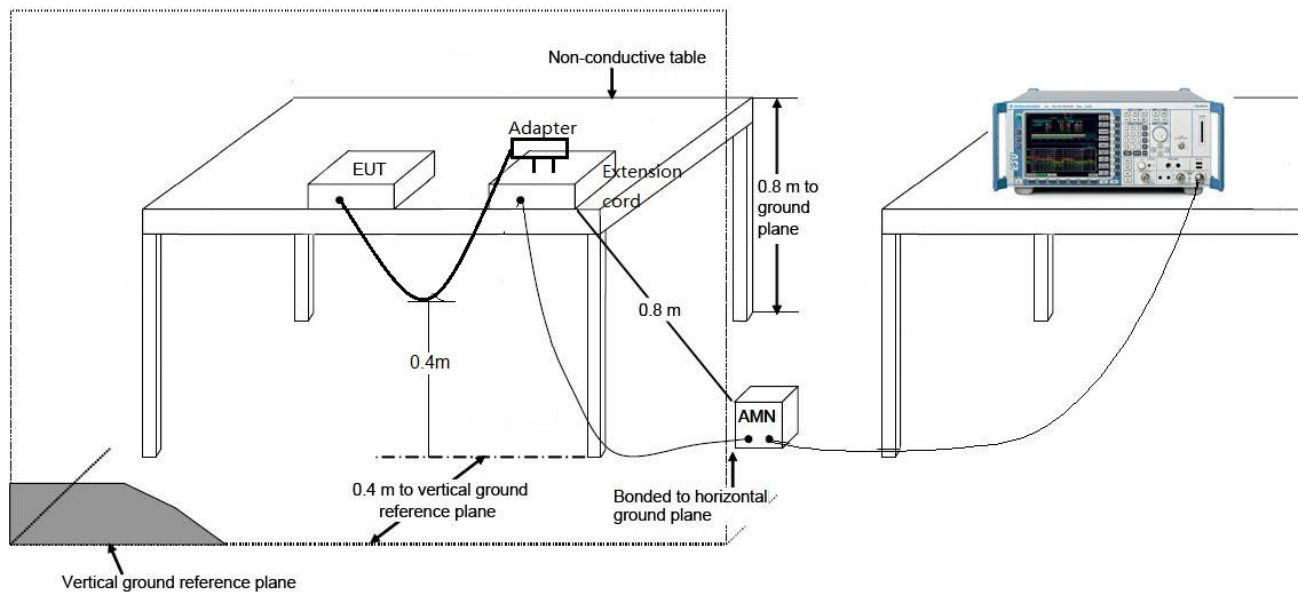

7.10.3.Test Result

Site: SR2	Time: 2018/04/27 - 13:45
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: DOLPHIN CT40	Power: AC 120V/60Hz
Test Mode: Mode 1	

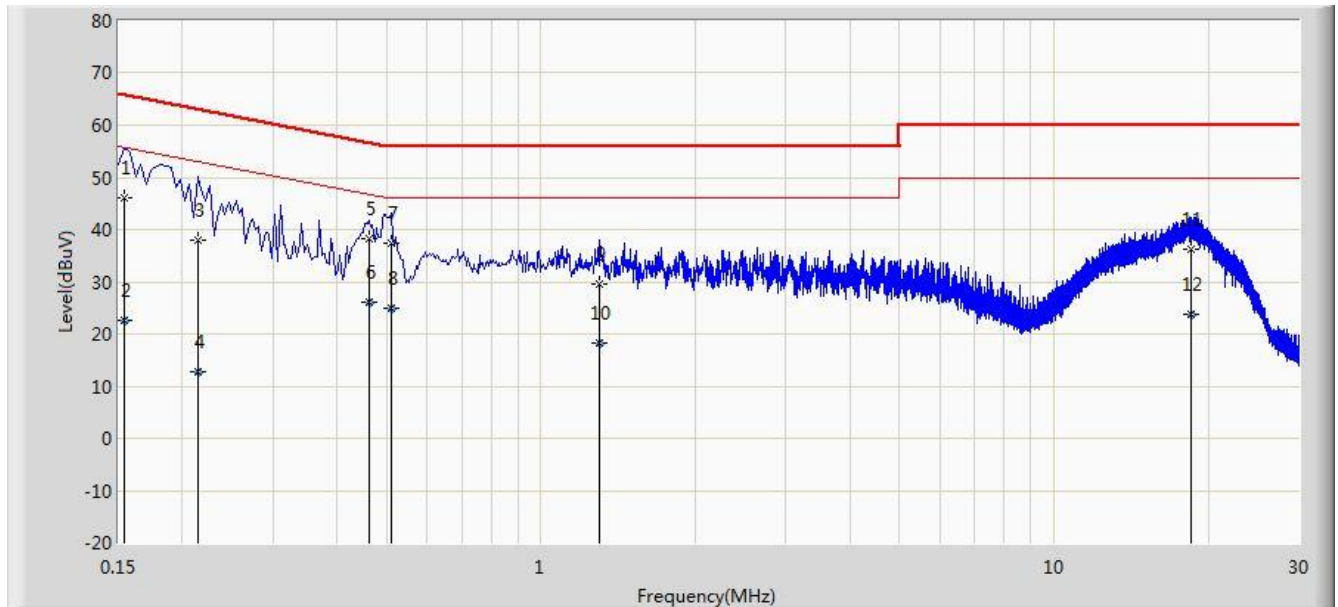


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	45.951	35.211	-19.831	65.781	10.740	QP
2			0.154	22.746	12.006	-33.035	55.781	10.740	AV
3			0.214	38.032	28.075	-25.017	63.049	9.957	QP
4			0.214	12.893	2.936	-40.156	53.049	9.957	AV
5		*	0.462	38.254	28.118	-18.403	56.657	10.136	QP
6			0.462	26.086	15.950	-20.571	46.657	10.136	AV
7			0.510	37.353	27.196	-18.647	56.000	10.157	QP
8			0.510	25.061	14.904	-20.939	46.000	10.157	AV
9			1.298	29.448	19.551	-26.552	56.000	9.897	QP
10			1.298	18.302	8.405	-27.698	46.000	9.897	AV
11			18.462	36.272	26.170	-23.728	60.000	10.102	QP
12			18.462	23.845	13.742	-26.155	50.000	10.102	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/04/27 - 13:50
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: DOLPHIN CT40	Power: AC 120V/60Hz
Test Mode: Mode 1	

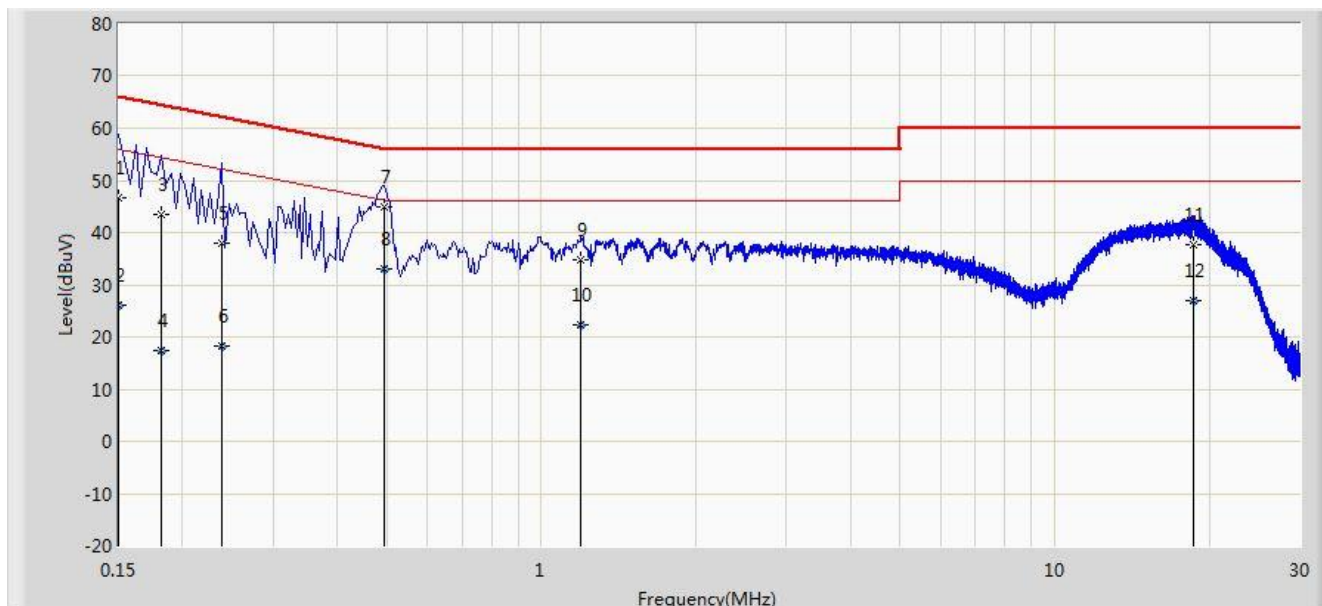

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	46.763	35.621	-19.237	66.000	11.142	QP
2			0.150	26.076	14.934	-29.924	56.000	11.142	AV
3			0.182	43.411	33.368	-20.983	64.394	10.042	QP
4			0.182	17.436	7.393	-36.958	54.394	10.042	AV
5			0.238	38.068	28.076	-24.098	62.166	9.992	QP
6			0.238	18.137	8.145	-34.029	52.166	9.992	AV
7		*	0.494	44.940	34.762	-11.160	56.100	10.178	QP
8			0.494	32.902	22.723	-13.198	46.100	10.178	AV
9			1.194	34.916	25.014	-21.084	56.000	9.903	QP
10			1.194	22.178	12.276	-23.822	46.000	9.903	AV
11			18.670	37.777	27.629	-22.223	60.000	10.148	QP
12			18.670	26.993	16.845	-23.007	50.000	10.148	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **DOLPHIN CT40** is in compliance with Part 15E of the FCC Rules and RSS Rules.

_____ The End _____