


|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/21 - 20:28 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 1 |                          |

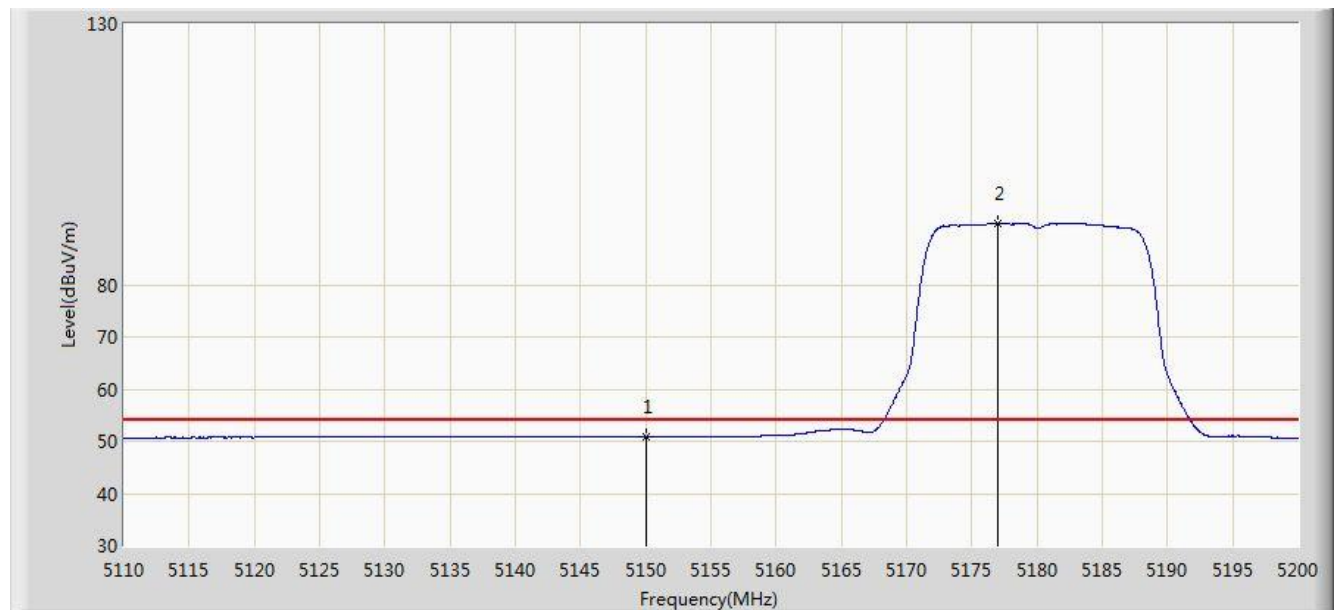


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.858                 | 11.417               | -3.142      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.005        | 91.721                 | 52.344               | N/A         | N/A            | 39.377      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/21 - 20:50 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 1 |                          |

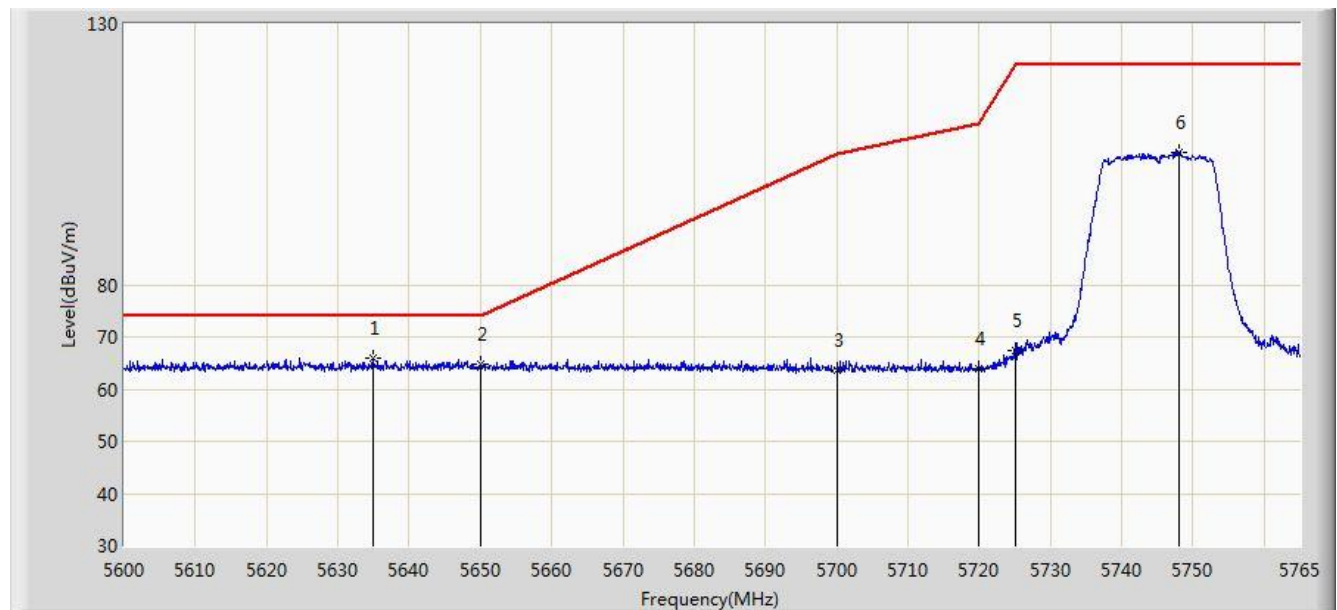


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5634.897        | 65.993                 | 26.094               | -8.007      | 74.000         | 39.899      | PK   |
| 2  |      |      | 5650.000        | 64.814                 | 24.885               | -9.186      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.685                 | 23.628               | -41.515     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 63.878                 | 23.737               | -46.922     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.527                 | 27.363               | -54.673     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5748.005        | 105.487                | 65.220               | N/A         | N/A            | 40.267      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/21 - 20:53 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 1 |                          |

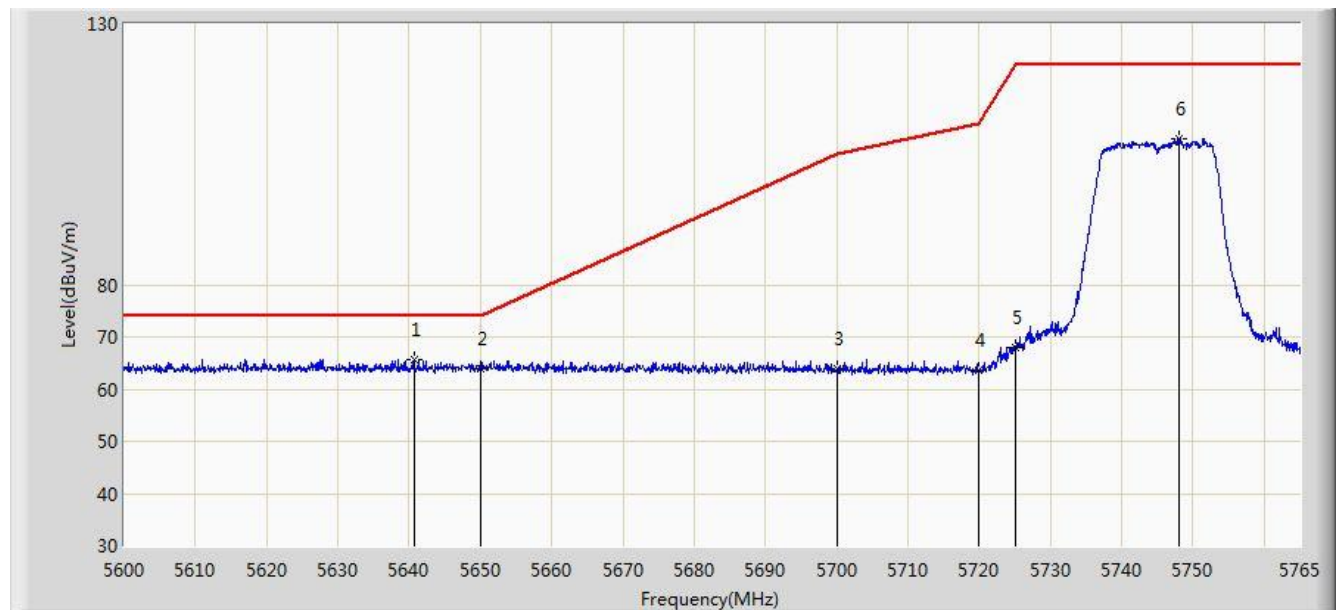


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5640.672        | 65.671                 | 25.762               | -8.329      | 74.000         | 39.910      | PK   |
| 2  |      |      | 5650.000        | 63.956                 | 24.027               | -10.044     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.905                 | 23.848               | -41.295     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 63.530                 | 23.389               | -47.270     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.977                 | 27.813               | -54.223     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5748.005        | 108.098                | 67.831               | N/A         | N/A            | 40.267      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/21 - 20:54 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 1 |                          |

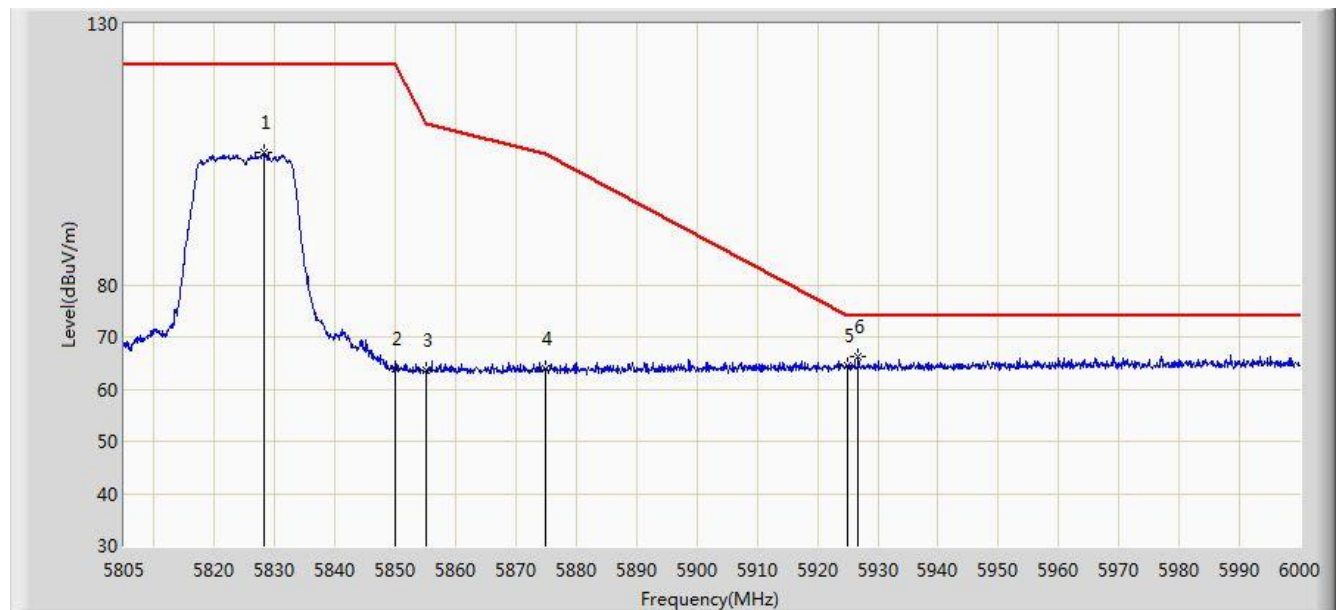


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5828.303        | 105.417                | 64.835               | N/A         | N/A            | 40.582      | PK   |
| 2  |      |      | 5850.000        | 64.026                 | 23.360               | -58.174     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.602                 | 22.924               | -47.198     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.935                 | 23.215               | -41.265     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.436                 | 23.644               | -9.564      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5926.777        | 66.128                 | 25.334               | -7.872      | 74.000         | 40.793      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/21 - 20:56 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 1 |                          |

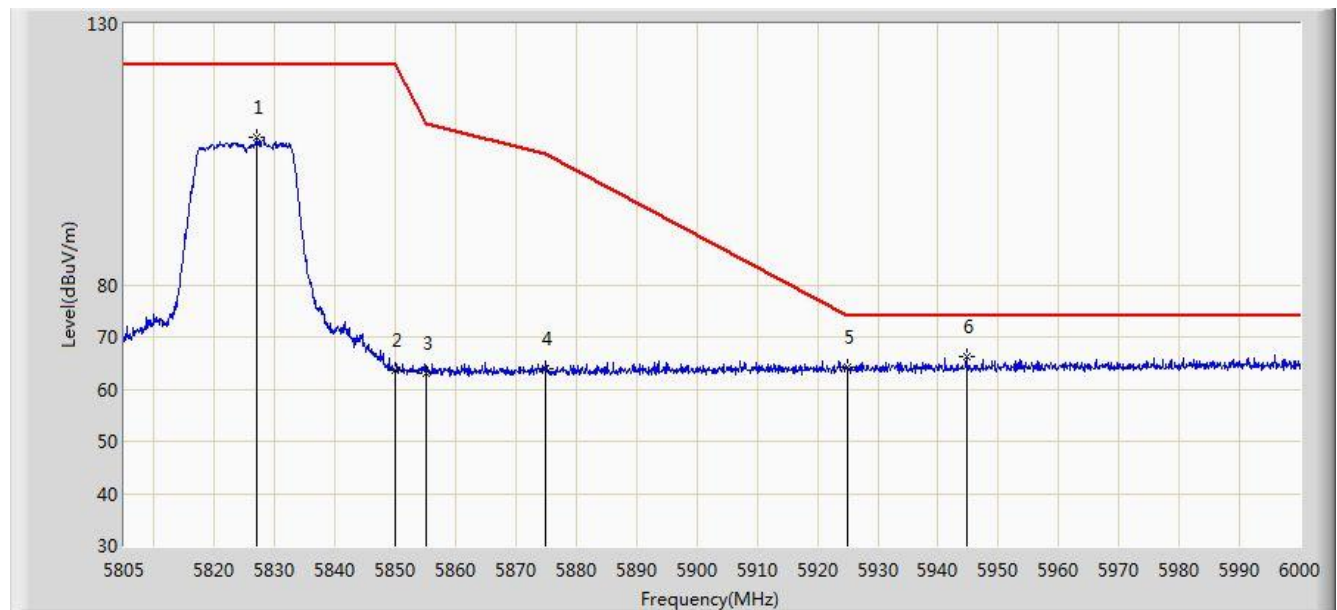


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.937        | 108.389                | 67.813               | N/A         | N/A            | 40.576      | PK   |
| 2  |      |      | 5850.000        | 63.592                 | 22.926               | -58.608     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.054                 | 22.376               | -47.746     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.866                 | 23.146               | -41.334     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.198                 | 23.406               | -9.802      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5944.717        | 66.346                 | 25.533               | -7.654      | 74.000         | 40.813      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 20:58 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1 |                          |

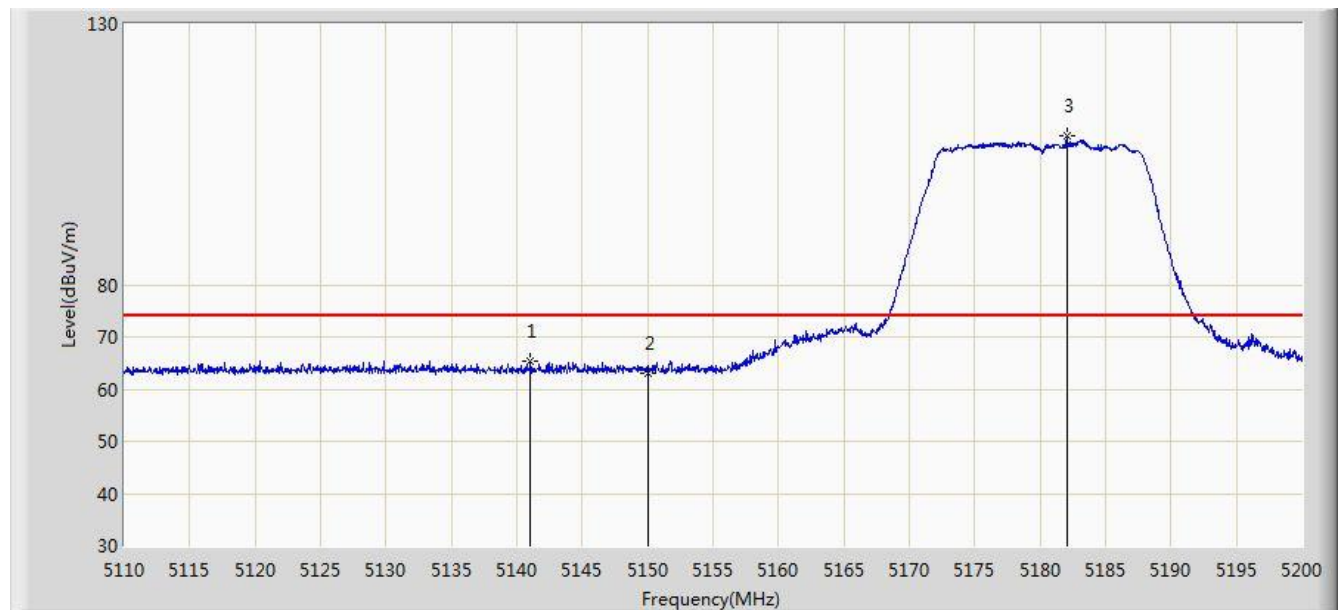


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5141.050        | 65.332                 | 25.886               | -8.668      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.187                 | 23.746               | -10.813     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5182.045        | 108.639                | 69.275               | N/A         | N/A            | 39.364      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:00 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1 |                          |

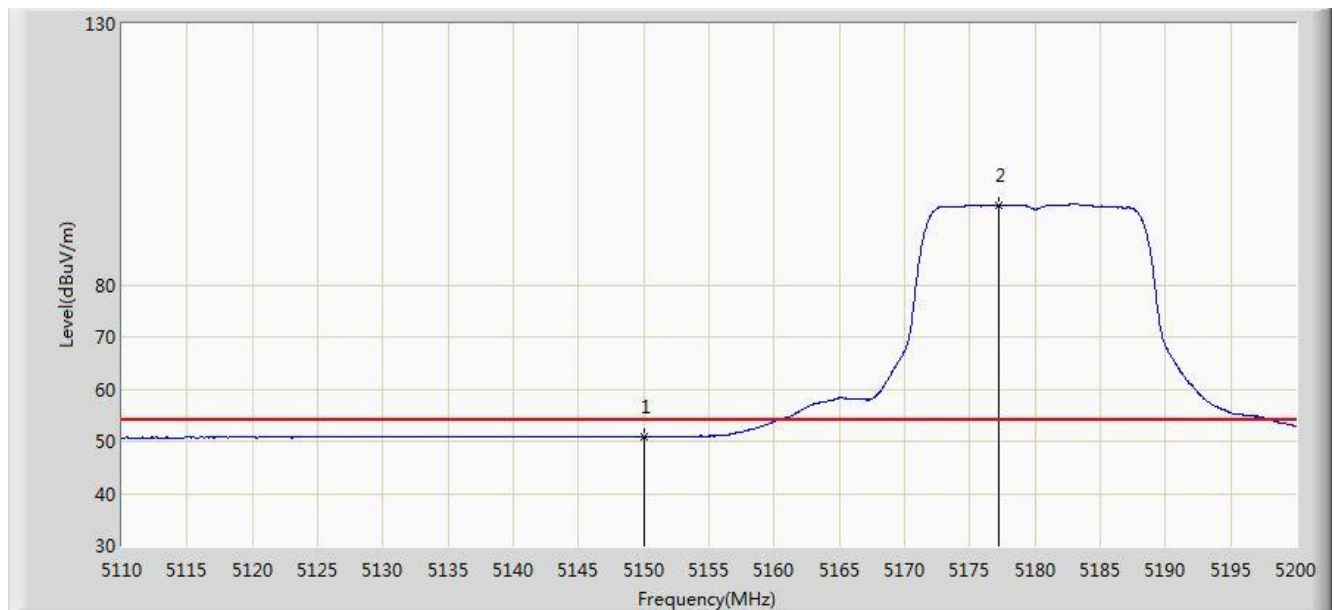


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.933                 | 11.492               | -3.067      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.185        | 95.312                 | 55.936               | N/A         | N/A            | 39.376      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:02 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1 |                          |

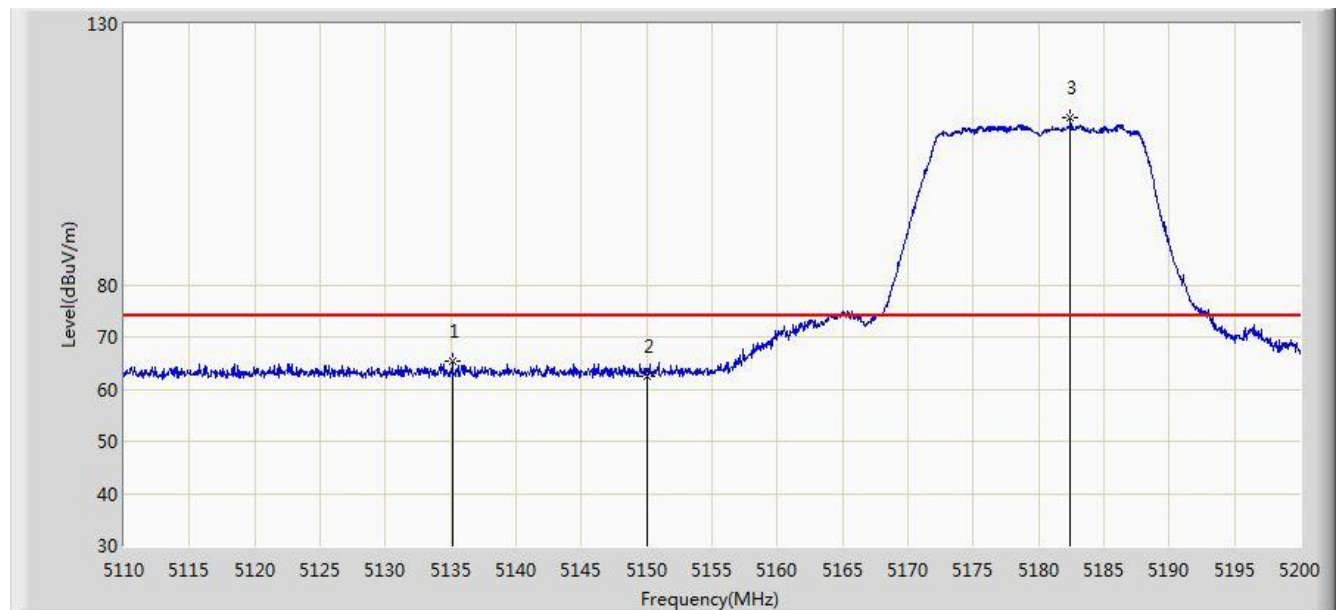


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5135.155        | 65.283                 | 25.838               | -8.717      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 62.416                 | 22.975               | -11.584     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5182.450        | 111.976                | 72.613               | N/A         | N/A            | 39.363      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:03 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 1 |                          |

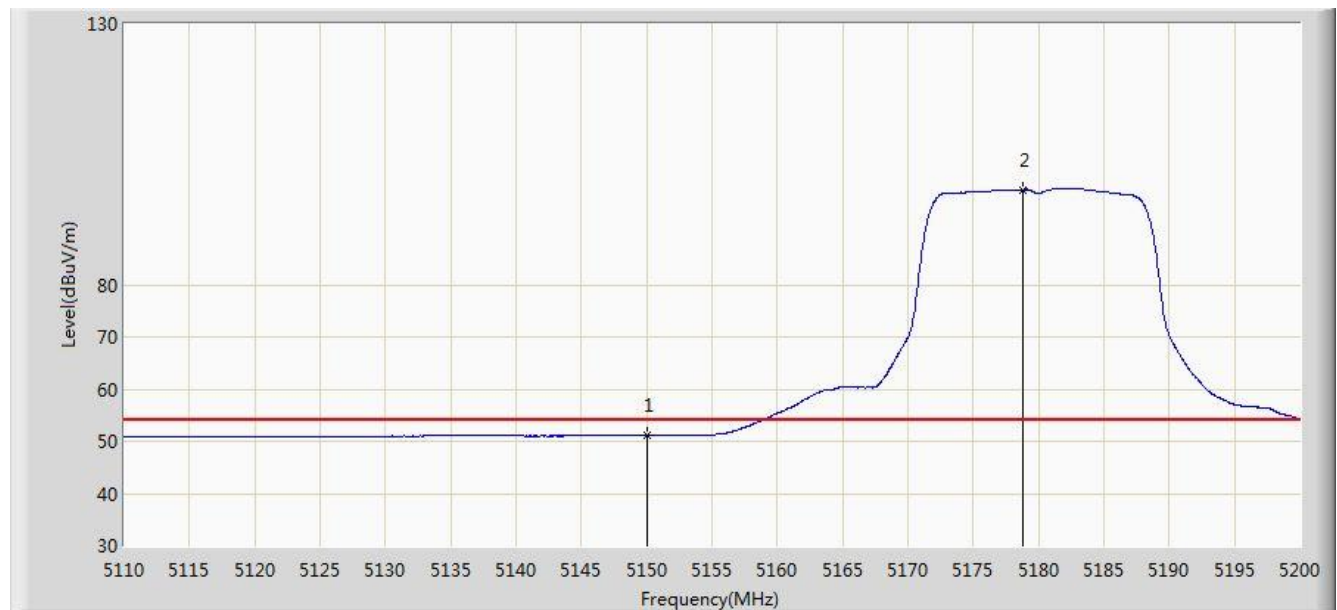


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.102                 | 11.661               | -2.898      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5178.805        | 98.221                 | 58.849               | N/A         | N/A            | 39.372      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:19 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 1 |                          |

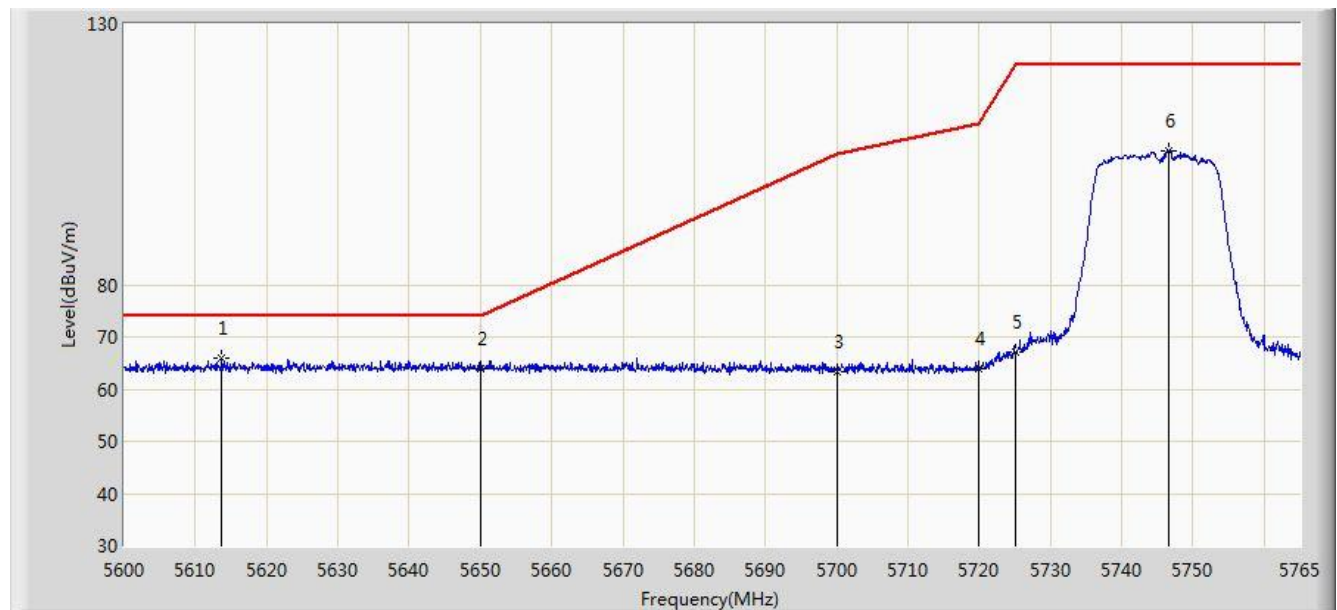


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5613.695        | 65.961                 | 26.102               | -8.039      | 74.000         | 39.859      | PK   |
| 2  |      |      | 5650.000        | 63.877                 | 23.948               | -10.123     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.320                 | 23.263               | -41.880     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.049                 | 23.908               | -46.751     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.088                 | 26.924               | -55.112     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.520        | 105.759                | 65.498               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:21 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 1 |                          |

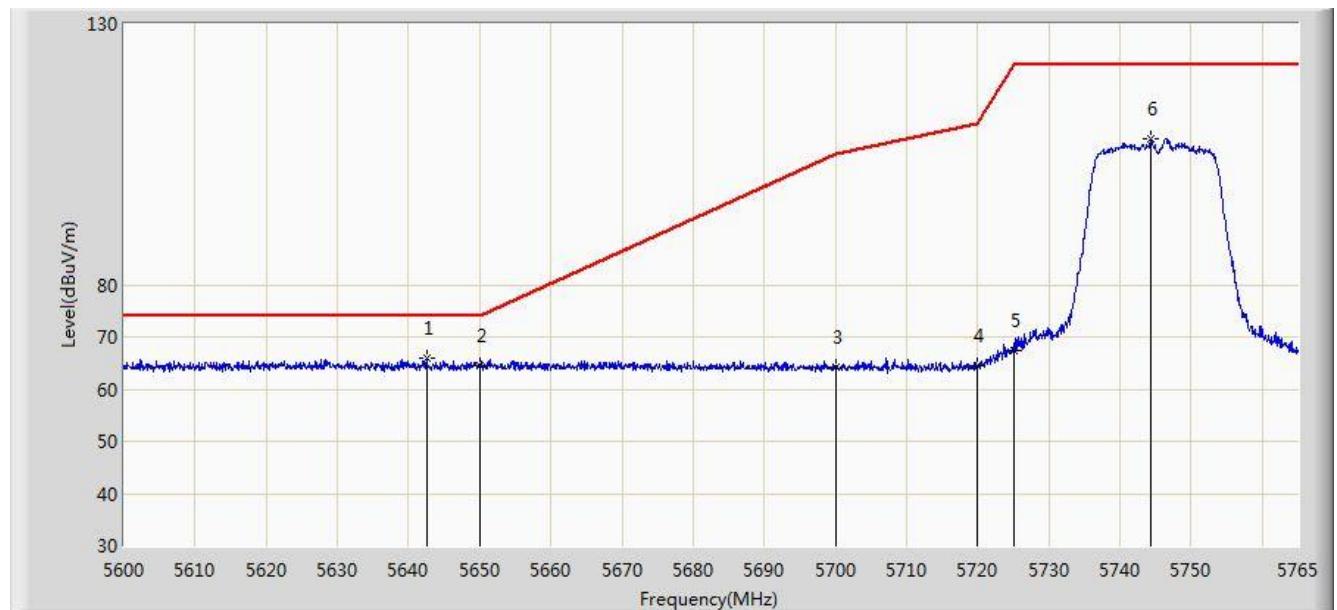


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5642.570        | 65.940                 | 26.027               | -8.060      | 74.000         | 39.913      | PK   |
| 2  |      |      | 5650.000        | 64.626                 | 24.697               | -9.374      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.315                 | 24.258               | -40.885     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.456                 | 24.315               | -46.344     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.486                 | 27.322               | -54.714     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5744.292        | 107.854                | 67.602               | N/A         | N/A            | 40.252      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:23 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 1 |                          |

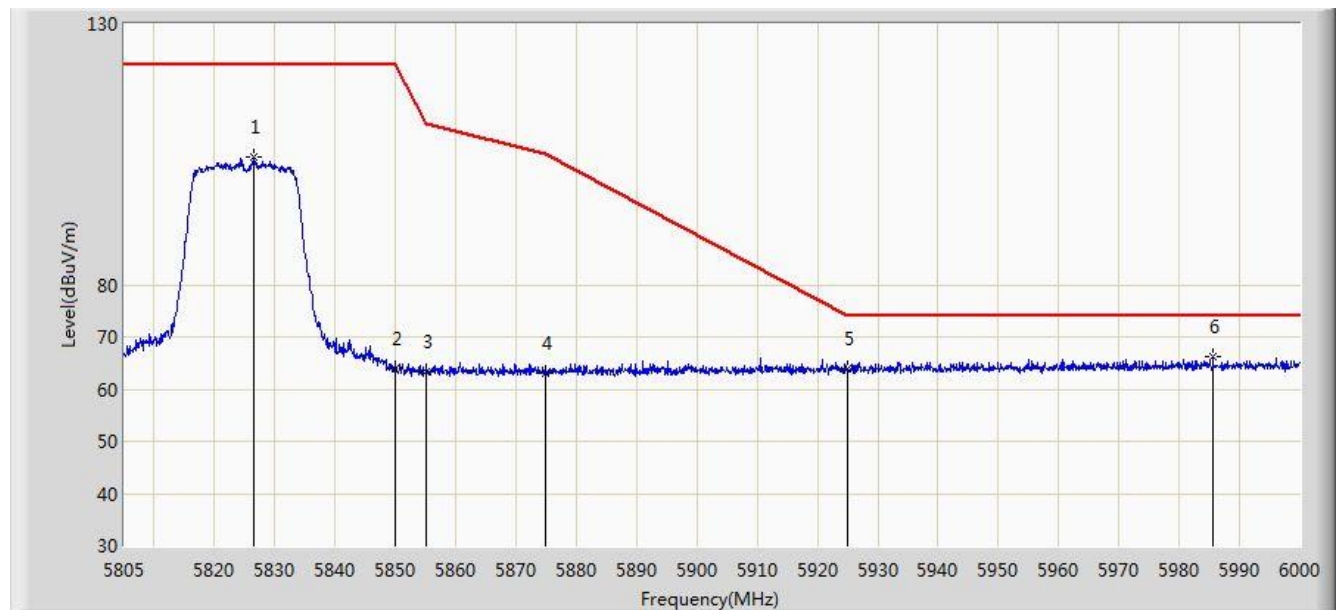


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.450        | 104.380                | 63.806               | N/A         | N/A            | 40.574      | PK   |
| 2  |      |      | 5850.000        | 63.872                 | 23.206               | -58.328     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.473                 | 22.795               | -47.327     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 62.924                 | 22.204               | -42.276     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.016                 | 23.224               | -9.984      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5985.570        | 66.315                 | 25.481               | -7.685      | 74.000         | 40.834      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 21:25 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 1 |                          |

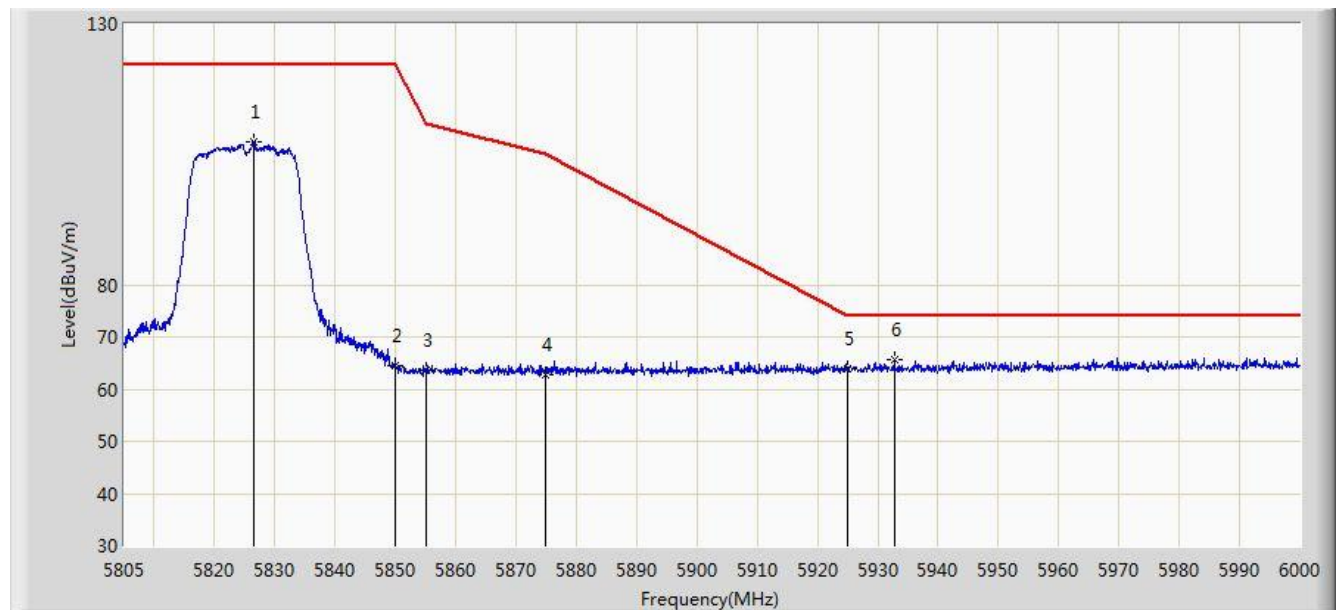


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.450        | 107.322                | 66.748               | N/A         | N/A            | 40.574      | PK   |
| 2  |      |      | 5850.000        | 64.461                 | 23.795               | -57.739     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.734                 | 23.056               | -47.066     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 62.828                 | 22.108               | -42.372     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.038                 | 23.246               | -9.962      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5932.725        | 65.573                 | 24.773               | -8.427      | 74.000         | 40.800      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:15 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1 |                          |

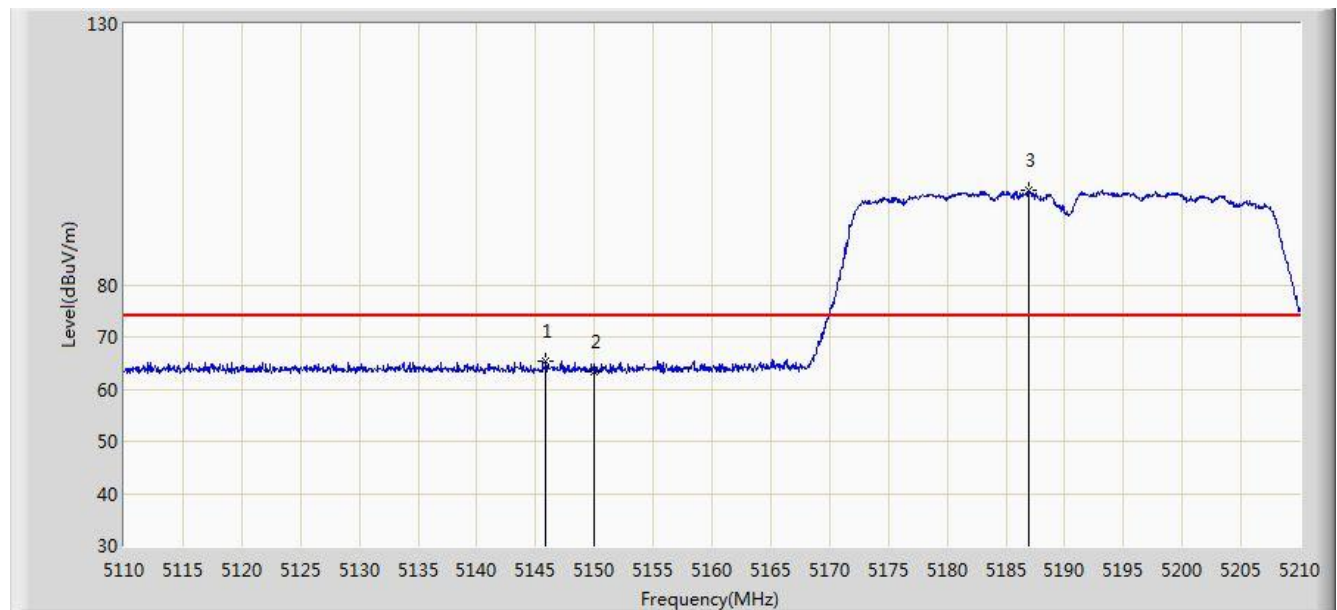


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5145.850        | 65.254                 | 25.808               | -8.746      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.383                 | 23.942               | -10.617     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5186.950        | 98.217                 | 58.865               | N/A         | N/A            | 39.351      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:19 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1 |                          |

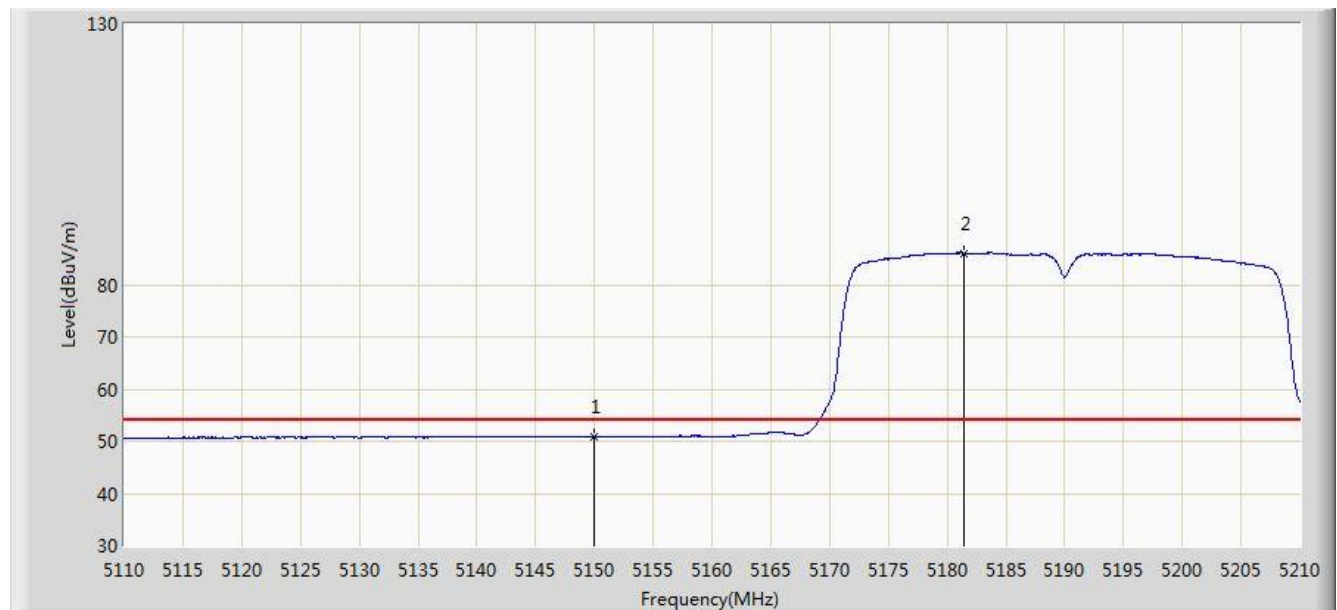


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.861                 | 11.420               | -3.139      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5181.400        | 86.070                 | 46.704               | N/A         | N/A            | 39.366      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:19 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1 |                          |

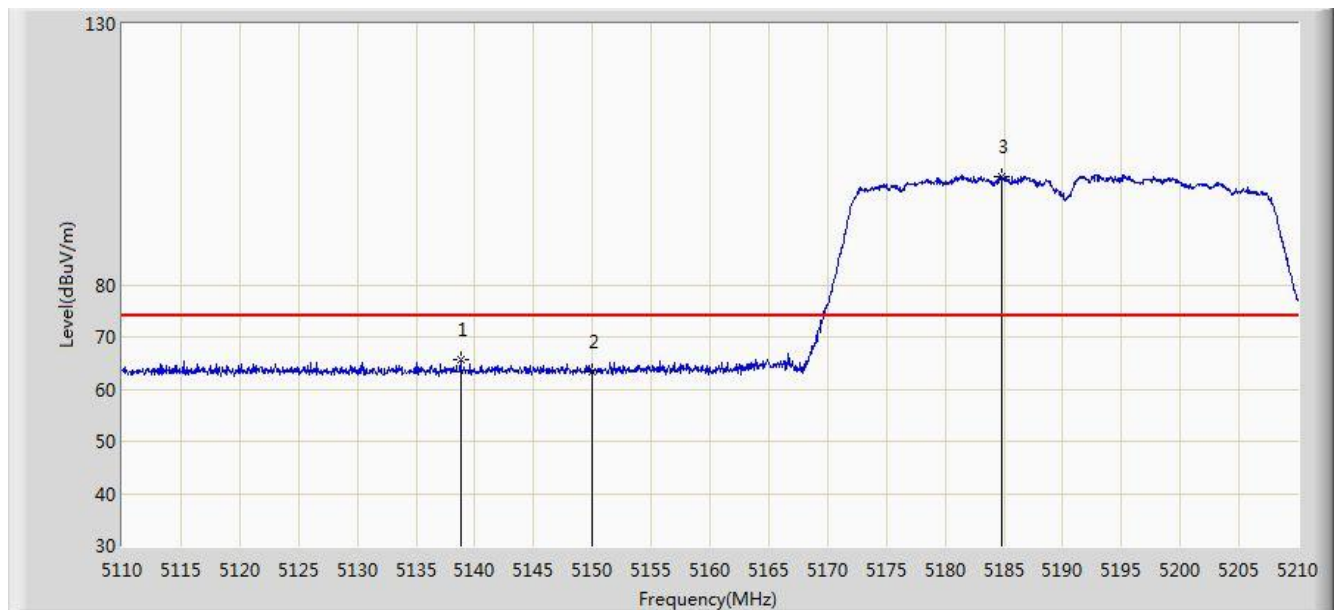


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5138.800        | 65.717                 | 26.272               | -8.283      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.472                 | 24.031               | -10.528     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5184.750        | 100.824                | 61.467               | N/A         | N/A            | 39.358      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:20 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 1 |                          |

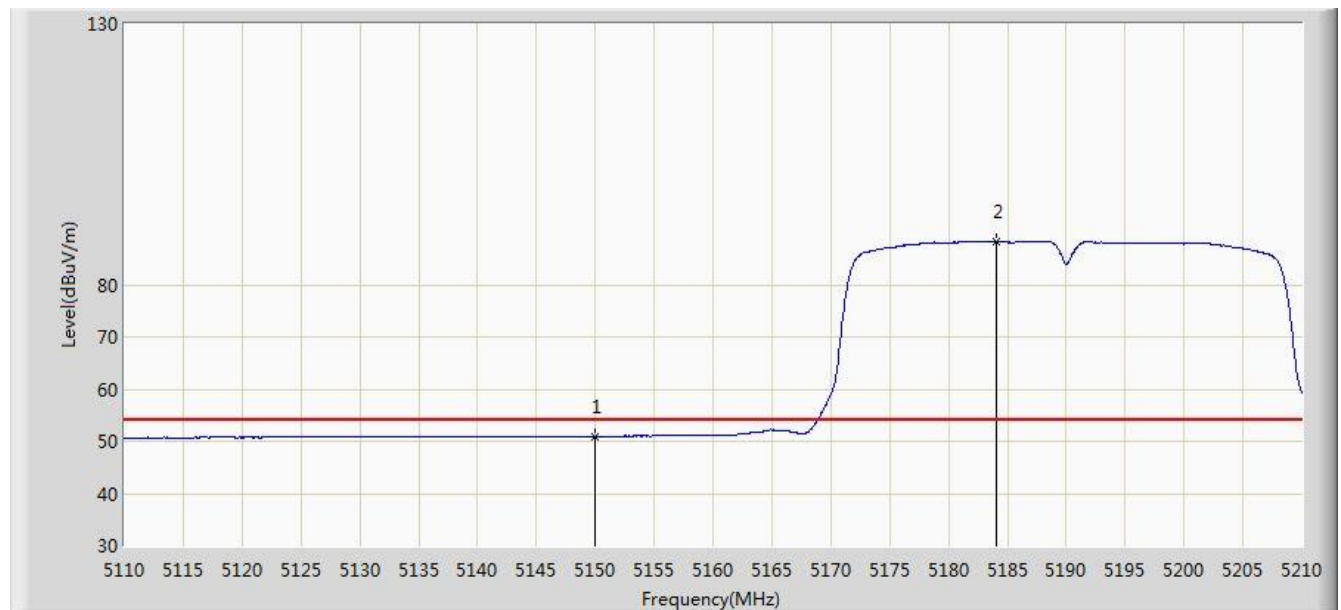


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.960                 | 11.519               | -3.040      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5184.000        | 88.287                 | 48.928               | N/A         | N/A            | 39.359      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:34 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1 |                          |

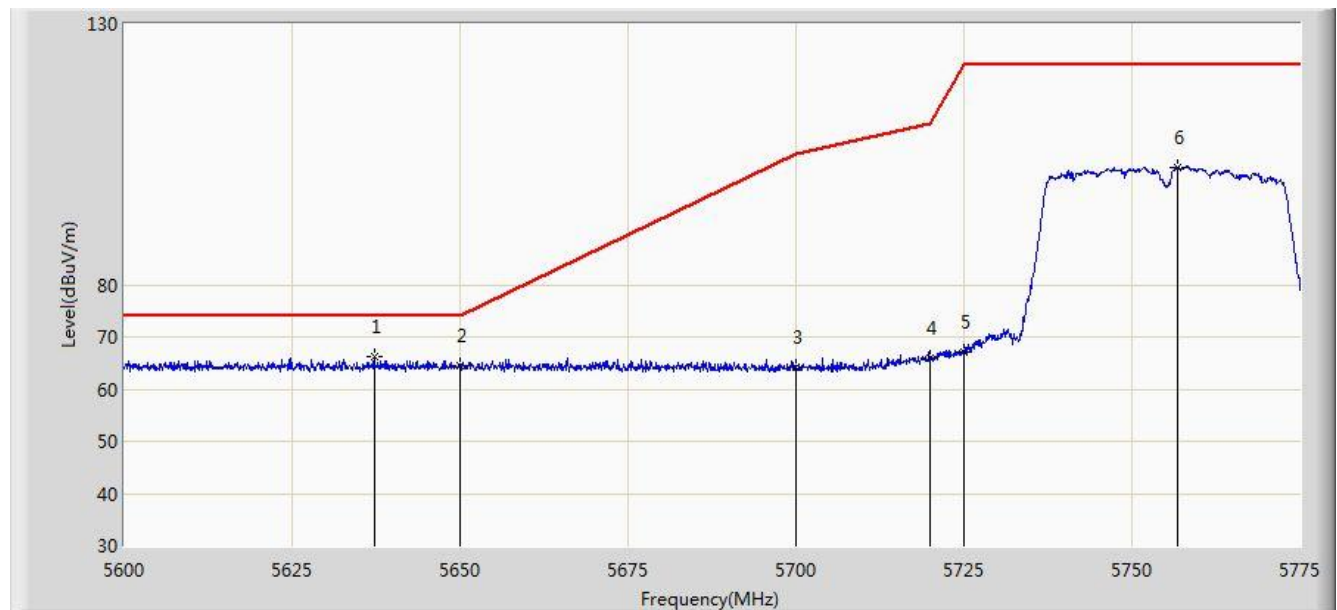


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5637.187        | 66.137                 | 26.234               | -7.863      | 74.000         | 39.903      | PK   |
| 2  |      |      | 5650.000        | 64.520                 | 24.591               | -9.480      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.133                 | 24.076               | -41.067     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.836                 | 25.695               | -44.964     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.034                 | 26.870               | -55.166     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5756.712        | 102.540                | 62.237               | N/A         | N/A            | 40.302      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:37 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 1 |                          |

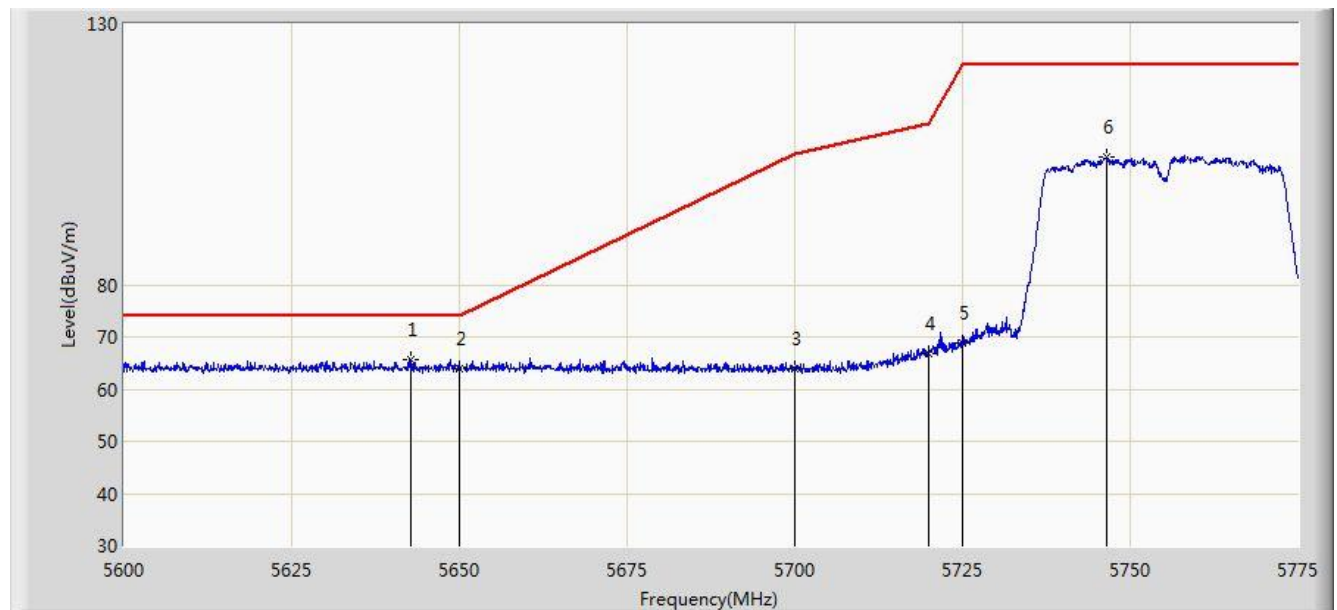


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5642.788        | 65.565                 | 25.651               | -8.435      | 74.000         | 39.913      | PK   |
| 2  |      |      | 5650.000        | 63.872                 | 23.943               | -10.128     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.813                 | 23.756               | -41.387     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 66.746                 | 26.605               | -44.054     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 68.817                 | 28.653               | -53.383     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.388        | 104.439                | 64.178               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:38 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1 |                          |

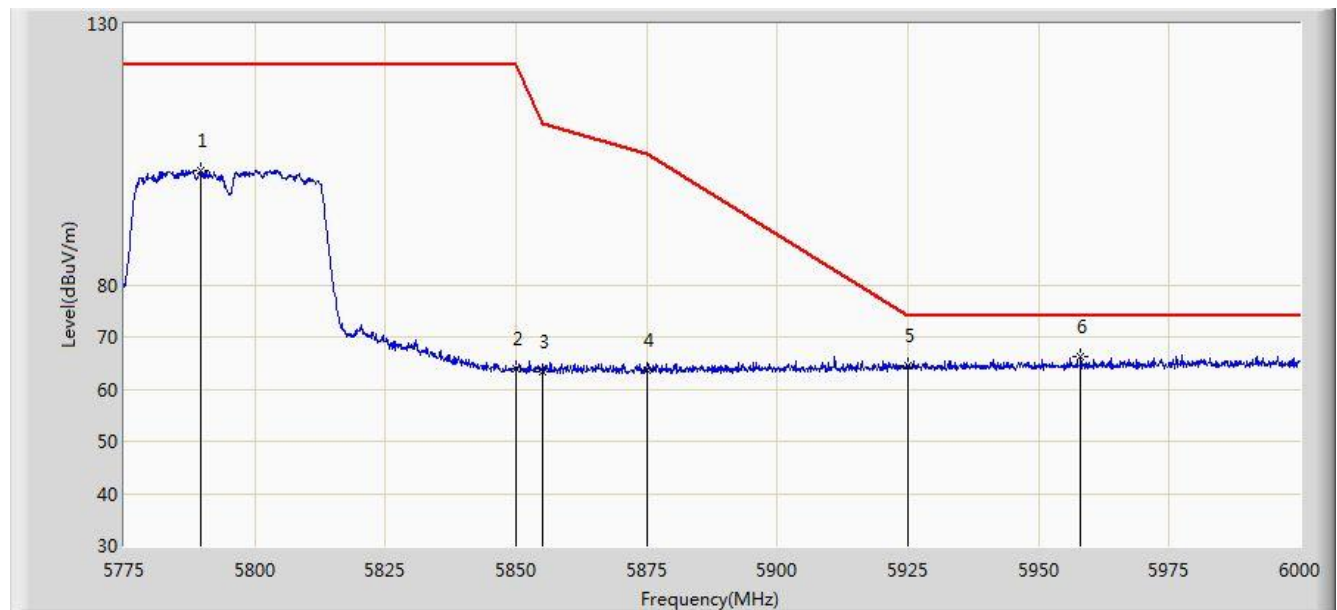


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5789.625        | 101.813                | 61.388               | N/A         | N/A            | 40.425      | PK   |
| 2  |      |      | 5850.000        | 64.050                 | 23.384               | -58.150     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.438                 | 22.760               | -47.362     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.554                 | 22.834               | -41.646     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.384                 | 23.592               | -9.616      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5958.038        | 66.205                 | 25.384               | -7.795      | 74.000         | 40.821      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/21 - 22:41 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 1 |                          |

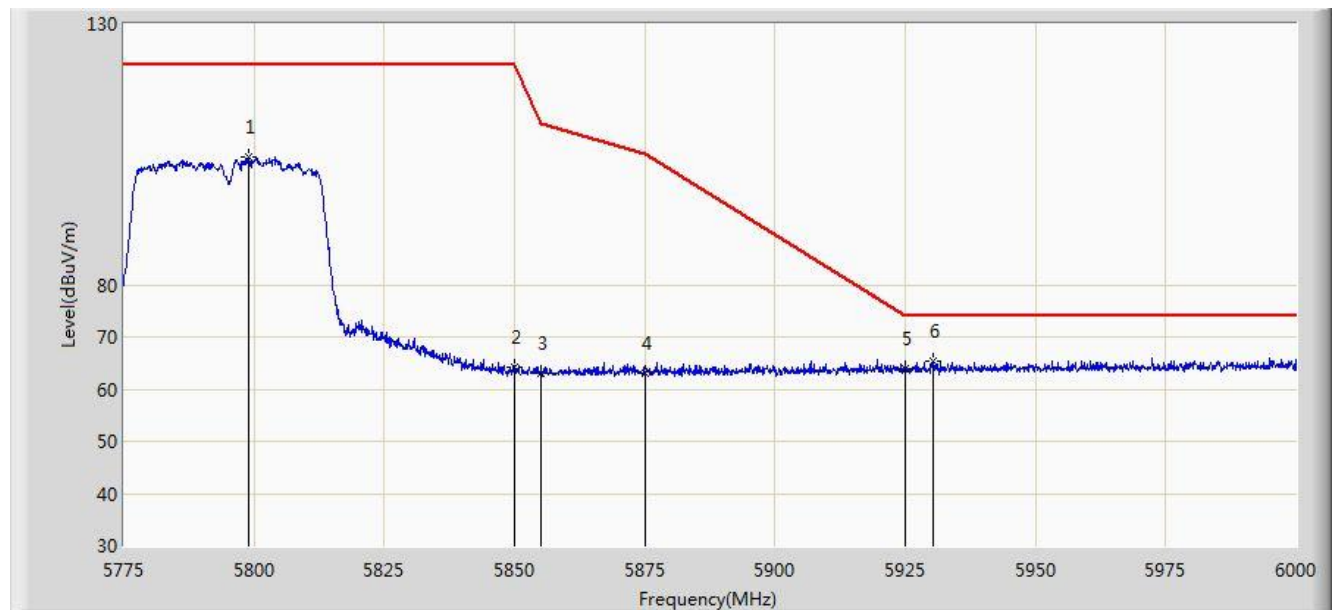


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5799.075        | 104.395                | 63.934               | N/A         | N/A            | 40.461      | PK   |
| 2  |      |      | 5850.000        | 64.083                 | 23.417               | -58.117     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.124                 | 22.446               | -47.676     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.074                 | 22.354               | -42.126     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.968                 | 23.176               | -10.032     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5930.250        | 65.375                 | 24.578               | -8.625      | 74.000         | 40.797      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 22:42 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1 |                          |

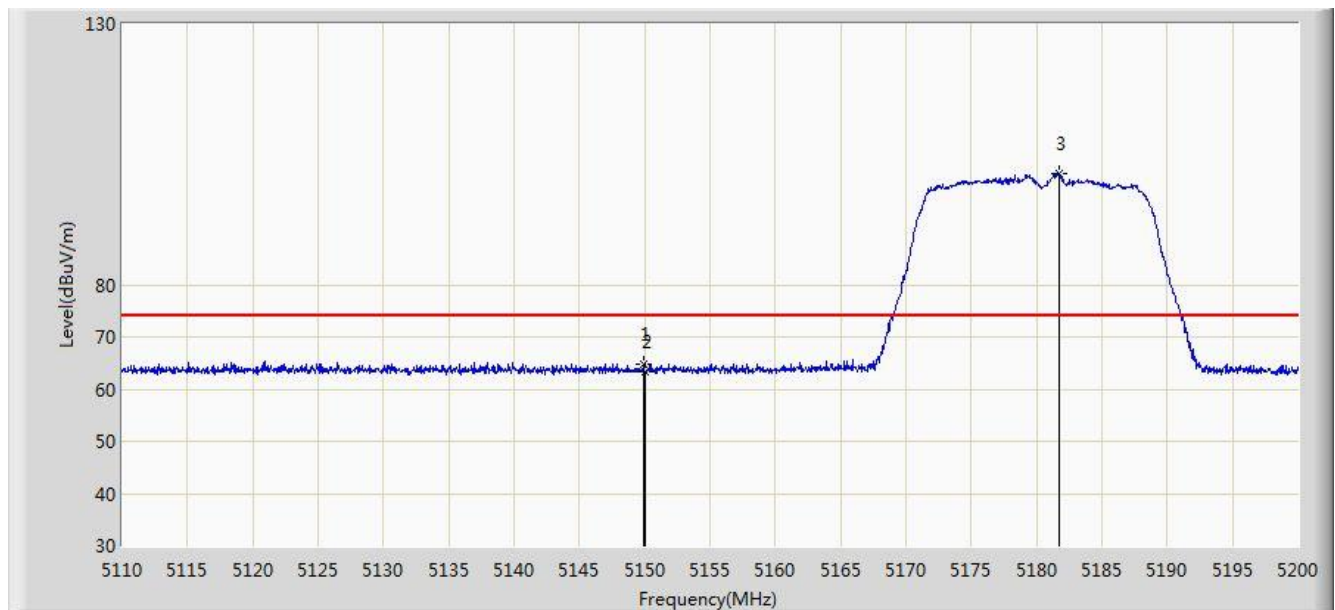


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.870        | 64.727                 | 25.285               | -9.273      | 74.000         | 39.442      | PK   |
| 2  |      |      | 5150.000        | 63.471                 | 24.030               | -10.529     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.685        | 101.322                | 61.957               | N/A         | N/A            | 39.365      | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 22:45 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1 |                          |

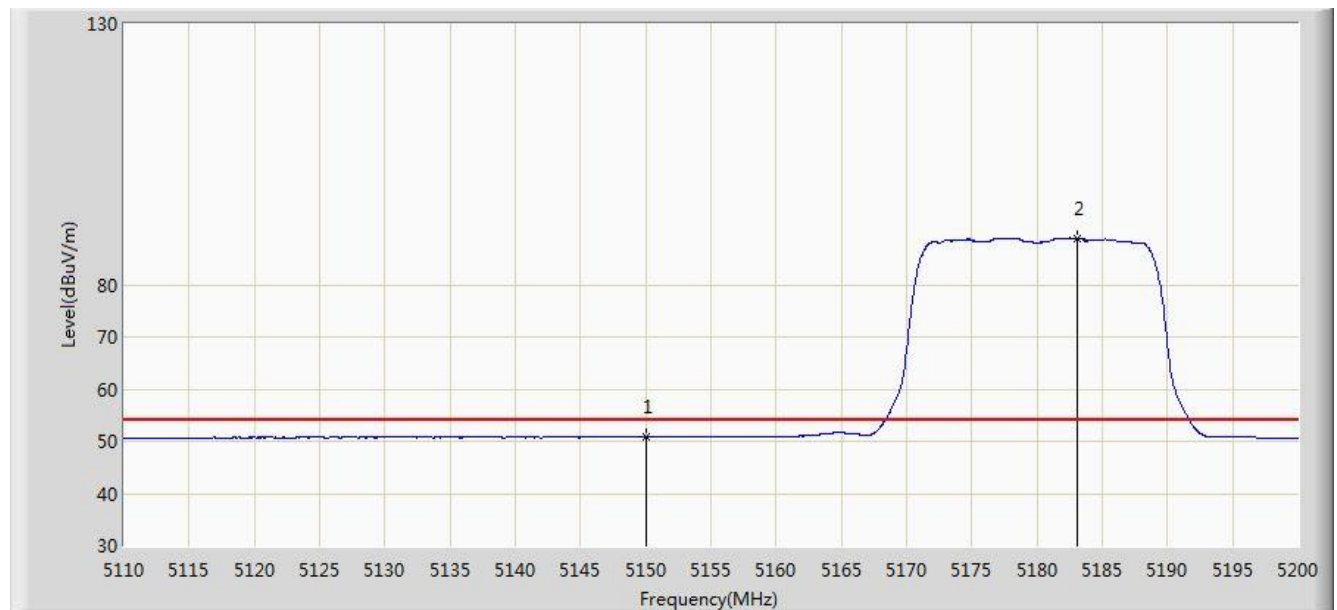


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.793                 | 11.352               | -3.207      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5183.035        | 88.911                 | 49.549               | N/A         | N/A            | 39.361      | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 22:45 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1 |                          |

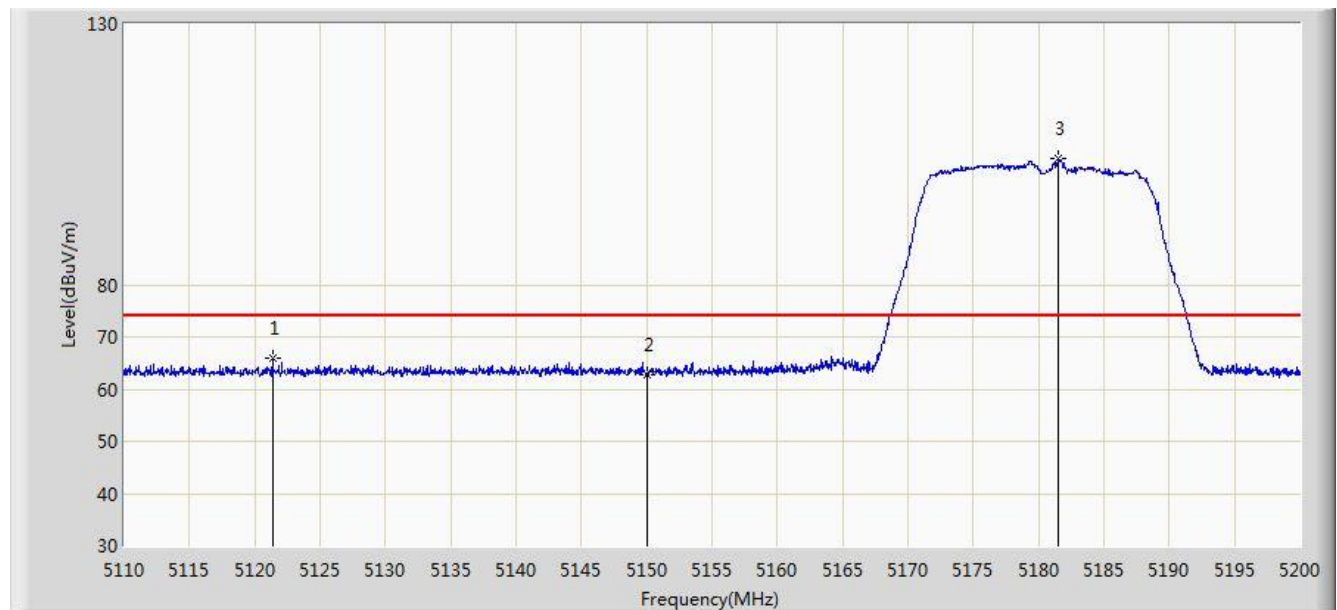


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5121.340        | 65.947                 | 26.502               | -8.053      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 62.766                 | 23.325               | -11.234     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.550        | 104.132                | 64.767               | N/A         | N/A            | 39.366      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 22:46 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 1 |                          |

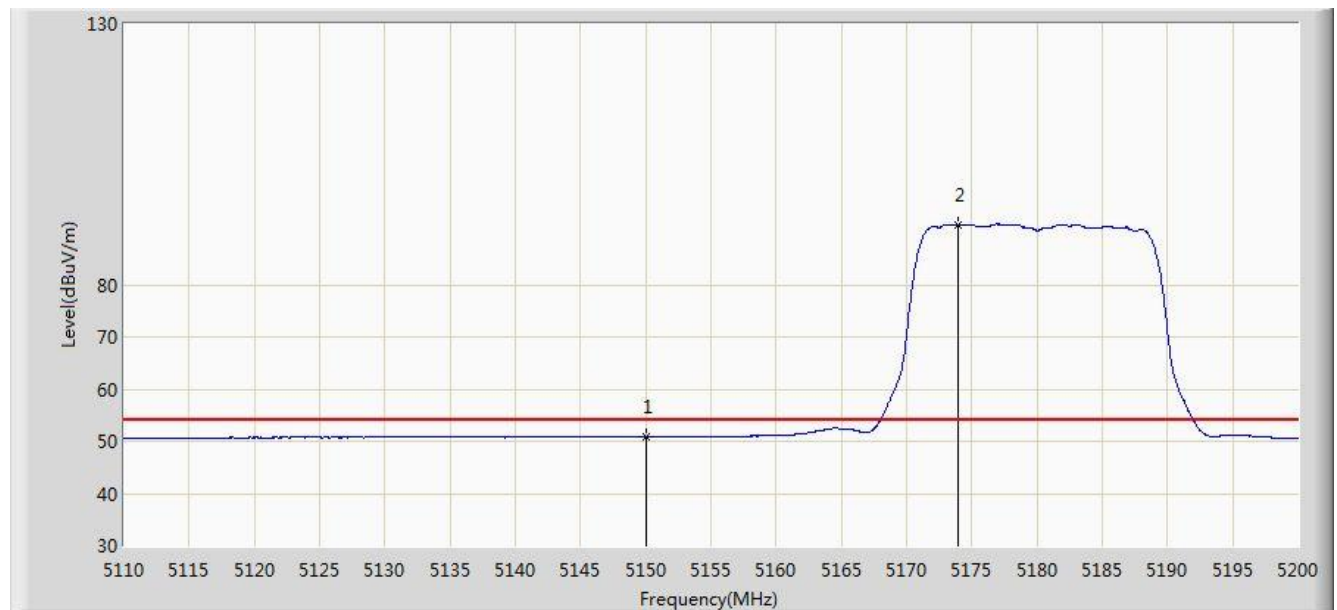


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.775                 | 11.334               | -3.225      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5173.900        | 91.426                 | 52.041               | N/A         | N/A            | 39.385      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:02 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 1 |                          |

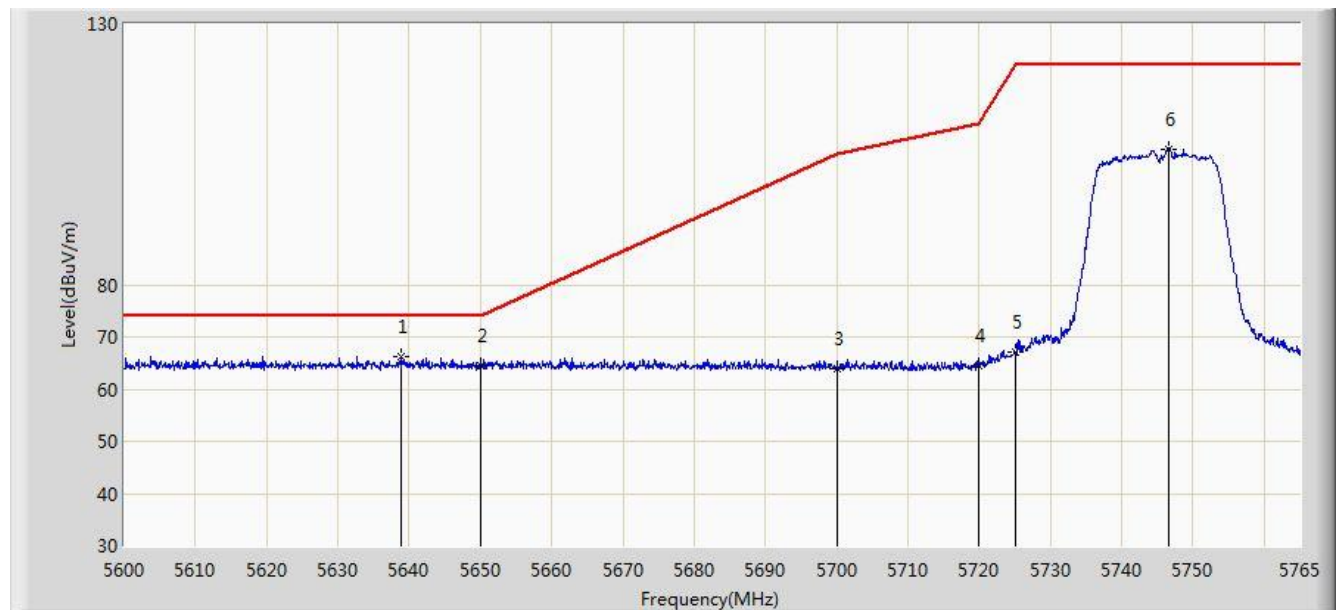


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5638.775        | 66.178                 | 26.272               | -7.822      | 74.000         | 39.906      | PK   |
| 2  |      |      | 5650.000        | 64.449                 | 24.520               | -9.551      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.989                 | 23.932               | -41.211     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.423                 | 24.282               | -46.377     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.012                 | 26.848               | -55.188     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.685        | 106.056                | 65.794               | N/A         | N/A            | 40.262      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:05 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 1 |                          |

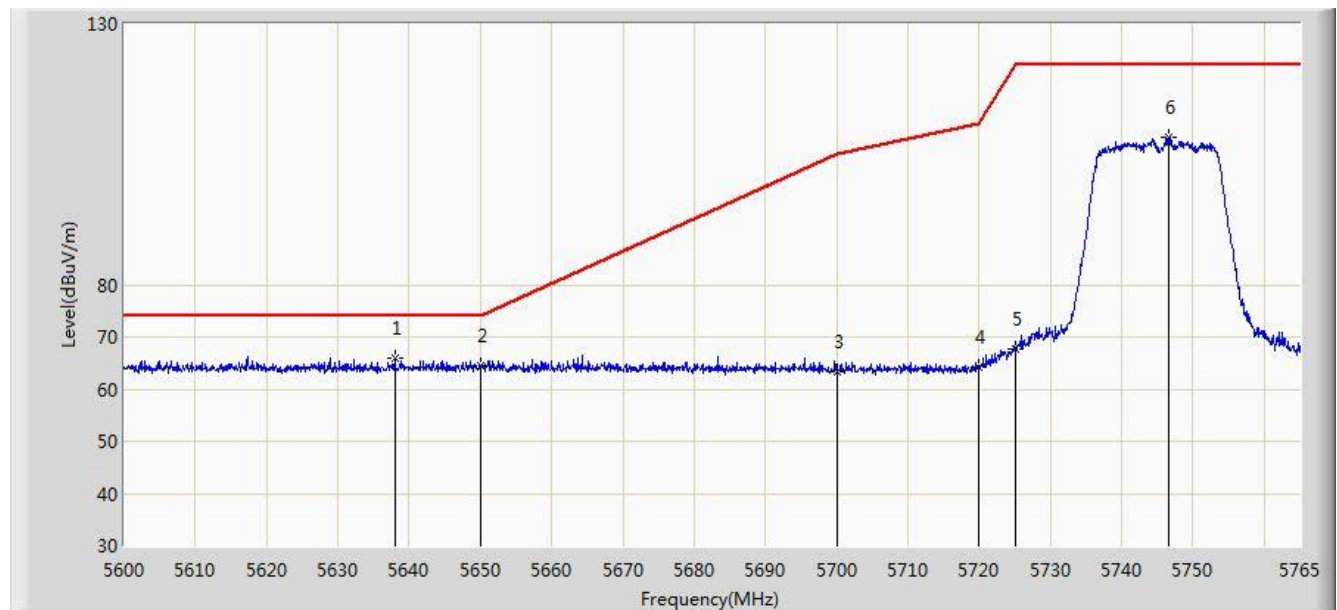


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5637.950        | 65.941                 | 26.037               | -8.059      | 74.000         | 39.904      | PK   |
| 2  |      |      | 5650.000        | 64.376                 | 24.447               | -9.624      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.364                 | 23.307               | -41.836     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.282                 | 24.141               | -46.518     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.669                 | 27.505               | -54.531     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.603        | 108.127                | 67.866               | N/A         | N/A            | 40.262      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:06 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 1 |                          |

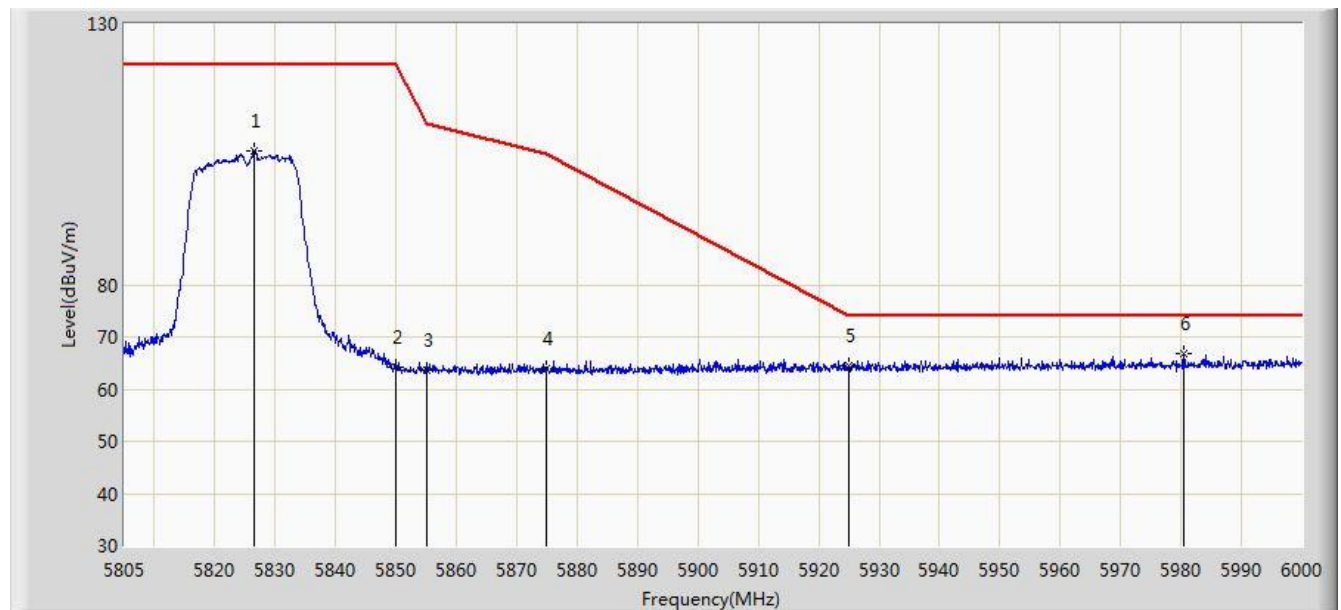


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.450        | 105.739                | 65.165               | N/A         | N/A            | 40.574      | PK   |
| 2  |      |      | 5850.000        | 64.286                 | 23.620               | -57.914     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.736                 | 23.058               | -47.064     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 64.049                 | 23.329               | -41.151     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.440                 | 23.648               | -9.560      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5980.402        | 66.930                 | 26.098               | -7.070      | 74.000         | 40.832      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:08 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 1 |                          |

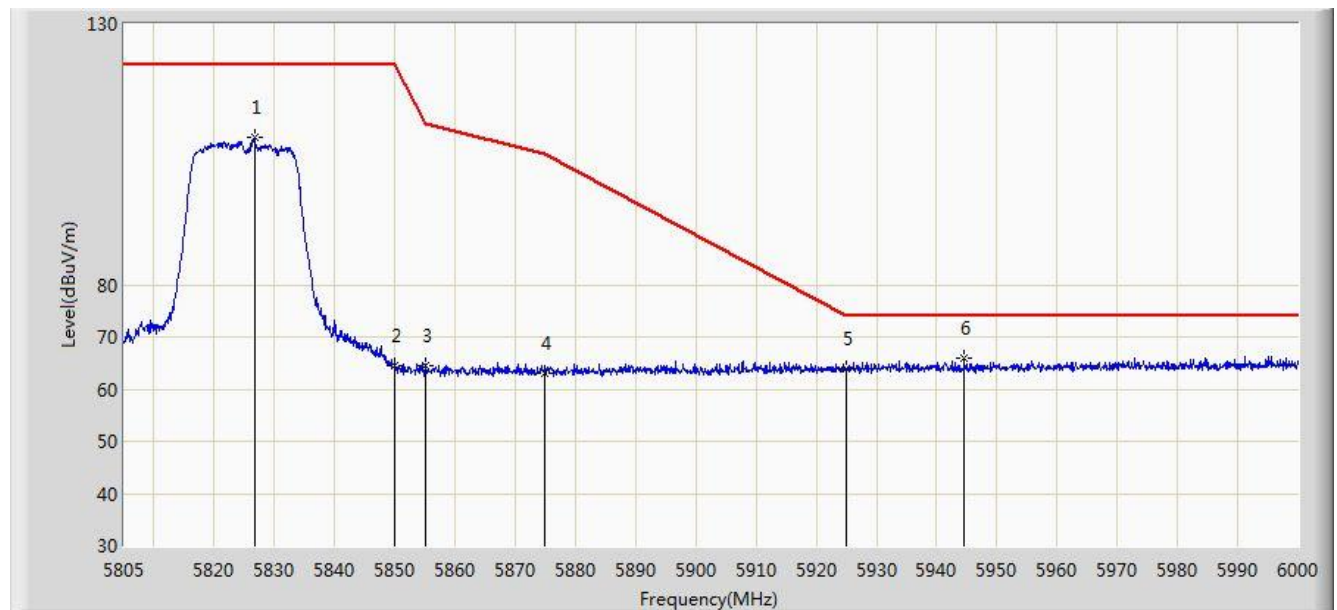


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.743        | 108.128                | 67.553               | N/A         | N/A            | 40.576      | PK   |
| 2  |      |      | 5850.000        | 64.503                 | 23.837               | -57.697     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 64.442                 | 23.764               | -46.358     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.080                 | 22.360               | -42.120     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.866                 | 23.074               | -10.134     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5944.522        | 65.890                 | 25.078               | -8.110      | 74.000         | 40.813      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:10 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1 |                          |

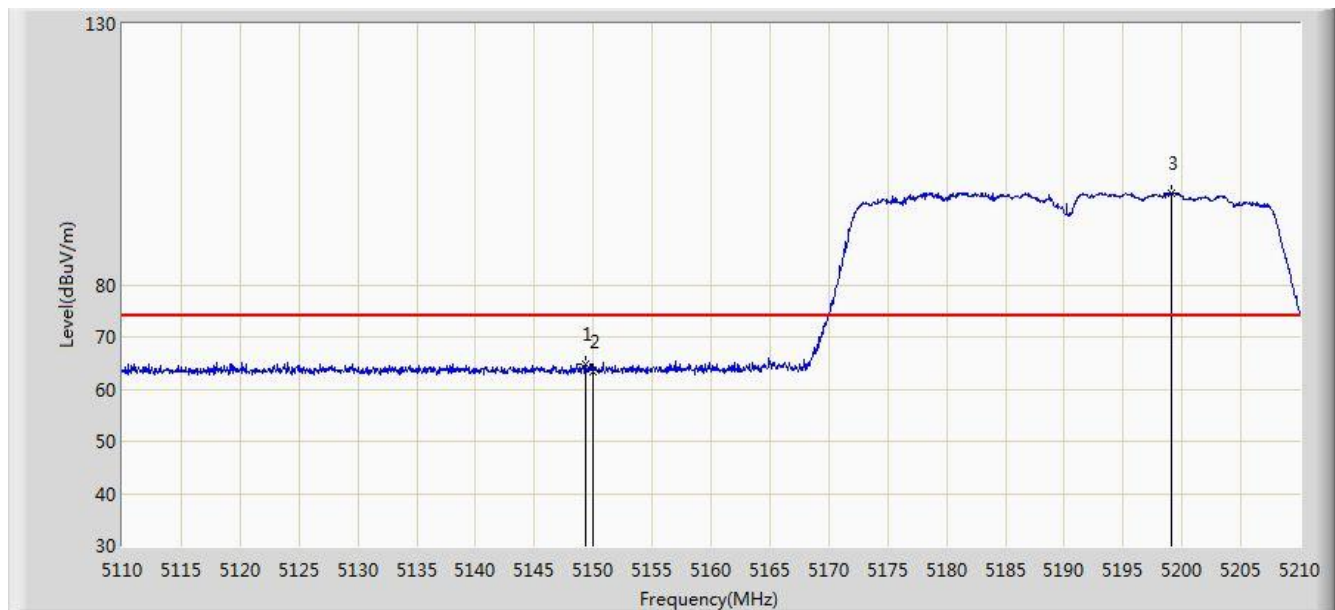


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.300        | 64.870                 | 25.427               | -9.130      | 74.000         | 39.443      | PK   |
| 2  |      |      | 5150.000        | 63.435                 | 23.994               | -10.565     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5199.100        | 97.644                 | 58.324               | N/A         | N/A            | 39.321      | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:13 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1 |                          |

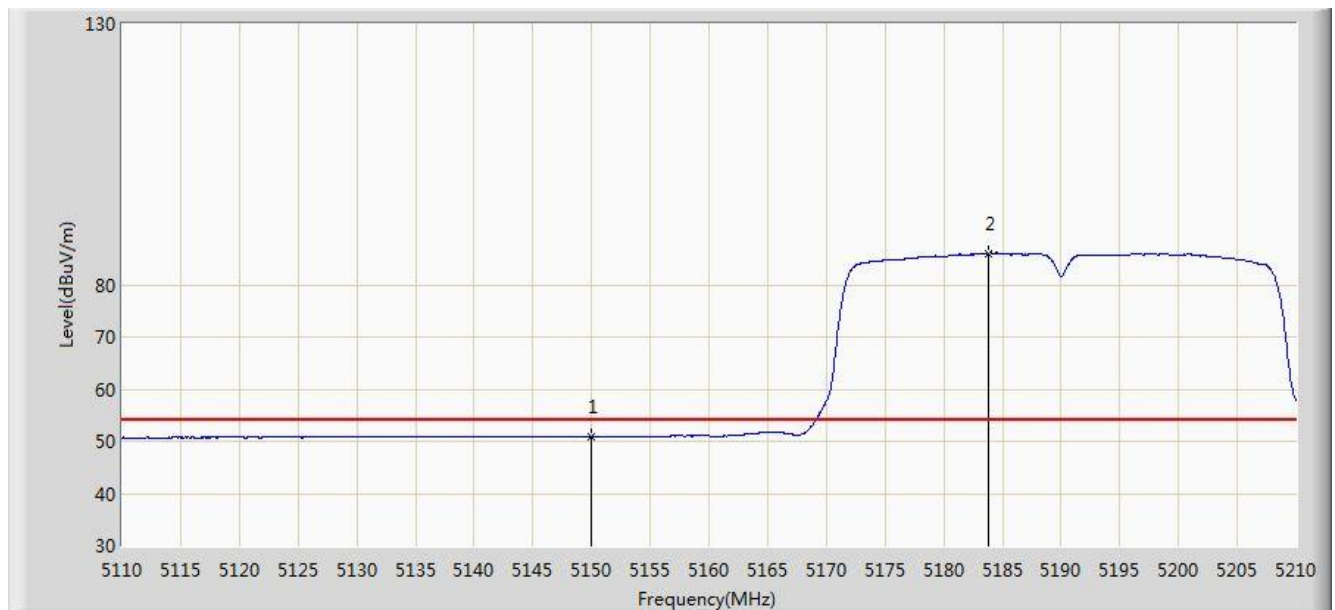


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.899                 | 11.458               | -3.101      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5183.850        | 86.065                 | 46.705               | N/A         | N/A            | 39.360      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:13 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1 |                          |

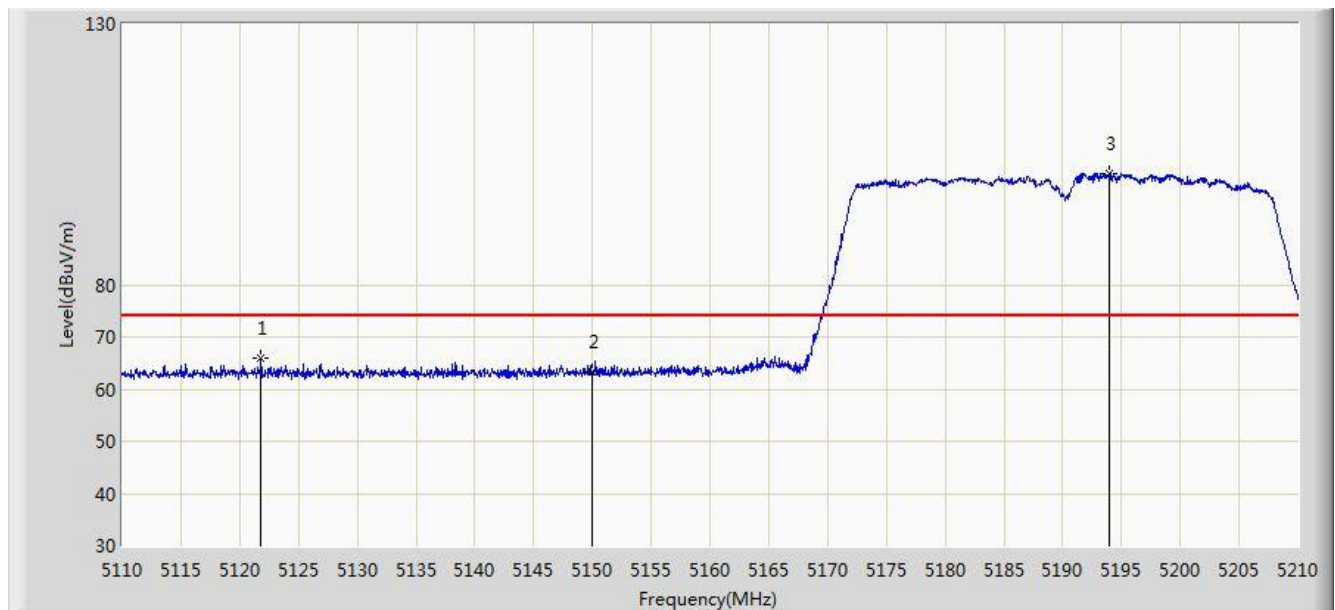


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5121.800        | 65.827                 | 26.382               | -8.173      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.283                 | 23.842               | -10.717     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5194.000        | 101.378                | 62.045               | N/A         | N/A            | 39.333      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:14 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 1 |                          |

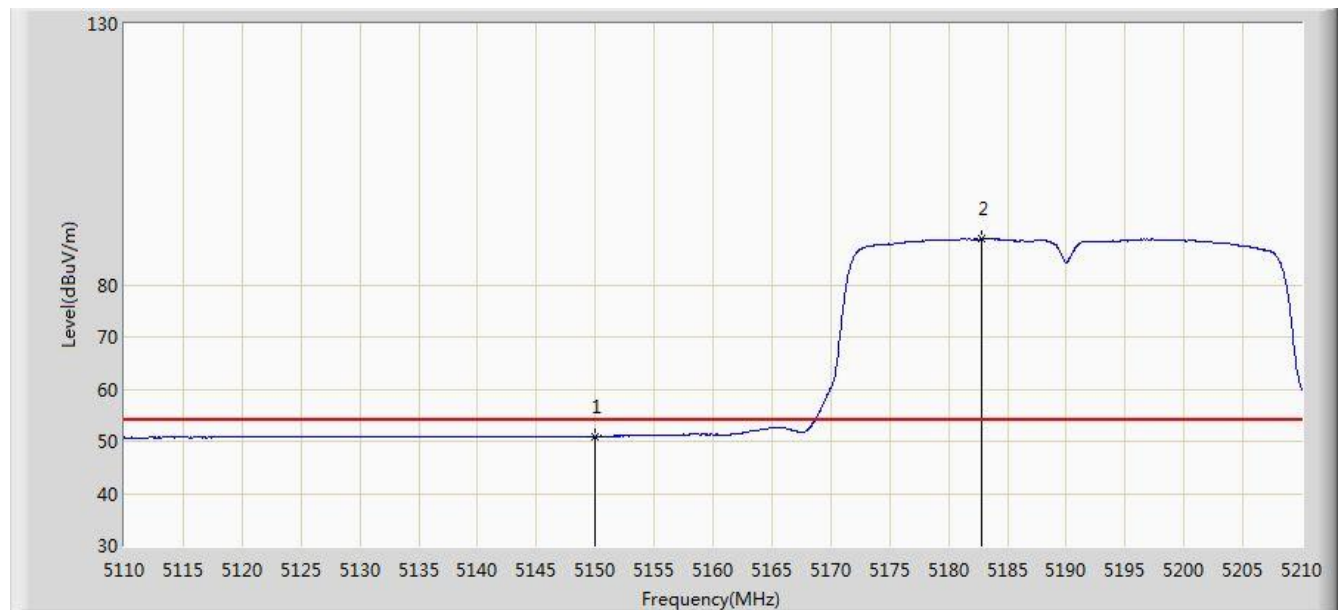


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.993                 | 11.552               | -3.007      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5182.750        | 88.757                 | 49.395               | N/A         | N/A            | 39.362      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:35 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 1 |                          |

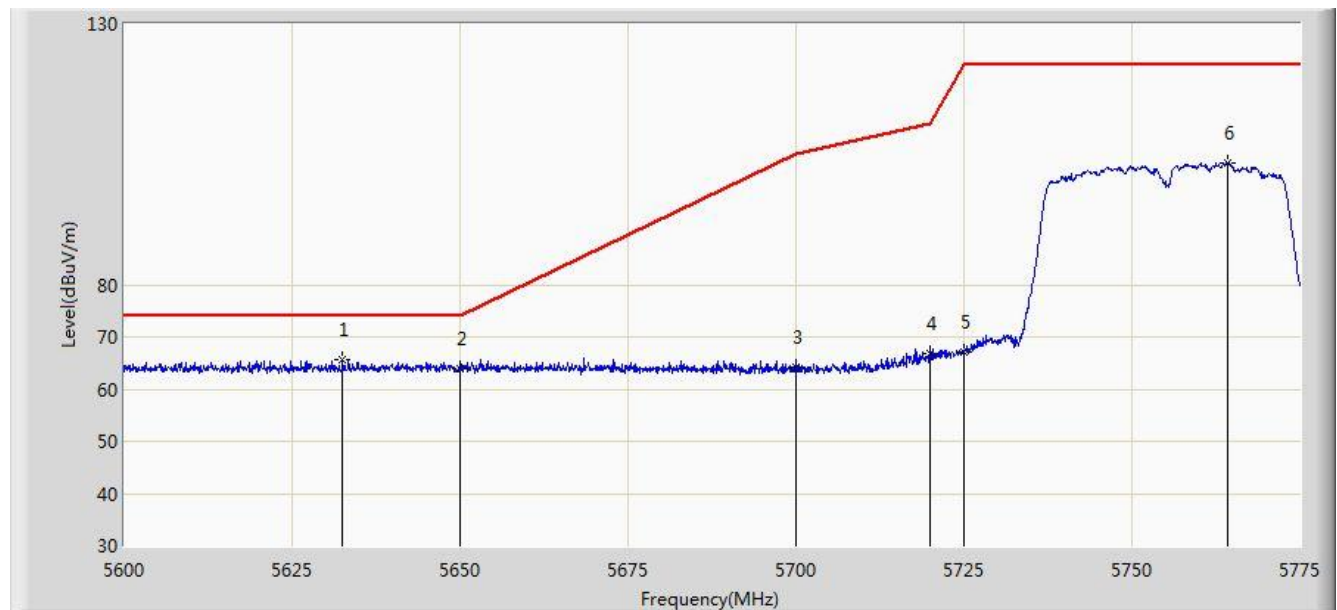


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5632.550        | 65.559                 | 25.665               | -8.441      | 74.000         | 39.895      | PK   |
| 2  |      |      | 5650.000        | 64.031                 | 24.102               | -9.969      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.302                 | 24.245               | -40.898     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 66.917                 | 26.776               | -43.883     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.162                 | 26.998               | -55.038     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5764.325        | 103.338                | 63.006               | N/A         | N/A            | 40.332      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:37 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 1 |                          |

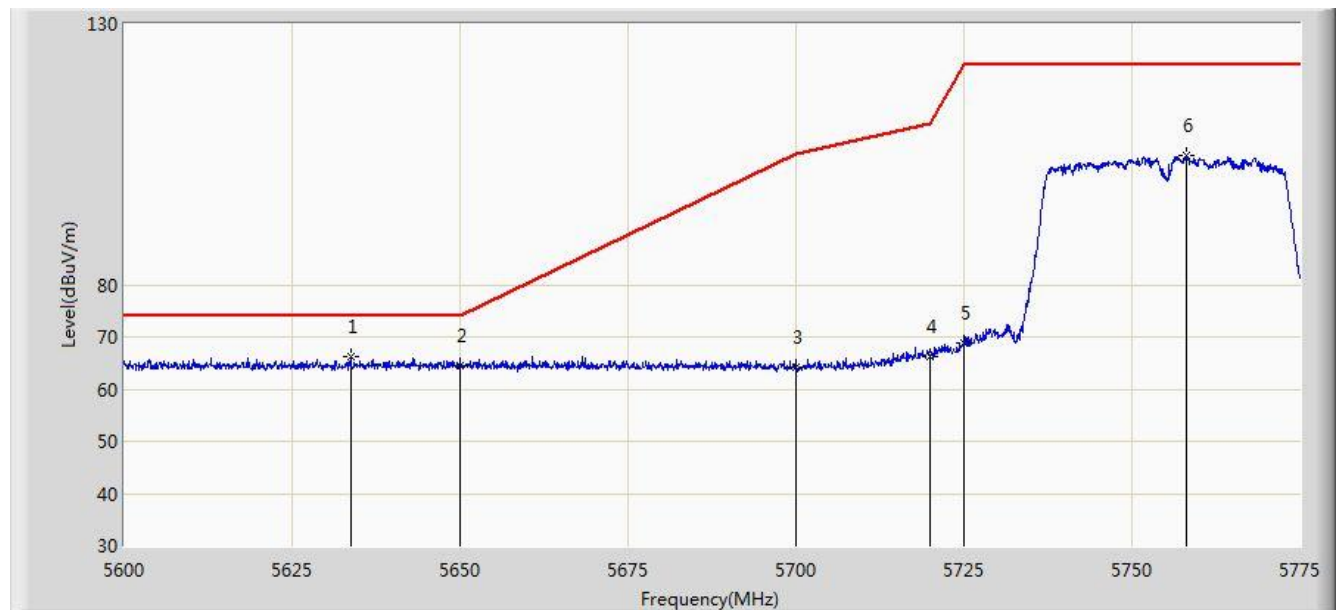


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5633.687        | 66.096                 | 26.200               | -7.904      | 74.000         | 39.897      | PK   |
| 2  |      |      | 5650.000        | 64.528                 | 24.599               | -9.472      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.132                 | 24.075               | -41.068     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 66.296                 | 26.155               | -44.504     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 68.899                 | 28.735               | -53.301     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5758.025        | 104.712                | 64.404               | N/A         | N/A            | 40.308      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:39 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 1 |                          |

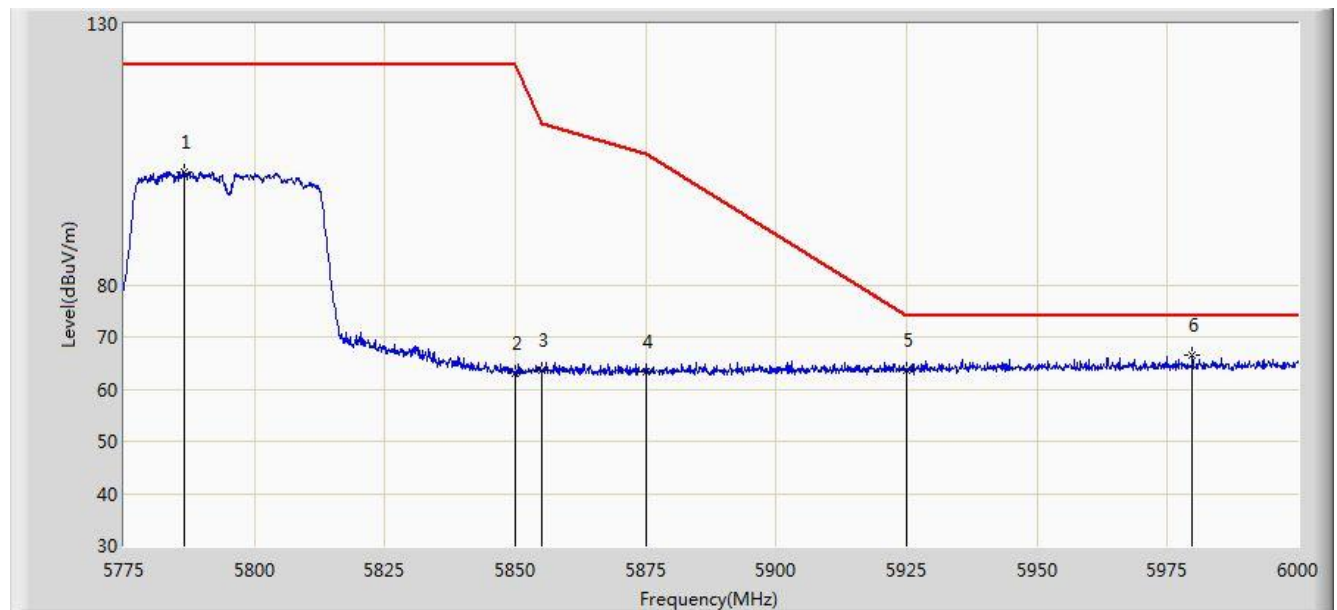


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5786.475        | 101.636                | 61.223               | N/A         | N/A            | 40.413      | PK   |
| 2  |      |      | 5850.000        | 62.955                 | 22.289               | -59.245     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.607                 | 22.929               | -47.193     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.462                 | 22.742               | -41.738     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.627                 | 22.835               | -10.373     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5979.750        | 66.567                 | 25.735               | -7.433      | 74.000         | 40.831      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:40 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 1 |                          |

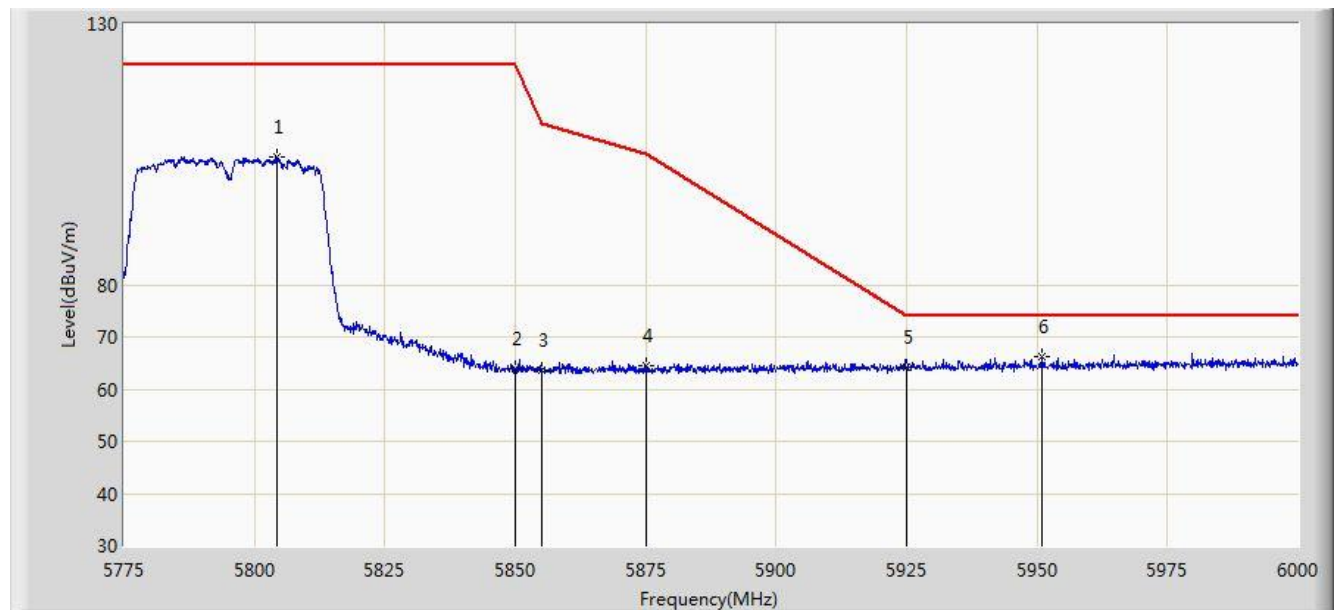


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5804.250        | 104.399                | 63.918               | N/A         | N/A            | 40.482      | PK   |
| 2  |      |      | 5850.000        | 63.831                 | 23.165               | -58.369     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.568                 | 22.890               | -47.232     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 64.443                 | 23.723               | -40.757     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.107                 | 23.315               | -9.893      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5950.837        | 66.299                 | 25.482               | -7.701      | 74.000         | 40.817      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:50 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1 |                          |

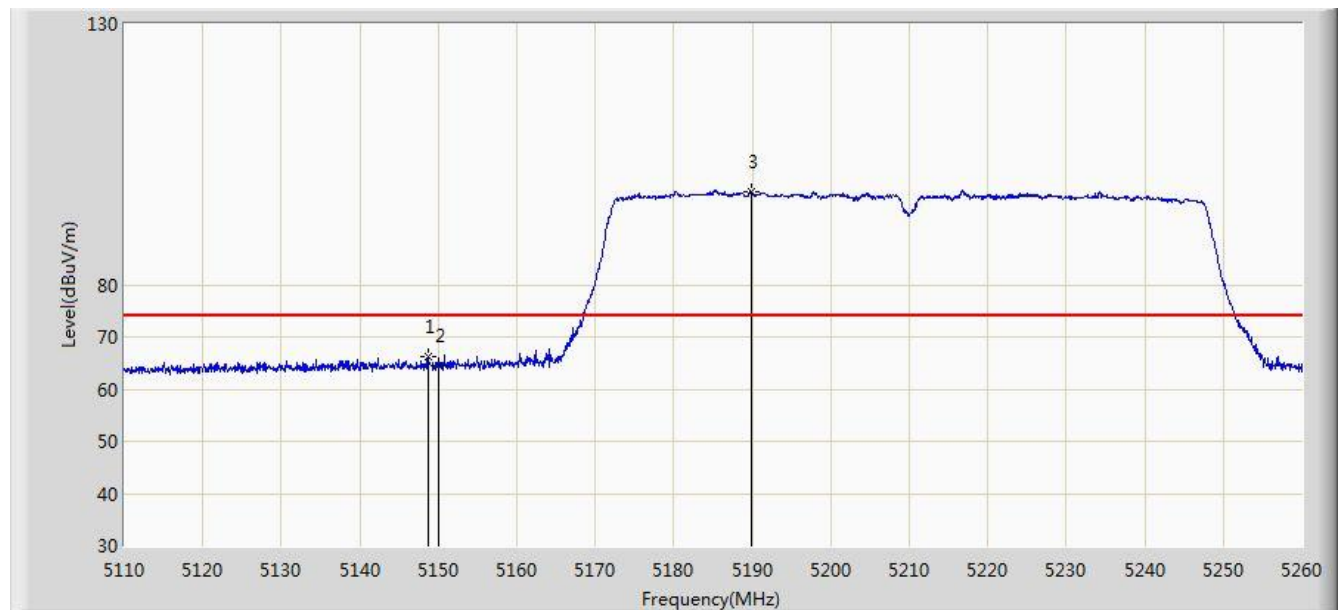


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.700        | 66.360                 | 26.916               | -7.640      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 64.496                 | 25.055               | -9.504      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5189.800        | 97.946                 | 58.602               | N/A         | N/A            | 39.344      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:52 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1 |                          |

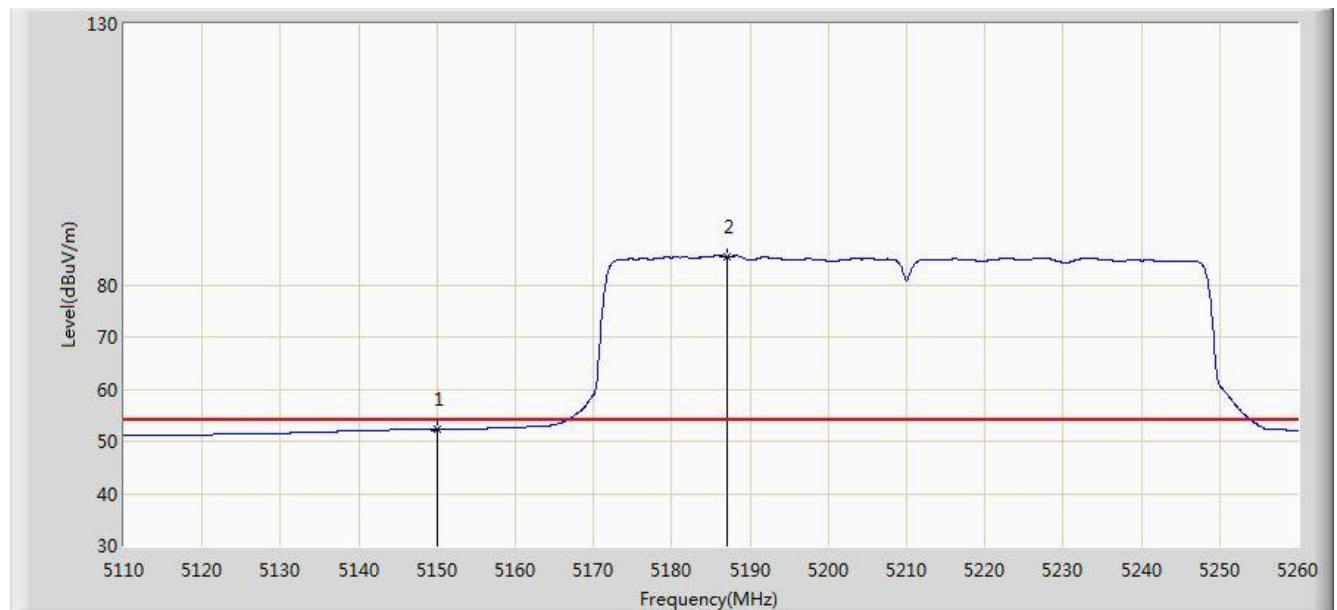


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.199                 | 12.758               | -1.801      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5187.100        | 85.435                 | 46.084               | N/A         | N/A            | 39.352      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:50 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1 |                          |

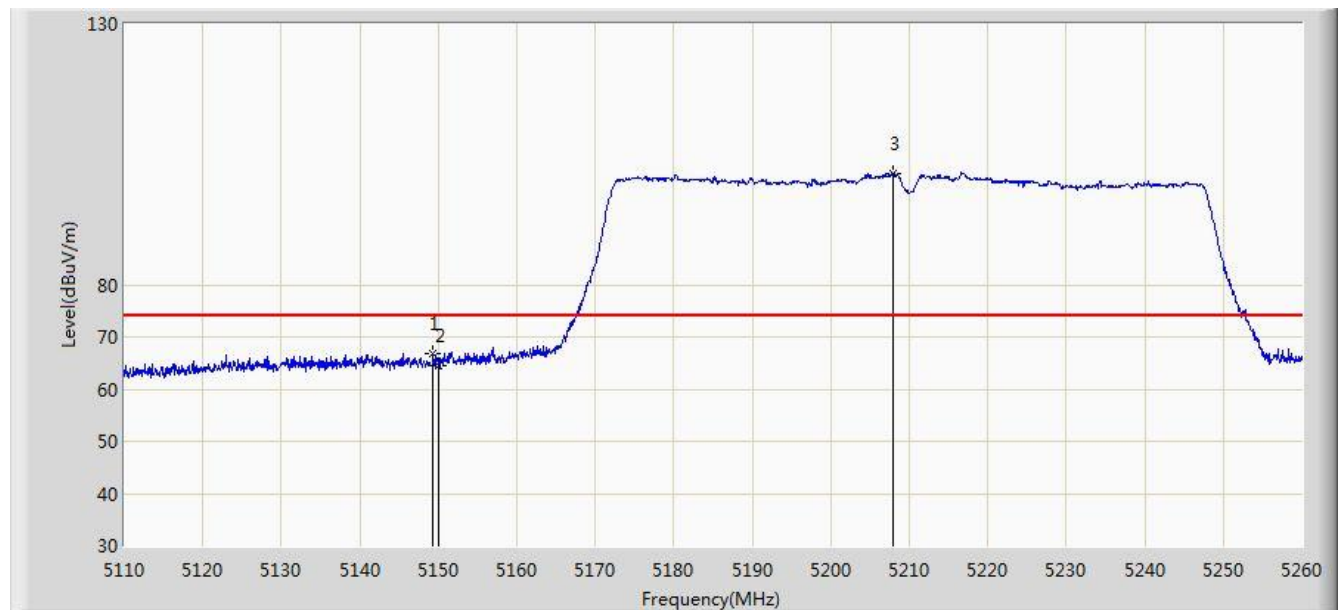


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.300        | 66.678                 | 27.235               | -7.322      | 74.000         | 39.443      | PK   |
| 2  |      |      | 5150.000        | 64.552                 | 25.111               | -9.448      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5207.875        | 101.308                | 62.007               | N/A         | N/A            | 39.301      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/21 - 23:49 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 1 |                          |

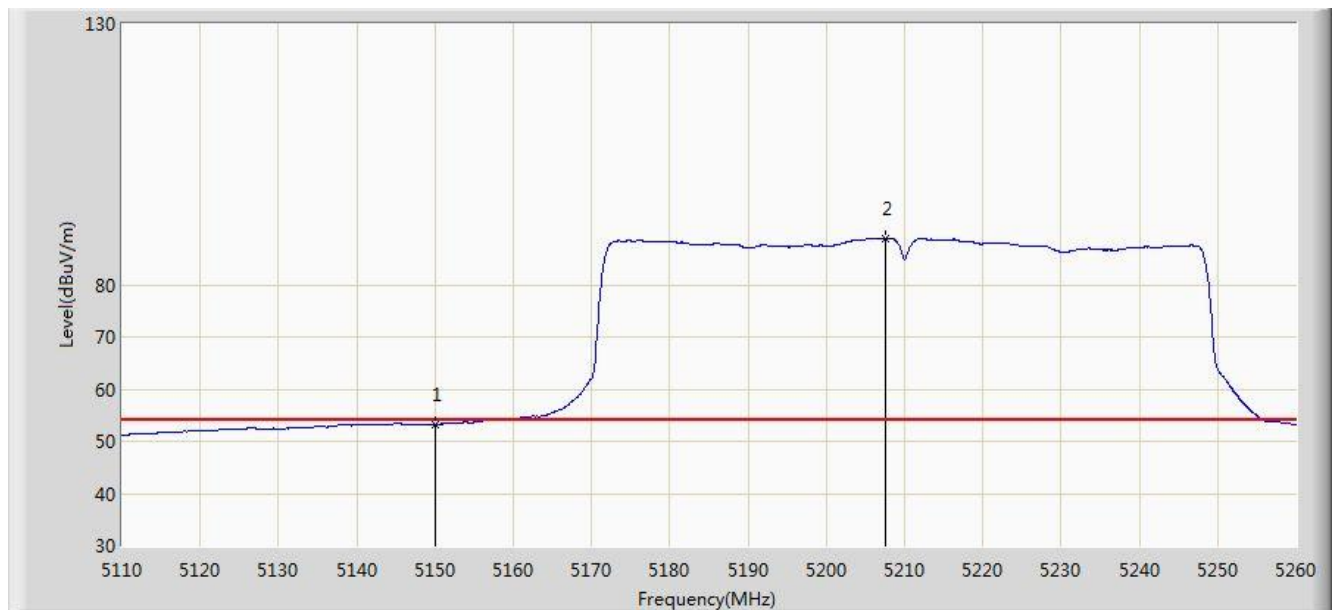


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.173                 | 13.732               | -0.827      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5207.650        | 88.971                 | 49.669               | N/A         | N/A            | 39.302      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 00:08 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 1 |                          |

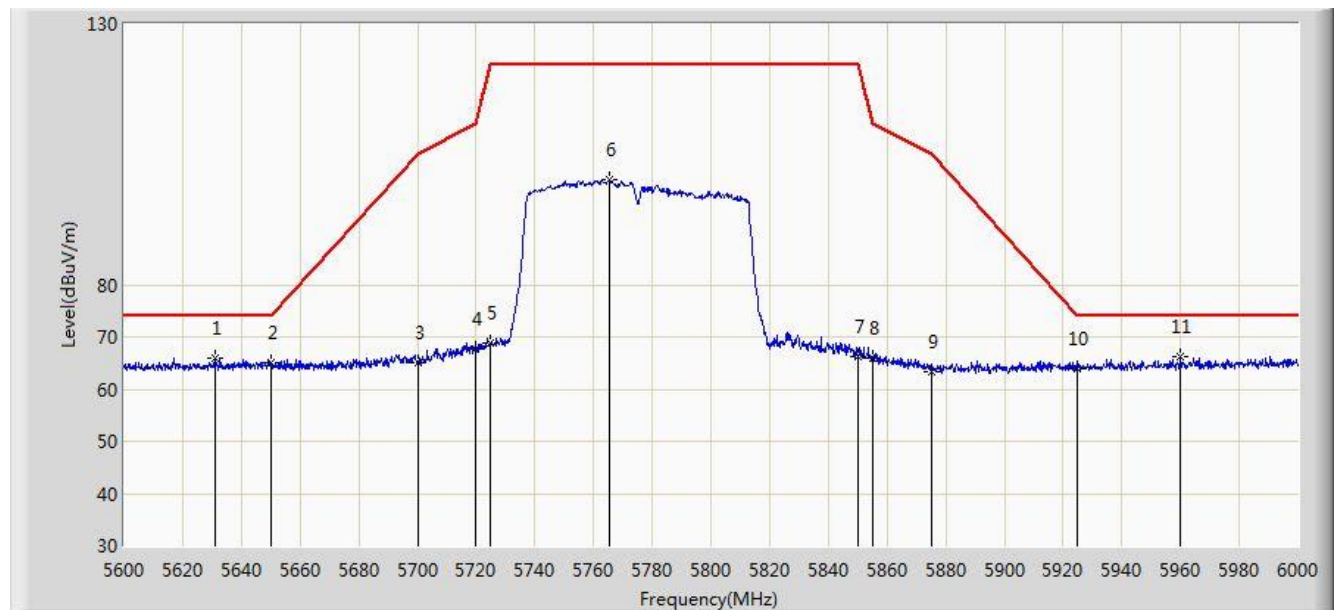


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5631.200        | 65.985                 | 26.093               | -8.015      | 74.000         | 39.892      | PK   |
| 2  |      |      | 5650.000        | 65.017                 | 25.088               | -8.983      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 65.168                 | 25.111               | -40.032     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 67.668                 | 27.527               | -43.132     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 68.921                 | 28.757               | -53.279     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5765.400        | 100.037                | 59.701               | N/A         | N/A            | 40.336      | PK   |
| 7  |      |      | 5850.000        | 66.190                 | 25.524               | -56.010     | 122.200        | 40.666      | PK   |
| 8  |      |      | 5855.000        | 65.855                 | 25.177               | -44.945     | 110.800        | 40.678      | PK   |
| 9  |      |      | 5875.000        | 63.311                 | 22.591               | -41.889     | 105.200        | 40.720      | PK   |
| 10 |      |      | 5925.000        | 63.883                 | 23.091               | -10.117     | 74.000         | 40.792      | PK   |
| 11 |      | *    | 5960.000        | 66.219                 | 25.397               | -7.781      | 74.000         | 40.822      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 00:12 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 1 |                          |

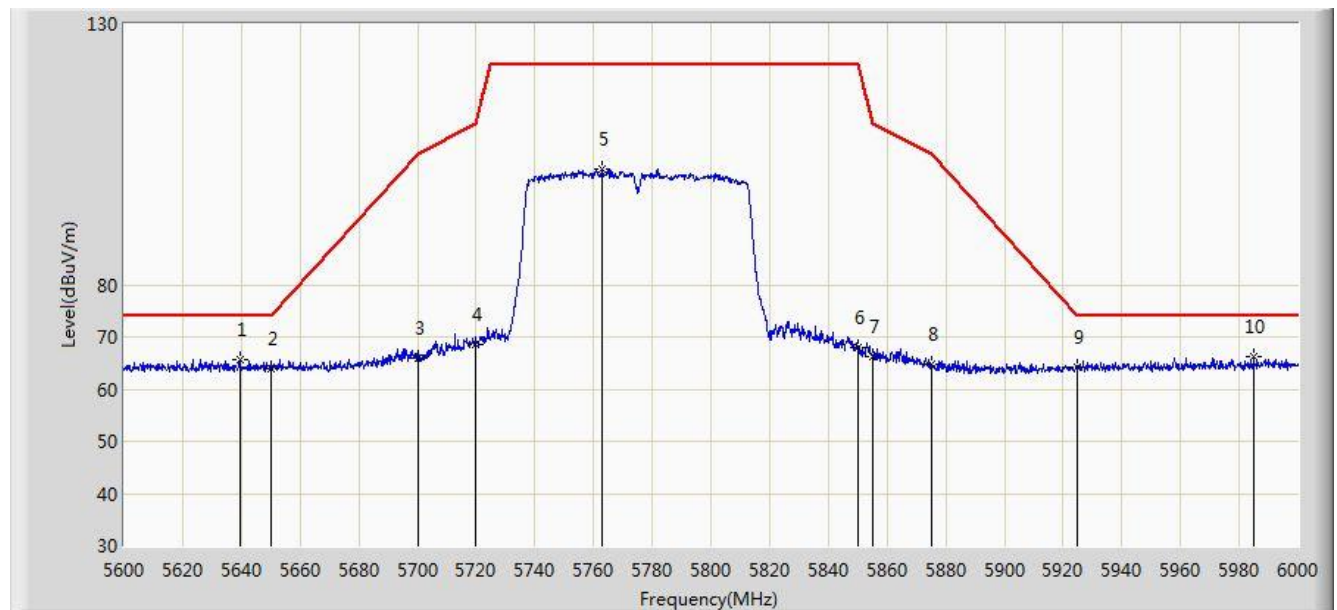


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5639.400        | 65.636                 | 25.729               | -8.364      | 74.000         | 39.906      | PK   |
| 2  |      |      | 5650.000        | 63.914                 | 23.985               | -10.086     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 65.827                 | 25.770               | -39.373     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 68.584                 | 28.443               | -42.216     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5763.000        | 102.208                | 61.881               | N/A         | N/A            | 40.327      | PK   |
| 6  |      |      | 5850.000        | 67.891                 | 27.225               | -54.309     | 122.200        | 40.666      | PK   |
| 7  |      |      | 5855.000        | 66.338                 | 25.660               | -44.462     | 110.800        | 40.678      | PK   |
| 8  |      |      | 5875.000        | 64.900                 | 24.180               | -40.300     | 105.200        | 40.720      | PK   |
| 9  |      |      | 5925.000        | 64.286                 | 23.494               | -9.714      | 74.000         | 40.792      | PK   |
| 10 |      | *    | 5985.000        | 66.093                 | 25.259               | -7.907      | 74.000         | 40.833      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:15 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 2 |                          |

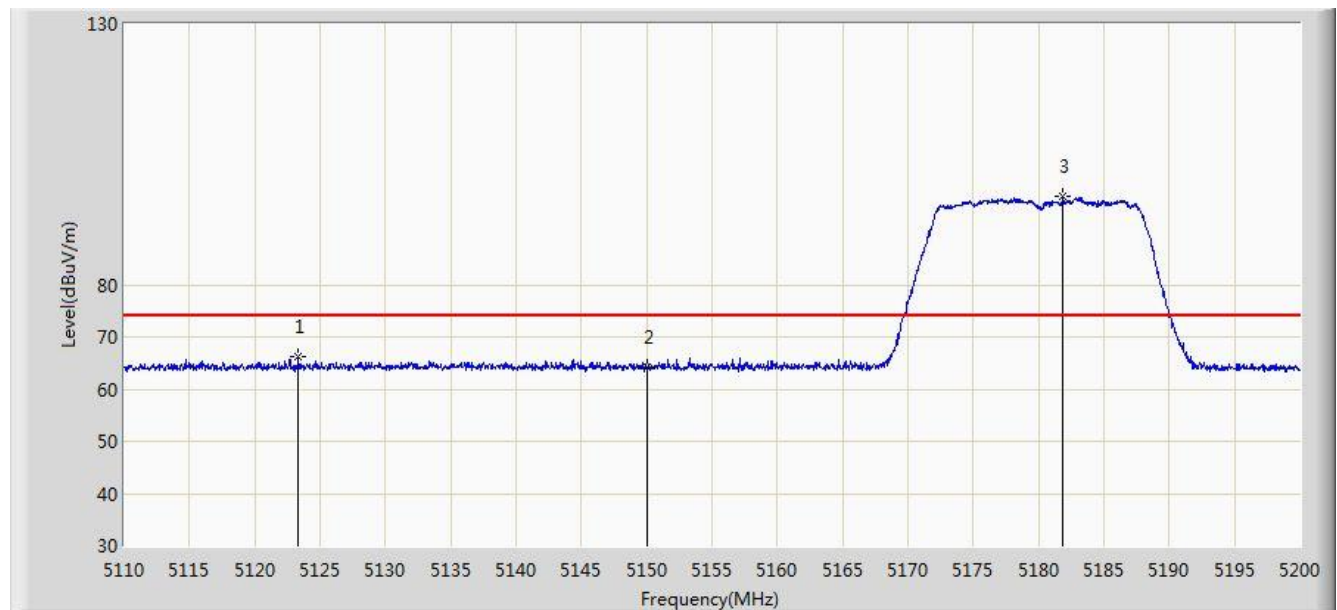


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5123.320        | 66.369                 | 26.924               | -7.631      | 74.000         | 39.444      | PK   |
| 2  |      |      | 5150.000        | 64.080                 | 24.639               | -9.920      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.865        | 96.980                 | 57.615               | N/A         | N/A            | 39.364      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:24 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 2 |                          |

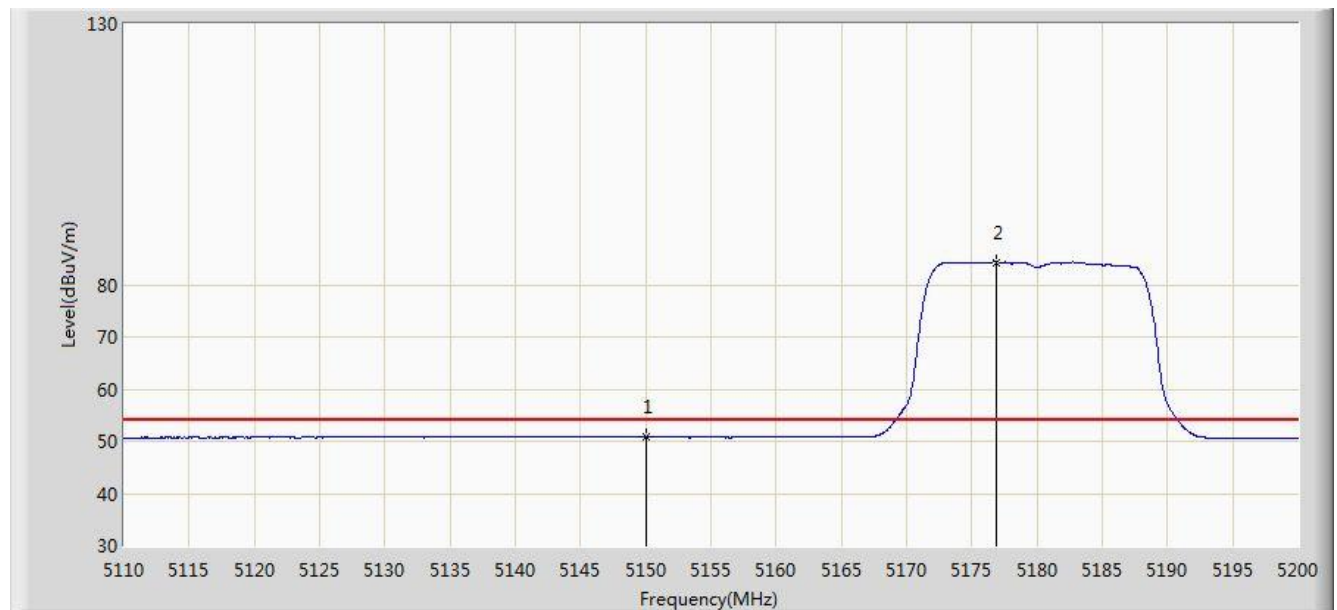


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.774                 | 11.333               | -3.226      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5176.870        | 84.340                 | 44.963               | N/A         | N/A            | 39.378      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:24 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 2 |                          |

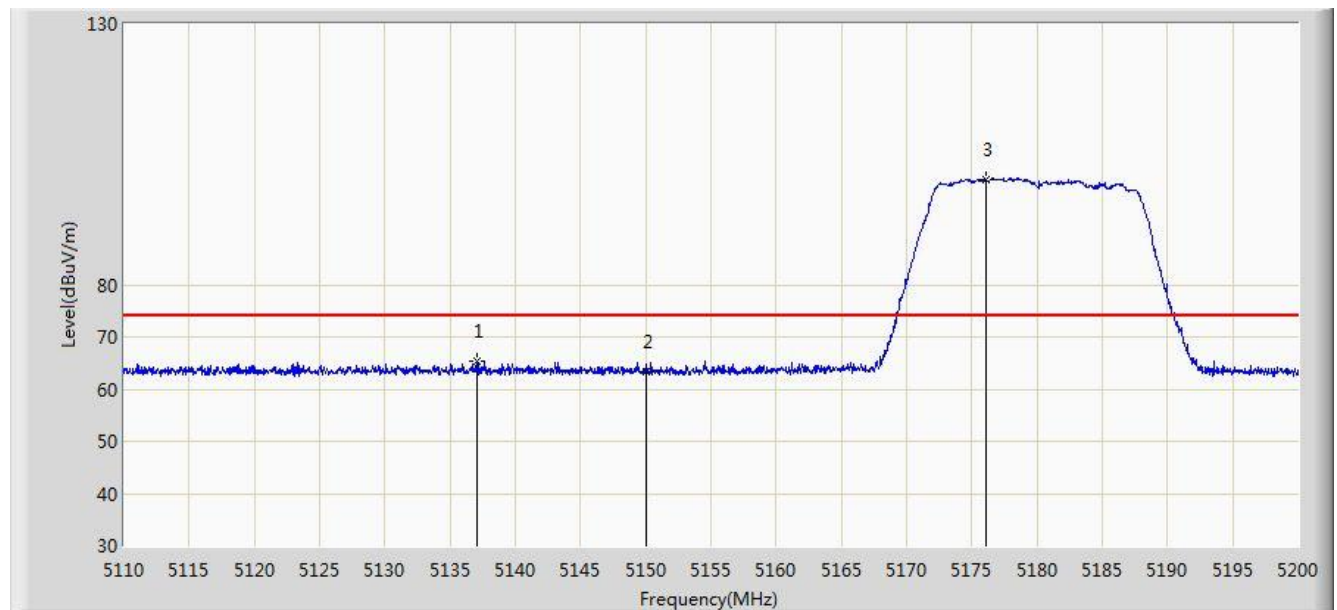


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5137.045        | 65.235                 | 25.790               | -8.765      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.438                 | 23.997               | -10.562     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5176.060        | 100.117                | 60.738               | N/A         | N/A            | 39.379      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:26 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 2 |                          |

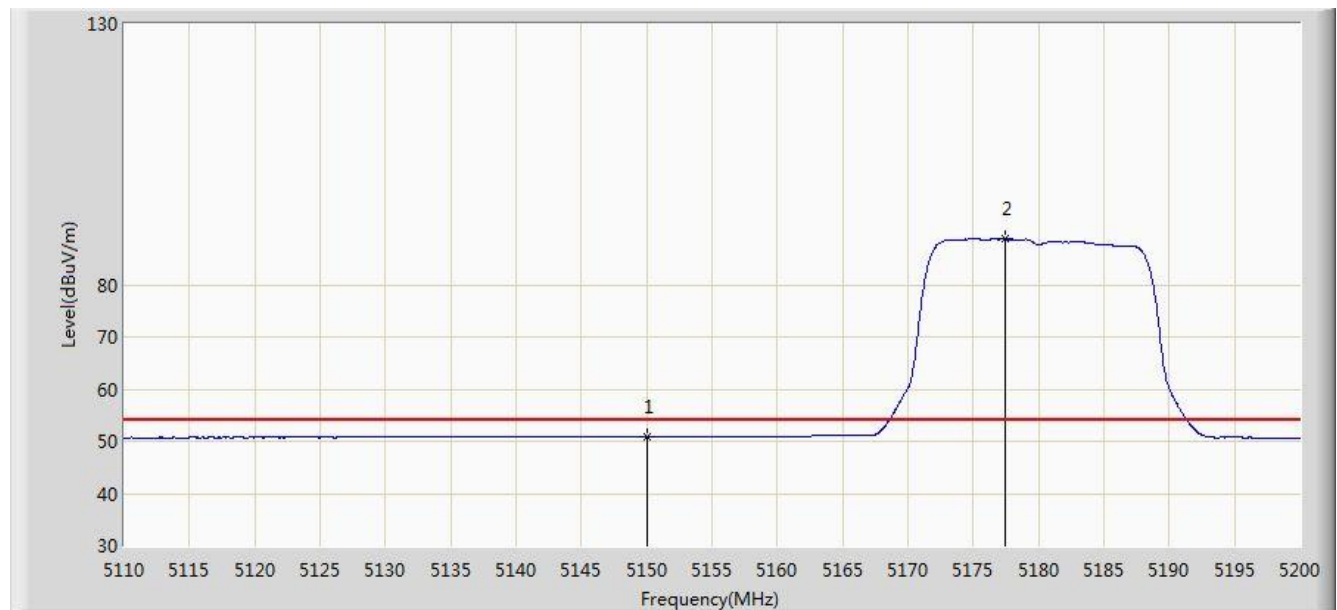


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.772                 | 11.331               | -3.228      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.410        | 88.922                 | 49.546               | N/A         | N/A            | 39.376      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:51 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 2 |                          |

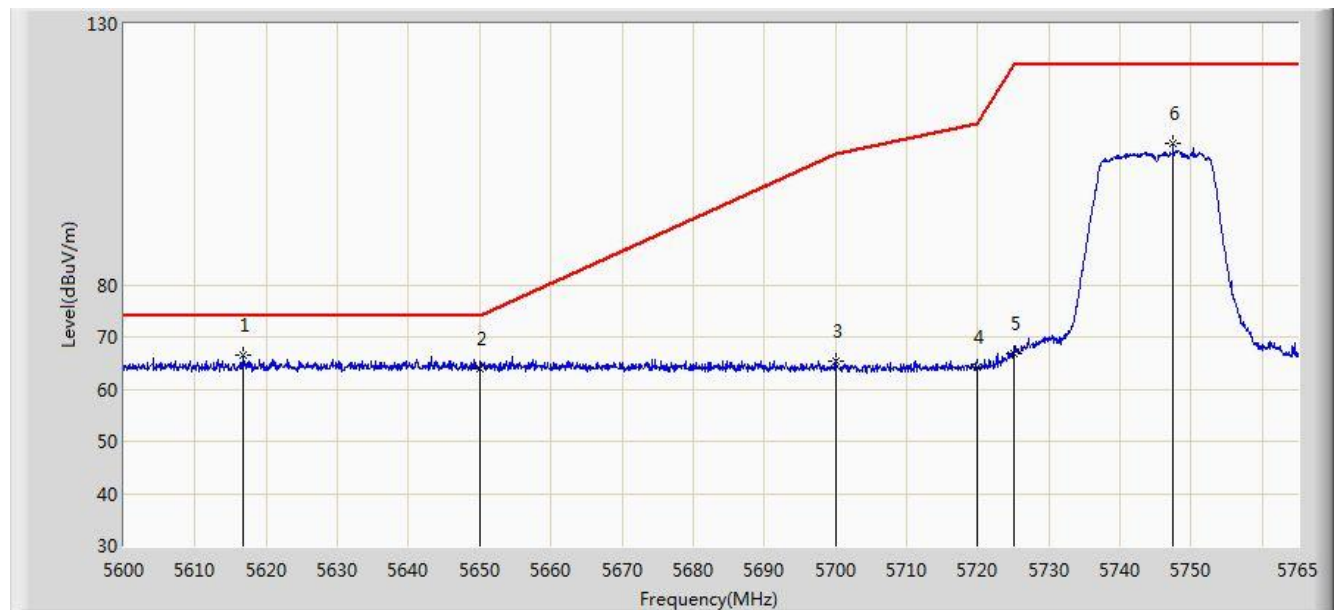


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5616.830        | 66.538                 | 26.673               | -7.462      | 74.000         | 39.865      | PK   |
| 2  |      |      | 5650.000        | 64.037                 | 24.108               | -9.963      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 65.478                 | 25.421               | -39.722     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.276                 | 24.135               | -46.524     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.743                 | 26.579               | -55.457     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5747.428        | 107.072                | 66.807               | N/A         | N/A            | 40.265      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:53 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 2 |                          |

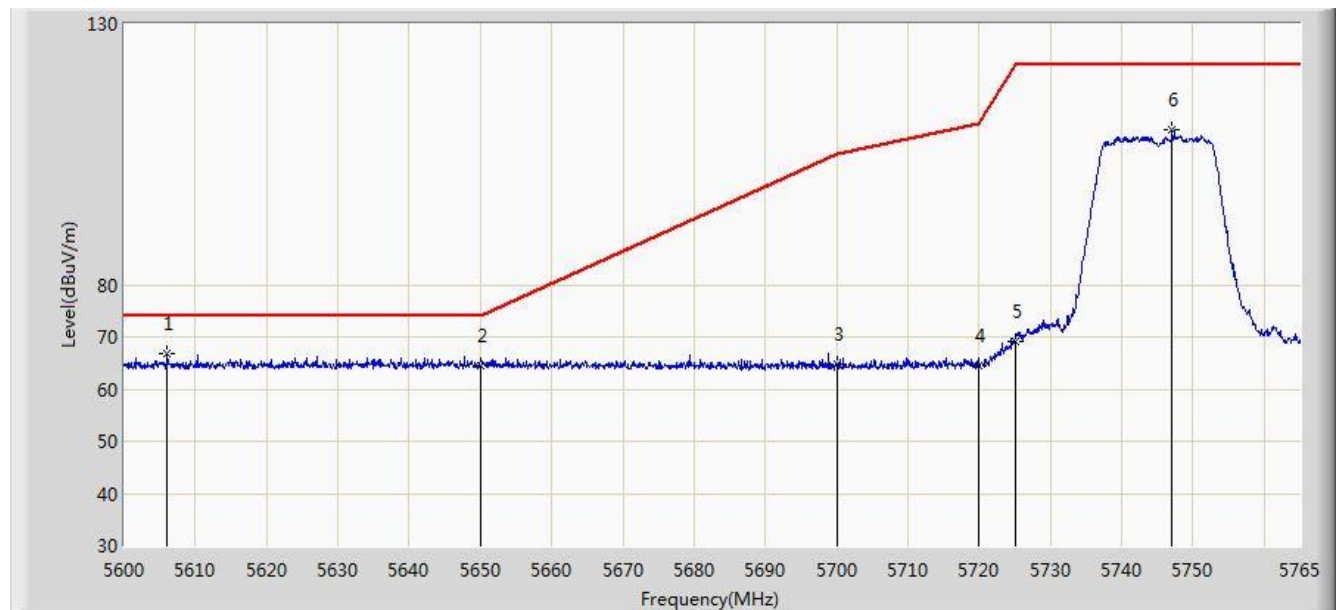


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5606.022        | 66.713                 | 26.868               | -7.287      | 74.000         | 39.846      | PK   |
| 2  |      |      | 5650.000        | 64.486                 | 24.557               | -9.514      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.873                 | 24.816               | -40.327     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.570                 | 24.429               | -46.230     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 69.258                 | 29.094               | -52.942     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5747.098        | 109.668                | 69.404               | N/A         | N/A            | 40.263      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:56 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 2 |                          |

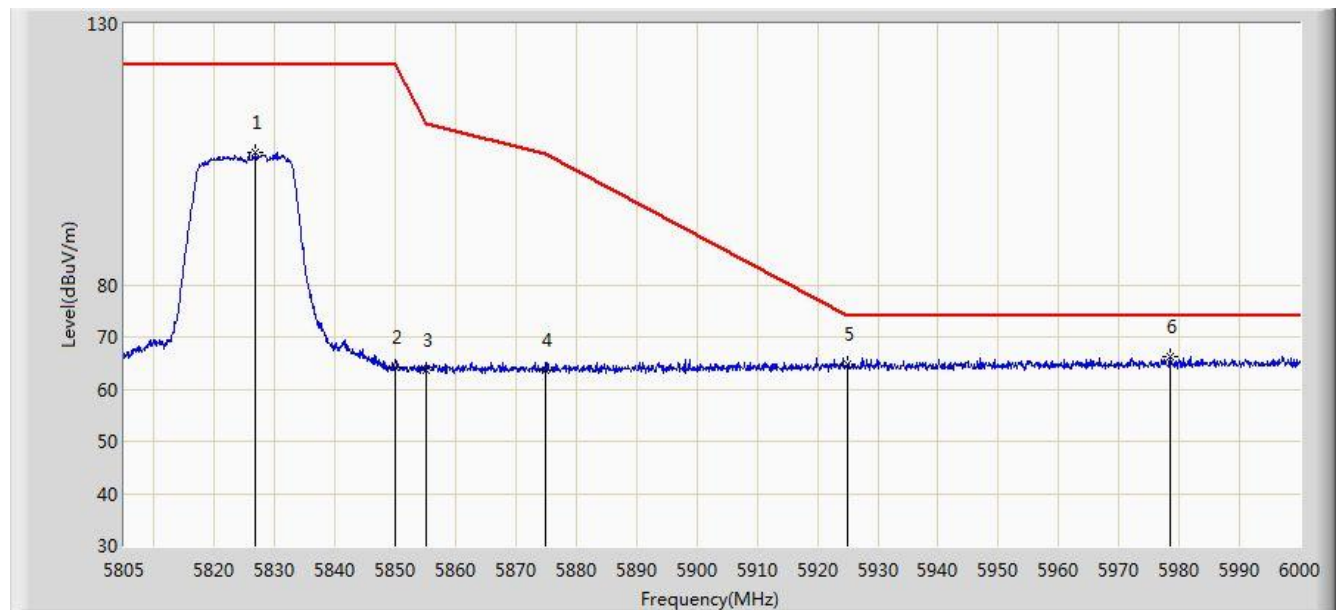


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.840        | 105.454                | 64.878               | N/A         | N/A            | 40.576      | PK   |
| 2  |      |      | 5850.000        | 64.162                 | 23.496               | -58.038     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.505                 | 22.827               | -47.295     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.656                 | 22.936               | -41.544     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.707                 | 23.915               | -9.293      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5978.550        | 66.226                 | 25.395               | -7.774      | 74.000         | 40.831      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 00:58 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 2 |                          |

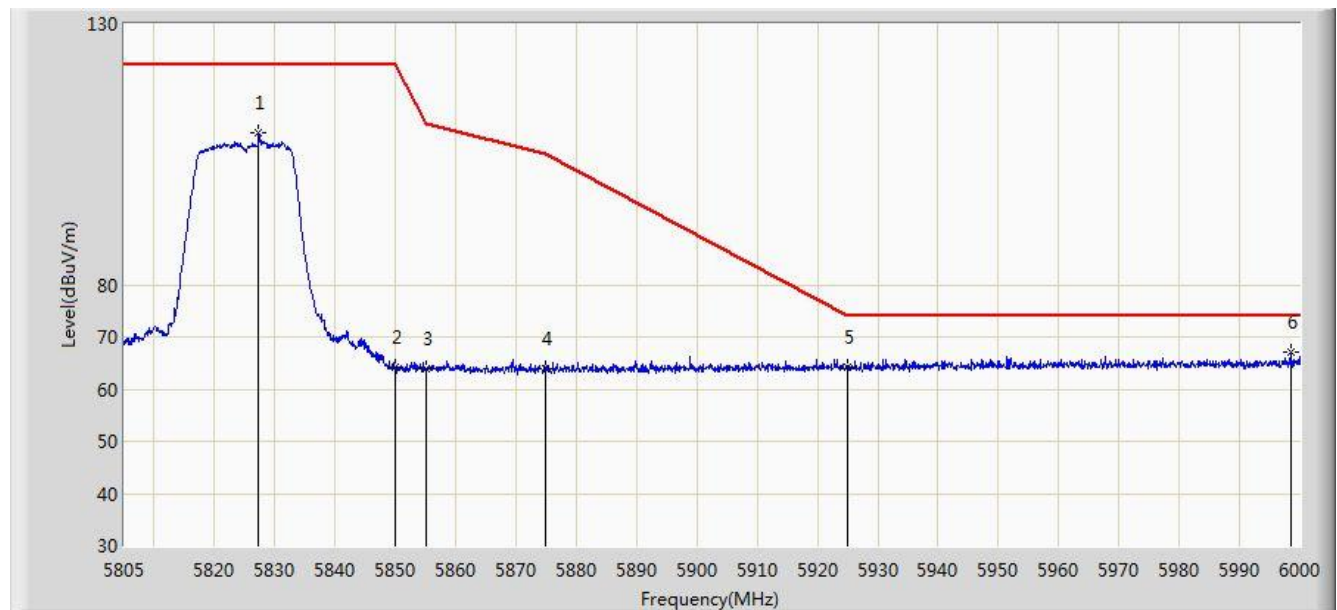


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5827.328        | 109.016                | 68.438               | N/A         | N/A            | 40.578      | PK   |
| 2  |      |      | 5850.000        | 64.088                 | 23.422               | -58.112     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.859                 | 23.181               | -46.941     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.994                 | 23.274               | -41.206     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.333                 | 23.541               | -9.667      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5998.440        | 67.141                 | 26.301               | -6.859      | 74.000         | 40.840      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 01:01 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 2 |                          |

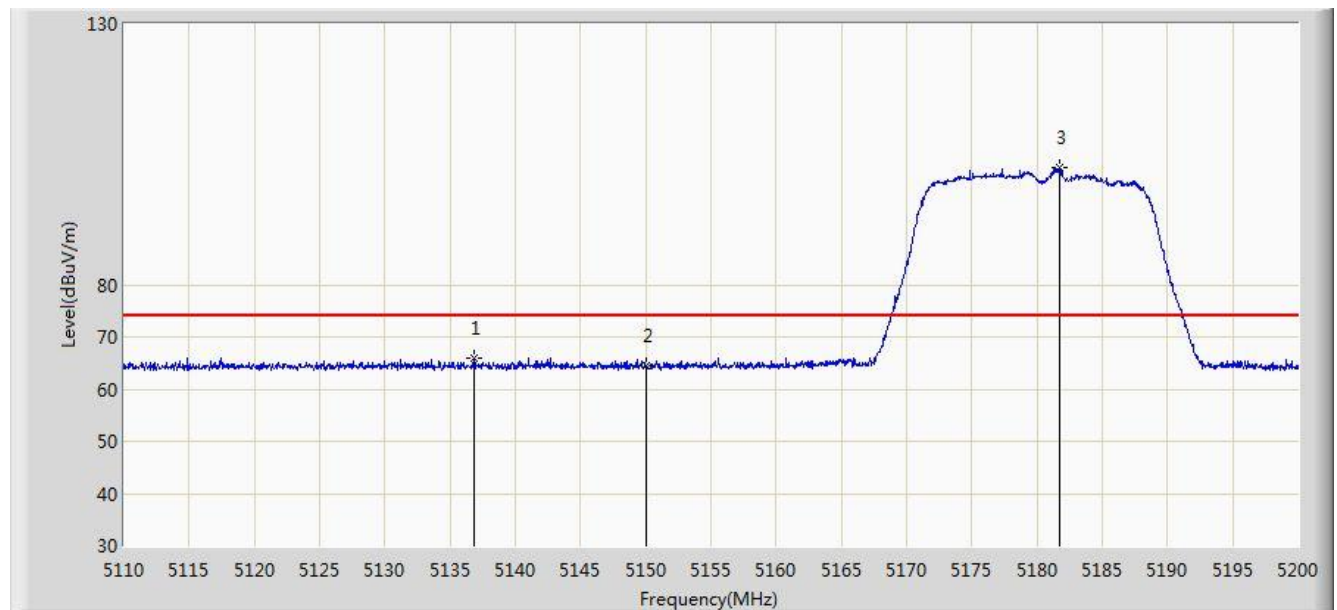


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5136.820        | 65.969                 | 26.524               | -8.031      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 64.441                 | 25.000               | -9.559      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.685        | 102.467                | 63.102               | N/A         | N/A            | 39.365      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 01:21 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 2 |                          |

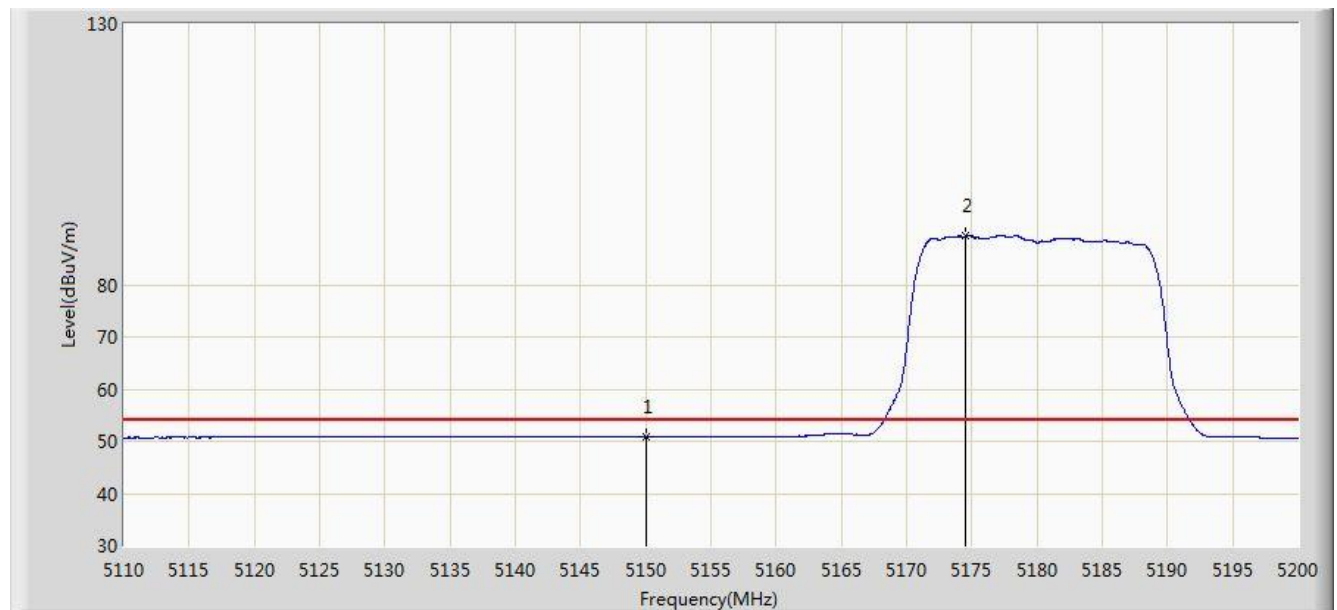


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.823                 | 11.382               | -3.177      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5174.485        | 89.292                 | 49.909               | N/A         | N/A            | 39.384      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 01:22 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 2 |                          |

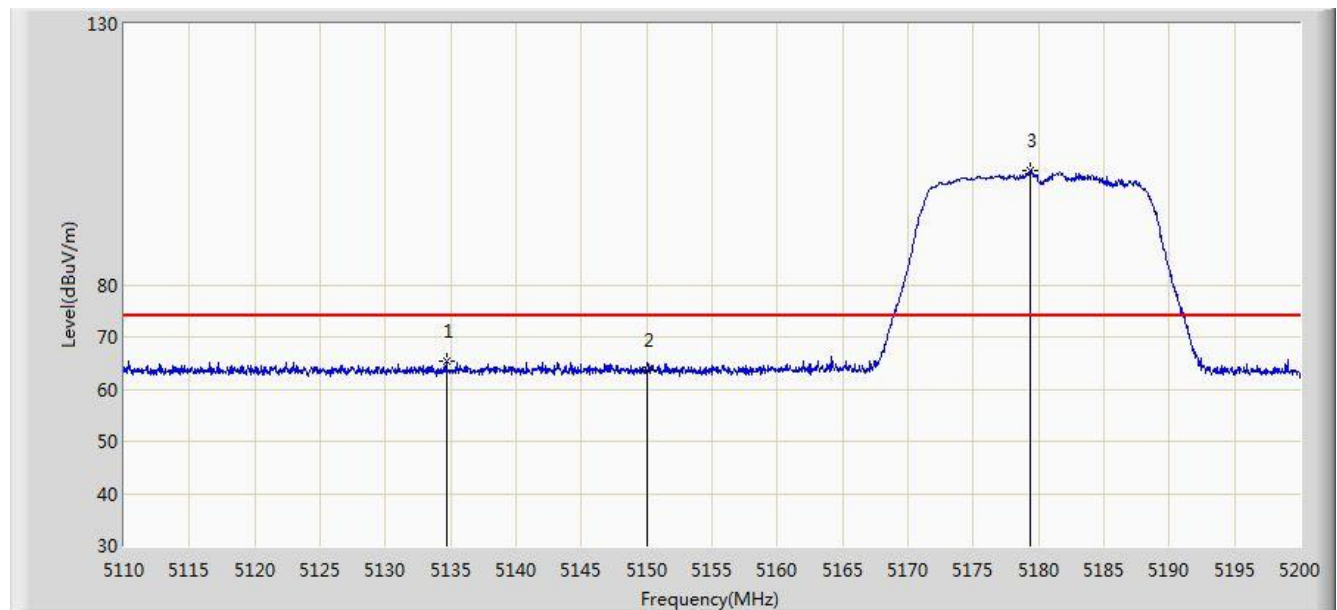


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5134.705        | 65.365                 | 25.920               | -8.635      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.495                 | 24.054               | -10.505     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5179.390        | 101.925                | 62.554               | N/A         | N/A            | 39.371      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 01:23 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 2 |                          |

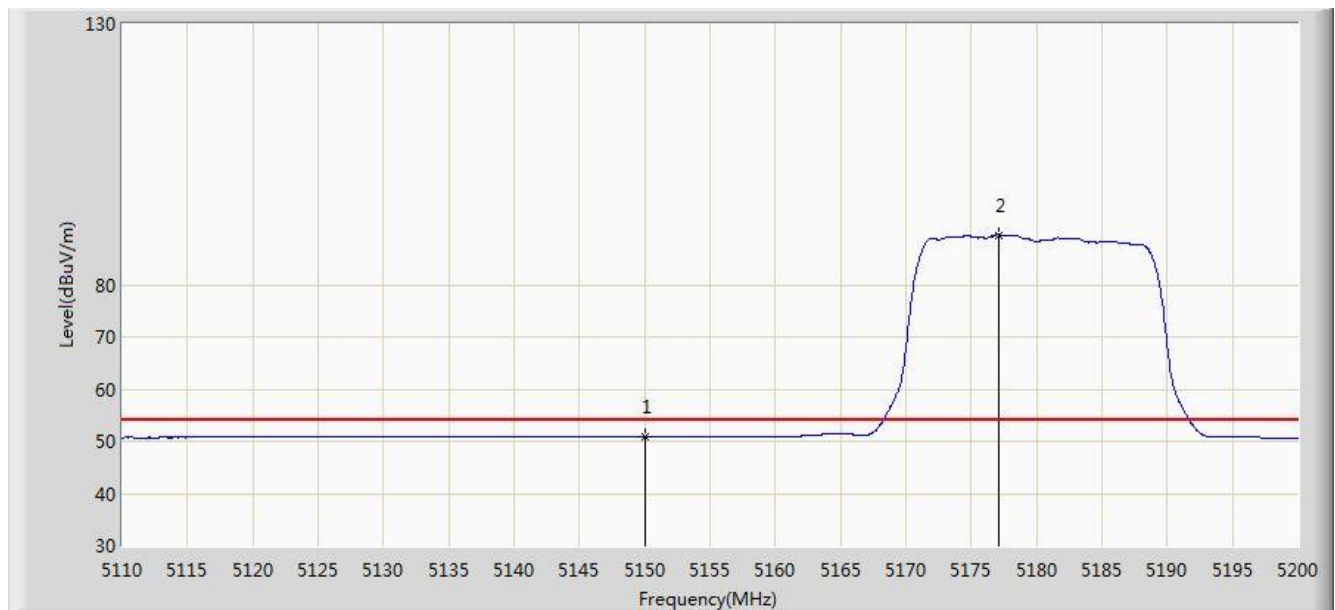


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.877                 | 11.436               | -3.123      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.140        | 89.545                 | 50.169               | N/A         | N/A            | 39.377      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:30 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 2 |                          |

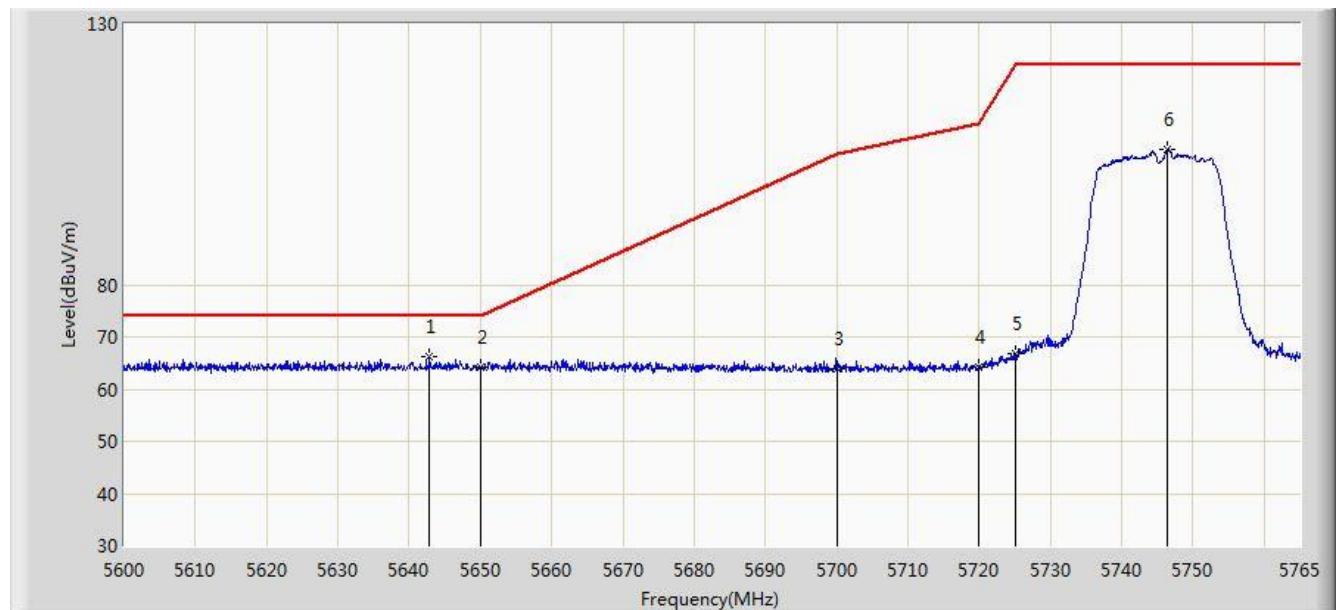


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5642.900        | 66.232                 | 26.318               | -7.768      | 74.000         | 39.913      | PK   |
| 2  |      |      | 5650.000        | 64.238                 | 24.309               | -9.762      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.004                 | 23.947               | -41.196     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.222                 | 24.081               | -46.578     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.859                 | 26.695               | -55.341     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.437        | 105.982                | 65.721               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:31 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 2 |                          |

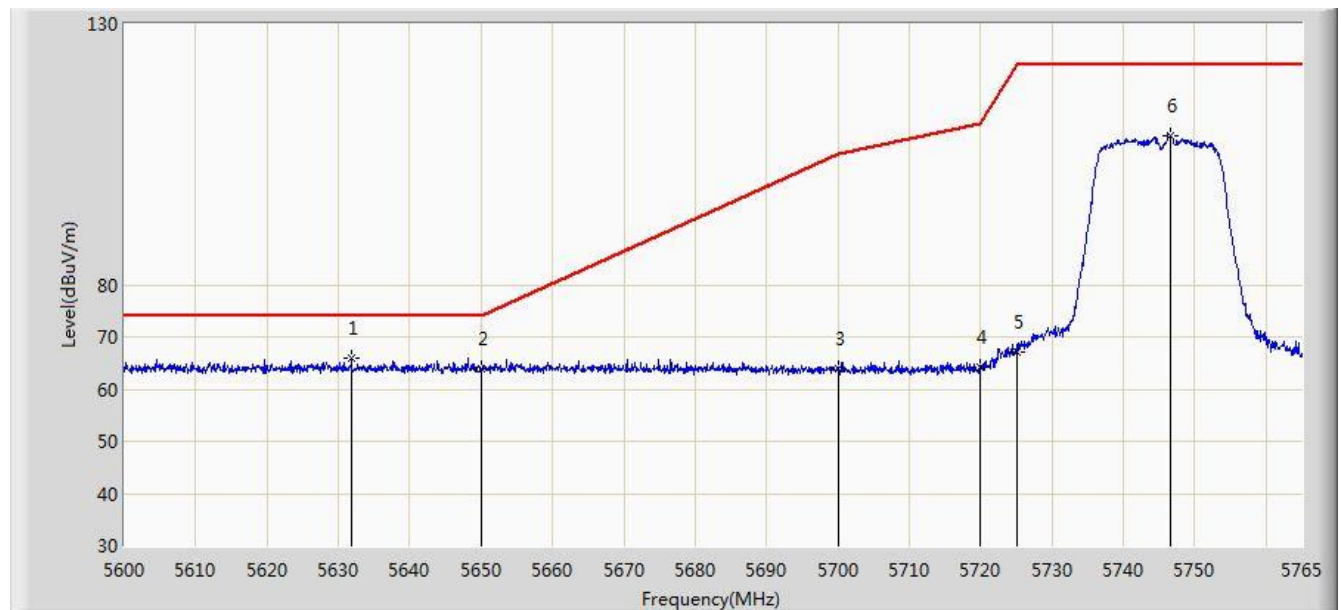


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5631.845        | 66.018                 | 26.125               | -7.982      | 74.000         | 39.893      | PK   |
| 2  |      |      | 5650.000        | 63.923                 | 23.994               | -10.077     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.023                 | 23.966               | -41.177     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.335                 | 24.194               | -46.465     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.137                 | 26.973               | -55.063     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.685        | 108.433                | 68.171               | N/A         | N/A            | 40.262      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:33 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 2 |                          |

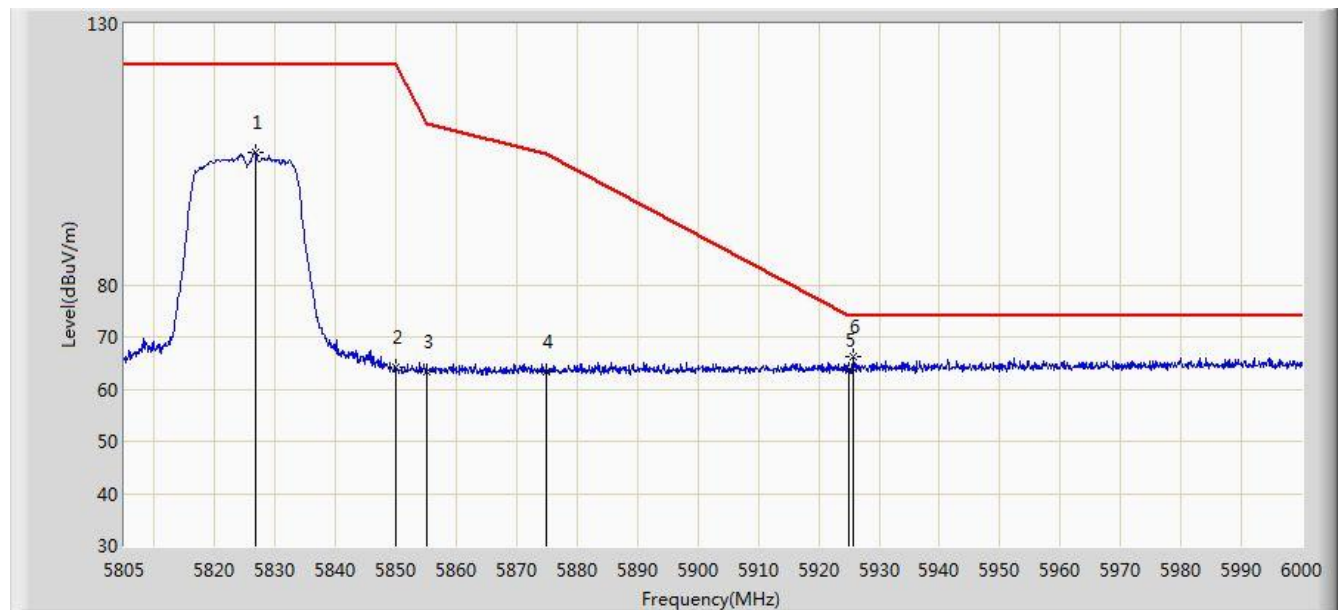


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.743        | 105.333                | 64.758               | N/A         | N/A            | 40.576      | PK   |
| 2  |      |      | 5850.000        | 64.152                 | 23.486               | -58.048     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.237                 | 22.559               | -47.563     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.469                 | 22.749               | -41.731     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.702                 | 22.910               | -10.298     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5925.803        | 66.173                 | 25.380               | -7.827      | 74.000         | 40.792      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:34 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 2 |                          |

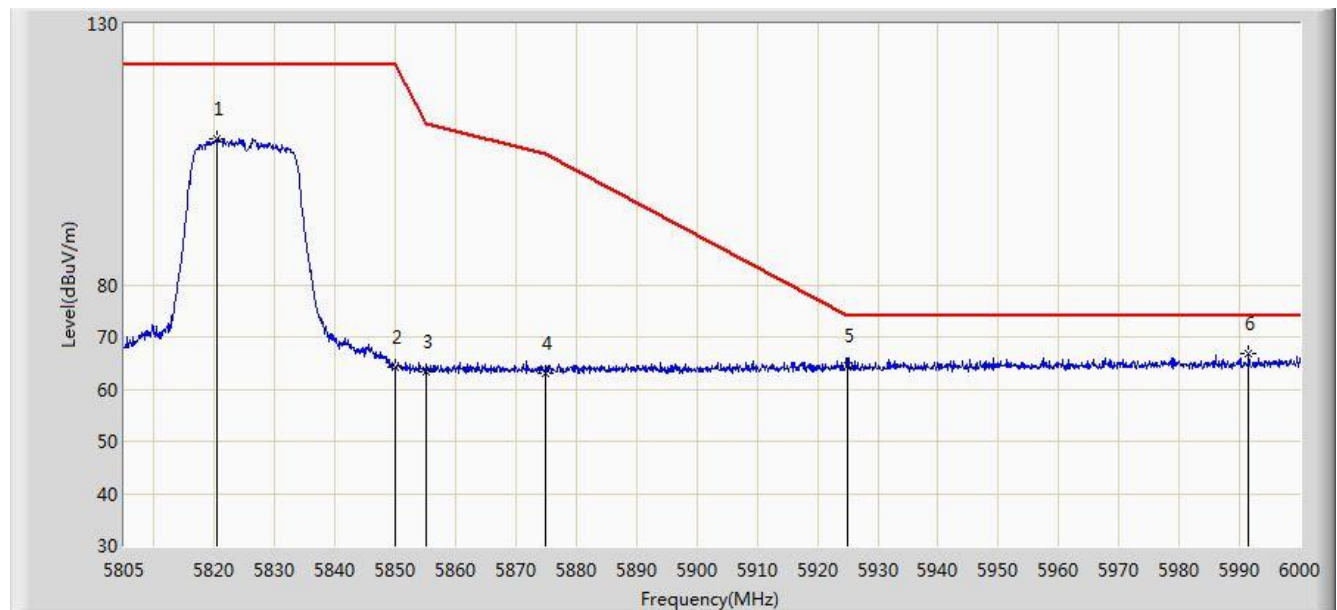


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5820.405        | 107.968                | 67.420               | N/A         | N/A            | 40.548      | PK   |
| 2  |      |      | 5850.000        | 64.116                 | 23.450               | -58.084     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.425                 | 22.747               | -47.375     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.129                 | 22.409               | -42.071     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.569                 | 23.777               | -9.431      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5991.518        | 66.841                 | 26.004               | -7.159      | 74.000         | 40.837      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:36 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 2 |                          |

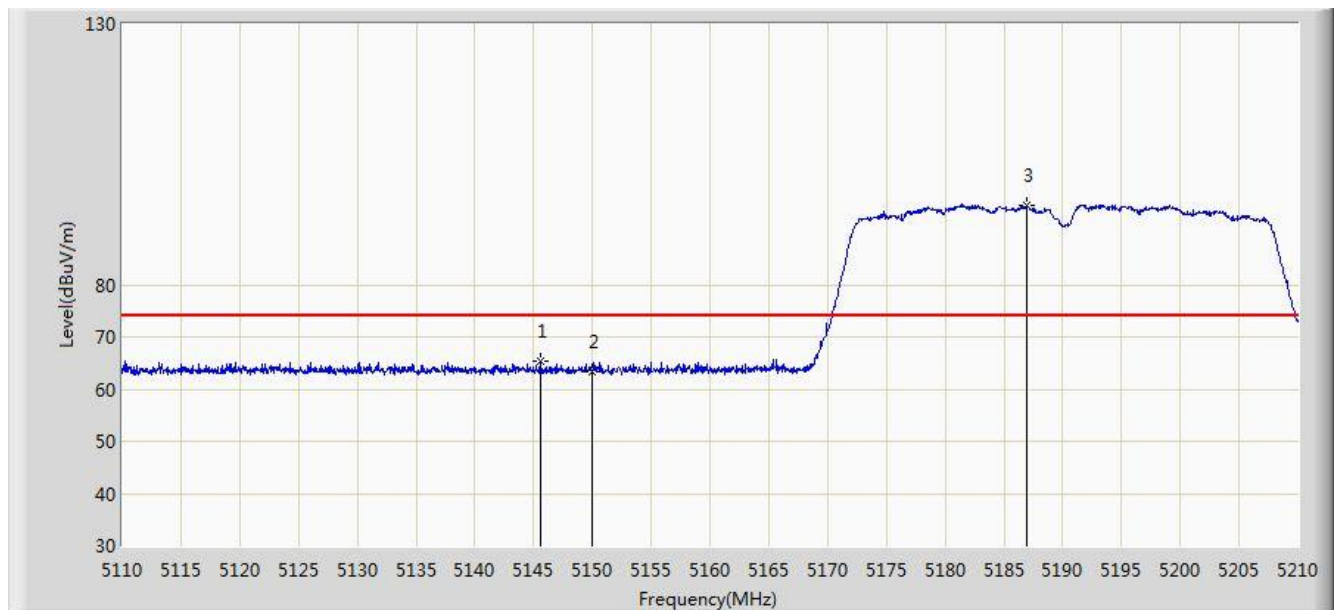


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5145.550        | 65.434                 | 25.988               | -8.566      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.331                 | 23.890               | -10.669     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5187.000        | 95.094                 | 55.743               | N/A         | N/A            | 39.351      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:39 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 2 |                          |

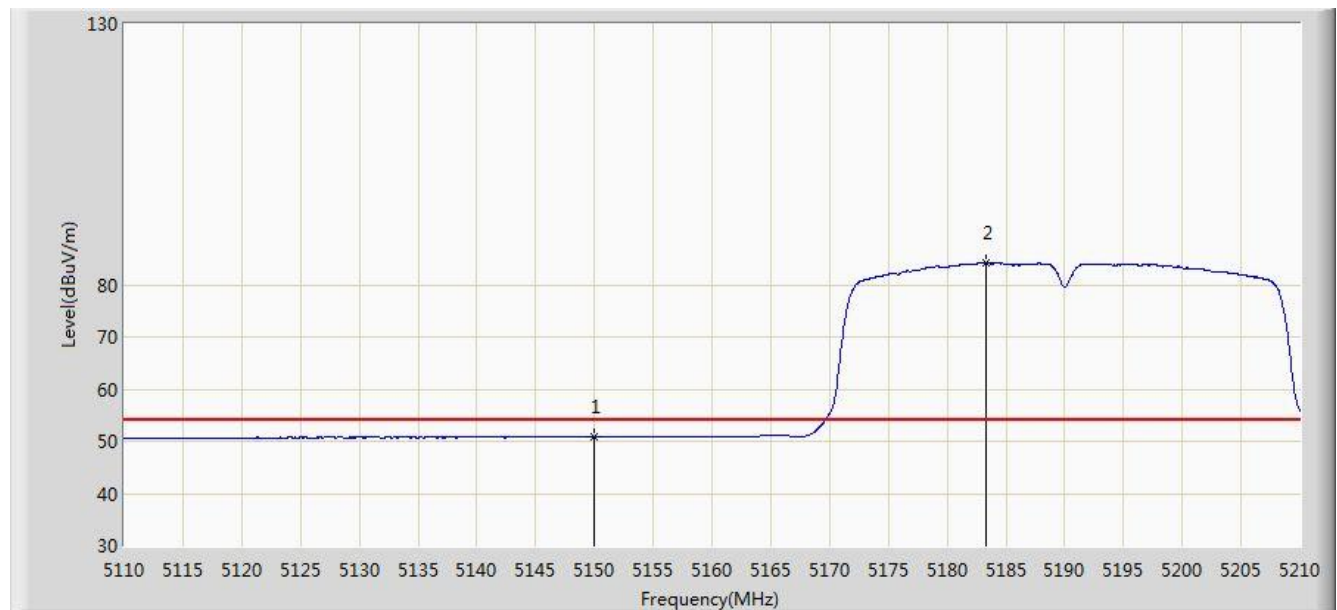


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.814                 | 11.373               | -3.186      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5183.350        | 84.224                 | 44.863               | N/A         | N/A            | 39.360      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:39 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 2 |                          |

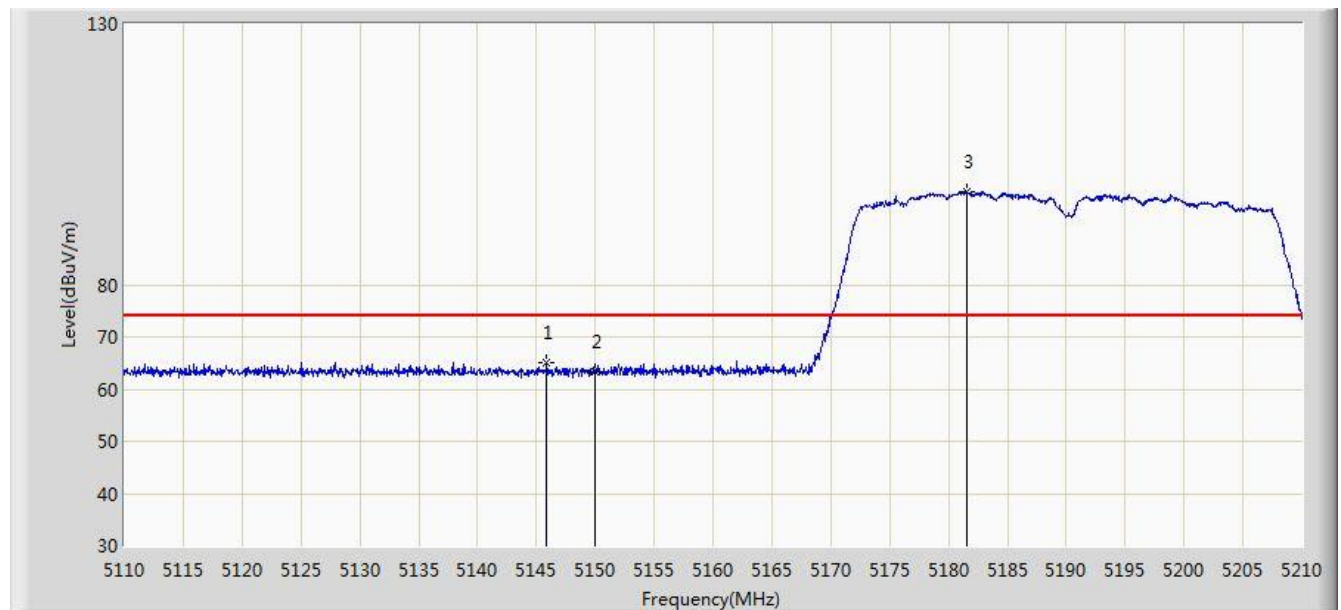


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5145.900        | 64.960                 | 25.514               | -9.040      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.193                 | 23.752               | -10.807     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.500        | 97.866                 | 58.501               | N/A         | N/A            | 39.366      | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:40 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 2 |                          |

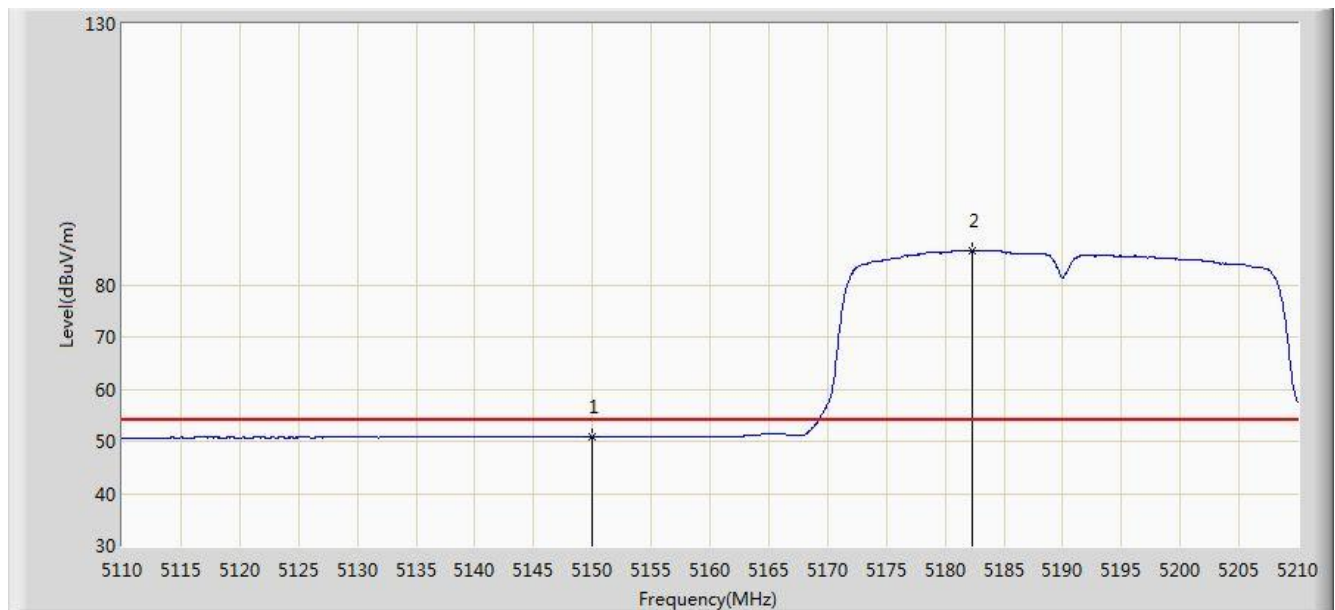


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.806                 | 11.365               | -3.194      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5182.250        | 86.503                 | 47.139               | N/A         | N/A            | 39.363      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:53 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 2 |                          |

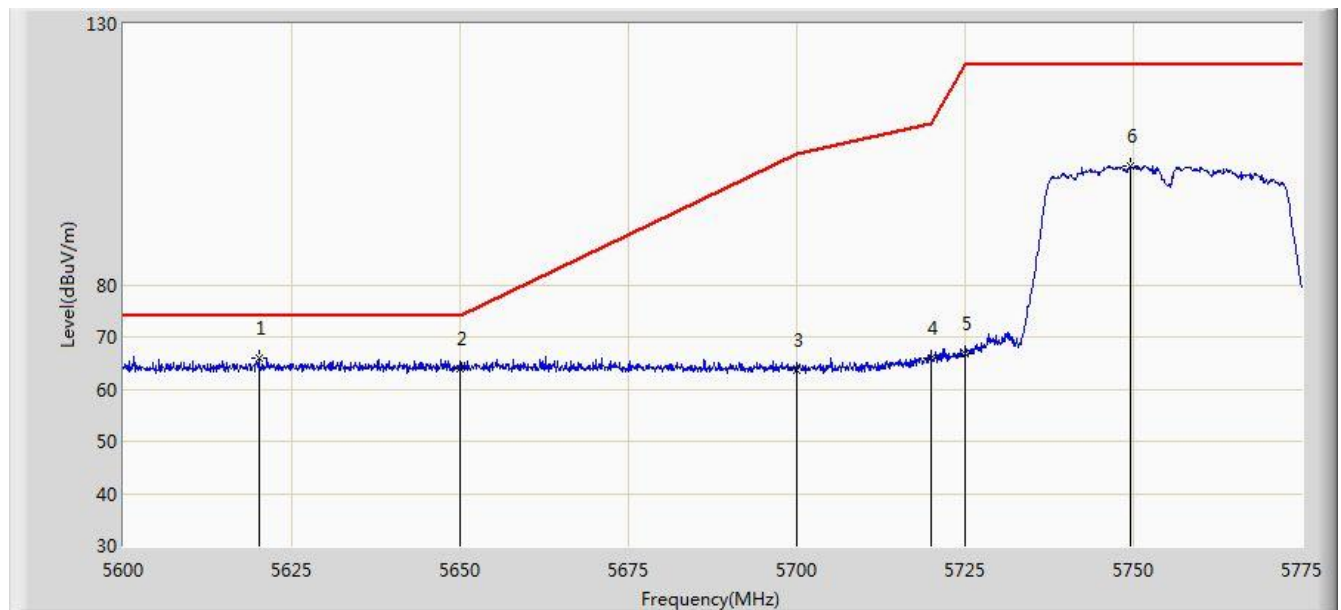


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5620.125        | 65.841                 | 25.970               | -8.159      | 74.000         | 39.871      | PK   |
| 2  |      |      | 5650.000        | 63.959                 | 24.030               | -10.041     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.619                 | 23.562               | -41.581     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 66.012                 | 25.871               | -44.788     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.956                 | 26.792               | -55.244     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5749.625        | 102.645                | 62.371               | N/A         | N/A            | 40.273      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:54 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz Ant 2 |                          |

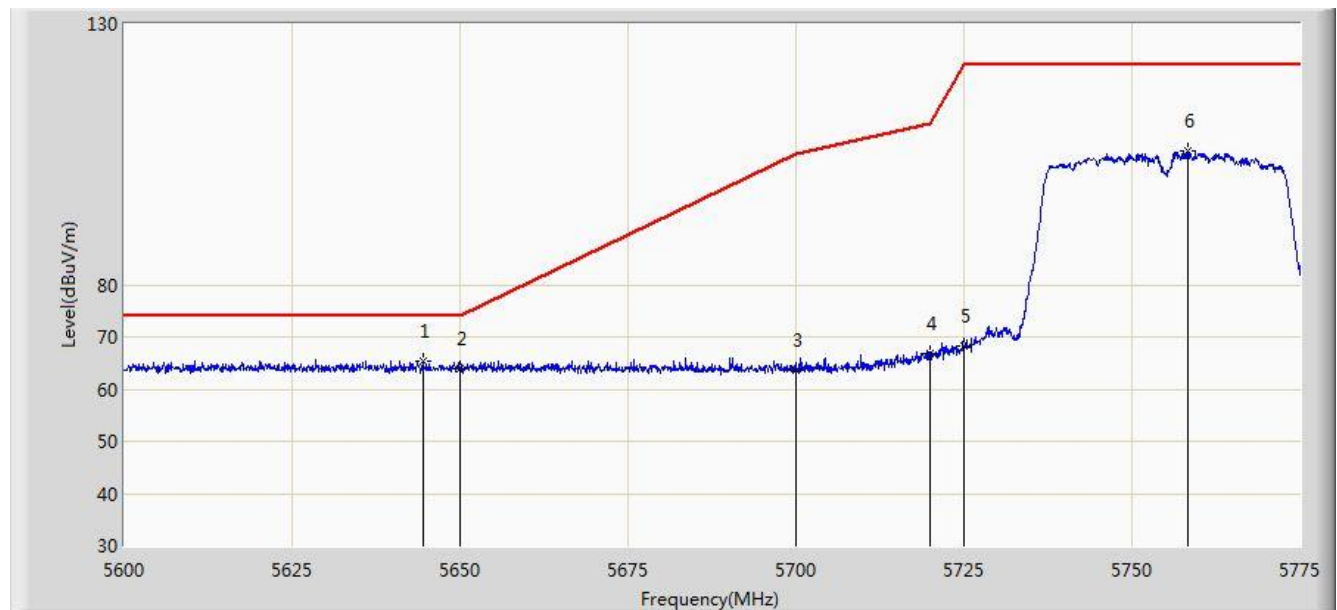


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5644.450        | 65.409                 | 25.492               | -8.591      | 74.000         | 39.917      | PK   |
| 2  |      |      | 5650.000        | 63.943                 | 24.014               | -10.057     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.514                 | 23.457               | -41.686     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 66.725                 | 26.584               | -44.075     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 68.289                 | 28.125               | -53.911     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5758.375        | 105.698                | 65.389               | N/A         | N/A            | 40.310      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:56 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 2 |                          |

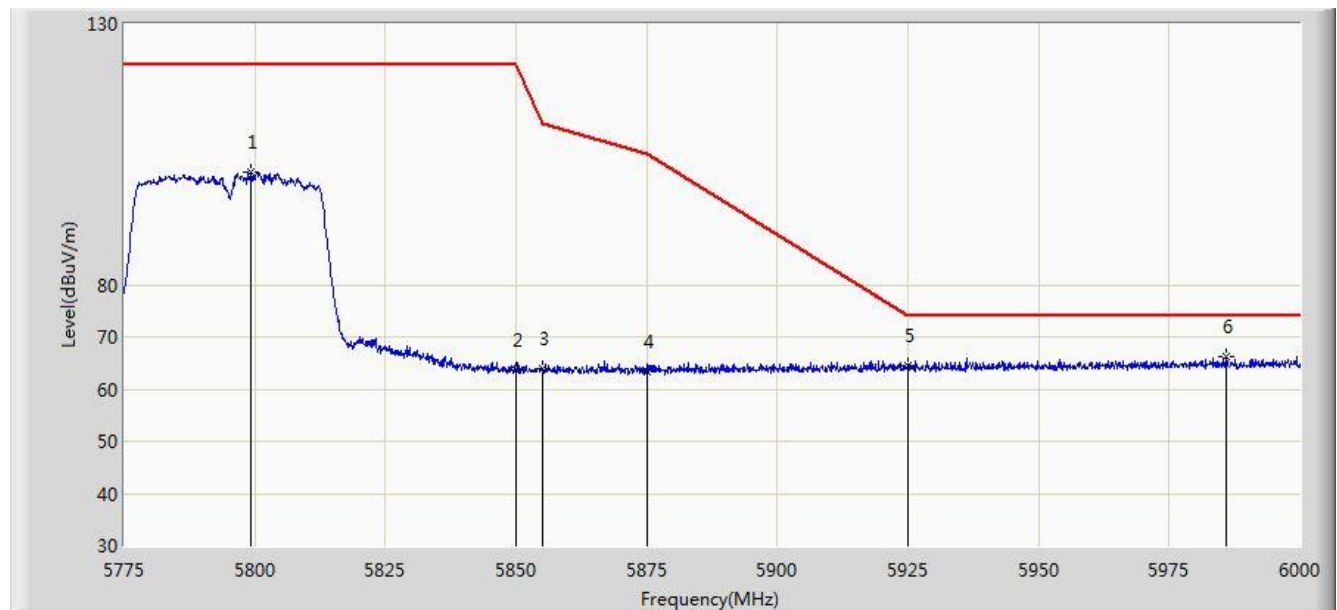


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5799.300        | 101.528                | 61.066               | N/A         | N/A            | 40.462      | PK   |
| 2  |      |      | 5850.000        | 63.485                 | 22.819               | -58.715     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.942                 | 23.264               | -46.858     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.358                 | 22.638               | -41.842     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.363                 | 23.571               | -9.637      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5985.825        | 66.306                 | 25.472               | -7.694      | 74.000         | 40.834      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 02:57 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 2 |                          |

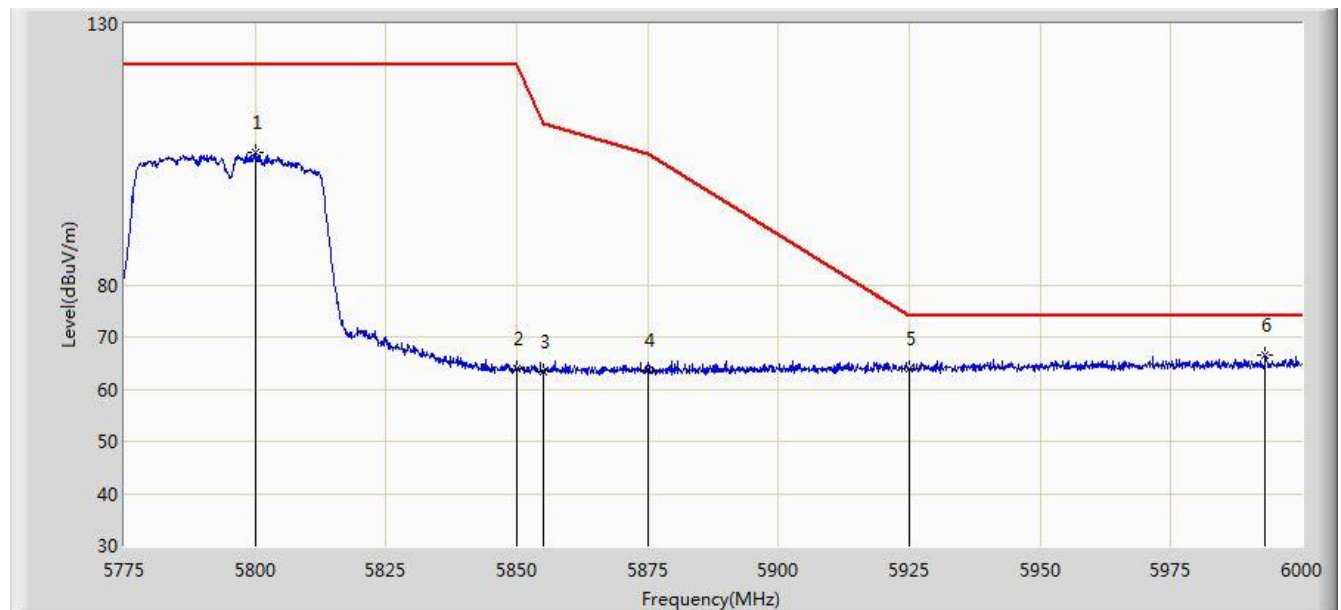


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5799.975        | 105.453                | 64.989               | N/A         | N/A            | 40.464      | PK   |
| 2  |      |      | 5850.000        | 63.997                 | 23.331               | -58.203     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.257                 | 22.579               | -47.543     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.625                 | 22.905               | -41.575     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.932                 | 23.140               | -10.068     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5993.025        | 66.577                 | 25.740               | -7.423      | 74.000         | 40.837      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 02:59 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 2 |                          |

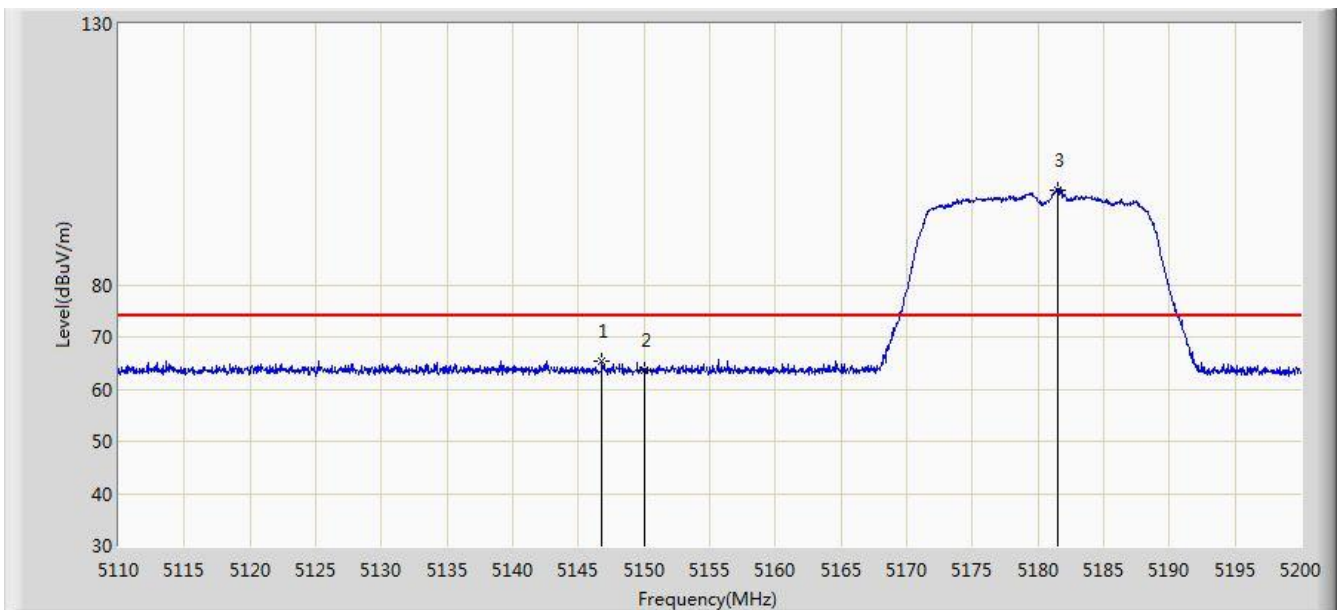


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.810        | 65.313                 | 25.867               | -8.687      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.643                 | 24.202               | -10.357     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.460        | 98.235                 | 58.869               | N/A         | N/A            | 39.366      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:01 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 2 |                          |

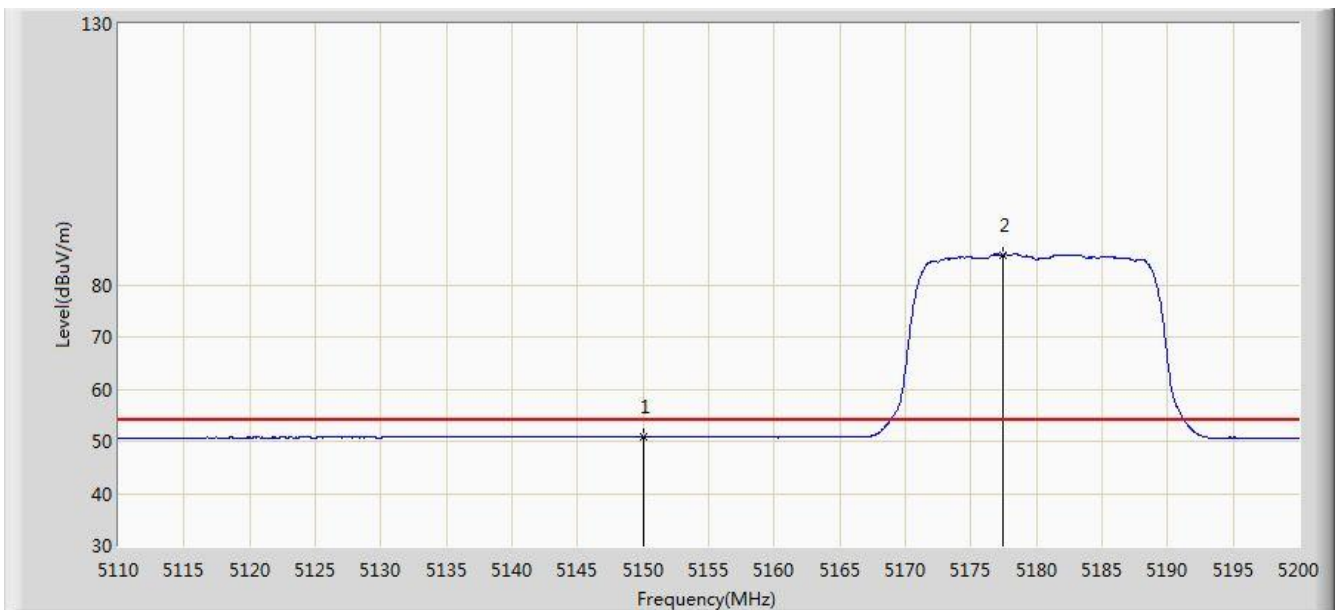


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.773                 | 11.332               | -3.227      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.410        | 85.753                 | 46.377               | N/A         | N/A            | 39.376      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:02 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 2 |                          |

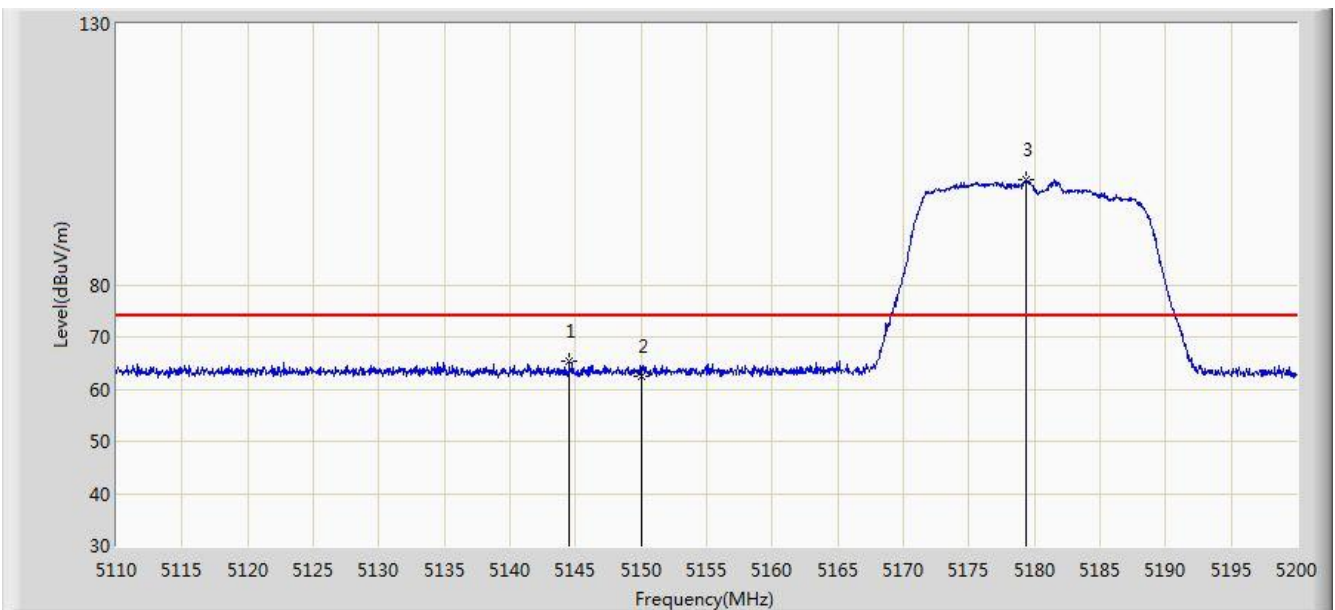


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5144.515        | 65.218                 | 25.772               | -8.782      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 62.482                 | 23.041               | -11.518     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5179.345        | 100.086                | 60.715               | N/A         | N/A            | 39.371      | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:03 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 2 |                          |

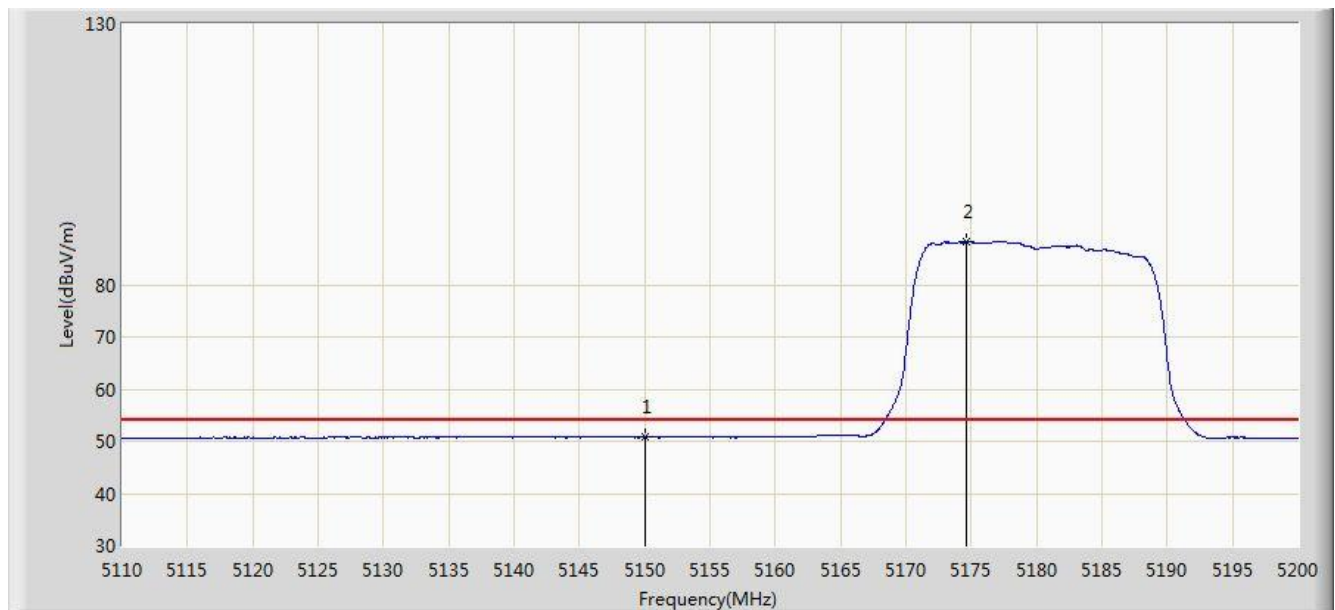


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.749                 | 11.308               | -3.251      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5174.575        | 88.242                 | 48.859               | N/A         | N/A            | 39.383      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:16 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 2 |                          |

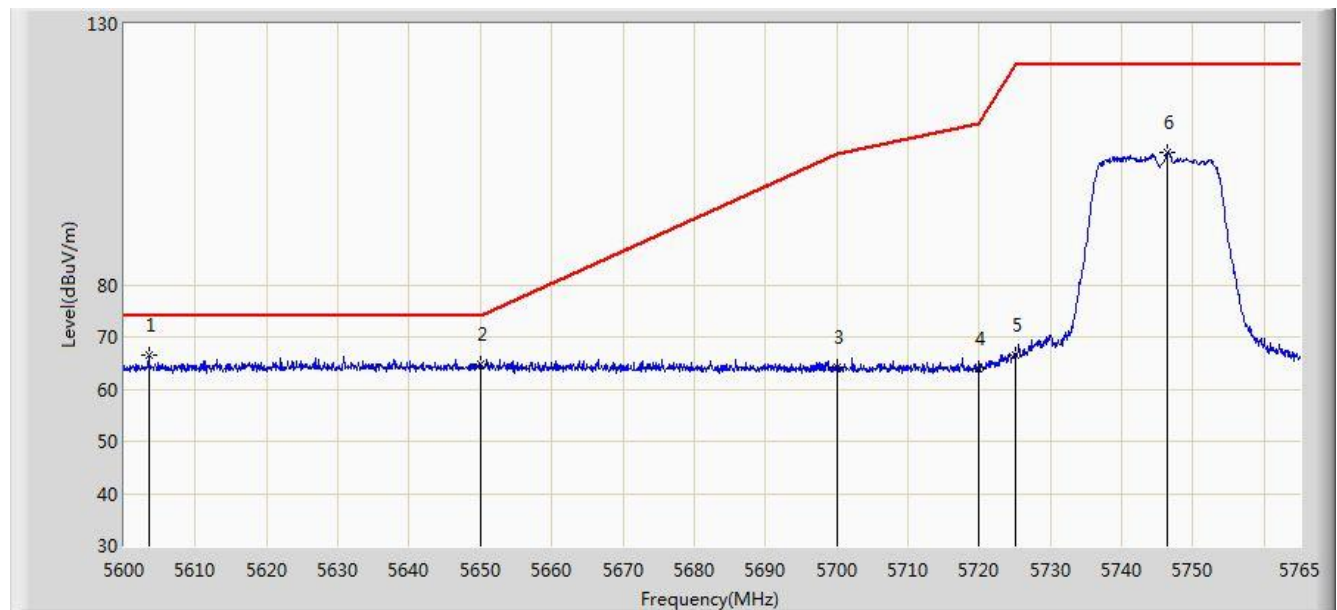


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5603.465        | 66.486                 | 26.643               | -7.514      | 74.000         | 39.843      | PK   |
| 2  |      |      | 5650.000        | 64.672                 | 24.743               | -9.328      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.162                 | 24.105               | -41.038     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.023                 | 23.882               | -46.777     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.604                 | 26.440               | -55.596     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.355        | 105.366                | 65.106               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:17 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 2 |                          |

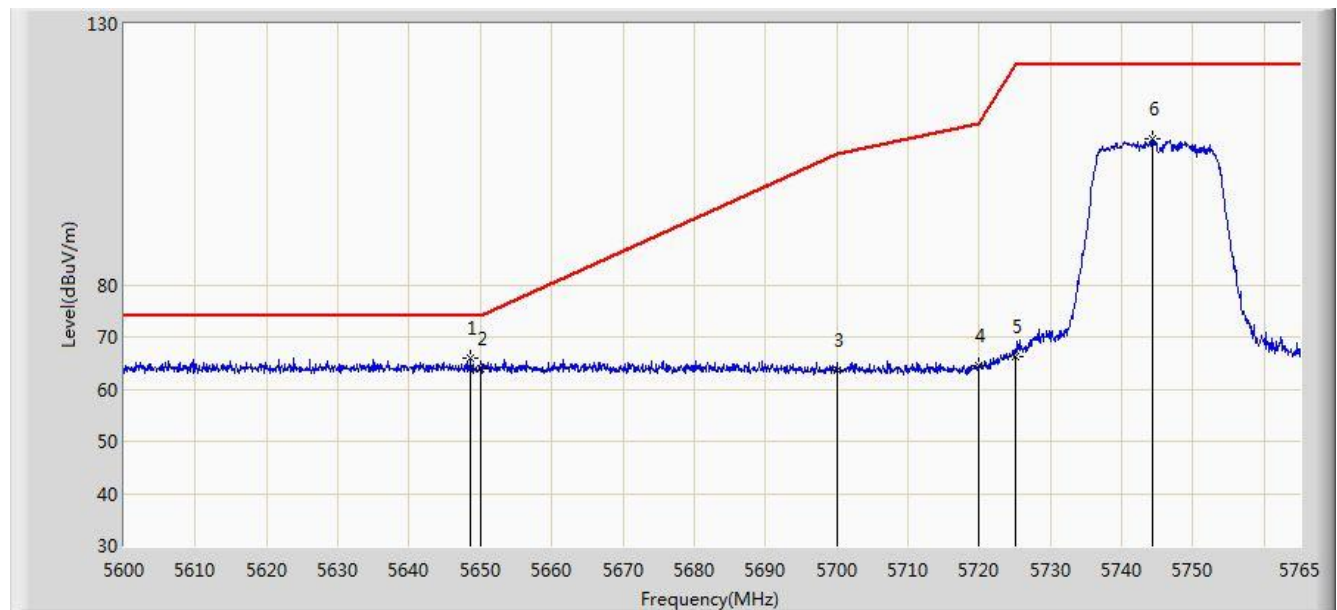


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5648.592        | 65.974                 | 26.048               | -8.026      | 74.000         | 39.926      | PK   |
| 2  |      |      | 5650.000        | 63.899                 | 23.970               | -10.101     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.749                 | 23.692               | -41.451     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.386                 | 24.245               | -46.414     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.371                 | 26.207               | -55.829     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5744.292        | 107.976                | 67.724               | N/A         | N/A            | 40.252      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:19 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 2 |                          |

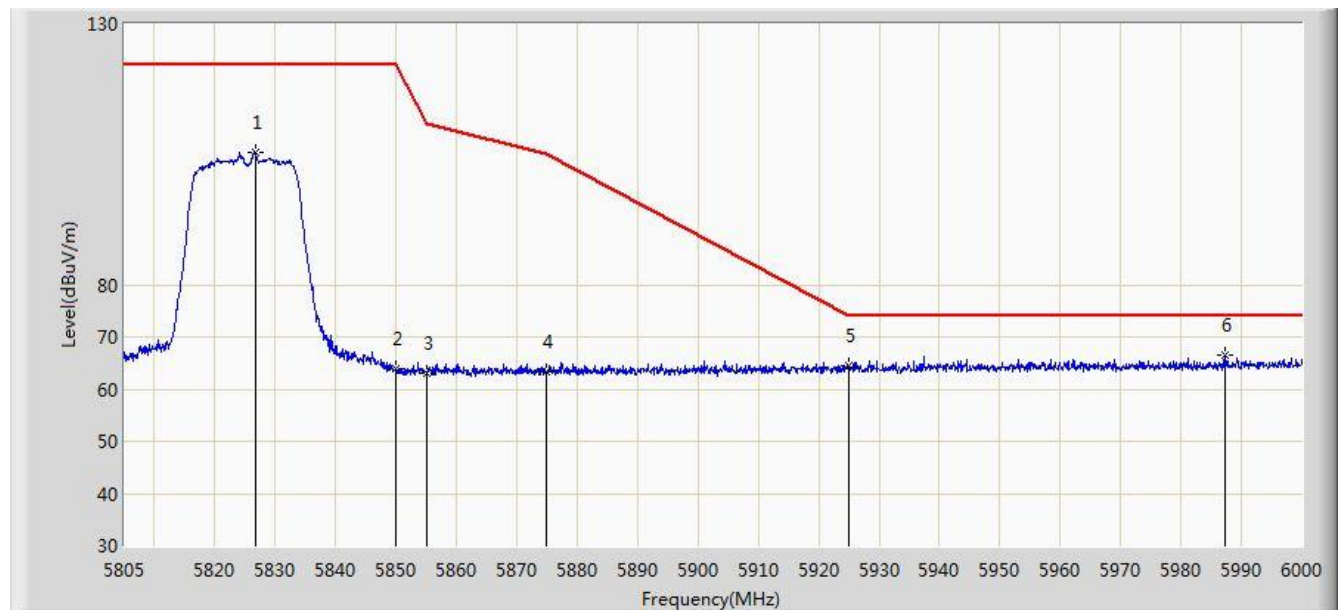


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.743        | 105.366                | 64.791               | N/A         | N/A            | 40.576      | PK   |
| 2  |      |      | 5850.000        | 63.990                 | 23.324               | -58.210     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 62.985                 | 22.307               | -47.815     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.339                 | 22.619               | -41.861     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.363                 | 23.571               | -9.637      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5987.325        | 66.638                 | 25.803               | -7.362      | 74.000         | 40.834      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 03:20 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz Ant 2 |                          |

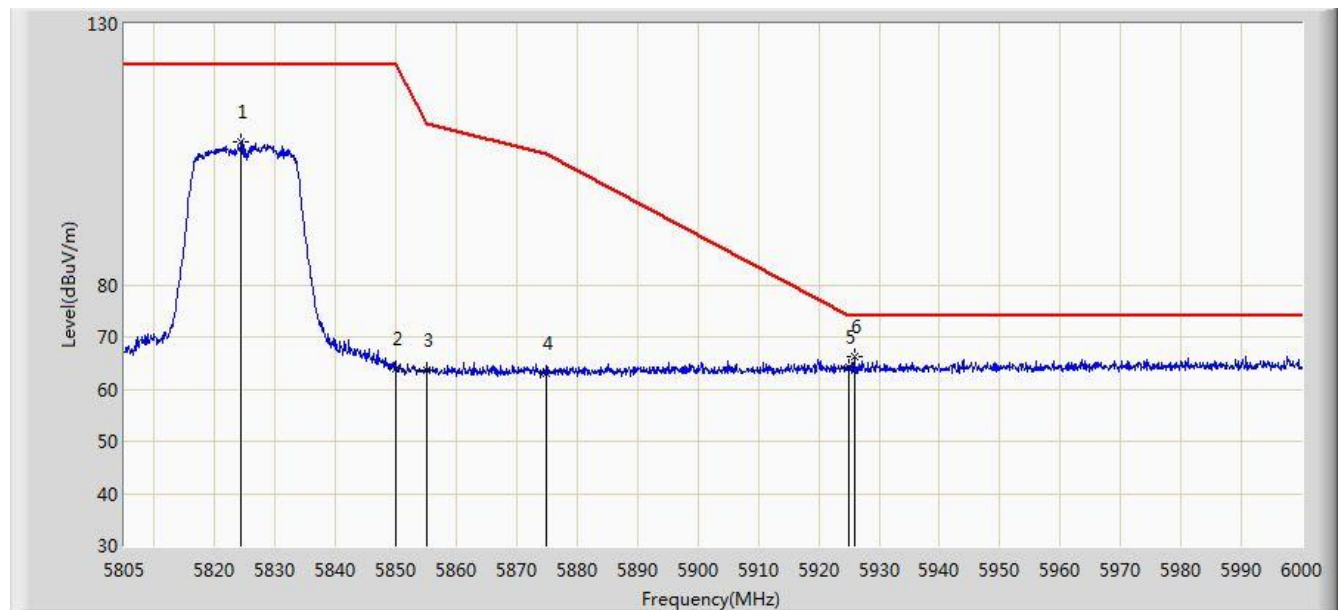


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5824.305        | 107.314                | 66.749               | N/A         | N/A            | 40.565      | PK   |
| 2  |      |      | 5850.000        | 63.977                 | 23.311               | -58.223     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.568                 | 22.890               | -47.232     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.122                 | 22.402               | -42.078     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.152                 | 23.360               | -9.848      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5925.900        | 66.131                 | 25.338               | -7.869      | 74.000         | 40.792      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 10:14 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 2 |                          |

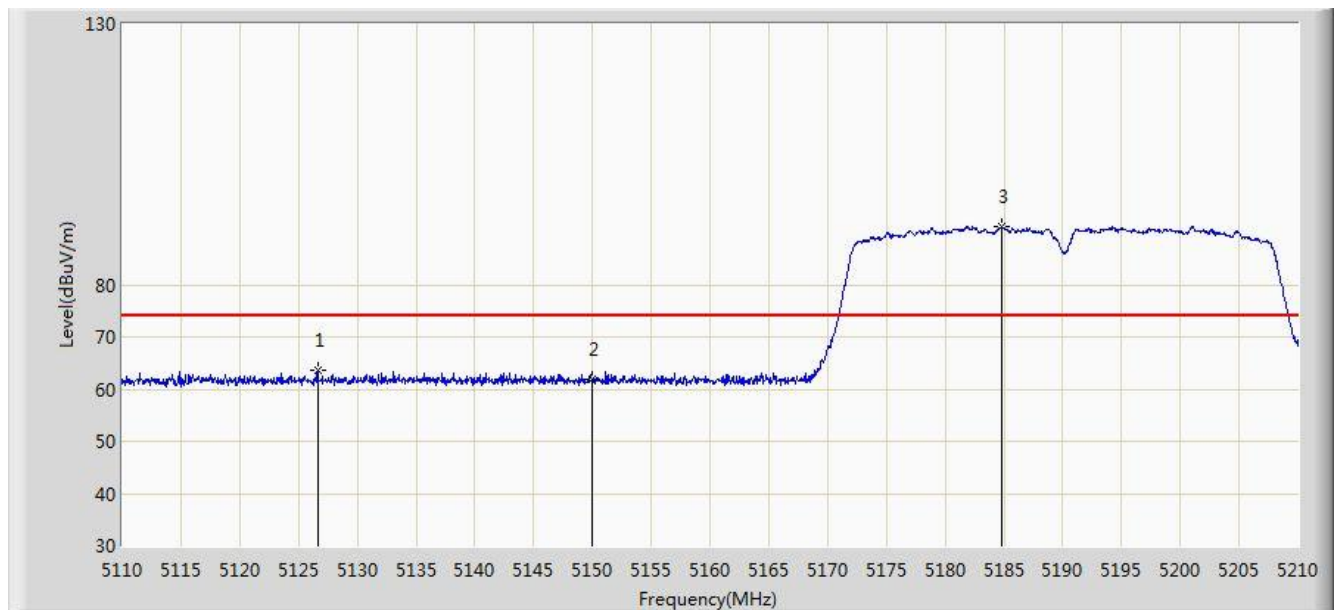


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5126.650        | 63.563                 | 24.118               | -10.437     | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 61.787                 | 22.346               | -12.213     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5184.750        | 91.157                 | 51.800               | N/A         | N/A            | 39.358      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 10:18 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 2 |                          |

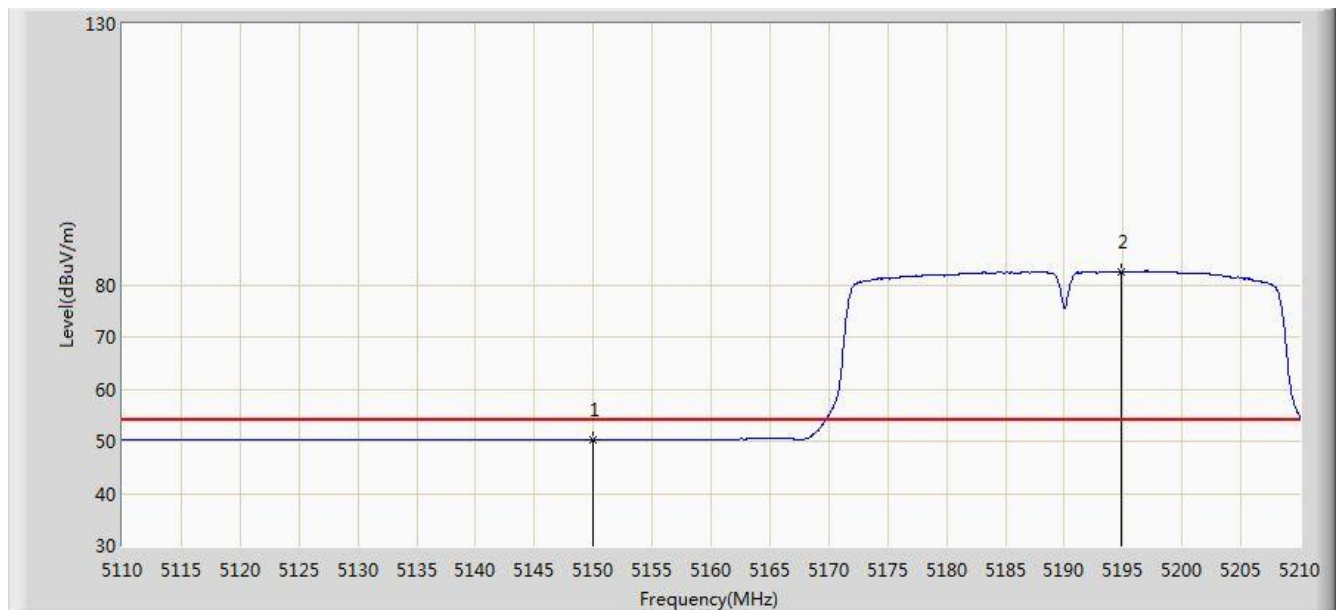


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.350                 | 10.909               | -3.650      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5194.850        | 82.428                 | 43.097               | N/A         | N/A            | 39.331      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 10:20 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 2 |                          |

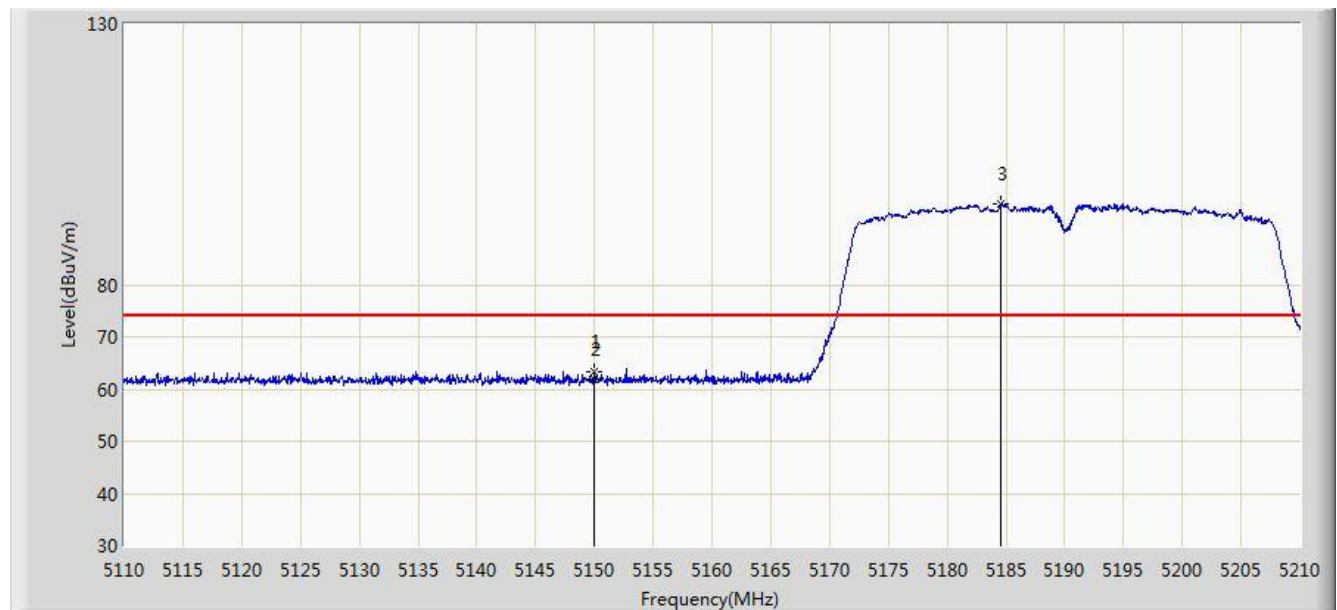


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.950        | 63.291                 | 23.849               | -10.709     | 74.000         | 39.442      | PK   |
| 2  |      |      | 5150.000        | 61.833                 | 22.392               | -12.167     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5184.600        | 95.420                 | 56.062               | N/A         | N/A            | 39.357      | PK   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 10:22 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz Ant 2 |                          |

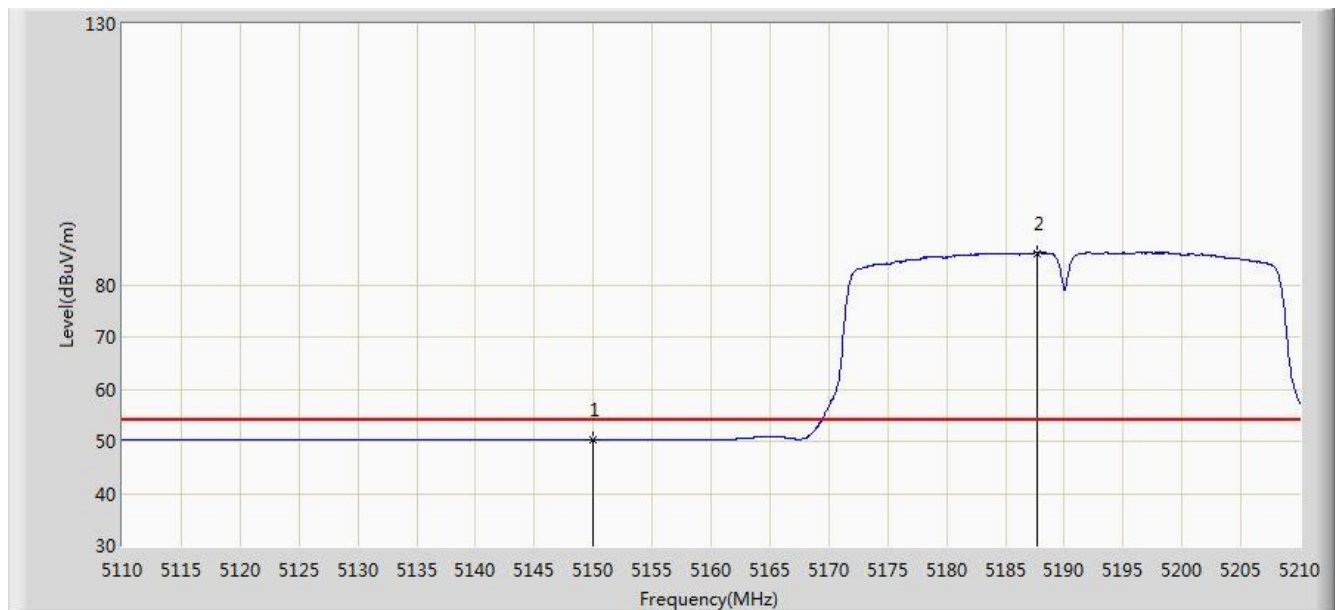


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.361                 | 10.920               | -3.639      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5187.700        | 86.065                 | 46.715               | N/A         | N/A            | 39.350      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:33 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 2 |                          |

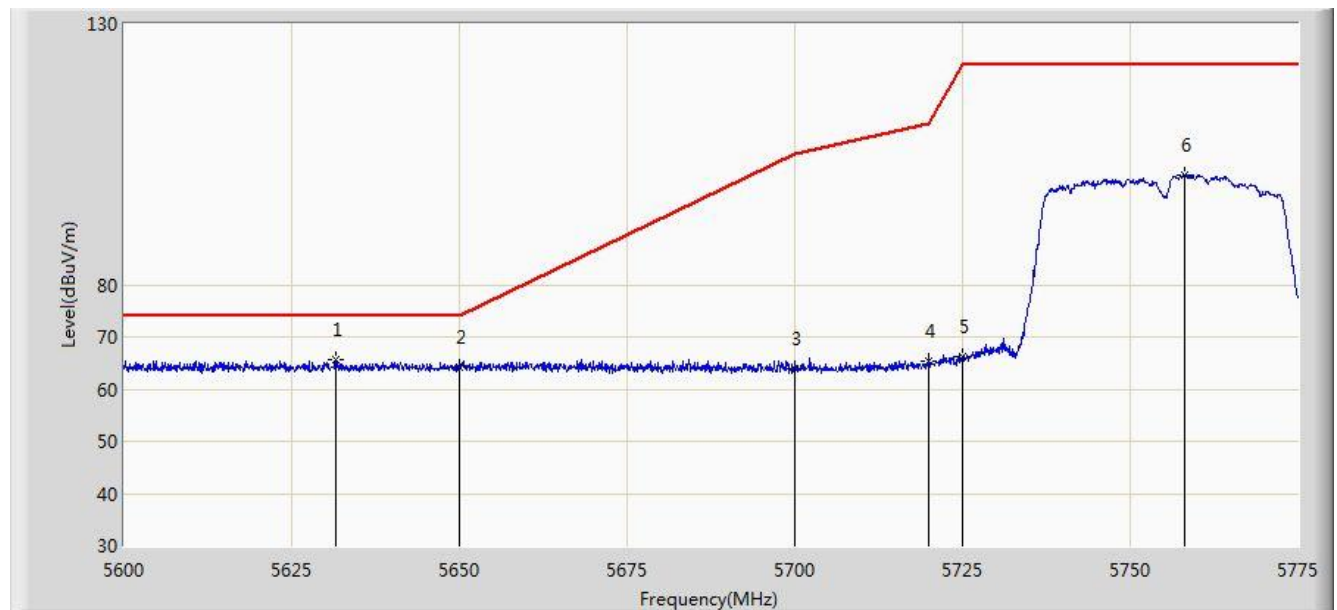


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5631.587        | 65.784                 | 25.892               | -8.216      | 74.000         | 39.893      | PK   |
| 2  |      |      | 5650.000        | 64.096                 | 24.167               | -9.904      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.983                 | 23.926               | -41.217     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.447                 | 25.306               | -45.353     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.119                 | 25.955               | -56.081     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5758.200        | 101.140                | 60.831               | N/A         | N/A            | 40.308      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:35 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz Ant 2 |                          |

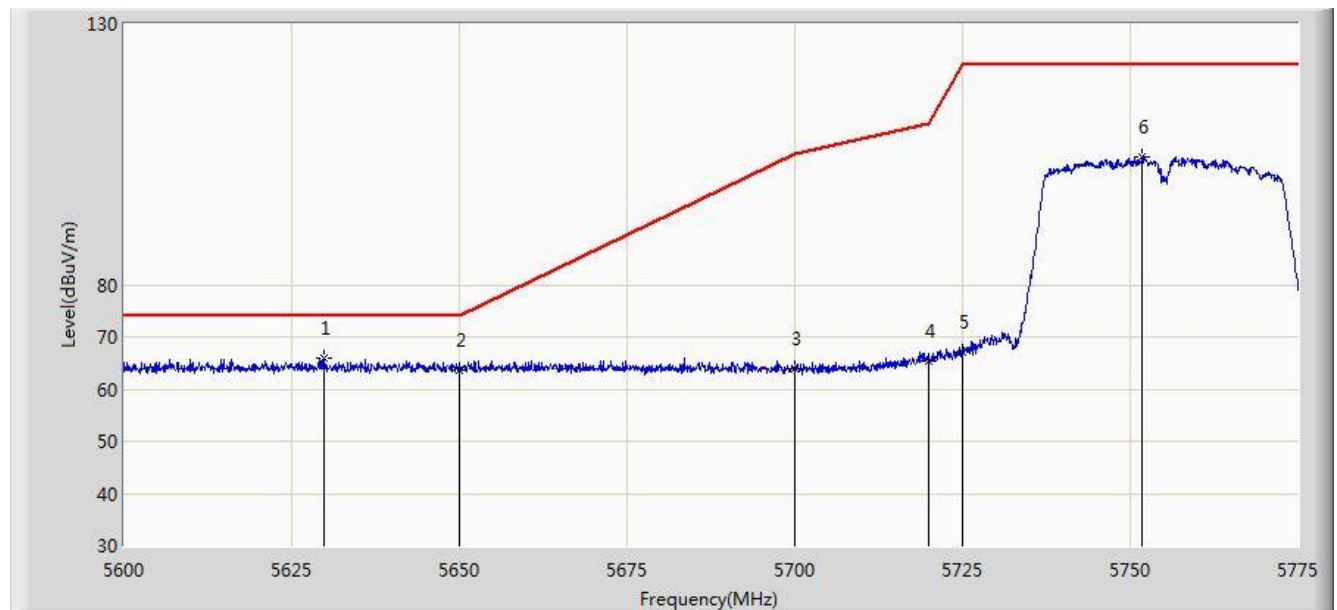


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5629.925        | 65.817                 | 25.928               | -8.183      | 74.000         | 39.889      | PK   |
| 2  |      |      | 5650.000        | 63.653                 | 23.724               | -10.347     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.846                 | 23.789               | -41.354     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.270                 | 25.129               | -45.530     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.088                 | 26.924               | -55.112     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5751.812        | 104.422                | 64.139               | N/A         | N/A            | 40.283      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:36 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 2 |                          |

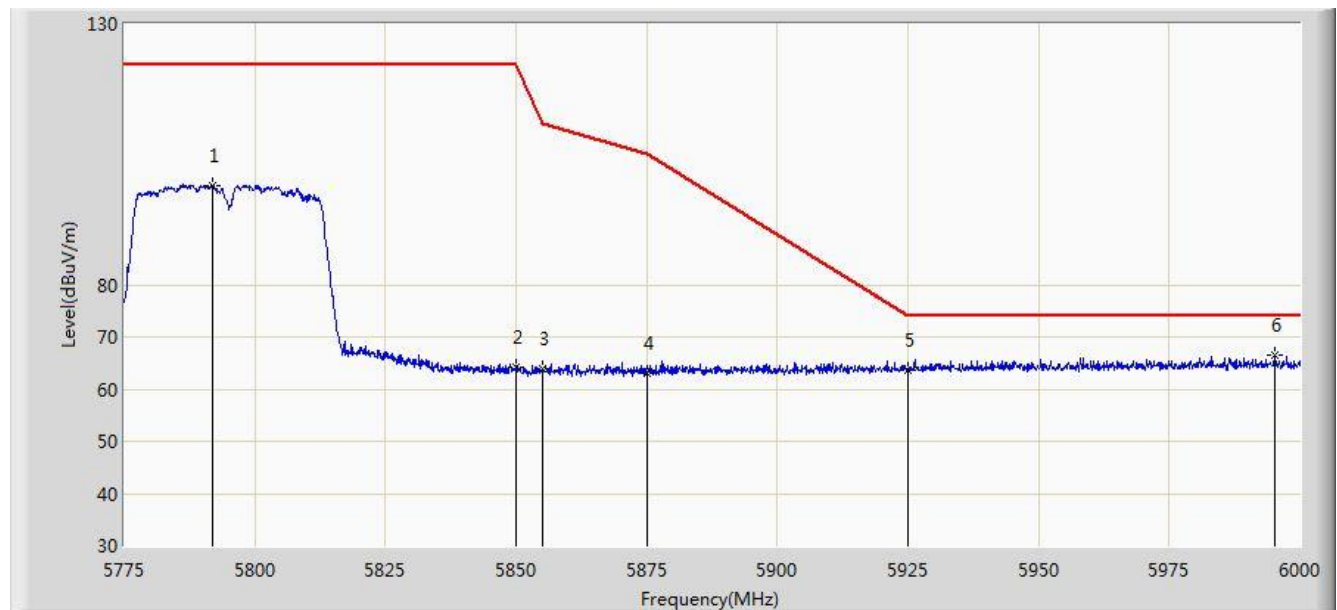


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5791.987        | 99.101                 | 58.668               | N/A         | N/A            | 40.433      | PK   |
| 2  |      |      | 5850.000        | 64.231                 | 23.565               | -57.969     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.970                 | 23.292               | -46.830     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.123                 | 22.403               | -42.077     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.649                 | 22.857               | -10.351     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5995.275        | 66.511                 | 25.673               | -7.489      | 74.000         | 40.838      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:37 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz Ant 2 |                          |

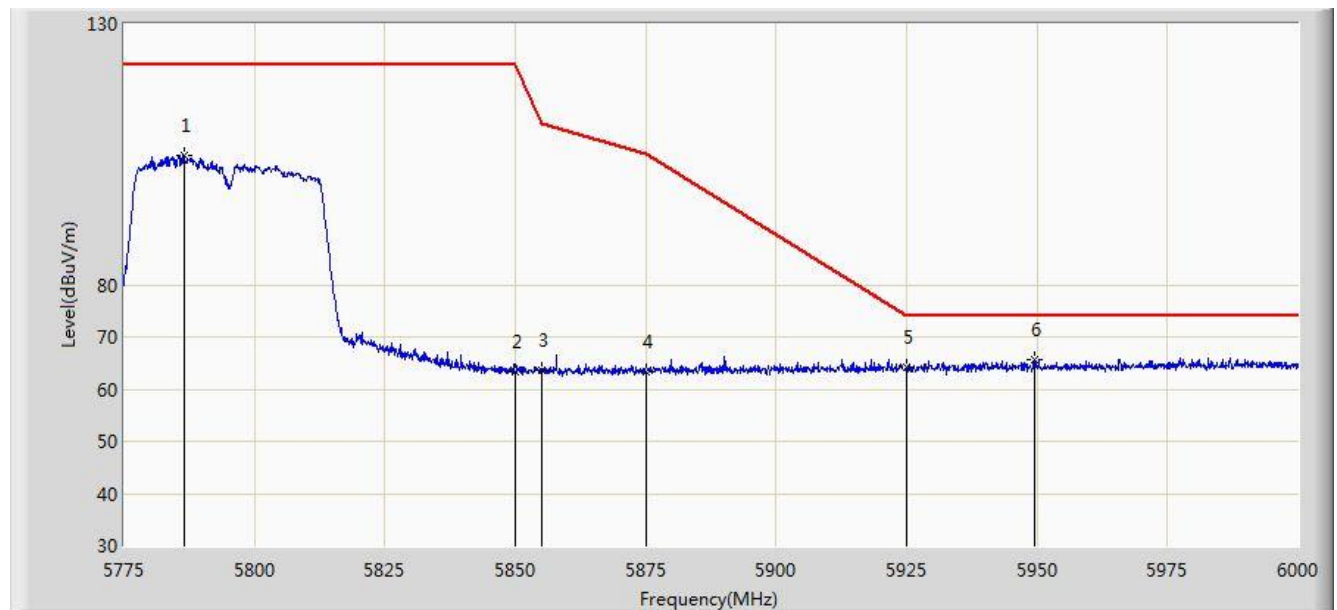


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5786.587        | 104.846                | 64.432               | N/A         | N/A            | 40.414      | PK   |
| 2  |      |      | 5850.000        | 63.226                 | 22.560               | -58.974     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.649                 | 22.971               | -47.151     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.197                 | 22.477               | -42.003     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.085                 | 23.293               | -9.915      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5949.600        | 65.624                 | 24.808               | -8.376      | 74.000         | 40.816      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:38 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 2 |                          |

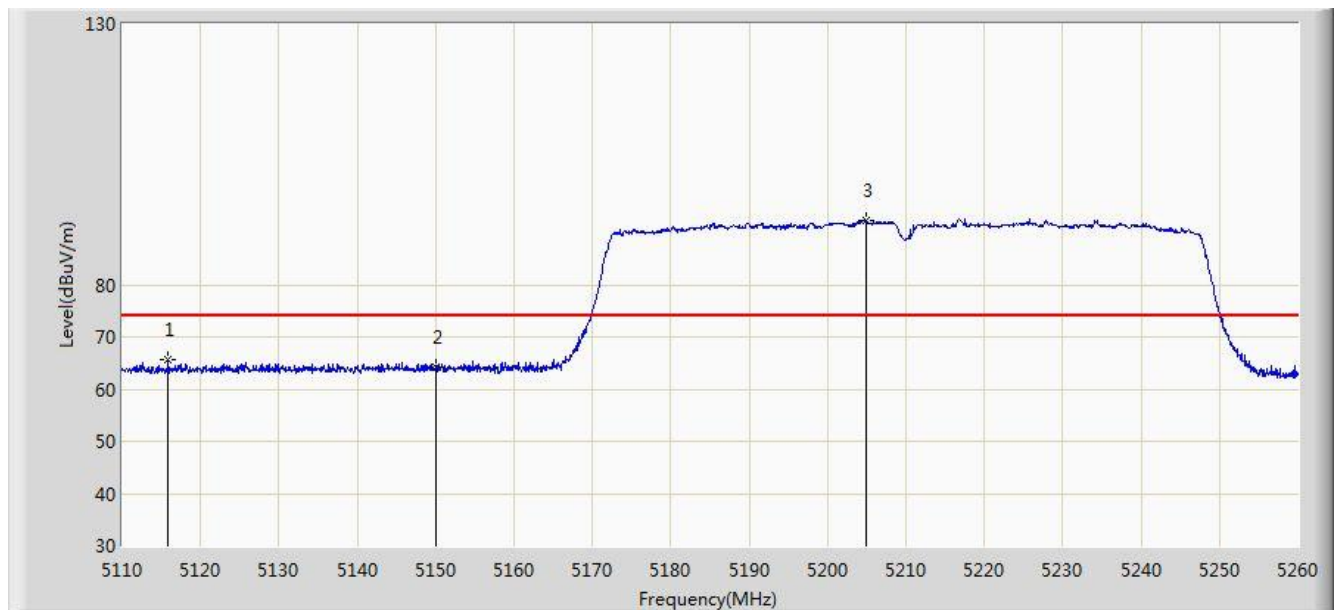


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5115.850        | 65.737                 | 26.292               | -8.263      | 74.000         | 39.444      | PK   |
| 2  |      |      | 5150.000        | 64.126                 | 24.685               | -9.874      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5204.875        | 92.358                 | 53.050               | N/A         | N/A            | 39.307      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:41 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 2 |                          |

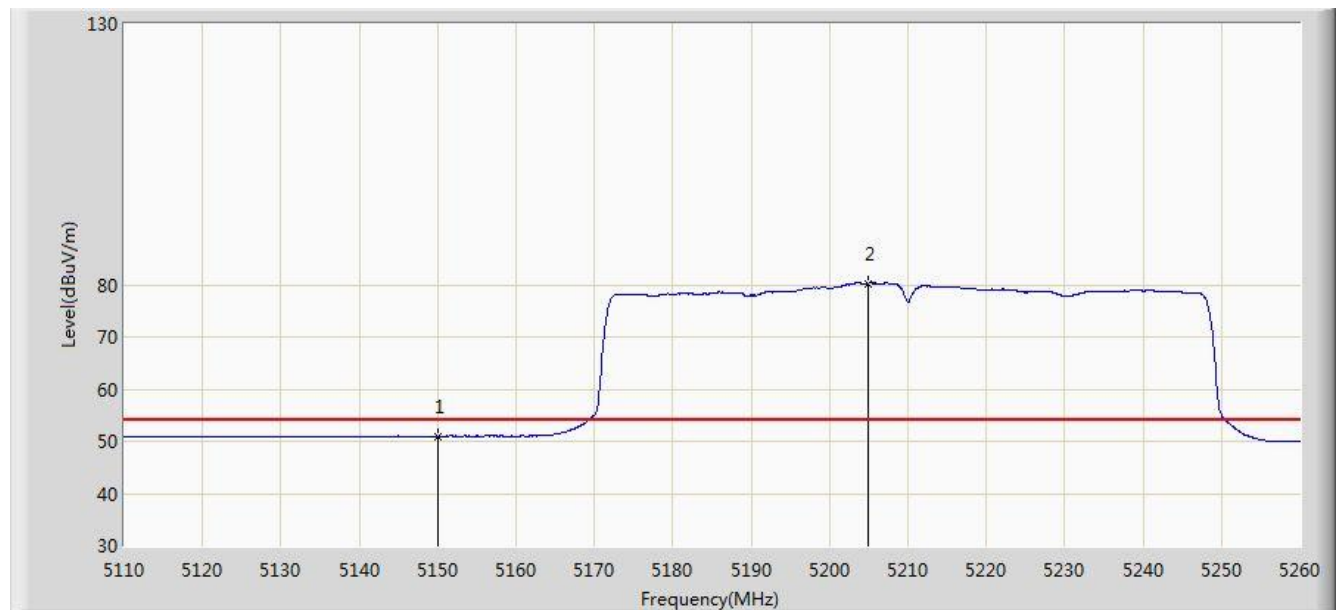


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.952                 | 11.511               | -3.048      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5204.875        | 80.264                 | 40.956               | N/A         | N/A            | 39.307      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:41 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 2 |                          |

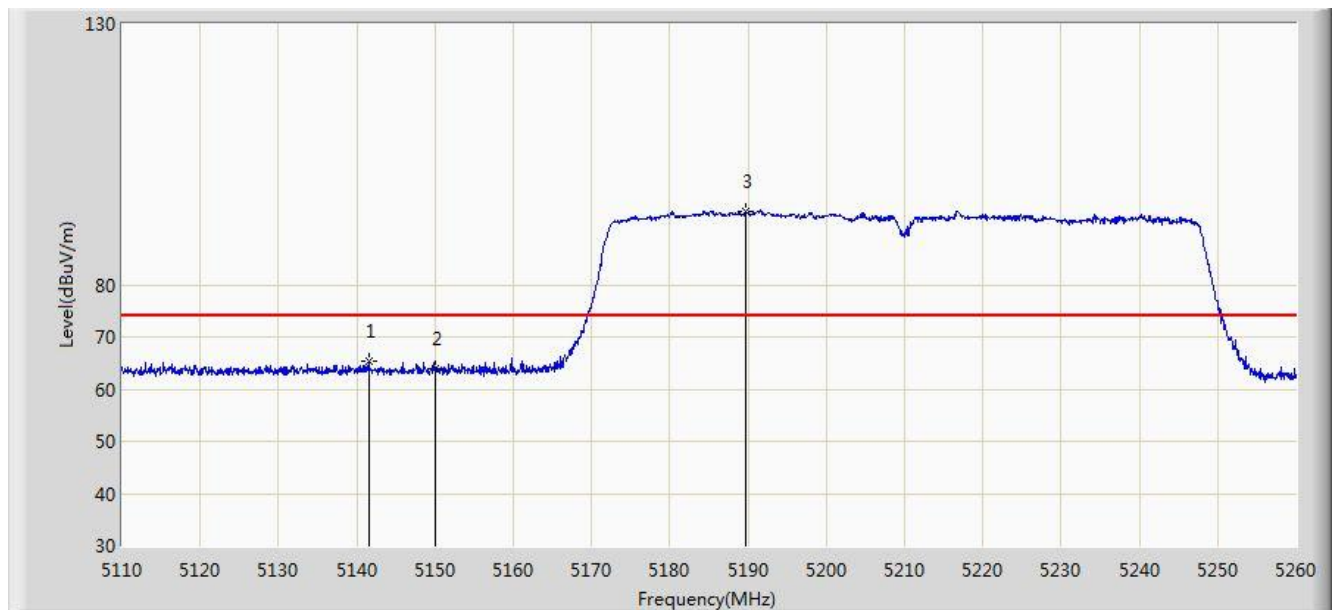


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5141.500        | 65.258                 | 25.812               | -8.742      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 64.036                 | 24.595               | -9.964      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5189.725        | 94.157                 | 54.813               | N/A         | N/A            | 39.345      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 20:42 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz Ant 2 |                          |

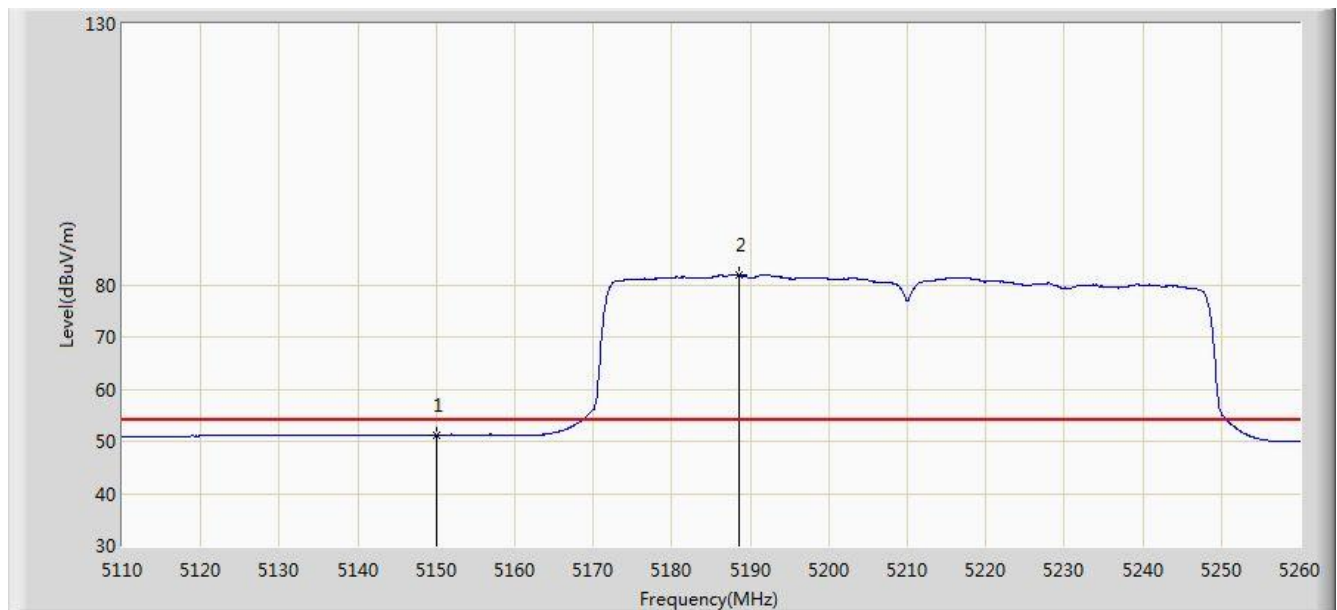


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.222                 | 11.781               | -2.778      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5188.525        | 81.846                 | 42.498               | N/A         | N/A            | 39.348      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 21:13 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 2 |                          |

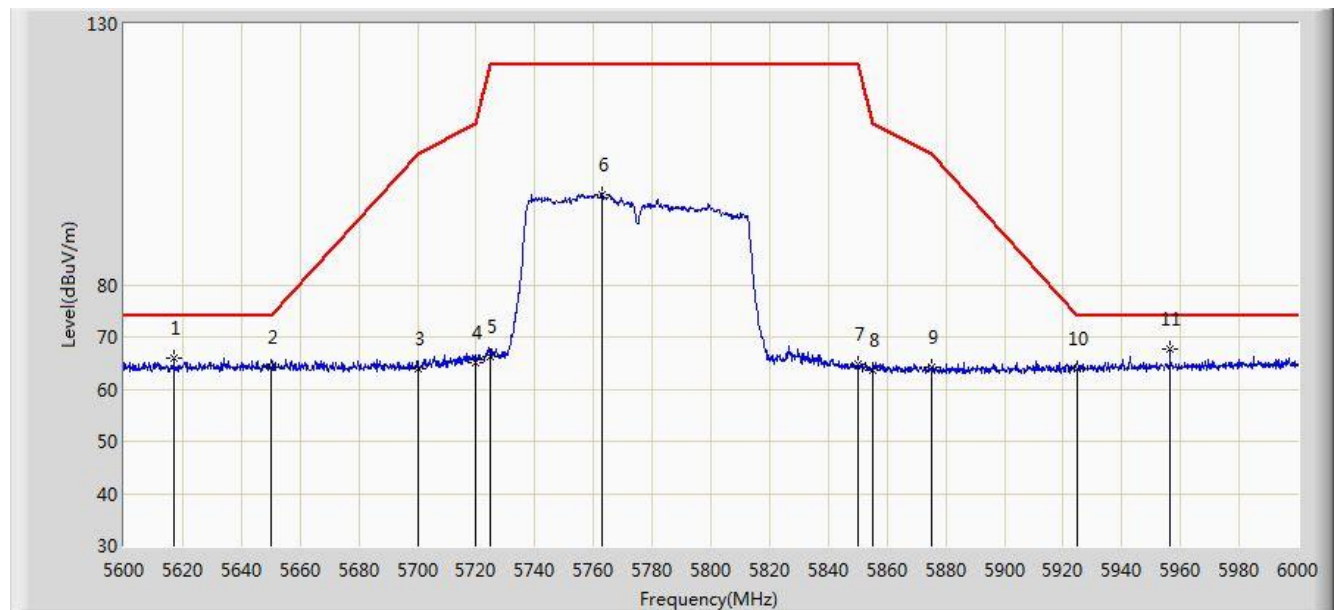


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5617.000        | 65.910                 | 26.045               | -8.090      | 74.000         | 39.865      | PK   |
| 2  |      |      | 5650.000        | 64.154                 | 24.225               | -9.846      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.887                 | 23.830               | -41.313     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.076                 | 24.935               | -45.724     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.296                 | 26.132               | -55.904     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5762.800        | 97.242                 | 56.916               | N/A         | N/A            | 40.326      | PK   |
| 7  |      |      | 5850.000        | 64.750                 | 24.084               | -57.450     | 122.200        | 40.666      | PK   |
| 8  |      |      | 5855.000        | 63.702                 | 23.024               | -47.098     | 110.800        | 40.678      | PK   |
| 9  |      |      | 5875.000        | 64.243                 | 23.523               | -40.957     | 105.200        | 40.720      | PK   |
| 10 |      |      | 5925.000        | 63.998                 | 23.206               | -10.002     | 74.000         | 40.792      | PK   |
| 11 |      | *    | 5956.400        | 67.634                 | 26.814               | -6.366      | 74.000         | 40.820      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 21:15 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz Ant 2 |                          |

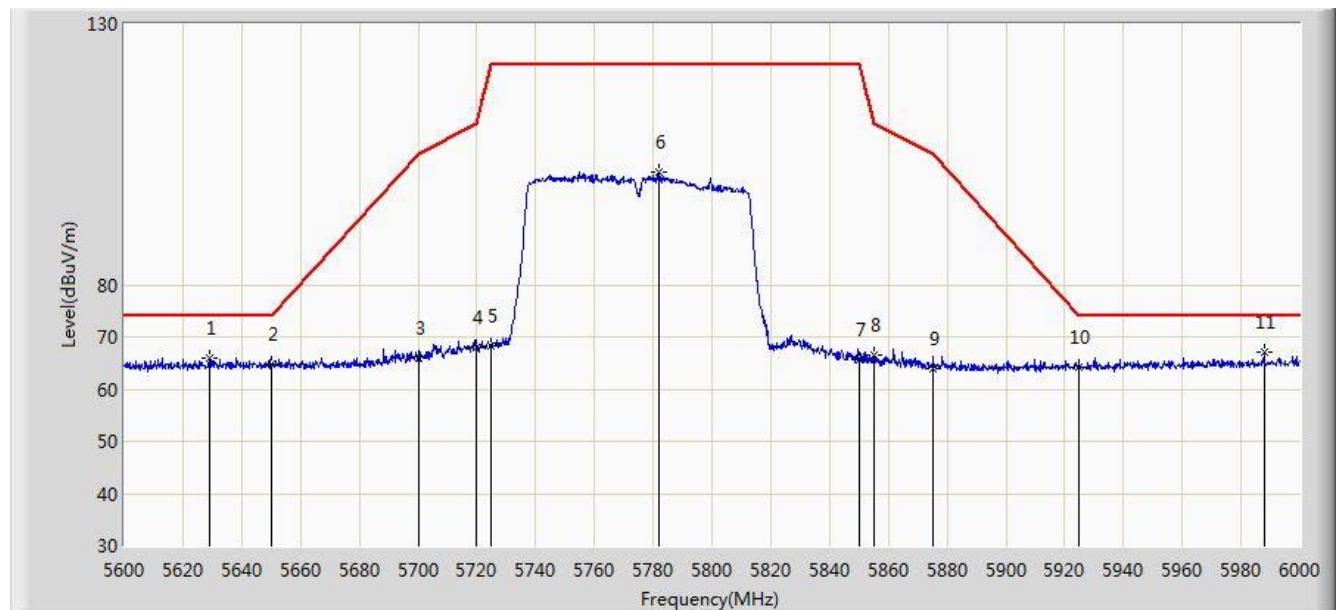


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5629.000        | 65.909                 | 26.021               | -8.091      | 74.000         | 39.888      | PK   |
| 2  |      |      | 5650.000        | 64.891                 | 24.962               | -9.109      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 65.810                 | 25.753               | -39.390     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 67.850                 | 27.709               | -42.950     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 68.211                 | 28.047               | -53.989     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5781.800        | 101.661                | 61.265               | N/A         | N/A            | 40.396      | PK   |
| 7  |      |      | 5850.000        | 65.734                 | 25.068               | -56.466     | 122.200        | 40.666      | PK   |
| 8  |      |      | 5855.000        | 66.381                 | 25.703               | -44.419     | 110.800        | 40.678      | PK   |
| 9  |      |      | 5875.000        | 63.927                 | 23.207               | -41.273     | 105.200        | 40.720      | PK   |
| 10 |      |      | 5925.000        | 64.210                 | 23.418               | -9.790      | 74.000         | 40.792      | PK   |
| 11 |      | *    | 5987.800        | 67.005                 | 26.170               | -6.995      | 74.000         | 40.835      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:17 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 3 |                          |

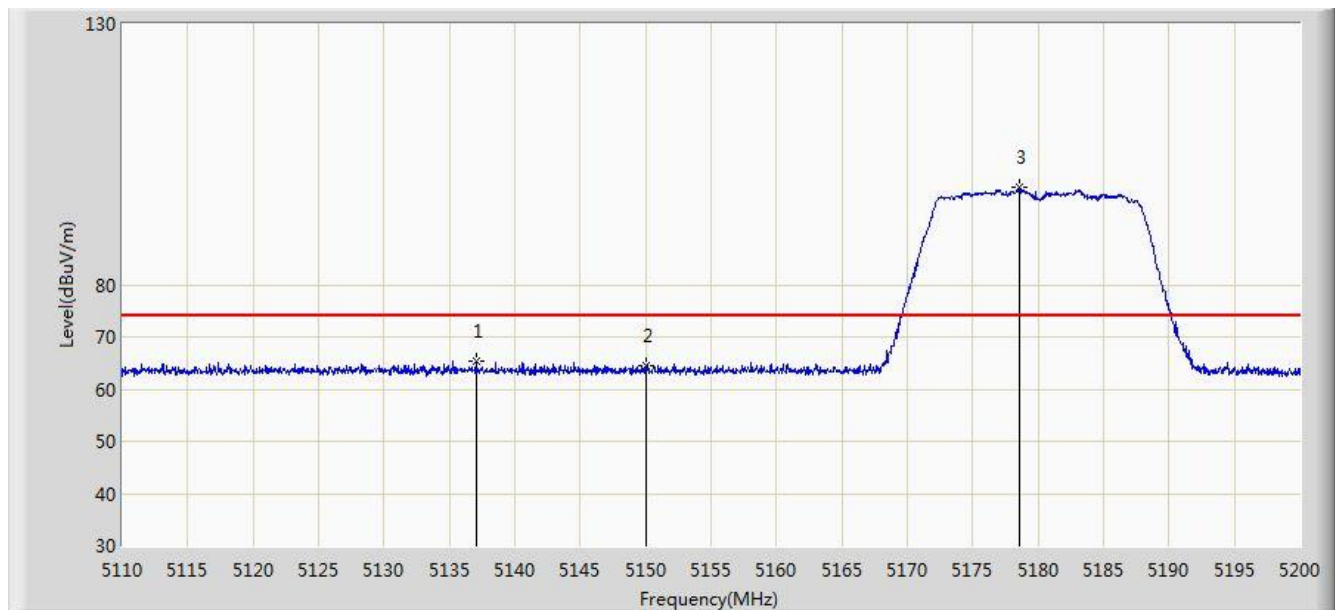


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5137.045        | 65.249                 | 25.804               | -8.751      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 64.439                 | 24.998               | -9.561      | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5178.625        | 98.765                 | 59.392               | N/A         | N/A            | 39.373      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:20 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 3 |                          |

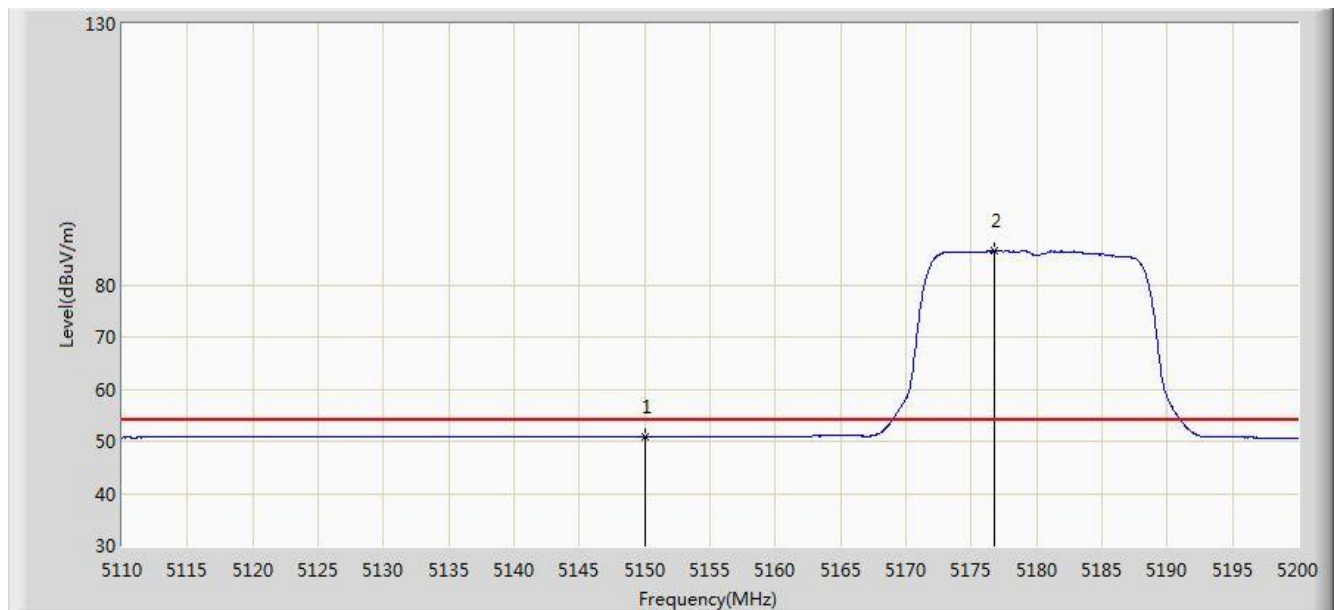


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.863                 | 11.422               | -3.137      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5176.735        | 86.424                 | 47.047               | N/A         | N/A            | 39.378      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:20 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 3 |                          |

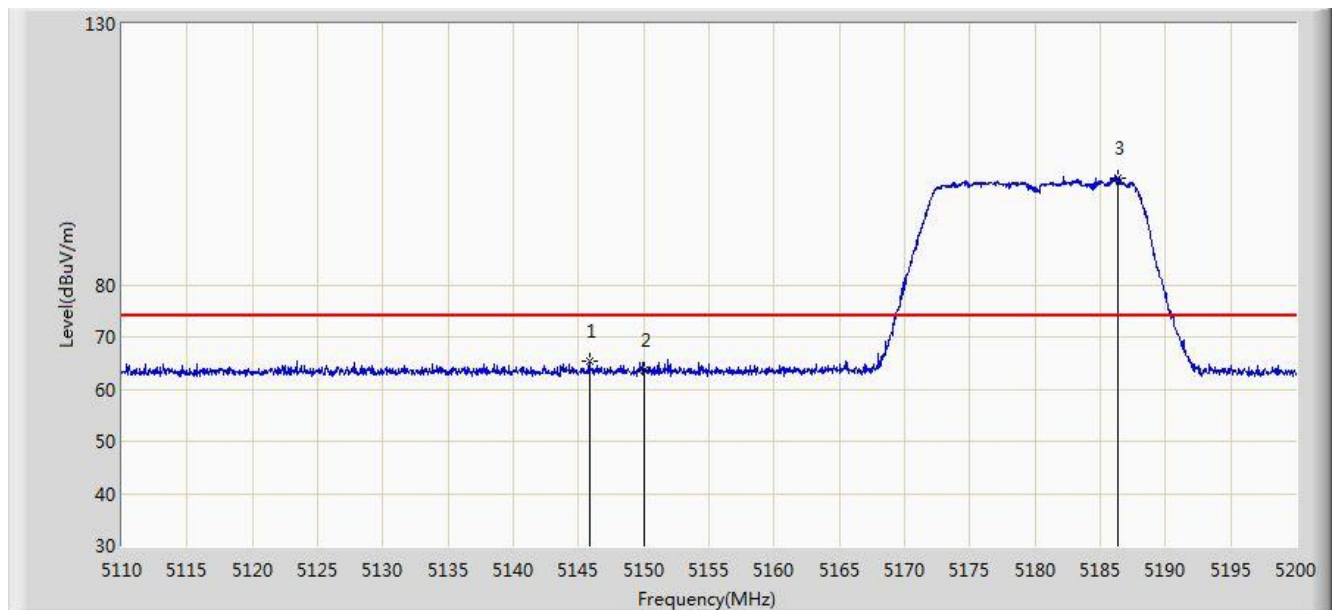


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5145.820        | 65.375                 | 25.929               | -8.625      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.586                 | 24.145               | -10.414     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5186.365        | 100.417                | 61.064               | N/A         | N/A            | 39.353      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:21 |
| Limit: FCC_Part15.209_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5180MHz Ant 3 |                          |

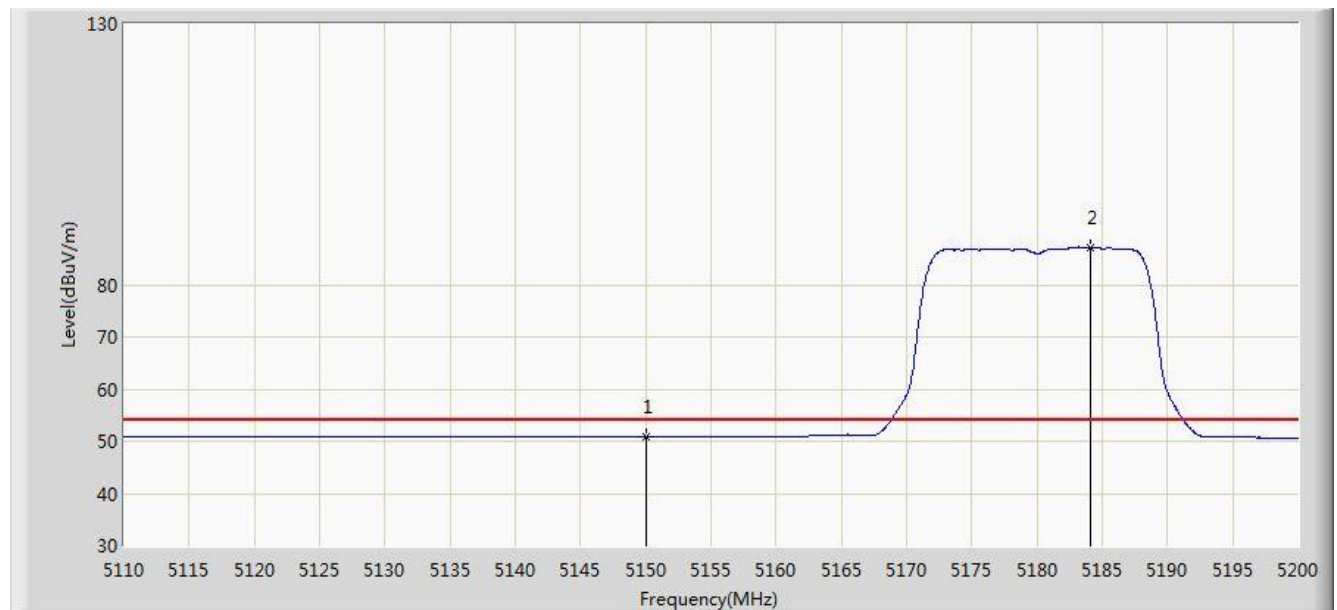


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.887                 | 11.446               | -3.113      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5184.115        | 87.100                 | 47.741               | N/A         | N/A            | 39.359      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:46 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 3 |                          |

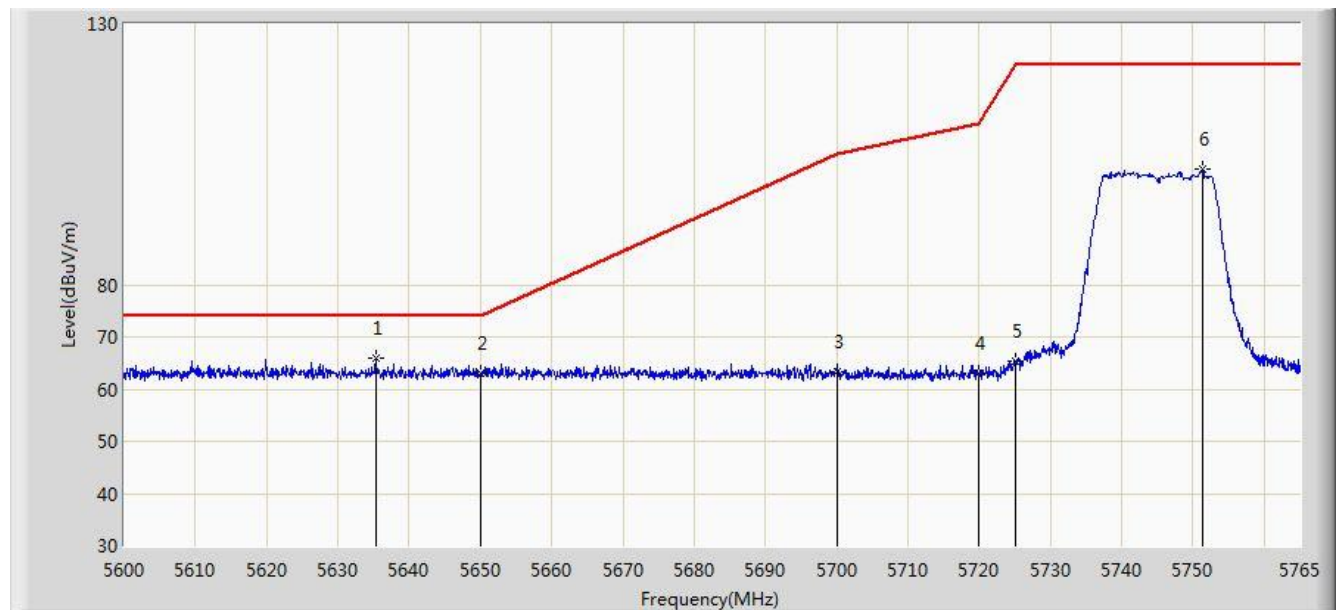


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5635.310        | 65.800                 | 25.901               | -8.200      | 74.000         | 39.899      | PK   |
| 2  |      |      | 5650.000        | 62.959                 | 23.030               | -11.041     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.364                 | 23.307               | -41.836     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 62.941                 | 22.800               | -47.859     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 65.347                 | 25.183               | -56.853     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5751.388        | 102.163                | 61.882               | N/A         | N/A            | 40.281      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:48 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5745MHz Ant 3 |                          |

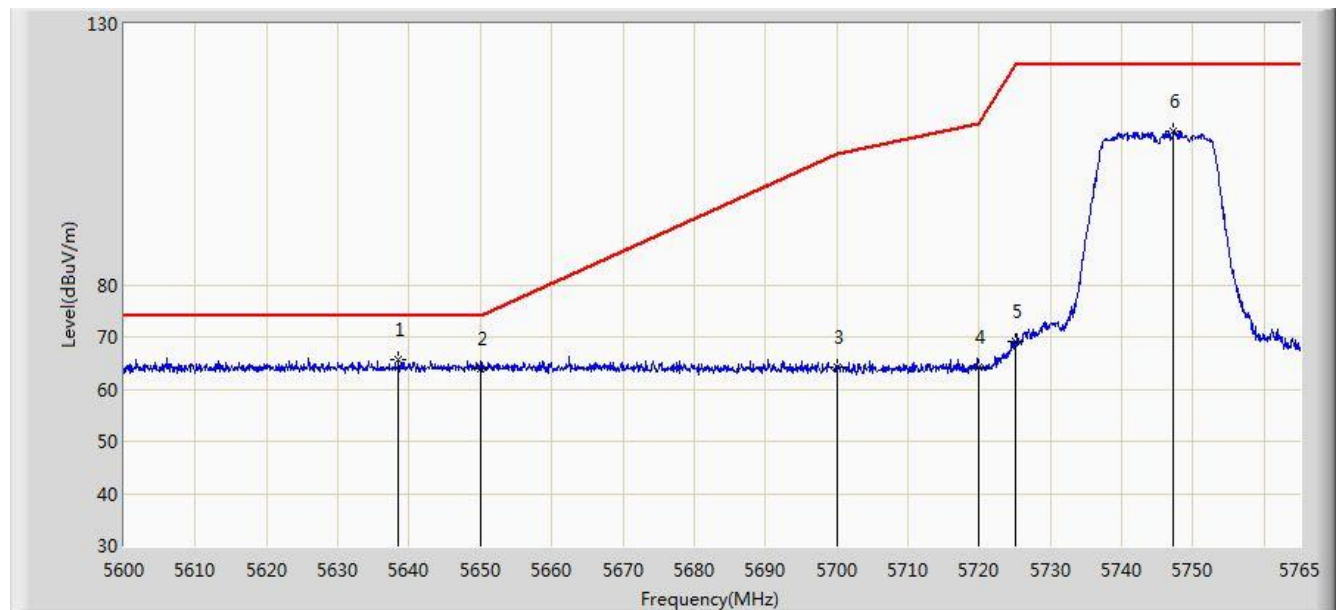


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5638.527        | 65.579                 | 25.674               | -8.421      | 74.000         | 39.906      | PK   |
| 2  |      |      | 5650.000        | 63.856                 | 23.927               | -10.144     | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.098                 | 24.041               | -41.102     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.153                 | 24.012               | -46.647     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 69.151                 | 28.987               | -53.049     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5747.263        | 109.401                | 69.137               | N/A         | N/A            | 40.264      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:49 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 3 |                          |

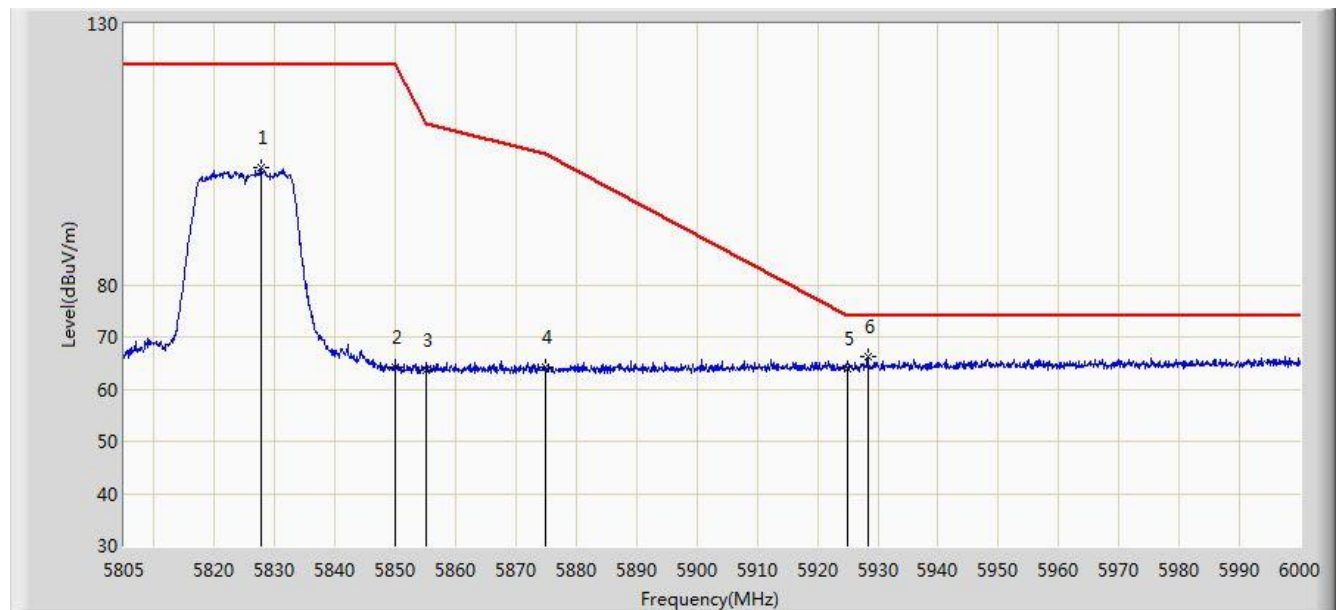


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5827.620        | 102.530                | 61.951               | N/A         | N/A            | 40.579      | PK   |
| 2  |      |      | 5850.000        | 64.284                 | 23.618               | -57.916     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.563                 | 22.885               | -47.237     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 64.122                 | 23.402               | -41.078     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.017                 | 23.225               | -9.983      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5928.337        | 66.161                 | 25.366               | -7.839      | 74.000         | 40.796      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2017/03/22 - 21:51 |
| Limit: FCC_Part15.407_RE(3m)                            | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                             | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US              | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at channel 5825MHz Ant 3 |                          |

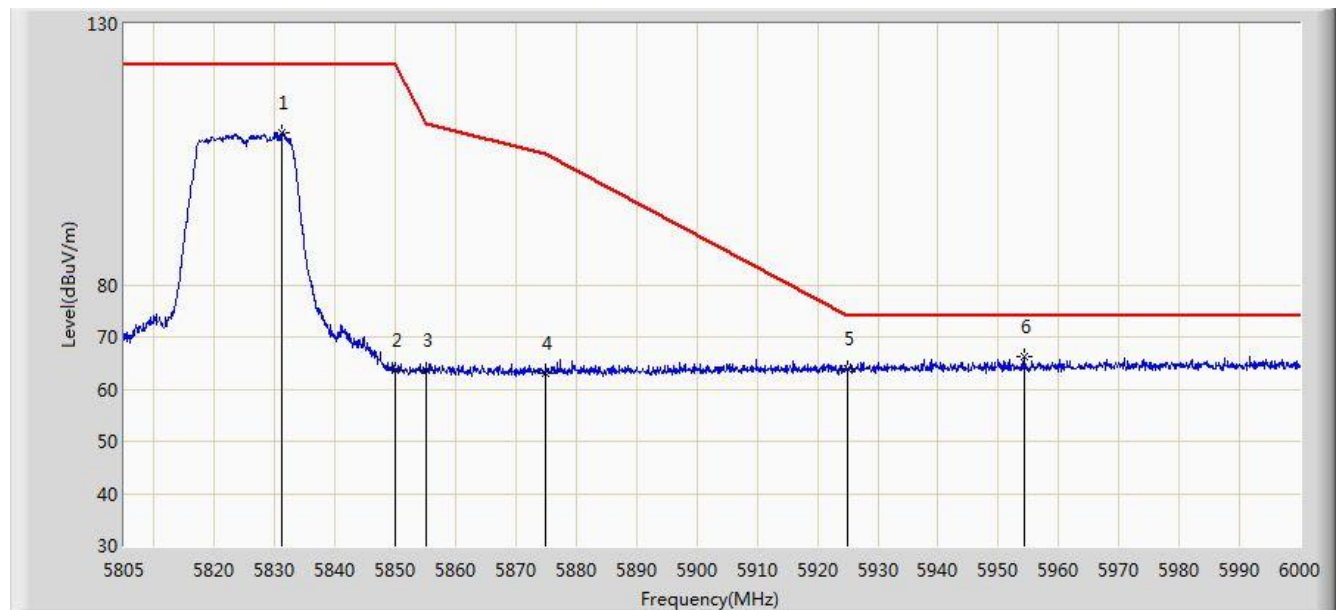


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5831.033        | 109.102                | 68.508               | N/A         | N/A            | 40.593      | PK   |
| 2  |      |      | 5850.000        | 63.623                 | 22.957               | -58.577     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.615                 | 22.937               | -47.185     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 62.992                 | 22.272               | -42.208     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.851                 | 23.059               | -10.149     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5954.370        | 66.274                 | 25.455               | -7.726      | 74.000         | 40.819      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 21:53 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 3 |                          |

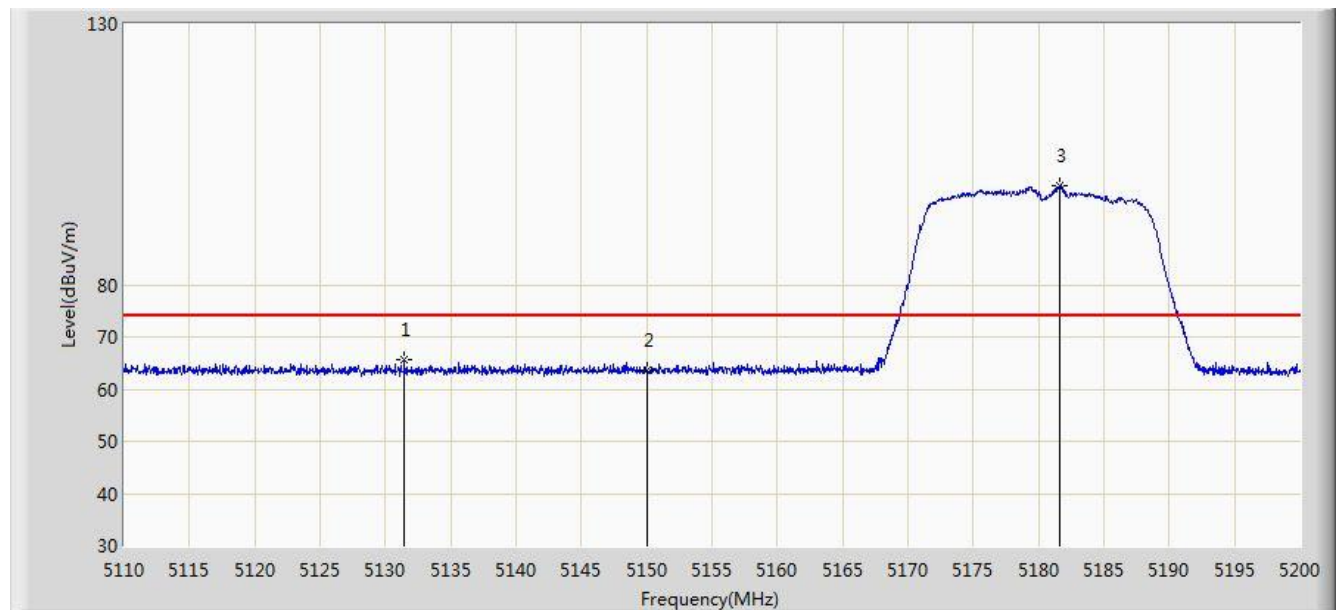


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5131.420        | 65.709                 | 26.264               | -8.291      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.616                 | 24.175               | -10.384     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.595        | 99.043                 | 59.678               | N/A         | N/A            | 39.365      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 21:54 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 3 |                          |

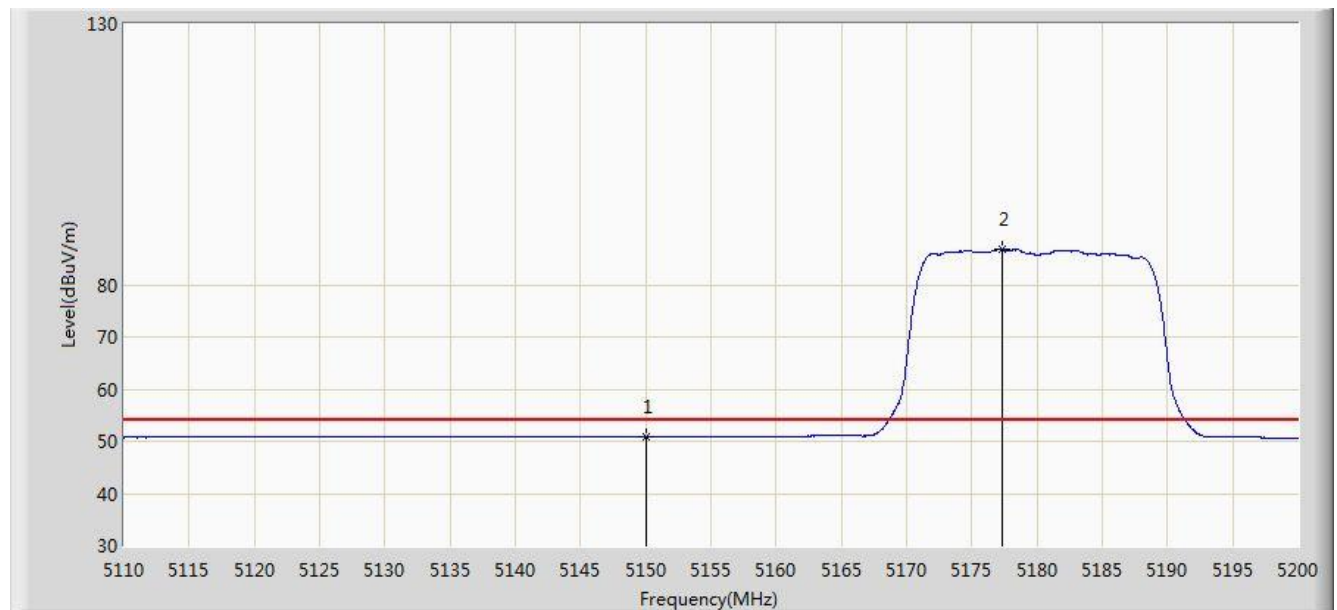


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.843                 | 11.402               | -3.157      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.275        | 86.759                 | 47.383               | N/A         | N/A            | 39.376      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 21:55 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 3 |                          |

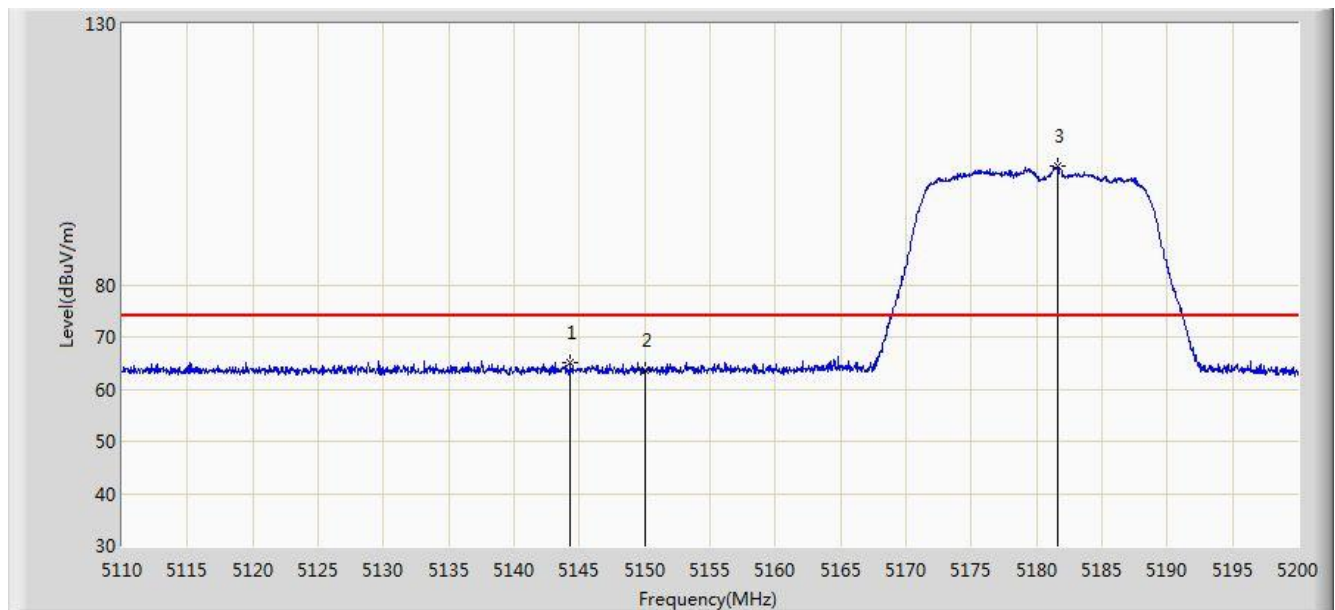


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5144.290        | 64.961                 | 25.515               | -9.039      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.603                 | 24.162               | -10.397     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.595        | 102.684                | 63.319               | N/A         | N/A            | 39.365      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 21:57 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz Ant 3 |                          |

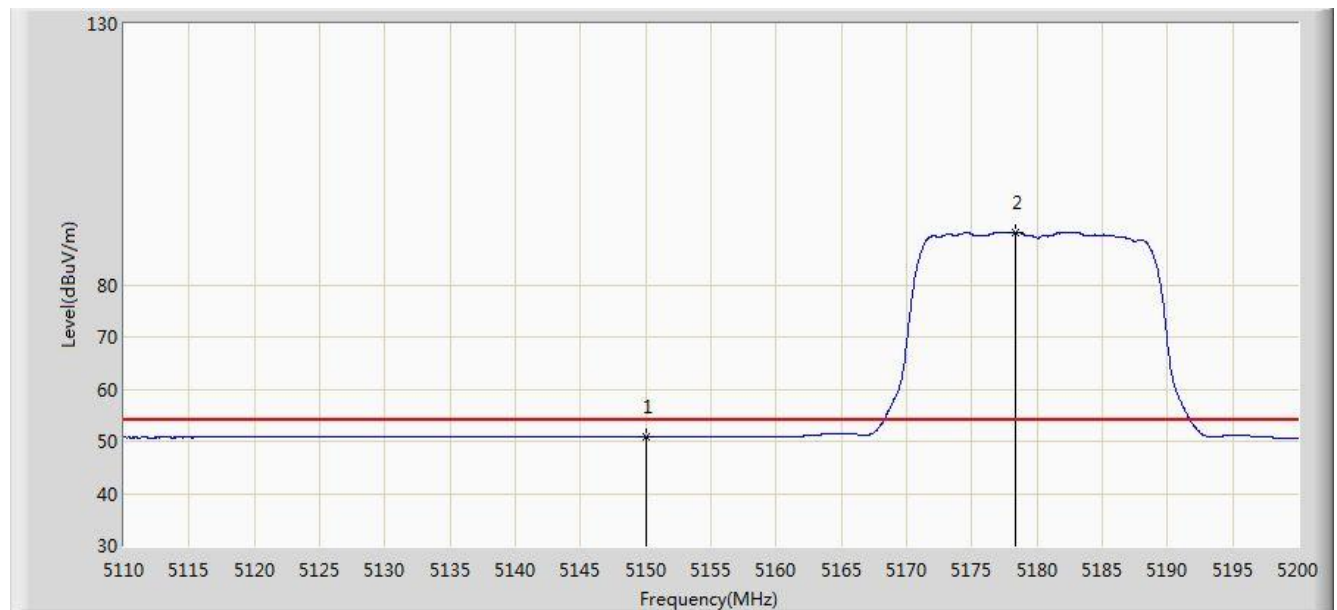


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.879                 | 11.438               | -3.121      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5178.400        | 90.106                 | 50.733               | N/A         | N/A            | 39.373      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:09 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 3 |                          |

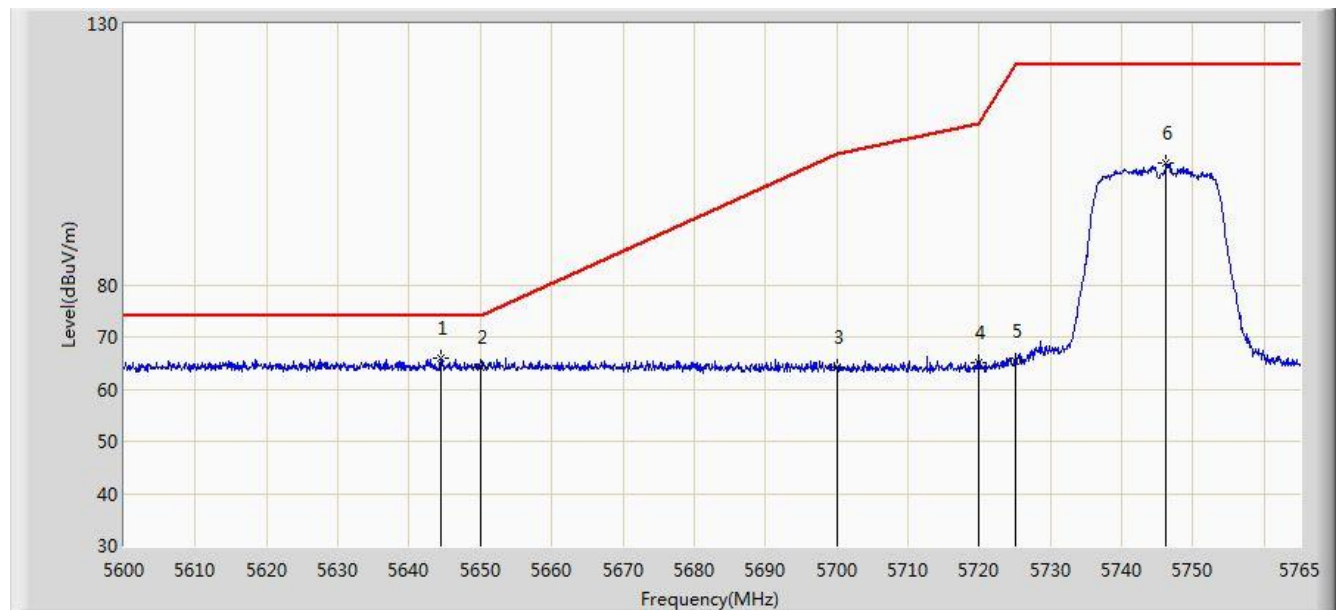


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5644.385        | 65.910                 | 25.993               | -8.090      | 74.000         | 39.917      | PK   |
| 2  |      |      | 5650.000        | 64.196                 | 24.267               | -9.804      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.215                 | 24.158               | -40.985     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.079                 | 24.938               | -45.721     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 65.422                 | 25.258               | -56.778     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.272        | 103.264                | 63.004               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:11 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz Ant 3 |                          |

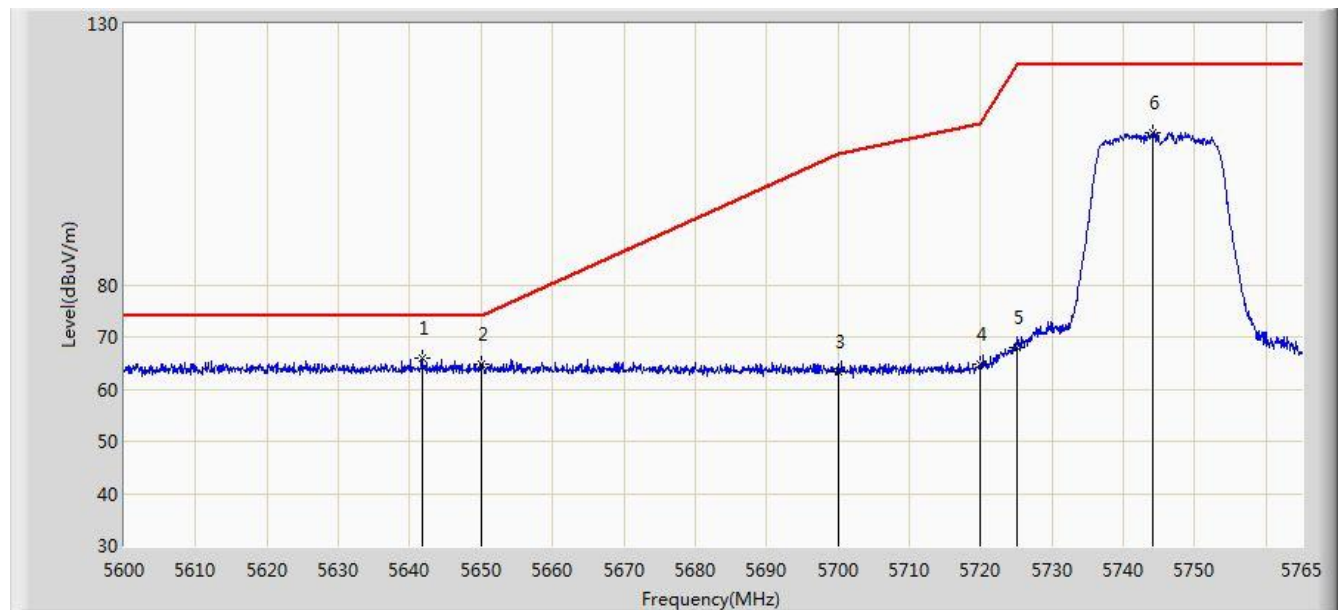


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5641.745        | 65.995                 | 26.084               | -8.005      | 74.000         | 39.911      | PK   |
| 2  |      |      | 5650.000        | 64.904                 | 24.975               | -9.096      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.456                 | 23.399               | -41.744     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.776                 | 24.635               | -46.024     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 67.971                 | 27.807               | -54.229     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5744.045        | 109.261                | 69.010               | N/A         | N/A            | 40.251      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:13 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 3 |                          |

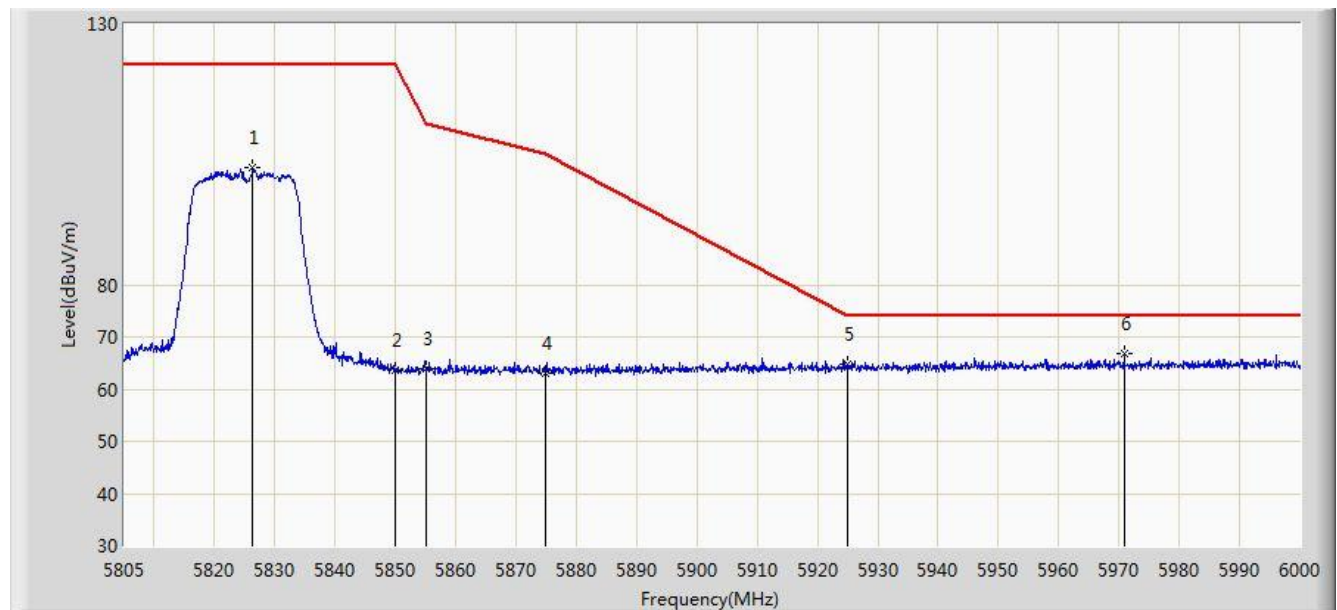


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.353        | 102.570                | 61.996               | N/A         | N/A            | 40.573      | PK   |
| 2  |      |      | 5850.000        | 63.574                 | 22.908               | -58.626     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 64.037                 | 23.359               | -46.763     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.126                 | 22.406               | -42.074     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.686                 | 23.894               | -9.314      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5970.945        | 66.733                 | 25.906               | -7.267      | 74.000         | 40.828      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:15 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz Ant 3 |                          |

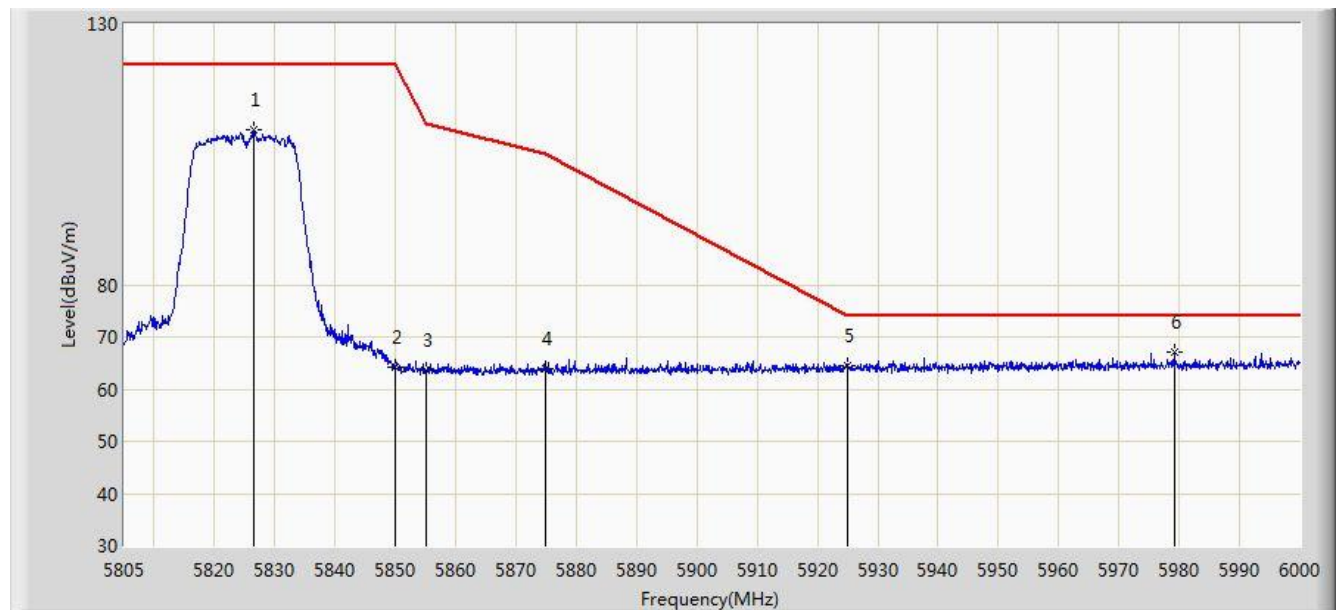


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5826.547        | 109.711                | 69.137               | N/A         | N/A            | 40.574      | PK   |
| 2  |      |      | 5850.000        | 64.284                 | 23.618               | -57.916     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 63.482                 | 22.804               | -47.318     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.929                 | 23.209               | -41.271     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.456                 | 23.664               | -9.544      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5979.135        | 67.240                 | 26.409               | -6.760      | 74.000         | 40.832      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:16 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 3 |                          |

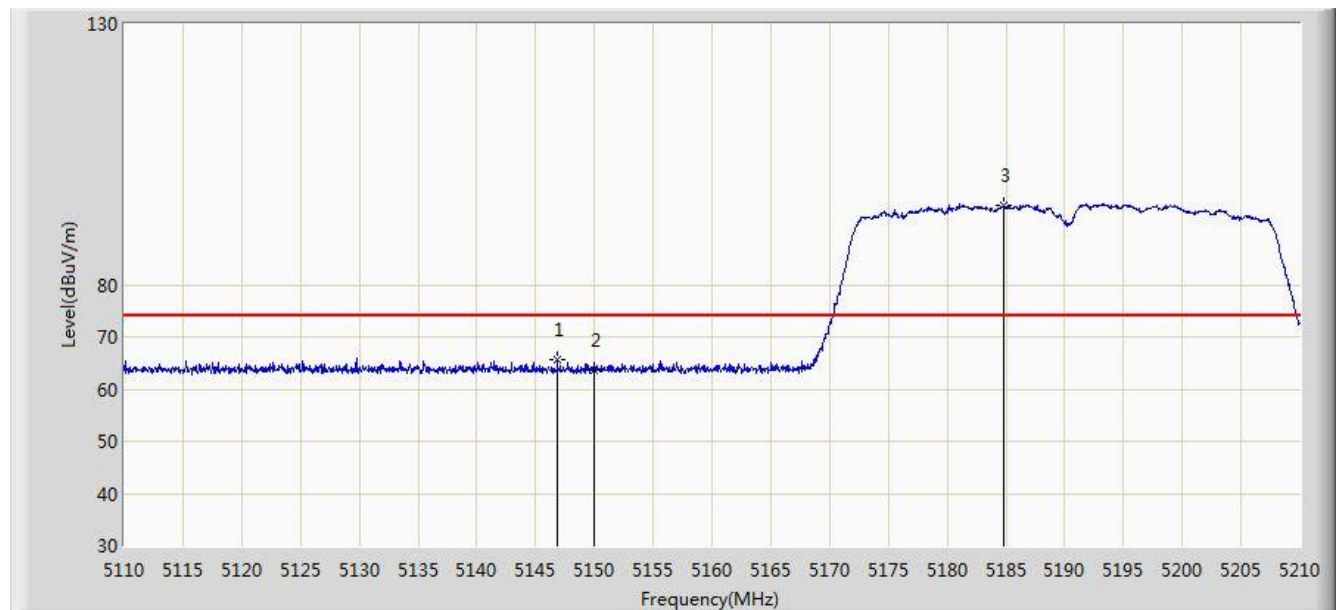


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.850        | 65.681                 | 26.235               | -8.319      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.726                 | 24.285               | -10.274     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5184.800        | 95.090                 | 55.733               | N/A         | N/A            | 39.357      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:19 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 3 |                          |

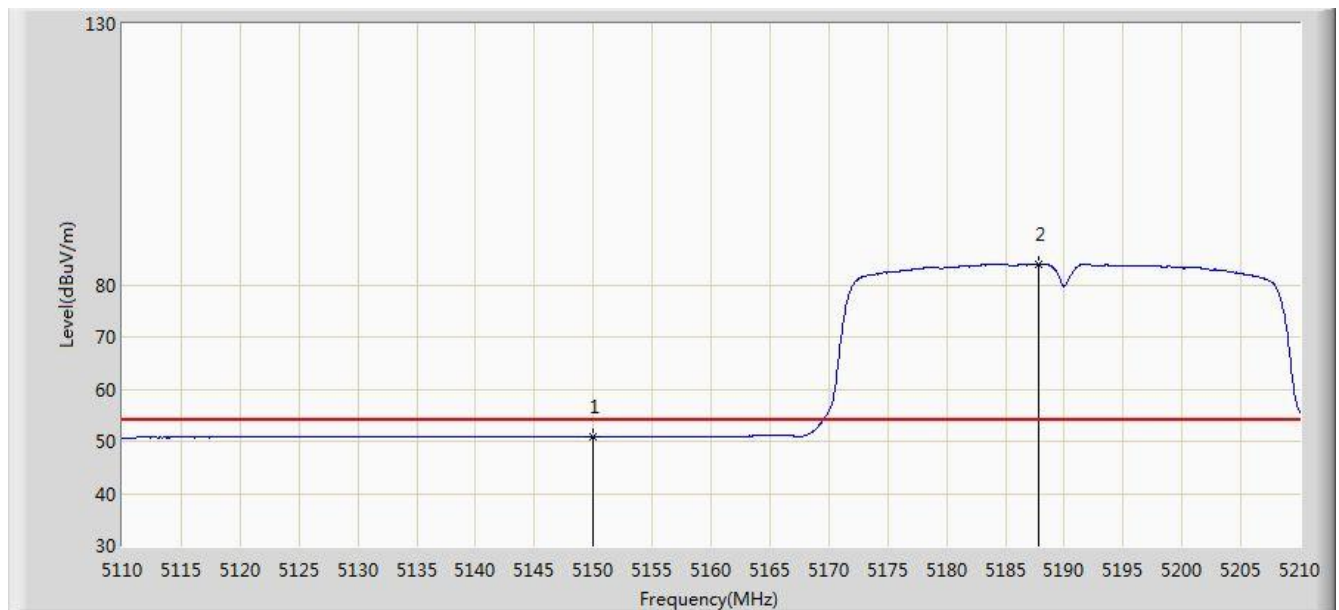


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.848                 | 11.407               | -3.152      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5187.850        | 84.004                 | 44.655               | N/A         | N/A            | 39.349      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:19 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 3 |                          |

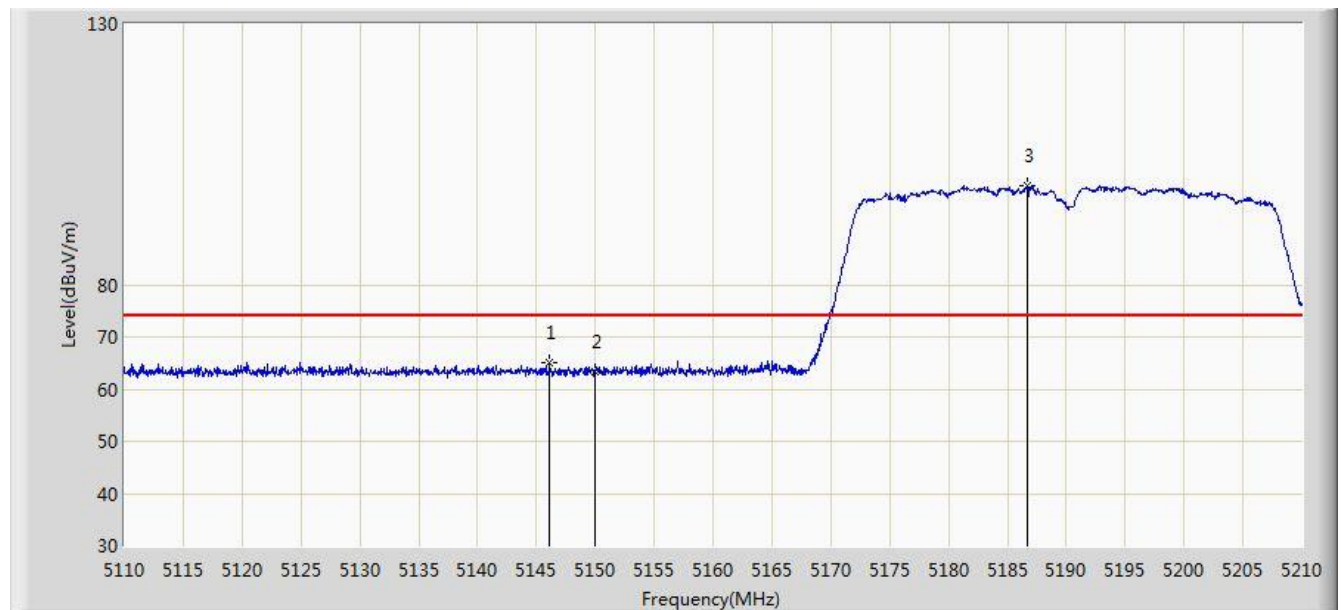


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.150        | 64.962                 | 25.516               | -9.038      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.291                 | 23.850               | -10.709     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5186.750        | 98.860                 | 59.508               | N/A         | N/A            | 39.352      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:20 |
| Limit: FCC_Part15.209_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz Ant 3 |                          |

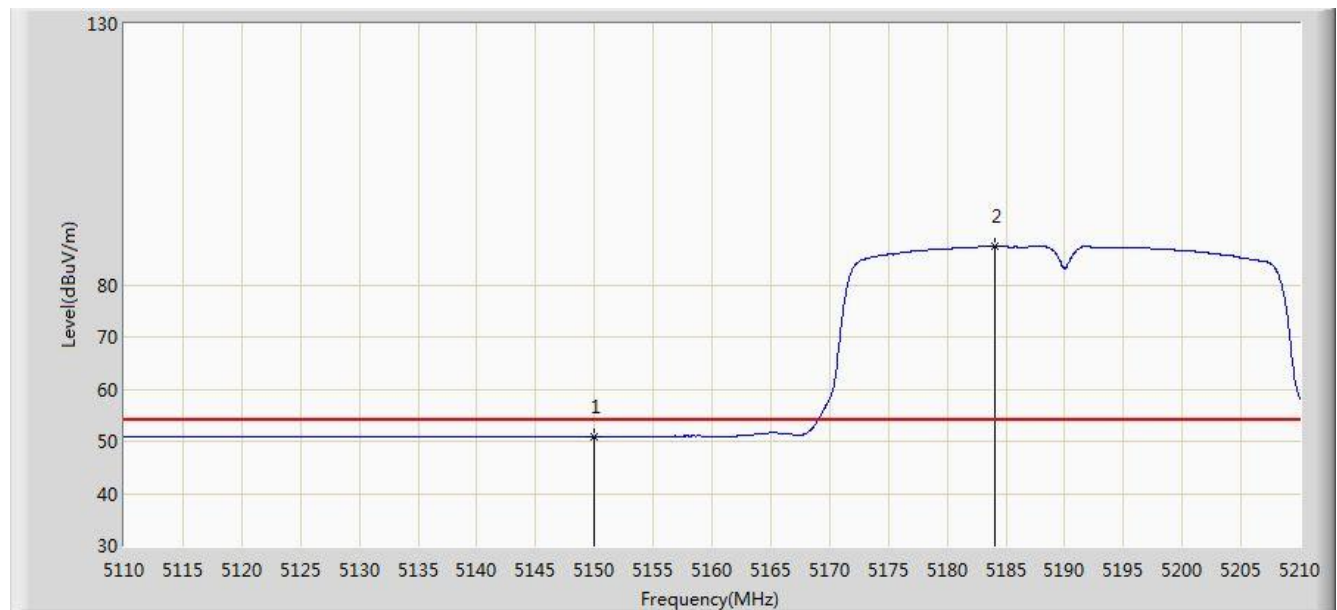


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.880                 | 11.439               | -3.120      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5184.000        | 87.375                 | 48.016               | N/A         | N/A            | 39.359      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:34 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 3 |                          |

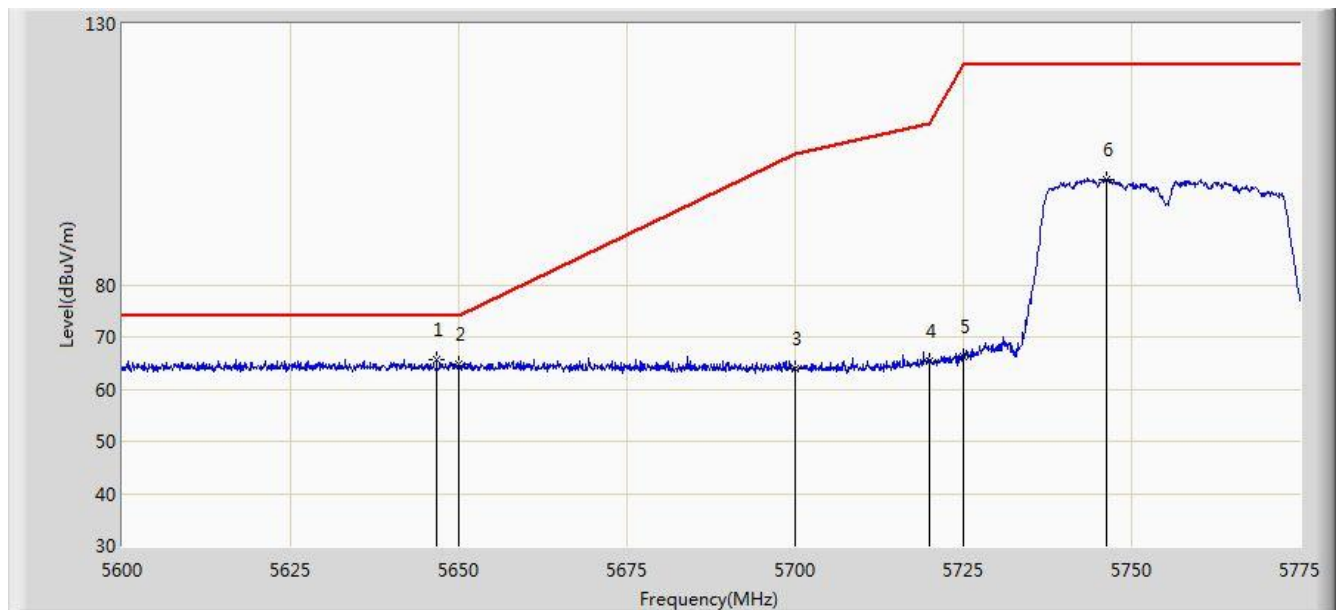


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5646.725        | 65.647                 | 25.725               | -8.353      | 74.000         | 39.922      | PK   |
| 2  |      |      | 5650.000        | 64.735                 | 24.806               | -9.265      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 63.852                 | 23.795               | -41.348     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 65.256                 | 25.115               | -45.544     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.342                 | 26.178               | -55.858     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.212        | 100.159                | 59.899               | N/A         | N/A            | 40.260      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:36 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz Ant 3 |                          |

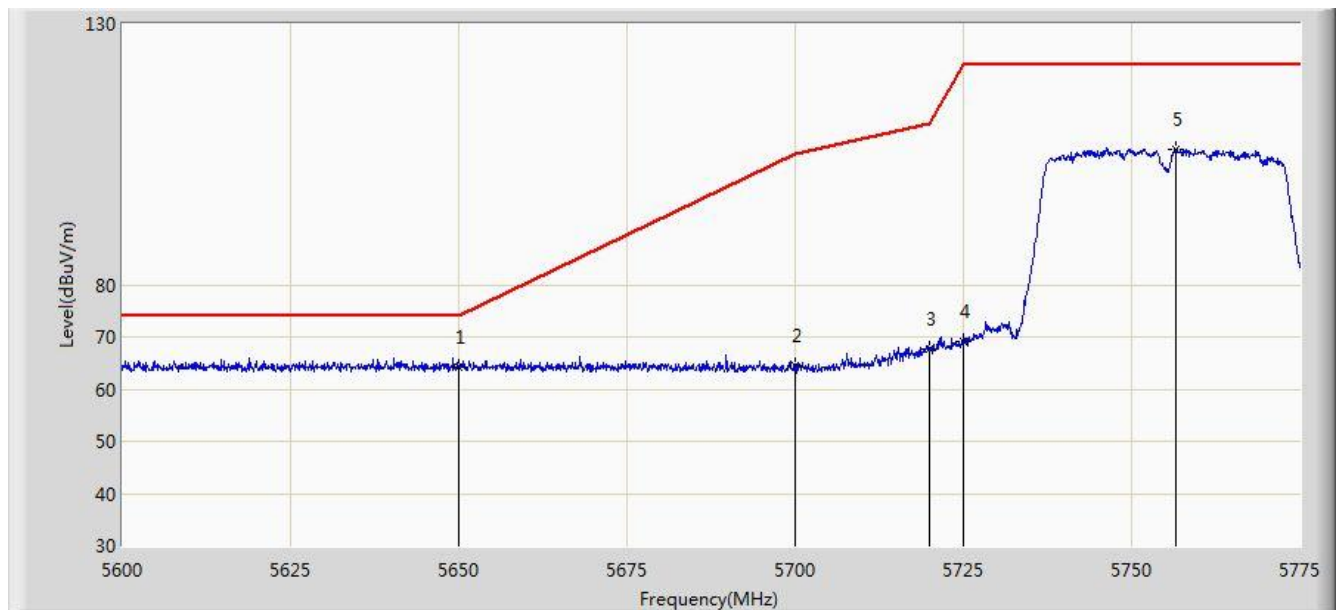


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5650.000        | 64.224                 | 24.295               | -9.776      | 74.000         | 39.929      | PK   |
| 2  |      |      | 5700.000        | 64.433                 | 24.376               | -40.767     | 105.200        | 40.057      | PK   |
| 3  |      |      | 5720.000        | 67.646                 | 27.505               | -43.154     | 110.800        | 40.141      | PK   |
| 4  |      |      | 5725.000        | 69.173                 | 29.009               | -53.027     | 122.200        | 40.164      | PK   |
| 5  |      |      | 5756.538        | 106.015                | 65.713               | N/A         | N/A            | 40.302      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:38 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 3 |                          |

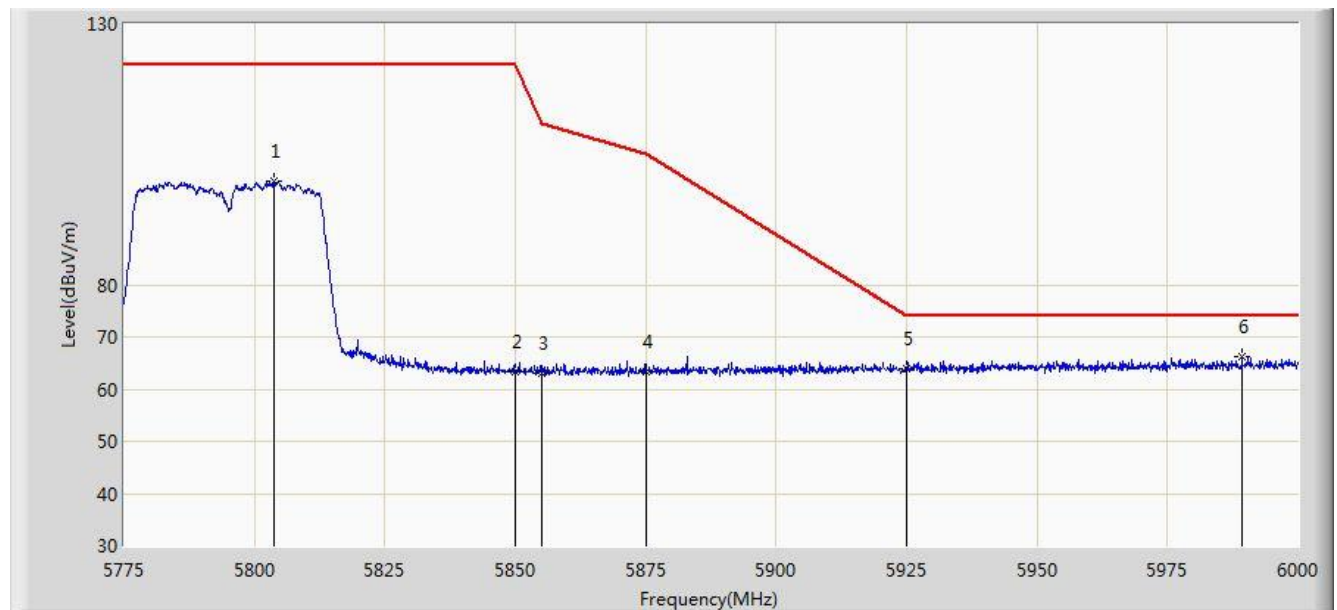


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5803.800        | 99.787                 | 59.307               | N/A         | N/A            | 40.479      | PK   |
| 2  |      |      | 5850.000        | 63.270                 | 22.604               | -58.930     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 62.933                 | 22.255               | -47.867     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.418                 | 22.698               | -41.782     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 63.997                 | 23.205               | -10.003     | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5989.312        | 66.355                 | 25.519               | -7.645      | 74.000         | 40.836      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).



|                                                              |                          |
|--------------------------------------------------------------|--------------------------|
| Site: AC1                                                    | Time: 2017/03/22 - 22:39 |
| Limit: FCC_Part15.407_RE(3m)                                 | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                  | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz Ant 3 |                          |

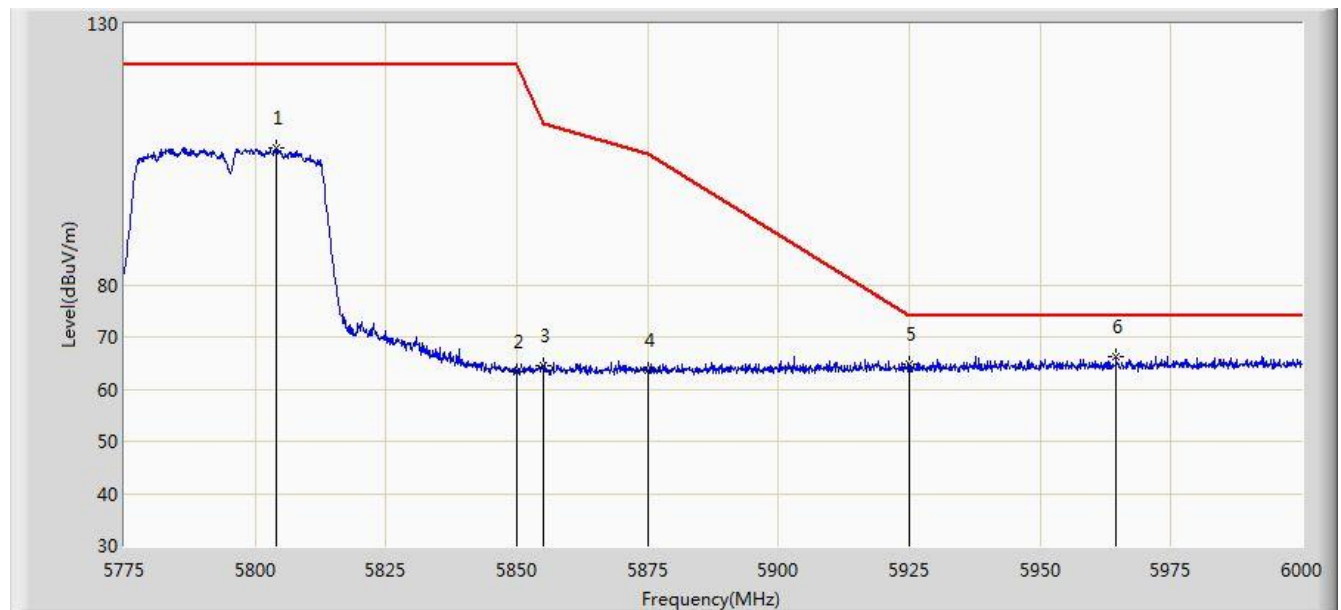


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5803.913        | 106.333                | 65.853               | N/A         | N/A            | 40.480      | PK   |
| 2  |      |      | 5850.000        | 63.434                 | 22.768               | -58.766     | 122.200        | 40.666      | PK   |
| 3  |      |      | 5855.000        | 64.455                 | 23.777               | -46.345     | 110.800        | 40.678      | PK   |
| 4  |      |      | 5875.000        | 63.767                 | 23.047               | -41.433     | 105.200        | 40.720      | PK   |
| 5  |      |      | 5925.000        | 64.816                 | 24.024               | -9.184      | 74.000         | 40.792      | PK   |
| 6  |      | *    | 5964.450        | 66.325                 | 25.501               | -7.675      | 74.000         | 40.824      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 22:40 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 3 |                          |

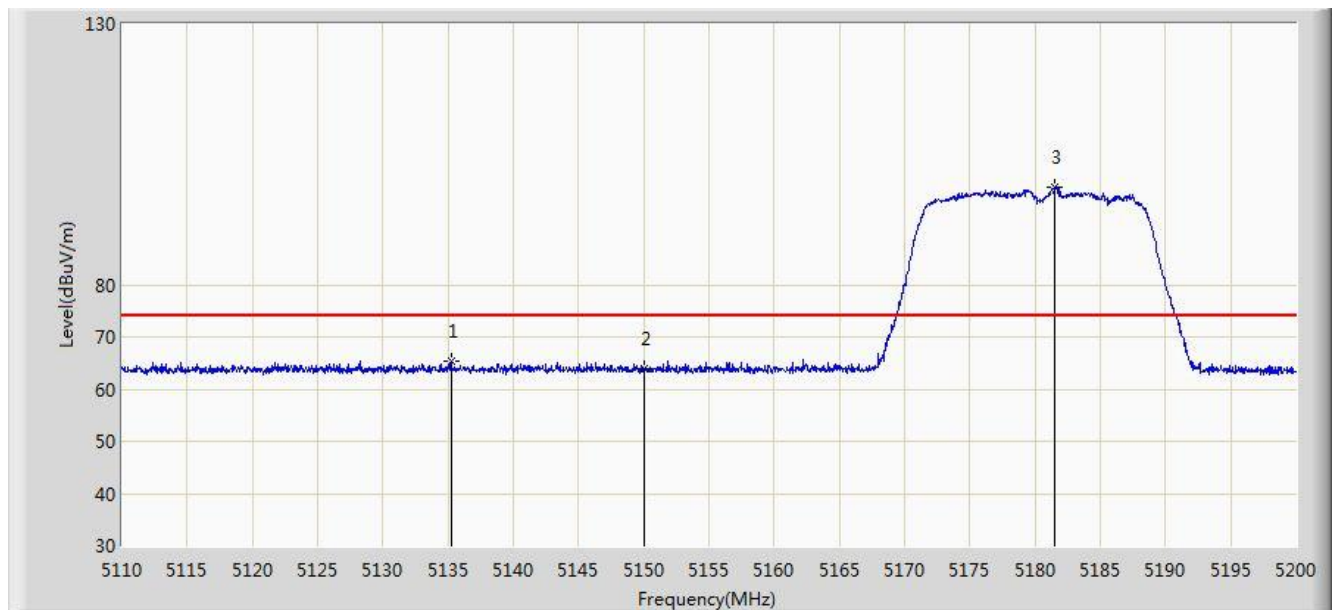


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5135.245        | 65.445                 | 26.000               | -8.555      | 74.000         | 39.445      | PK   |
| 2  |      |      | 5150.000        | 63.960                 | 24.519               | -10.040     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.550        | 98.835                 | 59.470               | N/A         | N/A            | 39.366      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 22:43 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 3 |                          |

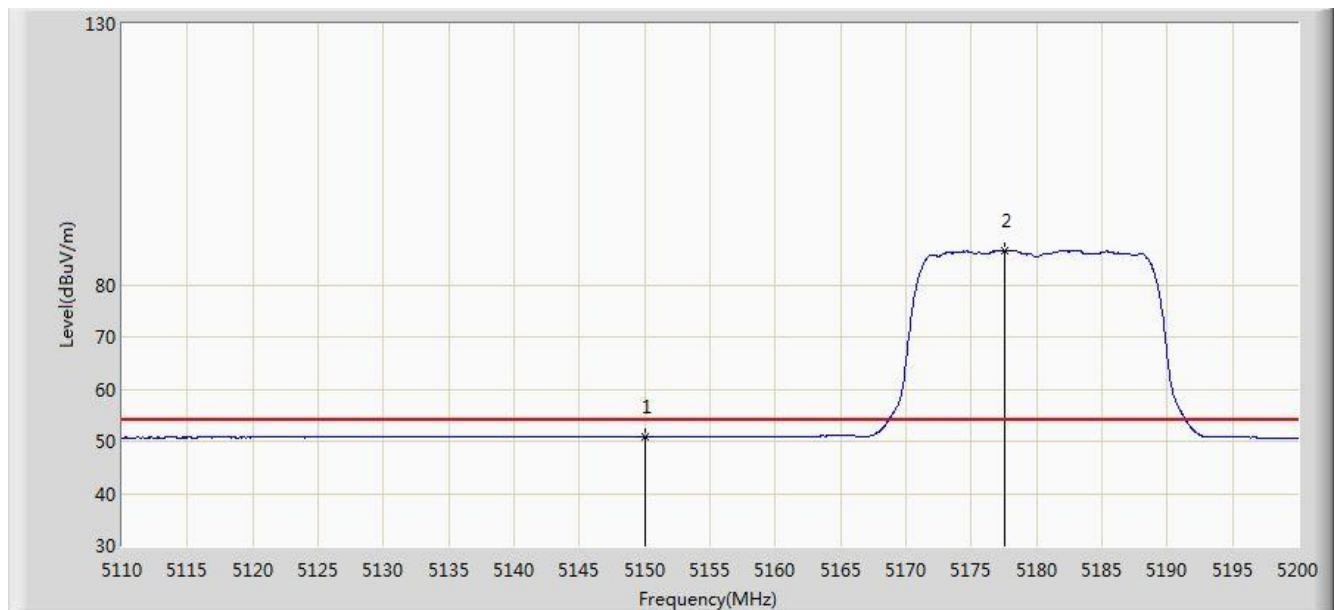


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.810                 | 11.369               | -3.190      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.545        | 86.542                 | 47.167               | N/A         | N/A            | 39.375      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 22:44 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 3 |                          |

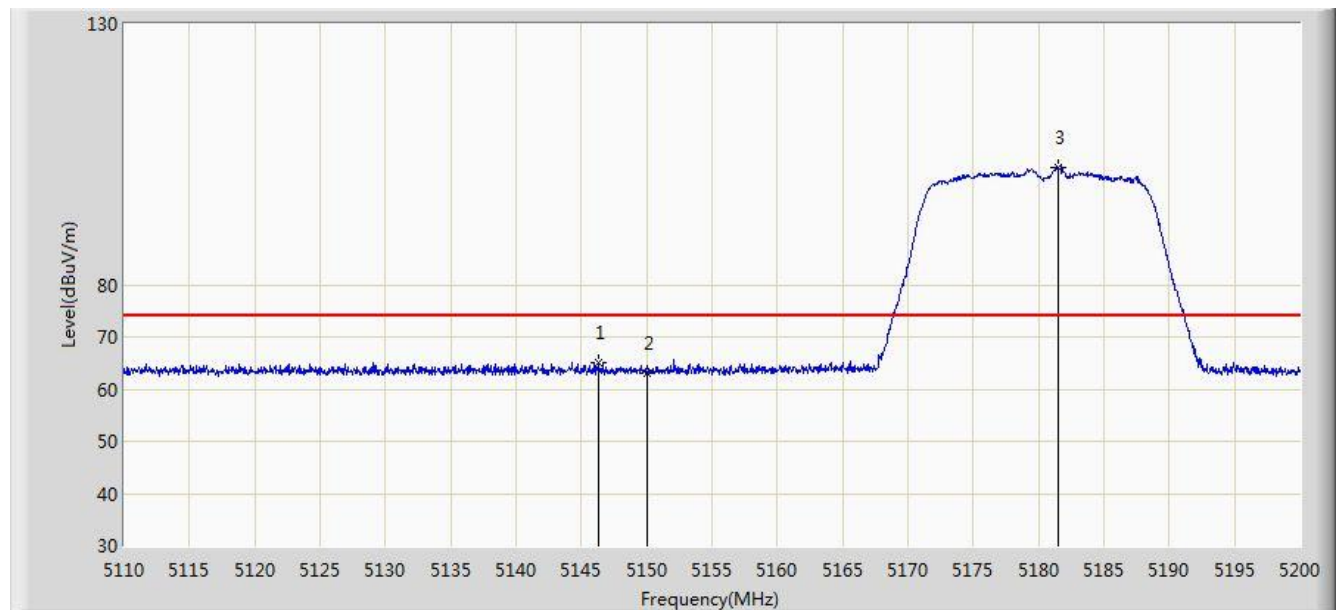


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.270        | 64.957                 | 25.511               | -9.043      | 74.000         | 39.446      | PK   |
| 2  |      |      | 5150.000        | 63.009                 | 23.568               | -10.991     | 74.000         | 39.442      | PK   |
| 3  |      | *    | 5181.505        | 102.603                | 63.238               | N/A         | N/A            | 39.366      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 22:45 |
| Limit: FCC_Part15.209_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz Ant 3 |                          |

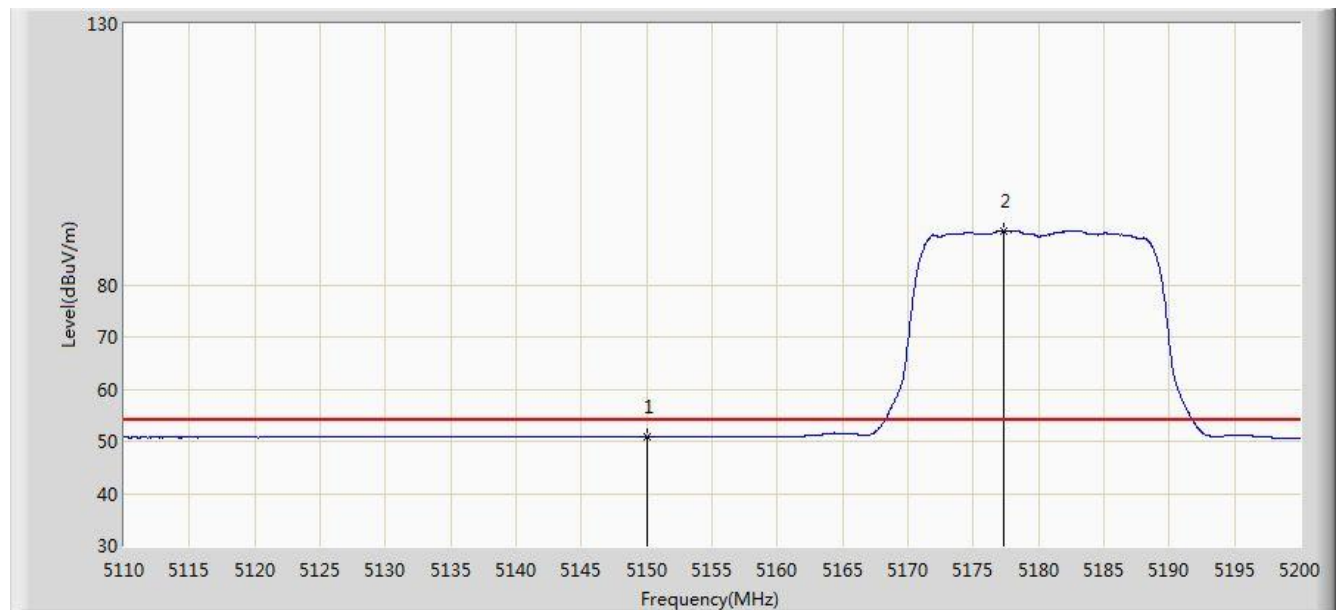


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.826                 | 11.385               | -3.174      | 54.000         | 39.442      | AV   |
| 2  |      | *    | 5177.275        | 90.302                 | 50.926               | N/A         | N/A            | 39.376      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 23:27 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Horizontal     |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 3 |                          |

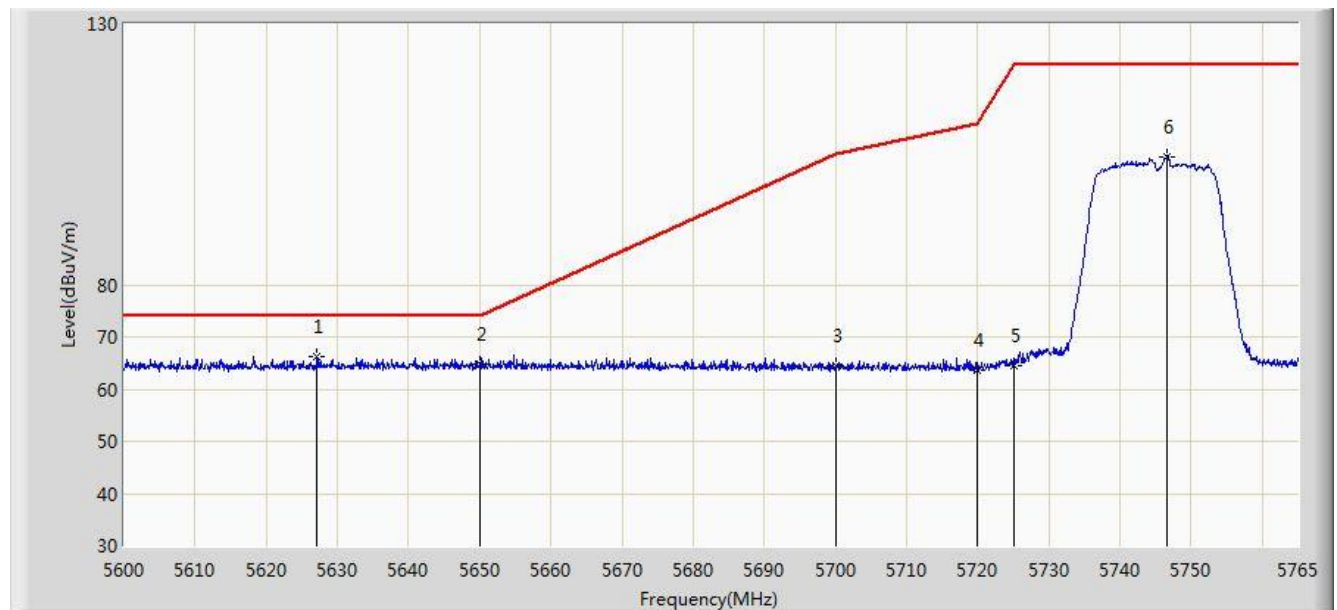


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5627.143        | 66.251                 | 26.367               | -7.749      | 74.000         | 39.884      | PK   |
| 2  |      |      | 5650.000        | 64.898                 | 24.969               | -9.102      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.373                 | 24.316               | -40.827     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 63.768                 | 23.627               | -47.032     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 64.602                 | 24.438               | -57.598     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.520        | 104.485                | 64.224               | N/A         | N/A            | 40.261      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                |                          |
|----------------------------------------------------------------|--------------------------|
| Site: AC1                                                      | Time: 2017/03/22 - 23:29 |
| Limit: FCC_Part15.407_RE(3m)                                   | Engineer: Kevin Ker      |
| Probe: BBHA9120D_1GHz_18GHz                                    | Polarity: Vertical       |
| EUT: Wi-Fi AP 4x4 OD small omni antenna US                     | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz Ant 3 |                          |

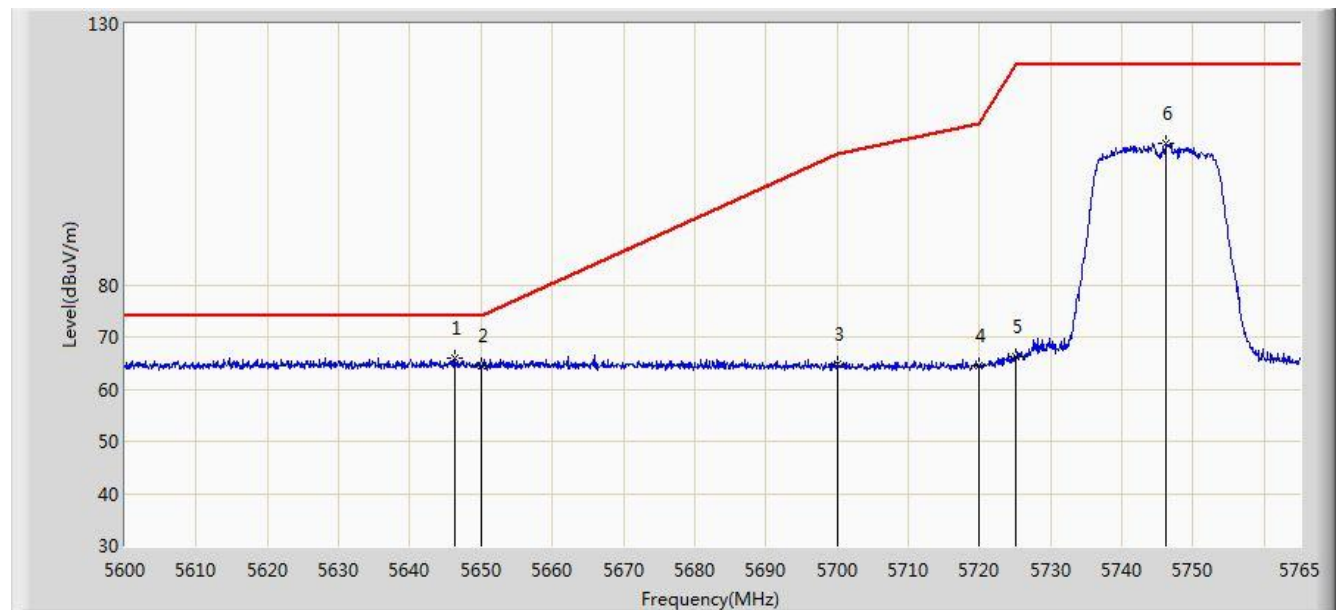

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5646.365        | 65.997                 | 26.076               | -8.003      | 74.000         | 39.921      | PK   |
| 2  |      |      | 5650.000        | 64.418                 | 24.489               | -9.582      | 74.000         | 39.929      | PK   |
| 3  |      |      | 5700.000        | 64.742                 | 24.685               | -40.458     | 105.200        | 40.057      | PK   |
| 4  |      |      | 5720.000        | 64.460                 | 24.319               | -46.340     | 110.800        | 40.141      | PK   |
| 5  |      |      | 5725.000        | 66.123                 | 25.959               | -56.077     | 122.200        | 40.164      | PK   |
| 6  |      |      | 5746.107        | 106.974                | 66.715               | N/A         | N/A            | 40.259      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).