

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11g	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4867.5	42.4	5.9	48.3	74.0	-25.7	Peak	Horizontal
	7307.0	38.0	11.7	49.7	74.0	-24.3	Peak	Horizontal
*	8879.5	31.7	14.2	45.9	74.8	-28.9	Peak	Horizontal
*	10316.0	32.0	17.3	49.3	74.8	-25.5	Peak	Horizontal
	4230.0	34.5	3.8	38.3	74.0	-35.7	Peak	Vertical
	4876.0	42.2	5.9	48.1	74.0	-25.9	Peak	Vertical
*	5981.0	34.4	7.7	42.1	74.8	-32.7	Peak	Vertical
*	6899.0	33.3	10.0	43.3	74.8	-31.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11g	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	41.4	6.1	47.5	74.0	-26.5	Peak	Horizontal
	7392.0	38.8	11.8	50.6	74.0	-23.4	Peak	Horizontal
*	8905.0	32.3	14.2	46.5	77.6	-31.1	Peak	Horizontal
*	9882.5	31.3	16.8	48.1	77.6	-29.5	Peak	Horizontal
	4000.5	34.9	3.3	38.2	74.0	-35.8	Peak	Vertical
	4927.0	41.4	6.1	47.5	74.0	-26.5	Peak	Vertical
*	6202.0	33.1	8.1	41.2	77.6	-36.4	Peak	Vertical
*	7128.5	33.4	11.3	44.7	77.6	-32.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (97.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT20	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4111.0	34.7	3.4	38.1	74.0	-35.9	Peak	Horizontal
	4825.0	39.9	6.1	46.0	74.0	-28.0	Peak	Horizontal
*	5632.5	33.2	7.0	40.2	74.0	-33.8	Peak	Horizontal
*	6567.5	32.4	9.6	42.0	74.0	-32.0	Peak	Horizontal
	4383.0	35.9	4.5	40.4	74.0	-33.6	Peak	Vertical
	4825.0	43.4	6.1	49.5	74.0	-24.5	Peak	Vertical
*	5972.5	33.8	7.7	41.5	74.0	-32.5	Peak	Vertical
*	6814.0	33.7	9.8	43.5	74.0	-30.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT20	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4119.5	34.9	3.5	38.4	74.0	-35.6	Peak	Horizontal
	4876.0	41.5	5.9	47.4	74.0	-26.6	Peak	Horizontal
*	6134.0	32.7	8.1	40.8	74.0	-33.2	Peak	Horizontal
*	7205.0	33.9	11.5	45.4	74.0	-28.6	Peak	Horizontal
	4077.0	34.5	3.3	37.8	74.0	-36.2	Peak	Vertical
	4876.0	41.3	5.9	47.2	74.0	-26.8	Peak	Vertical
*	6431.5	32.7	9.2	41.9	74.0	-32.1	Peak	Vertical
*	7120.0	33.6	11.3	44.9	74.0	-29.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT20	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3839.0	34.6	2.9	37.5	74.0	-36.5	Peak	Horizontal
	5122.5	33.5	6.7	40.2	74.0	-33.8	Peak	Horizontal
*	6185.0	32.7	8.2	40.9	74.7	-33.8	Peak	Horizontal
*	6839.5	32.9	10.0	42.9	74.7	-31.8	Peak	Horizontal
	3881.5	35.4	3.0	38.4	74.0	-35.6	Peak	Vertical
	4927.0	35.7	6.1	41.8	74.0	-32.2	Peak	Vertical
*	5989.5	33.6	7.8	41.4	74.7	-33.3	Peak	Vertical
*	7196.5	33.2	11.6	44.8	74.7	-29.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT40	Test Channel	03
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4128.0	34.4	3.6	38.0	74.0	-36.0	Peak	Horizontal
	4842.0	39.1	5.9	45.0	74.0	-29.0	Peak	Horizontal
*	6491.0	32.5	9.4	41.9	74.0	-32.1	Peak	Horizontal
*	6814.0	32.9	9.8	42.7	74.0	-31.3	Peak	Horizontal
	4077.0	35.1	3.3	38.4	74.0	-35.6	Peak	Vertical
	4842.0	42.5	5.9	48.4	74.0	-25.6	Peak	Vertical
*	6499.5	32.9	9.5	42.4	74.0	-31.6	Peak	Vertical
*	6848.0	33.3	10.0	43.3	74.0	-30.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (88.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT40	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4094.0	34.8	3.4	38.2	74.0	-35.8	Peak	Horizontal
	4876.0	39.2	5.9	45.1	74.0	-28.9	Peak	Horizontal
*	6142.5	33.2	8.1	41.3	74.0	-32.7	Peak	Horizontal
*	6542.0	32.6	9.5	42.1	74.0	-31.9	Peak	Horizontal
	3992.0	35.6	3.4	39.0	74.0	-35.0	Peak	Vertical
	4876.0	43.0	5.9	48.9	74.0	-25.1	Peak	Vertical
*	5972.5	34.7	7.7	42.4	74.0	-31.6	Peak	Vertical
*	7978.5	33.3	12.4	45.7	74.0	-28.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (88.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wearable video camera	Temperature	23°C
Test Engineer	David Lv	Relative Humidity	53%
Test Site	AC1	Test Date	2020/04/26
Test Mode	802.11n-HT40	Test Channel	09
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4043.0	34.5	3.3	37.8	74.0	-36.2	Peak	Horizontal
	4901.5	38.4	6.1	44.5	74.0	-29.5	Peak	Horizontal
*	7188.0	33.6	11.6	45.2	74.0	-28.8	Peak	Horizontal
*	8828.5	32.3	14.3	46.6	74.0	-27.4	Peak	Horizontal
	3703.0	35.7	2.4	38.1	74.0	-35.9	Peak	Vertical
	4901.5	38.4	6.1	44.5	74.0	-29.5	Peak	Vertical
*	5989.5	35.1	7.8	42.9	74.0	-31.1	Peak	Vertical
*	6814.0	33.4	9.8	43.2	74.0	-30.8	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (91.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The worst case of Radiated Emission below 1GHz:

Site: AC1	Time: 2020/04/30 - 17:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Flag Yang
Probe: SZ_AC1_VULB 9168 _30-2000MHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

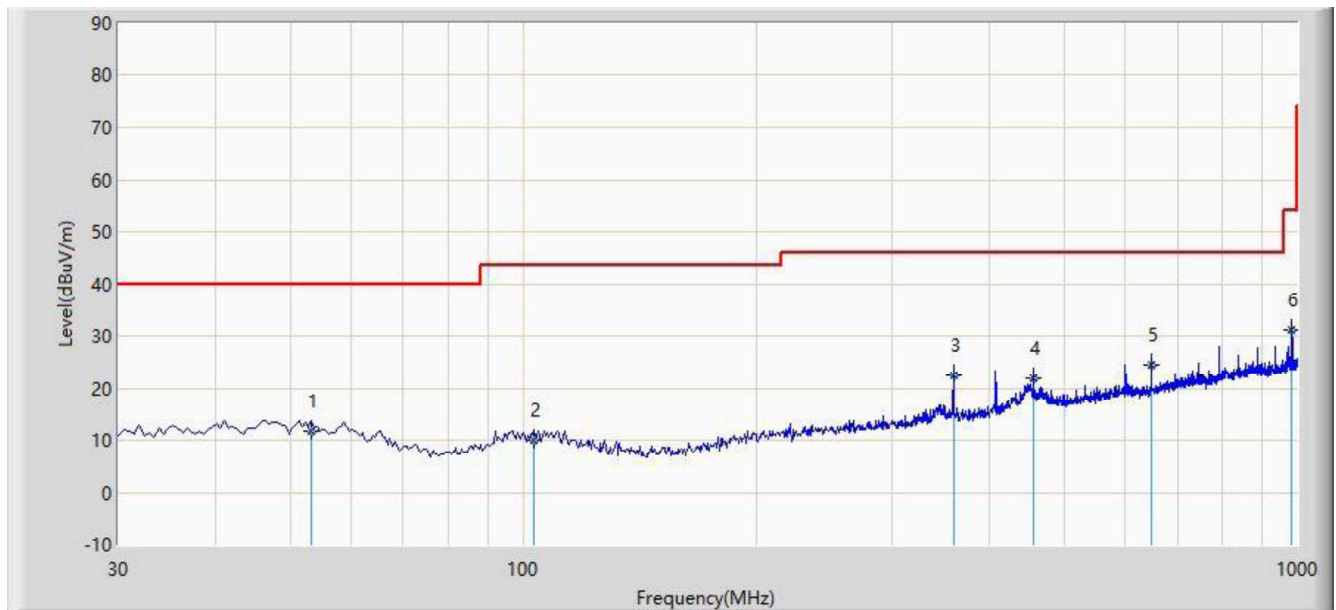

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			53.200	11.692	-3.415	-28.308	40.000	15.107	QP
2			103.235	9.997	-0.179	-33.503	43.500	10.176	QP
3			359.800	22.597	5.618	-23.403	46.000	16.979	QP
4			455.830	22.008	2.637	-23.992	46.000	19.371	QP
5		*	647.890	24.507	1.780	-21.493	46.000	22.727	QP
6			983.995	31.196	4.199	-22.804	54.000	26.997	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: AC1	Time: 2020/04/30 - 17:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Flag Yang
Probe: SZ_AC1_VULB 9168 _30-2000MHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at Channel 2412MHz	

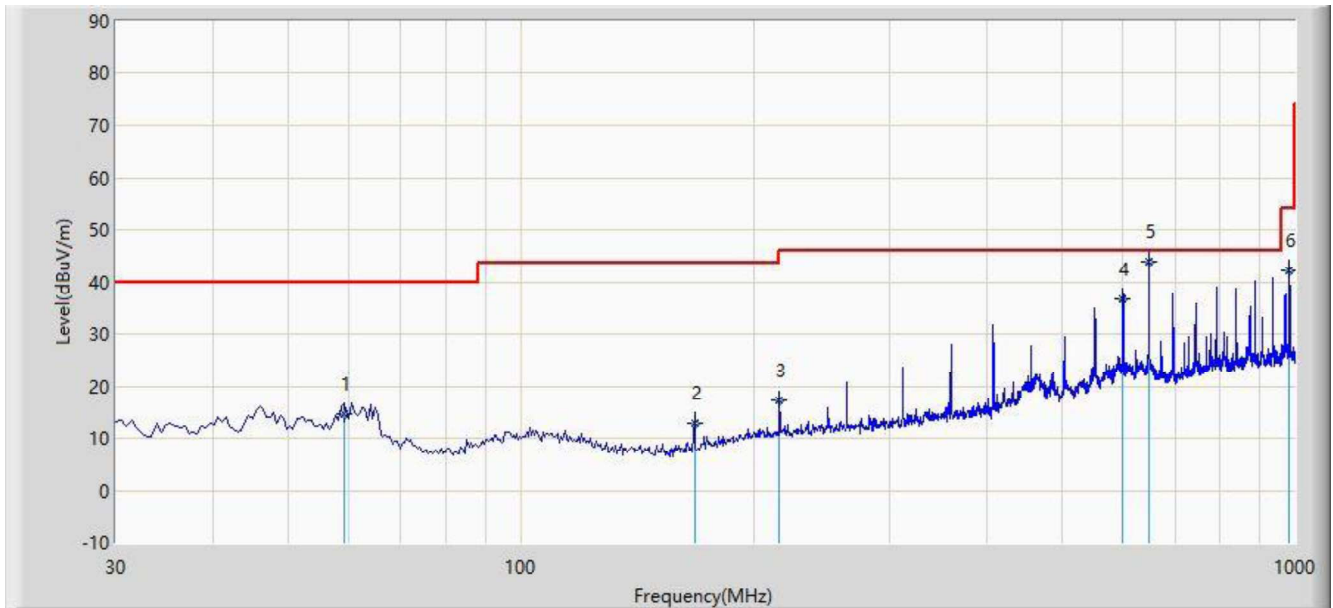

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			59.100	14.626	0.081	-25.374	40.000	14.545	QP
2			167.740	13.014	-1.431	-30.486	43.500	14.445	QP
3			215.755	17.116	4.833	-26.384	43.500	12.284	QP
4			599.875	36.726	14.366	-9.274	46.000	22.359	QP
5		*	648.030	43.956	21.228	-2.044	46.000	22.728	QP
6			983.995	42.260	15.263	-11.740	54.000	26.997	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table.

FCC Part 15.209 Limit		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

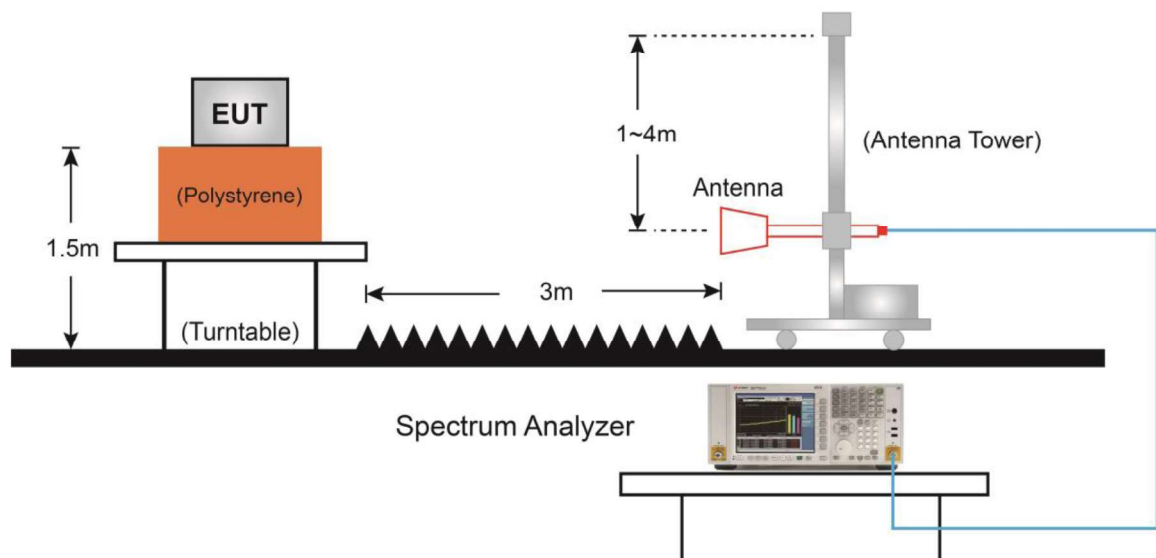7.7.4.Test Setup

7.7.5.Test Result

Site: AC1	Time: 2020/04/26 - 16:12
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

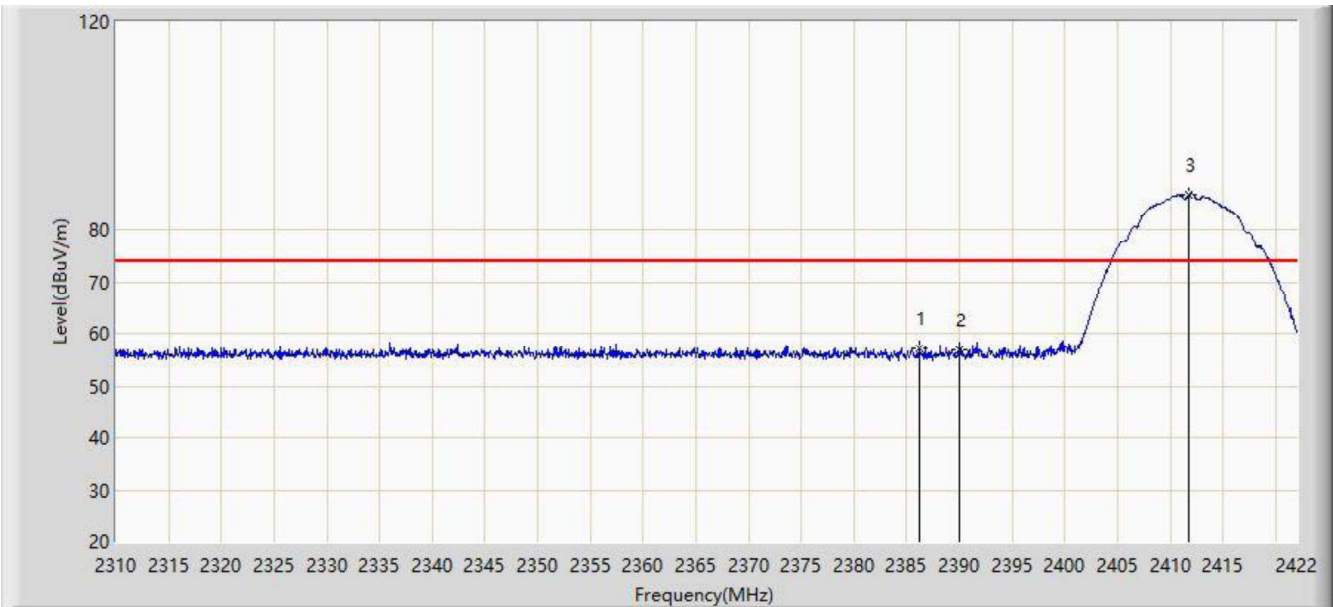


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.272	57.237	25.164	-16.763	74.000	32.073	PK
2			2390.000	56.878	24.806	-17.122	74.000	32.072	PK
3		*	2411.808	86.643	54.560	N/A	N/A	32.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

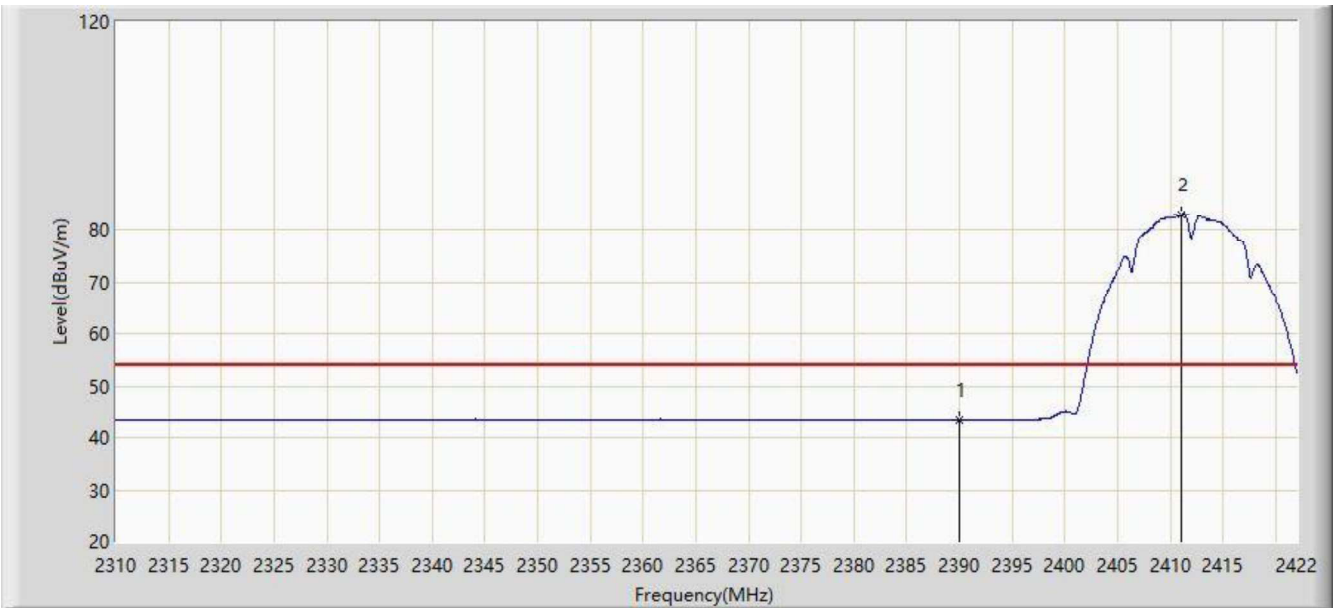


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.492	11.420	-10.508	54.000	32.072	AV
2		*	2411.080	82.952	50.871	N/A	N/A	32.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:25
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

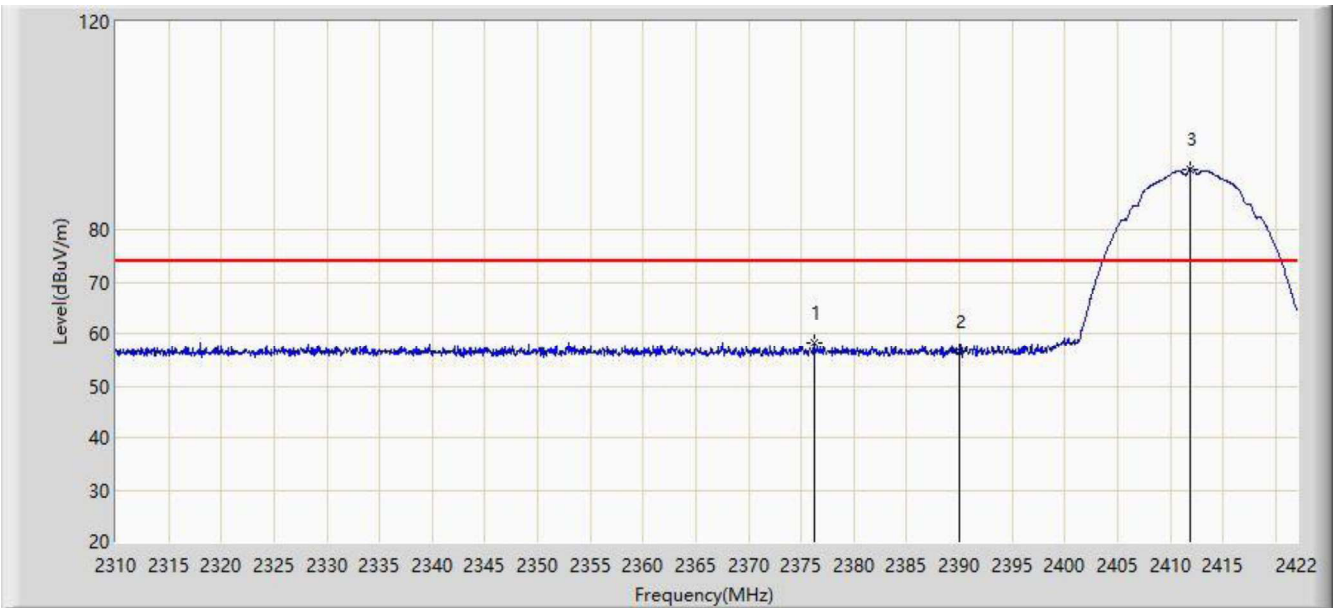


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.192	58.353	26.275	-15.647	74.000	32.079	PK
2			2390.000	56.405	24.333	-17.595	74.000	32.072	PK
3		*	2411.864	91.708	59.625	N/A	N/A	32.083	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:29
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2412MHz	

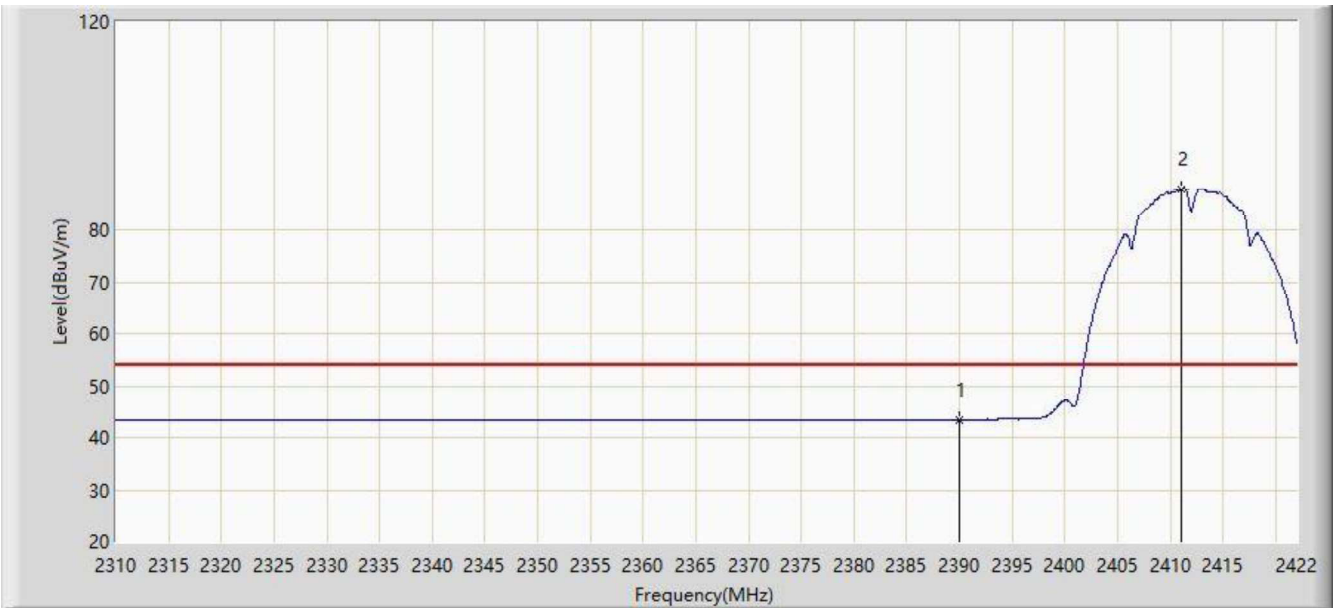


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.551	11.479	-10.449	54.000	32.072	AV
2		*	2411.080	87.960	55.879	N/A	N/A	32.081	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

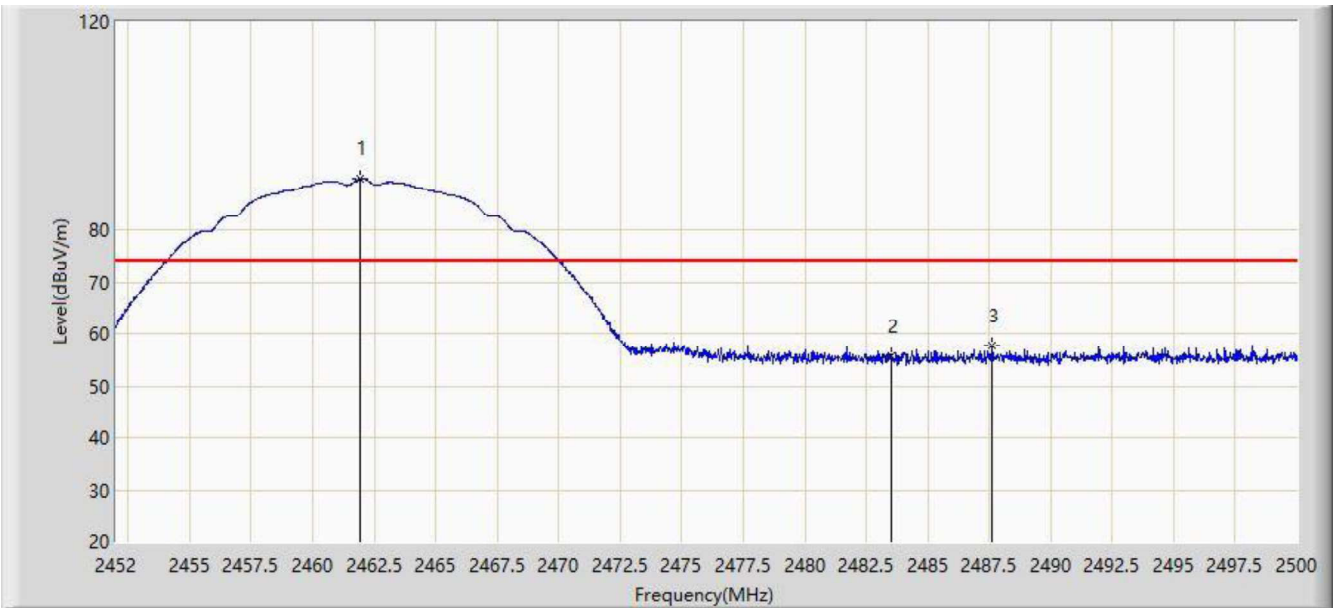

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.912	89.811	57.730	N/A	N/A	32.080	PK
2			2483.500	55.537	23.500	-18.463	74.000	32.037	PK
3			2487.616	57.754	25.725	-16.246	74.000	32.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:42
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.048	85.683	53.603	N/A	N/A	32.080	AV
2			2483.500	43.599	11.562	-10.401	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	

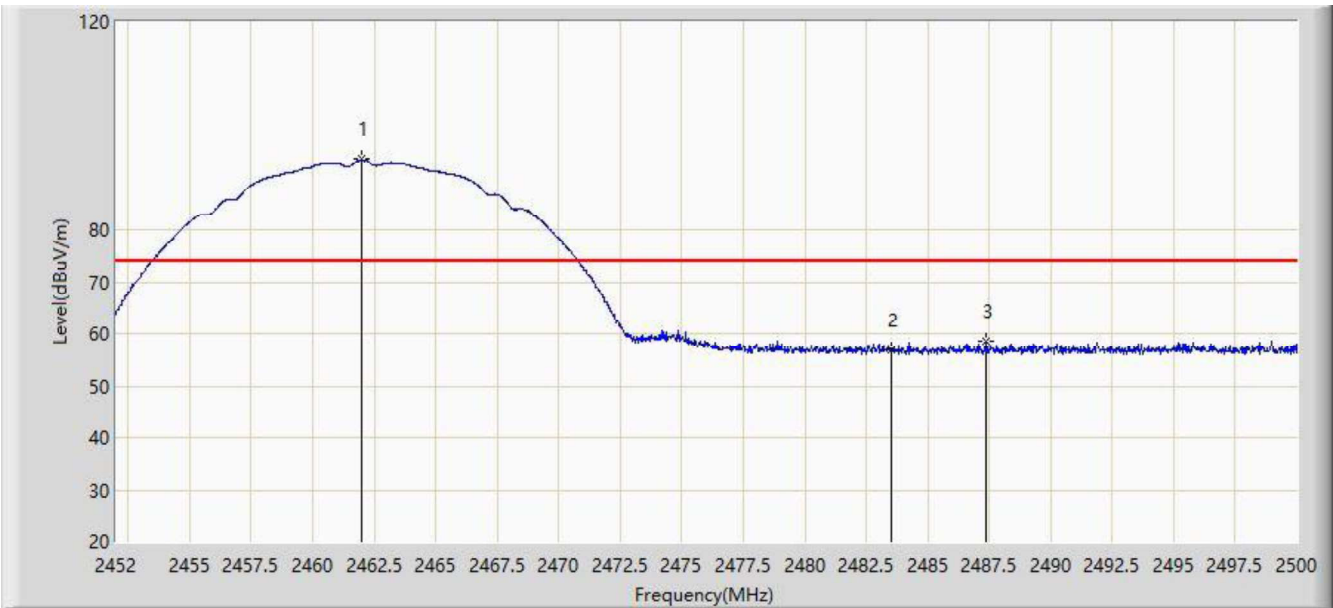

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.008	93.482	61.401	N/A	N/A	32.081	PK
2			2483.500	56.700	24.663	-17.300	74.000	32.037	PK
3			2487.376	58.565	26.535	-15.435	74.000	32.029	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11b at channel 2462MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.312	89.460	57.380	N/A	N/A	32.080	AV
2			2483.500	43.695	11.658	-10.305	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:49
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

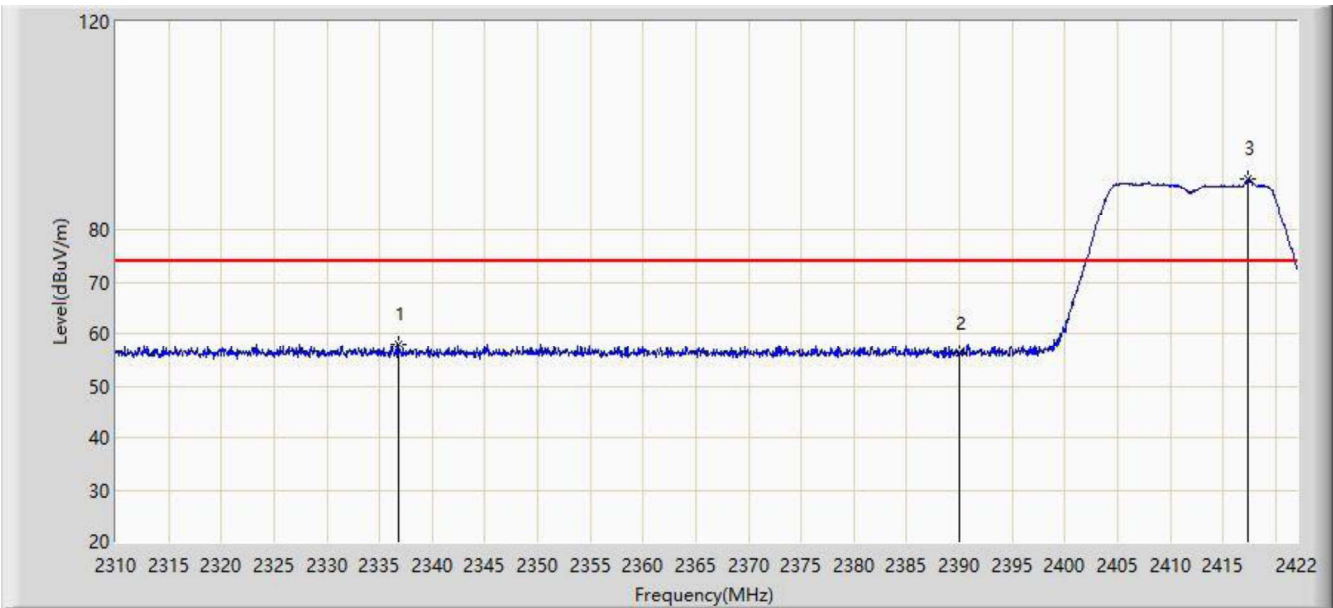


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2336.768	58.069	25.917	-15.931	74.000	32.152	PK
2			2390.000	56.144	24.072	-17.856	74.000	32.072	PK
3		*	2417.408	89.839	57.741	N/A	N/A	32.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

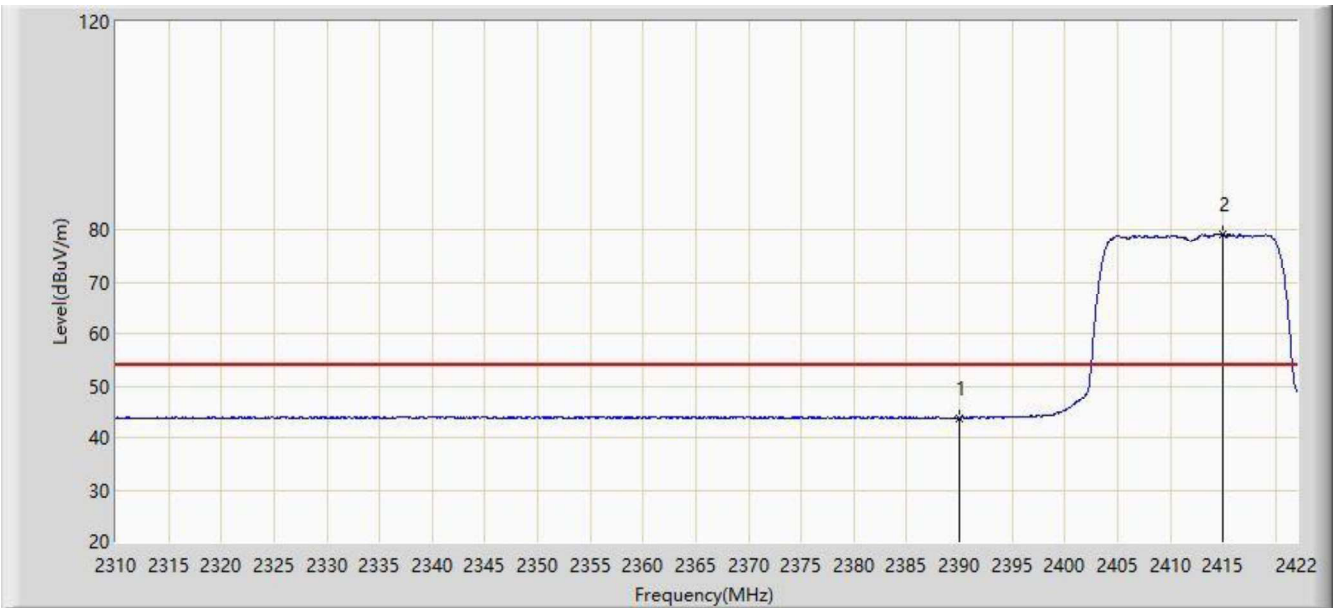


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.858	11.786	-10.142	54.000	32.072	AV
2		*	2415.000	79.199	47.108	N/A	N/A	32.091	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

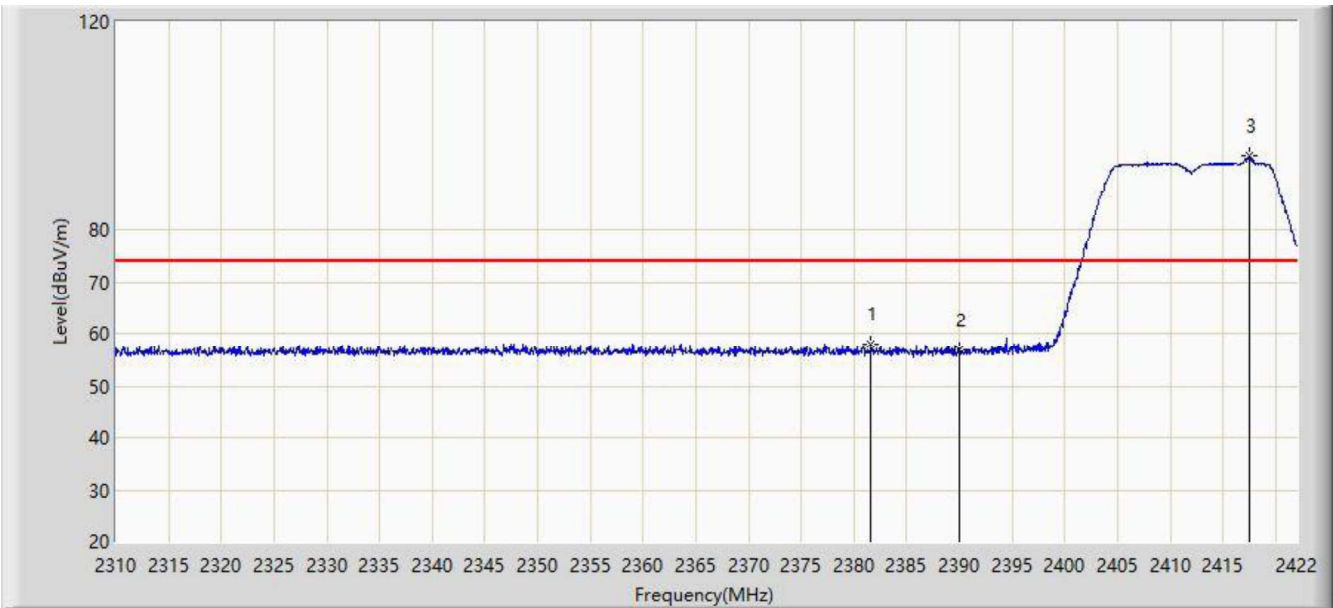


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.568	58.089	26.014	-15.911	74.000	32.075	PK
2			2390.000	56.698	24.626	-17.302	74.000	32.072	PK
3		*	2417.520	94.122	62.024	N/A	N/A	32.098	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:00
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2412MHz	

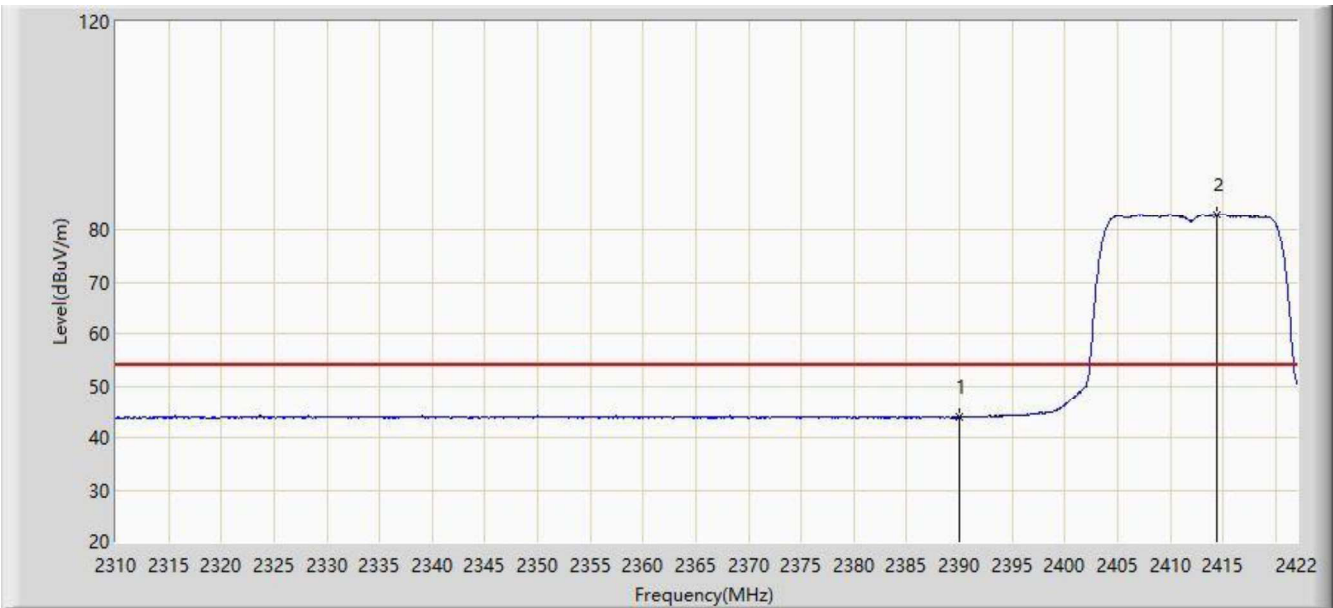


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.031	11.959	-9.969	54.000	32.072	AV
2		*	2414.384	82.892	50.802	N/A	N/A	32.090	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

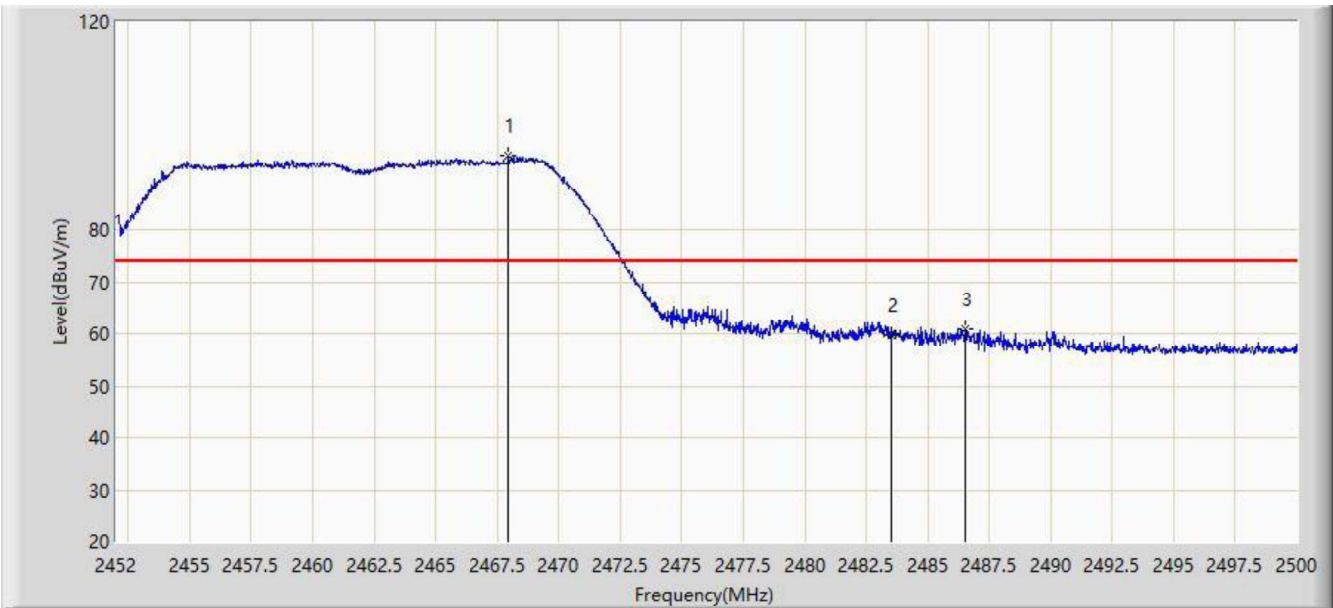


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.936	94.283	62.215	N/A	N/A	32.069	PK
2			2483.500	59.599	27.562	-14.401	74.000	32.037	PK
3			2486.536	60.872	28.841	-13.128	74.000	32.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:29
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

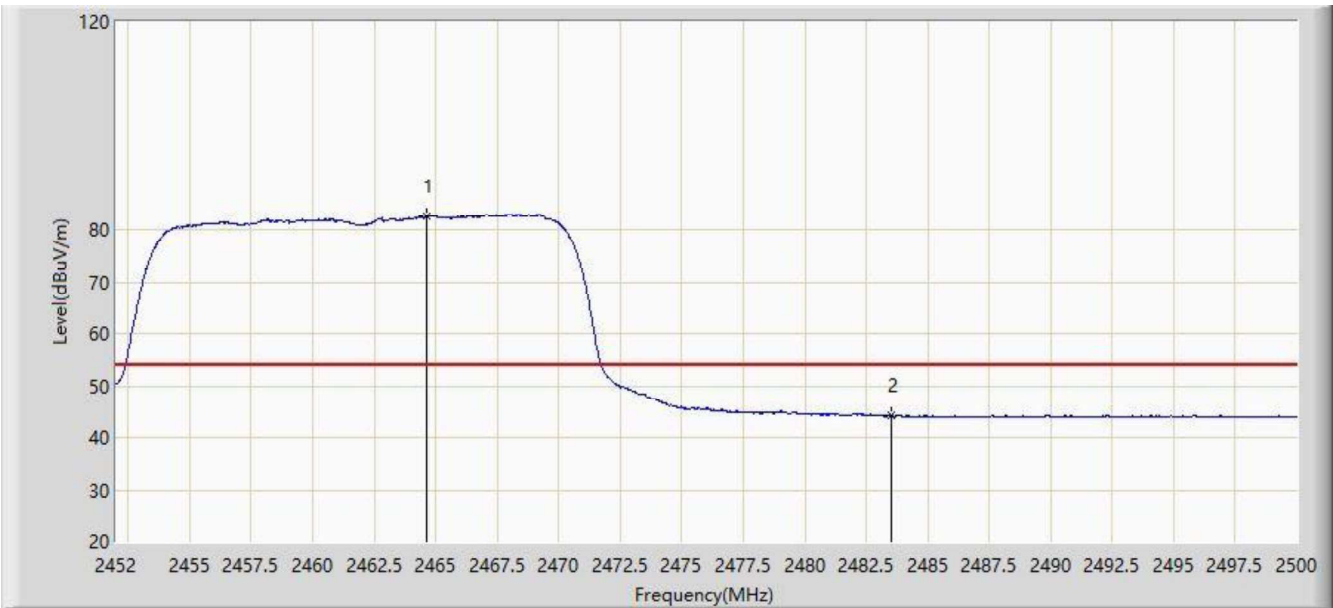


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.624	82.583	50.508	N/A	N/A	32.076	AV
2			2483.500	44.238	12.201	-9.762	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:30
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

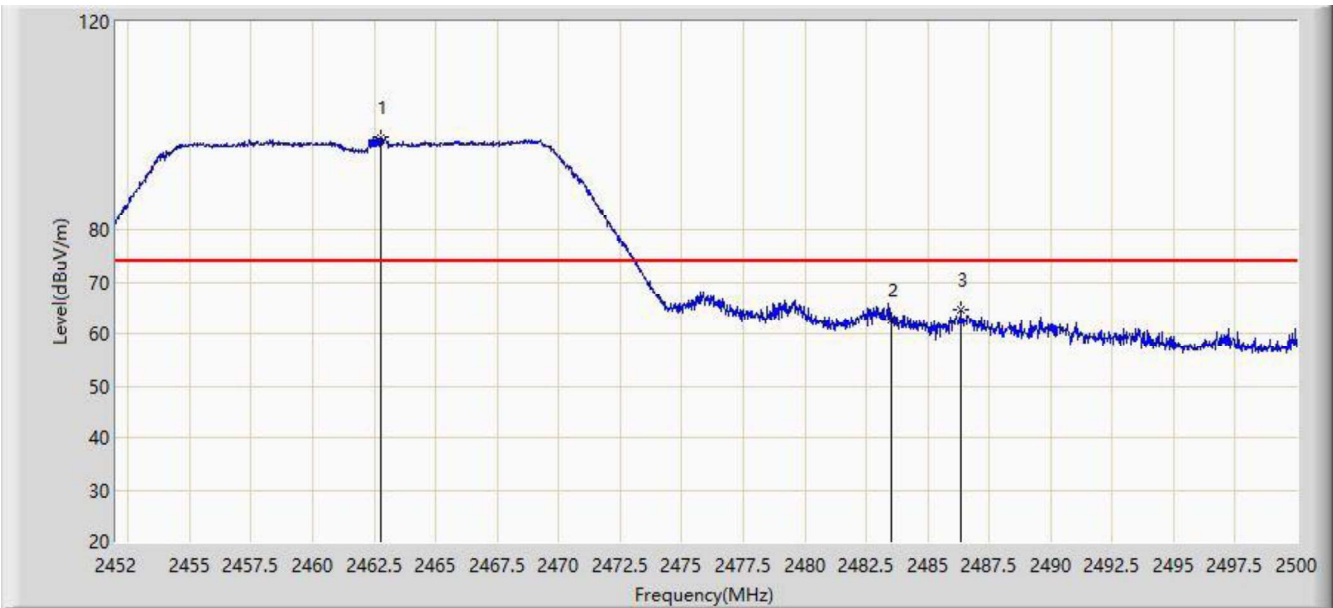


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.776	97.633	65.554	N/A	N/A	32.079	PK
2			2483.500	62.660	30.623	-11.340	74.000	32.037	PK
3			2486.320	64.498	32.466	-9.502	74.000	32.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:33
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11g at channel 2462MHz	

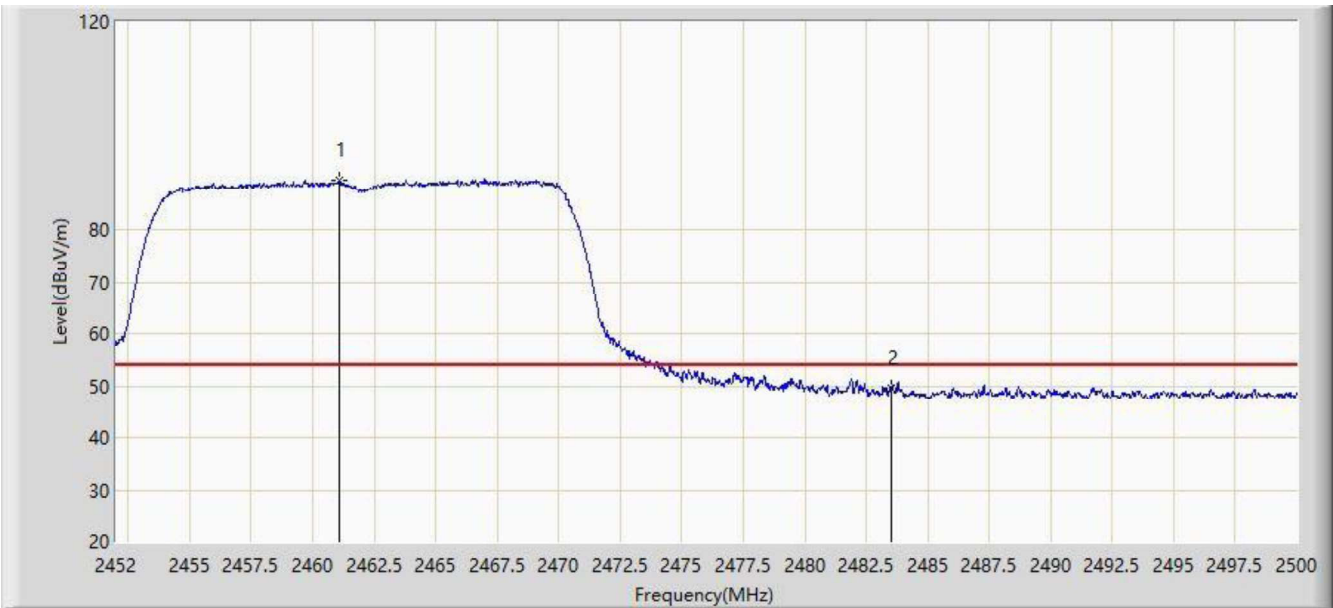


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.096	89.426	57.346	N/A	N/A	32.080	AV
2			2483.500	49.570	17.533	-4.430	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:35
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

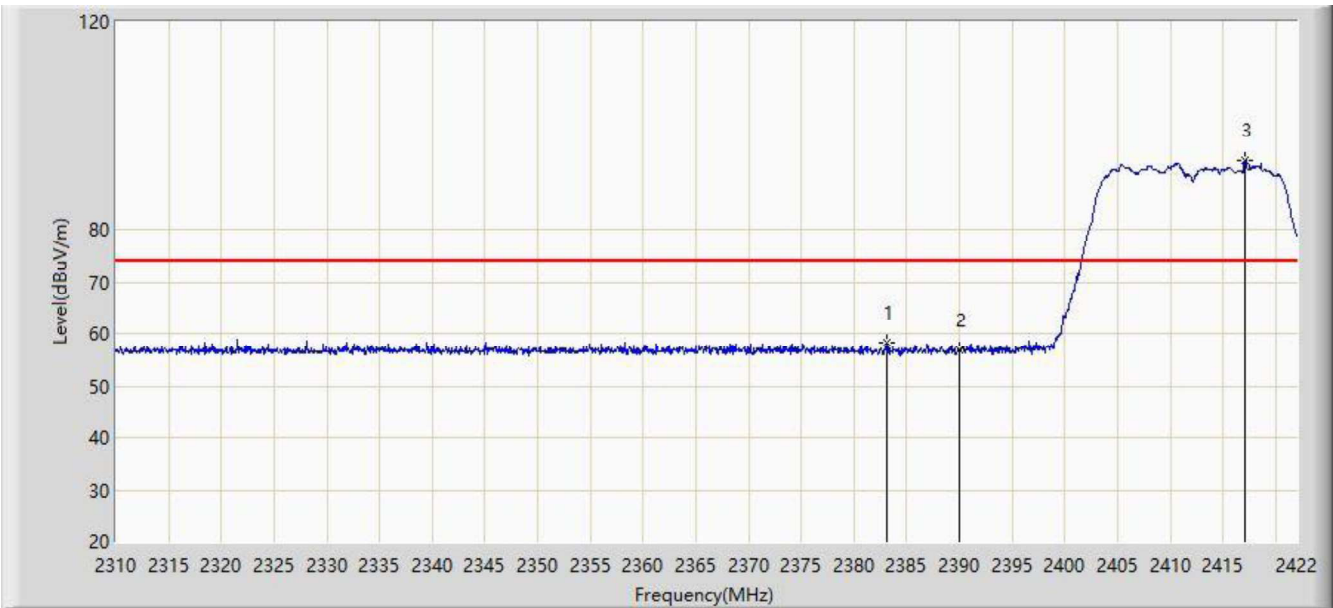


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.192	58.298	26.224	-15.702	74.000	32.074	PK
2			2390.000	56.808	24.736	-17.192	74.000	32.072	PK
3		*	2417.072	93.404	61.307	N/A	N/A	32.096	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:40
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

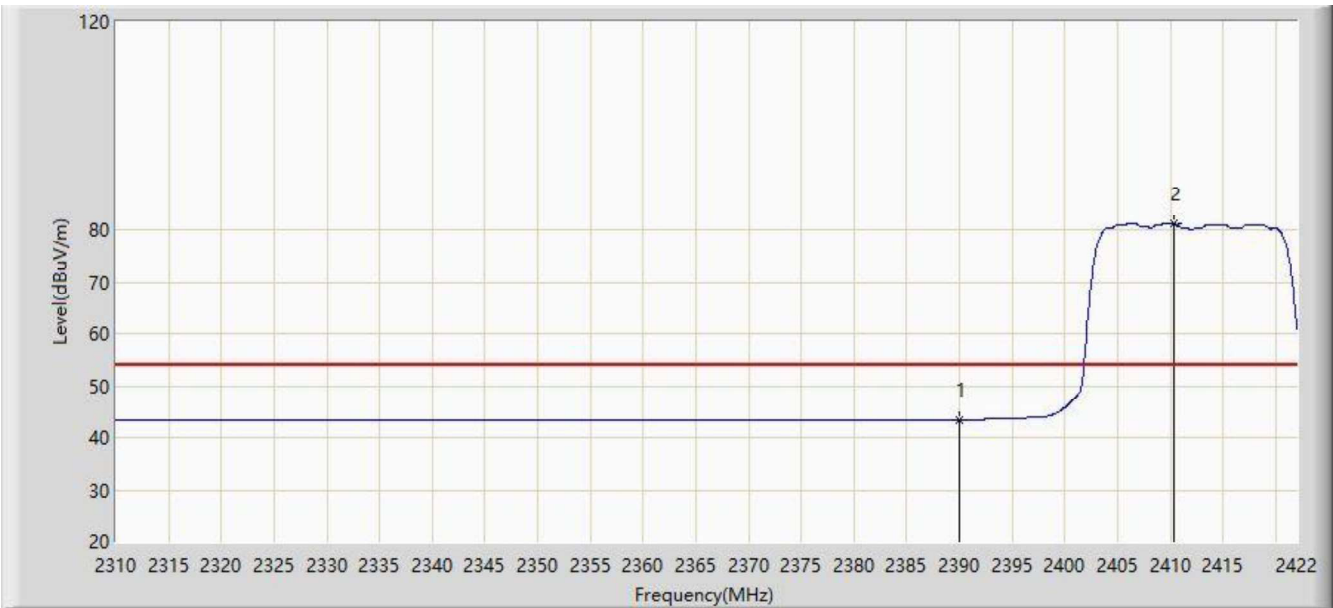


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.564	11.492	-10.436	54.000	32.072	AV
2		*	2410.296	81.095	49.015	N/A	N/A	32.080	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:42
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

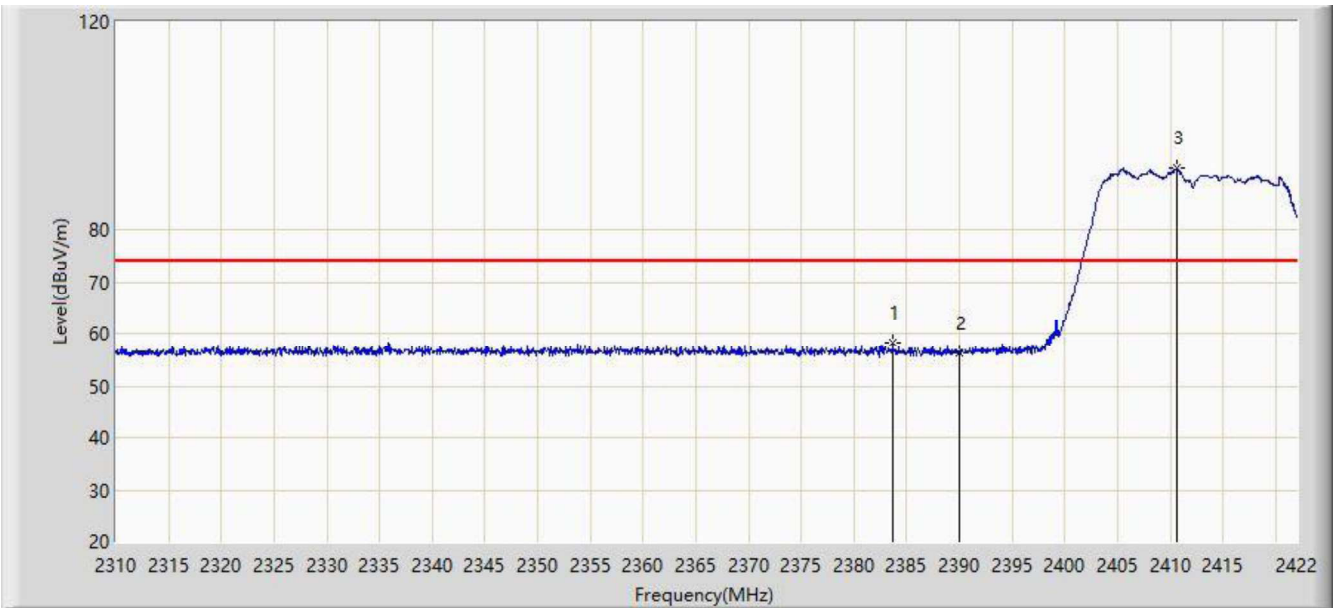


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.696	58.153	26.079	-15.847	74.000	32.074	PK
2			2390.000	56.370	24.298	-17.630	74.000	32.072	PK
3		*	2410.688	91.923	59.842	N/A	N/A	32.081	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:46
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

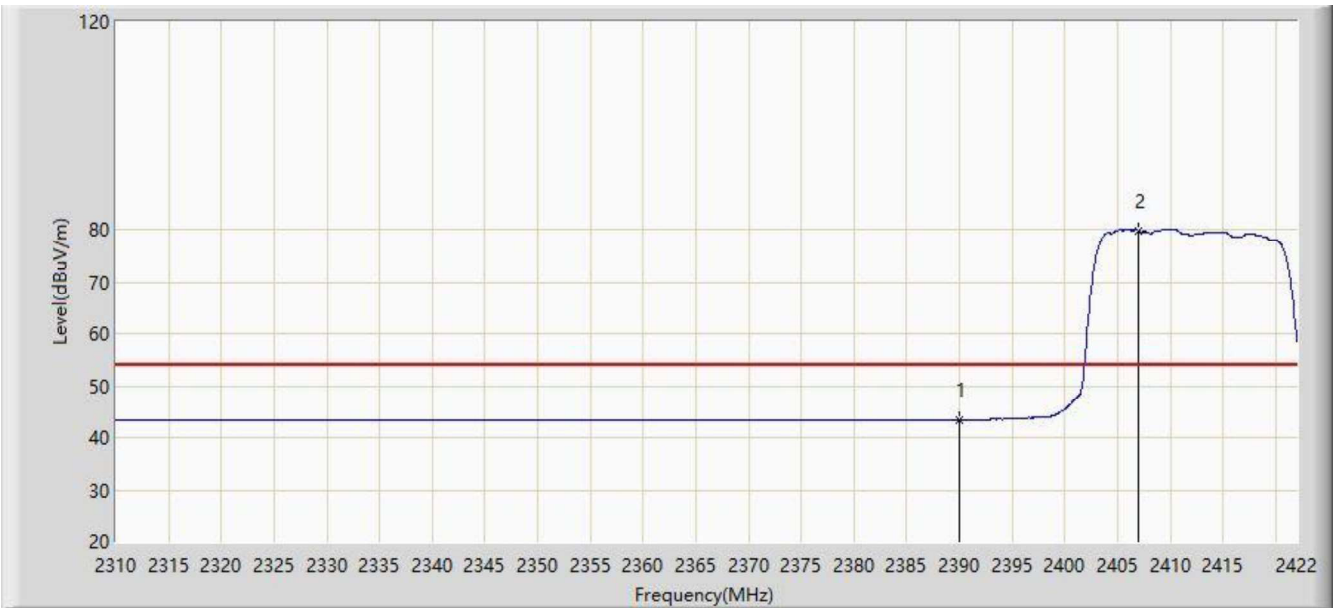


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.572	11.500	-10.428	54.000	32.072	AV
2		*	2406.936	79.846	47.768	N/A	N/A	32.079	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:49
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

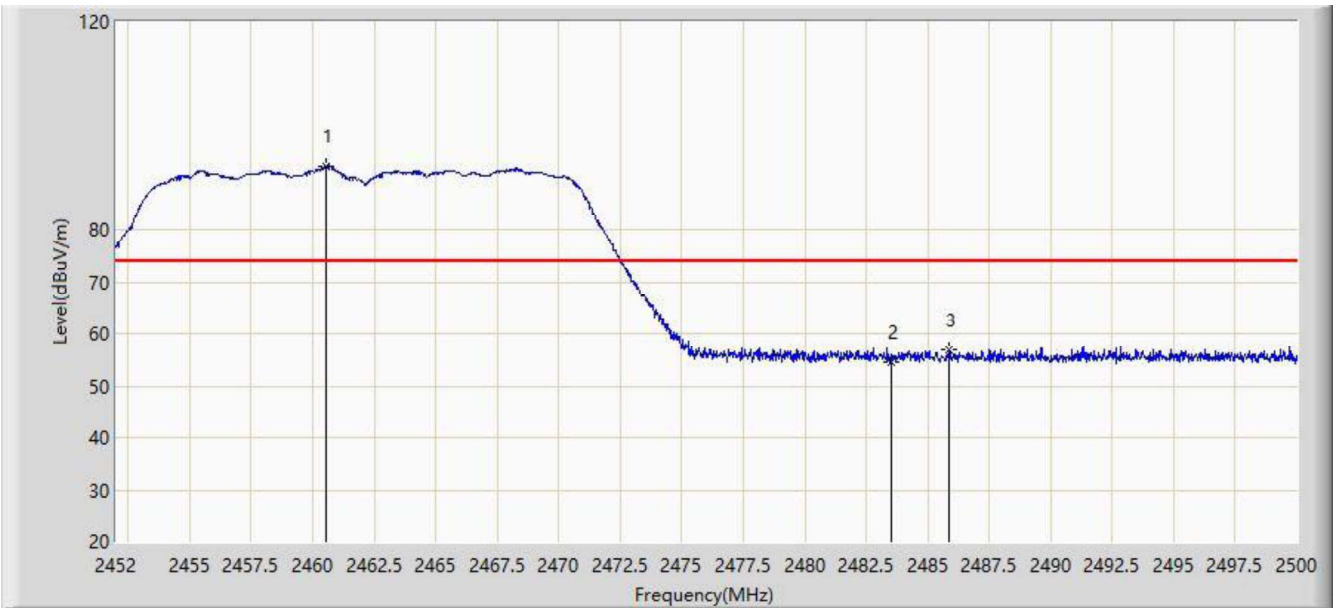


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.544	92.245	60.165	N/A	N/A	32.080	PK
2			2483.500	54.585	22.548	-19.415	74.000	32.037	PK
3			2485.888	56.840	24.808	-17.160	74.000	32.032	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:53
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

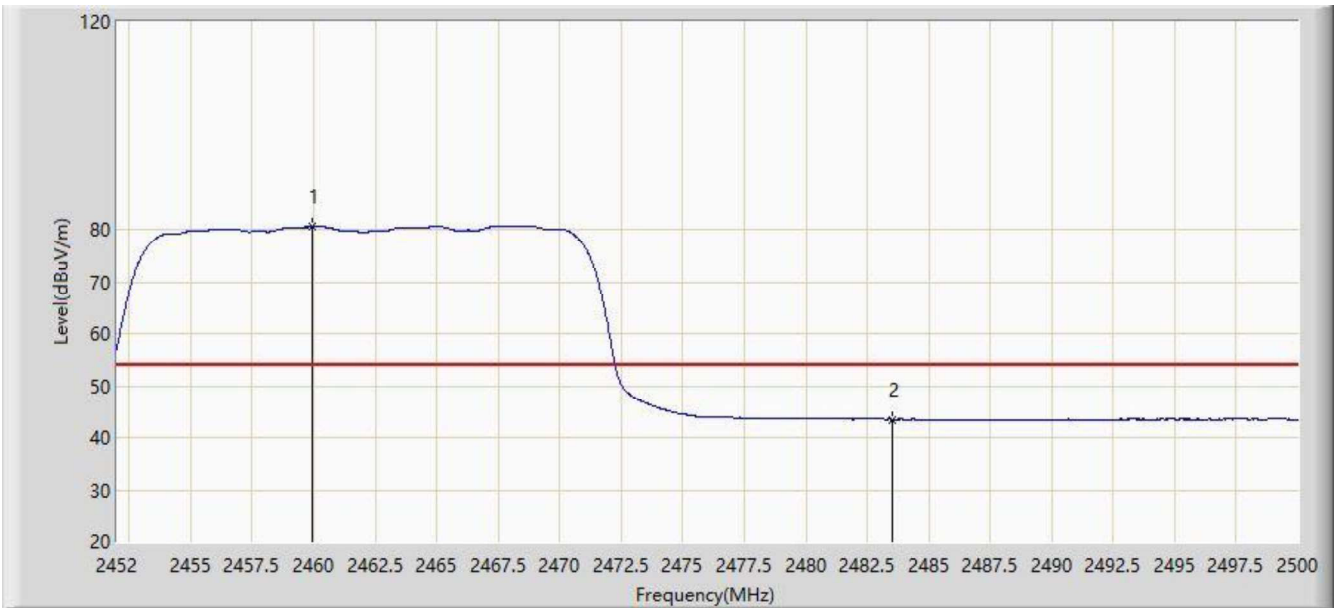


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.968	80.465	48.385	N/A	N/A	32.080	AV
2			2483.500	43.616	11.579	-10.384	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

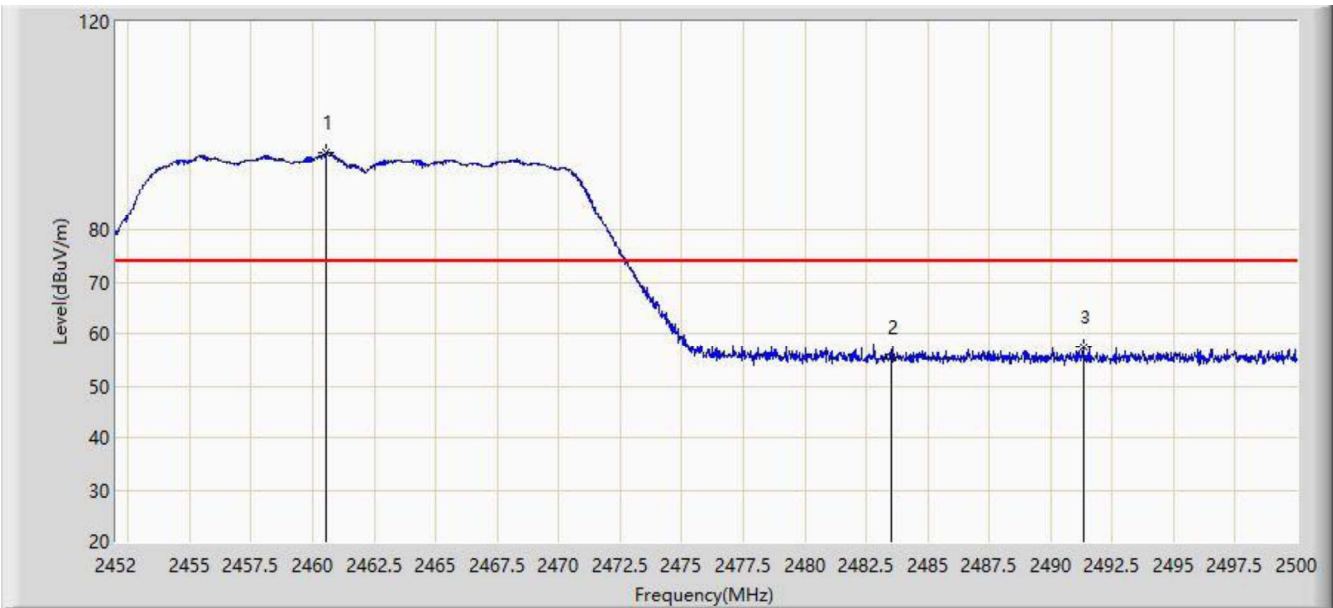


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.520	94.697	62.617	N/A	N/A	32.080	PK
2			2483.500	55.313	23.276	-18.687	74.000	32.037	PK
3			2491.312	57.502	25.480	-16.498	74.000	32.023	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 17:59
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

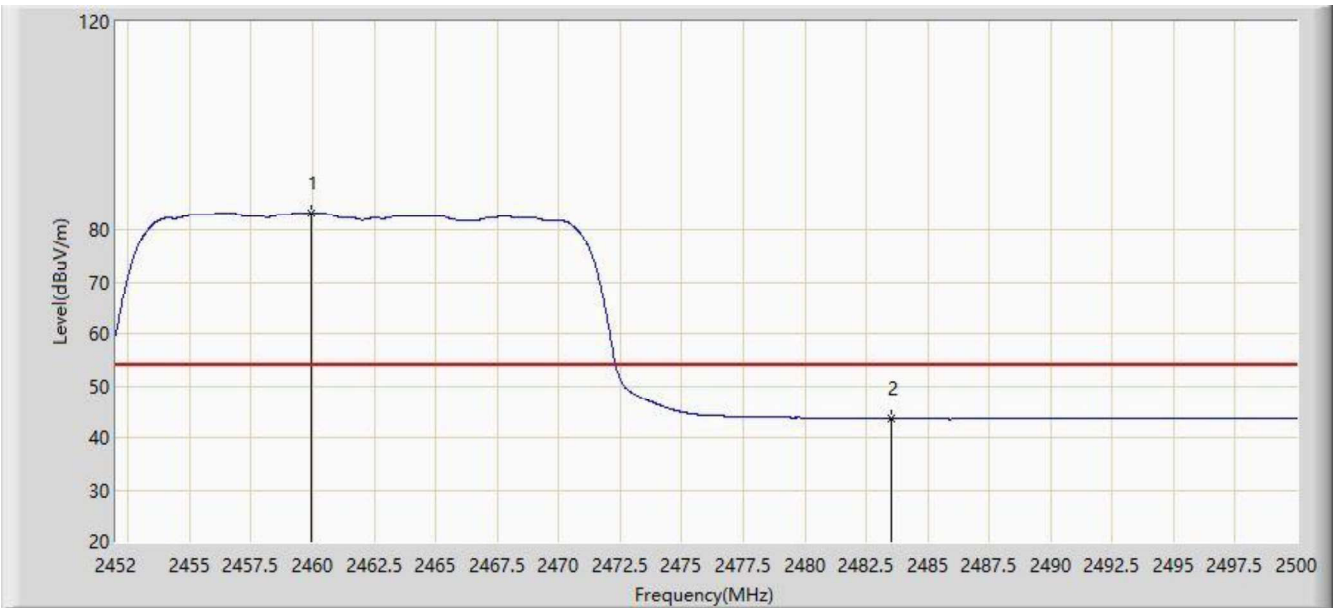


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.968	83.169	51.089	N/A	N/A	32.080	AV
2			2483.500	43.730	11.693	-10.270	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:01
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

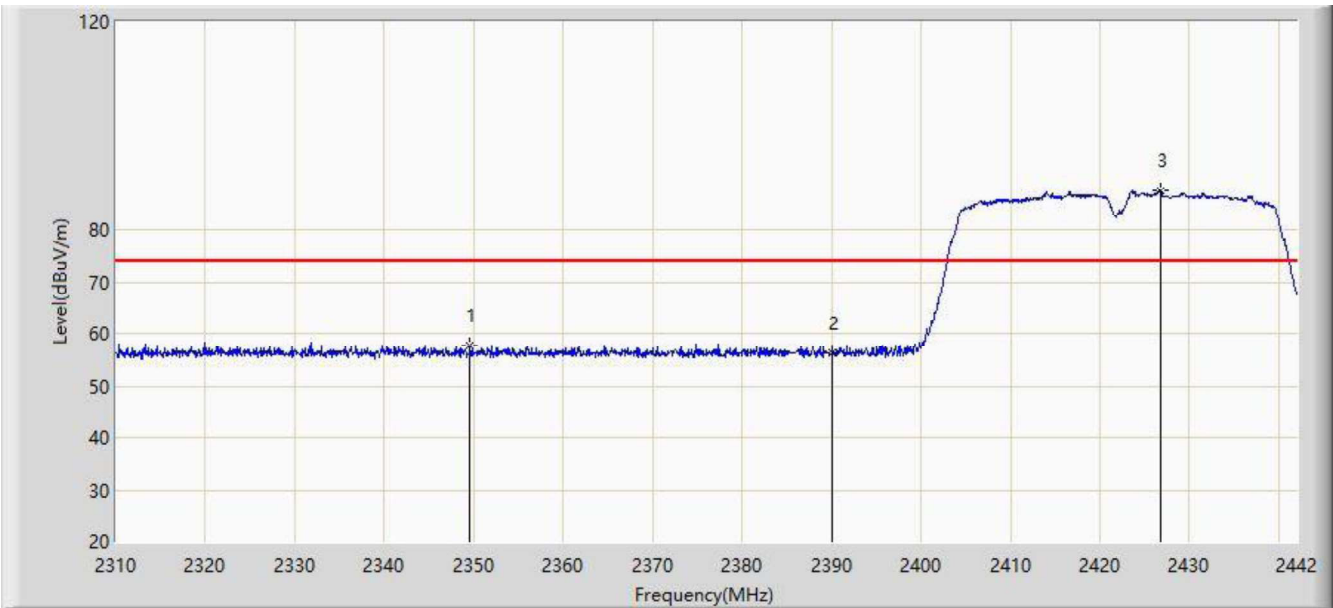


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2349.600	57.746	25.615	-16.254	74.000	32.131	PK
2			2390.000	56.096	24.024	-17.904	74.000	32.072	PK
3		*	2426.754	87.593	55.471	N/A	N/A	32.123	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:05
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

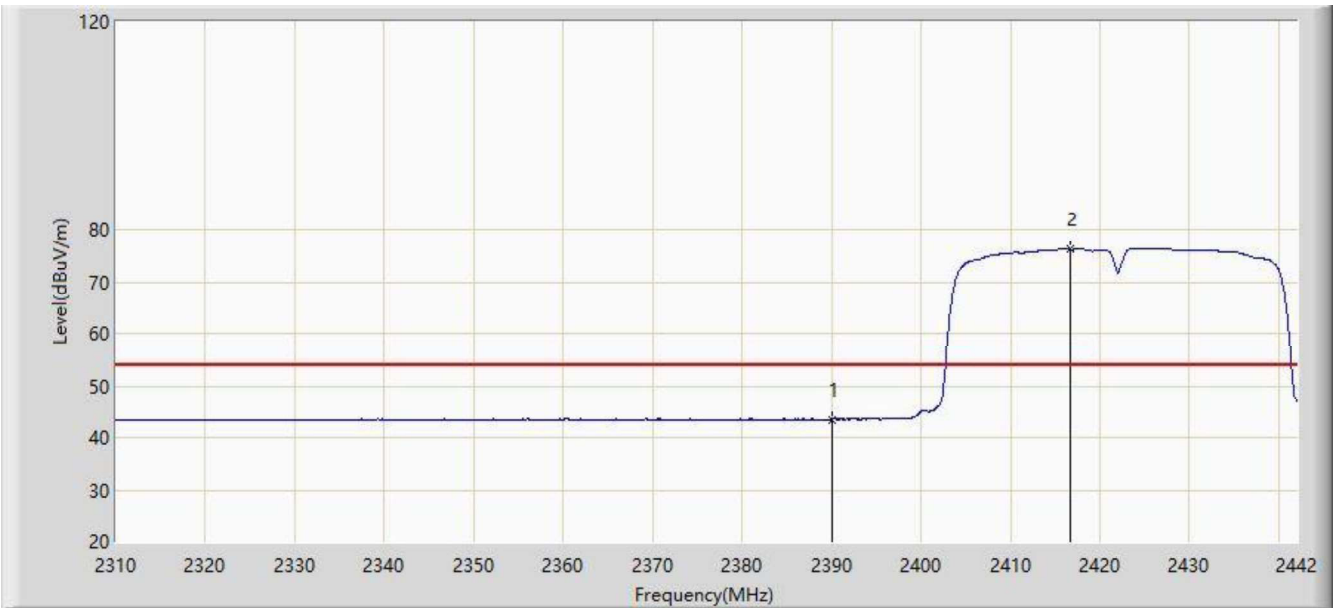


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.616	11.544	-10.384	54.000	32.072	AV
2		*	2416.656	76.087	43.991	N/A	N/A	32.096	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:07
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

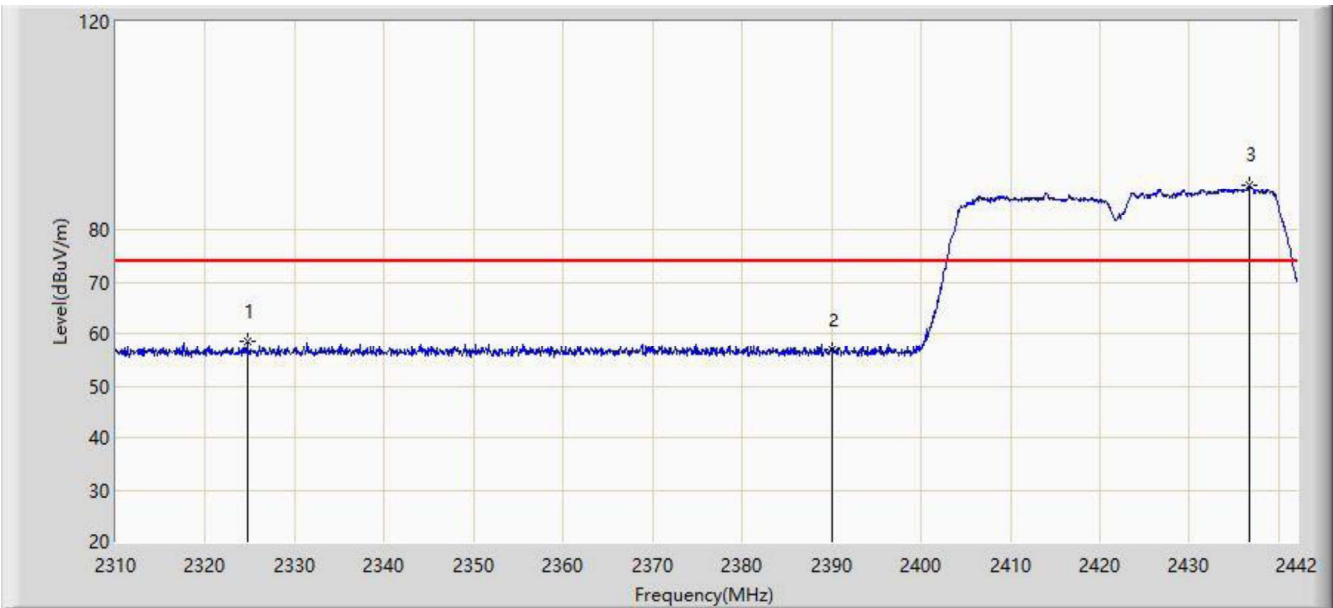


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2324.718	58.509	26.327	-15.491	74.000	32.182	PK
2			2390.000	56.749	24.677	-17.251	74.000	32.072	PK
3		*	2436.786	88.622	56.523	N/A	N/A	32.099	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:12
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

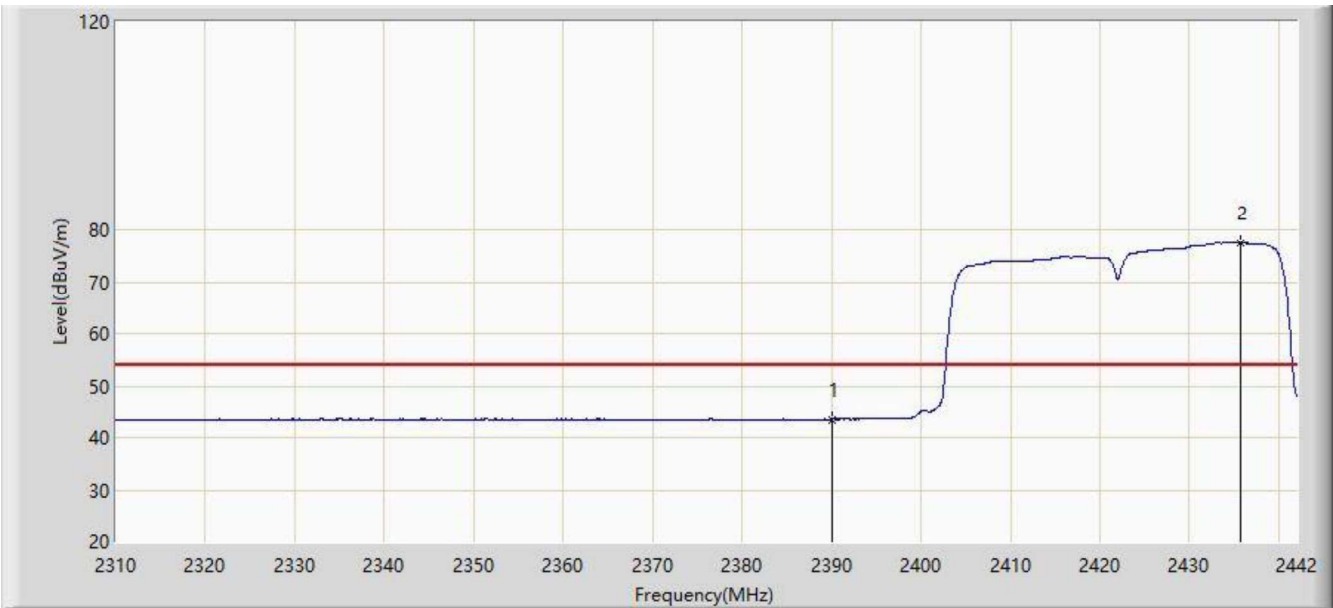


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	43.619	11.547	-10.381	54.000	32.072	AV
2		*	2435.796	77.417	45.315	N/A	N/A	32.101	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:13
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

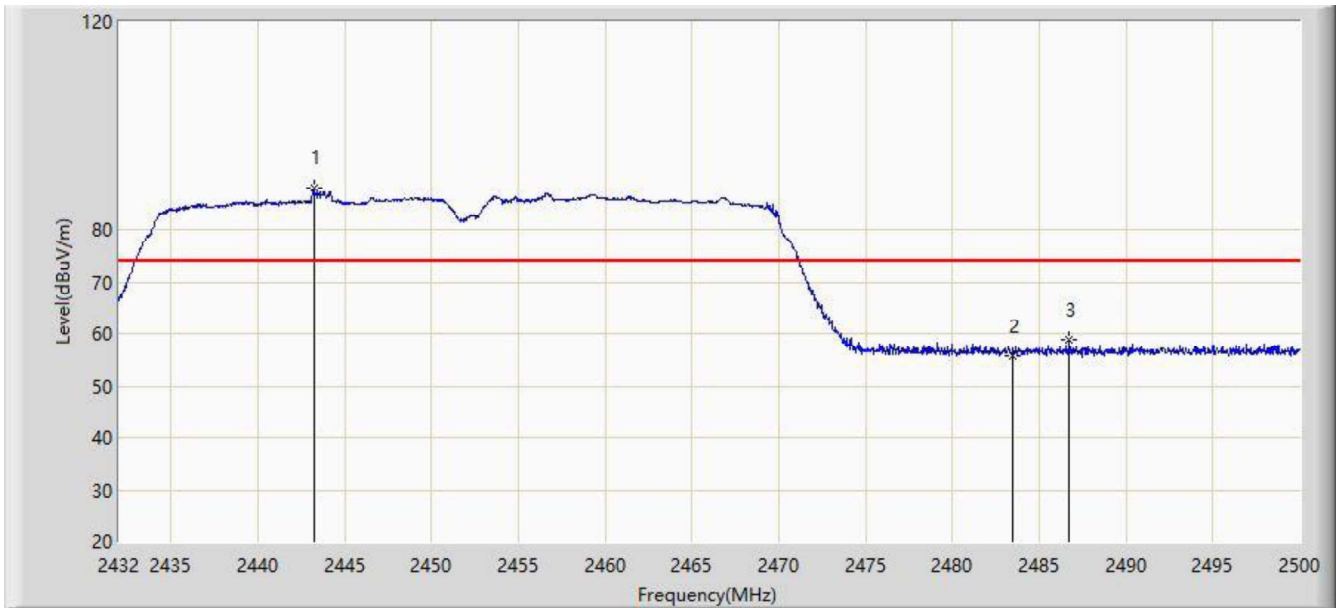


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2443.220	88.127	56.048	N/A	N/A	32.079	PK
2			2483.500	55.768	23.731	-18.232	74.000	32.037	PK
3			2486.740	58.803	26.772	-15.197	74.000	32.031	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:18
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

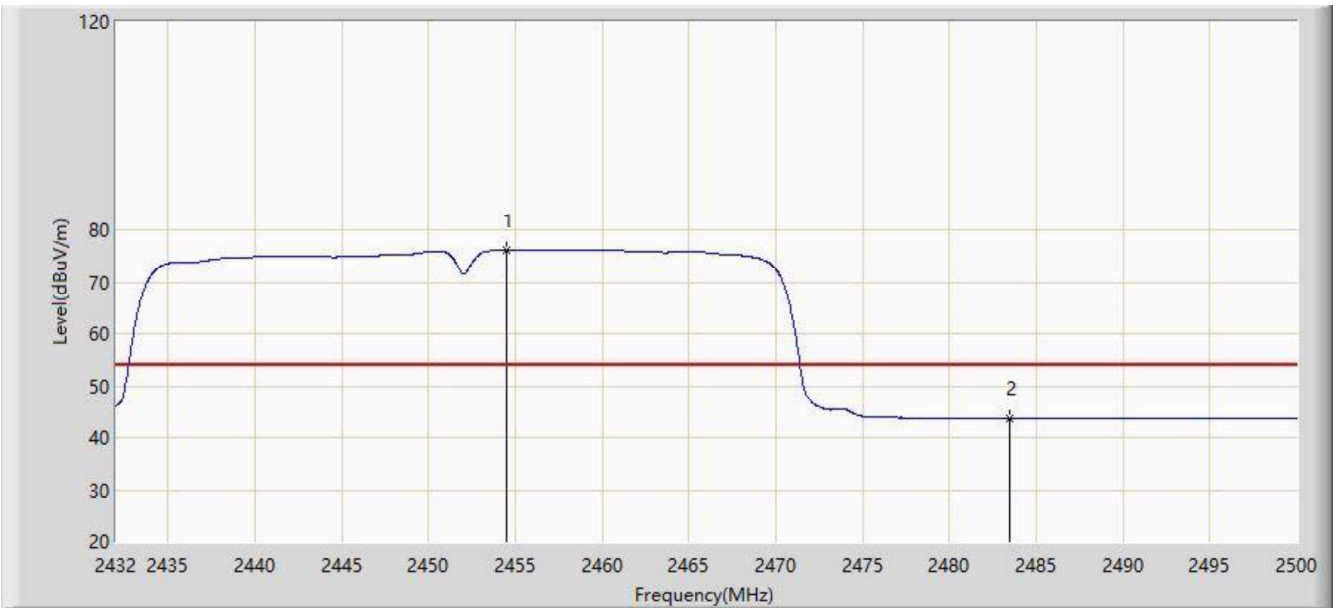


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2454.474	75.824	43.747	N/A	N/A	32.077	AV
2			2483.500	43.761	11.724	-10.239	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:21
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

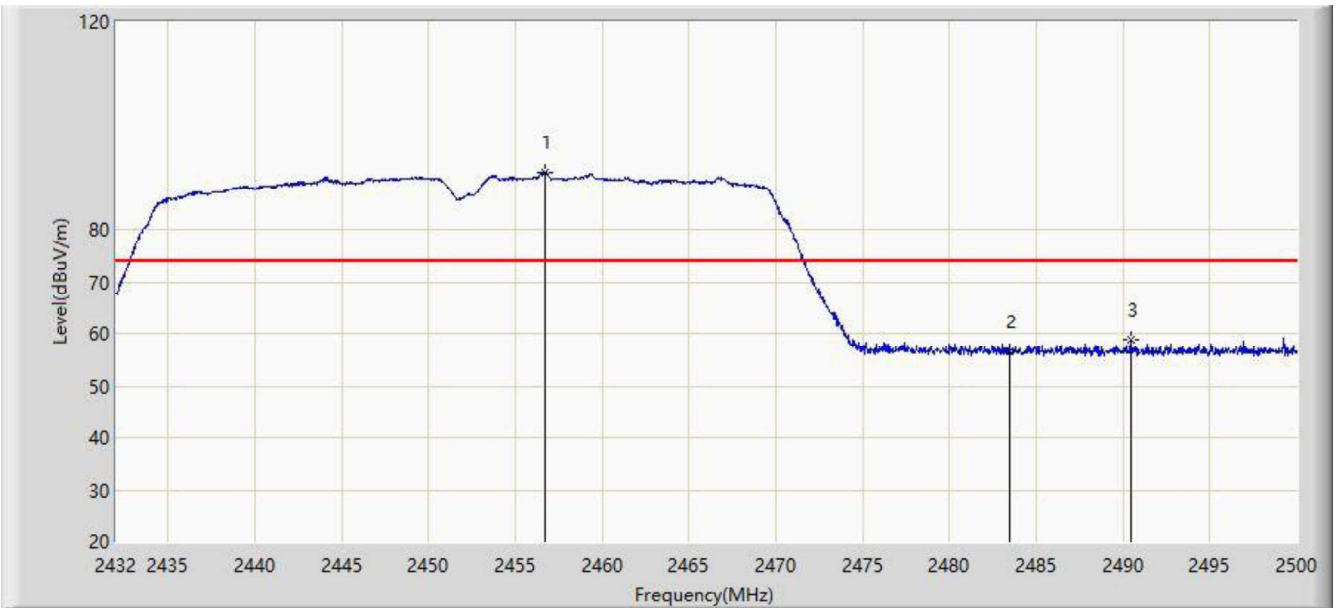


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2456.752	91.014	58.936	N/A	N/A	32.078	PK
2			2483.500	56.627	24.590	-17.373	74.000	32.037	PK
3			2490.446	58.874	26.850	-15.126	74.000	32.024	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/04/26 - 18:25
Limit: FCC_Part15.209_RE(3m)	Engineer: David Lv
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wearable video camera	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at channel 2452MHz	

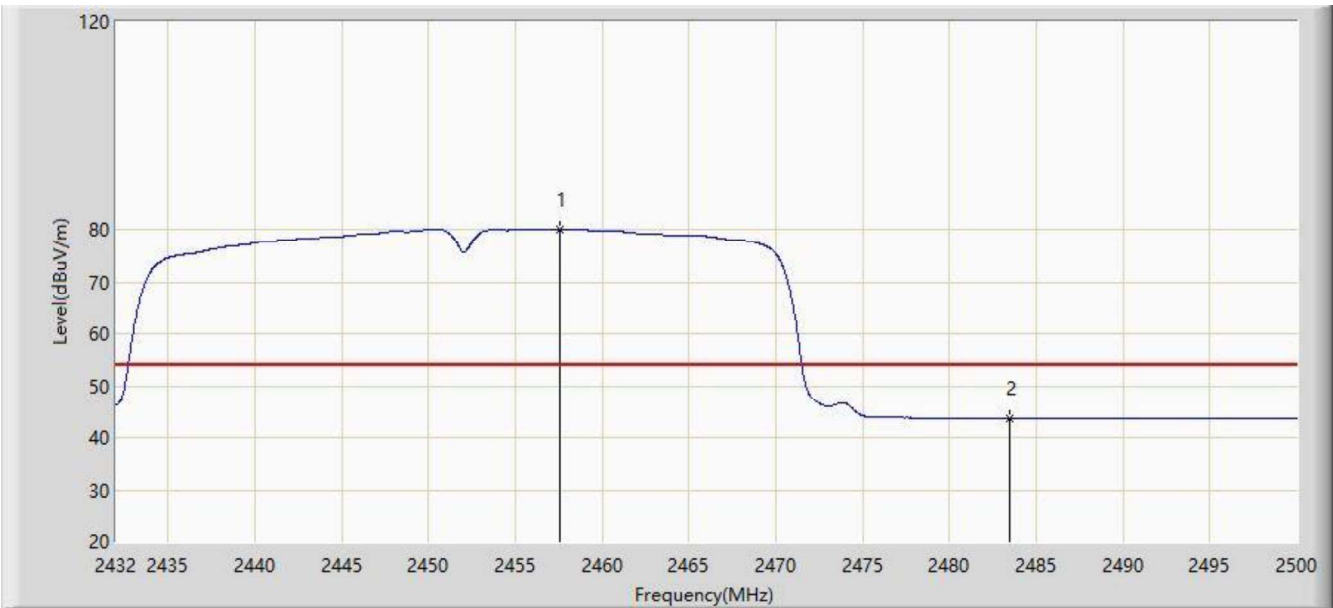

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.568	80.094	48.015	N/A	N/A	32.079	AV
2			2483.500	43.767	11.730	-10.233	54.000	32.037	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

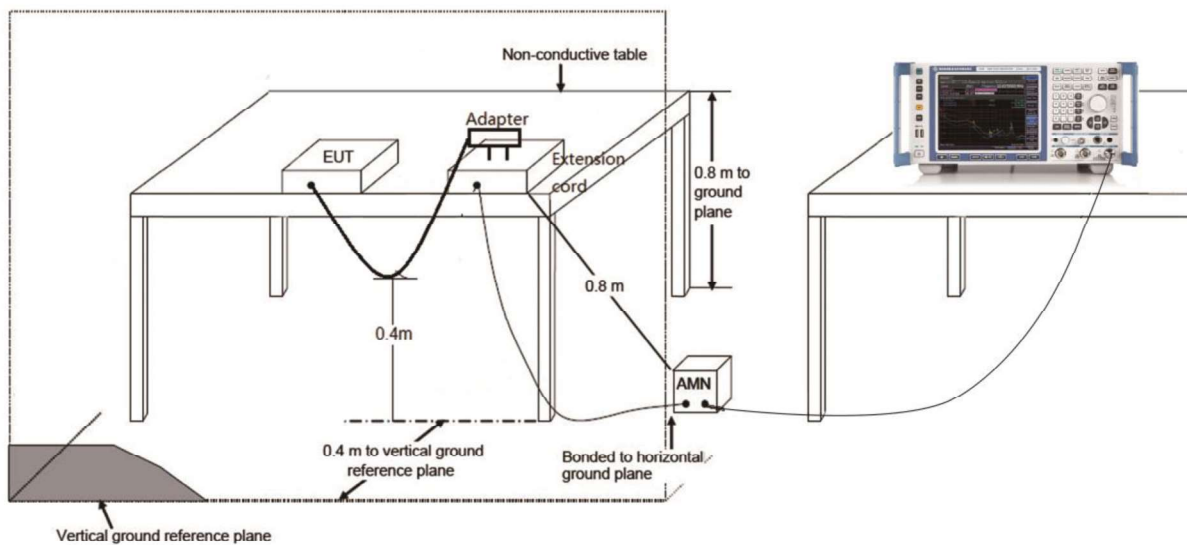

7.8.3.Test Result

Site: SR2	Time: 2020/04/29 - 19:49
Limit: FCC_Part15.207_CE_AC Power	Engineer: David Lv
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Wearable video camera	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

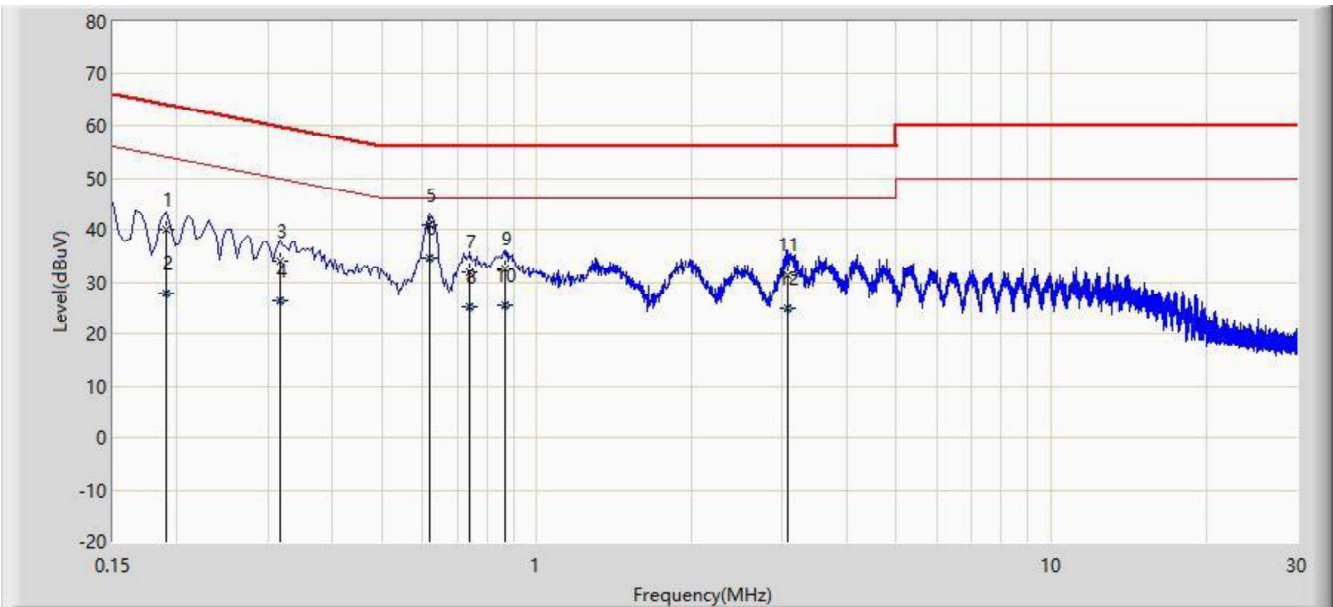


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.190	39.961	30.112	-24.076	64.037	9.849	QP
2			0.190	27.842	17.993	-26.194	54.037	9.849	AV
3			0.318	33.856	24.058	-25.902	59.759	9.798	QP
4			0.318	26.300	16.501	-23.459	49.759	9.798	AV
5			0.618	40.994	31.055	-15.006	56.000	9.938	QP
6		*	0.618	34.535	24.597	-11.465	46.000	9.938	AV
7			0.742	31.846	21.965	-24.154	56.000	9.882	QP
8			0.742	25.104	15.222	-20.896	46.000	9.882	AV
9			0.870	32.605	22.780	-23.395	56.000	9.825	QP
10			0.870	25.536	15.712	-20.464	46.000	9.825	AV
11			3.078	31.238	21.544	-24.762	56.000	9.694	QP
12			3.078	25.064	15.370	-20.936	46.000	9.694	AV

Note 1: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/04/29 - 19:54
Limit: FCC_Part15.207_CE_AC Power	Engineer: David Lv
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Wearable video camera	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2412MHz	

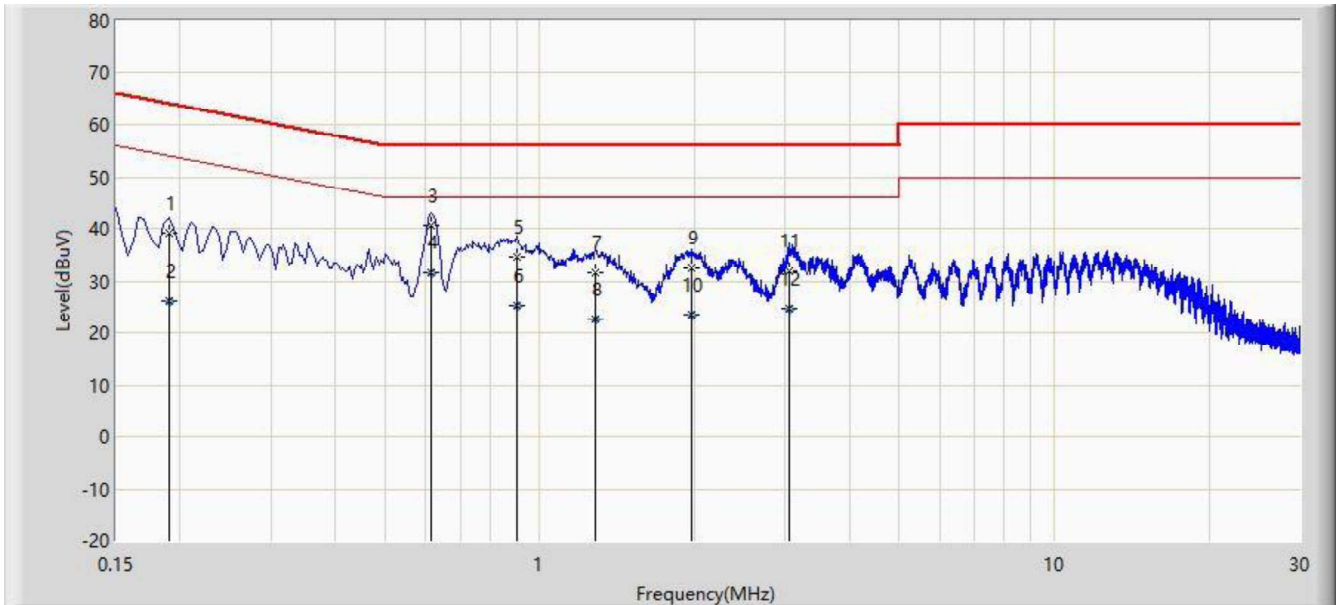

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.190	39.163	29.314	-24.874	64.037	9.849	QP
2			0.190	26.002	16.153	-28.035	54.037	9.849	AV
3			0.614	40.703	30.763	-15.297	56.000	9.940	QP
4		*	0.614	31.488	21.548	-14.512	46.000	9.940	AV
5			0.902	34.506	24.689	-21.494	56.000	9.817	QP
6			0.902	25.331	15.514	-20.669	46.000	9.817	AV
7			1.286	31.728	21.995	-24.272	56.000	9.734	QP
8			1.286	22.750	13.017	-23.250	46.000	9.734	AV
9			1.966	32.410	22.726	-23.590	56.000	9.684	QP
10			1.966	23.608	13.923	-22.392	46.000	9.684	AV
11			3.046	31.882	22.197	-24.118	56.000	9.684	QP
12			3.046	24.583	14.899	-21.417	46.000	9.684	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is compliance with Part 15C of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “2004RSU016-UT” file.

Appendix B - EUT Photograph

Refer to "2004RSU016-UE" file.