

TEST REPORT

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (1) / (63) Pages

1. Applicant

- Name : SMC Corporation
- Address : Akihabara UDX15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, Japan
- Date of Receipt : 2024-11-25

2. Manufacturer

- Name : SMC Corporation
- Address : Akihabara UDX15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, Japan



3. Use of Report : For FCC & ISSED Certification**4. Test Sample / Model:** SMC Wireless System / IN574-147**5. Date of Test :** 2024-11-26 to 2024-12-20**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247

ANSI C63.10-2013, RSS-247, RSS-Gen

7. Testing Environment: refer to 6 page**8. Test Results :** Compliance**9. Location of Test :** ☒ Permanent Testing Lab ☐ On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si,
Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Gwanyong Kim: (Signature) 	Young-taek Lee: (Signature) 

2025-01-23

CTK Co., Ltd.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (2) / (63) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2025-01-23	Issued (CTK-2025-00262)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (3) / (63) Pages

CONTENTS

1. General Product Description	4
1.1 Applicant Information	4
1.2 Product Information	4
1.3 Peripheral Devices	4
2. Accreditations	5
2.1 Laboratory Accreditations and Listings	5
2.2 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards	6
3.2 Testing Environment	6
3.3 Mode of operation during the test	7
3.4 Maximum Measurement Uncertainty	7
3.5 Software for Measurement	7
4. Technical Characteristic Test	8
4.1 Carrier Frequency Separation	8
4.2 Number of Hopping Frequencies	10
4.3 20 dB bandwidth & 99 % Bandwidth	13
4.4 Time of Occupancy (Dwell Time)	17
4.5 Maximum peak Conducted Output Power	21
4.6 Unwanted Emissions (Conducted)	27
4.7 Radiated Emission	38
APPENDIX A – Test Equipment Used For Tests	63

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (4) / (63) Pages

1. General Product Description

1.1 Applicant Information

Company	SMC Corporation
Contact Point	Akihabara UDX15F, 4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, Japan
Contact Person	Name : Norimasa OZAKI E-mail : ozaki.norimasa@smc.com Tel : +81-297-52-6665 Fax : -

1.2 Product Information

FCC ID	2AJE7SMC-WEX10
Certification Number ISED	21344-WEX10
Product Description	SMC Wireless System
Basic model (HVIN)	IN574-147
Variant Model name	-
Operating Frequency	2 403 MHz - 2 481 MHz
RF Output Power	250kbps : -12.469 dBm (0.057 mW) 1Mbps : -12.439 dBm (0.057 mW)
Antenna Specification	Antenna type : Printed Antenna Peak Gain : -2.24 dBi
Number of channels	79
Channel Spacing	1 MHz
Type of Modulation	GFSK
Power Source	DC 3.3 V
FVIN	1.0
SW provided by the client	Tera term 5.3
RF Power setting in Test SW	Initial value

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6P
AC/DC Adapter	HP	HSTNN-LA40	7628011101

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (5) / (63) Pages

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (6) / (63) Pages

3. Test Specifications

3.1 Standards

Section in FCC	Section in RSS	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	RSS-247 5.1(b)	Carrier Frequency Separation	C	Conducted
15.247(a)	RSS-247 5.1(d)	Number of Hopping Frequencies	C	
15.247(a)	RSS-247 5.1(a)	20 dB Bandwidth	C	
15.247(a)	RSS-247 5.1(d)	Time of occupancy (Dwell Time)	C	
15.247(b)	RSS-247 5.4(b)	Maximum peak conducted output power	C	
15.247(d)	RSS-247 5.5	Unwanted emission	C	
15.209	RSS-Gen 6.13	Transmitter emission	C	Radiated
15.207(a)	RSS-Gen 8.8	AC Conducted Emission	NA	Line Conducted
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
Note 2: The data in this test report are traceable to the national or international standards.				
Note 3: The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013, RSS-247 Issue 3, RSS-Gen Issue 5				
Note 4: The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013				
Note 5: This device is frequency hopping system(FHS), and complies frequency hopping system requirement.				

3.2 Testing Environment

Test Item		Test Date	Temperature (℃)	Relative Humidity (%)
Carrier Frequency Separation		2024-12-18	22	34
Number of Hopping Frequencies			22	34
20 dB Bandwidth			22	34
Time of occupancy (Dwell Time)		2024-12-18, 2024-12-20	21~22	34~36
Maximum peak conducted output power		2024-12-20	21	36
Unwanted emission		2024-12-20	21	36
Transmitter emission (Radiated)	1) 9 kHz to 30 MHz	2024-11-26	22	33
	2) 30 MHz to 1 GHz	2024-11-26, 2024-12-17	22	29
	3) 1 GHz to 18 GHz	2024-11-27, 2024-12-04	21~23	38~39
	4) 18 GHz to 26.5 GHz			
	5) Restricted Frequency Bands			

3.3 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
 During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
 The results are only attached worst cases.

Test Frequency

Lowest channel	Middle channel	Highest channel
2 403 MHz	2 441 MHz	2 481 MHz

Test mode

Transmission speed	
250 kbps	1 Mbps

3.4 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
 Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$)
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	3.82 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f > 1$ GHz)	4.50 dB (C.L.: Approx. 95 %, $k = 2$)

3.5 Software for Measurement

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.1.0, ES10 Ver. 10.001

4. Technical Characteristic Test

4.1 Carrier Frequency Separation

Test Procedures

ANSI C63.10-2013 - Section 7.8.2

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.
After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

- a) Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)
- b) RBW = 30 kHz (Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel)
- c) VBW = 30 kHz (\geq RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

Limit

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode : 250 kbps

Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Middle	1 000	197.3	25	Complies

Test mode : 1 Mbps

Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Middle	1 000	806	25	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (9) / (63) Pages

Test mode : 250 kbps

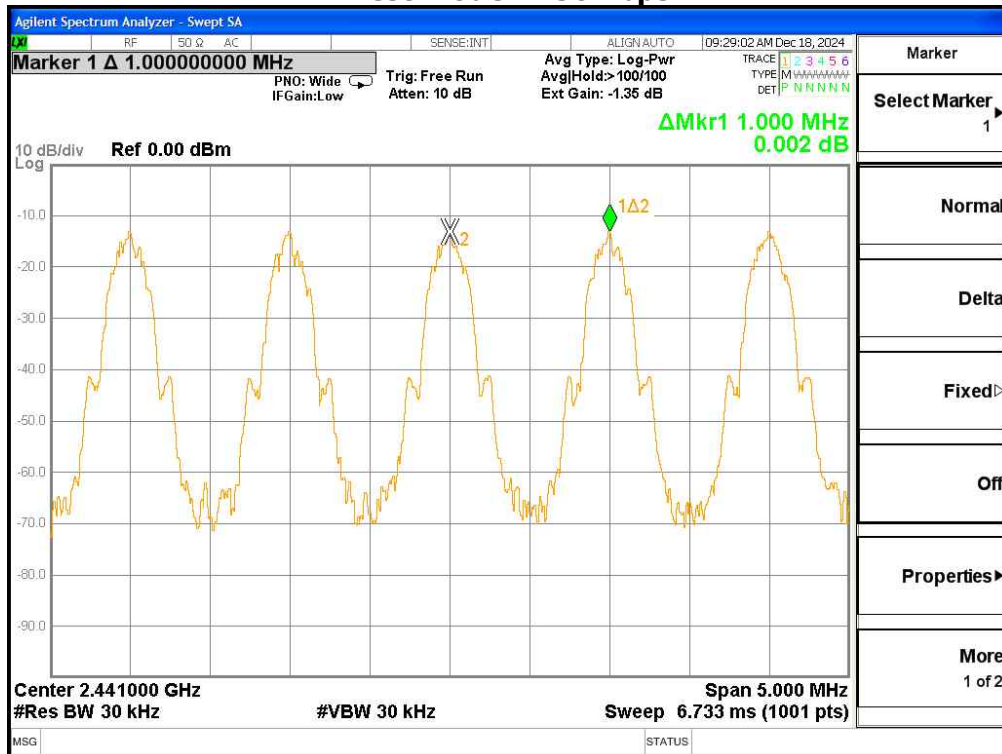

Test mode : 1 Mbps

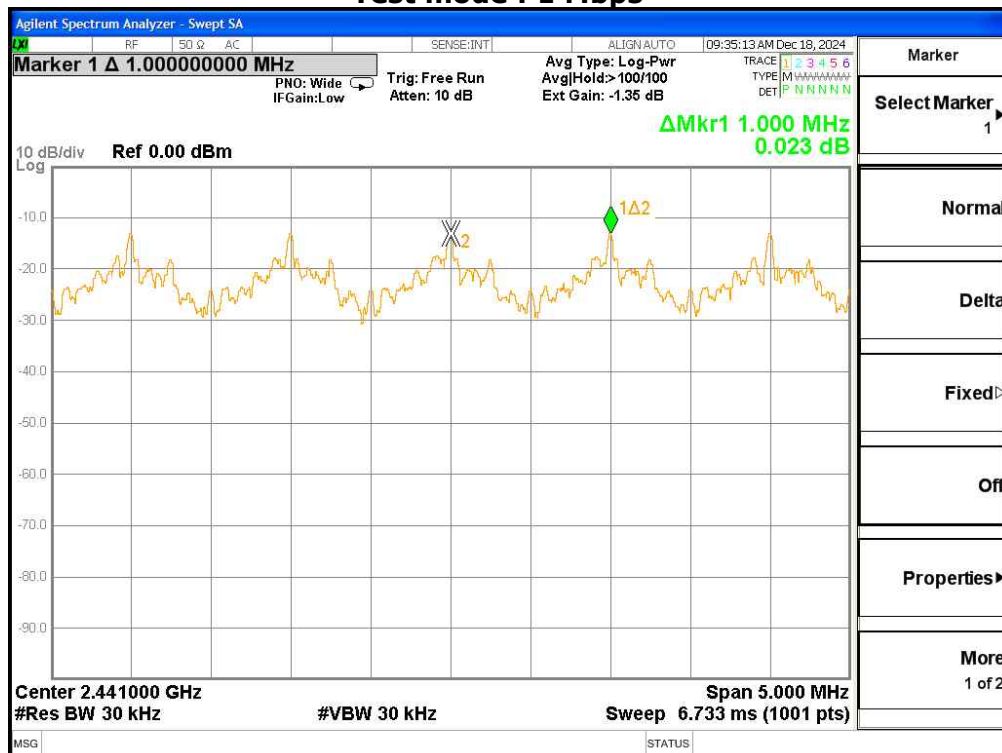

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (10) / (63) Pages

4.2 Number of Hopping Frequencies


Test Procedures

ANSI C63.10-2013 - Section 7.8.3

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

- a) Frequency range 1: Start = 2390.0 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz
- b) RBW = 300 kHz (To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller)
- c) VBW = 300 kHz (\geq RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold



Limit

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

Test Results

Test Mode	Total number of Hopping Channels	Result
250 kbps	79	Complies
1 Mbps	79	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (11) / (63) Pages

Test Mode : 250 kbps

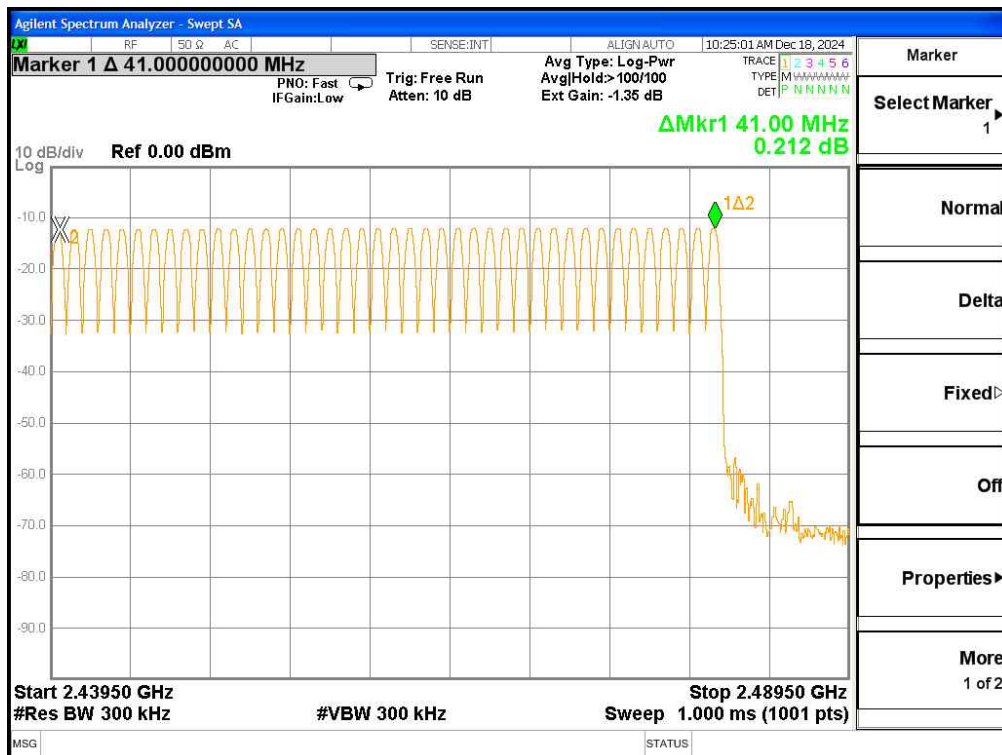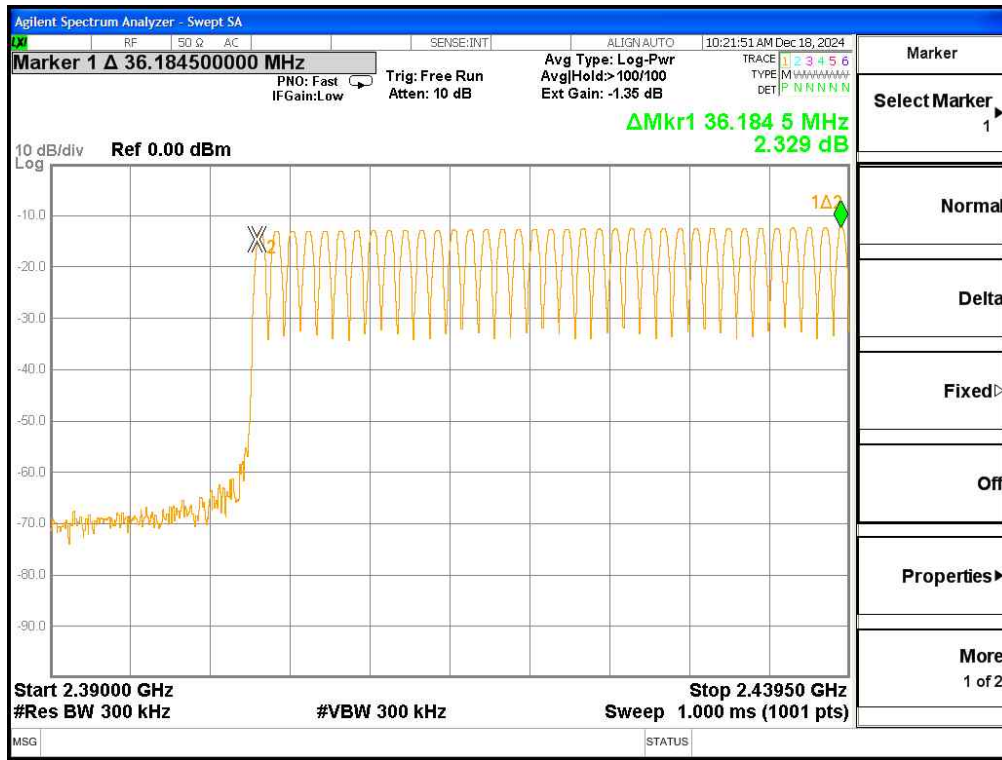





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (12) / (63) Pages

Test Mode : 1 Mbps

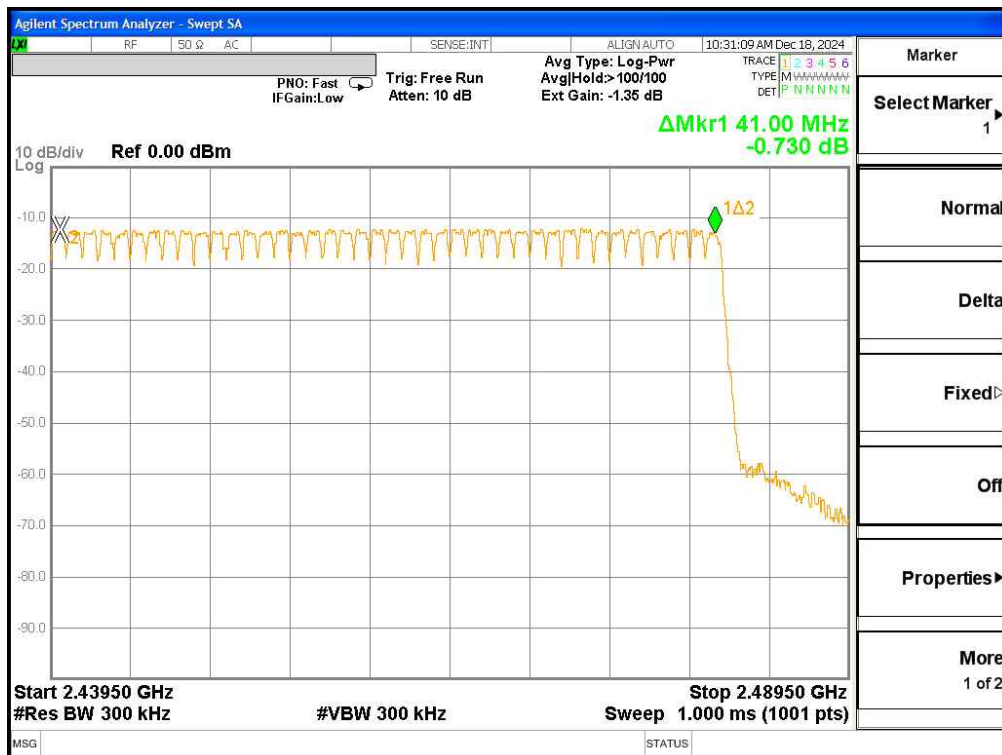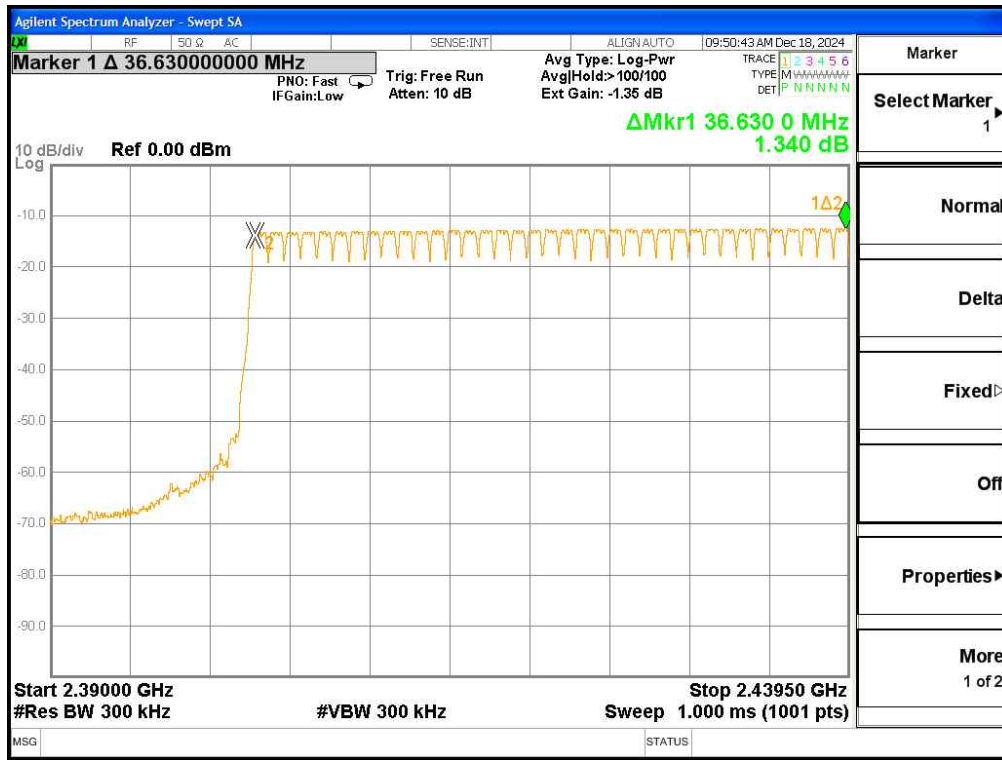



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (13) / (63) Pages

4.3 20 dB bandwidth & 99 % Bandwidth

Test Procedures

ANSI C63.10-2013 - Section 6.9.2
RSS-GEN – Section 6.7

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

ANSI C63.10-2013 - Section 6.9.3
RSS-GEN – Section 6.7

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

Use the 99 % power bandwidth function of the instrument and report the measured bandwidth.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

a) Span = between 2 times and 5 times the OBW


b) RBW = 1% to 5% of the OBW

c) VBW = approximately 3 times RBW

d) Sweep = auto

e) Detector function = peak

f) Trace = max hold



Limit

Limit : N/A

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (14) / (63) Pages

Test Results

Test Mode	Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
250 kbps	Low	2 403	0.309	0.272	Complies
	Middle	2 441	0.296	0.269	Complies
	High	2 481	0.307	0.271	Complies
1 Mbps	Low	2 403	1.246	1.082	Complies
	Middle	2 441	1.209	1.082	Complies
	High	2 481	1.227	1.077	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (15) / (63) Pages

Test mode : 250 KBPS

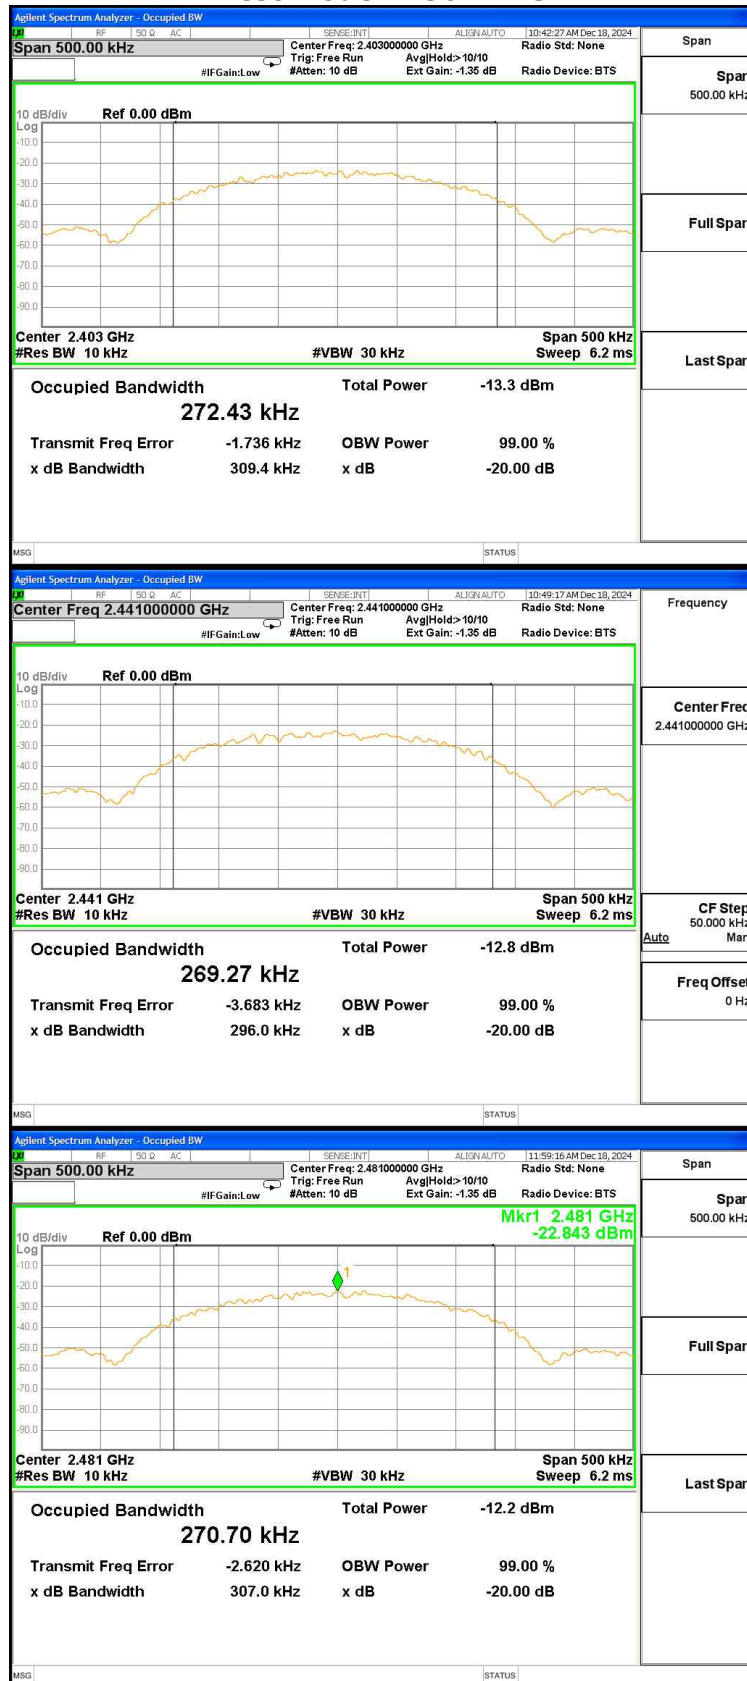



Report No.:
CTK-2025-00262
Page (16) / (63) Pages



4.4 Time of Occupancy (Dwell Time)

Test Procedures

ANSI C63.10-2013 - Section 7.8.4

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.


- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function : Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

Number of hops in the period specified in the requirements =
(number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.



Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (18) / (63) Pages

Test Results

The requirements are:

☒ Complies

Test Data

Mode	Number of hops on spectrum analyzer	period specified in the requirement (sec)	analyzer sweep time (sec)	Number of transmission in a period (channel number*0.4 sec)	Transmission time per hop (msec)	average time of occupancy (msec)	Limit (msec)
250 kbps	13	31.6	5.0	82.16	1.270	104.343	400
1 Mbps	31	31.6	5.0	195.92	0.450	88.164	400

Remark:

Number of transmission in a period(Channel number * 0.4)
= Number of hops on spectrum analyzer × (period specified in the requirement / analyzer sweep time)

Average time of occupancy = Number of transmission in a period × Transmission time per hop

See next pages for actual measured spectrum plots.





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (19) / (63) Pages

Time of Occupancy for Packet Type 250 kbps

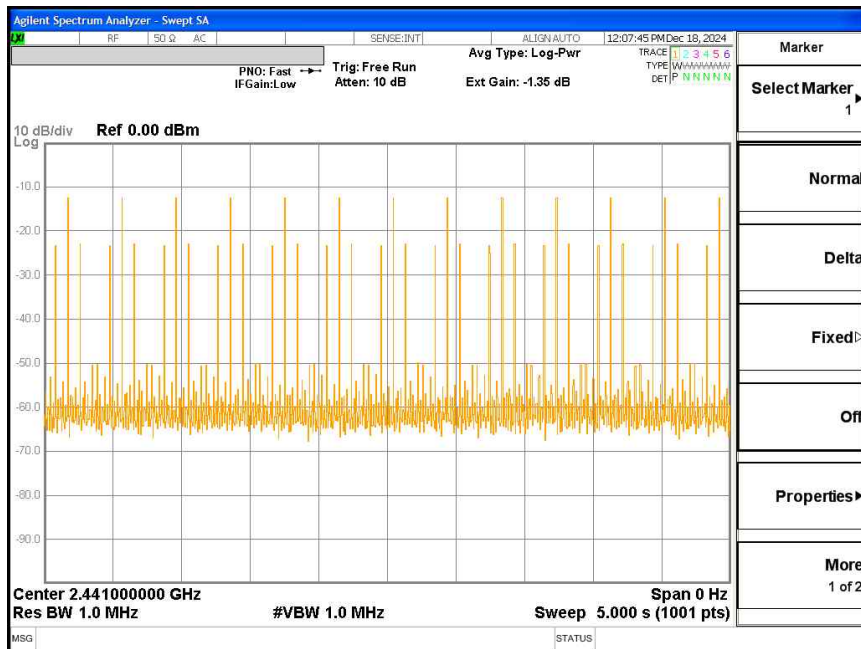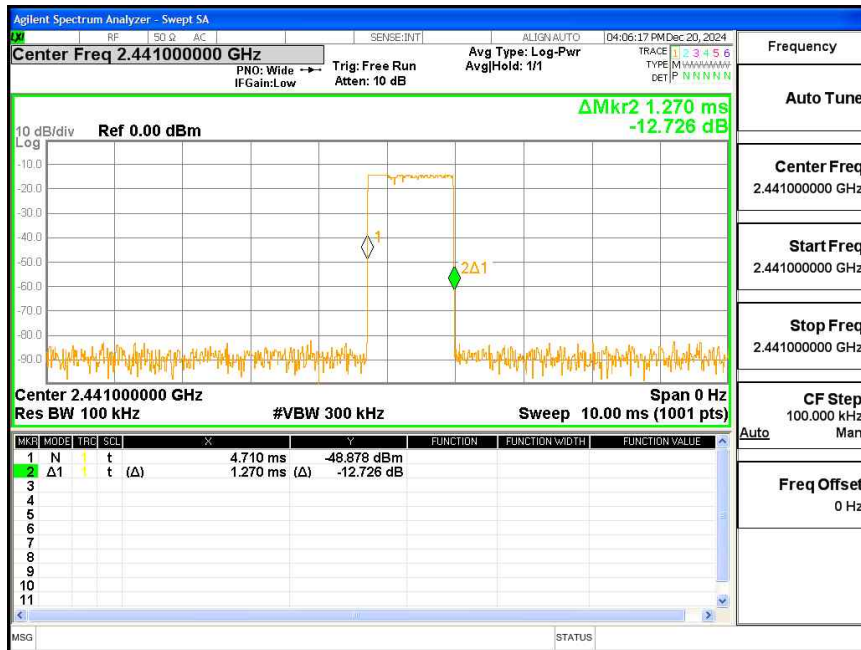





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (20) / (63) Pages

Time of Occupancy for Packet Type 1 Mbps

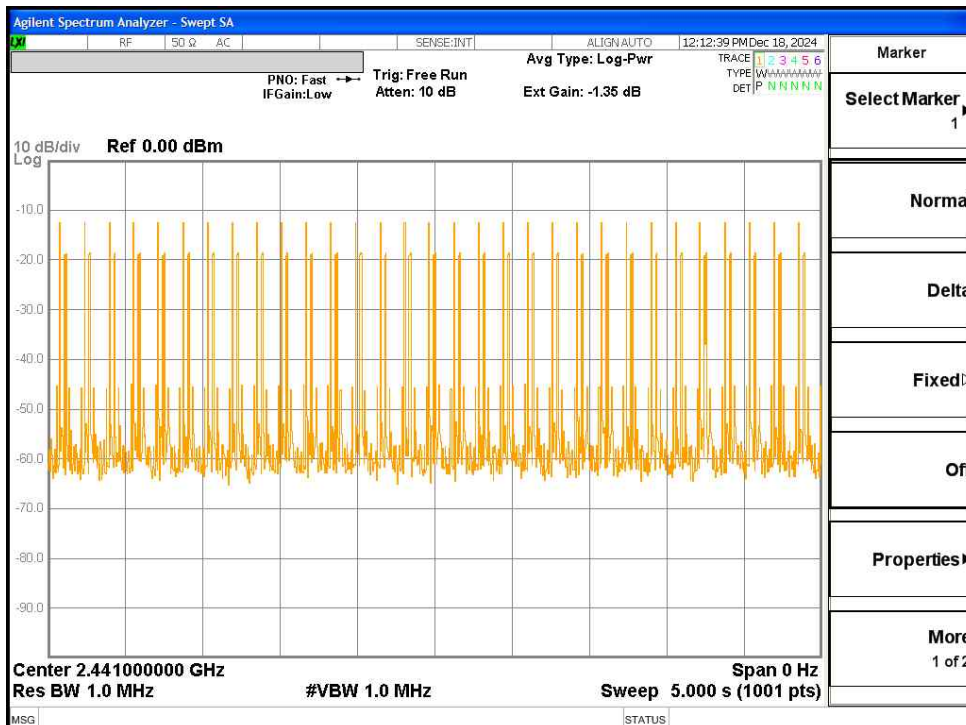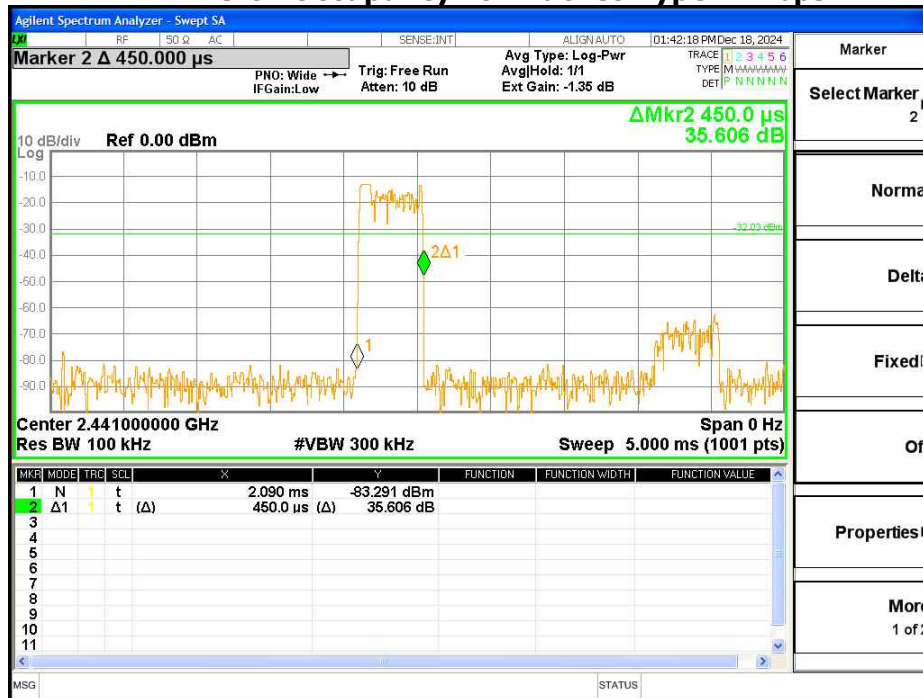

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (21) / (63) Pages

4.5 Maximum peak Conducted Output Power

Test Procedures

ANSI C63.10-2013 - Section 7.8.5
RSS-GEN – Section 6.12

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test.


The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

- a) Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)
- b) RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)
- c) VBW = 3 MHz (\geq RBW)
- d) Detector = peak
- e) Trace = max hold
- f) Sweep = auto

Allow trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission.



Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (22) / (63) Pages

Test Results

Test Mode	Frequency [MHz]	Conducted Power [dBm]	Conducted power [mW]	e.i.r.p. [dBm]	e.i.r.p. [W]	Result
250 kbps	2 403	-13.447	0.045	-15.687	0.027	Complies
	2 441	-12.687	0.054	-14.927	0.032	Complies
	2 481	-12.469	0.057	-14.709	0.034	Complies
1 Mbps	2 403	-13.442	0.045	-15.682	0.027	Complies
	2 441	-12.674	0.054	-14.914	0.032	Complies
	2 481	-12.439	0.057	-14.679	0.034	Complies

Remark

1. e.i.r.p.[dBm] = Conducted Power[dBm] + Antenna Gain[dBi]
2. Antenna Gain [dBi] = -2.24

See next pages for actual measured spectrum plots.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (23) / (63) Pages

Test Mode : 250 kbps

[Lowest channel]



[Middle channel]

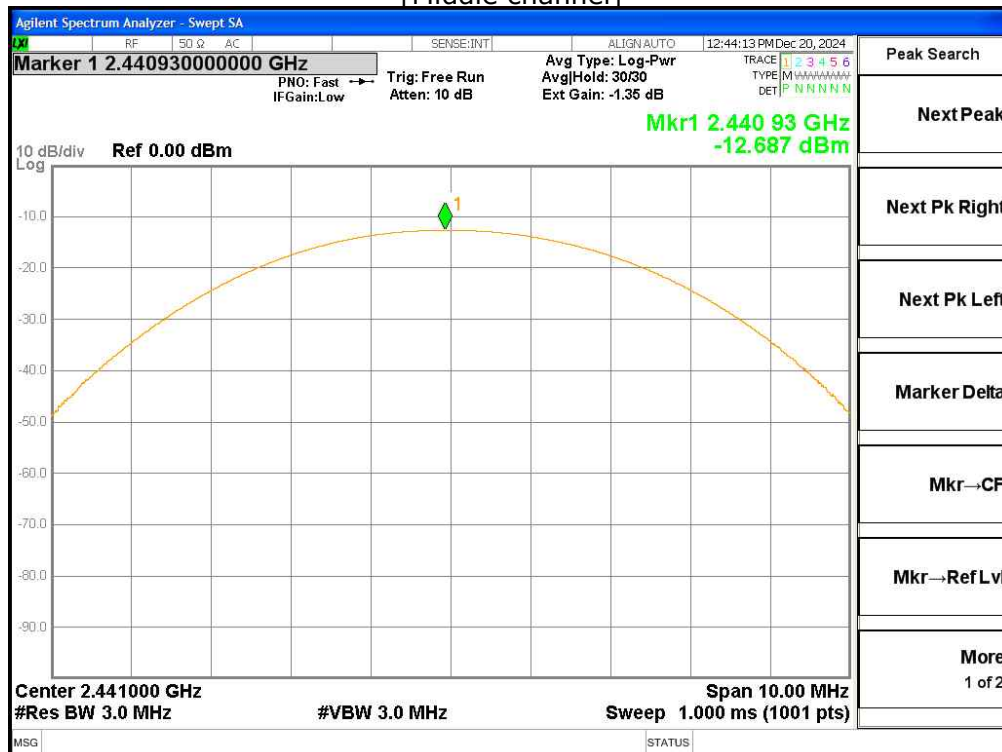




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (24) / (63) Pages

[Highest channel]

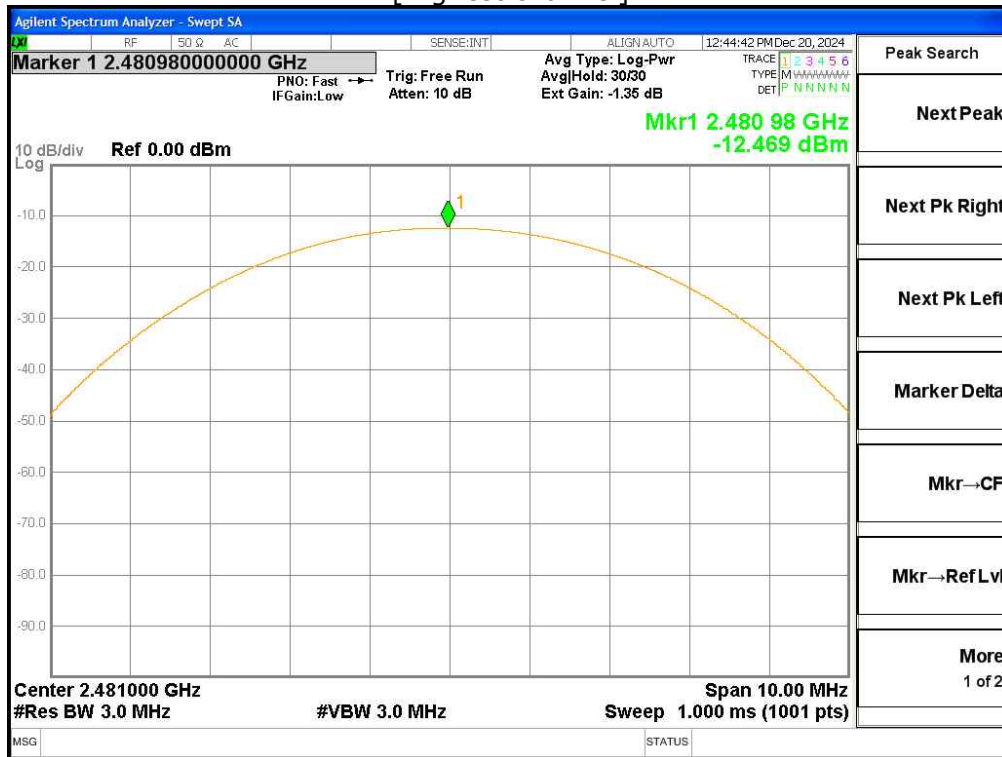



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (25) / (63) Pages

Test Mode : 1 Mbps

[Lowest channel]



[Middle channel]

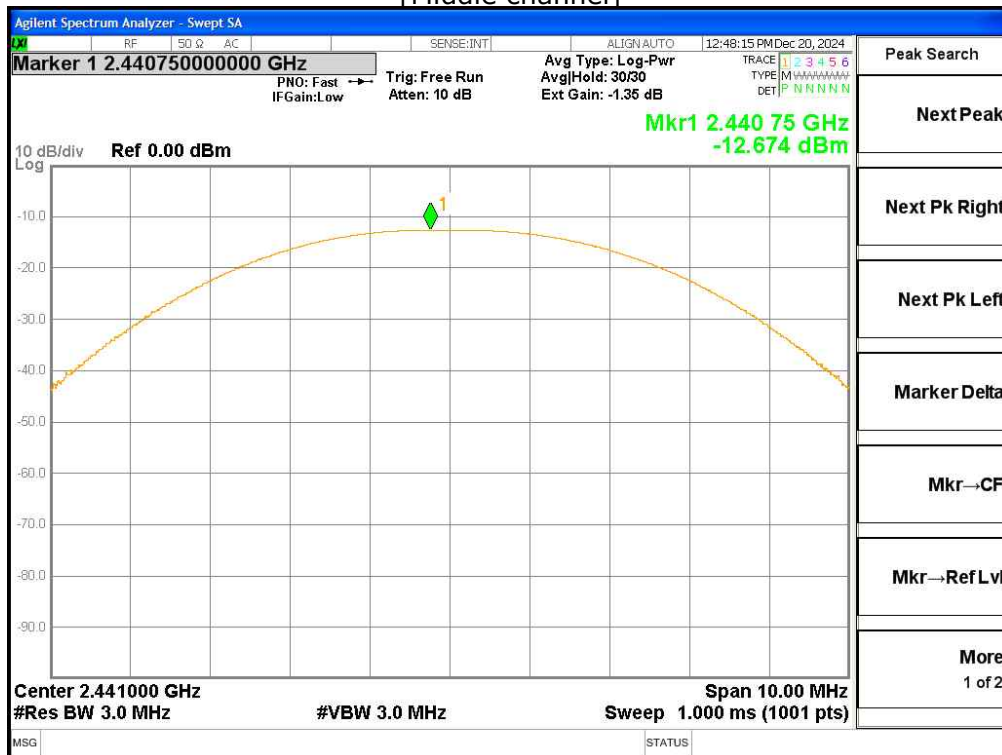



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (26) / (63) Pages

[Highest channel]



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (27) / (63) Pages

4.6 Unwanted Emissions (Conducted)

Test Procedures

ANSI C63.10-2013 - Section 7.8.6, 7.8.8


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

- | | |
|---|--------------------------------|
| a) RBW = 100 kHz | b) VBW = 300 kHz (\geq RBW) |
| c) Span = 30 MHz to 10 times the operating frequency in GHz | d) Detector = peak |
| e) Trace = max hold | f) Sweep = auto |



Limit

> 20 dBc



Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.

Band Edge

Test Mode : Hopping mode, 250 kbps

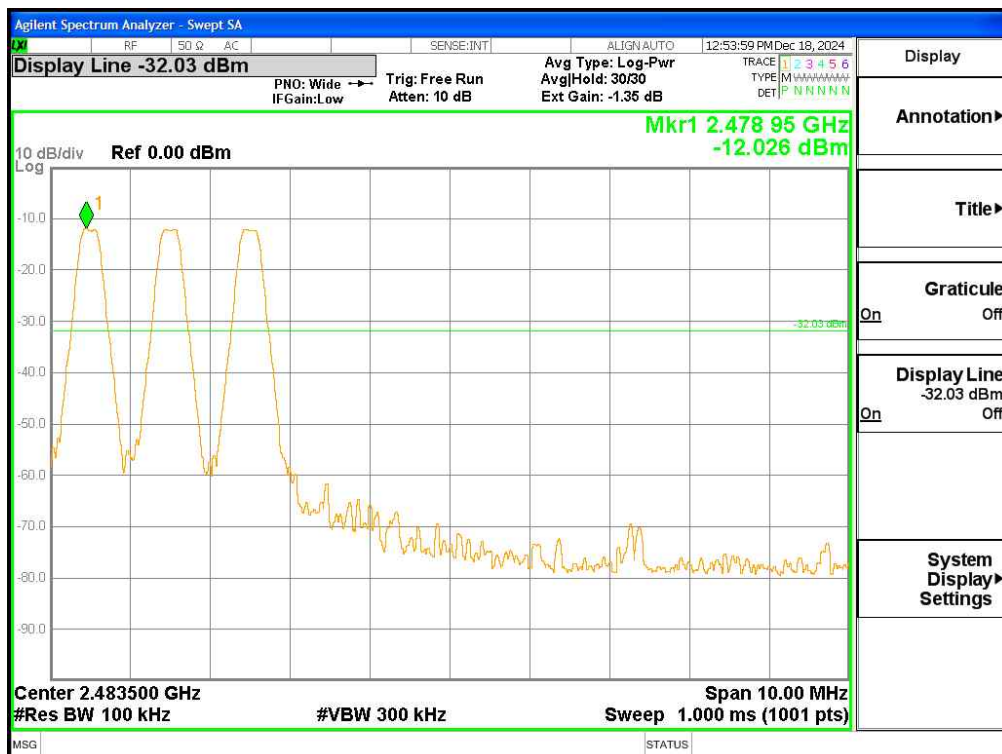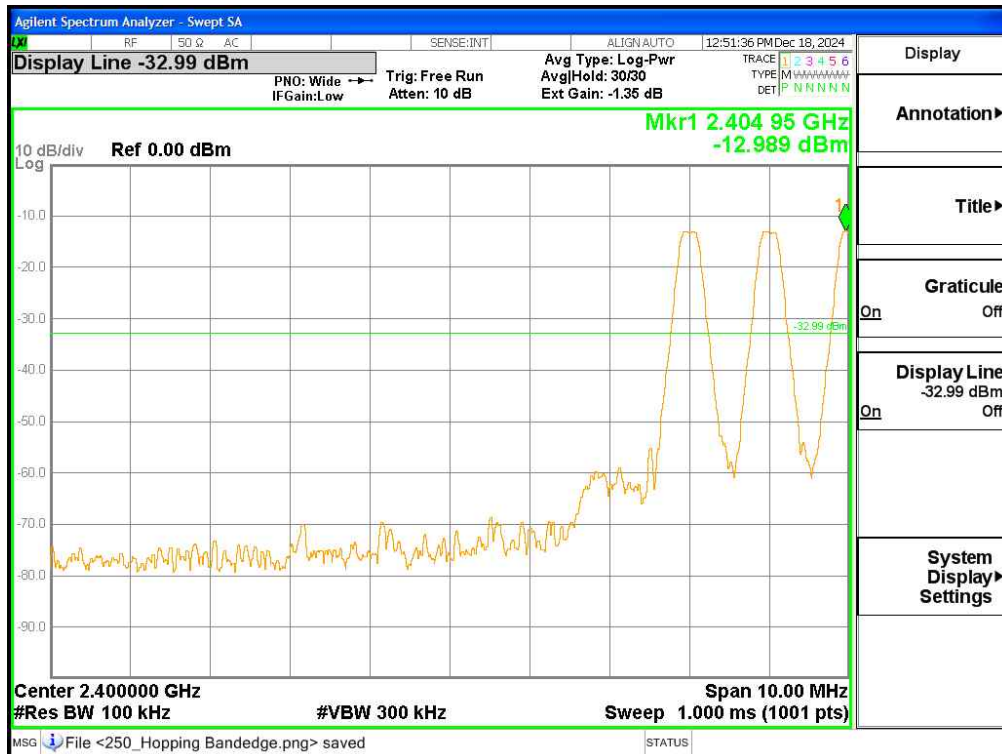



CTK Co., Ltd.



(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (29) / (63) Pages

Test Mode : Hopping mode, 1 Mbps

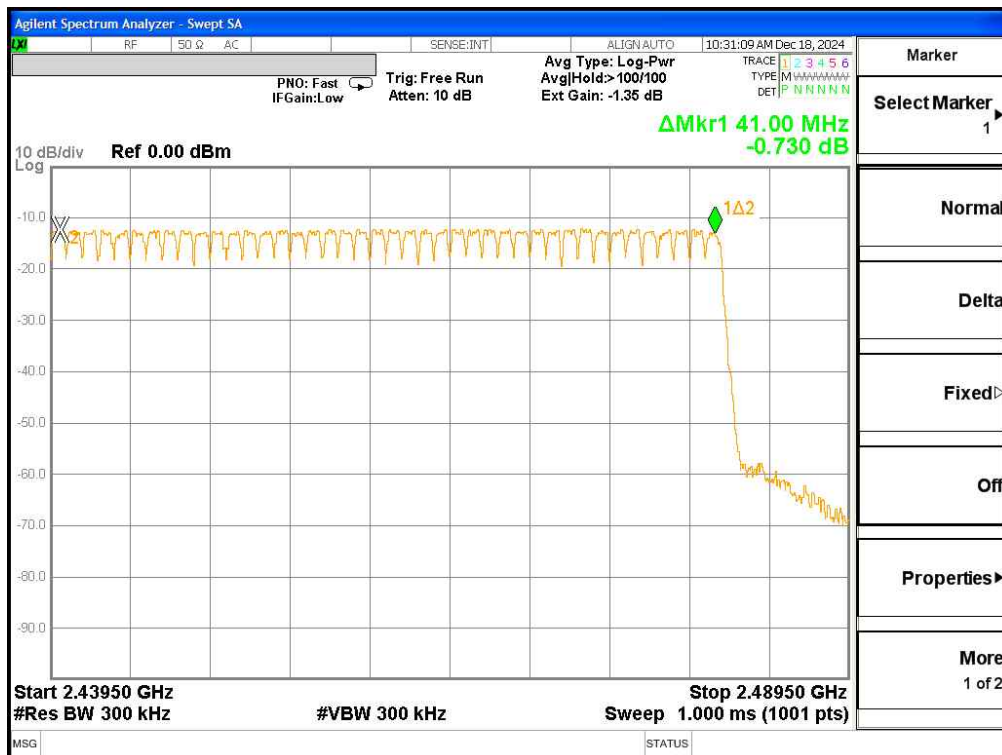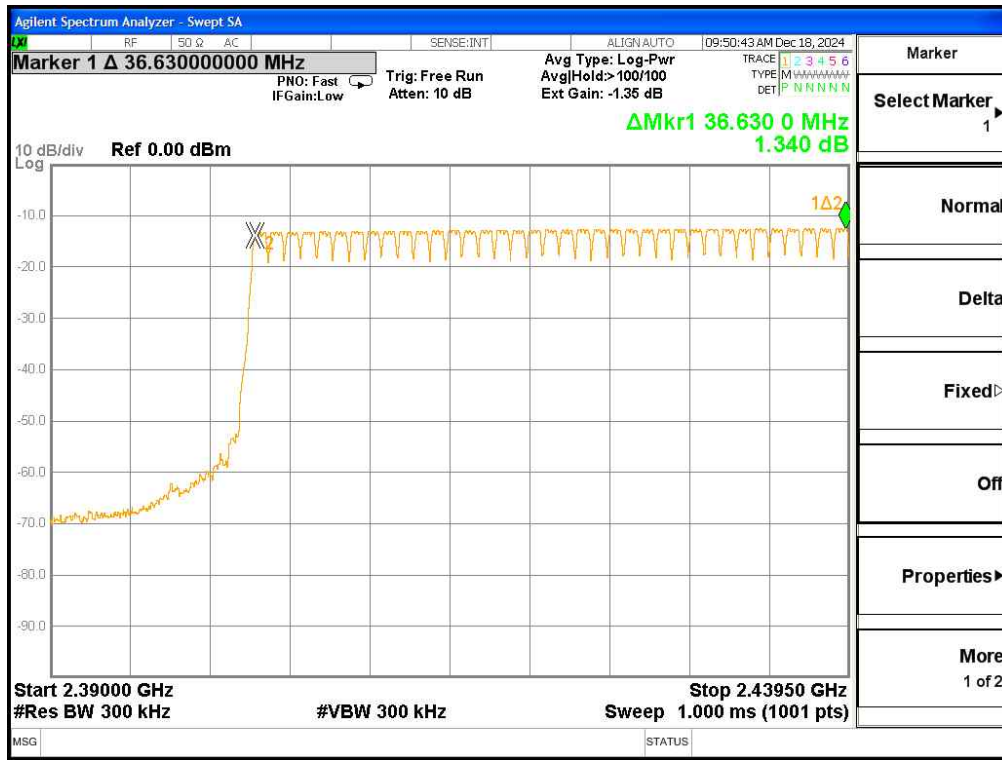





CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (30) / (63) Pages

Test Mode : Non-Hopping mode, 250 kbps

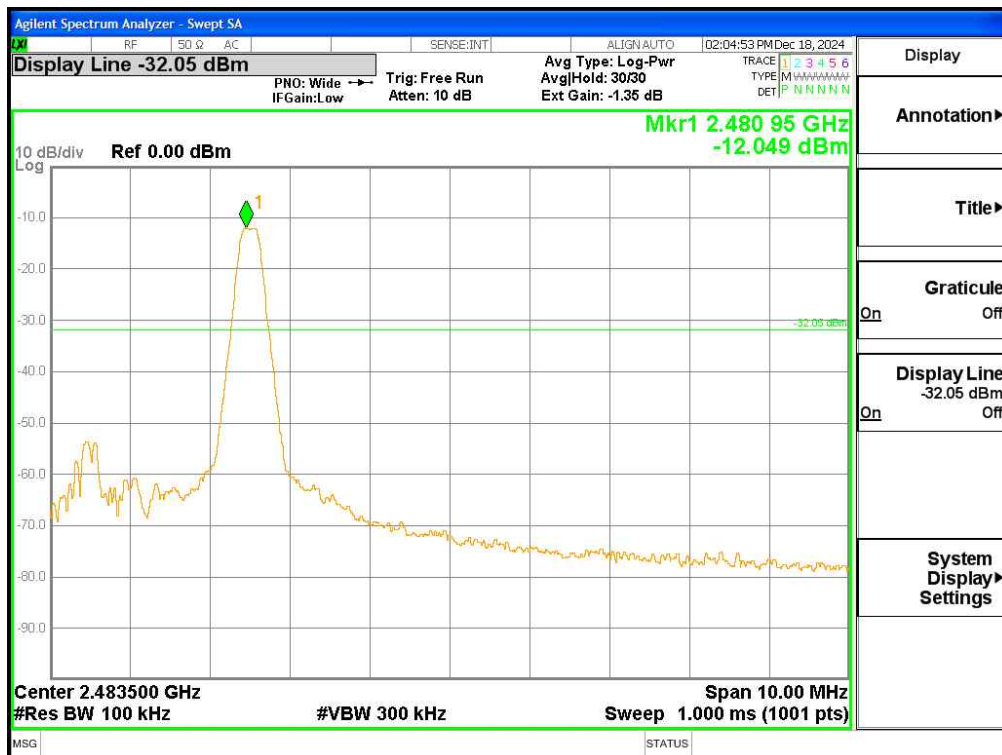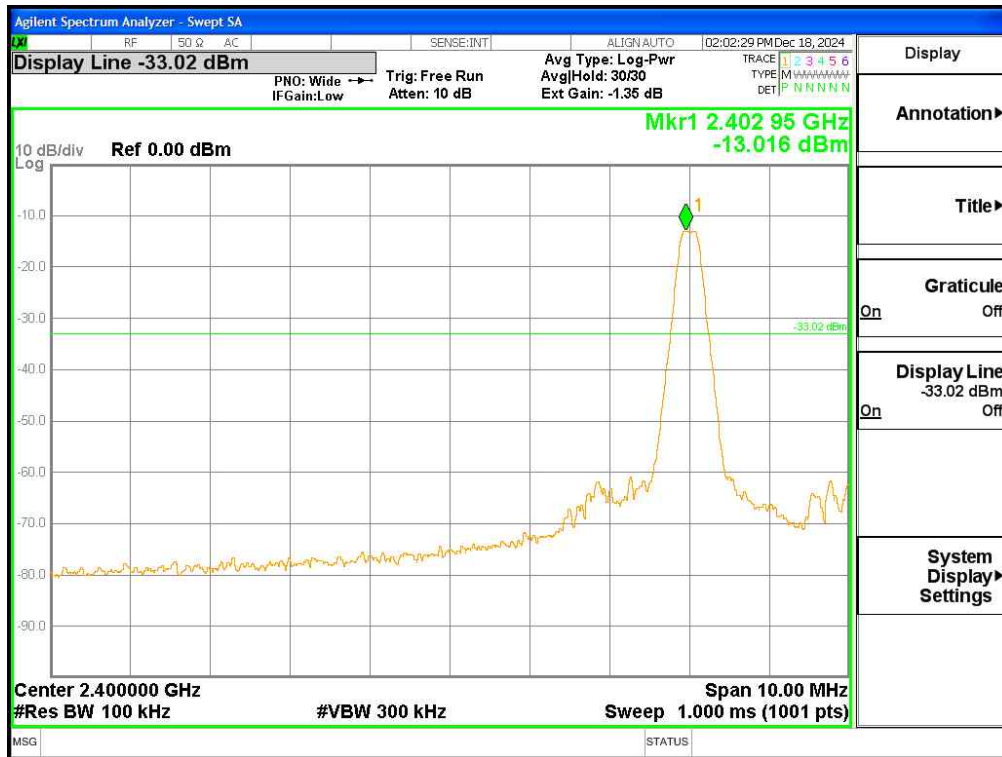

Test Mode : Non-Hopping mode 1 Mbps

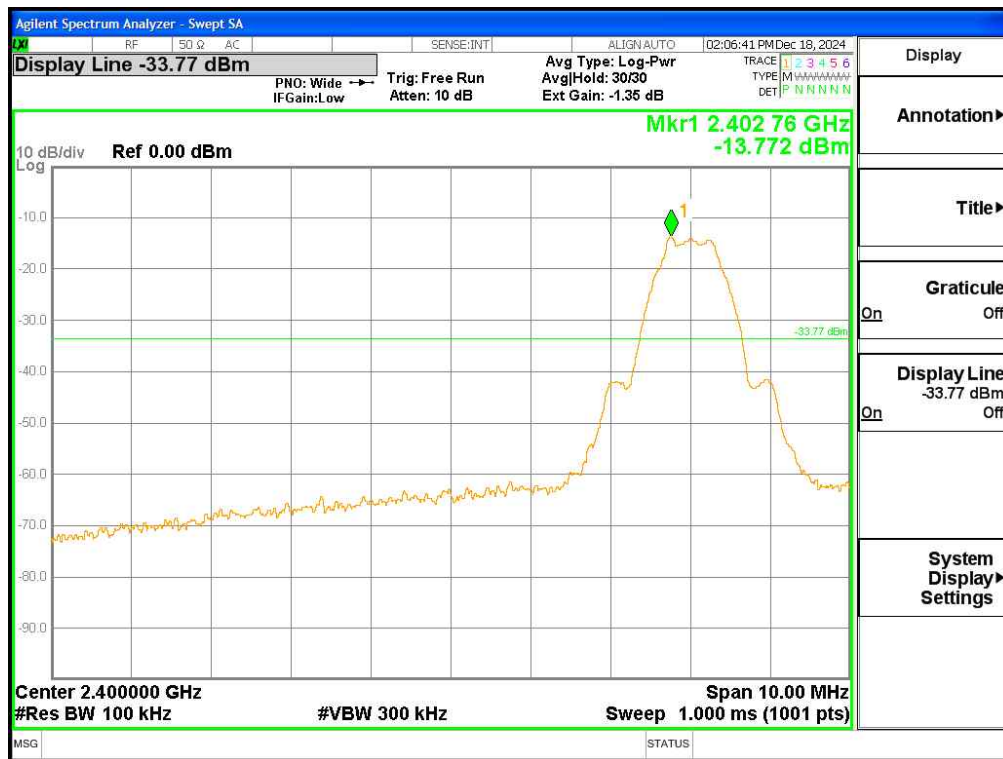



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:



CTK-2025-00262

Page (32) / (63) Pages

Spurious Emission

Test Mode : 250 kbps

[Lowest channel]

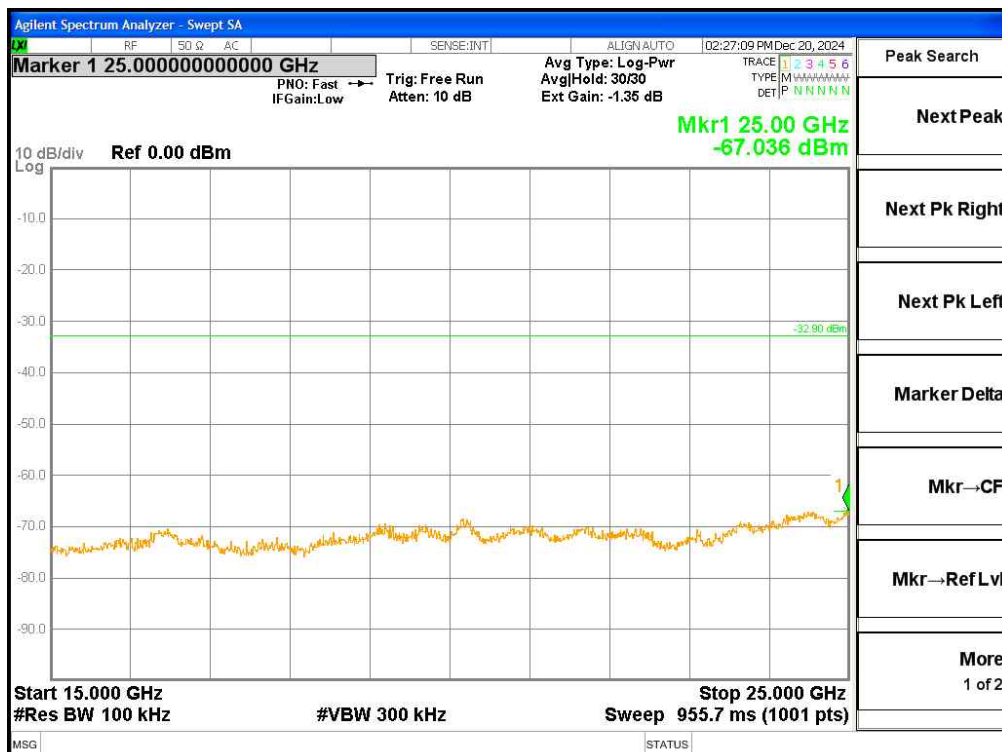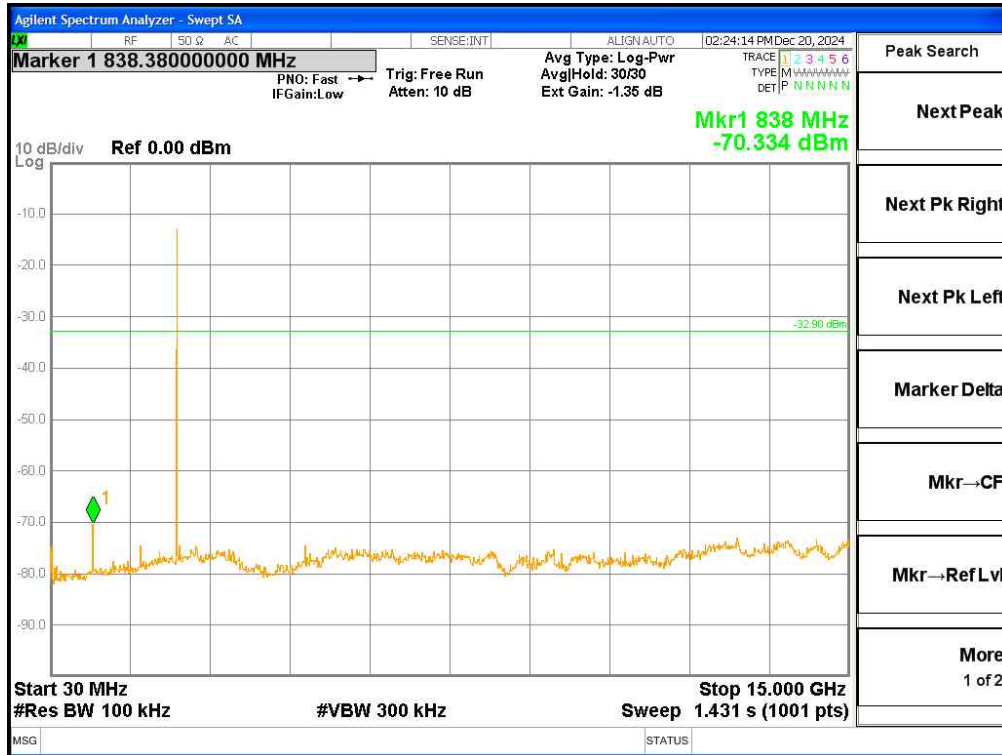




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (33) / (63) Pages

[Middle Channel]

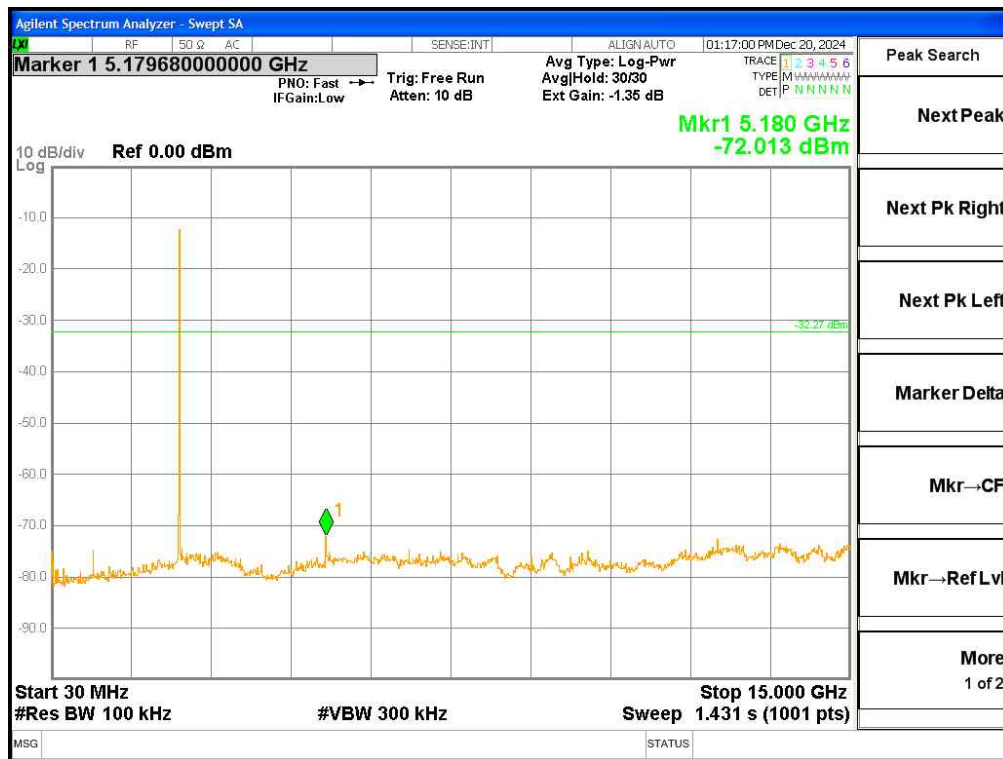





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (34) / (63) Pages

[Highest Channel]

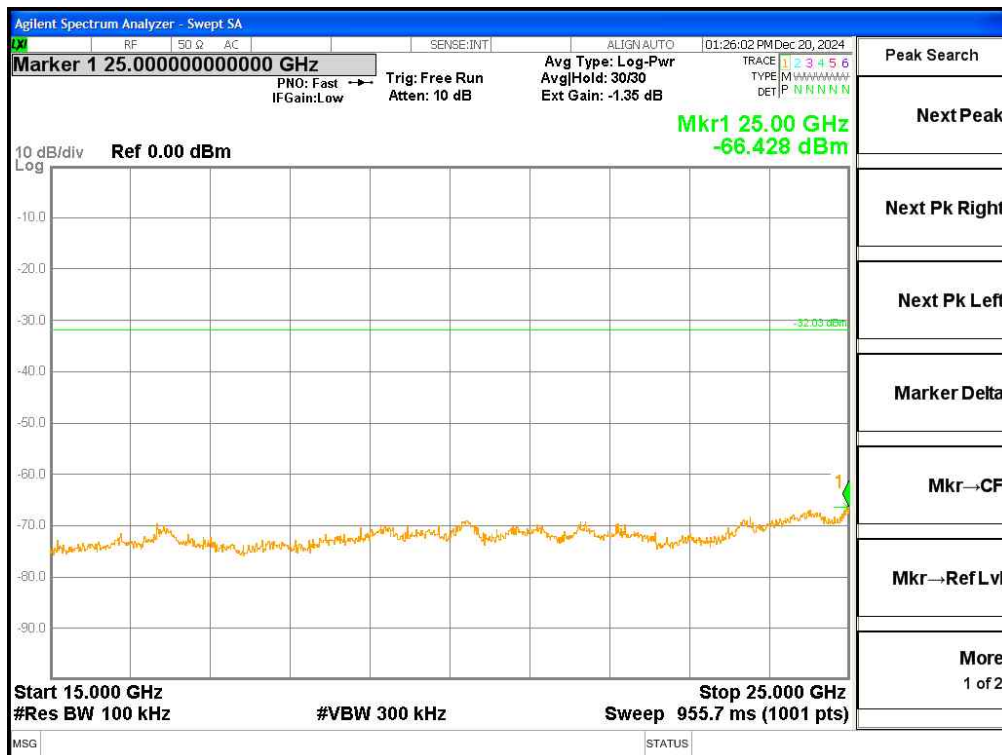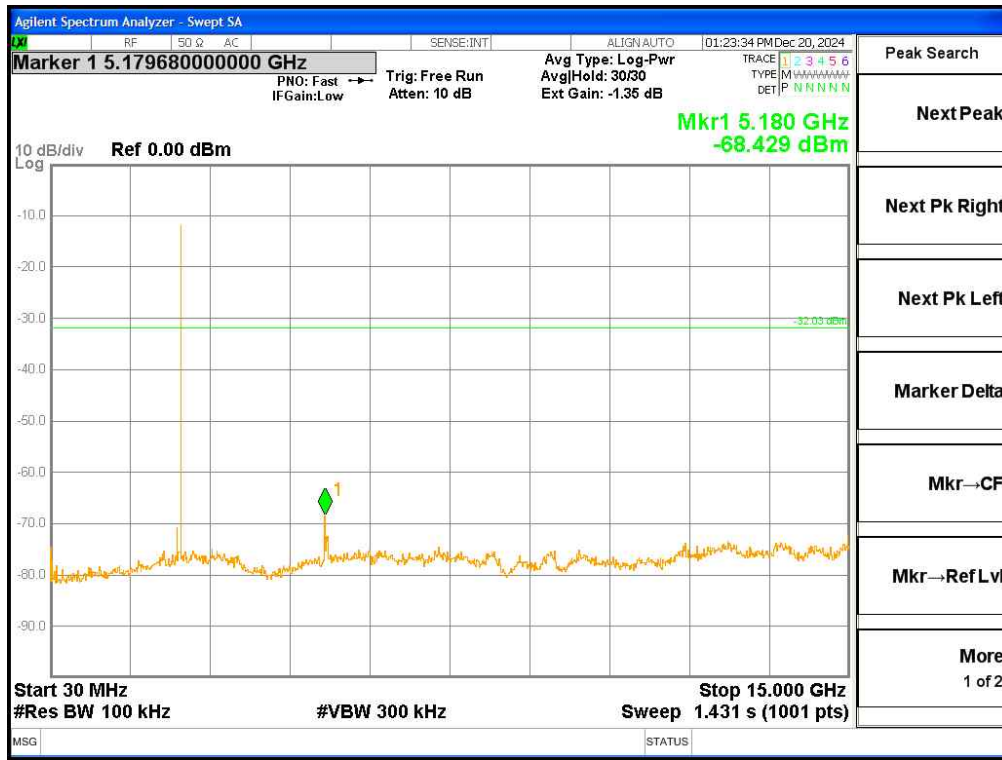





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (35) / (63) Pages

Test Mode : 1 Mbps

[Lowest channel]

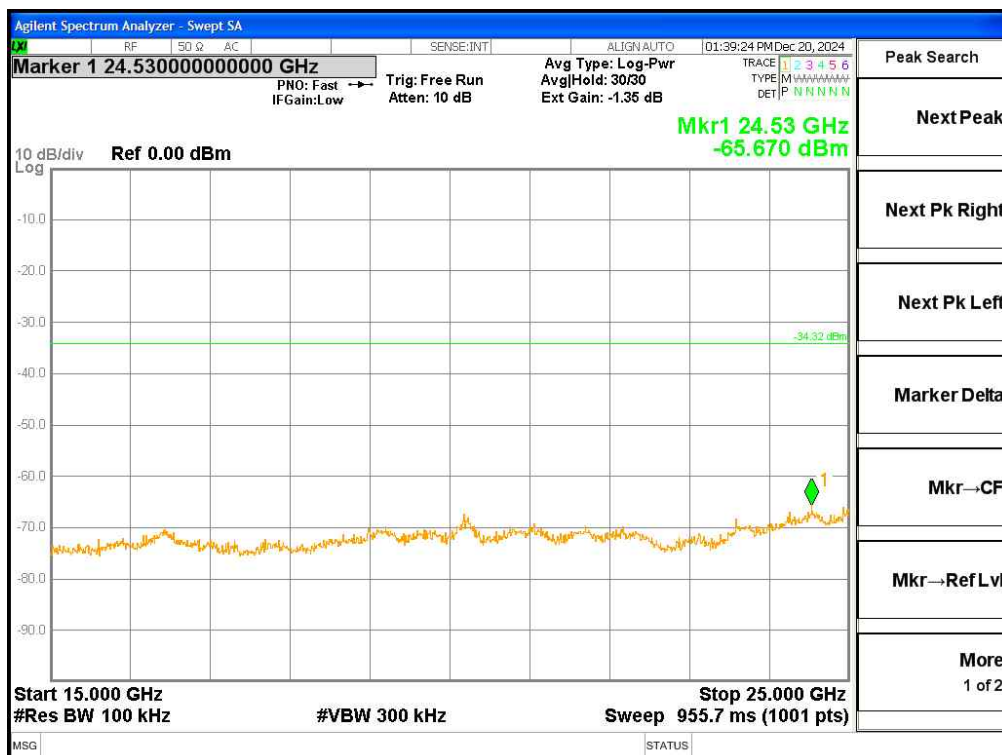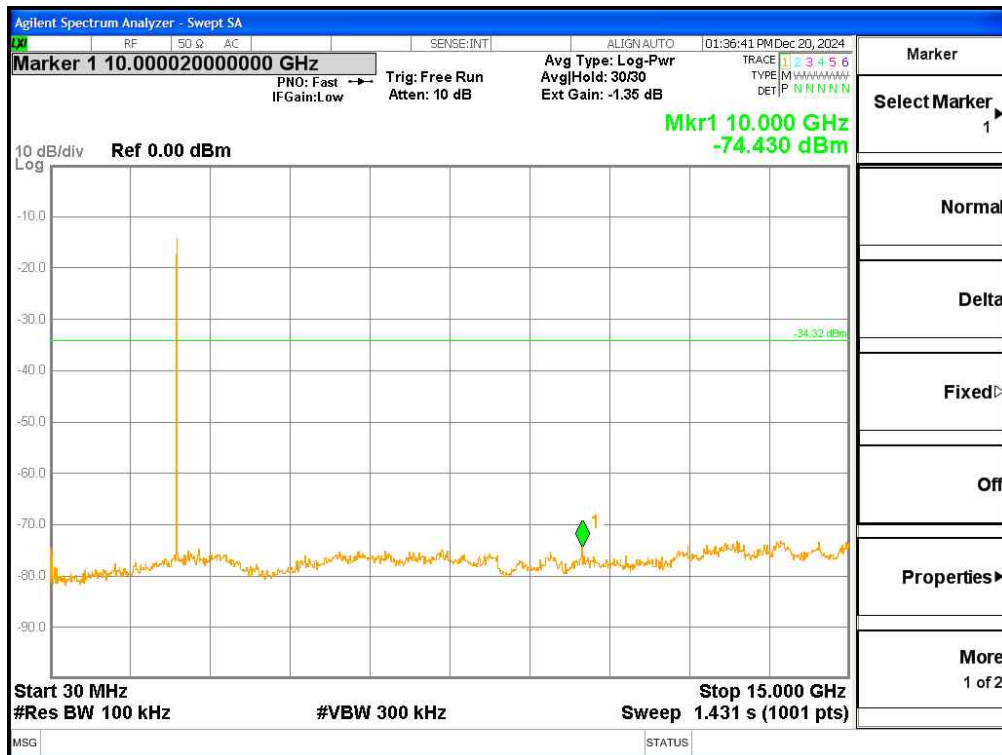




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (36) / (63) Pages

[Middle Channel]

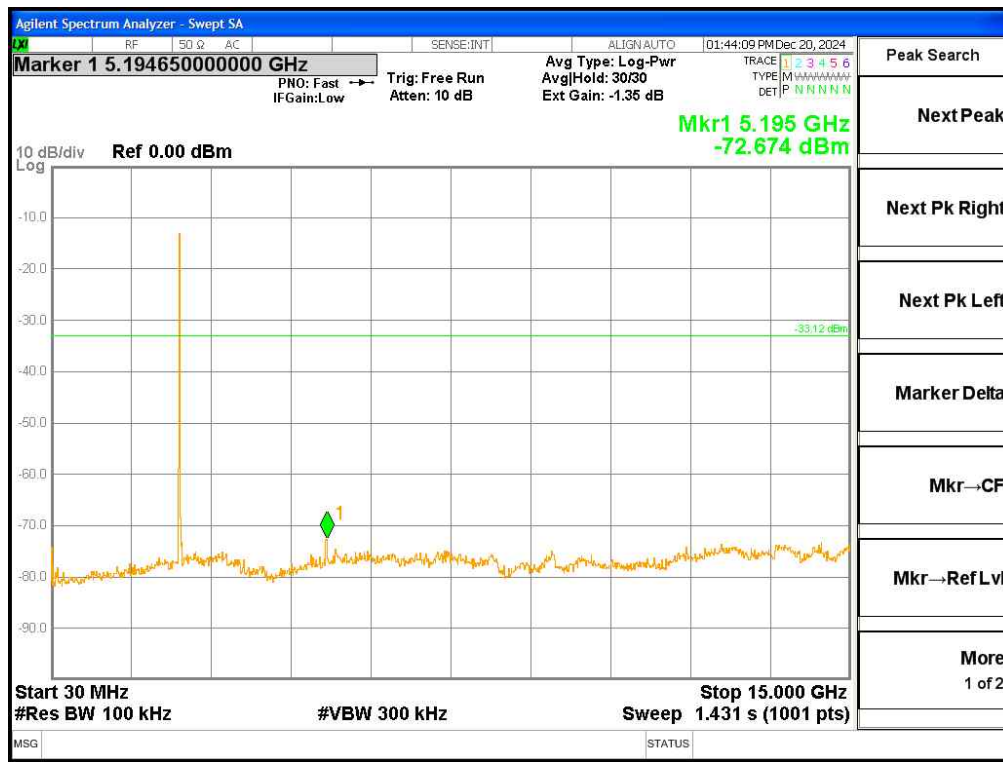




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (37) / (63) Pages

[Highest Channel]

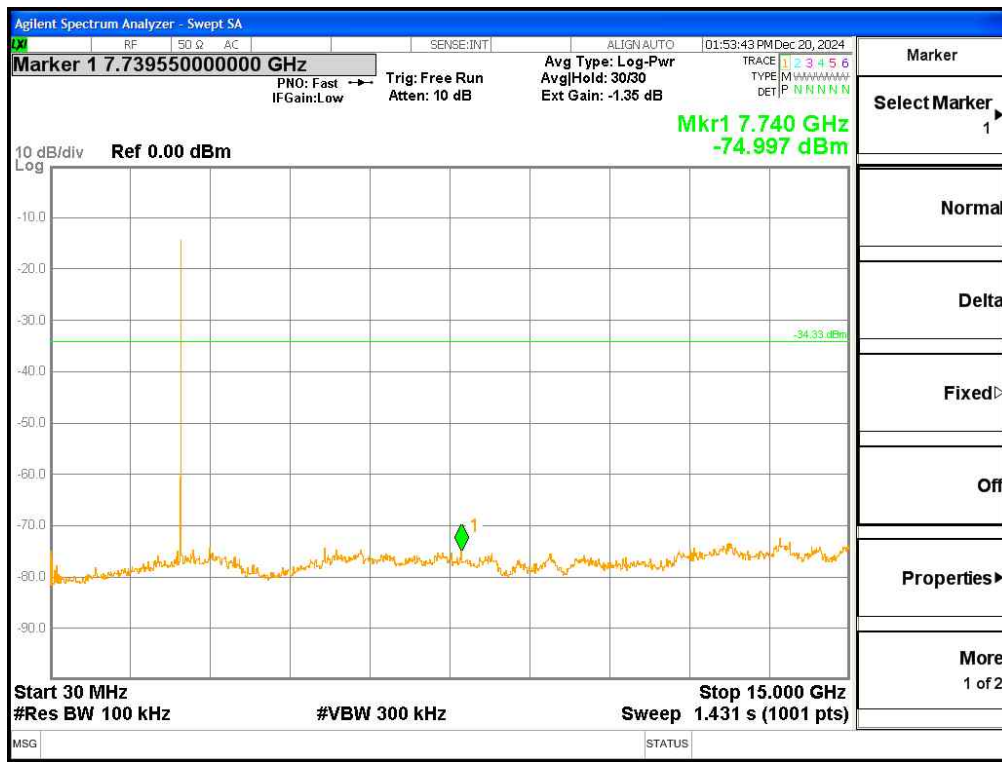

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (38) / (63) Pages

4.7 Radiated Emission

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

ANSI C63.10-2013 - Section 6.5, 6.6
RSS-Gen - Section 6.13

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Instrument Settings

Frequency Range = 9 kHz ~ 26.5 GHz (2.4 GHz 10th harmonic)

a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

200 Hz for $f < 150$ kHz

b) VBW \geq RBW

c) Sweep time = auto couple

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (39) / (63) Pages

Limit :

Unwanted emissions that do not fall within the restricted frequency bands of Table 1 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

*Certain frequency bands listed in Table 1 and in band above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in the 200- and 300-series of RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (40) / (63) Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 2 :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 2. General Field Strength Limits for Licence-Exempt Transmitters (FCC)

Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Table 3. General field strength limits at frequencies below 30 MHz (ISED)

Frequency(kHz)	Magnetic Field Strength (uV/m)	Magnetic Field Strength (dBuA/m)	Field Strength (dBuV/m)**	Deasurement Distance (meters)
9 - 490	6.37/F(kHz)	-3 ~ -37.7	48.5 ~ 13.8	300
490 - 1705	63.7/F(kHz)	-17.7 ~ -28.6	33.8 ~ 23	30
1.705 - 30	0.08	-21.9	29.5	30


**Field Strength (dBuV/m) : Magnetic Field Strength (dBuA/m) + 51.5 (conversion factor).
The limit of 30MHz or more is the same as Table 2.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3 m (AV) and 74 dBuV/m@3 m (PK)
- 3) For measurement above 1 GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

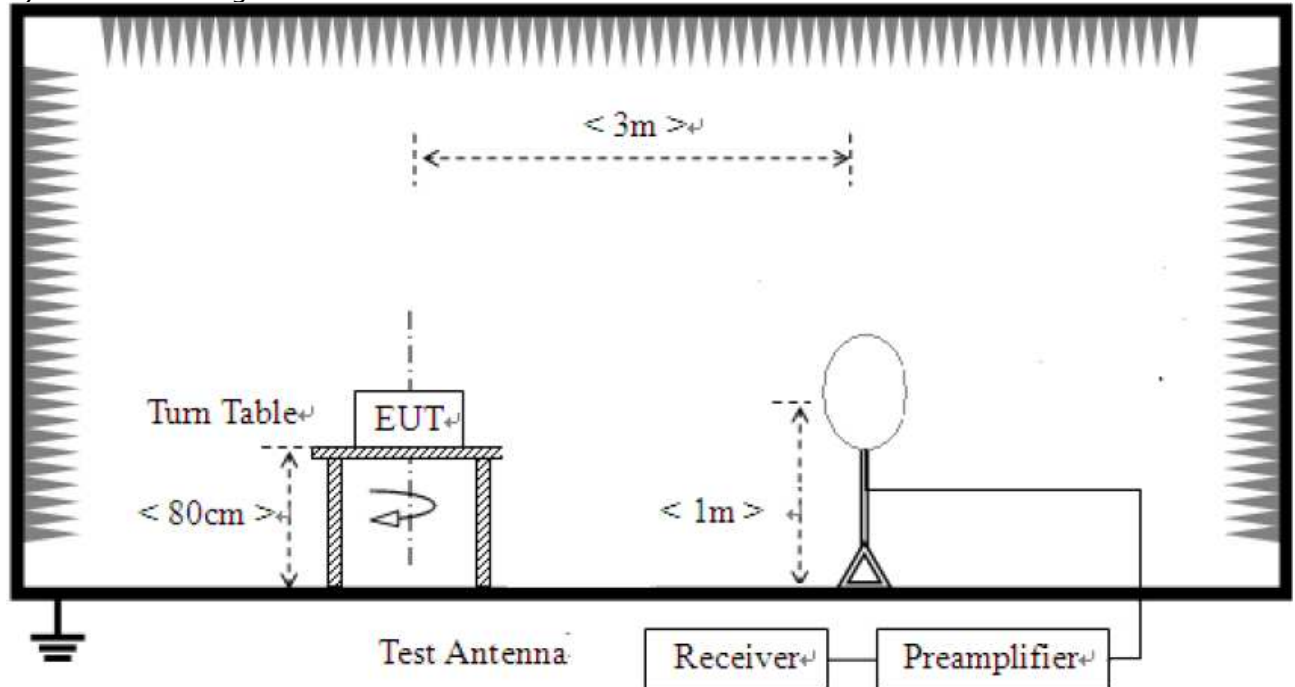

2) For field strength of emissions from 30 MHz to 1 GHz

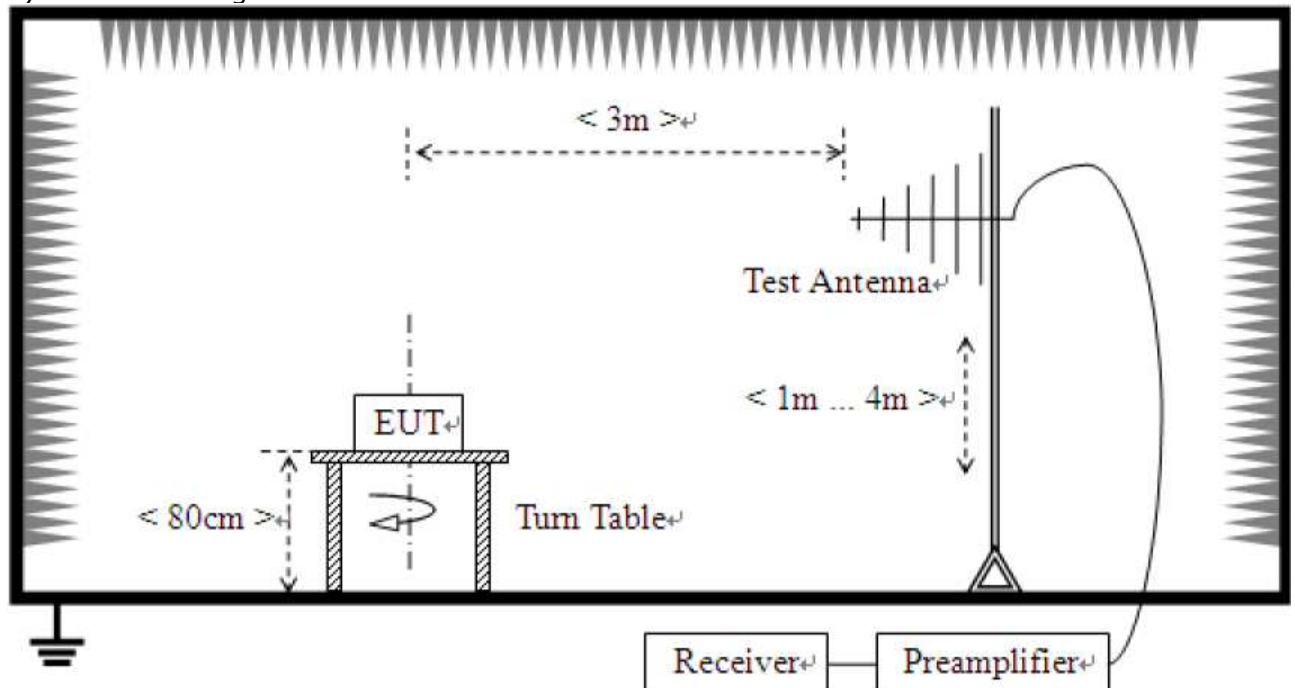

3) For field strength of emissions above 1 GHz

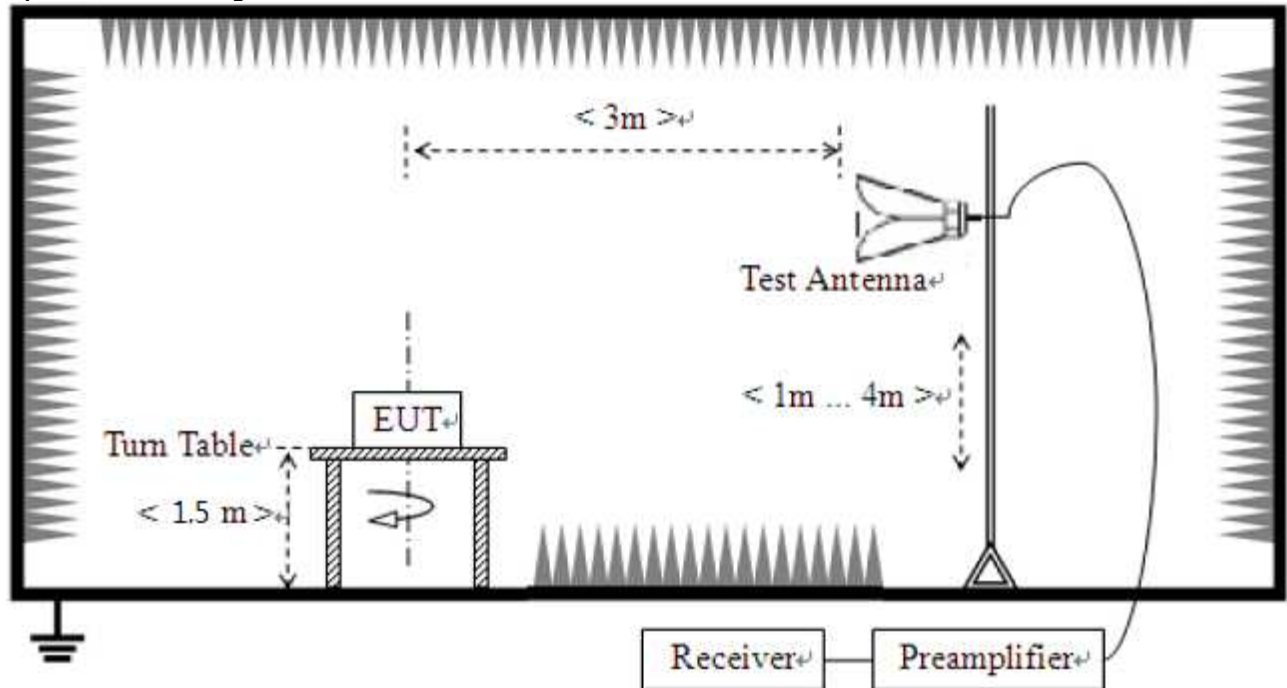



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (43) / (63) Pages

Test results


1) 9 kHz to 30 MHz

Test mode : Transmission status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

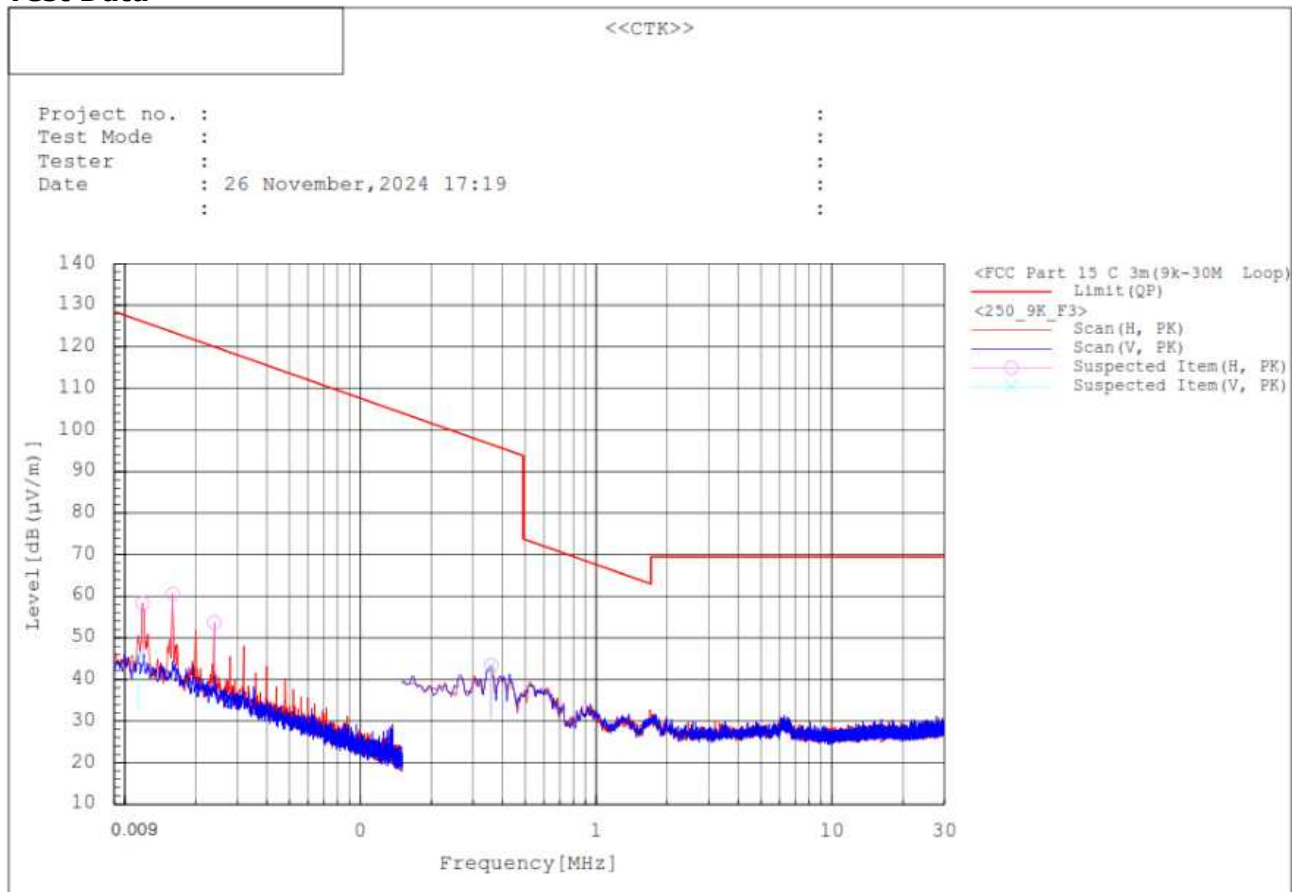

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (44) / (63) Pages

Test mode : Receiving status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

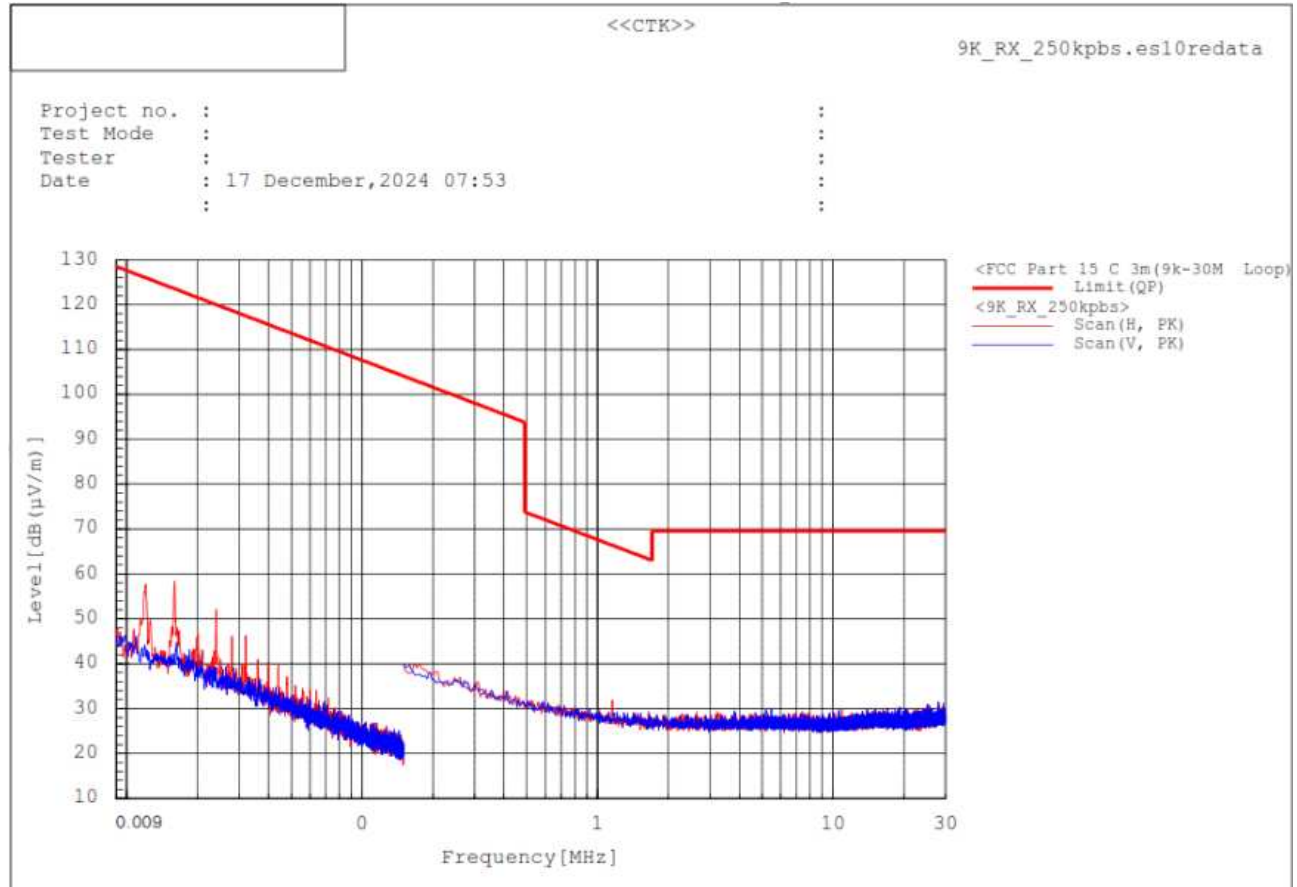

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (45) / (63) Pages

Test mode : Transmission status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

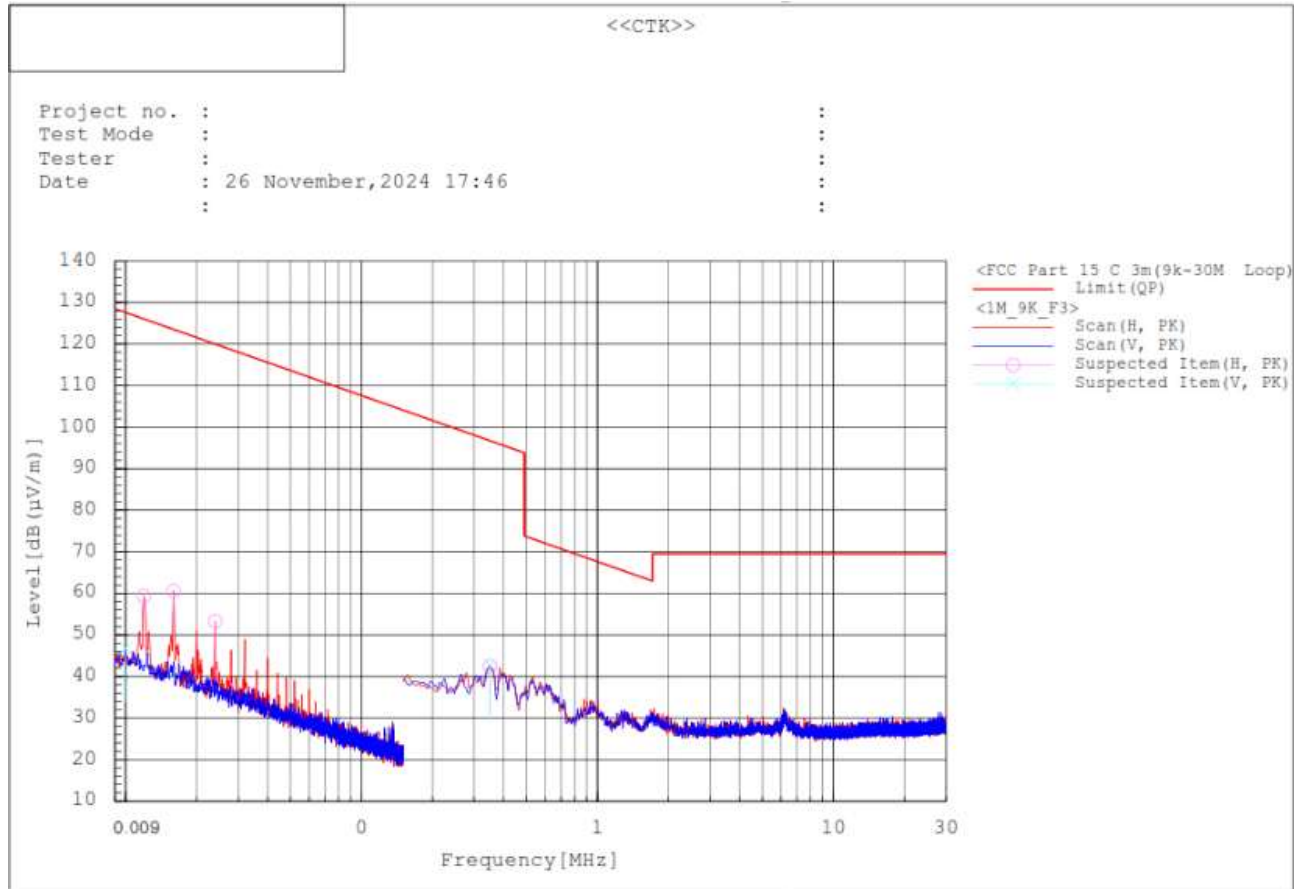

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (46) / (63) Pages

Test mode : Receiving status 1 Mbps Highest channel(Worst case)

The requirements are:

☒ Complies

Test Data

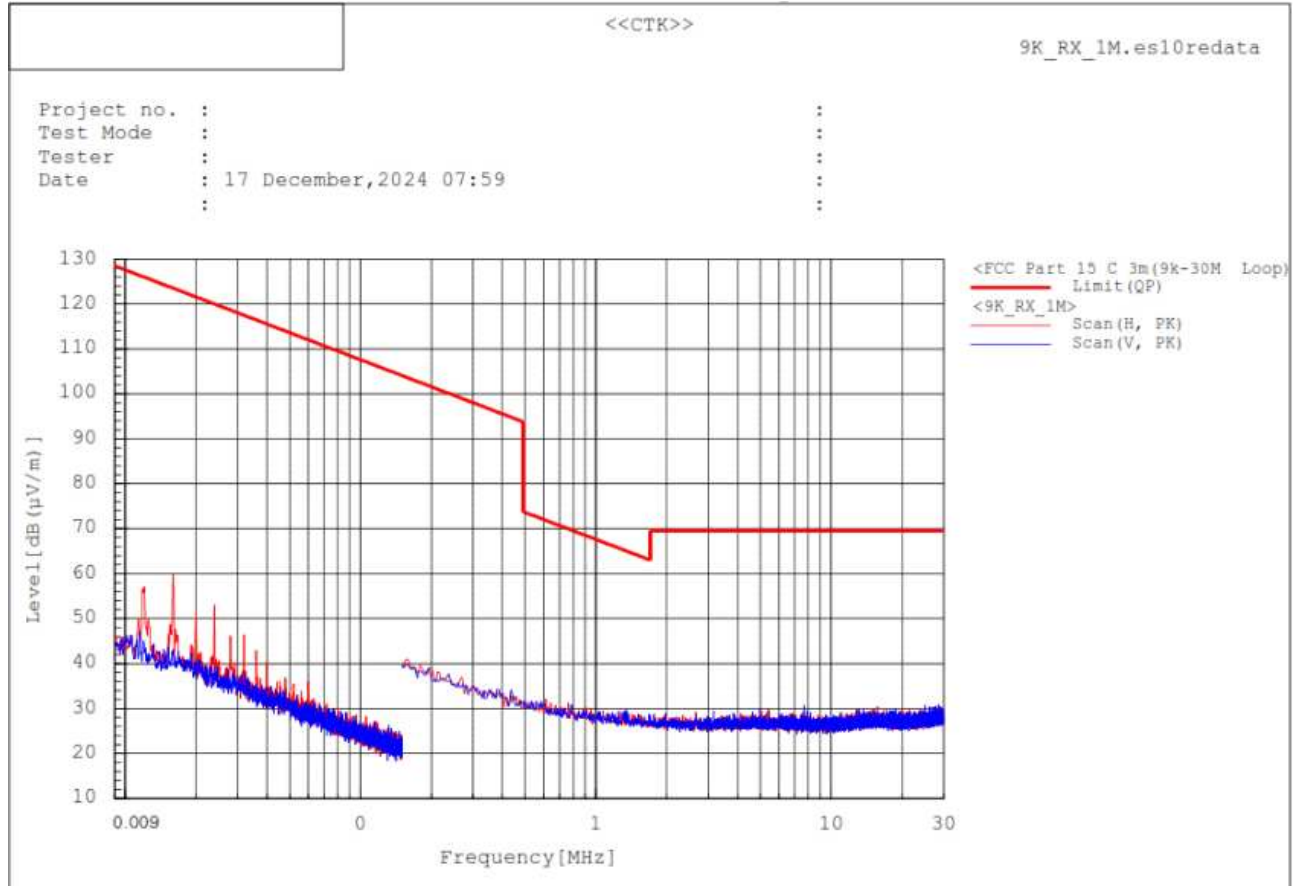

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (47) / (63) Pages


2) 30 MHz to 1 GHz

Test mode : Transmission status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

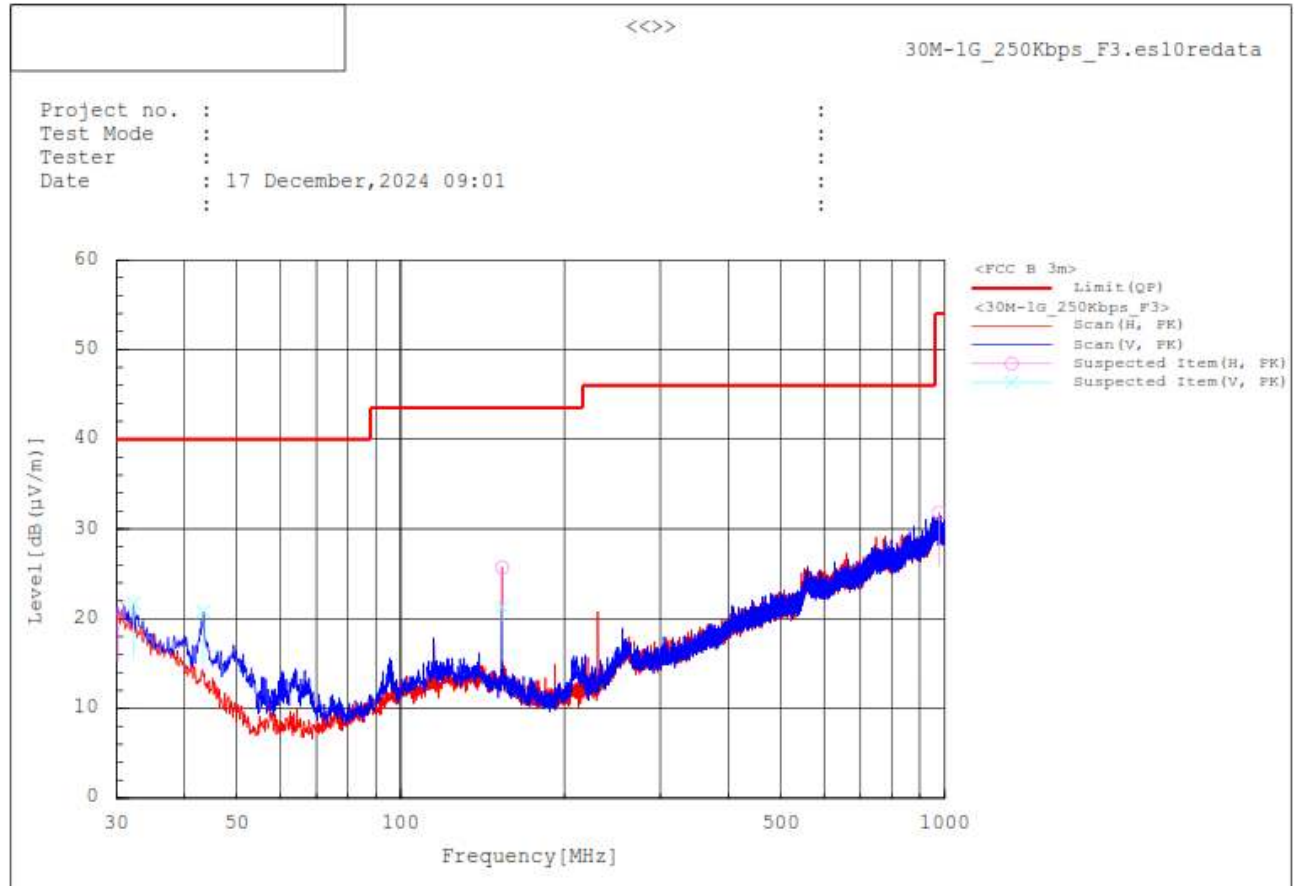

Spectrum Selection

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle
	[MHz]		PK		PK	QP	QP-PK		
			[dB (μV)]	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[cm]	[deg]
1	30.194	H	28.0	-6.8	21.2	40.0	18.8	300.0	1.9
2	32.328	V	29.4	-7.7	21.7	40.0	18.3	300.0	240.7
3	43.386	V	34.6	-13.8	20.8	40.0	19.2	99.9	49.0
4	153.578	H	38.8	-13.1	25.7	43.5	17.8	300.0	217.6
5	153.578	V	34.4	-13.1	21.3	43.5	22.2	300.0	301.4
6	976.332	H	25.9	5.9	31.8	54.0	22.2	100.0	359.7

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (48) / (63) Pages

Test mode : Receiving status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

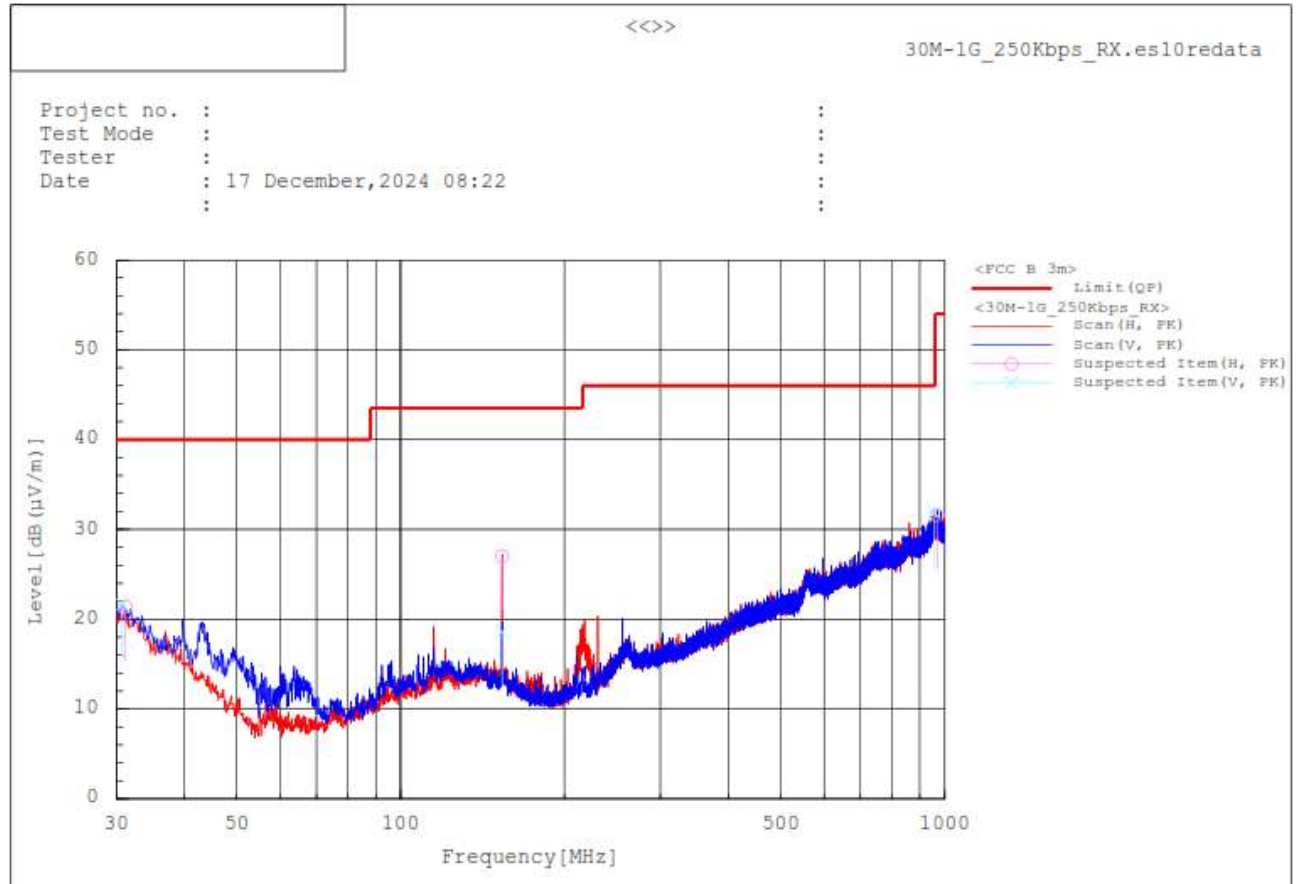

Spectrum Selection

No.	Frequency [MHz]	Pol	Reading PK [dB (μV)]	c.f [dB (1/m)]	Result PK [dB (μV/m)]	Limit QP [dB (μV/m)]	Margin QP-PK [dB]	Height [cm]	Angle [deg]
1	30.776	V	28.6	-7.0	21.6	40.0	18.4	99.9	354.2
2	31.164	H	28.6	-7.2	21.4	40.0	18.6	99.9	159.2
3	153.578	H	40.1	-13.1	27.0	43.5	16.5	200.1	215.7
4	153.578	V	31.7	-13.1	18.6	43.5	24.9	300.0	301.3
5	954.798	V	26.5	5.4	31.9	46.0	14.1	300.0	353.9
6	967.893	H	25.8	5.8	31.6	54.0	22.4	395.9	0.2

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (49) / (63) Pages

Test mode : Transmission status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

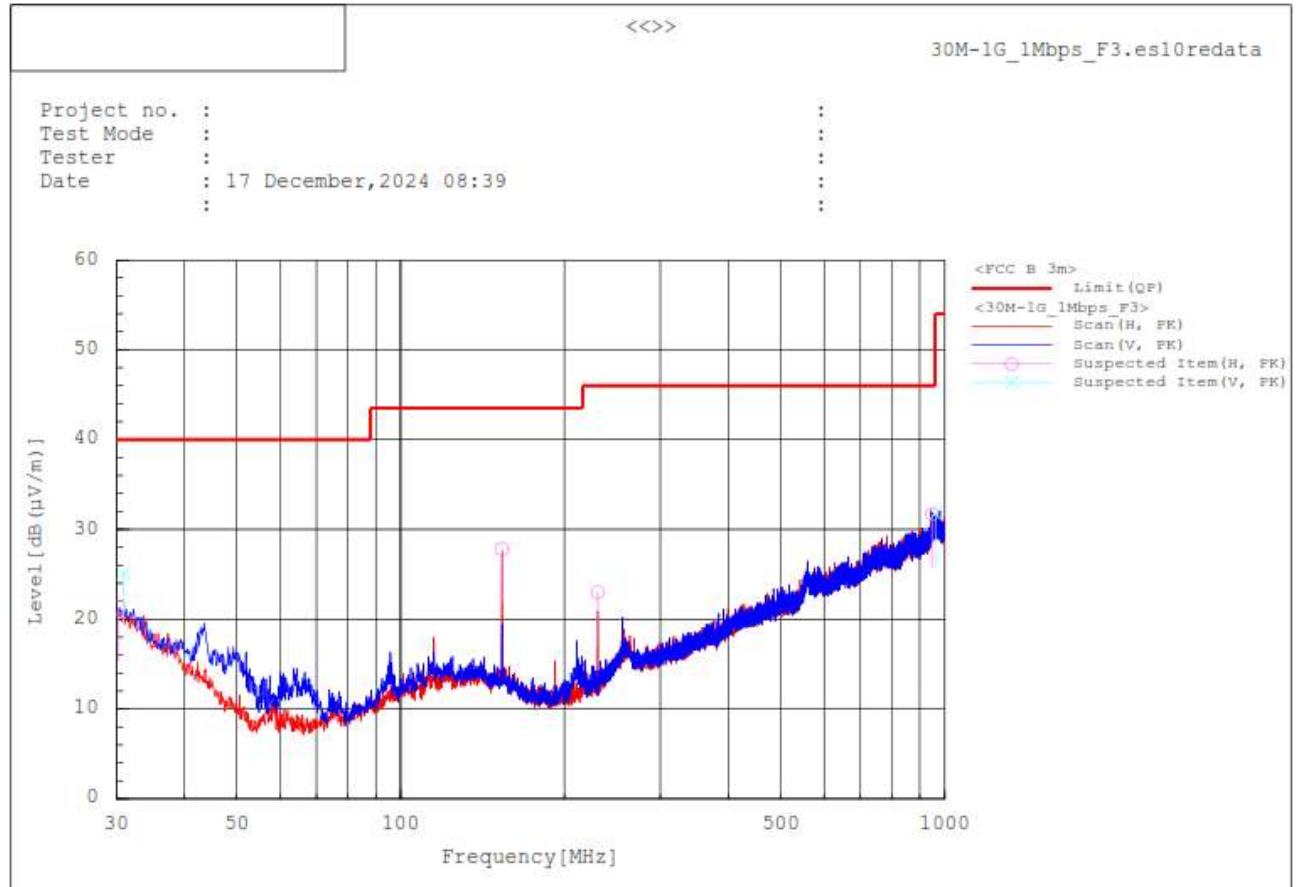

No.	Frequency [MHz]	Pol	Reading PK [dB (μV)]	c.f [dB(1/m)]	Result PK [dB (μV/m)]	Limit QP [dB (μV/m)]	Margin QP-PK [dB]	Height [cm]	Angle [deg]
1	30.291	H	28.2	-6.9	21.3	40.0	18.7	300.0	232.7
2	30.970	V	32.2	-7.1	25.1	40.0	14.9	99.9	1.0
3	153.578	H	40.9	-13.1	27.8	43.5	15.7	200.1	2.2
4	230.402	H	36.9	-13.9	23.0	46.0	23.0	99.8	323.4
5	947.717	H	26.6	5.1	31.7	46.0	14.3	300.0	60.5
6	961.200	V	26.0	5.7	31.7	54.0	22.3	299.9	359.8

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (50) / (63) Pages

Test mode : Receiving status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

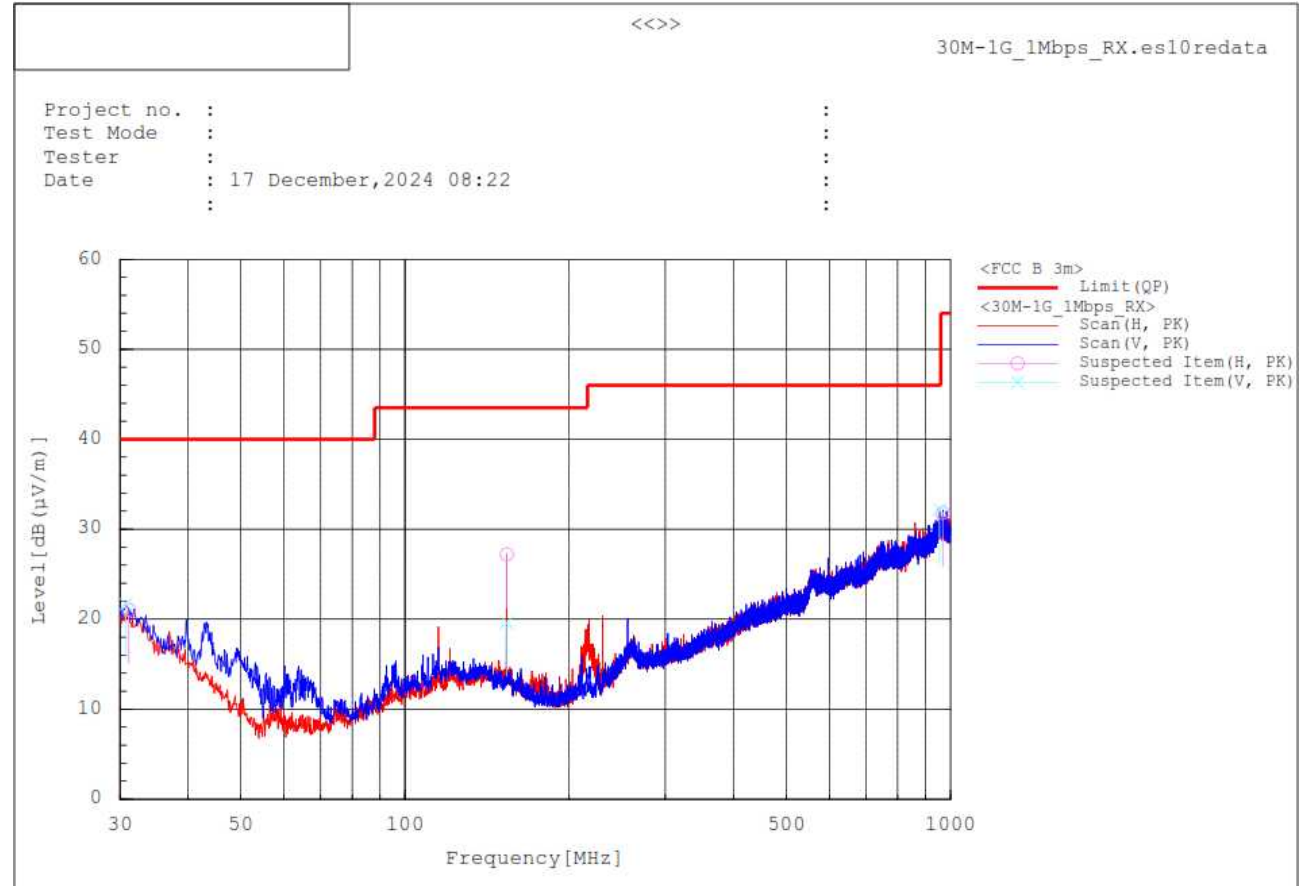

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle
	[MHz]		PK		PK	QP	QP-PK		
			[dB (μV)]	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[cm]	[deg]
1	30.776	V	28.7	-7.0	21.7	40.0	18.3	99.9	354.2
2	31.164	H	28.2	-7.2	21.0	40.0	19.0	99.9	159.2
3	153.578	H	40.3	-13.1	27.2	43.5	16.3	200.1	215.7
4	153.578	V	32.8	-13.1	19.7	43.5	23.8	300.0	301.3
5	954.798	V	26.8	5.4	32.2	46.0	13.8	300.0	353.9
6	967.893	H	26.0	5.8	31.8	54.0	22.2	395.9	0.2

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (51) / (63) Pages


3) 1 GHz to 18 GHz

Test mode : Transmission status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

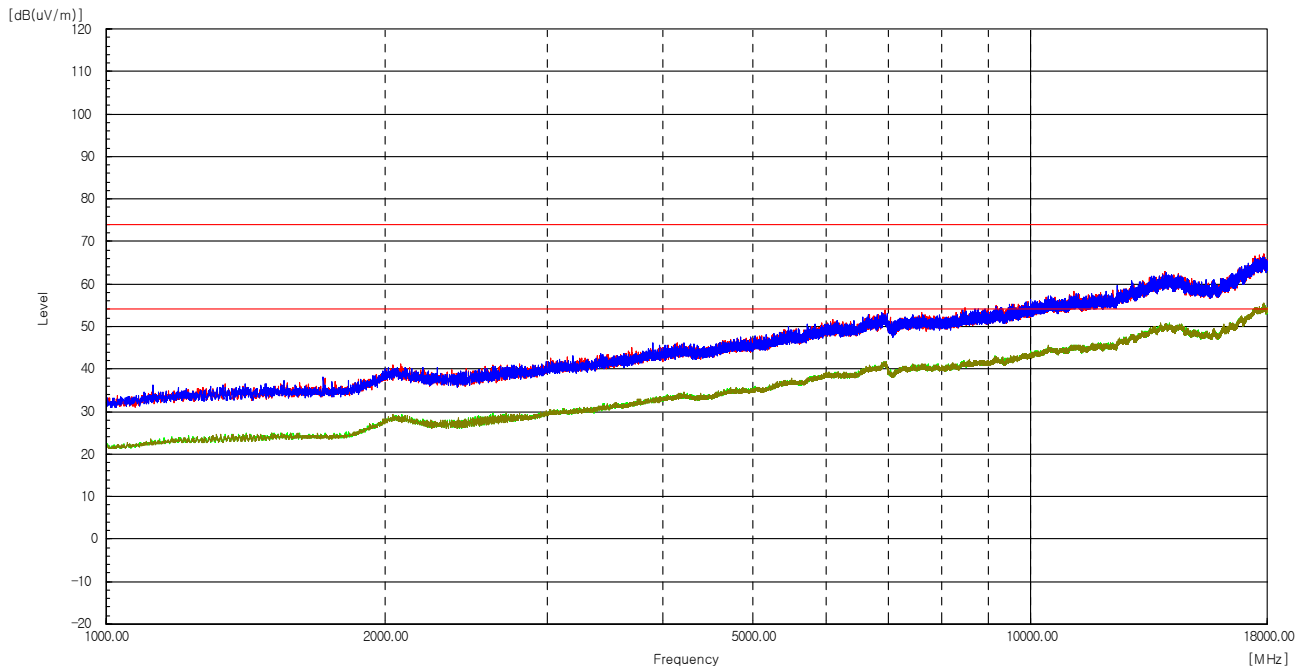

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz
5. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (52) / (63) Pages

Test mode : Receiving status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

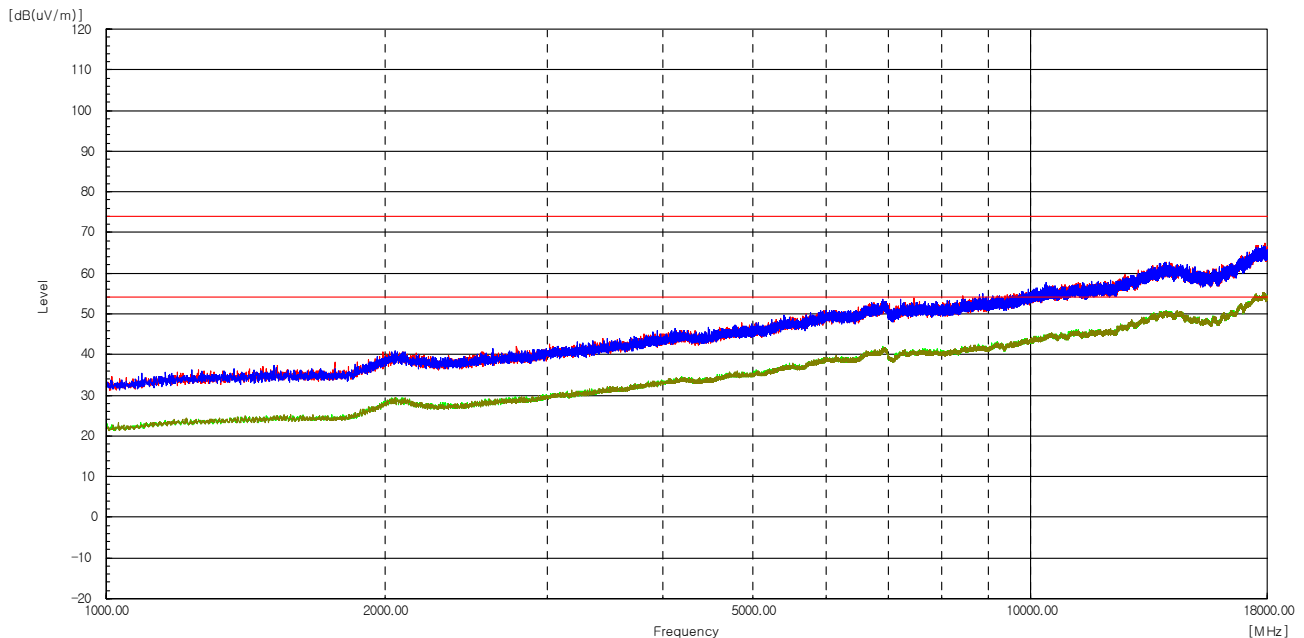Test Data

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (53) / (63) Pages

Test mode : Transmission status 1 Mbps Highest channel(Worst case)

The requirements are:

☒ Complies

Test Data

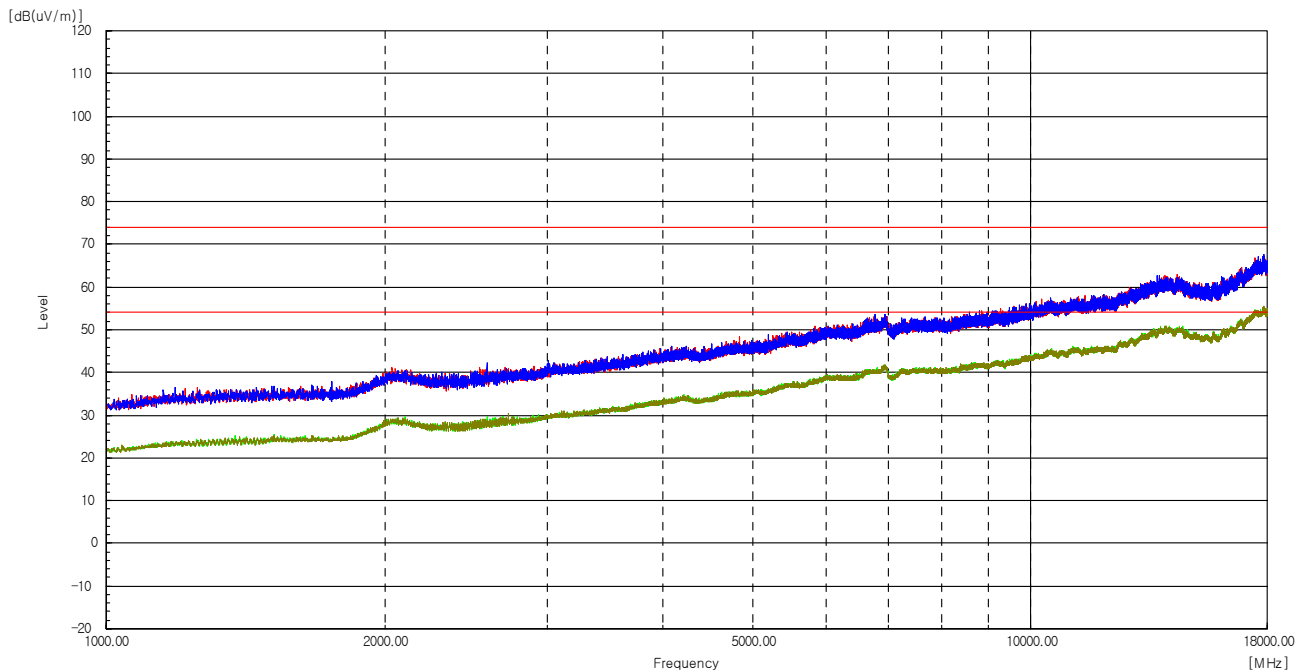

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz
5. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (54) / (63) Pages

Test mode : Receiving status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

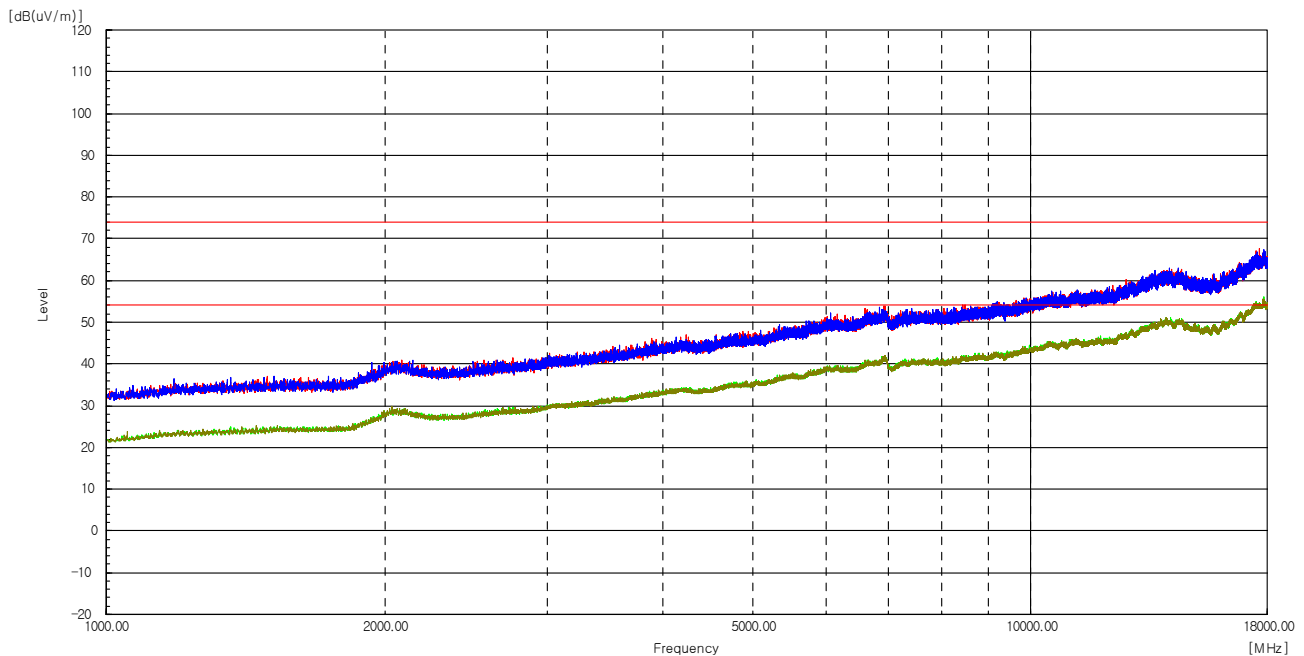

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (55) / (63) Pages


4) 18 GHz to 26.5 GHz

Test mode : Transmission status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

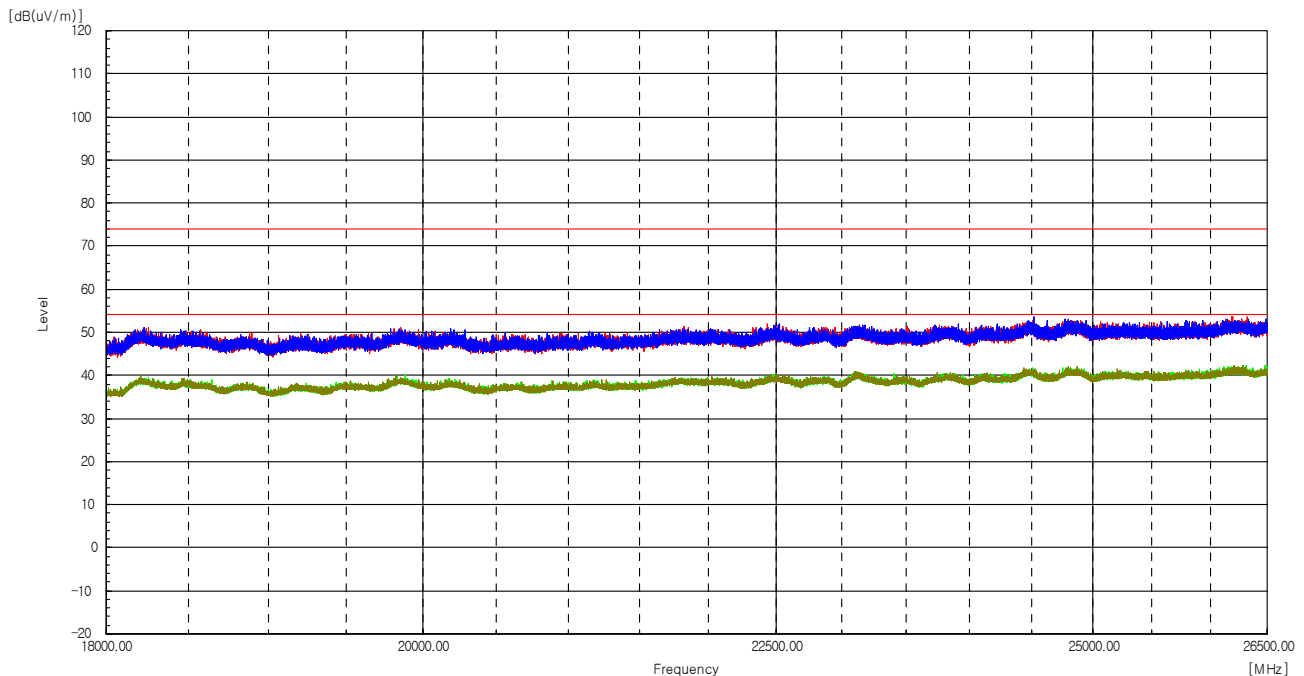

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (56) / (63) Pages

Test mode : Receiving status 250 kbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

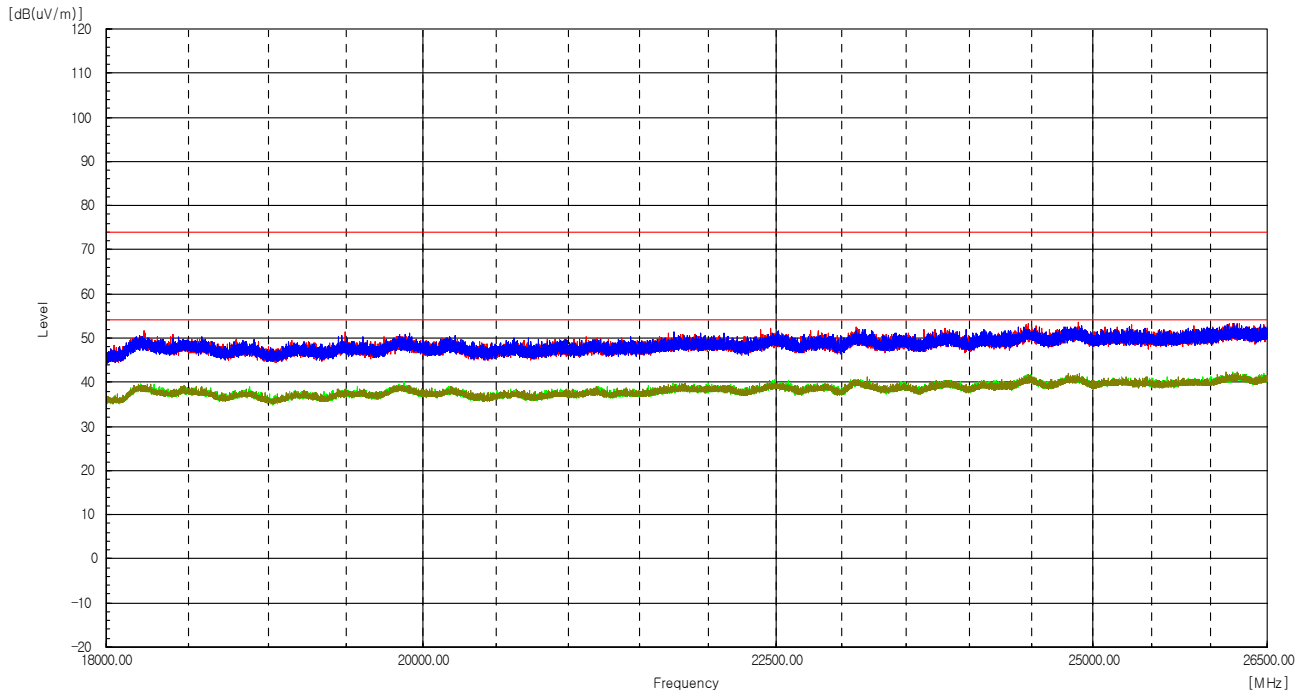

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (57) / (63) Pages

Test mode : Transmission status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

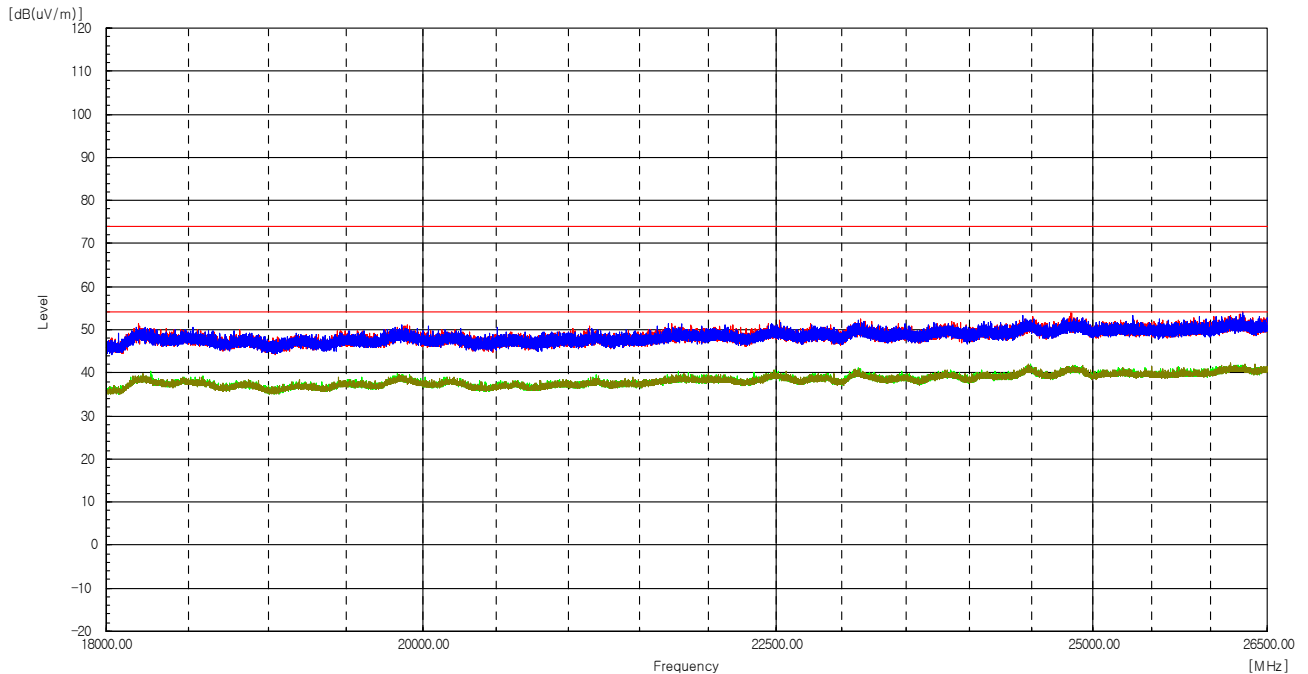

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2025-00262
Page (58) / (63) Pages

Test mode : Receiving status 1 Mbps Highest channel (Worst case)

The requirements are:

☒ Complies

Test Data

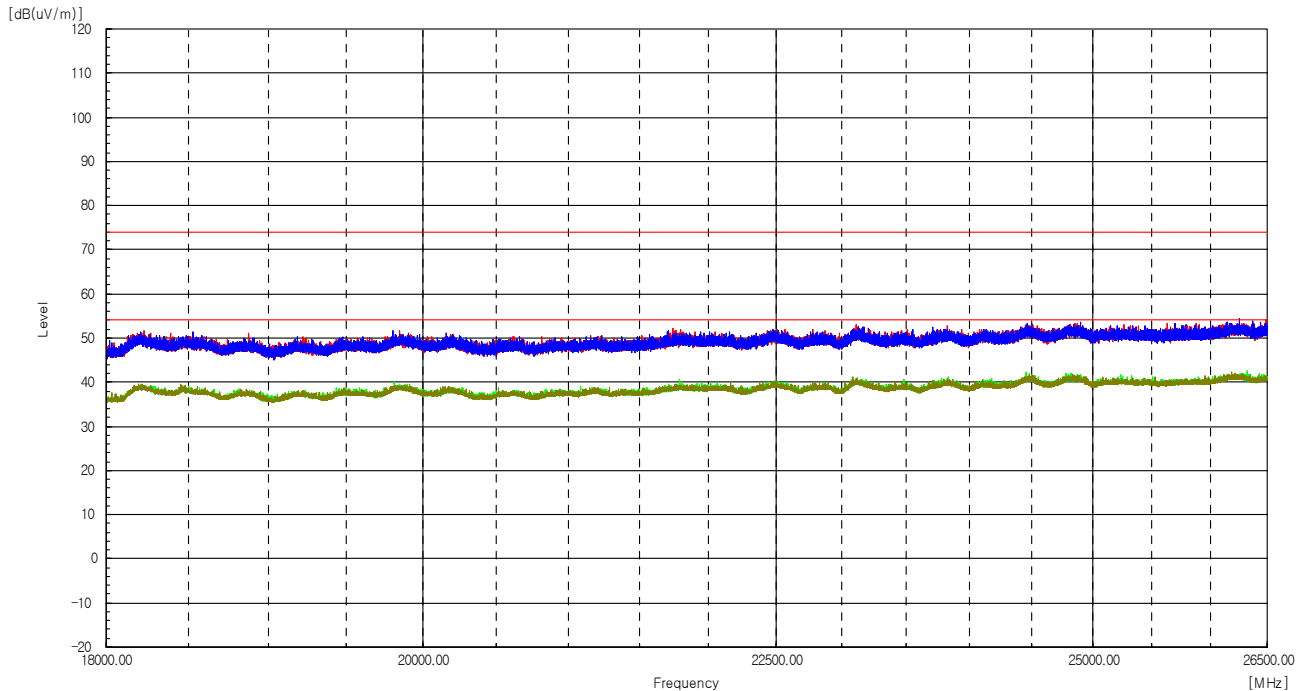

Result : no peak found

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262

Page (59) / (63) Pages


5) Restricted Frequency Bands

Test mode : Transmission status 250 kbps Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are:

☒ Complies

Test Data

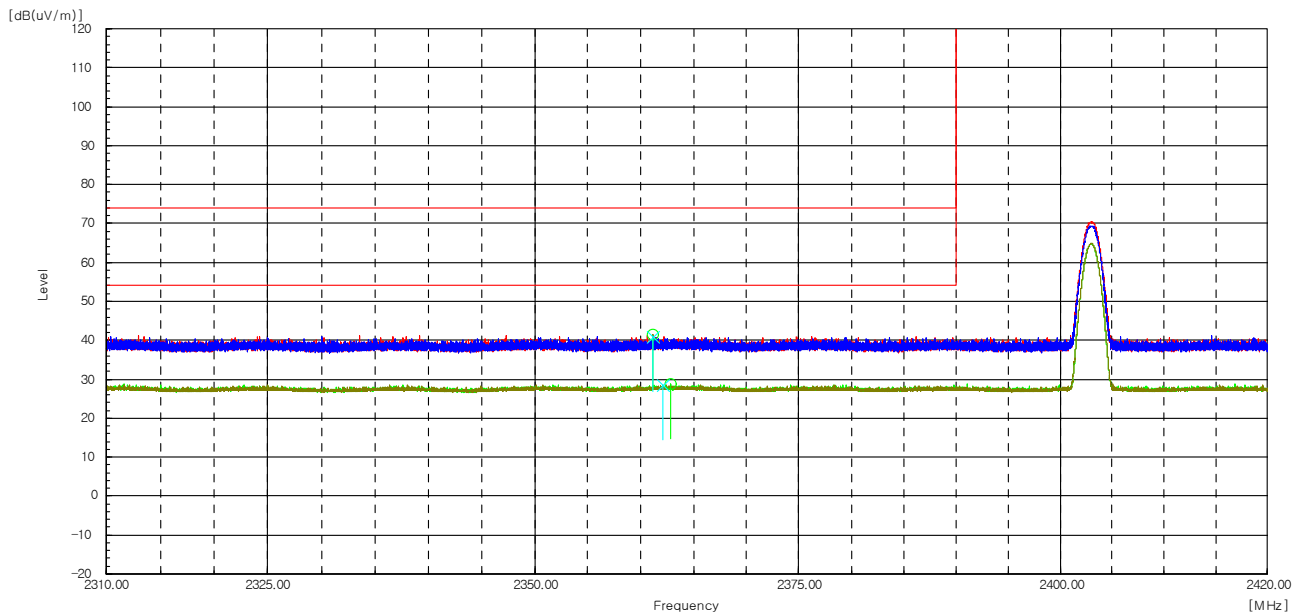

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 361.156	H	47.1	-----	-5.8	41.3	-----	74	-----	32.7	-----
2 362.864	H	-----	34.5	-5.8	-----	28.7	-----	54	-----	25.3
2 361.130	V	46.7	-----	-5.8	40.9	-----	74	-----	33.1	-----
2 362.107	V	-----	34.4	-5.8	-----	28.6	-----	54	-----	25.4

Remarks

- Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
- Result = Reading + c.f(correction factor)
- Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (60) / (63) Pages

Test mode : Transmission status 250 kbps Highest channel (Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are:

☒ Complies

Test Data

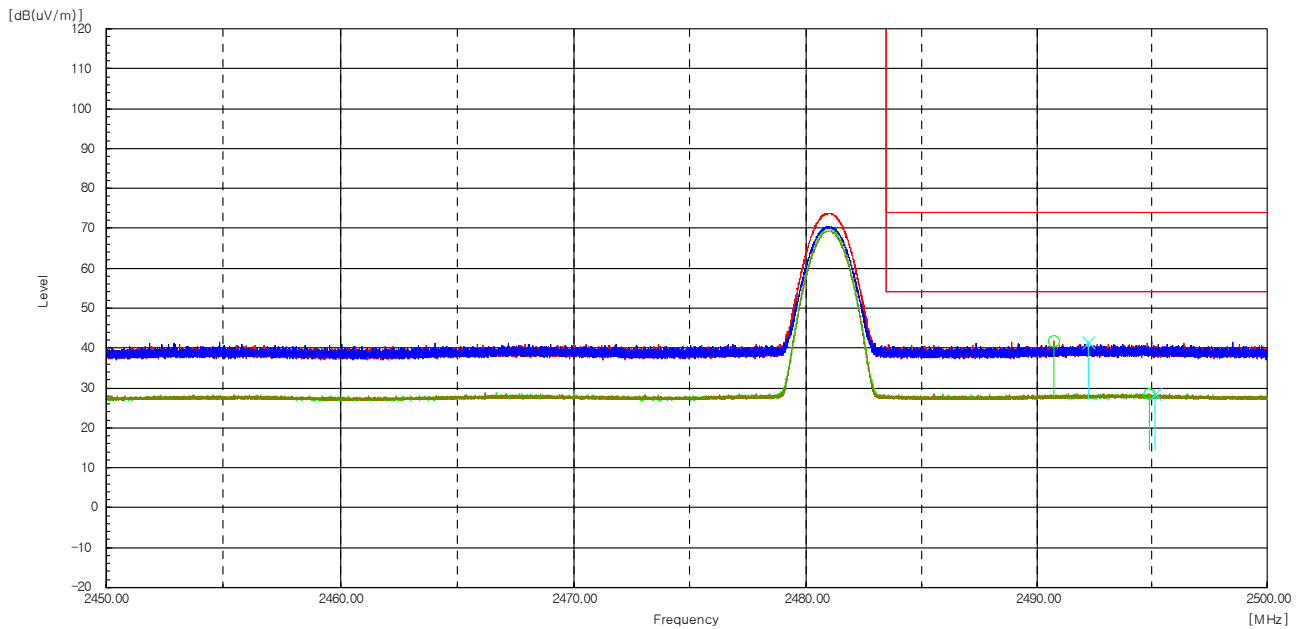

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 490.732	H	46.8	-----	-5.2	41.6	-----	74	-----	32.4	-----
2 494.864	H	-----	33.8	-5.2	-----	28.6	-----	54	-----	25.4
2 492.214	V	46.7	-----	-5.2	41.5	-----	74	-----	32.5	-----
2 495.124	V	-----	33.8	-5.2	-----	28.6	-----	54	-----	25.4

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (61) / (63) Pages

Test mode : Transmission status 1 Mbps Lowest channel (Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are:

☒ Complies

Test Data

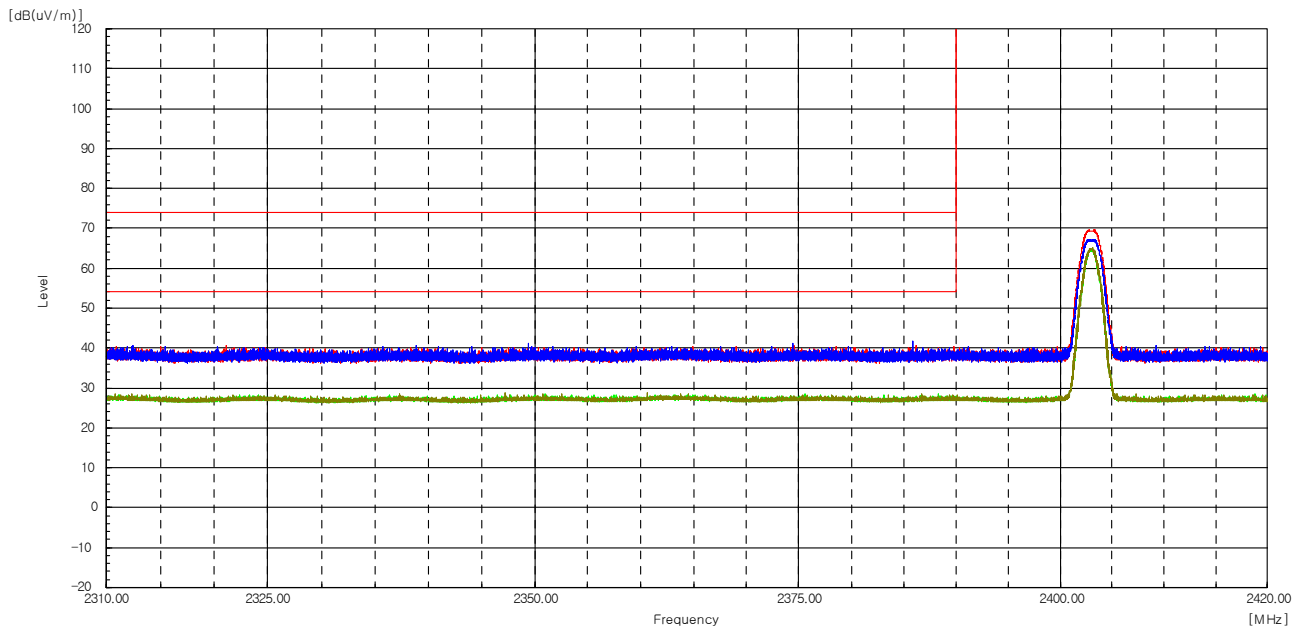

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 374.498	H	46.4	-----	-5.8	40.6	-----	74	-----	33.4	-----
2 351.001	H	-----	34.4	-5.8	-----	28.6	-----	54	-----	25.4
2 385.850	V	47.6	-----	-5.8	41.8	-----	74	-----	32.2	-----
2 360.611	V	-----	34.6	-5.8	-----	28.8	-----	54	-----	25.2

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:

CTK-2025-00262


Page (62) / (63) Pages

Test mode : Transmission status 1 Mbps Highest channel (Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are:

☒ Complies

Test Data

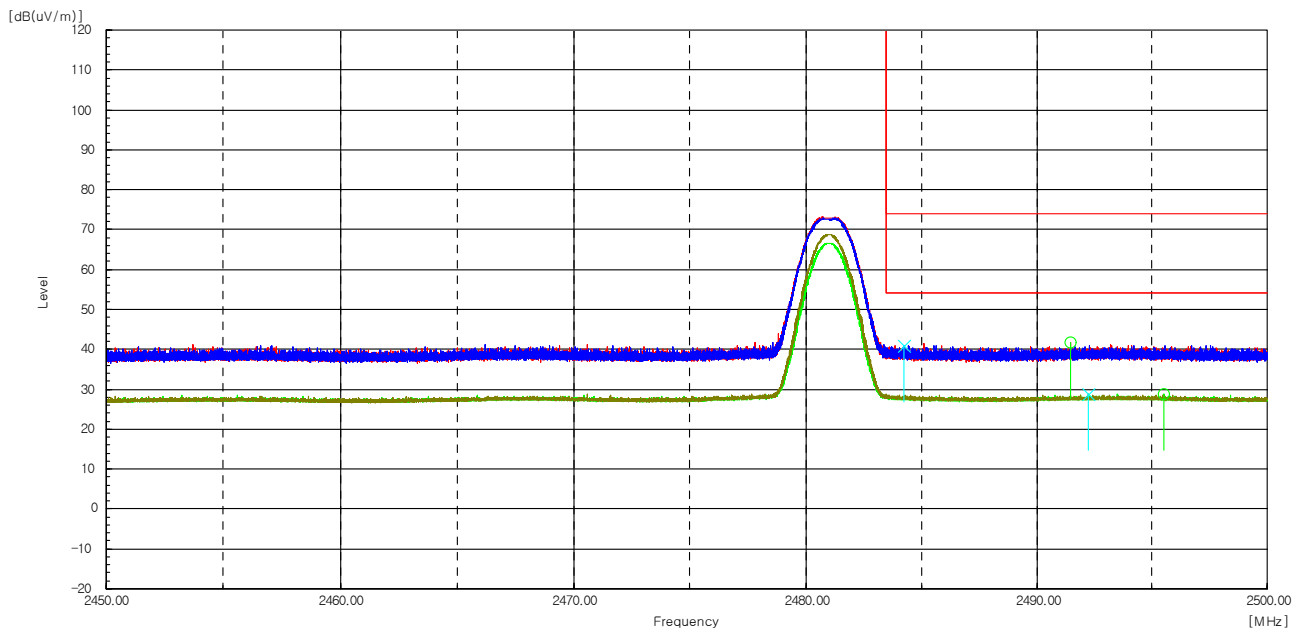

Frequency [MHz]	(P)	Reading PK [dBuV]	Reading AV [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]
2 491.468	H	47.0	-----	-5.2	41.8	-----	74	-----	32.2	-5.2
2 495.522	H	-----	34.0	-5.2	-----	28.8	-----	54	-----	-5.2
2 484.263	V	46.3	-----	-5.3	41.0	-----	74	-----	33.0	-5.3
2 492.244	V	-----	33.9	-5.2	-----	28.7	-----	54	-----	-5.2

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2025-00262
Page (63) / (63) Pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	US46470483	2024-11-26	2025-11-26
2	Signal Analyzer	Agilent	N9020A	MY52090670	2024-09-19	2025-09-19
3	Signal Generator	Rohde & Schwarz	SMB100A	175528	2024-03-21	2025-03-21
4	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2024-04-29	2025-04-29
5	BILOG ANTENNA	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
6	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
7	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2024-07-31	2025-07-31
8	6dB Attenuator	NONE	6dB	190557	2024-09-19	2025-09-19
9	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2024-07-31	2025-07-31
10	Spectrum Analyzer	R&S	FSV40	101574	2024-01-15	2025-01-15
11	PRE AMPLIFIER	HP	8449B	3008A00620	2024-04-11	2025-04-11
12	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2024-04-16	2025-04-16
13	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2024-10-18	2025-10-18
14	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2024-10-18	2025-10-18
15	DC Power Supply	HP	E3632A	KR94907541	2024-09-20	2025-09-20
16	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	711196	2024-03-20	2025-03-20
17	Band Reject Filter	Micro Tronics	BRM50702	G444	2024-09-20	2025-09-20

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2024-12-18
2	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2024-03-05
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2024-03-05
4	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2023-06-28
5	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2023-06-28
6	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2023-06-28
7	RF Cable (18 GHz - 26.5 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2372/2	2023-06-28
8	RF Cable (18 GHz - 26.5 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2371/2	2023-06-28
9	RF Cable (18 GHz - 26.5 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2023-06-28

-END-