



**F2 Labs**  
**16740 Peters Road**  
**Middlefield, Ohio 44062**  
**United States of America**  
**[www.f2labs.com](http://www.f2labs.com)**

## **PCII TEST REPORT**

**Manufacturer:** **Structured Monitoring Products**  
**151 Innovation Way, Suite 210**  
**Elyria, Ohio 44035 USA**

**Applicant:** **Same as Above**

**Product Name:** **Heart Monitor (VetGuardian)**

**Product Description:** Heart rate and respiratory rate measurement device for animals.

**Operating Voltage/Freq. of EUT During Testing:** 12VDC from Host

**Model:** **SMPVG04\***  
*\*Denotes actual model tested to add it to product family that includes models SMPVG02 Version 2.5 and SMPVG03.*

**FCC ID:** **2ARN8-SMPVG02**

**Testing Commenced:** 2023-12-18

**Testing Ended:** 2023-12-18

**Summary of Test Results:** **In Compliance**

The EUT complies with the EMC requirements when manufactured identically as the unit tested in this report, including any required modifications and/or manufacturer's statement. Any changes to the design or build of this unit subsequent to this testing may deem it non-compliant.

### **Standards:**

- ❖ **FCC Part 15 Subpart C, Section 15.249**
- ❖ **FCC Part 15 Subpart C, Section 15.215(c) – Additional provisions to the general radiated emission limitations**
- ❖ **FCC15.207 - Conducted Limits**
- ❖ **FCC Part 15 Subpart A, Section 15.31(e) – Measurement Standards**



Order No(s): F2P27463-R1-C1A

Applicant: Structured Monitoring Products  
Model: SMPVG04

**Evaluation Conducted by:**

Julius Chiller, Senior Wireless Project Engineer

**Report Reviewed by:**

Ken Littell, Vice President of Operations

F2 Labs  
26501 Ridge Road  
Damascus, MD 20872  
Ph 301.253.4500

F2 Labs  
16740 Peters Road  
Middlefield, OH 44062  
Ph 440.632.5541

F2 Labs  
8583 Zionsville Road  
Indianapolis, IN 46268  
Ph 317.610.0611

This test report may be reproduced in full; partial reproduction only may be made with the written consent of F2 Labs. The results in this report apply only to the equipment tested.



## TABLE OF CONTENTS

1	<a href="#"><u>ADMINISTRATIVE INFORMATION</u></a>
2	<a href="#"><u>SUMMARY OF TEST RESULTS/MODIFICATIONS</u></a>
3	<a href="#"><u>TABLE OF MEASURED RESULTS</u></a>
4	<a href="#"><u>ENGINEERING STATEMENT</u></a>
5	<a href="#"><u>EUT INFORMATION AND DATA</u></a>
6	<a href="#"><u>LIST OF MEASUREMENT INSTRUMENTATION</u></a>
7	<a href="#"><u>OCCUPIED BANDWIDTH</u></a>
8	<a href="#"><u>FIELD STRENGTH OF EMISSIONS</u></a>
9	<a href="#"><u>VOLTAGE VARIATIONS</u></a>
10	<a href="#"><u>CONDUCTED EMISSIONS</u></a>
11	<a href="#"><u>PHOTOGRAPHS - TEST SETUPS</u></a>



## 1 ADMINISTRATIVE INFORMATION

### 1.1 Measurement Location:

F2 Labs in Middlefield, Ohio. Site description and attenuation data are on file with the FCC's Sampling and Measurement Branch at the FCC Laboratory in Columbia, MD.

### 1.2 Measurement Procedure:

All measurements were performed according to the 2013 version of ANSI C63.10 and recommended FCC procedure of measurement of DXT operating under Section 15.249. A list of the measurement equipment can be found in Section 6.

### 1.3 Uncertainty Budget:

The uncertainty in EMC measurements arises from several factors which affect the results, some associated with environmental conditions in the measurement room, the test equipment being used, and the measurement techniques adopted.

The measurement uncertainty budgets detailed below are calculated from the test and calibration data and are expressed with a 95% confidence factor using a coverage factor of  $k=2$ . The Uncertainty for a laboratory is referred to as  $U_{lab}$ . For Radiated and Conducted Emissions, the Expanded Uncertainty is compared to the  $U_{cispr}$  values to determine if a specific margin is required to deem compliance.

#### $U_{lab}$

Measurement Range	Combined Uncertainty	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	2.54dB	5.07dB
Radiated Emissions <1 GHz @ 10m	2.55dB	5.09dB
Radiated Emissions 1 GHz to 2.7 GHz	1.81dB	3.62dB
Radiated Emissions 2.7 GHz to 18 GHz	1.55dB	3.10dB
AC Power Line Conducted Emissions, 150kHz to 30 MHz	1.38dB	2.76dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	1.66dB	3.32dB

#### $U_{cispr}$

Measurement Range	Expanded Uncertainty
Radiated Emissions <1 GHz @ 3m	5.2dB
Radiated Emissions <1 GHz @ 10m	5.2dB
Radiated Emissions 1 GHz to 2.7 GHz	Under Consideration
Radiated Emissions 2.7 GHz to 18 GHz	Under Consideration
AC Power Line Conducted Emissions, 150kHz to 30 MHz	3.6dB
AC Power Line Conducted Emissions, 9kHz to 150kHz	4.0dB

If  $U_{lab}$  is less than or equal to  $U_{cispr}$ , then:

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  in table 1, then:

- compliance is deemed to occur if no measured disturbance, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Note: Only measurements listed in the tables above that relate to tests included in this Test Report are applicable.



Order No(s): F2P27463-R1-C1A

Applicant: Structured Monitoring Products  
Model: SMPVG04

#### 1.4 Document History:

Document Number	Description	Issue Date	Approved By
F2P27463-R1-C1A-03E	First Issue	2024-05-29	K. Littell



## 2 SUMMARY OF TEST RESULTS

Test Name	Standard(s)	Results
99% Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
-20dB Occupied Bandwidth	CFR 47 Part 15.215(c)	Complies
Field Strength of Emissions	CFR 47 Part 15.249(a)(d)	Complies
Variation of the Input Power	CFR 47 Part 15.31(e)	Complies
Conducted Emissions	CFR 47 Part 15.207(a)	Complies

Note: Product was operated using an AC to DC power supply, so Voltage Variation testing in 15.31(3)(e) was performed at the nominal voltage, and then the 85% and 115% of that voltage was tested also. The output power at the Low, Mid, and High channels was measured to verify how much the power and frequency were affected by the variation of the input power. No shift in frequency or power was measured at either of the varied voltages on any of the channels.

Modifications Made to the Equipment
None



### 3 TABLE OF MEASURED RESULTS

Test		5780 MHz
Average Field Strength of Fundamental		6.9 millivolts/meter, 76.8dB $\mu$ V/m
Average Limit for Fundamental		50 millivolts/meter, 93.98 dB $\mu$ V/m
99% Occupied Bandwidth		8.653kHz
-20dB Occupied Bandwidth		35.2kHz
Voltage Variations	-15%	76.3dBuV/m / 6.5 mV/m
	Nominal	76.8dBuV/m / 6.9 mV/m
	+15%	76.5dBuV/m / 6.6 mV/m





#### 4 **ENGINEERING STATEMENT**

This report has been prepared on behalf of Structured Monitoring Products to provide documentation for the testing described herein. This equipment has been tested and found to comply with part 15.249 of the FCC Rules using ANSI C63.10 2013 standard. The test results found in this test report relate only to the items tested.



## 5 EUT INFORMATION AND DATA

### 5.1 Equipment Under Test:

Product: Heart Monitor (VetGuardian)

Model: SMPVG04\*

Serial No.: 1

Firmware: 2.5

Hardware: F

**FCC ID: 2ARN8-SMPVG02**

*\*Denotes actual model tested to add it to product family that includes models SMPVG02 Version 2.5 and SMPVG03.*

### 5.2 Trade Name:

Structured Monitoring Products

### 5.3 Power Supply:

12VDC from Host

### 5.4 Applicable Rules:

CFR 47, Part 15.249, subpart C

### 5.5 Antenna:

Integral Antenna

### 5.6 Accessories:

Shenzhen AC Adaptor J483-1203500UX

### 5.7 Test Item Condition:

The equipment to be tested was received in good condition.

### 5.8 Testing Algorithm:

EUT was set to transmit a continuous signal at 5870 MHz.

**6 LIST OF MEASUREMENT INSTRUMENTATION**

Equipment Type	Asset Number	Manufacturer	Model	Serial Number	Calibration Due Date
Shielded Chamber	CL166-E	Albatross Projects	B83117-DF435-T261	US140023	2024-11-15
Receiver	CL151	Rohde & Schwarz	ESU40	100319	2024-04-10
Low Loss Cable Set	--	Pasternack	PE3C0666-252 / PE3C066-50CM	None Spec.	Verified
Horn Antenna 18-26.5 GHz	CL114	A.H. Systems, Inc.	SAS-572	237	2023-12-31
Pre-Amplifier	CL153	Keysight Tech.	83006A	MY39500791	2024-11-14
Amplifier w/Monopole & 18" Loop	CL163-Loop	A.H. Systems, Inc.	EHA-52B	100	2024-12-14
Antenna, JB3 Combination	CL175	Sunol Sciences	JB3	A030315	2024-09-25
Horn Antenna	CL098	Emco	3115	9809-5580	2025-01-02
Horn Antenna 26.5-40 GHz	CL188	Com-Power	AH-640	091065	2023-12-31
Pre-Amplifier	CL189	Com-Power	PAM-840A	461303	2024-06-14
Preamplifier	CL285	AH Systems	PAM-0207	322	2024-05-15
Spectrum Analyzer	0204	Hewlett Packard	HP8591A	3149A02546	2024-04-11
Software:	EMC Analyzer 85712D Rev. A.00.01			Date Verified:	2023-12-18
Transient Limiter	0202	Hewlett Packard	11947A	3107A00729	2024-04-11
Software:	Tile Version 3.4.B.3.		Software Verified: 2023-12-18		
Software:	EMC 32, Version 8.53.0		Software Verified: 2023-12-18		
LISN	CL181	Com-Power	LI-125A	191226	2026-11-20
LISN	CL182	Com-Power	LI-125A	191225	2026-11-21
Temp./Hum. Recorder	CL294	Thermpro	TP50	2	2026-04-27



## **7 FCC PART 15.215(e), OCCUPIED BANDWIDTH**

### **7.1 Requirements:**


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the -20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

Bandwidth measurements were made at the 5.87 GHz frequency. The bandwidth was measured using the analyzer's marker function. Two resolution bandwidths were used.



7.2 Occupied Bandwidth Test Data

Test Date(s):	2023-12-18	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.215(c)	Air Temperature:	21.7°C
		Relative Humidity:	32%

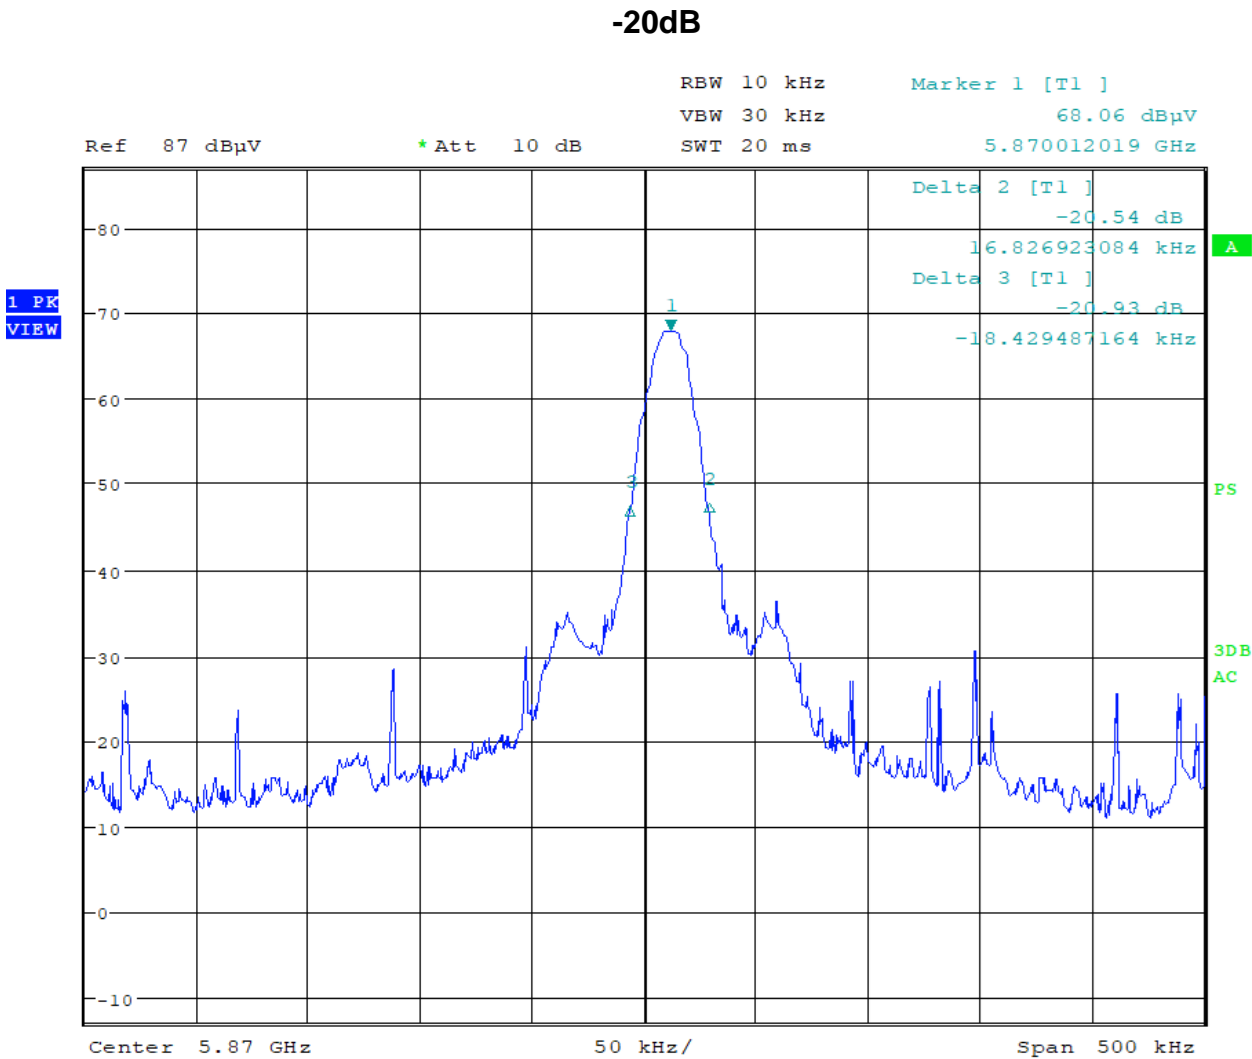

Note: The nature of the signal prevents a 1-5% RBW.



SDB  
AC



## 8 FIELD STRENGTH OF EMISSIONS FROM INTENTIONAL RADIATORS

- (a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

- (d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


NOTE: During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions.




## 8.1 Test Data - Field Strength of Emissions from Intentional Radiators

Test Date(s):	2203-12-18	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(a)	Air Temperature:	21.7°C
		Relative Humidity:	32%

### Band Edges: Vertical

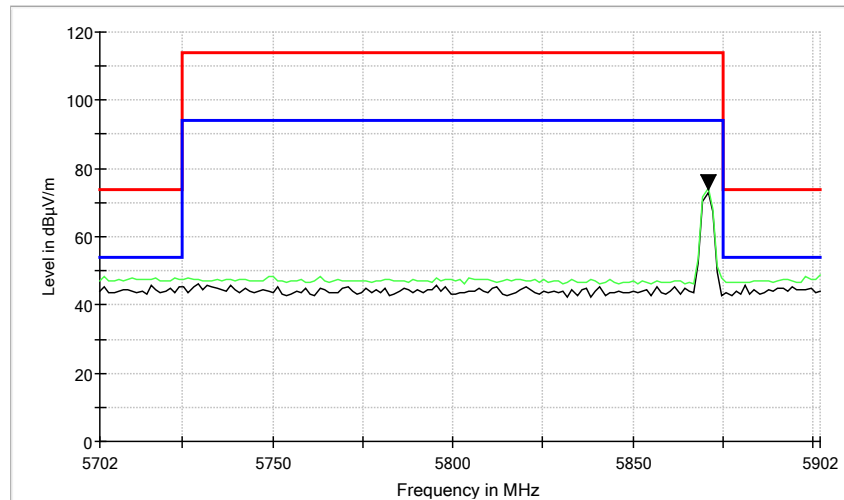

### Band Edges: Horizontal

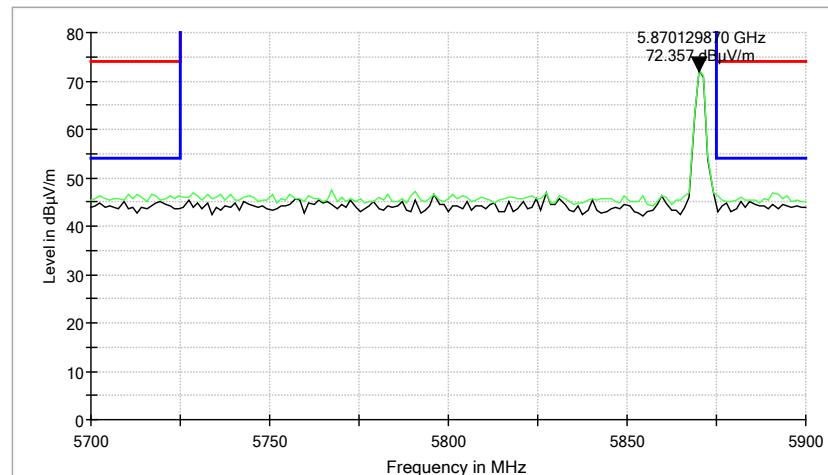






Band Edge and Field Strength of the Fundamentals

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV/m)	Comment
5725.000000	47.6	34.5	1000.0	1000.000	156.0	H	343.0	13.1	19.5	54.0	
5725.000000	47.3	34.3	1000.0	1000.000	257.0	V	87.0	13.1	19.7	54.0	
5870.000000	77.0	76.8	1000.0	1000.000	257.0	V	87.0	13.1	17.2	94.0	
5870.000000	75.6	74.7	1000.0	1000.000	156.0	H	343.0	13.1	19.3	94.0	
5875.000000	46.3	33.8	1000.0	1000.000	257.0	V	87.0	13.1	20.2	54.0	
5875.000000	47.1	34.0	1000.0	1000.000	156.0	H	343.0	13.1	20.0	54.0	

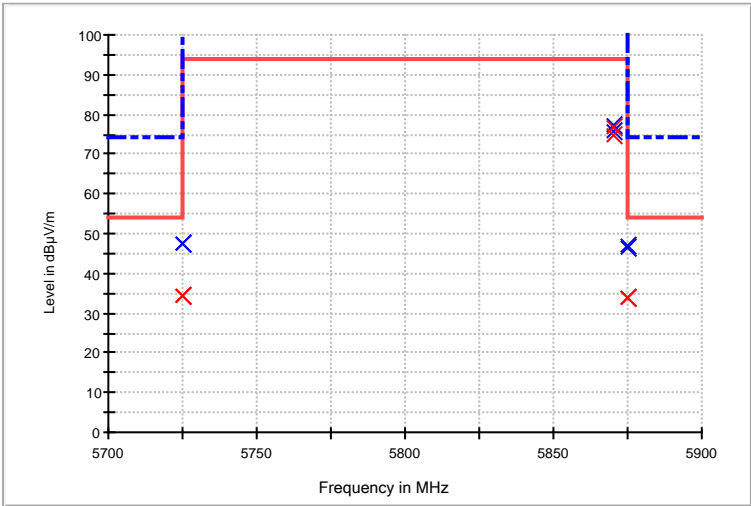



## 8.2 Test Data – Spurious Emissions

Notes: Plots are peak, max hold pre-scan data included only to determine what frequencies to investigate and measure. During the pre-scan evaluation, the EUT was rotated in all possible directions to find the maximum emissions. The orthogonal position that showed the highest emissions was used. At some frequencies, no emissions from the EUT were measurable over the ambient noise floor. The readings did not change with EUT on and EUT off.


At least 6 of the highest frequencies were measured per ANSI 63.4 in a 3-meter anechoic chamber. Frequencies below 1 GHz were measured using a quasi-peak detector. The antenna was raised between 1 and 4 meters and the EUT turntable was rotated 360 degrees to maximize the emissions. Some of the frequencies did not change with the EUT on or off. At those frequencies, the test distance was shortened to 1 meter and still no emissions from the EUT were visible or over the ambient or limit. Frequencies were scanned from 9kHz to 40 GHz and the highest emissions are listed below.

In the following plots, the black line indicates ambient noise and the red line indicates the measurement with the EUT on. Emissions to be found by the EUT were measured and listed in tables below.




Test Date(s):	2023-12-18	Test Engineer(s):	J. Chiller
Standards:	CFR 47 Part 15.249(d) / Part 15.209	Air Temperature:	21.6°C
		Relative Humidity:	35%

### Characterization Scan, 9 kHz to 150 kHz

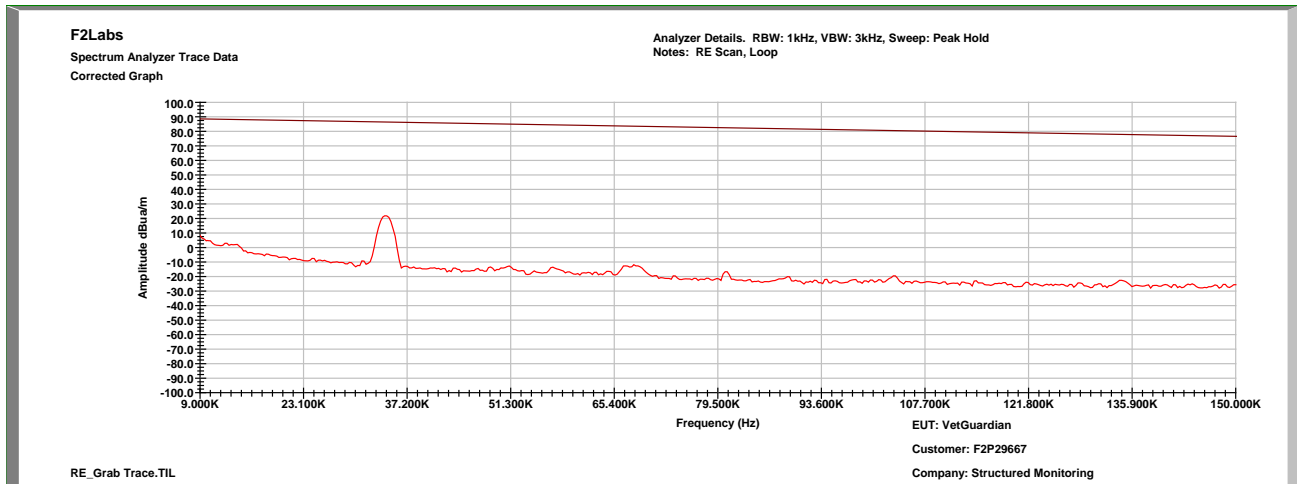


### Characterization Scan, 150 kHz to 30 MHz

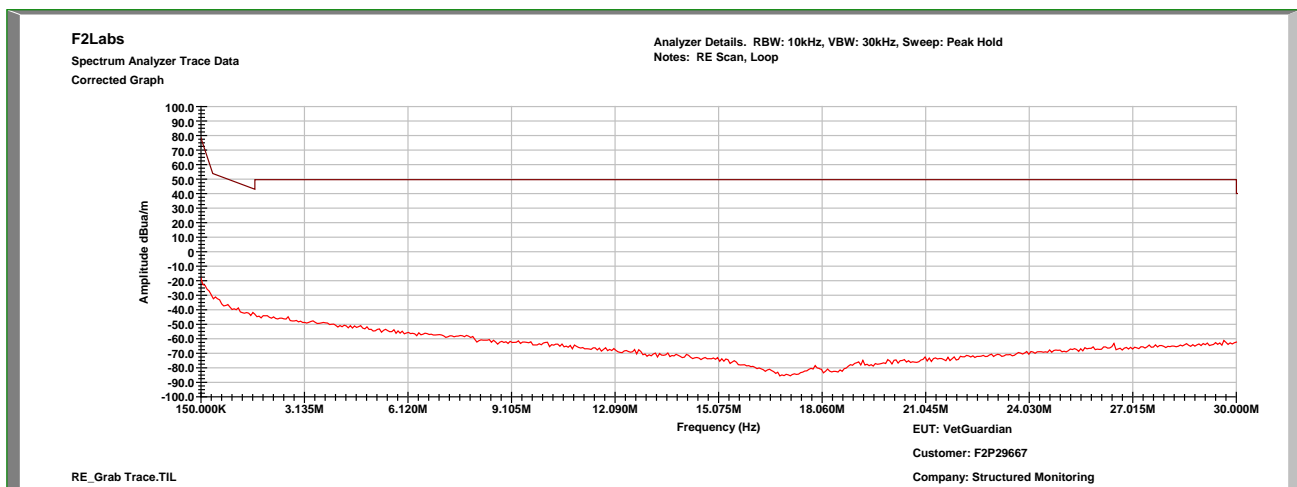




## 30 MHz to 1000 MHz

Frequency (MHz)	Ant. Pol.	Ant. Height (cm)	Azimuth (degrees)	Reading (dB $\mu$ V)	Corr. Factors (dB)	Emission (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
31.750000	V	100.00	42.00	55.8	-20.5	35.30	40.0	-4.7
41.250000	V	100.00	334.00	53.5	-27.7	25.80	40.0	-14.2
99.260000	V	100.00	288.00	64.8	-30.1	34.70	43.5	-8.8
140.590000	H	100.00	245.00	68.9	-26.7	42.20	43.5	-1.3
143.300000	V	100.00	332.00	58.5	-26.8	31.70	43.5	-11.8
157.070000	V	100.00	0.00	56.8	-27.1	29.70	43.5	-13.8
174.920000	H	156.00	266.00	57.0	-28.1	28.90	43.5	-14.6
179.190000	H	145.00	261.00	70.7	-28.3	42.40	43.5	-1.1
188.890000	V	100.00	357.00	62.4	-27.9	34.50	43.5	-9.0
362.520000	H	145.00	109.00	55.0	-23.7	31.30	46.0	-14.7

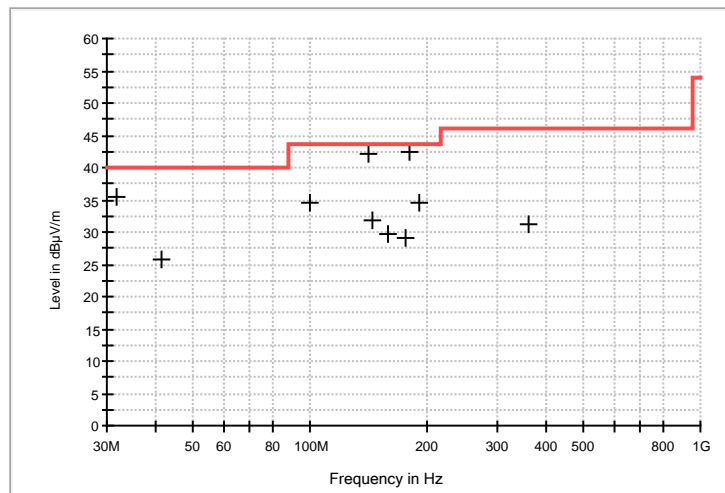




### 30 MHz to 1000 MHz, Vertical

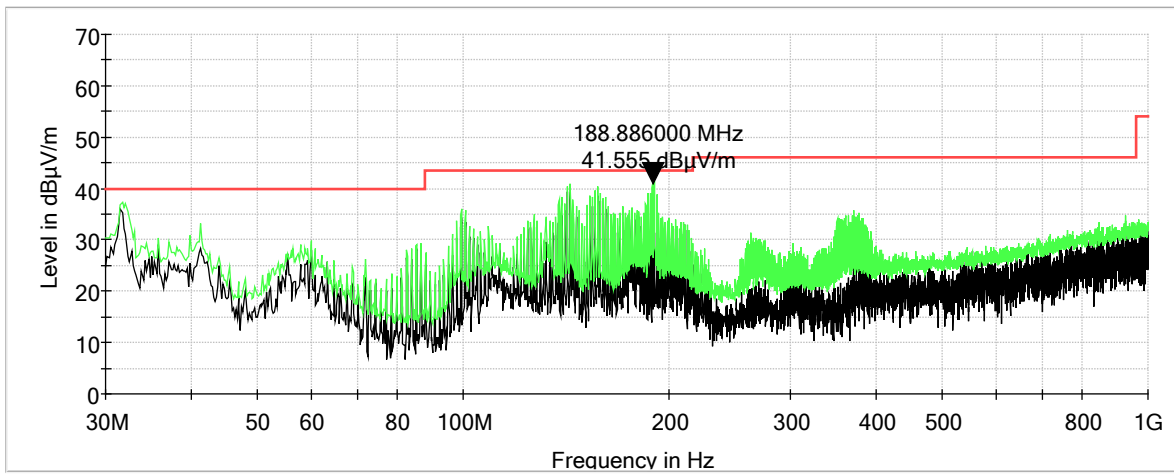




### 1 GHz to 18 GHz, Vertical

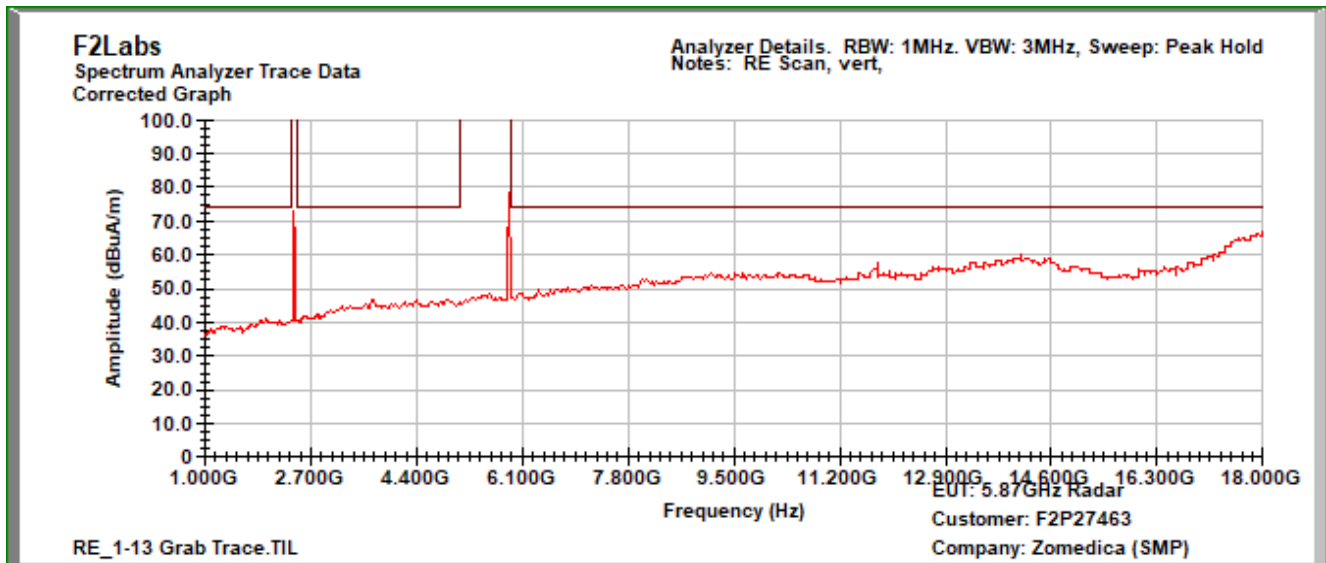


Note: In the above plot, the emissions spikes shown are from the fundamental frequencies of a certified Wi-Fi module.

### 18 GHz to 26 GHz, Vertical

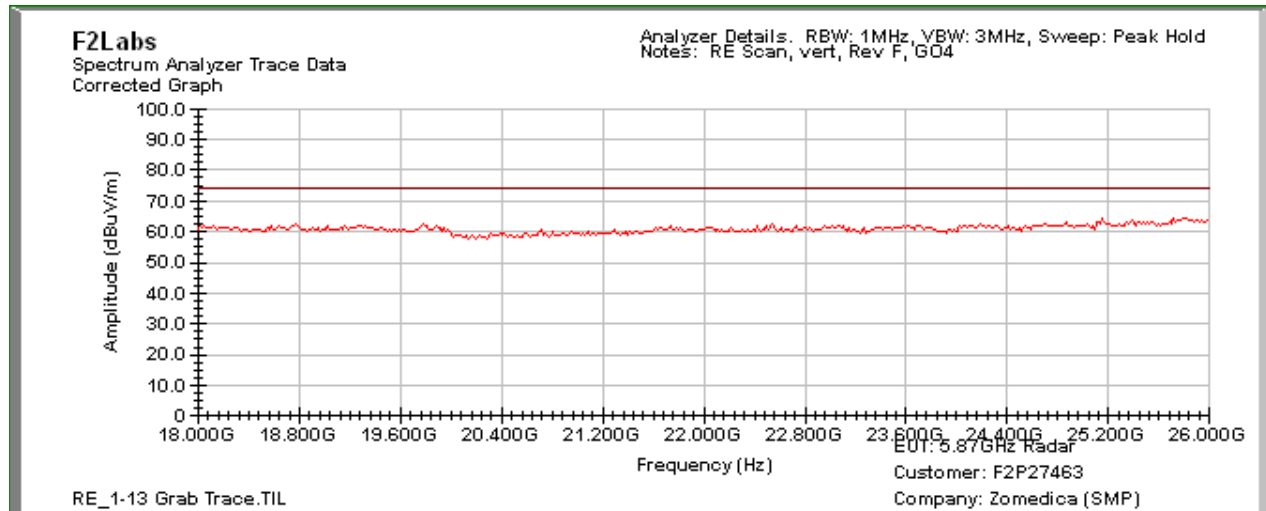




## 26 GHz to 40 GHz, Vertical

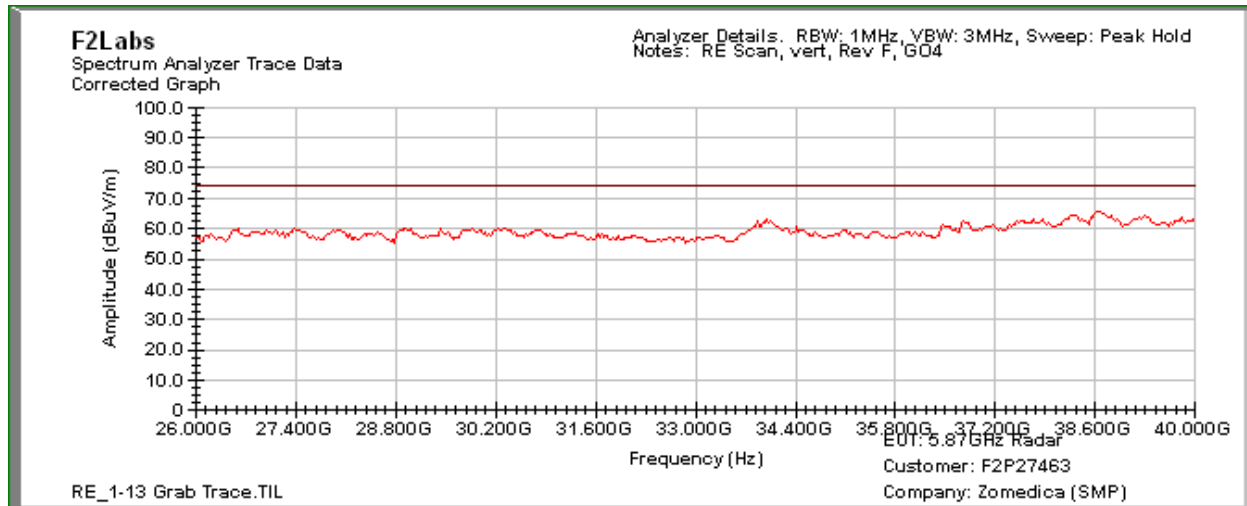




### 30 MHz to 1000 MHz, Horizontal

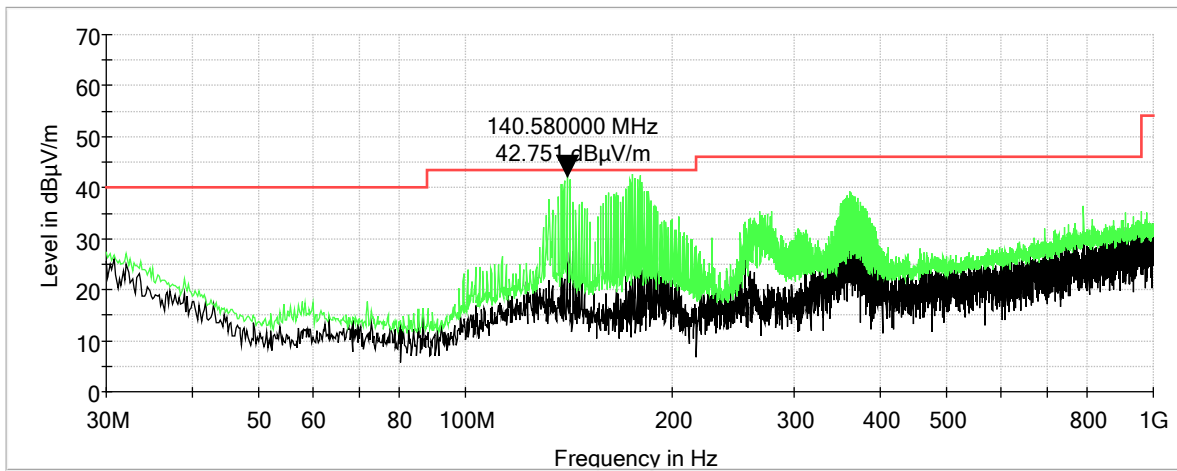






### 1 GHz to 18 GHz, Horizontal

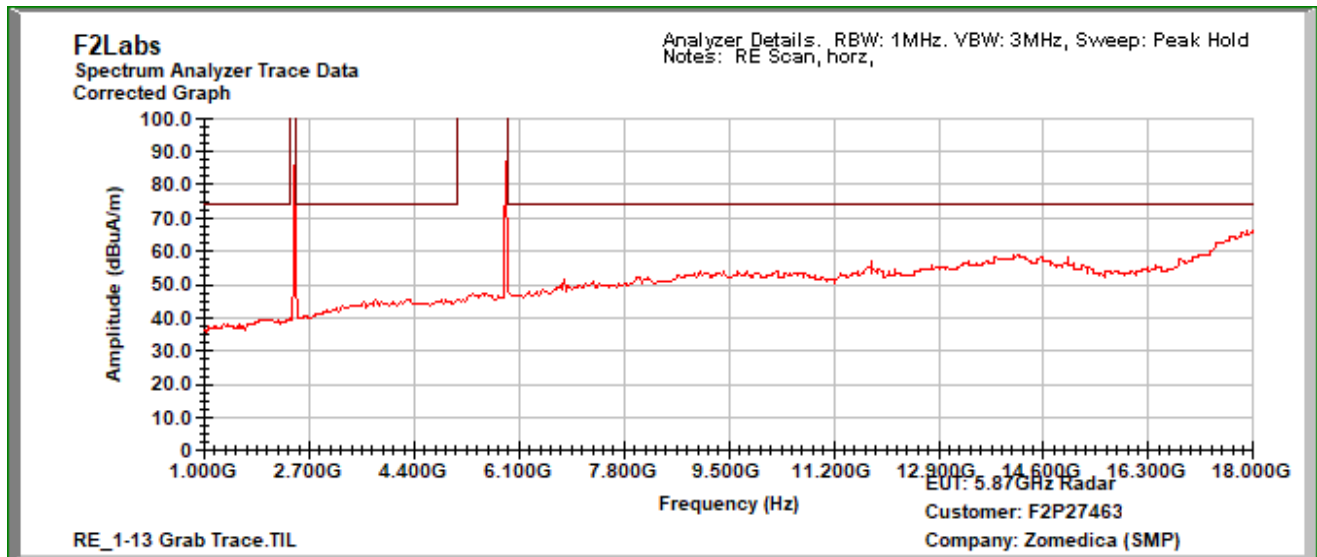


Note: In the above plot, the emissions spikes shown are from the fundamental frequencies of a certified Wi-Fi module.

### 18 GHz to 26 GHz, Horizontal

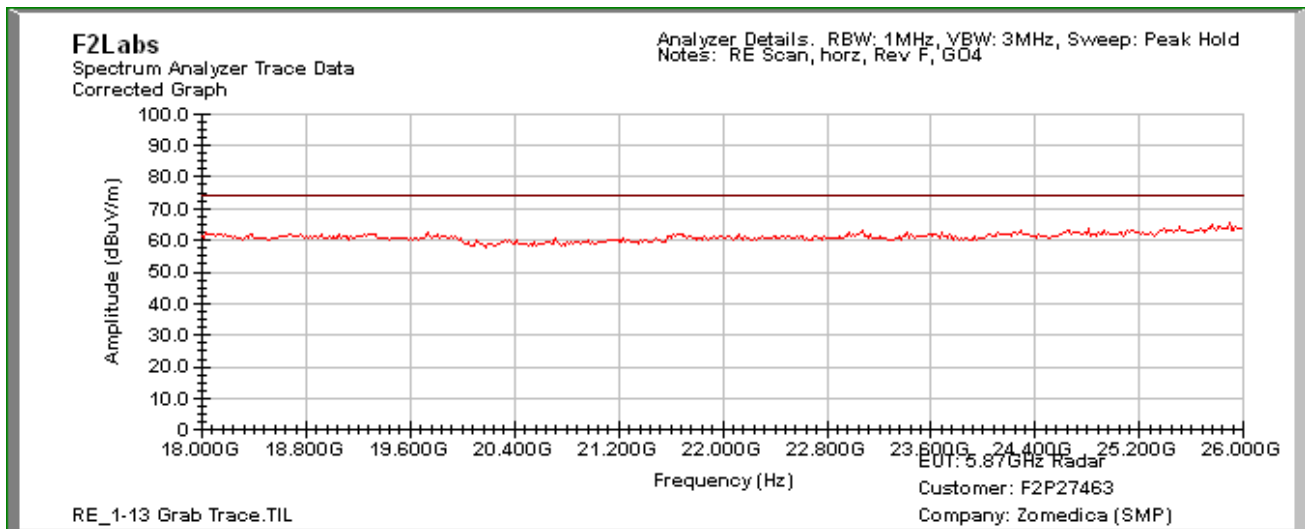




## 26 GHz to 40 GHz, Horizontal

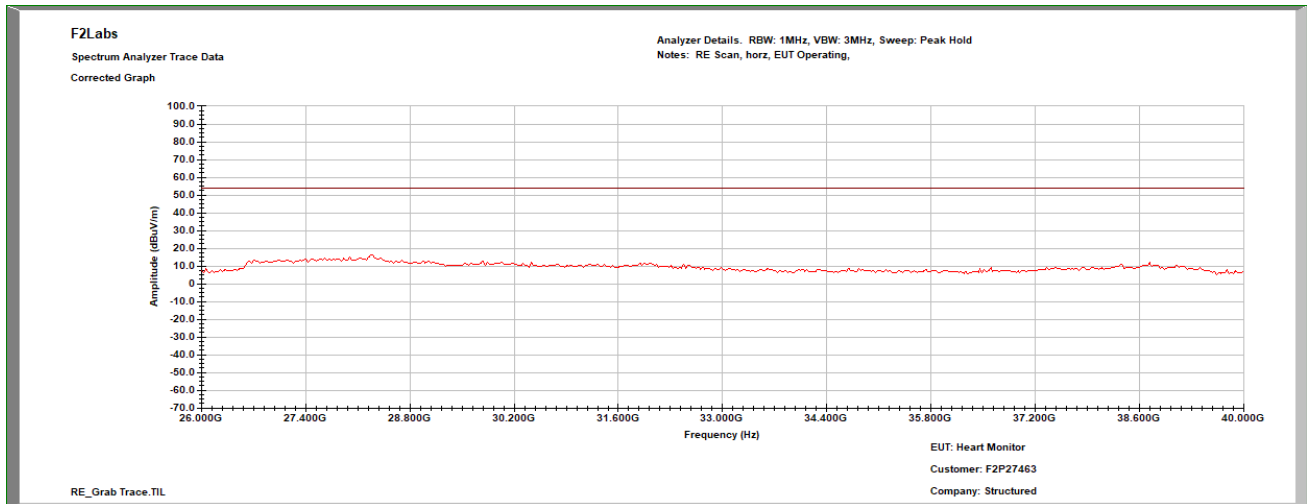




### Harmonics: 6 GHz to 18 GHz, Vertical

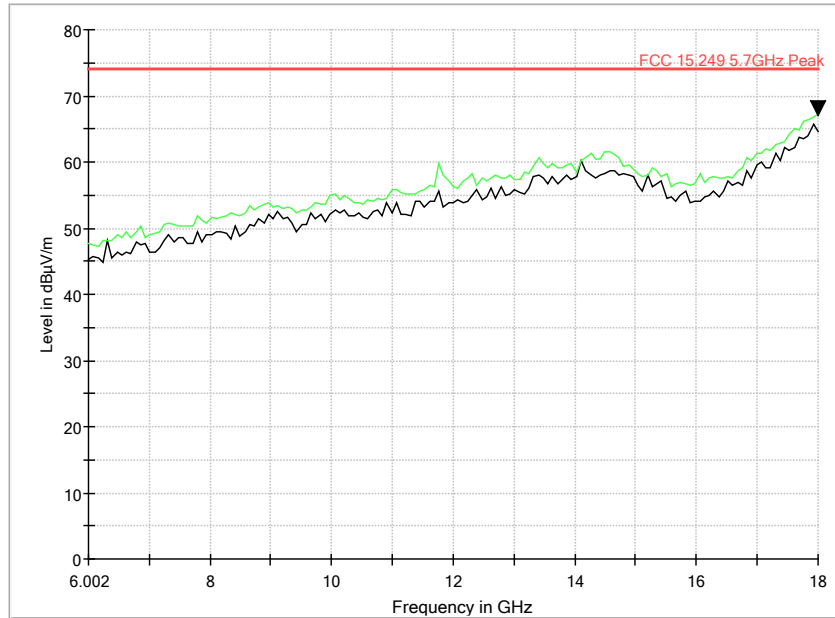


### Harmonics: 6 GHz to 18 GHz, Horizontal

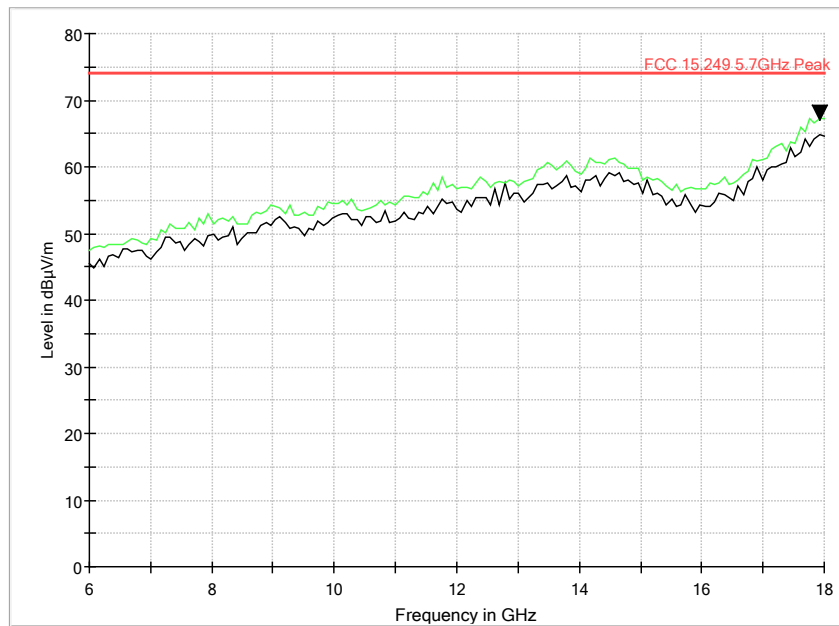



## Harmonics: Measurements

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
11740.000000	58.3	49.8	1000.0	1000.000	150.0	H	13.0	22.3	4.2	54.0
11740.000000	59.5	51.8	1000.0	1000.000	150.0	V	141.0	22.3	2.2	54.0
17610.000000	63.5	50.5	1000.0	1000.000	150.0	H	311.0	30.2	3.5	54.0
17610.000000	64.2	52.1	1000.0	1000.000	150.0	V	6.0	30.2	1.9	54.0

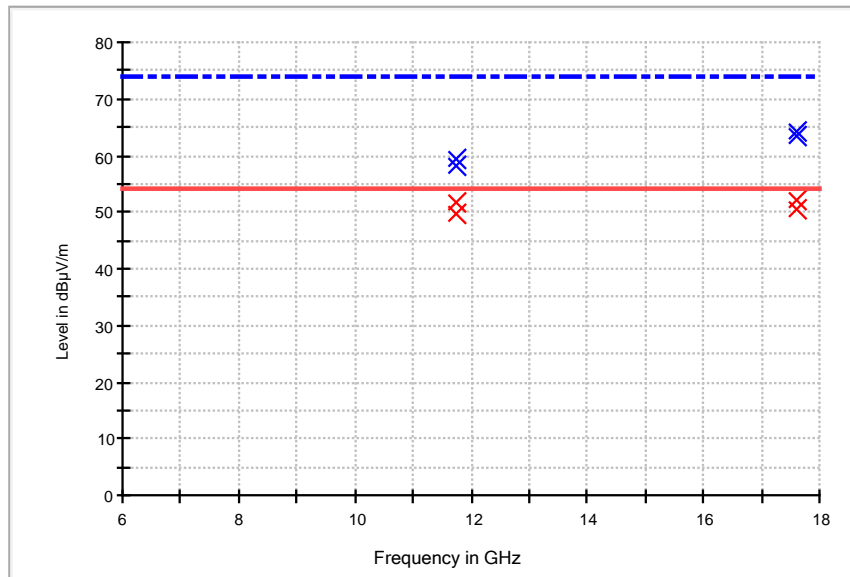



## 7 VOLTAGE VARIATIONS


For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery. A nominal voltage of 120VAC was used and then 100VAC and 138VAC were used as the 85% and 115% variations.

**RESULTS:** The results showed that the fundamental frequency did not move outside the frequency band and the field strength did not increase above the limit during the variations.



Test Date:	2023-12-18	Test Engineer:	J. Chiller
Rule:	CFR 47 Part 15.31(e)	Air Temperature:	21.7° C
Test Results:	Pass	Relative Humidity:	32%

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)	Comment
5870.000000	74.5	74.2	1000.0	1000.000	156.0	H	343.0	13.1	19.8	94.0	115%
5870.000000	76.8	76.5	1000.0	1000.000	257.0	V	87.0	13.1	17.5	94.0	115%
5870.000000	76.6	76.3	1000.0	1000.000	257.0	V	87.0	13.1	17.7	94.0	85%
5870.000000	74.0	73.7	1000.0	1000.000	156.0	H	343.0	13.1	20.3	94.0	85%

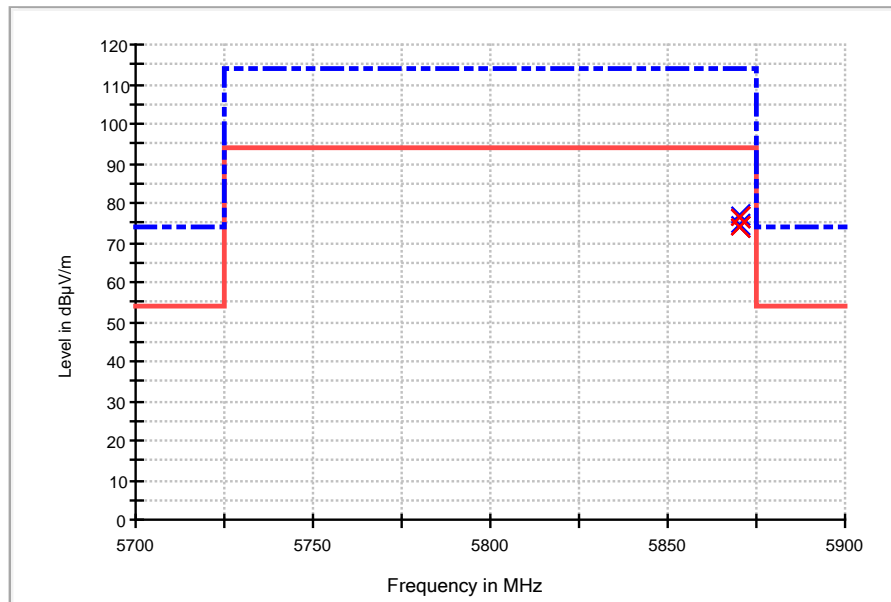



## 9 CONDUCTED EMISSIONS

### 9.1 Requirements

In accordance with FCC CFR 47 Part 15.207(a), "Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### 9.2 Procedure


The EUT was placed on a 1.0 x 1.5 meter non-conductive table, 0.8 meter above a horizontal ground plane and 0.4 meter from a vertical ground plane. Power was provided to the EUT through a LISN bonded to a 3 x 2 meter ground plane. The LISN and peripherals were supplied power through a filtered AC power source. The output of the LISN was connected to the input of the receiver via a transient limiter, and emissions in the range 150 kHz to 30 MHz were measured. The measurements were recorded using the quasi-peak and average detectors as directed by the standard, and the resolution bandwidth during testing was 9 kHz. The raw measurements were corrected to allow for attenuation from the LISN, transient limiter and cables.




### 9.3 Conducted Emissions Test Data

Test Date(s):	2023-12-18	Test Engineer:	J. Chiller
Rule:	15.207	Air Temperature:	22.6° C
Test Results:	Complies	Relative Humidity:	30%

#### Conducted Test – Live: 0.15 MHz to 0.5 MHz

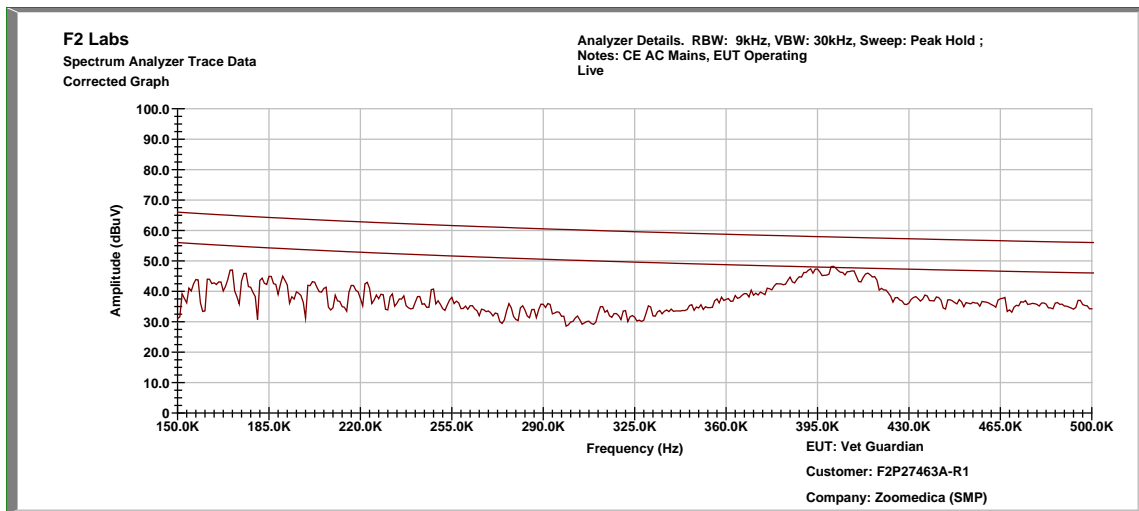


#### Conducted Test – Live: 0.5 MHz to 5.0 MHz

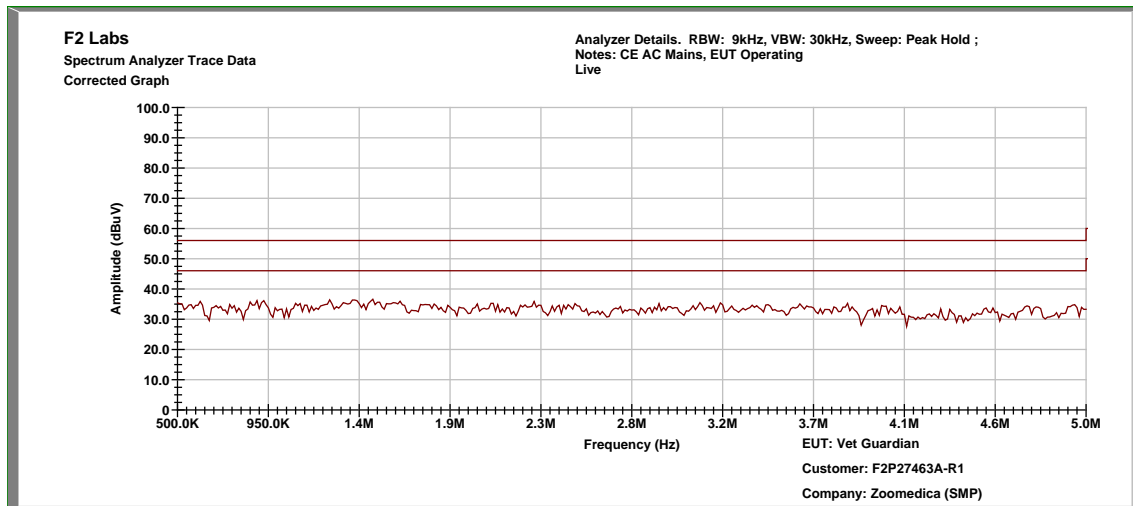






## Conducted Test – Live: 5.0 MHz to 30.0 MHz

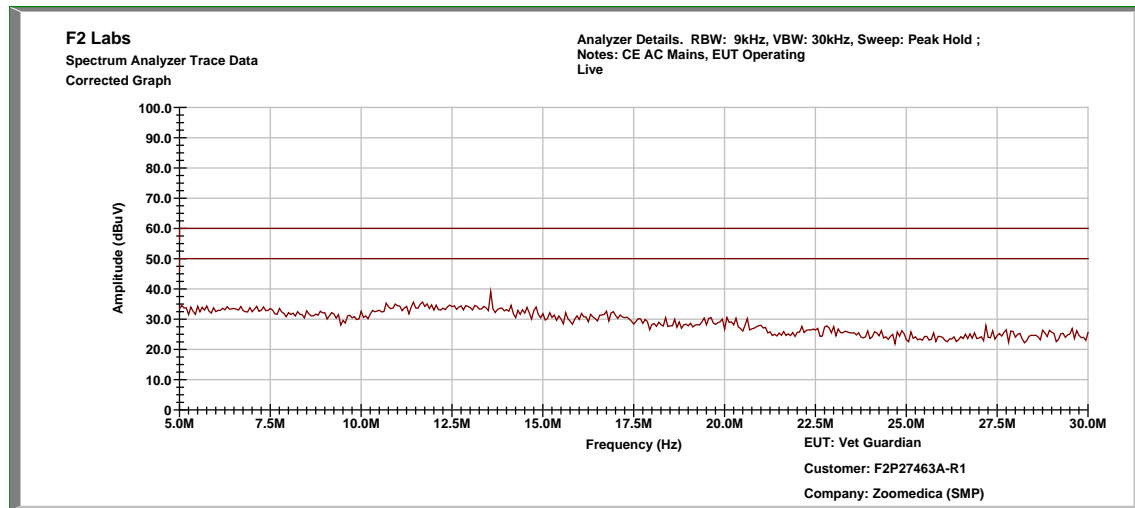


Top Discrete Measurements								
No.	Conductor	Frequency (MHz)	Detector	Level (dBμV)	Adjustment (dB)	Results (dBμV)	Limit (dBμV)	Margin (dB)
1	Live	0.395	Quasi-Peak	39.22	10.098	49.32	60.383	-11.1
			Average	28.22	10.098	38.32	50.383	-12.1
2	Live	0.401	Quasi-Peak	38.51	10.030	48.54	57.831	-9.3
			Average	28.34	10.030	38.37	47.831	-9.5
3	Live	0.415	Quasi-Peak	36.90	10.025	46.93	57.546	-10.6
			Average	26.82	10.025	36.85	47.546	-10.7



### Conducted Test – Neutral: 0.15 MHz to 0.5 MHz

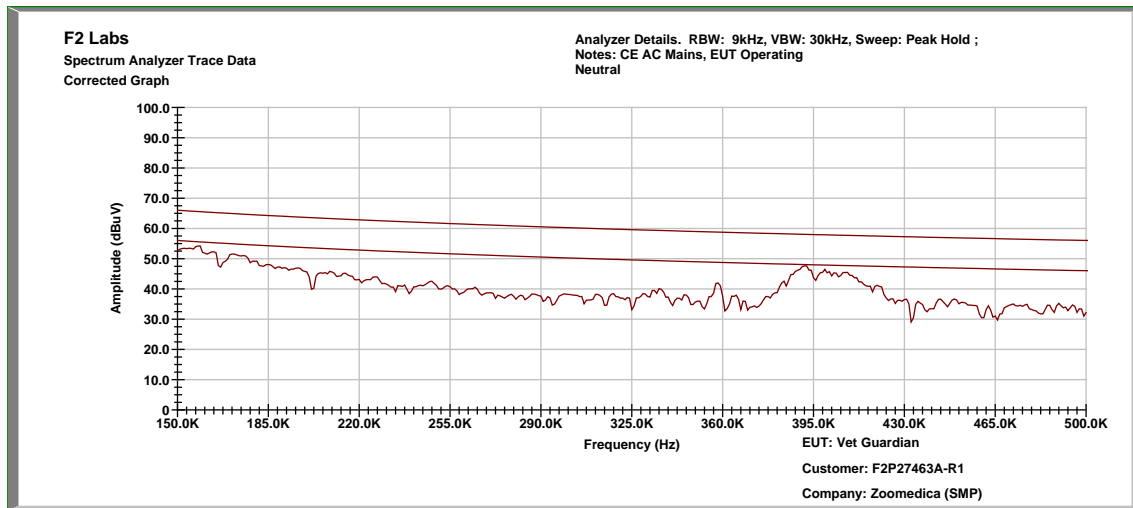


### Conducted Test –Neutral: 0.5 MHz to 5.0 MHz

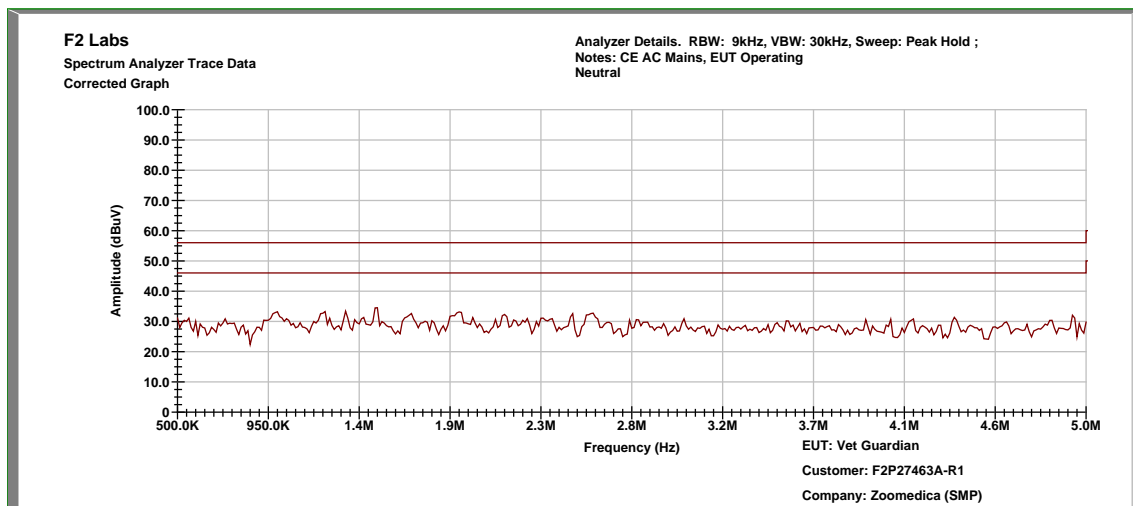



## Conducted Test – Neutral: 5.0 MHz to 30.0 MHz

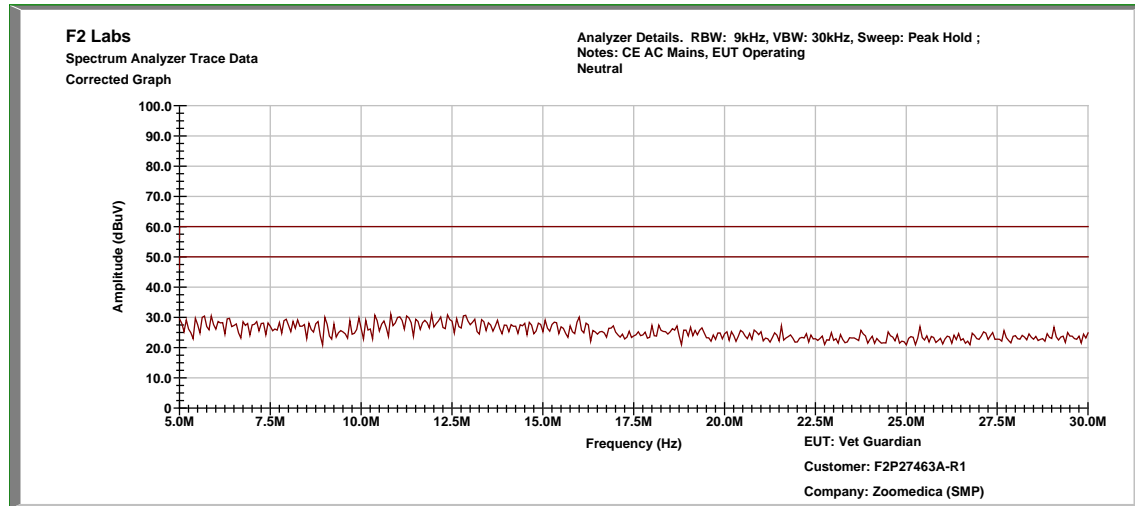


Top Discrete Measurements								
No.	Conductor	Frequency (MHz)	Detector	Level (dB $\mu$ V)	Adjustment (dB)	Results (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
1	Neutral	0.415	Quasi-Peak	33.32	10.028	43.35	57.548	-14.2
			Average	24.30	10.028	34.33	47.548	-13.2
2	Neutral	0.165	Quasi-Peak	38.78	10.883	49.66	65.208	-15.5
			Average	19.64	10.883	30.52	55.208	-24.7
3	Neutral	0.380	Quasi-Peak	34.61	10.042	44.65	58.280	-13.6
			Average	24.89	10.042	34.93	48.280	-13.3



## 10 PHOTOGRAPHS - TEST SETUPS

### Loop Antenna

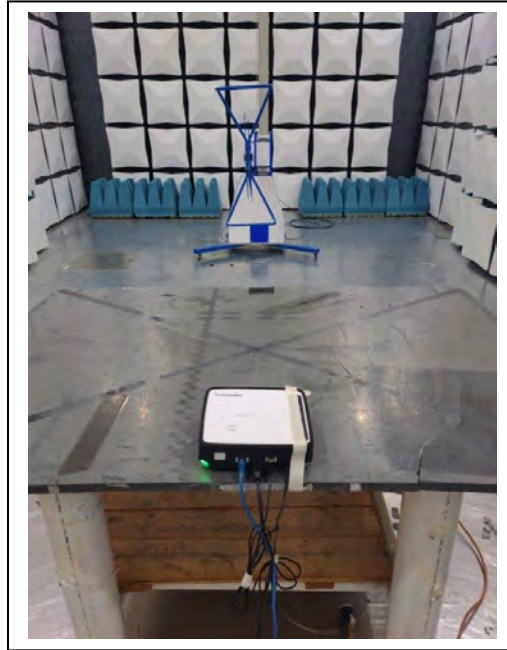

**Radiated Spurious Emissions: 30 MHz to 1000 MHz****Radiated Spurious Emissions Above 1 GHz,  
Occupied Bandwidth, Field Strength**



### Conducted Emissions

