


6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6865MHz Straddle 6.875-7.125GHz_TX

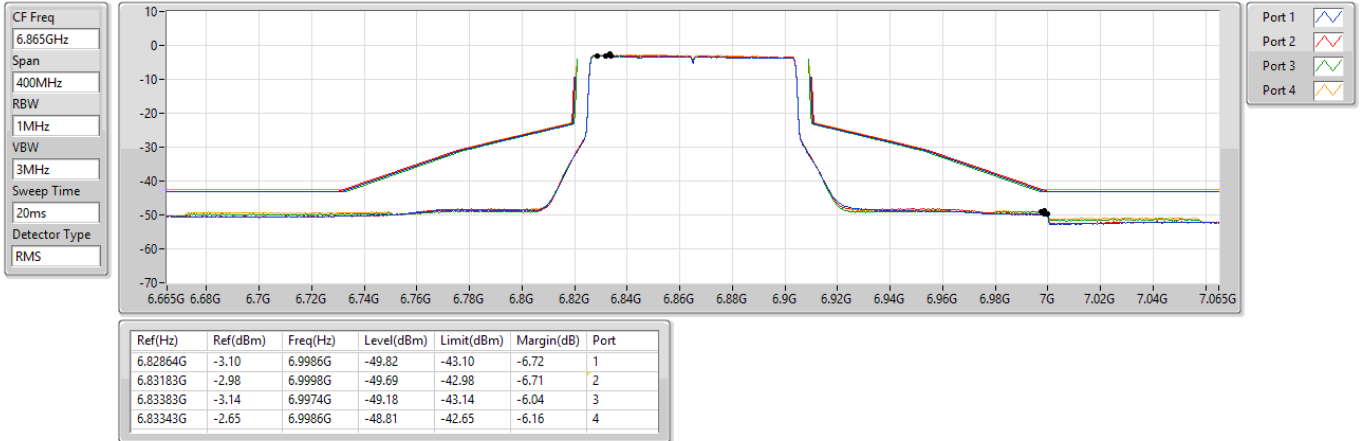

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


6945MHz_TX

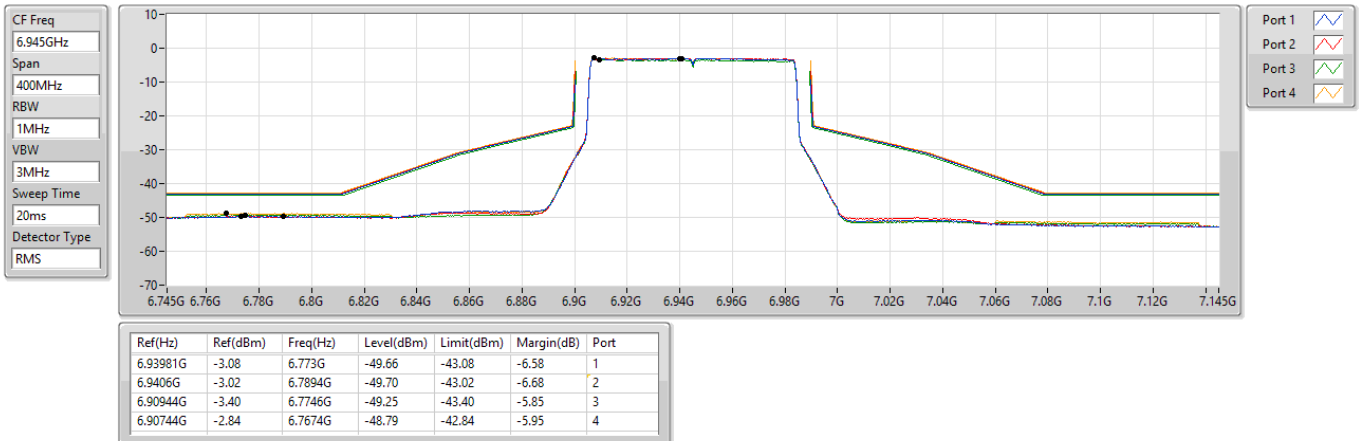

6.875-7.125GHz_802.11be EHT80_Nss4,(MCS0)_4TX

MASK


7025MHz_TX

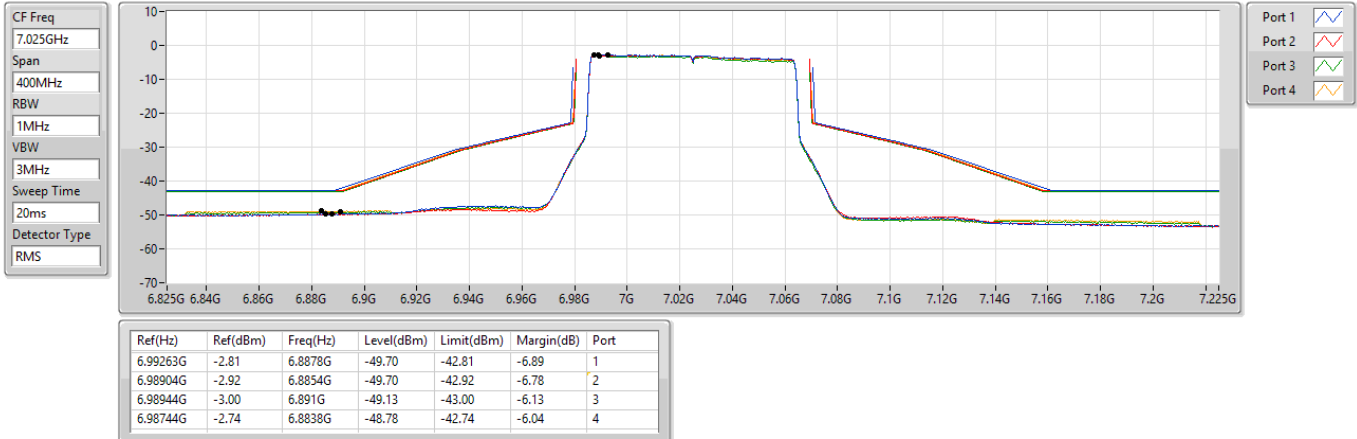

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6025MHz_TX

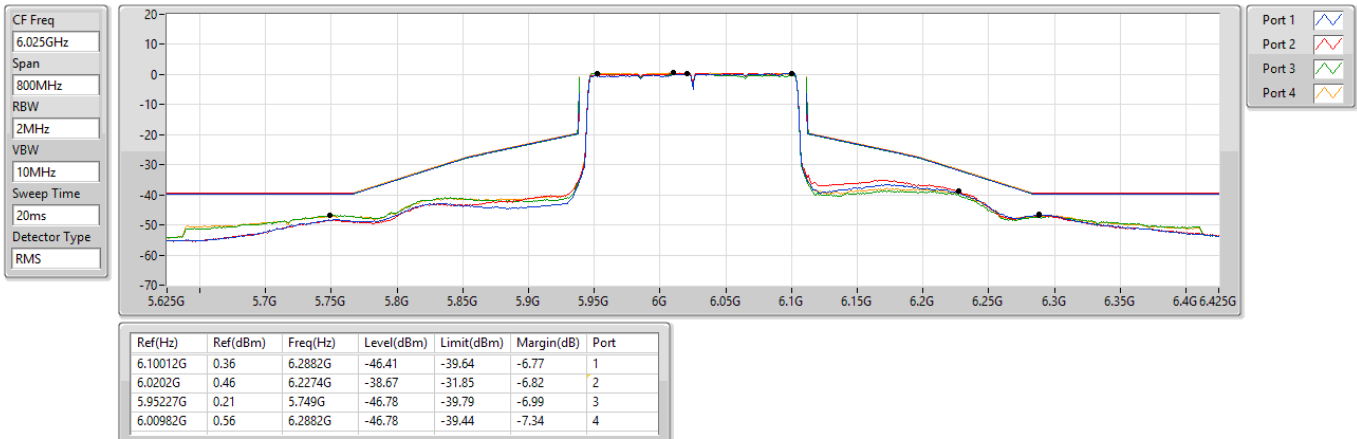

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6185MHz_TX

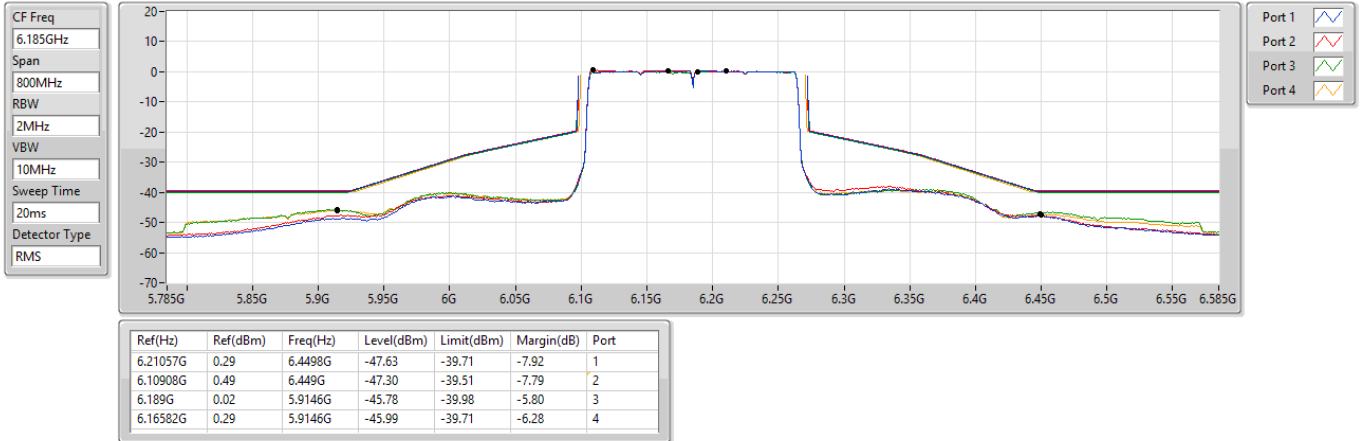

5.925-6.425GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6345MHz_TX

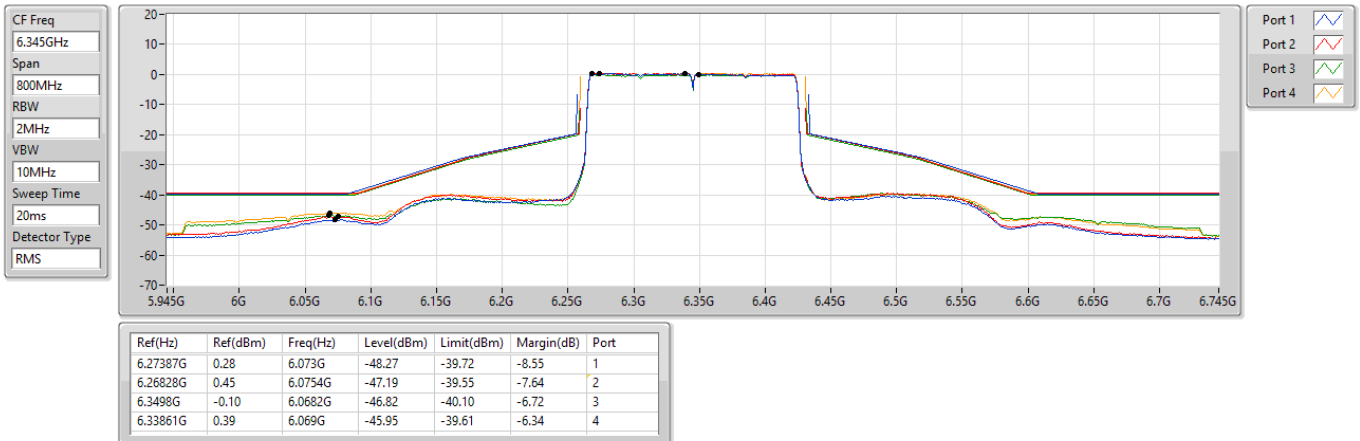

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6505MHz Straddle 6.525-6.875GHz_TX

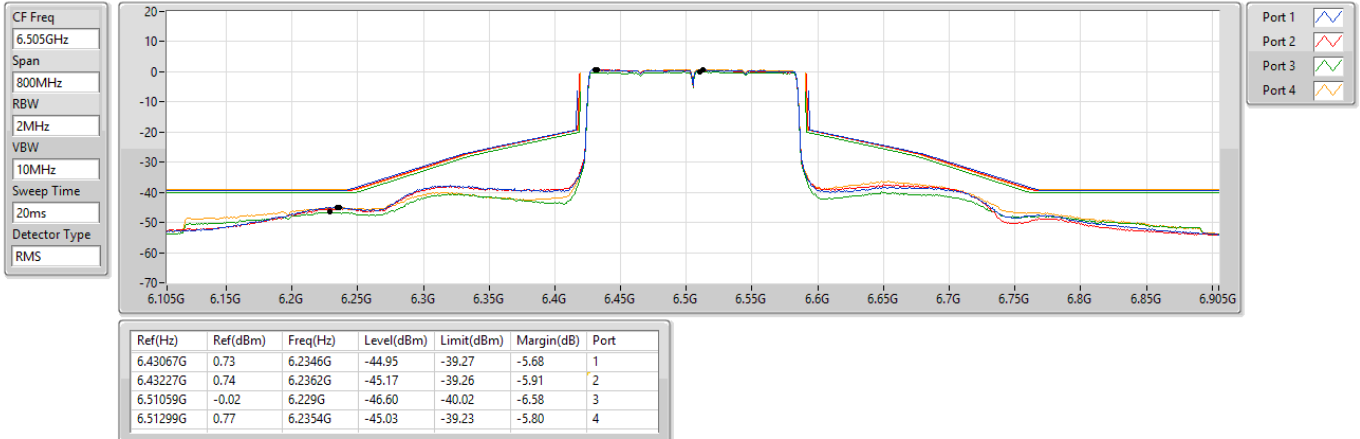

6.525-6.875GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6665MHz_TX

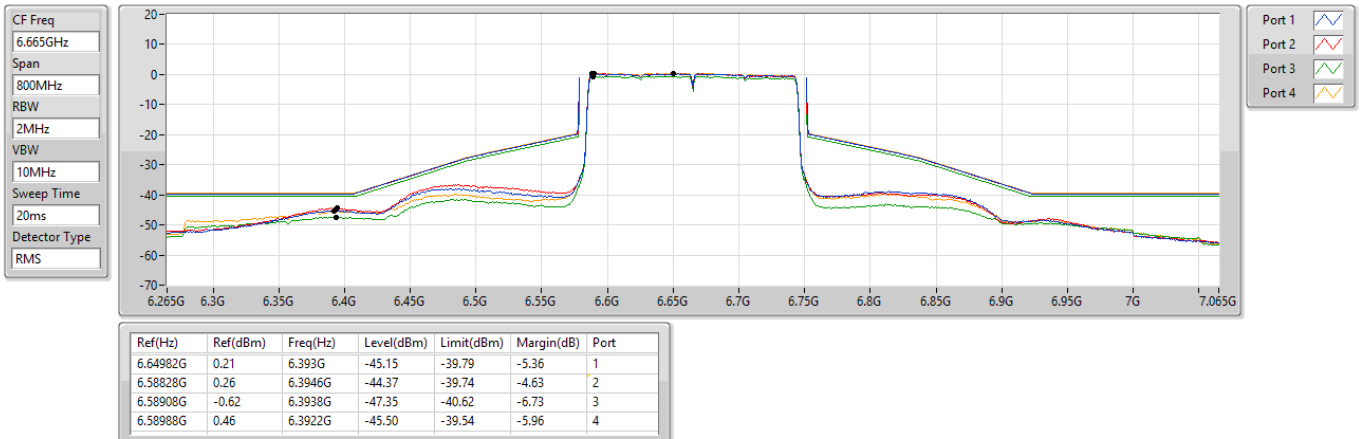

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6825MHz Straddle 6.875-7.125GHz_TX

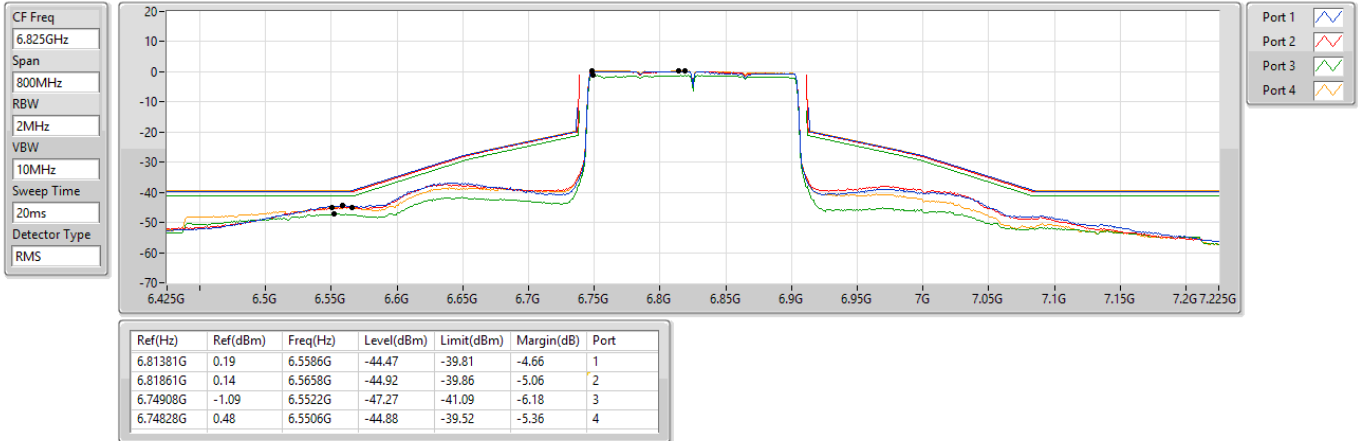

6.875-7.125GHz_802.11be EHT160_Nss4,(MCS0)_4TX

MASK


6985MHz_TX

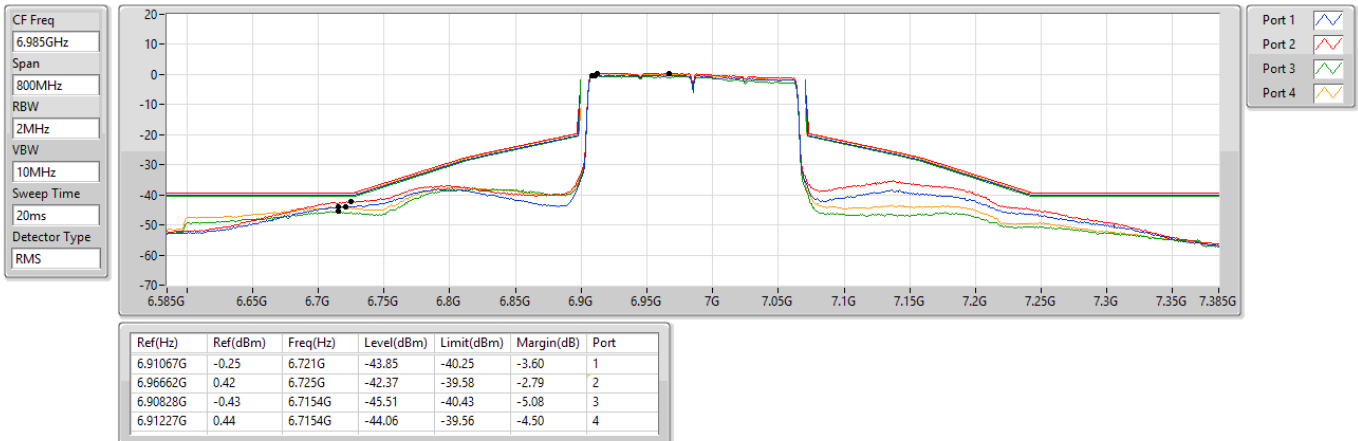

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6105MHz_TX

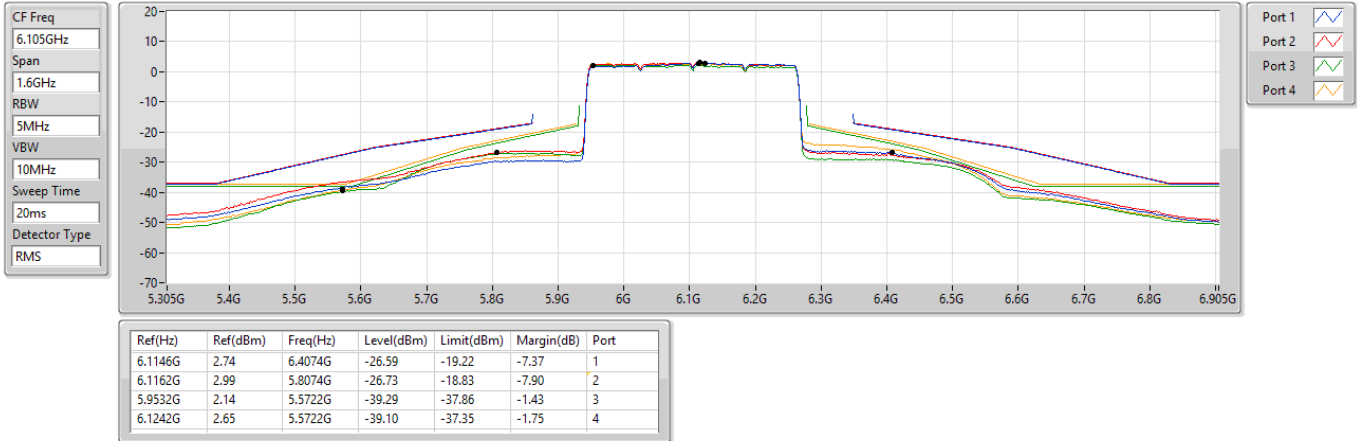

5.925-6.425GHz_802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6265MHz_TX

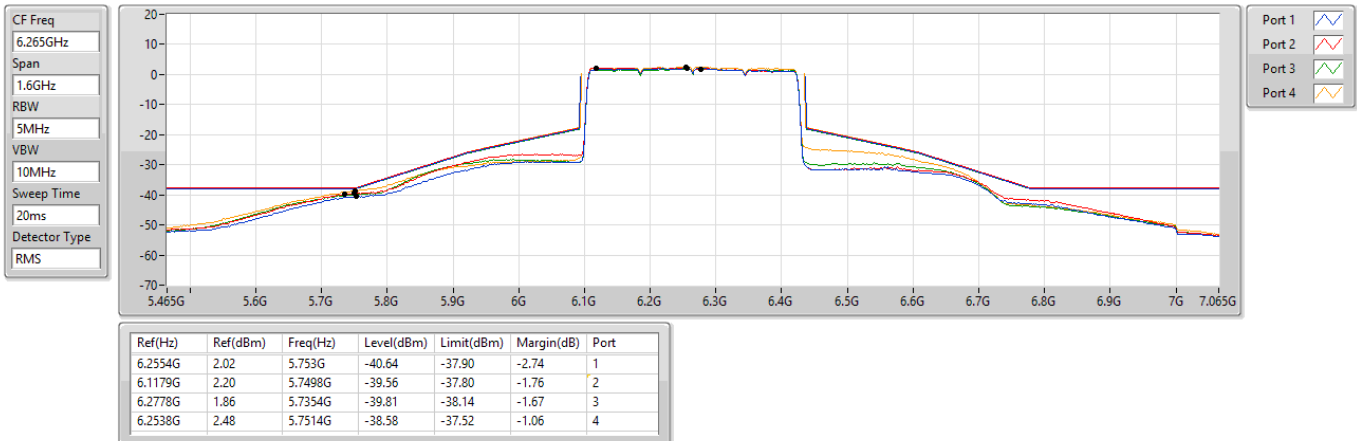

5.925-6.425GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6425MHz Straddle 5.925-6.425GHz_TX

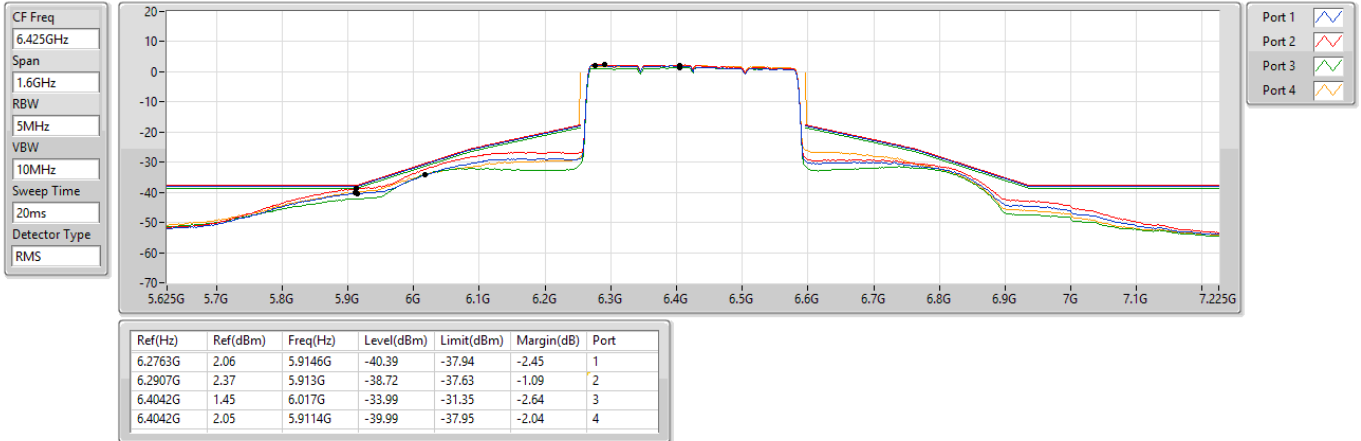

6.525-6.875GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6585MHz Straddle 6.525-6.875GHz_TX

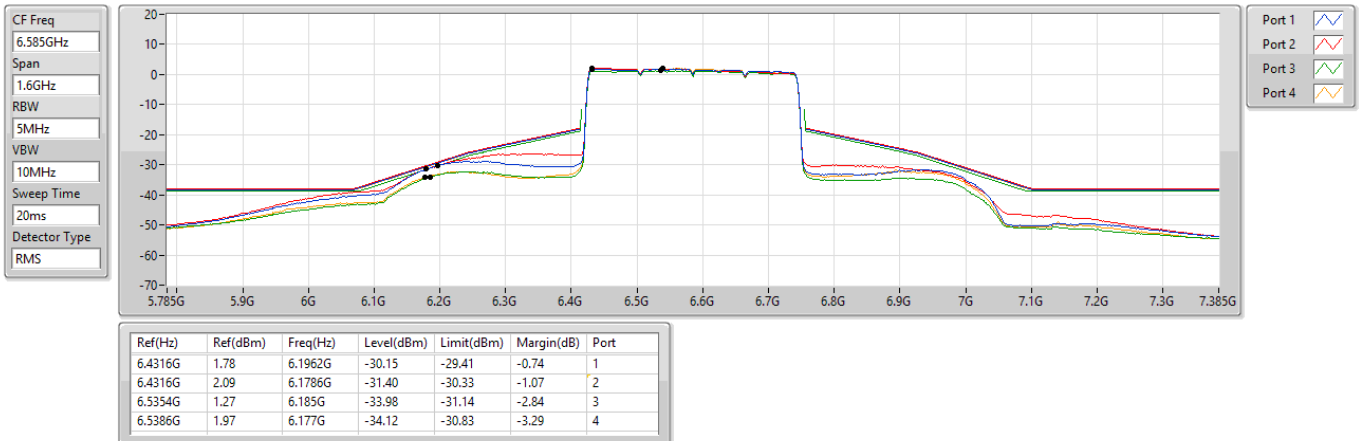

6.875-7.125GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK


6745MHz Straddle 6.875-7.125GHz_TX

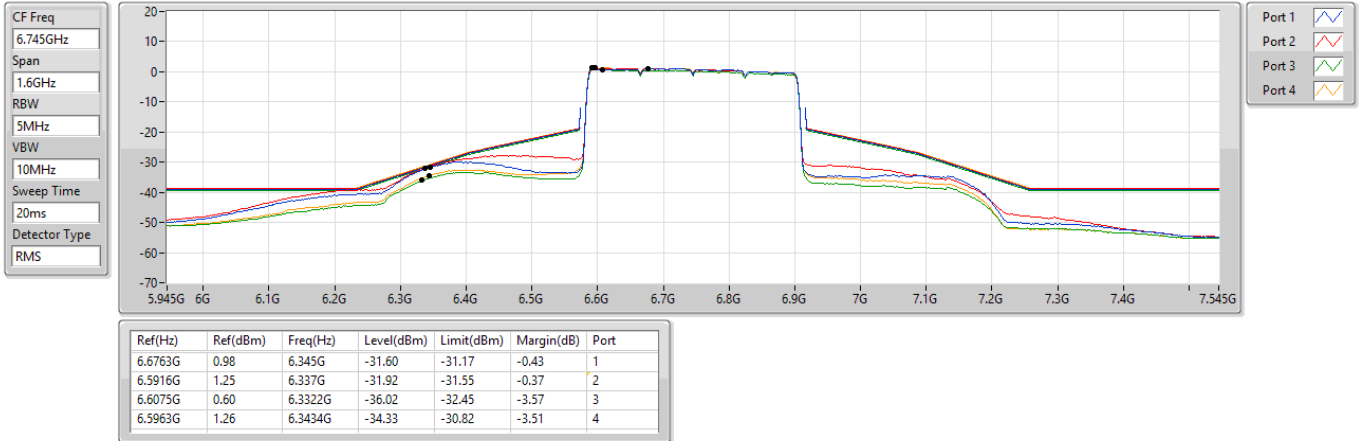

6.875-7.125GHz 802.11be EHT320_Nss4,(MCS0)_4TX

MASK

6905MHz Straddle 6.875-7.125GHz_TX

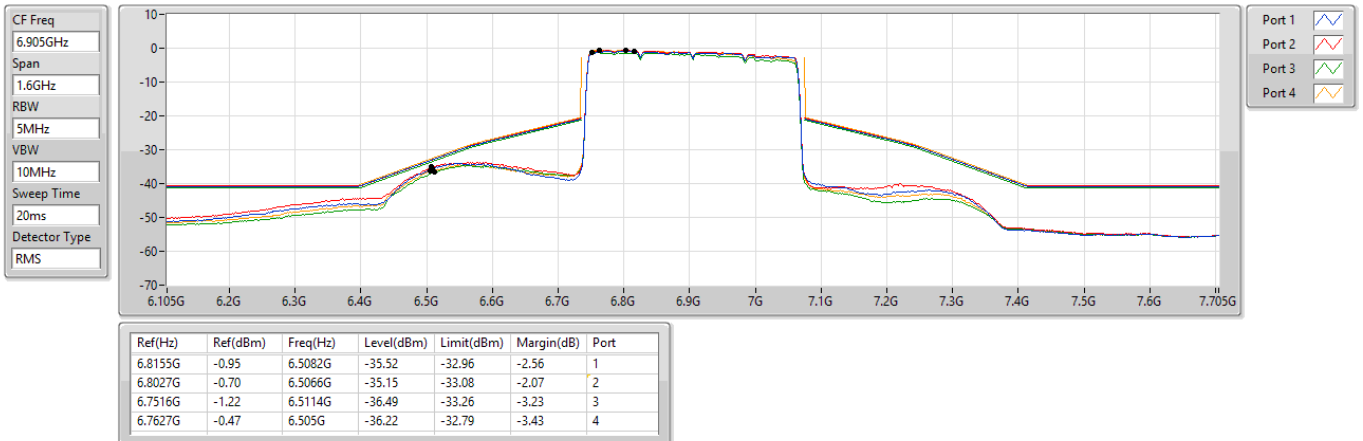

Frequency: 6475 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.43	0.34	0.24	0.24
T20°CVmin	1.73	1.54	1.43	1.34
T50°CVnom	0.24	0.11	-0.01	-0.06
T40°CVnom	0.26	0.16	0.05	0.00
T30°CVnom	0.30	0.20	0.12	0.09
T20°CVnom	0.36	0.29	0.22	0.19
T10°CVnom	1.77	1.60	1.49	1.42
T0°CVnom	3.22	3.14	3.06	3.03
T-10°CVnom	9.76	9.26	8.84	8.65
T-20°CVnom	11.05	10.92	10.78	10.74
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	

Frequency: 7015 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.41	0.31	0.21	0.20
T20°CVmin	1.68	1.75	1.70	1.75
T50°CVnom	0.23	0.08	-0.06	-0.12
T40°CVnom	0.25	0.12	-0.01	-0.06
T30°CVnom	0.28	0.16	0.04	0.01
T20°CVnom	0.33	0.25	0.17	0.15
T10°CVnom	1.75	1.75	1.75	1.75
T0°CVnom	3.19	2.81	2.52	2.39
T-10°CVnom	9.55	9.09	8.68	8.50
T-20°CVnom	10.89	10.72	10.57	10.50
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain With path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT20	5	6195	6194	-66.88	0.99	-67.87	-62	Ceased
				-68.88	0.99	-69.87	-62	Minimal
				-86.88	0.99	-87.87	-62	Normal
	6	6475	6474	-67.97	0.34	-68.31	-62	Ceased
				-69.97	0.34	-70.31	-62	Minimal
				-87.97	0.34	-88.31	-62	Normal
	7	6695	6694	-65.65	0.61	-66.26	-62	Ceased
				-68.65	0.61	-69.26	-62	Minimal
				-85.65	0.61	-86.26	-62	Normal
	8	6995	6994	-66.97	0.75	-67.72	-62	Ceased
				-70.97	0.75	-71.72	-62	Minimal
				-86.97	0.75	-87.72	-62	Normal

Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Antenna gain with path Loss (dBi)	Adjusted Power (dBm)	Detection limit (dBm)	EUT Tx Status
be EHT320	5	6105	5950	-68.08	0.99	-69.07	-62	Ceased
				-71.08	0.99	-72.07	-62	Minimal
				-88.08	0.99	-89.07	-62	Normal
	6 / 7	6585	6740	-64.91	0.34	-65.25	-62	Ceased
				-67.91	0.34	-68.25	-62	Minimal
				-84.91	0.34	-85.25	-62	Normal
	7 / 8	6905	7060	-69.59	0.61	-70.2	-62	Ceased
				-73.59	0.61	-74.2	-62	Minimal
				-89.59	0.61	-90.2	-62	Normal


Note: Adjusted Power = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT20	5	6195	6194	-66.88	-67.87	V	V	V	V	V	V	V	V	V	V	100	90
	6	6475	6474	-67.97	-68.31	V	V	V	V	V	V	V	V	V	V	100	90
	7	6695	6694	-65.65	-66.26	V	V	V	V	V	V	V	V	V	V	100	90
	8	6995	6994	-66.97	-67.72	V	V	V	V	V	V	V	V	V	V	100	90


Mode	UNII Band	Center Frequency (MHz)	Incumbent Frequency (MHz)	Injected (AWGN) Power (dBm)	Adjusted Power (dBm)	1	2	3	4	5	6	7	8	9	10	Detection Probability (%)	Limit (%)
be EHT320	5	6105	5950	-68.08	-69.07	V	V	V	V	V	V	V	V	V	V	100	90
			6100	-69.64	-70.63	V	V	V	V	V	V	V	V	V	V	100	90
			6260	-68.32	-69.31	V	V	V	V	V	V	V	V	V	X	90	90
	6 / 7	6585	6270	-65.18	-65.52	V	V	V	V	V	V	V	V	V	V	100	90
			6420	-69.79	-70.13	V	V	V	V	V	V	V	V	X	V	90	90
			6580	-64.91	-65.25	V	V	V	V	V	V	V	V	V	V	100	90
	7 / 8	6905	6750	-70.19	-70.8	V	V	V	V	V	V	V	V	V	V	100	90
			6900	-70.7	-71.31	V	V	V	V	V	V	V	V	V	V	100	90
			7060	-69.59	-70.2	V	V	V	V	V	V	V	V	V	X	90	90

Test plot of Incumbent signal

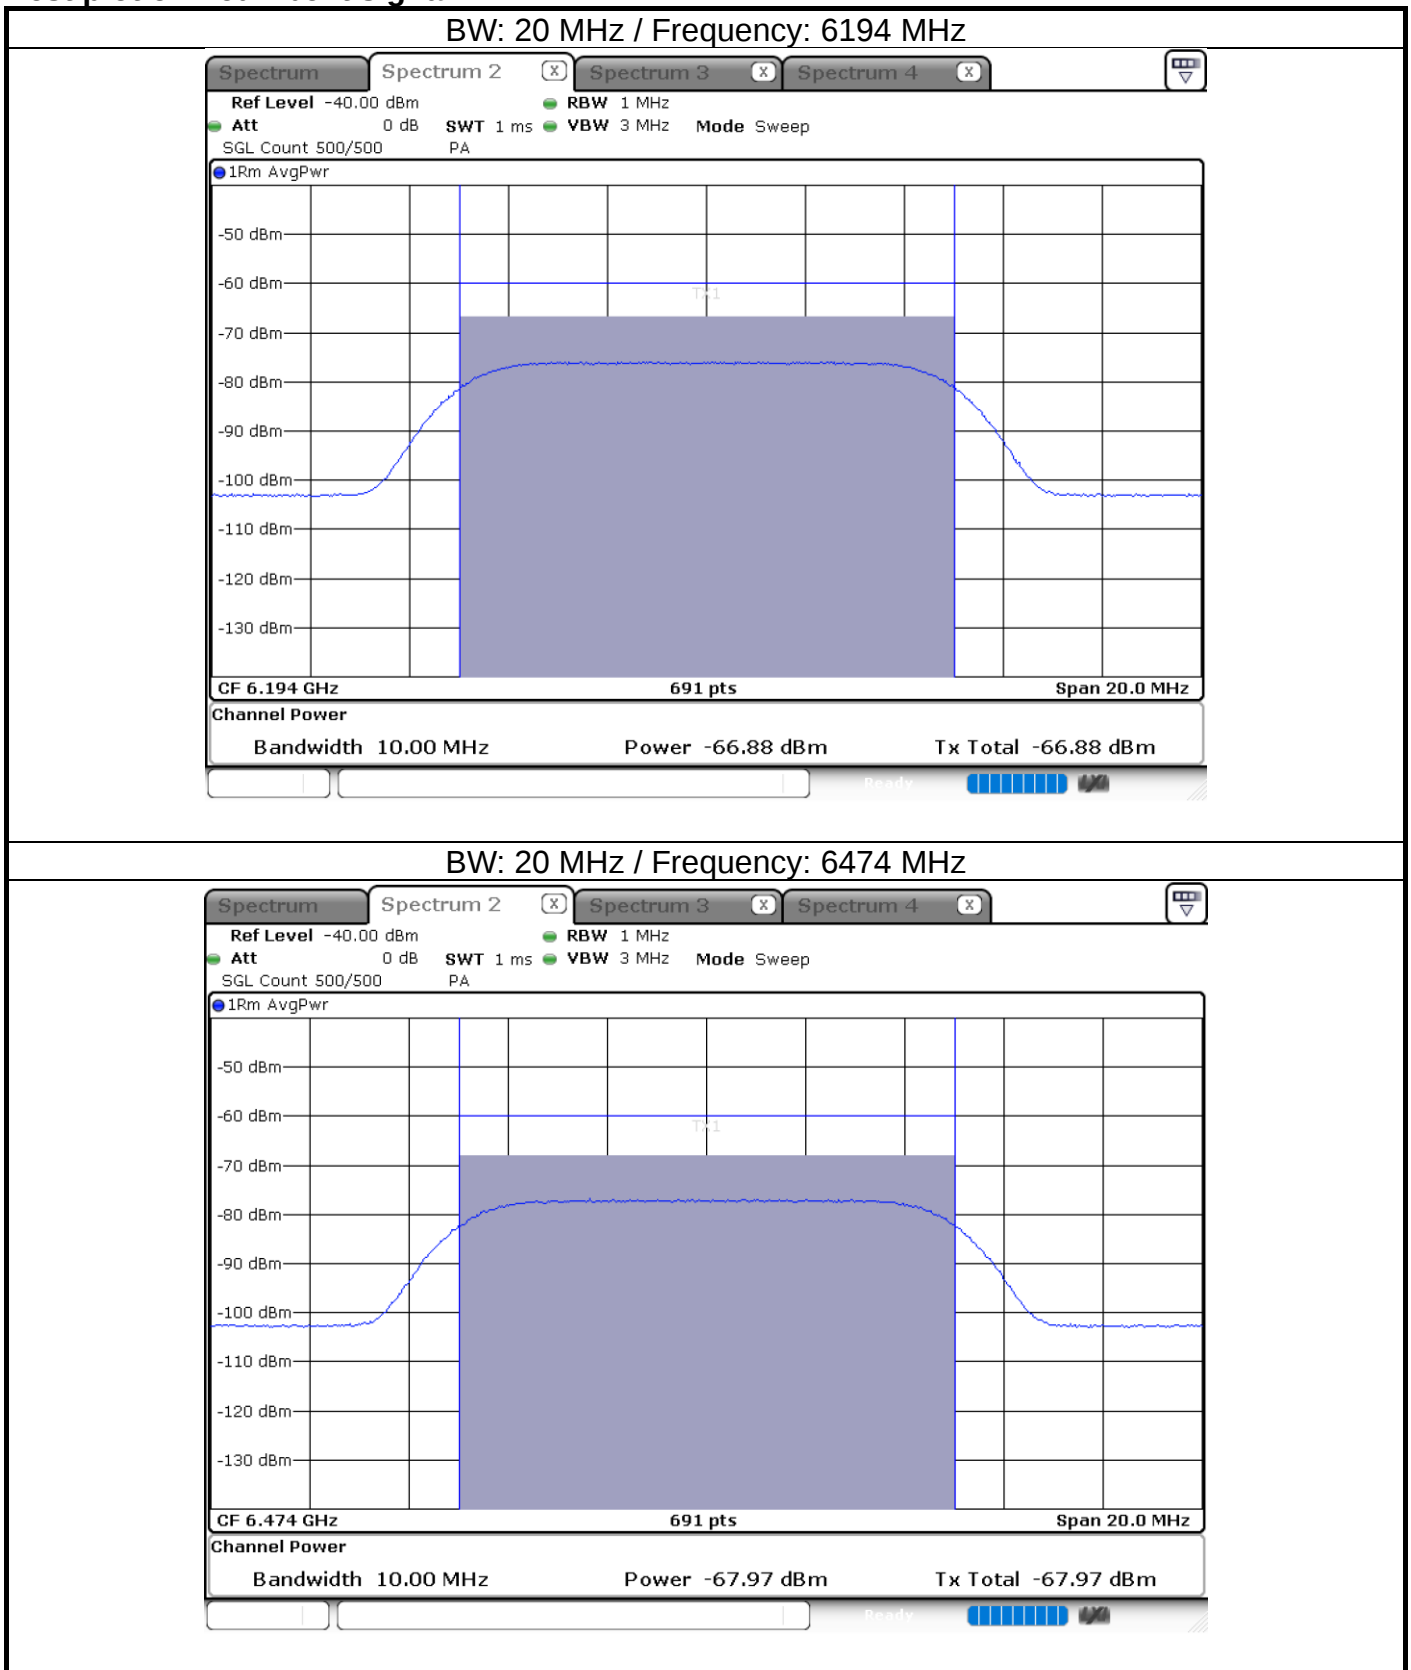


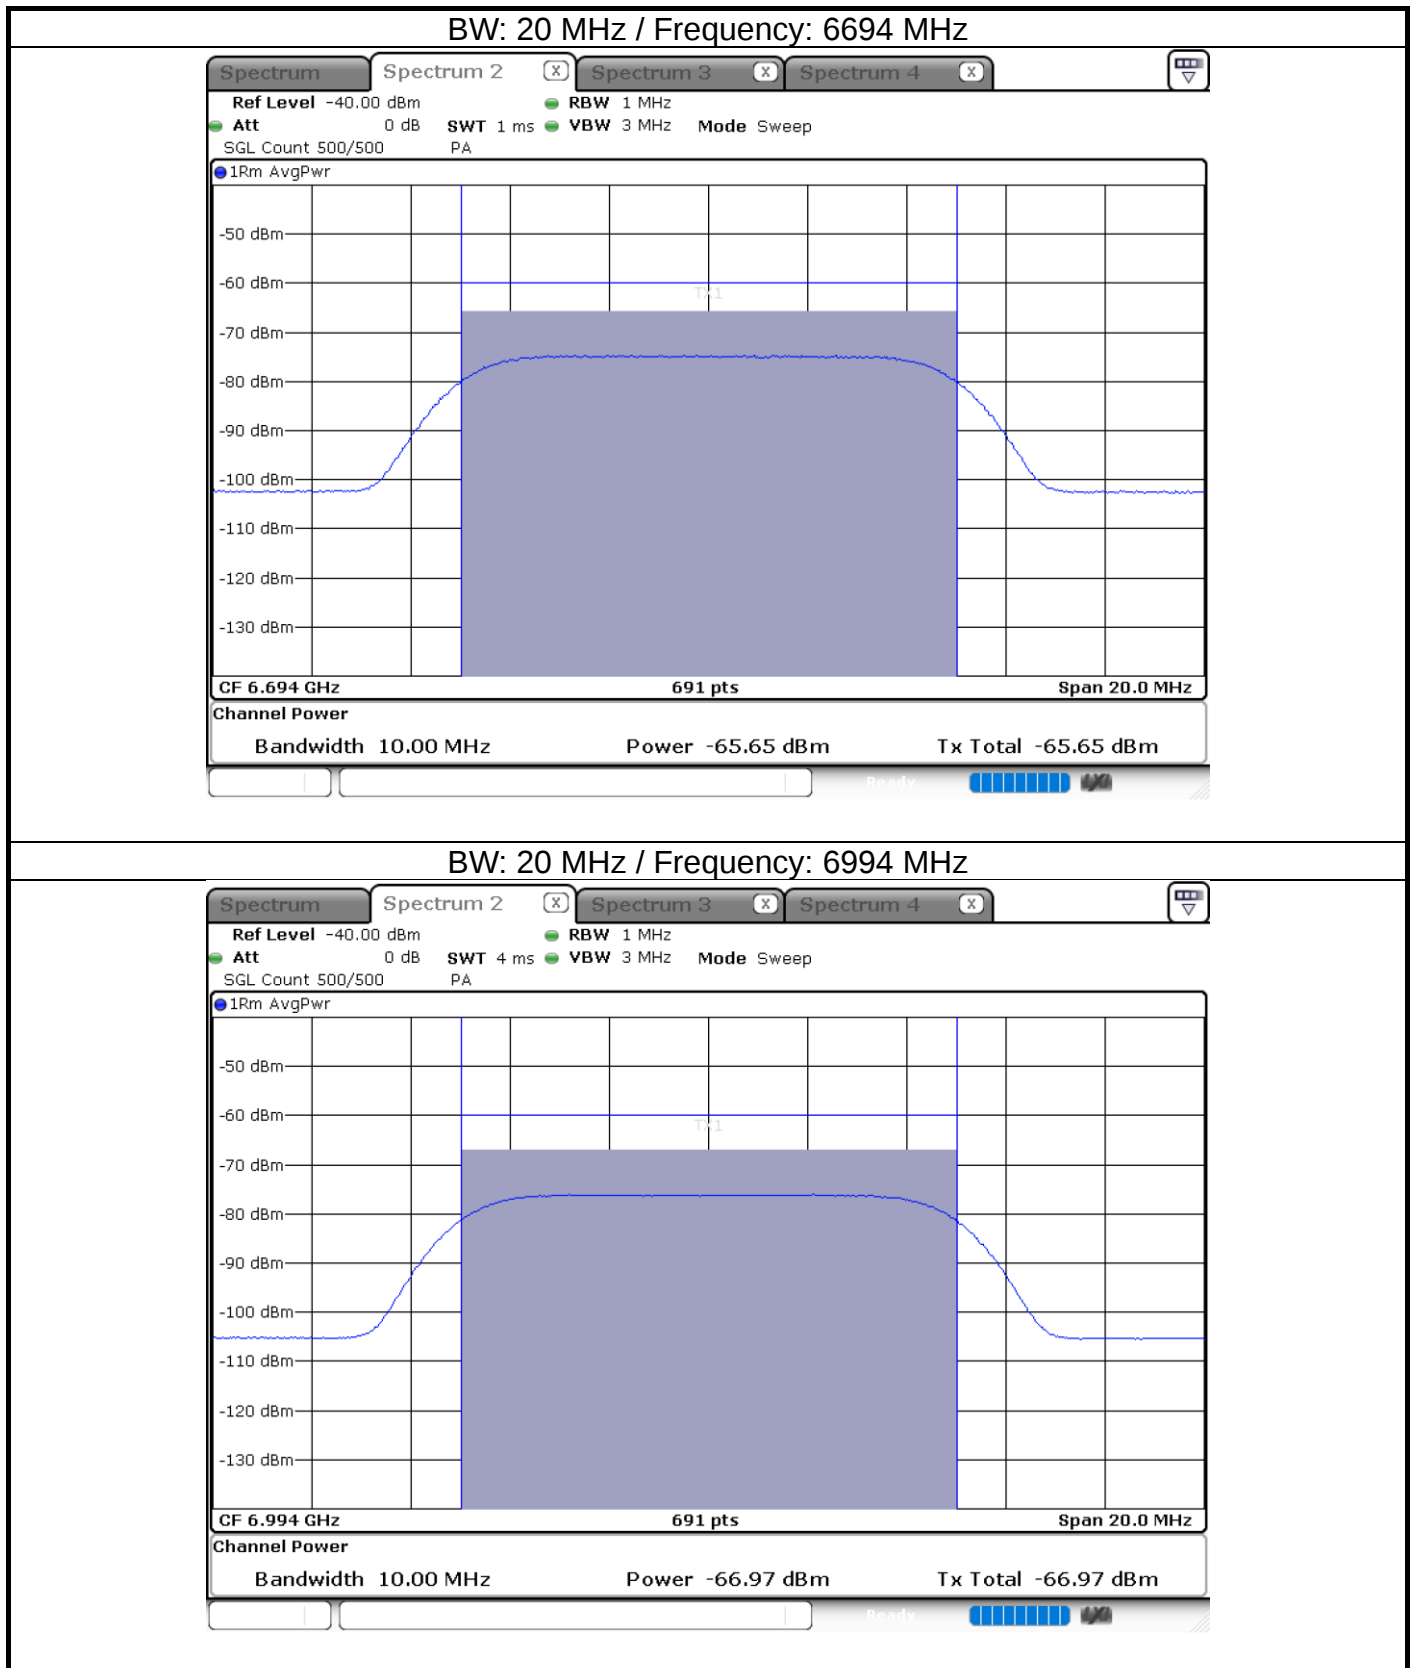


BW: 320 MHz / Frequency: 5950 MHz

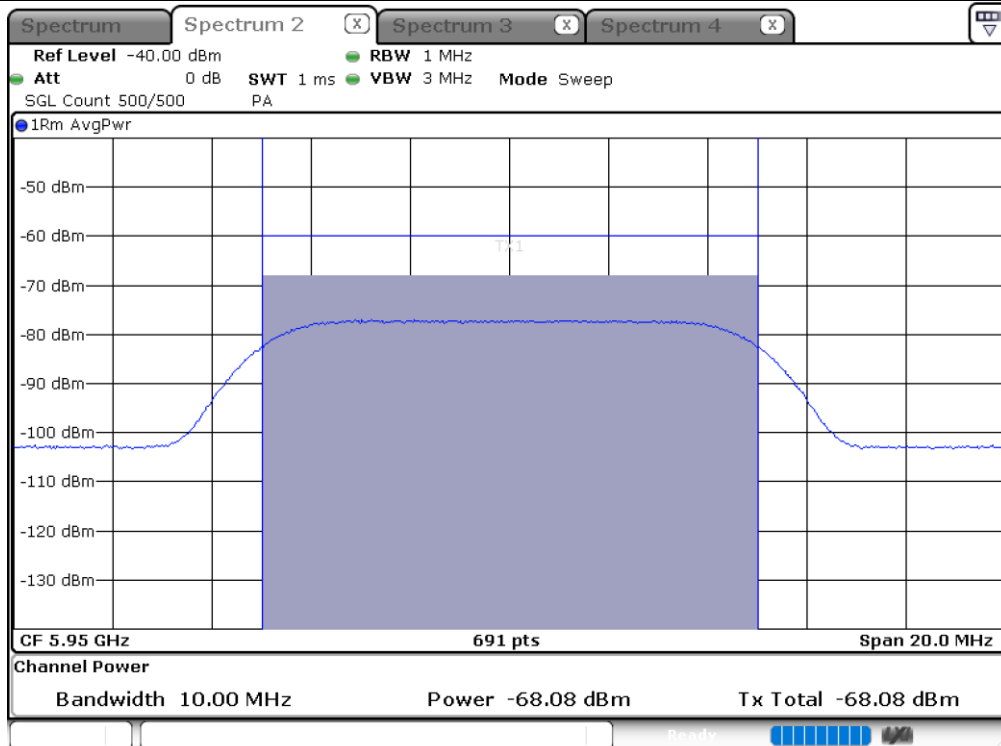


BW: 320 MHz / Frequency: 6100 MHz

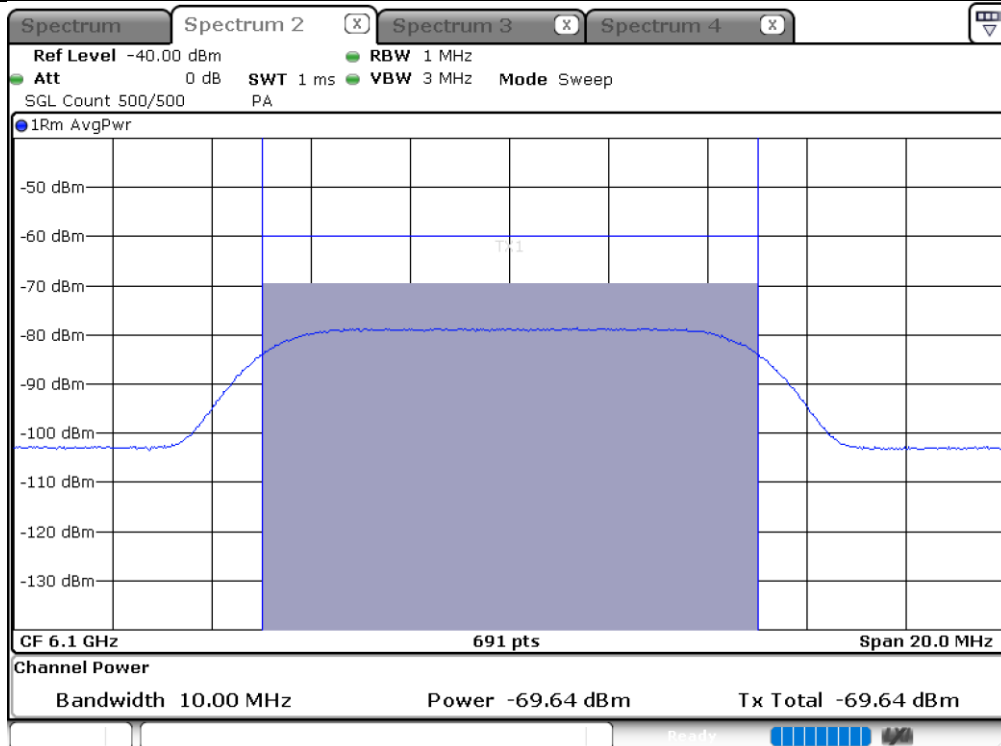


BW: 320 MHz / Frequency: 6260 MHz

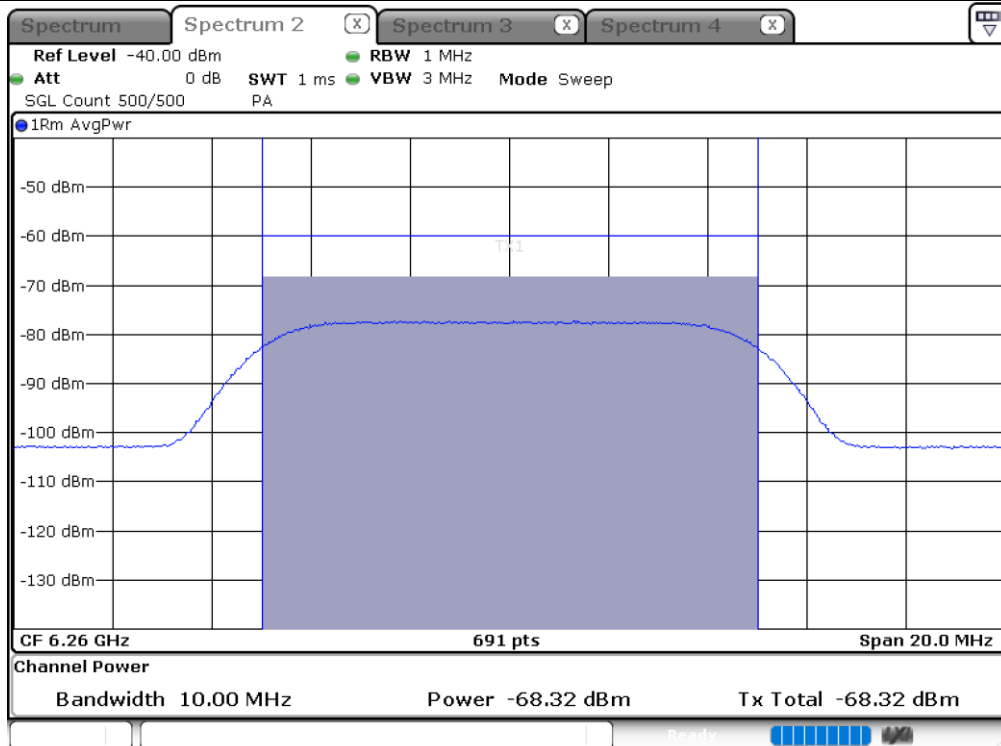


BW: 320 MHz / Frequency: 6270 MHz

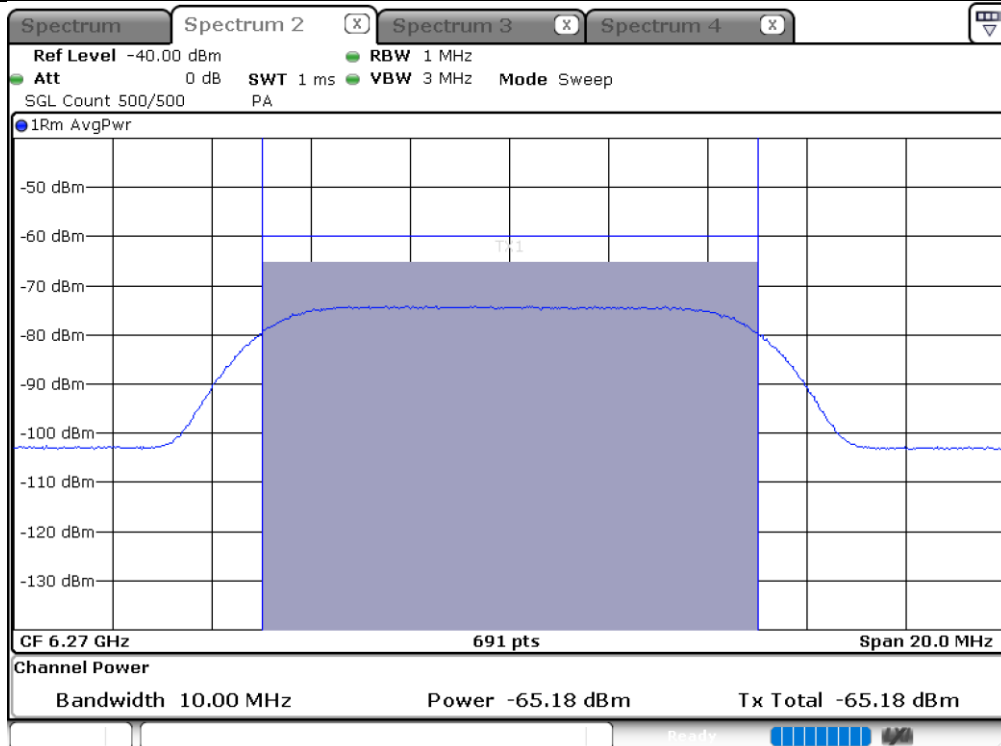


BW: 320 MHz / Frequency: 6420 MHz

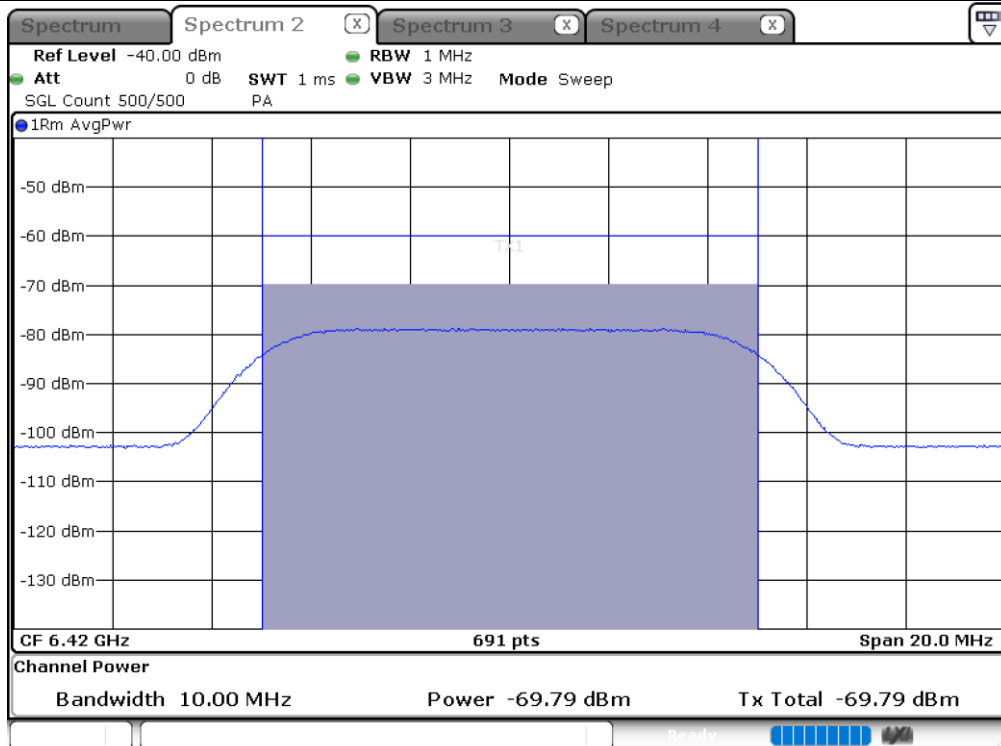


BW: 320 MHz / Frequency: 6580 MHz

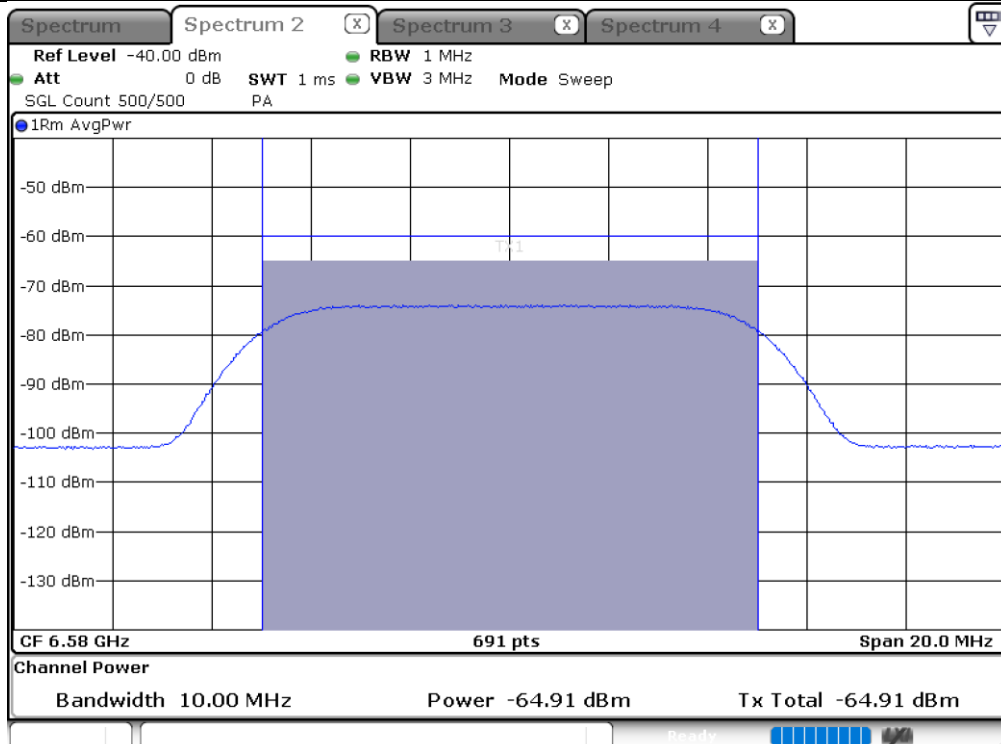


BW: 320 MHz / Frequency: 6750 MHz


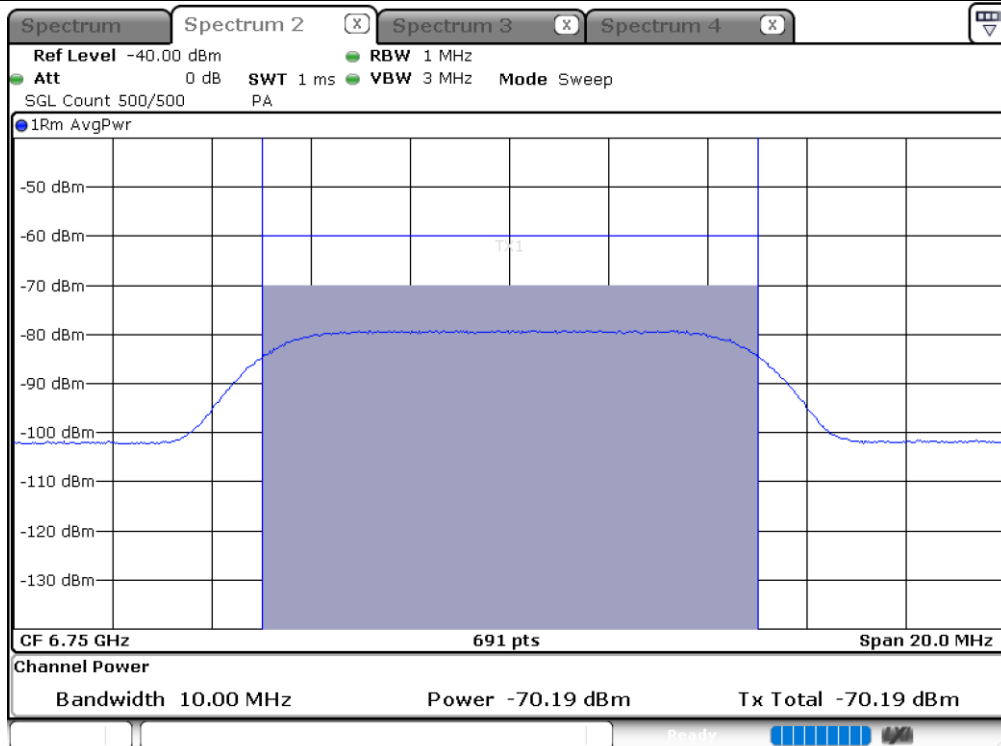




BW: 320 MHz / Frequency: 6900 MHz


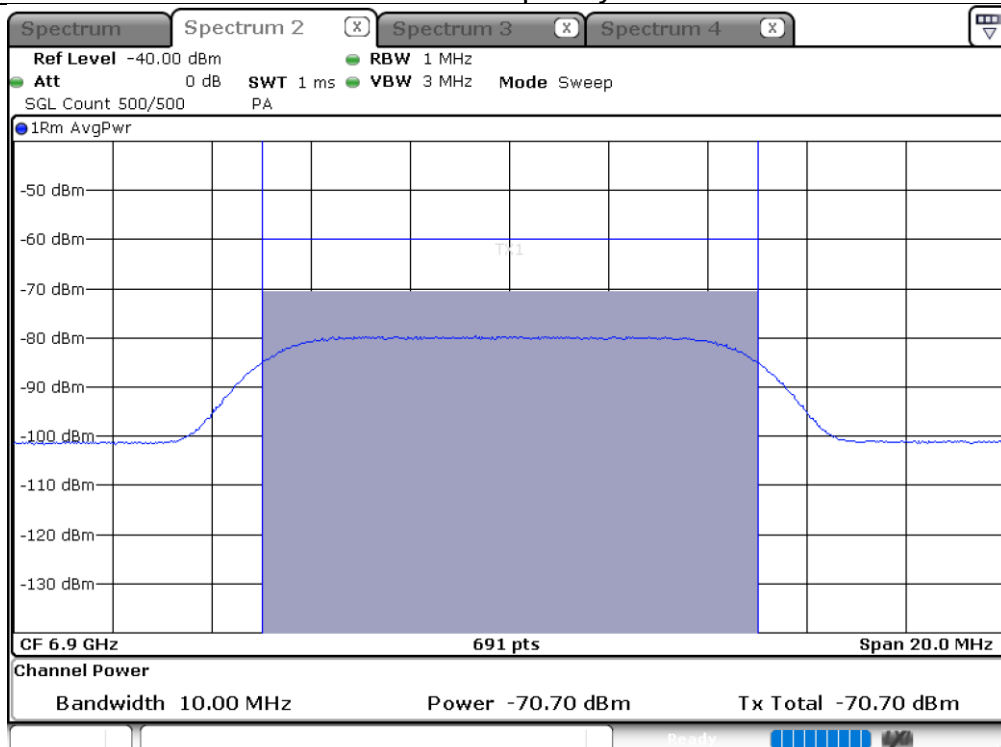


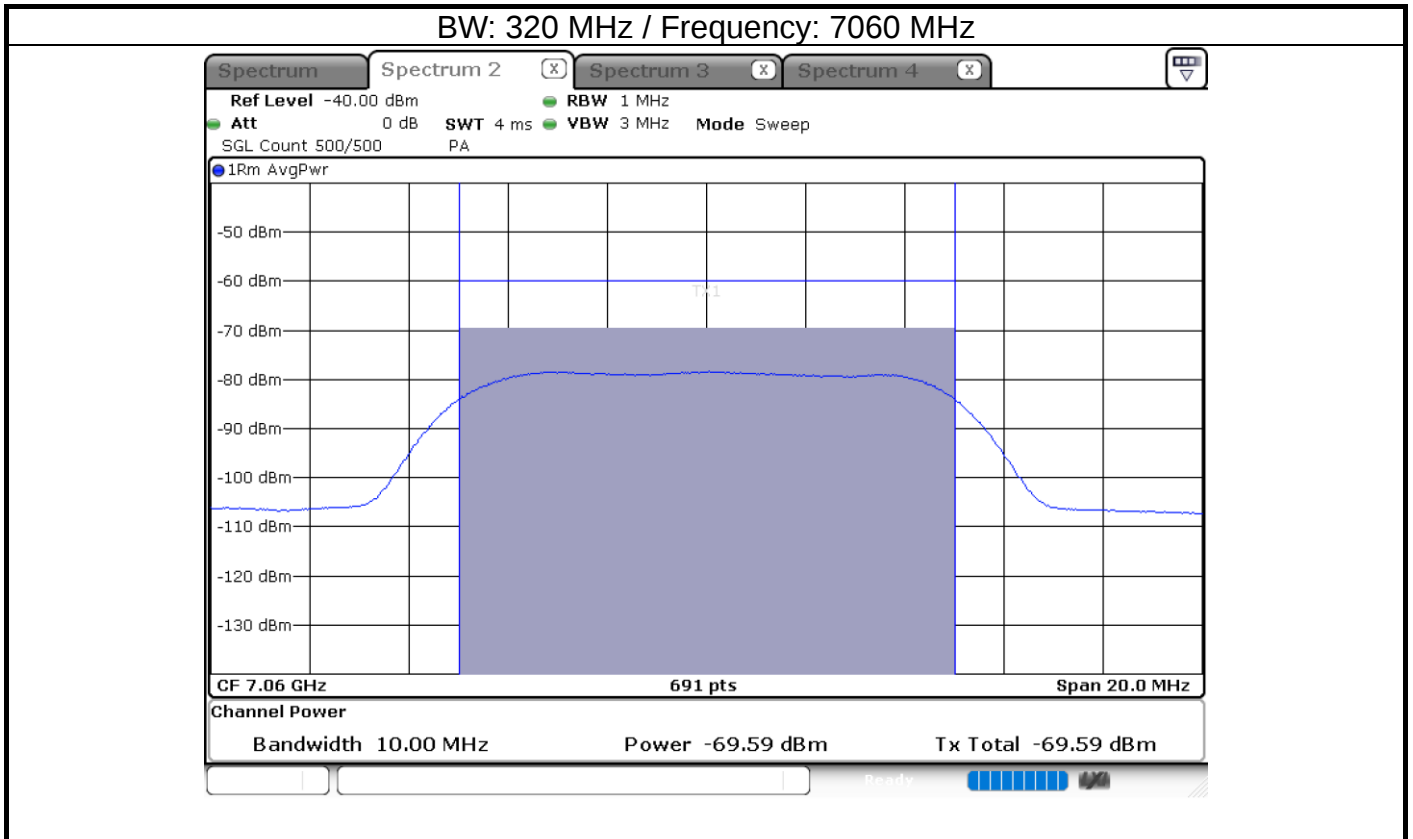


Test plot of Contention Based Protocol EUT Normal transmission

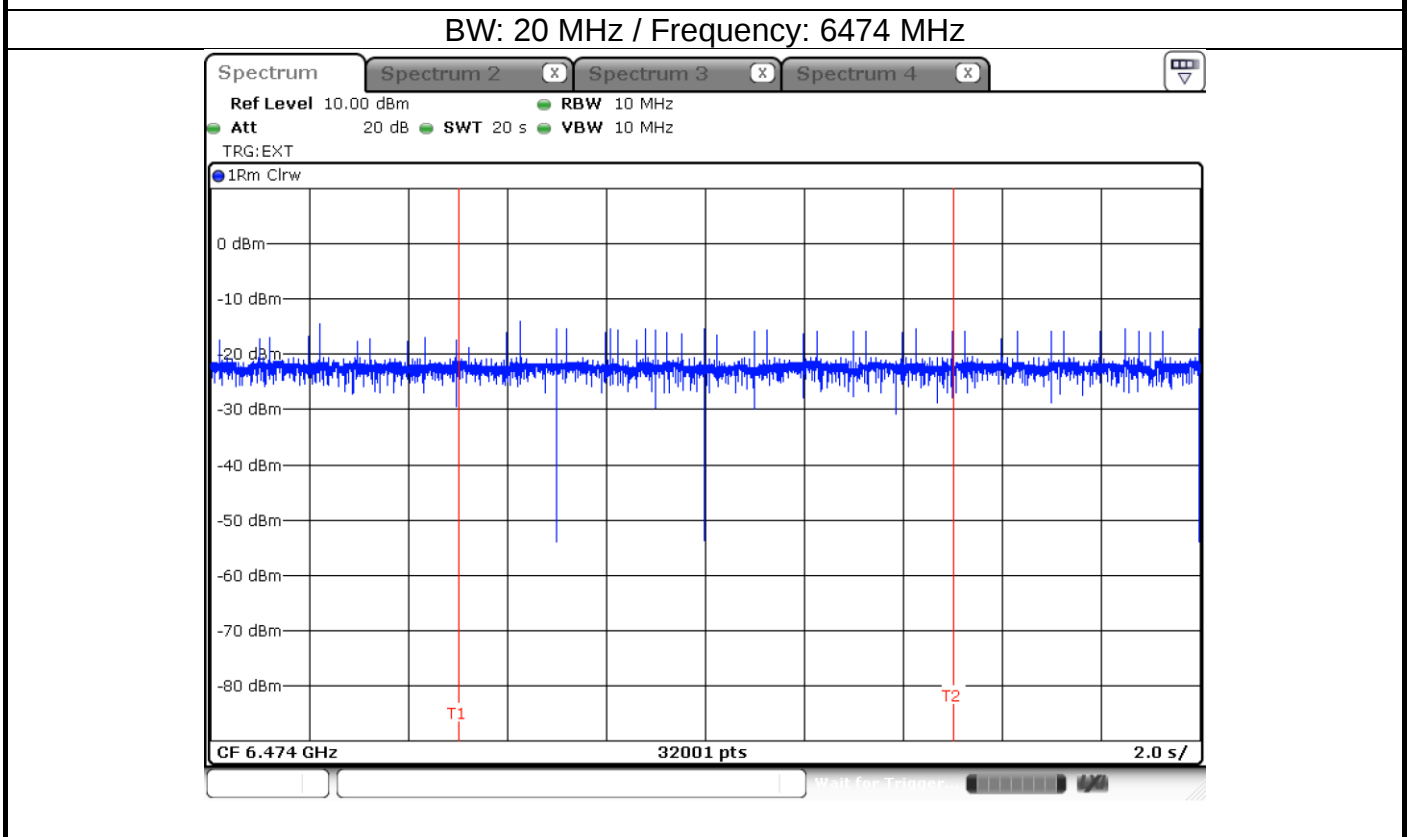
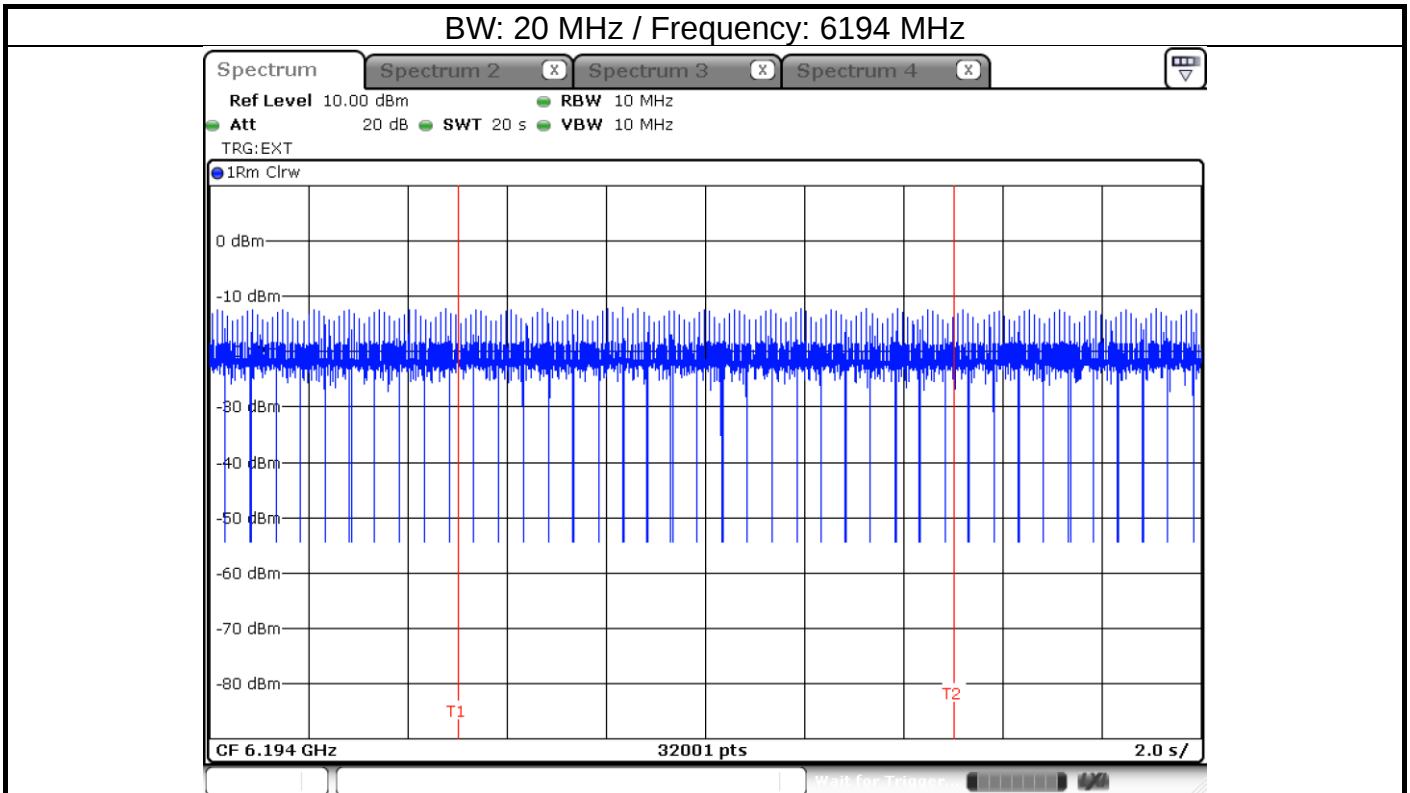


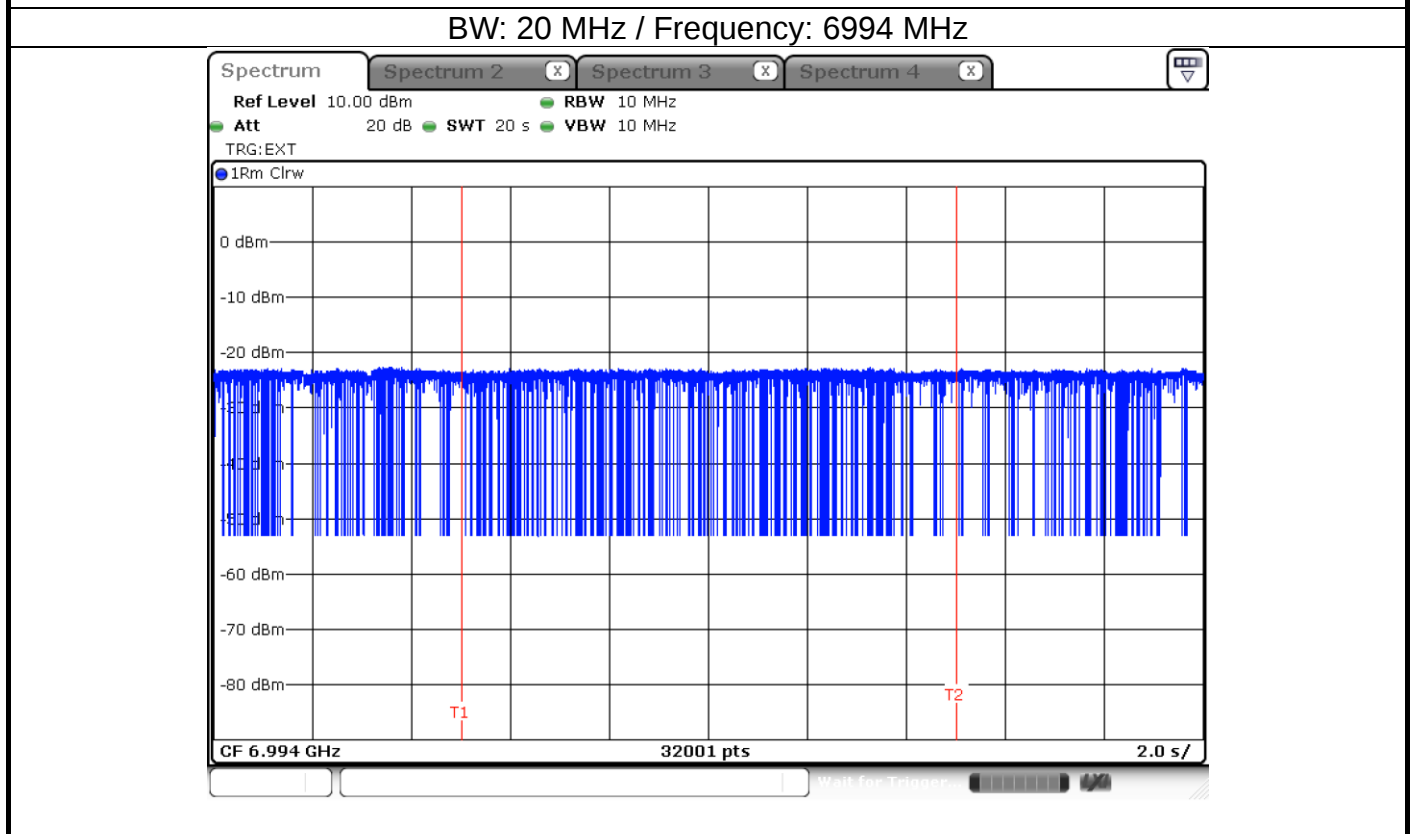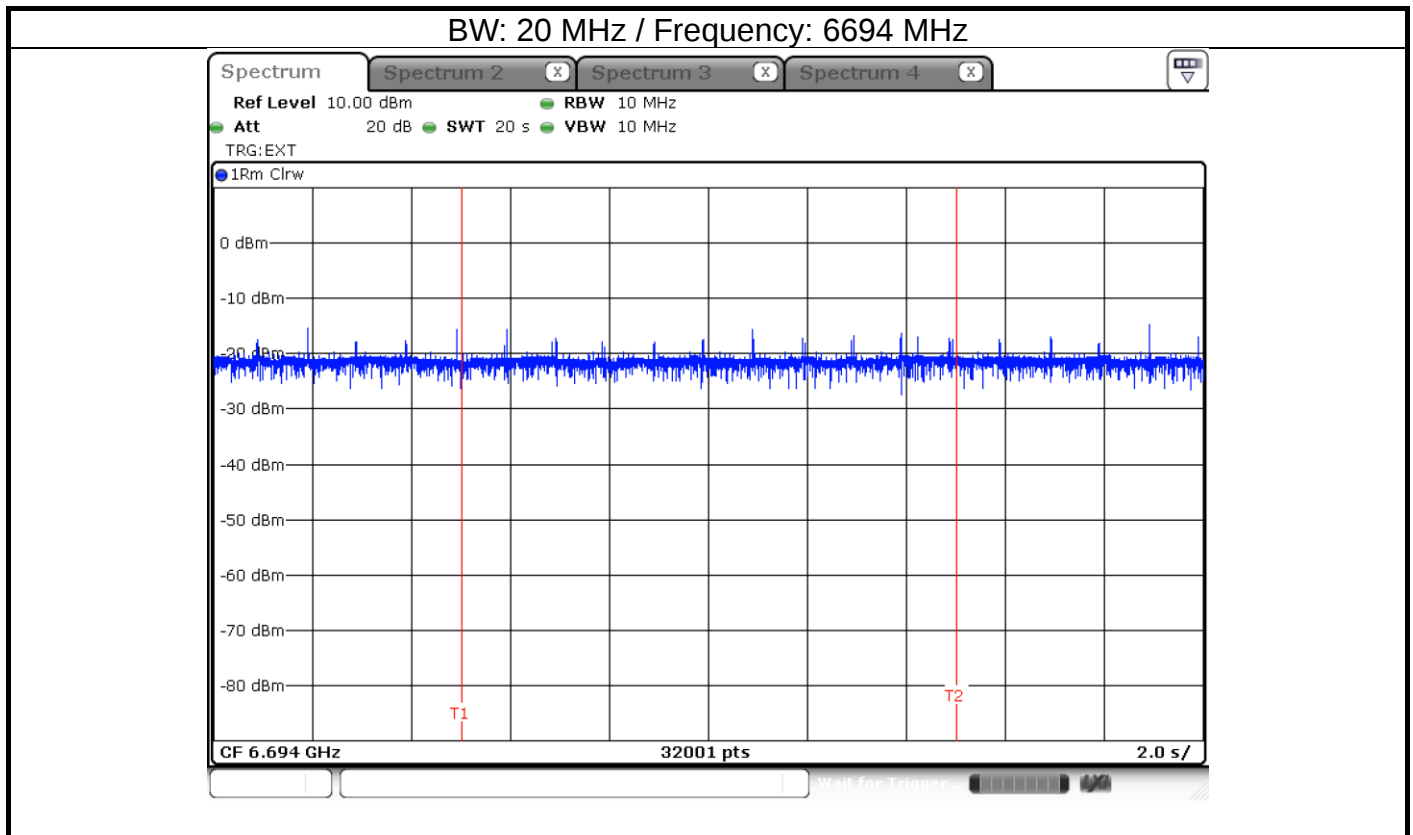


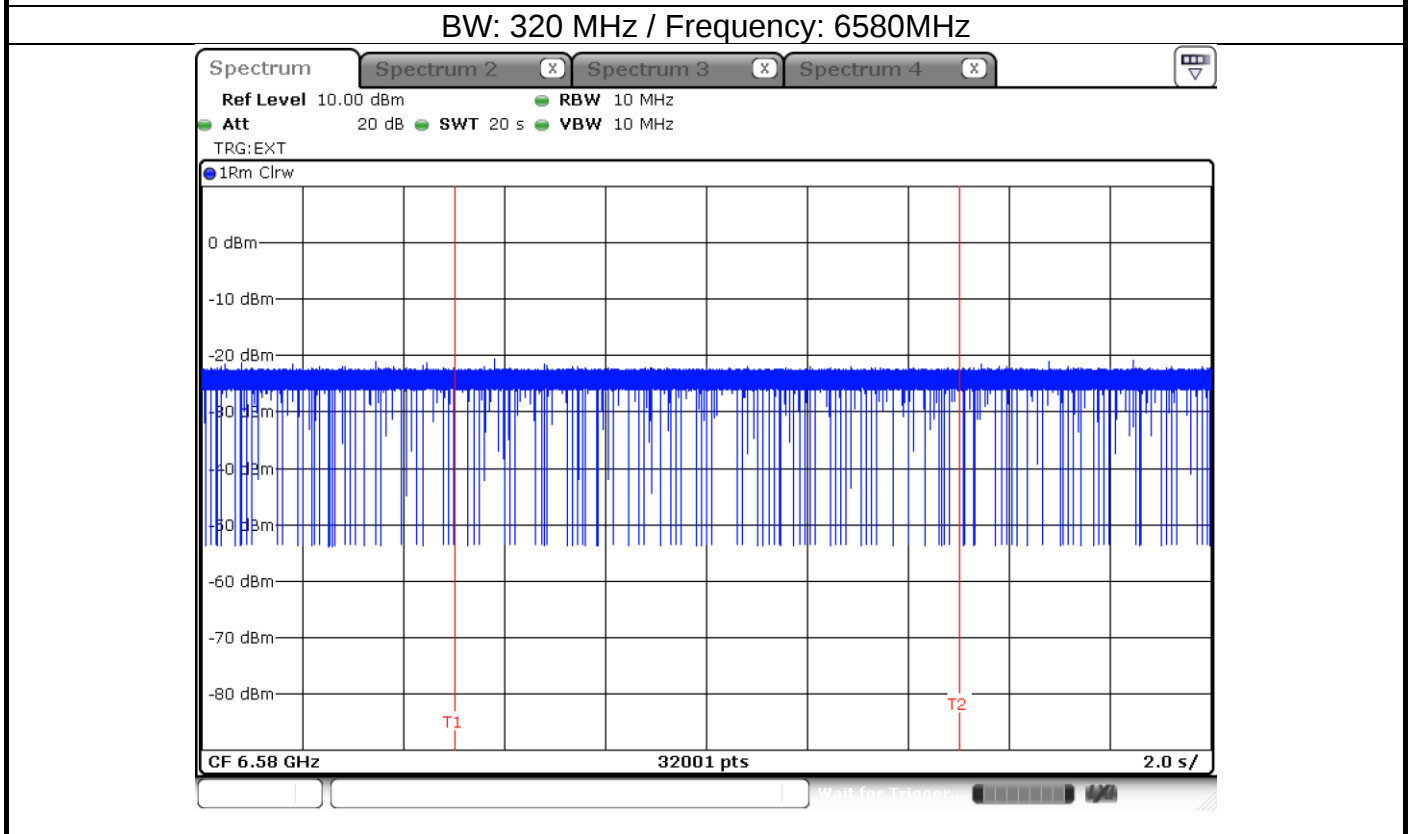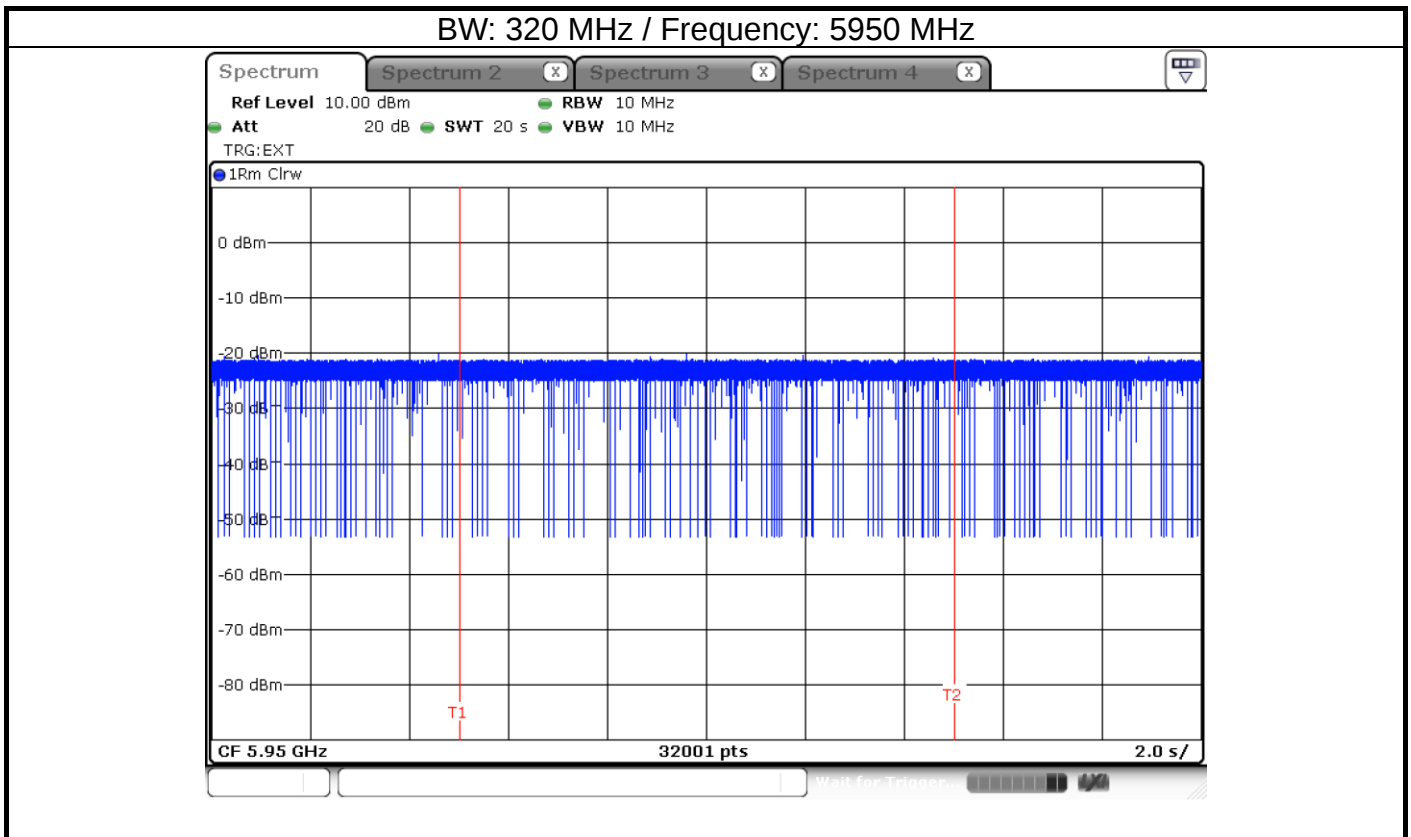


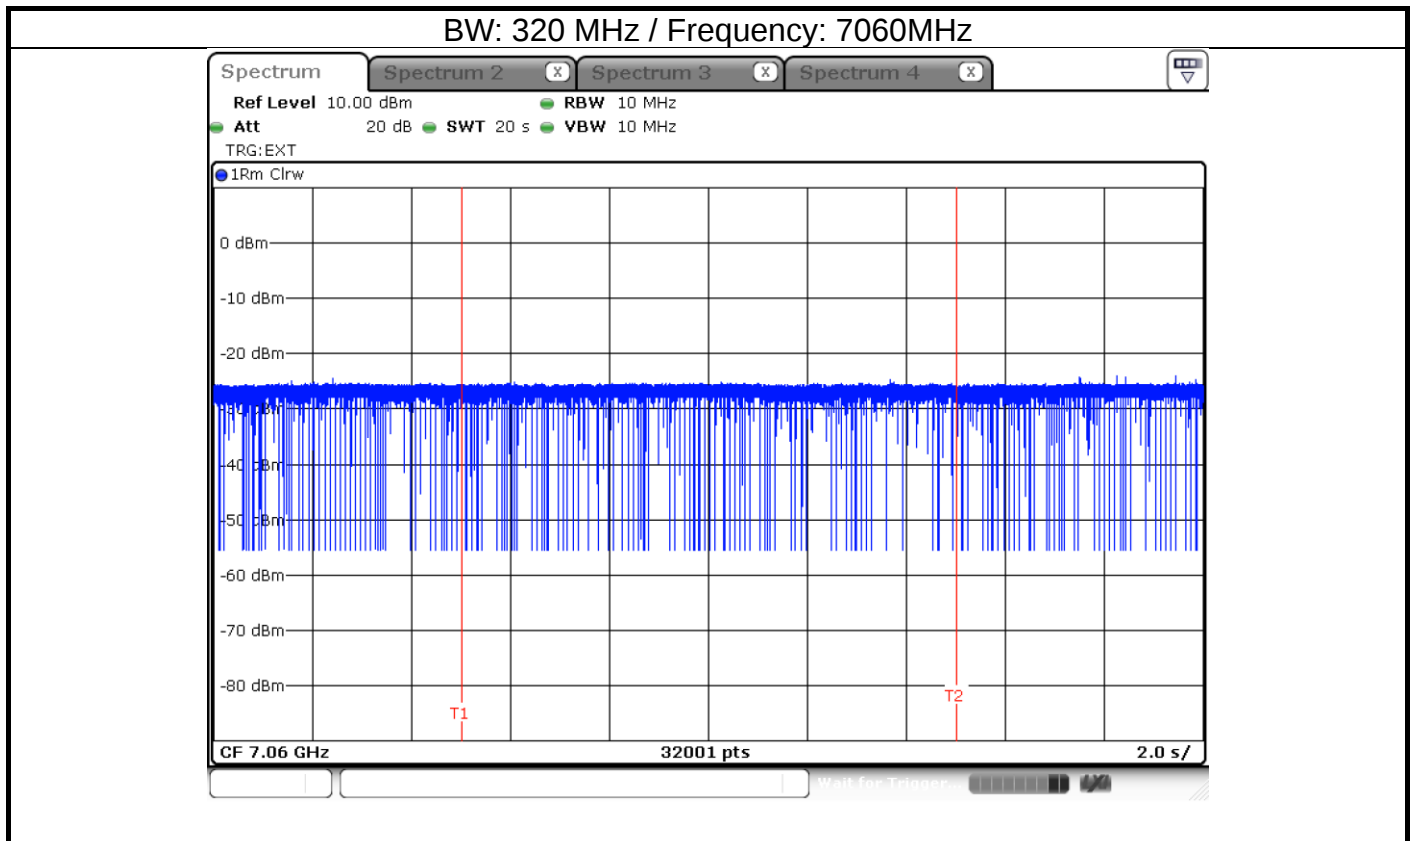


EUT Minimal transmission

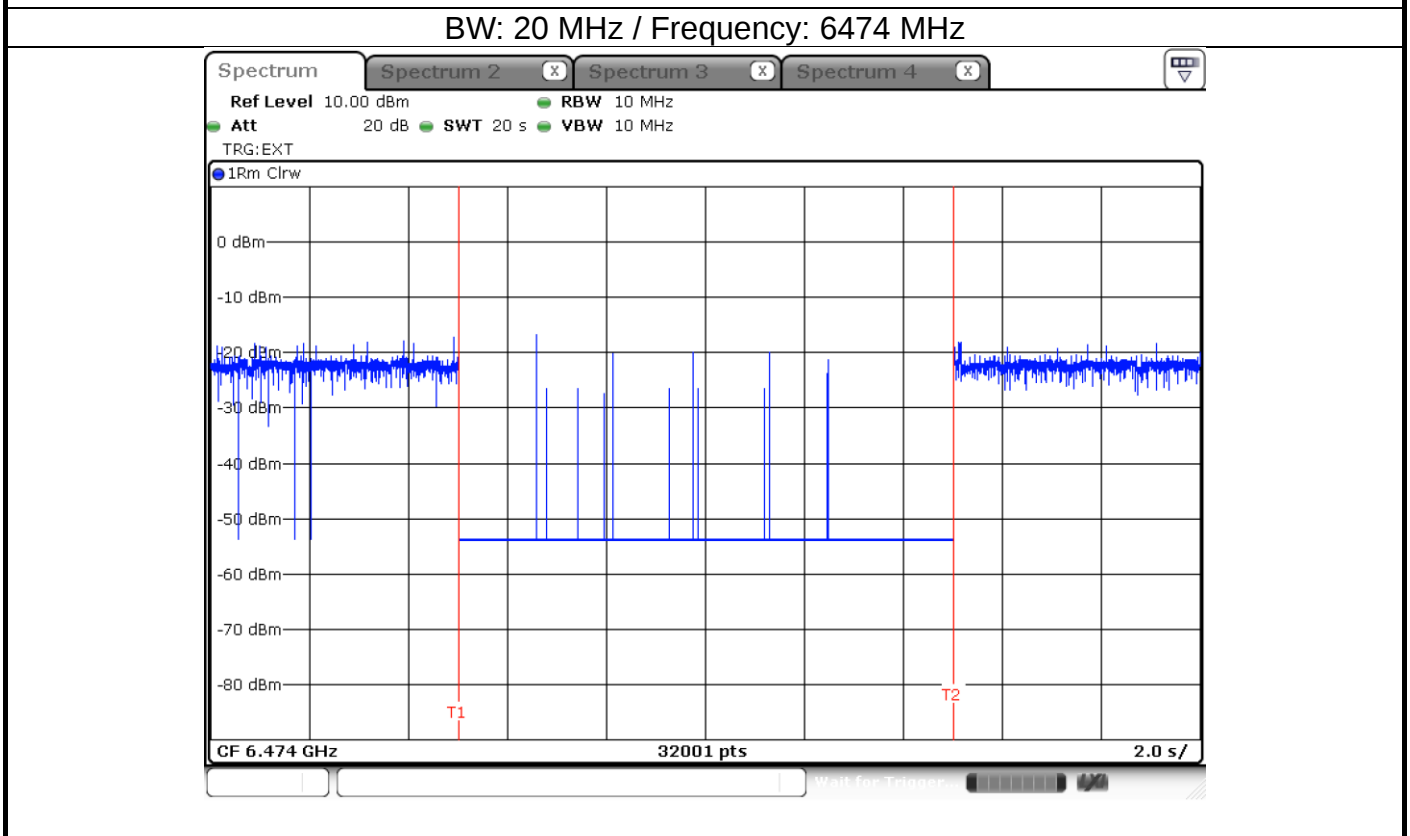
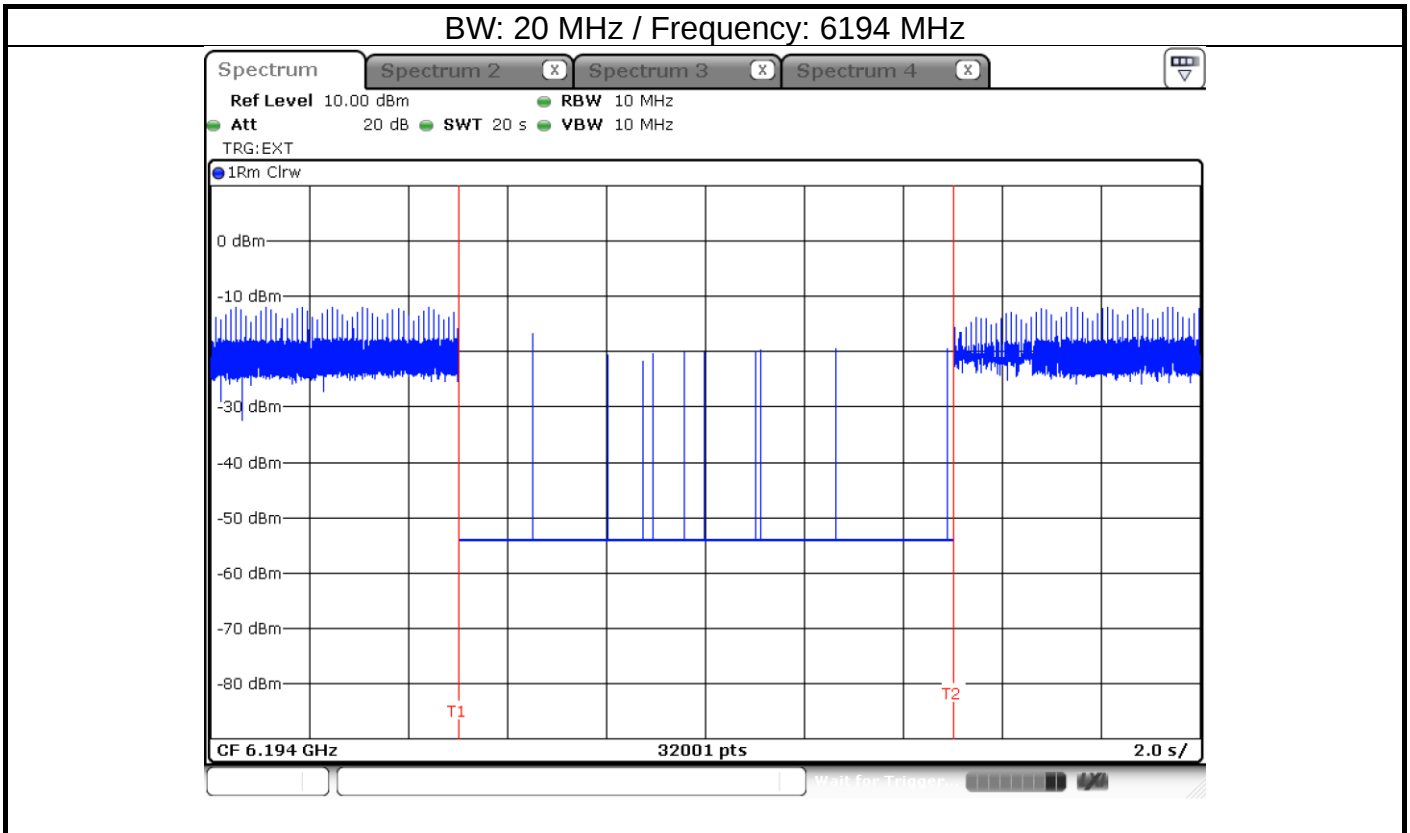


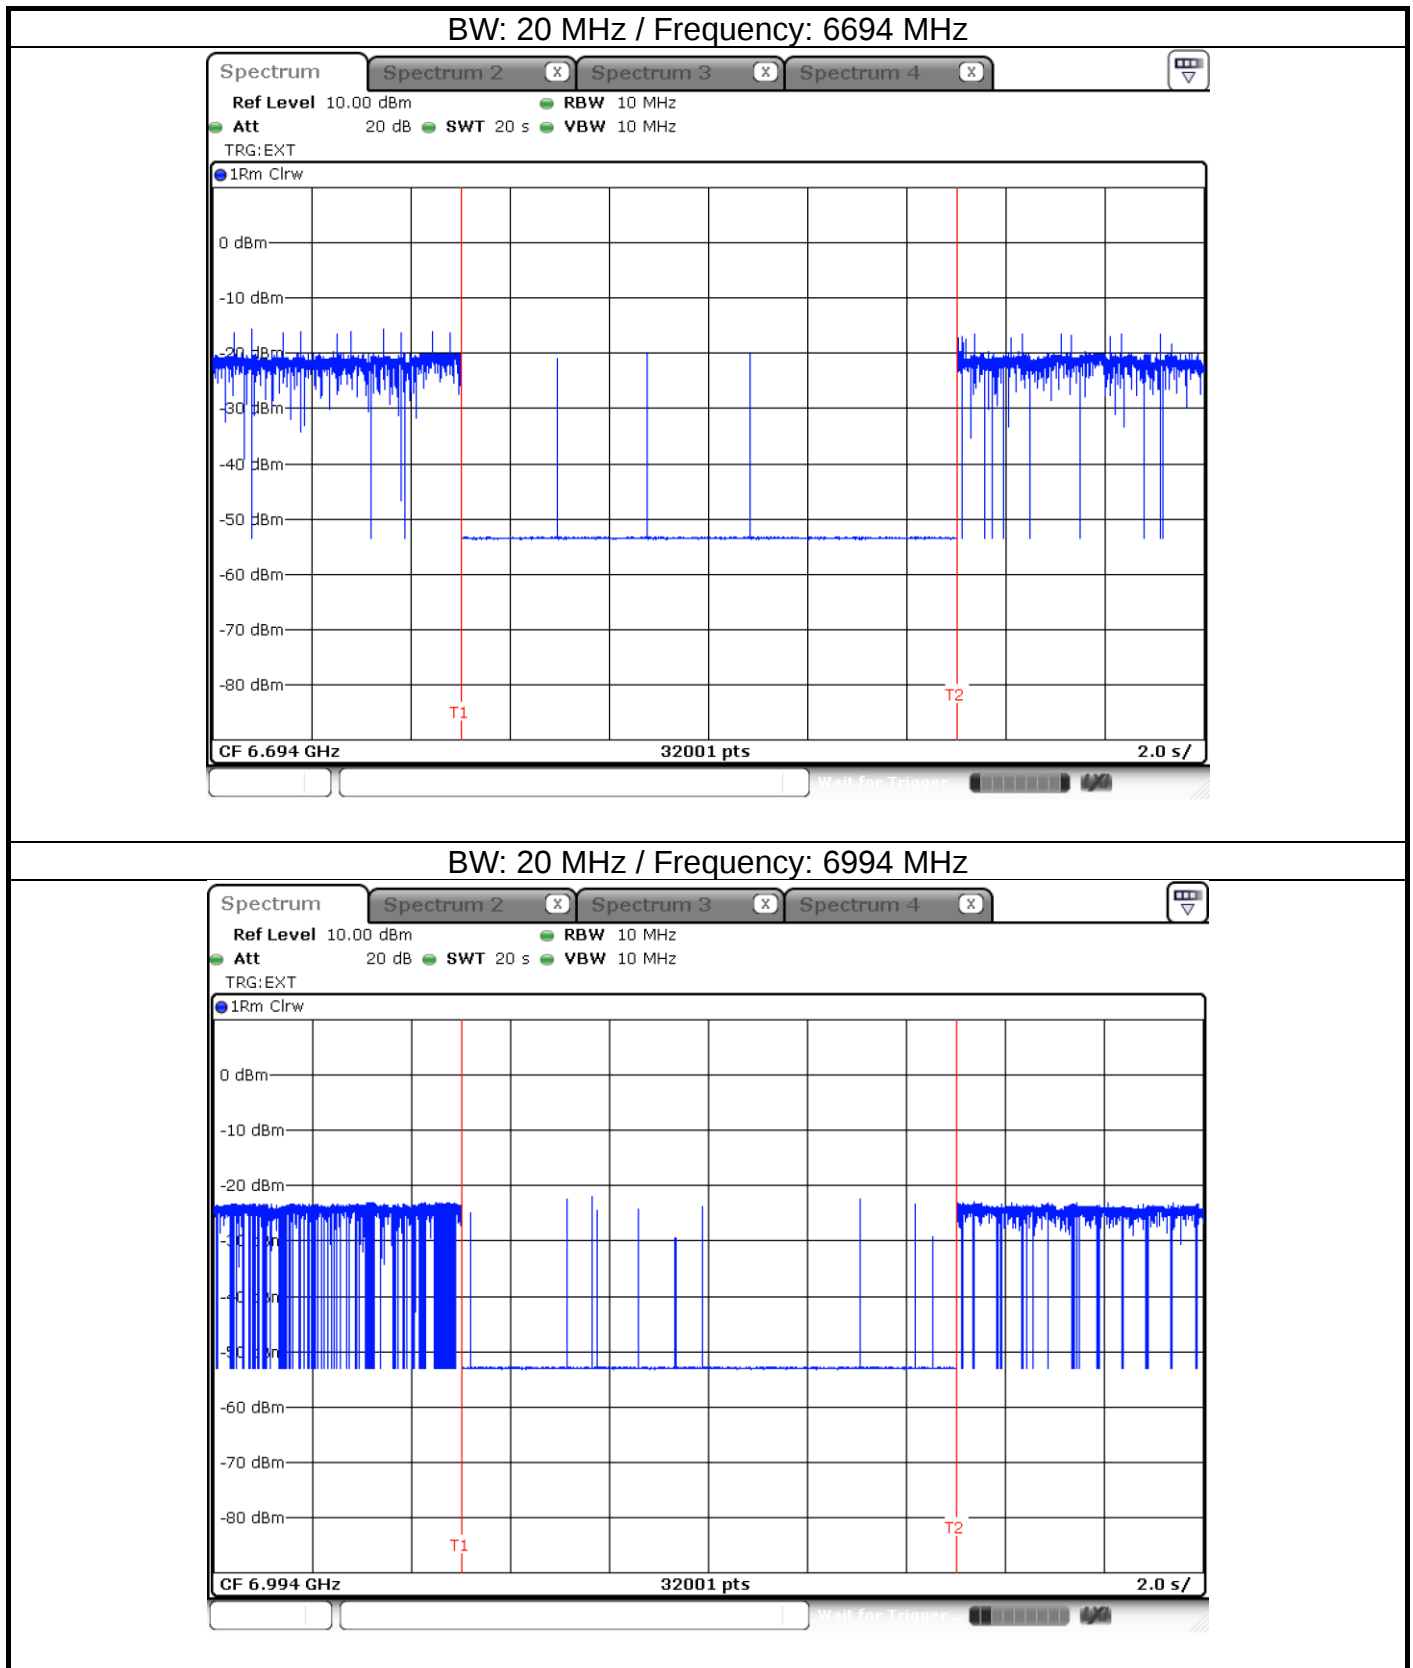

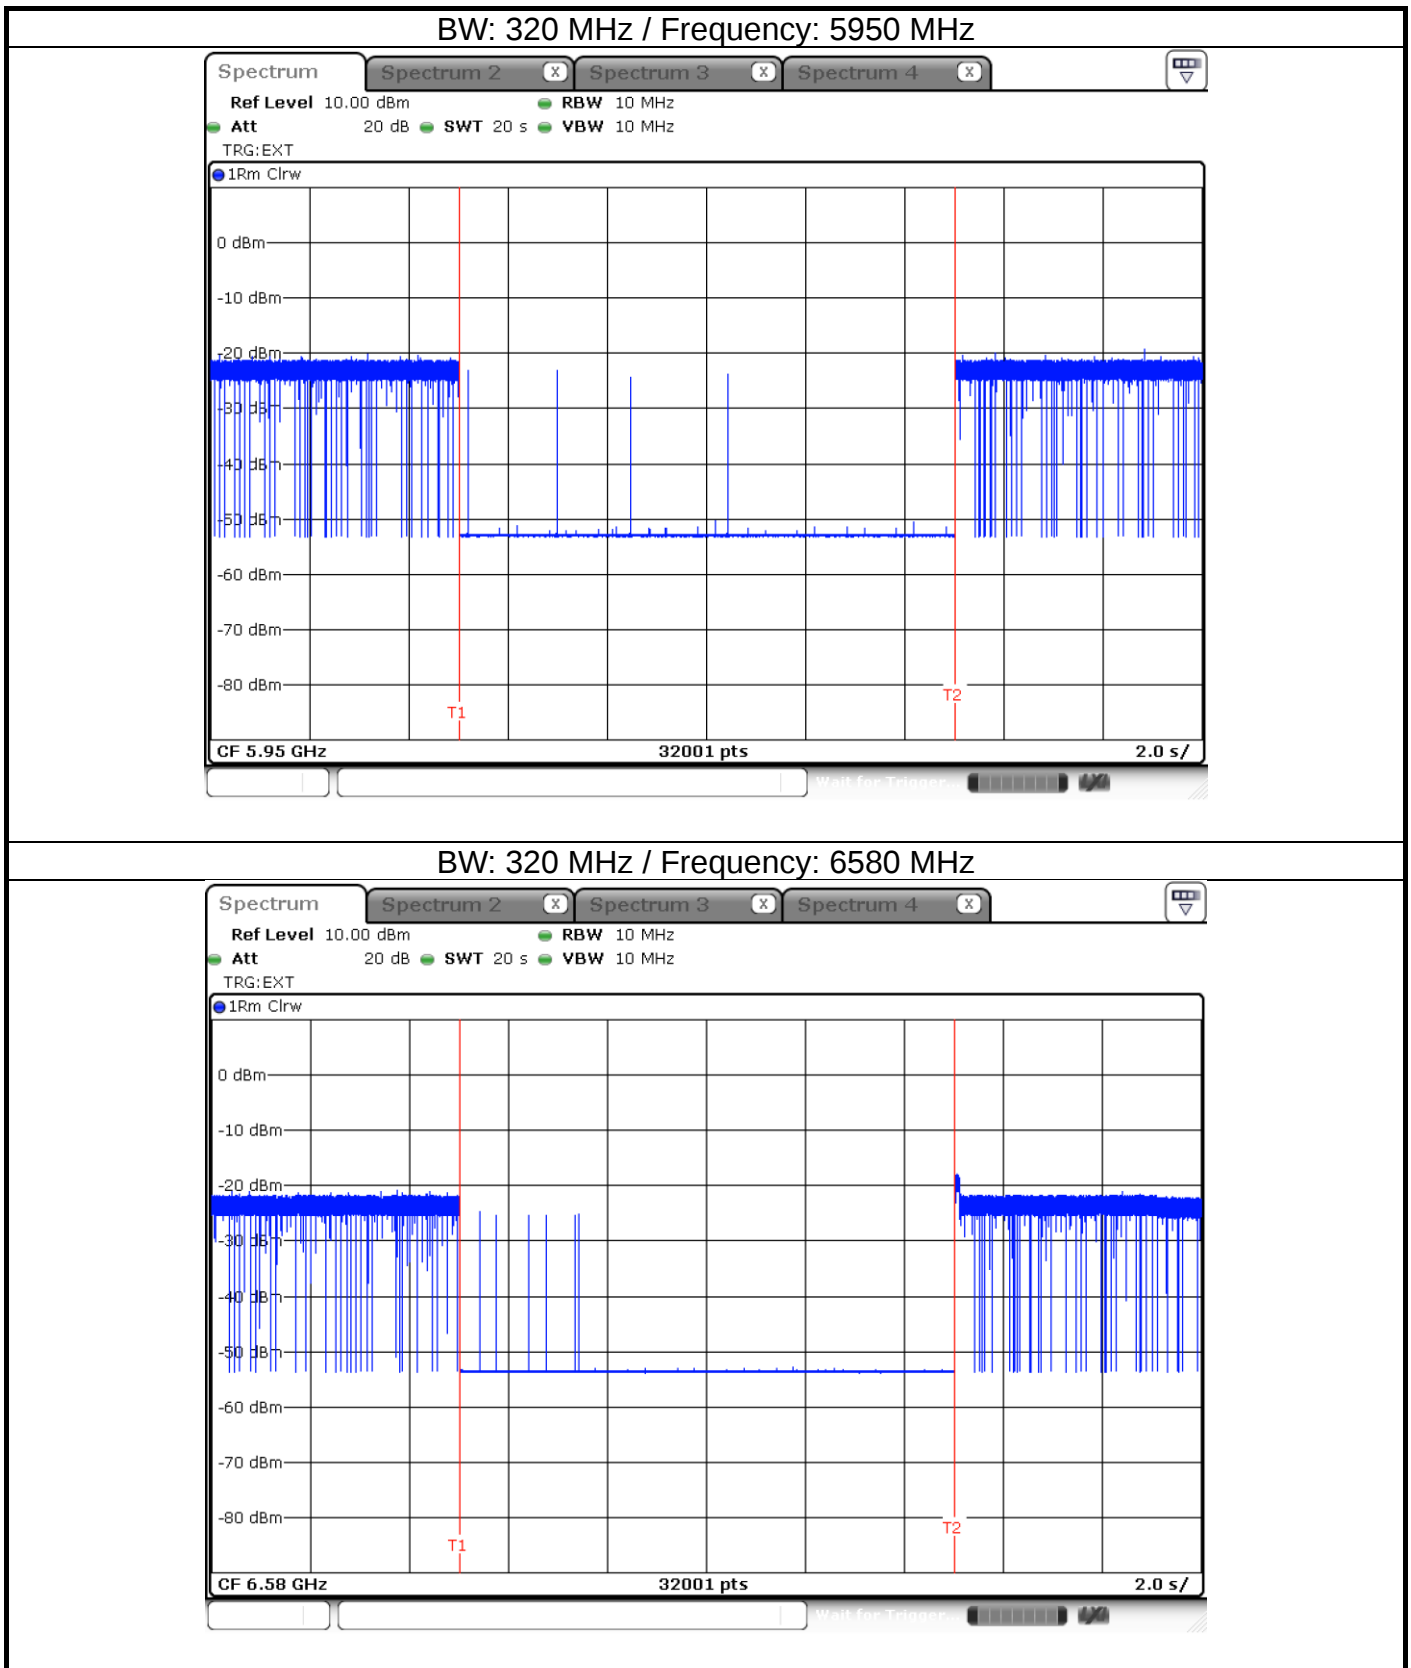


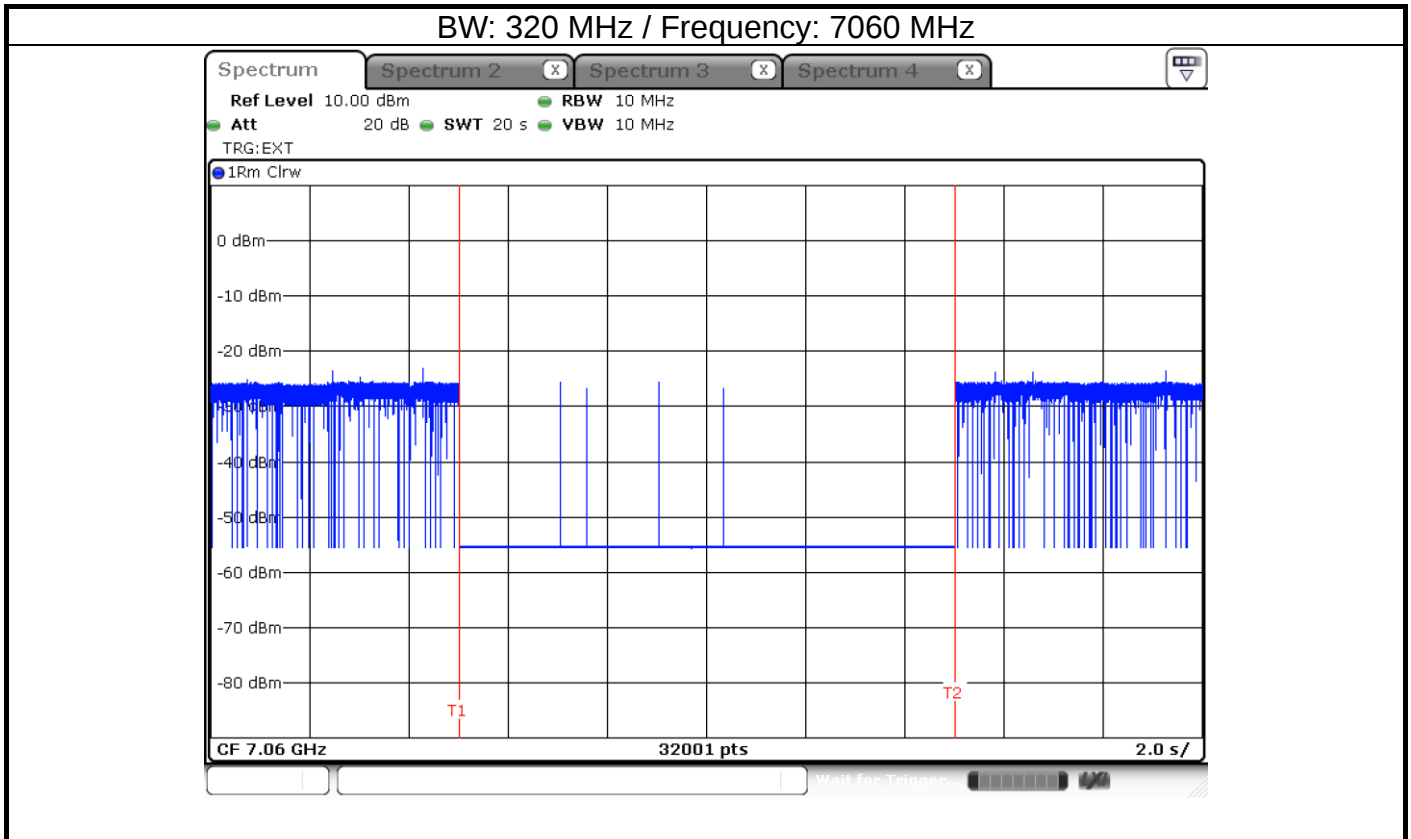


EUT ceased transmission

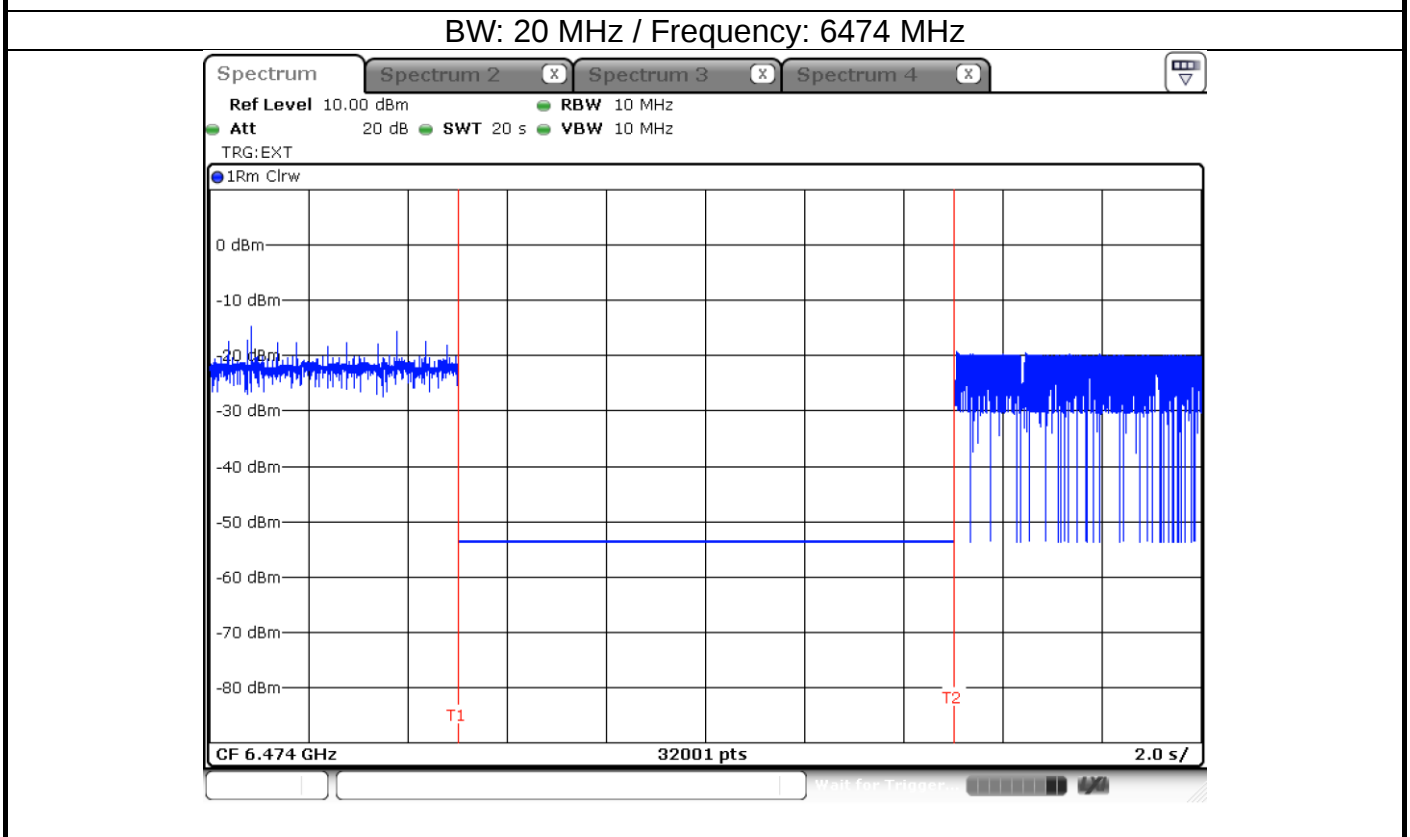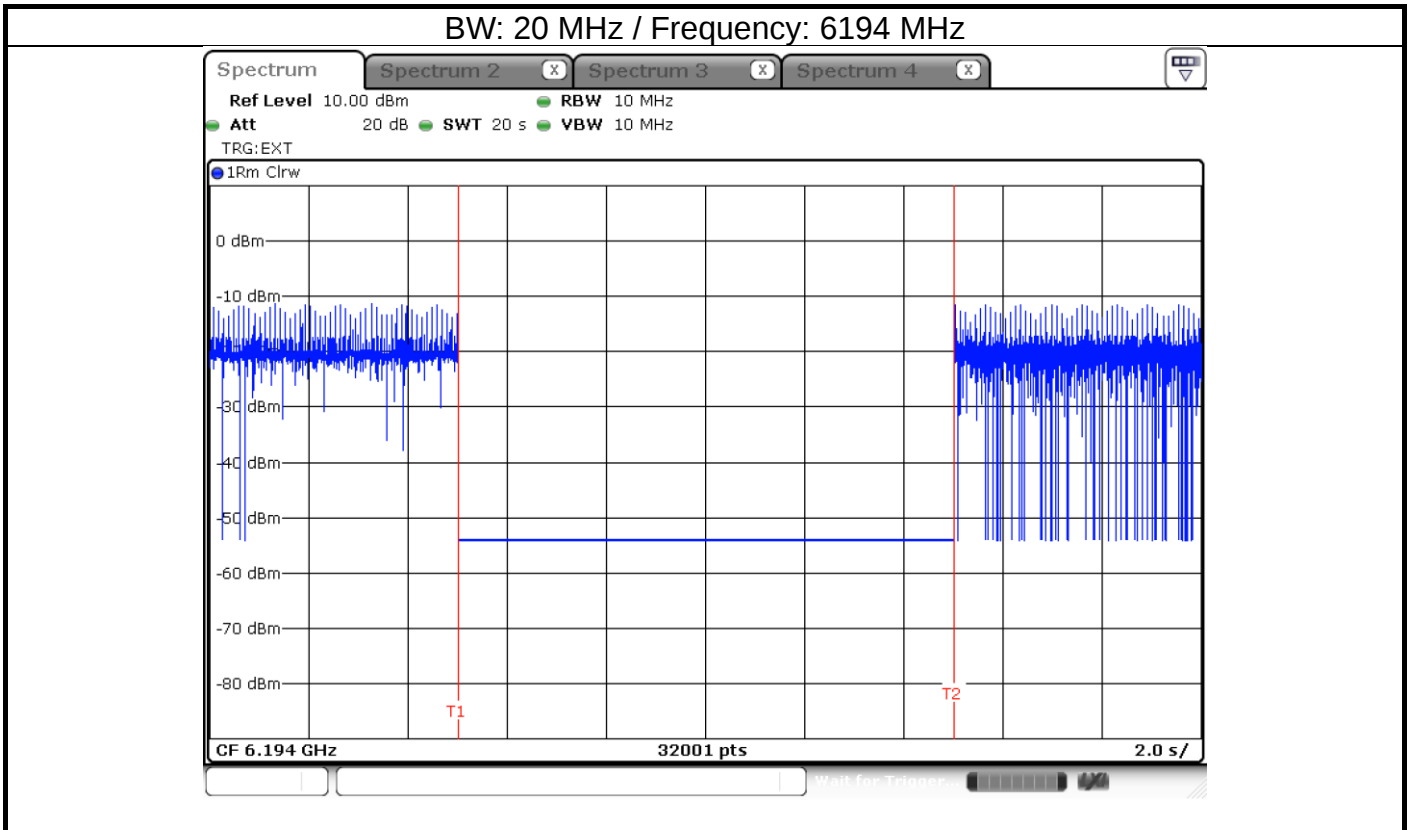


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

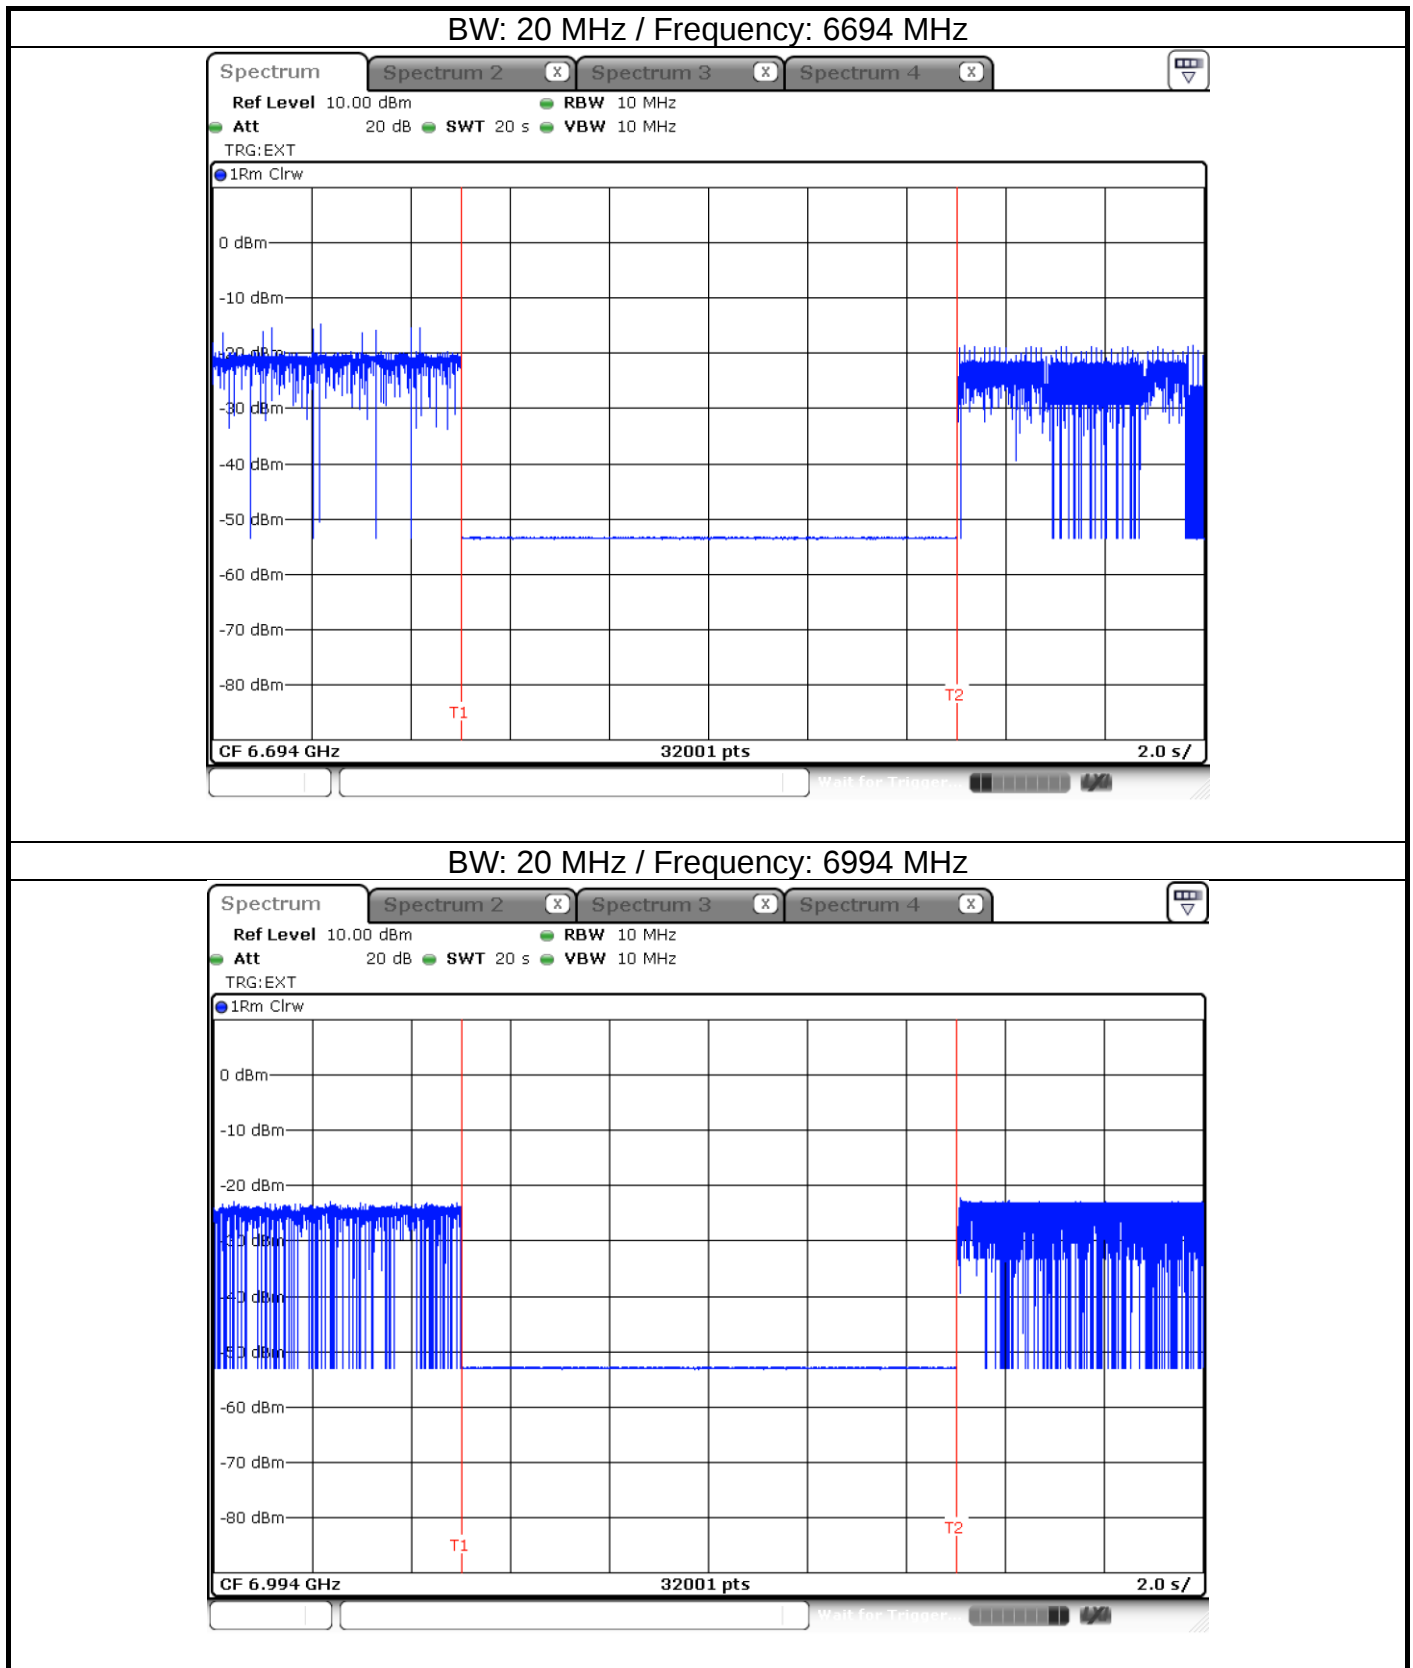


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

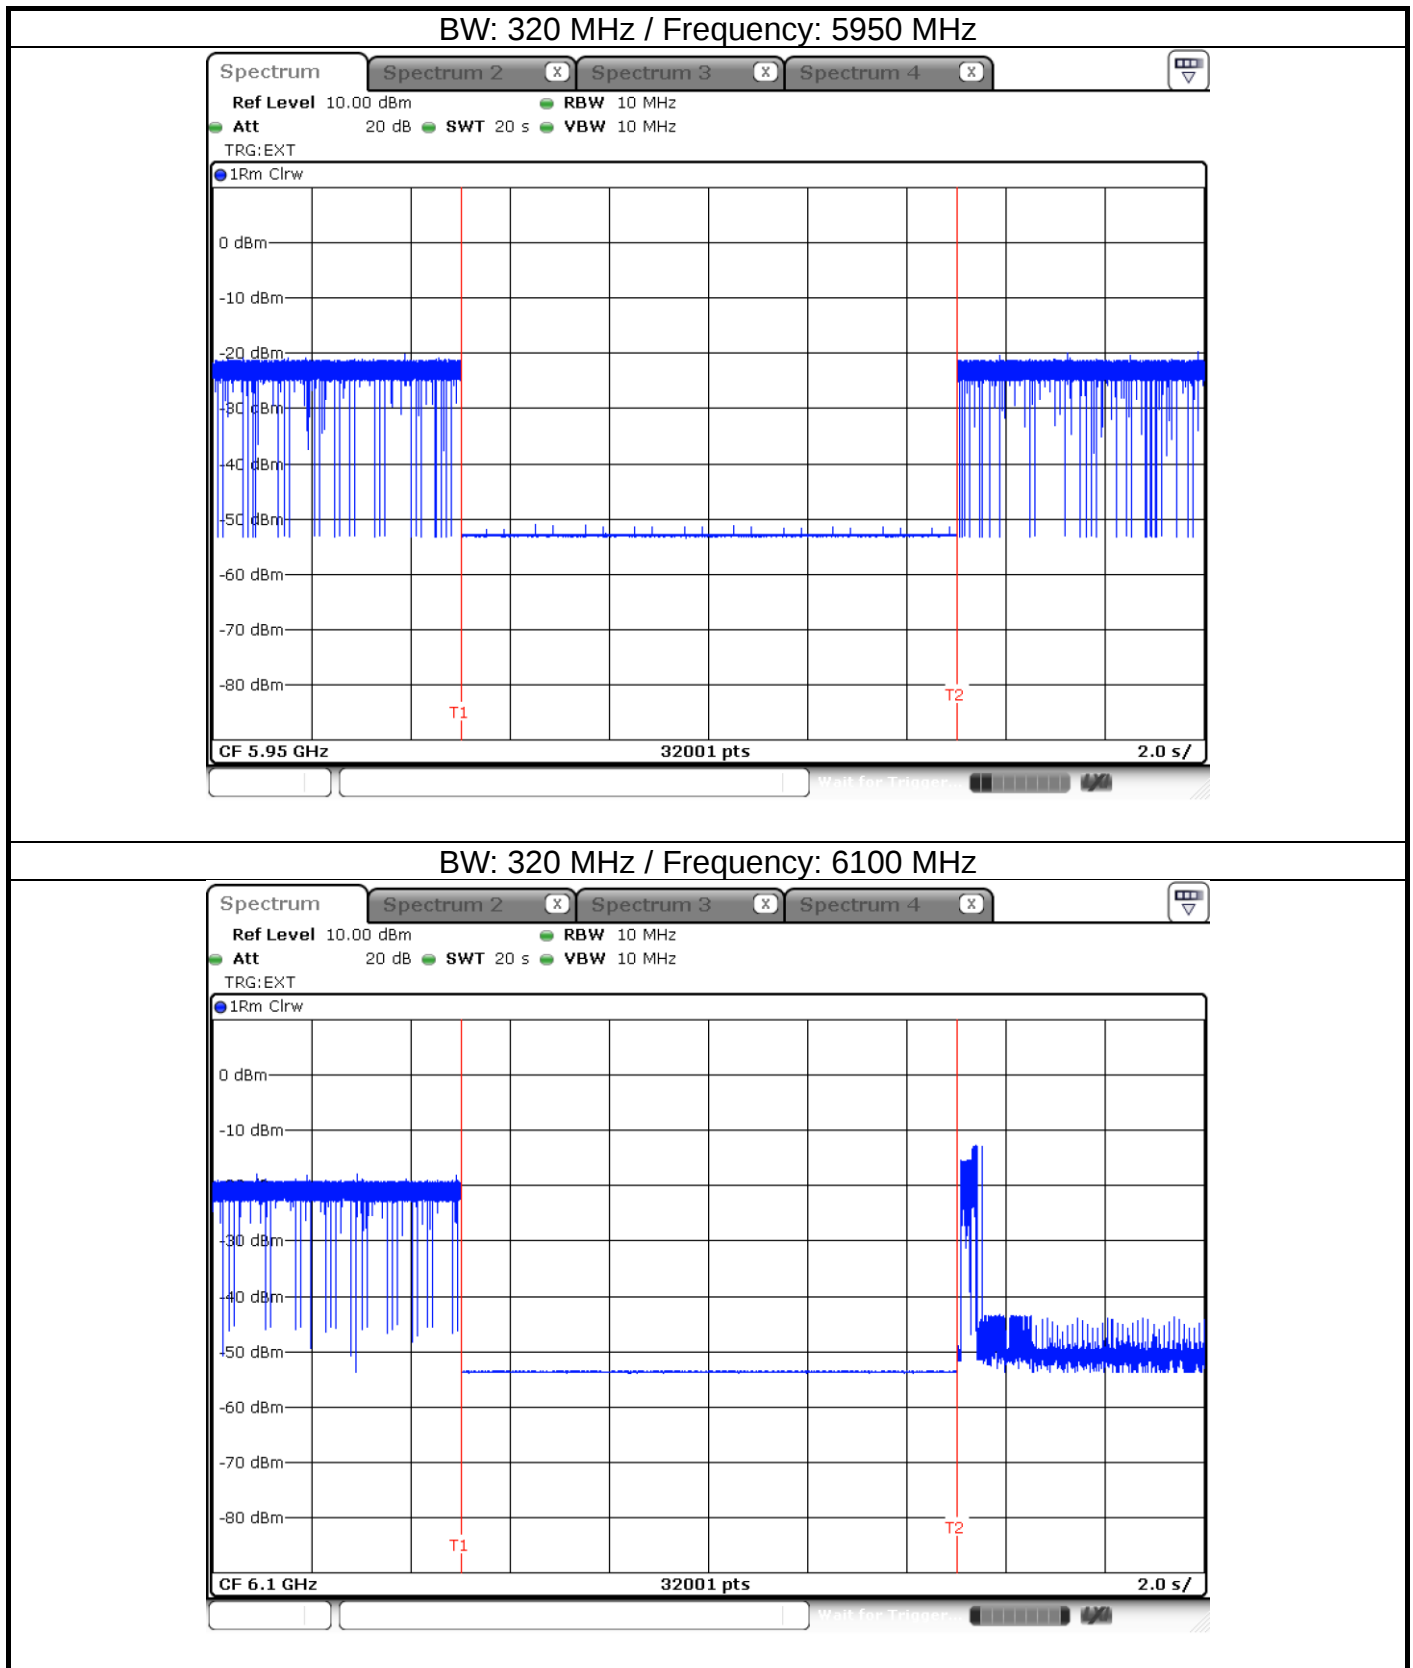


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

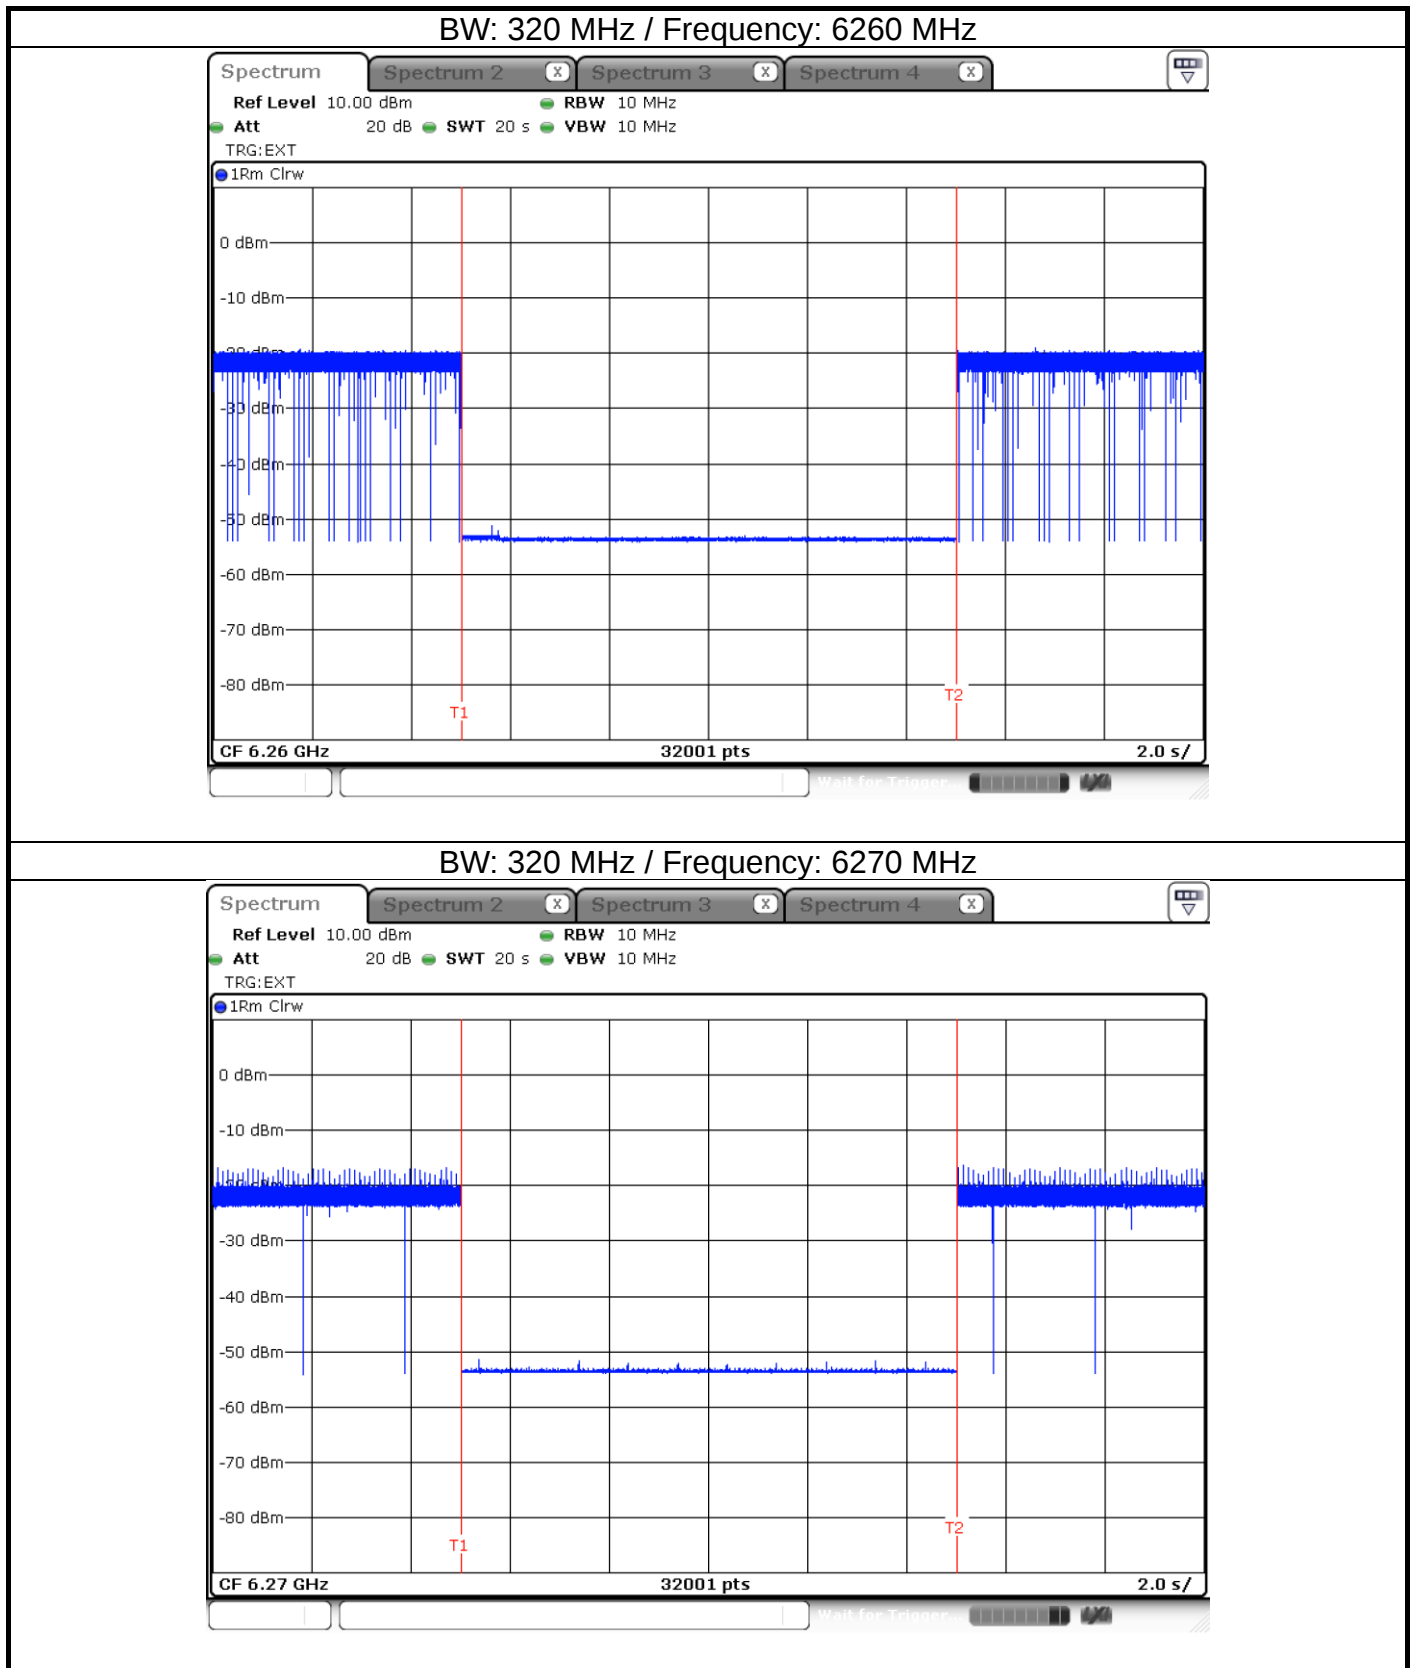


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

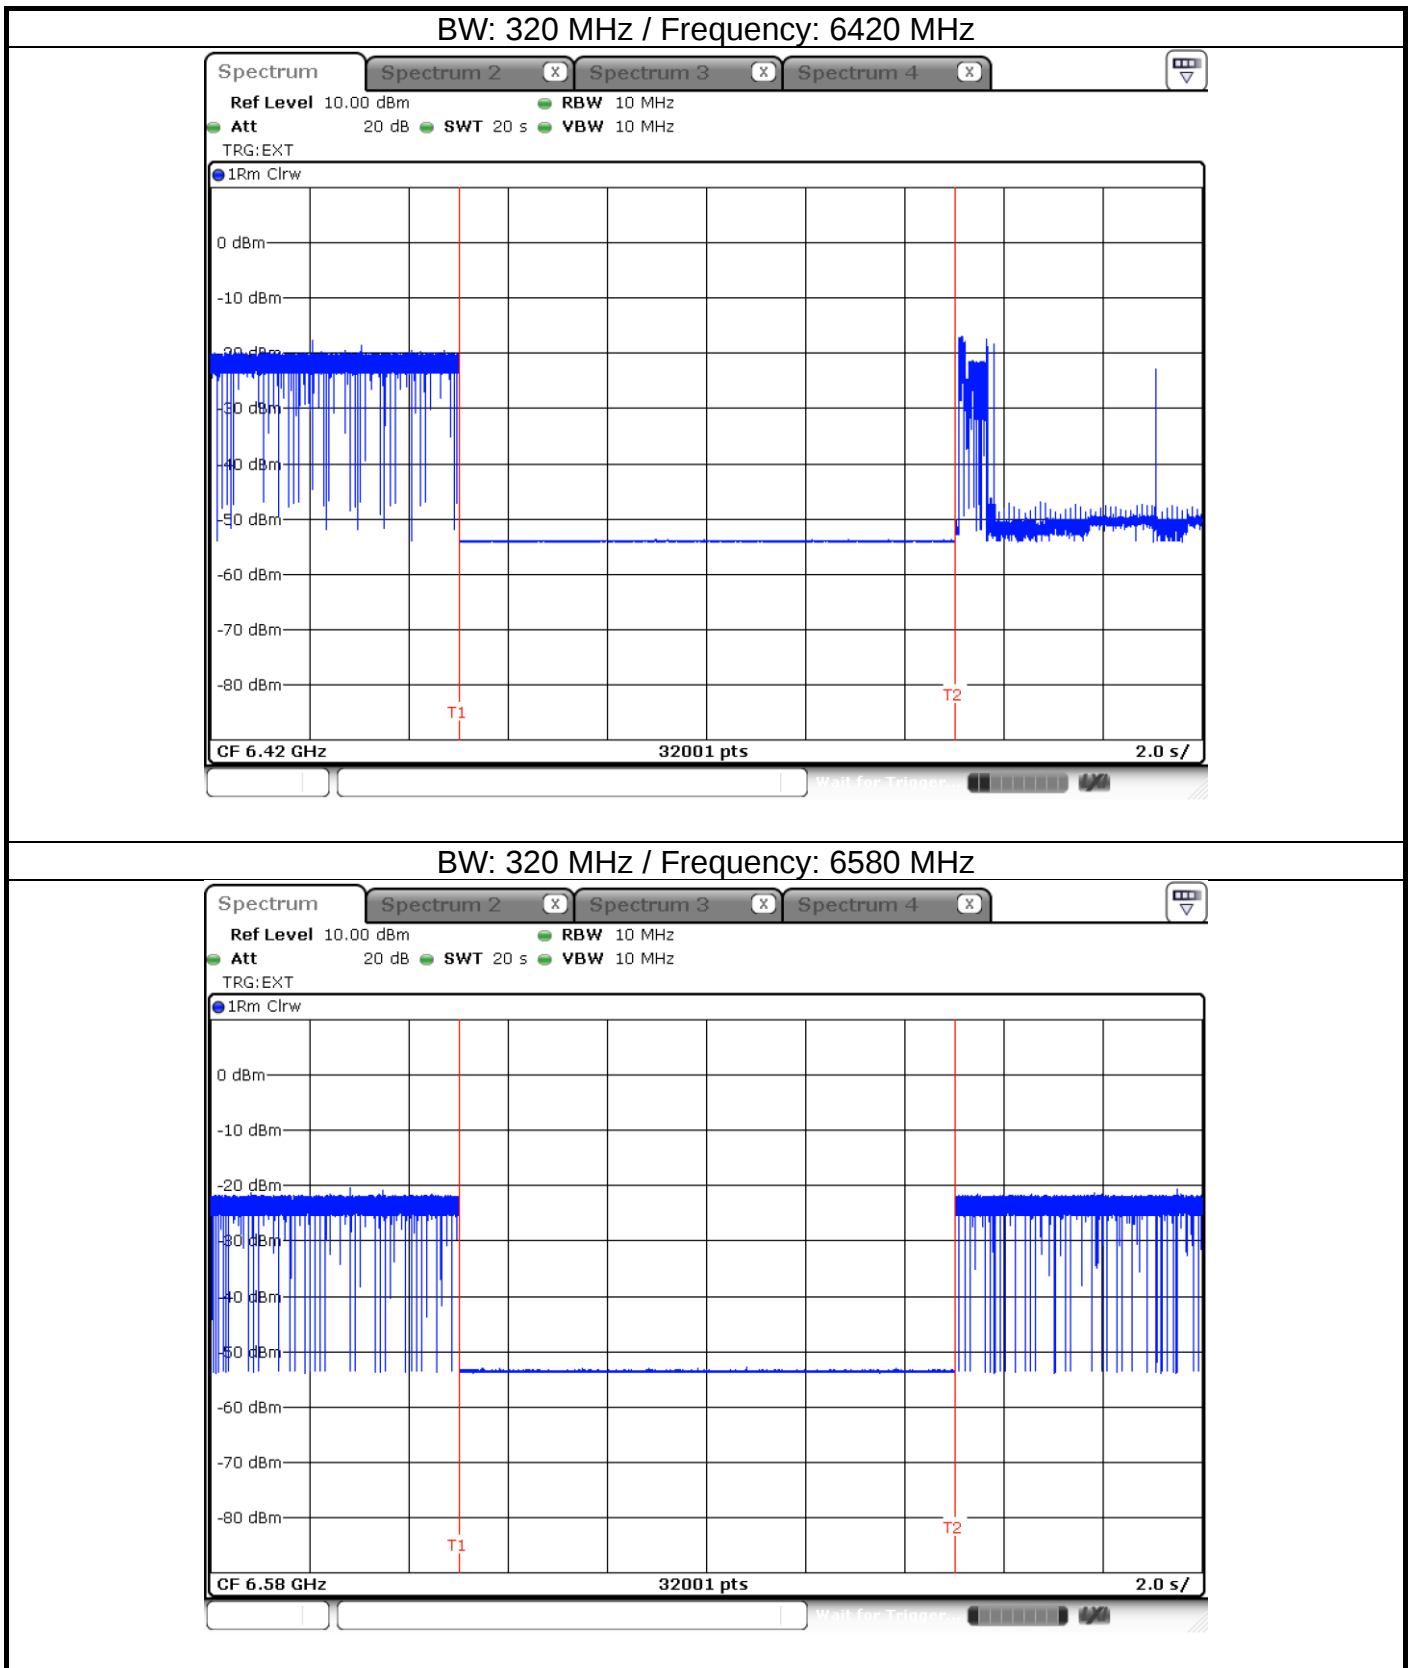

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

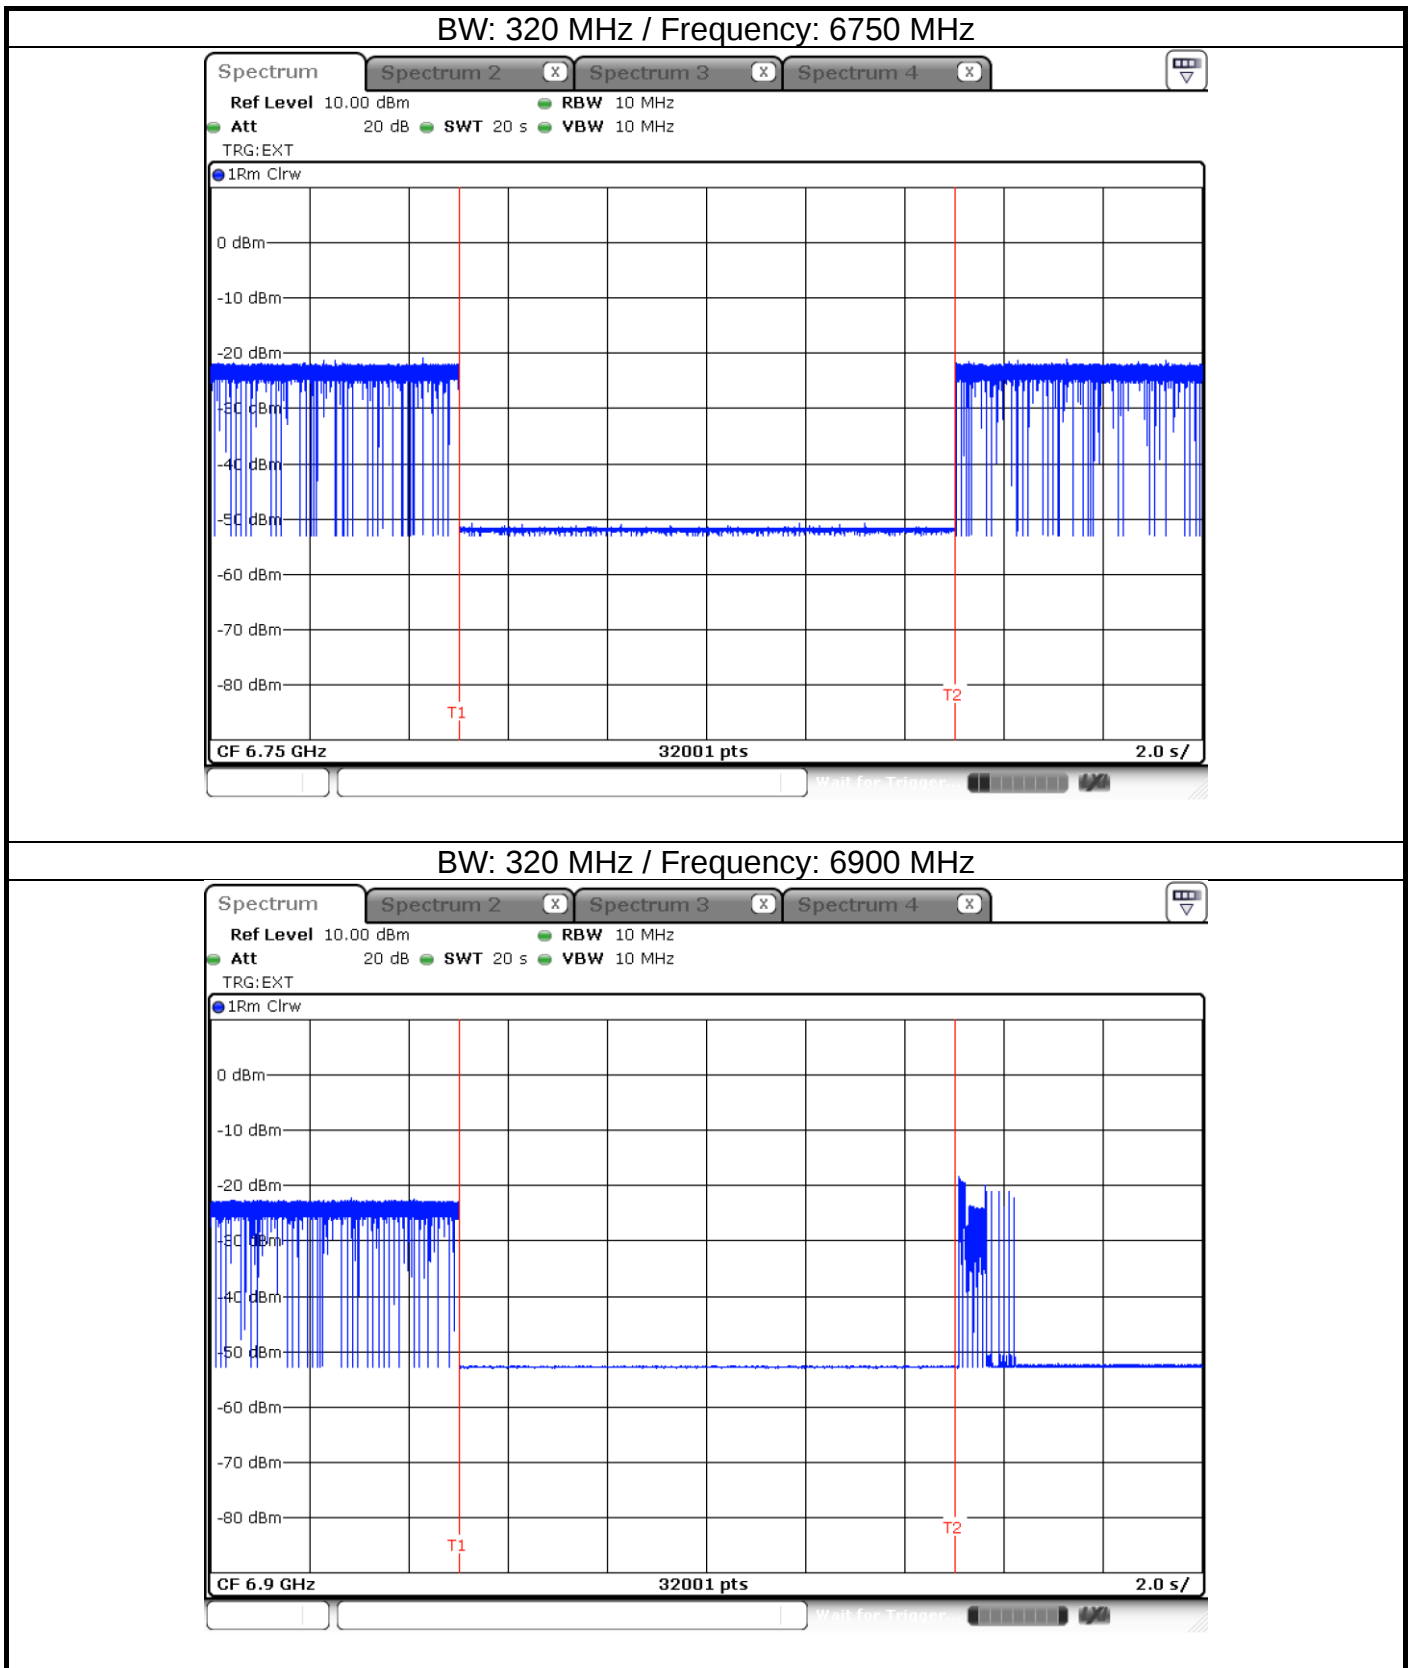

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

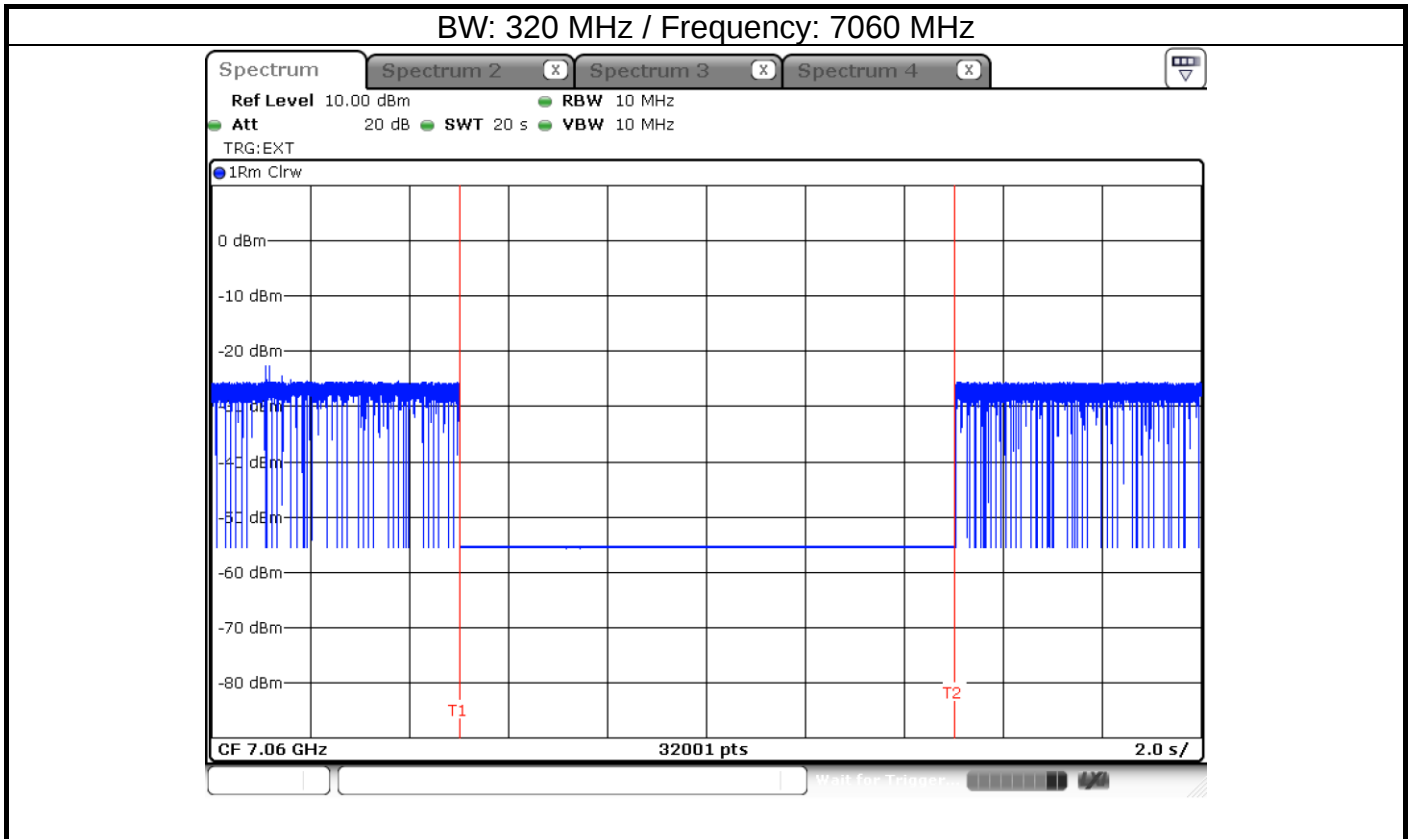


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

POE mode

Modulation Mode	be EHT320	Test Freq. (MHz)	6585
Power Phase	Line		

Test by : Michael Shang Temperature: 21°C Humidity: 61%

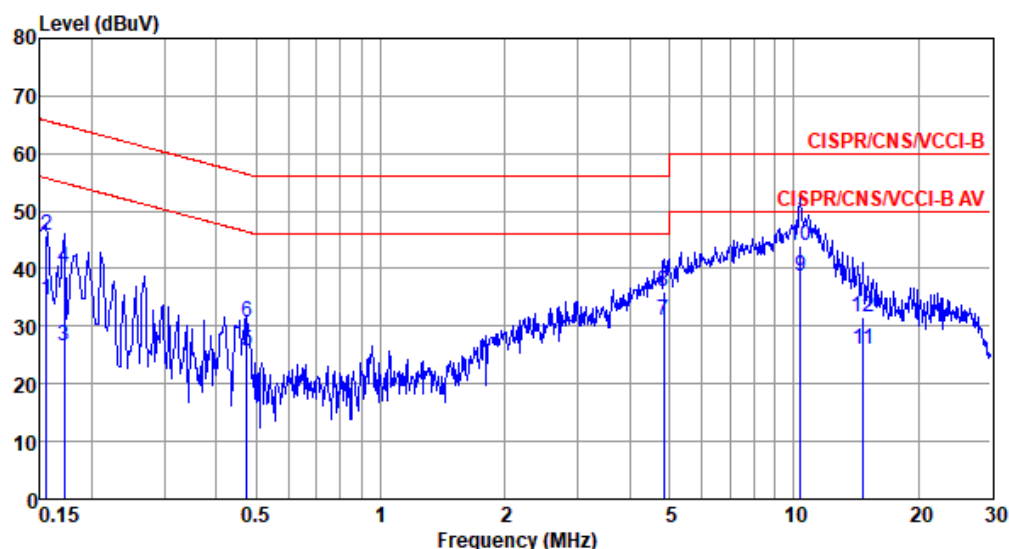

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	34.67	55.69	-21.02	24.94	9.65	0.08	0.00	Average
2	0.156	45.76	65.69	-19.93	36.03	9.65	0.08	0.00	QP
3	0.171	26.61	54.90	-28.29	16.88	9.65	0.08	0.00	Average
4	0.171	40.12	64.90	-24.78	30.39	9.65	0.08	0.00	QP
5	0.474	25.72	46.45	-20.73	15.99	9.64	0.09	0.00	Average
6	0.474	30.63	56.45	-25.82	20.90	9.64	0.09	0.00	QP
7	4.848	30.96	46.00	-15.04	21.04	9.68	0.24	0.00	Average
8	4.848	36.01	56.00	-19.99	26.09	9.68	0.24	0.00	QP
9*	10.397	38.79	50.00	-11.21	28.77	9.71	0.31	0.00	Average
10	10.397	44.06	60.00	-15.94	34.04	9.71	0.31	0.00	QP
11	14.750	25.99	50.00	-24.01	15.87	9.69	0.43	0.00	Average
12	14.750	31.56	60.00	-28.44	21.44	9.69	0.43	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6585																																																																																																																				
Power Phase	Neutral																																																																																																																						
Test by : Michael Shang Temperature: 21°C Humidity: 61%																																																																																																																							
Level (dBuV) Frequency (MHz) <table><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr><tr><td>1</td><td>0.162</td><td>30.47</td><td>55.34</td><td>-24.87</td><td>20.73</td><td>9.66</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>2</td><td>0.162</td><td>42.51</td><td>65.34</td><td>-22.83</td><td>32.77</td><td>9.66</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>3</td><td>0.192</td><td>26.89</td><td>53.93</td><td>-27.04</td><td>17.16</td><td>9.65</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>4</td><td>0.192</td><td>38.53</td><td>63.93</td><td>-25.40</td><td>28.80</td><td>9.65</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>5</td><td>0.204</td><td>27.01</td><td>53.45</td><td>-26.44</td><td>17.28</td><td>9.65</td><td>0.08</td><td>0.00</td><td>Average</td></tr><tr><td>6</td><td>0.204</td><td>36.51</td><td>63.45</td><td>-26.94</td><td>26.78</td><td>9.65</td><td>0.08</td><td>0.00</td><td>QP</td></tr><tr><td>7</td><td>0.447</td><td>27.40</td><td>46.93</td><td>-19.53</td><td>17.67</td><td>9.64</td><td>0.09</td><td>0.00</td><td>Average</td></tr><tr><td>8</td><td>0.447</td><td>31.57</td><td>56.93</td><td>-25.36</td><td>21.84</td><td>9.64</td><td>0.09</td><td>0.00</td><td>QP</td></tr><tr><td>9*</td><td>11.080</td><td>37.93</td><td>50.00</td><td>-12.07</td><td>27.85</td><td>9.75</td><td>0.33</td><td>0.00</td><td>Average</td></tr><tr><td>10</td><td>11.080</td><td>44.51</td><td>60.00</td><td>-15.49</td><td>34.43</td><td>9.75</td><td>0.33</td><td>0.00</td><td>QP</td></tr><tr><td>11</td><td>19.122</td><td>26.08</td><td>50.00</td><td>-23.92</td><td>15</td></tr></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.162	30.47	55.34	-24.87	20.73	9.66	0.08	0.00	Average	2	0.162	42.51	65.34	-22.83	32.77	9.66	0.08	0.00	QP	3	0.192	26.89	53.93	-27.04	17.16	9.65	0.08	0.00	Average	4	0.192	38.53	63.93	-25.40	28.80	9.65	0.08	0.00	QP	5	0.204	27.01	53.45	-26.44	17.28	9.65	0.08	0.00	Average	6	0.204	36.51	63.45	-26.94	26.78	9.65	0.08	0.00	QP	7	0.447	27.40	46.93	-19.53	17.67	9.64	0.09	0.00	Average	8	0.447	31.57	56.93	-25.36	21.84	9.64	0.09	0.00	QP	9*	11.080	37.93	50.00	-12.07	27.85	9.75	0.33	0.00	Average	10	11.080	44.51	60.00	-15.49	34.43	9.75	0.33	0.00	QP	11	19.122	26.08	50.00	-23.92	15
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																														
1	0.162	30.47	55.34	-24.87	20.73	9.66	0.08	0.00	Average																																																																																																														
2	0.162	42.51	65.34	-22.83	32.77	9.66	0.08	0.00	QP																																																																																																														
3	0.192	26.89	53.93	-27.04	17.16	9.65	0.08	0.00	Average																																																																																																														
4	0.192	38.53	63.93	-25.40	28.80	9.65	0.08	0.00	QP																																																																																																														
5	0.204	27.01	53.45	-26.44	17.28	9.65	0.08	0.00	Average																																																																																																														
6	0.204	36.51	63.45	-26.94	26.78	9.65	0.08	0.00	QP																																																																																																														
7	0.447	27.40	46.93	-19.53	17.67	9.64	0.09	0.00	Average																																																																																																														
8	0.447	31.57	56.93	-25.36	21.84	9.64	0.09	0.00	QP																																																																																																														
9*	11.080	37.93	50.00	-12.07	27.85	9.75	0.33	0.00	Average																																																																																																														
10	11.080	44.51	60.00	-15.49	34.43	9.75	0.33	0.00	QP																																																																																																														
11	19.122	26.08	50.00	-23.92	15																																																																																																																		

Adapter mode

Modulation Mode	be EHT320	Test Freq. (MHz)	6585
Power Phase	Line		

Test by : Michael Shang Temperature: 21°C Humidity: 61%

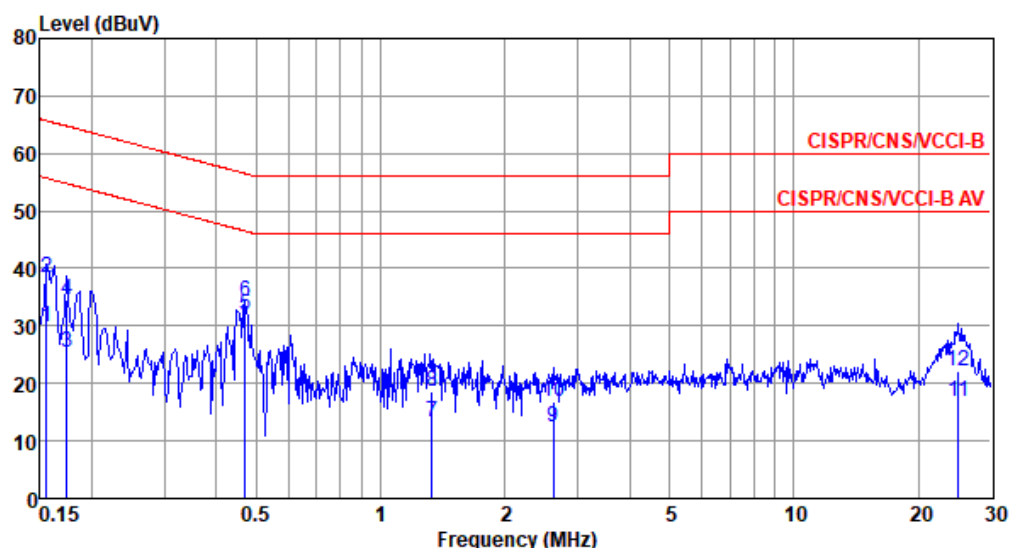

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	29.73	55.69	-25.96	19.78	9.65	0.08	0.22	Average
2	0.156	38.32	65.69	-27.37	28.37	9.65	0.08	0.22	QP
3	0.174	25.47	54.77	-29.30	15.50	9.65	0.08	0.24	Average
4	0.174	34.46	64.77	-30.31	24.49	9.65	0.08	0.24	QP
5*	0.471	31.89	46.49	-14.60	21.83	9.64	0.09	0.33	Average
6	0.471	34.25	56.49	-22.24	24.19	9.64	0.09	0.33	QP
7	1.331	13.38	46.00	-32.62	3.19	9.65	0.13	0.41	Average
8	1.331	18.70	56.00	-37.30	8.51	9.65	0.13	0.41	QP
9	2.622	12.38	46.00	-33.62	2.08	9.66	0.19	0.45	Average
10	2.622	16.92	56.00	-39.08	6.62	9.66	0.19	0.45	QP
11	25.055	16.97	50.00	-33.03	5.94	9.66	0.63	0.74	Average
12	25.055	22.02	60.00	-37.98	10.99	9.66	0.63	0.74	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6585
Power Phase	Neutral		

Test by : Michael Shang

Temperature: 21°C

Humidity: 61%

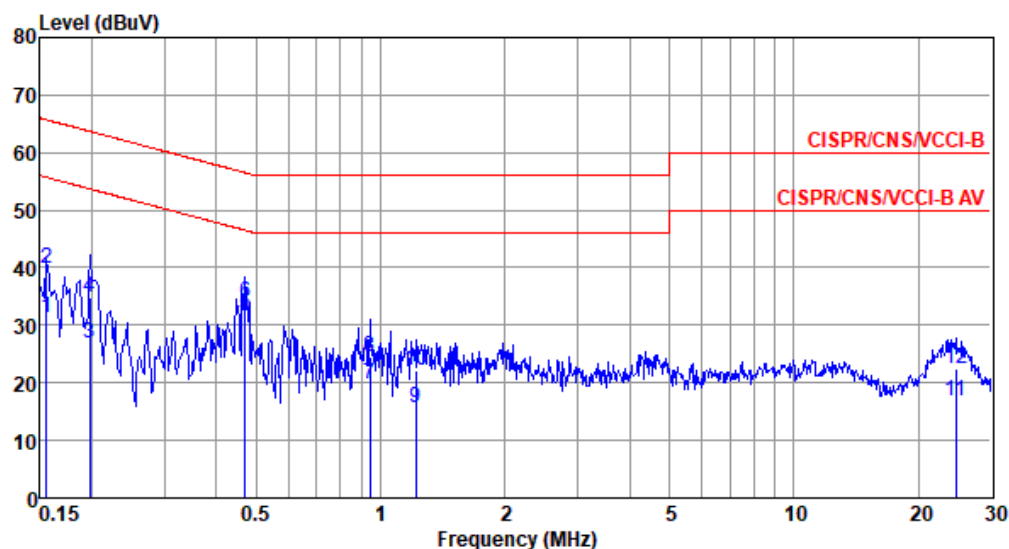

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	31.25	55.69	-24.44	21.36	9.66	0.08	0.15	Average
2	0.156	39.95	65.69	-25.74	30.06	9.66	0.08	0.15	QP
3	0.198	26.92	53.71	-26.79	16.99	9.65	0.08	0.20	Average
4	0.198	34.73	63.71	-28.98	24.80	9.65	0.08	0.20	QP
5*	0.471	31.99	46.49	-14.50	21.98	9.64	0.09	0.28	Average
6	0.471	34.04	56.49	-22.45	24.03	9.64	0.09	0.28	QP
7	0.943	19.91	46.00	-26.09	9.82	9.65	0.10	0.34	Average
8	0.943	24.60	56.00	-31.40	14.51	9.65	0.10	0.34	QP
9	1.216	15.72	46.00	-30.28	5.58	9.65	0.12	0.37	Average
10	1.216	22.03	56.00	-33.97	11.89	9.65	0.12	0.37	QP
11	24.659	16.91	50.00	-33.09	5.76	9.85	0.63	0.67	Average
12	24.659	22.51	60.00	-37.49	11.36	9.85	0.63	0.67	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).