

# FCC Test Report

Report No.: AGC13779240403FR02

| :             | Z63-O4SOFKEYS                      |
|---------------|------------------------------------|
| :             | Original Equipment                 |
| :             | Wireless Keyboard                  |
| :             | AUSDOM                             |
| :             | Please see the page 6.             |
| :             | SHENZHEN AONI ELECTRONIC CO., LTD  |
| :             | Jun. 11, 2024                      |
| :             | FCC Part 15 Subpart C §15.247      |
| :             | V1.0                               |
| f <b>G</b> lo | bal Compliance (Shenzhen) Co., Ltd |
|               | : : : : :                          |





## **Report Revise Record**

| <b>Report Version</b> | Revise Time | Issued Date   | Valid Version | Notes           |
|-----------------------|-------------|---------------|---------------|-----------------|
| V1.0                  | /           | Jun. 11, 2024 | Valid         | Initial Release |



# **Table of Contents**

| 1. General Information                                 | 5  |
|--|----|
| 2. Product Information                                 | 6  |
| 2.1 Product Technical Description                      |    |
| 2.2 Test Frequency List                                | 7  |
| 2.3 Related Submittal(S) / Grant (S)                   |    |
| 2.4 Test Methodology                                   |    |
| 2.5 Special Accessories                                |    |
| 2.6 Equipment Modifications                            |    |
| 2.7 Antenna Requirement                                |    |
| 3. Test Environment                                    | 9  |
| 3.1 Address of the Test Laboratory                     | 9  |
| 3.2 Test Facility                                      | 9  |
| 3.3 Environmental Conditions                           |    |
| 3.4 Measurement Uncertainty                            |    |
| 3.5 List of Equipment Use                              | 11 |
| 4.System Test Configuration                            |    |
| 4.1 EUT Configuration                                  |    |
| 4.2 EUT Exercise                                       |    |
| 4.3 Configuration of Tested System                     |    |
| 4.4 Equipment Used In Tested System                    |    |
| 4.5 Summary of Test Results                            |    |
| 5. Description of Test Modes                           |    |
| 6. Duty Cycle Measurement                              |    |
| 7. RF Output Power Measurement                         |    |
| 7.1 Provisions Applicable                              |    |
| 7.2 Measurement Procedure                              |    |
| 7.3 Measurement Setup (Block Diagram of Configuration) |    |
| 7.4 Measurement Result                                 |    |
| 8. 6dB Bandwidth Measurement                           |    |
| 8.1 Provisions Applicable                              |    |
| 8.2 Measurement Procedure                              |    |
| 8.3 Measurement Setup (Block Diagram of Configuration) |    |
| 8.4 Measurement Results                                |    |
| 9. Power Spectral Density Measurement                  |    |
| 9.1 Provisions Applicable                              |    |
| 9.2 Measurement Procedure                              |    |
| 9.3 Measurement Setup (Block Diagram of Configuration) |    |
| 9.4 Measurement Results                                |    |



| 10. Conducted Band Edge And Out-of-Band Emissions          | 29 |
|--|----|
| 10.1 Provisions Applicable                                 |    |
| 10.2 Measurement Procedure                                 |    |
| 10.3 Measurement Setup (Block Diagram of Configuration)    |    |
| 10.4 Measurement Results                                   | 30 |
| 11. Radiated Spurious Emission                             |    |
| 11.1 Measurement Limit                                     |    |
| 11.2 Measurement Procedure                                 |    |
| 11.3 Measurement Setup (Block Diagram of Configuration)    |    |
| 11.4 Measurement Result                                    | 40 |
| 12. AC Power Line Conducted Emission Test                  | 49 |
| 12.1 Measurement Limit                                     | 49 |
| 12.2 Measurement Setup (Block Diagram of Configuration)    |    |
| 12.3 Preliminary Procedure of Line Conducted Emission Test | 50 |
| 12.4 Final Procedure of Line Conducted Emission Test       | 50 |
| 12.5 Measurement Results                                   | 50 |
| Appendix I: Photographs of Test Setup                      | 51 |
| Appendix II: Photographs of Test EUT                       | 51 |



## **1. General Information**

| Applicant                    | SHENZHEN AONI ELECTRONIC CO., LTD  |  |  |
|------------------------------|--|--|--|
| Address                      | No.5,Bldg.,Honghui Industrial Park, 2nd Liuxian Road, Xin'An streets, Bao'an |  |  |
| Address                      | District, ShenZhen, China  |  |  |
| Manufacturer                 | Shenzhen Ausdom CO., LTD.  |  |  |
|                              | ROOM 701, NO.5 FACTORY BUILDING, HONGHUIINDUSTRIAL PARK, NO.2,               |  |  |
| Address                      | LIUXIAN 3rd ROAD, DISTRICT 68, XINGDONG COMMUNITY, XIN'AN STREET,            |  |  |
|                              | BAOAN DISTRICT, SHENZHEN   |  |  |
| Factory                      | Shenzhen Ausdom CO., LTD.  |  |  |
|                              | ROOM 701, NO.5 FACTORY BUILDING, HONGHUIINDUSTRIAL PARK, NO.2,               |  |  |
| Address                      | LIUXIAN 3rd ROAD, DISTRICT 68, XINGDONG COMMUNITY, XIN'AN STREET,            |  |  |
|                              | BAOAN DISTRICT, SHENZHEN   |  |  |
| Product Designation          | Wireless Keyboard  |  |  |
| Brand Name                   | AUSDOM   |  |  |
| Test Model                   | Please see the page 6.   |  |  |
| Series Model(s)              | Please see the page 6.   |  |  |
| Difference Description       | Please see the page 6.   |  |  |
| Date of receipt of test item | Apr. 15, 2024  |  |  |
| Date of Test                 | Apr. 15, 2024 – Jun. 11, 2024  |  |  |
| Deviation from Standard      | No any deviation from the test method  |  |  |
| Condition of Test Sample     | Normal   |  |  |
| Test Result                  | Pass   |  |  |
| Test Report Form No          | AGCER-FCC-BLE-V1   |  |  |

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jouk Gai

Jack Gui (Project Engineer)

Jun. 11, 2024

**Reviewed By** 

Calvin Liu (Reviewer)

Jun. 11, 2024

Approved By

ax tra

Jun. 11, 2024

0

Max Zhang Authorized Officer

Jun. 11, 2024



## 2. Product Information

#### 2.1 Product Technical Description

| Frequency Band            | 2400MHz-2483.5MHz |
|---------------------------|-------------------|
| Operation Frequency Range | 2402MHz-2480MHz   |
| Modulation Type           | GFSK              |
| Number of channels        | 79                |
| Channel Separation        | 2 MHz             |
| Maximum Transmitter Power | -1.962dBm         |
| Hardware Version          | 00                |
| Software Version          | F1420             |
| Antenna Designation       | PCB Antenna       |
| Antenna Gain              | 1.87dBi           |
| Power Supply              | DC 3.7V           |
| Adapter Information       | N/A               |

| Test Model             | Sofkeys4  |  |  |
|------------------------|---|--|--|
|                        | Sofkeys2, Sofkeys3, Sofkeys4 pro, Sofkeys4L, Sofkeys4 AI, Sofkeys4X,      |  |  |
|                        | Sofkeys4 SE, Sofkeys4 ultra, Sofkeys4S, Sofkeys5, Sofkeys5 pro,           |  |  |
| Series Model(s)        | Sofkeys5L, Sofkeys5 AI, Sofkeys5X, Sofkeys5 SE, Sofkeys5 ultra,           |  |  |
| Series Model(S)        | Sofkeys5S, Sofkeys6, Sofkeys6 pro, Sofkeys7, Sofkeys8, Sofkeys Air1,      |  |  |
|                        | Sofkeys Air2, Sofkeys Air3, Sofkeys Air4, Sofkeys Air5, KAM200, KAM200X,  |  |  |
|                        | KAM200S, KAM300, KAM400, KAM500   |  |  |
| Difference Description | All the series models are the same as the test model except for the model |  |  |
|                        | names.  |  |  |



#### 2.2 Test Frequency List

| Frequency Band   | Channel Number | Frequency |  |  |
|--|----------------|-----------|--|--|
|  | 0              | 2402 MHz  |  |  |
|  | 1              | 2403 MHz  |  |  |
|  | :              | :         |  |  |
| 2400~2483.5MHz   | 40             | 2442MHz   |  |  |
|  | :              | :         |  |  |
|  | 77             | 2479 MHz  |  |  |
|  | 78             | 2480 MHz  |  |  |
| Note: $f = 2402 + 1*k$ MHz, $k = 0,, 79$ f is the operating frequency (MHz); k is the operating channel. |                |           |  |  |



## 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: Z63-O4SOFKEYS, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 Test Methodology

The tests were performed according to following standards:

| No. | Identity   | Document Title  |  |  |
|-----|--|---|--|--|
| 1   | FCC 47 CFR Part 2                                | Frequency allocations and radio treaty matters; general rules and regulations   |  |  |
| 2   | FCC 47 CFR Part 15                               | Radio Frequency Devices   |  |  |
| 3   | ANSI C63.10-2013                                 | American National Standard for Testing Unlicensed Wireless Devices  |  |  |
| 4   | KDB 558074<br>D01 15.247 Meas<br>Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems,<br>Frequency Hopping Spread Spectrum system, and Hybrid system devices<br>operating under Section 15.247 of the FCC rules |  |  |

#### 2.5 Special Accessories

Not available for this EUT intended for grant.

#### 2.6 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.7 Antenna Requirement

Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 1.87dBi.



## 3. Test Environment

#### 3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



#### **3.3 Environmental Conditions**

|                         | Normal Conditions |
|-------------------------|-------------------|
| Temperature range (°C)  | 15 - 35           |
| Relative humidity range | 20 % - 75 %       |
| Pressure range (kPa)    | 86 - 106          |
| Power supply            | DC 3.7V           |

#### **3.4 Measurement Uncertainty**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Item  | Measurement Uncertainty    |
|---|----------------------------|
| Uncertainty of Conducted Emission for AC Port | $U_c = \pm 2.9 \text{ dB}$ |
| Uncertainty of Radiated Emission below 1GHz   | $U_c = \pm 3.9 \text{ dB}$ |
| Uncertainty of Radiated Emission above 1GHz   | $U_c = \pm 4.9 \text{ dB}$ |
| Uncertainty of total RF power, conducted      | $U_c = \pm 0.8 \text{ dB}$ |
| Uncertainty of RF power density, conducted    | $U_c = \pm 2.6 \text{ dB}$ |
| Uncertainty of spurious emissions, conducted  | U <sub>c</sub> = ±2 %      |
| Uncertainty of Occupied Channel Bandwidth     | U <sub>c</sub> = ±2 %      |



#### 3.5 List of Equipment Use

| • R         | RF Conducted Test System |                                  |              |            |            |                              |                              |
|-------------|--------------------------|----------------------------------|--------------|------------|------------|------------------------------|------------------------------|
| Used        | Equipment No.            | Test Equipment                   | Manufacturer | Model No.  | Serial No. | Last Cal. Date<br>(YY-MM-DD) | Next Cal. Date<br>(YY-MM-DD) |
| $\boxtimes$ | AGC-ER-E036              | Spectrum Analyzer                | Agilent      | N9020A     | MY49100060 | 2023-06-01                   | 2024-05-31                   |
| $\boxtimes$ | AGC-ER-E036              | Spectrum Analyzer                | Agilent      | N9020A     | MY49100060 | 2024-05-24                   | 2025-05-23                   |
| $\boxtimes$ | AGC-ER-E062              | Power Sensor                     | Agilent      | U2021XA    | MY54110007 | 2024-02-01                   | 2025-01-31                   |
| $\boxtimes$ | AGC-ER-E063              | Power Sensor                     | Agilent      | U2021XA    | MY54110009 | 2024-02-01                   | 2025-01-31                   |
|             | AGC-ER-A001              | 6dB Attenuator                   | Eeatsheep    | LM-XX-6-5W | N/A        | 2023-09-21                   | 2025-09-20                   |
| $\square$   | AGC-ER-E083              | Signal Generator                 | Agilent      | E4421B     | US39340815 | 2023-06-01                   | 2024-05-31                   |
| $\square$   | AGC-ER-E083              | Signal Generator                 | Agilent      | E4421B     | US39340815 | 2024-05-23                   | 2025-05-22                   |
| $\boxtimes$ | N/A                      | RF Connection<br>Cable           | N/A          | 1#         | N/A        | Each time                    | N/A                          |
| $\boxtimes$ | N/A                      | RF Connection<br>Cable           | N/A          | 2#         | N/A        | Each time                    | N/A                          |
|             | adiated Spuria           |                                  |              |            |            |                              |                              |
|             | adiated Spurio           |                                  |              |            |            | Last Cal. Date               | Next Cal. Date               |
| Used        | Equipment No.            | Test Equipment                   | Manufacturer | Model No.  | Serial No. | (YY-MM-DD)                   | (YY-MM-DD)                   |
|             | AGC-EM-E046              | EMI Test Receiver                | R&S          | ESCI       | 10096      | 2024-02-01                   | 2025-01-31                   |
|             | AGC-EM-E116              | EMI Test Receiver                | R&S          | ESCI       | 100034     | 2023-06-03                   | 2024-06-02                   |
|             | AGC-EM-E116              | EMI Test Receiver                | R&S          | ESCI       | 100034     | 2024-05-24                   | 2025-05-23                   |
| $\square$   | AGC-EM-E061              | Spectrum Analyzer                | Agilent      | N9010A     | MY53470504 | 2023-06-01                   | 2024-05-31                   |
| $\boxtimes$ | AGC-EM-E061              | Spectrum Analyzer                | Agilent      | N9010A     | MY53470504 | 2024-05-28                   | 2025-05-27                   |
|             | AGC-EM-E086              | Loop Antenna                     | ZHINAN       | ZN30900C   | 18051      | 2024-03-05                   | 2026-03-04                   |
| $\boxtimes$ | AGC-EM-E001              | Wideband Antenna                 | SCHWARZBECK  | VULB9168   | D69250     | 2023-05-11                   | 2025-05-10                   |
|             | AGC-EM-E029              | Broadband Ridged<br>Horn Antenna | ETS          | 3117       | 00034609   | 2024-03-31                   | 2025-03-30                   |
| $\boxtimes$ | AGC-EM-E082              | Horn Antenna                     | SCHWARZBECK  | BBHA 9170  | #768       | 2023-09-24                   | 2025-09-23                   |
|             | AGC-EM-E146              | Pre-amplifier                    | ETS          | 3117-PA    | 00246148   | 2022-08-04                   | 2024-08-03                   |
|             | AGC-EM-A119              | 2.4G Filter                      | SongYi       | N/A        | N/A        | 2023-06-01                   | 2024-05-31                   |
|             | AGC-EM-A119              | 2.4G Filter                      | SongYi       | N/A        | N/A        | 2024-05-23                   | 2025-05-22                   |
|             | AGC-EM-A138              | 6dB Attenuator                   | Eeatsheep    | LM-XX-6-5W | N/A        | 2023-06-09                   | 2025-06-08                   |
|             | AGC-EM-A139              | 6dB Attenuator                   | Eeatsheep    | LM-XX-6-5W | N/A        | 2023-06-09                   | 2025-06-08                   |



| • A  | AC Power Line Conducted Emission |                   |              |            |            |                              |                              |
|------|----------------------------------|-------------------|--------------|------------|------------|------------------------------|------------------------------|
| Used | Equipment No.                    | Test Equipment    | Manufacturer | Model No.  | Serial No. | Last Cal. Date<br>(YY-MM-DD) | Next Cal. Date<br>(YY-MM-DD) |
|      | AGC-EM-E045                      | EMI Test Receiver | R&S          | ESPI       | 101206     | 2023-06-03                   | 2024-06-02                   |
|      | AGC-EM-E045                      | EMI Test Receiver | R&S          | ESPI       | 101206     | 2024-05-28                   | 2025-05-27                   |
|      | AGC-EM-A130                      | 6dB Attenuator    | Eeatsheep    | LM-XX-6-5W | DC-6GZ     | 2023-06-09                   | 2024-06-08                   |
|      | AGC-EM-A130                      | 6dB Attenuator    | Eeatsheep    | LM-XX-6-5W | DC-6GZ     | 2023-06-09                   | 2025-06-08                   |
|      | AGC-EM-E023                      | AMN               | R&S          | 100086     | ESH2-Z5    | 2023-06-03                   | 2024-06-02                   |
|      | AGC-EM-E023                      | AMN               | R&S          | 100086     | ESH2-Z5    | 2024-05-28                   | 2025-05-27                   |

| • Tes     | Test Software |                     |              |                      |                     |  |
|-----------|---------------|---------------------|--------------|----------------------|---------------------|--|
| Used      | Equipment No. | Test Equipment      | Manufacturer | Model No.            | Version Information |  |
|           | AGC-EM-S001   | CE Test System      | R&S          | ES-K1                | V1.71               |  |
| $\square$ | AGC-EM-S003   | RE Test System      | FARA         | EZ-EMC               | VRA-03A             |  |
|           | AGC-ER-S012   | BT/WIFI Test System | Tonscend     | JS1120-2             | 2.6                 |  |
|           | AGC-EM-S011   | RSE Test System     | Tonscend     | TS+-Ver2.1(JS36-RSE) | 4.0.0.0             |  |



# **4.System Test Configuration**

## 4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 Configuration of Tested System

Radiated Emission Configure:



#### 4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

#### ☐ Test Accessories Come From The Laboratory

| No. | Equipment                                     | Manufacturer | Model No. | Specification Information | Cable |  |  |
|-----|---|--------------|-----------|---------------------------|-------|--|--|
| 1   | Notebook PC                                   | HUAWEI       | D15       |                           |       |  |  |
|     | I Test Accessories Come From The Manufacturer |              |           |                           |       |  |  |

| No. | Equipment | Manufacturer | Model No. | Specification Information | Cable |
|-----|-----------|--------------|-----------|---------------------------|-------|
| 1   |           |              |           |                           |       |



## 4.5 Summary of Test Results

| Item | FCC Rules            | Description of Test F                           |      |
|------|----------------------|---|------|
| 1    | §15.203&15.247(b)(4) | Antenna Equipment                               | Pass |
| 2    | §15.247 (b)(3)       | RF Output Power                                 | Pass |
| 3    | §15.247 (a)(2)       | 6 dB Bandwidth                                  |      |
| 4    | §15.247 (e)          | Power Spectral Density                          |      |
| 5    | §15.247 (d)          | Conducted Band Edge and Out-of-Band Emissions F |      |
| 6    | §15.209              | Radiated Emission& Band Edge                    |      |
| 7    | §15.207              | AC Power Line Conducted Emission Not appli      |      |

Note: The BT function cannot transmit when charging.



## 5. Description of Test Modes

|   | Summary Table of Test Cases  |  |  |  |  |
|---|--|--|--|--|--|
|   | Data Rate / Modulation   |  |  |  |  |
| Test Item   | 2.4G / GFSK  |  |  |  |  |
| Radiated & Conducted<br>Test Cases  | Mode 1: 2.4G Tx CH00_2402 MHz (Battery powered)<br>Mode 2: 2.4G Tx CH39_2442 MHz (Battery powered) |  |  |  |  |
|   | Mode 3: 2.4G Tx CH78_2480 MHz (Battery powered)  |  |  |  |  |
| AC Conducted Emission   | N/A  |  |  |  |  |
| Note:<br>1. Only the result of the worst case was recorded in the report, if no other cases.<br>2. The battery is full-charged during the test. |  |  |  |  |  |

For Radiated Emission, 3axis were chosen for testing for each applicable mode.

For Conducted Test method, a temporary antenna connector is provided by the manufacture.

3. 4. 5. Set the EUT into the individual test modes by pressing the EUT buttons.



## 6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Operating mode | T(µs) | Duty Cycle<br>(%) | Duty Cycle Factor<br>(dB) | 1/ T Minimum VBW<br>(kHz) |
|----------------|-------|-------------------|---------------------------|---------------------------|
| 2.4G           | 512   | 83.25             | -0.8                      | 1.95                      |

Remark:

- 1. Duty Cycle factor =  $10 * \log (1/\text{Duty cycle})$
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

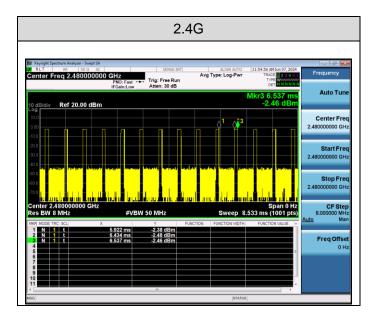



# 7. RF Output Power Measurement

#### 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


#### 7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW  $\geq$  [3 x RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


#### 7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

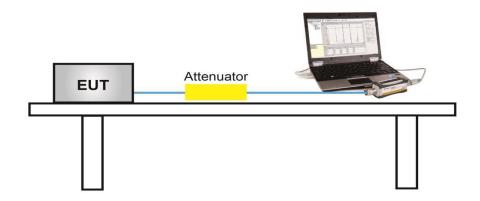




## For peak power test setup

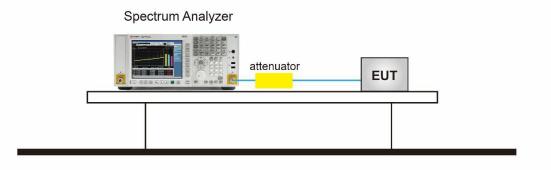

#### 7.4 Measurement Result


| Test Data of Conducted Output Power |                         |                     |                 |              |  |
|-------------------------------------|-------------------------|---------------------|-----------------|--------------|--|
| Test Mode                           | Test Frequency<br>(MHz) | Peak Power<br>(dBm) | Limits<br>(dBm) | Pass or Fail |  |
|                                     | 2402                    | -2.388              | ≪30             | Pass         |  |
| GFSK                                | 2442                    | -2.007              | ≪30             | Pass         |  |
|                                     | 2480                    | -1.962              | ≪30             | Pass         |  |



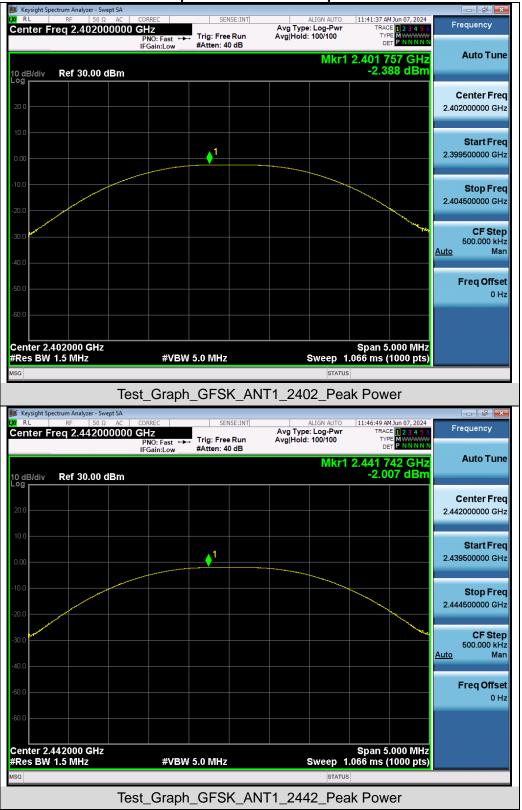

#### Test Graphs of Conducted Output Power



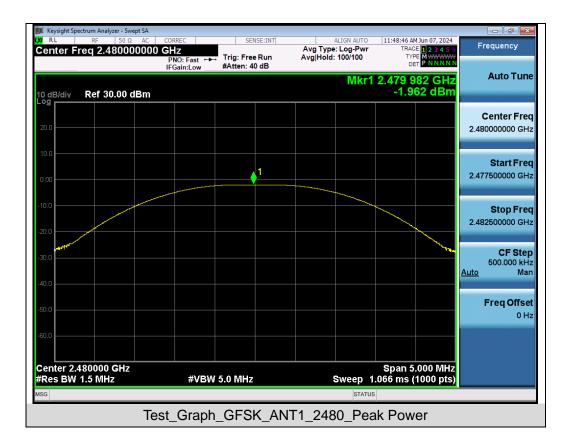



## 8. 6dB Bandwidth Measurement

#### 8.1 Provisions Applicable


The minimum 6 dB bandwidth shall be 500 kHz.

#### 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Measure and record the results in the test report.


#### 8.3 Measurement Setup (Block Diagram of Configuration)

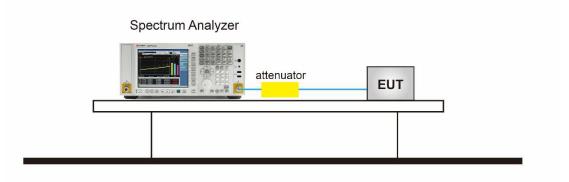



#### **8.4 Measurement Results**

| Test Data of Occupied Bandwidth and DTS Bandwidth |                         |                             |                 |                  |              |
|---|-------------------------|-----------------------------|-----------------|------------------|--------------|
| Test Mode   | Test Frequency<br>(MHz) | Occupied Bandwidth<br>(MHz) | DTS BW<br>(MHz) | DTS BW<br>Limits | Pass or Fail |
|   | 2402                    | 1.037                       | 0.689           | ≥0.5             | Pass         |
| GFSK  | 2442                    | 1.039                       | 0.689           | ≥0.5             | Pass         |
|   | 2480                    | 1.040                       | 0.687           | ≥0.5             | Pass         |

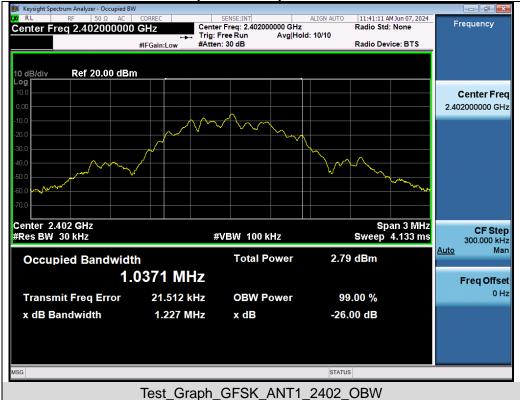


# Test Graphs of Occupied Bandwidth








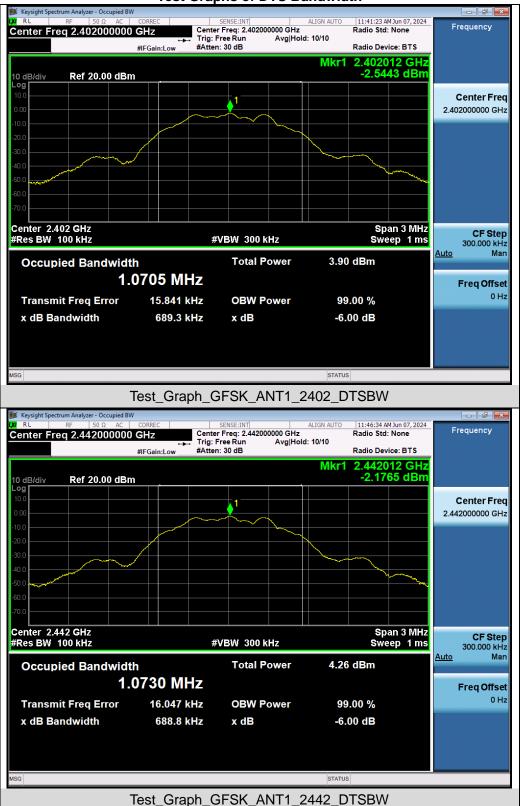

#### Test Graphs of DTS Bandwidth



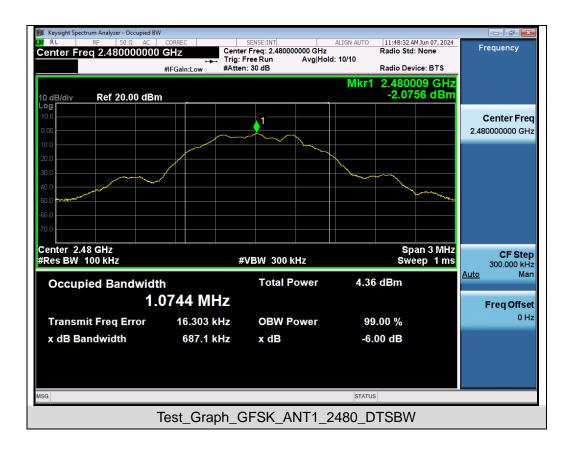



# 9. Power Spectral Density Measurement

#### 9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

## 9.3 Measurement Setup (Block Diagram of Configuration)

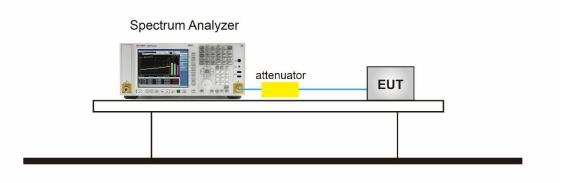





#### 9.4 Measurement Results

| Test Data of Conducted Output Power Spectral Density |                         |                             |                     |              |  |
|--|-------------------------|-----------------------------|---------------------|--------------|--|
| Test Mode  | Test Frequency<br>(MHz) | Power density<br>(dBm/3kHz) | Limit<br>(dBm/3kHz) | Pass or Fail |  |
|  | 2402                    | -19.953                     | ≪8                  | Pass         |  |
| GFSK   | 2442                    | -19.660                     | ≪8                  | Pass         |  |
|  | 2480                    | -19.585                     | ≪8                  | Pass         |  |

#### Test Graphs of Conducted Output Power Spectral Density

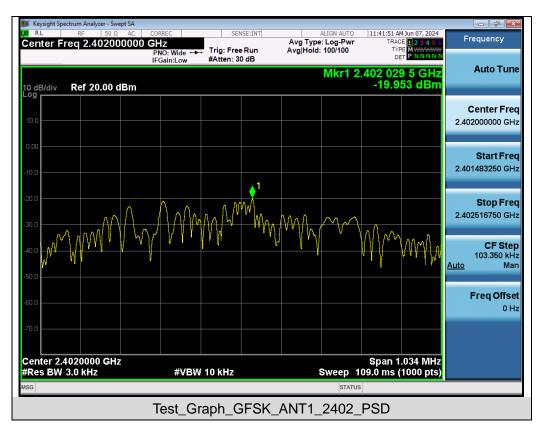



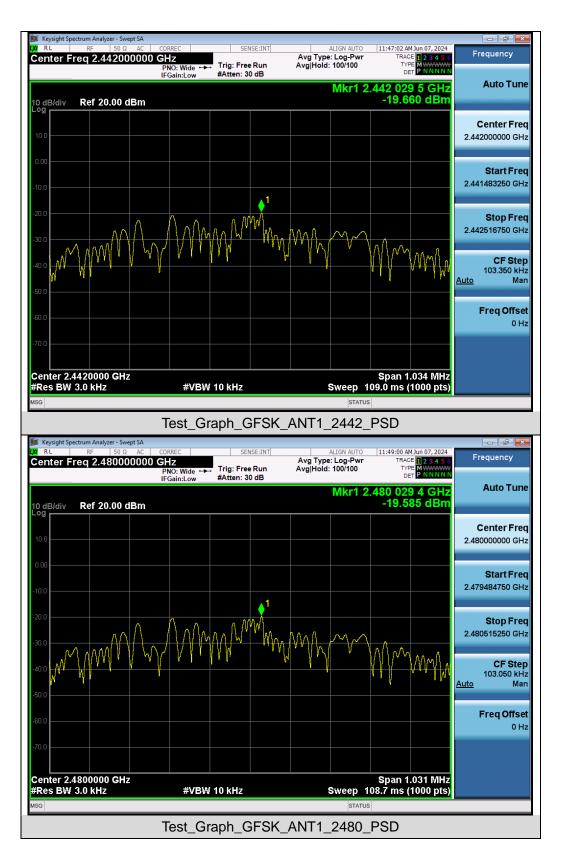



# 10. Conducted Band Edge and Out-of-Band Emissions

#### **10.1 Provisions Applicable**


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

#### **10.2 Measurement Procedure**

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to  $\geq$  1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW  $\ge$  3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

#### 10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

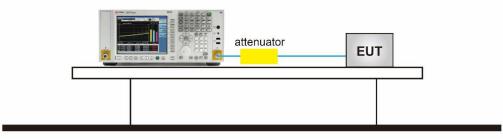



#### **10.4 Measurement Results**




#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands








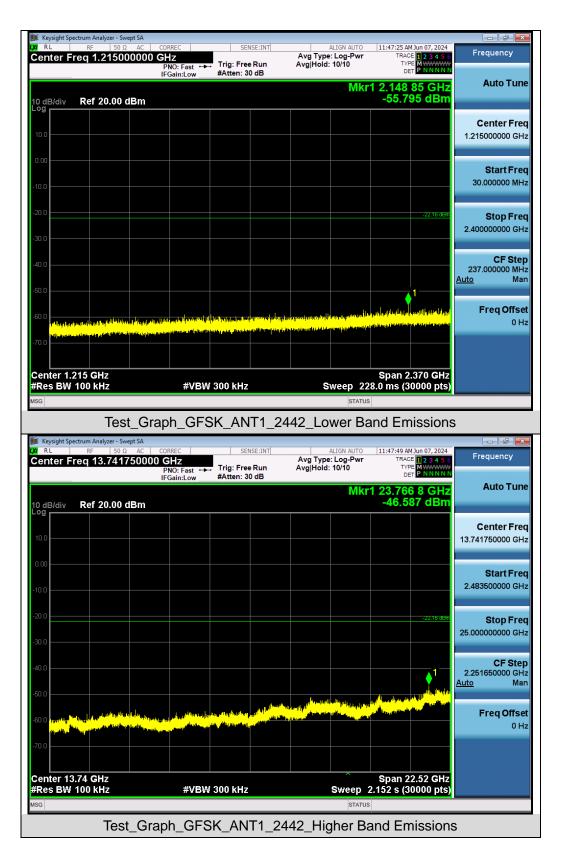








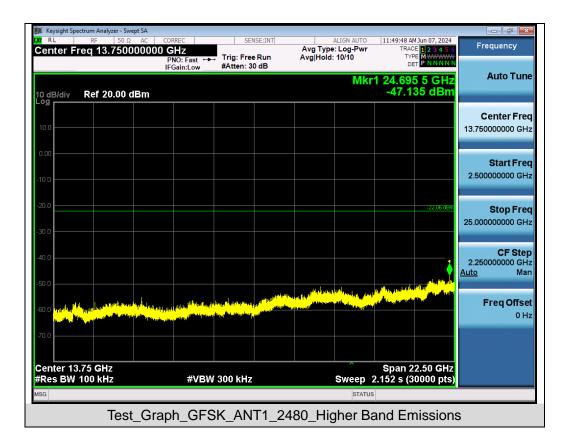



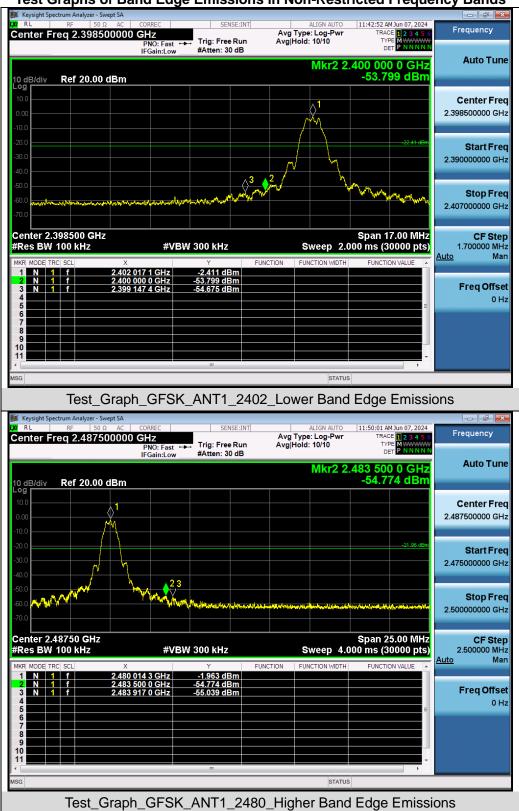

#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



# 11. Radiated Spurious Emission

## **11.1 Measurement Limit**

#### FCC Part 15.209 Limit in the below table to be followed

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## **11.2 Measurement Procedure**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

| Spectrum Parameter     | Setting                                   |  |  |  |
|------------------------|---|--|--|--|
| Start ~Stop Frequency  | 9kHz~150kHz/RB 200Hz for QP               |  |  |  |
| Start ~Stop Frequency  | 150kHz~30MHz/RB 9kHz for QP               |  |  |  |
| Start ~Stop Frequency  | 30MHz~1000MHz/RB 120kHz for QP            |  |  |  |
| Start ~Stop Frequency  | 1GHz~26.5GHz                              |  |  |  |
| Start ~Stop T requency | 1MHz/3MHz for Peak, 1MHz/3MHz for Average |  |  |  |

The following table is the setting of spectrum analyzer and receiver.

| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9kHz~150kHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150kHz~30MHz/RB 9kHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120kHz for QP |



#### • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


#### <u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




## 11.3 Measurement Setup (Block Diagram of Configuration)




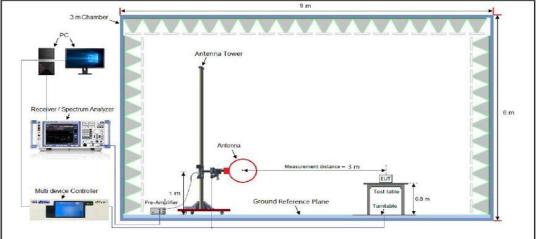

Radiated Emission Test Setup 30MHz-1000MHz

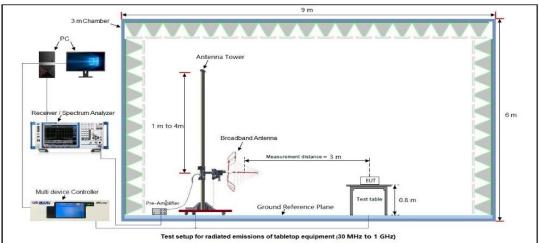

#### Radiated Emission Test Setup Above 1000MHz

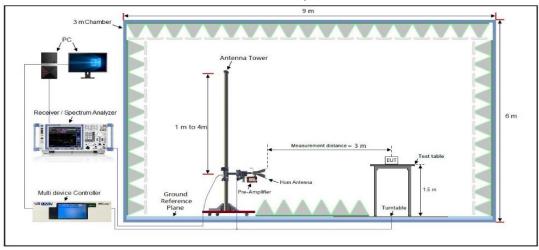

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




#### **11.4 Measurement Result**

## Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

|             |                              |   | Rad  | liated E            | miss | sion Test Re     | sults at            | 30MHz    | -1GH  | łz     |                 |            |     |
|-------------|------------------------------|---|------|---------------------|------|------------------|---------------------|----------|-------|--------|-----------------|------------|-----|
| EUT Name    | Wireless Keyboard Model Name |   |      |                     |      | Sof              | keys4               |          |       |        |                 |            |     |
| Temperature | 22.6°C Relative Humidity     |   |      |                     |      | 59.              | 8%                  |          |       |        |                 |            |     |
| Pressure    | 960h                         | Pa  |      |                     |      |                  | Те                  | st Volta | ge    |        | No              | rmal Volta | ige |
| Test Mode   | Mode                         | e 3   |      |                     |      |                  | Ar                  | tenna l  | Polar | ity    | Ho              | rizontal   |     |
| 70.0        | -10-477-                     |   |      |                     |      |                  |                     |          |       |        |                 |            |     |
| 32          | dBuV/m                       | 1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1<br>1 |      | urright, obder With | ,    | Martin Marrielle | Samuran Contraction |          |       | M. Man | Limit:<br>Margi | [          |     |
| -8          | 00 40                        | 50  | 60 7 | 0 80                |      | (MHz)            |                     | 300      | 400   | 500    | 60D 70          | 0 1000.00  | n   |
|             | JU 40                        | 50  | 50 r | Read                | ina  | Correct          | Measu               |          | 400   | 500    | 000 70          |            | U   |
| N           | o. Mk.                       | . Fr  | eq.  | Leve                |      | Factor           | ment                | 1.1      | mit   | Ove    | r               |            |     |
|             |                              | М   | Hz   | dBu                 | V    | dB               | dBuV/m              | n dB     | uV/m  | dB     | D               | etector    |     |
|             | 1                            | 43.9  | 658  | 6.1                 | 1    | 13.62            | 19.73               | 40       | .00   | -20.2  | 27              | peak       |     |
|             | 2                            | 137.42  | 202  | 6.9                 | 8    | 15.35            | 22.33               | 43       | 50    | -21.1  | 7               | peak       |     |
|             | 3                            | 256.52  | 211  | 8.2                 | 8    | 14.90            | 23.18               | 46       | .00   | -22.8  | 32              | peak       |     |
|             |                              |   |      | 6.7                 | 7    | 24.65            | 31.42               | 46       | .00   | -14.5  | 8               | peak       |     |
|             | 4                            | 452.7   | 197  | 0.7                 | ·    | 24.00            | 01.42               |          |       |        |                 |            |     |
|             |                              | 452.7<br>622.8  |      | 7.0                 |      | 24.93            | 31.99               |          | .00   | -14.0  |                 | peak       |     |





|             |                           |                   |  | Rau   | lated En   | nission Test F   | esuits at .   |   | 1Z  |  |  |
|-------------|---------------------------|-------------------|--|---|--|--|---|---|---|--|--|
| EUT Name    | V                         | Wireless Keyboard |  |   |  |  | Мос   | del Name  |   | Sofkeys4                                 |  |
| Temperature | 2                         | 2.6°C             | 2  |   |  |  | Rela  | ative Humi  | dity  | 59.8%                                    |  |
| Pressure    | 9                         | 60hF              | Pa   |   |  |  | Tes   | t Voltage   |   | Normal Volta                             |  |
| Test Mode   | N                         | /lode             | 3  |   |  |  | Ant   | enna Polar  | ity   | Vertical                                 |  |
| 72.0        | dBuV                      | //m               |  |   |  |  |   |   |   |  |  |
| -           |                           |                   |  |   |  |  |   |   |   | imit: —<br>Iargin: —                     |  |
| 32          |                           |                   |  |   |  |  |   | 3   |   | Mar Martin A                             |  |
| -           | Makedan                   | nnandhr           | Was Ny Harry                               |   | where we wanted  | 2 martine for the district   | where where the second                              | n peterson der w  | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~              |  |  |
| -8          | eddiwland <sup>arad</sup> | nte-shi           | ilen leveleren                             |   | and an and a second | town the and the second s | uhater naturkan alwaran                             | noulons south dear of                                       |   |  |  |
| -8          | edition of the second     | 40                | 50   | 1<br>   | 90   | (MHz)  |   | 300 400   |   | 700 1000.00                              |  |
| -8<br>30.   |                           | 40                | 50   |   |  | (ин₂)<br>ng Correct  | Measure<br>ment                                     | 300 400   |   | 700 1000.00                              |  |
| -8<br>30.   | 000                       | 40                | 50   | 60 70   | Readi  | (мн₂)<br>ng Correct<br>I Factor  | Measure   | 300 400<br>E-   | 500 600<br>Over                                     | 700 1000.00                              |  |
| -8<br>30.   | 000                       | 40                | 50<br>F                                    | 60 70   | Readii<br>Leve   | (мн₂)<br>ng Correct<br>I Factor<br>/ dB  | Measure   | 300 400<br>e-<br>Limit                                      | 500 600<br>Over                                     | Detector                                 |  |
| -8<br>30.   | 000<br>No.                | 40<br>Mk.         | 50<br>F<br>66.4                            | 60 70<br>Freq.                                | Readi<br>Leve<br>dBuV  | (MHz)<br>ng Correct<br>I Factor<br>/ dB<br>0 17.03   | Measure<br>ment<br>dBuV/m                           | 300 400<br>e-<br>Limit<br>dBuV/m                            | 500 GOO<br>Over<br>dB                               | Detector<br>peak                         |  |
| -8<br>30.   | 000<br>No.<br>1           | 40<br>Mk.         | 50<br>F<br>1<br>66.4                       | 60 70<br>Freq.<br>MHz<br>4989                 | Readii<br>Leve<br>dBuV<br>8.10   | (мн₂)<br>ng Correct<br>I Factor<br>/ dB<br>0 17.03<br>8 18.14  | Measure<br>ment<br>dBuV/m<br>25.13                  | 300 400<br>e-<br>Limit<br>dBuV/m<br>40.00                   | 500 600<br>Over<br>dB<br>-14.87                     | Detector<br>peak<br>peak                 |  |
| -8<br>30.   | 000<br>No.<br>1<br>2      | 40<br>Mk.         | 50<br>F<br>66.4<br>137.4                   | 60 70<br>Freq.<br>MHz<br>1989                 | Readi<br>Leve<br>dBuv<br>8.10  | (мн₂)<br>ng Correct<br>I Factor<br>/ dB<br>0 17.03<br>8 18.14<br>5 26.09   | Measure<br>ment<br>dBuV/m<br>25.13<br>25.12         | 300 400<br>e-<br>Limit<br>dBuV/m<br>40.00<br>43.50          | 500 600<br>Over<br>dB<br>-14.87<br>-18.38           | Detector<br>peak<br>peak<br>peak         |  |
| -8<br>30.   | 000<br>No.<br>1<br>2<br>3 | 40<br>Mk.         | 50<br>F<br>66.4<br>137.4<br>137.5<br>595.7 | 60 70<br>Freq.<br>MHz<br>4989<br>4202<br>1963 | Readii<br>Leve<br>dBuV<br>8.10<br>6.98   | (мн₂)<br>ng Correct<br>Factor<br>/ dB<br>0 17.03<br>8 18.14<br>5 26.09<br>2 25.98  | Measur<br>ment<br>dBuV/m<br>25.13<br>25.12<br>32.64 | 300 400<br>e-<br>Limit<br>dBuV/m<br>40.00<br>43.50<br>46.00 | 500 600<br>Over<br>dB<br>-14.87<br>-18.38<br>-13.36 | Detector<br>peak<br>peak<br>peak<br>peak |  |

#### **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



| UT Name  |        | Wireless Keyboard  |   |   | Mode  | I Name  | Sofkeys   | 1                                    |  |
|--|--------|--|---|---|---|---|---|--------------------------------------|--|
| emperature   |        | <b>22.6</b> ℃  |   |   | Relat   | ive Humidity  | 59.8%   |                                      |  |
| ressure  |        | 960hPa   |   |   | Test Voltage  |   | Normal  | /oltage                              |  |
| est Mode   |        | Mode 1   |   |   | Anter   | nna Polarity  | Horizont  | al                                   |  |
|  |        |  |   |   |   |   |   |                                      |  |
| Frequency  | Me     | ter Reading  | Factor  | Emissio                                   | n Level   | Limits  | Margin  | Value Type                           |  |
| (MHz)  |        | (dBµV)   | (dB)  | (dBµ∖                                     | //m)  | (dBµV/m)  | (dB)  | value Type                           |  |
| 4804.000   |        | 47.98  | 0.08  | 48.0                                      | 06  | 74  | -25.94  | peak                                 |  |
| 4804.000   |        | 37.52  | 0.08  | 37.                                       | 6   | 54  | -16.4   | AVG                                  |  |
| 7206.000   |        | 41.06  | 2.21  | 43.2                                      | 27  | 74  | -30.73  | peak                                 |  |
| 7206.000   |        | 32.69  | 2.21  | 34.                                       | 9   | 54  | -19.1   | AVG                                  |  |
|  |        |  |   |   |   |   |   |                                      |  |
|  |        |  |   |   |   |   |   |                                      |  |
| Remark:  |        |  |   |   |   |   |   |                                      |  |
| Remark:<br>Factor = Anter  | nna Fa | actor + Cabl   | e Loss – Pre-                                     | amplifier.                                |   |   |   |                                      |  |
|  | nna Fa | actor + Cabl   |   | amplifier.                                | Mode  | I Name  | Sofkeys   | 4                                    |  |
| Factor = Anter   | nna Fa |  |   | amplifier.                                |   | I Name  | Sofkeys4  | 4                                    |  |
| Factor = Anter   | nna Fa | Wireless Ke  |   | amplifier.                                | Relat   |   |   |                                      |  |
| Factor = Anter<br>UT Name<br>emperature  | nna Fa | Wireless Ke<br>22.6℃   |   | amplifier.                                | Relat   | ive Humidity  | 59.8%   |                                      |  |
| Factor = Anter<br>UT Name<br>emperature<br>ressure<br>est Mode   |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1   | eyboard   |   | Relat<br>Test V<br>Anter                                      | ive Humidity<br>/oltage<br>nna Polarity   | 59.8% Normal Vertical   | /oltage                              |  |
| Factor = Anter<br>UT Name<br>emperature<br>ressure<br>est Mode   |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading                                      | eyboard<br>Factor                                 | Emissio                                   | Relat<br>Test V<br>Anter                                      | ive Humidity<br>Voltage<br>nna Polarity   | 59.8% Normal Vertical Margin  |                                      |  |
| Factor = Anter   |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)                            | eyboard<br>Factor<br>(dB)                         | Emissioi<br>(dBµ\                         | Relat<br>Test V<br>Anter                                      | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)                   | 59.8%<br>Normal Vertical<br>Margin<br>(dB)                                    | /oltage<br>Value Type                |  |
| Factor = Anter   |        | Wireless Ke<br>22.6°C<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)<br>48.33                  | Factor<br>(dB)<br>0.08                            | Emission<br>(dBµ\<br>48.4                 | Relat<br>Test V<br>Anter                                      | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)<br>74             | 59.8%<br>Normal Vertical<br>Margin<br>(dB)<br>-25.59                          | /oltage                              |  |
| Factor = Anter   |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)<br>48.33<br>38.45          | Factor<br>(dB)<br>0.08<br>0.08                    | Emission<br>(dBµ\<br>48.4<br>38.5         | Relat<br>Test V<br>Anter                                      | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54       | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.59<br>-15.47           | Voltage<br>Value Type<br>peak<br>AVG |  |
| Factor = Anter<br>UT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4804.000<br>4804.000<br>7206.000 |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)<br>48.33<br>38.45<br>42.74 | Factor<br>(dB)<br>0.08                            | Emission<br>(dBµ\<br>48.4<br>38.5<br>44.5 | Relat<br>Test V<br>Anter<br>h Level<br>//m)<br>41<br>53<br>95 | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)<br>74             | 59.8%<br>Normal Vertical<br>Margin<br>(dB)<br>-25.59                          | /oltage<br>Value Type                |  |
| Factor = Anter   |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)<br>48.33<br>38.45          | Eyboard<br>Factor<br>(dB)<br>0.08<br>0.08<br>2.21 | Emission<br>(dBµ\<br>48.4<br>38.5         | Relat<br>Test V<br>Anter<br>h Level<br>//m)<br>41<br>53<br>95 | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.59<br>-15.47<br>-29.05 | Value Type<br>Peak<br>AVG<br>peak    |  |
| Factor = Anter<br>UT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4804.000<br>4804.000<br>7206.000 |        | Wireless Ke<br>22.6℃<br>960hPa<br>Mode 1<br>ter Reading<br>(dBµV)<br>48.33<br>38.45<br>42.74 | Eyboard<br>Factor<br>(dB)<br>0.08<br>0.08<br>2.21 | Emission<br>(dBµ\<br>48.4<br>38.5<br>44.5 | Relat<br>Test V<br>Anter<br>h Level<br>//m)<br>41<br>53<br>95 | ive Humidity<br>Voltage<br>nna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.59<br>-15.47<br>-29.05 | Value Type<br>Peak<br>AVG<br>peak    |  |

## Radiated Emissions Test Results for Above 1GHz

## **RESULT: Pass**



| JT Name  | Wireless K  | evboard                                | Mod  | el Name   | Sofkeys  | 4  |       |  |
|--|---|--|--|---|--|--|-------|--|
| emperature   | 22.6°C  |  |  | 22.6°C  |  |  | 59.8% |  |
| essure   | 960hPa  |  |  | Test Voltage  |  | Voltage                                      |       |  |
|  |   |  |  | -   |  | 0  |       |  |
| est Mode   | Mode 2  |  | Ante   | enna Polarity   | Horizon  | tal  |       |  |
|  |   |  |  |   |  |  |       |  |
| Frequency  | Meter Reading   | Factor                                 | Emission Level   | Limits  | Margin   | Value Type                                   |       |  |
| (MHz)  | (dBµV)  | (dB)                                   | (dBµV/m)   | (dBµV/m)  | (dB)   | value Type                                   |       |  |
| 4884.000   | 49.62   | 0.14                                   | 49.76  | 74  | -24.24   | peak   |       |  |
| 4884.000   | 38.42   | 0.14                                   | 38.56  | 54  | -15.44   | AVG  |       |  |
| 7326.000   | 42.51   | 2.36                                   | 44.87  | 74  | -29.13   | peak   |       |  |
| 7326.000   | 31.29   | 2.36                                   | 33.65  | 54  | -20.35   | AVG  |       |  |
|  |   |  |  |   |  |  |       |  |
|  |   |  |  |   |  |  |       |  |
| Remark:  |   |  |  |   |  |  |       |  |
|  |   |  |  |   |  |  |       |  |
| Factor = Anter   | nna Factor + Cab  | le Loss – Pre-                         | amplifier.   |   |  |  |       |  |
| Factor = Anter<br>JT Name  | nna Factor + Cab  | -                                      |  | el Name   | Sofkeys  | 4  |       |  |
|  |   | -                                      | Mod  | el Name<br>tive Humidity  | Sofkeys  | 4  |       |  |
| JT Name  | Wireless K  | -                                      | Mod<br>Rela  |   | -  |  |       |  |
| JT Name<br>emperature  | Wireless k<br>22.6℃   | -                                      | Mod<br>Rela<br>Test  | tive Humidity   | 59.8%  |  |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode   | Wireless K<br>22.6℃<br>960hPa<br>Mode 2   | eyboard                                | Mod<br>Rela<br>Test<br>Ante  | tive Humidity<br>Voltage<br>enna Polarity   | 59.8% Normal Vertical  |  |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode   | Wireless K<br>22.6℃<br>960hPa<br>Mode 2<br>Meter Reading  | eyboard<br>Factor                      | Mod<br>Rela<br>Test<br>Ante<br>Emission Level  | tive Humidity<br>Voltage<br>enna Polarity   | 59.8%<br>Normal<br>Vertical<br>Margin  |  |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)                                     | Wireless K<br>22.6℃<br>960hPa<br>Mode 2<br>Meter Reading<br>(dBµV)  | eyboard<br>Factor<br>(dB)              | Mod<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)                            | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)                   | 59.8% Solution Soluti | Voltage<br>Value Type                        |       |  |
| JT Name<br>emperature<br>essure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000                          | Wireless K           22.6 °C           960hPa           Mode 2           Meter Reading           (dBµV)           48.64                 | Factor<br>(dB)<br>0.14                 | Mod<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78                   | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74             | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22  | Voltage<br>Value Type<br>peak                |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000<br>4884.000             | Wireless K           22.6 °C           960hPa           Mode 2           Meter Reading           (dBµV)           48.64           37.91 | Factor<br>(dB)<br>0.14<br>0.14         | Mod<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78<br>38.05          | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54       | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22<br>-15.95  | Voltage<br>Value Type<br>peak<br>AVG         |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000<br>4884.000<br>7326.000 | Wireless K         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         48.64         37.91         41.05 | Factor<br>(dB)<br>0.14<br>0.14<br>2.36 | Мос<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78<br>38.05<br>43.41 | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22<br>-15.95<br>-30.59  | Voltage<br>Value Type<br>peak<br>AVG<br>peak |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000<br>4884.000             | Wireless K           22.6 °C           960hPa           Mode 2           Meter Reading           (dBµV)           48.64           37.91 | Factor<br>(dB)<br>0.14<br>0.14         | Mod<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78<br>38.05          | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54       | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22<br>-15.95  | Voltage<br>Value Type<br>peak<br>AVG         |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000<br>4884.000<br>7326.000 | Wireless K         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         48.64         37.91         41.05 | Factor<br>(dB)<br>0.14<br>0.14<br>2.36 | Мос<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78<br>38.05<br>43.41 | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22<br>-15.95<br>-30.59  | Voltage<br>Value Type<br>peak<br>AVG<br>peak |       |  |
| JT Name<br>emperature<br>ressure<br>est Mode<br>Frequency<br>(MHz)<br>4884.000<br>4884.000<br>7326.000 | Wireless K         22.6 °C         960hPa         Mode 2         Meter Reading         (dBµV)         48.64         37.91         41.05 | Factor<br>(dB)<br>0.14<br>0.14<br>2.36 | Мос<br>Rela<br>Test<br>Ante<br>Emission Level<br>(dBµV/m)<br>48.78<br>38.05<br>43.41 | tive Humidity<br>Voltage<br>enna Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal<br>Vertical<br>Margin<br>(dB)<br>-25.22<br>-15.95<br>-30.59  | Voltage<br>Value Type<br>peak<br>AVG<br>peak |       |  |

## Radiated Emissions Test Results for Above 1GHz

## **RESULT: Pass**




| UT Name  | Wireless K  | Wireless Keyboard                                 |  |   | Name   | Sofkeys4   | ŀ                                 |  |
|--|---|---|--|---|--|--|-----------------------------------|--|
| emperature   | <b>22.6</b> ℃   |   |  | Relativ   | ve Humidity  | 59.8%  |                                   |  |
| ressure  | 960hPa  |   |  | Test Voltage  |  | Normal V   | Normal Voltage                    |  |
| est Mode   | Mode 3  |   |  | Antenr  | na Polarity  | Horizonta  | al                                |  |
|  |   |   |  |   |  |  |                                   |  |
| Frequency  | Meter Reading   | Factor  | Emission                                   | n Level   | Limits   | Margin   | Value Type                        |  |
| (MHz)  | (dBµV)  | (dB)  | (dBµV/                                     | ∥m)   | (dBµV/m)   | (dB)   | value Type                        |  |
| 4960.000   | 47.94   | 0.22  | 48.1                                       | 6   | 74   | -25.84   | peak                              |  |
| 4960.000   | 37.55   | 0.22  | 37.7                                       | 7   | 54   | -16.23   | AVG                               |  |
| 7440.000   | 41.64   | 2.64  | 44.2                                       | 28  | 74   | -29.72   | peak                              |  |
| 7440.000   | 30.36   | 2.64  | 33   |   | 54   | -21  | AVG                               |  |
|  |   |   |  |   |  |  |                                   |  |
|  |   |   |  |   |  |  |                                   |  |
|  |   |   |  |   |  |  |                                   |  |
| Remark:  |   |   |  |   |  |  |                                   |  |
|  | nna Factor + Cat  | le Loss – Pre-                                    | amplifier.                                 |   |  |  |                                   |  |
|  | nna Factor + Cat<br>Wireless K  |   |  | Model   | Name   | Sofkeys4   |                                   |  |
| Factor = Anter   |   |   |  |   | Name<br>/e Humidity  | Sofkeys4   |                                   |  |
| Factor = Anter   | Wireless K  |   |  |   | ve Humidity  |  |                                   |  |
| Factor = Anter<br>UT Name<br>emperature  | Wireless K<br>22.6℃   |   |  | Relativ<br>Test Vo  | ve Humidity  | 59.8%  |                                   |  |
| Factor = Anter<br>UT Name<br>emperature<br>ressure<br>est Mode   | Wireless K<br>22.6℃<br>960hPa<br>Mode 3   | eyboard   |  | Relativ<br>Test Vo<br>Antenr                                      | ve Humidity<br>oltage<br>na Polarity   | 59.8%<br>Normal V<br>Vertical  |                                   |  |
| Factor = Anter   | Wireless K<br>22.6°C<br>960hPa<br>Mode 3<br>Meter Reading   | eyboard<br>Factor                                 | Emission                                   | Relativ<br>Test Vo<br>Antenn                                      | ve Humidity<br>oltage<br>na Polarity<br>Limits                               | 59.8%<br>Normal V<br>Vertical  |                                   |  |
| Factor = Anter   | Wireless K<br>22.6°C<br>960hPa<br>Mode 3<br>Meter Reading<br>(dBµV)   | eyboard<br>Factor<br>(dB)                         | Emission<br>(dBµV                          | Relativ<br>Test Vo<br>Antenn<br>Level                             | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBµV/m)                   | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)                              | Value Type                        |  |
| Factor = Anter   | Wireless K           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           48.62                                 | Factor<br>(dB)<br>0.22                            | Emission<br>(dBµV/<br>48.8                 | Relativ<br>Test Vo<br>Antenn<br>h Level<br>//m)                   | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBµV/m)<br>74             | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.16                    | Value Type                        |  |
| Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4960.000  | Wireless K         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         48.62         37.91                               | Factor<br>(dB)<br>0.22<br>0.22                    | Emission<br>(dBµV/<br>48.8<br>38.1         | Relativ<br>Test Vo<br>Antenn<br>h Level<br>//m)<br>34<br>3        | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBμV/m)<br>74<br>54       | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.16<br>-15.87          | Value Type<br>Peak<br>AVG         |  |
| Factor = Anter           UT Name           emperature           ressure           est Mode           Frequency           (MHz)           4960.000           7440.000 | Wireless K           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           48.62           37.91           40.66 | Eyboard<br>Factor<br>(dB)<br>0.22<br>0.22<br>2.64 | Emission<br>(dBµV/<br>48.8<br>38.1<br>43.3 | Relative<br>Test Vo<br>Antenne<br>D Level<br>(/m)<br>34<br>3<br>3 | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.16<br>-15.87<br>-30.7 | Value Type<br>Peak<br>AVG<br>peak |  |
| Factor = Anter UT Name emperature ressure est Mode Frequency (MHz) 4960.000  | Wireless K         22.6 °C         960hPa         Mode 3         Meter Reading         (dBµV)         48.62         37.91                               | Factor<br>(dB)<br>0.22<br>0.22                    | Emission<br>(dBµV/<br>48.8<br>38.1         | Relative<br>Test Vo<br>Antenne<br>D Level<br>(/m)<br>34<br>3<br>3 | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBμV/m)<br>74<br>54       | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.16<br>-15.87          | Value Type<br>Peak<br>AVG         |  |
| Factor = Anter           UT Name           emperature           ressure           est Mode           Frequency           (MHz)           4960.000           7440.000 | Wireless K           22.6 °C           960hPa           Mode 3           Meter Reading           (dBµV)           48.62           37.91           40.66 | Eyboard<br>Factor<br>(dB)<br>0.22<br>0.22<br>2.64 | Emission<br>(dBµV/<br>48.8<br>38.1<br>43.3 | Relative<br>Test Vo<br>Antenne<br>D Level<br>(/m)<br>34<br>3<br>3 | ve Humidity<br>oltage<br>na Polarity<br>Limits<br>(dBµV/m)<br>74<br>54<br>74 | 59.8%<br>Normal V<br>Vertical<br>Margin<br>(dB)<br>-25.16<br>-15.87<br>-30.7 | Value Type<br>Peak<br>AVG<br>peak |  |

## **Radiated Emissions Test Results for Above 1GHz**

#### **RESULT: Pass**

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.







| EUT Name    | Wireless Keyboard | Model Name        | Sofkeys4       |
|-------------|-------------------|-------------------|----------------|
| Temperature | <b>25℃</b>        | Relative Humidity | 55.4%          |
| Pressure    | 960hPa            | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1            | Antenna Polarity  | Horizontal     |

#### Band Edge Emission Test Results for Restricted Bands

#### Test Graph for Peak Measurement

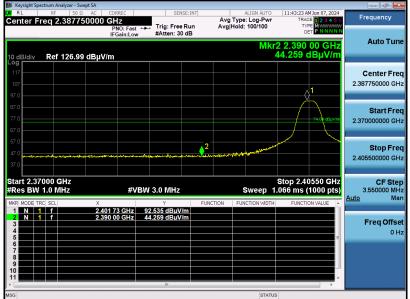

Test Graph for Average Measurement

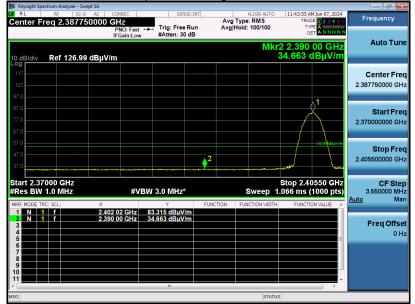


## **RESULT: Pass**




| EUT Name    | Wireless Keyboard | Model Name        | Sofkeys4       |
|-------------|-------------------|-------------------|----------------|
| Temperature | <b>25</b> ℃       | Relative Humidity | 55.4%          |
| Pressure    | 960hPa            | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 1            | Antenna Polarity  | Vertical       |

## Band Edge Emission Test Results for Restricted Bands

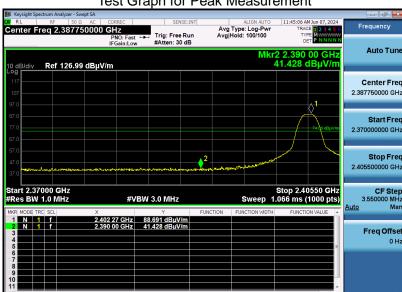


#### Test Graph for Peak Measurement

Test Graph for Average Measurement

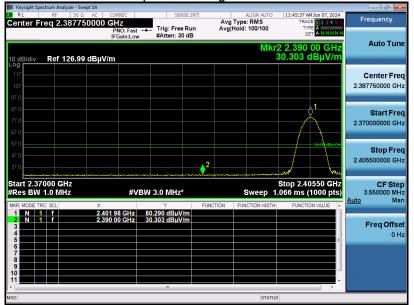

## **RESULT: Pass**



Normal Voltage

Horizontal



Pressure

**Test Mode** 

960hPa

Mode 3

| Band Edge Emission Test Results for Restricted Bands |                   |                   |          |  |  |  |
|--|-------------------|-------------------|----------|--|--|--|
| EUT Name   | Wireless Keyboard | Model Name        | Sofkeys4 |  |  |  |
| Temperature  | <b>25</b> ℃       | Relative Humidity | 55.4%    |  |  |  |

**Test Voltage** 

Antenna Polarity

## d Edge Emission Test Results for Restricted Bands


| Test Graph for Peak Measurement |  |
|---------------------------------|--|
| A 2 trave                       |  |



Test Graph for Average Measurement



## **RESULT: Pass**






| EUT Name    | Wireless Keyboard | Model Name        | Sofkeys4       |
|-------------|-------------------|-------------------|----------------|
| Temperature | <b>25</b> ℃       | Relative Humidity | 55.4%          |
| Pressure    | 960hPa            | Test Voltage      | Normal Voltage |
| Test Mode   | Mode 3            | Antenna Polarity  | Vertical       |

## Band Edge Emission Test Results for Restricted Bands

#### Test Graph for Peak Measurement

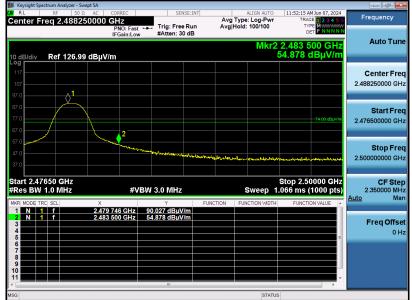

Test Graph for Average Measurement



## **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



## 12. AC Power Line Conducted Emission Test

## 12.1 Measurement Limit


| Frequency     | Maximum RF Line Voltage |                |
|---------------|-------------------------|----------------|
|               | Q.P. (dBµV)             | Average (dBµV) |
| 150kHz~500kHz | 66-56                   | 56-46          |
| 500kHz~5MHz   | 56                      | 46             |
| 5MHz~30MHz    | 60                      | 50             |

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

## 12.2 Measurement Setup (Block Diagram of Configuration)

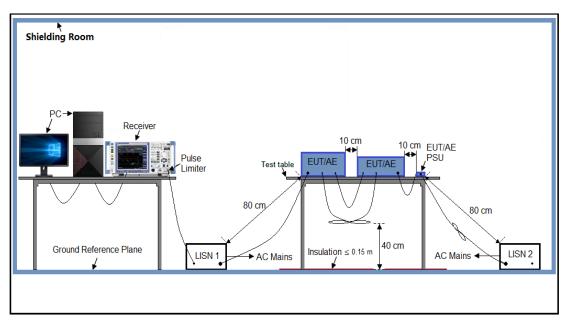



## 12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

## 12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

#### **12.5 Measurement Results**

N/A

Note: The BT function cannot transmit when charging



Report No.: AGC13779240403FR02 Page 51 of 51

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC13779240403AP01

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC13779240403AP02

-----End of Report-----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.