

Emission Test Report

Standard: FCC Part 15 Subpart C / IC RSS-210

Class II Permissive Change

Document Number : FCC 19-0252-0

Model Number: WM3B2200BG

measured with **IBM ThinkPad T40 Series**
and **IBM ThinkPad R50 Series**

FCC ID: ANO20040501CX2
IC: 349E-WM3B22BG

February 12, 2004

Prepared :

EMC R&D Staff Engineer

Takeshi Asano

Signature:



IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-4779

Fax: +81-46-273-7420

E-Mail: asano@jp.ibm.com

Reviewed and Checked :

EMC R&D Staff Engineer

Toshiya Murota

Signature:



IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-6574

Fax: +81-46-273-7420

E-Mail: murota@jp.ibm.com

Approved :

Manager, EMC Engineering

/ NVLAP signatory

Akihisa Sakurai

Signature:



IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-2613

Fax: +81-46-273-7420

E-Mail: akihisa@jp.ibm.com

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart C (Intentional Radiator)

Model: WM3B22-U (802.11b/g Wireless LAN Adapter)
with
IBM ThinkPad T40 Series
(Machine Type: 2373, 2374, 2375, 2376, 2378, 2379)
and
IBM ThinkPad R50 Series
(Machine Type: 1829, 1830, 1831, 1832, 1833, 1836, 1840, 1841,
2883, 2887, 2888, 2889, 2894, 2895)

FCC ID : ANO20040501CX2

February 12, 2004

This report concerns: (check one)

Original Grant _____

Class I change _____

Class II change ☒ _____

Equipment type: Wireless LAN device

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b).

☒ Yes or No

"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"

Prepared by: Takeshi Asano

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A.	General Information.....	5
A.1	Test Methodology.....	5
A.2	Test Facility / NVLAP Accreditation.....	5
A.3	EUT details	5
B.	Summary of Test Results.....	6
C.	Operation Mode of EUT.....	7
D.	Justification	7
E.	Test Instruments	8
F.	Measurement Uncertainty.....	9
G.	Temperature and Humidity	9
H.	Related Submittal(s)/Grant(s)/Notes	9
1.	Bandwidth at 6 dB below.....	10
1.1	Test Procedure.....	10
1.2	Test Instruments and Measurement Setup.....	10
1.3	Measurement Results	10
1.4	Trace Data of 6dB bandwidth.....	12
2.	Occupied Bandwidth (20 dB Bandwidth)	18
2.1	Test Procedure.....	18
2.2	Test Instruments and Measurement Setup.....	18
2.3	Measurement Results	18
2.4	Trace Data of Occupied Bandwidth	20
3.	Conducted Peak Output Power.....	26
3.1	Test Procedure.....	26
3.2	Test Instruments and Measurement Setup.....	26
3.3	Measurement Results	26
3.4	Trace Data of Conducted Peak Output Power.....	27
4.	Out of Band Emissions (Conducted Spurious).....	33
4.1	Test Procedure.....	33
4.2	Test Instruments and Measurement Setup.....	33
4.3	Measurement Results	33
4.4	Trace Data of Out of Band Emissions	34
5.	Peak Power Spectral Density	40
5.1	Test Procedure.....	40
5.2	Test Instruments and Measurement Setup.....	40
5.3	Measurement Results	40
5.4	Trace Data of Peak Power Spectral Density	41
6.	AC Wireline Conducted Emissions (150KHz – 30MHz)	47
6.1	Test Procedure.....	47
6.2	Test Instruments and Measurement Setup.....	47
6.3	Powerline Voltage Calculation.....	48
6.4	Measurement Results	49

7. Restricted Bands Radiation (30MHz – 1GHz)	52
7.1 Test Procedure.....	52
7.2 Test Instruments and Measurement Setup.....	52
7.3 Field Strength Calculation	54
7.4 Measurement Results	55
8. Restricted Bands Radiatio (1GHz – 25GHz)	58
8.1 Test Procedure.....	58
8.2 Test Instruments and Measurement Setup.....	58
8.3 Field Strength Calculation	60
8.4 Measurement Results	61
8.5 Measurement plots of adjacent restricted band.....	64
8.5.1 List of Measurement Results	64
8.5.2 Bandedge Measurement Plots for ThinkPad T40 Series.....	65
8.5.3 Bandedge Measurement Plots for ThinkPad R50 Series	89

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart C
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : WM3B2200BG
 FCC ID : ANO20040501CX2
 IC Certification Number : 349E-MW3B22BG
 SERIAL NUMBER : 006FA0473
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : DTS: IEEE802.11b/g Wireless LAN Mini-PCI card
 TESTED DATE : January 29, 30, February 2, 3, 5 and 10, 2004

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(**NVLAP Lab code: 200198-0**)
- These facilities are accepted by **Industry Canada** as number **IC 4221** for chamber #1 (expiry date: January 25, 2005), and as number **IC 4221-1** for chamber #2 (expiry date: February 16, 2007).

A.3 EUT details

Table A EUT details

Model and S/N	FCC ID IC Certification Number	Description
WM3B2200BG (s/n 006FA0473)	FCC ID: ANO20040501CX2 IC: 349E-MW3B22BG	Applying modular transmitter Built_in type IEEE802.11b/g Wireless LAN Mini-PCI card without antenna
ThinkPad T40 Series M/T 2373-PUU (15 inch) (s/n ZZ-22134)	N/A	Host equipment IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.7GHz
ThinkPad R50 Series M/T 1829-38x (14 inch) (s/n ZZ-08189)		IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.5GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for DTS (Digital Transmissions System) devices under FCC Part 15 Subpart C and Industry Canada RSS-210.

The section numbers of upper portion are showing FCC number, and the other (lower) ones are for IC.

Table-B List of the measurements

Section(s)	Test Items : Transmit mode (TX):		Condition	Result
15.247(a)(2) 6.2.2(o)(b)	Bandwidth at 6 dB below	FCC requirement	Conducted	Pass
– 5.9.1	Occupied BW (Bandwidth at 20 dB below)	IC requirement		Pass
15.247(c) 6.2.2(o)(e1)	Out of Band Emissions	The radiated emission in any 100kHz of outband shall be at least 20dB below the highest inband spectral density.		Pass
15.247(b)(3) 6.2.2(o)(b)	Transmitter peak output power	Shall not exceed 1.0 W.		Pass
15.247(d) 6.2.2(o)(b)	Transmitter power spectral Density	Shall not be greater than 8 dBm in any 3kHz band.		Pass
15.207 6.2.2(o)(e3) / 6.6	AC Wireline Conducted Emissions 150kHz – 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Radiated (30MHz-1GHz)	Pass
15.205 / 209 6.2.1 / 6.2.2(o)(e3) / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (1– 25GHz)	Pass

	Test Items : Receive mode (RX):			
15.207 6.2.2(o)(e3) / 7.4	AC Wireline Conducted Emissions 150kHz – 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass
15.205 / 209 6.2.1 / 6.2.2(o)(e3) / 7.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz -1GHz)	Pass
			Radiated (1– 25GHz)	Pass

	Other requirements		Result
15.247(b)(4)(i) –	Antenna gain	Peak gain of the device : 1.24 dBi and 1.84dBi	N/A
15.203 6.2.2(o)(e2)	Unique antenna connector	The device employs an unique electronic connector so called BIOS Lock . Refer to “Confidential_BIOS-Lock” exhibit.	complies

C. Operation Mode of EUT

- All tests were performed using the “CRTU II, version 2.2.9.3000” test program provided by Intel Corporation. This tool supports the continuous or burst transmission mode for the testing purpose. The parameter GAIN of the test software was set to 31.0 for IEEE 802.11b mode and was set to 26.0 for ch.1 and 11 and 27.0 for ch.2 through 10 of IEEE 802.11g mode.
- The following frequencies were chosen for the measurements.
Tx tests: 2412MHz (lowest), 2437MHz(middle), and 2462MHz (highest)
Rx tests: 2437MHz(middle)

Table-C Transmission mode of EUT

Operation Frequency [GHz]	Rated output power (conducted) [dBm]										
	IEEE802.11b (DSSS)			IEEE802.11g (OFDM)							
	1/2M bps	5.5M bps	11M bps	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
2.412 (Ch. 1)	+17	+17	+17	+12	+12	+12	+12	+12	+12	+12	+12
2.417 (Ch. 2)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.422 (Ch. 3)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.427 (Ch. 4)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.432 (Ch. 5)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.437 (Ch. 6)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.442 (Ch. 7)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.447 (Ch. 8)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.452 (Ch. 9)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.457 (Ch. 10)	+17	+17	+17	+13	+13	+13	+13	+13	+13	+13	+13
2.462 (Ch. 11)	+17	+17	+17	+12	+12	+12	+12	+12	+12	+12	+12

D. Justification

- The shading columns in the above Table C are measurement plots in this test report.
- The host PCs (IBM ThinkPad T40 Series and R50 Series) are designed with the same conceptual hardware configuration of full size laptop PC. The host devices marked in shading in Table-D below were used for EUT which have comparatively higher antenna gains and worse measurement results in each host PC series (T40 or R50). Then, the worst case data were selected for this report among the two systems. The actual highest emissions taken in this report for the Chapter 6 through 8 were found at 1Mb/s for DSSS on the auxiliary antenna of ThinkPad R50 Series (14 inch LCD model) and 6Mb/s for OFDM on the main antenna of ThinkPad T40 Series (15 inch LCD model). Refer to the Chapter 8.5 concerning the evaluation of the worst emission case.

Table-D Peak Antenna Gains of EUT

		14 inch LCD	15 inch LCD
ThinkPad T40 Series	Main Antenna gain	0.99 dBi (peak)	1.24 dBi (peak)
	Auxiliary Antenna gain	-0.48 dBi (peak)	0.38 dBi (peak)
ThinkPad R50 Series	Main Antenna gain	1.52 dBi (peak)	1.18 dBi (peak)
	Auxiliary Antenna gain	1.84 dBi (peak)	1.71 dBi (peak)

E. Test Instruments

Table-E List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 6868-30J	97-901X3	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	09/09/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05156	08/14/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254	08/25/03	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	09/09/03	1 year
Spectrum Analyzer Display	HP 85662A	3026A19366	08/14/03	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	08/25/03	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	09/09/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01433	08/14/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	08/25/03	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447F	2805A02919	04/14/03	1 year
- for 200-1000MHz	HP 8447D	2727A05190	04/14/03	1 year
Amplifier (1GHz - 18GHz)	HP 8449B	3008A00582	06/11/03	1 year
Amplifier (18 – 25GHz)	Agilent 83051A	3950M00193	01/27/04	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	05/01/03	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/17/03	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030	03/17/03	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2536	04/23/03	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849	04/23/03	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/17/03	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	07/17/03	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	07/17/03	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	07/17/03	1 year
LISN	EMCO 3810/2NM	00022007	05/20/03	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	03/27/03	1 year
- RF Amp. <=> Spectrum Analyzer	16m	- GEM0101	03/27/03	1 year
Coaxial cables (18 – 25GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	03/27/03	1 year
- RF Amp. <=> Spectrum Analyzer	1m	- SF102-21105	03/27/03	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/14/03	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/14/03	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/14/03	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/14/03	1 year

- Shield Panel <=> RF Amp	7 m	- EM103H03	04/14/03	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/14/03	1 year
Coax cables:				
- Lism-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/14/03	1 year
- Lism-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/14/03	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/14/03	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/14/03	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/14/03	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 "Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to DoC.

1. Bandwidth at 6 dB below

[FCC 15.247(a)(2), RSS-210 6.2.2(o)(b)]

1.1 Test Procedure

The bandwidth at 6 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The spectrum analyzer was set to :

RBW=100kHz, VBW=100kHz*1, Span=30MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

1.2 Test Instruments and Measurement Setup

Table 1-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length : 110 cm Loss : 1.3 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 6dB bandwidth test

1.3 Measurement Results

Test Date: January 29, 2004

1.3.1 2.4GHz band DSSS mode

Table 1-2-1. 6dB bandwidth, 2.4GHz band DSSS mode, TX mode 1Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2407.46	2416.60	9.14	> 0.5
2437 (ch. 6)	Plot 1-1	2432.46	2441.60	9.14	
2462 (ch. 11)	omitted	2457.46	2466.60	9.14	

Table 1-2-2. 6dB bandwidth, 2.4GHz band DSSS mode, TX mode 5.5Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2407.46	2416.54	9.08	> 0.5
2437 (ch. 6)	omitted	2432.58	2441.84	9.26	
2462 (ch. 11)	Plot 1-2	2457.58	2466.24	8.66	

Table 1-2-3. 6dB bandwidth, 2.4GHz band DSSS mode, TX mode 11Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2407.40	2416.60	9.20	> 0.5
2437 (ch. 6)	Plot 1-3	2432.16	2441.36	9.20	
2462 (ch. 11)	omitted	2457.46	2466.78	9.32	

1.3.2 2.4GHz band OFDM mode

Table 1-2-4. 6dB bandwidth, 2.4GHz band OFDM mode, TX mode 6Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2403.79	2420.27	16.48	> 0.5
2437 (ch. 6)	Plot 1-4	2428.79	2445.27	16.48	
2462 (ch. 11)	omitted	2453.79	2470.27	16.48	

Table 1-2-5. 6dB bandwidth, 2.4GHz band OFDM mode, TX mode 18Mbps


Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2403.73	2420.33	16.60	> 0.5
2437 (ch. 6)	Plot 1-5	2428.73	2445.33	16.60	
2462 (ch. 11)	omitted	2453.73	2470.33	16.60	

Table 1-2-6. 6dB bandwidth, 2.4GHz band OFDM mode, TX mode 54Mbps


Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2403.73	2420.33	16.60	> 0.5
2437 (ch. 6)	Plot 1-6	2428.73	2445.33	16.60	
2462 (ch. 11)	omitted	2453.73	2470.33	16.60	

1.4 Trace Data of 6dB bandwidth

The plots are comparatively worse measurement cases in the previous [Table 1-2-1](#) through [Table 1-2-6](#).

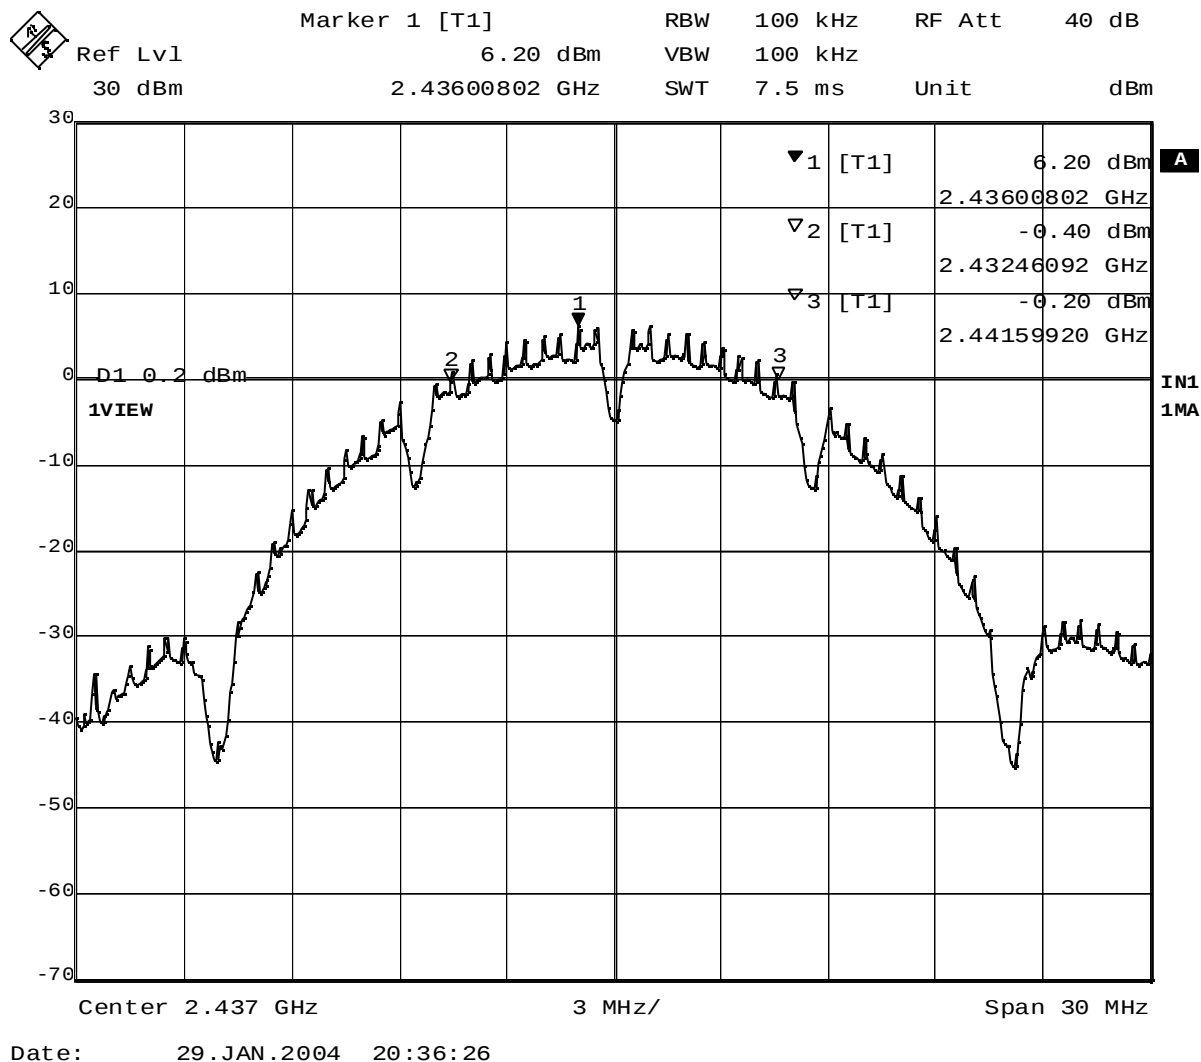


Plot 1-1. 6dB BW at 2437MHz. (DSSS. 1Mbps)

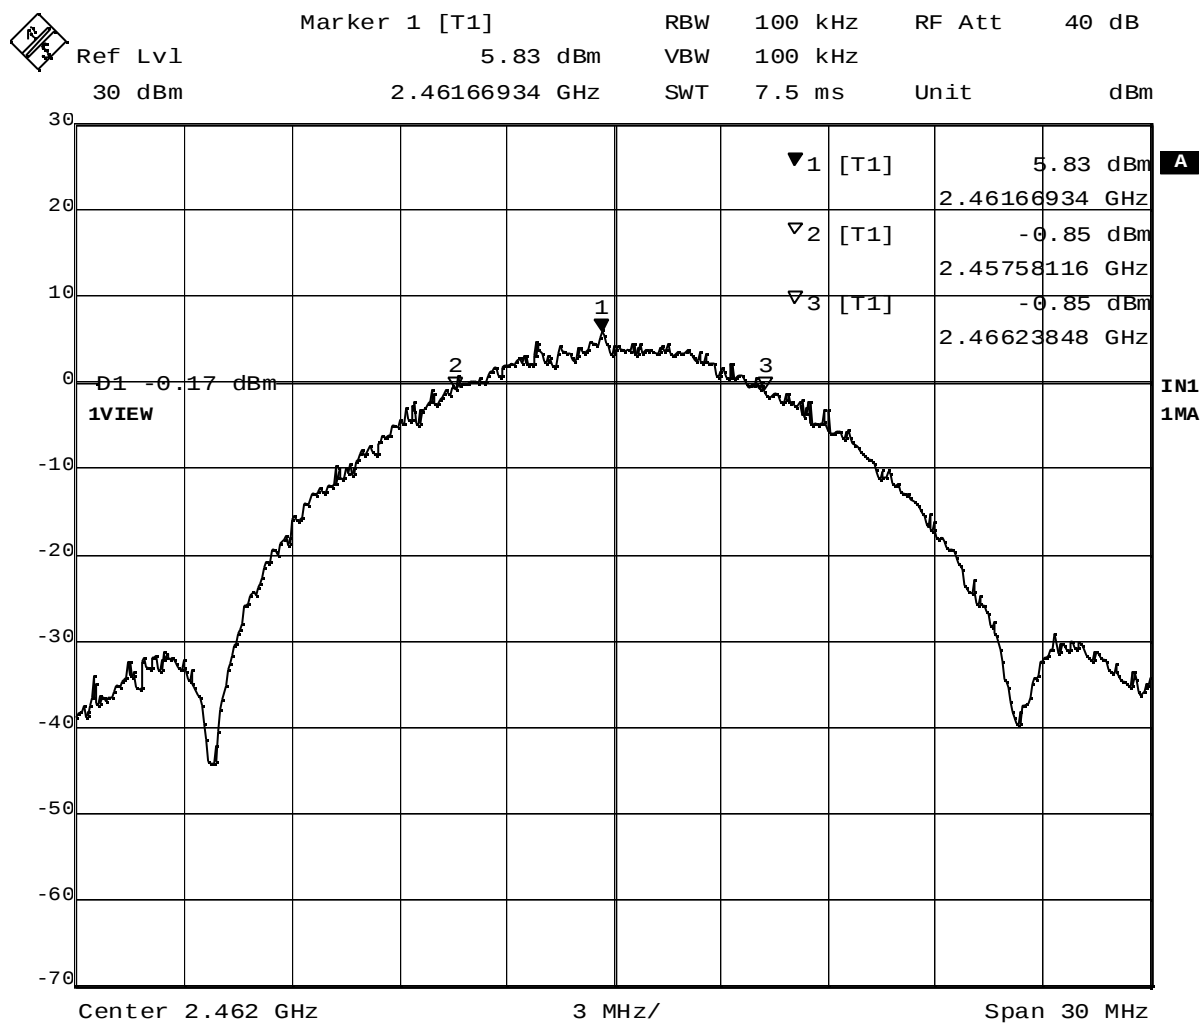


Date: 29.JAN.2004 20:52:25

Plot 1-2. 6dB BW at 2462MHz. (DSSS. 5.5Mbps)

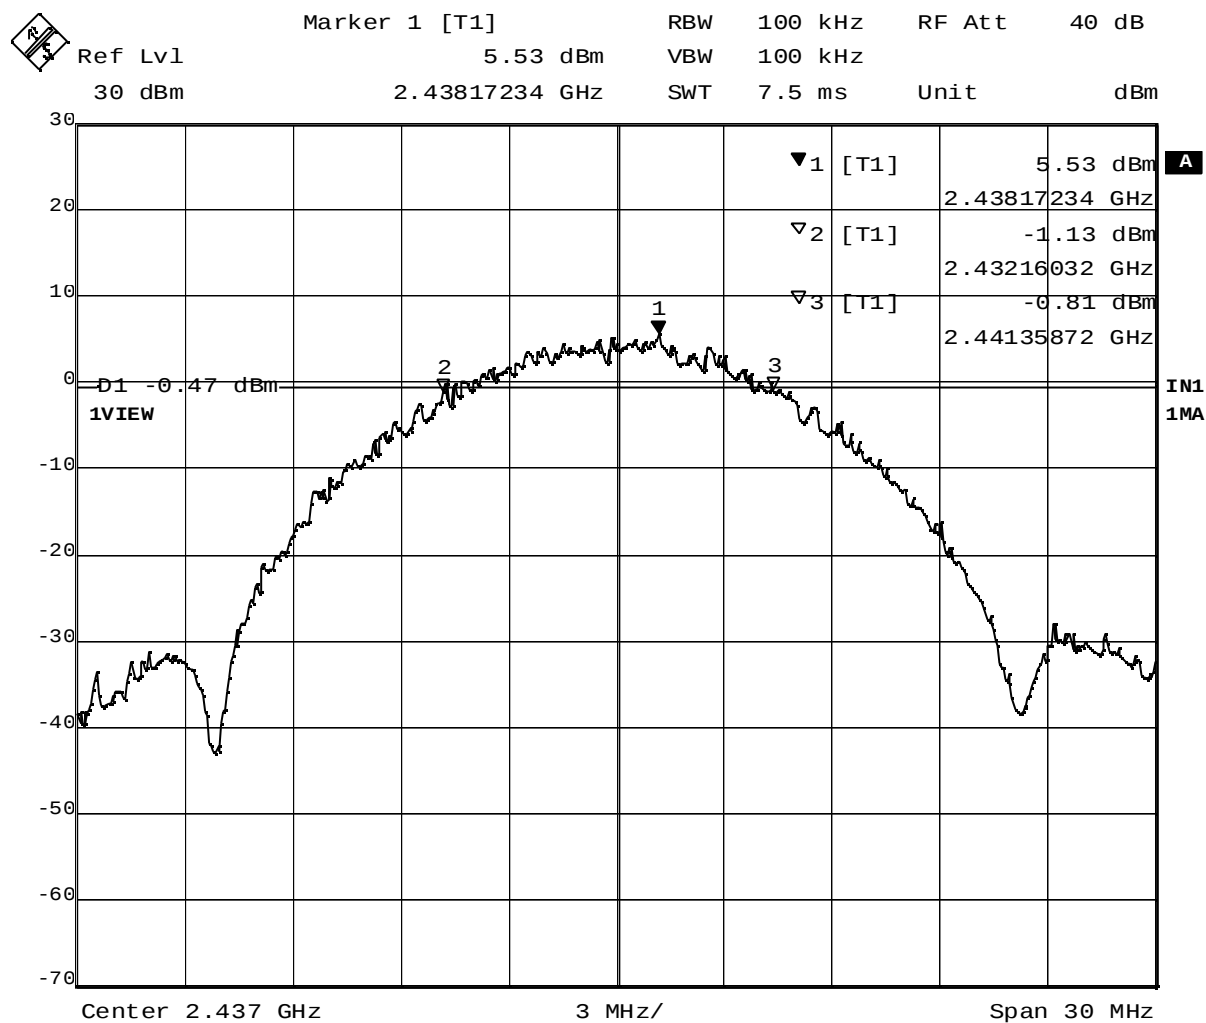


Date: 29. JAN. 2004 20:47:54

Plot 1-3. 6dB BW at 2437MHz (DSSS, 11Mbps)

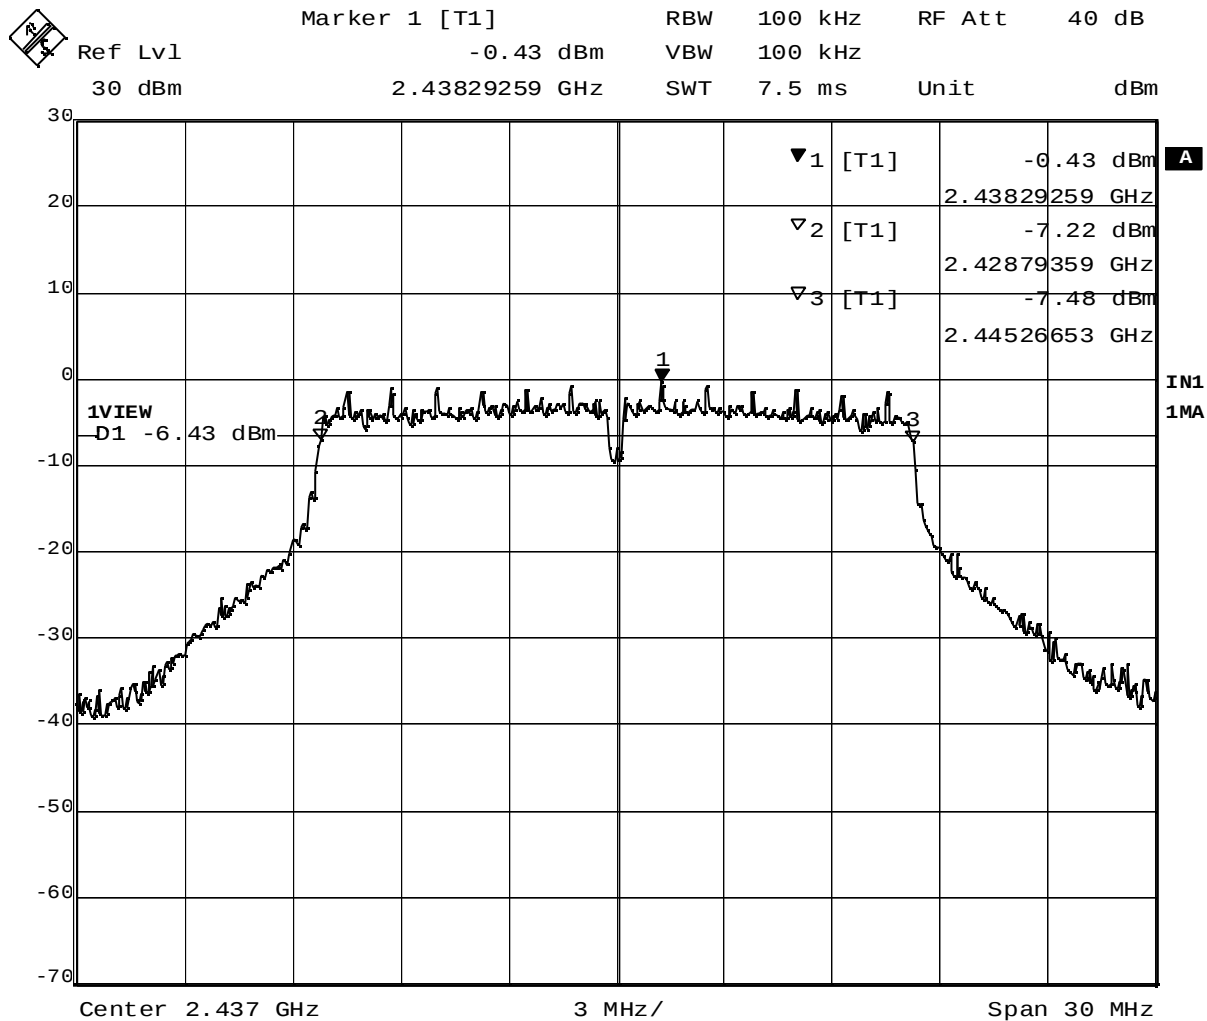


Date: 29.JAN.2004 14:39:27

Plot 1-4. 6dB BW at 2437MHz (OFDM, 6Mbps)

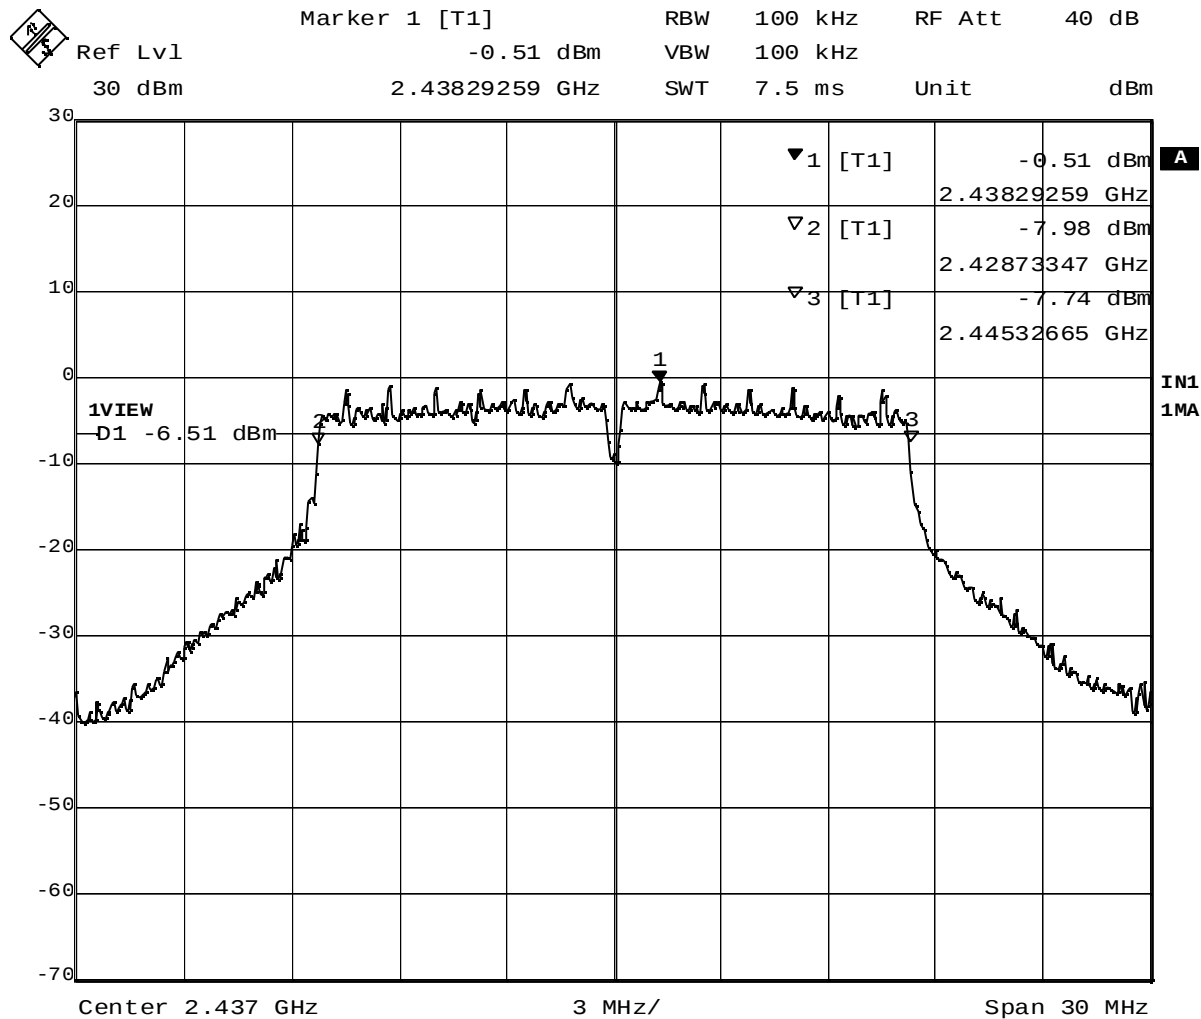

Date: 29.JAN.2004 14:40:43

Plot 1-5. 6dB BW at 2437MHz (OFDM, 18Mbps)

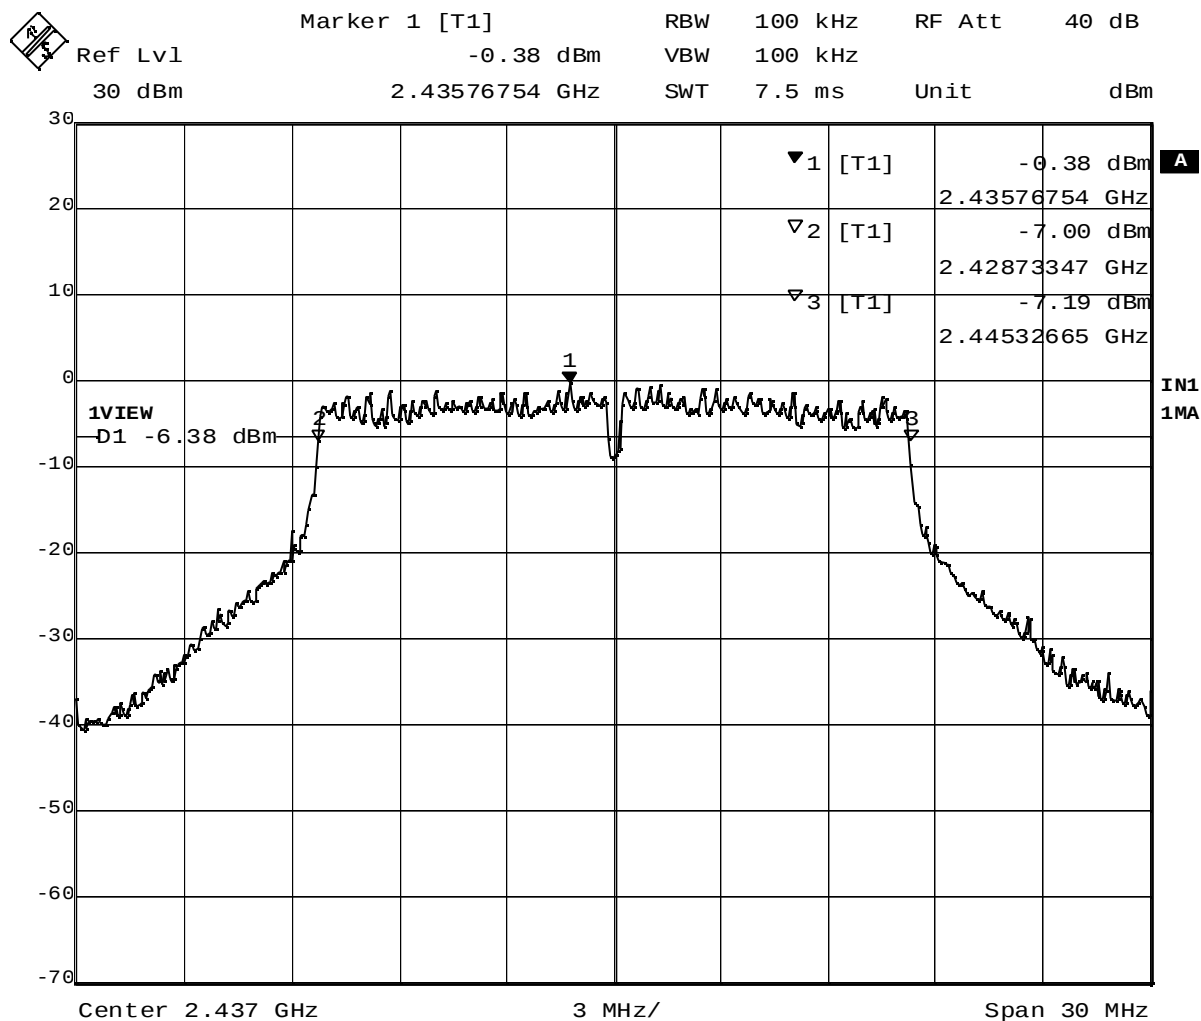

Date: 29.JAN.2004 14:45:39

Plot 1-6. 6dB BW at 2437MHz (OFDM, 54Mbps)

2. Occupied Bandwidth (20 dB Bandwidth) [RSS-210 5.9.1]

2.1 Test Procedure

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The spectrum analyzer was set to:

RBW=100kHz, VBW=100kHz^{*1}, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

2.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

2.3 Measurement Results

Test Date: January 29, 2004

2.3.1 2.4GHz band DSSS mode

Table 2-2-1. Occupied bandwidth, 2.4GHz band DSSS mode, TX 1Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2403.43	2420.67	17.24
2437 (ch. 6)	omitted	2428.43	2445.22	16.79
2462 (ch. 11)	Plot 2-1	2453.43	2470.67	17.24

Table 2-2-2. Occupied bandwidth, 2.4GHz band DSSS mode, TX 5.5Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2403.53	2420.67	17.14
2437 (ch. 6)	omitted	2428.33	2445.62	17.29
2462 (ch. 11)	Plot 2-2	2453.33	2470.67	17.34

Table 2-2-3. Occupied bandwidth, 2.4GHz band DSSS mode, TX 11Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2403.43	2420.57	17.14
2437 (ch. 6)	omitted	2428.43	2445.42	16.99
2462 (ch. 11)	Plot 2-3	2453.13	2470.67	17.54

2.3.2 2.4GHz band OFDM mode

Table 2-2-4. Occupied bandwidth, 2.4GHz band OFDM mode, TX 6Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2402.83	2421.17	18.34
2437 (ch. 6)	omitted	2427.93	2446.22	18.29
2462 (ch. 11)	Plot 2-4	2452.73	2471.17	18.44

Table 2-2-5. Occupied bandwidth, 2.4GHz band OFDM mode, TX 18Mbps


Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2402.93	2421.07	18.14
2437 (ch. 6)	Plot 2-5	2427.83	2446.22	18.39
2462 (ch. 11)	omitted	2452.83	2471.17	18.34

Table 2-2-6. Occupied bandwidth, 2.4GHz band OFDM mode, TX 54Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2402.63	2421.17	18.54
2437 (ch. 6)	omitted	2427.93	2446.21	18.28
2462 (ch. 11)	Plot 2-6	2452.73	2471.27	18.54


2.4 Trace Data of Occupied Bandwidth

The plots are comparatively worse measurement cases in the previous [Table 2-2-1](#) through [Table 2-2-6](#).

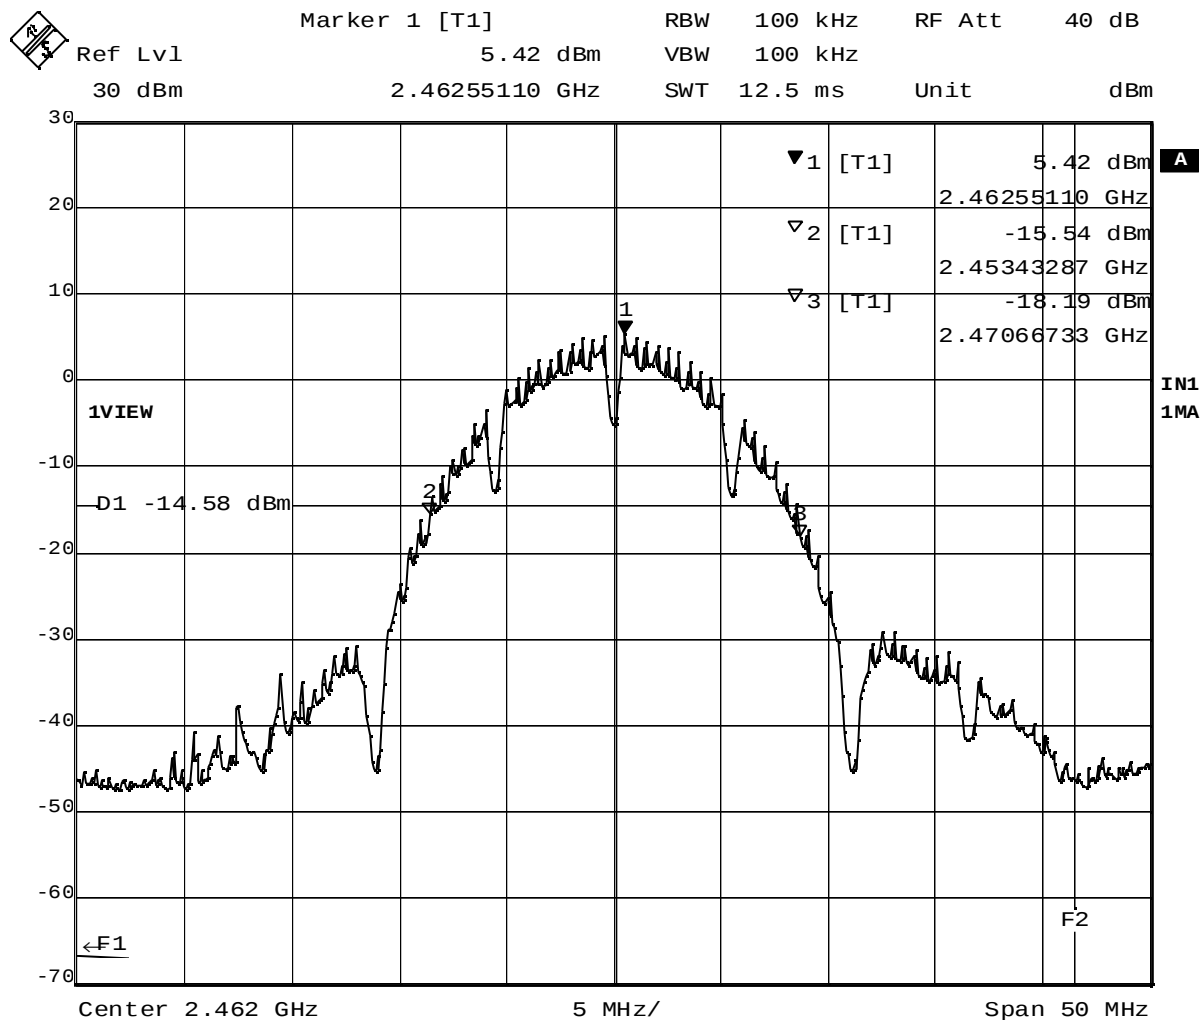


Date: 29.JAN.2004 22:50:11

Plot 2-1. 20dB BW at 2462MHz (DSSS, 1Mbps)

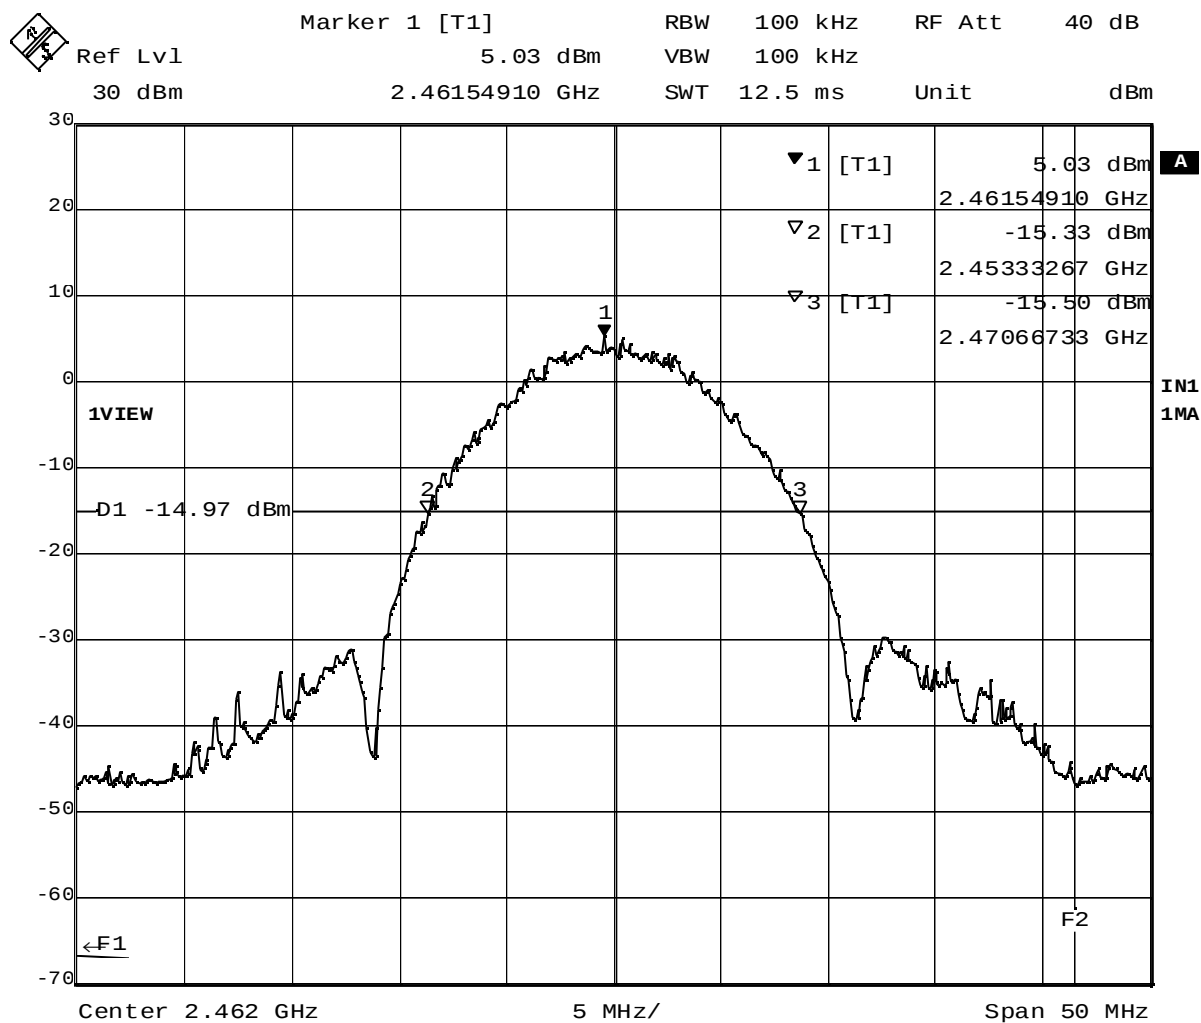


Date: 29.JAN.2004 22:52:01

Plot 2-2. 20dB BW at 2462MHz (DSSS, 5.5Mbps)

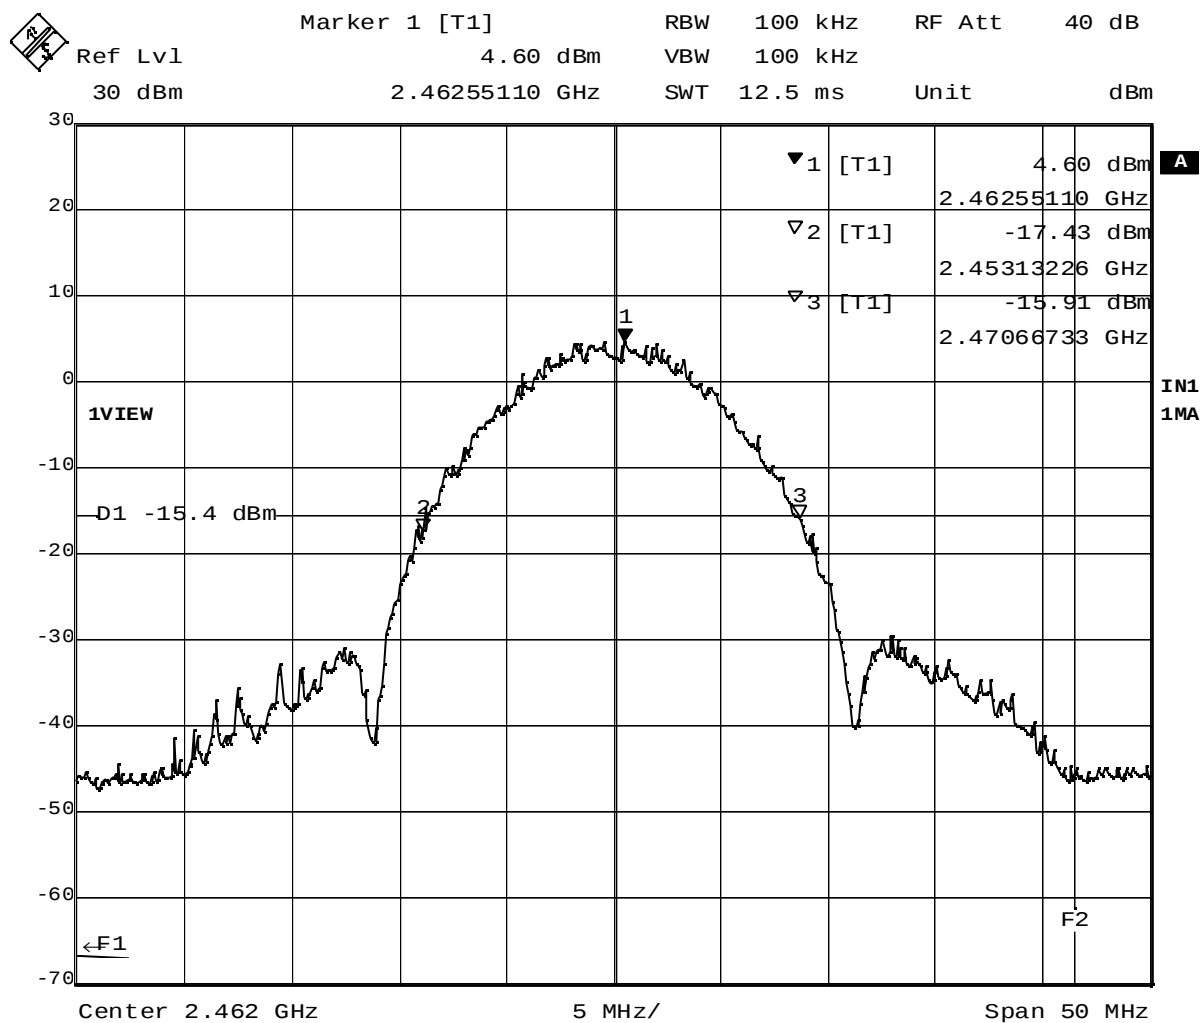


Date: 29.JAN.2004 22:58:00

Plot 2-3. 20dB BW at 2462MHz (DSSS, 11Mbps)

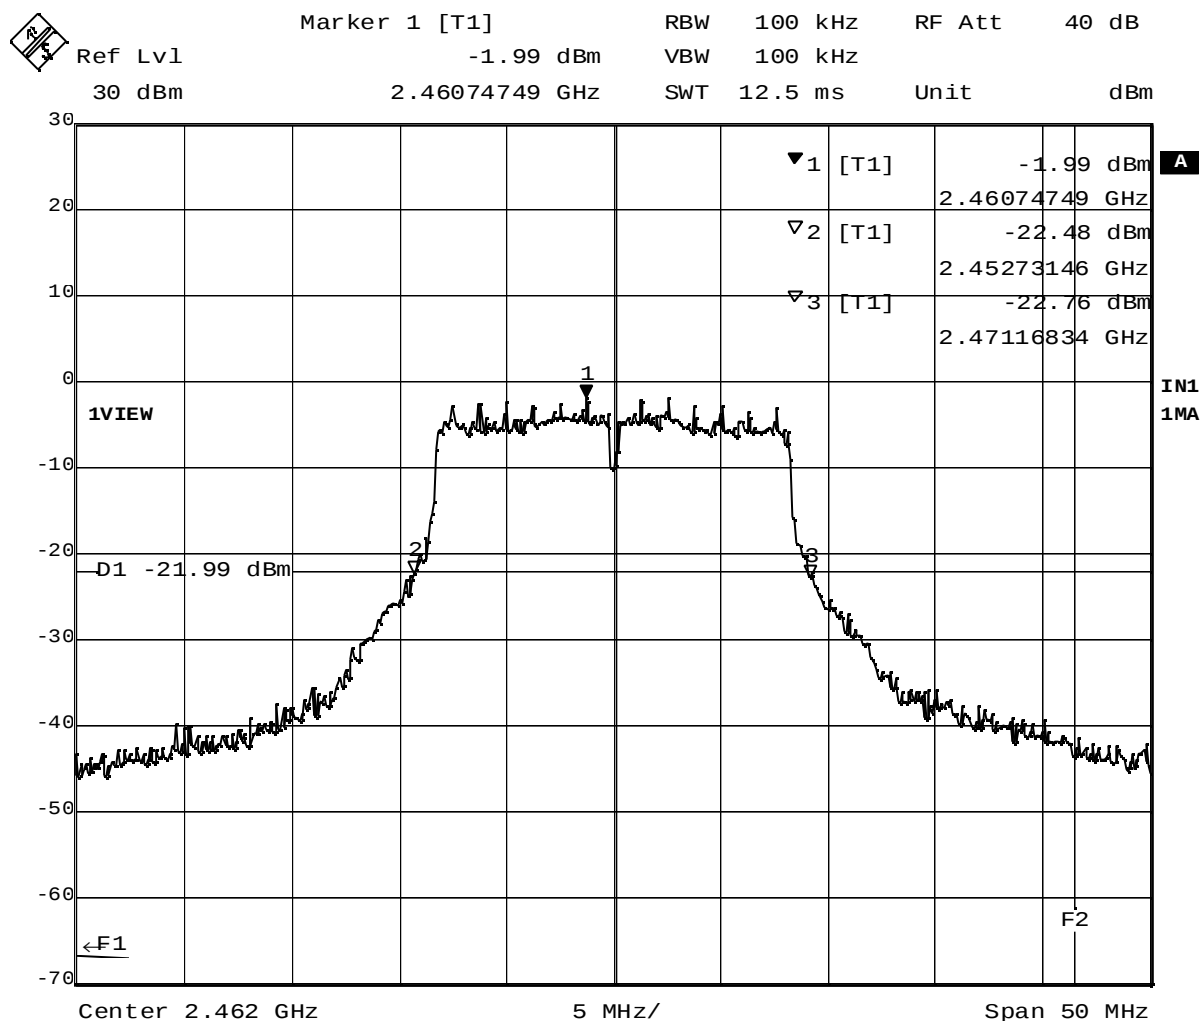


Date: 29.JAN.2004 23:07:57

Plot 2-4. 20dB BW at 2462MHz (OFDM, 6Mbps)

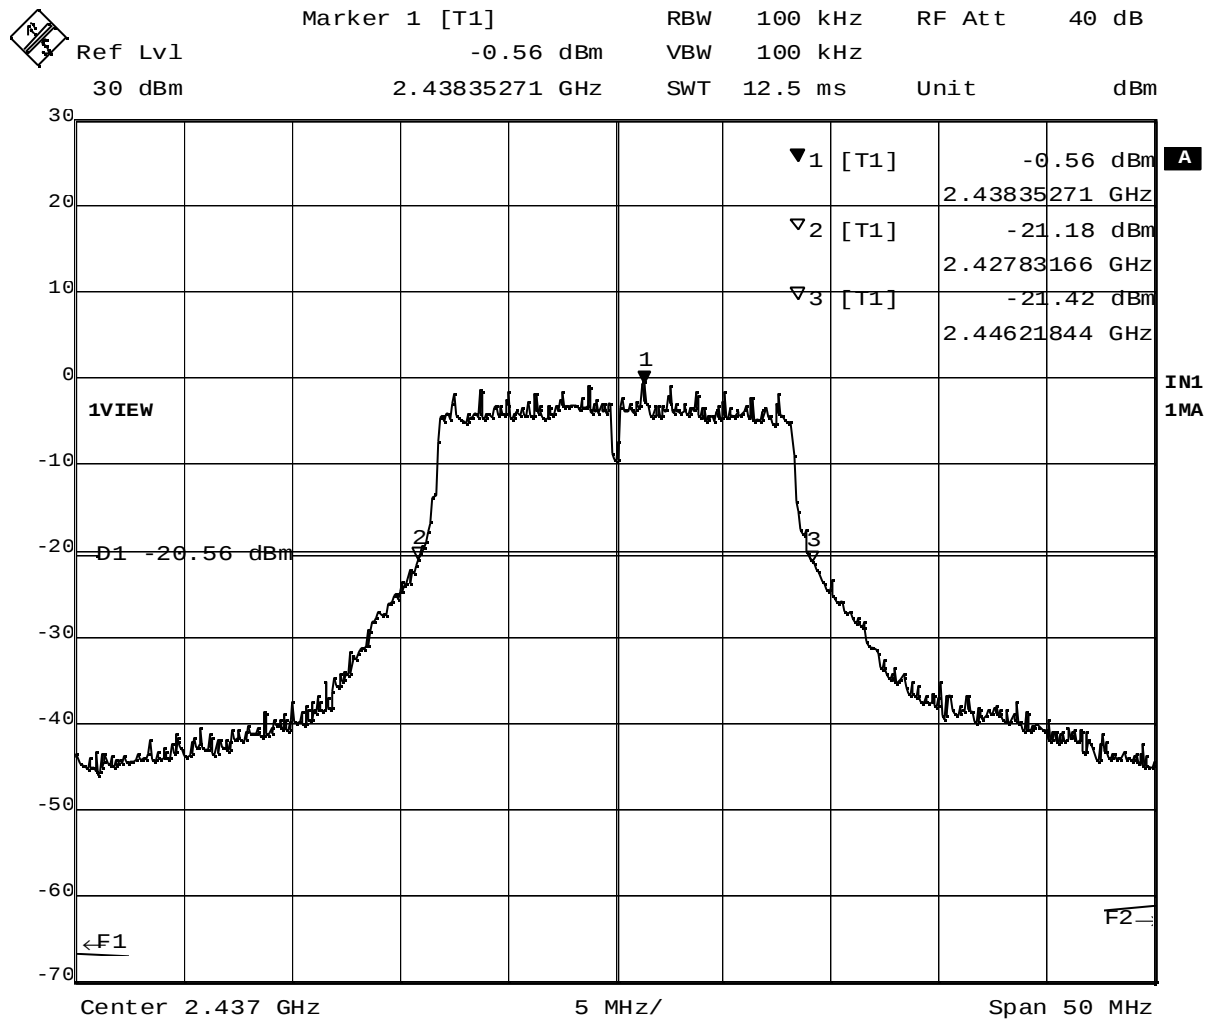

Date: 29. JAN. 2004 23:05:37

Plot 2-5. 20dB BW at 2437MHz (OFDM, 18Mbps)

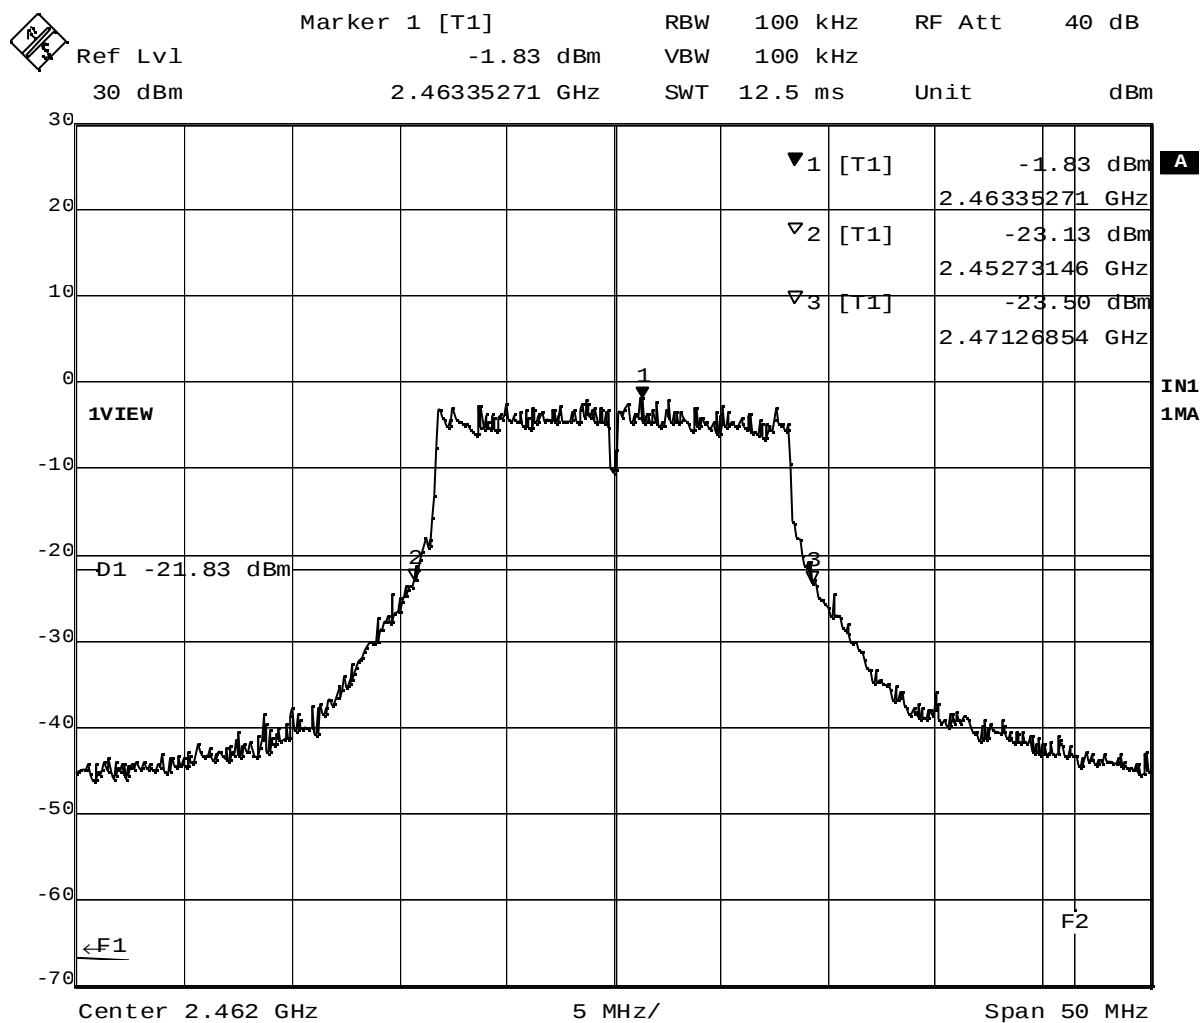

Date: 29.JAN.2004 23:10:03

Plot 2-6. 20dB BW at 2462MHz (OFDM, 54Mbps)

3. Conducted Peak Output Power

[FCC 15.247(b)(3), RSS-210 6.2.2(o)(b)]

3.1 Test Procedure

The test was performed with 6dB bandwidth measurement method in accordance with Appendix C of FCC R&O 97114.

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Chapter C) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz, RBW=1MHz,

Span=30-40MHz encompassing the entire 6 dB emission bandwidth of the transmission signal,

Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode. The analyzer computed the peak power by integrating the spectrum across the 6 dB emission bandwidth given by the previous chapter.

3.2 Test Instruments and Measurement Setup

The test instruments and setup configuration are the same as the Table 1-1 and Figure 1.


3.3 Measurement Results

Test Date: January 29, 2004

Table 3-2-1. Conducted peak output power measurement results


Measured Frequency (MHz)	Tx mode (Mb/s)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Margin to limit (dBm)
						FCC (dBm)	IC (dBm)	
2412 (DSSS)	1	14.91	omitted	1.3	16.2 (41.7 mW)	30	30	13.79
	5.5	15.55	Plot 3-1		16.9 (49.0 mW)			13.15
	11	15.41	omitted		16.7 (46.8 mW)			13.29
2437 (DSSS)	1	14.52	omitted	1.3	15.8 (38.0 mW)			14.18
	5.5	15.26	Plot 3-2		16.6 (45.7 mW)			13.44
	11	15.19	omitted		16.5 (44.7 mW)			13.51
2462 (DSSS)	1	14.28	omitted	1.3	15.6 (36.3 mW)			14.42
	5.5	14.95	Plot 3-3		16.3 (42.7 mW)			13.75
	11	14.93	omitted		16.2 (41.7 mW)			13.77
2412 (OFDM)	6	10.75	Plot 3-4	1.3	12.1 (16.2 mW)			17.95
	18	10.55	omitted		11.9 (15.5 mW)			18.15
	54	10.75	omitted		12.1 (16.2 mW)			17.95
2437 (OFDM)	6	11.67	Plot 3-5	1.3	13.0 (20.0 mW)			17.03
	18	11.49	omitted		12.8 (19.1 mW)			17.21
	54	11.57	omitted		12.9 (19.5 mW)			17.13
2462 (OFDM)	6	10.45	Plot 3-6	1.3	11.8 (15.1 mW)			18.25
	18	10.26	omitted		11.6 (14.5 mW)			18.44
	54	10.45	omitted		11.8 (15.1 mW)			18.25

3.4 Trace Data of Conducted Peak Output Power

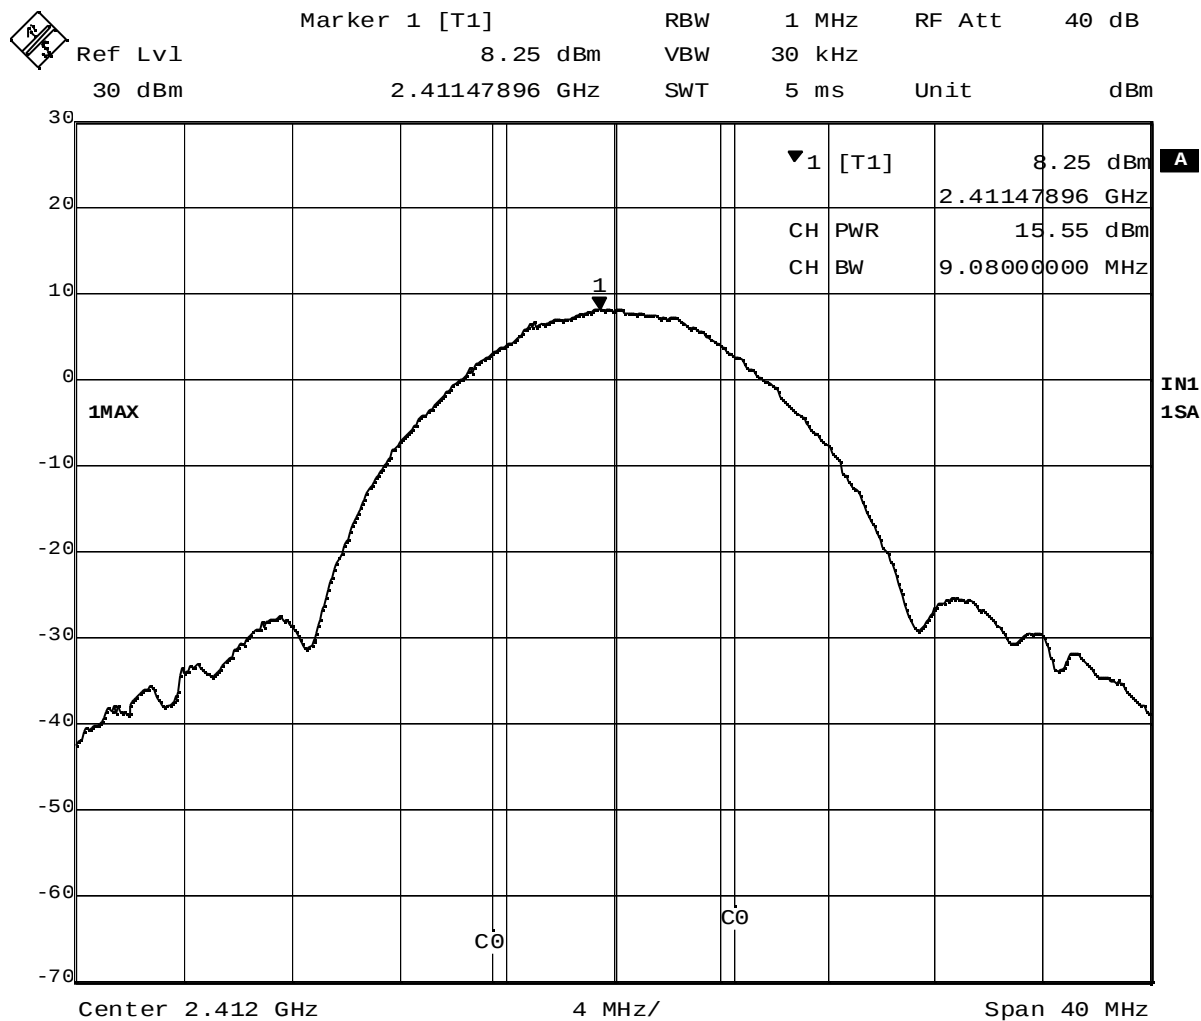


Date: 29.JAN.2004 21:14:26

Plot 3-1. Conducted Peak Output Power of 2412MHz (DSSS, 5.5Mbps)

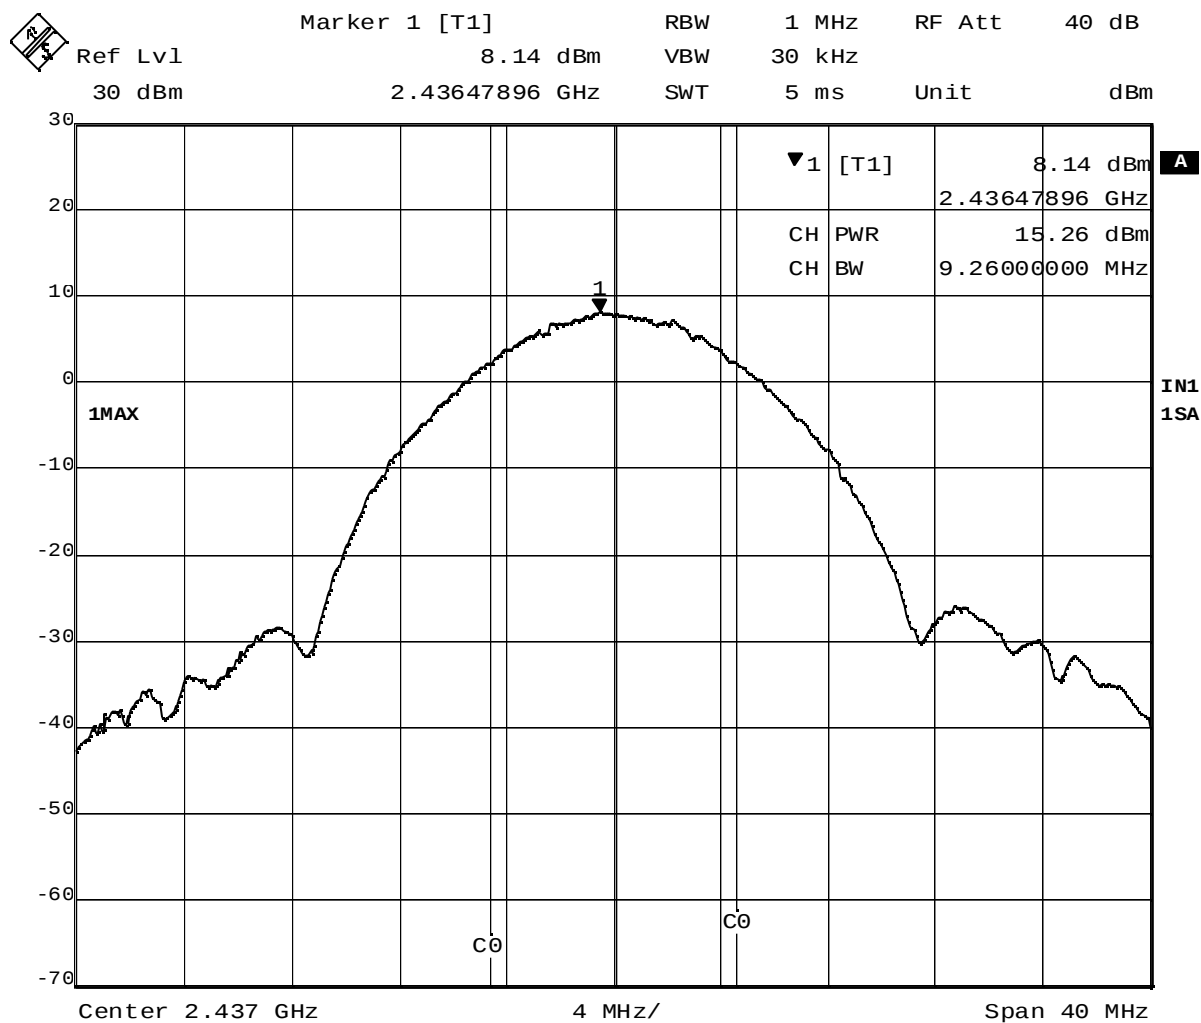


Date: 29.JAN.2004 21:36:33

Plot 3-2. Conducted Peak Output Power of 2437MHz (DSSS, 5.5Mbps)

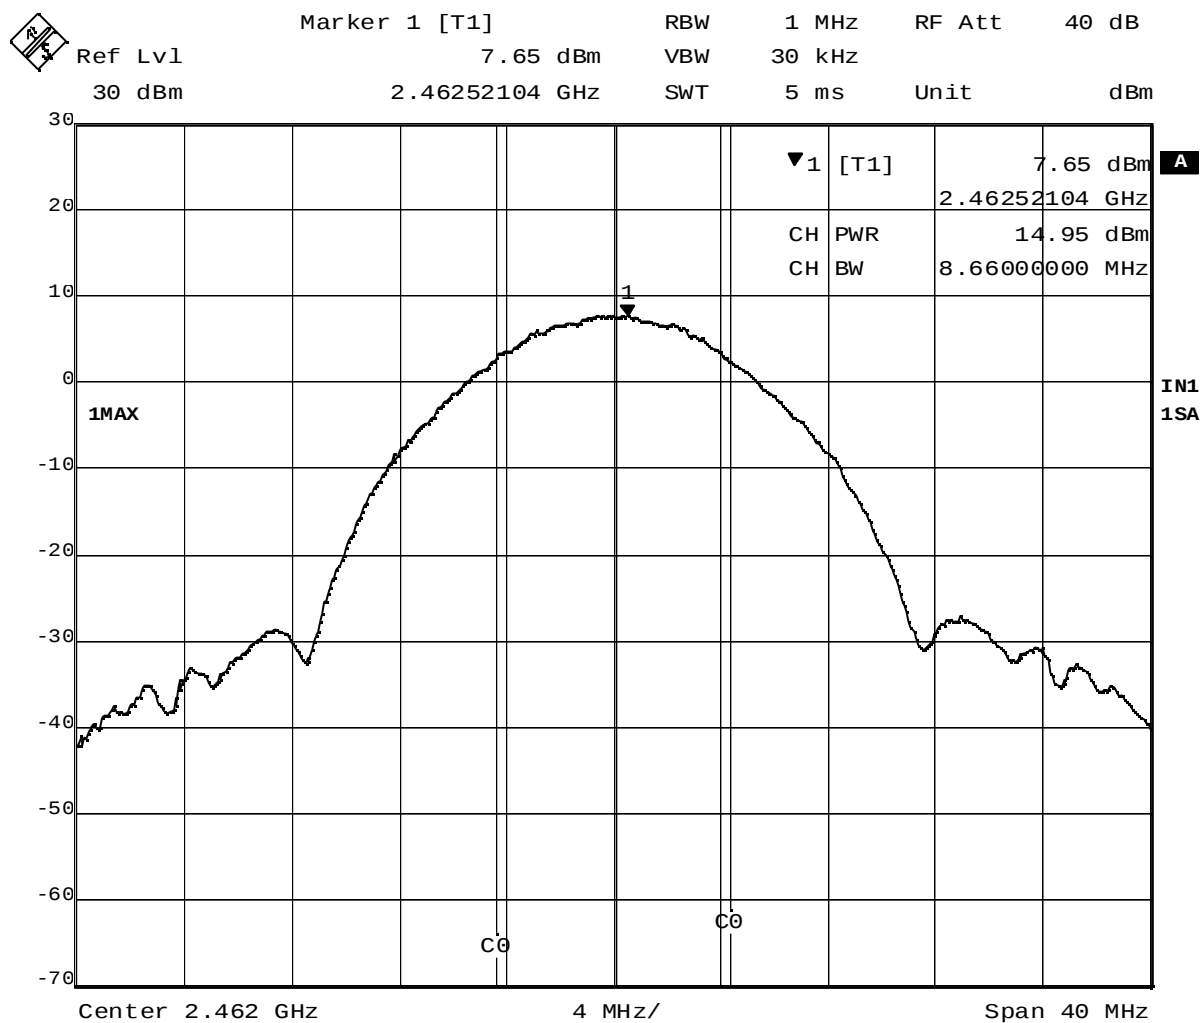


Date: 29.JAN.2004 22:07:01

Plot 3-3. Conducted Peak Output Power of 2462MHz (DSSS, 5.5Mbps)

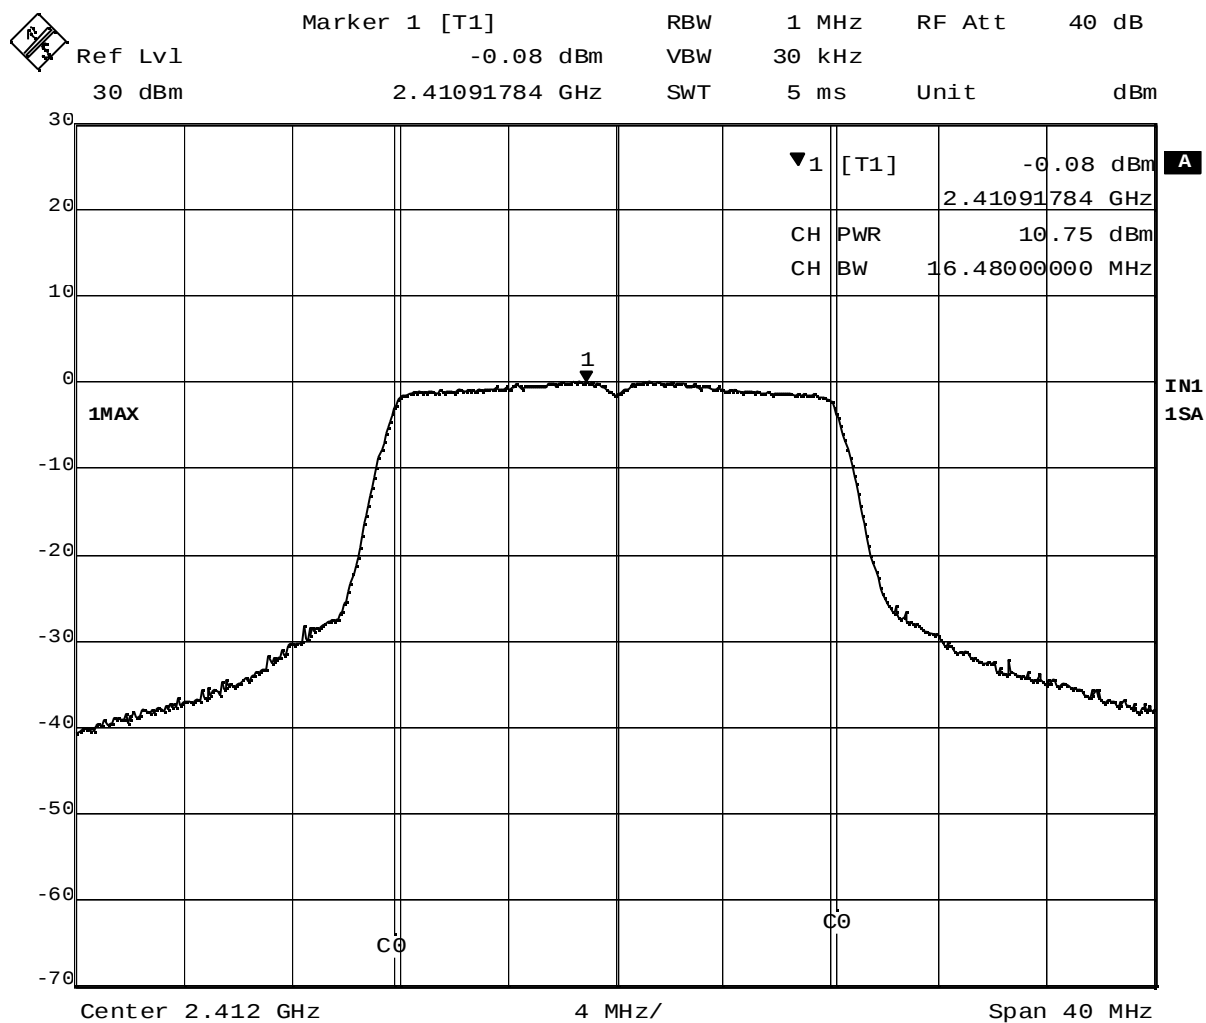


Date: 29. JAN. 2004 15:23:16

Plot 3-4. Conducted Peak Output Power of 2412MHz (OFDM, 6Mbps)

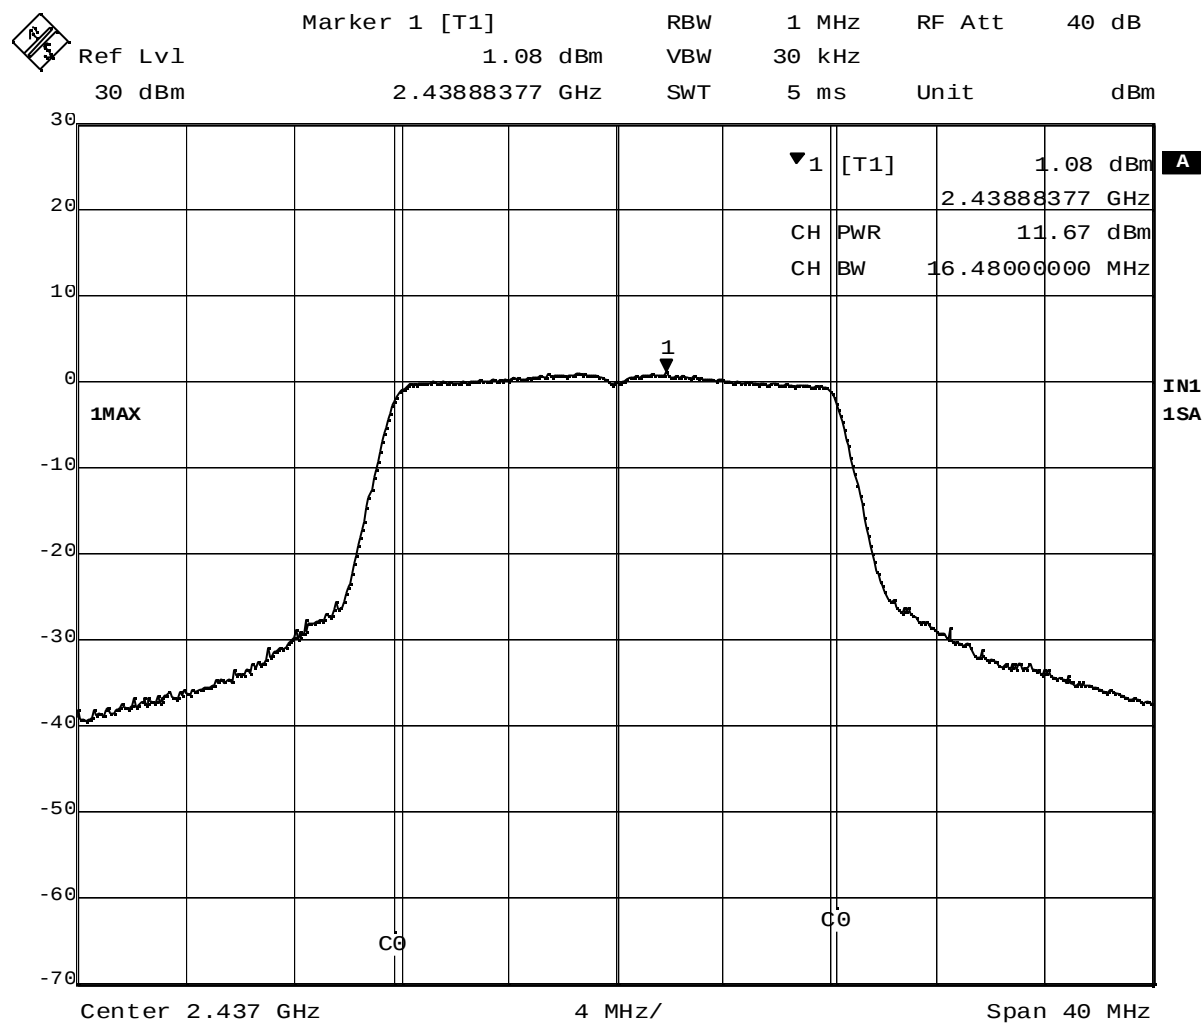

Date: 29.JAN.2004 16:58:28

Plot 3-5. Conducted Peak Output Power of 2437MHz (OFDM, 6Mbps)

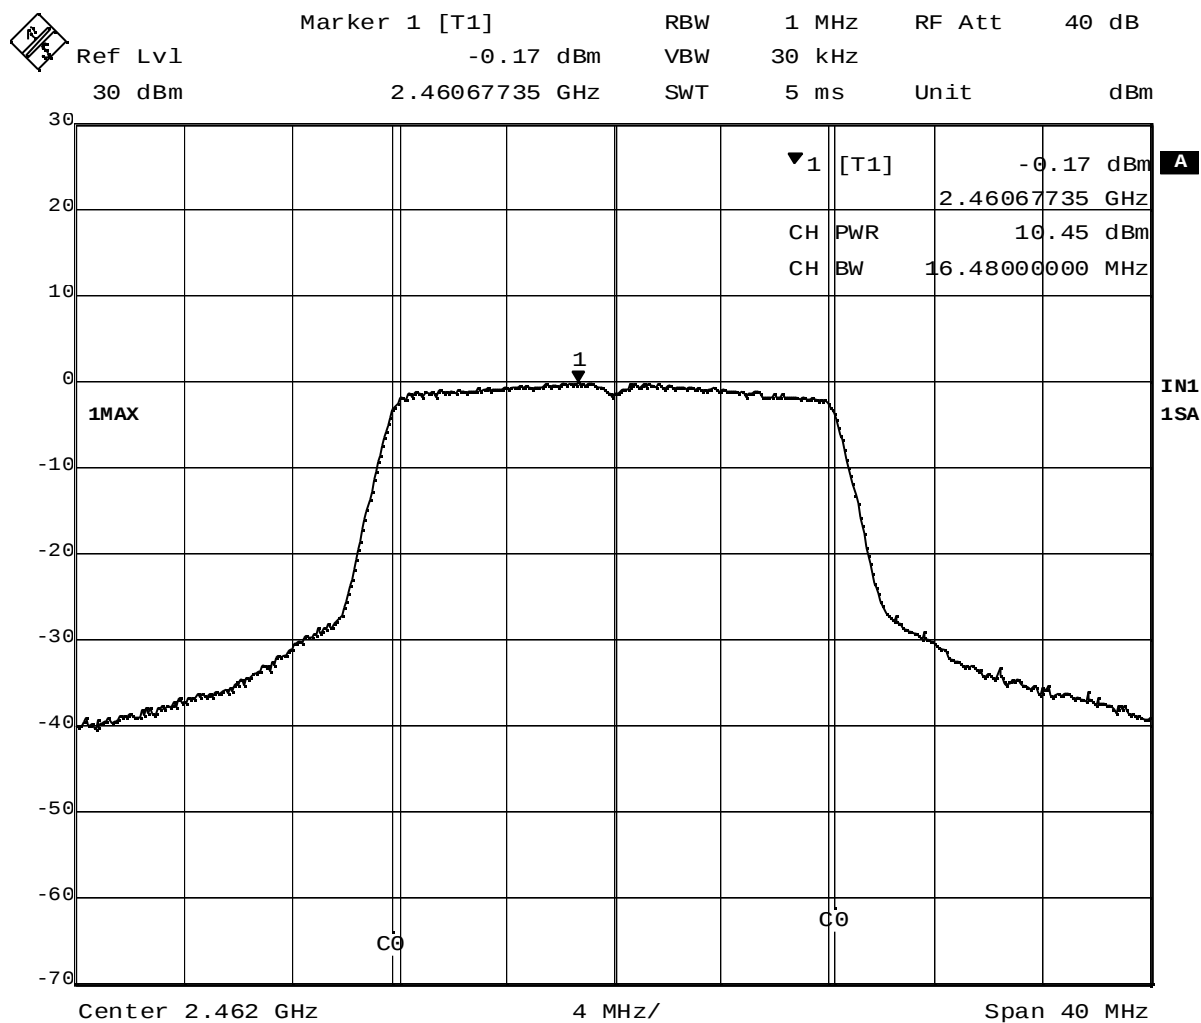

Date: 29.JAN.2004 18:57:21

Plot 3-6. Conducted Peak Output Power of 2462MHz (OFDM, 6Mbps)

4. Out of Band Emissions (Conducted Spurious) [FCC 15.247(c), RSS-210 6.2.2(o)(e1)]

4.1 Test Procedure

The outband emissions in any 100kHz bandwidth was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The spectrum analyzer was set to:

RBW = 100kHz, VBW = 100kHz*¹, Scanning frequency range = 30MHz~2GHz, 2GHz~3GHz, and 3GHz~25GHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

4.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

4.3 Measurement Results

All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density.


The measurement was performed with the worse cases of each transmission mode, that tend to have higher conducted peak power, based on the results of previous Chapter 3, “Conducted Peak Output Power” measurement.

Test Date: January 29, 2004 : See the following plots.


Center Frequency (MHz)		Tx Rate (worst case)	Trace number *1
2412 (ch. 1)	DSSS	5.5Mb/s	Plot 4-1
2437 (ch. 6)		5.5Mb/s	Plot 4-2
2462 (ch. 11)		5.5Mb/s	Plot 4-3
2412 (ch. 1)	OFDM	6Mb/s	Plot 4-4
2437 (ch. 6)		6Mb/s	Plot 4-5
2462 (ch. 11)		6Mb/s	Plot 4-6

*1 : Each submittal plot includes the highest conducted spurious in the 10th harmonics frequency range of each worst case in measured Tx modes.


4.4 Trace Data of Out of Band Emissions

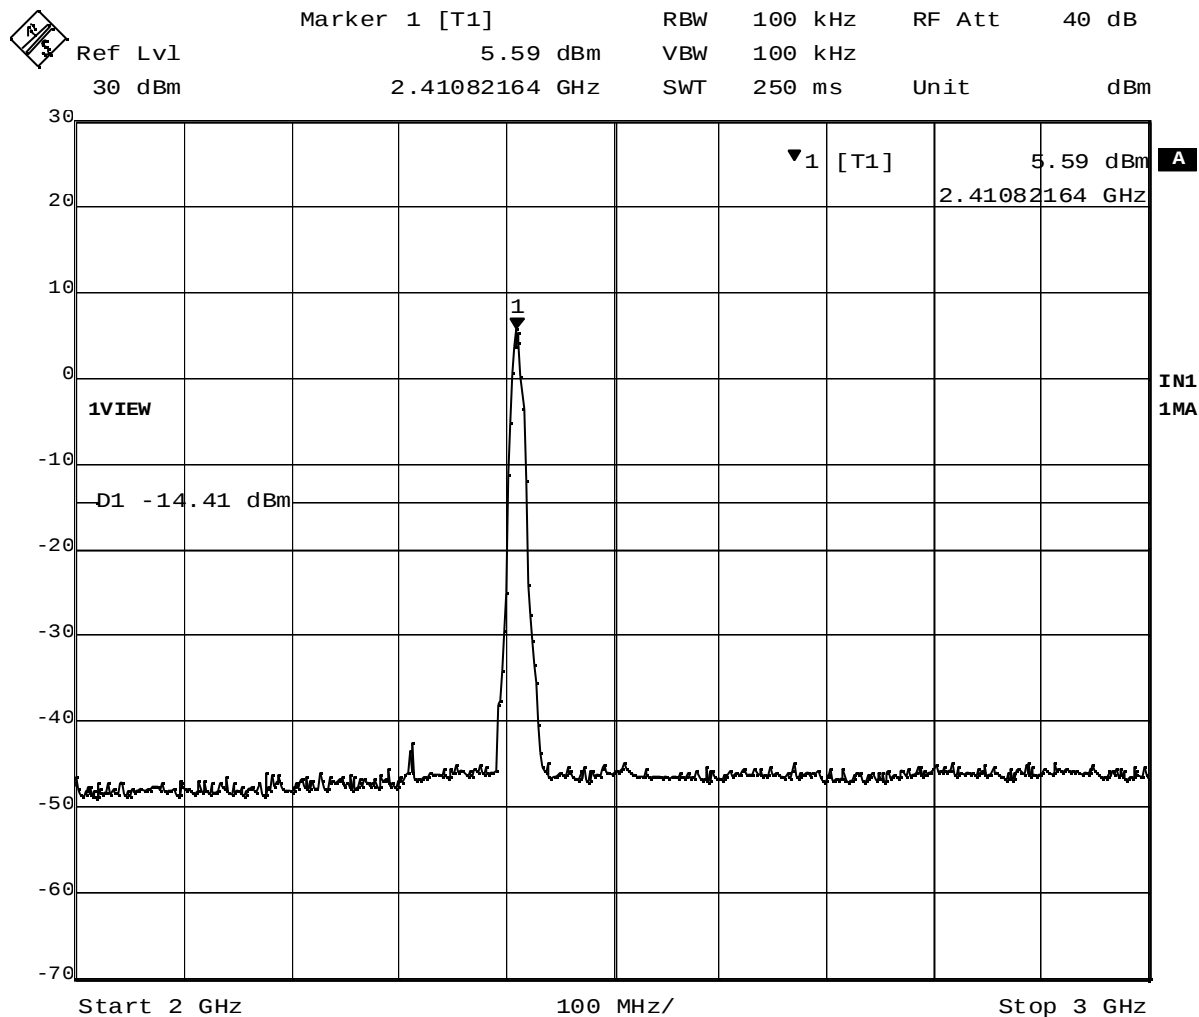


Date: 29.JAN.2004 23:15:25

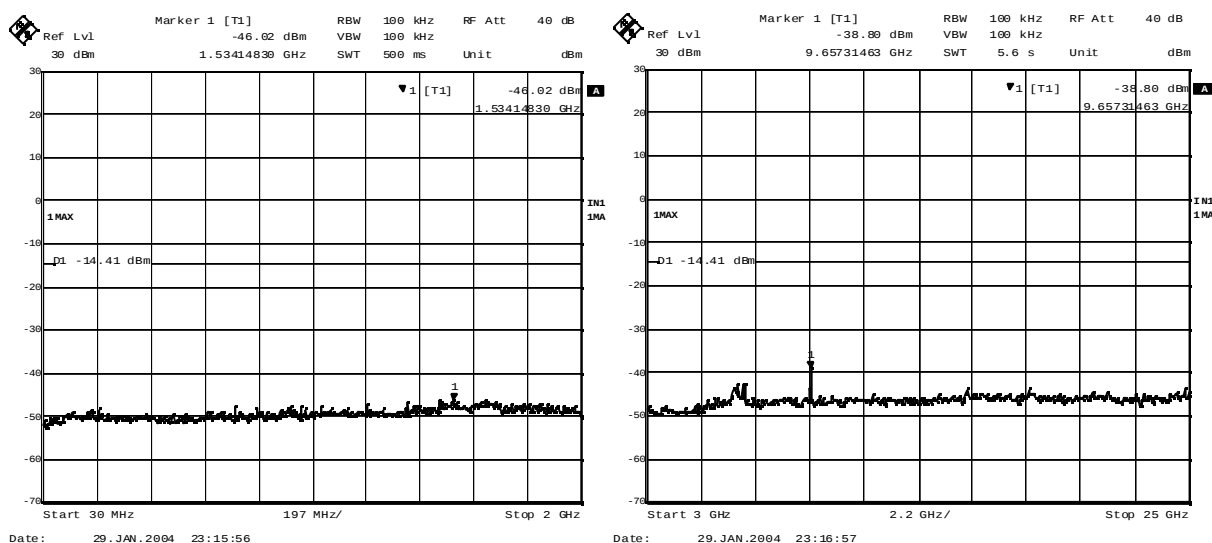


Plot 4-1. Out of band emissions around 2412MHz (DSSS, 5.5Mbps)

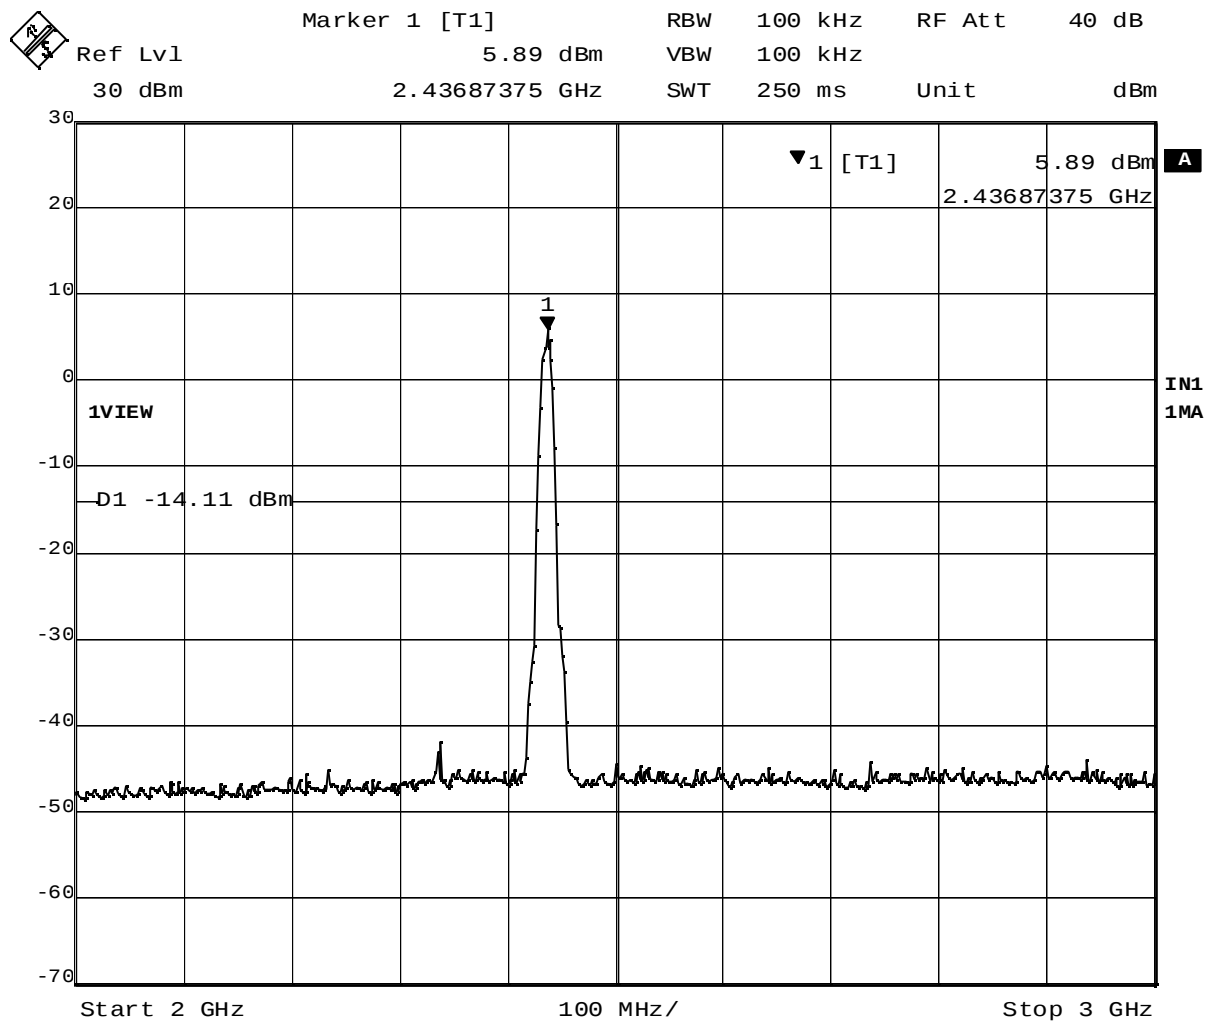

Date: 29. JAN. 2004 23:23:07

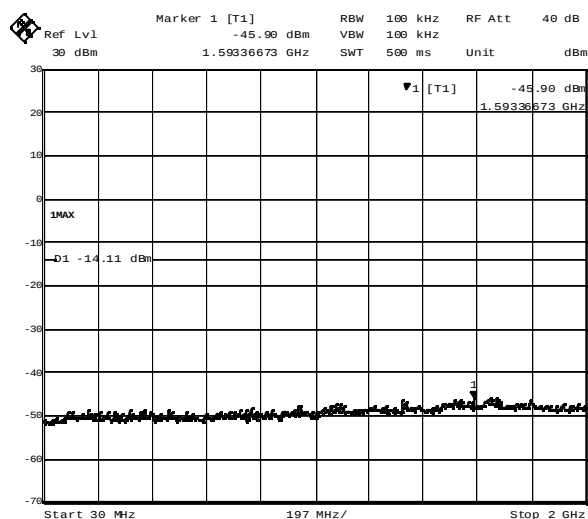


Date: 29. JAN. 2004 23:23:45

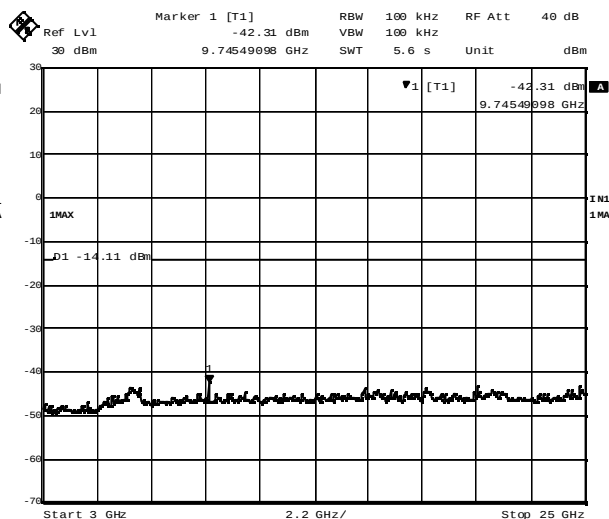


Date: 29. JAN. 2004 23:25:07


Plot 4-2. Out of band emissions around 2437MHz (DSSS, 5.5Mbps)

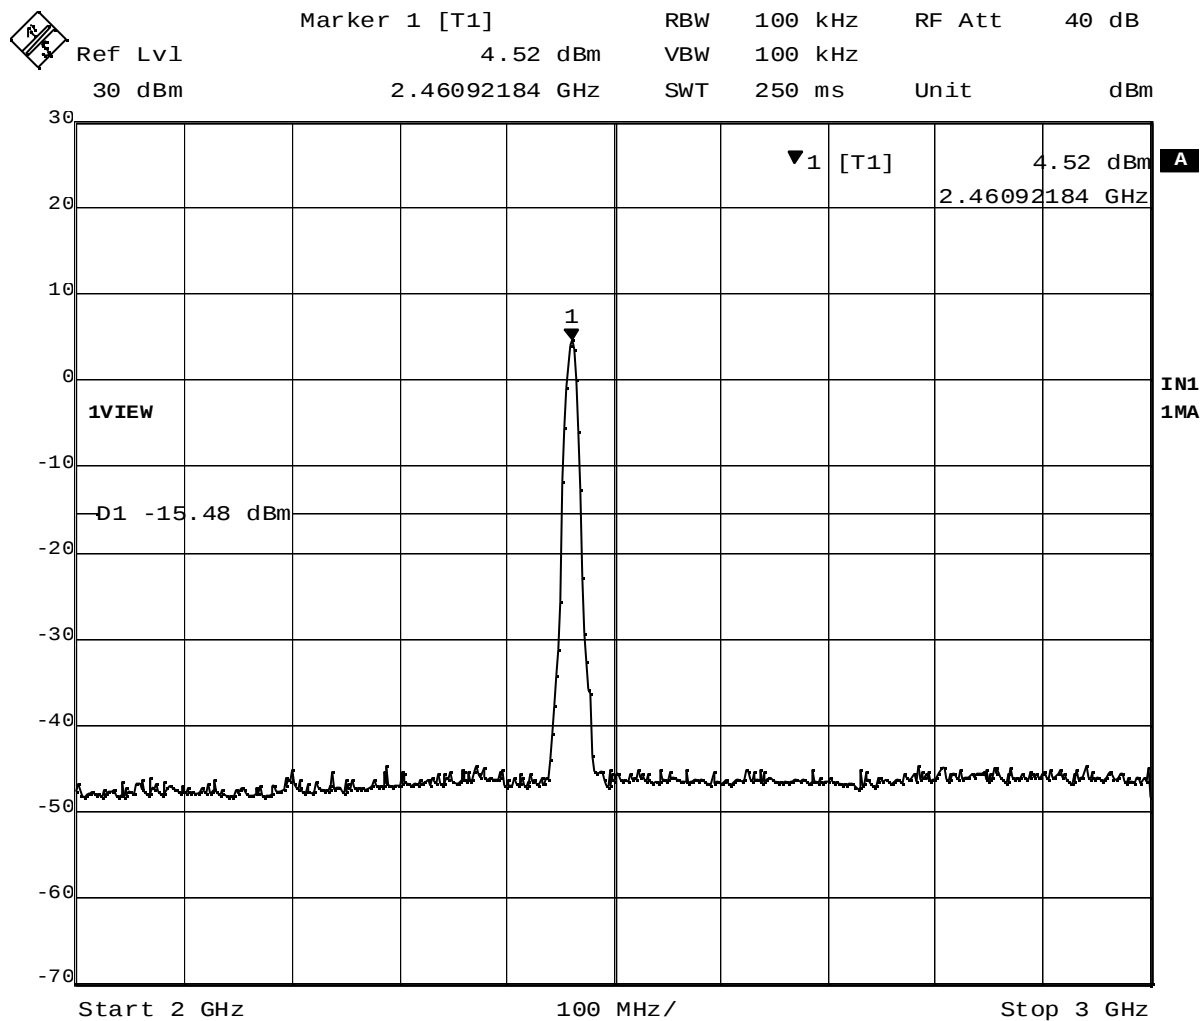


Date: 29.JAN.2004 23:31:19

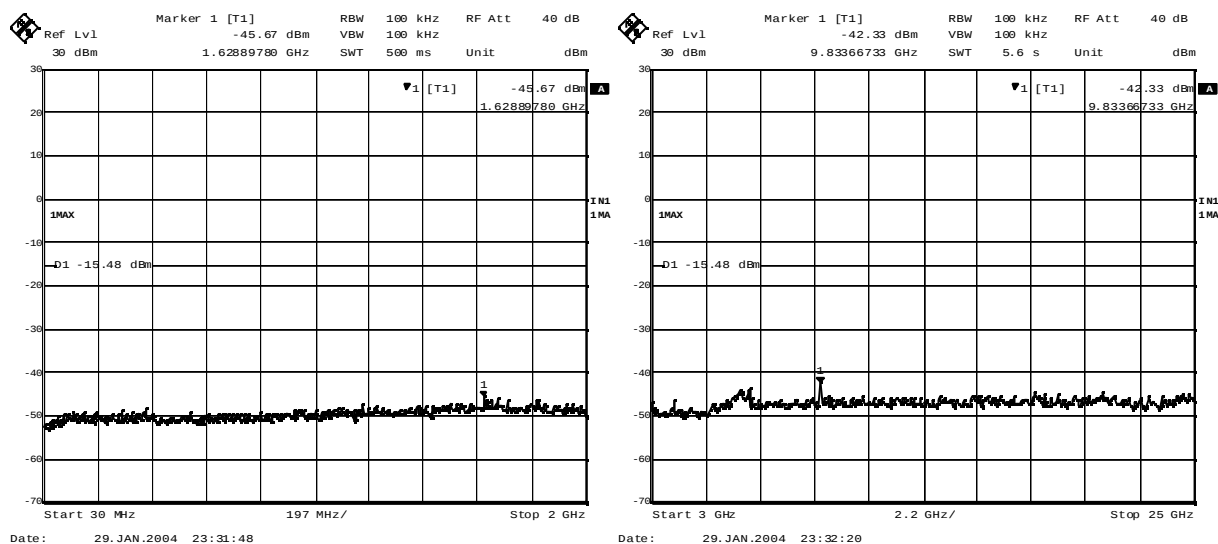


Plot 4-3. Out of band emissions around 2462MHz (DSSS, 5.5Mbps)

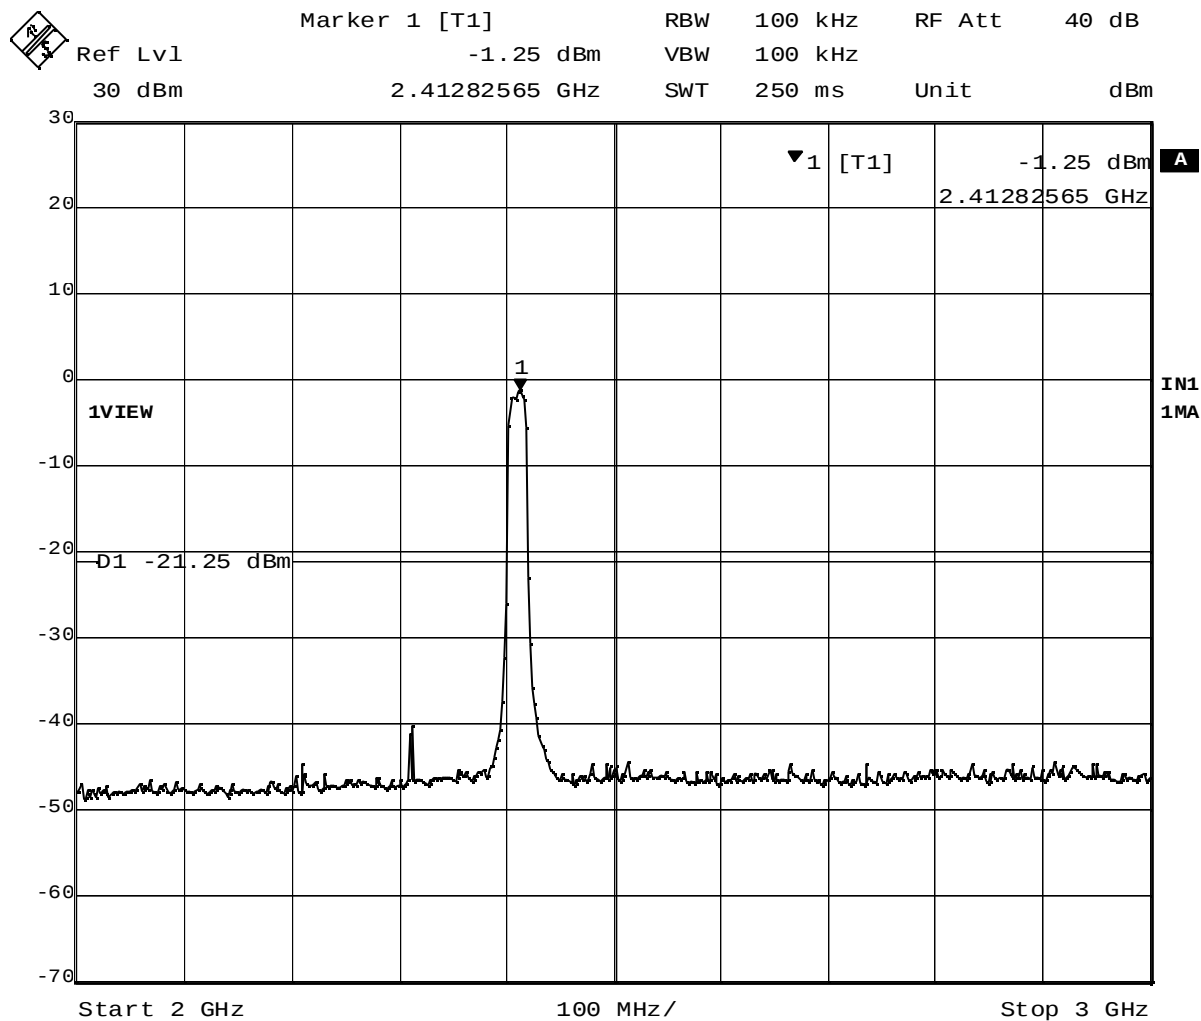


Date: 29.JAN.2004 23:36:17

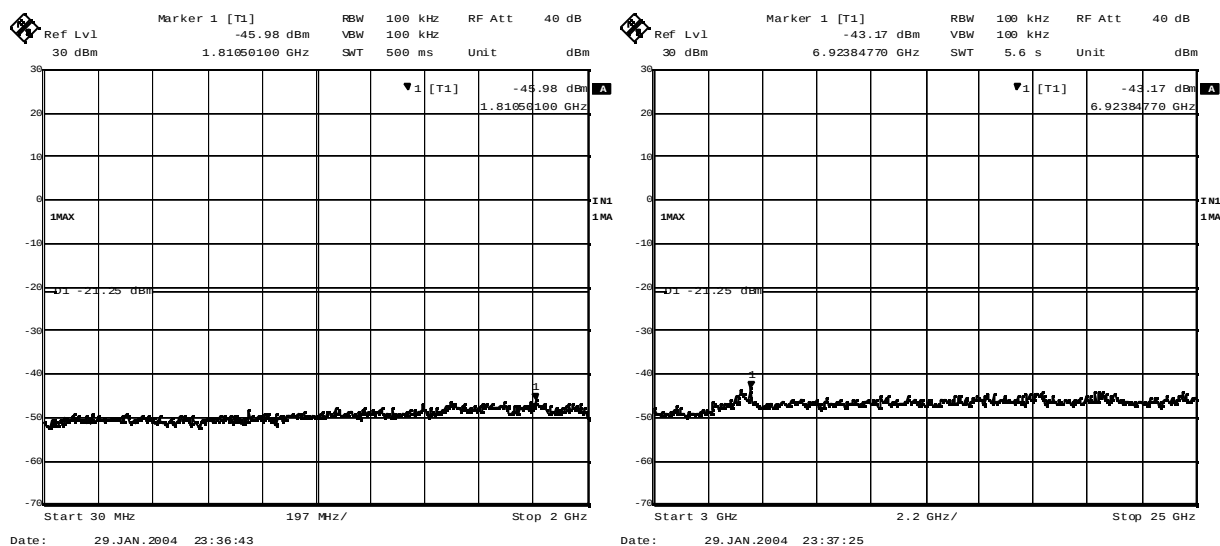


Plot 4-4. Out of band emissions around 2412MHz (OFDM, 6Mbps)

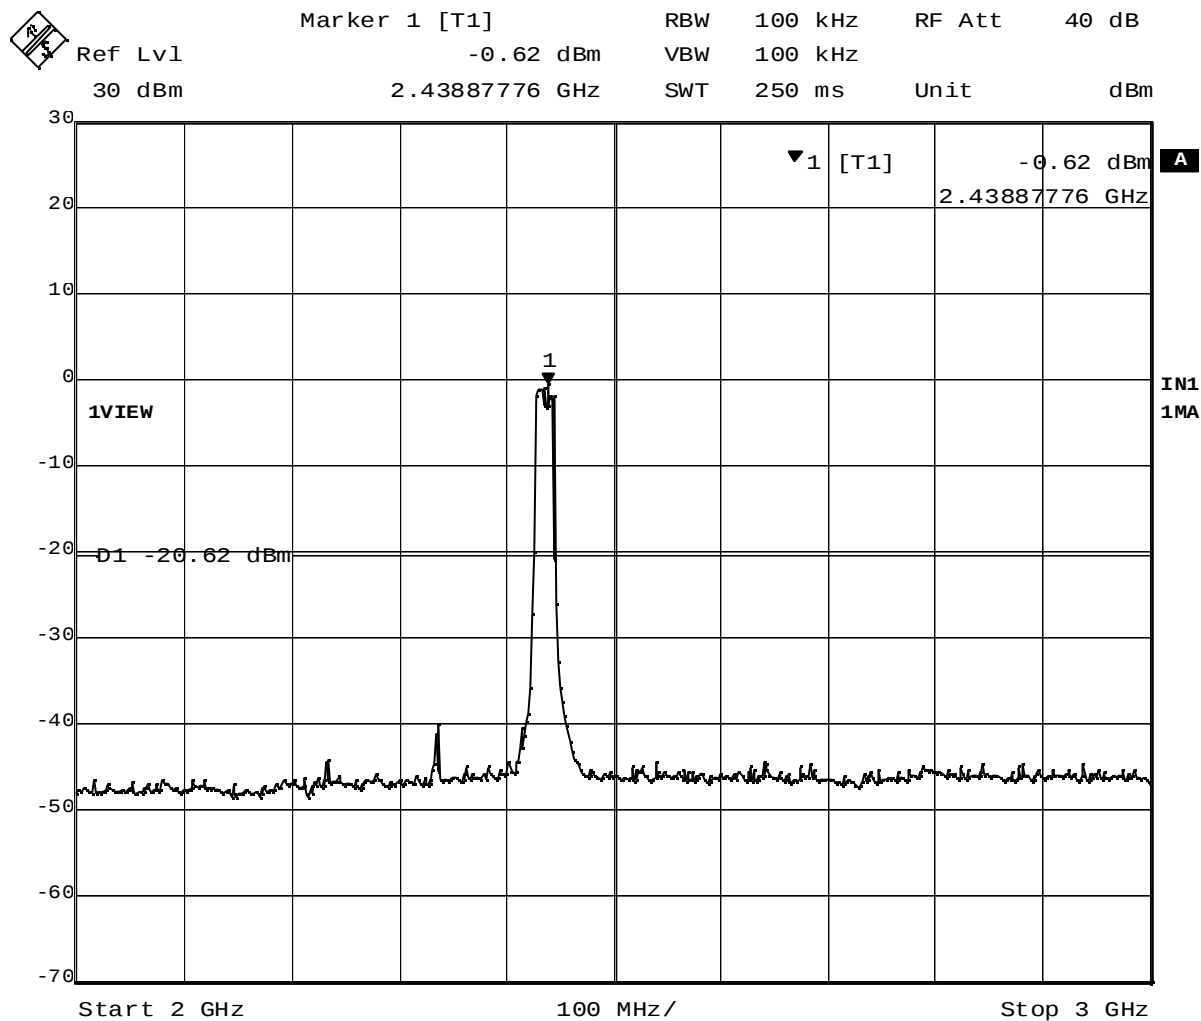


Date: 29.JAN.2004 23:43:29

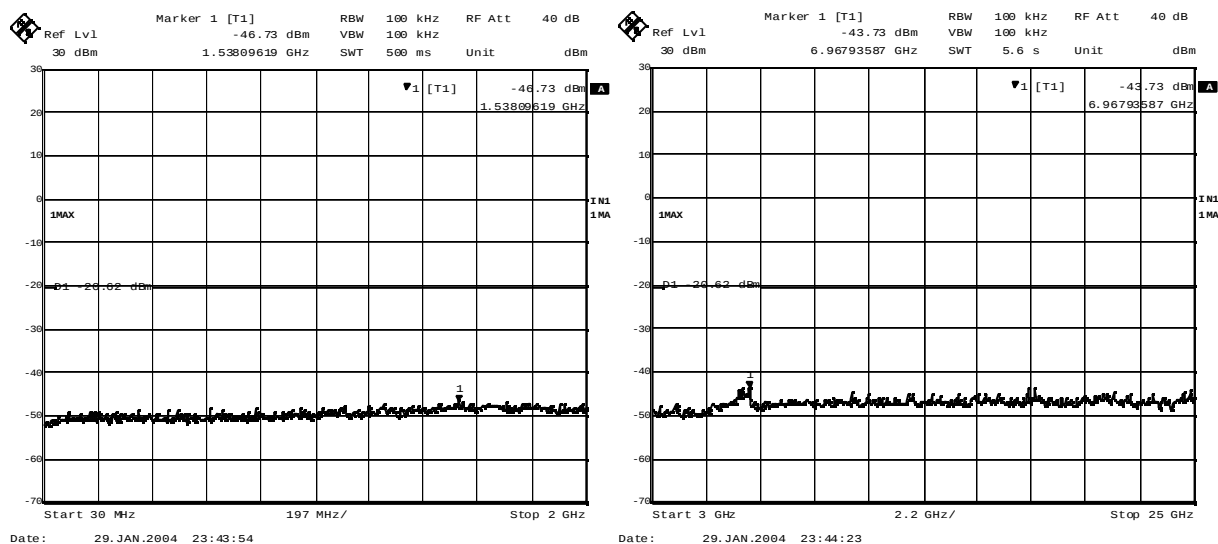

Plot 4-5. Out of band emissions around 2437MHz (OFDM, 6Mbps)

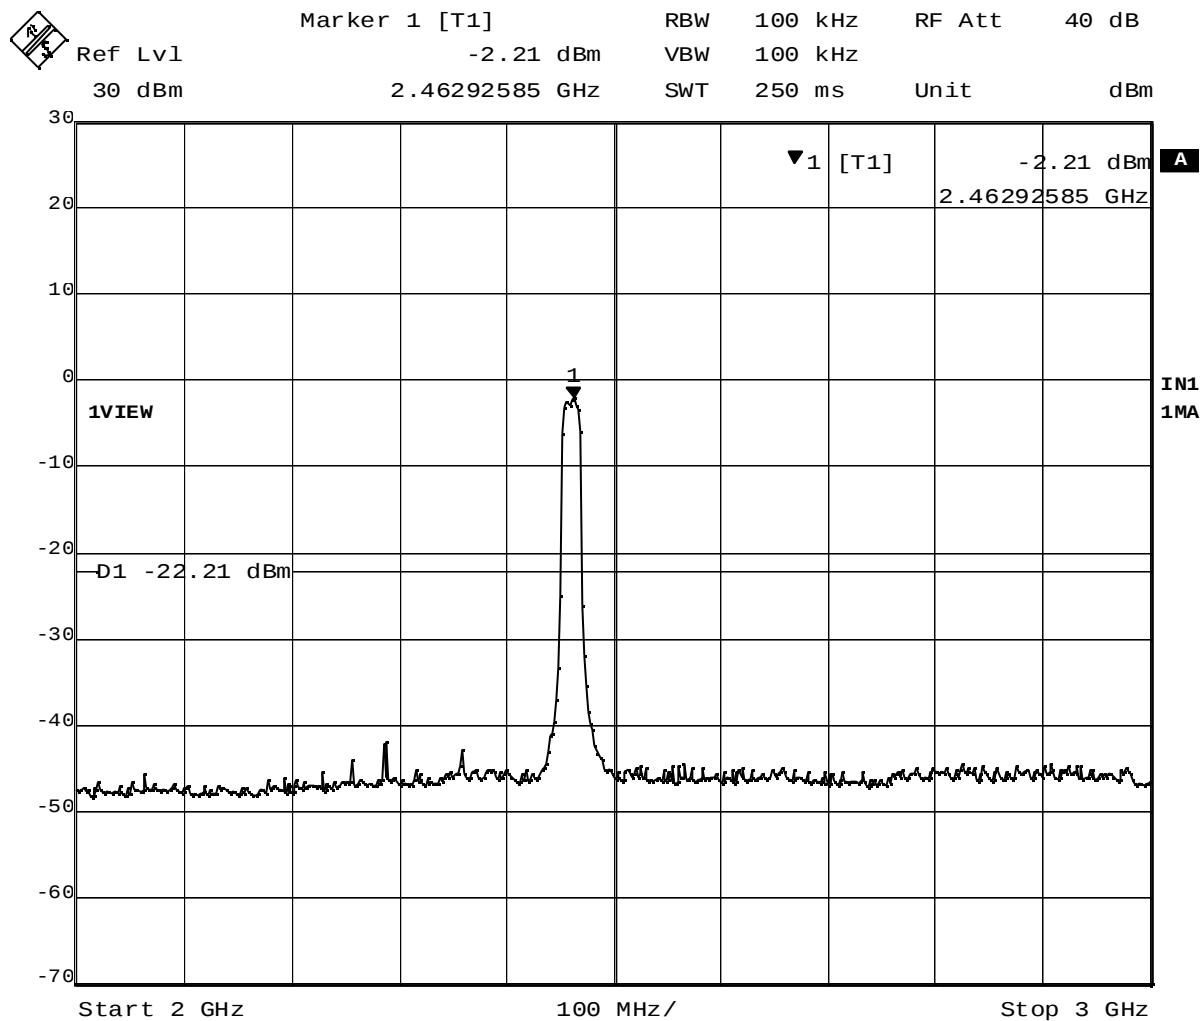

Date: 29.JAN.2004 23:50:41

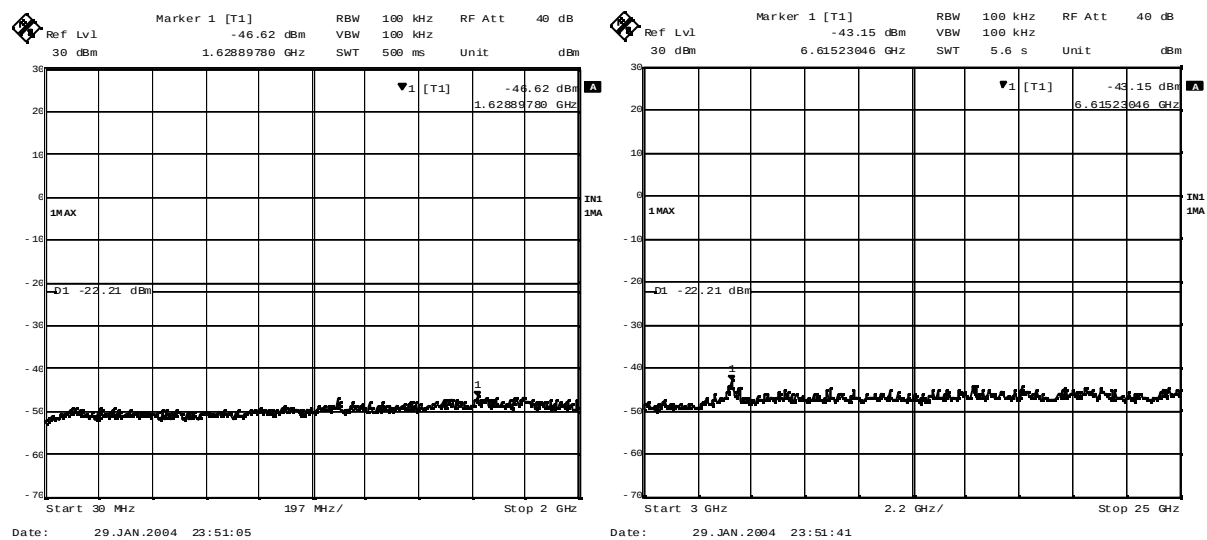

Plot 4-6. Out of band emissions around 2462MHz (OFDM, 6Mbps)

5. Peak Power Spectral Density

[FCC 15.247(d), RSS-210 6.2.2(o)(b)]

5.1 Test Procedure

The power spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The pre-scanning was performed with the spectrum analyzer to search and locate the center frequency at the peak emission of each transmission mode.

Then, the spectral analyzer was set to the emission peak found in the pre-scan and the peak power spectral density was measured with:

RBW = 3 kHz, VBW = 3 kHz, Span = 300 kHz, Sweep = 100 seconds

5.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

5.3 Measurement Results


The measurement was performed with the worse cases of each transmission mode, that tend to have higher conducted peak power, based on the results of previous Chapter 3, “Conducted Peak Output Power” measurement.

Test Date: January 30, 2004


Table 5-1. Peak Power Spectrum Density, TX mode

Ch No.			Frequency (MHz)	Analyzer Reading (dBm)	Trace number	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
DSSS	2.4GHz 5.5Mbps	1	2412.29	-8.40	Plot 5-1	1.3	- 7.1	8.0	15.1
		6	2435.82	-8.86	Plot 5-2	1.3	- 7.6	8.0	15.6
		11	2462.52	-9.02	Plot 5-3	1.3	- 7.7	8.0	15.7
OFDM	2.4GHz 6Mbps	1	2411.00	-14.51	Plot 5-4	1.3	-13.2	8.0	21.2
		6	2437.63	-13.72	Plot 5-5	1.3	-12.4	8.0	20.4
		11	2462.88	-14.30	Plot 5-6	1.3	-13.0	8.0	21.0

5.4 Trace Data of Peak Power Spectral Density

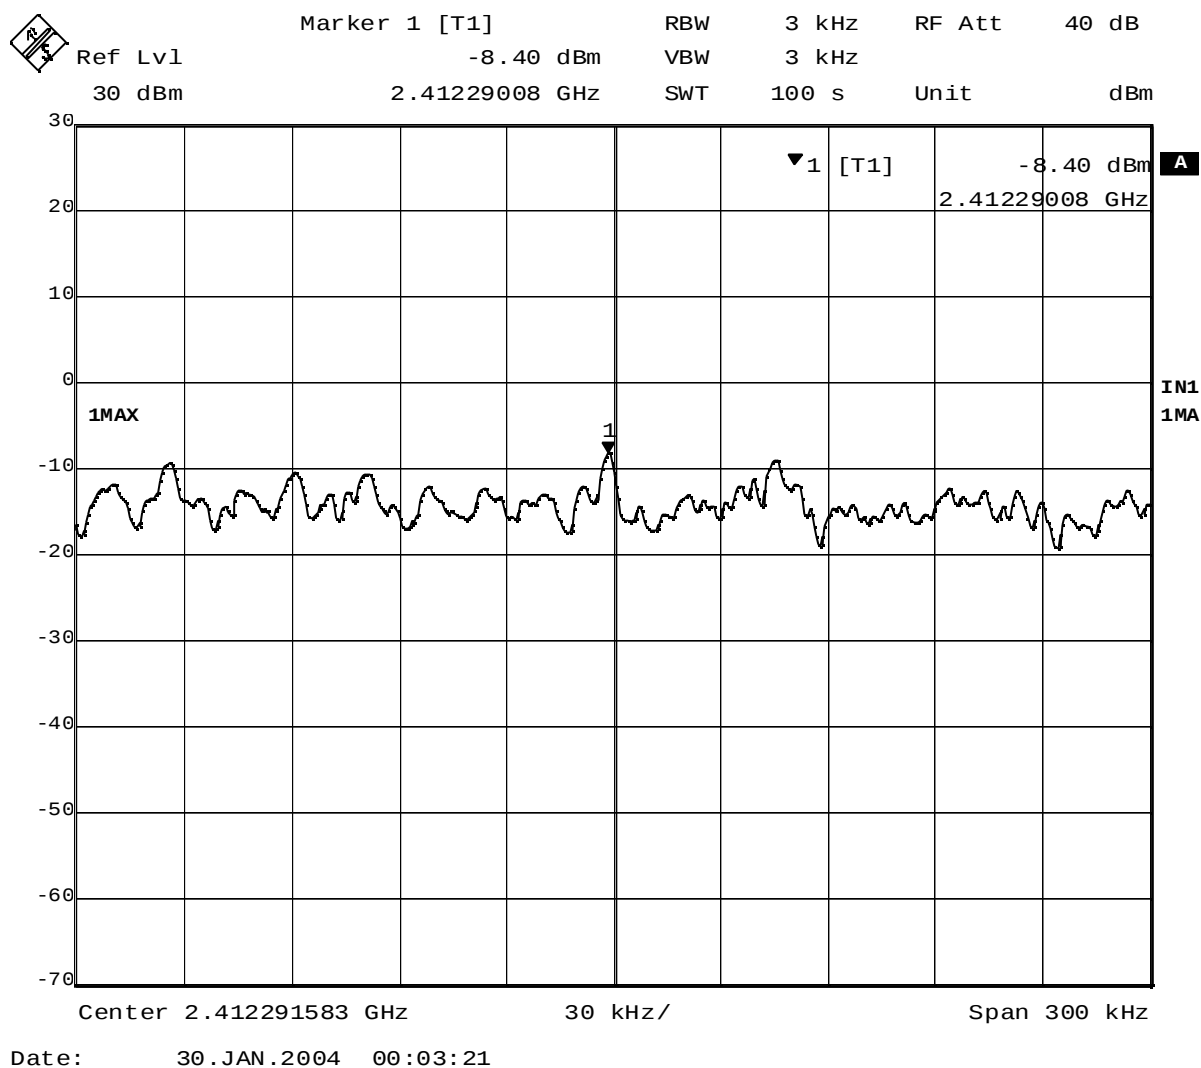


Plot 5-1. Peak Power Spectral Density of 2412MHz (DSSS, 5.5Mbps)

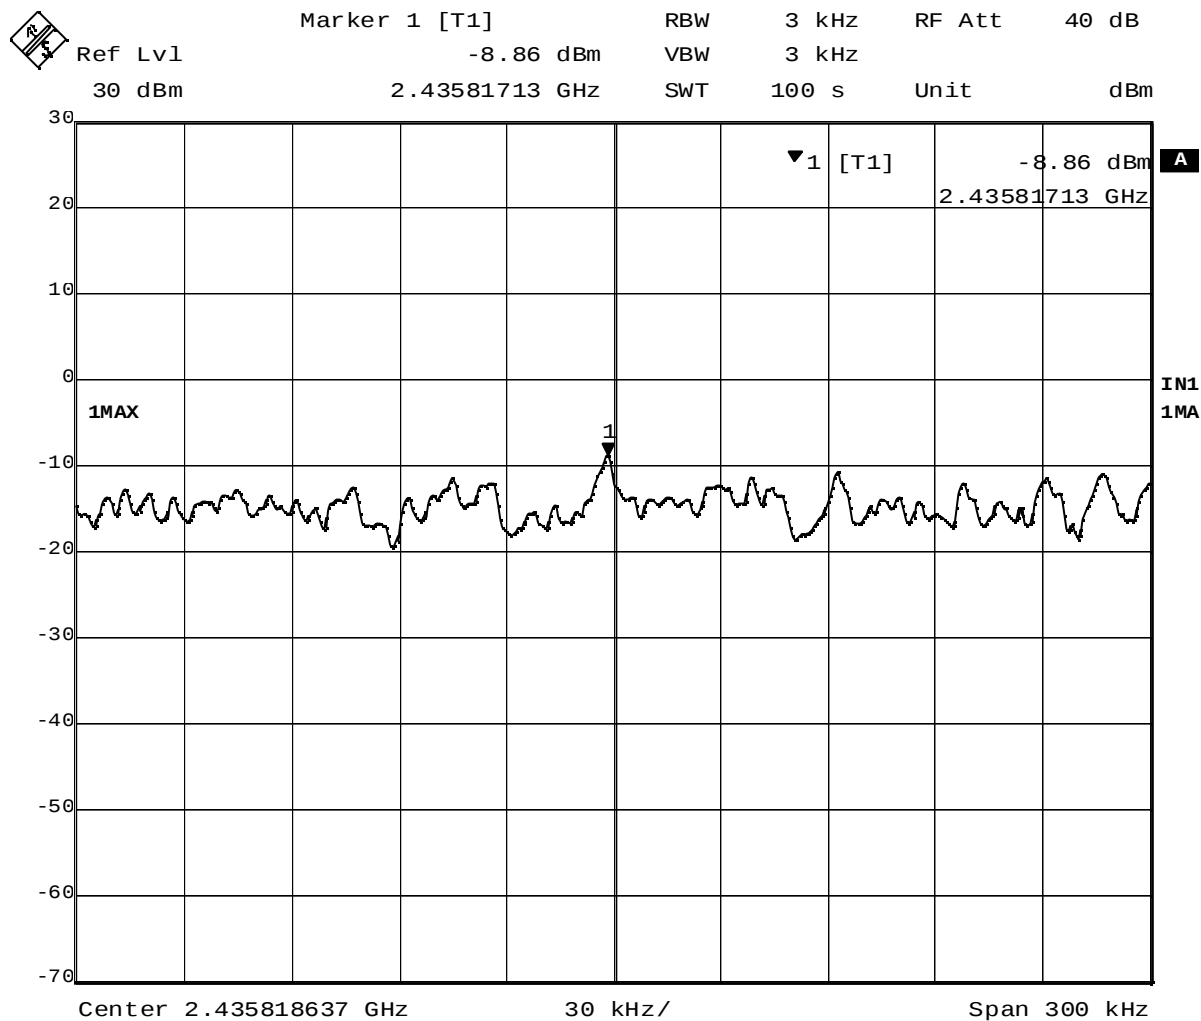


Date: 30.JAN.2004 00:12:27

Plot 5-2. Peak Power Spectral Density of 2437MHz (DSSS, 5.5Mbps)

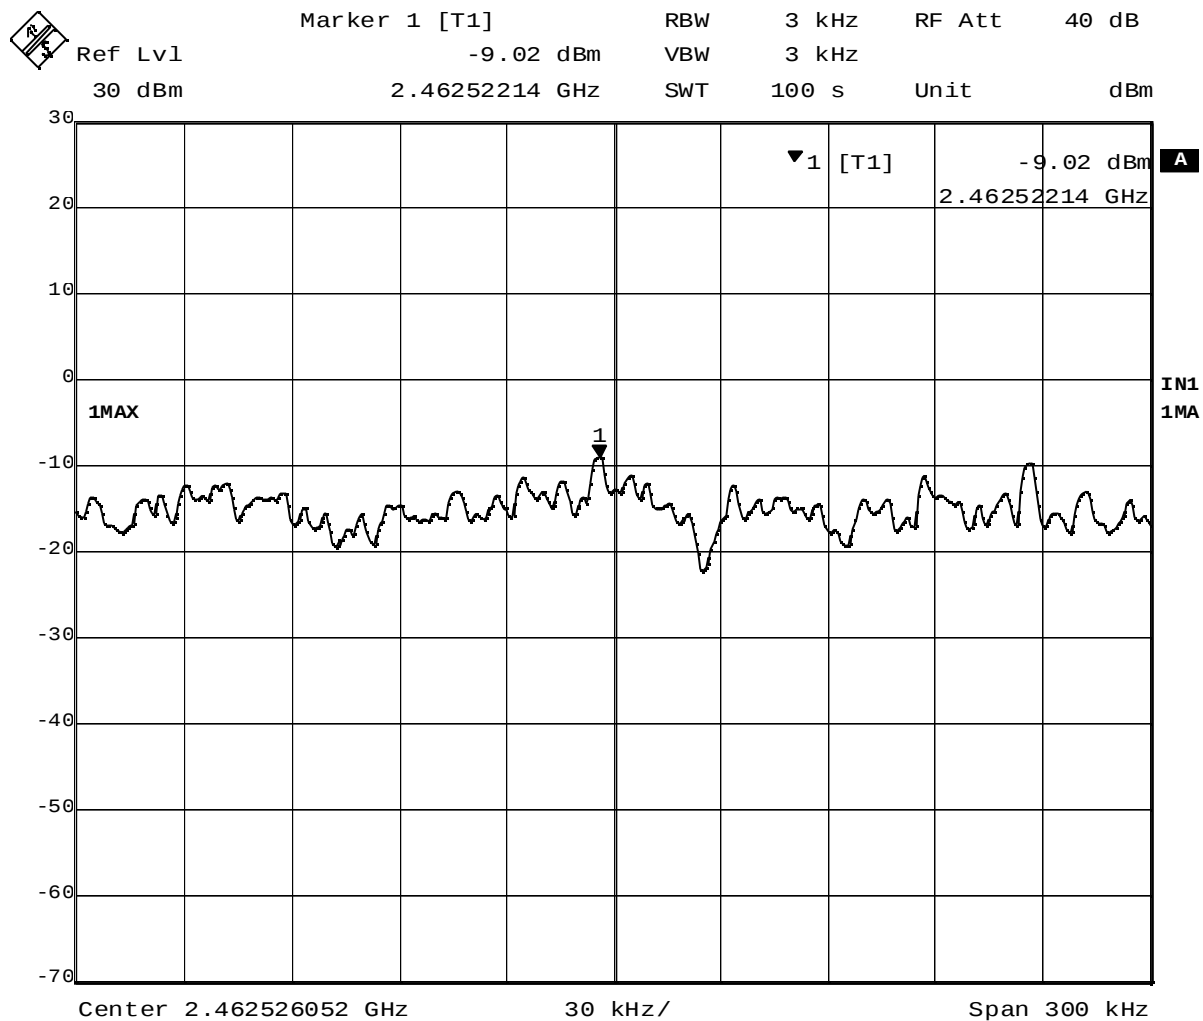


Date: 30.JAN.2004 00:26:28

Plot 5-3. Peak Power Spectral Density of 2462MHz (DSSS, 5.5Mbps)

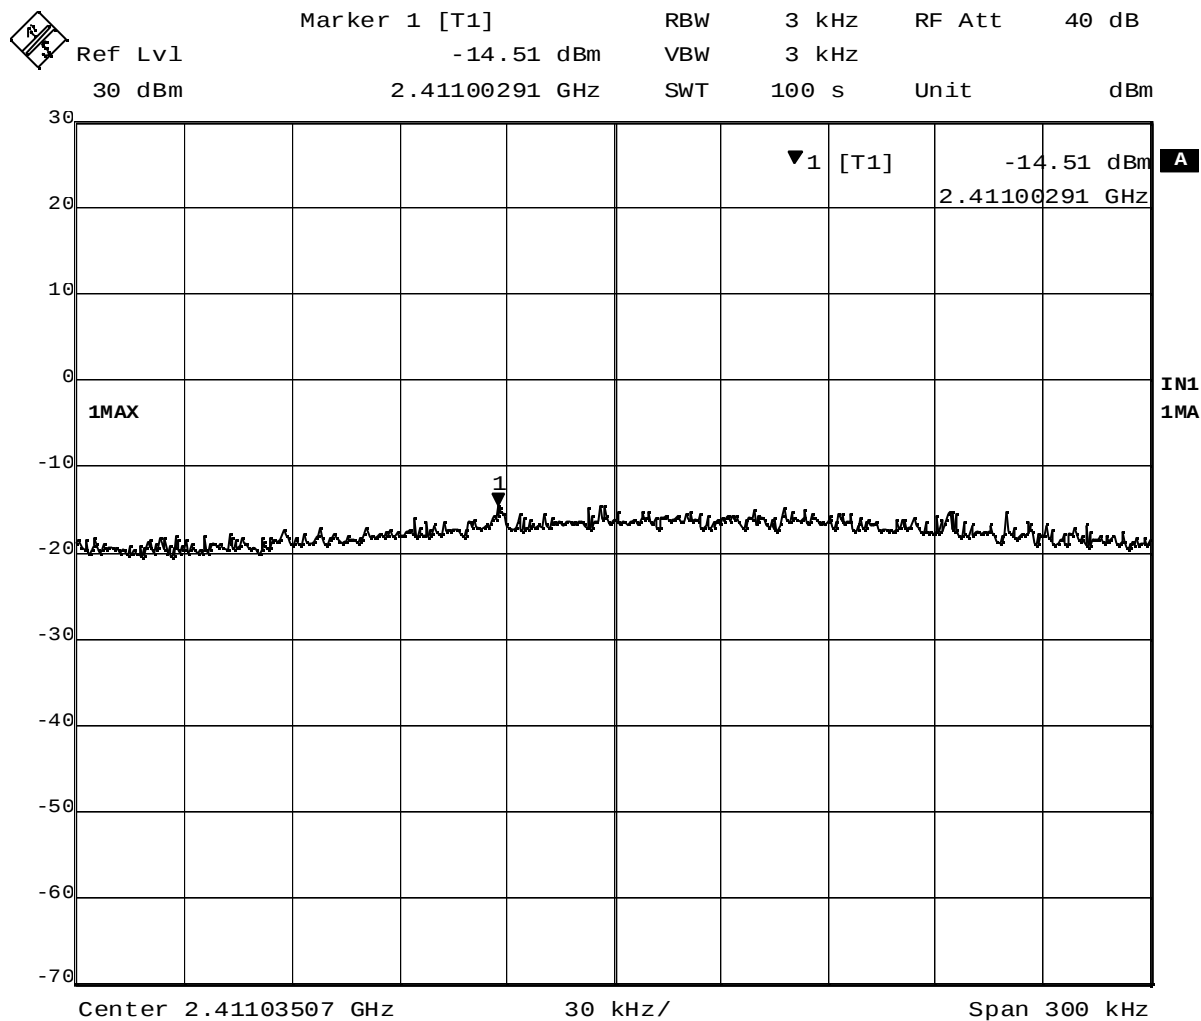


Date: 30.JAN.2004 00:34:28

Plot 5-4. Peak Power Spectral Density of 2412MHz (OFDM, 6Mbps)

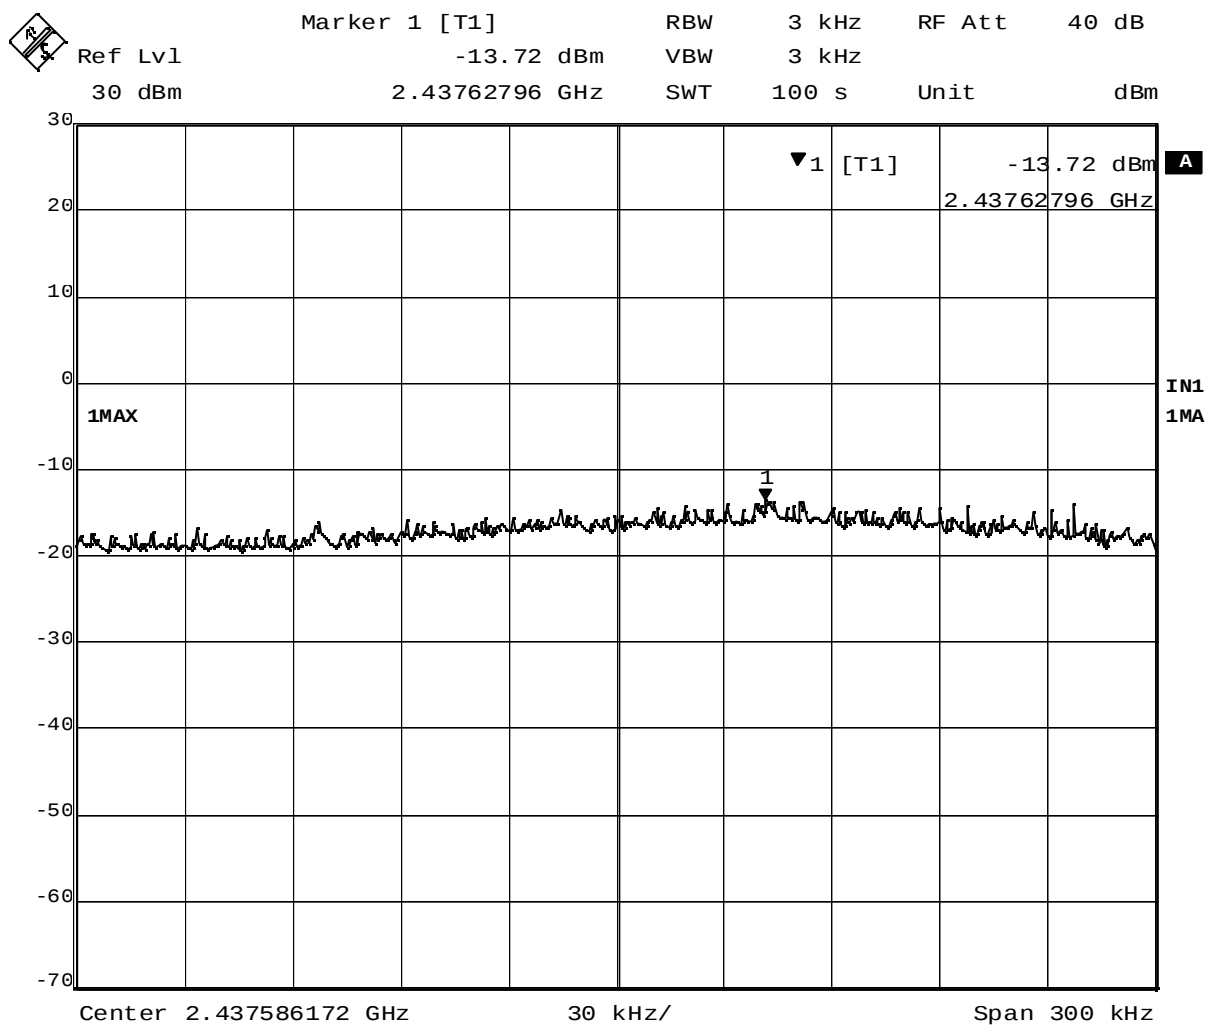

Date: 30.JAN.2004 00:43:06

Plot 5-5. Peak Power Spectral Density of 2437MHz (OFDM, 6Mbps)

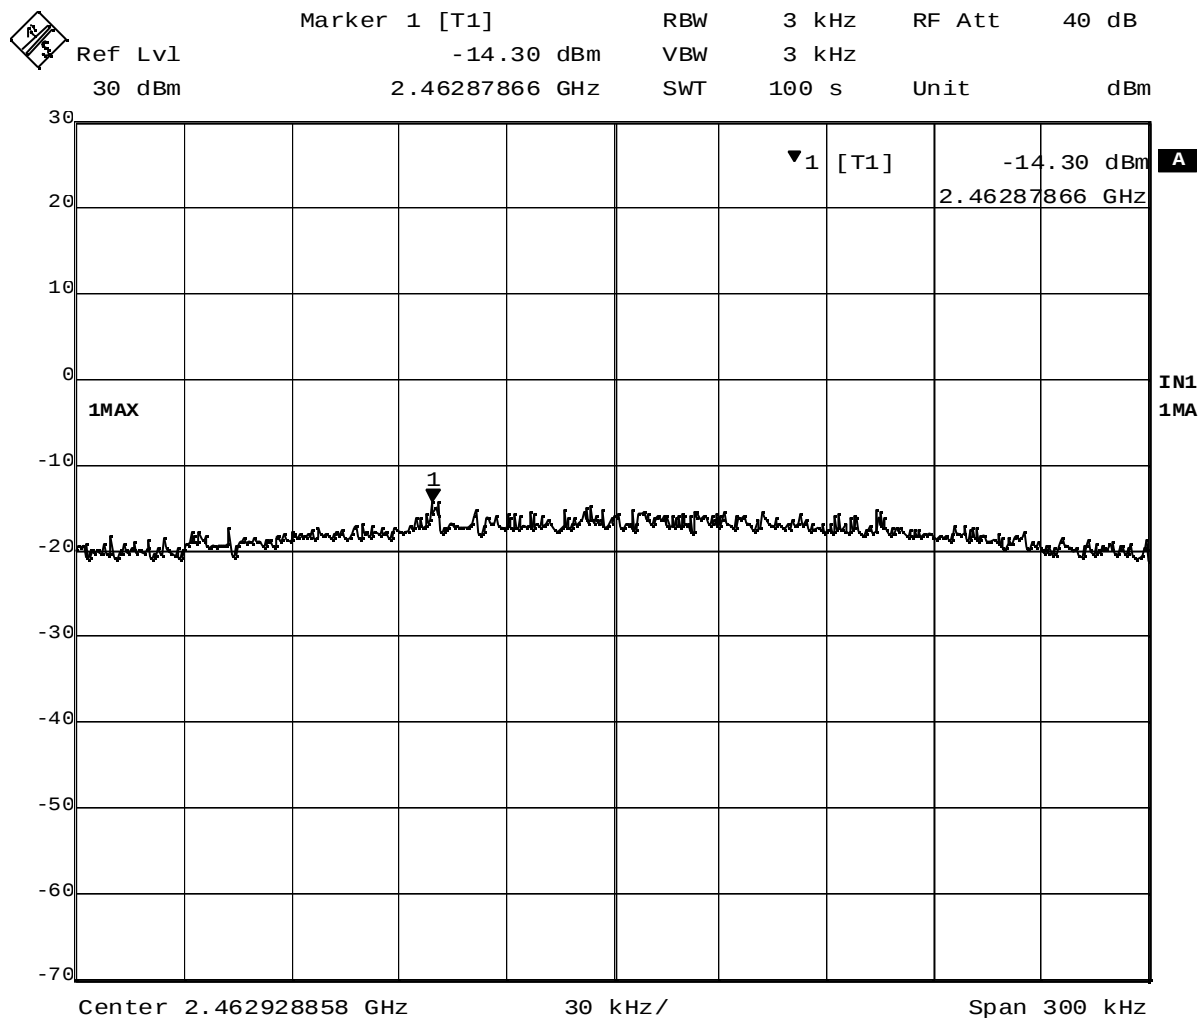

Date: 30.JAN.2004 00:52:12

Plot 5-6. Peak Power Spectral Density of 2462MHz (OFDM, 6Mbps)

6. AC Wireline Conducted Emissions (150KHz – 30MHz)

[FCC 15.207, RSS-210 6.6 / 7.4]

6.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254
Spectrum Analyzer Display	HP 85662A	2816A16831
Quasi-Peak Adapter	HP 85650A	2811A01156
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3810/2NM	00022007
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

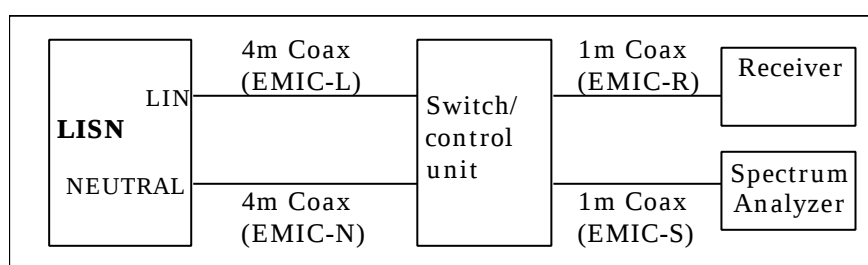


Figure 6. Cables for Conducted Emission Test

6.3 Powerline Voltage Calculation

The powerline voltage is calculated by adding insertion losses of LISN, Cable, Switch control unit and Pulse limiter to the measured reading. All factors are included in the reported data.

$$PV = R + CORR$$

where:

$$PV = \text{Powerline Voltage (dB}\mu\text{V)}$$

$$R = \text{Measured Receiver Input Amplitude (dB}\mu\text{V)}$$

$$CORR = \text{Correction Factor (dB) = LL+CL+SWL+PLL}$$

$$LL = \text{Insertion loss of LISN (dB)}$$

$$CL = \text{Insertion loss of Cable (dB)}$$

$$SWL = \text{Insertion loss of Switch control unit (dB)}$$

$$PLL = \text{Insertion loss of Pulse Limiter (dB)}$$

Given a Receiver input reading of 50.0 dB μ V, LISN loss of 0.6 dB, Cable loss of 0.1dB, Switch control unit loss of 0.1dB and Pulse limiter loss of 0.2dB. The Powerline Voltage of the measured emission is:

$$CORR = 0.6 + 0.1 + 0.1 + 0.2 = 1.0 \text{ (dB)}$$

$$PV = 50.0 + 1.0 = 51.0 \text{ (dB}\mu\text{V)}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 15.4dB. The 6 highest emissions relative to the limits are reported.

Test Date: February 3 and 10, 2004

6.3.1 EUT in 2.4GHz DSSS transmission mode (ThinkPad R50 Series)

Table 6-2-1. Ch.1 (2412MHz) **TX** mode 1Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2783	39.4	0.6	40.0	32.1	0.6	32.7	60.9	50.9	Neutral
0.3438	28.8	0.6	29.4	25.2	0.6	25.8	59.1	49.1	Neutral
0.4157	34.6	0.6	35.2	29.8	0.6	30.4	57.5	47.5	Neutral
0.5588	22.8	0.6	23.4	17.3	0.6	17.9	56.0	46.0	Neutral
0.6247	25.2	0.6	25.8	21.4	0.6	22.0	56.0	46.0	Neutral
5.5073	37.5	0.7	38.2	24.9	0.7	25.6	60.0	50.0	Line

Table 6-2-2. Ch.6 (2437MHz) **TX** mode 1Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2111	44.1	0.5	44.6	34.3	0.5	34.8	63.2	53.2	Line
0.2795	38.5	0.6	39.1	31.7	0.6	32.3	60.8	50.8	Neutral
0.3491	33.8	0.6	34.4	29.7	0.6	30.3	59.0	49.0	Neutral
0.4177	35.7	0.6	36.3	31.2	0.6	31.8	57.5	47.5	Neutral
0.6239	23.5	0.6	24.1	19.9	0.6	20.5	56.0	46.0	Neutral
6.0729	36.6	0.7	37.3	23.8	0.7	24.5	60.0	50.0	Line

Table 6-2-3. Ch.11 (2462MHz) **TX** mode 1Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2081	45.0	0.5	45.5	35.6	0.5	36.1	63.3	53.3	Line
0.2782	39.4	0.6	40.0	32.6	0.6	33.2	60.9	50.9	Neutral
0.3506	32.8	0.6	33.4	26.4	0.6	27.0	58.9	48.9	Neutral
0.4155	33.5	0.6	34.1	29.2	0.6	29.8	57.5	47.5	Neutral
0.6266	26.0	0.6	26.6	22.8	0.6	23.4	56.0	46.0	Neutral
0.9464	21.2	0.6	21.8	19.6	0.6	20.2	56.0	46.0	Neutral

Table 6-2-4. Ch. 6 (2437MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2108	43.9	0.5	44.4	34.2	0.5	34.7	63.2	53.2	Line
0.2788	38.3	0.6	38.9	31.9	0.6	32.5	60.9	50.9	Neutral
0.3501	33.9	0.6	34.5	30.4	0.6	31.0	59.0	49.0	Neutral
0.4180	35.8	0.6	36.4	31.5	0.6	32.1	57.5	47.5	Neutral
0.6301	25.8	0.6	26.4	22.3	0.6	22.9	56.0	46.0	Neutral
0.9498	22.3	0.6	22.9	20.9	0.6	21.5	56.0	46.0	Neutral

6.3.2 EUT in 2.4GHz OFDM transmission mode (ThinkPad T40 Series)Table 6-2-5. Ch.1 (2412MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2116	44.6	0.5	45.1	34.7	0.5	35.2	63.1	53.1	Neutral
0.2805	39.7	0.6	40.3	32.2	0.6	32.8	60.8	50.8	Neutral
0.3490	33.2	0.6	33.8	25.5	0.6	26.1	59.0	49.0	Line
0.4187	35.4	0.6	36.0	31.2	0.6	31.8	57.5	47.5	Neutral
0.4903	30.3	0.6	30.9	25.4	0.6	26.0	56.2	46.2	Neutral
0.6977	26.1	0.6	26.7	22.6	0.6	23.2	56.0	46.0	Neutral

Table 6-2-6. Ch.6 (2437MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2108	45.5	0.5	46.0	35.1	0.5	35.6	63.2	53.2	Line
0.2814	39.3	0.6	39.9	31.8	0.6	32.4	60.8	50.8	Neutral
0.3517	32.0	0.6	32.6	24.6	0.6	25.2	58.9	48.9	Neutral
0.4186	35.3	0.6	35.9	31.1	0.6	31.7	57.5	47.5	Neutral
0.4884	30.3	0.6	30.9	25.6	0.6	26.2	56.2	46.2	Neutral
0.6988	26.4	0.6	27.0	22.8	0.6	23.4	56.0	46.0	Neutral

Table 6-2-7. Ch.11 (2462MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2120	44.7	0.5	45.2	34.4	0.5	34.9	63.1	53.1	Line
0.2783	39.6	0.6	40.2	32.2	0.6	32.8	60.9	50.9	Neutral
0.3498	33.6	0.6	34.2	26.2	0.6	26.8	59.0	49.0	Line
0.4190	35.4	0.6	36.0	31.2	0.6	31.8	57.5	47.5	Neutral
0.4911	29.9	0.6	30.5	25.2	0.6	25.8	56.1	46.1	Neutral
4.8262	32.5	0.7	33.2	22.5	0.7	23.2	56.0	46.0	Line

Table 6-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2114	44.5	0.5	45.0	34.6	0.5	35.1	63.1	53.1	Neutral
0.2813	39.4	0.6	40.0	31.8	0.6	32.4	60.8	50.8	Neutral
0.4182	35.4	0.6	36.0	31.3	0.6	31.9	57.5	47.5	Neutral
0.4862	28.2	0.6	28.8	23.7	0.6	24.3	56.2	46.2	Neutral
0.6974	26.0	0.6	26.6	22.5	0.6	23.1	56.0	46.0	Neutral
6.0865	37.9	0.7	38.6	24.8	0.7	25.5	60.0	50.0	Line

7. Restricted Bands Radiation (30MHz – 1GHz)

[FCC 15.205 / 209, RSS-210 6.3 / 7.3]

7.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6868-30J	97-901X3
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	2601A02634
Spectrum Analyzer Display for 30-200MHz	HP 85662A	2542A12308
Quasi-Peak Adapter for 30-200MHz	HP 85650A	2043A00062
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	3019A05156
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	3026A19366
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01433
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447F	2805A02919
- for 200-1000MHz	HP 8447D	2727A05190
Biconical Antenna (30-200MHz)	EMCO 3108	2536
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

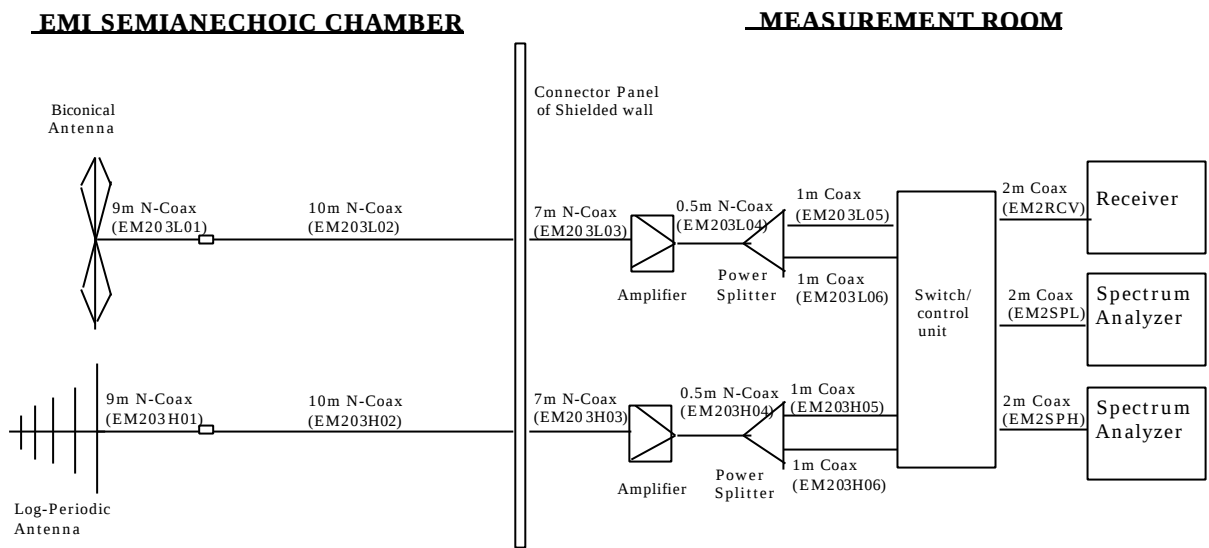


Figure 7 Cables for Radiated Emission Test

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example :

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 1.9 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: February 2 and 5, 2004

7.4.1 EUT in 2.4GHz DSSS transmission mode (ThinkPad R50 Series)

Table 7-2-1. Ch.1 (2412MHz) **TX** mode 1Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
168.936	H	39.6	12.5	-16.2	35.9	43.5	62.4	150
200.454	V	36.0	11.4	-12.6	34.8	43.5	55.0	150
364.508	H	39.3	14.4	-13.6	40.1	46.0	101.2	200
458.447	V	33.3	16.6	-13.8	36.1	46.0	63.8	200
729.015	V	32.8	21.1	-11.1	42.8	46.0	138.0	200
911.269	V	25.3	22.8	-9.0	39.1	46.0	90.2	200

Table 7-2-2. Ch.6 (2437MHz) **TX** mode 1Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
168.540	H	38.5	12.5	-16.2	34.8	43.5	55.0	150
200.454	H	39.4	11.4	-12.6	38.2	43.5	81.3	150
364.508	H	40.8	14.4	-13.6	41.6	46.0	120.2	200
458.447	V	33.6	16.6	-13.8	36.4	46.0	66.1	200
729.016	H	33.6	21.1	-11.1	43.6	46.0	151.4	200
911.270	V	27.0	22.8	-9.0	40.8	46.0	109.6	200

Table 7-2-3. Ch.11 (2462MHz) **TX** mode 1Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
170.436	H	39.2	12.5	-16.1	35.6	43.5	60.3	150
200.644	H	36.6	11.4	-12.6	35.4	43.5	58.9	150
364.508	H	40.8	14.4	-13.6	41.6	46.0	120.2	200
458.447	V	33.1	16.6	-13.8	35.9	46.0	62.4	200
729.016	H	34.1	21.1	-11.1	44.1	46.0	160.3	200
911.269	V	26.1	22.8	-9.0	39.9	46.0	98.9	200

Table 7-2-4. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.182	H	35.9	12.2	-16.6	31.5	43.5	37.6	150
171.817	H	41.0	12.5	-16.2	37.3	43.5	73.3	150
200.454	H	38.7	11.4	-12.6	37.5	43.5	75.0	150
364.508	H	41.2	14.4	-13.6	42.0	46.0	125.9	200
455.072	V	34.2	16.5	-13.8	36.9	46.0	70.0	200
729.016	H	32.3	21.1	-11.1	42.3	46.0	130.3	200

7.4.2 EUT in 2.4GHz OFDM transmission mode (ThinkPad T40 Series)

Table 7-2-5. Ch.1 (2412MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.181	V	35.3	12.2	-16.6	30.9	43.5	35.1	150
172.184	H	37.3	12.6	-16.2	33.7	43.5	48.4	150
299.432	H	32.3	14.1	-14.2	32.2	46.0	40.7	200
466.045	V	30.9	16.8	-13.7	34.0	46.0	50.1	200
564.643	V	26.9	18.2	-13.2	31.9	46.0	39.4	200
928.692	V	17.9	22.7	-9.1	31.5	46.0	37.6	200

Table 7-2-6. Ch.6 (2437MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.181	V	34.9	12.2	-16.6	30.5	43.5	33.5	150
175.314	H	37.4	12.6	-16.2	33.8	43.5	49.0	150
299.449	H	29.8	14.1	-14.2	29.7	46.0	30.5	200
303.959	H	29.5	14.7	-13.9	30.3	46.0	32.7	200
465.545	V	30.0	16.8	-13.8	33.0	46.0	44.7	200
563.611	V	28.3	18.2	-13.2	33.3	46.0	46.2	200

Table 7-2-7. Ch.11 (2462MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.181	V	34.8	12.2	-16.6	30.4	43.5	33.1	150
176.979	H	38.3	12.7	-16.1	34.9	43.5	55.6	150
200.453	H	33.4	11.4	-12.6	32.2	43.5	40.7	150
299.462	H	30.4	14.1	-14.2	30.3	46.0	32.7	200
563.611	V	26.8	18.2	-13.2	31.8	46.0	38.9	200
663.854	V	20.1	20.4	-12.1	28.4	46.0	26.3	200

Table 7-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
143.181	V	35.2	12.2	-16.6	30.8	43.5	34.7	150
174.478	H	37.6	12.6	-16.0	34.2	43.5	51.3	150
200.453	H	33.3	11.4	-12.6	32.1	43.5	40.3	150
331.659	H	28.6	14.2	-13.9	28.9	46.0	27.9	200
465.795	V	30.6	16.8	-13.7	33.7	46.0	48.4	200
563.611	V	28.5	18.2	-13.2	33.5	46.0	47.3	200

8. Restricted Bands Radiatio (1GHz – 25GHz)

[FCC 15.205 / 209, RSS-210 6.3 / 7.3]

8.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 25GHz in transmitting mode and 1 GHz to 12.5GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 25 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

8.2 Test Instruments and Measurement Setup

Table 8 Radiated Emission Test Instrumentation (1GHz – 25GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Amplifier (1 – 18GHz)	HP 8449B	3008A00582
Amplifier (18 – 25GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (18 - 25GHz)	EMCO 3160-9	0004-1202
Coaxial cables: - Horn Ant <=> RF Amp. (1-18GHz) - RF Amp. <=> Spectrum Analyzer (1-18GHz) - Horn Ant <=> RF Amp. (18-25GHz) - RF Amp. <=> Spectrum Analyzer (18-25GHz)	Length: 6 m 16 m 3m 1m	- EM206SCO - GEM0101 - SF102-20167 - SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

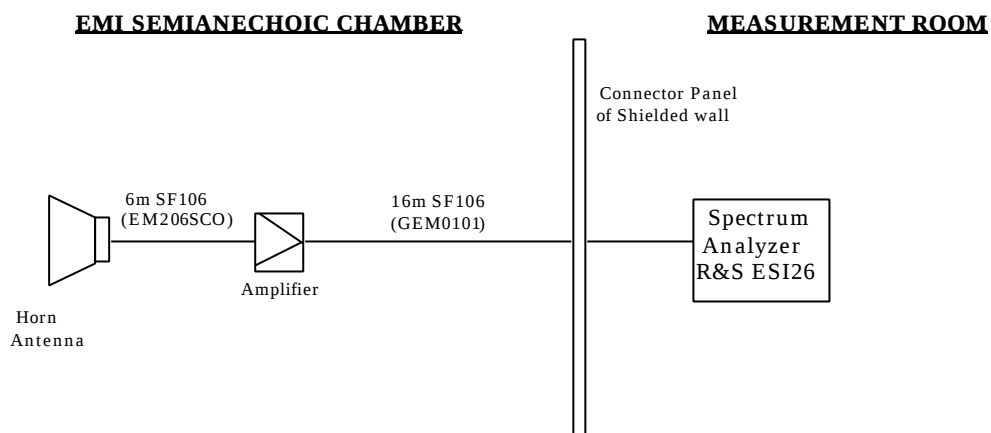


Figure 8-1. Cables for Radiated Emission Test (1 – 18 GHz)

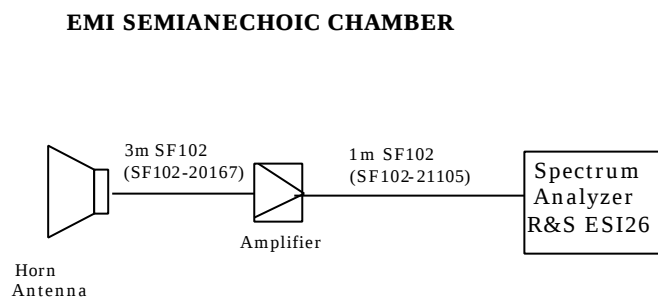


Figure 8-2. Cables for Radiated Emission Test (18 - 25GHz)

8.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log (Level}(\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

8.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 0.8 dB. The measurement was done for the frequency range of 1 GHz to 25 GHz in TX mode and 1 GHz to 12.5GHz in RX mode.

Test Date: January 30, February 2, 3 and 5, 2004

8.4.1 EUT in 2.4GHz DSSS transmission mode (ThinkPad R50 Series)

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter)

Table 8-2-1. Ch.1 (2412MHz) **TX** mode 1Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband 2.411	H	109.0	102.7	28.3	-29.6	0.0	107.7	OB*	101.4	OB*
Adjacent RB 2.386	H	57.0	47.0	28.2	-29.6	0.0	55.6	74.0	45.6	54.0
2.390	H	55.6	43.3	28.2	-29.6	0.0	54.2	74.0	41.9	54.0
1.094	V	54.3	-	24.4	-31.9	0.0	46.8	74.0	-	54.0
1.129	V	49.9	-	24.5	-31.8	0.0	42.6	74.0	-	54.0
1.160	V	49.5	-	24.6	-31.7	0.0	42.4	74.0	-	54.0
1.196	V	50.7	-	25.2	-31.6	0.0	44.3	74.0	-	54.0
2.312	H	52.4	-	28.0	-29.7	0.0	50.7	74.0	-	54.0
2.373	H	52.9	-	28.2	-29.6	0.0	51.5	74.0	-	54.0
4.826	V	42.7	-	27.1	-27.2	0.0	42.6	74.0	-	54.0

Table 8-2-2. Ch.6 (2437MHz) **TX** mode 1Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband 2.436	H	107.6	101.3	28.4	-29.6	0.0	106.4	OB*	100.1	OB*
Adjacent RB 2.390	H	52.3	-	28.2	-29.6	0.0	50.9	74.0	-	54.0
2.484	H	51.9	-	28.4	-29.6	0.0	50.7	74.0	-	54.0
2.488	H	54.4	-	28.4	-29.6	0.0	53.2	74.0	-	54.0
1.094	V	53.6	-	24.4	-31.9	0.0	46.1	74.0	-	54.0
1.129	V	49.6	-	24.5	-31.8	0.0	42.3	74.0	-	54.0
1.160	V	48.9	-	24.6	-31.7	0.0	41.8	74.0	-	54.0
1.196	V	50.0	-	25.2	-31.6	0.0	43.6	74.0	-	54.0
2.337	V	51.0	-	28.1	-29.6	0.0	49.5	74.0	-	54.0
2.363	V	50.1	-	28.1	-29.6	0.0	48.6	74.0	-	54.0
2.371	V	50.1	-	28.2	-29.6	0.0	48.7	74.0	-	54.0
4.876	V	41.6	-	27.0	-27.0	0.0	41.6	74.0	-	54.0
7.314	V	37.0	-	29.9	-24.9	0.0	42.0	74.0	-	54.0

Table 8-2-3. Ch.11 (2462MHz) **TX** mode 1Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμ V) (peak)	Measured (dBμ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμ V/m) (peak)	FCC Limit (dBμ V/m) (peak)	Field Strength (dBμ V/m) (average)	FCC Limit (dBμ V/m) (average)
Inband 2.463	H	107.9	101.8	28.4	-29.6	0.0	106.7	OB*	100.6	OB*
Adjacent RB 2.484	H	58.3	48.4	28.4	-29.6	0.0	57.1	74.0	47.2	54.0
2.488	H	61.1	53.4	28.4	-29.6	0.0	59.9	74.0	52.2	54.0
1.094	V	53.2	-	24.4	-31.9	0.0	45.7	74.0	-	54.0
1.129	V	49.3	-	24.5	-31.8	0.0	42.0	74.0	-	54.0
1.160	V	48.1	-	24.6	-31.7	0.0	41.0	74.0	-	54.0
1.196	V	50.2	-	25.2	-31.6	0.0	43.8	74.0	-	54.0
2.288	H	51.2	-	27.8	-29.8	0.0	49.2	74.0	-	54.0
2.361	H	50.3	-	28.1	-29.6	0.0	48.8	74.0	-	54.0
2.383	H	52.7	-	28.2	-29.6	0.0	51.3	74.0	-	54.0
4.926	V	39.5	-	27.0	-27.0	0.0	39.5	74.0	-	54.0
7.390	V	36.7	-	29.8	-24.9	0.0	41.6	74.0	-	54.0

Table 8-2-4. Ch.6 (2437MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dBμ V) (peak)	Measured (dBμ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμ V/m) (peak)	FCC Limit (dBμ V/m) (peak)	Field Strength (dBμ V/m) (average)	FCC Limit (dBμ V/m) (average)
1.094	V	53.3	-	24.4	-31.9	0.0	45.8	74.0	-	54.0
1.129	V	50.6	-	24.5	-31.8	0.0	43.3	74.0	-	54.0
1.160	V	50.0	-	24.6	-31.7	0.0	42.9	74.0	-	54.0
1.196	V	51.8	-	25.2	-31.6	0.0	45.4	74.0	-	54.0

8.4.2 EUT in 2.4GHz OFDM transmission mode (ThinkPad T40 Series)

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter)

Table 8-2-5. Ch.1 (2412MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμ V) (peak)	Measured (dBμ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμ V/m) (peak)	FCC Limit (dBμ V/m) (peak)	Field Strength (dBμ V/m) (average)	FCC Limit (dBμ V/m) (average)
Inband 2.410	H	109.8	96.0	28.3	-29.6	0.0	108.5	OB*	94.7	OB*
Adjacent RB 2.389	H	67.5	52.1	28.2	-29.6	0.0	66.1	74.0	50.7	54.0
2.390	H	67.0	53.0	28.2	-29.6	0.0	65.6	74.0	51.6	54.0
1.013	V	49.2	-	24.3	-32.2	0.0	41.3	74.0	-	54.0
1.051	V	48.5	-	24.6	-32.0	0.0	41.1	74.0	-	54.0
1.196	V	52.4	-	25.2	-31.6	0.0	46.0	74.0	-	54.0
2.313	H	59.6	45.2	28.0	-29.7	0.0	57.9	74.0	43.5	54.0
2.361	H	55.4	-	28.1	-29.6	0.0	53.9	74.0	-	54.0
2.378	H	60.6	43.5	28.2	-29.6	0.0	59.2	74.0	42.1	54.0
2.386	H	63.3	46.5	28.2	-29.6	0.0	61.9	74.0	45.1	54.0

Table 8-2-6. Ch.6 (2437MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.436	H	111.2	96.7	28.4	-29.6	0.0	110.0	OB*	95.5	OB*
Adjacent RB 2.390	H	56.6	43.4	28.2	-29.6	0.0	55.2	74.0	42.0	54.0
2.484	H	59.0	42.5	28.4	-29.6	0.0	57.8	74.0	41.3	54.0
2.485	H	57.0	42.5	28.4	-29.6	0.0	55.8	74.0	41.3	54.0
1.003	V	51.1	-	24.1	-32.3	0.0	42.9	74.0	-	54.0
1.029	V	49.0	-	24.3	-32.2	0.0	41.1	74.0	-	54.0
1.091	V	48.3	-	24.4	-31.9	0.0	40.8	74.0	-	54.0
1.192	V	53.2	-	25.2	-31.6	0.0	46.8	74.0	-	54.0
2.235	H	51.0	-	27.7	-29.8	0.0	48.9	74.0	-	54.0
2.281	H	52.8	-	27.8	-29.8	0.0	50.8	74.0	-	54.0
2.337	H	60.1	46.8	28.1	-29.6	0.0	58.6	74.0	45.3	54.0
2.361	H	55.1	-	28.1	-29.6	0.0	53.6	74.0	-	54.0

Table 8-2-7. Ch.11 (2462MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.459	H	109.0	95.2	28.4	-29.6	0.0	107.8	OB*	94.0	OB*
Adjacent RB 2.484	H	71.1	54.4	28.4	-29.6	0.0	69.9	74.0	53.2	54.0
2.487	H	68.6	52.1	28.4	-29.6	0.0	67.4	74.0	50.9	54.0
1.031	V	47.6	-	24.6	-32.0	0.0	40.2	74.0	-	54.0
1.196	V	52.5	-	25.2	-31.6	0.0	46.1	74.0	-	54.0
1.330	V	51.2	-	25.6	-31.3	0.0	45.5	74.0	-	54.0
2.257	H	52.4	-	27.7	-29.8	0.0	50.3	74.0	-	54.0
2.289	H	55.9	-	27.8	-29.8	0.0	53.9	74.0	-	54.0
2.360	H	58.7	44.9	28.1	-29.6	0.0	57.2	74.0	43.4	54.0
2.389	H	55.4	43.3	28.2	-29.6	0.0	54.0	74.0	41.9	54.0

Table 8-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.013	V	49.1	-	24.3	-32.2	0.0	41.2	74.0	-	54.0
1.028	V	47.2	-	24.3	-32.2	0.0	39.3	74.0	-	54.0
1.199	V	53.5	-	25.2	-31.6	0.0	47.1	74.0	-	54.0
1.325	V	53.1	-	25.6	-31.3	0.0	47.4	74.0	-	54.0

8.5 Measurement plots of adjacent restricted band

8.5.1 List of Measurement Results

a) EUT in 2.4GHz DSSS transmission mode

Measured with IBM ThinkPad T40 Series

Tx Rate (Mb/s)	Frequency (GHz)	Polarity (H/V)	Reading (dBμV) (peak)	Rading (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	Margin to Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	Margin to Limit (dBμV/m) (average)
1	2.374	H	60.3	51.5	28.2	-29.6	0.0	58.9	15.1	50.1	3.9
	2.488	H	61.2	52.8	28.4	-29.6	0.0	60.0	14.0	51.6	2.4
5.5	2.387	H	61.8	46.3	28.2	-29.6	0.0	60.4	13.6	44.9	9.1
	2.486	H	60.6	46.8	28.4	-29.6	0.0	59.4	14.6	45.6	8.4
11	2.386	H	61.9	44.9	28.2	-29.6	0.0	60.5	13.5	43.5	10.5
	2.486	H	60.9	46.1	28.4	-29.6	0.0	59.7	14.3	44.9	9.1

Measured with IBM ThinkPad R50 Series

Tx Rate (Mb/s)	Frequency (GHz)	Polarity (H/V)	Reading (dBμV) (peak)	Rading (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	Margin to Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	Margin to Limit (dBμV/m) (average)
1	2.386	H	57.0	47.0	28.2	-29.6	0.0	55.6	18.4	45.6	8.4
	2.488	H	61.1	53.4	28.4	-29.6	0.0	59.9	14.1	52.2	1.8
5.5	2.387	H	58.2	43.5	28.2	-29.6	0.0	56.8	17.2	42.1	11.9
	2.490	H	60.0	45.3	28.4	-29.6	0.0	58.8	15.2	44.1	9.9
11	2.387	H	58.9	43.0	28.2	-29.6	0.0	57.5	16.5	41.6	12.4
	2.490	H	61.6	45.8	28.4	-29.6	0.0	60.4	13.6	44.6	9.4

b) EUT in 2.4GHz OFDM transmission mode


Measured with IBM ThinkPad T40 Series

Tx Rate (Mb/s)	Frequency (GHz)	Polarity (H/V)	Reading (dBμV) (peak)	Rading (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	Margin to Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	Margin to Limit (dBμV/m) (average)
6	2.390	H	67.0	53.0	28.2	-29.6	0.0	65.6	8.4	51.6	2.4
	2.484	H	71.1	54.4	28.4	-29.6	0.0	69.9	4.1	53.2	0.8
18	2.390	H	67.4	50.9	28.2	-29.6	0.0	66.0	8.0	49.5	4.5
	2.484	H	69.3	52.2	28.4	-29.6	0.0	68.1	5.9	51.0	3.0
54	2.390	H	66.5	46.9	28.2	-29.6	0.0	65.1	8.9	45.5	8.5
	2.484	H	69.4	48.1	28.4	-29.6	0.0	68.2	5.8	46.9	7.1

Measured with IBM ThinkPad R50 Series

Tx Rate (Mb/s)	Frequency (GHz)	Polarity (H/V)	Reading (dBμV) (peak)	Rading (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	Margin to Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	Margin to Limit (dBμV/m) (average)
6	2.390	H	62.2	47.8	28.2	-29.6	0.0	60.8	13.2	46.4	7.6
	2.484	H	70.0	52.3	28.4	-29.6	0.0	68.8	5.2	51.1	2.9
18	2.390	H	62.5	46.3	28.2	-29.6	0.0	61.1	12.9	44.9	9.1
	2.484	H	67.1	50.5	28.4	-29.6	0.0	65.9	8.1	49.3	4.7
54	2.390	H	61.2	43.0	28.2	-29.6	0.0	59.8	14.2	41.6	12.4
	2.484	H	67.6	46.8	28.4	-29.6	0.0	66.4	7.6	45.6	8.4

8.5.2 Bandedge Measurement Plots for ThinkPad T40 Series

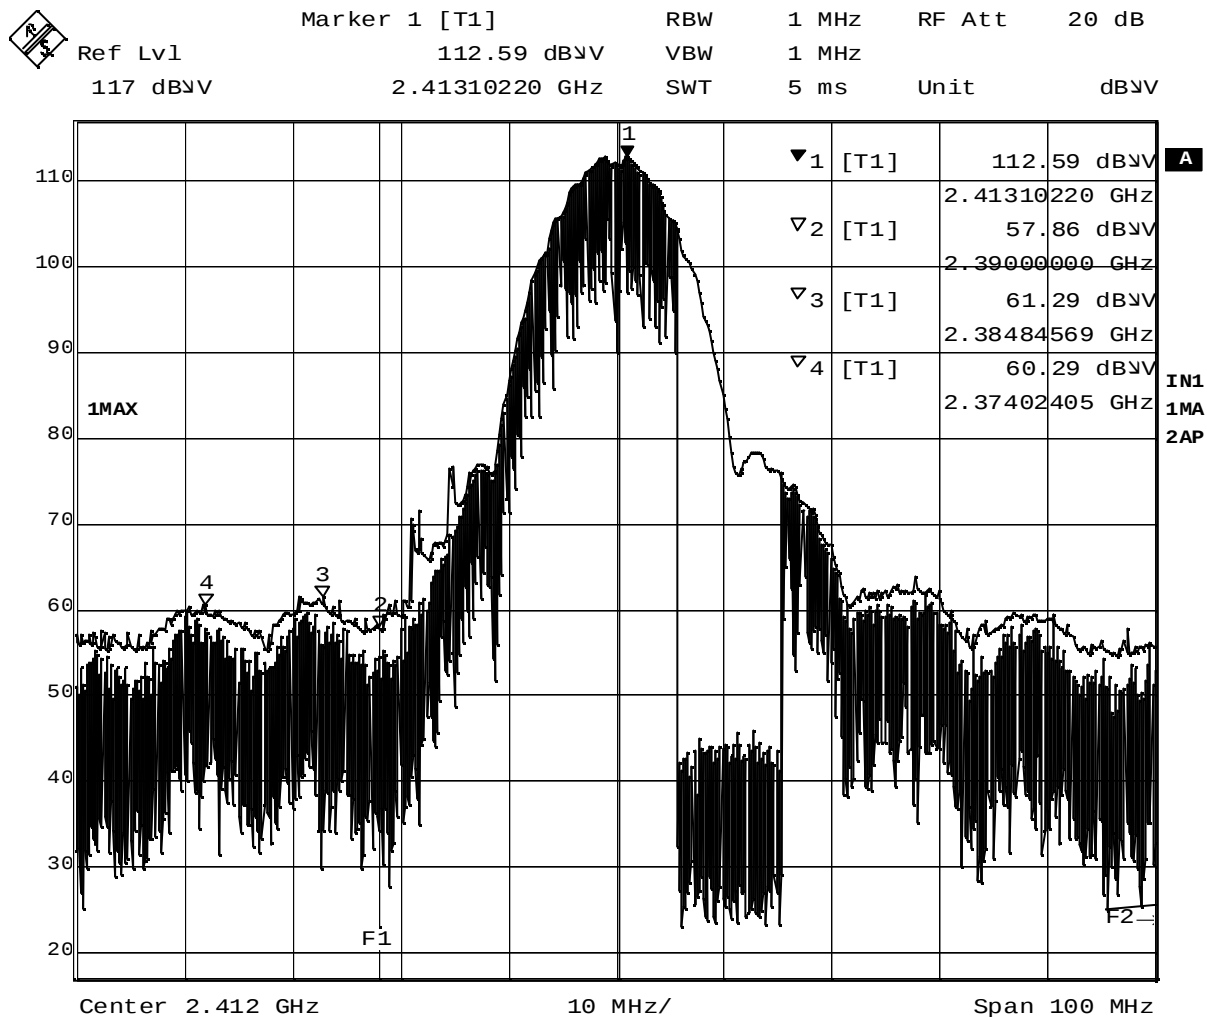


Date: 2.FEB.2004 20:37:33

Plot 8-1-1 Ch.1 2412MHz TX, DSSS 1Mbps (Peak), T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 106.25 dBμV
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

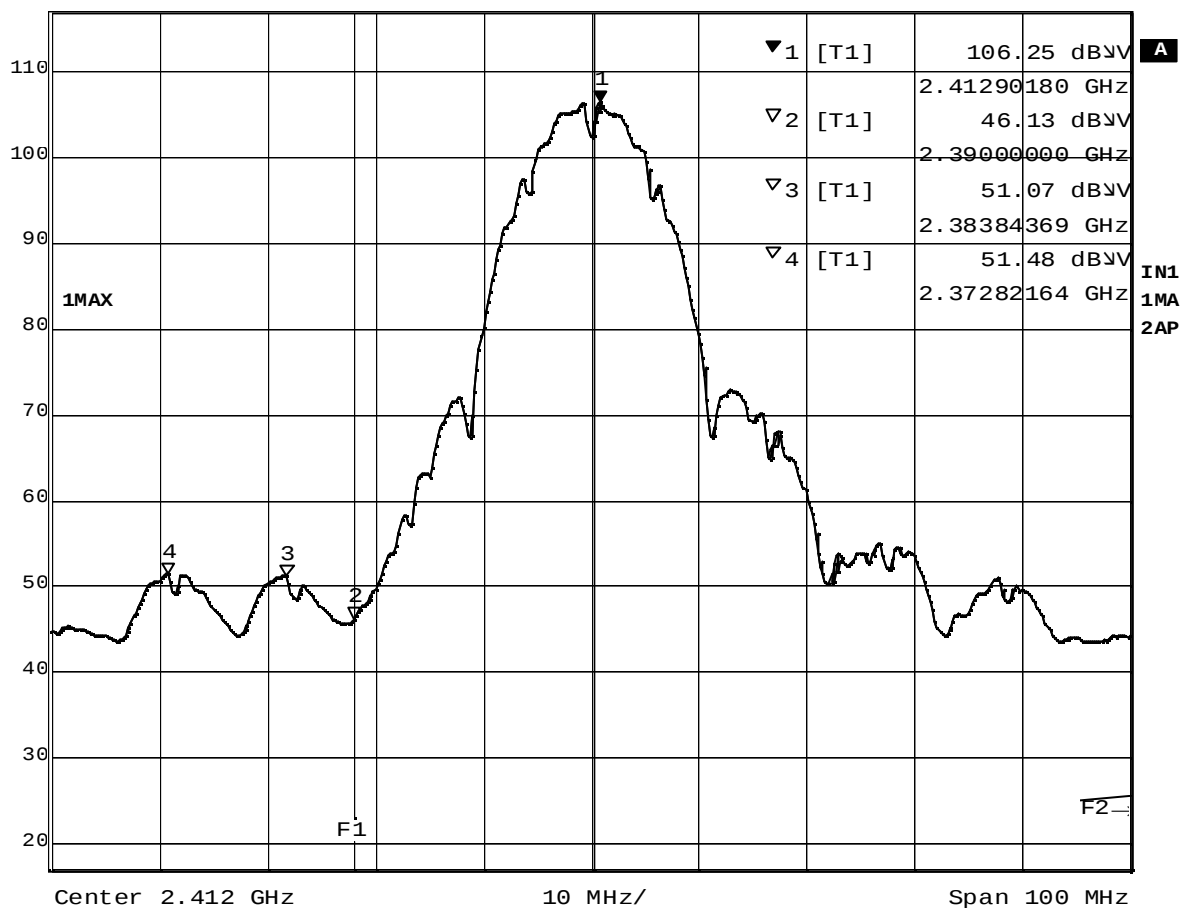


Date: 2.FEB.2004 20:34:06

Plot 8-1-2 Ch.1 2412MHz TX, DSSS 1Mbps (Average), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 111.73 dBμV VBW 1 MHz
117 dBμV 2.46310220 GHz SWT 5 ms Unit dBμV

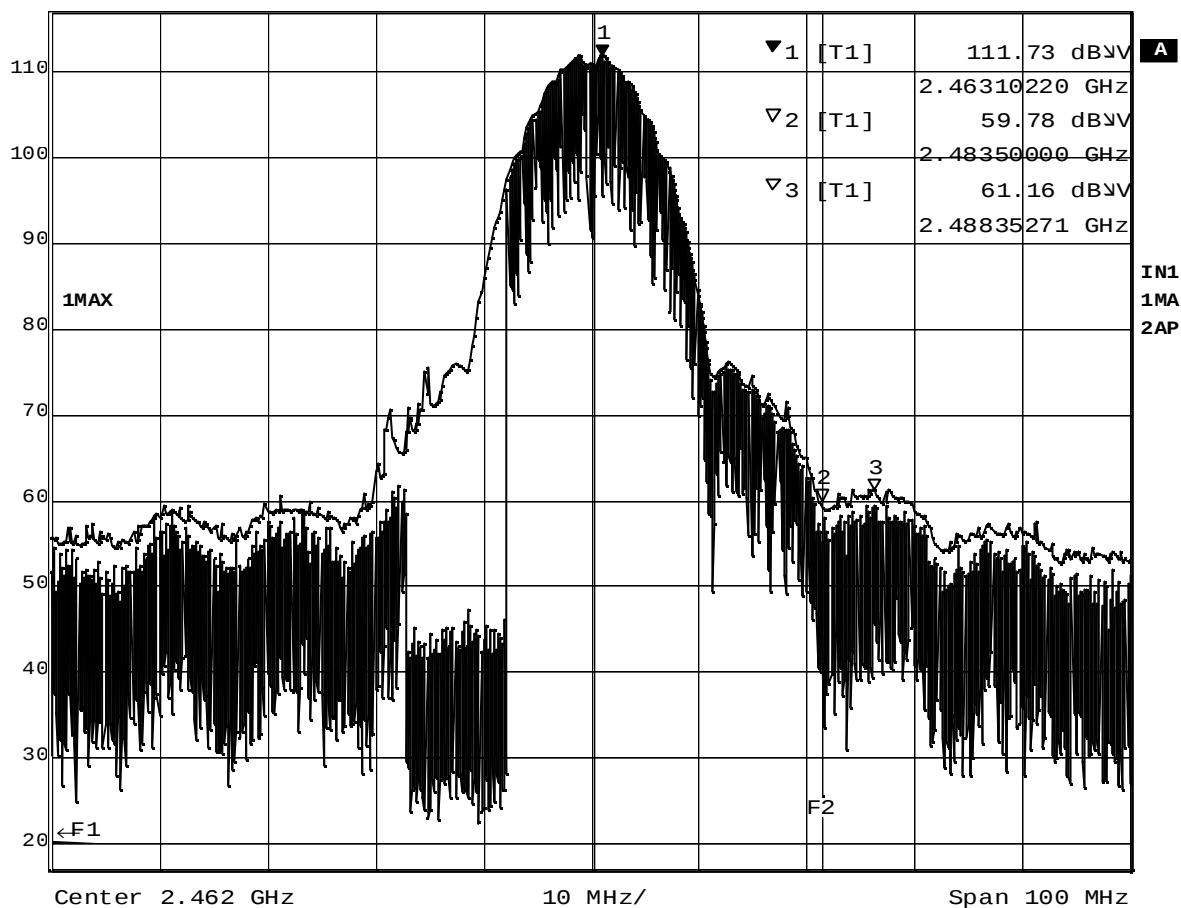


Date: 2.FEB.2004 20:22:36

Plot 8-1-3 Ch.11 2462MHz TX, DSSS 1Mbps (Peak), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 105.31 dBμV VBW 10 Hz
117 dBμV 2.46290180 GHz SWT 25 s Unit dBμV

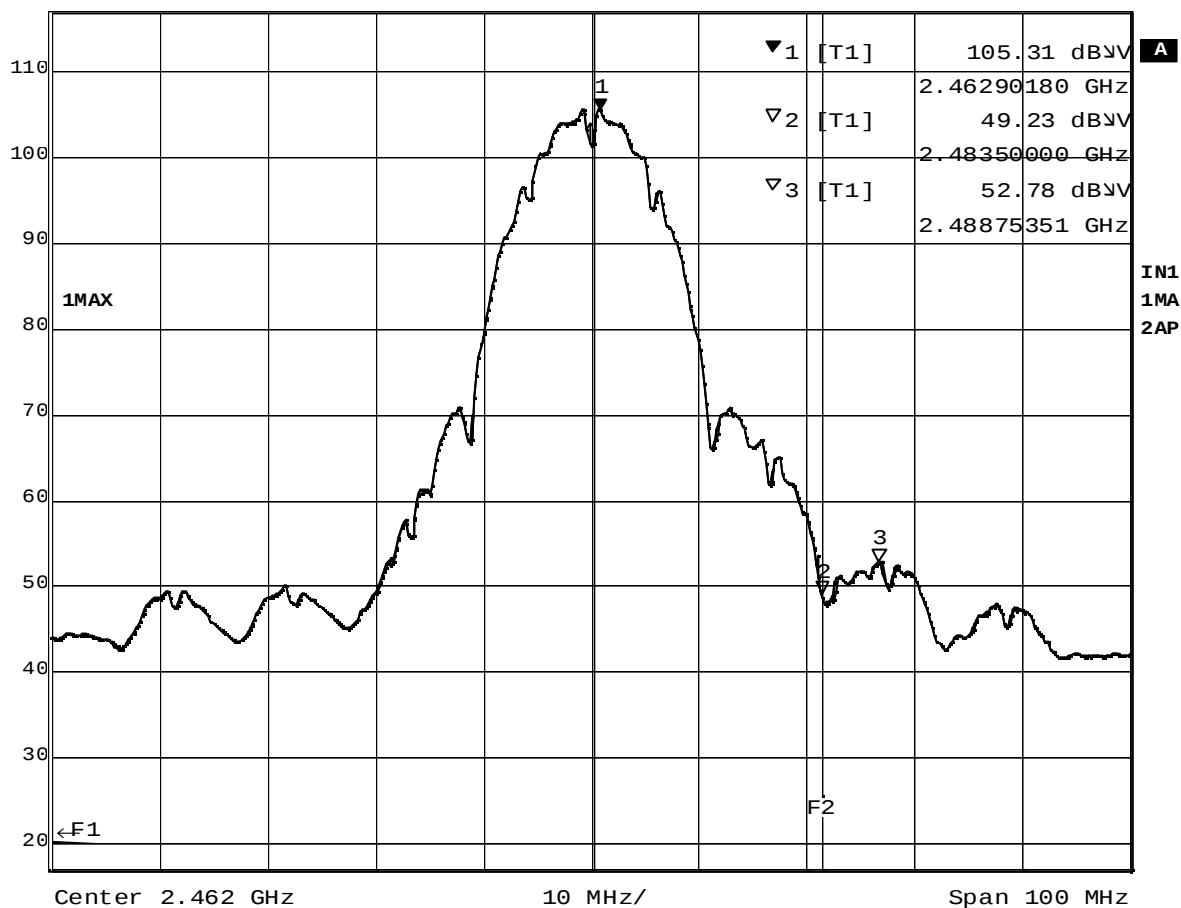


Date: 2.FEB.2004 20:22:03

Plot 8-1-4 Ch.11 2462MHz TX. DSSS 1Mbps (Average). T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 114.56 dBμV VBW 1 MHz
117 dBμV 2.41189980 GHz SWT 5 ms Unit dBμV

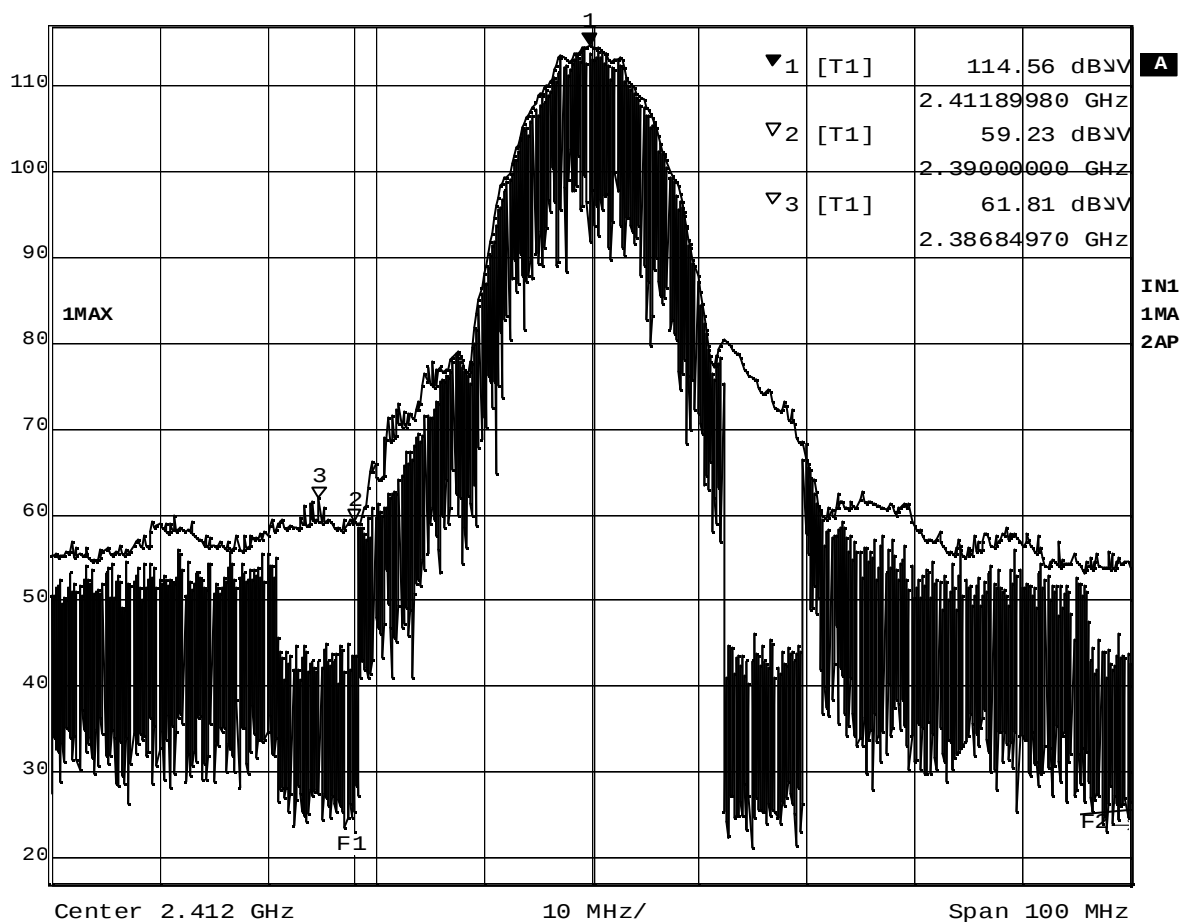


Date: 2.FEB.2004 20:32:47

Plot 8-2-1 Ch.1 2412MHz TX. DSSS 5.5Mbps (Peak). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 95.82 dBμV
2.41109820 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

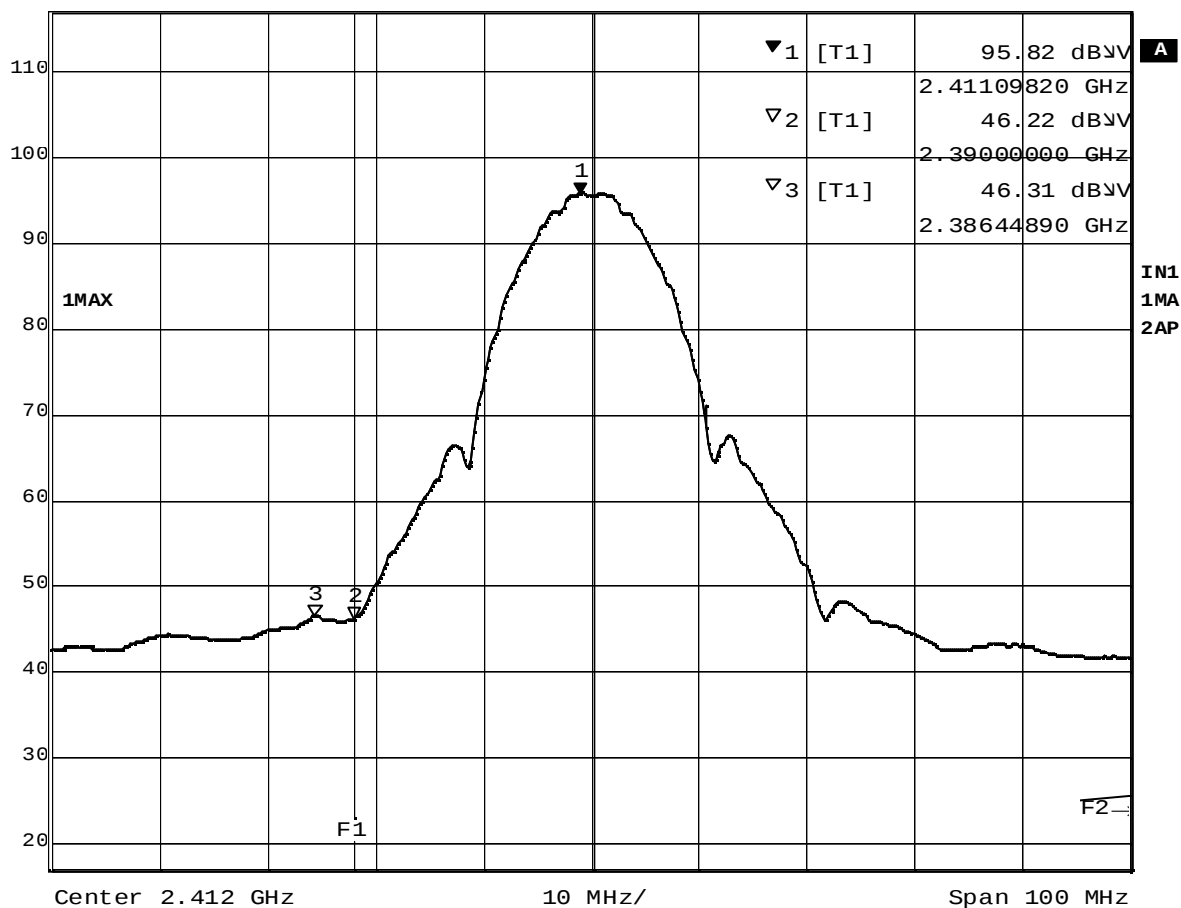


Date: 2.FEB.2004 20:32:17

Plot 8-2-2 Ch.1 2412MHz TX. DSSS 5.5Mbps (Average). T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 113.59 dBμV VBW 1 MHz
117 dBμV 2.46189980 GHz SWT 5 ms Unit dBμV

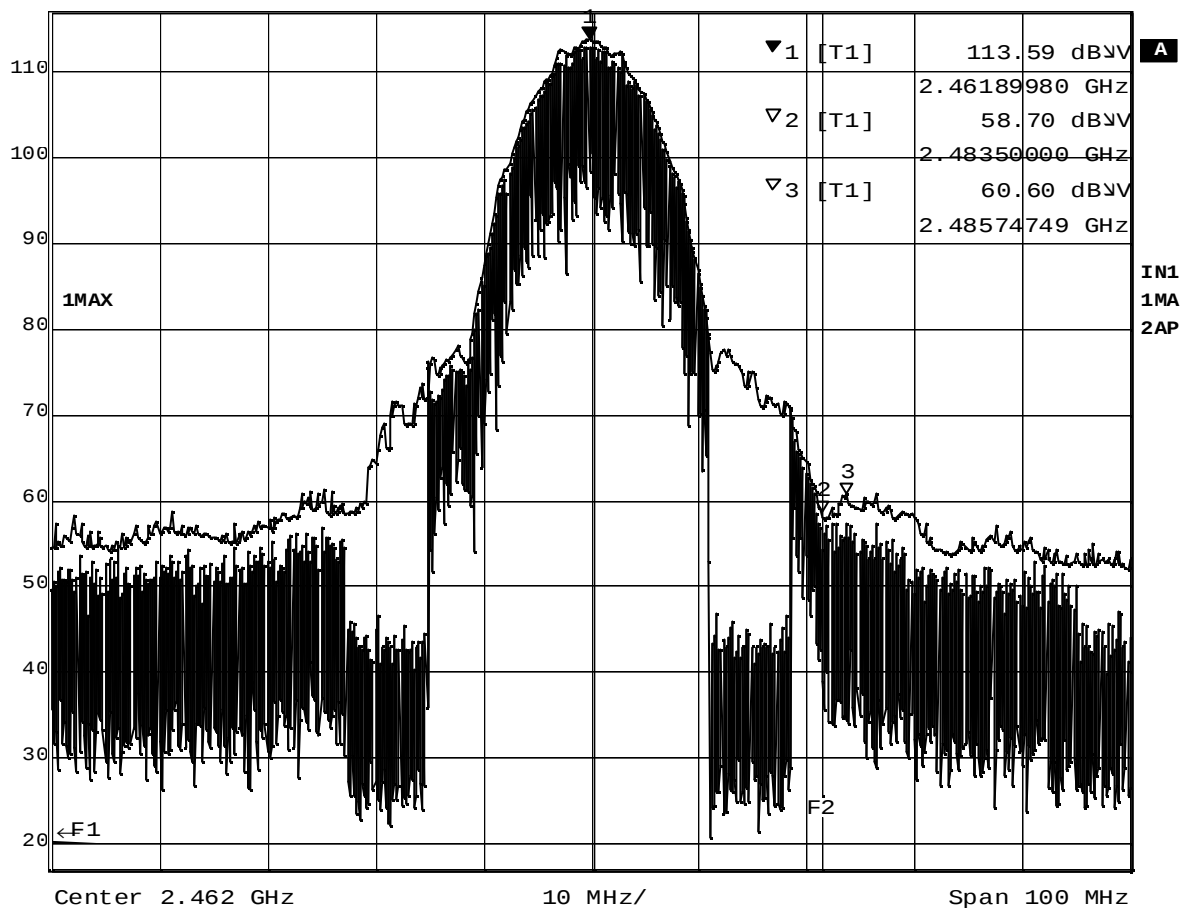


Date: 2.FEB.2004 20:25:06

Plot 8-2-3 Ch.11 2462MHz TX, DSSS 5.5Mbps (Peak), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 94.93 dBμV VBW 10 Hz
117 dBμV 2.46109820 GHz SWT 25 s Unit dBμV

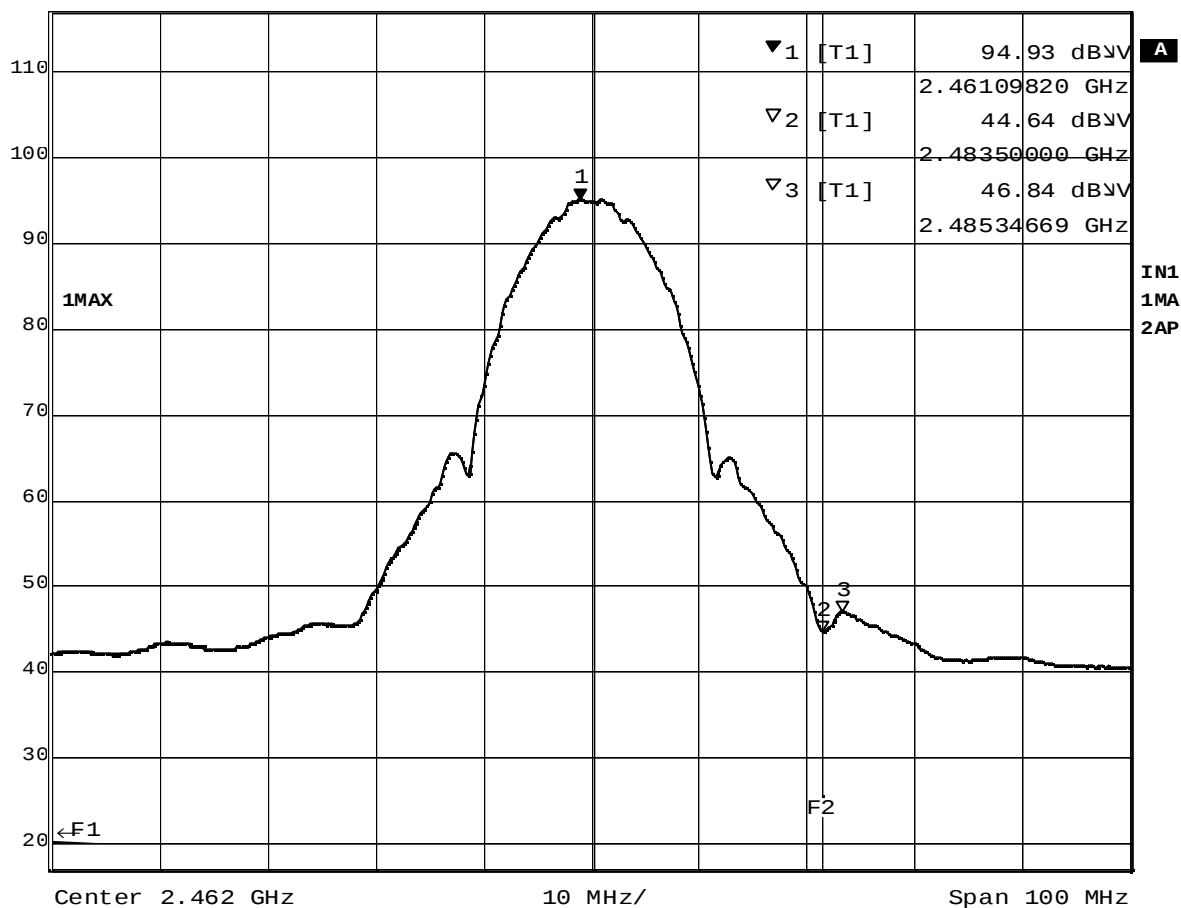


Date: 2.FEB.2004 20:24:29

Plot 8-2-4 Ch.11 2462MHz TX, DSSS 5.5Mbps (Average), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 115.42 dBμV VBW 1 MHz
117 dBμV 2.41129860 GHz SWT 5 ms Unit dBμV

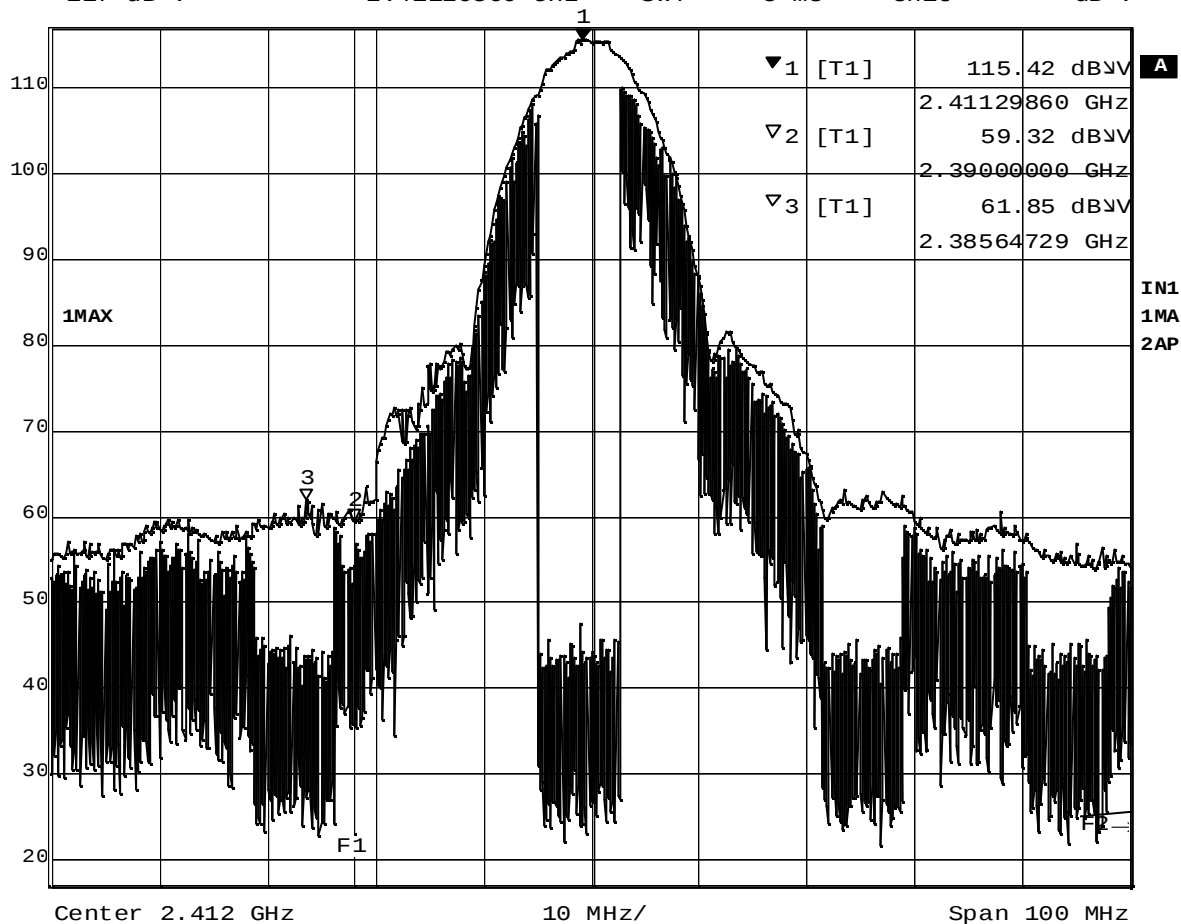


Date: 2.FEB.2004 20:31:01

Plot 8-3-1 Ch.1 2412MHz TX, DSSS 11Mbps (Peak), T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 88.09 dBμV
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

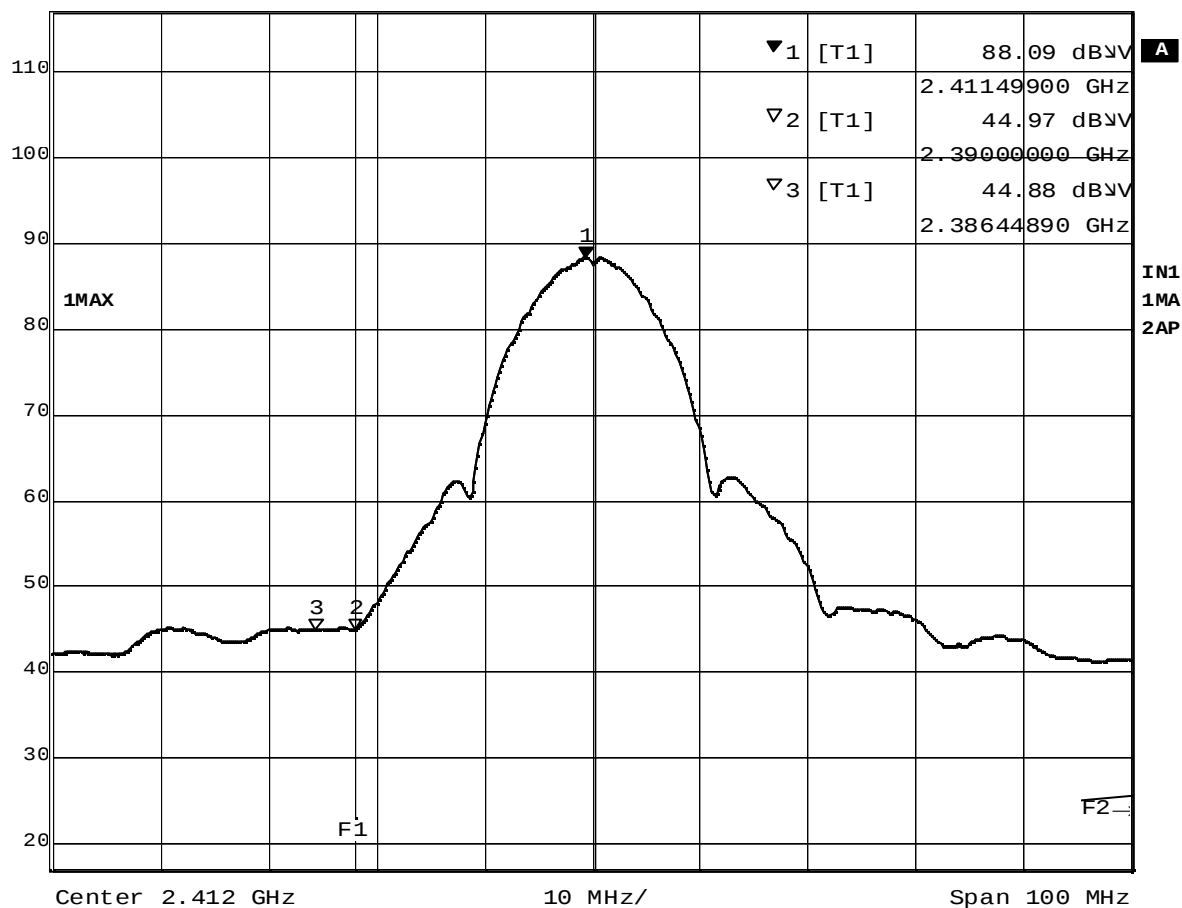


Date: 2.FEB.2004 20:30:34

Plot 8-3-2 Ch.1 2412MHz TX. DSSS 11Mbps (Average). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 114.53 dBμV
2.46270140 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

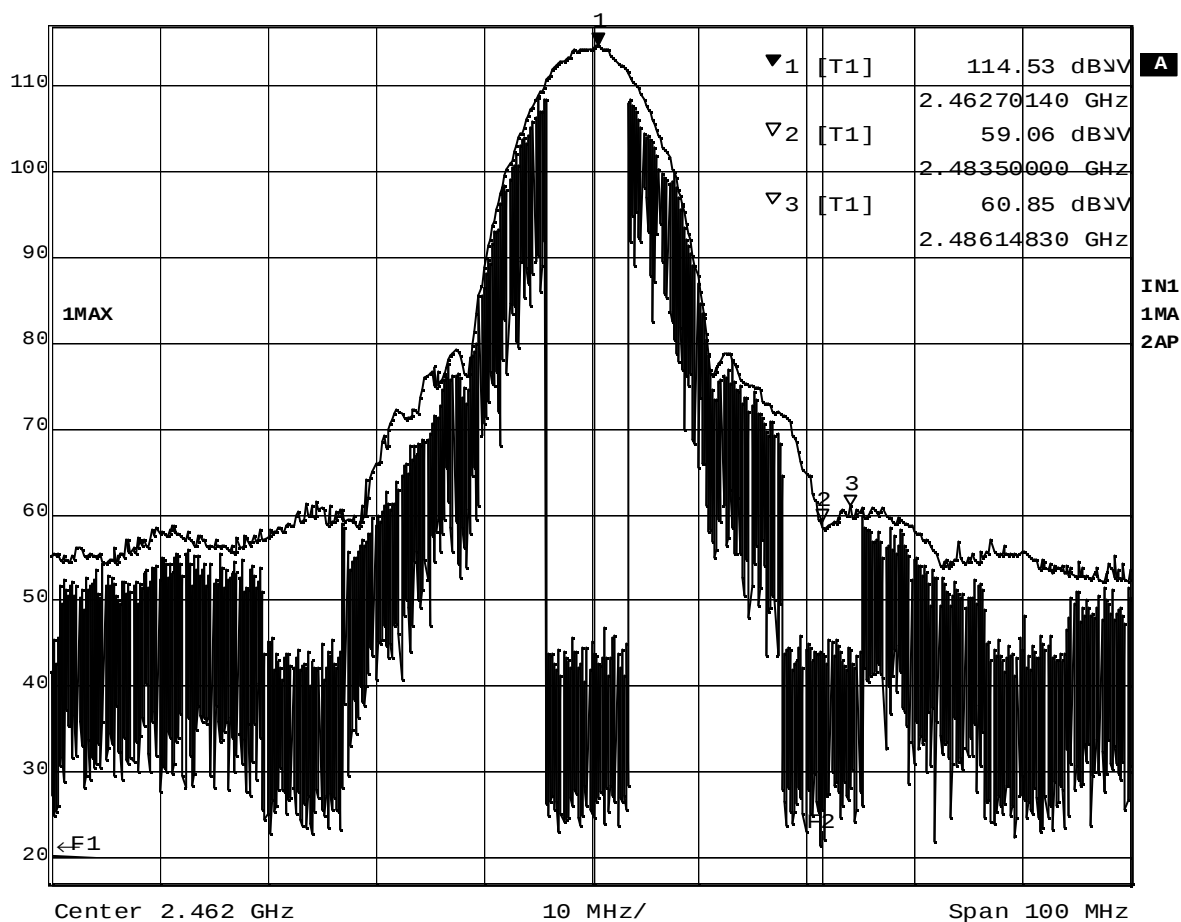


Date: 2.FEB.2004 20:27:07

Plot 8-3-3 Ch.11 2462MHz TX. DSSS 11Mbps (Peak). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 87.31 dBμV
2.46270140 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

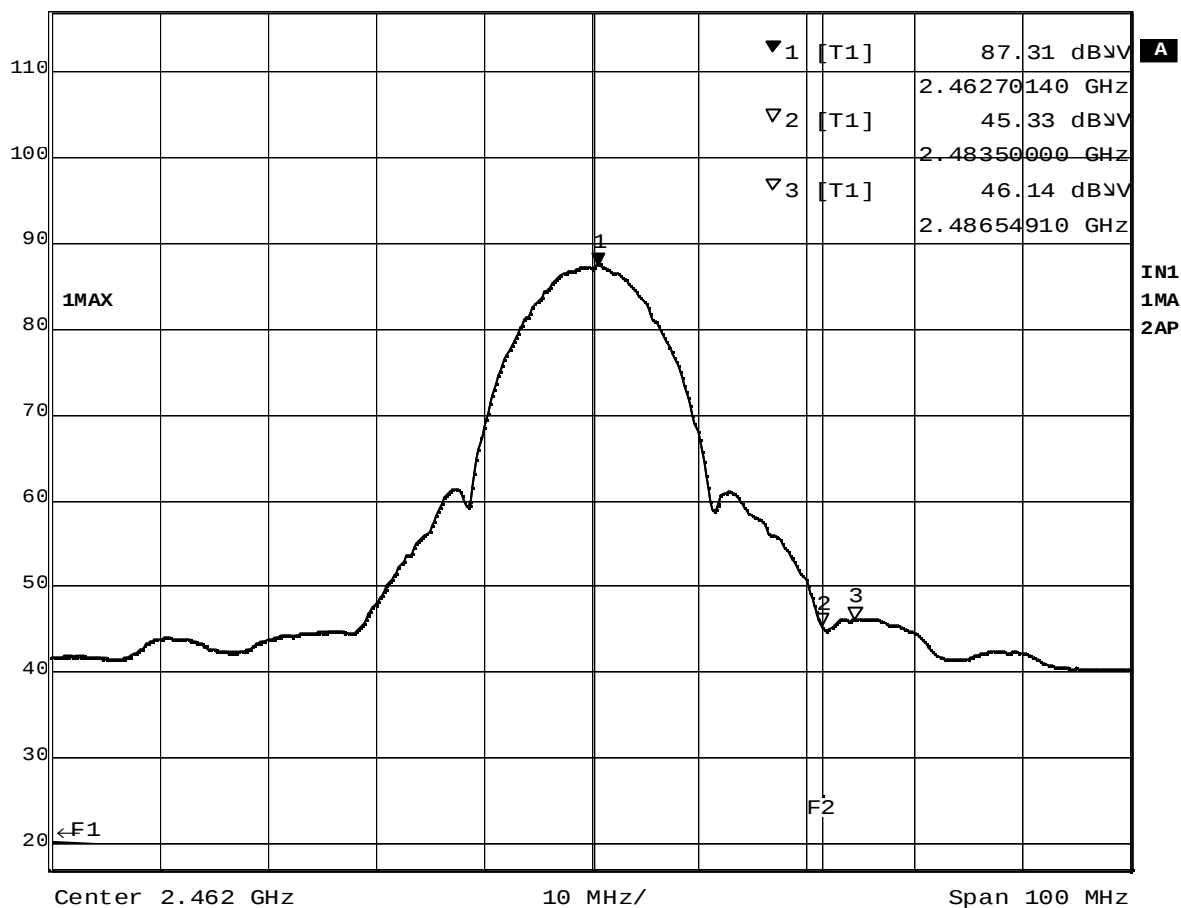


Date: 2.FEB.2004 20:26:32

Plot 8-3-4 Ch.11 2462MHz TX, DSSS 11Mbps (Average), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 109.77 dBμV VBW 1 MHz
117 dBμV 2.41029659 GHz SWT 5 ms Unit dBμV

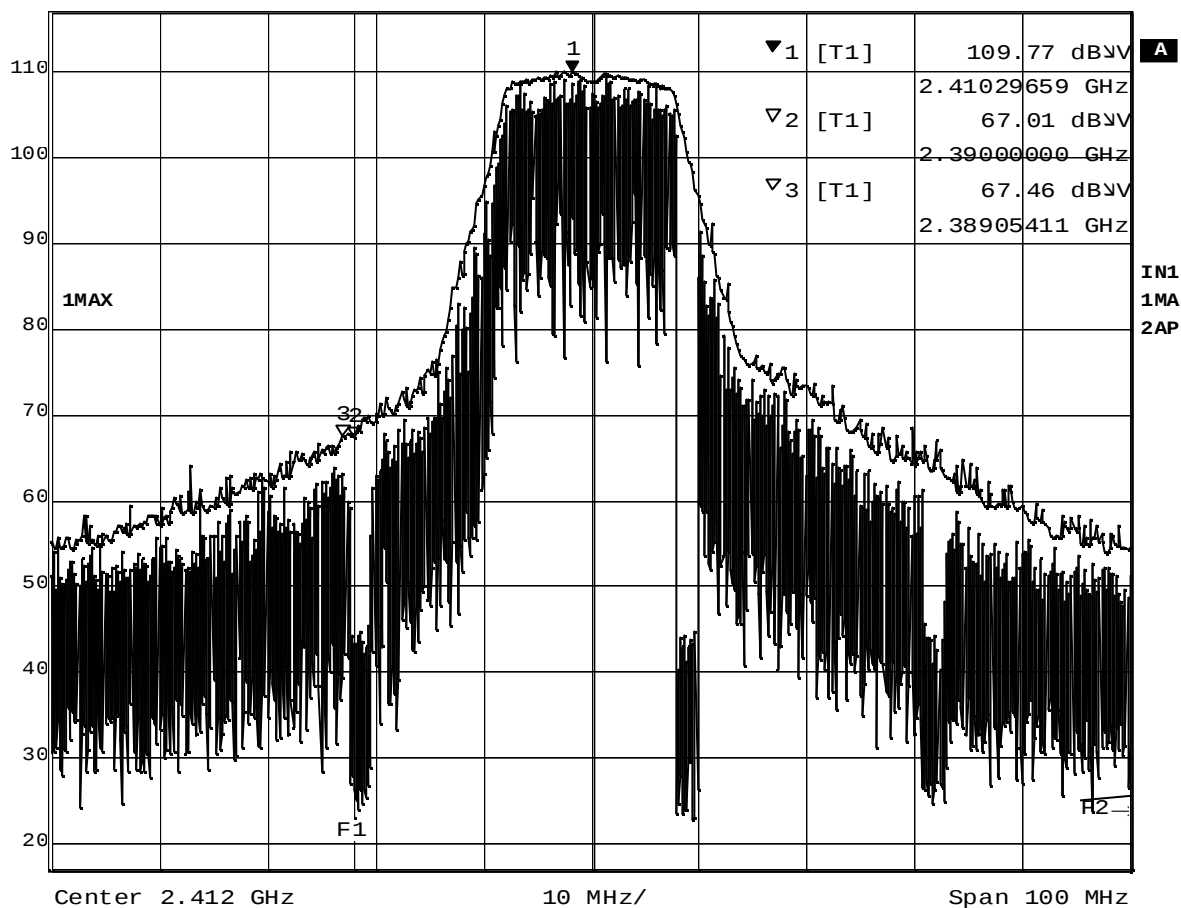


Date: 2.FEB.2004 20:09:08

Plot 8-4-1 Ch.1 2412MHz TX, OFDM 6Mbps (Peak), T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 95.96 dBμV
2.41089780 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

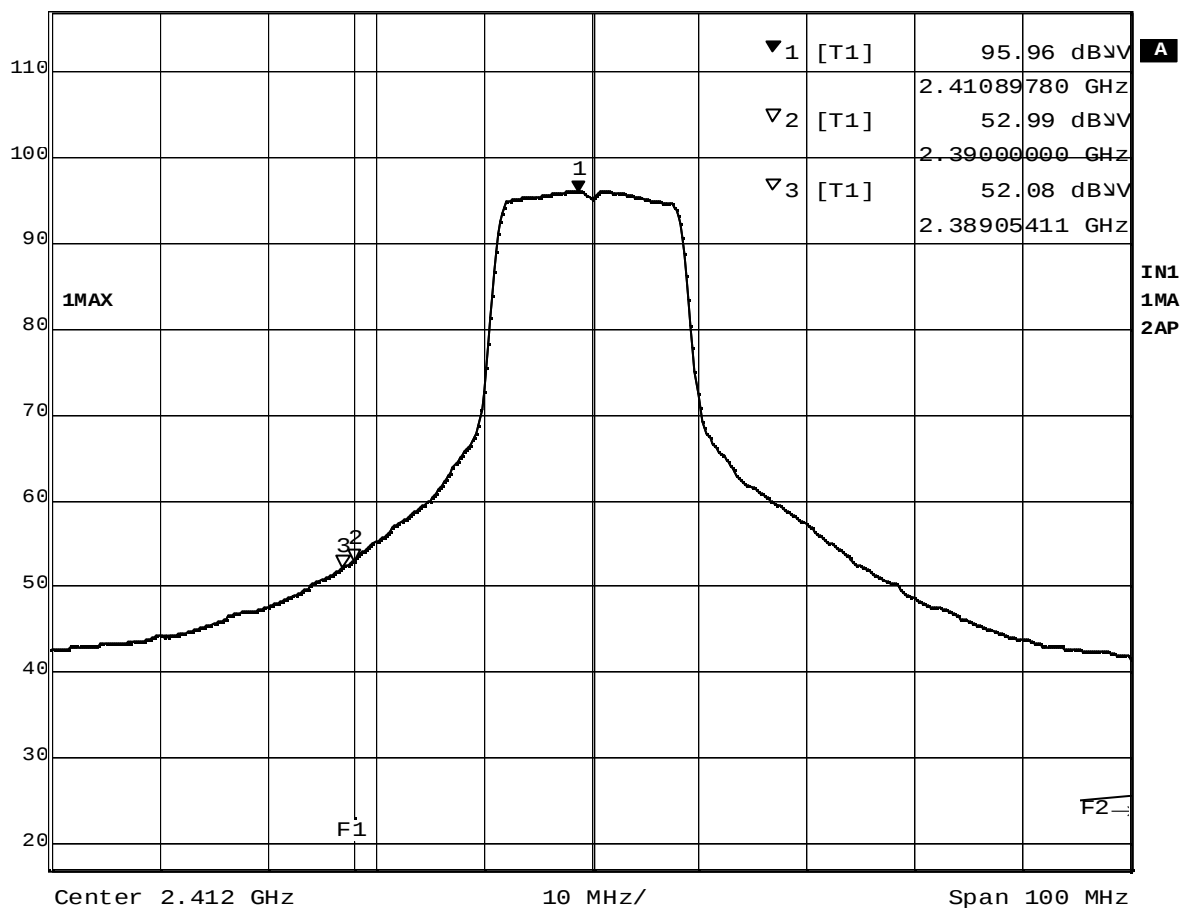


Date: 2.FEB.2004 20:09:59

Plot 8-4-2 Ch.1 2412MHz TX, OFDM 6Mbps (Average), T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 109.03 dBμV VBW 1 MHz
117 dBμV 2.45929459 GHz SWT 5 ms Unit dBμV

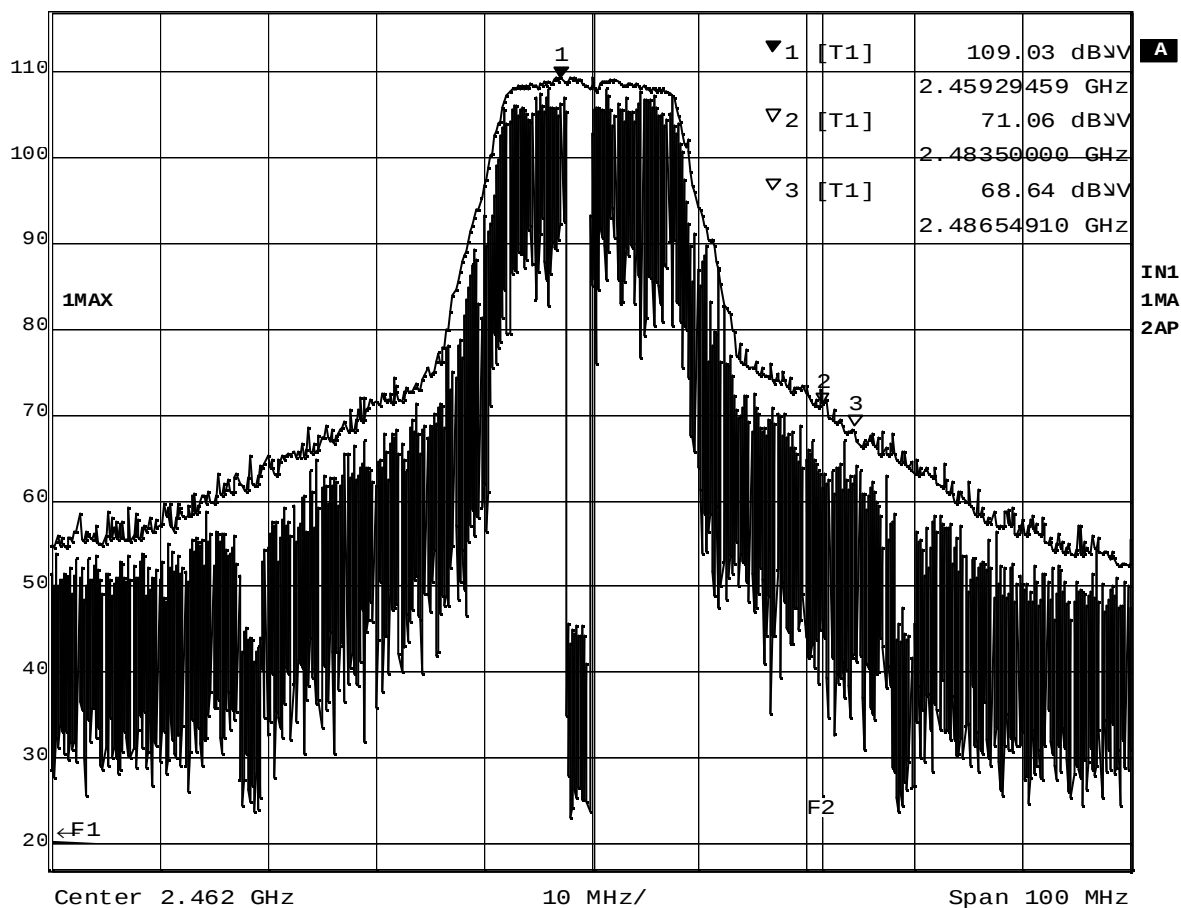


Date: 2.FEB.2004 19:49:38

Plot 8-4-3 Ch.11 2462MHz TX. OFDM 6Mbps (Peak). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 95.17 dBμV
2.46069739 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

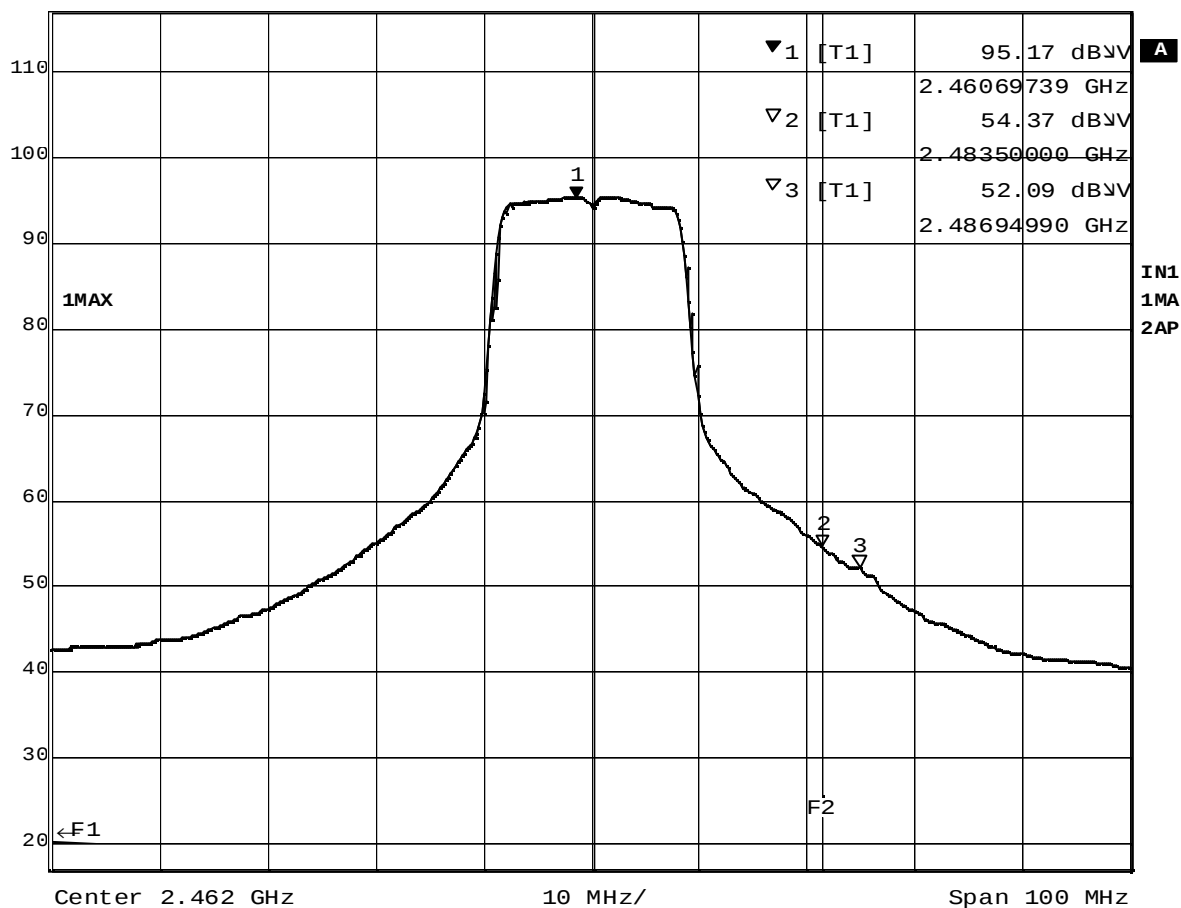


Date: 2.FEB.2004 19:48:50

Plot 8-4-4 Ch.11 2462MHz TX. OFDM 6Mbps (Average). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 111.29 dBμV
RBW 1 MHz
RF Att 20 dB
VBW 1 MHz
SWT 5 ms
Unit dBμV

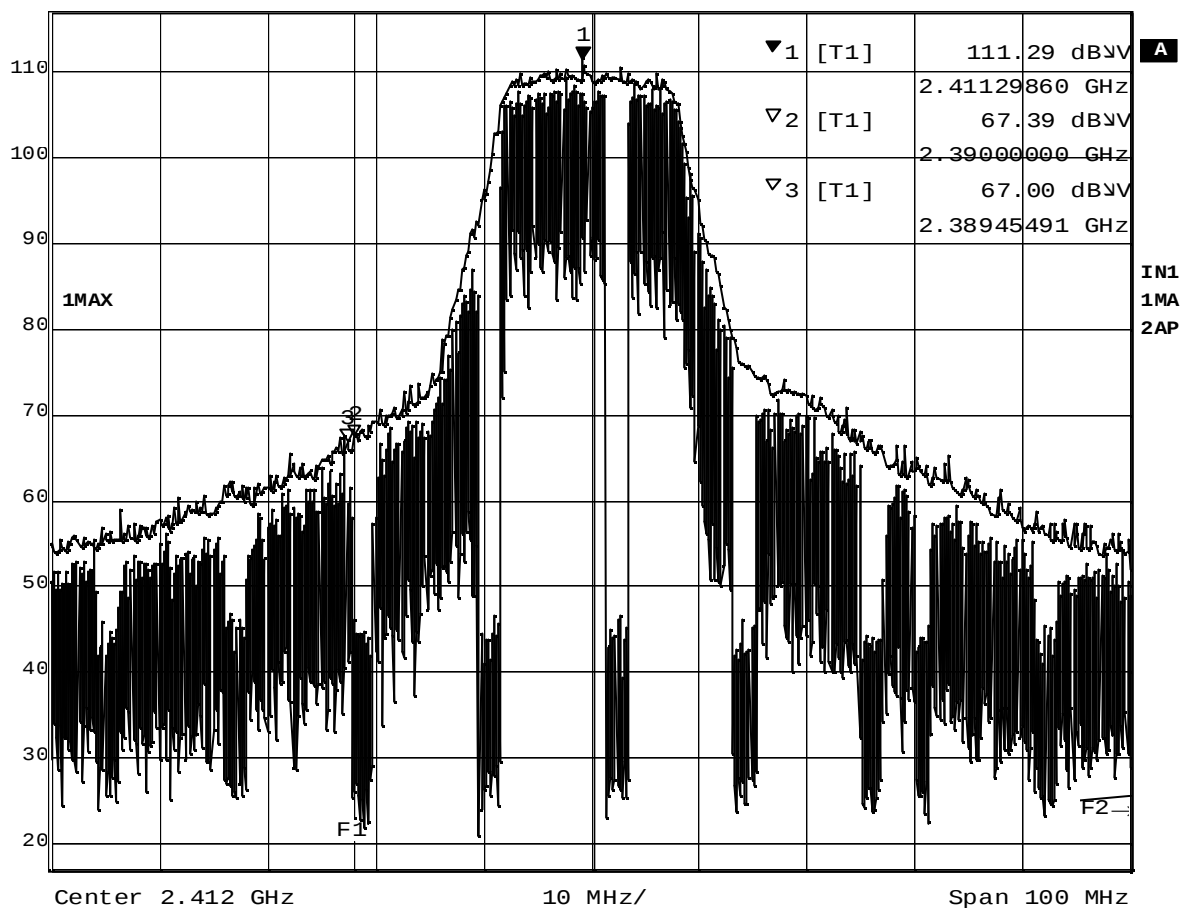


Date: 2.FEB.2004 20:07:33

Plot 8-5-1 Ch.1 2412MHz TX. OFDM 18Mbps (Peak). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 89.12 dBμV
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

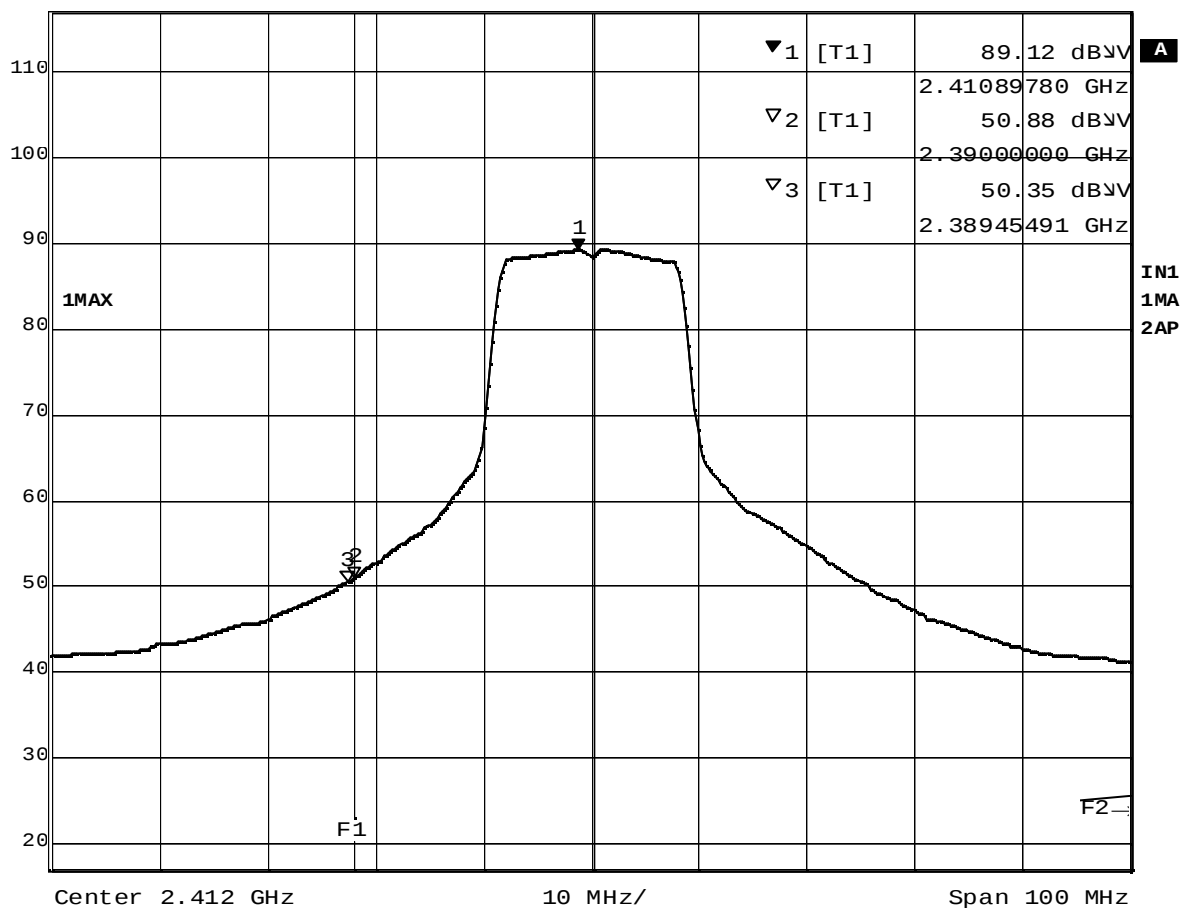


Date: 2.FEB.2004 20:08:17

Plot 8-5-2 Ch.1 2412MHz TX. OFDM 18Mbps (Average). T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 110.15 dBμV VBW 1 MHz
117 dBμV 2.45789178 GHz SWT 5 ms Unit dBμV

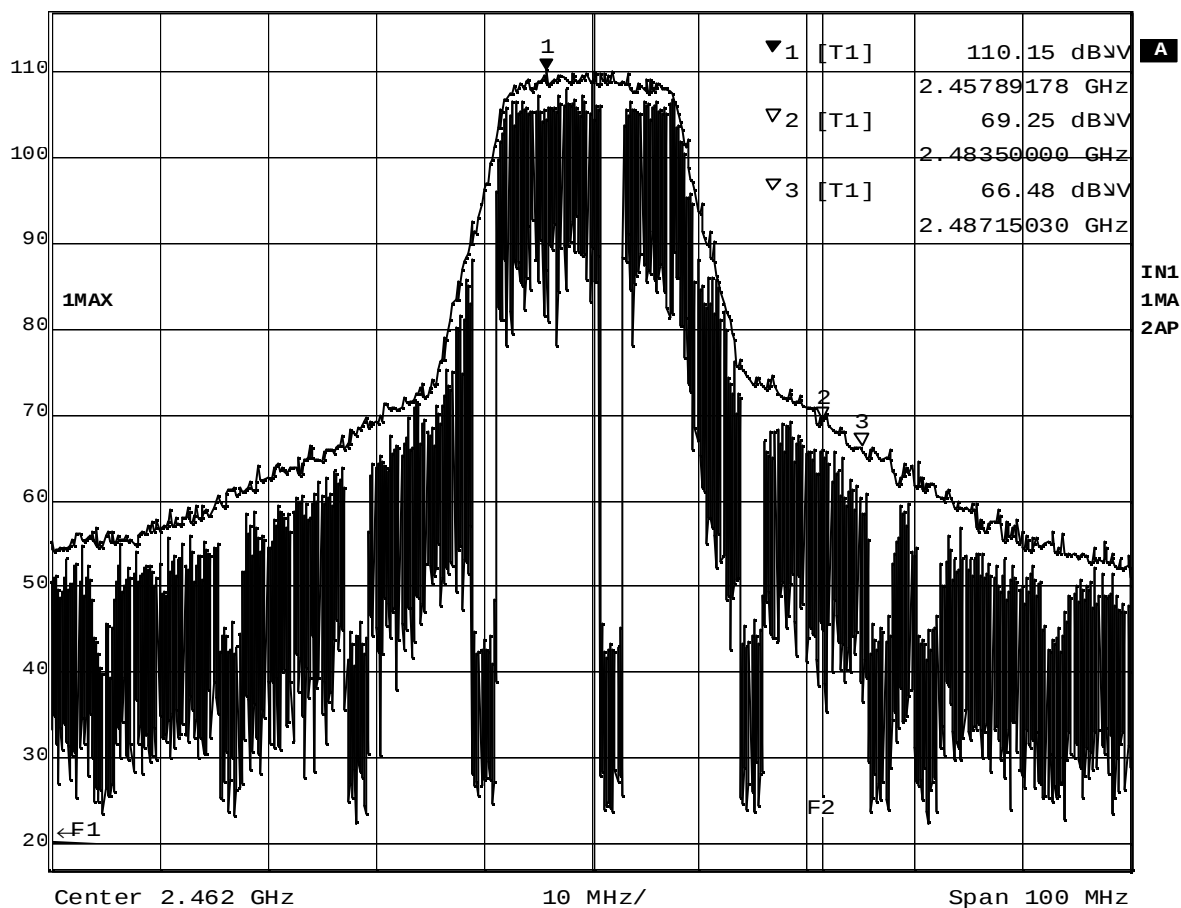


Date: 2.FEB.2004 19:51:04

Plot 8-5-3 Ch.11 2462MHz TX, OFDM 18Mbps (Peak), T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 87.97 dBμV
2.45789178 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

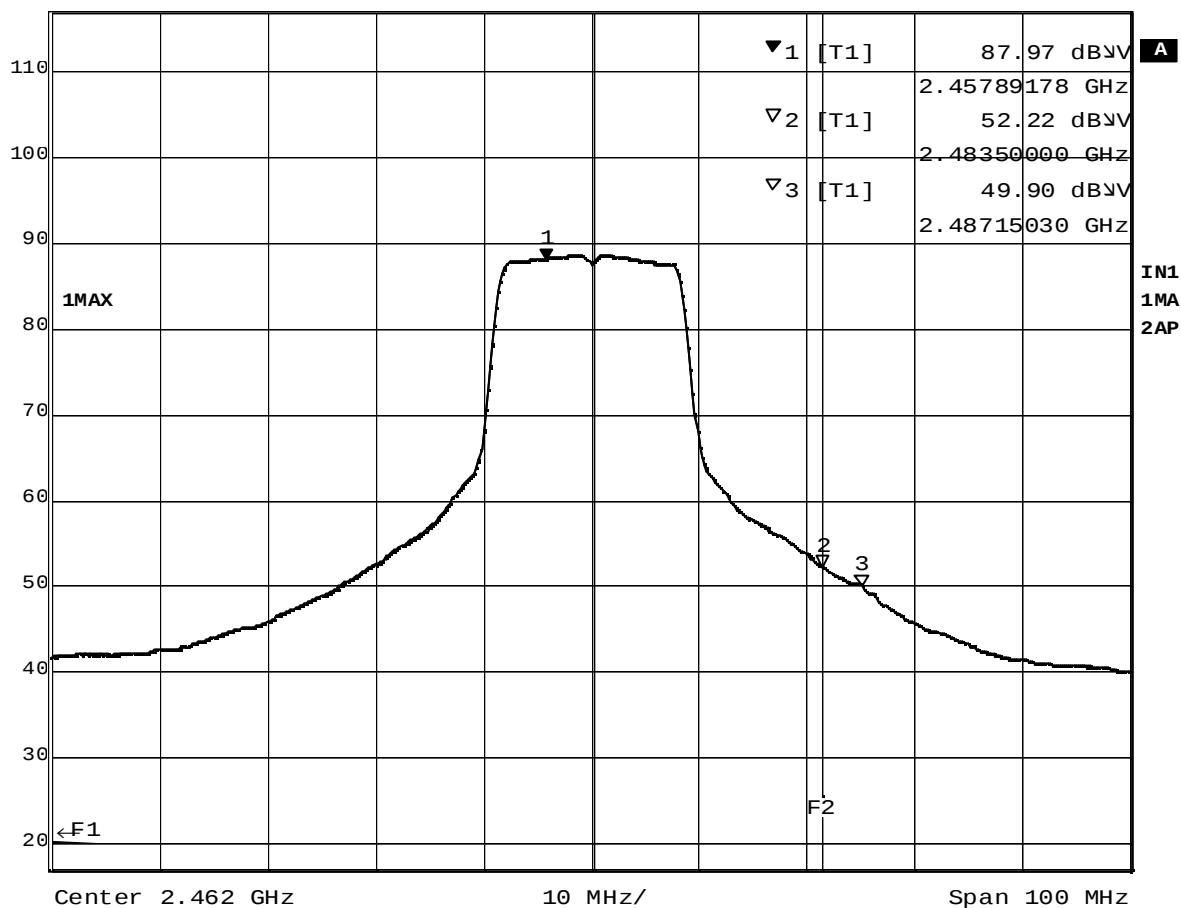


Date: 2.FEB.2004 19:54:04

Plot 8-5-4 Ch.11 2462MHz TX, OFDM 18Mbps (Average). T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 111.44 dBμV VBW 1 MHz
117 dBμV 2.41129860 GHz SWT 5 ms Unit dBμV

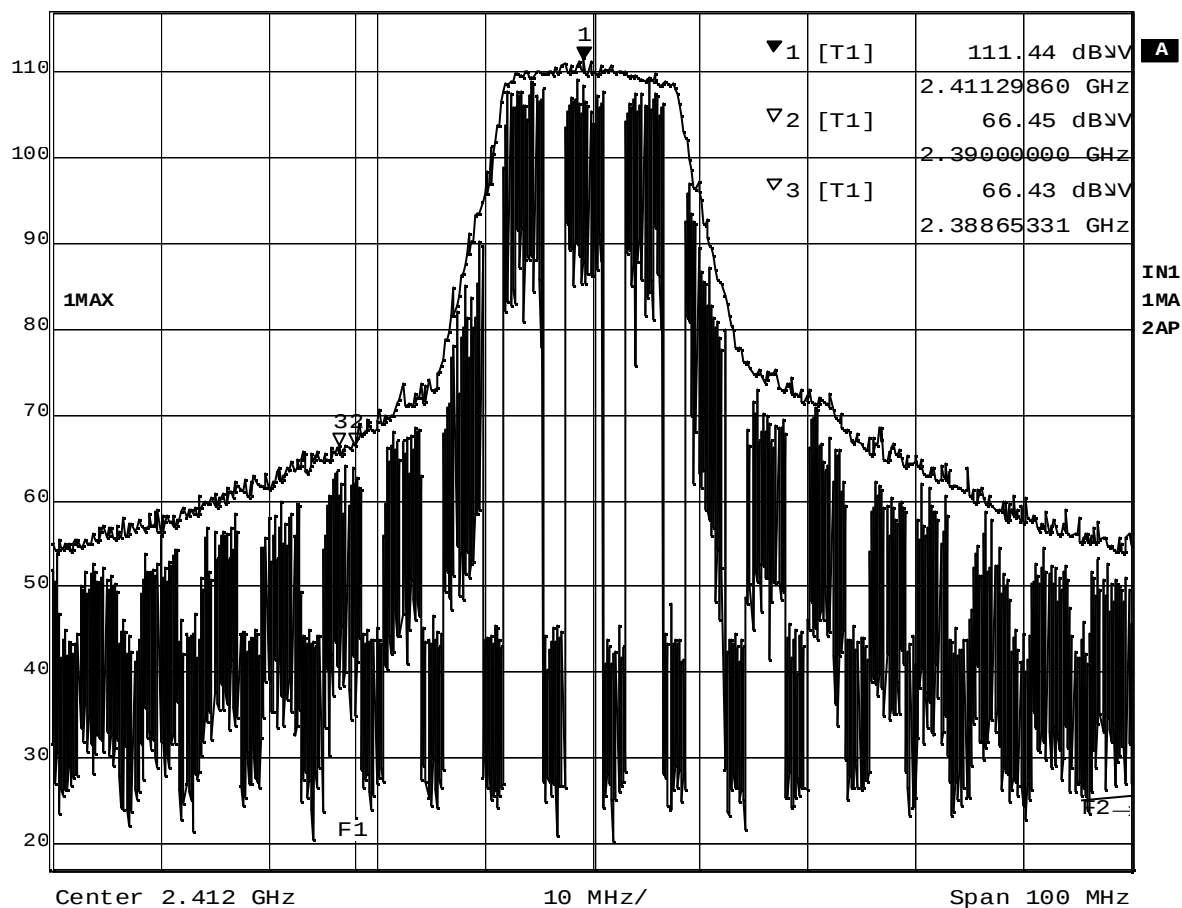


Date: 2.FEB.2004 20:05:44

Plot 8-6-1 Ch.1 2412MHz TX. OFDM 54Mbps (Peak). T40 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 76.63 dBμV
2.41089780 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

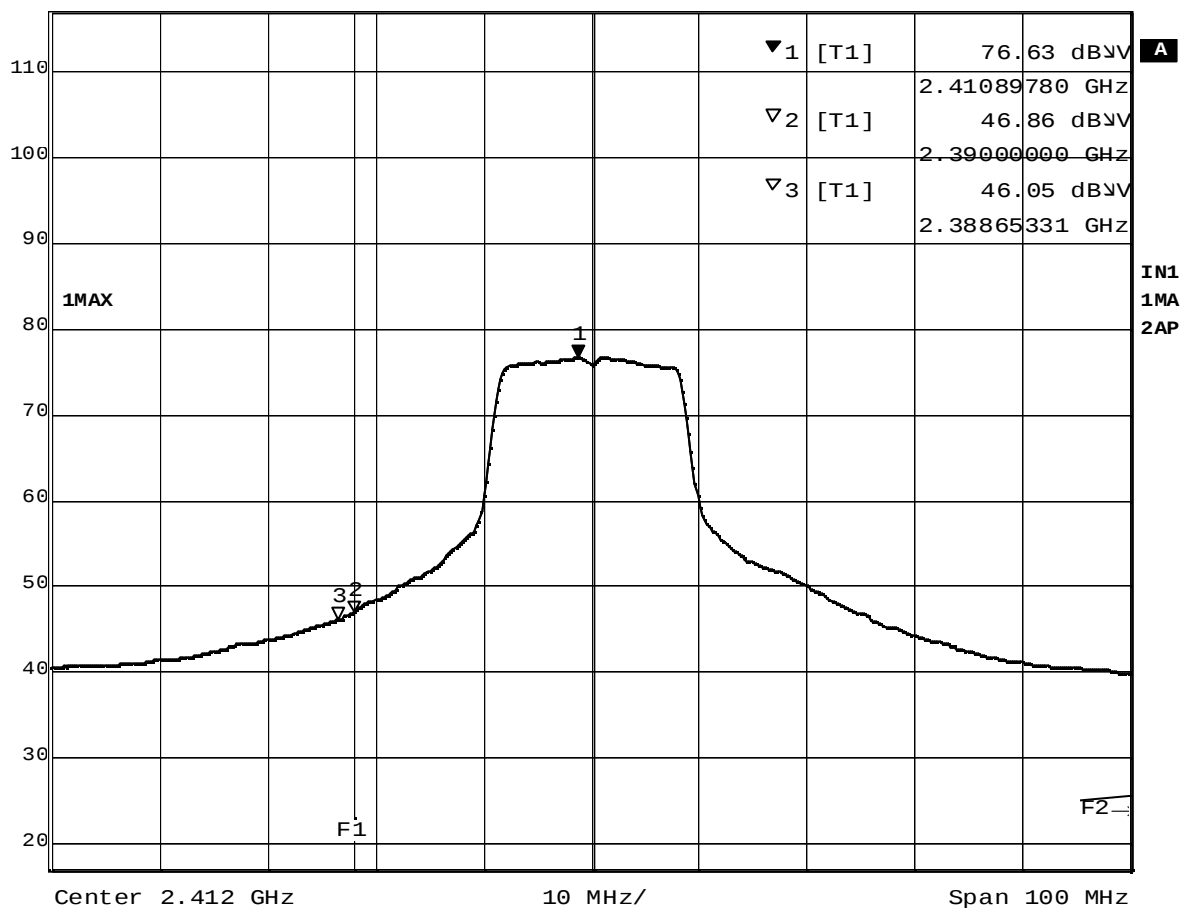


Date: 2.FEB.2004 20:06:37

Plot 8-6-2 Ch.1 2412MHz TX. OFDM 54Mbps (Average). T40 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 110.32 dBμV VBW 1 MHz
117 dBμV 2.46310220 GHz SWT 5 ms Unit dBμV

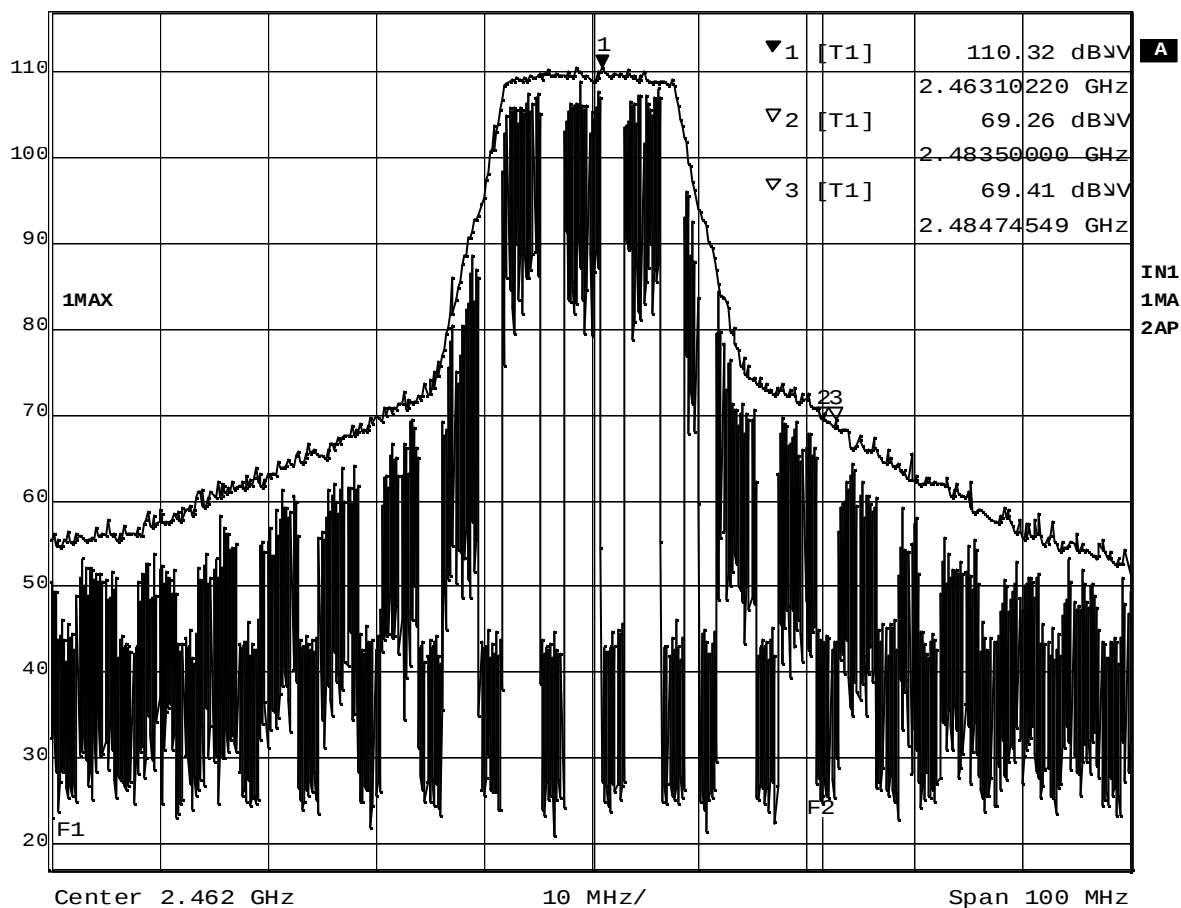


Date: 2.FEB.2004 20:03:01

Plot 8-6-3 Ch.11 2462MHz TX, OFDM 54Mbps (Peak), T40 Series




Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 76.01 dBμV VBW 10 Hz
117 dBμV 2.46069739 GHz SWT 25 s Unit dBμV

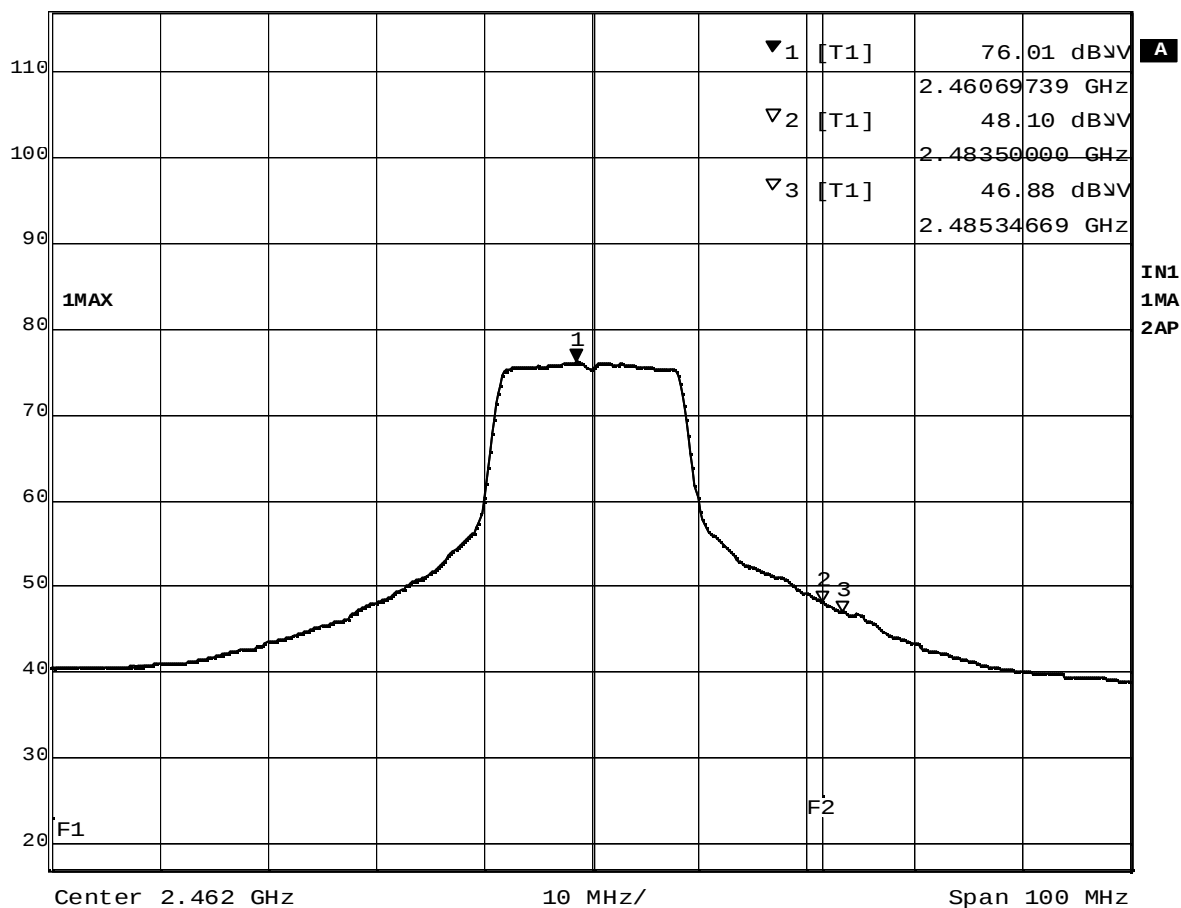

Date: 2.FEB.2004 20:04:06

Plot 8-6-4 Ch.11 2462MHz TX, OFDM 54Mbps (Average). T40 Series

8.5.3 Bandedge Measurement Plots for ThinkPad R50 Series

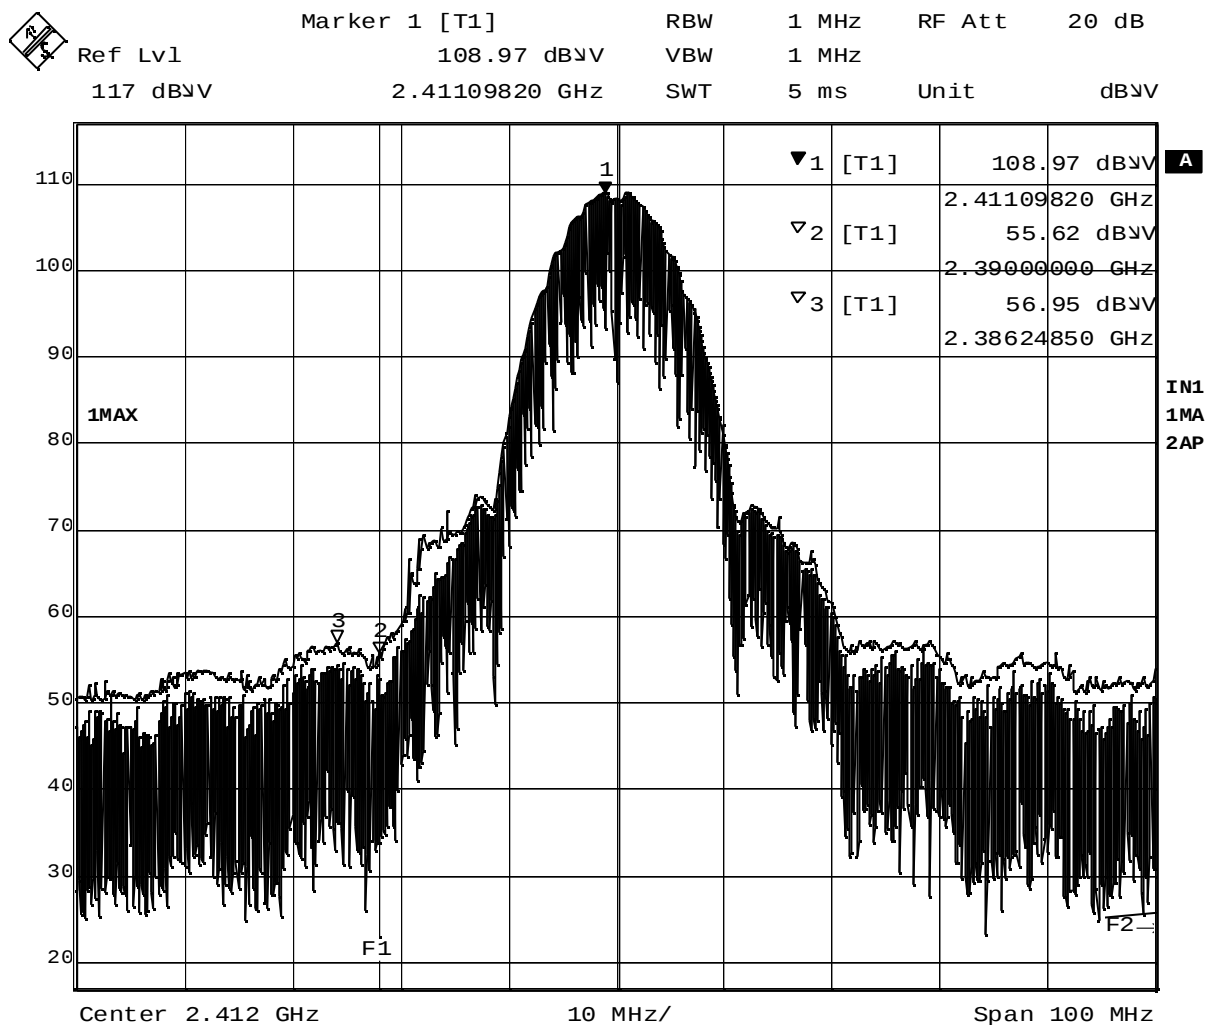


Date: 30.JAN.2004 09:37:34

Plot 8-7-1 Ch.1 2412MHz TX, DSSS 1Mbps (Peak), R50 Series




Ref Lvl 117 dBμV
Marker 1 [T1] 102.65 dBμV
2.41129860 GHz
RBW 1 MHz
VBW 10 Hz
RF Att 20 dB
SWT 25 s
Unit dBμV

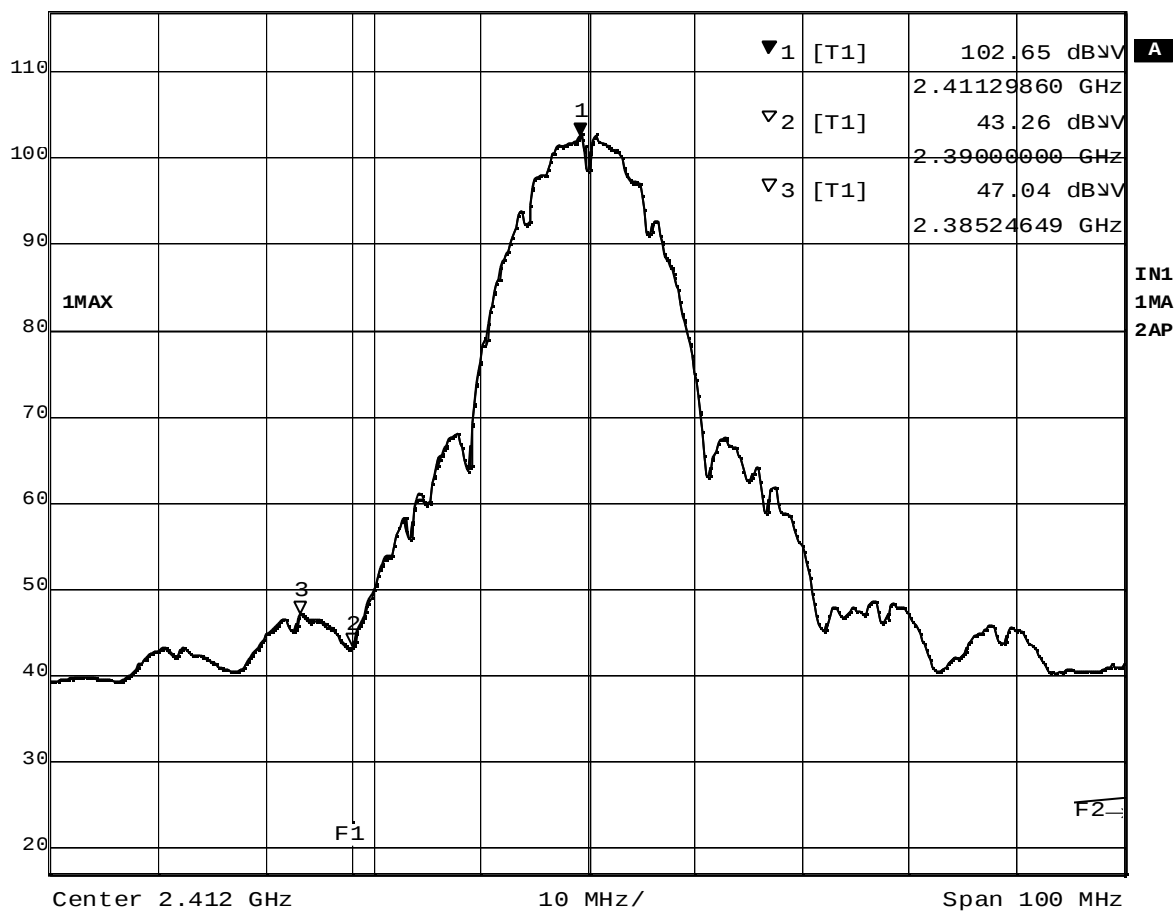

Date: 30.JAN.2004 09:38:32

Plot 8-7-2 Ch.1 2412MHz TX, DSSS 1Mbps (Average). R50 Series

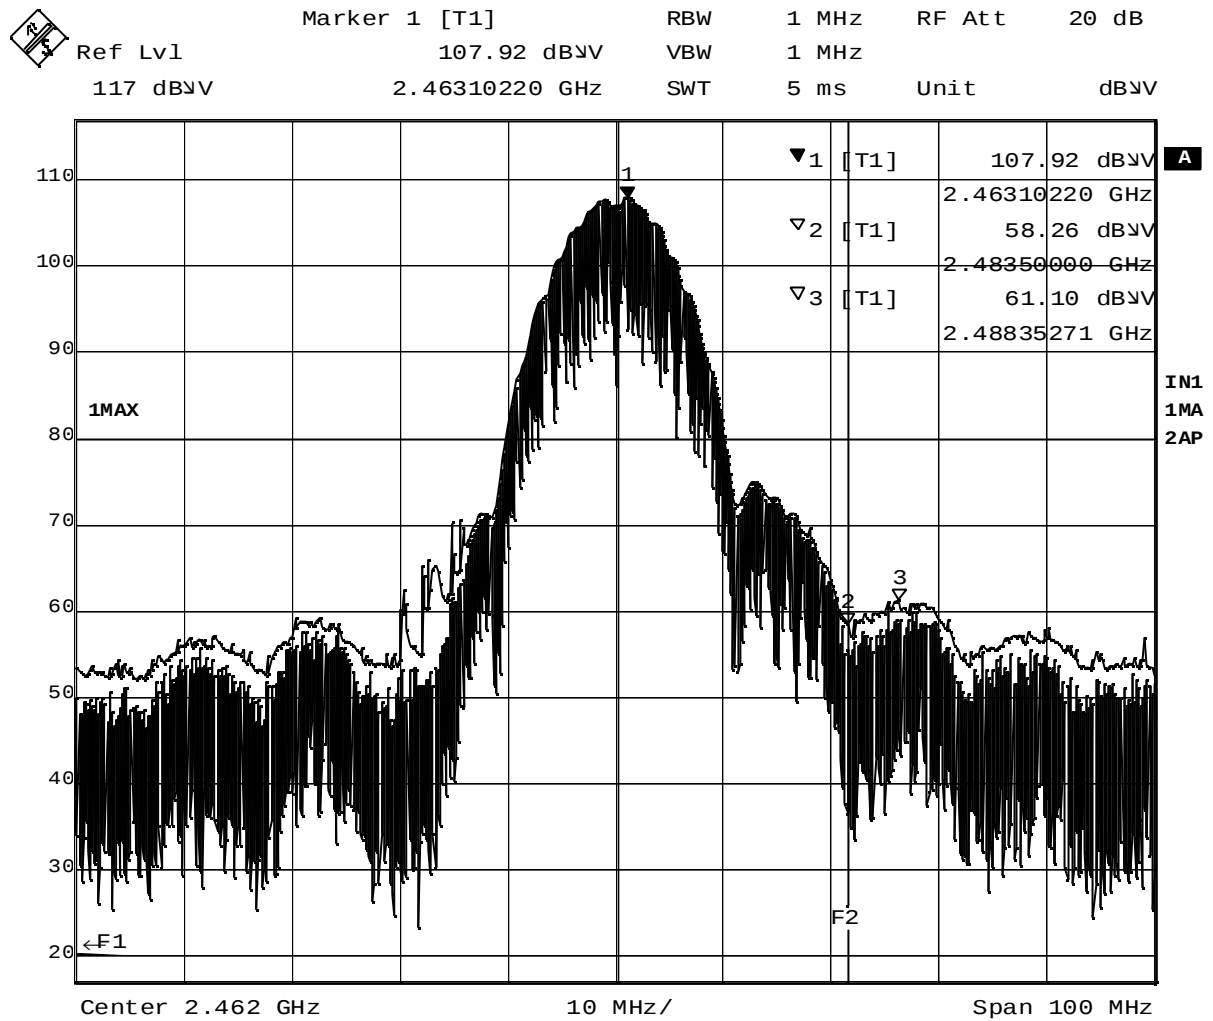


Date: 30. JAN. 2004 09:21:45

Plot 8-7-3 Ch.11 2462MHz TX, DSSS 1Mbps (Peak), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 101.78 dBμV
2.46290180 GHz
RBW 1 MHz
VBW 10 Hz
RF Att 20 dB
SWT 25 s
Unit dBμV

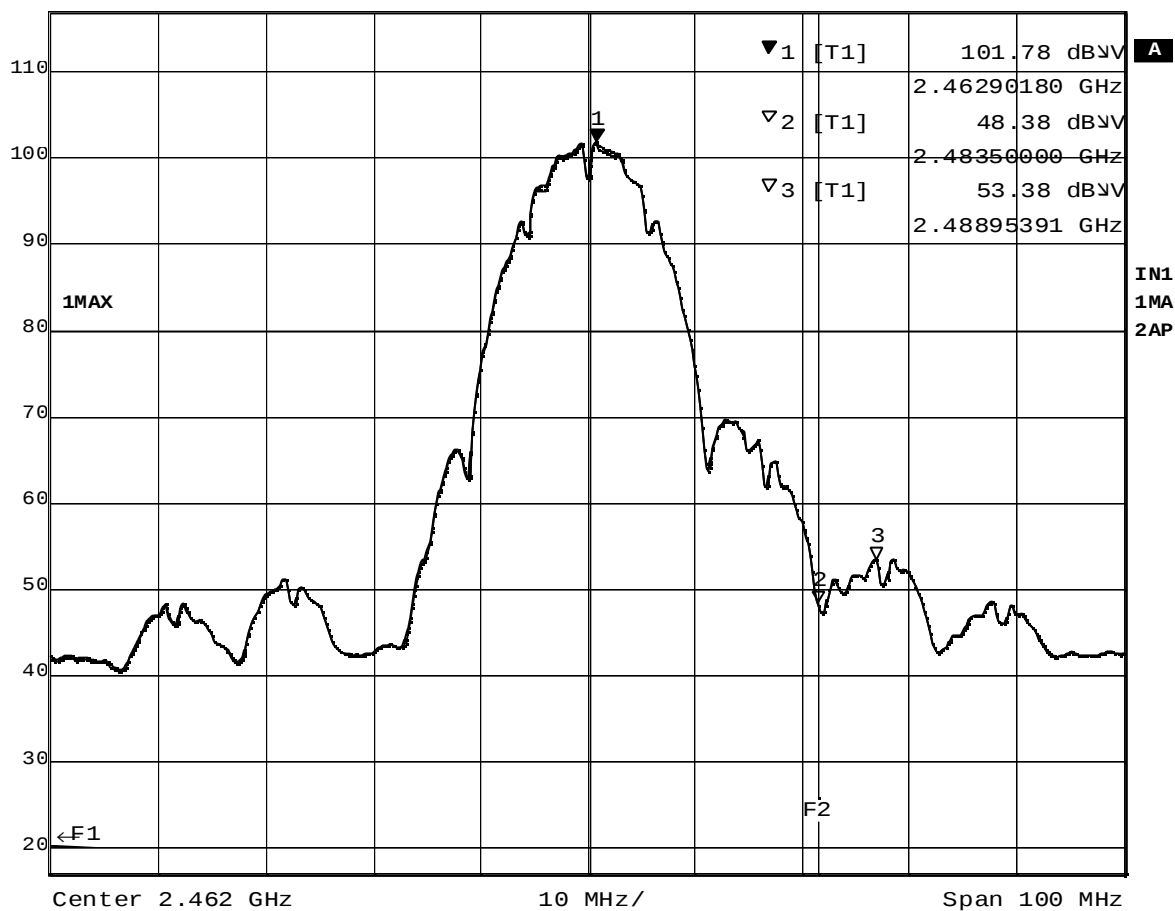


Date: 30.JAN.2004 09:20:59

Plot 8-7-4 Ch.11 2462MHz TX, DSSS 1Mbps (Average), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 110.57 dBμV
2.41149900 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

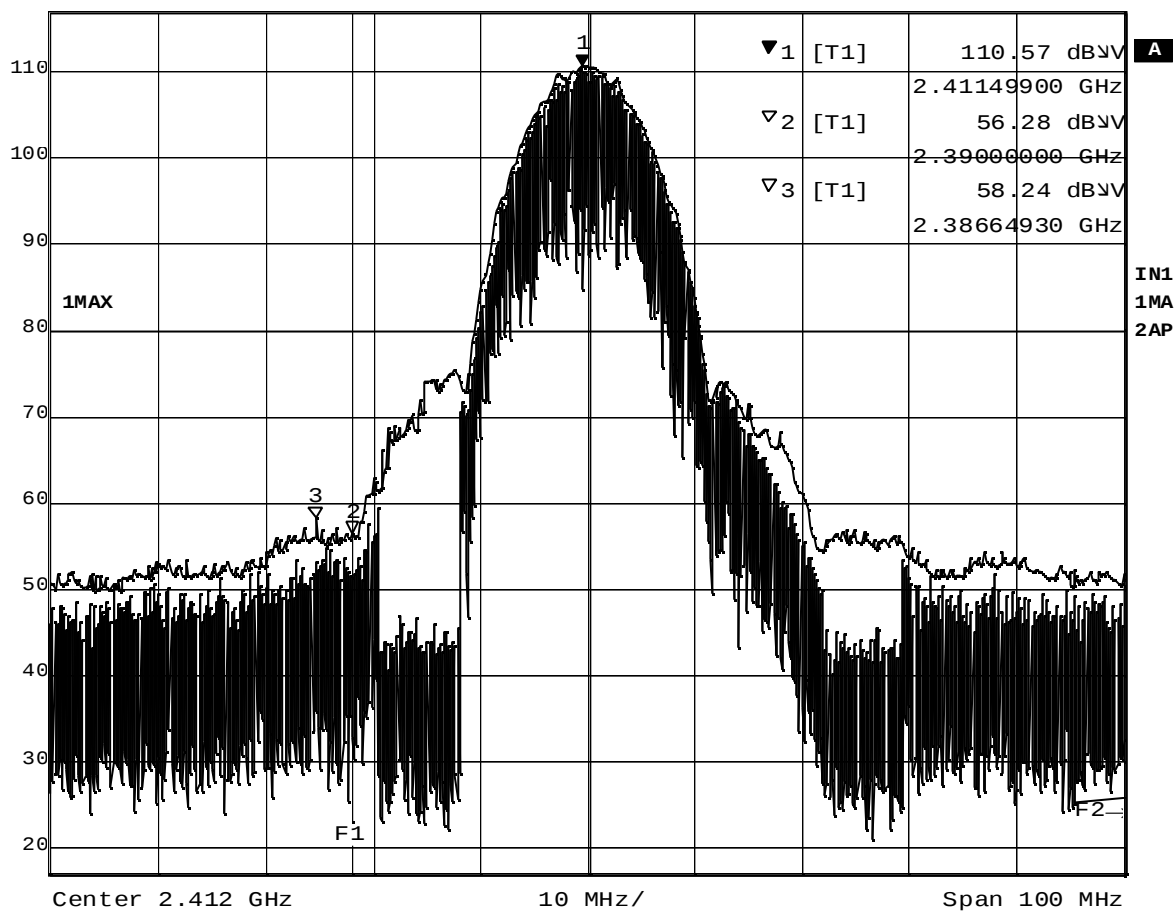


Date: 30.JAN.2004 09:36:23

Plot 8-8-1 Ch.1 2412MHz TX, DSSS 5.5Mbps (Peak), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 92.76 dBμV
2.41109820 GHz
RBW 1 MHz
VBW 10 Hz
RF Att 20 dB
SWT 25 s
Unit dBμV

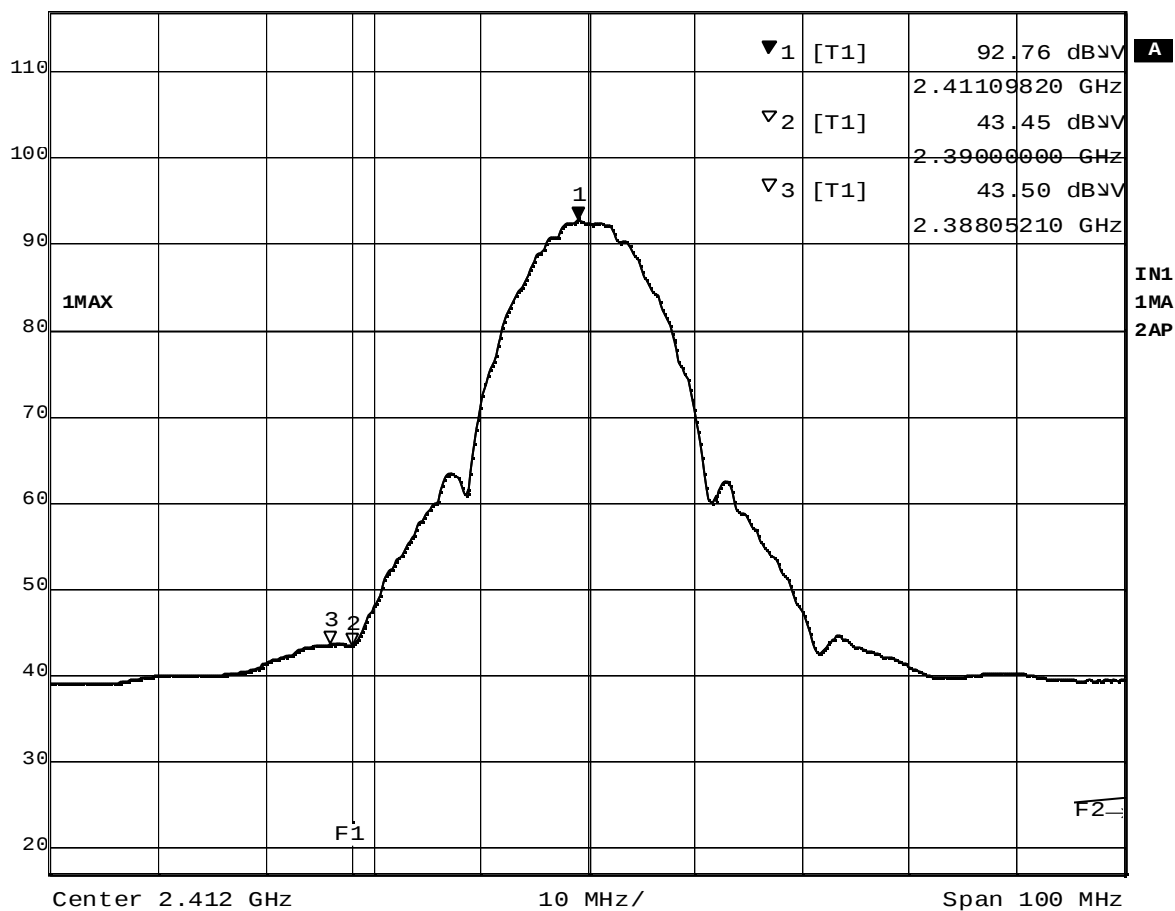


Date: 30.JAN.2004 09:35:54

Plot 8-8-2 Ch.1 2412MHz TX, DSSS 5.5Mbps (Average), R50 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 109.56 dBμV VBW 1 MHz
117 dBμV 2.46189980 GHz SWT 5 ms Unit dBμV

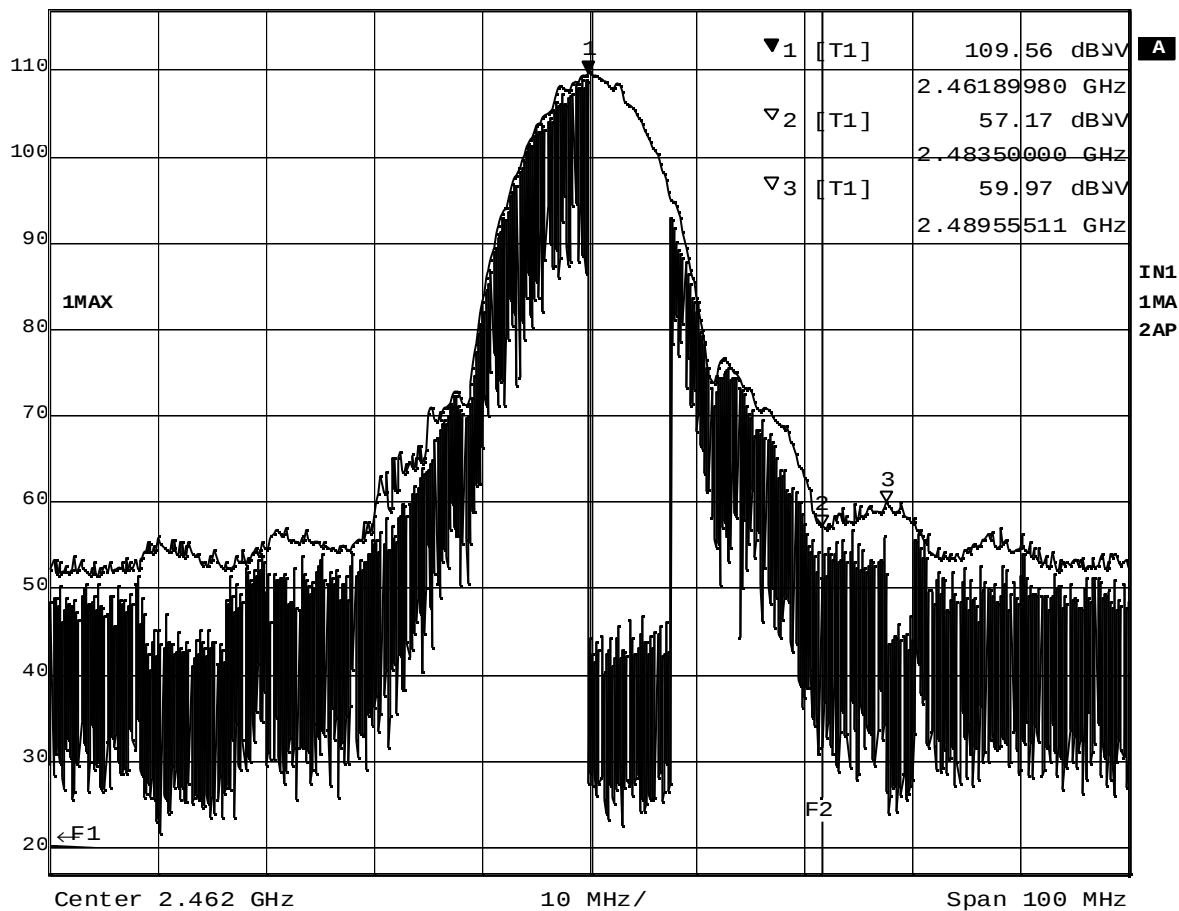


Date: 30. JAN. 2004 09:23:53

Plot 8-8-3 Ch.11 2462MHz TX, DSSS 5.5Mbps (Peak), R50 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 91.67 dBμV VBW 10 Hz
117 dBμV 2.46310220 GHz SWT 25 s Unit dBμV

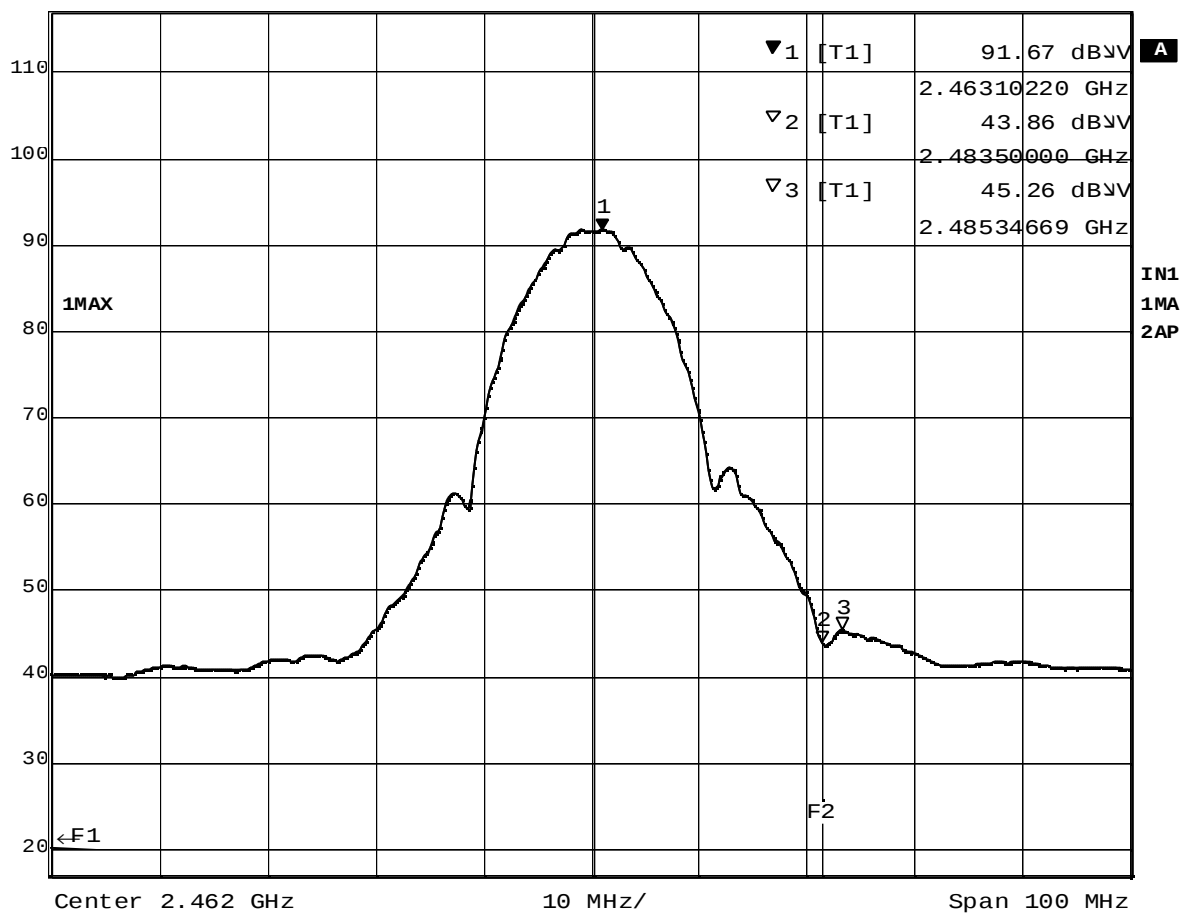


Date: 30.JAN.2004 09:25:08

Plot 8-8-4 Ch.11 2462MHz TX, DSSS 5.5Mbps (Average), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 111.99 dBμV
2.41169940 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

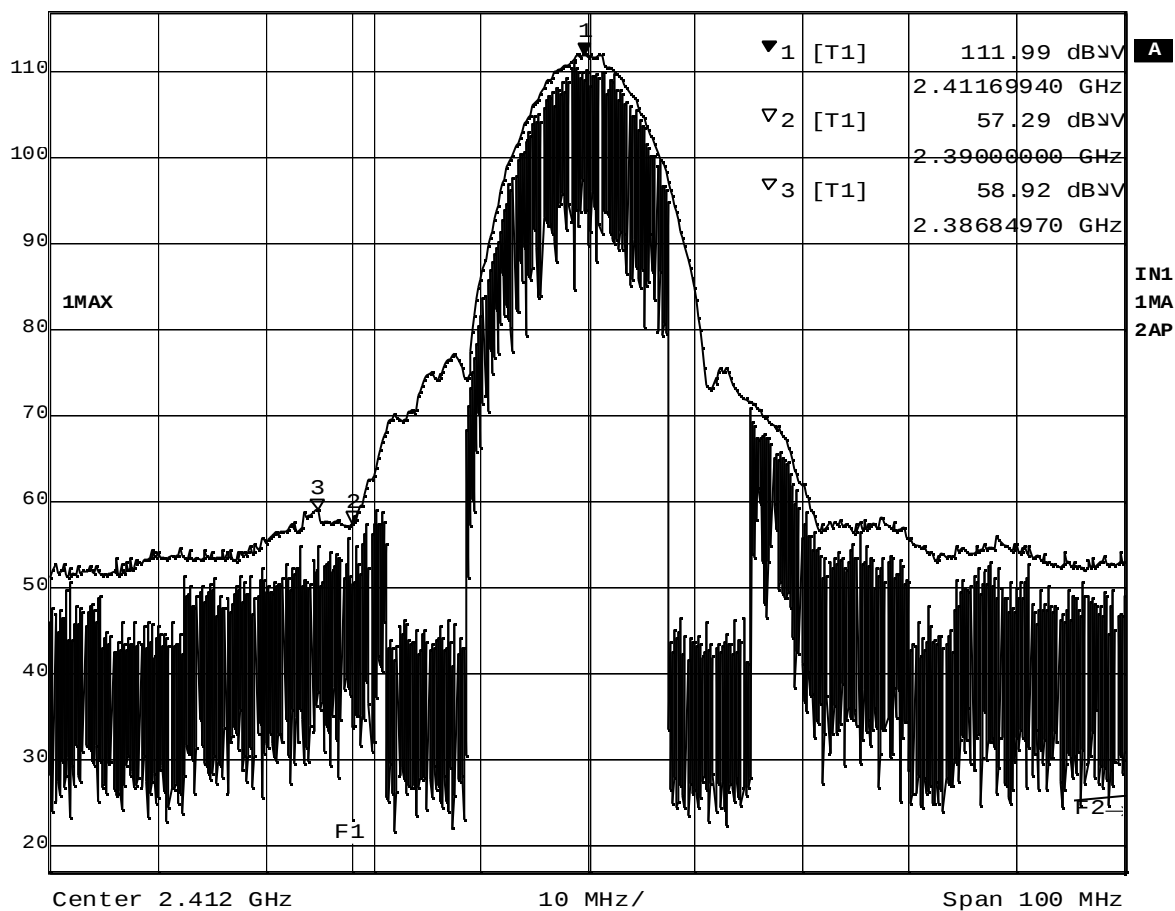


Date: 30.JAN.2004 09:33:05

Plot 8-9-1 Ch.1 2412MHz TX, DSSS 11Mbps (Peak), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 85.35 dBμV
2.41149900 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

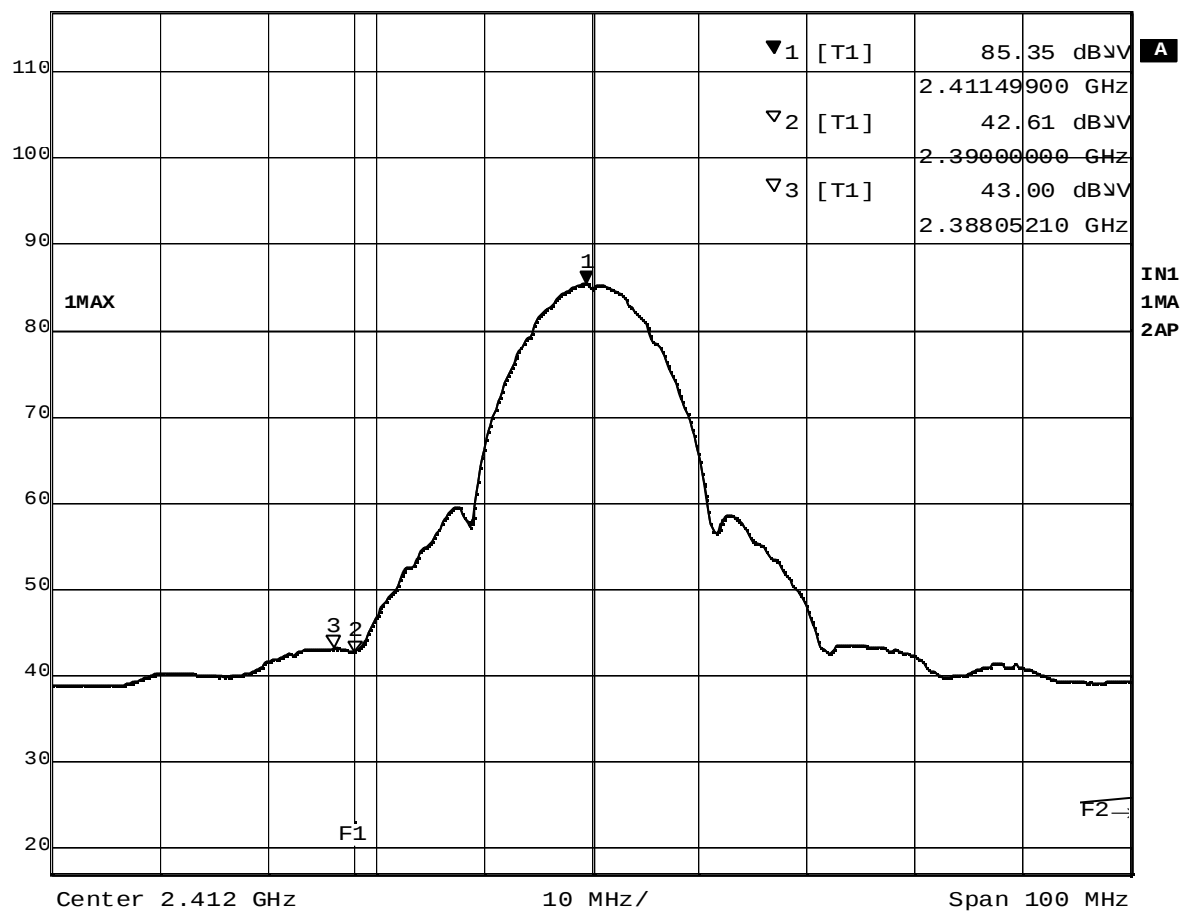


Date: 30. JAN. 2004 09:34:22

Plot 8-9-2 Ch.1 2412MHz TX, DSSS 11Mbps (Average), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 110.39 dBμV
2.46250100 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

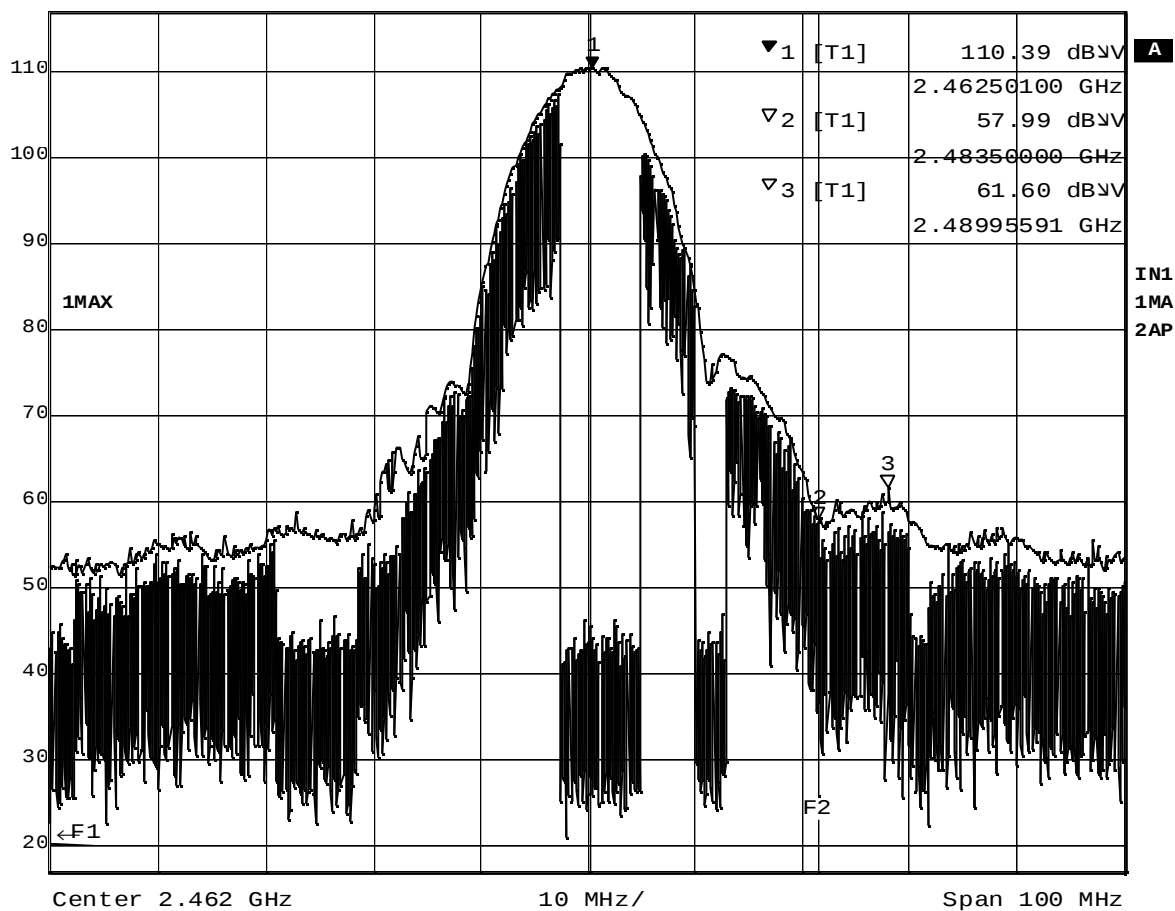


Date: 30.JAN.2004 09:27:06

Plot 8-9-3 Ch.11 2462MHz TX, DSSS 11Mbps (Peak), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 84.59 dBμV
2.46270140 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

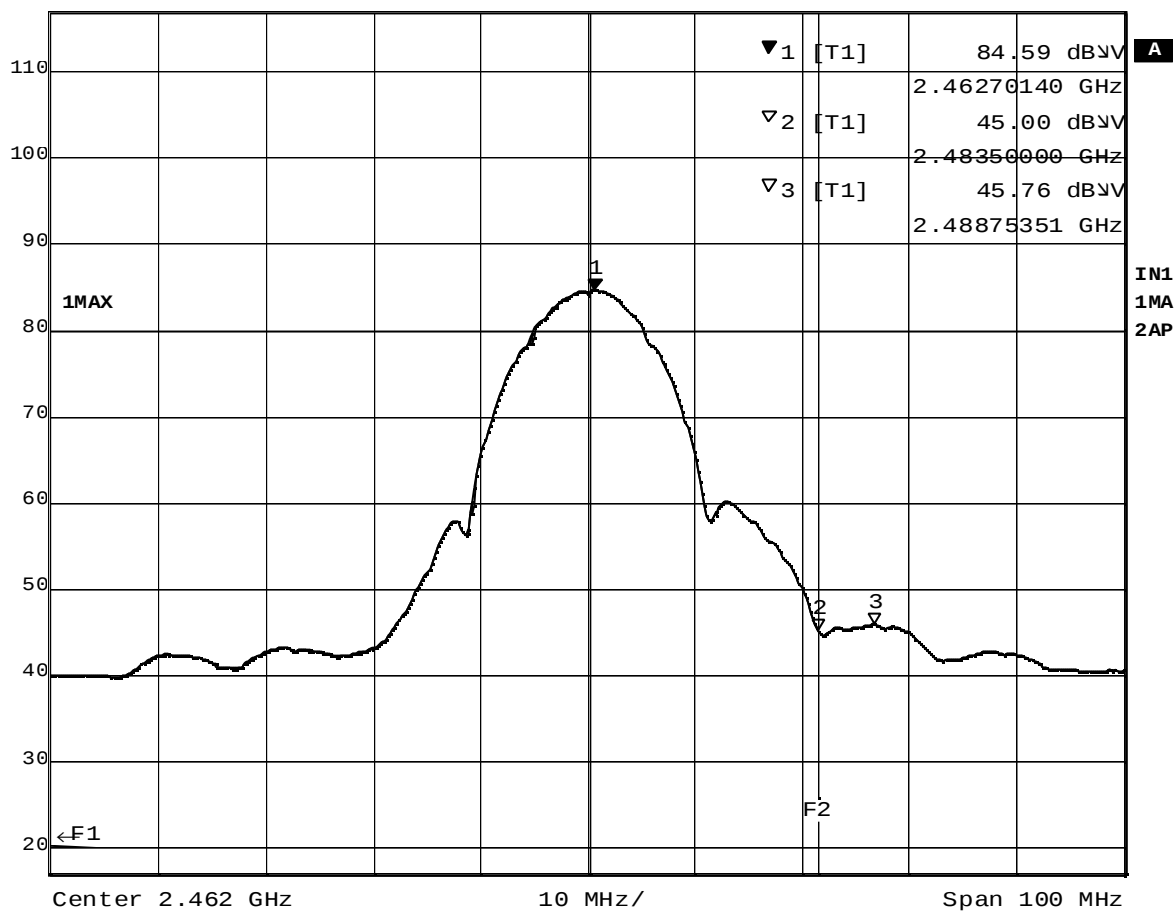


Date: 30.JAN.2004 09:26:41

Plot 8-9-4 Ch.11 2462MHz TX, DSSS 11Mbps (Average), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 105.64 dBμV
2.40989579 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

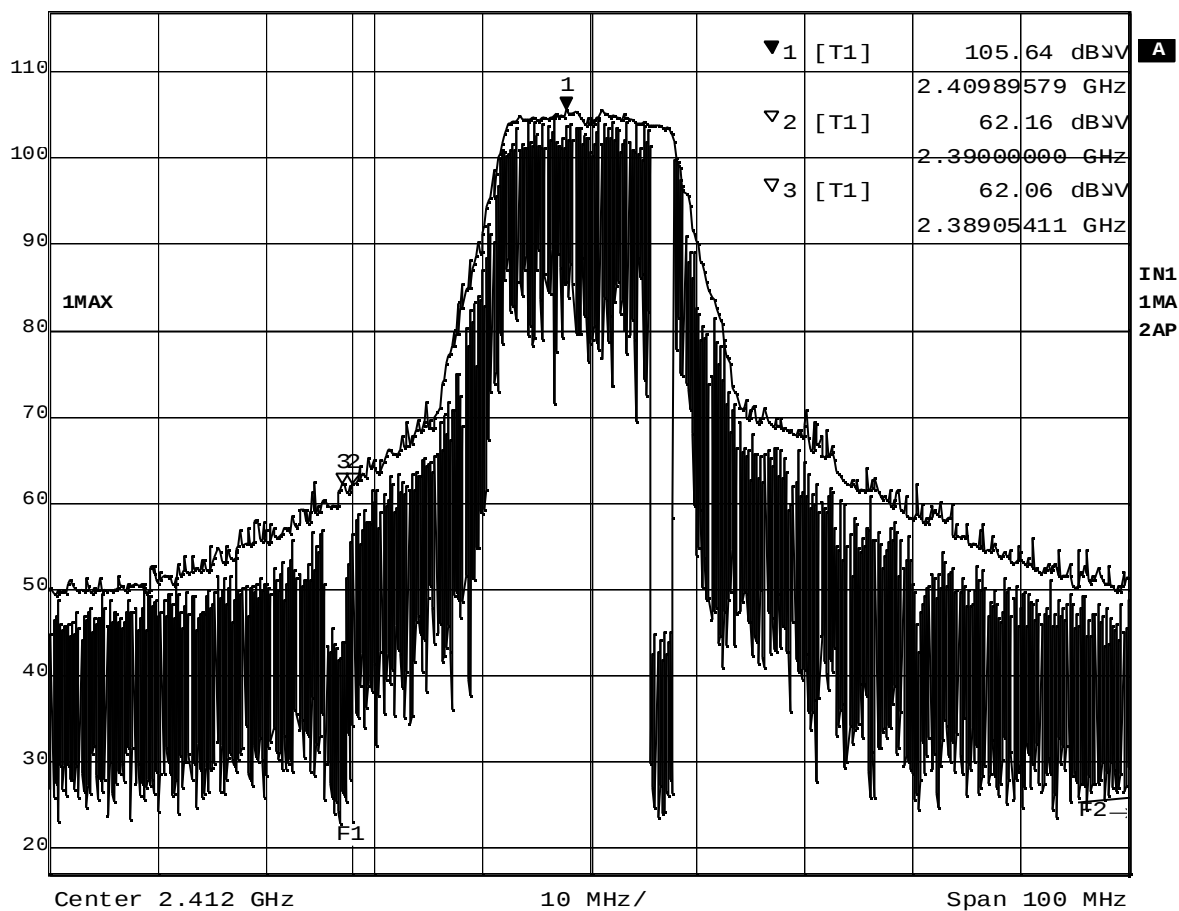

Date: 30.JAN.2004 11:13:57


Plot 8-10-1 Ch.1 2412MHz TX, OFDM 6Mbps (Peak), R50 Series



Ref Lvl
117 dBμV

Marker 1 [T1]
91.79 dBμV
2.41049699 GHz

RBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 25 s Unit dBμV

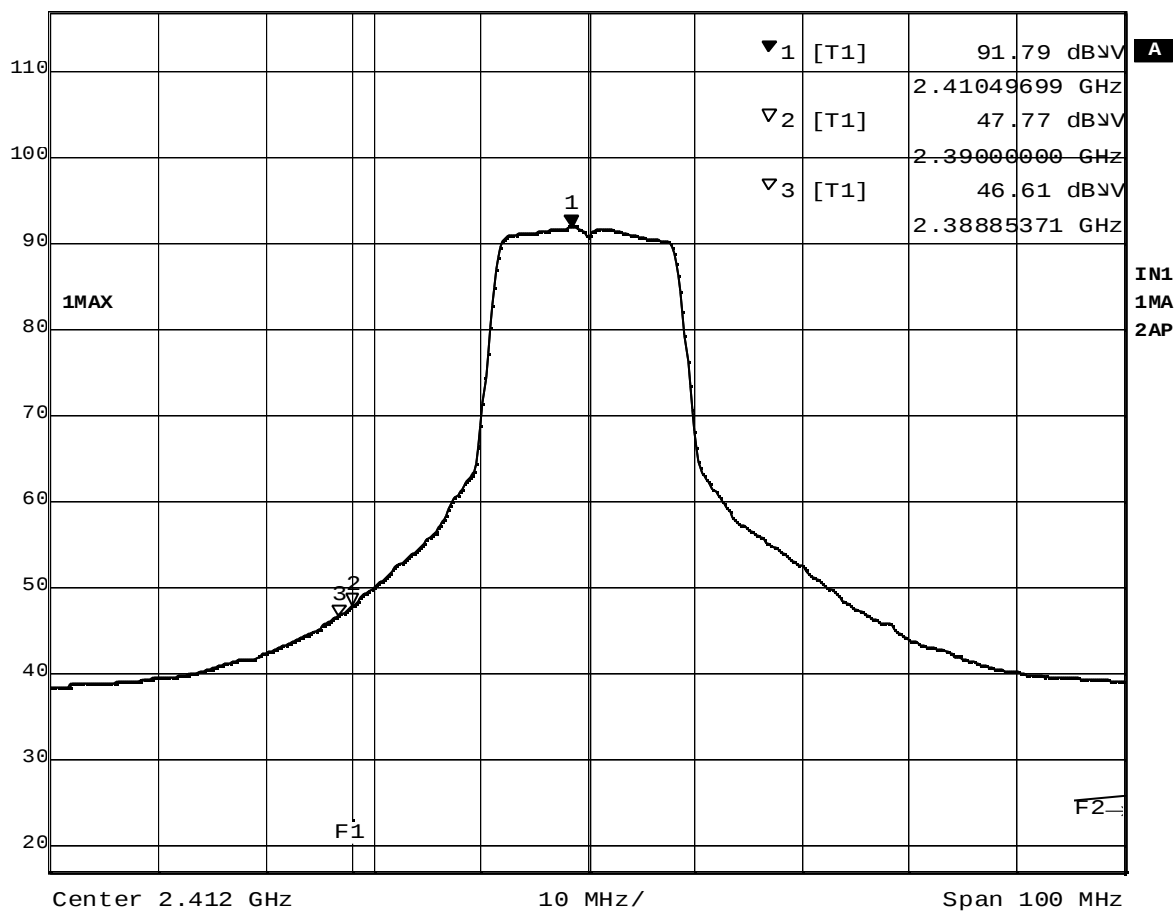


Date: 30.JAN.2004 11:13:30

Plot 8-10-2 Ch.1 2412MHz TX, OFDM 6Mbps (Average), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 105.63 dBμV
2.46670942 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

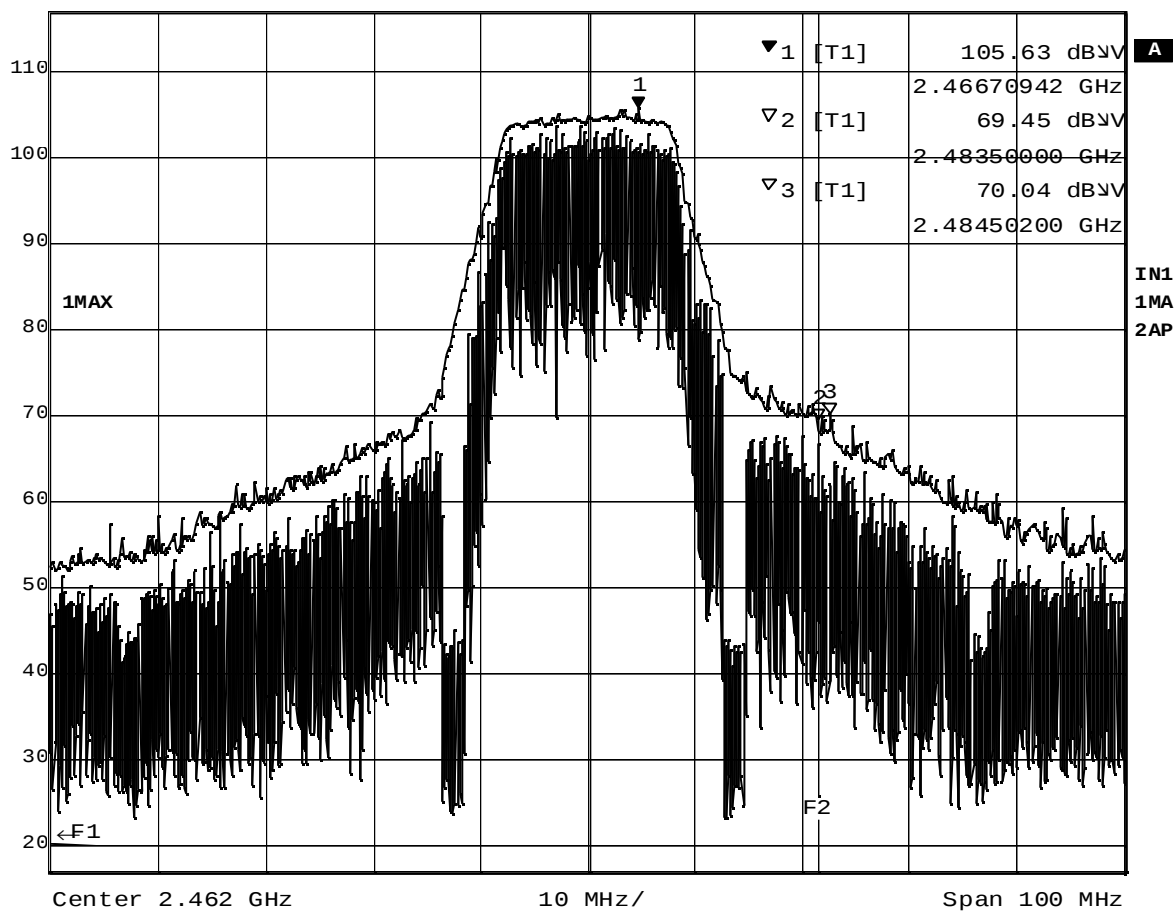


Date: 30.JAN.2004 11:01:02

Plot 8-10-3 Ch.11 2462MHz TX, OFDM 6Mbps (Peak), R50 Series




Ref Lvl 117 dBμV
Marker 1 [T1] 91.27 dBμV
2.46370341 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

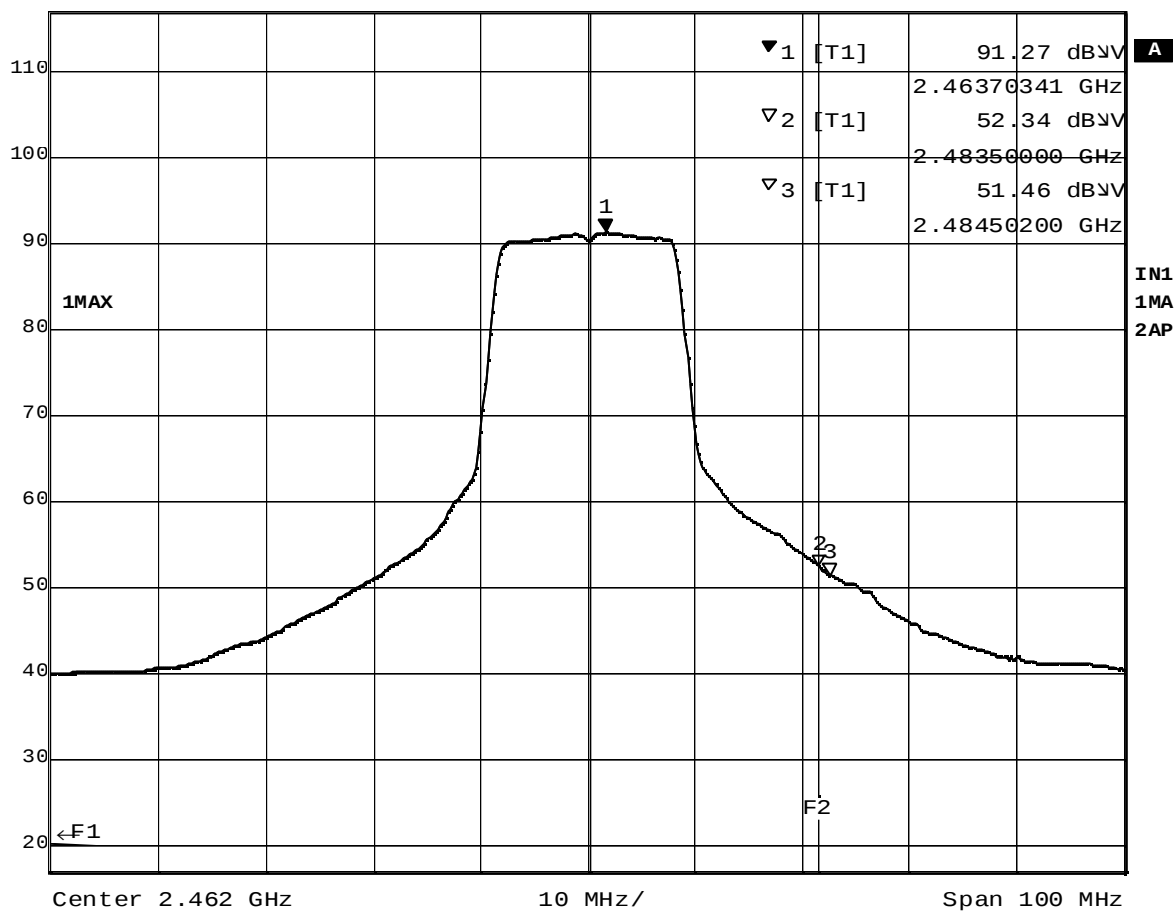


Date: 30.JAN.2004 11:02:06

Plot 8-10-4 Ch.11 2462MHz TX, OFDM 6Mbps (Average), R50 Series

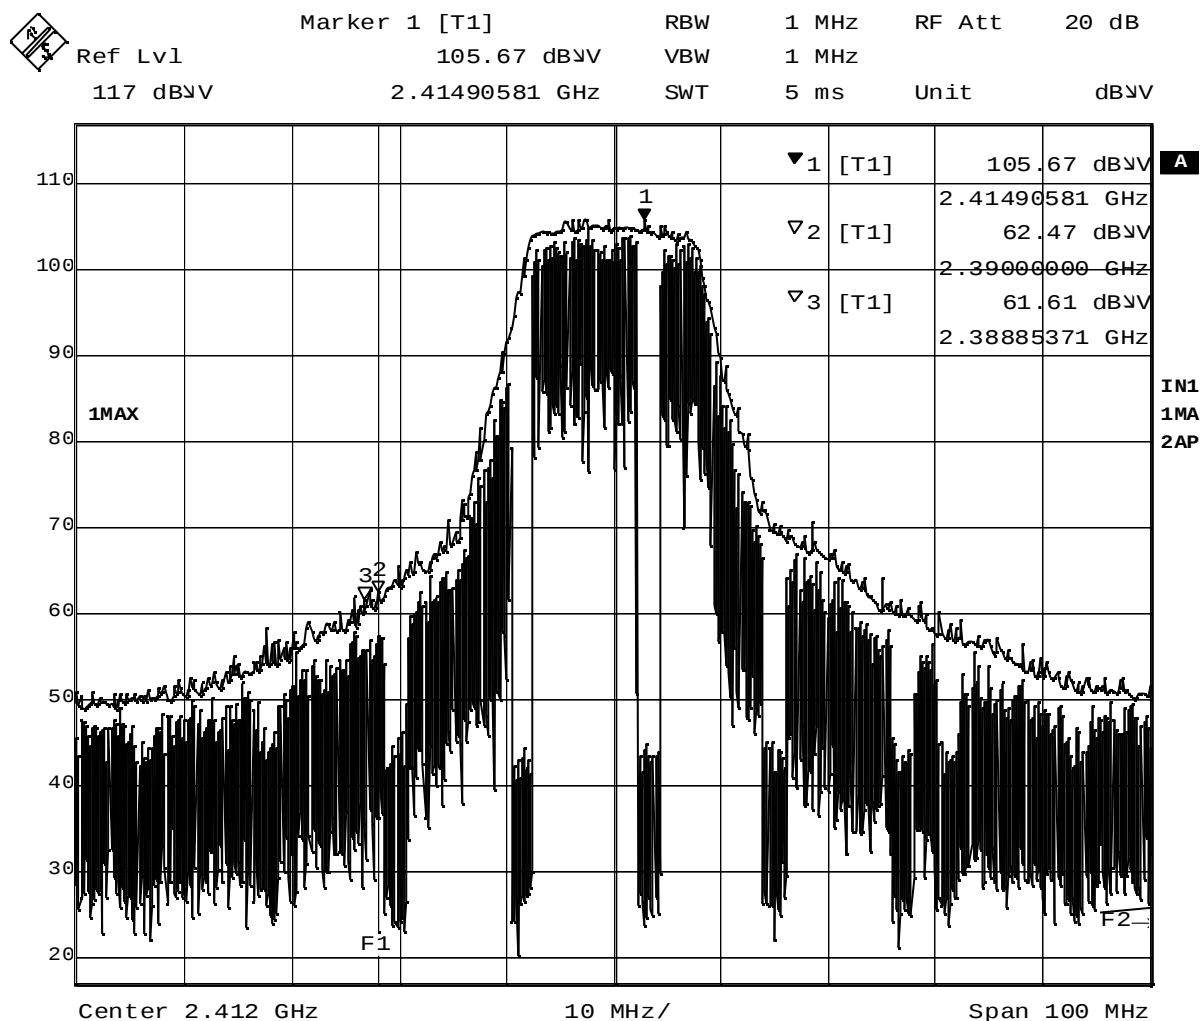

Date: 30.JAN.2004 11:10:41

Plot 8-11-1 Ch.1 2412MHz TX, OFDM 18Mbps (Peak), R50 Series

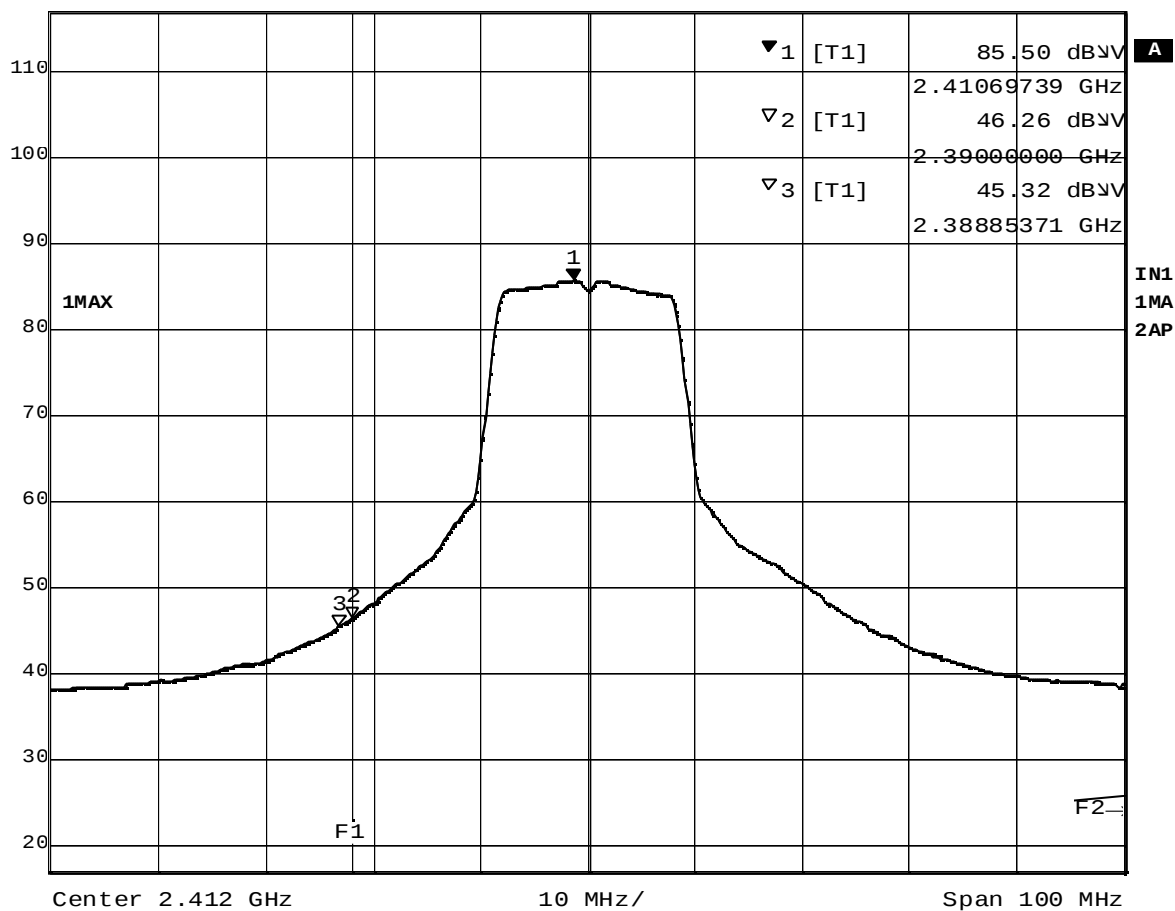
Ref Lvl
117 dBμVMarker 1 [T1]
85.50 dBμV
2.41069739 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 25 s Unit dBμV

Date: 30.JAN.2004 11:12:01

Plot 8-11-2 Ch.1 2412MHz TX. OFDM 18Mbps (Average). R50 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 106.51 dBμV VBW 1 MHz
117 dBμV 2.46490581 GHz SWT 5 ms Unit dBμV

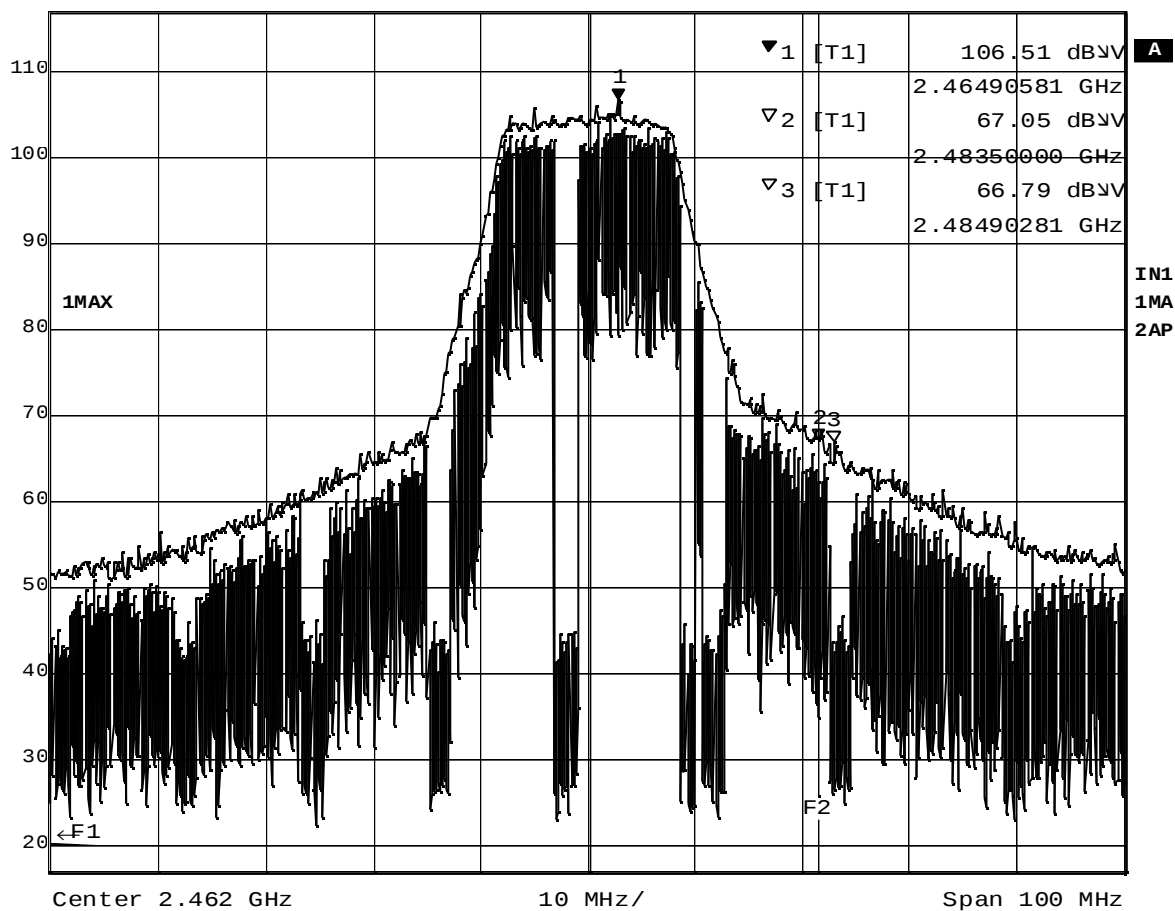


Date: 30.JAN.2004 11:04:08

Plot 8-11-3 Ch.11 2462MHz TX. OFDM 18Mbps (Peak). R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 84.99 dBμV
2.46350301 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

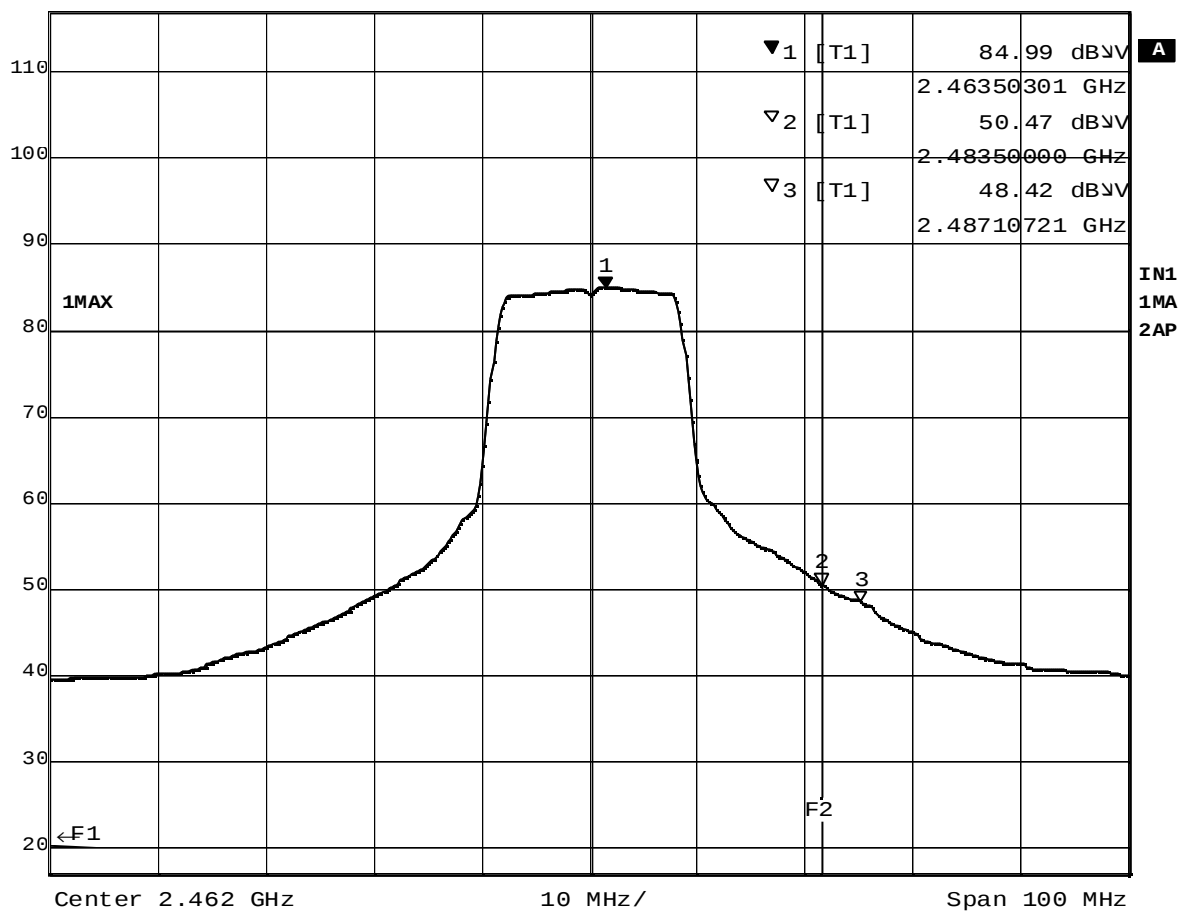


Date: 30.JAN.2004 11:03:37

Plot 8-11-4 Ch.11 2462MHz TX. OFDM 18Mbps (Average). R50 Series




Ref Lvl 117 dBμV
Marker 1 [T1] 105.82 dBμV
2.40929459 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

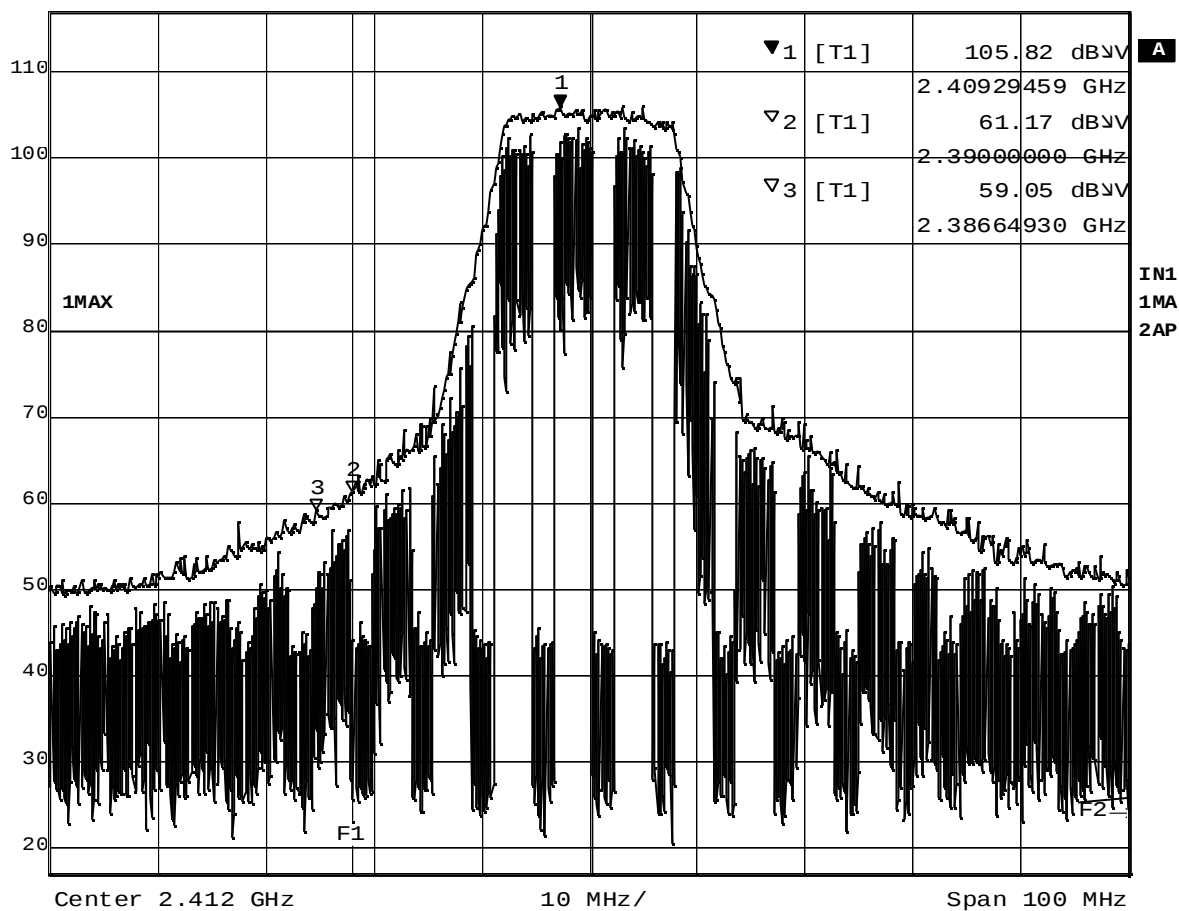

Date: 30. JAN. 2004 13:08:52

Plot 8-12-1 Ch.1 2412MHz TX. OFDM 54Mbps (Peak). R50 Series

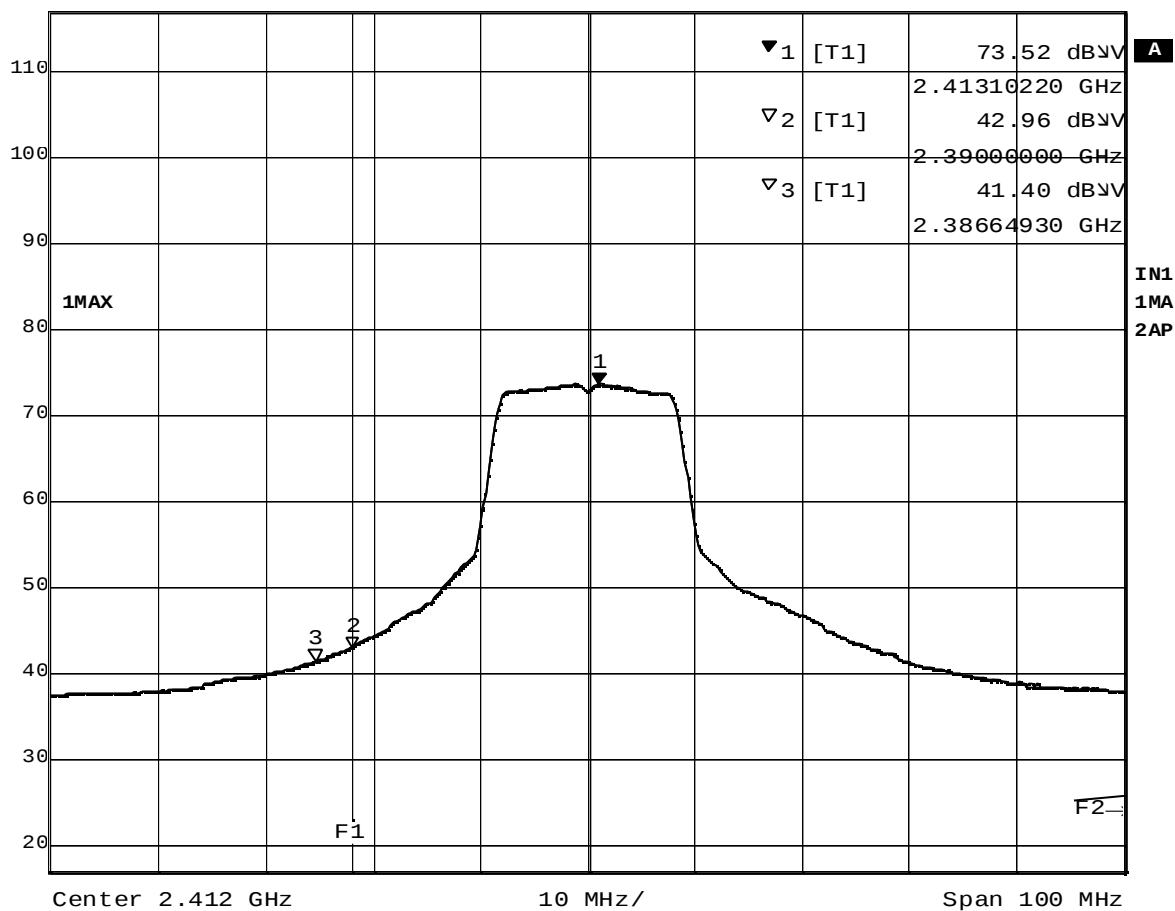
Ref Lvl
117 dBμVMarker 1 [T1]
73.52 dBμV
2.41310220 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 25 s Unit dBμV

Date: 30.JAN.2004 13:11:35

Plot 8-12-2 Ch.1 2412MHz TX. OFDM 54Mbps (Average). R50 Series



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 106.52 dBμV VBW 1 MHz
117 dBμV 2.46069739 GHz SWT 5 ms Unit dBμV

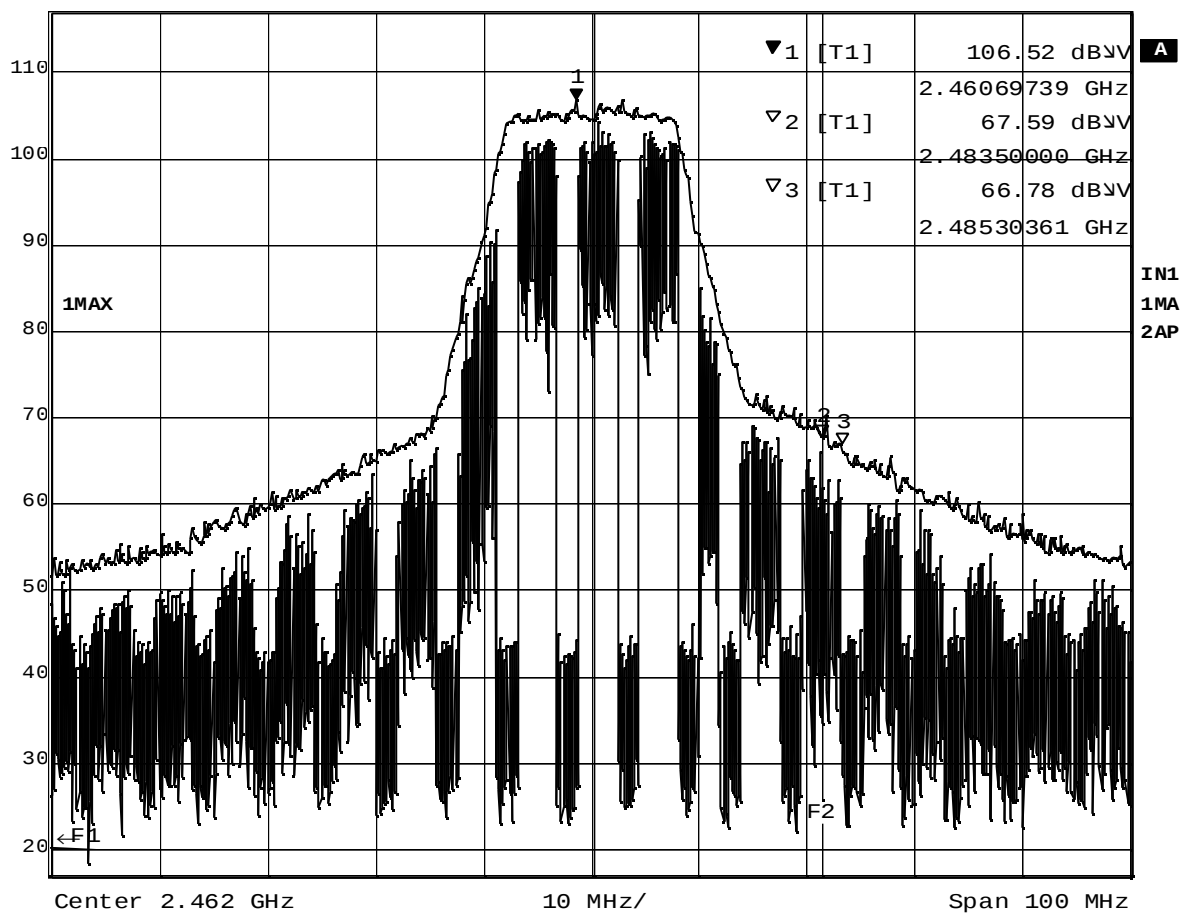


Date: 30.JAN.2004 11:05:30

Plot 8-12-3 Ch.11 2462MHz TX, OFDM 54Mbps (Peak), R50 Series



Ref Lvl 117 dBμV
Marker 1 [T1] 73.40 dBμV
2.46350301 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

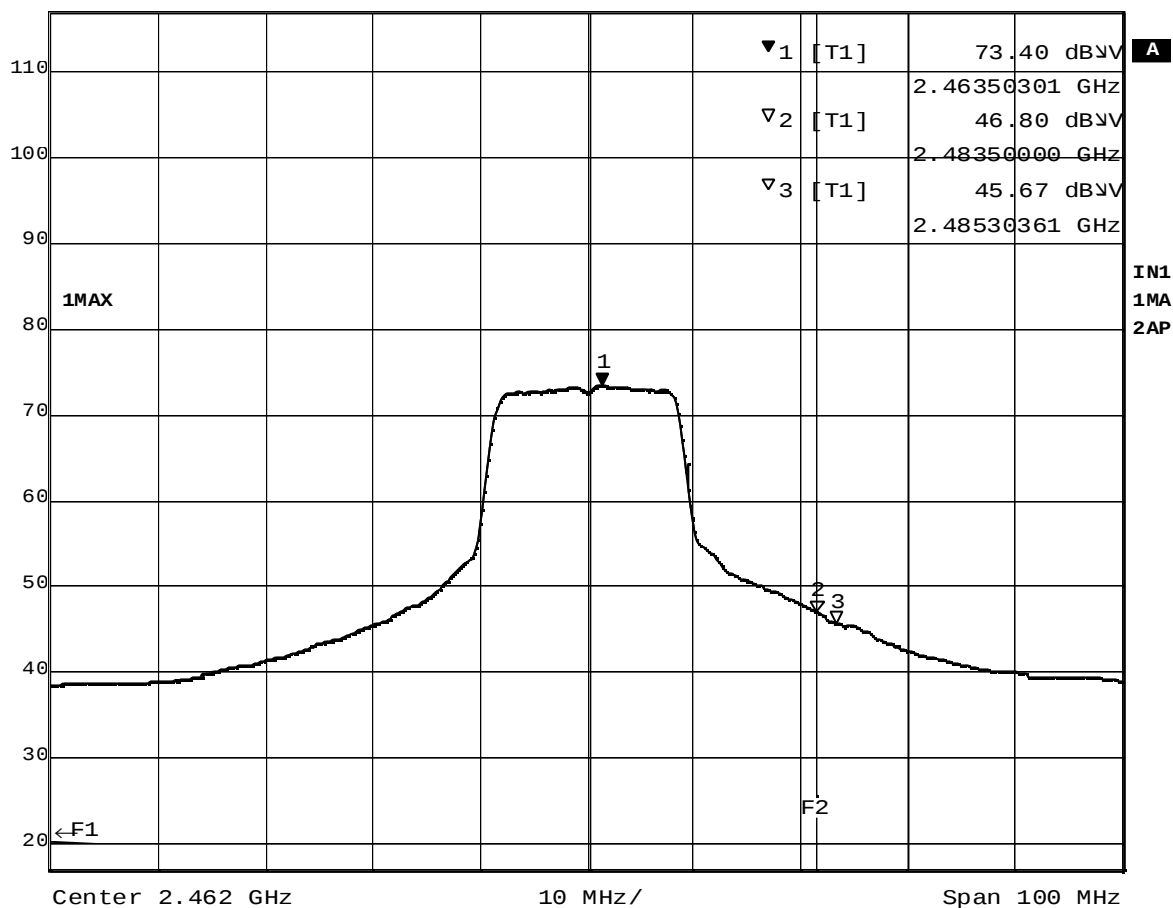

Date: 30.JAN.2004 11:06:38

Plot 8-12-4 Ch.11 2462MHz TX, OFDM 54Mbps (Average), R50 Series