


Test report No:
2231093R-RF-US-P06V02

FCC TEST REPORT

Product Name	Barcode Scanner
Trademark	Honeywell
Model and /or type reference	8690i
FCC ID	HD5-8690B
Applicant's name / address	HONEYWELL INTERNATIONAL INC Honeywell Safety and Productivity Solutions 9680 OLD BAILES RD FORT MILL SC 29707-7539,USA
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Enginggr 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2022-06-07
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	5
Environmental conditions	5
Possible test case verdicts	6
Abbreviations.....	6
Document History.....	7
Remarks and Comments	7
Used Equipment.....	8
Uncertainty	10
1 General Information	11
1.1 General Description of the Item(s).....	11
1.2 Antenna Information	12
1.3 Channel List.....	13
2 Description of Test Setup.....	14
2.1 Operating mode(s) used for tests	14
2.2 Auxiliary equipment / Test software for the EUT	14
2.3 Test Configuration / Block diagram used for tests.....	15
2.4 Testing process	16
3 Verdict summary section.....	17
3.1 Standards	17
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	17
3.3 Overview of results	18
3.4 Test Facility.....	19
4 Test Results	20
4.1 Conducted Emission.....	20
4.1.1 Limit	20
4.1.2 Test Setup	20
4.1.3 Test Procedure	20
4.1.4 Test Data	21
4.2 Emissions in restricted frequency bands	23
4.2.1 Limit	23
4.2.2 Test Setup	25
4.2.3 Test Procedure	26
4.2.4 Test Data	27
4.3 20dB Bandwidth.....	41

4.3.1	Limit	41
4.3.2	Test Setup	41
4.3.3	Test Procedure	41
4.3.4	Test Data	42
4.4	Carrier Frequency Separation	44
4.4.1	Limit	44
4.4.2	Test Setup	44
4.4.3	Test Procedure	44
4.4.4	Test Data	45
4.5	Number of hopping Frequencies	47
4.5.1	Limit	47
4.5.2	Test Setup	47
4.5.3	Test Procedure	47
4.5.4	Test Data	48
4.6	Time of Occupancy(Dwell Time)	49
4.6.1	Limit	49
4.6.2	Test Setup	49
4.6.3	Test Procedure	49
4.6.4	Test Data	50
4.7	Peak Output Power.....	53
4.7.1	Limit	53
4.7.2	Test Setup	53
4.7.3	Test Procedure	54
4.7.4	Test Data	54
4.8	Emissions in non-restricted frequency band	55
4.8.1	Limit	55
4.8.2	Test Setup	55
4.8.3	Test Procedure	55
4.8.4	Test Data	56
4.9	Duty cycle	57
4.9.1	Limit	57
4.9.2	Test Setup	57
4.9.3	Test Procedure	57
4.9.4	Test Data	58
4.10	Radiated Emission Band Edge	59
4.10.1	Limit	59
4.10.2	Test Setup	59



4.10.3	Test Procedure	59
4.10.4	Test Data	60
4.11	Antenna Requirement.....	76
4.11.1	Limit:	76
4.11.2	Antenna Connector Construction:	76
5	Test setup photo and EUT Photo	77

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 13, 2022
Date (start test)	May. 14, 2022
Date (finish test)	May. 25, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2231093R-RF-US-P06V02	V1.0	Initial issue of report.	2022-06-07

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List.
8. This test EUT is based on the EUT of 2090075R-RF-US-P06V02, and the WIFI&BT module has been updated. The RFID module has not changed. We have verified the RFID radiation test, and the test results have not changed. Therefore, our report is based on 2090075-RF-US-P06V02 to update report.
9. The EUT supports the way of RFID+BT and RFID+WIFI working at the same time, so we evaluate the Emissions in restricted frequency bands test of RFID+BT and RFID+WIFI working at the same time.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2021.12.15	2022.12.14
Two-Line V-Network	R&S	ENV216	101190	2021.07.11	2022.07.10
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
Current Probe	R&S	EZ-17	100678	2021.09.18	2022.09.17
50ohm Termination	SHX	TF2	07081402	2021.11.17	2022.11.16
50ohm Termination	SHX	TF2	07081403	2021.11.17	2022.11.16
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2021.11.23	2022.11.22
Coaxial Cable	Suhner	RG 223	TR1-C1	2021.06.08	2022.06.07
Coaxial Cable	Suhner	RG 223	TR1-C2	2021.06.09	2022.06.08
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.08.12	2022.08.11
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.08.12	2022.08.11
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.08.04	2022.08.03
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2021.10.30	2022.10.29
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2021.06.30	2022.06.29
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2021.08.04	2022.08.03
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2021.06.09	2022.06.08
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
Preamplifier	Agilent	8449B	3008A02597	2021.06.08	2022.06.07
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2021.12.13	2022.12.12
DRG Horn	ETS-Lindgren	3117	00123988	2021.08.23	2022.08.22
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2021.07.09	2022.07.08
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2022.03.12	2023.03.11
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.06.08	2022.06.07
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2021.06.08	2022.06.07
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
Conducted Emission	± 2.02 dB
Emissions in restricted frequency bands	above 1G : ± 3.9 dB below 1G is : ± 3.8 dB
20dB Bandwidth	± 1 kHz
Carrier Frequency Separation	± 1 kHz
Number of Hopping Frequencies	± 1 kHz
Time of Occupancy (Dwell Time)	± 0.1 us
Peak Output Power	± 1.0 dB
Emissions in non-restricted frequency bands	± 1.0 dB
Radiated Emission Band Edge	above 1G : ± 3.9 dB below 1G : ± 3.8 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Barcode Scanner
Model No.	8690i
FCC ID	HD5-8690B
Manufacturer	HONEYWELL INTERNATIONAL INC Honeywell Safety and Productivity Solutions
Manufacturer Address.....	9680 OLD BAILES RD FORT MILL SC 29707-7539,USA
Factory	Metro(Suzhou)Technologies Co.,Ltd
Address	No.221 Xinghai street China-Singapore Suzhou Industrial Park.

Wireless specification.....	RFID
Operating frequency range(s)	907.25 ~ 920.75 MHz
Type of Modulation.....	ASK
Number of channel.....	28
Channel Spacing	0.5 MHz

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☐	AC: 100 – 240 V, 50/60 Hz
	☐	DC: 2.6~3.3V
	☒	Battery: 3.7 V
Mounting position	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☒	Hand-held equipment
	☒	Other: Wearable equipment

1.2 Antenna Information

Antenna model / type number	N/A			
Antenna serial number	N/A			
Antenna Delivery	☒	1TX + 1RX		
	☐	2TX + 2RX		
Antenna technology	☒	SISO		
	☐	MIMO	☐	CDD
			☐	Beam-forming
Antenna Type	☒	External	☐	Dipole
			☐	Sectorized
			☒	PCB
	☒	Internal	☐	PIFA
			☒	PCB
			☐	Coil Antenna
			☐	Ceramic chip
			☐	Others.....
Antenna Gain	External: 1.5 dBi Internal : -0.85 dBi			

1.3 Channel List

Bluetooth Working Frequency of Each Channel: (For RFID)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
14	907.25 MHz	15	907.75 MHz	16	908.25 MHz	17	908.75 MHz
18	909.25 MHz	19	909.75 MHz	20	910.25 MHz	21	910.75 MHz
22	911.25 MHz	23	911.75 MHz	24	912.25 MHz	25	912.75 MHz
26	913.25 MHz	27	913.75 MHz	28	914.25 MHz	29	914.75 MHz
30	915.25 MHz	31	915.25 MHz	32	916.25 MHz	33	916.25 MHz
34	917.25 MHz	35	917.25 MHz	36	918.25 MHz	37	918.25 MHz
38	919.25 MHz	39	919.25 MHz	40	920.25 MHz	41	920.25 MHz

Note: The General Description of the Item , antenna information and Channel List for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode 1: Transmitter-RFID
	Mode 2: Transmitter-RFID Hopping


2.2 Auxiliary equipment / Test software for the EUT

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
ospv	V1.0.24	N/A	N/A


2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Power Line Conducted Emission Test

Chamber

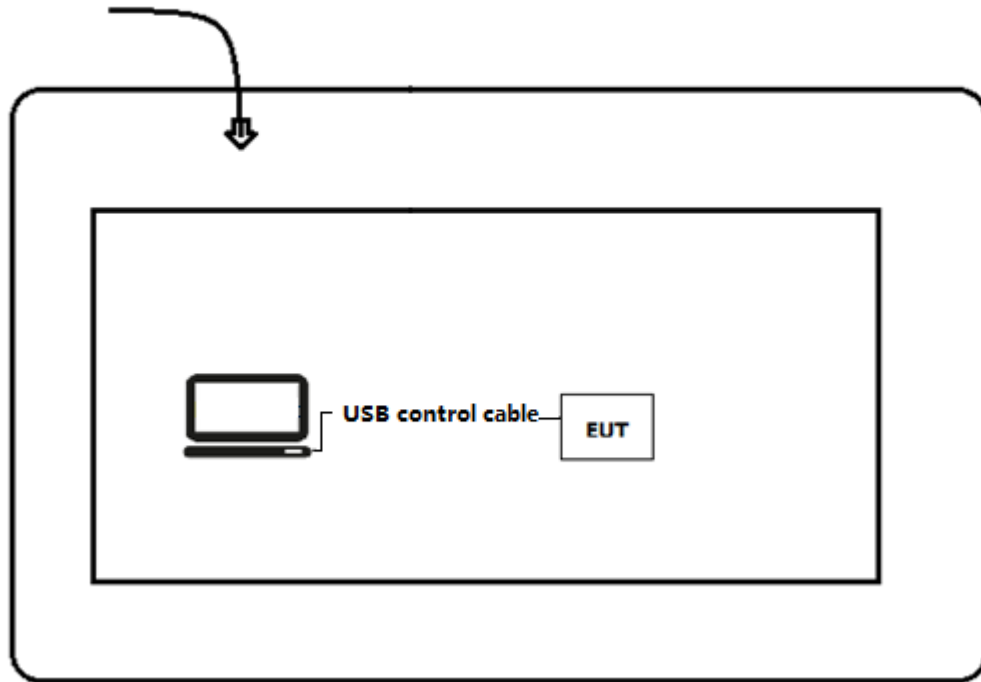

Test setup Diagram- Conducted test

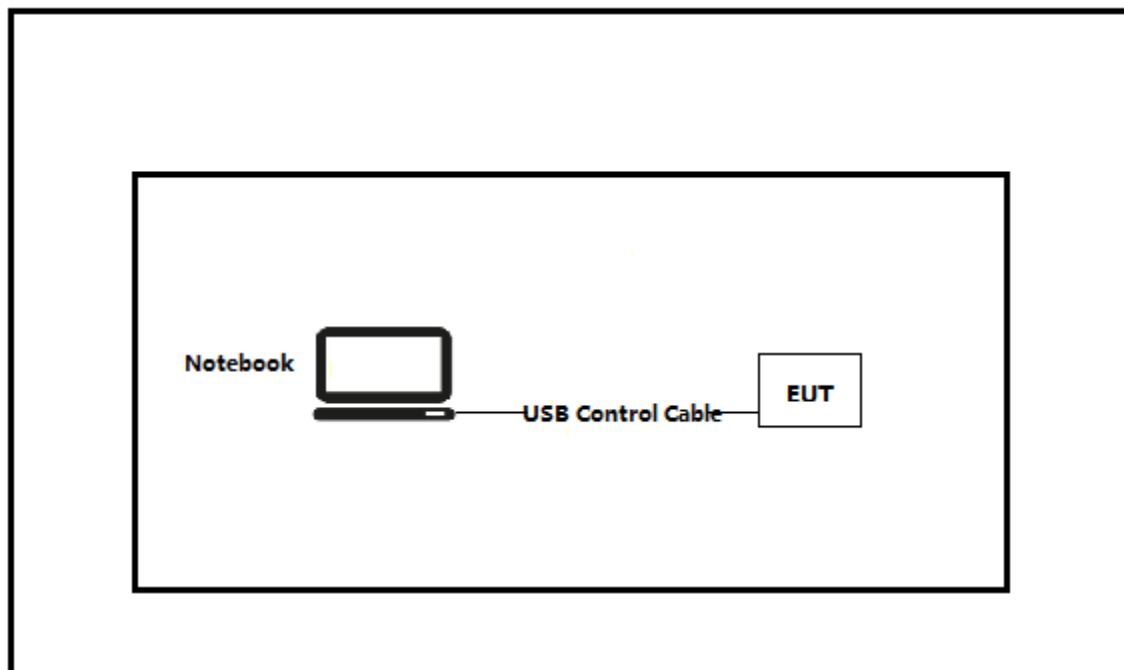

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the Bluetool on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2019	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Yes	No
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(1)	Yes	No
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.215(c), 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	Yes	No
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	Yes	No

3.4 Test Facility

USA : FCC Designation Number: CN1199

4 TEST RESULTS

4.1 Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

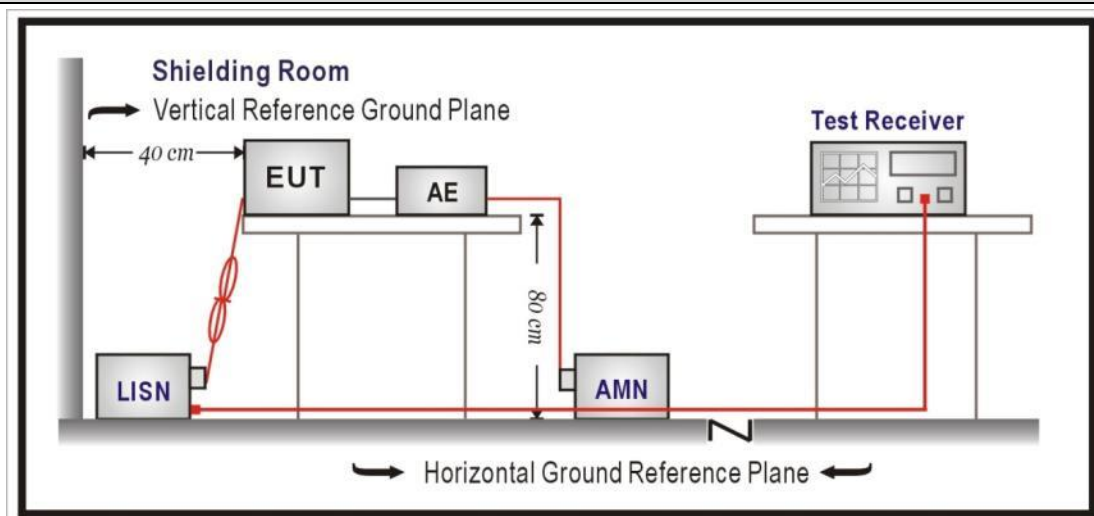


4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 2090075R	Page No.: 9
Engineer: Pawn	
Site: TR1	Time: 2020/09/27 - 20:54
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: 8690i	Power: AC 120V/60Hz
Note: Mode1	

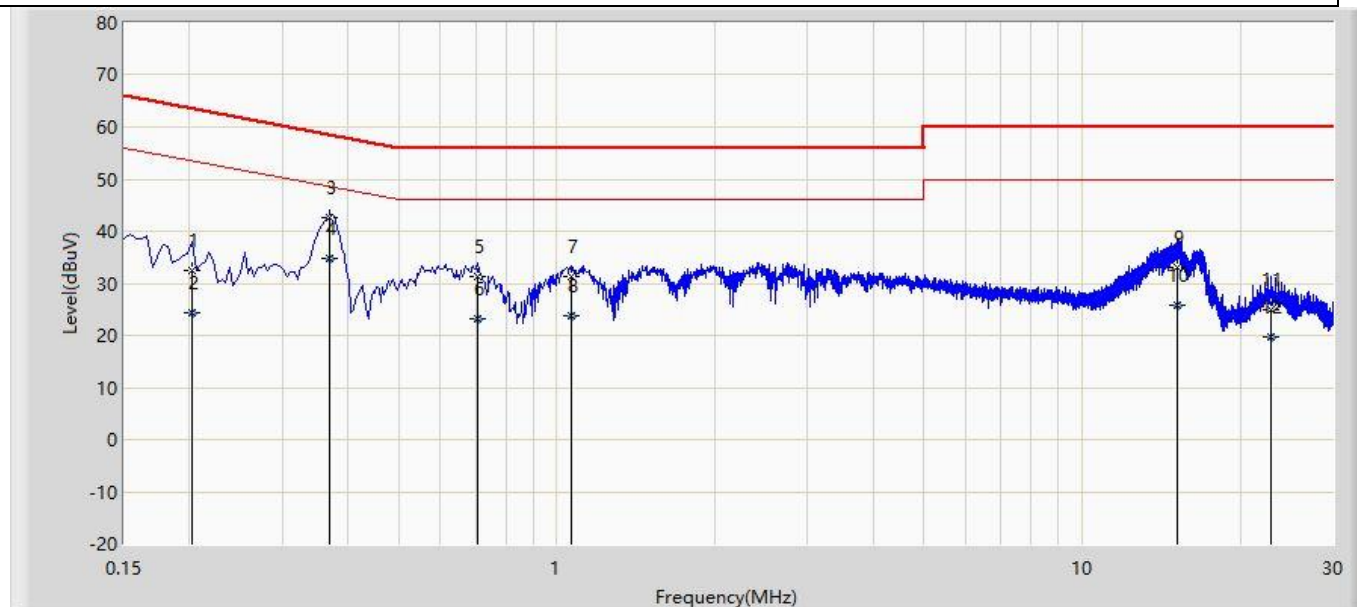

N o	Mar k	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.202	32.436	22.786	-31.092	63.528	9.650	QP
2		0.202	24.415	14.765	-29.113	53.528	9.650	AV
3		0.370	42.511	32.854	-15.990	58.501	9.657	QP
4	*	0.370	34.815	25.158	-13.686	48.501	9.657	AV
5		0.706	31.268	21.599	-24.732	56.000	9.669	QP
6		0.706	23.271	13.603	-22.729	46.000	9.669	AV
7		1.062	31.335	21.645	-24.665	56.000	9.690	QP
8		1.062	23.833	14.143	-22.167	46.000	9.690	AV
9		15.170	32.950	22.831	-27.050	60.000	10.120	QP
10		15.170	25.875	15.755	-24.125	50.000	10.120	AV
11		22.926	24.987	14.614	-35.013	60.000	10.374	QP
12		22.926	19.802	9.428	-30.198	50.000	10.374	AV

Profile: 2090075R	Page No.: 10
Engineer: Pawn	
Site: TR1	Time: 2020/09/27 - 21:00
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: 8690i	Power: AC 120V/60Hz
Note: Mode1	

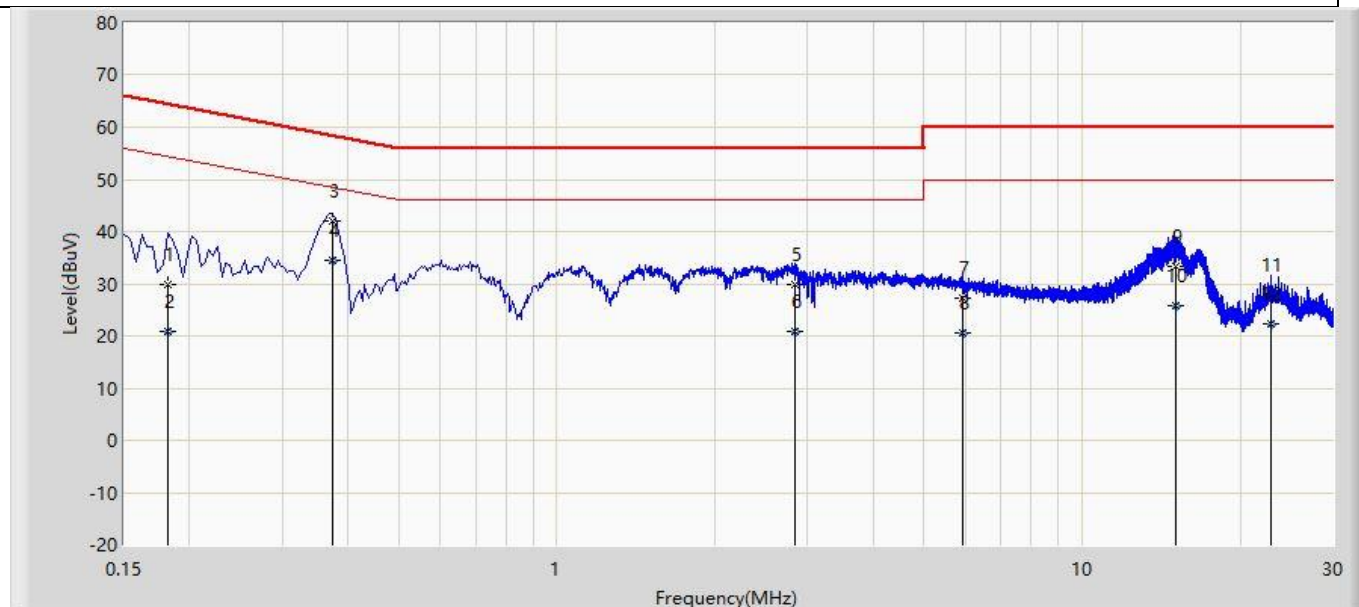

N o	Mar k	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.182	29.946	20.274	-34.447	64.394	9.673	QP
2		0.182	20.988	11.315	-33.406	54.394	9.673	AV
3		0.374	41.931	32.250	-16.481	58.412	9.681	QP
4	*	0.374	34.435	24.754	-13.977	48.412	9.681	AV
5		2.834	29.928	20.168	-26.072	56.000	9.760	QP
6		2.834	20.955	11.195	-25.045	46.000	9.760	AV
7		5.902	27.350	17.493	-32.650	60.000	9.857	QP
8		5.902	20.683	10.826	-29.317	50.000	9.857	AV
9		15.074	33.364	23.235	-26.636	60.000	10.128	QP
10		15.074	25.770	15.642	-24.230	50.000	10.128	AV
11		22.906	27.762	17.377	-32.238	60.000	10.385	QP
12		22.906	22.398	12.012	-27.602	50.000	10.385	AV


4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.207	
Restricted Bands of operation for FCC			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 –16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975–12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675–12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			
Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 ^(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 ^(Note 1)
1.705 - 30	30	29.5	30 ^(Note 1)
30 - 88	100	40	3 ^(Note 2)
88 - 216	150	43.5	3 ^(Note 2)
216 - 960	200	46	3 ^(Note 2)
Above 960	500	54	3 ^(Note 2)
Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).			
Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.			
Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20			


dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

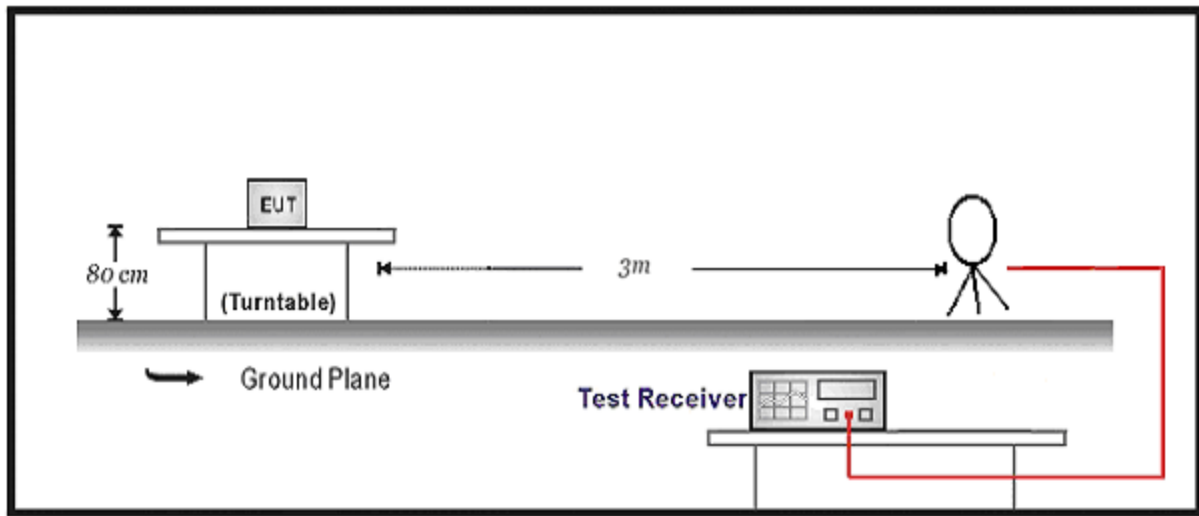

30MHz-1GHz Test Setup:

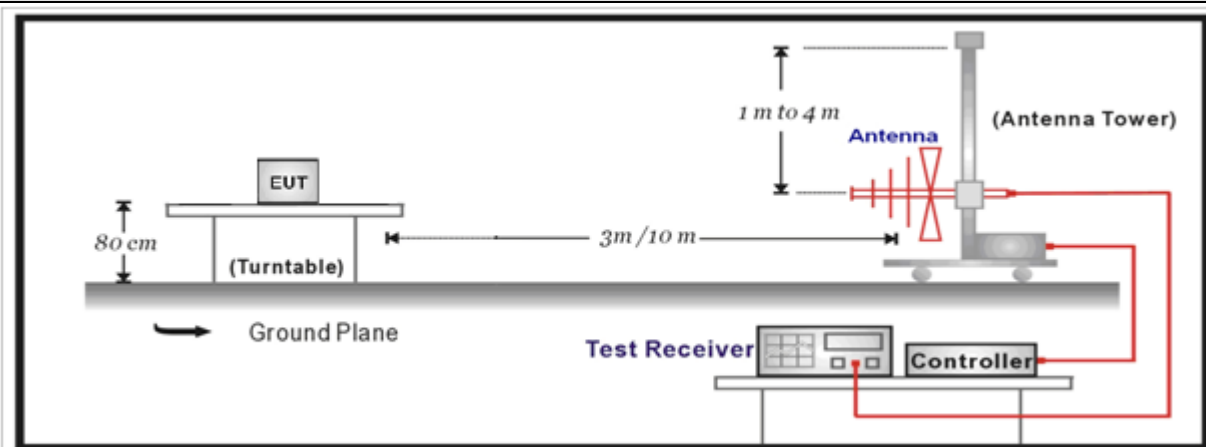

Above 1GHz Test Setup:

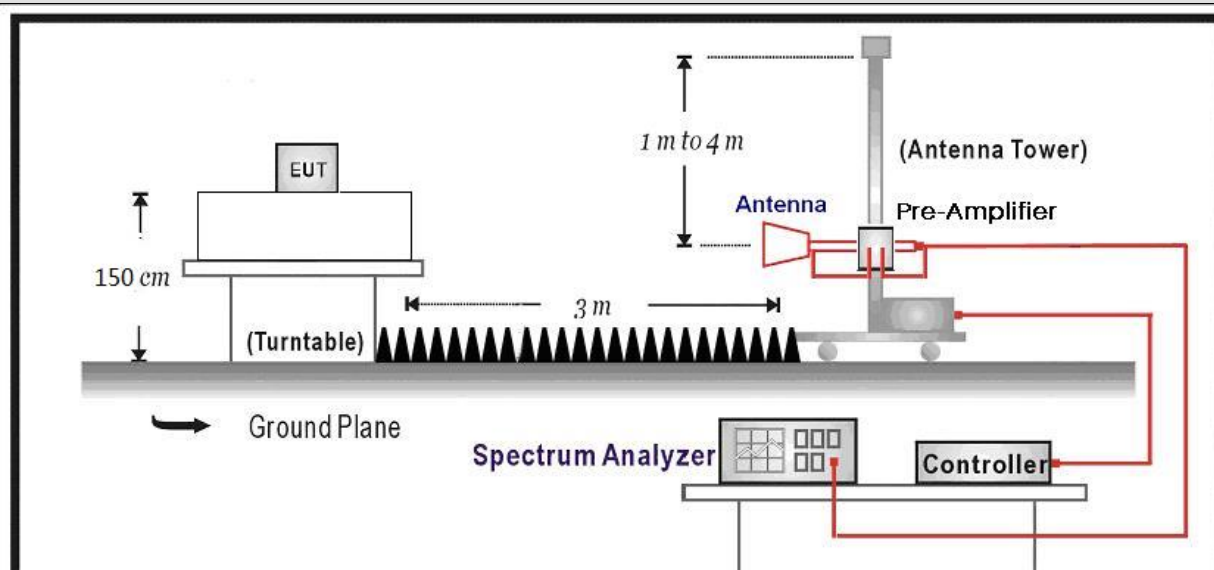


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
		☒ ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		☒ ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		☒ ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2090075R	Page No.: 7
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1:Transmit at 907.25MHz by RFID	

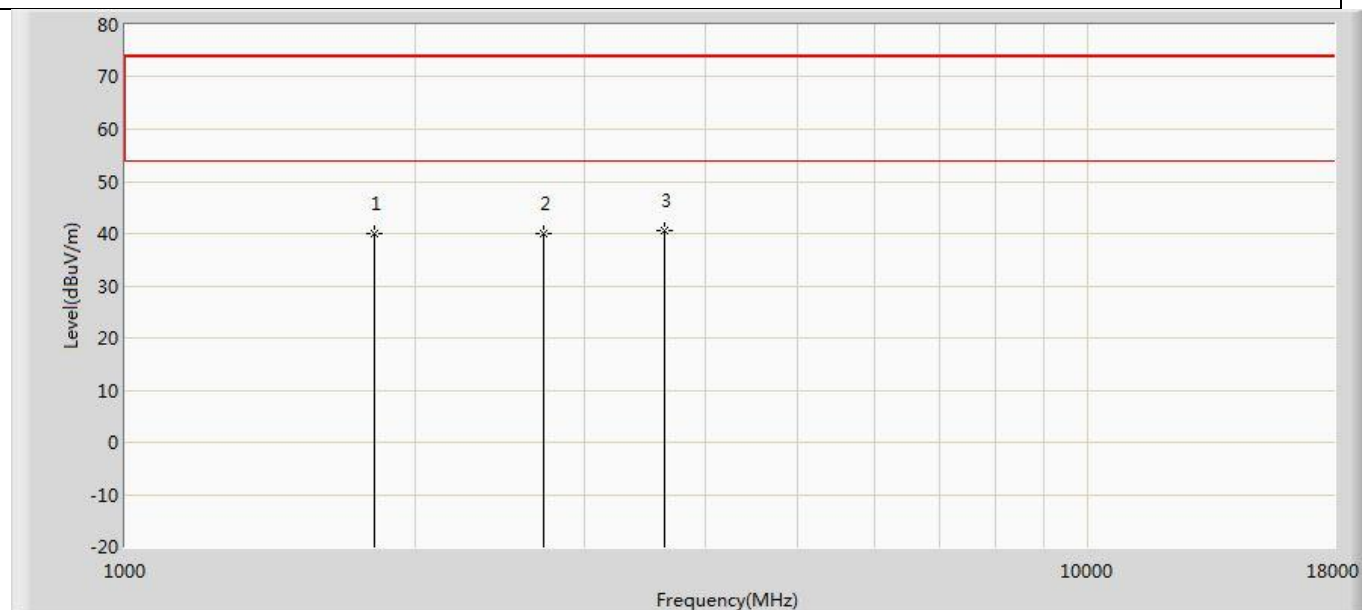


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1814.500	39.866	40.356	-34.134	74.000	-0.490	PK
2		2721.750	40.130	39.287	-33.870	74.000	0.842	PK
3	*	3629.000	40.448	37.971	-33.552	74.000	2.477	PK

Profile: 2090075R	Page No.: 8
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 907.25MHz by RFID	

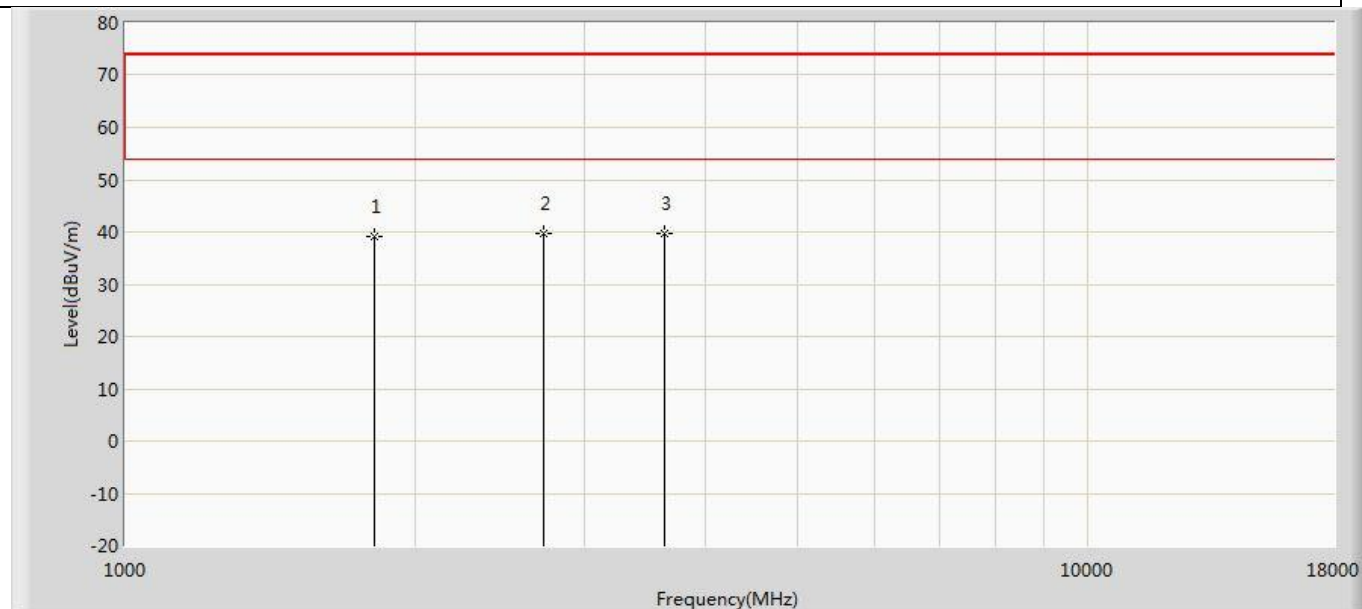


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1814.500	39.206	39.696	-34.794	74.000	-0.490	PK
2		2721.750	39.714	38.871	-34.286	74.000	0.842	PK
3	*	3629.000	39.789	37.312	-34.211	74.000	2.477	PK

Profile: 2090075R	Page No.: 9
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 914.25MHz by RFID	

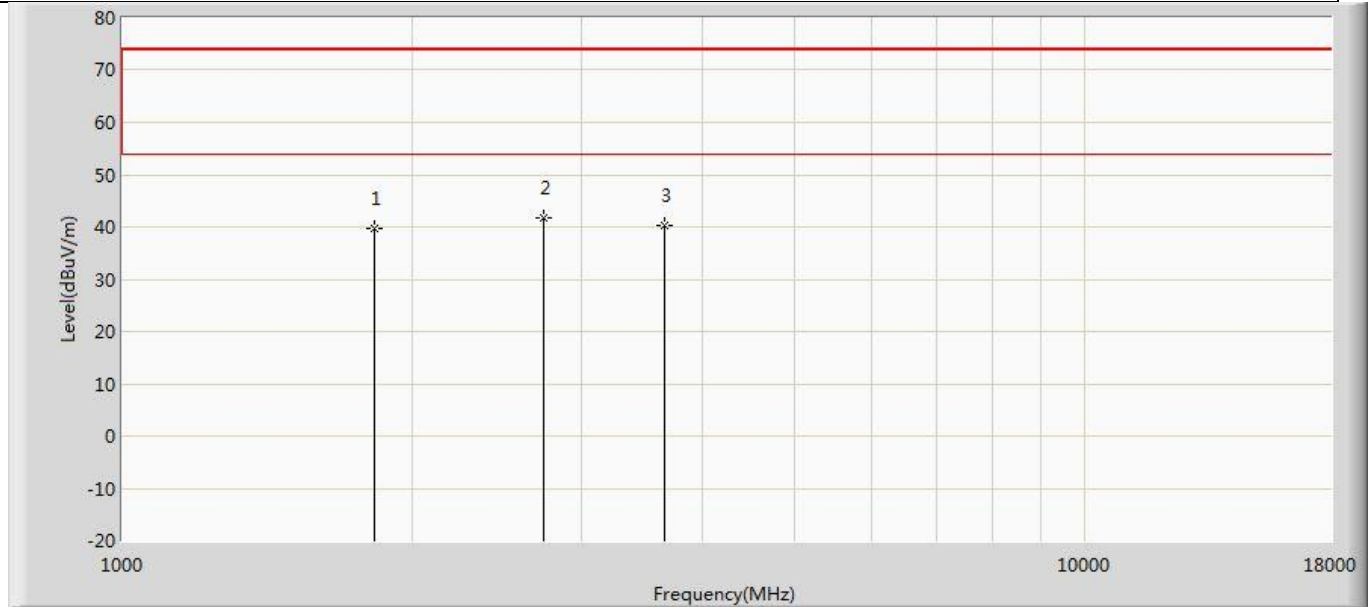


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	39.600	39.880	-34.400	74.000	-0.279	PK
2	*	2742.750	41.624	40.715	-32.376	74.000	0.909	PK
3		3657.000	40.328	37.683	-33.672	74.000	2.645	PK

Profile: 2090075R	Page No.: 10
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 914.25MHz by RFID	

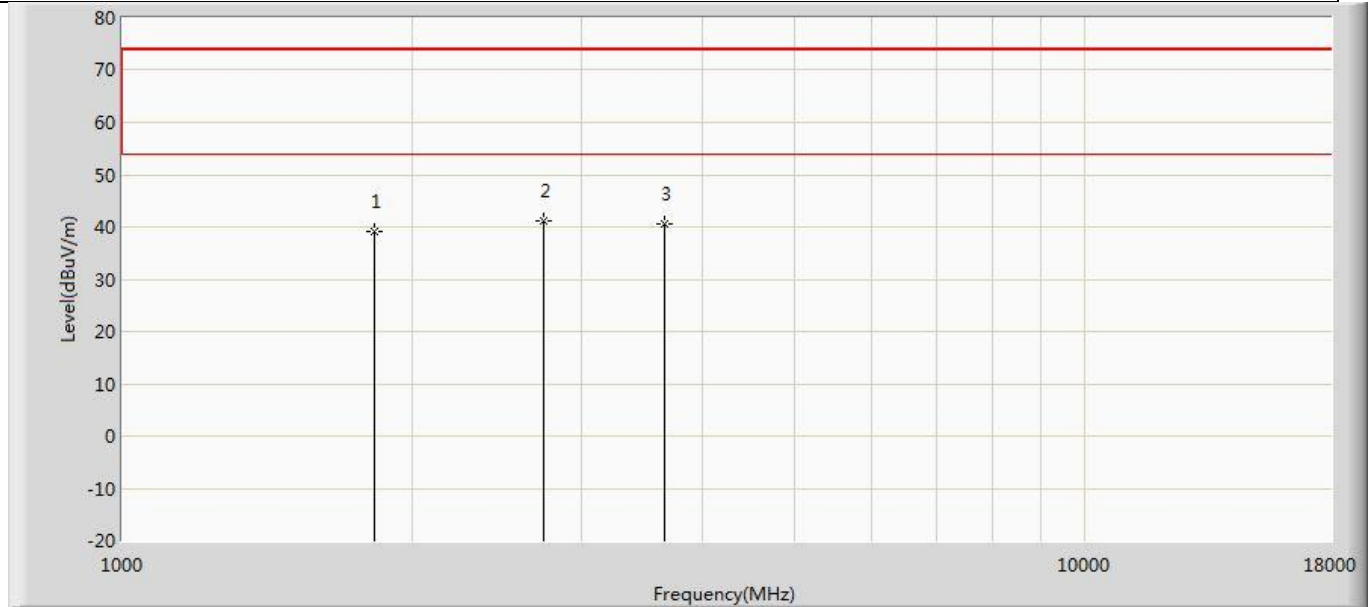


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	39.140	39.420	-34.860	74.000	-0.279	PK
2	*	2742.750	41.126	40.217	-32.874	74.000	0.909	PK
3		3657.000	40.639	37.994	-33.361	74.000	2.645	PK

Profile: 2090075R	Page No.: 11
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75MHz by RFID	

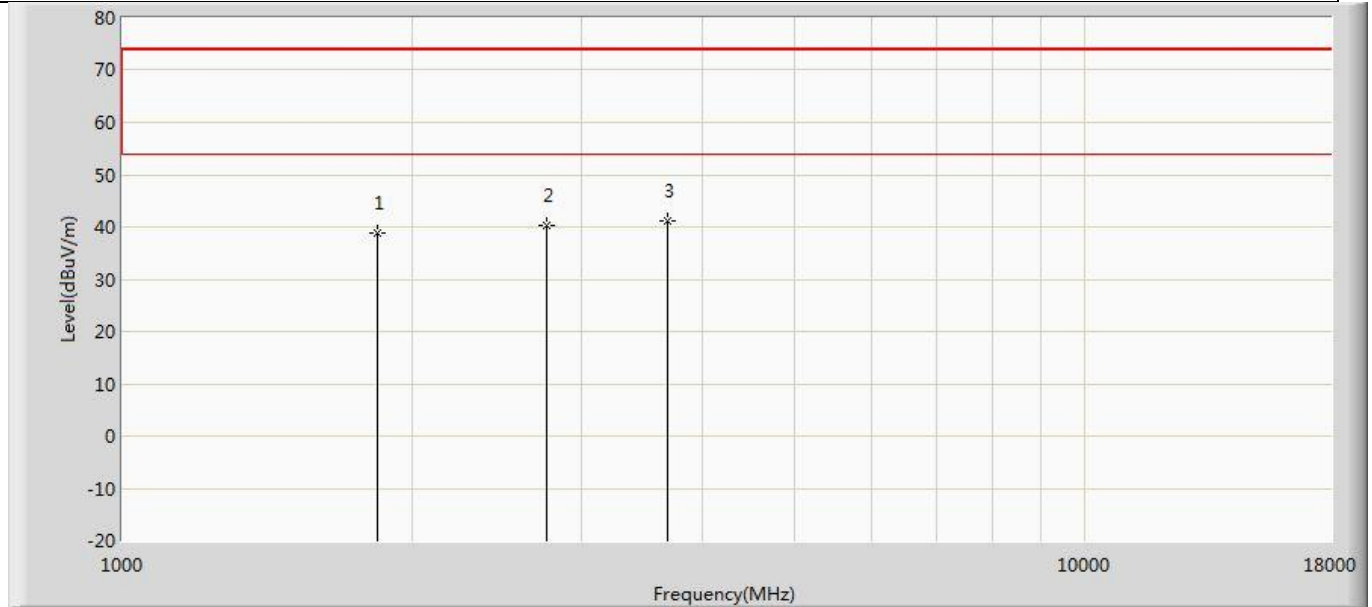

N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1841.500	38.738	38.898	-35.262	74.000	-0.160	PK
2		2762.250	40.431	39.617	-33.569	74.000	0.814	PK
3	*	3683.000	41.179	38.180	-32.821	74.000	2.999	PK

Profile: 2090075R	Page No.: 12
Engineer: Tongben	
Site: AC5	Time: 2020/09/20 - 18:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75MHz by RFID	

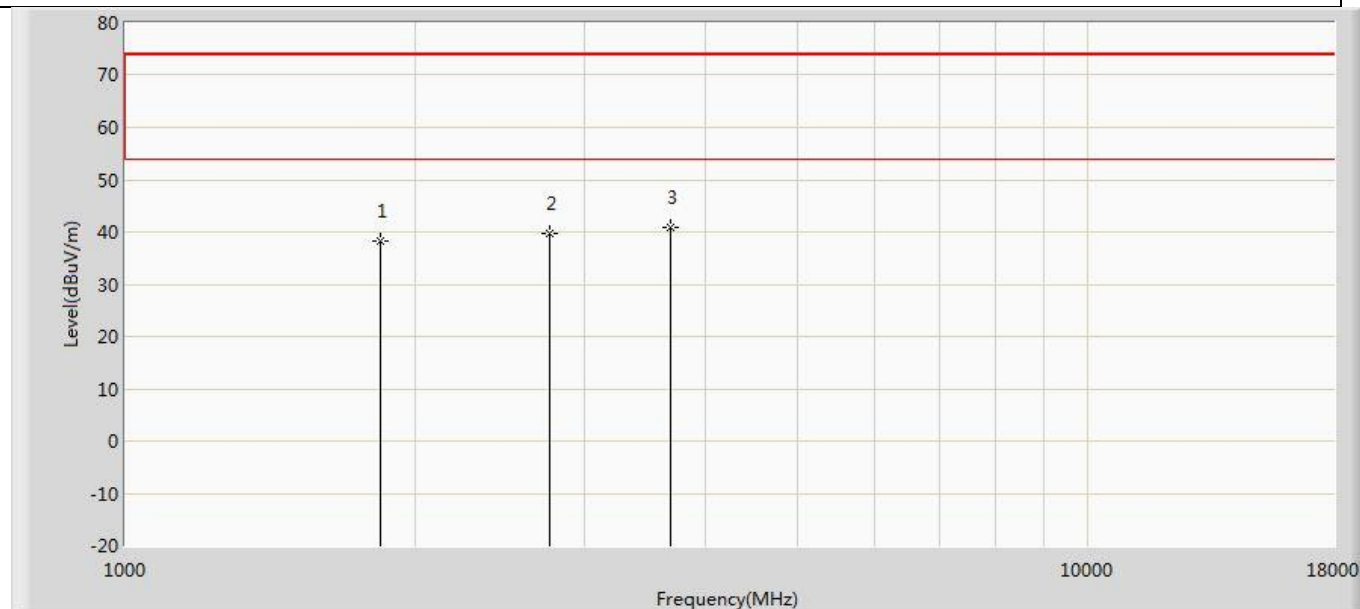


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1841.500	38.136	38.296	-35.864	74.000	-0.160	PK
2		2762.250	39.641	38.827	-34.359	74.000	0.814	PK
3	*	3683.000	40.772	37.773	-33.228	74.000	2.999	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).
3. We tested both usage mode, shown in report is the worst data.


The worst case of Radiated Emission below 1GHz:

Profile: 2090075R	Page No.: 1
Engineer: Yingfei.Wang	
Site: AC2	Time: 2020/09/22 - 20:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8690i	Power: Battery
Note: Mode 1	

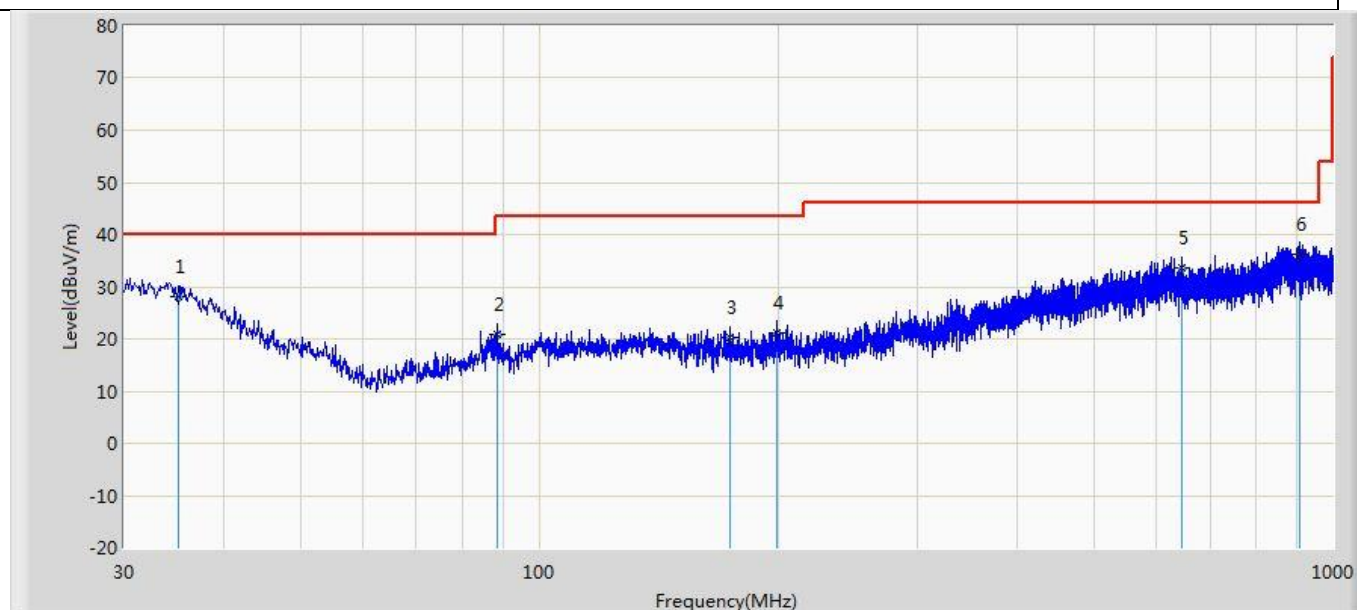

N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		35.092	28.076	1.258	-11.924	40.000	26.817	QP
2		88.564	20.749	6.987	-22.751	43.500	13.762	QP
3		174.045	20.218	3.123	-23.282	43.500	17.095	QP
4		199.023	21.161	3.458	-22.339	43.500	17.703	QP
5		644.616	33.668	5.485	-12.332	46.000	28.183	QP
6	*	906.759	36.172	3.458	-9.828	46.000	32.714	QP

Profile: 2090075R	Page No.: 2
Engineer: Yingfei.Wang	
Site: AC2	Time: 2020/09/22 - 20:28
Limit: FCC_Part15.109_RE(3m)_ClassB	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8690i	Power: Battery
Note: Mode 1	

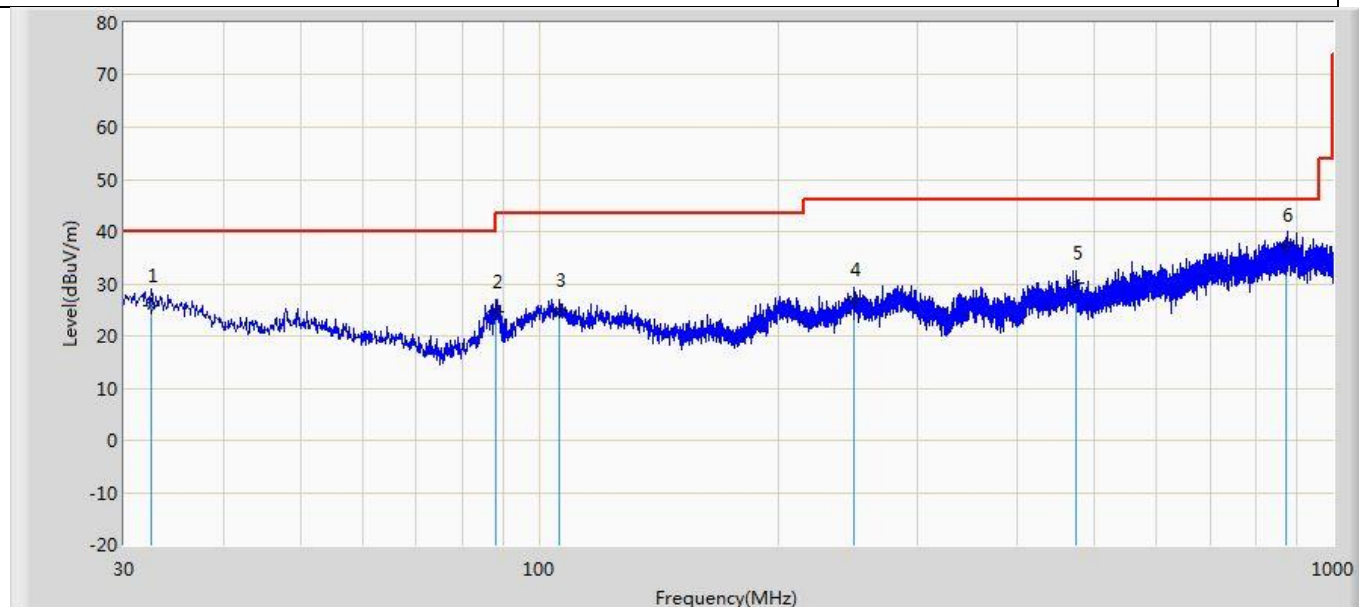


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.425	25.903	2.698	-14.097	40.000	23.205	QP
2		88.200	24.643	7.984	-18.857	43.500	16.659	QP
3		106.024	25.019	3.012	-18.481	43.500	22.007	QP
4		248.977	26.901	2.589	-19.099	46.000	24.312	QP
5		475.473	30.098	3.984	-15.902	46.000	26.114	QP
6	*	873.051	37.397	4.516	-8.603	46.000	32.881	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).
3. We tested both usage mode, shown in report is the worst data.


The worst case of Simultaneous Radiated Emission:

Profile: 2231093R	Page No.: 7
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:40
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode 1:Transmit BT 2440MHz by & RFID 914.25	

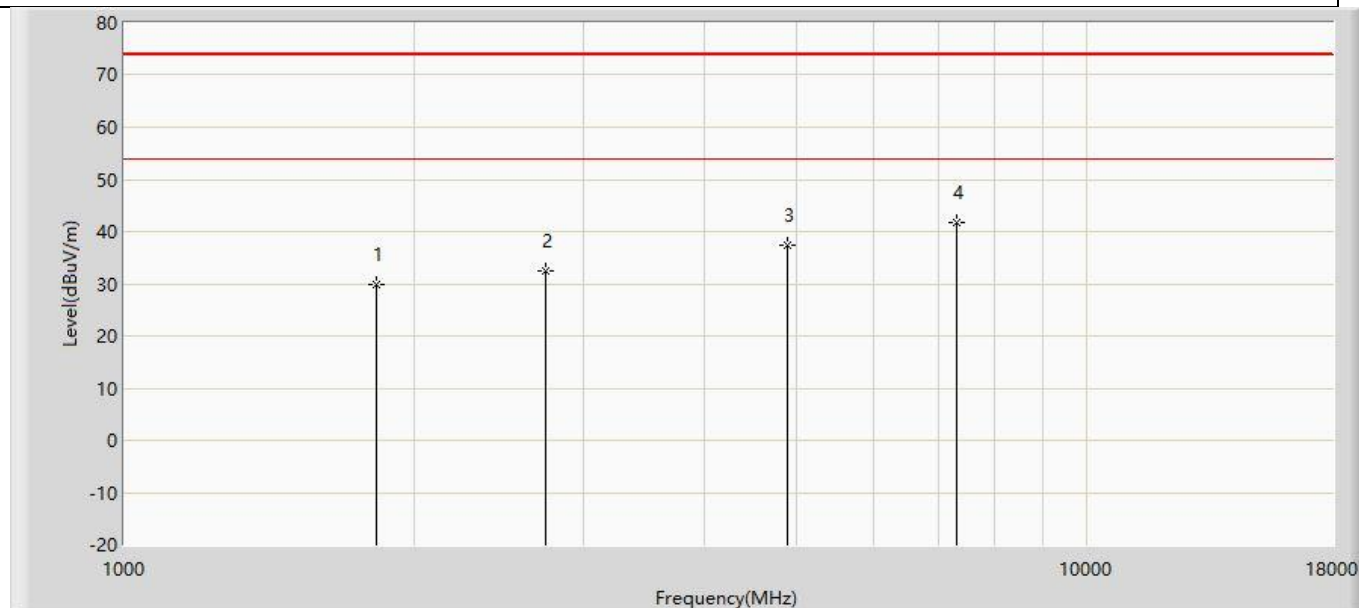


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	29.924	52.497	-44.076	74.000	-22.573	PK
2		2742.750	32.427	52.273	-41.573	74.000	-19.846	PK
3		4880.000	37.495	51.883	-36.505	74.000	-14.388	PK
4	*	7320.000	41.772	50.092	-32.228	74.000	-8.320	PK

Profile: 2231093R	Page No.: 8
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:40
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode1:Transmit BT 2440MHz by & RFID 914.25	

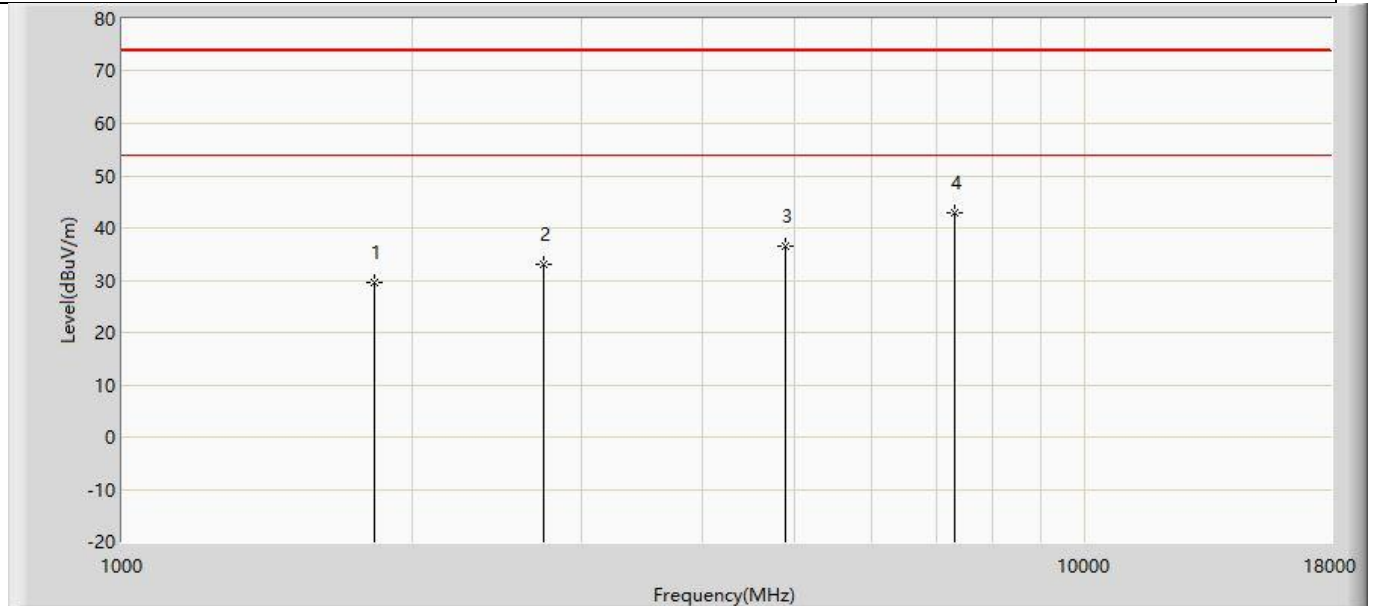


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	29.509	52.082	-44.491	74.000	-22.573	PK
2		2742.750	33.143	52.989	-40.857	74.000	-19.846	PK
3		4880.000	36.597	50.985	-37.403	74.000	-14.388	PK
4	*	7320.000	43.030	51.350	-30.970	74.000	-8.320	PK

Profile: 2231093R	Page No.: 9
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:41
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode 1:Transmit 2.4G WIFI 2437MHz & RFID 914.25	

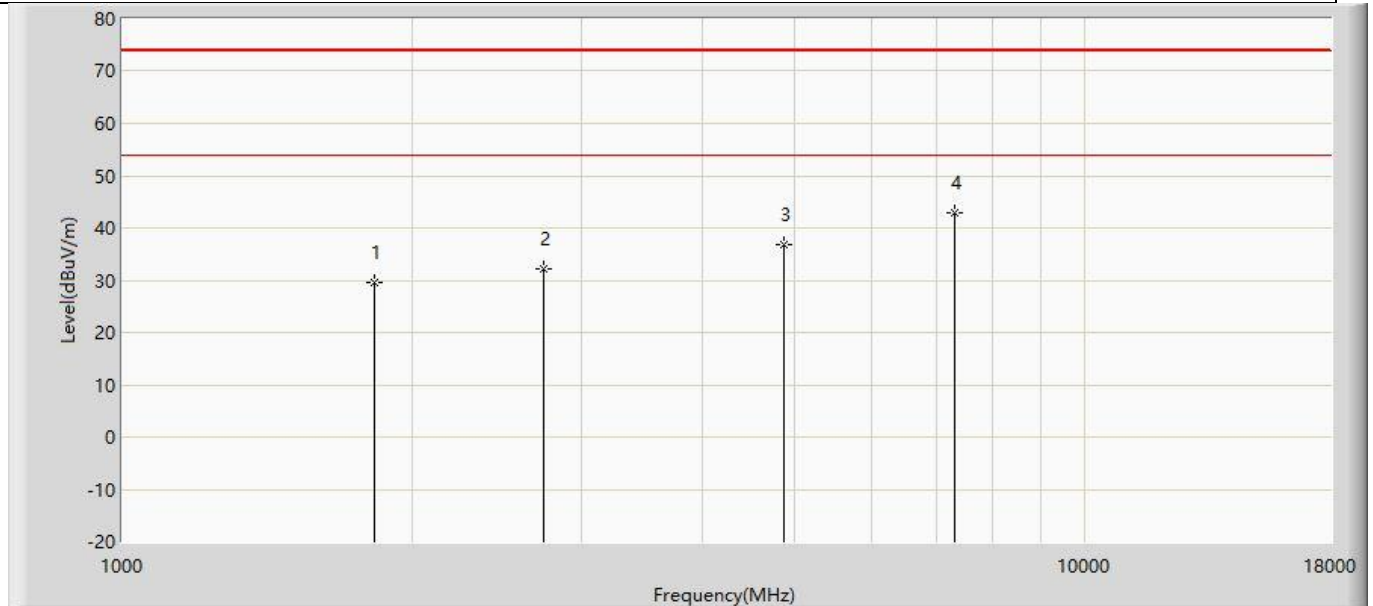


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	29.584	52.157	-44.416	74.000	-22.573	PK
2		2742.750	32.105	51.951	-41.895	74.000	-19.846	PK
3		4874.000	36.853	51.293	-37.147	74.000	-14.440	PK
4	*	7311.000	42.854	51.153	-31.146	74.000	-8.299	PK

Profile: 2231093R	Page No.: 10
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:41
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode 1:Transmit 2.4G WIFI 2437MHz & RFID 914.25	

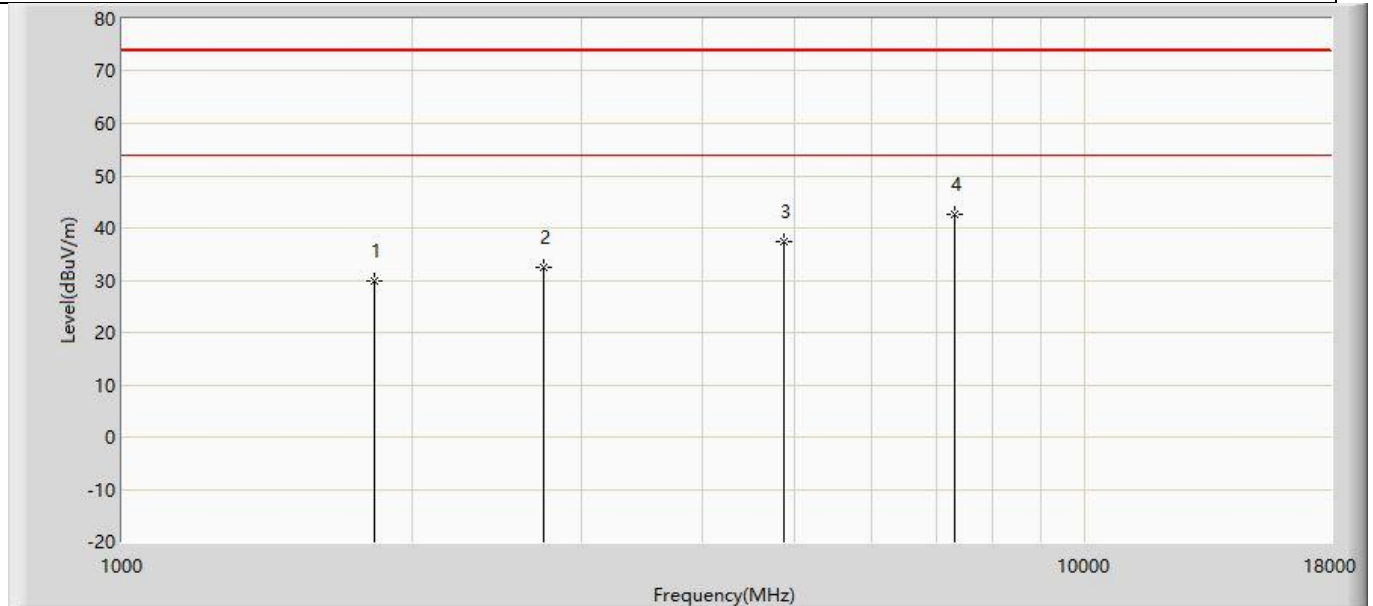


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	29.870	52.443	-44.130	74.000	-22.573	PK
2		2742.750	32.591	52.437	-41.409	74.000	-19.846	PK
3		4874.000	37.376	51.816	-36.624	74.000	-14.440	PK
4	*	7311.000	42.491	50.790	-31.509	74.000	-8.299	PK

Profile: 2231093R	Page No.: 11
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:41
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Horizontal
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode 1:Transmit 5G WIFI 5180MHz & RFID 914.25	

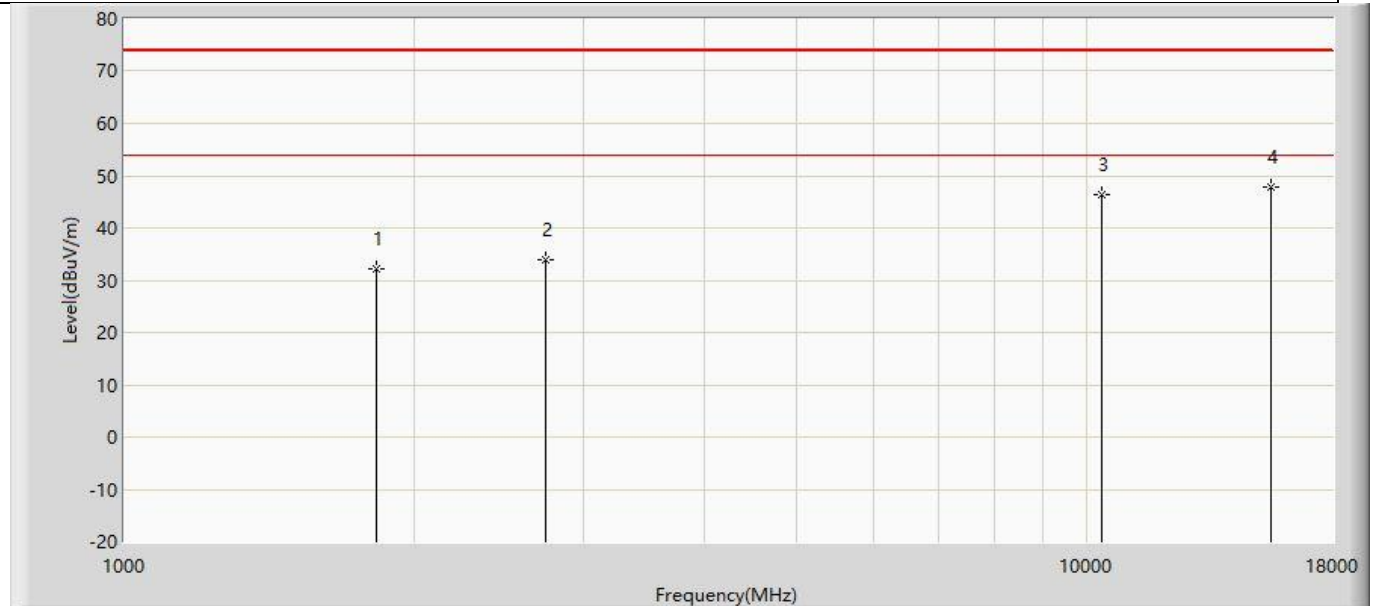

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	32.243	54.816	-41.757	74.000	-22.573	PK
2		2742.750	33.980	53.826	-40.020	74.000	-19.846	PK
3		10360.000	46.306	49.292	-27.694	74.000	-2.986	PK
4	*	15540.000	47.772	49.623	-26.228	74.000	-1.851	PK


Profile: 2231093R	Page No.: 12
Engineer: Juliuszhou	
Site: AC5	Time: 2022/05/30 - 14:41
Limit: FCC-15.209	Margin: 0
Probe: FCC_ANT-1-18G	Polarity: Vertical
EUT: Barcode Scanner	Power: DC3.7V
Note: Mode 1:Transmit at 5180MHz by WIFI 914.25 by RFID	

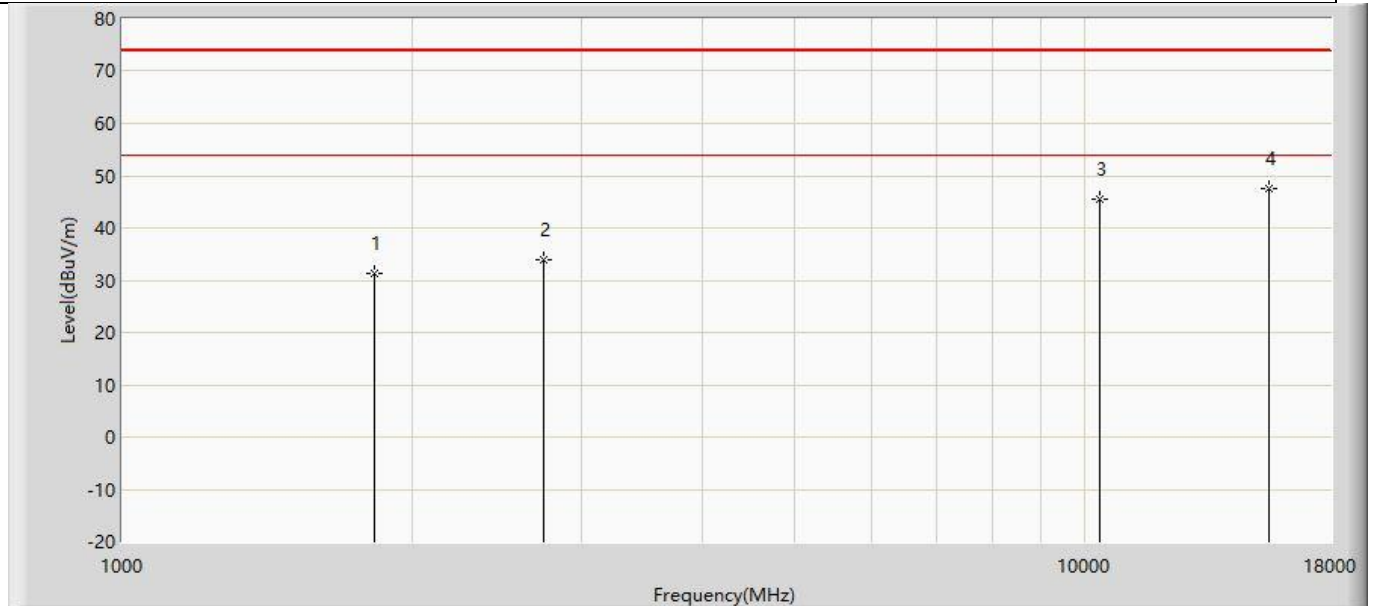

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		1828.500	31.435	54.008	-42.565	74.000	-22.573	PK
2		2742.750	33.783	53.629	-40.217	74.000	-19.846	PK
3		10360.000	45.548	48.534	-28.452	74.000	-2.986	PK
4	*	15540.000	47.572	49.423	-26.428	74.000	-1.851	PK

4.3 20dB Bandwidth**VERDICT: PASS****4.3.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(a)
☐	For frequency hopping systems operating in 2400-2483.5 MHz band, within frequency range.	
☒	For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.	
☐	For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.	

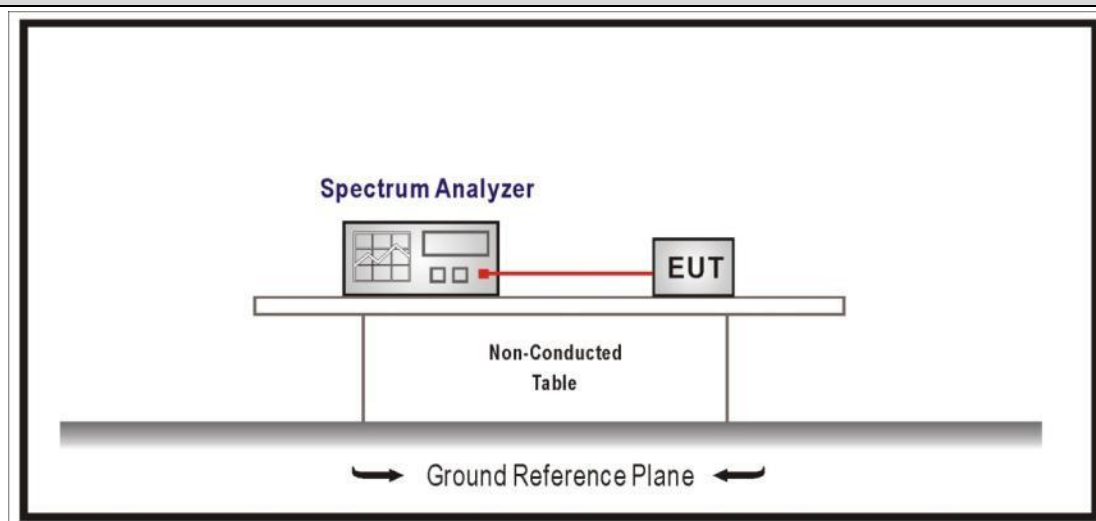
4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	6.9	Occupied bandwidth tests
☒	ANSI C63.10	6.9.2	Occupied bandwidth—relative measurement procedure

4.3.4 Test Data

Mode	Channel	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
1	14	907.25	262.9	300.06
	27	913.75	261.6	265.18
	41	920.75	254.7	263.76


Mode 1 CH14 (907.25MHz)

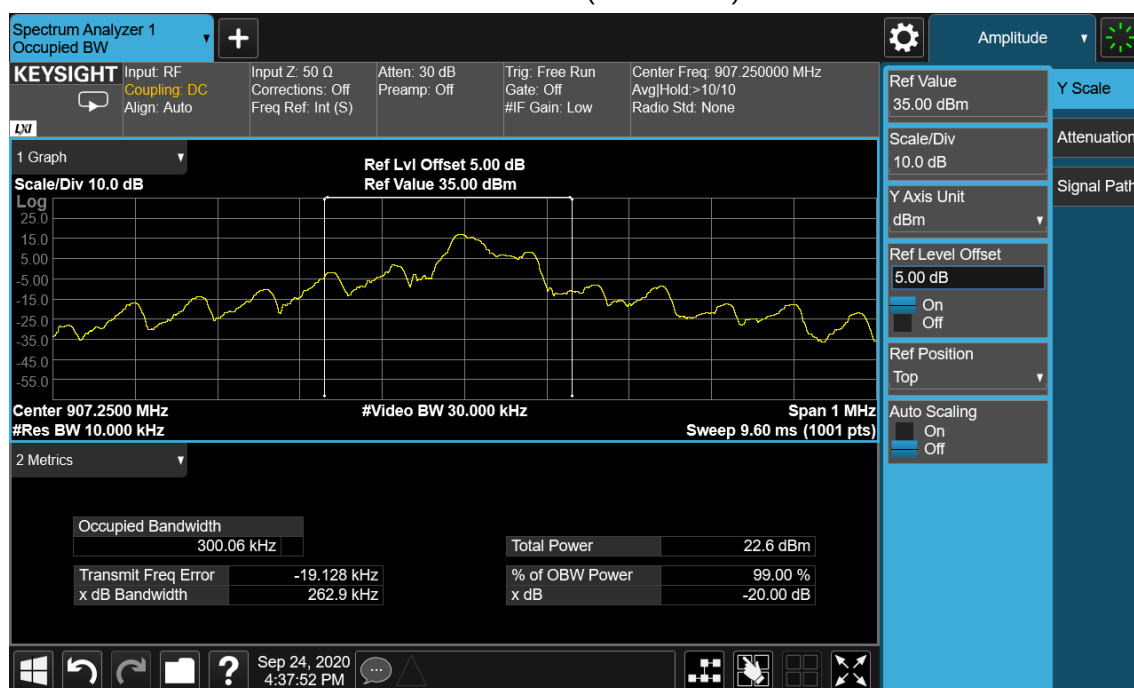

Mode 1 CH27 (913.75 MHz)



Mode 1 CH41 (920.75 MHz)

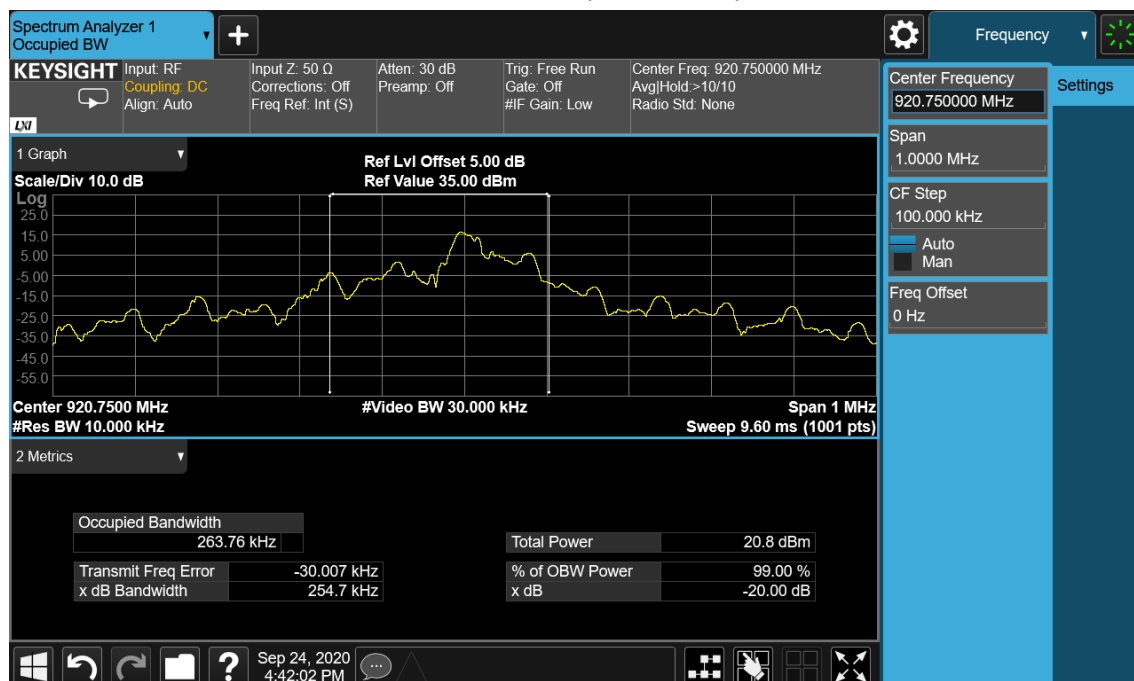


4.4 Carrier Frequency Separation

VERDICT: PASS

4.4.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☐	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.
☐	The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4
☒	The 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 Test Setup

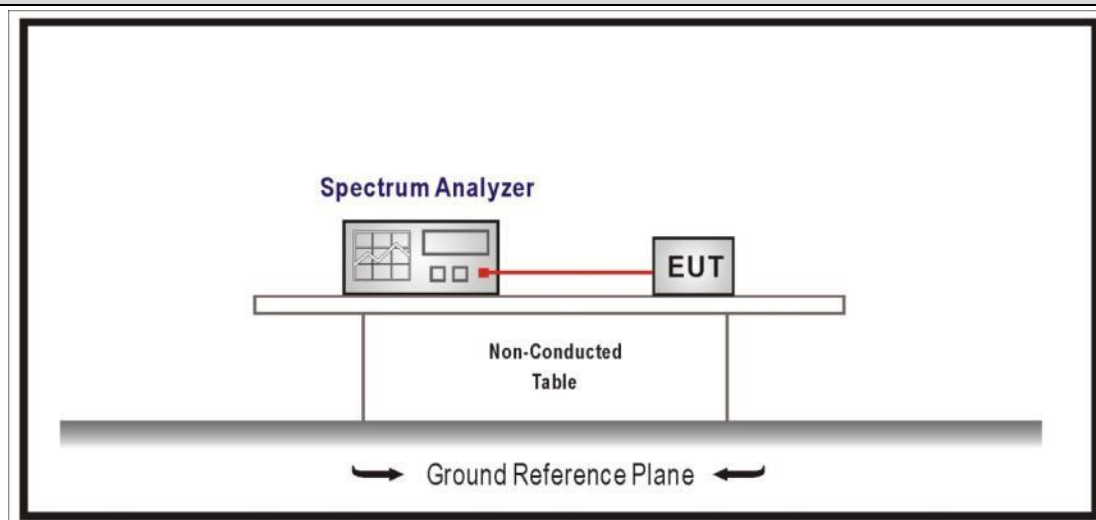


4.4.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.2	Carrier frequency separation


4.4.4 Test Data

Mode	Channel	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
2	14	907.25	500	262.9	Pass
	27	913.75	500	261.6	Pass
	41	920.75	500	254.7	Pass


Mode 1 CH14 (907.25 MHz)

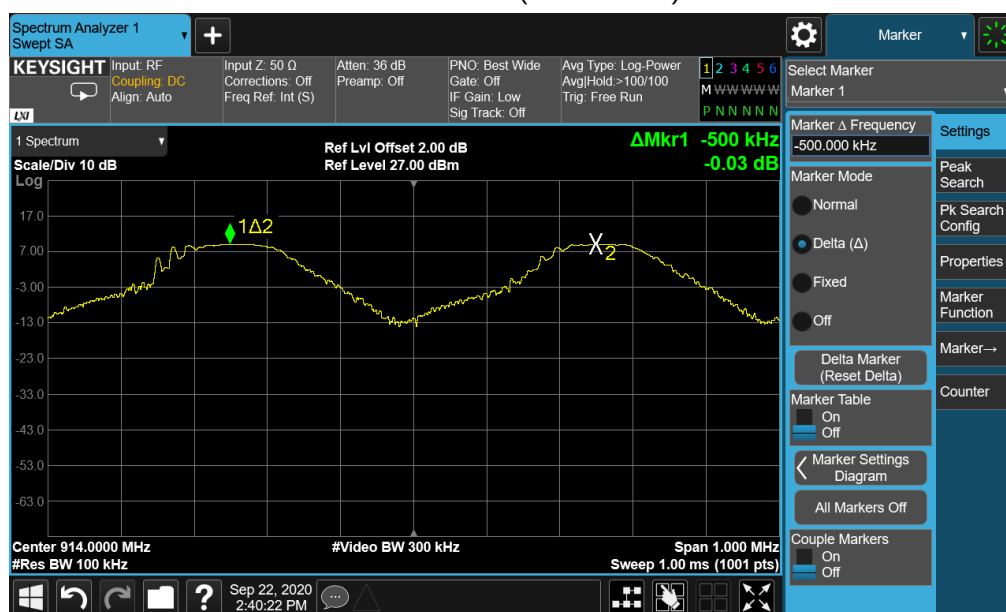

Mode 1 CH27 (913.75 MHz)

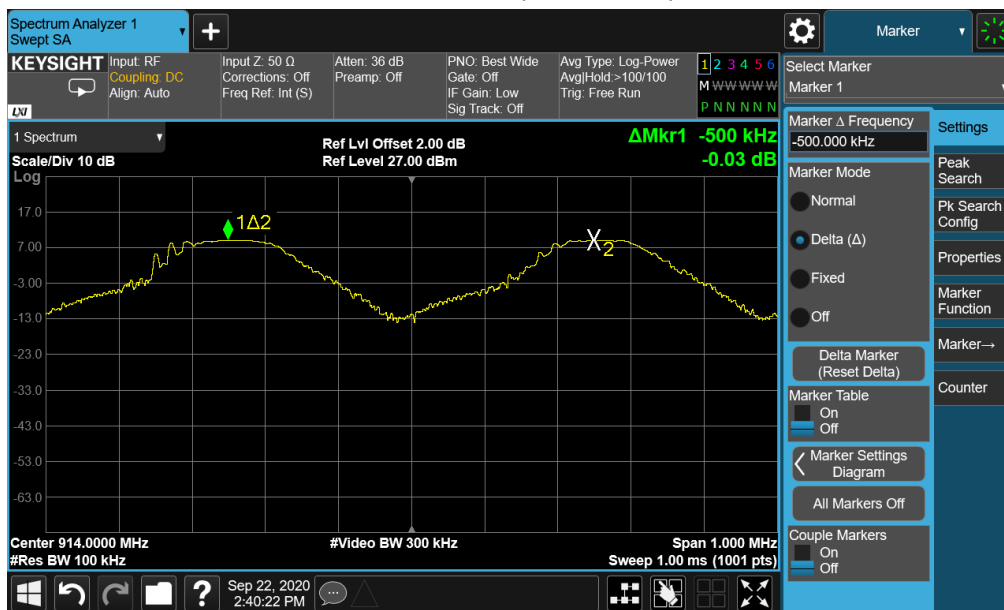

Mode 1 CH41 (920.75 MHz)

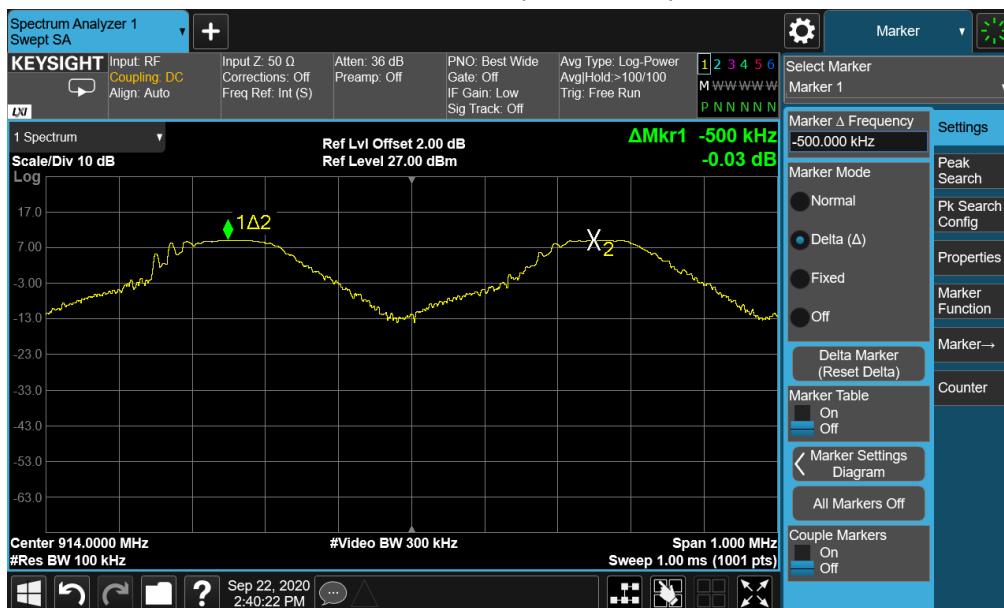


4.5 Number of hopping Frequencies

VERDICT: PASS

4.5.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(a)
☐	For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
☐	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, shall use at least 50 hopping frequencies.
☒	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is higher than 250 kHz, shall use at least 25 hopping frequencies.
☐	For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

4.5.2 Test Setup

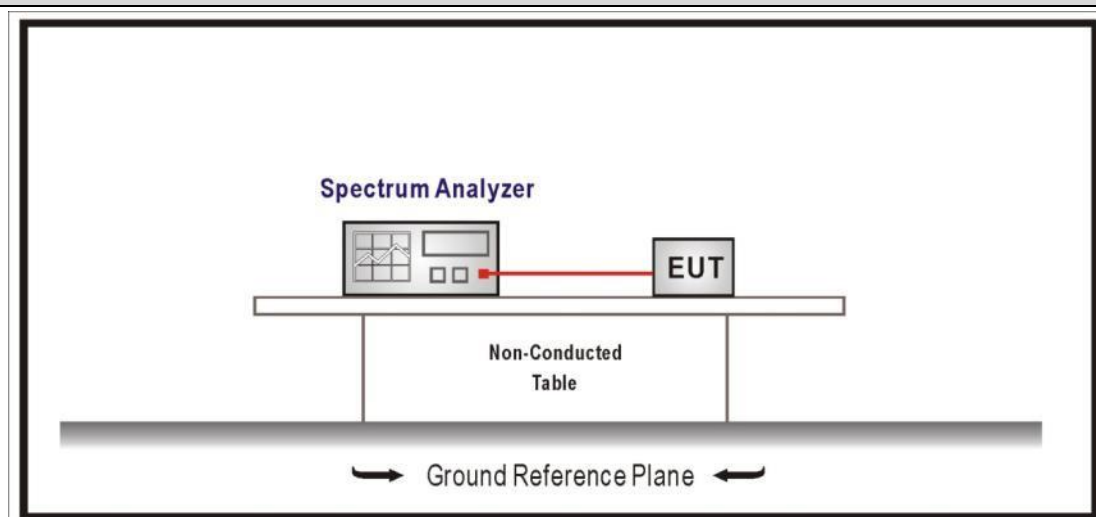


4.5.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	7.8.	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.3	Number of Hopping Frequencies

4.5.4 Test Data


Mode	Number of Hopping Frequencies	Limit	Result
2	28	>25	Pass

Mode 2

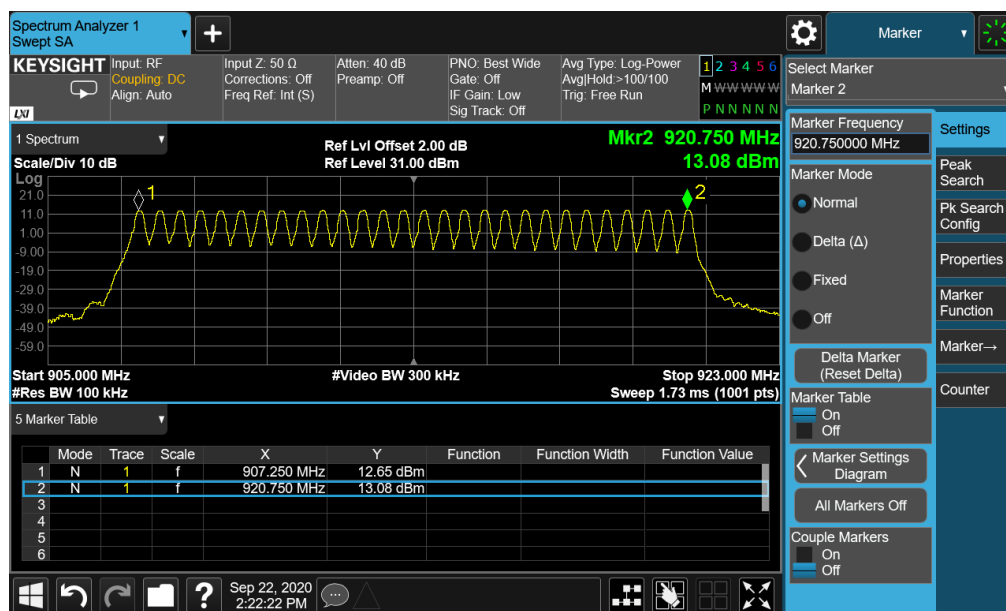

4.6 Time of Occupancy(Dwell Time)**VERDICT: PASS****4.6.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(a)
☐	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
☐	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20	
☒	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10	
☐	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.	

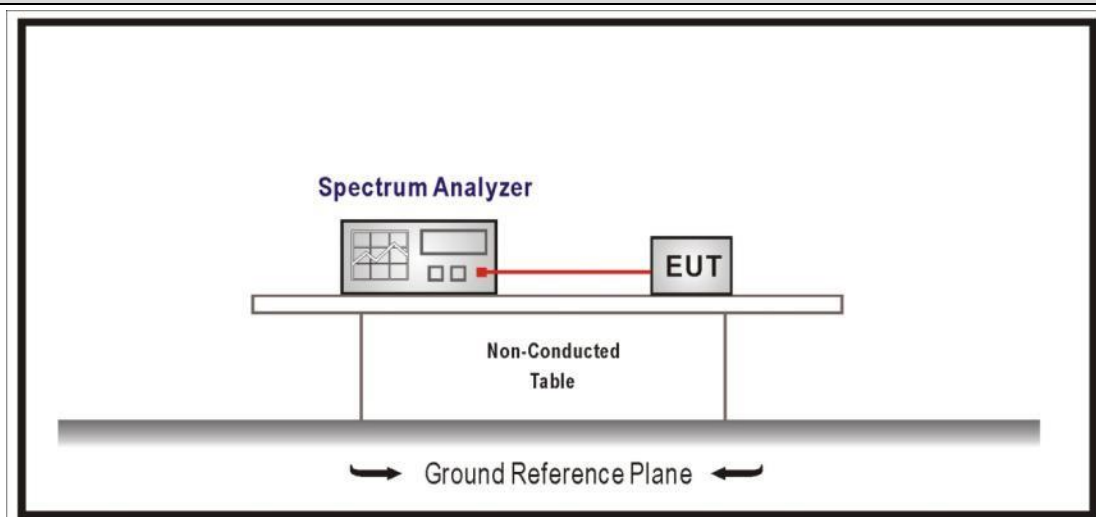4.6.2 Test Setup**4.6.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒	ANSI C63.10	7.8.4	Time of occupancy (dwell time)



4.6.4 Test Data

Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
2	14	907.25	144.8	< 400	Pass

Note1: Time of Occupancy = $36.2 \times 4 = 144.8$ ms

Note2: We have evaluated different packet type, shown in the report is the worst data.

Channel 14 (907.25 MHz)

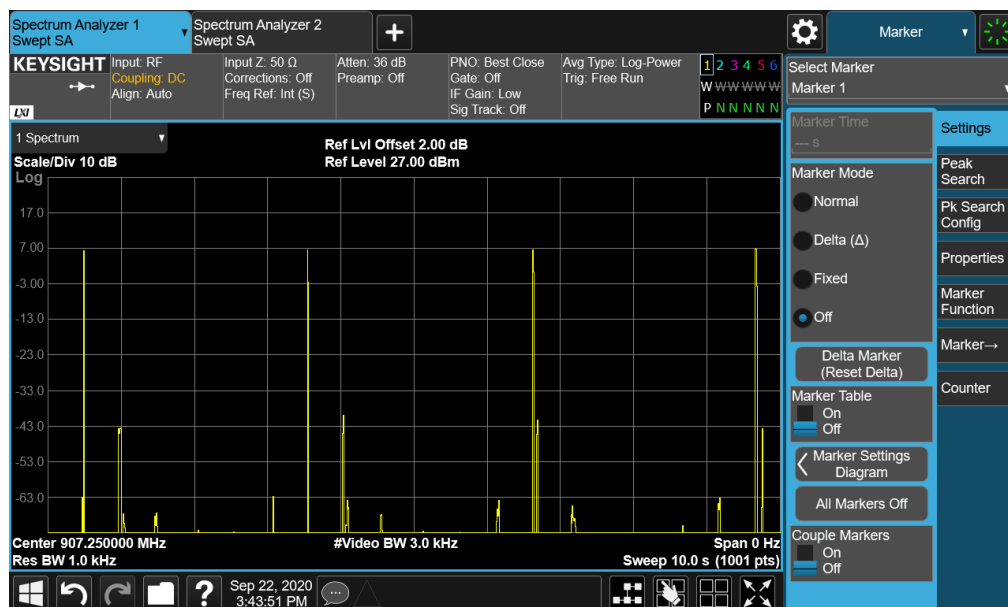
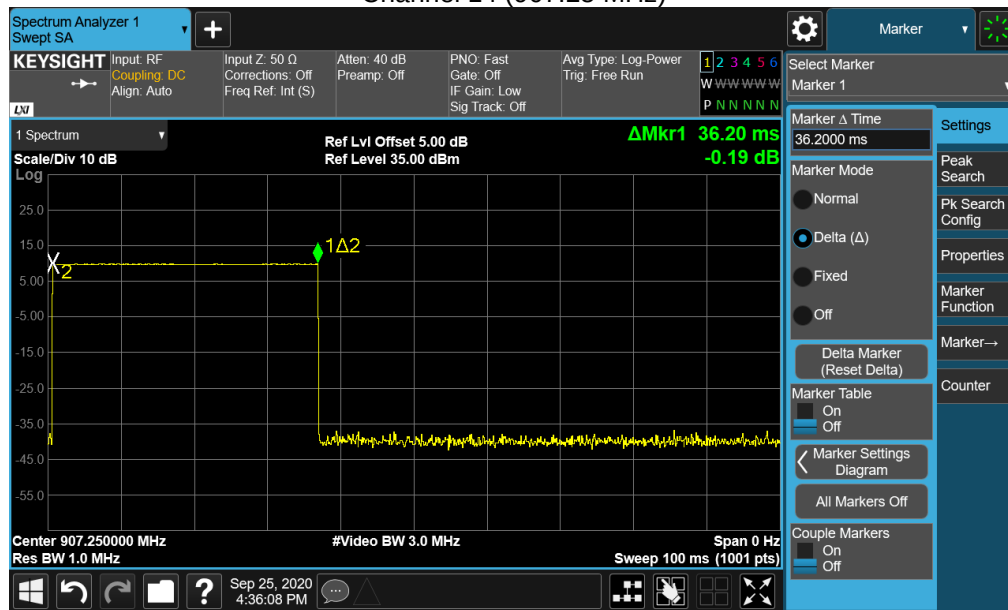


Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
2	27	913.75	139.6	< 400	Pass

Note1: Time of Occupancy = $34.9 \times 4 = 139.6$ ms

Note2: We have evaluated different packet type, shown in the report is the worst data.

Channel 27 (913.75 MHz)

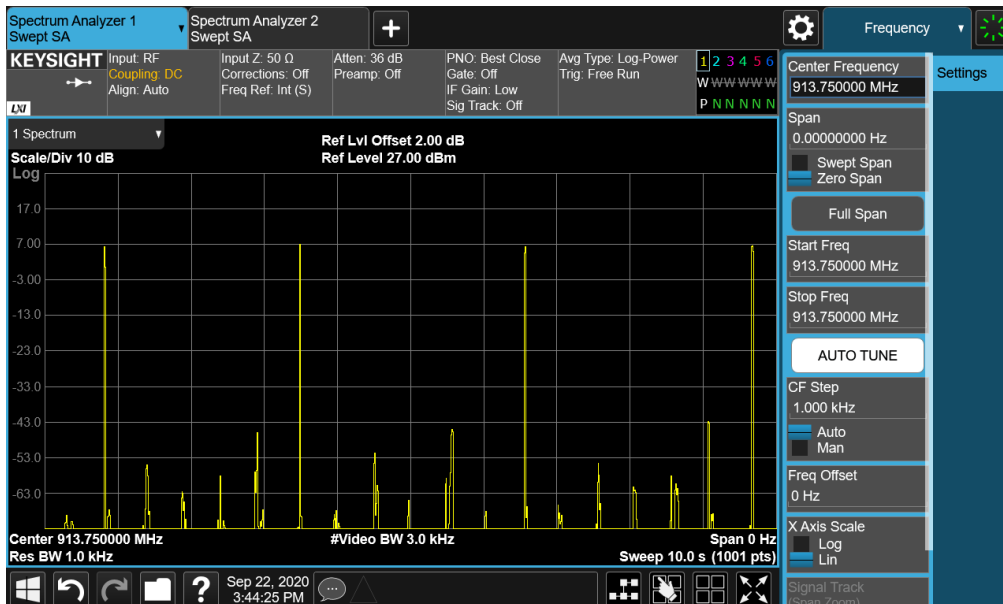
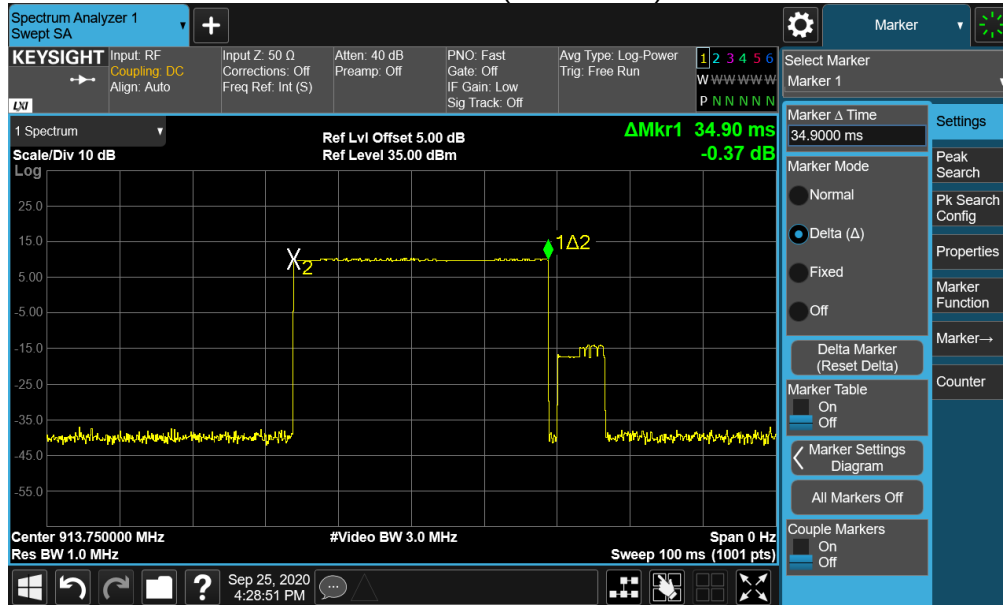


Mode	Channel	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
2	41	920.75	356	< 400	Pass

Note1: Time of Occupancy = $27.6 \times 4 = 110.4$ ms


Note2: We have evaluated different packet type, shown in the report is the worst data.

Channel 41 (920.75 MHz)

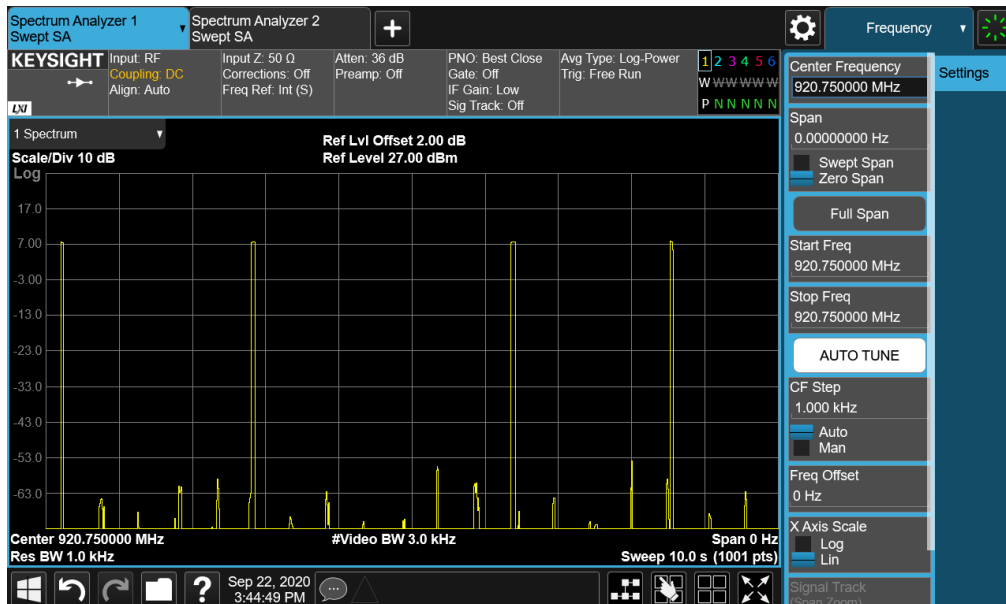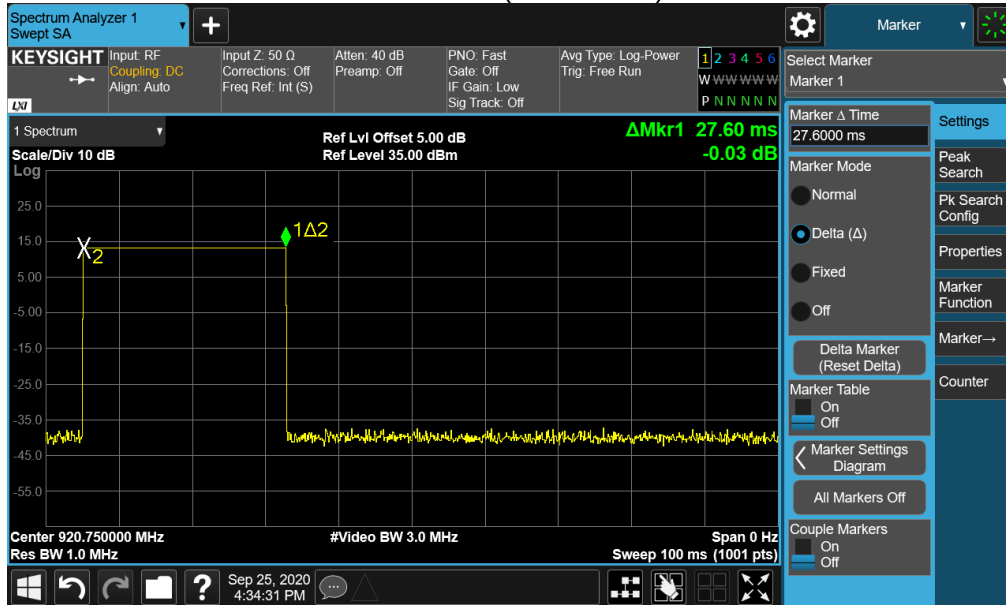

4.7 Peak Output Power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (a)(1)
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.	
☐	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.	
☒	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels	

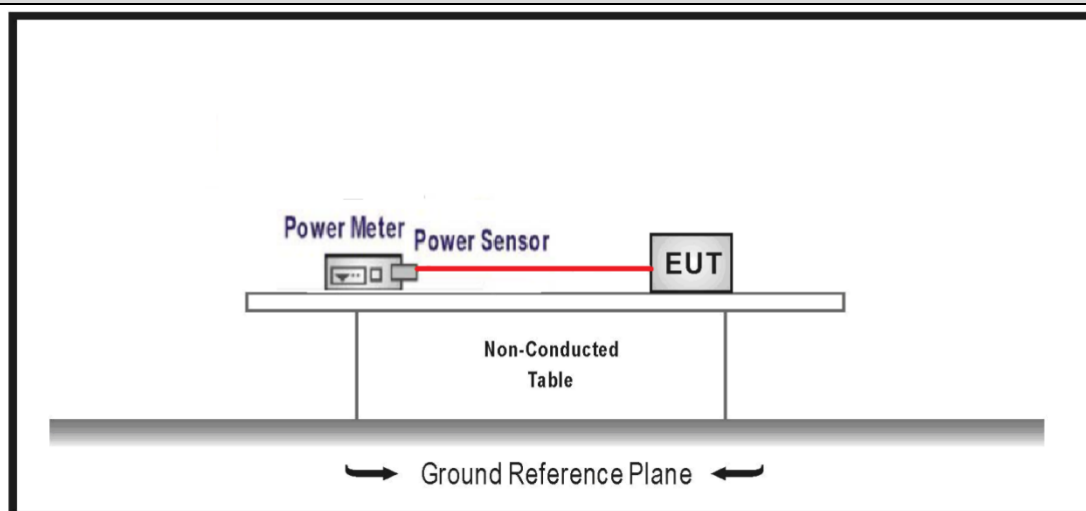4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		7.8	Evaluation of frequency-hopping device parameters
☒	ANSI C63.10		7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	Result
Mode 1	14	907.25	17.99	≤24	Pass
	27	913.75	18.77	≤24	Pass
	41	920.75	19.00	≤24	Pass

4.8 Emissions in non-restricted frequency band

VERDICT: PASS


4.8.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.8.2 Test Setup

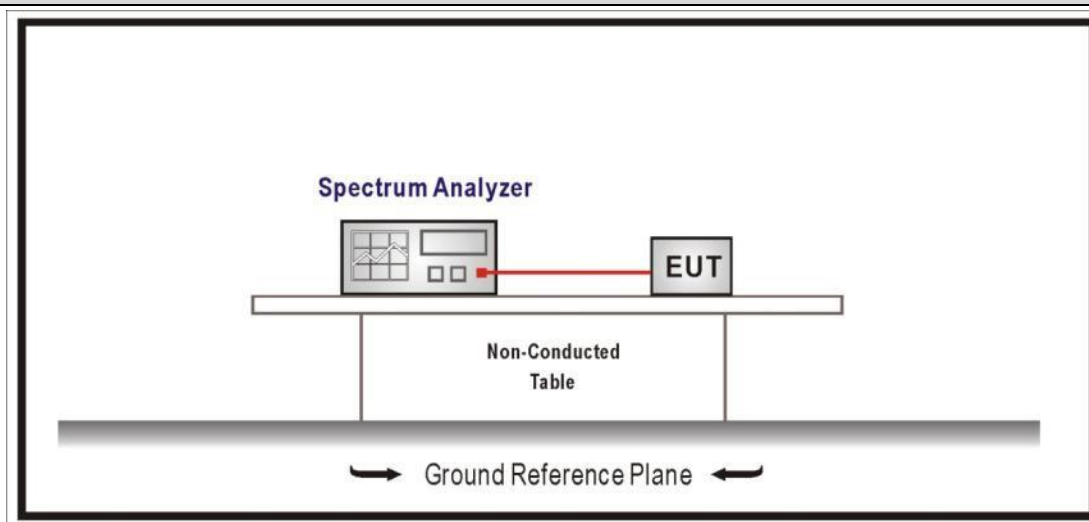

4.8.3 Test Procedure


References Rule	Chapter	Description
☒ ANSI C63.10	7.8	Evaluation of frequency-hopping device parameters
☒ ANSI C63.10	7.8.6	Band-edge measurements for RF conducted emissions

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Maximum In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	14	907.25	16.55	880.080	-47.69	64.24	>20	Pass
	41	920.75	16.72	948.405	-33.14	49.86	>20	Pass
2	14	907.25	17.31	892.180	-44.09	61.40	>20	Pass
	41	920.75	16.88	948.405	-32.75	49.63	>20	Pass

Note: The worst data as shown in below:

Mode 2 CH41 (920.75 MHz)

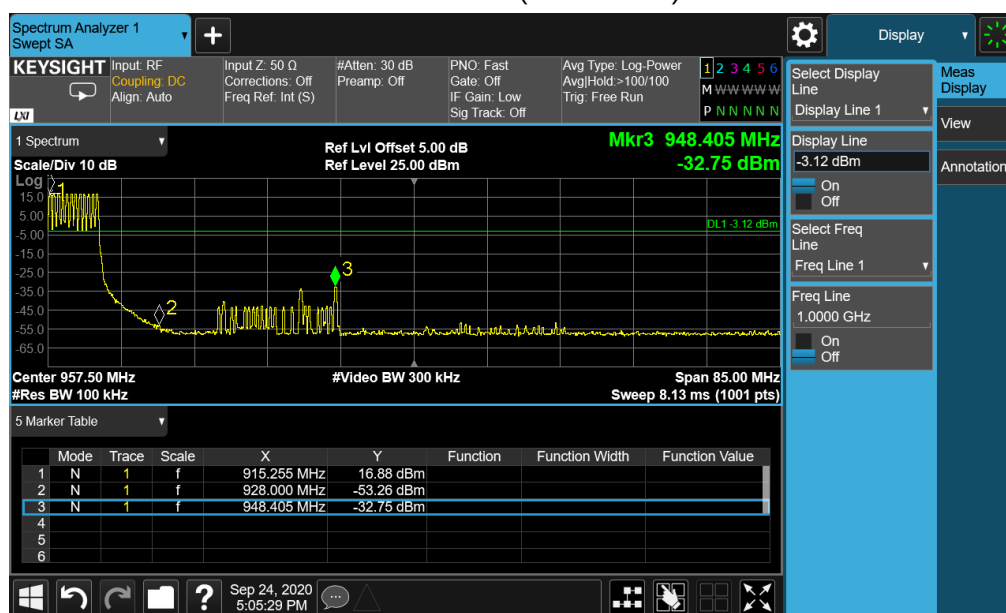


4.9 Duty cycle

VERDICT: PASS

4.9.1 Limit

N/A

4.9.2 Test Setup

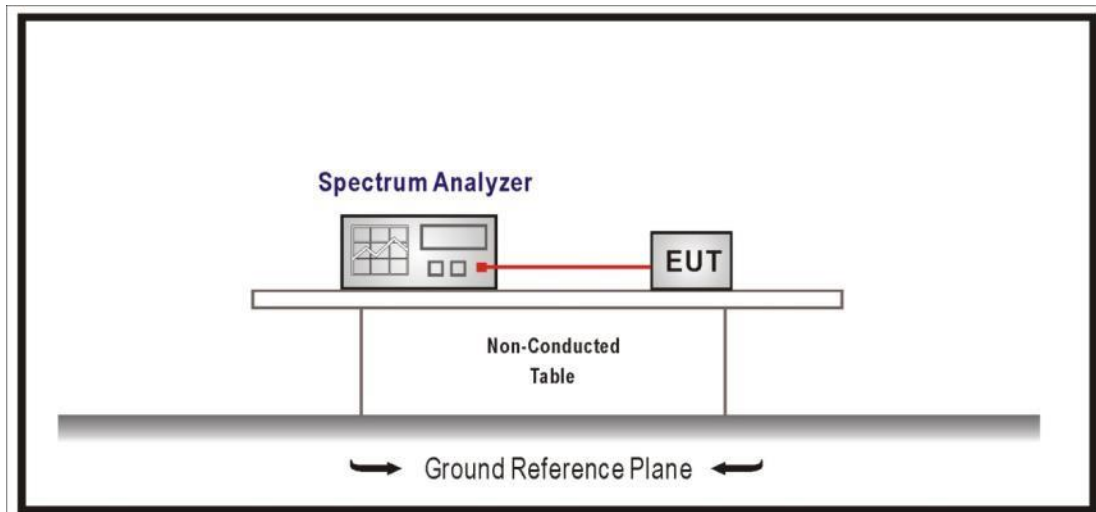

4.9.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.9.4 Test Data


Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Period (ms)	Duty Cycle
Mode 1	90	412.5	0.02	100	90%

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to ANSI C63.10, the period of the pulse train should be 100 ms if the pulse train length is greater than 100 ms.

Note 3: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1 CH27 913.75MHz

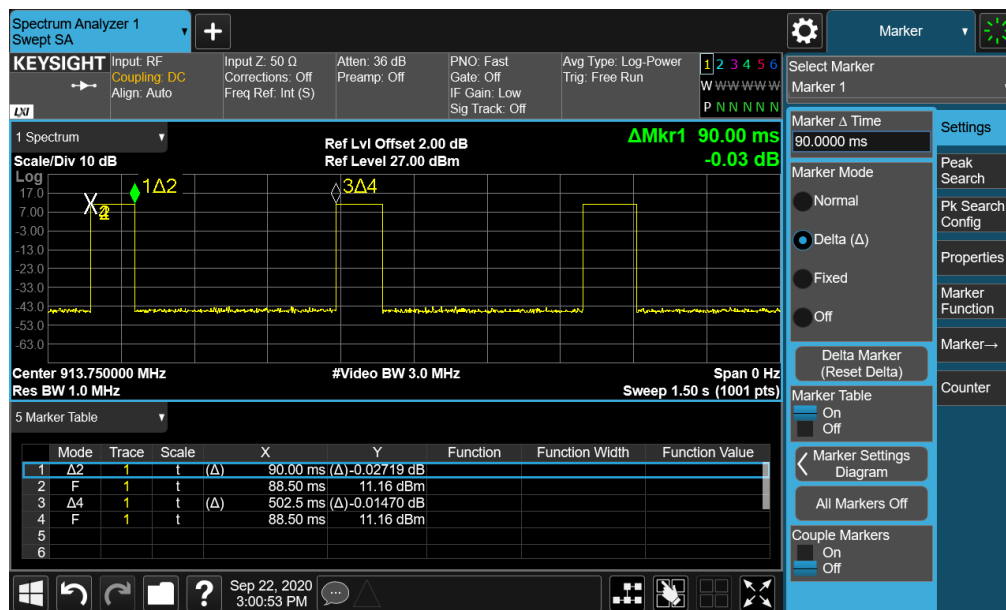


4.10 Radiated Emission Band Edge**VERDICT: PASS****4.10.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209

Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
902-928	QP	46	0.1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.10.2 Test Setup

Above 1GHz Test Setup:

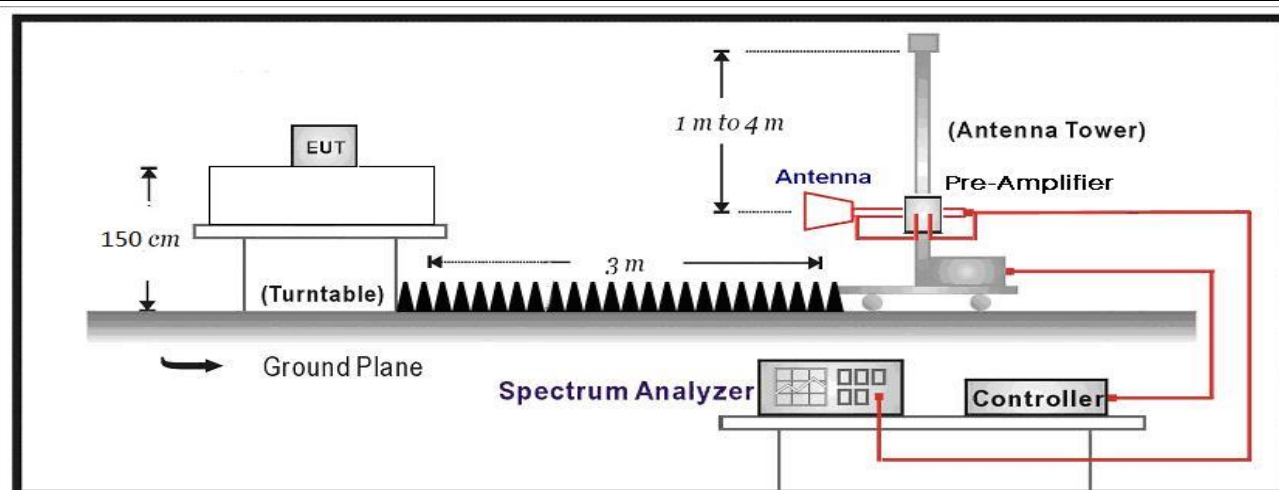
**4.10.3 Test Procedure**

Test Method

	References Rule	Chapter	Description
☐	DA 00-705	N/A	duty cycle correction factor
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.10.4 Test Data

Profile: 2090075R	Page No.: 1
Engineer: Yingfeiwang	
Site: AC2	Time: 2019/08/05 - 14:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 907.25 MHz by RFID	

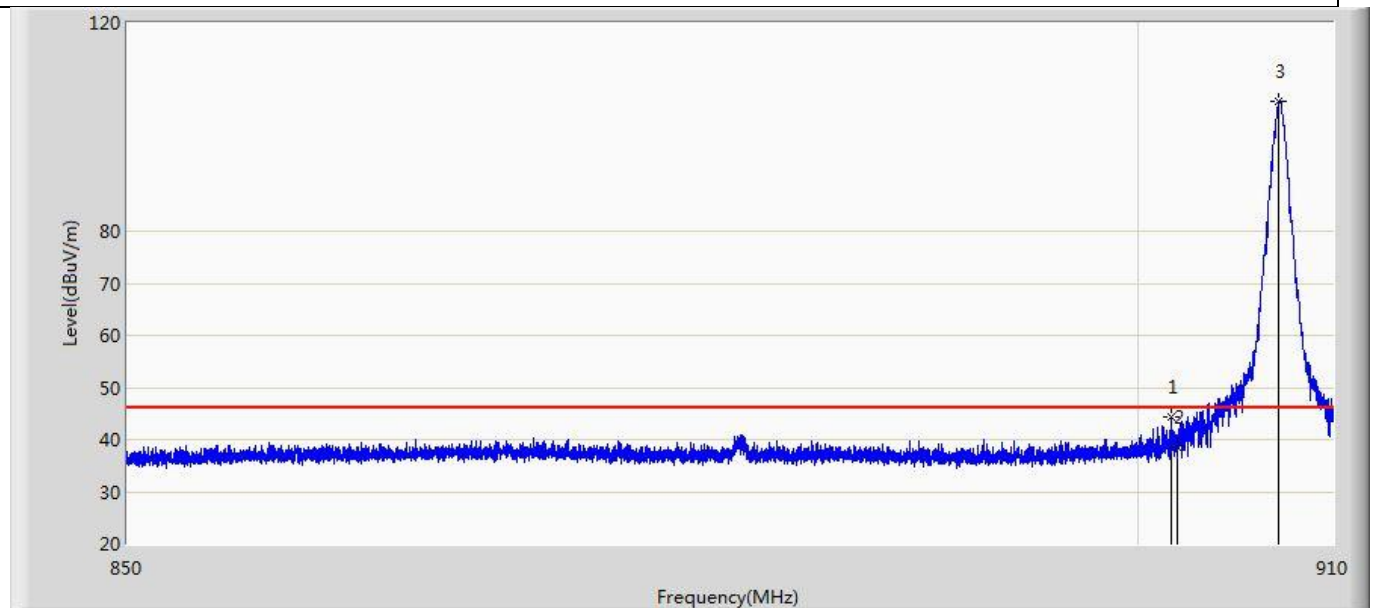


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		901.727	44.236	11.206	-1.764	46.000	33.030	PK
2		902.000	38.463	5.431	-7.537	46.000	33.032	PK
3	*	907.240	104.957	72.339	58.957	46.000	32.618	PK

Profile: 2090075R	Page No.: 2
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 18:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 907.25 MHz by RFID	

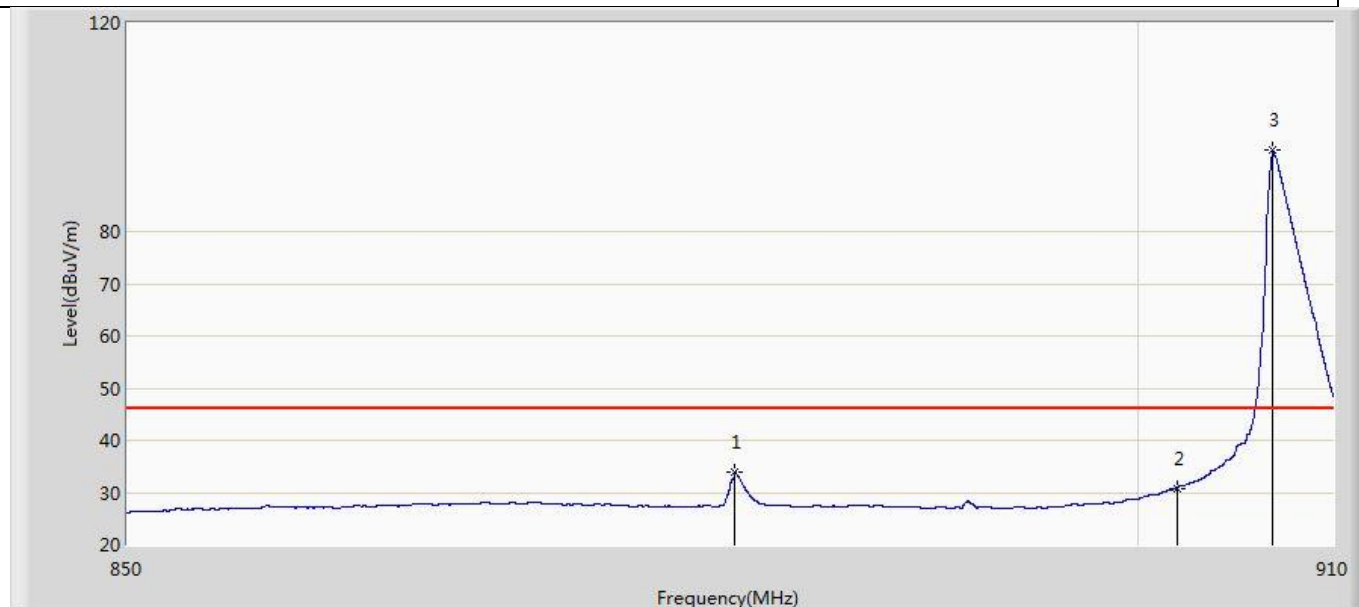


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		879.722	33.907	1.518	-12.093	46.000	32.389	QP
2		902.000	30.710	-2.322	-15.290	46.000	33.032	QP
3	*	906.903	95.679	62.994	49.679	46.000	32.685	QP

Profile: 2090075R	Page No.: 3
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 907.25 MHz by RFID	

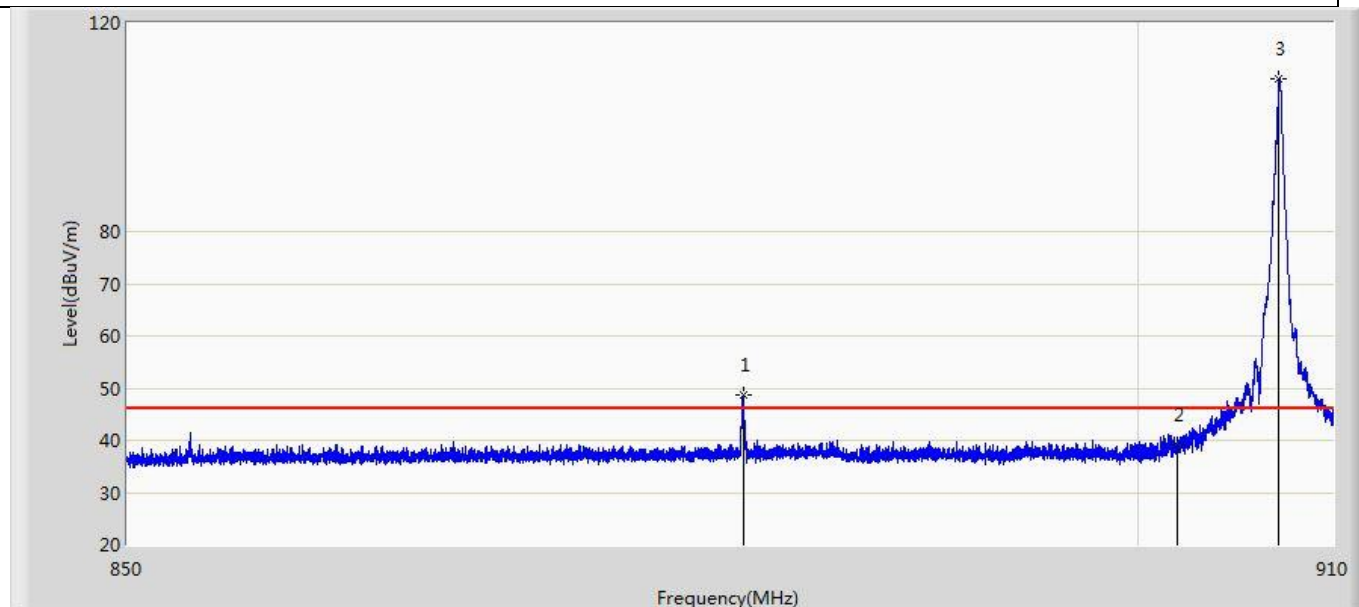


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		880.143	48.649	15.346	2.649	46.000	33.303	PK
2		902.000	39.223	6.524	-6.777	46.000	32.699	PK
3	*	907.240	109.338	76.890	63.338	46.000	32.448	PK

Profile: 2090075R	Page No.: 4
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 907.25 MHz by RFID	

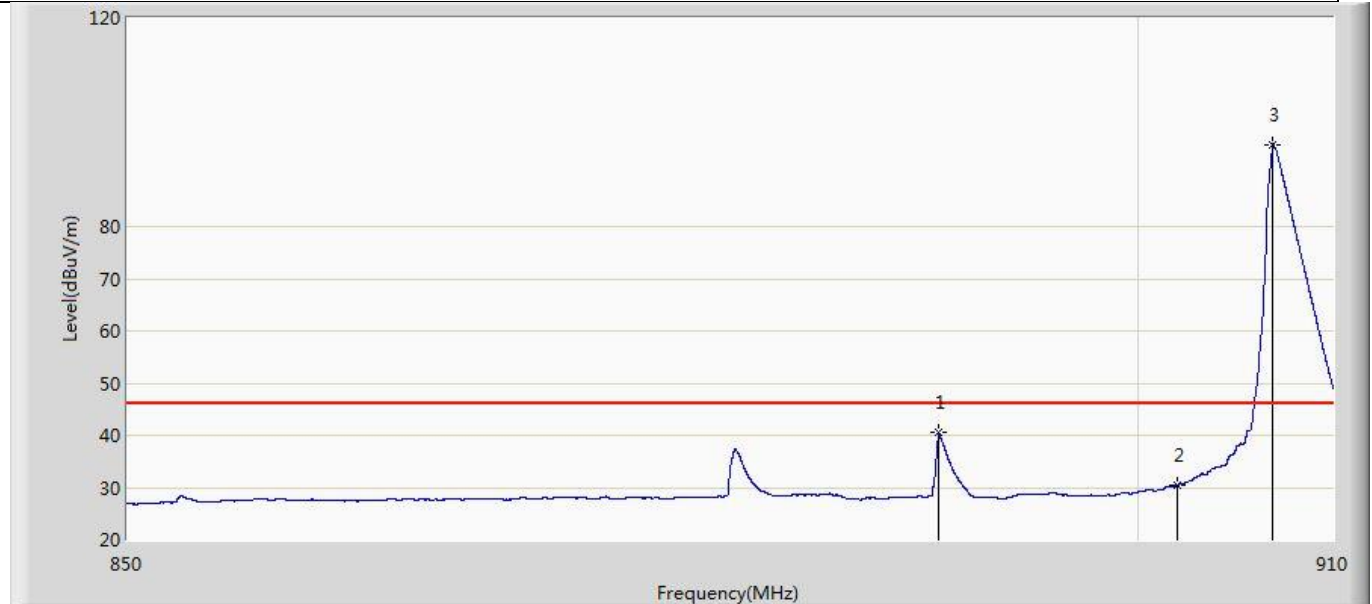


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		889.937	40.509	7.306	-5.491	46.000	33.202	QP
2		902.000	30.459	-2.240	-15.541	46.000	32.699	QP
3	*	906.895	95.673	63.242	49.673	46.000	32.431	QP

Profile: 2090075R	Page No.: 5
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75 MHz by RFID	

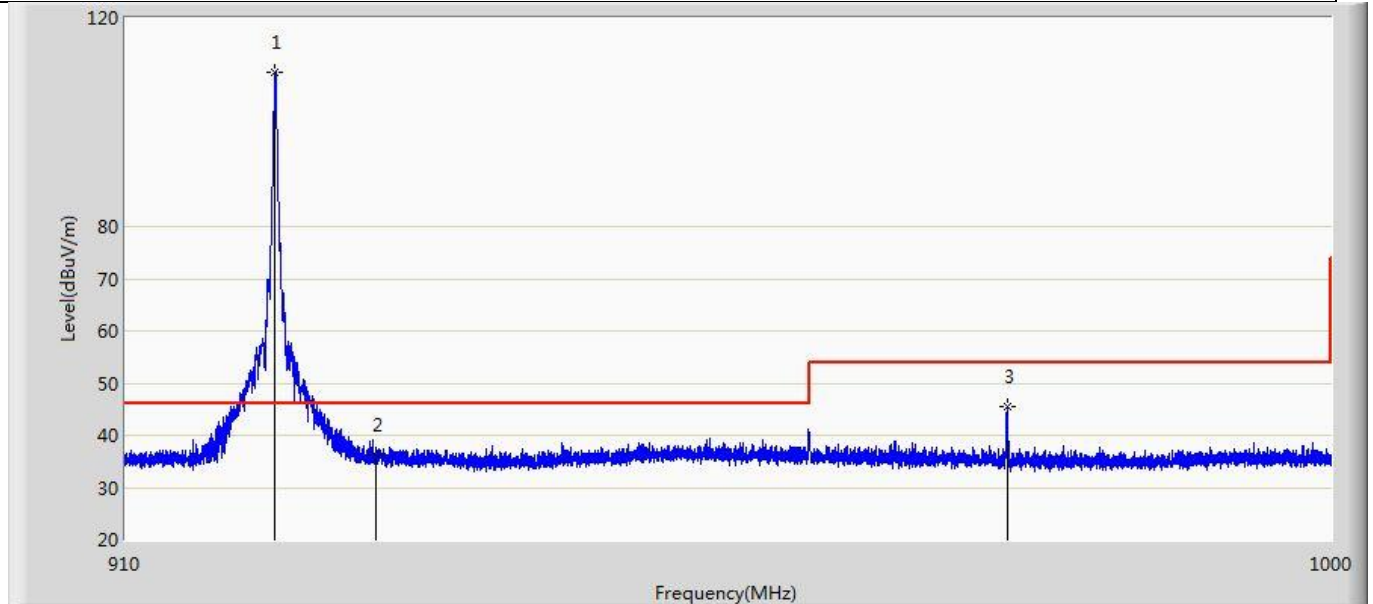


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	920.744	109.622	76.976	63.622	46.000	32.646	PK
2		928.000	36.229	3.902	-9.771	46.000	32.327	PK
3		975.025	45.501	13.636	-8.499	54.000	31.865	PK

Profile: 2090075R	Page No.: 6
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75 MHz by RFID	

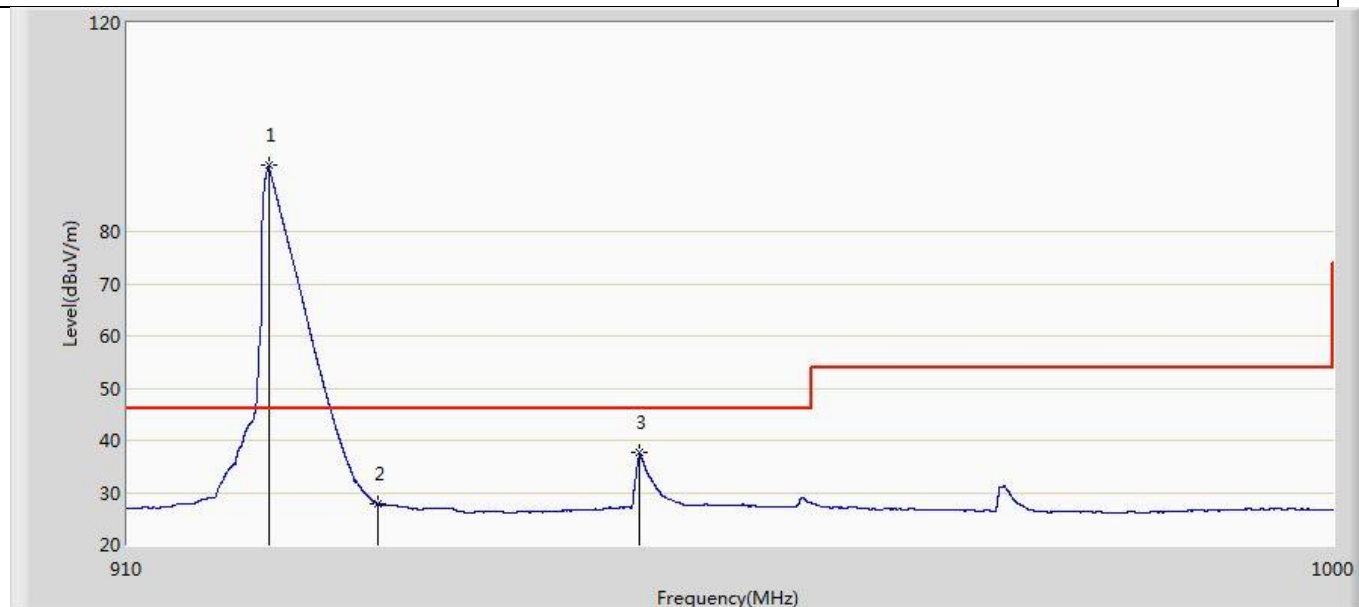


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	920.114	92.610	60.069	46.610	46.000	32.541	QP
2		928.000	27.870	-4.457	-18.130	46.000	32.327	QP
3		947.204	37.564	4.813	-8.436	46.000	32.751	QP

Profile: 2090075R	Page No.: 7
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75 MHz by RFID	

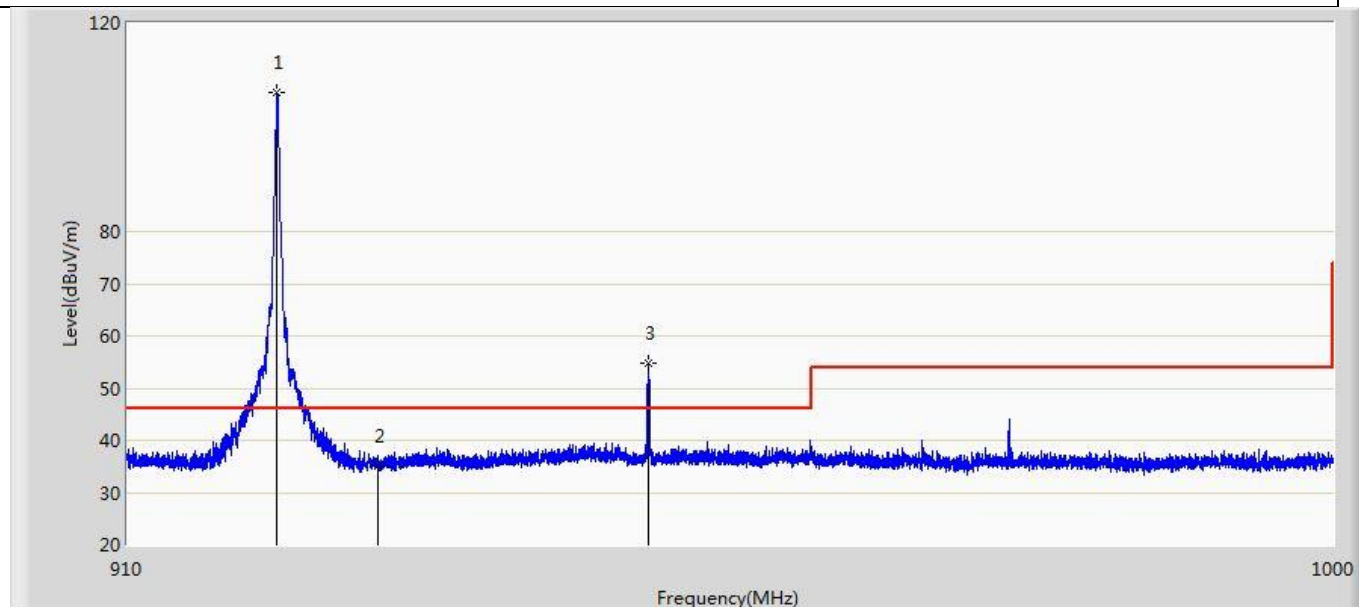


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	920.744	106.595	74.863	60.595	46.000	31.732	PK
2		928.000	35.112	3.127	-10.888	46.000	31.985	PK
3		947.867	54.647	21.807	8.647	46.000	32.841	PK

Profile: 2090075R	Page No.: 8
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 1: Transmit at 920.75 MHz by RFID	

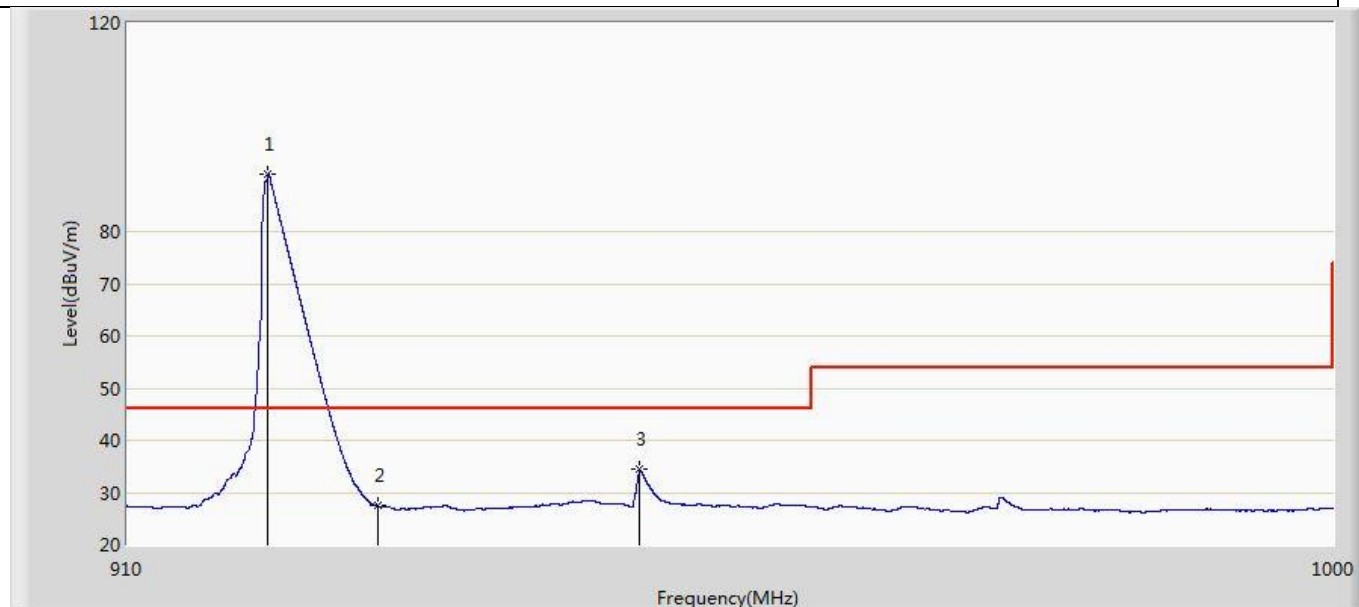


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	920.102	91.016	59.279	45.016	46.000	31.737	QP
2		928.000	27.431	-4.554	-18.569	46.000	31.985	QP
3		947.204	34.477	1.752	-11.523	46.000	32.725	QP

Profile: 2090075R	Page No.: 9
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

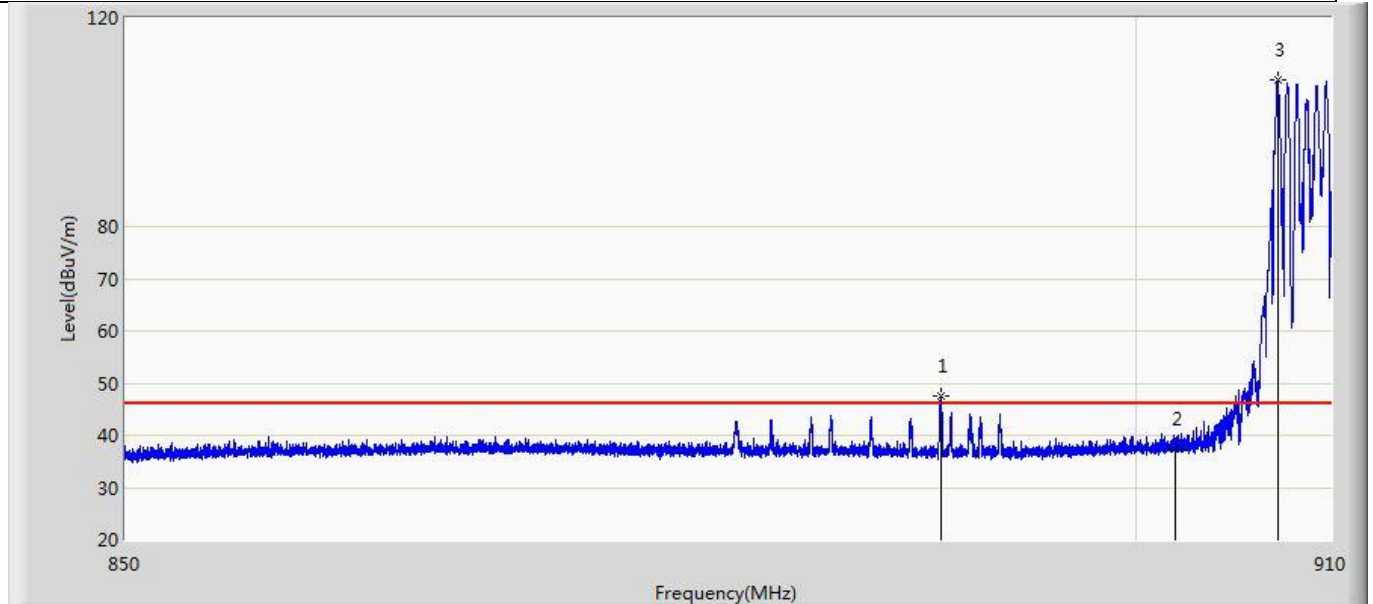


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		890.140	47.648	15.645	1.648	46.000	32.003	PK
2		902.000	37.497	4.465	-8.503	46.000	33.032	PK
3	*	907.247	107.976	75.359	61.976	46.000	32.617	PK

Profile: 2090075R	Page No.: 10
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:47
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

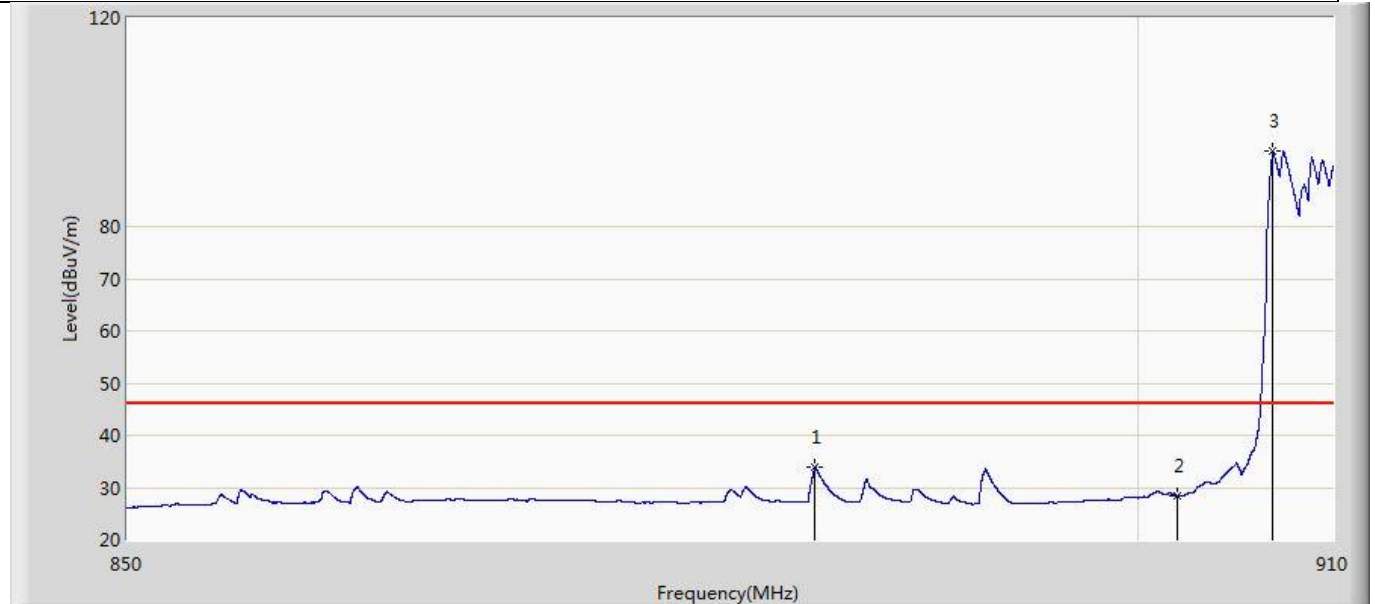


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		883.727	33.854	1.431	-12.146	46.000	32.423	QP
2		902.000	28.294	-4.738	-17.706	46.000	33.032	QP
3	*	906.895	94.387	61.700	48.387	46.000	32.687	QP

Profile: 2090075R	Page No.: 11
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

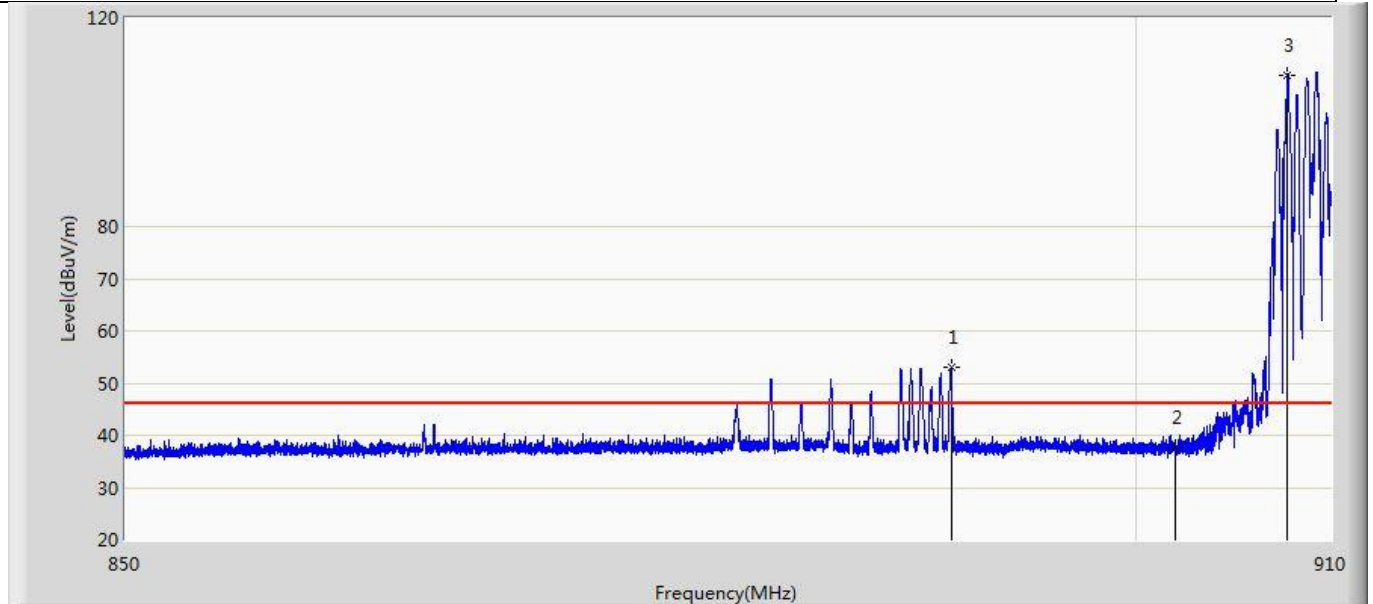


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		890.650	53.187	20.019	7.187	46.000	33.168	PK
2		902.000	37.614	4.915	-8.386	46.000	32.699	PK
3	*	907.735	109.111	76.639	63.111	46.000	32.472	PK

Profile: 2090075R	Page No.: 12
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

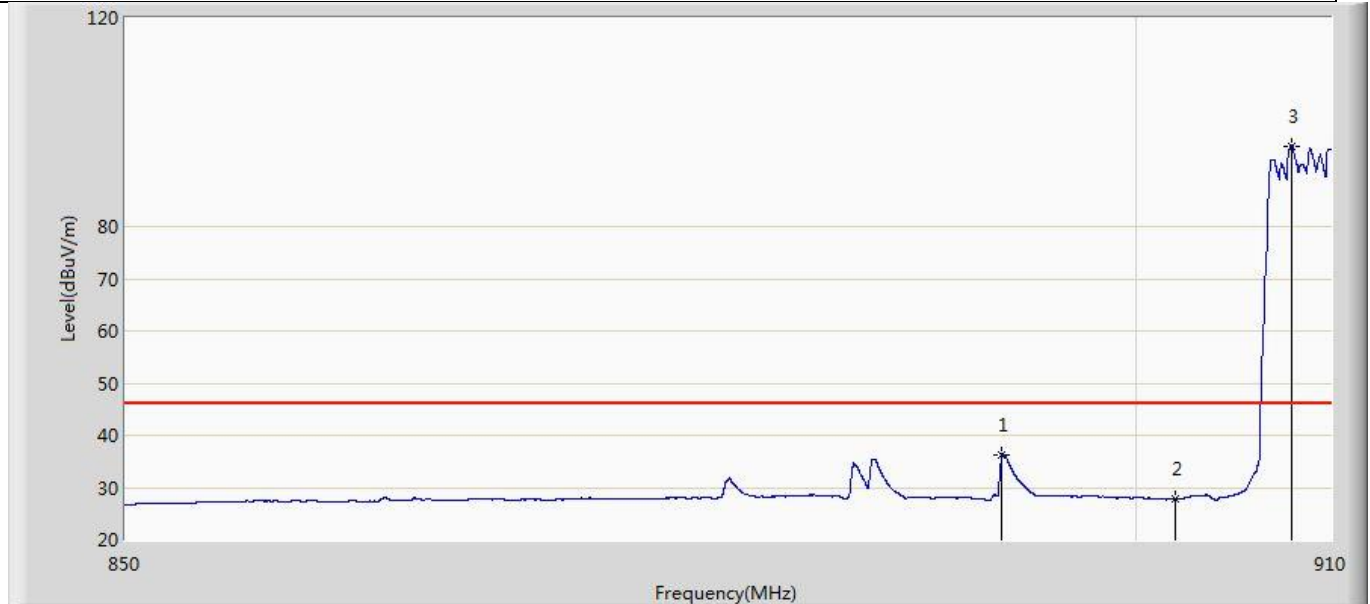


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		893.215	36.333	3.538	-9.667	46.000	32.795	QP
2		902.000	27.938	-4.761	-18.062	46.000	32.699	QP
3	*	908.013	95.340	62.853	49.340	46.000	32.488	QP

Profile: 2090075R	Page No.: 13
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 20:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

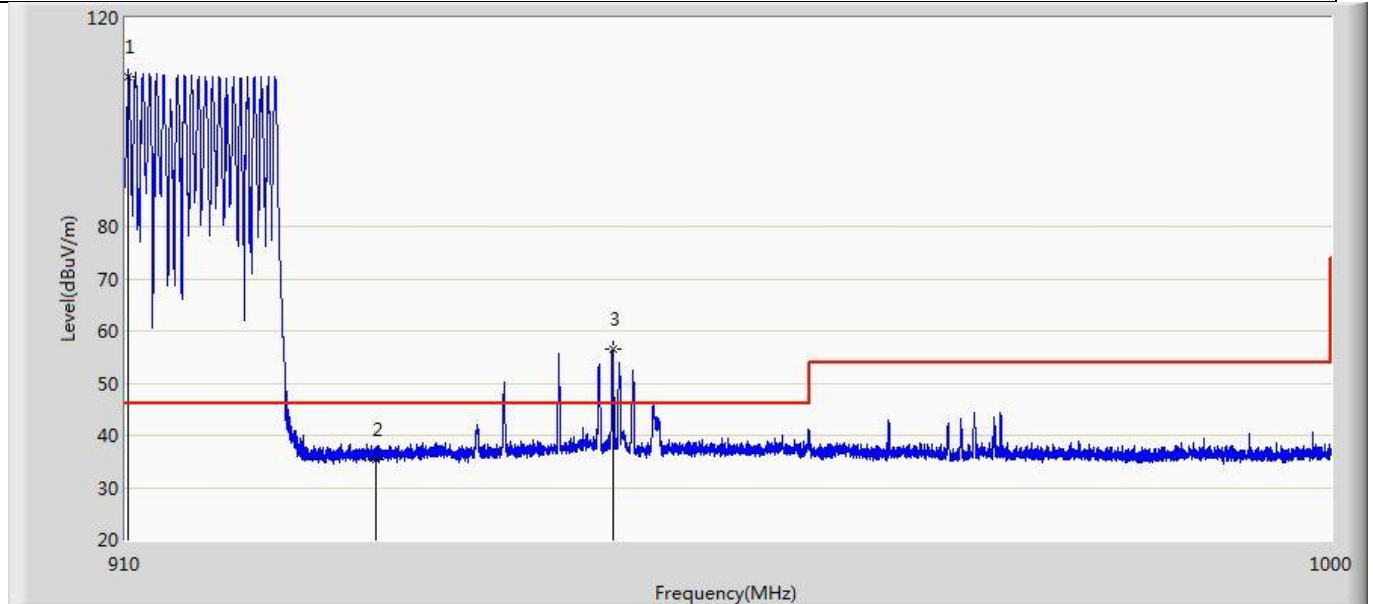


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	910.203	108.559	76.019	62.559	46.000	32.540	PK
2		928.000	35.348	3.363	-10.652	46.000	31.985	PK
3		945.359	56.533	24.055	10.533	46.000	32.478	PK

Profile: 2090075R	Page No.: 14
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 20:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

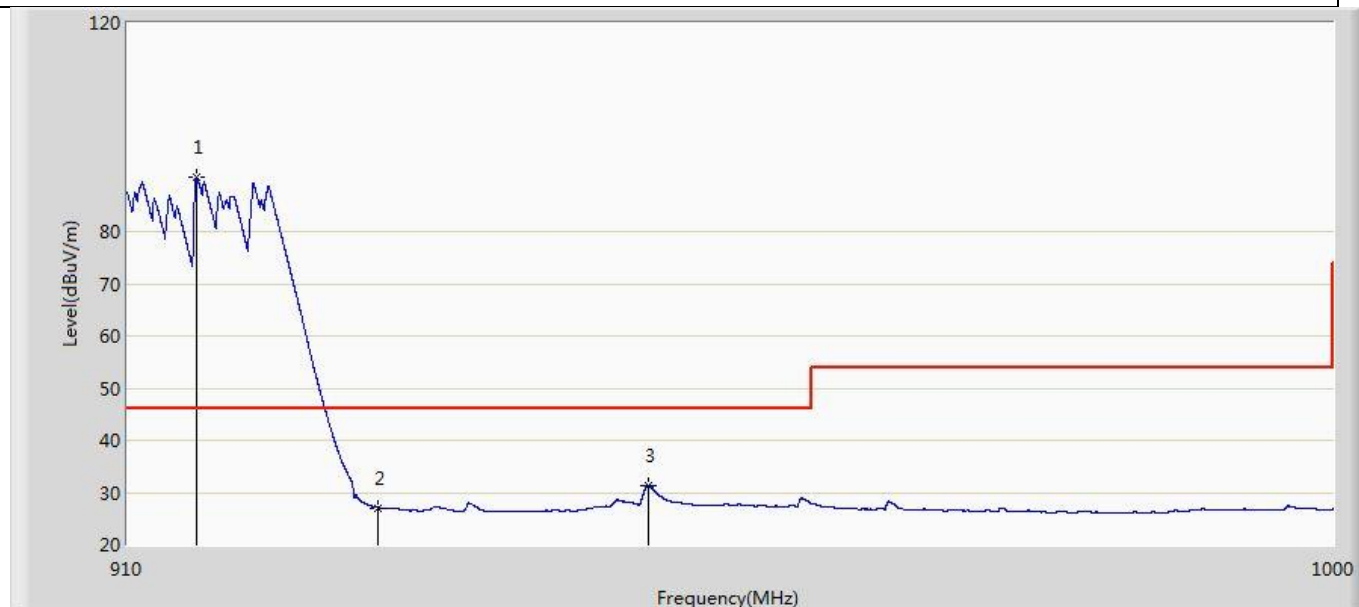


N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	914.927	90.380	58.435	44.380	46.000	31.945	QP
2		928.000	27.101	-5.226	-18.899	46.000	32.327	QP
3		947.912	31.363	-1.491	-14.637	46.000	32.854	QP

Profile: 2090075R	Page No.: 15
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 20:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

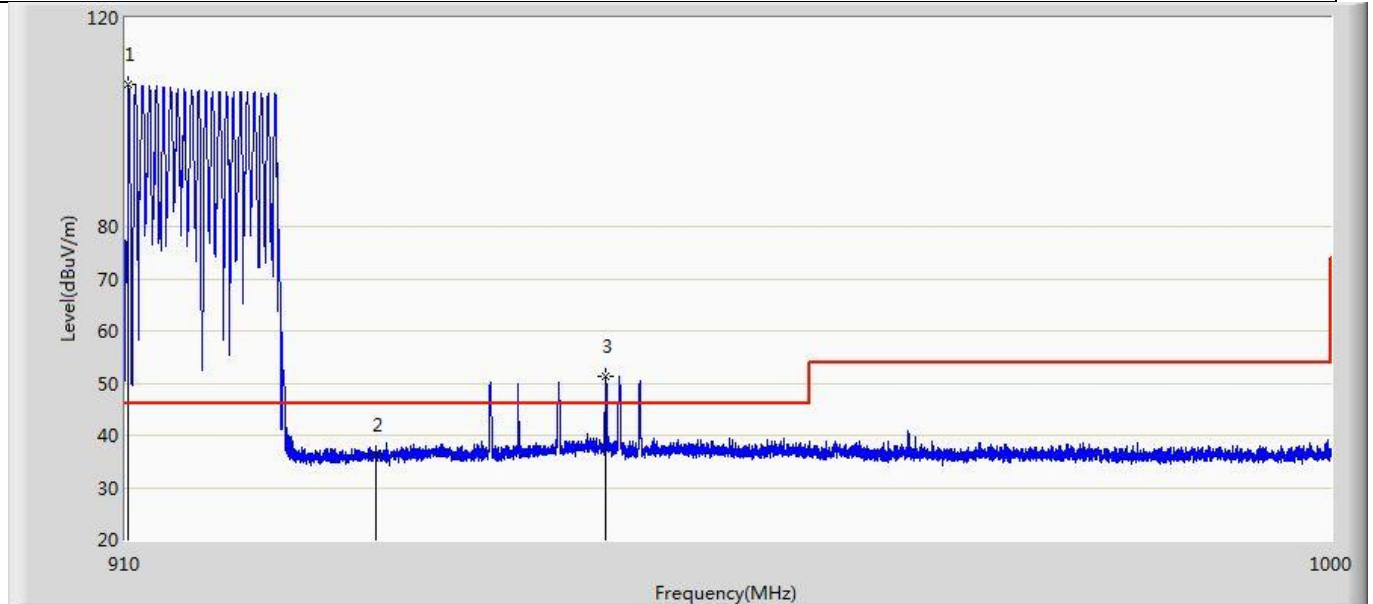

N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	910.247	107.148	74.612	61.148	46.000	32.536	PK
2		928.000	36.159	4.174	-9.841	46.000	31.985	PK
3		944.875	51.428	18.143	5.428	46.000	33.285	PK

Profile: 2090075R	Page No.: 16
Engineer: Yingfeiwang	
Site: AC2	Time: 2020/09/22 - 20:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: 8960i	Power: Battery
Note: Mode 2: Transmit by RFID hopping	

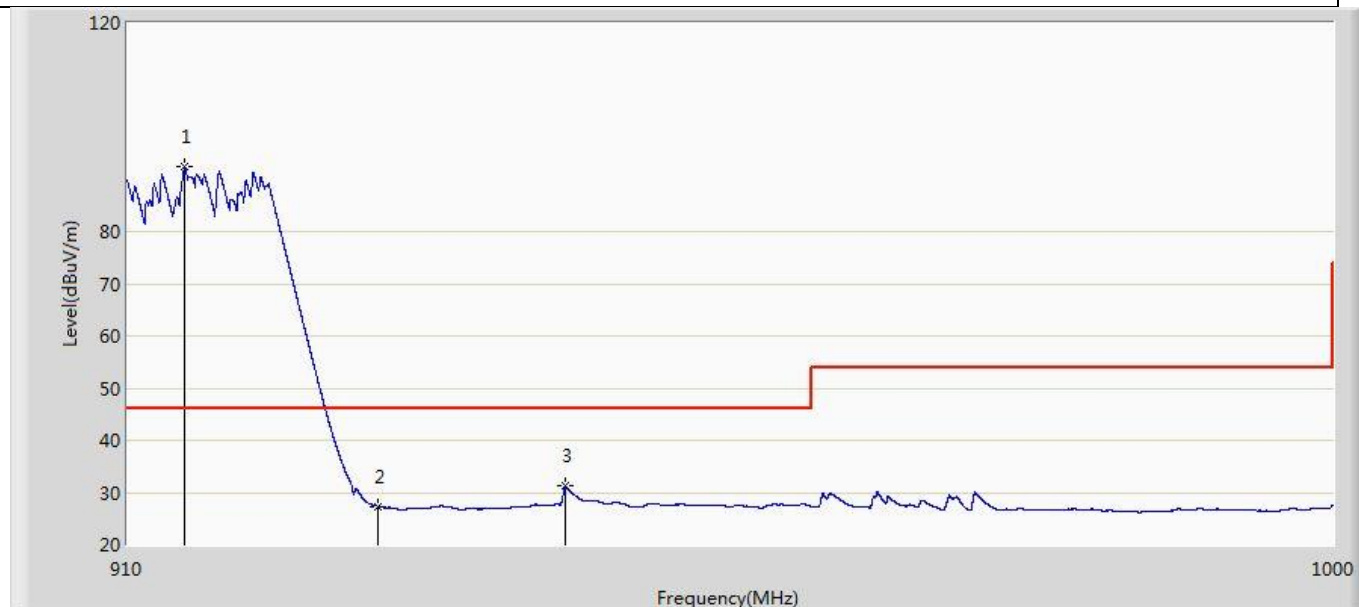

N o	Mar k	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	914.095	92.319	60.326	46.319	46.000	31.993	QP
2		928.000	27.371	-4.614	-18.629	46.000	31.985	QP
3		941.770	31.208	-2.197	-14.792	46.000	33.405	QP

Note:

1. Measured Level = Reading Level + Factor.
2. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
3. As the radiated emission was performed, so conducted emission was not tested.
4. We tested both usage mode, shown in report is the worst data.

4.11 Antenna Requirement**VERDICT: PASS****4.11.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.203
----------	--

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____