


	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>Transmitting mode.</p>
Final Test Mode:	<p>Through Pre-scan, find the 1Mbps of data type and GFSK modulation is the worst case.</p> <p>For below 1GHz part, through pre-scan, the worst case is the highest channel.</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

Radiated Emission below 1GHz

30MHz~1GHz, the worst case


Test mode: Transmitting mode Horizontal

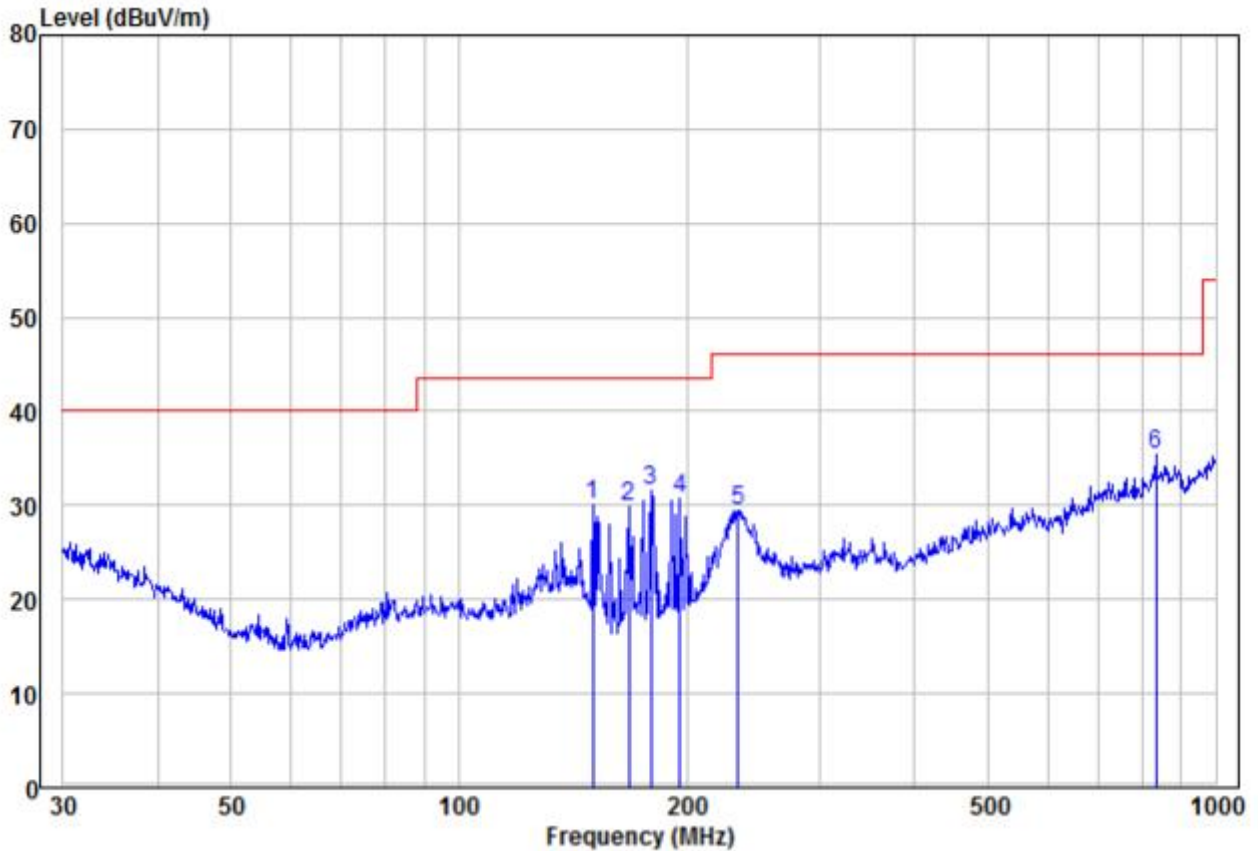

		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	150.54	21.61	8.43	30.04	43.50	-13.46	Peak	HORIZONTAL
2	167.82	22.13	7.65	29.78	43.50	-13.72	Peak	HORIZONTAL
3	179.39	23.25	8.30	31.55	43.50	-11.95	Peak	HORIZONTAL
4	195.82	22.50	8.27	30.77	43.50	-12.73	Peak	HORIZONTAL
5	234.17	18.58	10.91	29.49	46.00	-16.51	Peak	HORIZONTAL
6 pp	833.32	11.46	23.97	35.43	46.00	-10.57	Peak	HORIZONTAL

30MHz~1GHz, the worst case

Test mode:	Transmitting mode	Vertical
------------	-------------------	----------

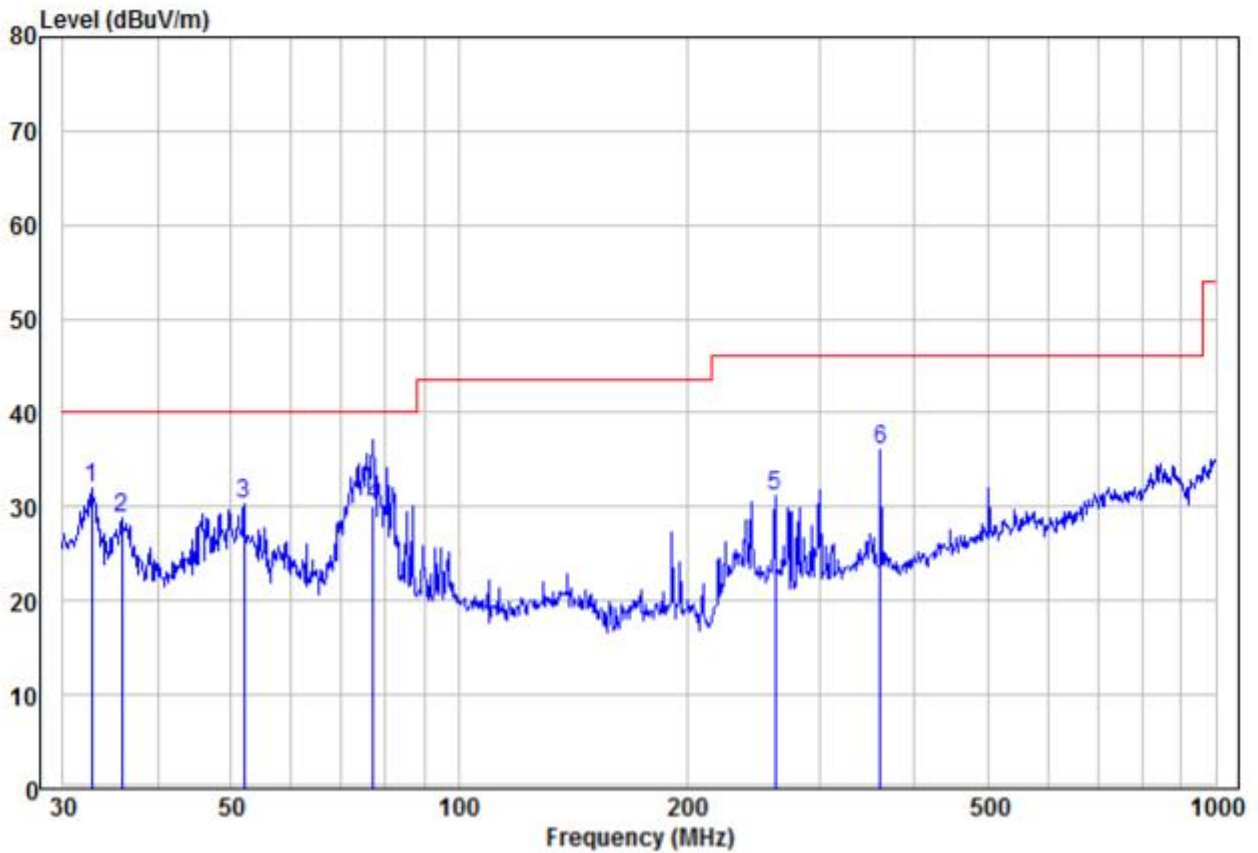

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	32.75	16.85	15.19	32.04	40.00	-7.96 Peak
2		35.87	14.52	14.29	28.81	40.00	-11.19 Peak
3		52.03	22.52	7.68	30.20	40.00	-9.80 Peak
4	qp	77.05	20.79	9.31	30.10	40.00	-9.90 QP
5		261.98	18.63	12.47	31.10	46.00	-14.90 Peak
6		360.45	20.81	15.20	36.01	46.00	-9.99 Peak

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.26	-9.2	44.06	74	-29.94	Peak	H
2400	54.98	-9.39	45.59	74	-28.41	Peak	H
4804	52.64	-4.33	48.31	74	-25.69	Peak	H
7206	49.11	1.01	50.12	74	-23.88	Peak	H
2390	52.29	-9.2	43.09	74	-30.91	Peak	V
2400	50.89	-9.39	41.50	74	-32.50	Peak	V
4804	54.85	-4.33	50.52	74	-23.48	Peak	V
7206	48.43	1.01	49.44	74	-24.56	Peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4880	52.46	-4.11	48.35	74	-25.65	peak	H
7320	50.67	1.51	52.18	74	-21.82	peak	H
4880	52.34	-4.11	48.23	74	-25.77	peak	V
7320	49.00	1.51	50.51	74	-23.49	peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	56.82	-9.29	47.53	74	-26.47	Peak	H
4960	52.65	-4.04	48.61	74	-25.39	Peak	H
7440	50.88	1.57	52.45	74	-21.55	Peak	H
2483.5	56.48	-9.29	47.19	74	-26.81	Peak	V
4960	49.33	-4.04	45.29	74	-28.71	Peak	V
7440	49.89	1.57	51.46	74	-22.54	Peak	V

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9kHz~30MHz:



30MHz~1GHz:

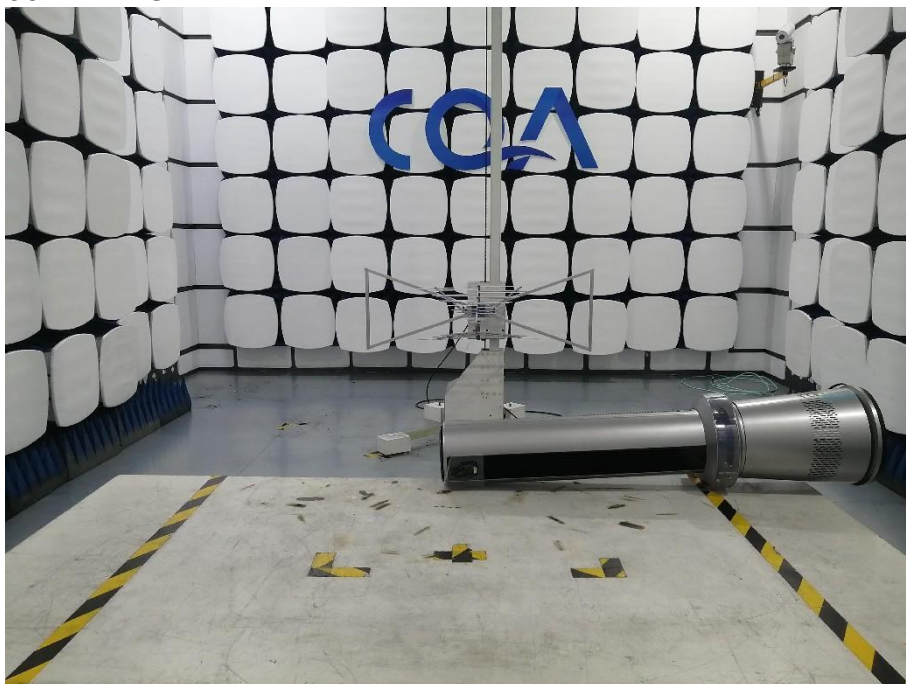

Above 1GHz:




6.2 Conducted Emissions Test Setup





7 Photographs - EUT Constructional Details









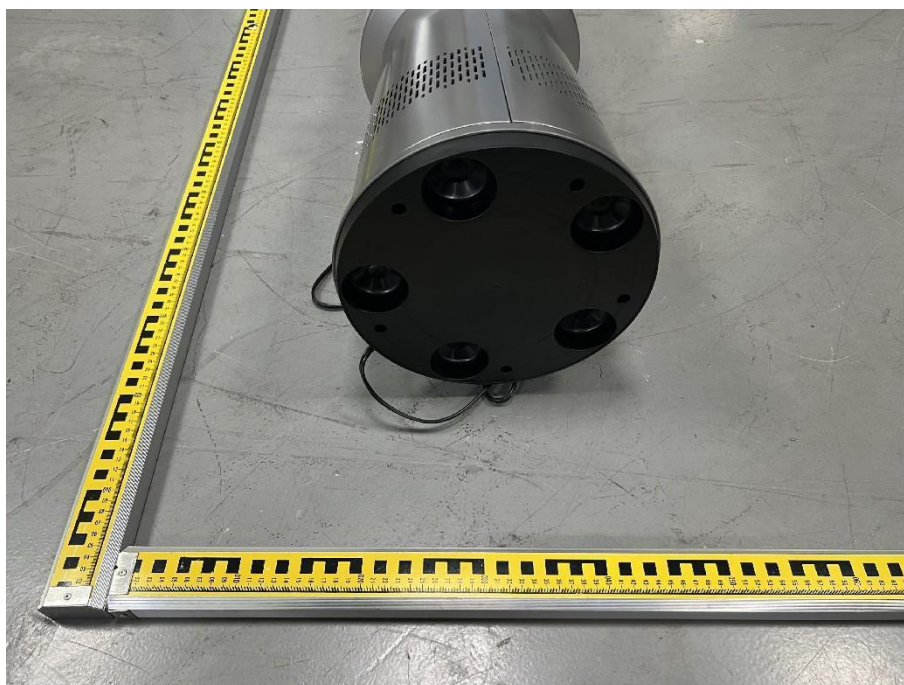

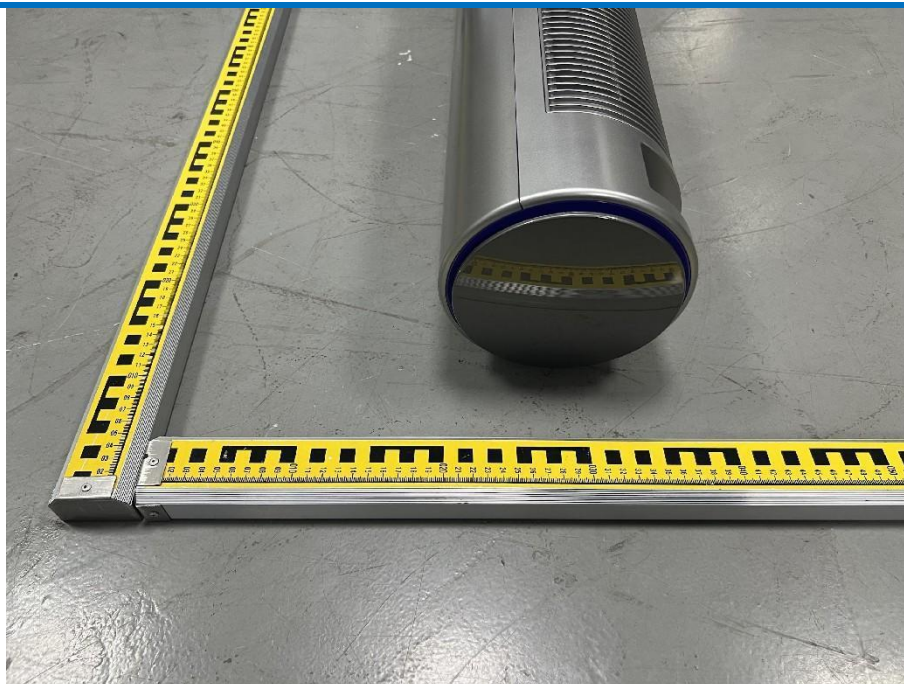

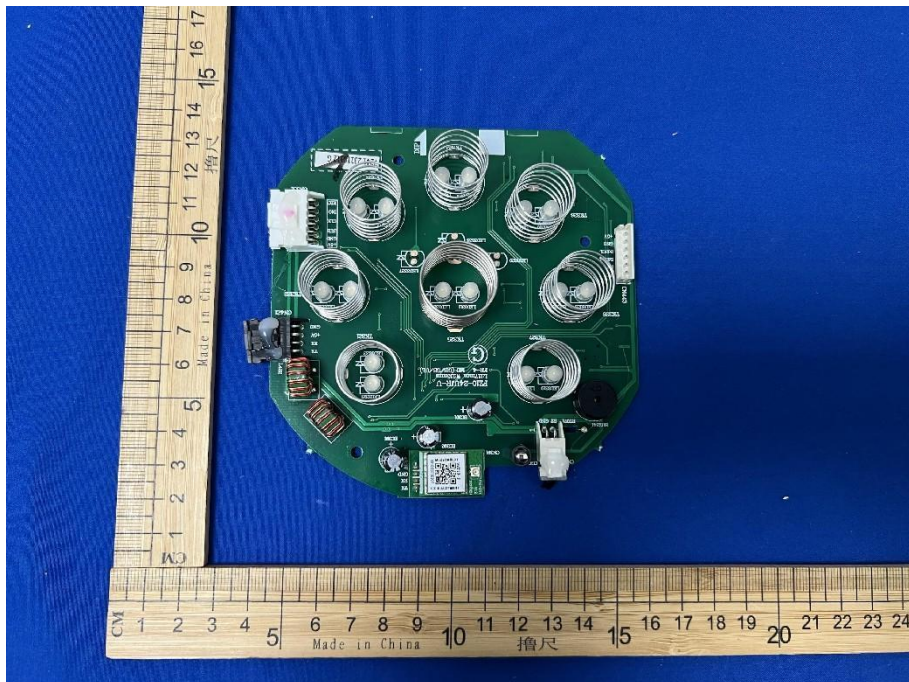

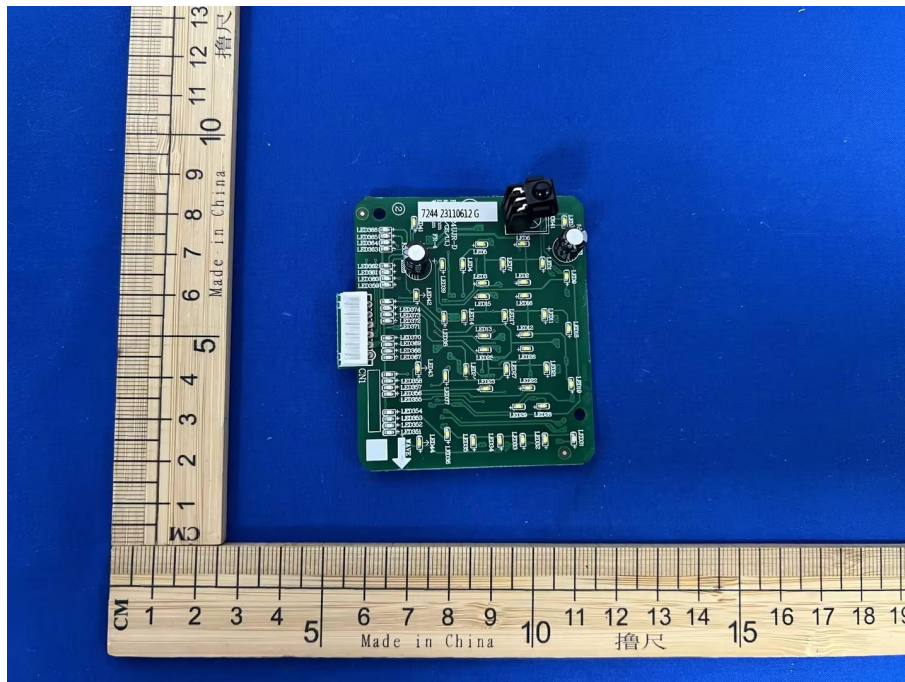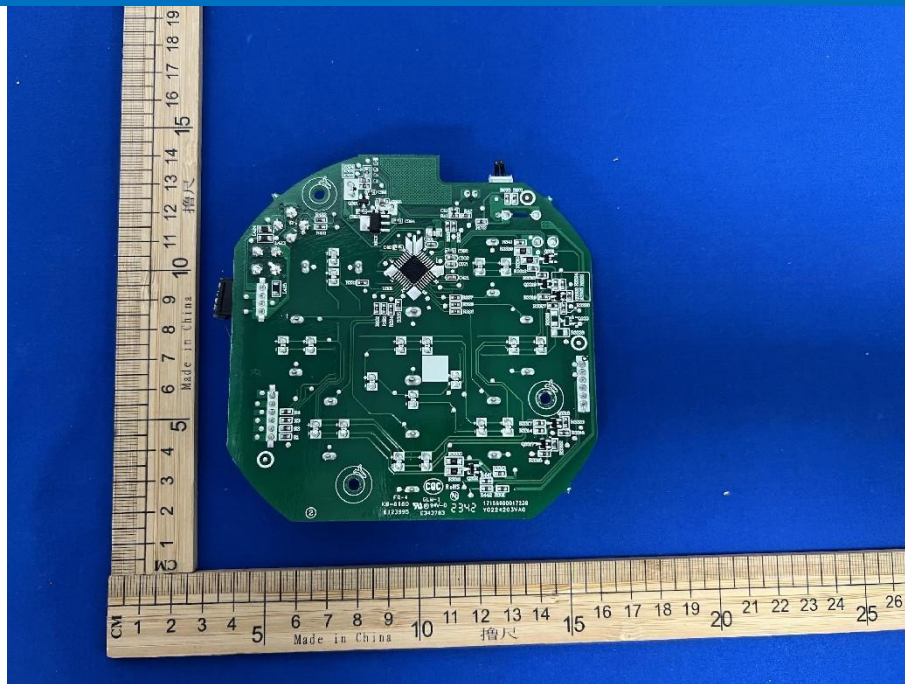

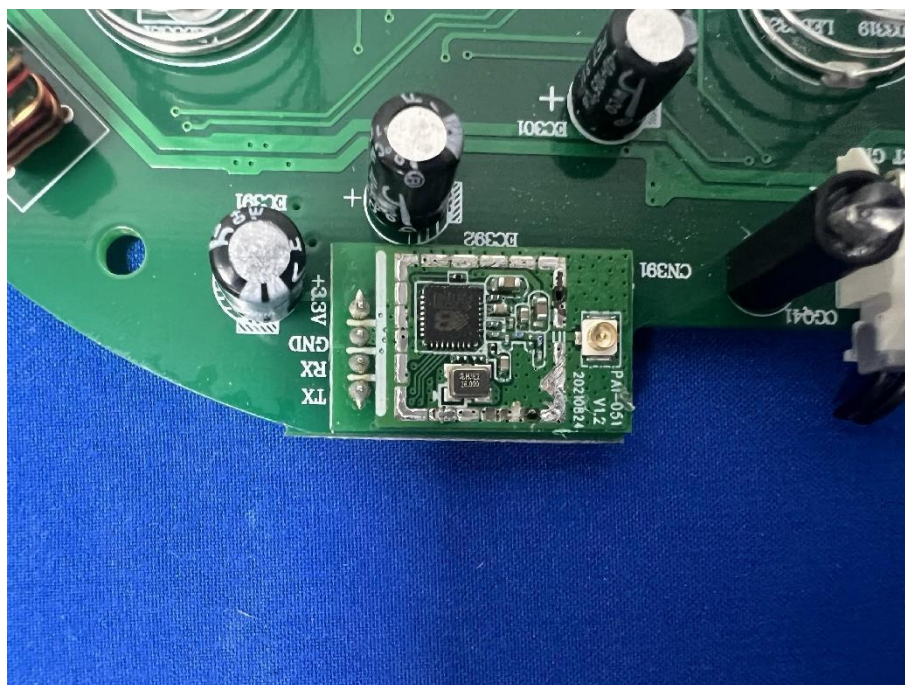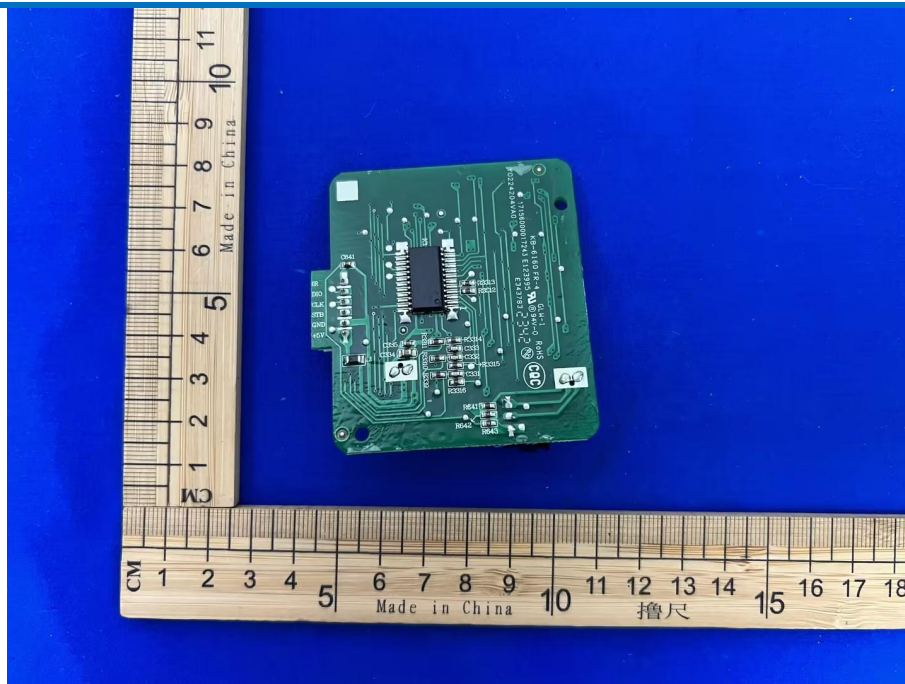

*** END OF REPORT ***