

December 23, 2020

Bluecats US LLC  
6767 Old Madison Pike Suite 300  
Huntsville, Alabama 35806  
USA

Dear Kurt Nehrenz,

Enclosed is the EMC Wireless test report for compliance testing of the Bluecats US LLC, BC4520 ProxPoint as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if we can be of further service to you, please feel free to contact me.

Sincerely yours,  
EUROFINS E&E NORTH AMERICA

A handwritten signature in black ink, appearing to read "Arsalan Hasan".

Arsalan Hasan  
Wireless Laboratory

Reference: (\Bluecats US LLC\WIRS109093-FCC-247 Rev 0)



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects Eurofins accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

## **Electromagnetic Compatibility Criteria Test Report**

for the

**Bluecats US LLC  
BC4520 ProxPoint**

**Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional Radiators

**Report: WIRS109093-FCC-247 Rev 0**

December 23, 2020


**Prepared For:**

**Bluecats US LLC  
6767 Old Madison Pike Suite 300  
Huntsville, Alabama 35806  
USA**

**Prepared By:**  
**Eurofins E&E North America**  
3162 Belick Street  
Santa Clara, CA 95054

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**Bluecats US LLC  
BC4520 ProxPoint****Tested under**  
the FCC Certification Rules  
contained in  
15.247 Subpart C for Intentional RadiatorsFelix Huang  
Engineer, Wireless LaboratoryArsalan Hasan  
Manager, Wireless Laboratory

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.

Eleazar Zuniga, PhD.  
Director, Wireless Technologies

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 23, 2020	Initial Issue.

## Table of Contents

<b>I. Executive Summary .....</b>	<b>7</b>
1.1 Purpose of Test.....	8
1.2 Executive Summary.....	8
<b>II. Equipment Configuration.....</b>	<b>9</b>
2.1 Overview .....	10
2.2 References .....	10
2.3 Test Site .....	10
2.4 Measurement Uncertainty .....	11
2.5 Description of Test Sample .....	11
2.6 Equipment Configuration .....	11
2.7 Support Equipment.....	11
2.8 Ports and Cabling Information .....	12
2.9 Mode of Operation .....	12
2.10 Method of Monitoring EUT Operation.....	12
2.11 Modifications.....	12
2.11.1 Modifications to EUT .....	12
2.11.2 Modifications to Test Standard .....	12
2.12 Disposition of EUT .....	12
<b>III. Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>13</b>
§ 15.203 Antenna Requirement .....	15
§ 15.207(a) Conducted Emissions Requirements .....	16
§ 15.247(d) Radiated Spurious Emissions Requirements .....	20
<b>IV. Test Equipment .....</b>	<b>42</b>

## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB $\mu$ A	Decibels above one <b>microamp</b>
dB $\mu$ V	Decibels above one <b>microvolt</b>
dB $\mu$ A/m	Decibels above one <b>microamp per meter</b>
dB $\mu$ V/m	Decibels above one <b>microvolt per meter</b>
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
$\mu$ H	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts <b>per meter</b>
VCP	Vertical Coupling Plane

# **I. Executive Summary**

## 1.1 Purpose of Test

An EMC evaluation was performed to determine compliance of the Bluecats US LLC BC4520 ProxPoint, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the BC4520 ProxPoint. Bluecats US LLC should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the BC4520 ProxPoint, has been **permanently** discontinued.

## 1.2 Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Bluecats US LLC, purchase order number PO-BCUS-00608. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference 47 CFR Part 15.247:2005	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	6dB Occupied Bandwidth	Data valid from module original certification FCC ID: XF6-M7DB6
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Data valid from module original certification FCC ID: XF6-M7DB6
Title 47 of the CFR, Part 15 §15.247(c)	Spurious Emissions in Non-restricted Bands	Data valid from module original certification FCC ID: XF6-M7DB6
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	Peak Power Spectral Density	Data valid from module original certification FCC ID: XF6-M7DB6

**Table 1. Executive Summary of EMC Part 15.247 Compliance Testing**

**Rationale:** Per KDB KDB 996369 D04 “Modular Transmitter Integration Guide – Guidance for Host Product Manufacturers” only worst-case radiated measurements are reported in this filing.

## II. Equipment Configuration

## 2.1 Overview

Eurofins MET Laboratories, Inc. was contracted by Bluecats US LLC to perform testing on the BC4520 ProxPoint, under Bluecats US LLC's purchase order number PO-BCUS-00608.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Bluecats US LLC, BC4520 ProxPo

<b>Model(s) Tested:</b>	BC4520 ProxPoint	
<b>Model(s) Covered:</b>	BC4520 ProxPoint	
<b>Filing Status:</b>	Original	
<b>EUT Specifications:</b>	Primary Power: 120V (AC/DC Adaptor)	
	FCC ID: 2AHXCBC4520	
	Module Original Report Number(s): Report: 1901FR13 Note: BT, BLE & ZigBee have been disabled in the RedPine module.	
	Type of Modulations:	GFSK
	Equipment Code:	DTS
	Peak RF Output Power:	17 dBm
	EUT Frequency Ranges:	2412 – 2462 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Arsalan Hasan	
<b>Report Date(s):</b>	December 23, 2020	

Table 1: EUT Summary Table

## 2.2 References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices

Table 2: References

## 2.3 Test Site

All testing was performed at Eurofins MET Labs, 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Eurofins MET Labs is a ISO/IEC 17025 accredited site by A2LA, California #0591.02.

## 2.4 Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	$\pm 4.52$ Hz	2	95%
RF Power Conducted Emissions	$\pm 2.32$ dB	2	95%
RF Power Conducted Spurious Emissions	$\pm 2.25$ dB	2	95%
RF Power Radiated Emissions	$\pm 3.01$ dB	2	95%

Table 4. Measurement Uncertainty

## 2.5 Description of Test Sample

The Bluecats US LLC BC4520 ProxPoint is an RTLS gateway that receives Bluetooth transmissions from beacons and tags, filters and processes location and sensor information, and forwards to a server via Ethernet, Wi-Fi, or LTE.

## 2.6 Equipment Configuration

The EUT was set up as outlined in **Error! Reference source not found.**, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Revision
	NA	BC4520 ProxPoint	BC4520	NA	NA	NA
	BT1, BT4	Bluetooth Stick Antenna, Right Angle	W5029	NA	NA	NA
	BT2, BT3	Bluetooth Stick Antenna, Straight	W5029RPGT	NA	NA	NA
	LTE	LTE Flat Bar Antenna, 2m cable	ANT-LTE-VDP-2000-SMA	NA	NA	NA
	GNSS	GPS GLONASS SMA, 3m cable	ANT-GPS-SH2-SMA	NA	NA	NA
	PWR	Power Adapter	GST25A12-P1J	NA	NA	NA
	ETH	M12 X-Coded to RJ45 10m cable	ETH	NA	NA	NA

Table 5: Equipment Configuration

## 2.7 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
	Laptop with Windows 10	HP	NA	N/A

Table 6: Support Equipment

## 2.8 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
	BT1	W5029 Antenna	1	NA	NA	NA	NA
	BT2	W5029RPGT Antenna	1	NA	NA	NA	NA
	BT3	W5029RPGT Antenna	1	NA	NA	NA	NA
	BT4	W5029 Antenna	1	NA	NA	NA	NA
	LTE	ANT-LTE-VDP-2000-SMA Antenna	1	2m	NA	Yes	NA
	GNSS	ANT-GPS-SH2-SMA Antenna	1	3m	NA	Yes	NA
	ETH	M12 X-Coded connector to RJ45	1	10m	NA	Yes	NA
	PWR	M12 A-Coded terminated GST25A12-P1J Power Adapter	1	NA	NA	NA	(120v/60hz)

Table 7: Ports and Cabling Information

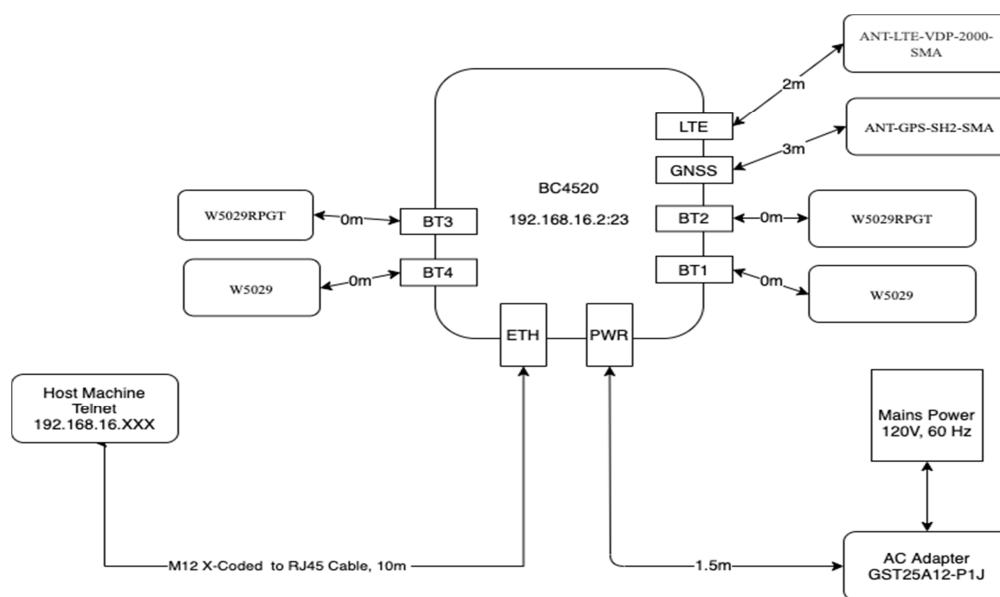


Figure 1: EUT configuration

## **2.9 Mode of Operation During Testing**

Standard test mode was used. Allows independent activation of all radios in their various test modes, as well as methods to generate traffic similar to normal operation on all digital busses.

## **2.10 Method of Monitoring EUT Operation**

The signal will be displayed on a spectrum analyzer.

## **2.11 Modifications**

### **2.11.1 Modifications to EUT**

No modifications were made to the EUT.

### **2.11.2 Modifications to Test Standard**

No modifications were made to the test standard.

## **2.12 Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Bluecats US LLC upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 11/25/2020

Gain	Type	Manufacturer
0.712 dBi	PCB Trace	RedPine Signals

**Table 8: Antenna Requirement, Antenna List**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 9: Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:** The EUT **completed testing** to this requirement. Measured emissions were below applicable limits.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 11/24/2020


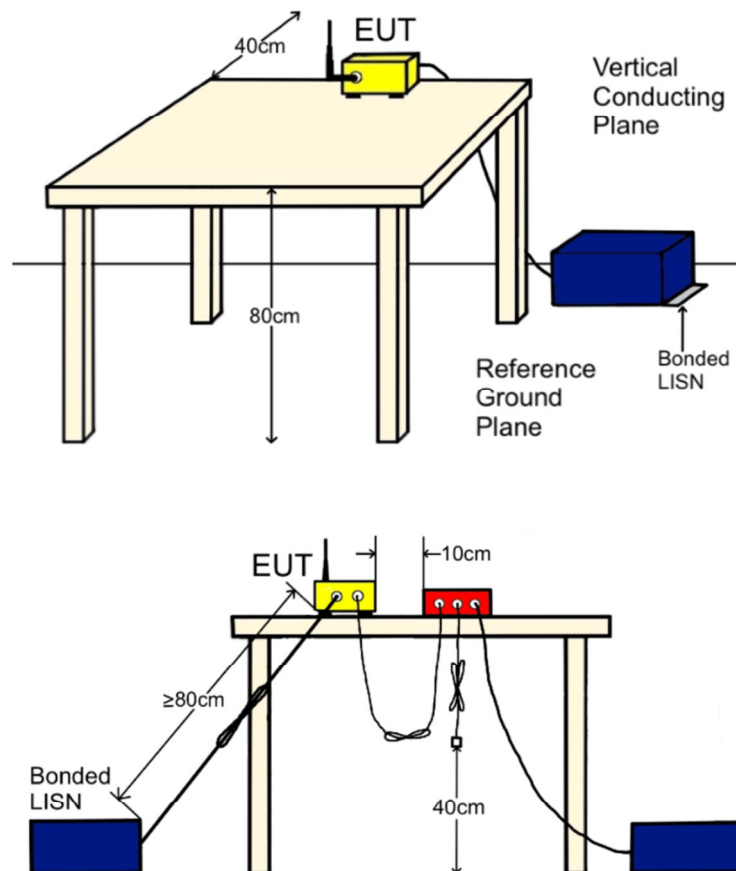


Figure 2: Conducted Emissions Voltage, Test Setup

LISN Ground Connection	VCP Ground Connection (<2.5mΩ)
1.4mΩ	1.4mΩ


	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line	0.152045	39.33	65.888	-26.558	Pass	23.4	55.888	-32.488	Pass
Line	0.205215	50.51	63.404	-12.894	Pass	25.84	53.404	-27.564	Pass
Line	0.810535	43.25	56	-12.75	Pass	35.76	46	-10.24	Pass
Line	0.859615	37.86	56	-18.14	Pass	29.97	46	-16.03	Pass
Line	1.170455	45.5	56	-10.5	Pass	37.05	46	-8.95	Pass
Line	1.370865	46.85	56	-9.15	Pass	40.87	46	-5.13	Pass

Table 10: Conducted Emissions Limits, Line, Test Data

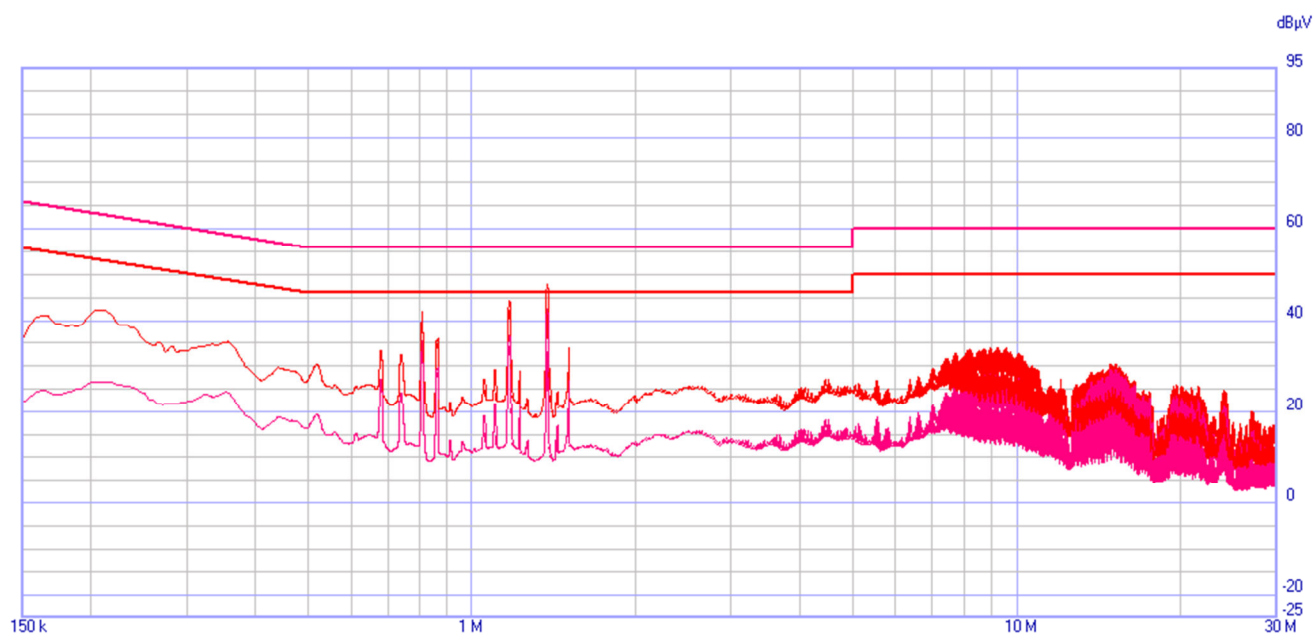

Plot 1: Conducted Emissions Limits, Line

	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Neutral	0.20726	37.7	63.322	-25.622	Pass	16.19	53.322	-37.132	Pass
Neutral	0.810535	36.09	56	-19.91	Pass	20.06	46	-25.94	Pass
Neutral	0.86166	30.74	56	-25.26	Pass	16.73	46	-29.27	Pass
Neutral	1.170455	38.77	56	-17.23	Pass	22.41	46	-23.59	Pass
Neutral	1.370865	42.56	56	-13.44	Pass	27.13	46	-18.87	Pass
Neutral	15.04373	30.63	60	-29.37	Pass	24.3	50	-25.7	Pass

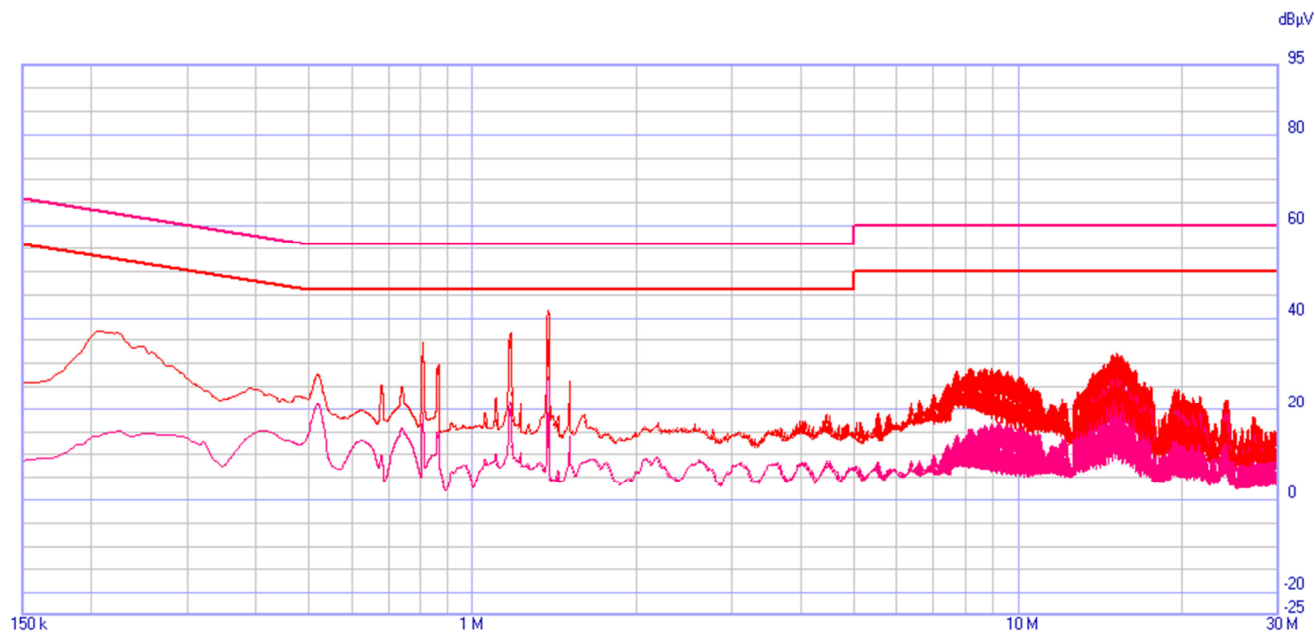**Table 11: Conducted Emissions Limits, Neutral, Test Data**

**Plot 2: Conducted Emissions Limits, Neutral**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358 36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 12: Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 13:

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBμV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 13: Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured below 30 MHz and above 18 GHz.

**Test Results:** The EUT **completed testing** to the requirements of § 15.247(d). No anomalies noted.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 11/24/2020

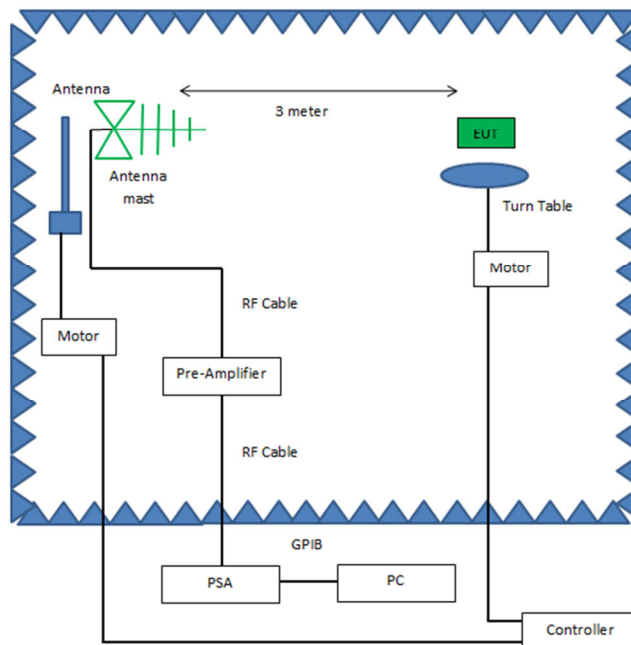


Figure 3: Radiated Emissions, Below 1GHz, Test Setup



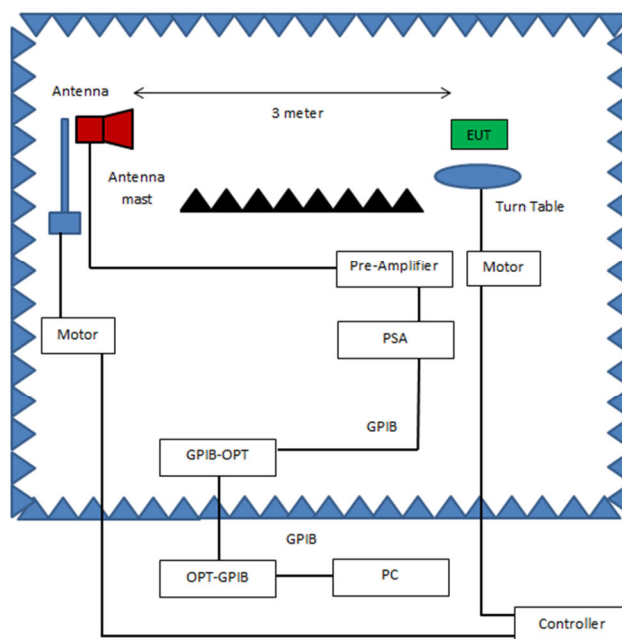


Figure 4: Radiated Emissions, Above 1GHz, Test Setup


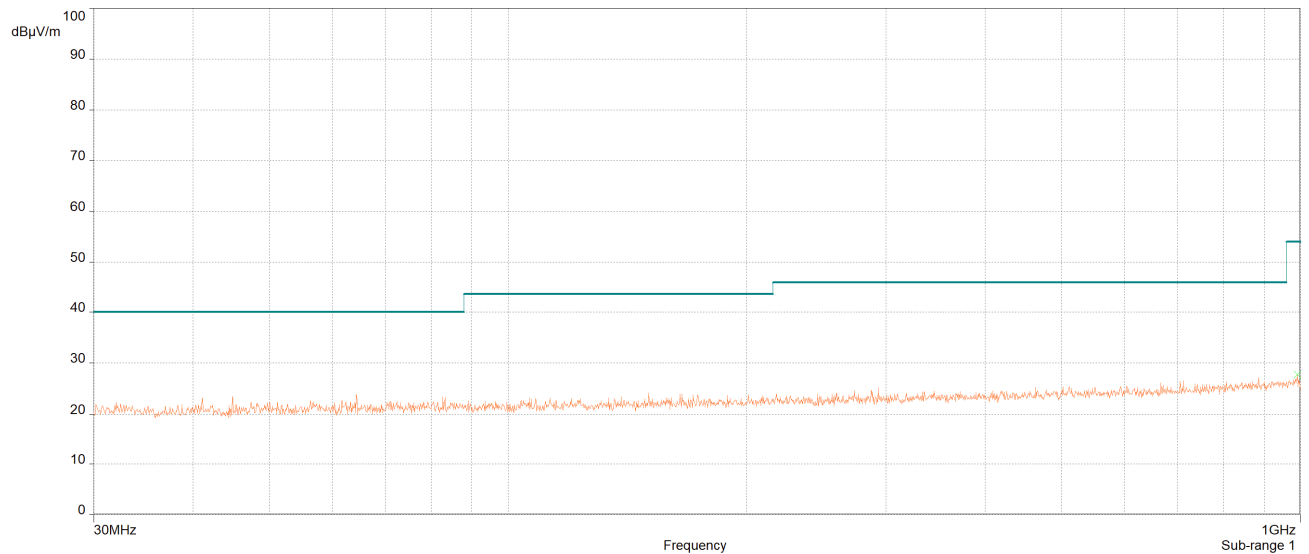


Vertical


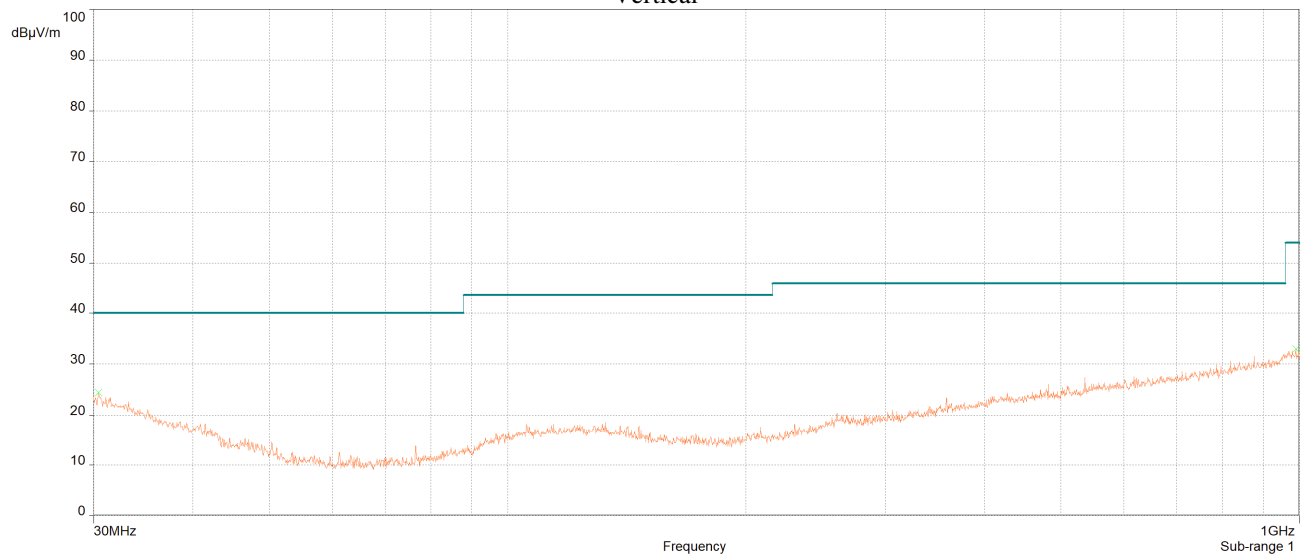


Horizontal



**Plot 3: Radiated Emissions, 30 MHz - 1 GHz, (worst case)**

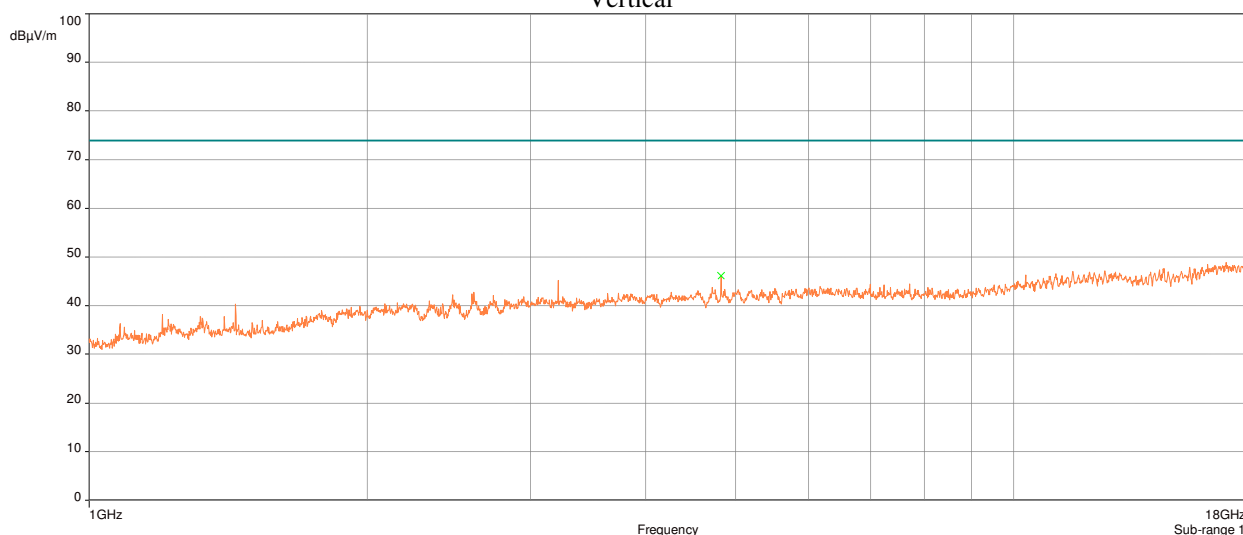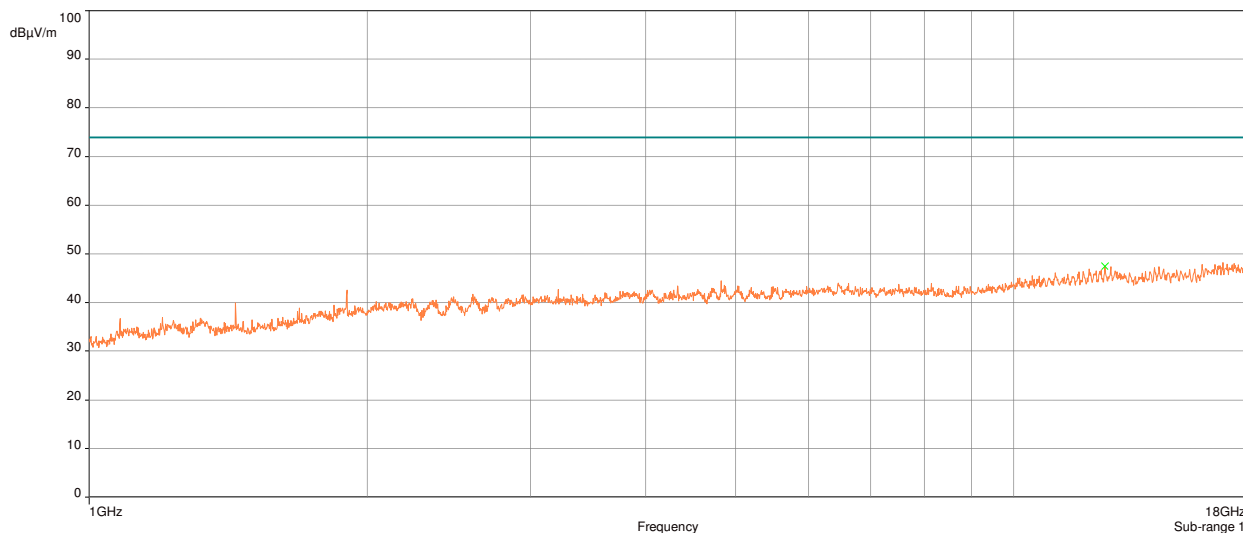



**Plot 4: Radiated Spurious Emissions Requirements, 802.11b, Low Channel 2412MHz, Peak**

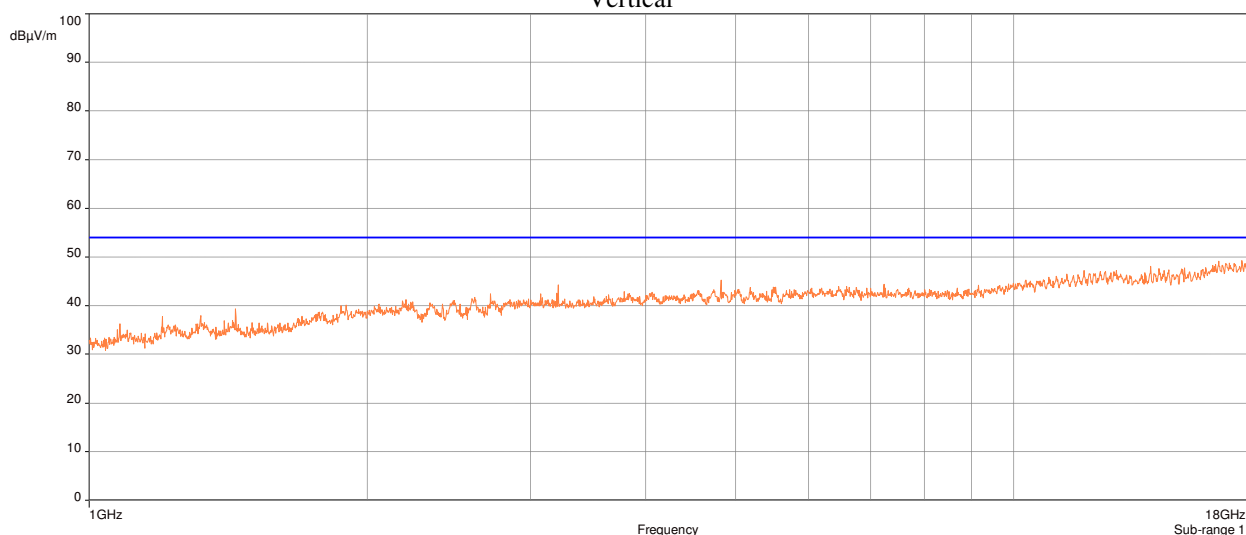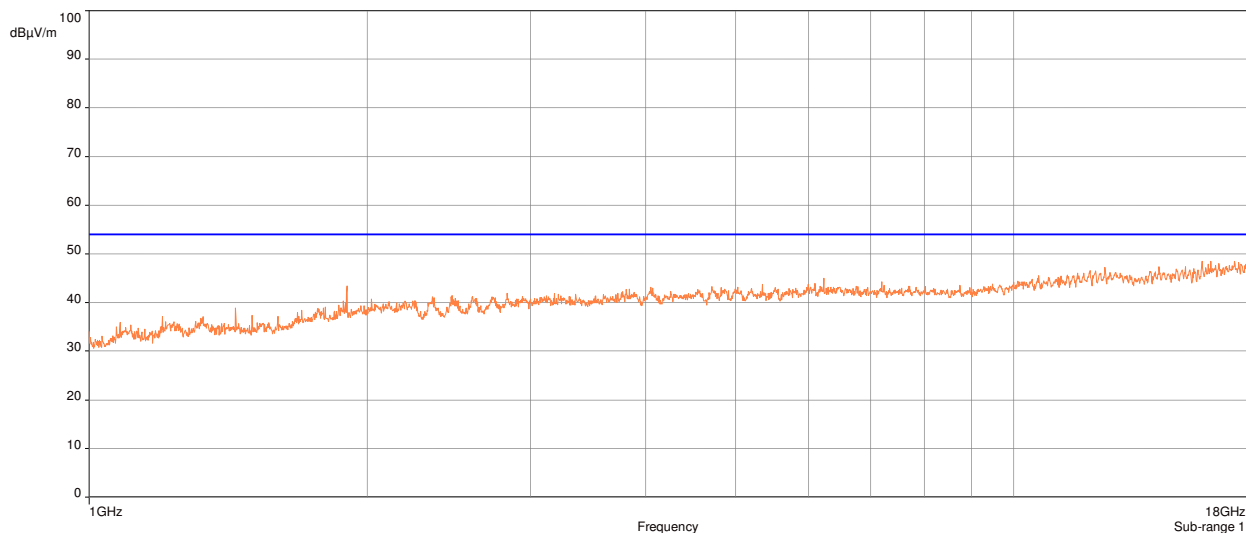



**Plot 5: Radiated Spurious Emissions Requirements, 802.11b, Low Channel 2412MHz, Average**

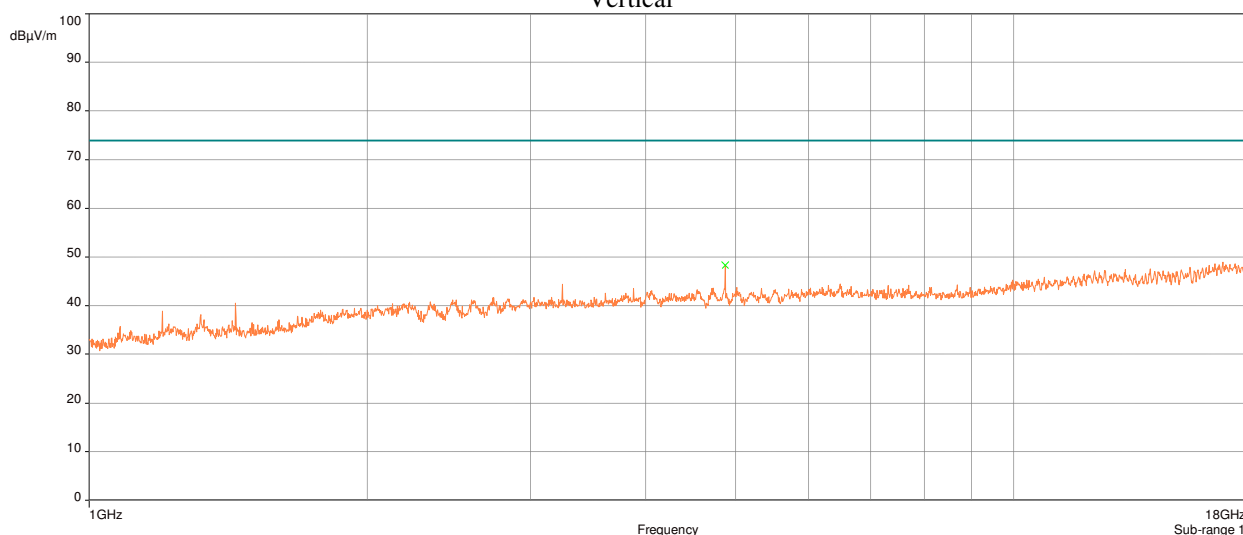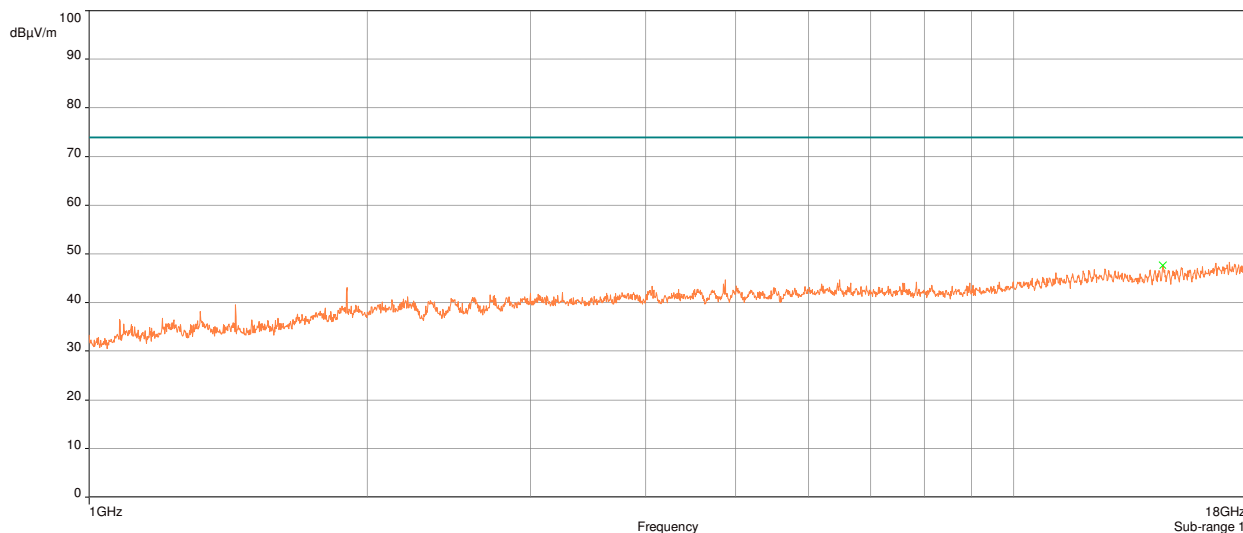



**Plot 6: Radiated Spurious Emissions Requirements, 802.11b, Mid Channel 2437MHz, Peak**

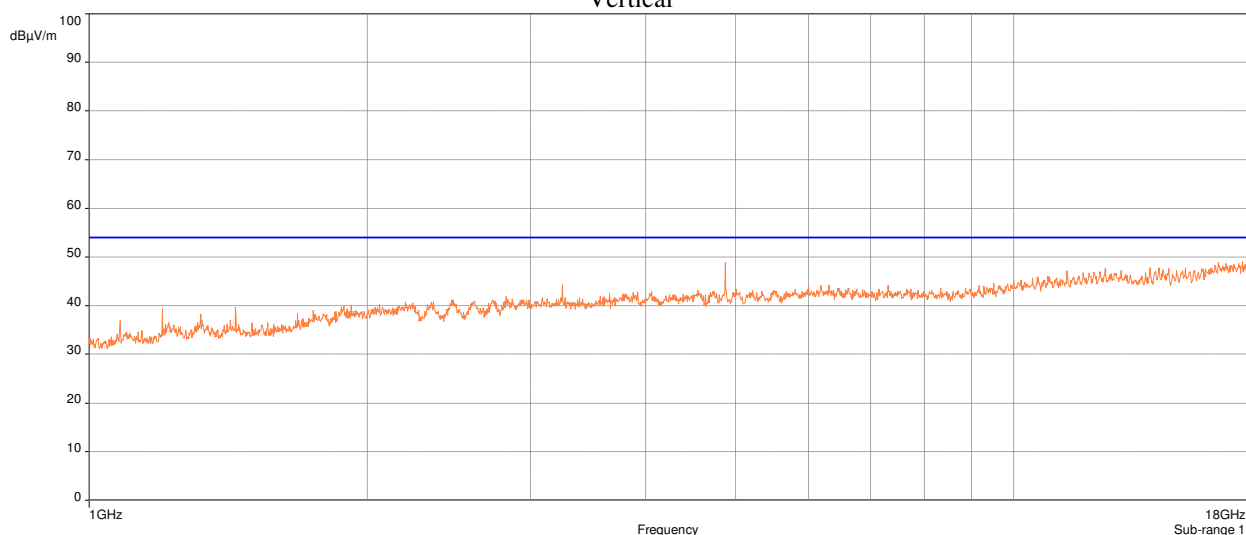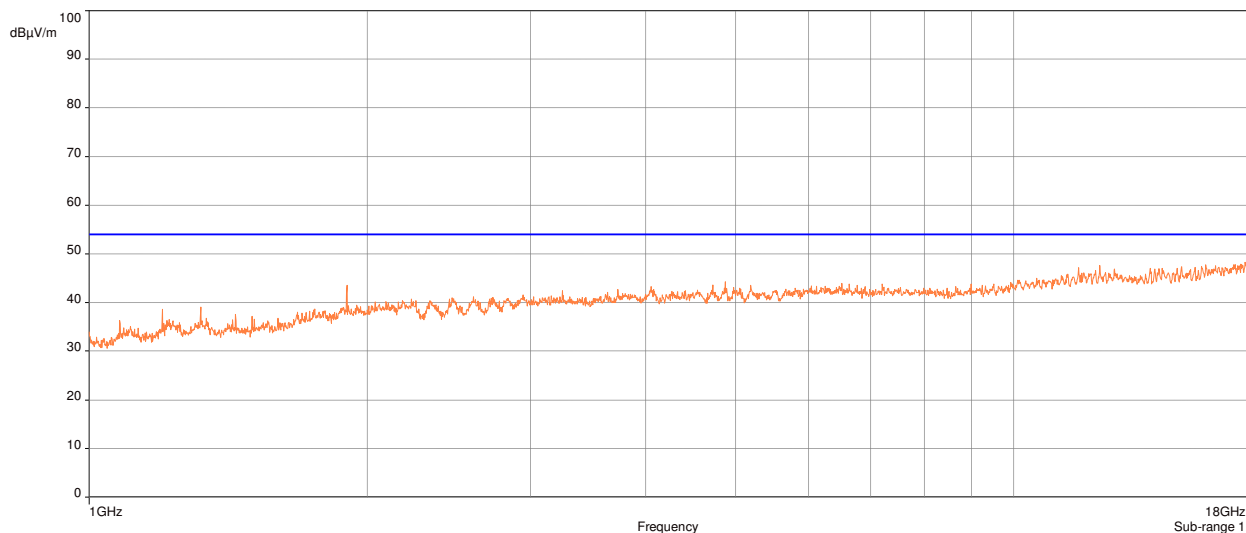



**Plot 7: Radiated Spurious Emissions Requirements, 802.11b, Mid Channel 2412MHz, Average**

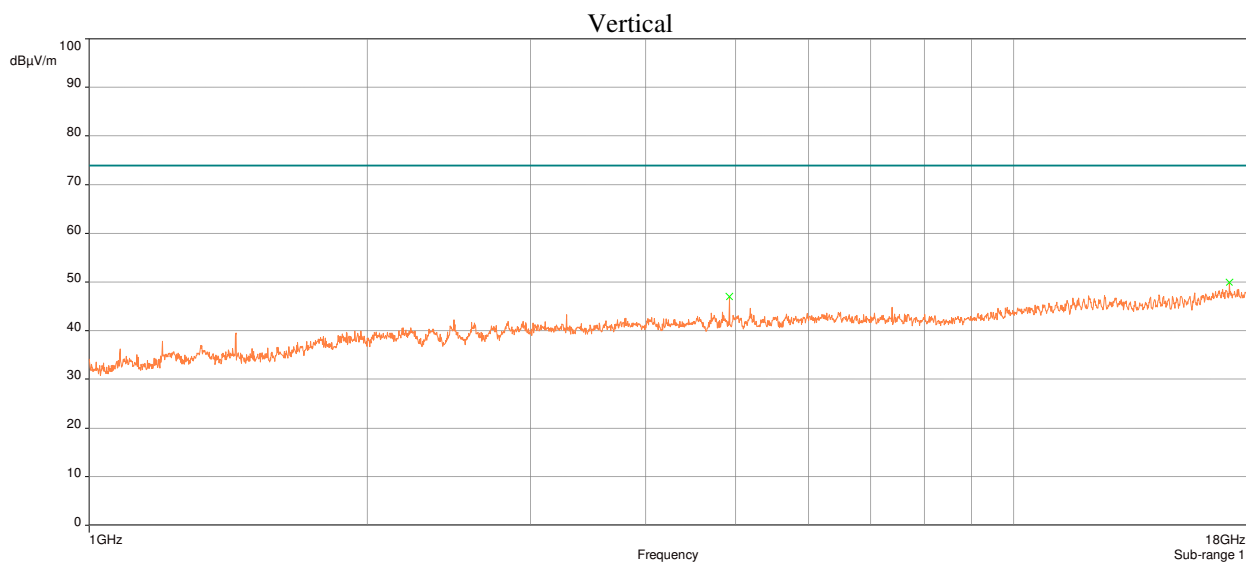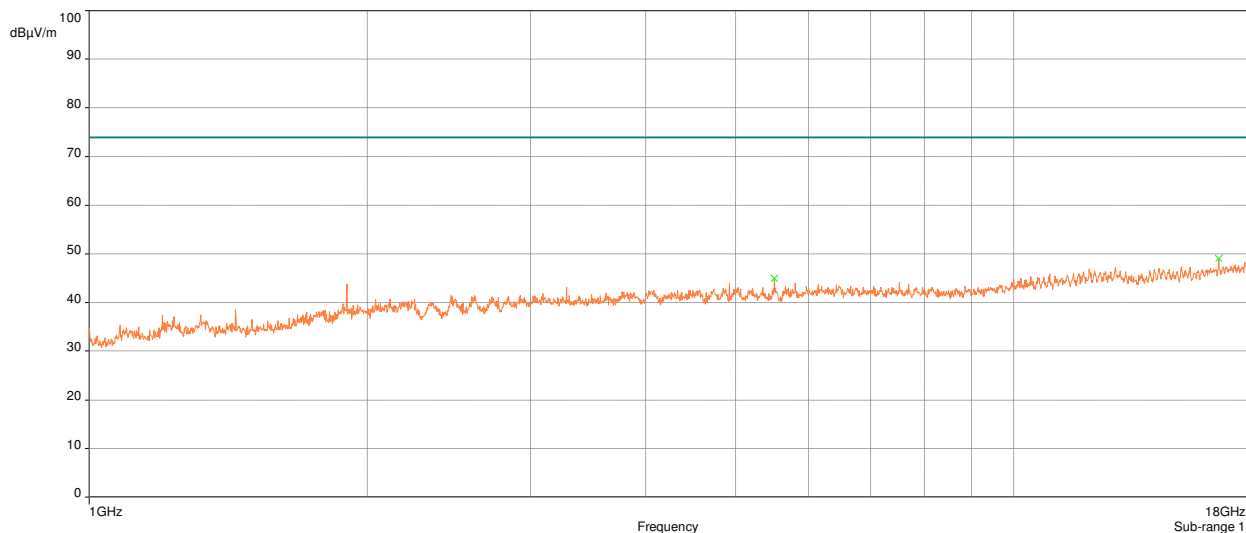



**Plot 8: Radiated Spurious Emissions Requirements, 802.11b, High Channel 2462MHz, Peak**

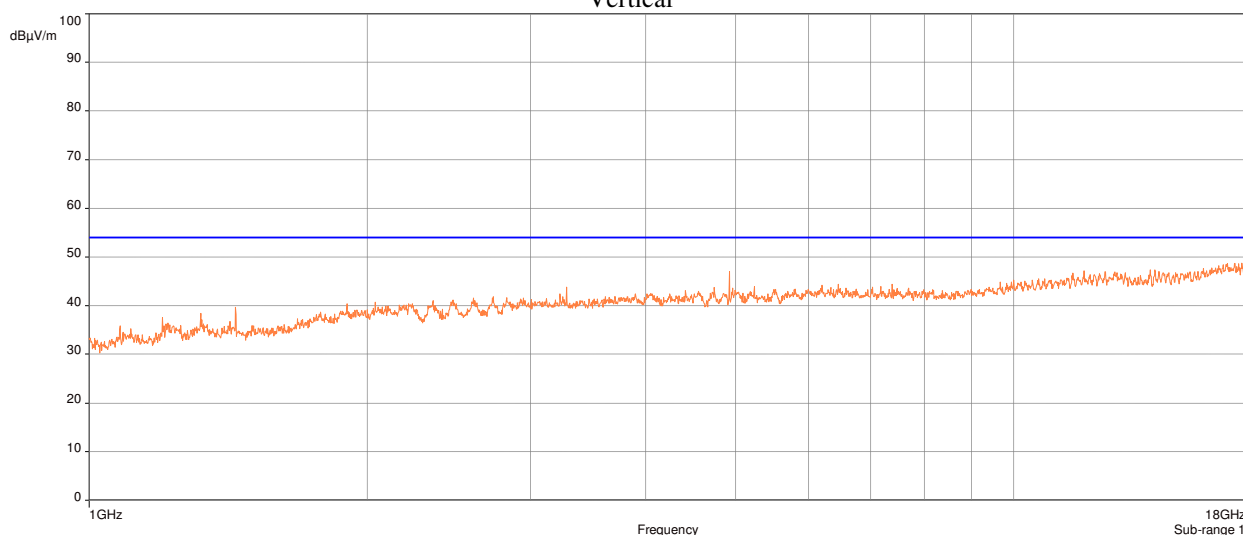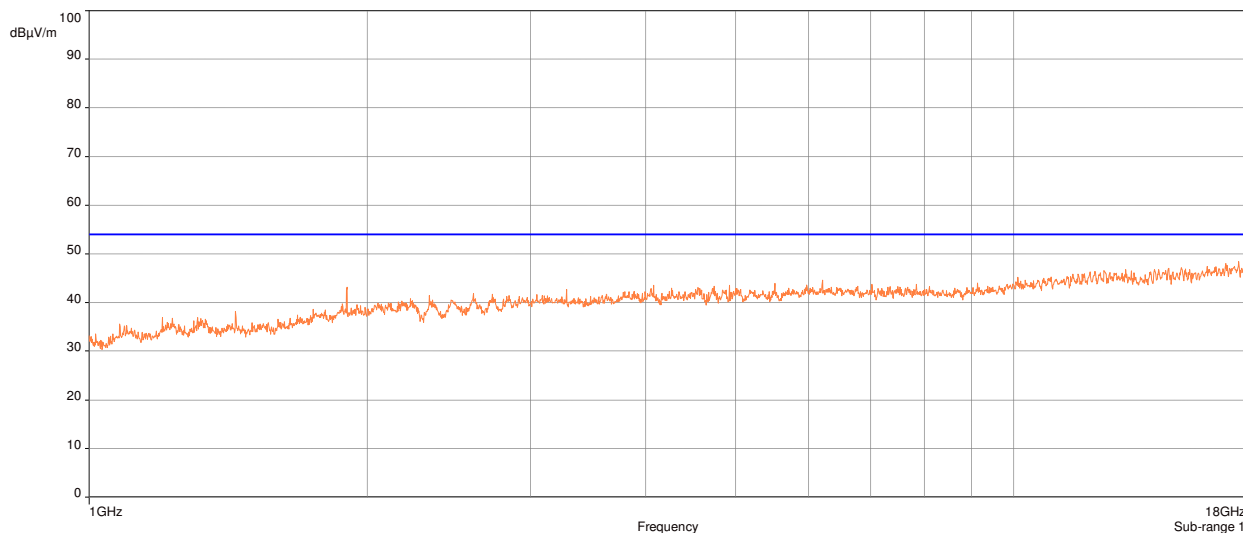



**Plot 9: Radiated Spurious Emissions Requirements, 802.11b, High Channel 2462MHz, Average**

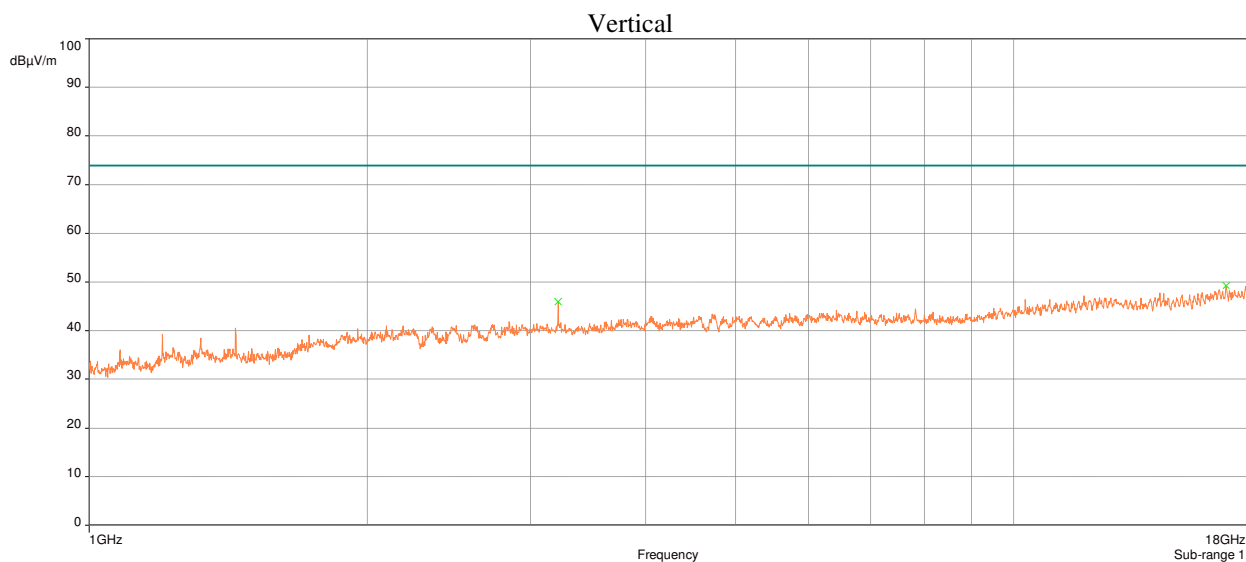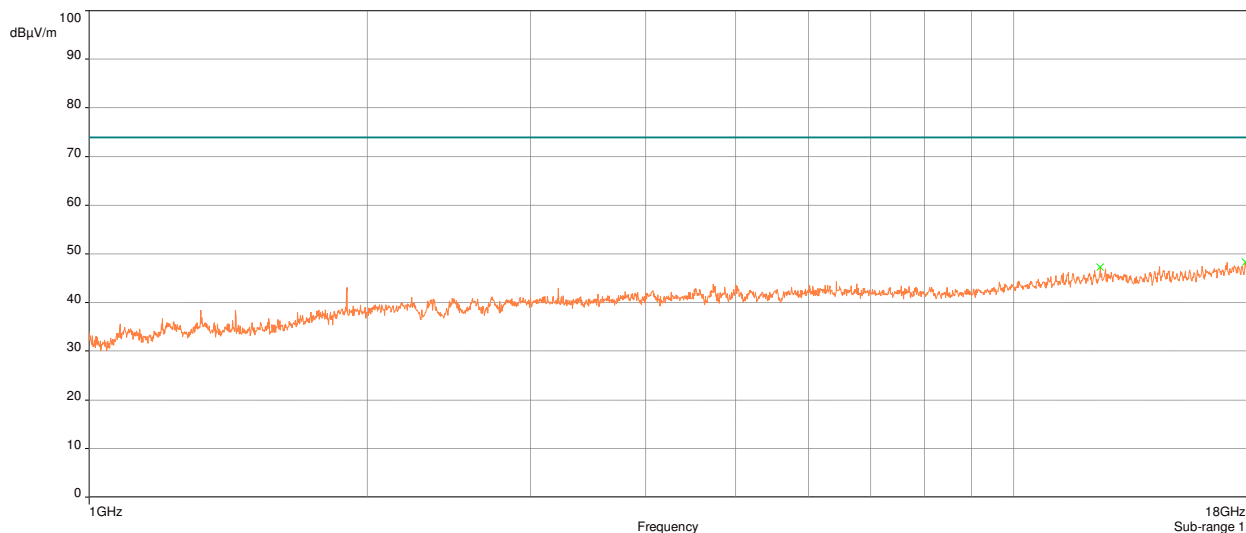



**Plot 10: Radiated Spurious Emissions Requirements, 802.11g, Low Channel 2412MHz, Peak**

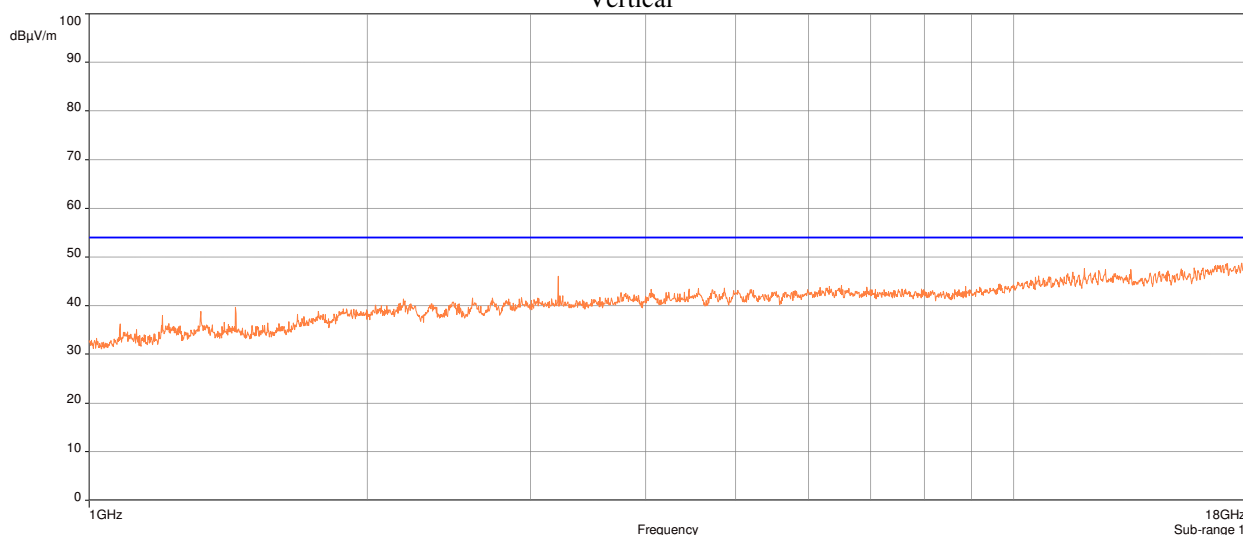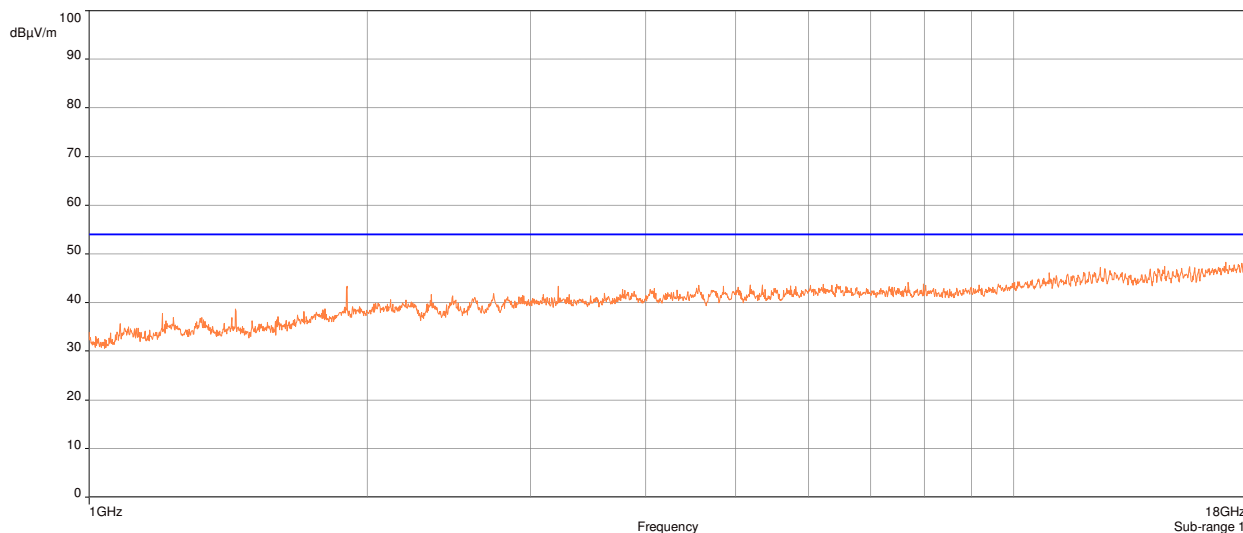



**Plot 11: Radiated Spurious Emissions Requirements, 802.11g, Low Channel 2412MHz, Average**

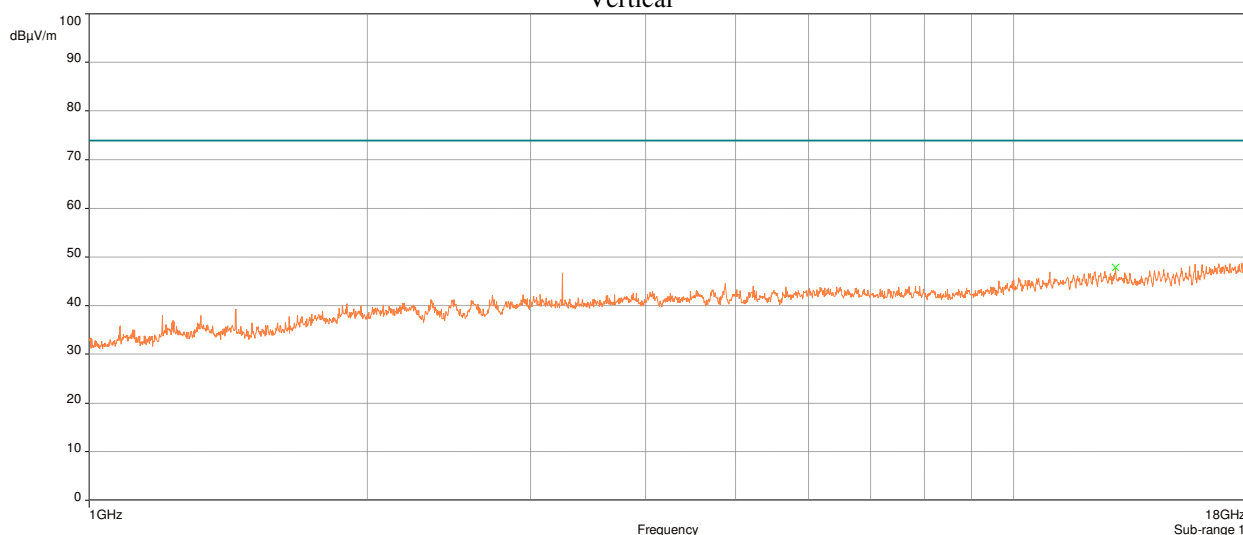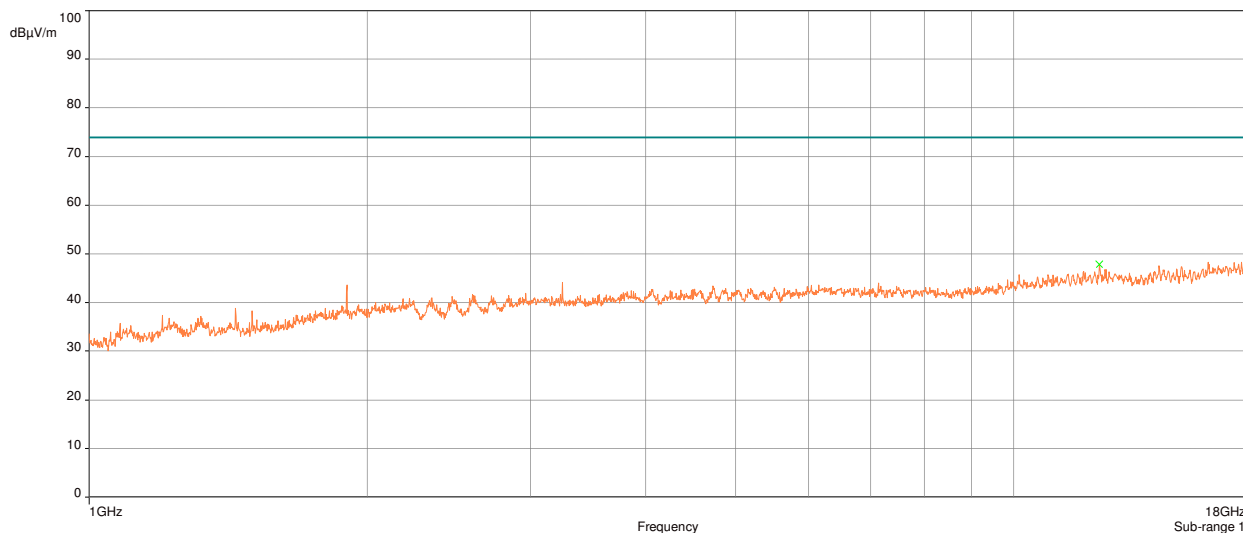



**Plot 12: Radiated Spurious Emissions Requirements, 802.11g, Mid Channel 2437MHz, Peak**

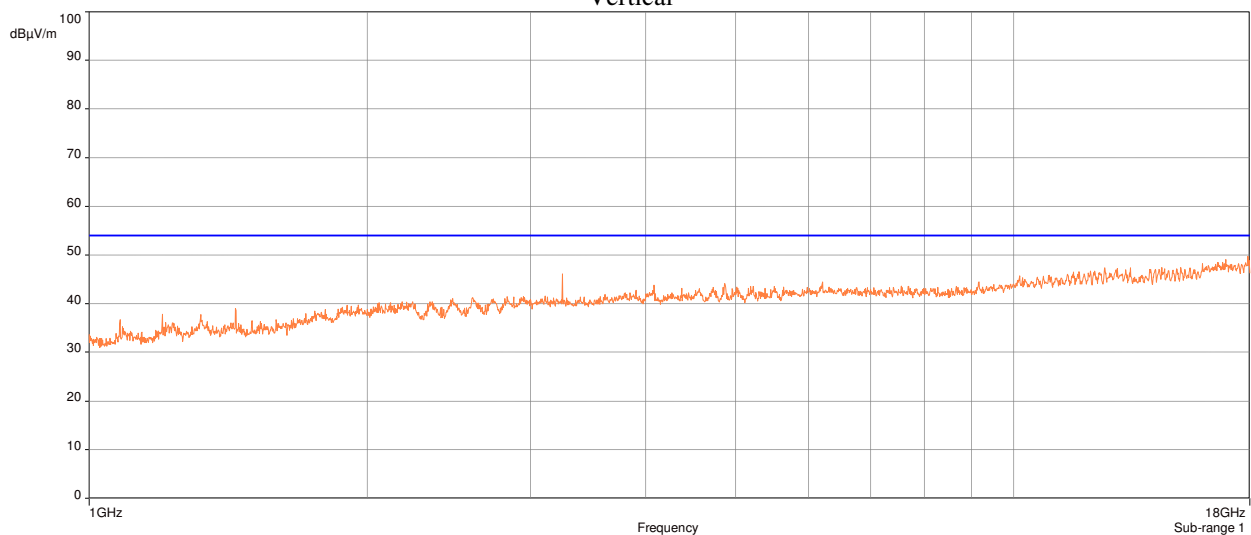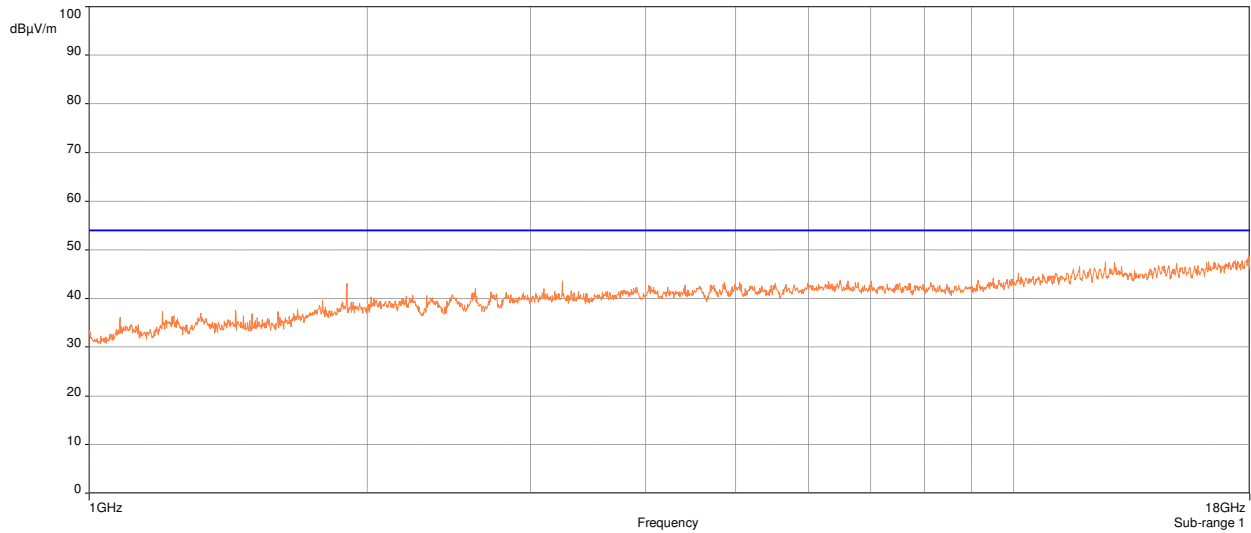



**Plot 13: Radiated Spurious Emissions Requirements, 802.11g, Mid Channel 2437MHz, Average**

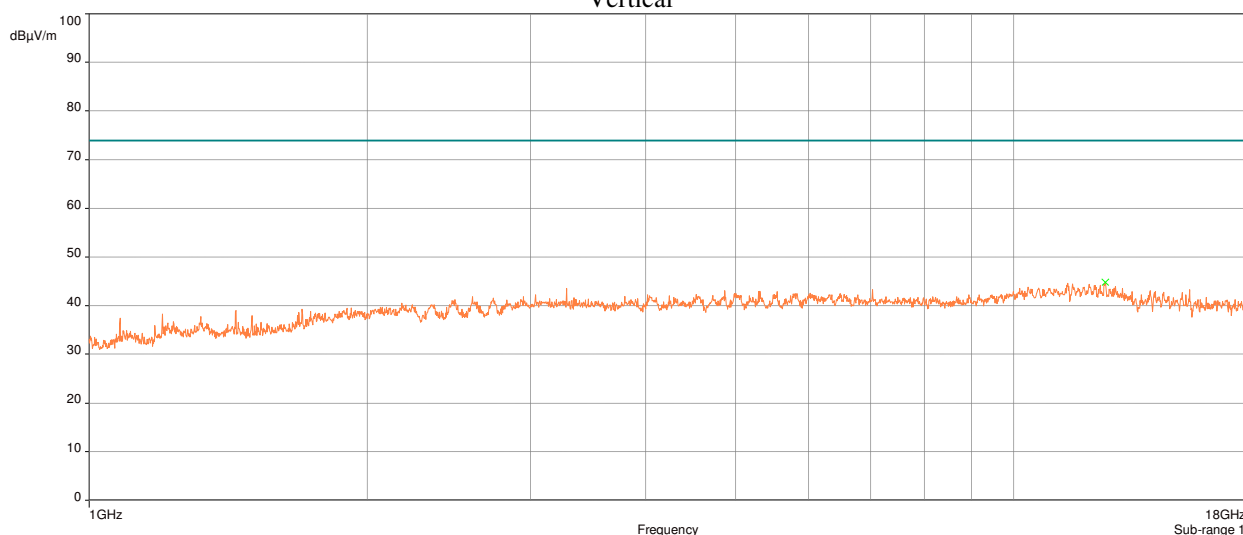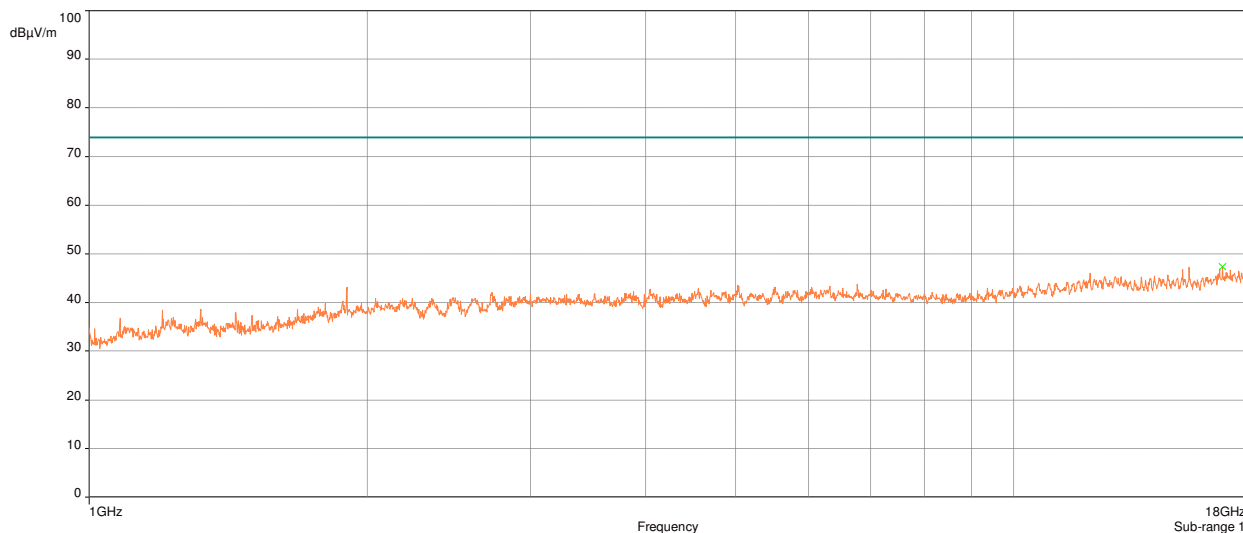



**Plot 14: Radiated Spurious Emissions Requirements, 802.11g, High Channel 2462MHz, Peak**

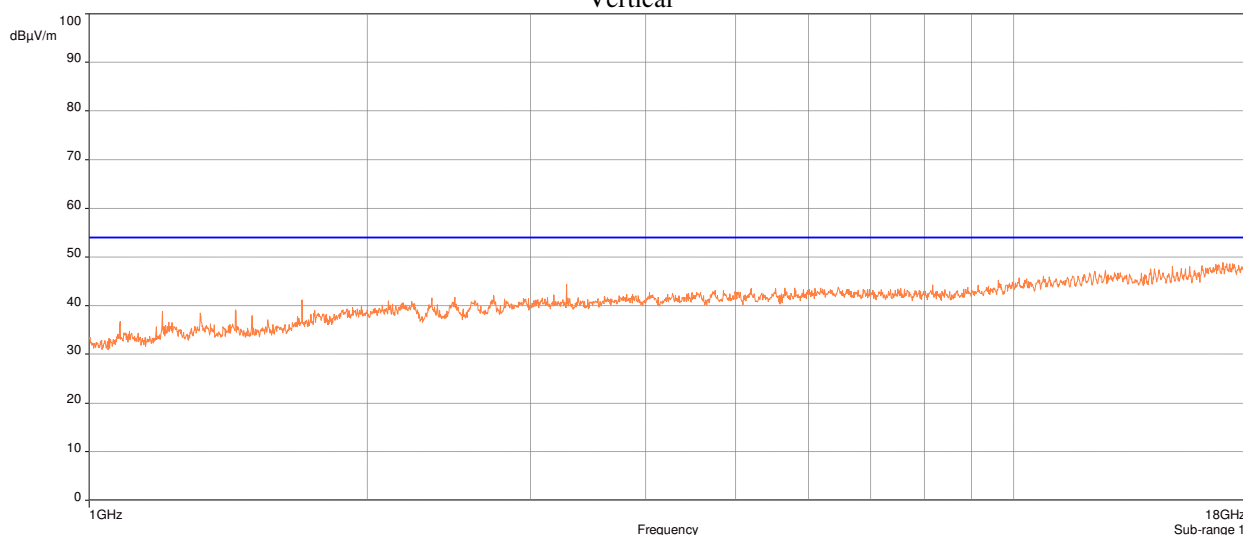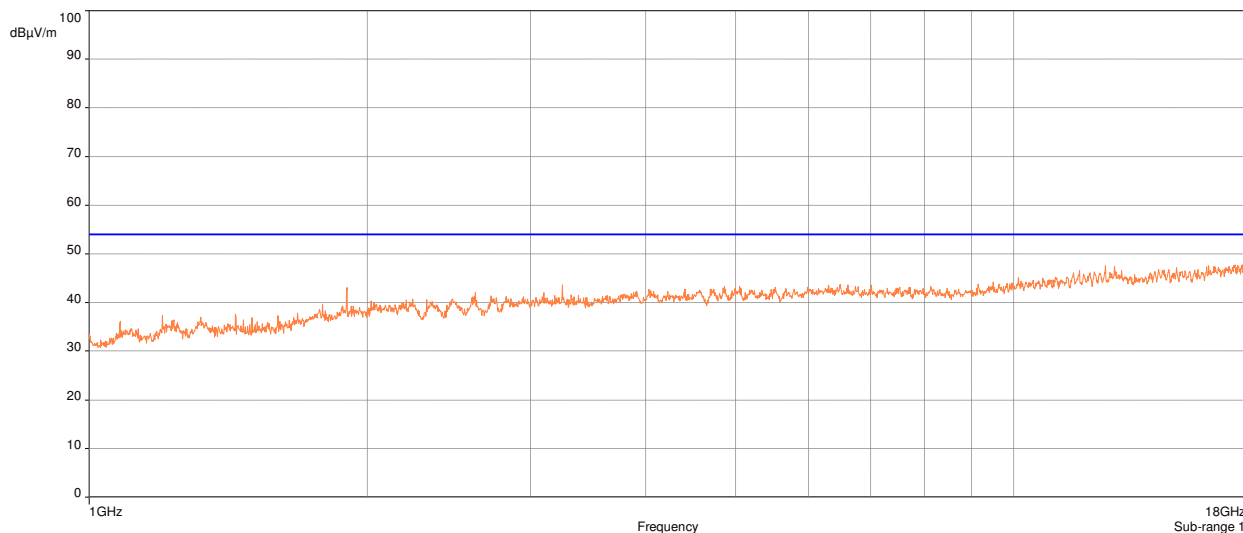



**Plot 15: Radiated Spurious Emissions Requirements, 802.11g, High Channel 2462MHz, Average**

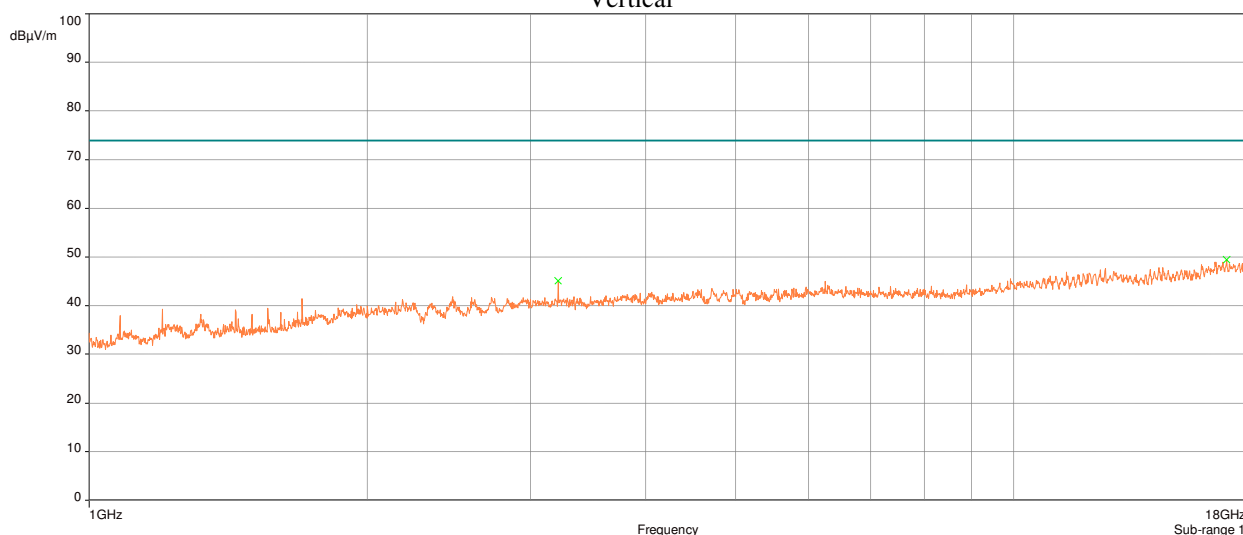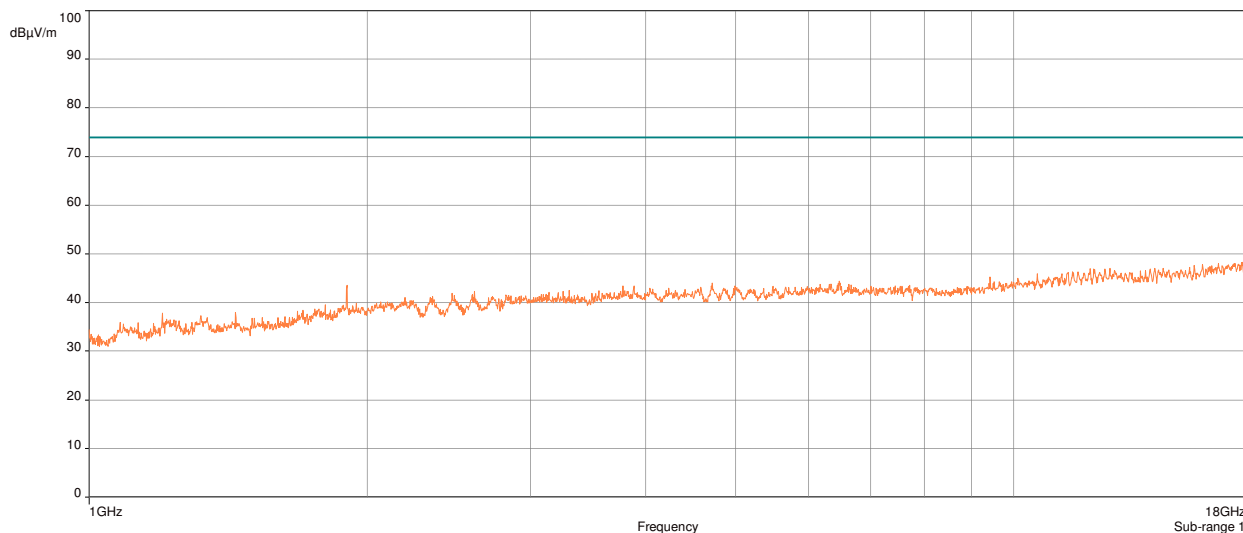



**Plot 16: Radiated Spurious Emissions Requirements, 802.11n, Low Channel 2412MHz, Peak**

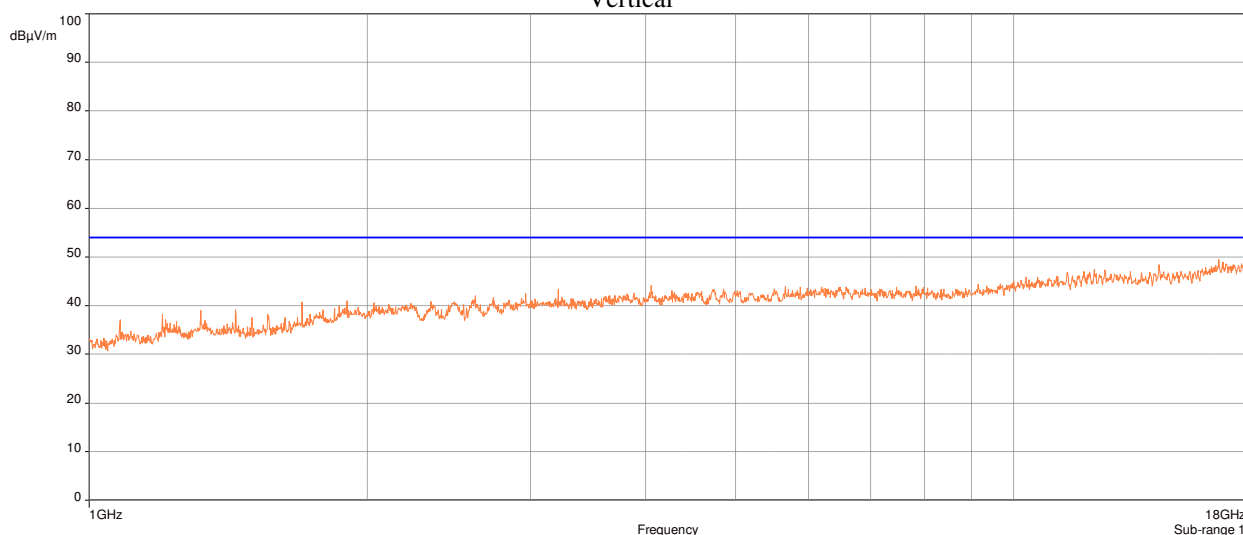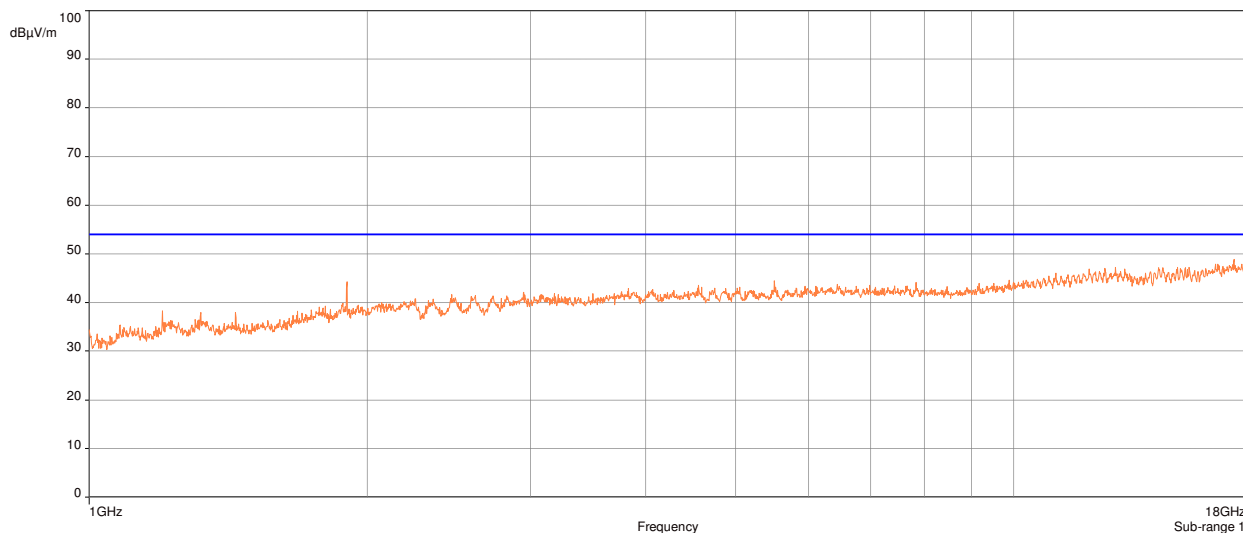



**Plot 17: Radiated Spurious Emissions Requirements, 802.11n, Low Channel 2412MHz, Average**

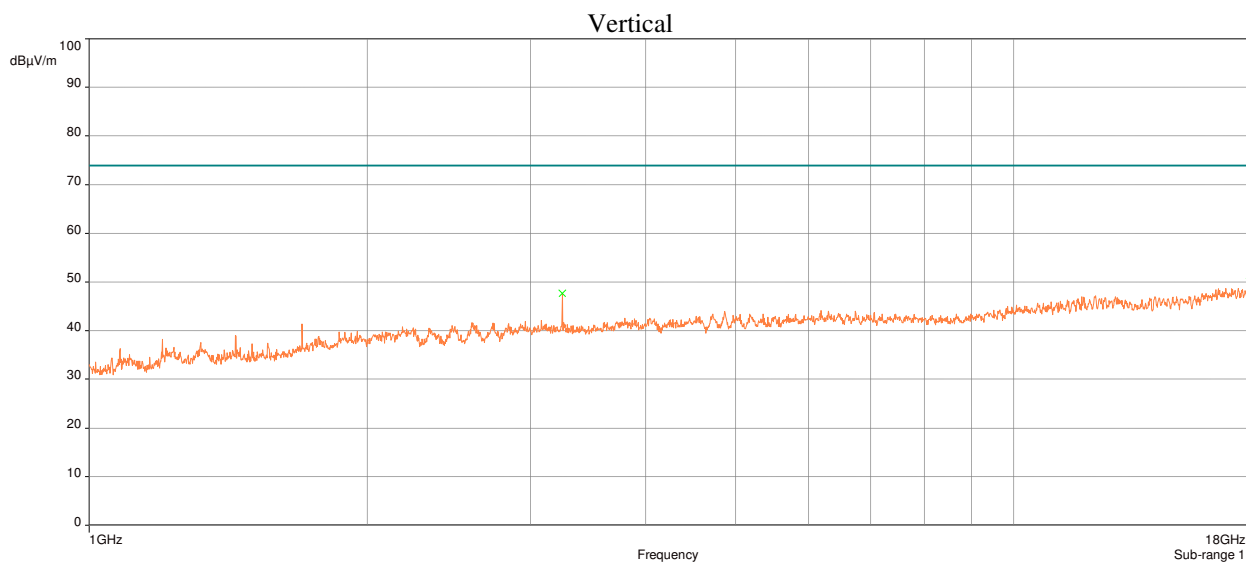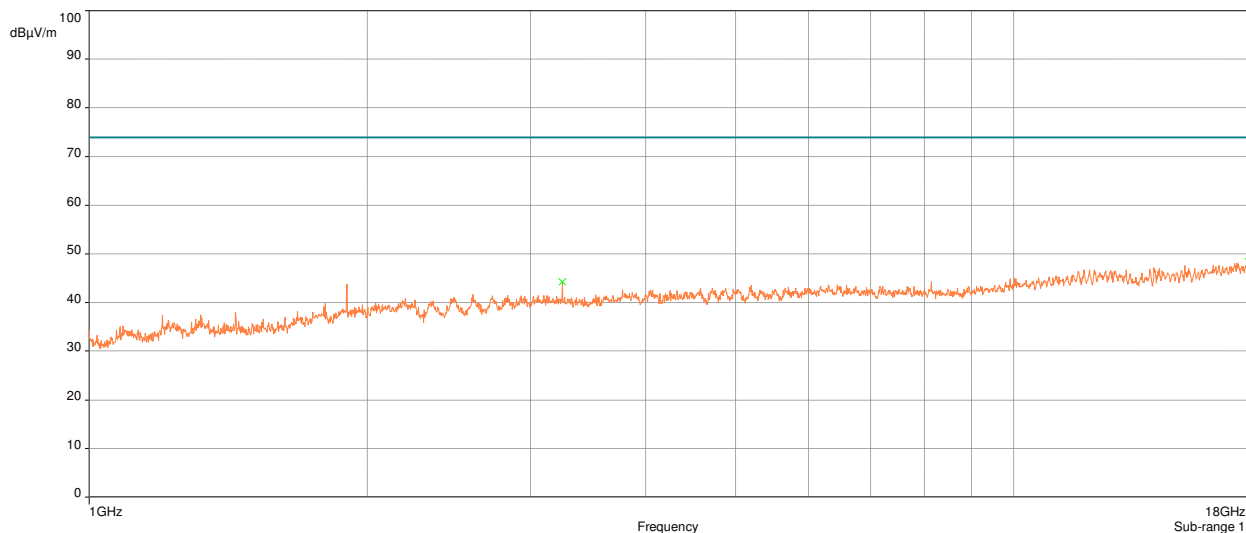


**Plot 18: Radiated Spurious Emissions Requirements, 802.11n, Mid Channel 2437MHz, Peak**

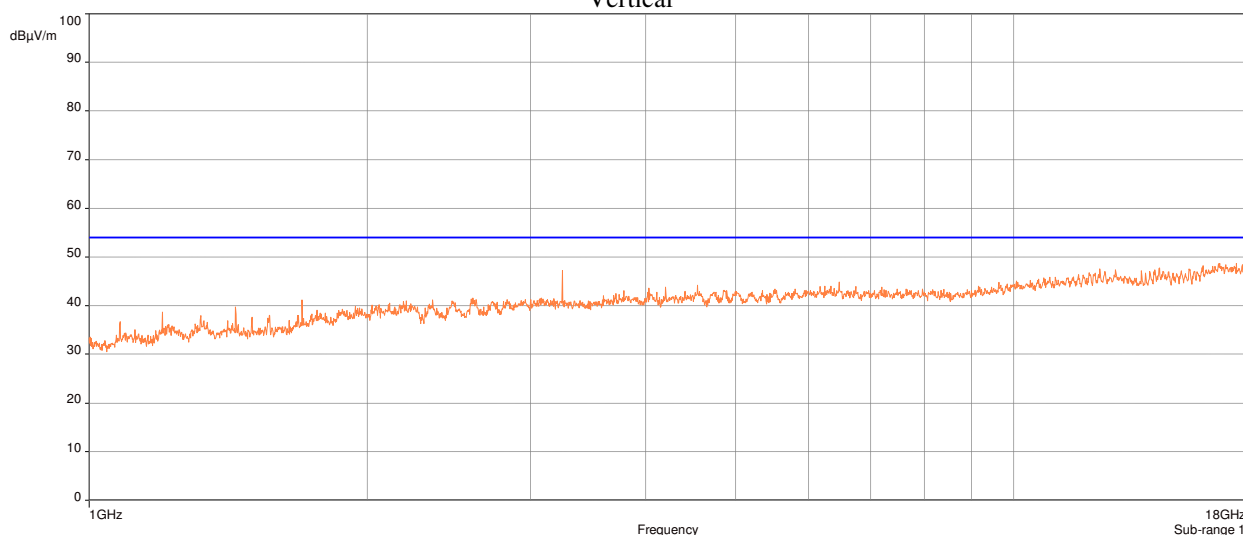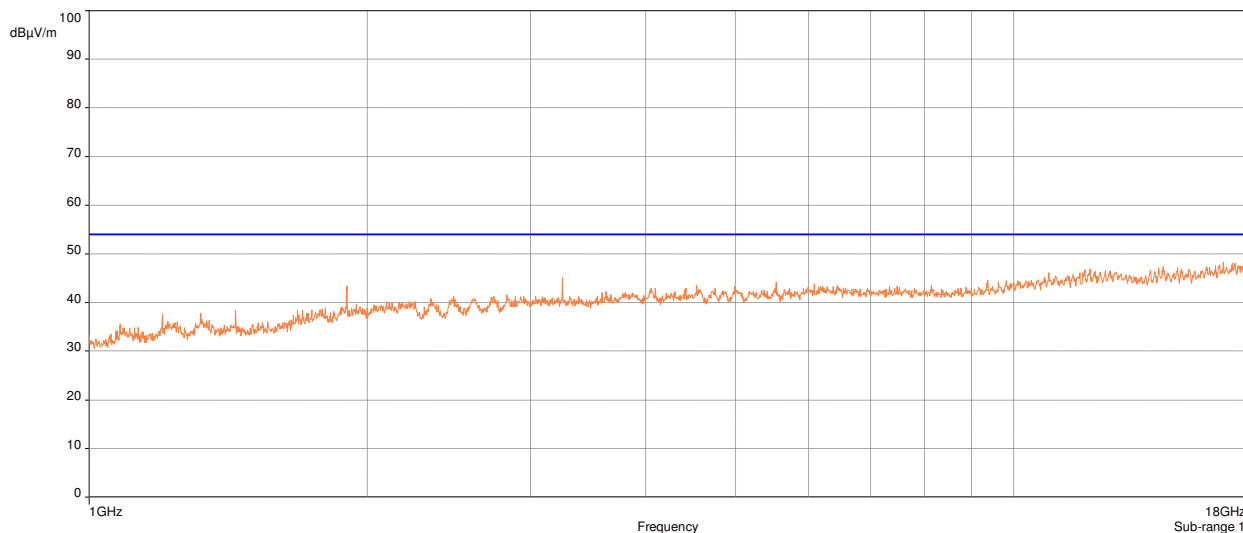


**Plot 19: Radiated Spurious Emissions Requirements, 802.11n, Mid Channel 2437MHz, Average**

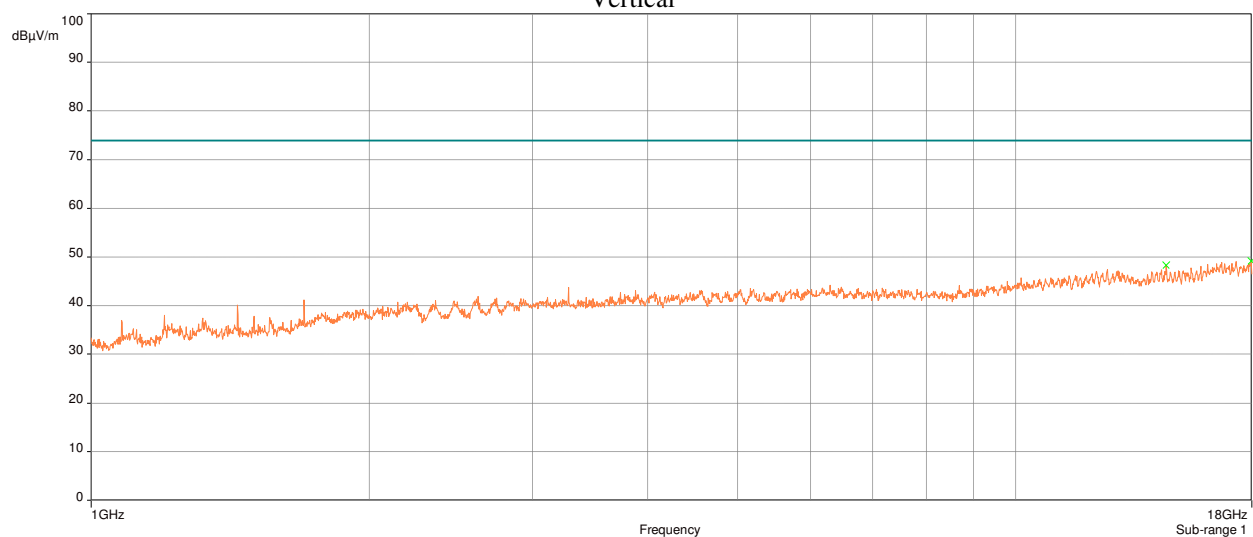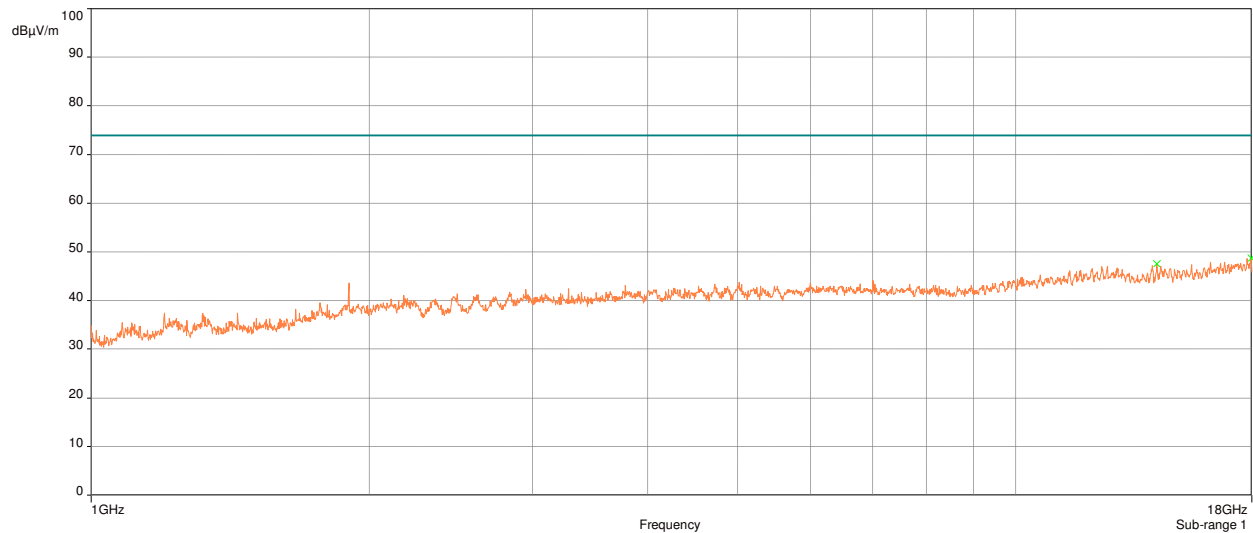

**Plot 20: Radiated Spurious Emissions Requirements, 802.11n, High Channel 2462MHz, Peak**

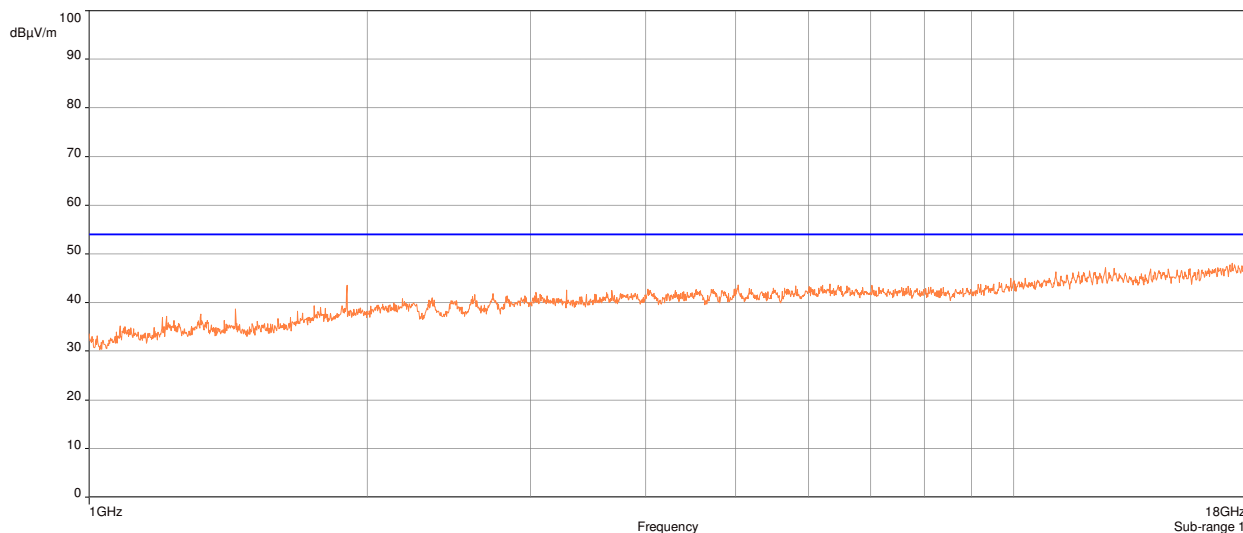

**Vertical**

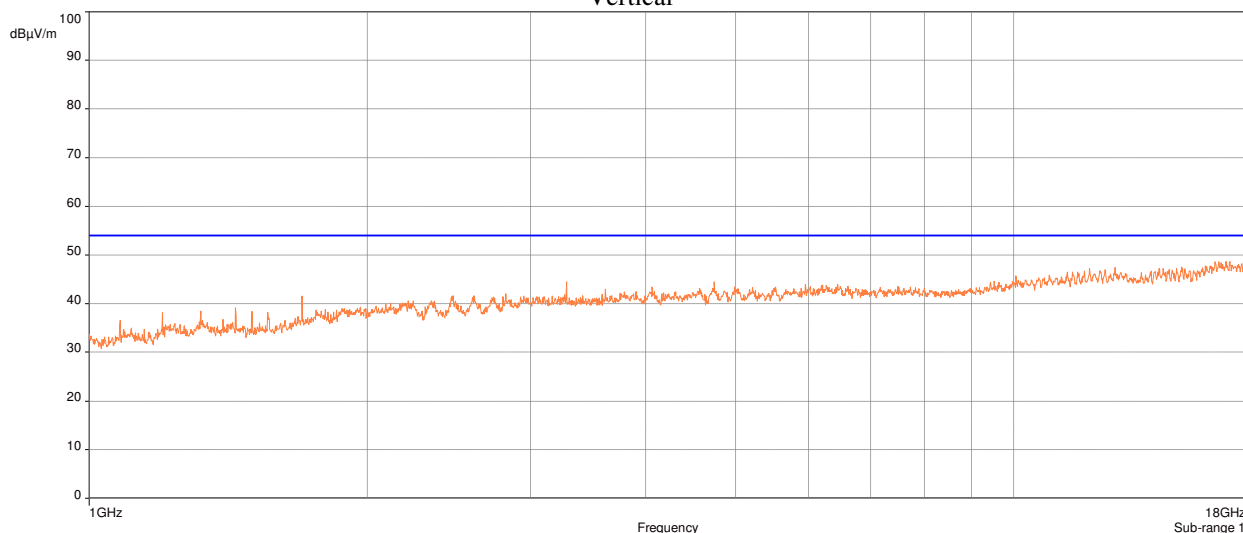

**Horizontal**

**Plot 21: Radiated Spurious Emissions Requirements, 802.11n, High Channel 2462MHz, Average**

## **IV. Test Equipment**

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

ASSET #	NOMENCLATURE	MANUFACTURER	MODEL	LAST CAL	CAL DUE
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	FUNCTIONAL VERIFY	
1S3928	EMI TESTER RECEIVER	ROHDE & SCHWARZ	ESR26	03/04/2020	03/04/2021
1S2600	BILOG ANTENNA	TESEQ	CBL6112D	03/19/2019	03/19/2021
1S2486	5 METER CHAMBER CONTROL ROOM	PANASHIELD	5 METER CONTROL ROOM	FUNCTIONAL VERIFY	
1S3926	1MHZ STEP, 1GHZ COMBO GENERATOR	COM-POWER CORP	CGO-501	FUNCTIONAL VERIFY	
1S4067	DIGITAL BAROMETER	CONTROL CO	6530	06/22/2020	06/22/2022
1S2481	10 METER CHAMBER	ETS-LINGREN	DKE-8X8 DBL	FUNCTIONAL VERIFY	
1S380	EMI RECEIVER	NARDA SAFETY TEST SOLUTIONS	PMM 9010F	8/23/2020	8/23/2021
1S245	COMB GENERATOR (RADIATED)	COM-POWER	GG510	FUNCTIONAL VERIFY	
1S2599	LASER PROBE INTERFACE	AMPLIFIER RESEARCH	F1700	FUNCTIONAL VERIFY	
1S2603	DOUBLE RIDGED WAVEGUIDE HORN	ETS-LINDGREN	3117	09/18/2020	09/18/2022
1S2000	SPECTRUM ANALYZER	AGILENT	E4448A	11/06/2020	11/06/2022
1S3818	DRG HORN ANTENNA	A.H. SYSTEMS, INC	SAS-574	09/24/2020	09/24/2022

**Table 14: Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

**End of Report**