

54_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865

Communication System: Band 26; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.956 W/kg; SAR (10g) = 0.630 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.987 W/kg; SAR (10g) = 0.561 W/kg;

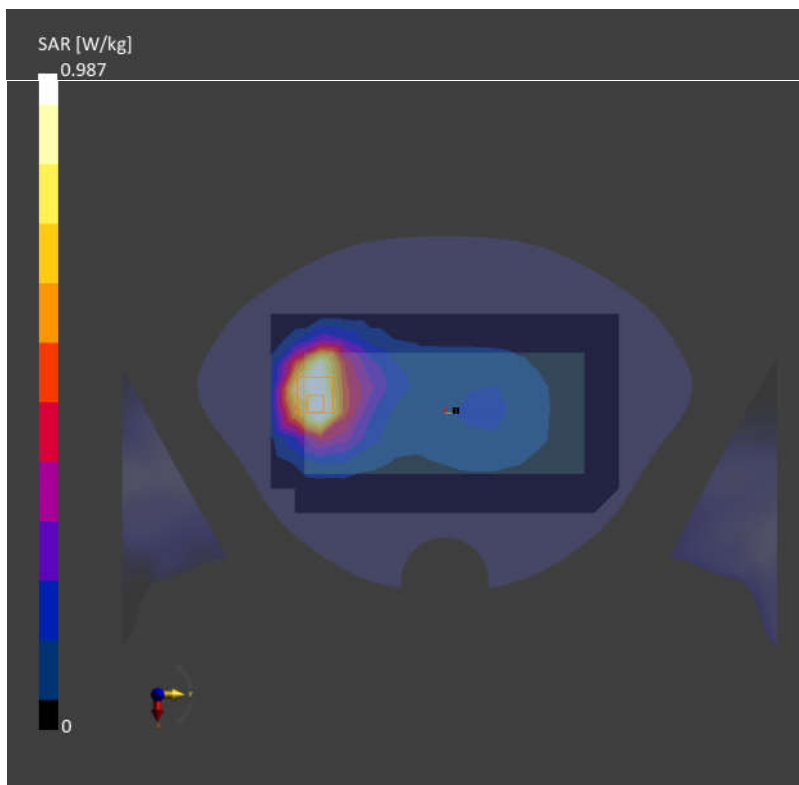

55_FR1 n26_20M_QPSK_100RB_0Offset_Back_5mm_Ch166300

Communication System: Band n26; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.302 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.364 W/kg;

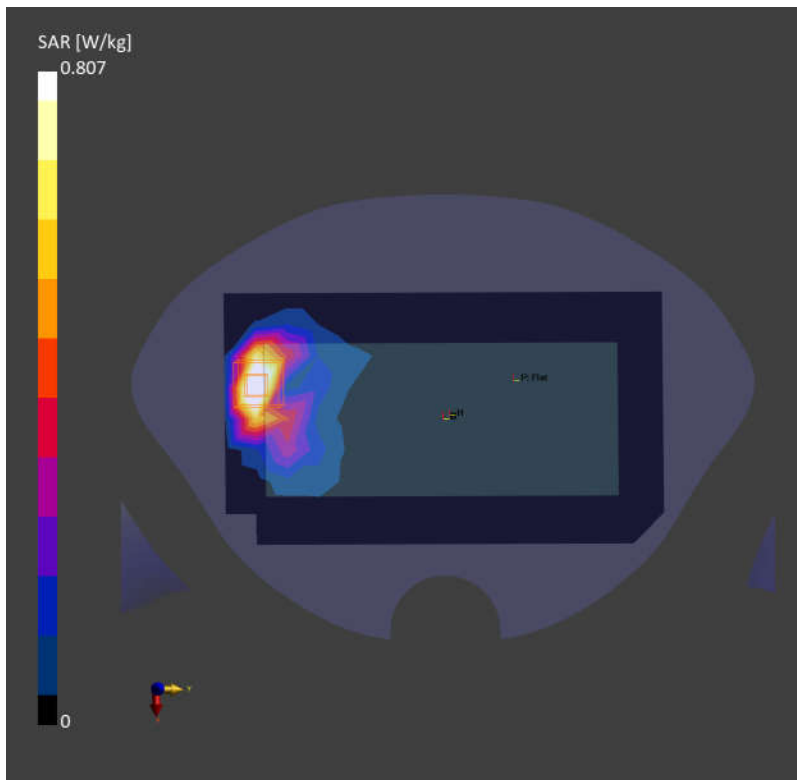

56_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513

Communication System: Band 4; Frequency: 1752.6

Medium: HSL. Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.887 W/kg; SAR (10g) = 0.452 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.925 W/kg; SAR (10g) = 0.561 W/kg;

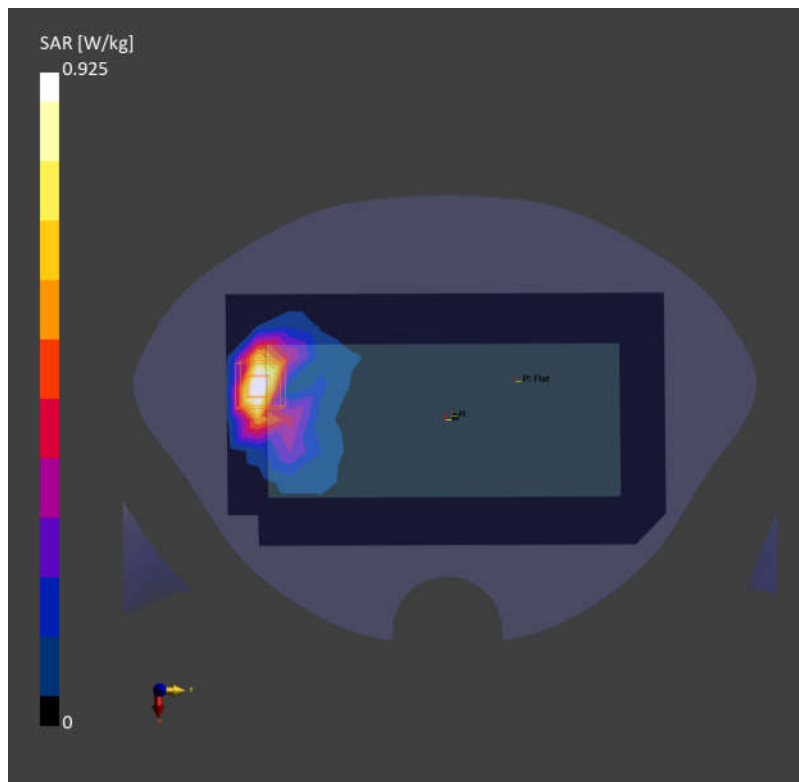

57_LTE Band 66_20M_QPSK_1RB_0Offset_Back_5mm_Ch132072

Communication System: Band 66; Frequency: 1720.0

Medium: HSL. Medium parameters used: $f = 1720.0$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.907 W/kg; SAR (10g) = 0.486 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.952 W/kg; SAR (10g) = 0.533 W/kg;

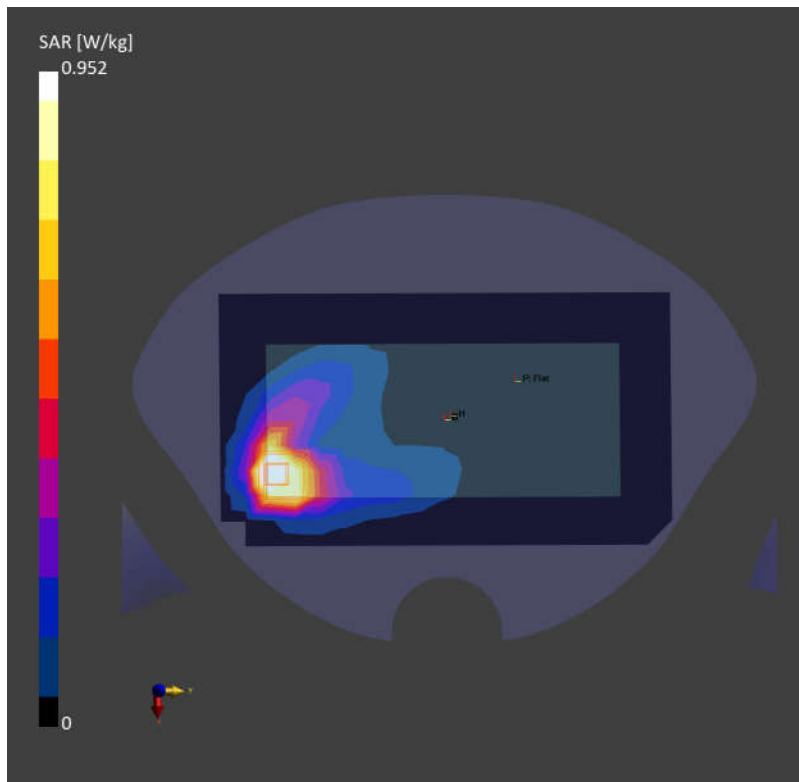

58_FR1 n66_40M_QPSK_216RB_0Offset_Back_5mm_Ch349000

Communication System: Band n66; Frequency: 1745.0

Medium: HSL. Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.914 W/kg; SAR (10g) = 0.482 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.8 mm x 5.8 mm x 1.5 mm

Power Drift = -0.19 dB

SAR (1g) = 0.959 W/kg; SAR (10g) = 0.424 W/kg;

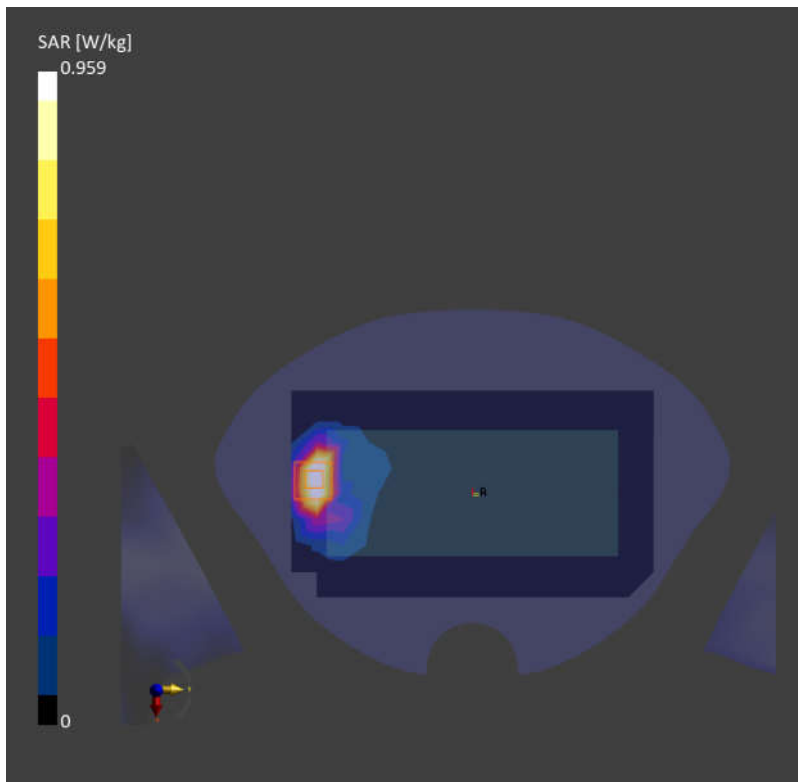

59_GSM1900_GPRS (3 Tx slots)_Back_5mm_Ch512

Communication System: PCS 1900; Frequency: 1850.2

Medium: HSL. Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.359 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.902 W/kg; SAR (10g) = 0.435 W/kg;

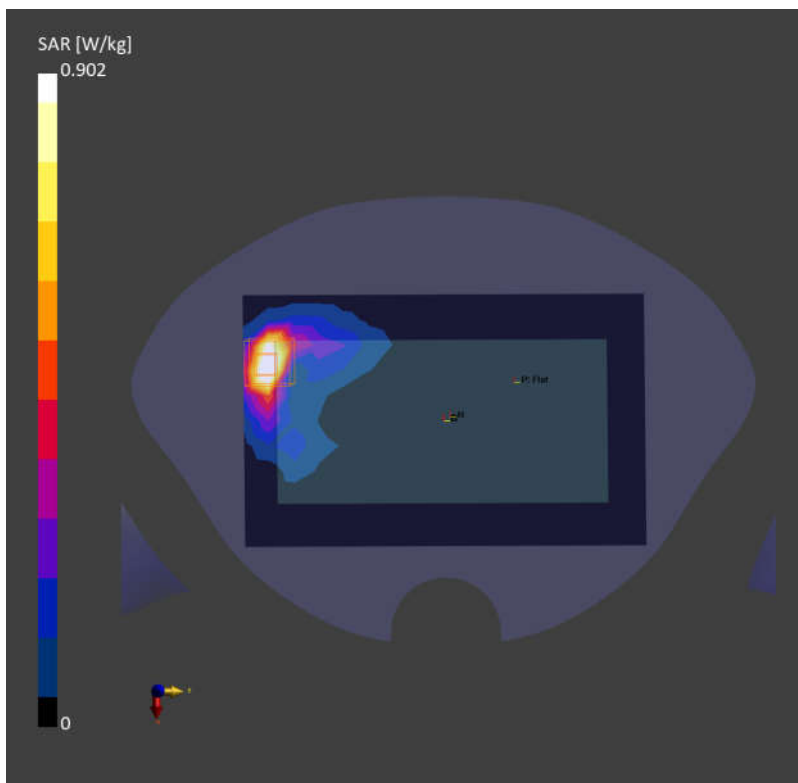

60_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9538

Communication System: Band 2; Frequency: 1907.6

Medium: HSL. Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.925 W/kg; SAR (10g) = 0.453 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.942 W/kg; SAR (10g) = 0.473 W/kg;

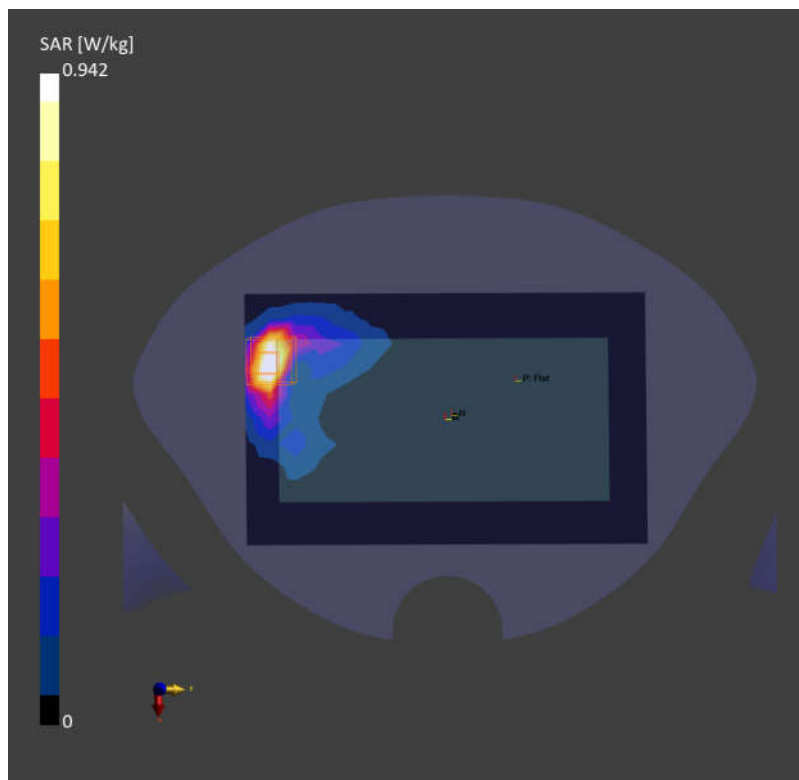

61_LTE Band 25_20M_QPSK_1RB_0Offset_Back_5mm_Ch26590

Communication System: Band 25; Frequency: 1905.0

Medium: HSL. Medium parameters used: $f = 1905.0$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.496 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 0.922 W/kg; SAR (10g) = 0.481 W/kg;

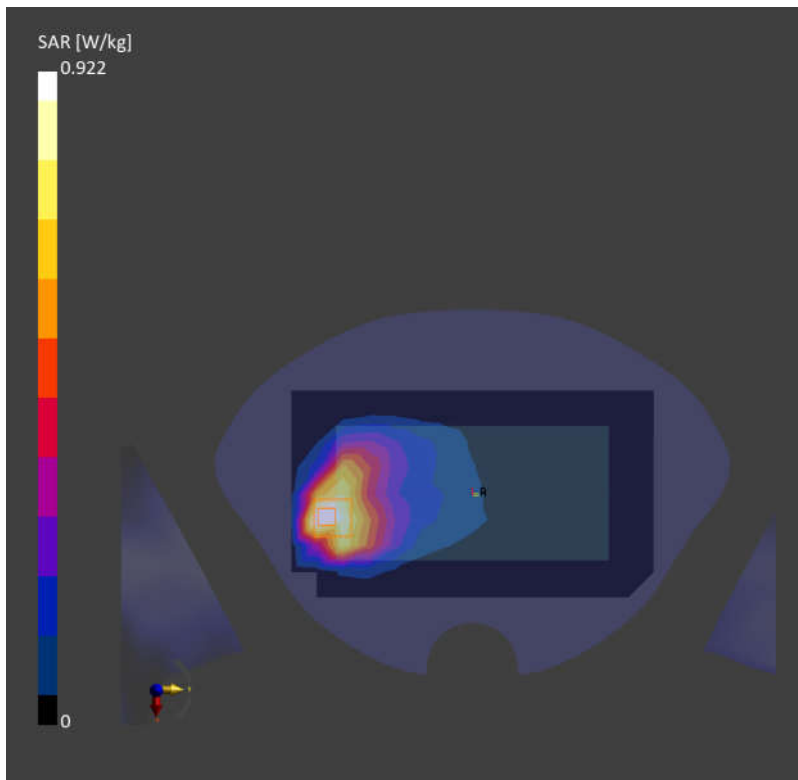

62_FR1 n2_20M_QPSK_100RB_0Offset_Back_5mm_Ch376000

Communication System: Band n2; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.914 W/kg; SAR (10g) = 0.502 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.564 W/kg;

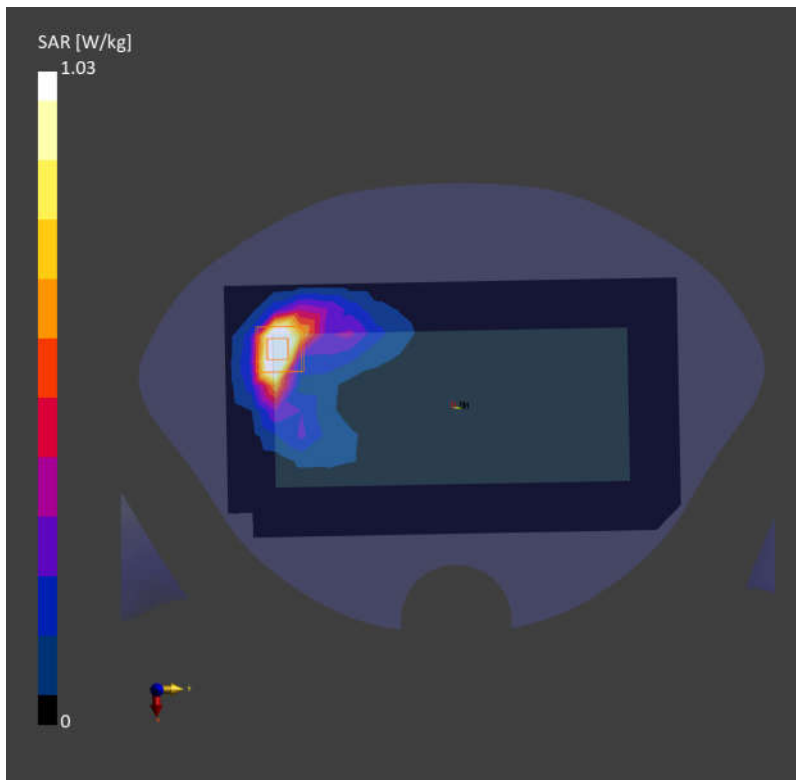

63_LTE Band 7_20M_QPSK_1RB_0Offset_Back_5mm_Ch21350

Communication System: Band 7; Frequency: 2560.0

Medium: HSL. Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.915 W/kg; SAR (10g) = 0.368 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 0.932 W/kg; SAR (10g) = 0.396 W/kg;

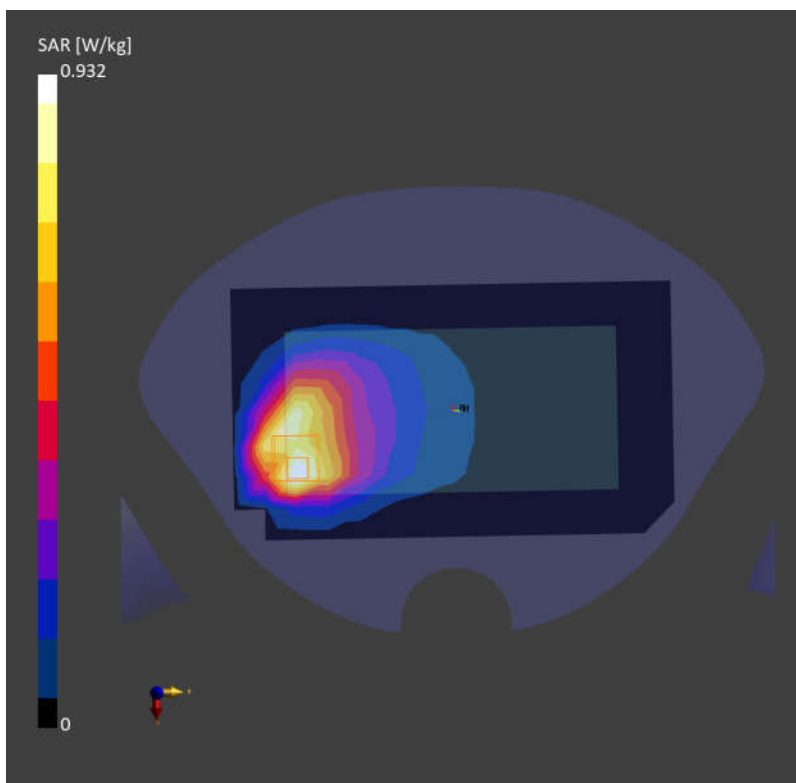

64_LTE Band 41_20M_QPSK_1RB_0Offset_Back_5mm_Ch39750

Communication System: Band 41, E-UTRA/TDD; Frequency: 2506.0

Medium: HSL. Medium parameters used: $f = 2506.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.905 W/kg; SAR (10g) = 0.408 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.932 W/kg; SAR (10g) = 0.411 W/kg;

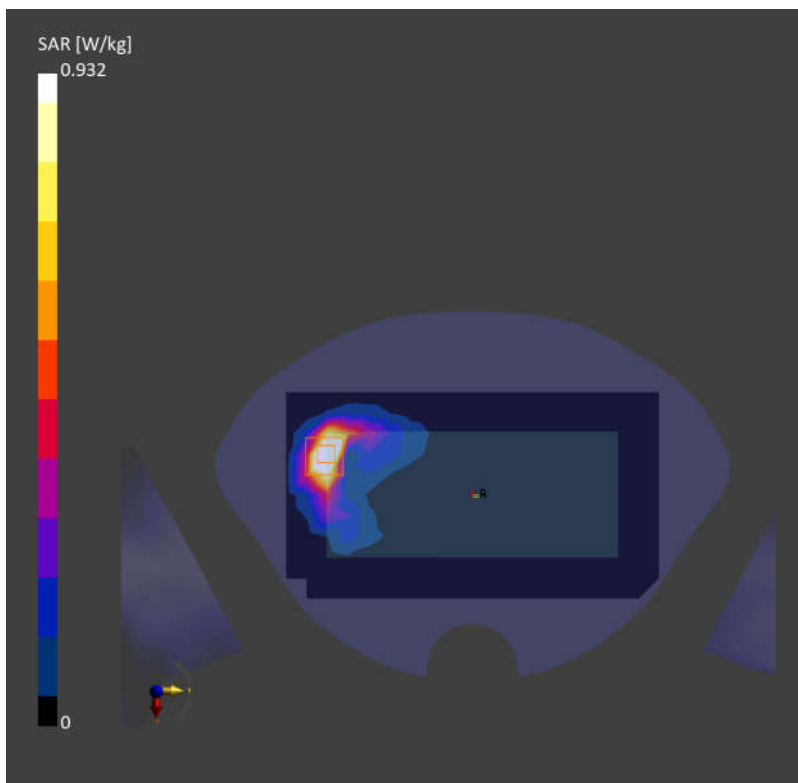

65_FR1 n7_40M_QPSK_216RB_0Offset_Back_5mm_Ch507000

Communication System: Band n7; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.776 W/kg; SAR (10g) = 0.387 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.840 W/kg; SAR (10g) = 0.396 W/kg;

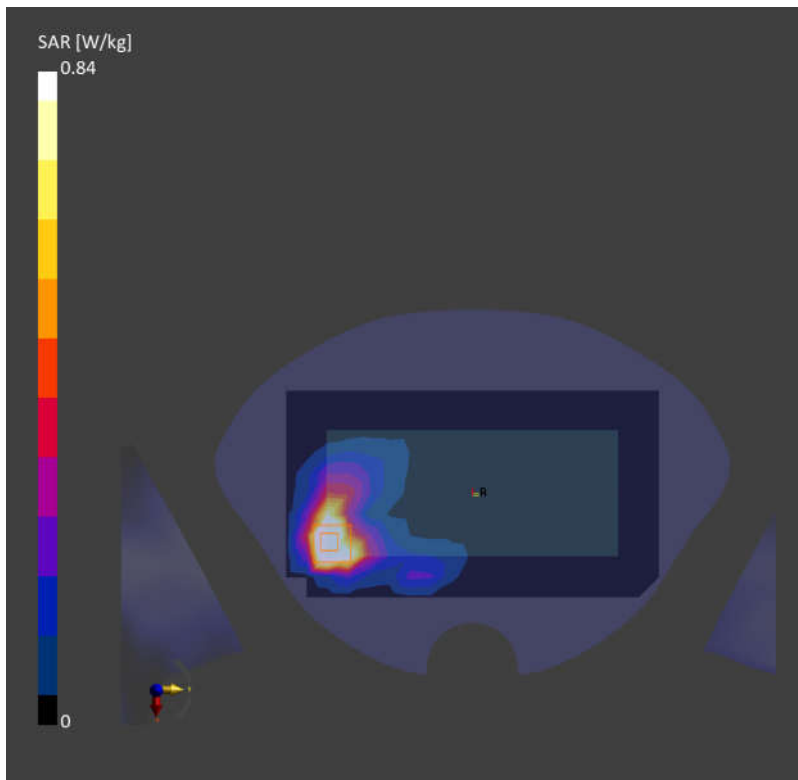

66_FR1 n41_100M_QPSK_1RB_1Offset_Back_5mm_Ch518598

Communication System: Band n41; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.443 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 1.06 W/kg; SAR (10g) = 0.471 W/kg;

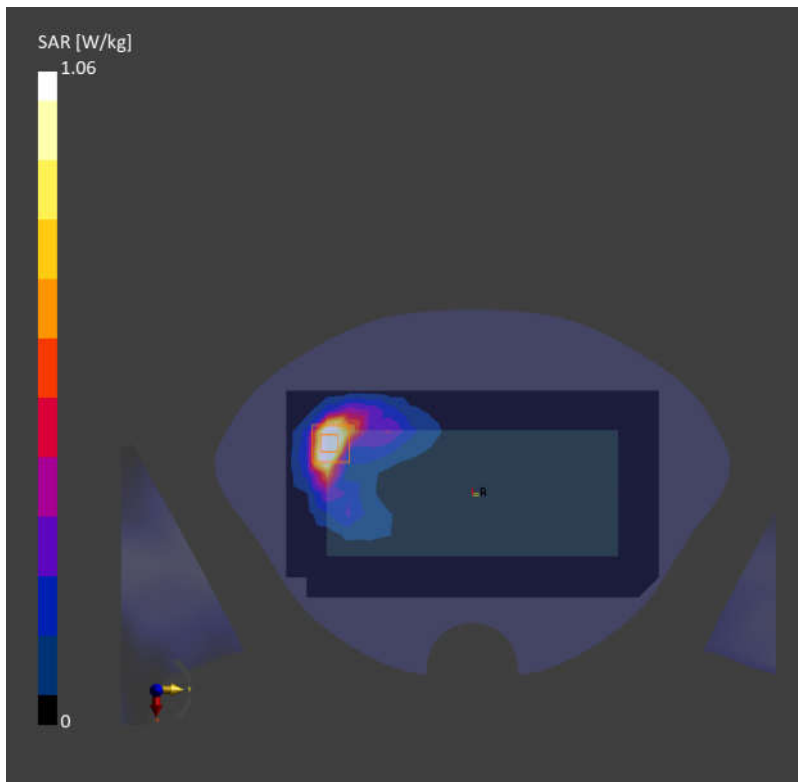

67_LTE Band 42_20M_QPSK_1RB_0Offset_Front_5mm_Ch42190

Communication System: Band 42; Frequency: 3460.0

Medium: HSL. Medium parameters used: $f = 3460.0$ MHz; $\sigma = 2.77$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.331 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.728 W/kg; SAR (10g) = 0.352 W/kg;

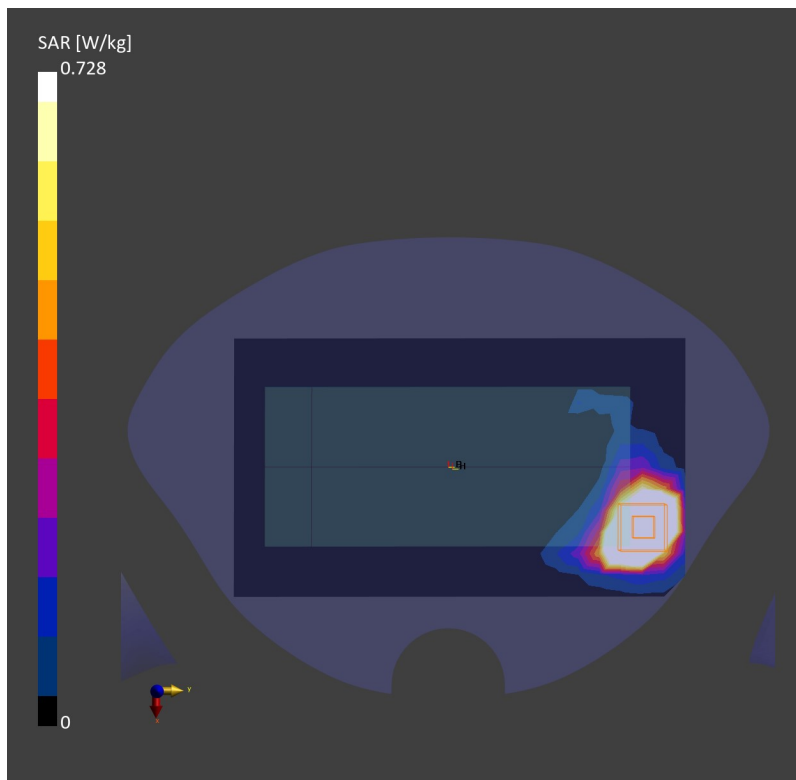

68_LTE Band 48_20M_QPSK_1RB_0Offset_Front_5mm_Ch56640

Communication System: Band 48; Frequency: 3690.0

Medium: HSL. Medium parameters used: $f = 3690.0$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.61, 7.61, 7.61); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.680 W/kg; SAR (10g) = 0.262 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.277 W/kg;

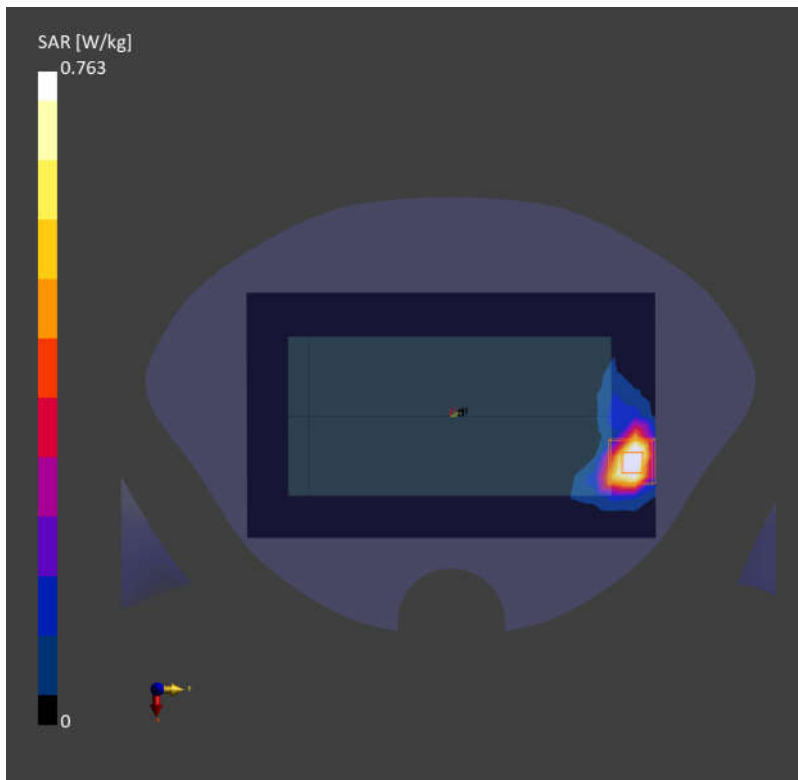

69_FR1 n77_100M_QPSK_135RB_69Offset_Front_5mm_Ch656000

Communication System: Band n77; Frequency: 3840.0

Medium: HSL. Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.22$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.254 W/kg;

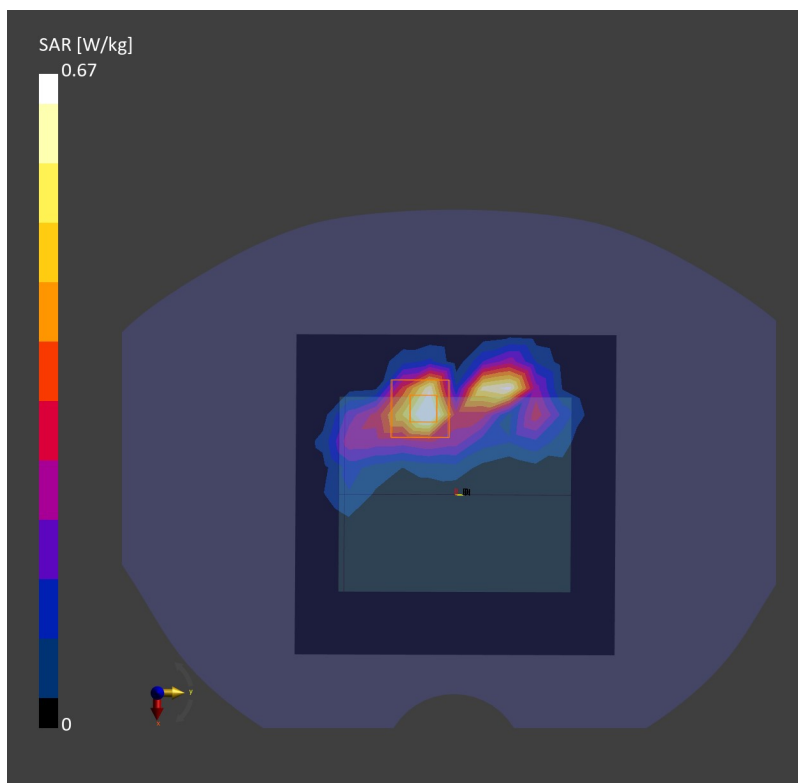

70_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: WLAN 2.4GHz; Frequency: 2437.0

Medium: HSL. Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.443 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.984 W/kg; SAR (10g) = 0.454 W/kg;

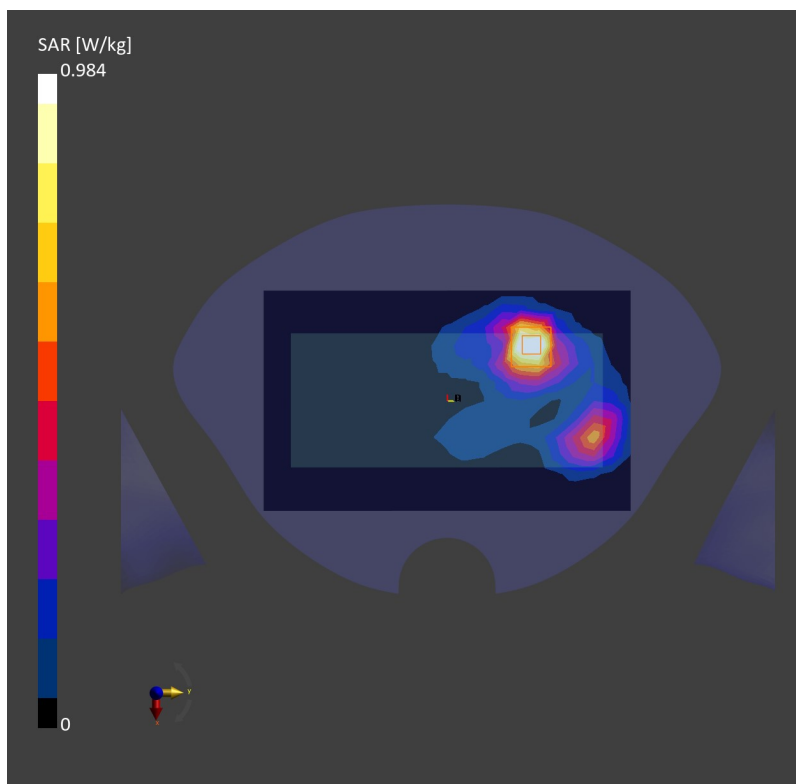

71_Bluetooth_1Mbps_Front_5mm_Ch39

Communication System: ISM 2.4 GHz Band; Frequency: 2441.0

Medium: HSL. Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.264 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.263 W/kg; SAR (10g) = 0.135 W/kg;

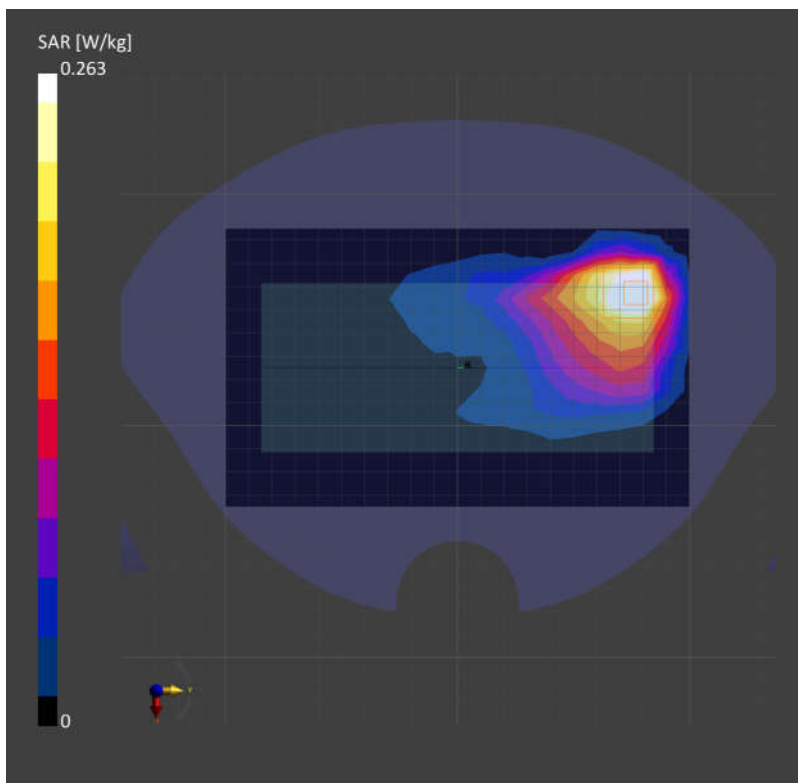

72_WLAN5GHz_802.11n-HT40 MCS0_Front_5mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.0

Medium: HSL. Medium parameters used: $f = 5270.0$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.569 W/kg; SAR (10g) = 0.206 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.209 W/kg;

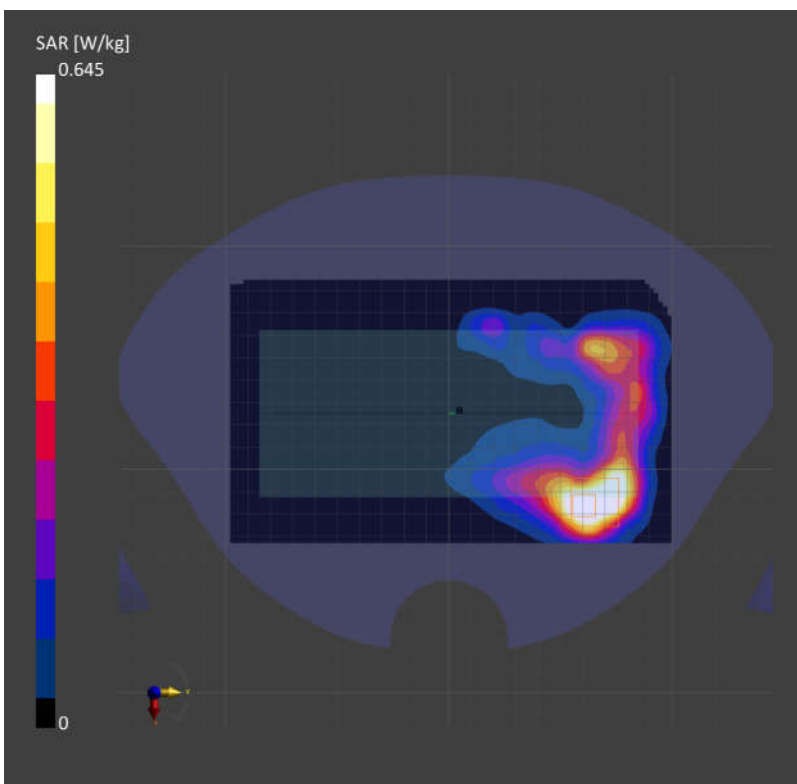

73_WLAN5GHz_802.11ac-VHT80 MCS0_Front_5mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.0

Medium: HSL. Medium parameters used: $f = 5690.0$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.39, 5.39, 5.39); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.814 W/kg; SAR (10g) = 0.318 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.821 W/kg; SAR (10g) = 0.312 W/kg;

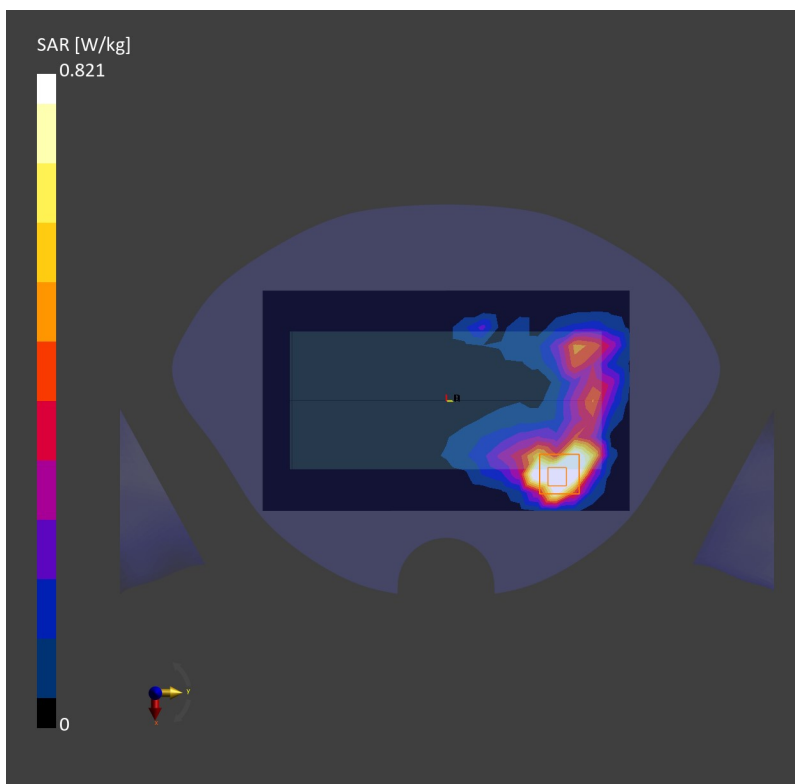

74_WLAN5GHz_802.11ac-VHT80 MCS0_Front_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.808 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 0.829 W/kg; SAR (10g) = 0.289 W/kg;

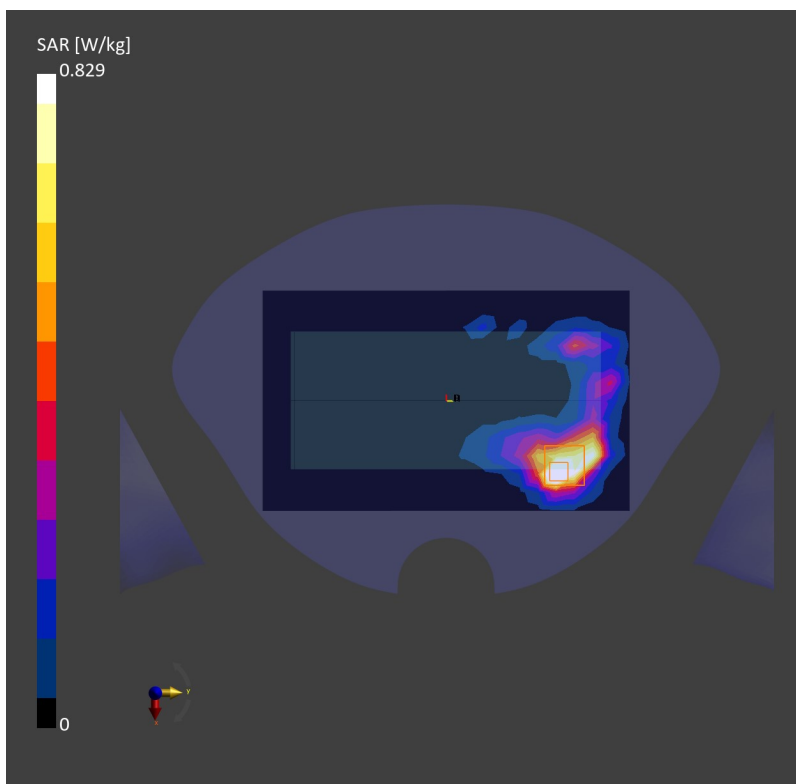

75_LTE Band 12_10M_QPSK_1RB_0Offset_Bottom Side_0mm_Ch23095

Communication System: Band 12, E-UTRA/FDD; Frequency: 707.5

Medium: HSL. Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.832$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 7.51 W/kg; SAR (10g) = 3.47 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 6.38 W/kg; SAR (10g) = 2.40 W/kg;

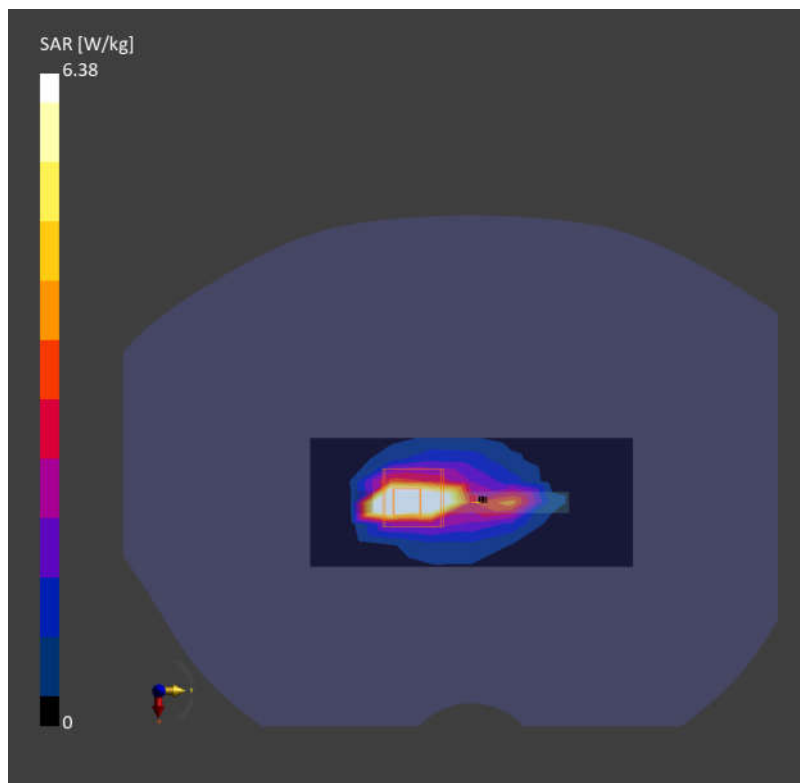

76_LTE Band 13_10M_QPSK_1RB_0Offset_Bottom Side_0mm_Ch23230

Communication System: Band 13, E-UTRA/FDD; Frequency: 782.0

Medium: HSL. Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.97, 10.97, 10.97); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.03 W/kg; SAR (10g) = 2.21 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.11 dB

SAR (1g) = 6.17 W/kg; SAR (10g) = 2.31 W/kg;

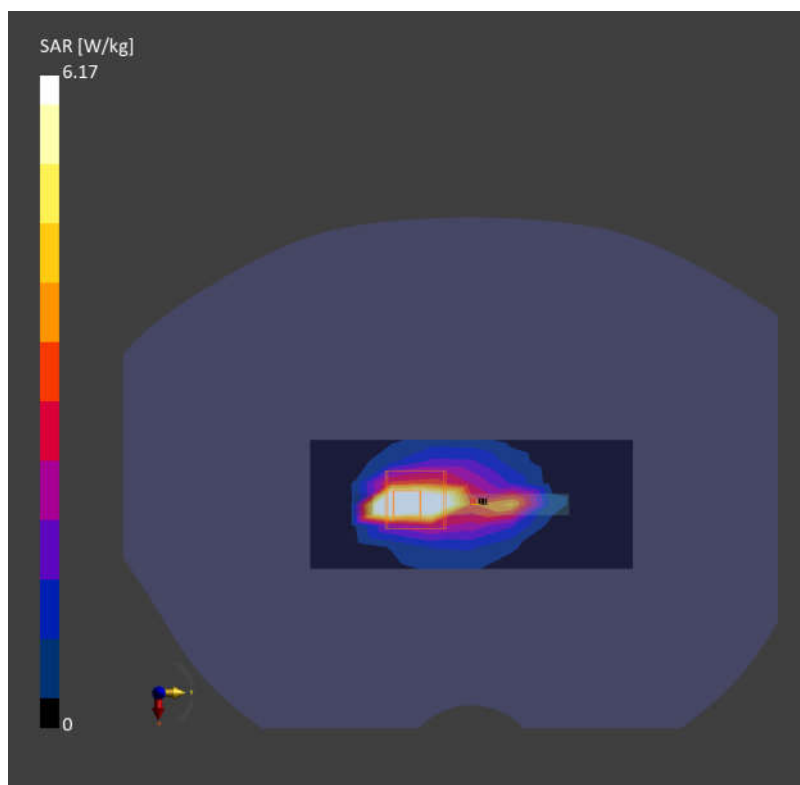

77_GSM850_GPRS (3 Tx slots)_Back_0mm_Ch189

Communication System: GSM 850; Frequency: 836.4

Medium: HSL. Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.78 W/kg; SAR (10g) = 1.23 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 2.92 W/kg; SAR (10g) = 1.30 W/kg;

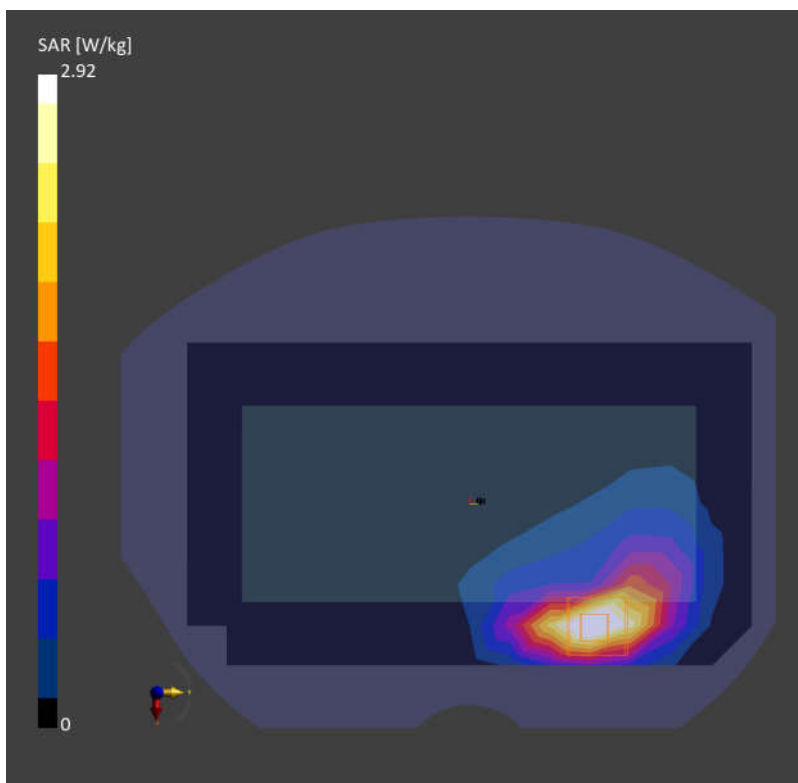

78_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4233

Communication System: Band 5, UTRA/FDD; Frequency: 846.6

Medium: HSL. Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.25 W/kg; SAR (10g) = 1.91 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 3.65 W/kg; SAR (10g) = 1.76 W/kg;

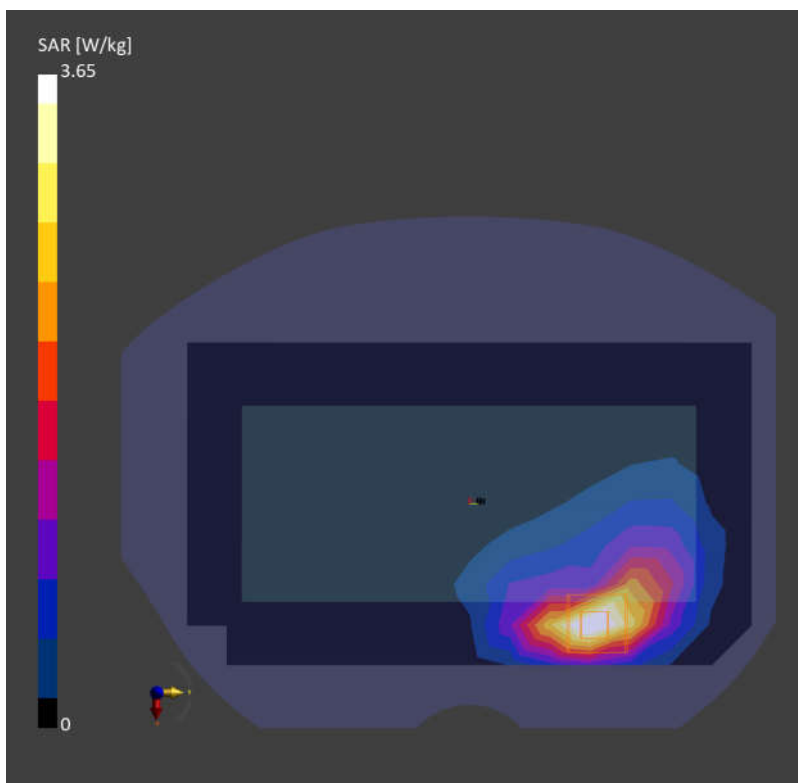

79_LTE Band 26_15M_QPSK_1RB_0Offset_Bottom Side_0mm_Ch26865

Communication System: Band 26 E-UTRA/FDD; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.22 W/kg; SAR (10g) = 3.02 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.16 dB

SAR (1g) = 6.56 W/kg; SAR (10g) = 2.42 W/kg;

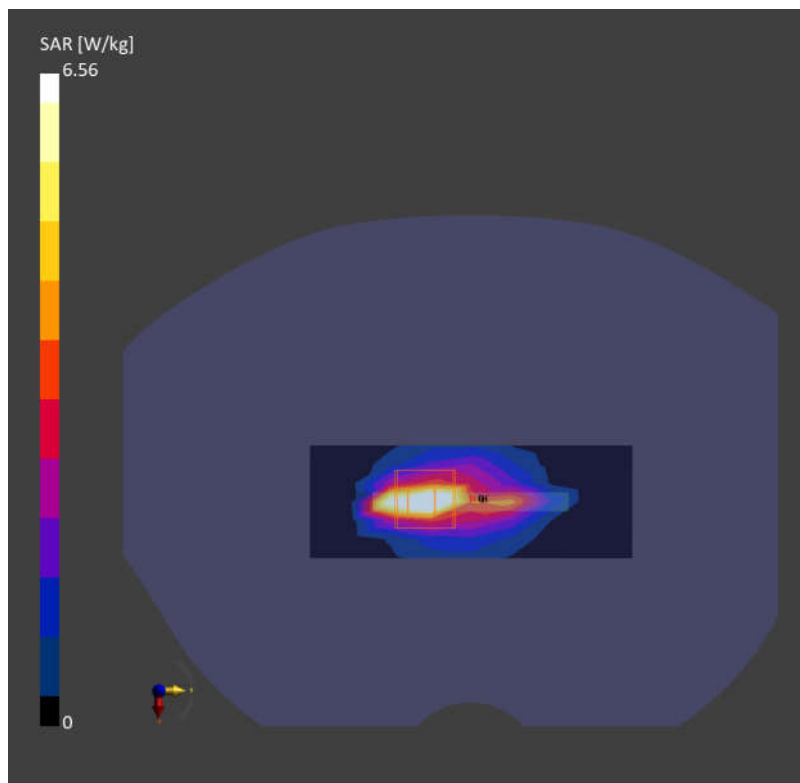

80_FR1 n26_20M_QPSK_50RB_28Offset_Back_0mm_Ch166300

Communication System: Band n26; Frequency: 831.5

Medium: HSL. Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(10.67, 10.67, 10.67); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.79 W/kg; SAR (10g) = 1.09 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.03 dB

SAR (1g) = 2.37 W/kg; SAR (10g) = 1.14 W/kg;

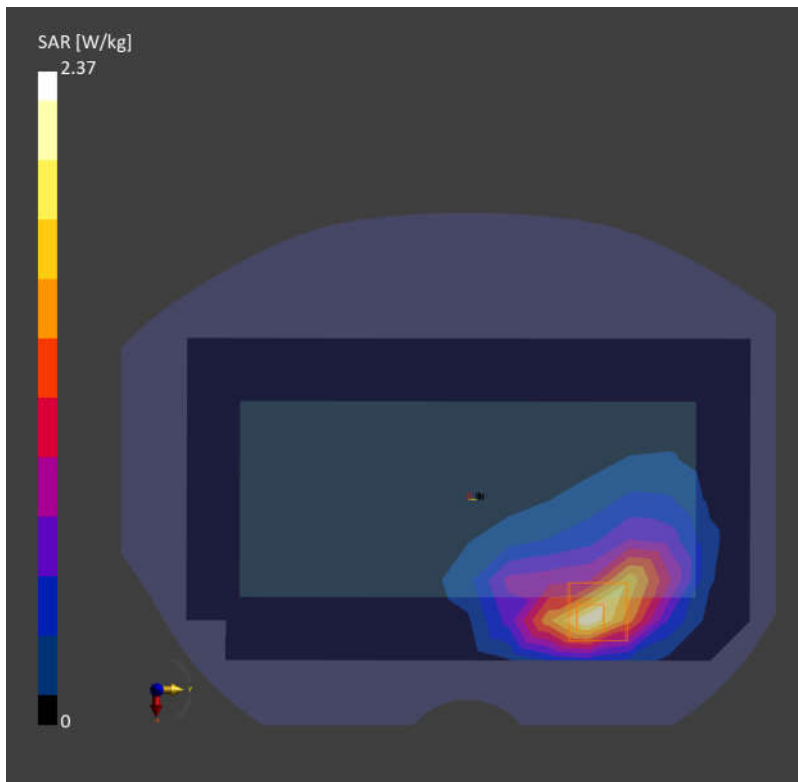

81_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1513

Communication System: Band 4, UTRA/FDD; Frequency: 1752.6

Medium: HSL. Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.49 W/kg; SAR (10g) = 2.38 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.12 dB

SAR (1g) = 6.85 W/kg; SAR (10g) = 2.54 W/kg;

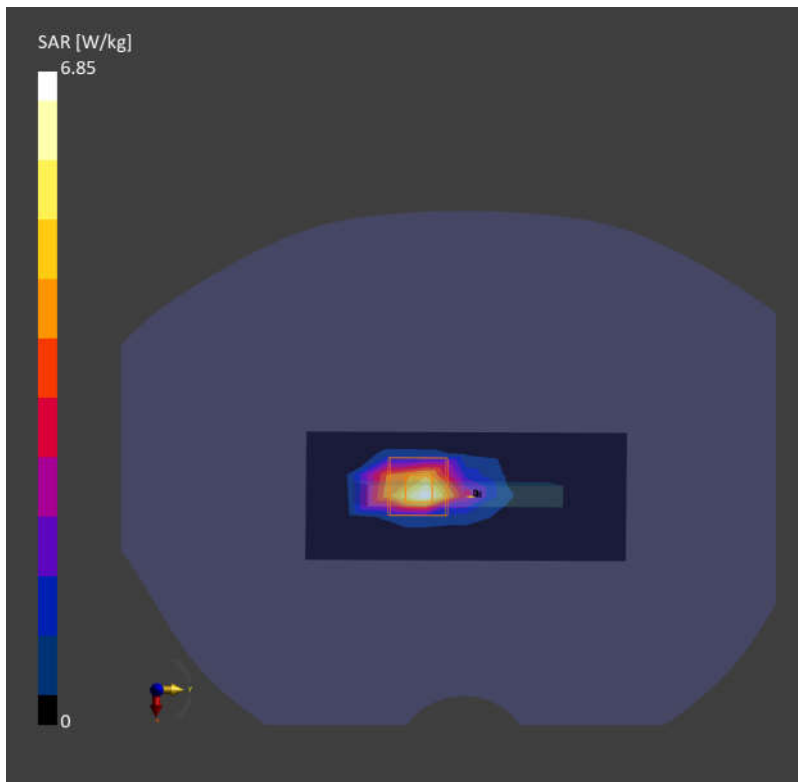

82_LTE Band 66_20M_QPSK_1RB_0Offset_Back_0mm_Ch132572

Communication System: Band 66, E-UTRA/FDD; Frequency: 1770.0

Medium: HSL. Medium parameters used: $f = 1770.0$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.40 W/kg; SAR (10g) = 2.20 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.14 dB

SAR (1g) = 6.79 W/kg; SAR (10g) = 2.30 W/kg;

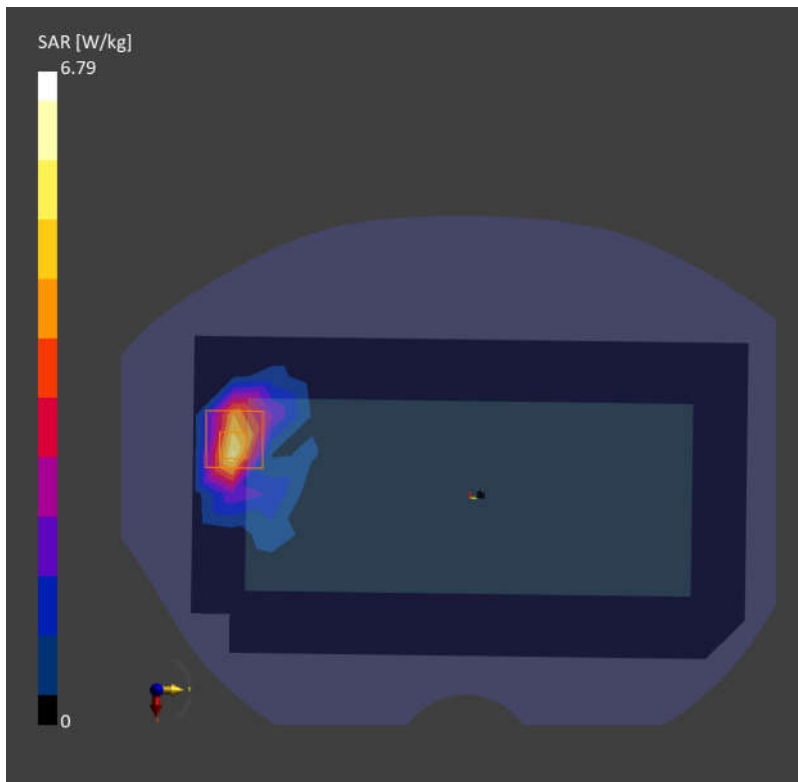

83_FR1 n66_40M_QPSK_1RB_1Offset_Bottom Side_0mm_Ch349000

Communication System: Band n66; Frequency: 1745.0

Medium: HSL. Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(9.31, 9.31, 9.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.64 W/kg; SAR (10g) = 2.34 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.08 dB

SAR (1g) = 7.18 W/kg; SAR (10g) = 2.57 W/kg;

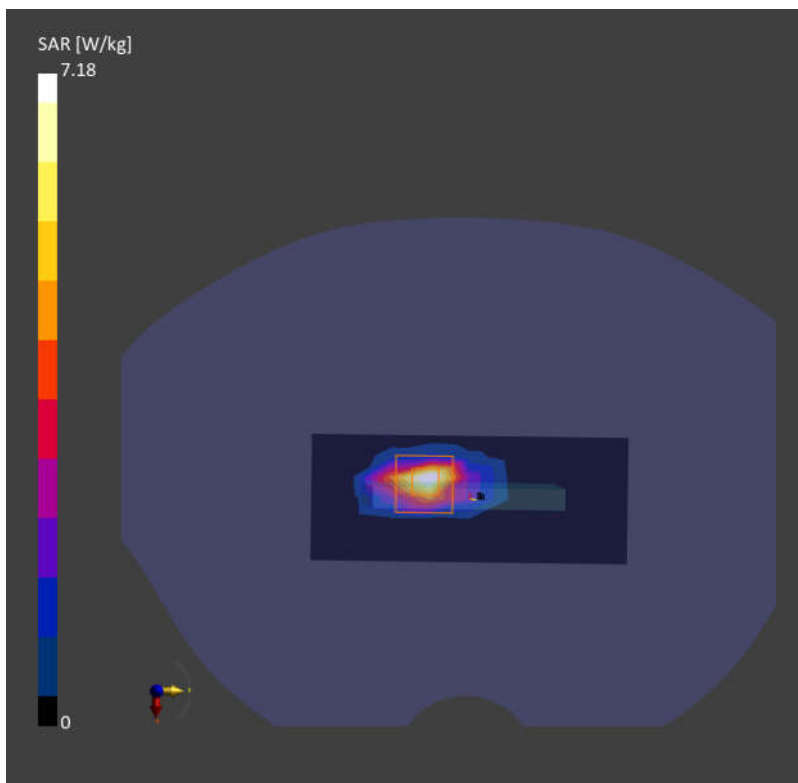

84_GSM1900_GPRS (3 Tx slots)_Bottom Side_0mm_Ch661

Communication System: PCS 1900; Frequency: 1880.0

Medium: HSL. Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.60 W/kg; SAR (10g) = 2.35 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 6.07 W/kg; SAR (10g) = 2.33 W/kg;

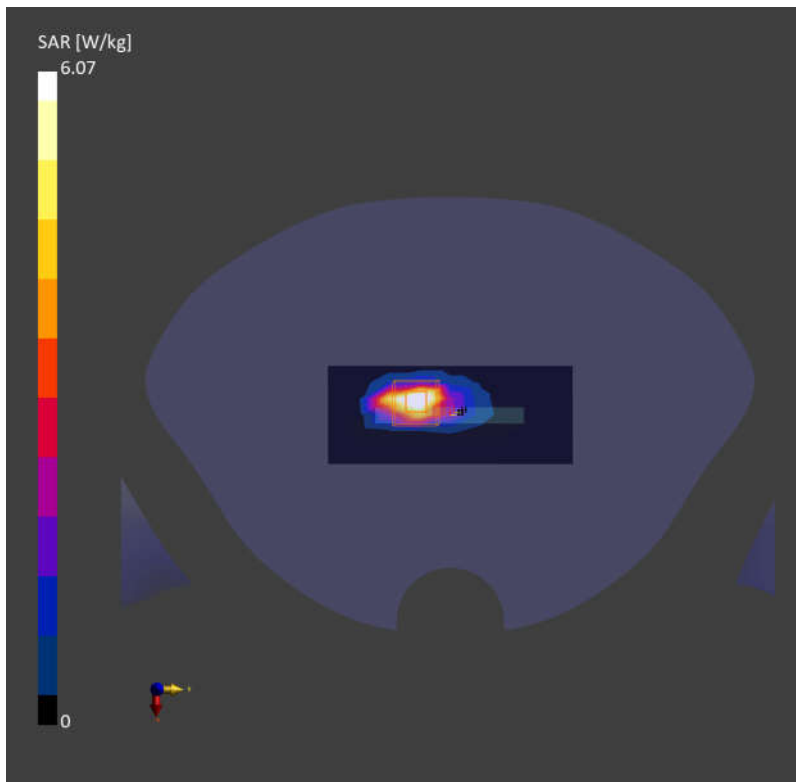

85_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262

Communication System: Band 2, UTRA/FDD; Frequency: 1852.4

Medium: HSL. Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.13 W/kg; SAR (10g) = 2.25 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 7.06 W/kg; SAR (10g) = 2.44 W/kg;

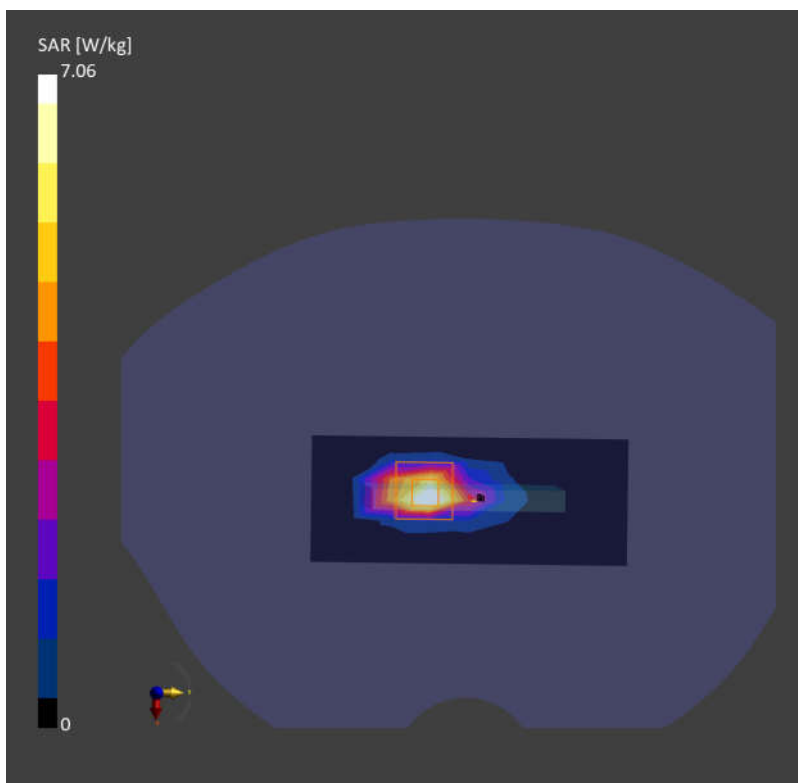

86_LTE Band 25_20M_QPSK_1RB_0Offset_Back_0mm_Ch26590

Communication System: Band 25, E-UTRA/FDD; Frequency: 1905.0

Medium: HSL. Medium parameters used: $f = 1905.0$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.64 W/kg; SAR (10g) = 2.20 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 6.12 W/kg; SAR (10g) = 2.46 W/kg;

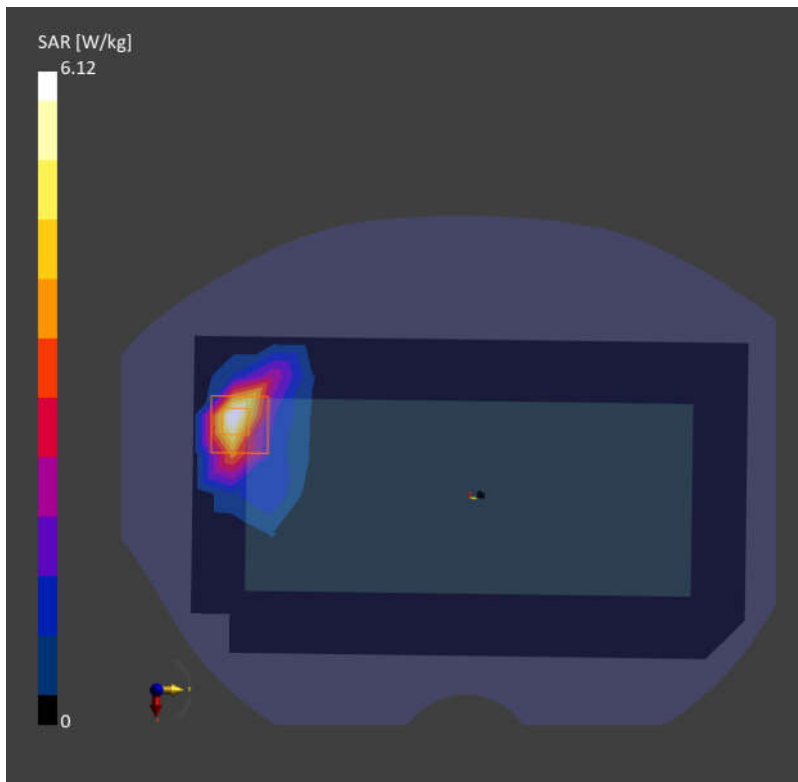

87_FR1 n2_20M_QPSK_50RB_28Offset_Bottom Side_0mm_Ch380000

Communication System: Band n2; Frequency: 1900.0

Medium: HSL. Medium parameters used: $f=1900.0$ MHz; $\sigma=1.45$ S/m; $\epsilon_r=39.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.89, 8.89, 8.89); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.32 W/kg; SAR (10g) = 2.52 W/kg;

Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm): Measurement Grid: 8.0 mm x 8.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 7.01 W/kg; SAR (10g) = 2.54 W/kg;

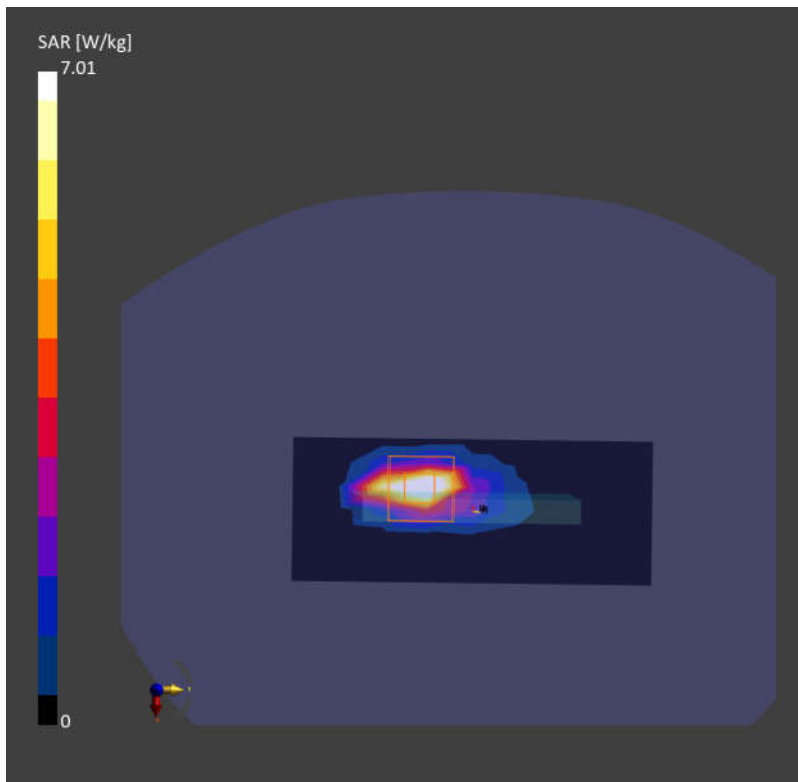

88_LTE Band 7_20M_QPSK_1RB_0Offset_Back_0mm_Ch21350

Communication System: Band 7, E-UTRA/FDD; Frequency: 2560.0

Medium: HSL. Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 6.69 W/kg; SAR (10g) = 2.77 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 6.33 W/kg; SAR (10g) = 2.36 W/kg;

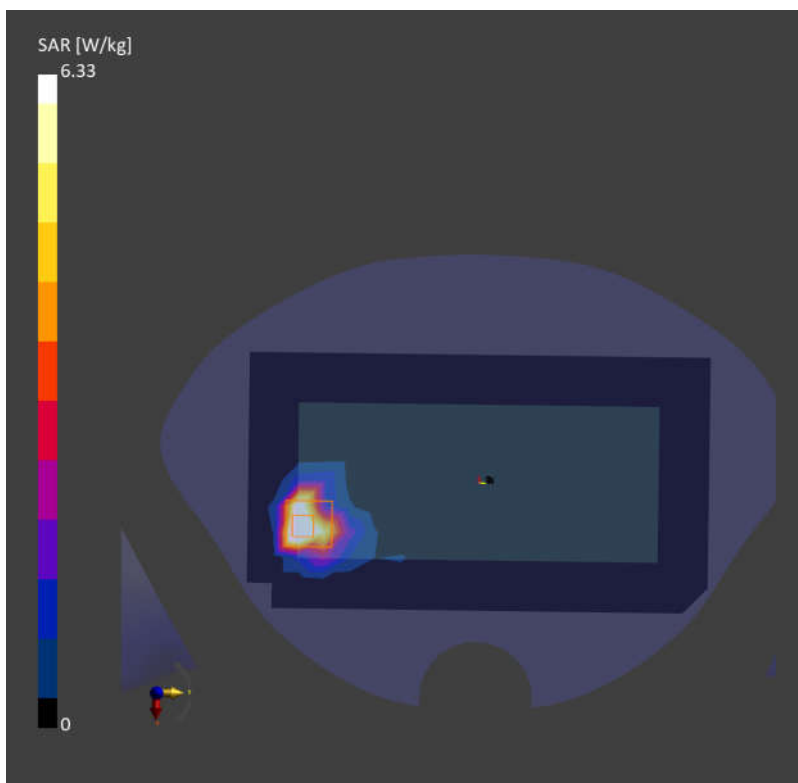

89_LTE Band 41_20M_QPSK_1RB_0Offset_Bottom Side_0mm_Ch40620

Communication System: Band 41, E-UTRA/TDD; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 6.89 W/kg; SAR (10g) = 2.05 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 7.13 W/kg; SAR (10g) = 2.53 W/kg;

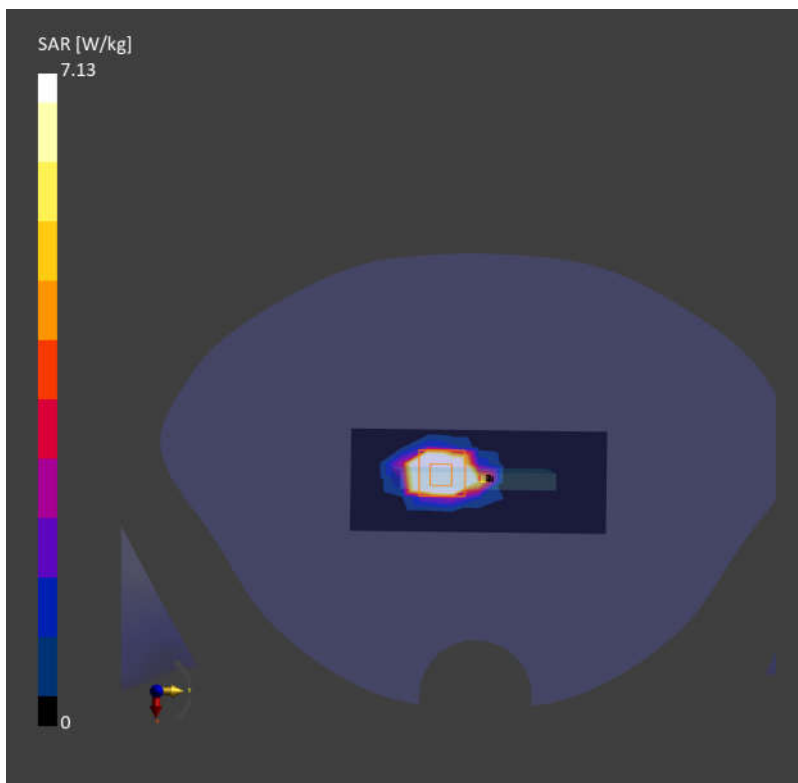

90_FR1 n7_40M_QPSK_1RB_1Offset_Bottom Side_0mm_Ch507000

Communication System: Band n7; Frequency: 2535.0

Medium: HSL. Medium parameters used: $f=2535.0$ MHz; $\sigma=1.89$ S/m; $\epsilon_r=37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 6.25 W/kg; SAR (10g) = 2.46 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 7.69 W/kg; SAR (10g) = 2.62 W/kg;

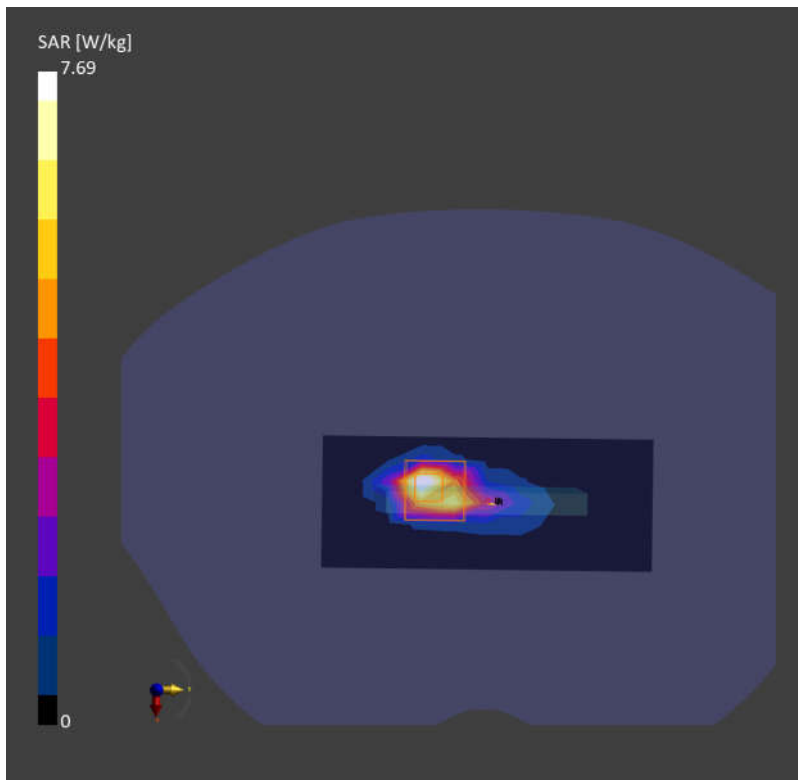

91_FR1 n41_100M_QPSK_1RB_1Offset_Bottom Side_0mm_Ch518598

Communication System: Band n41; Frequency: 2593.0

Medium: HSL. Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.1, 8.1, 8.1); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 6.56 W/kg; SAR (10g) = 2.35 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.01 dB

SAR (1g) = 7.41 W/kg; SAR (10g) = 2.53 W/kg;

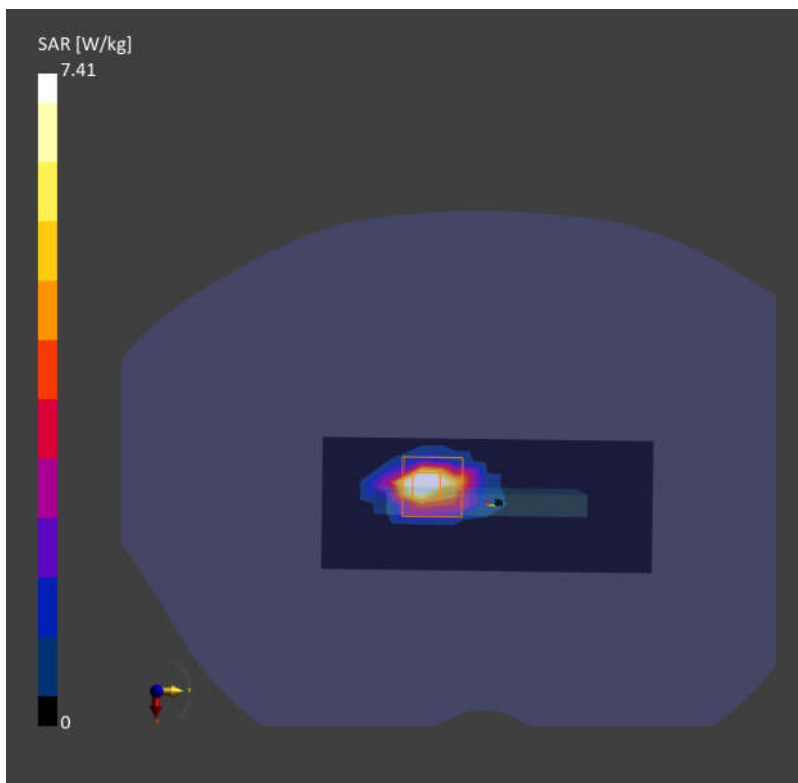

92_LTE Band 42_20M_QPSK_50RB_0Offset_Front_0mm_Ch42190

Communication System: Band 42, E-UTRA/TDD; Frequency: 3460.0

Medium: HSL. Medium parameters used: $f=3460.0$ MHz; $\sigma=2.81$ S/m; $\epsilon_r=39.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.68, 7.68, 7.68); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.66 W/kg; SAR (10g) = 1.55 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.19 dB

SAR (1g) = 4.32 W/kg; SAR (10g) = 1.72 W/kg;

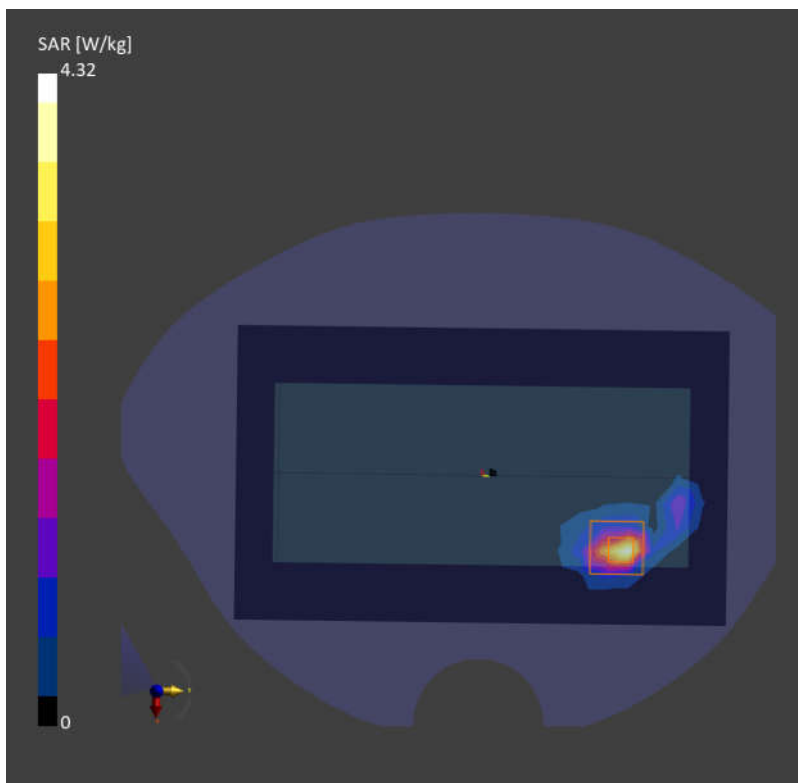

93_LTE Band 48_20M_QPSK_1RB_0Offset_Top Side_0mm_Ch56640

Communication System: Band 48, E-UTRA/TDD; Frequency: 3690.0

Medium: HSL. Medium parameters used: $f = 3690.0$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.61, 7.61, 7.61); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.42 W/kg; SAR (10g) = 1.72 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 4.56 W/kg; SAR (10g) = 1.78 W/kg;

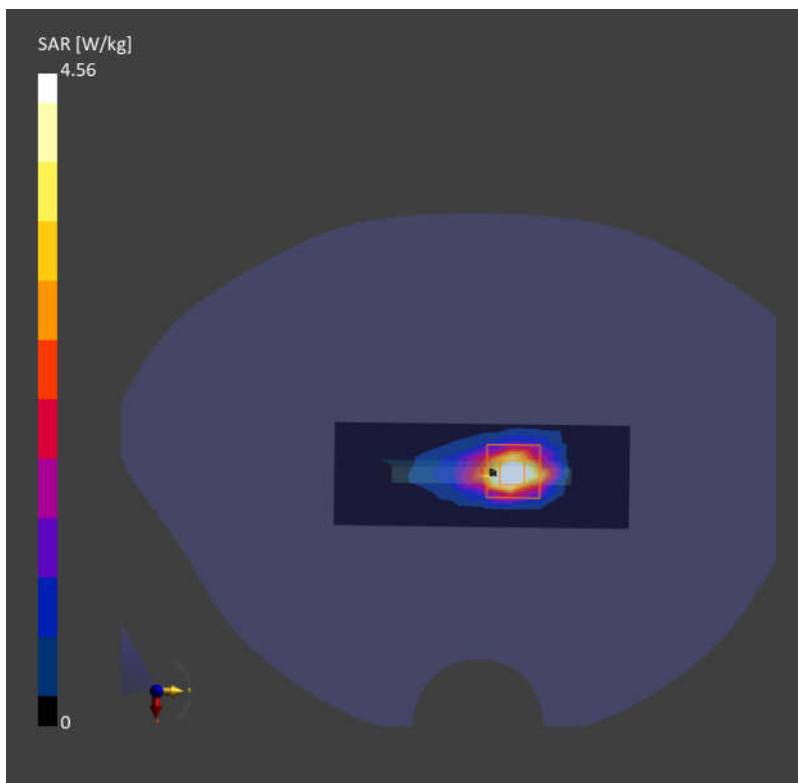

94_FR1 n77_100M_QPSK_1RB_1Offset_Top Side_0mm_Ch656000

Communication System: Band n77; Frequency: 3840.0

Medium: HSL. Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.16$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(7.31, 7.31, 7.31); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.47 W/kg; SAR (10g) = 1.88 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 6.96 W/kg; SAR (10g) = 2.03 W/kg;

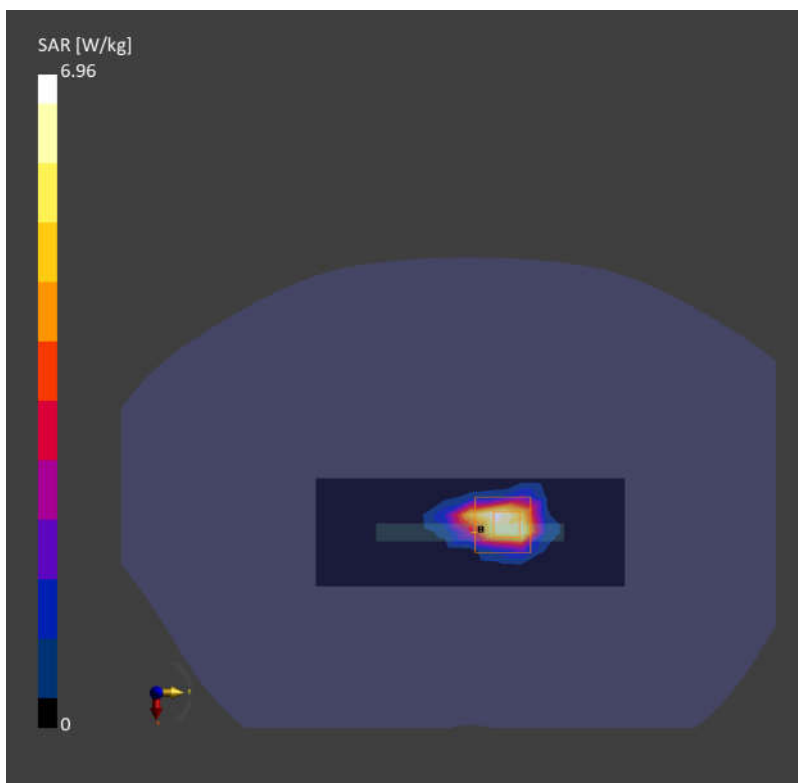

95_WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.0

Medium: HSL. Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(8.38, 8.38, 8.38); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 4.53 W/kg; SAR (10g) = 1.77 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.13 dB

SAR (1g) = 4.79 W/kg; SAR (10g) = 1.86 W/kg;

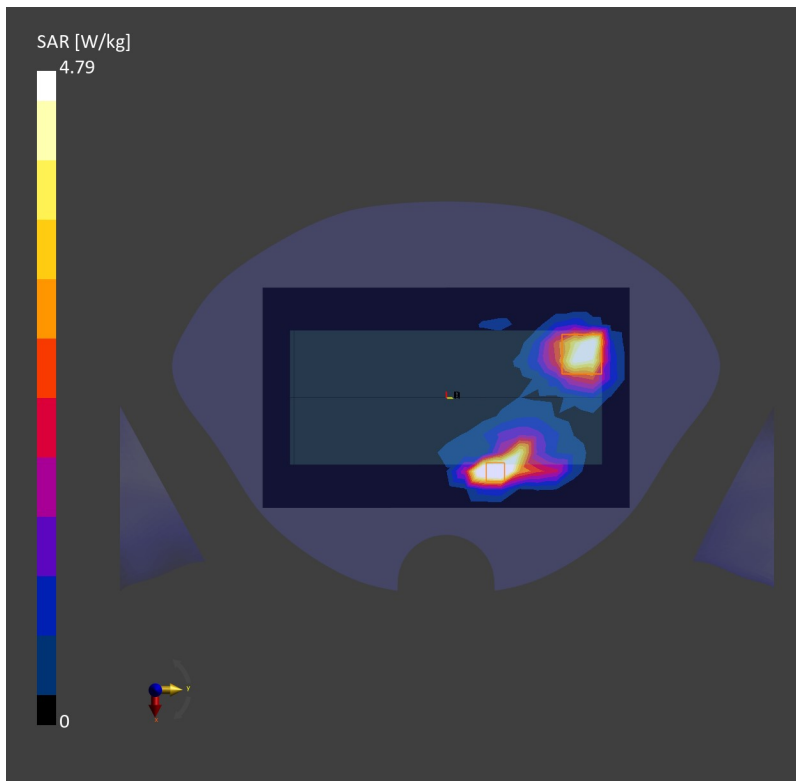

96_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.0

Medium: HSL. Medium parameters used: $f = 5230.0$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.54 W/kg; SAR (10g) = 1.01 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 4.05 W/kg; SAR (10g) = 0.965 W/kg;

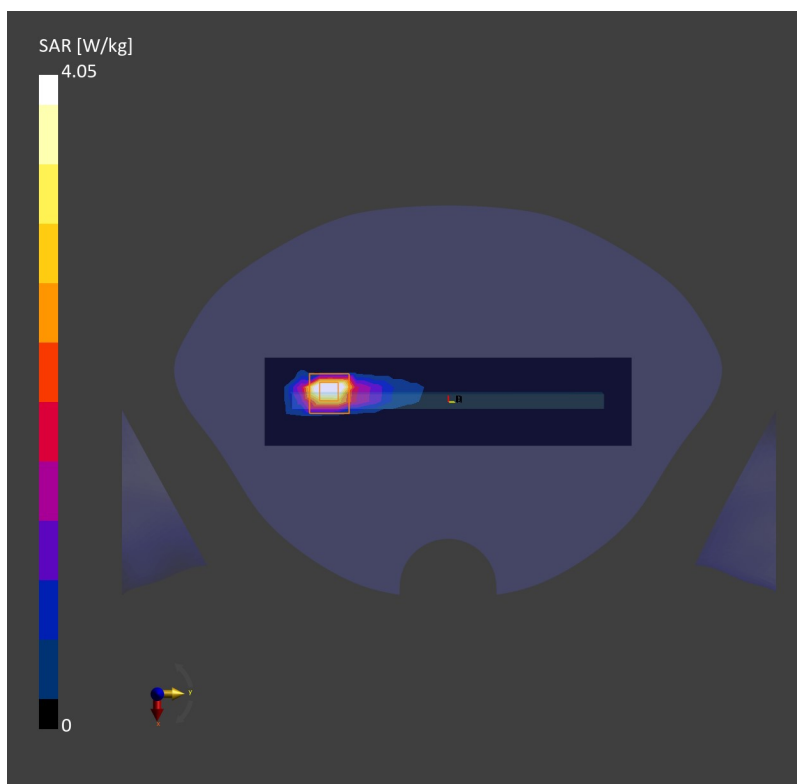

97_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.0

Medium: HSL. Medium parameters used: $f = 5270.0$ MHz; $\sigma = 4.66$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.18, 6.18, 6.18); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.76 W/kg; SAR (10g) = 1.09 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 6.67 W/kg; SAR (10g) = 1.13 W/kg;

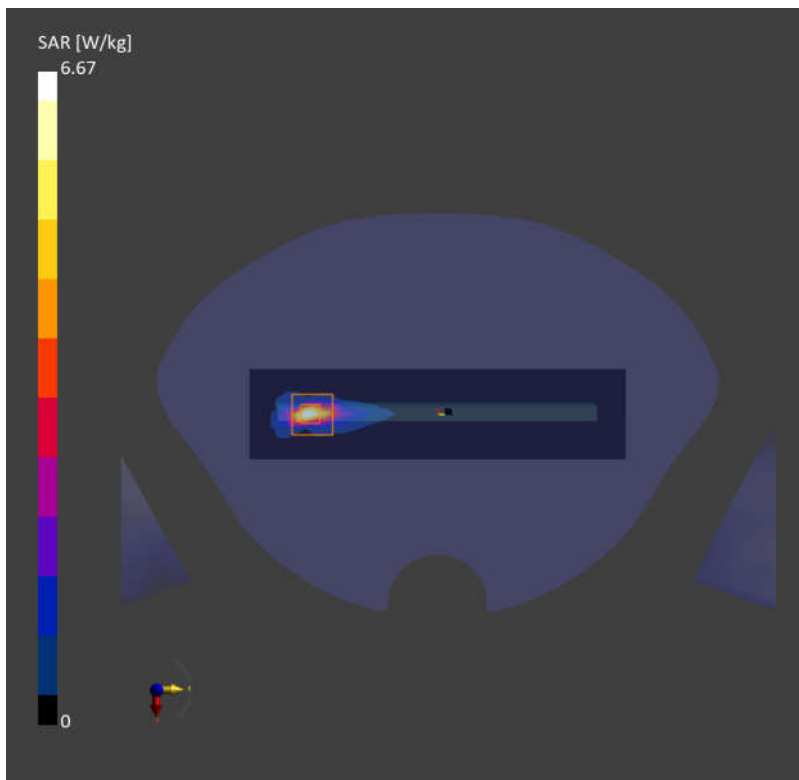

98_WLAN5GHz_802.11ac-VHT80 MCS0_Front_0mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.0

Medium: HSL. Medium parameters used: $f = 5690.0$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.21 W/kg; SAR (10g) = 1.84 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 6.11 W/kg; SAR (10g) = 1.67 W/kg;

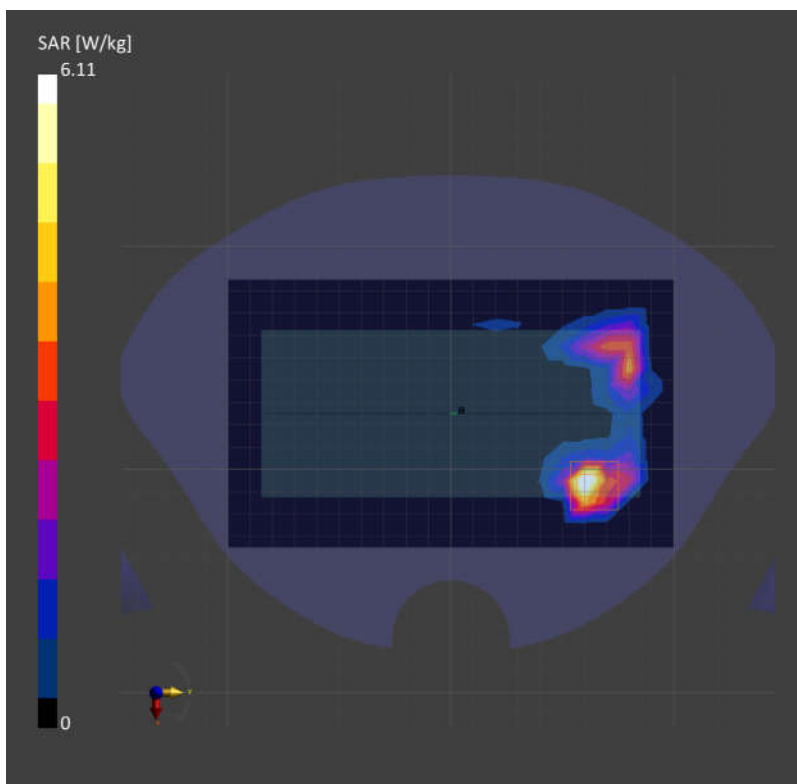

99_WLAN5GHz_802.11ac-VHT80 MCS0_Front_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.57, 5.57, 5.57); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn690; Calibrated: 2022-06-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1644
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.81 W/kg; SAR (10g) = 1.90 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 7.29 W/kg; SAR (10g) = 1.94 W/kg;

