

TEST REPORT

Applicant: Xiamen Milesight IoT Co., Ltd.

Address: Building C09, Software Park Phase III, Xiamen 361024, Fujian, China

Product Name: Radar Human Presence Sensor

FCC ID: 2AYHY-VS370

Standard(s): 47 CFR Part 15, Subpart C(15.249)
ANSI C63.10-2013

Report Number: 2402Y101434E-RF-00C

Report Date: 2024/12/23

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Reviewed By: Pedro Yun

Title: Project Engineer

Gavin Xu

Approved By: Gavin Xu

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION.....	5
1.3 ANTENNA INFORMATION DETAIL▲:	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 EUT OPERATION CONDITION.....	7
3.2 EUT EXERCISE SOFTWARE.....	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP	8
3.6 TEST FACILITY.....	9
3.7 MEASUREMENT UNCERTAINTY	9
4. REQUIREMENTS AND TEST RESULTS	10
4.1 AC LINE CONDUCTED EMISSIONS.....	10
4.1.1 Applicable Standard.....	10
4.1.2 EUT Setup.....	11
4.1.3 EMI Test Receiver Setup	11
4.1.4 Test Procedure	12
4.1.5 Corrected Amplitude & Margin Calculation.....	12
4.1.6 Test Result	12
4.2 RADIATED EMISSIONS	13
4.2.1 Applicable Standard.....	13
4.2.2 EUT Setup.....	13
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
4.2.4 Test Procedure	17
4.2.5 Corrected Amplitude & Margin Calculation.....	18
4.2.6 Test Result	19
4.3 20 dB EMISSION BANDWIDTH	35
4.3.1 Applicable Standard.....	35
4.3.2 EUT Setup.....	35
4.3.3 Test Procedure	35
4.3.4 Test Result	36
4.4 ANTENNA REQUIREMENT.....	37
4.4.1 Applicable Standard.....	37
4.4.2 Judgment.....	37
EXHIBIT A - EUT PHOTOGRAPHS.....	38

EXHIBIT B - TEST SETUP PHOTOGRAPHS 39

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402Y101434E-RF-00C	Original Report	2024/12/23

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Radar Human Presence Sensor
EUT Model:	VS370-915M
Multiple Models:	NF370-915M,VS370,NF370,VS370-868M/915M,NF370-868M/915M
Operation Frequency:	24.025-24.225GHz
Modulation Type:	FMCW
Rated Input Voltage:	DC 3.6V from battery
Serial Number:	2TL1-3 (For Radiated Spurious Emission Test)
EUT Received Date:	2024/10/28
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	Frequency Range	Antenna Gain
SGR SEMICONDUCTORS INC.	Array	24~24.25GHz	2.75dBi
The design of compliance with §15.203:			
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.			
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.			
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant

Note: Not Applicable, the device was powered by battery when operating.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The device employs FMCW modulation in the frequency range: 24.025GHz-24.225GHz.

According to § 15.31(c), Except as otherwise indicated in §§ 15.255 and 15.256, for swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

The device was tested with the frequency sweep stopped mode, the test frequency: 24.025GHz,24.125GHz, 24.225GHz.

3.2 EUT Exercise Software

No software was used in test.


3.3 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

3.5 Block Diagram of Test Setup

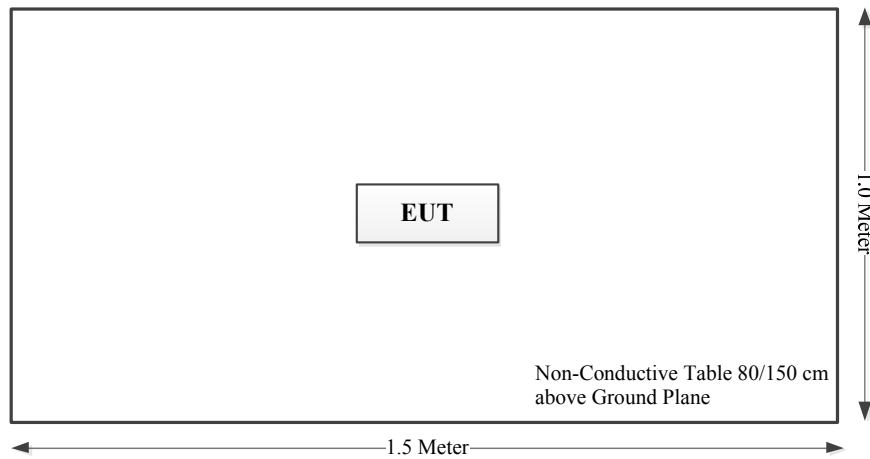

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB, 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G-140G: 5.46dB, 140G-220G: 6.00dB, 220G-325G: 7.35dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST RESULTS

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

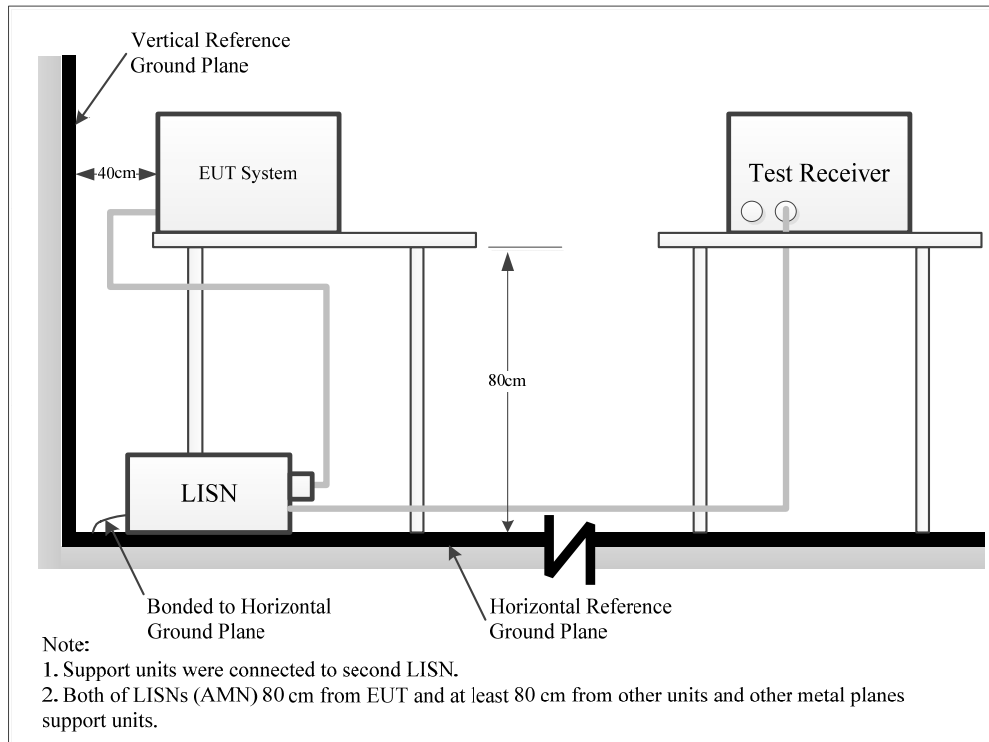

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground[protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor=attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Not Applicable, the device was powered by battery when operating.

4.2 Radiated Emissions

4.2.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

4.2.2 EUT Setup


9kHz~30MHz:

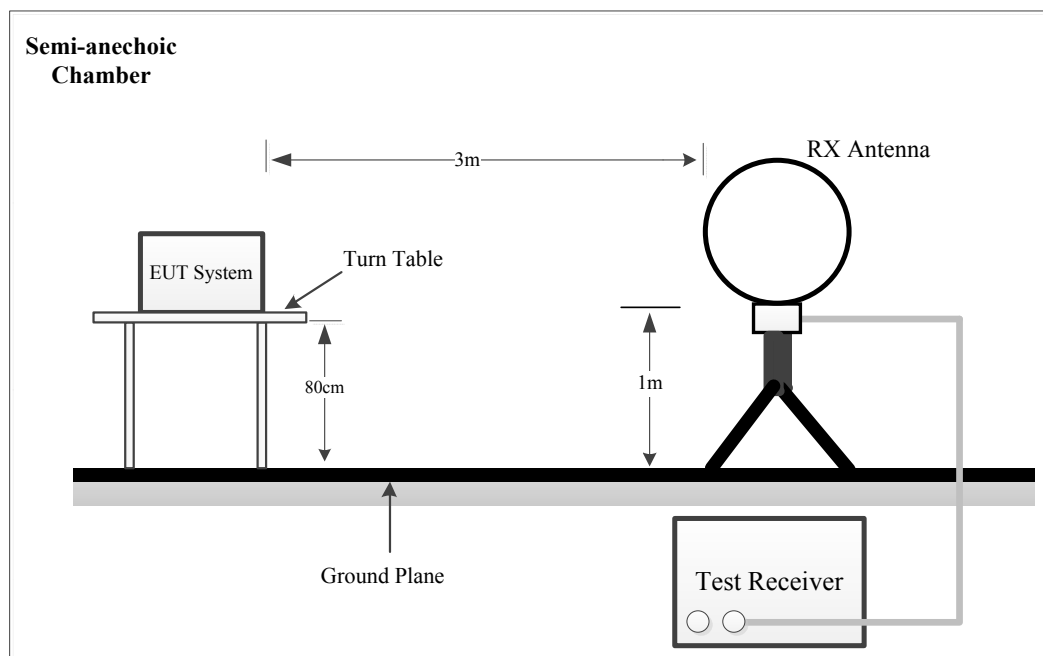


30MHz-1GHz:

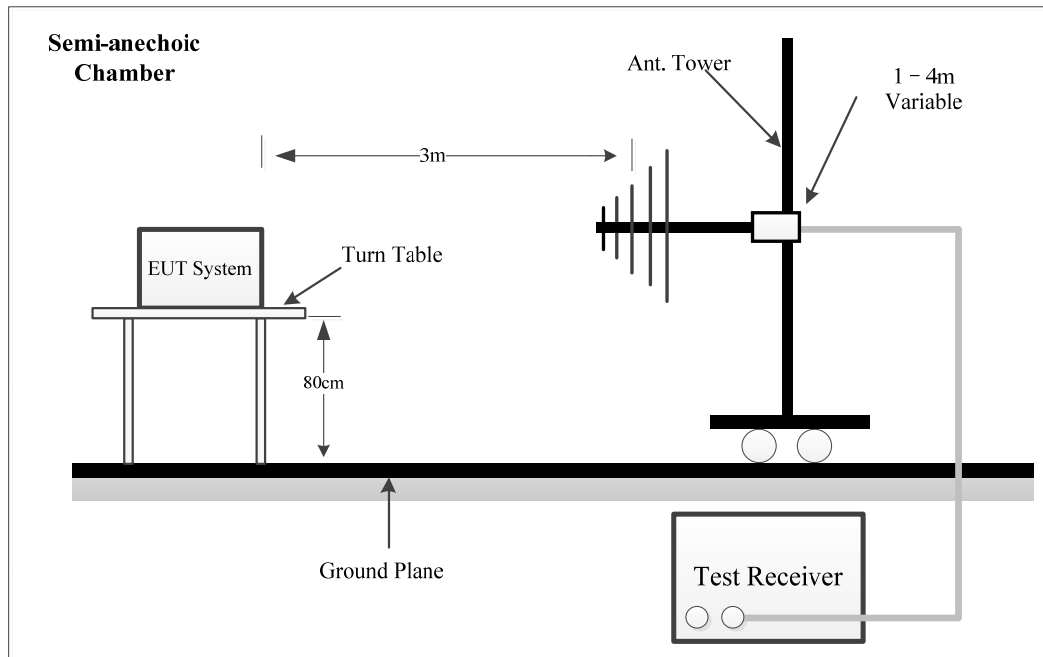


1GHz-26.5 GHz:

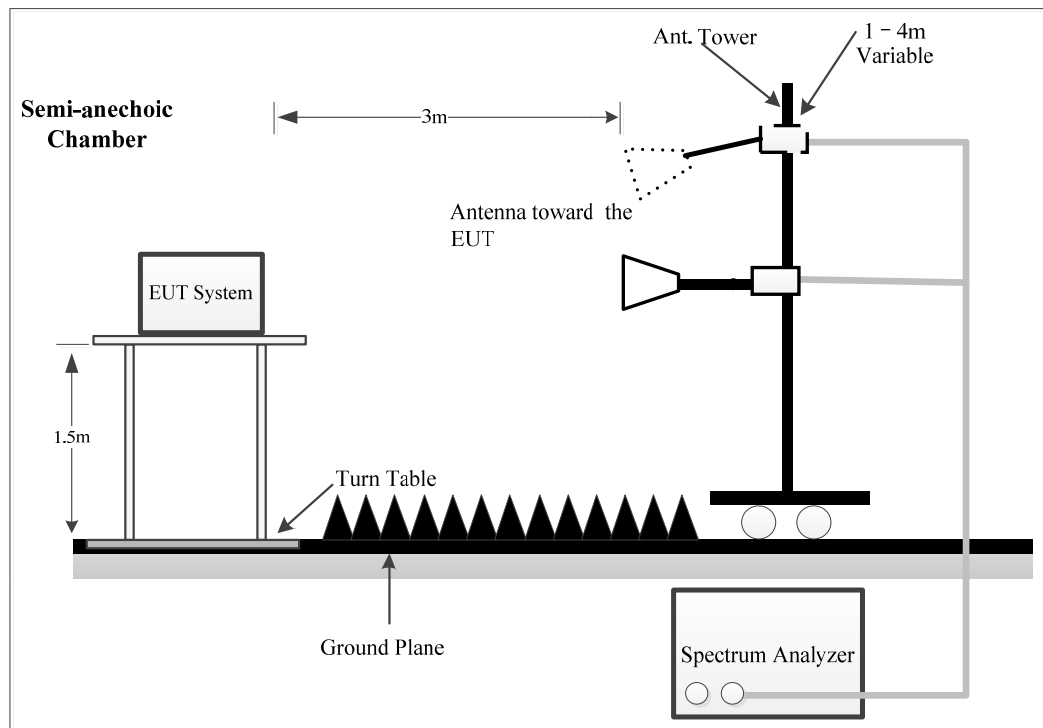


26.5-40GHz:

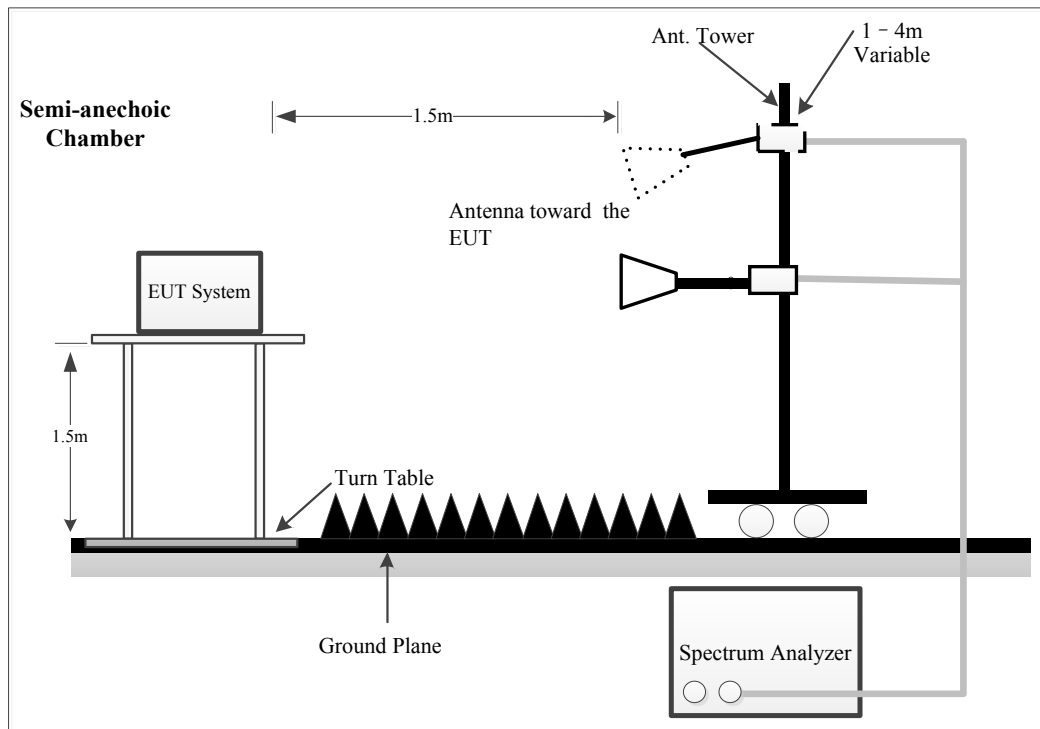

40~90 GHz:

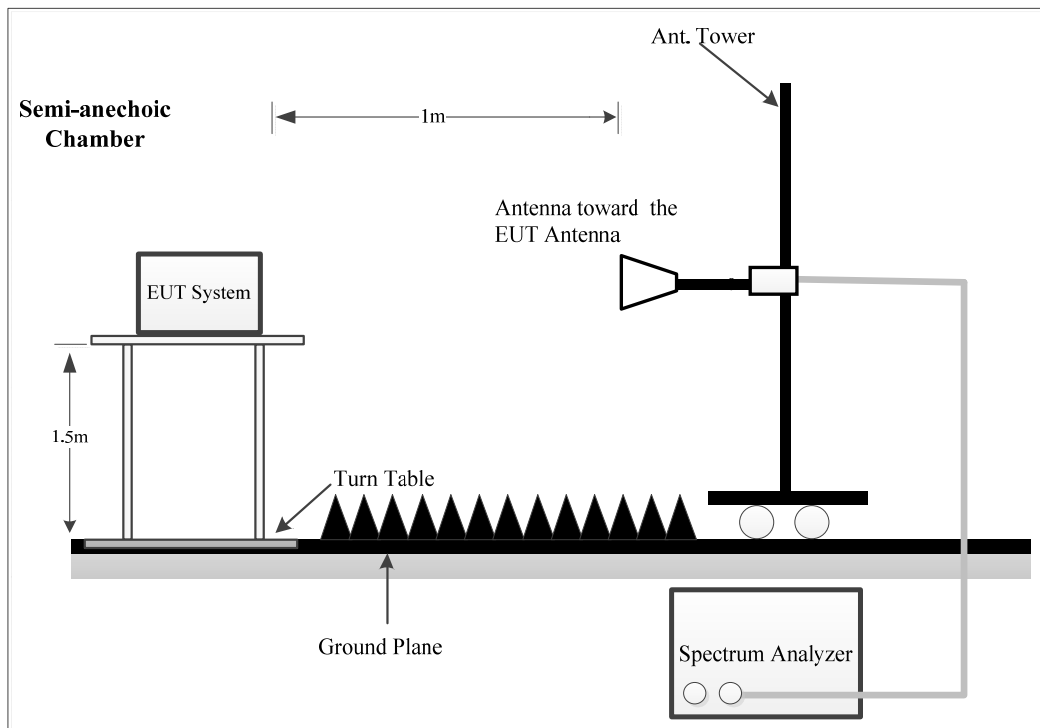

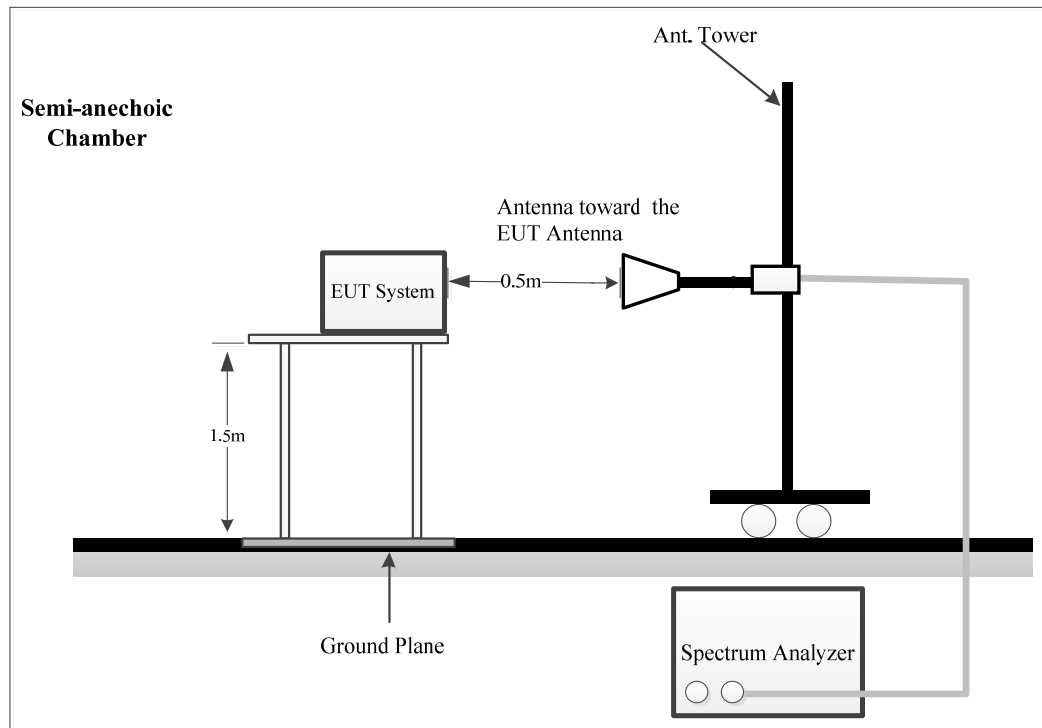90~100 GHz:

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

For above 40GHz: The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100 GHz.

The radiated emission test was performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205, FCC 15.249 limits.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 100 GHz.

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz-150 kHz	QP/AV	200 Hz	1 kHz	200 Hz	QP/AV
150 kHz-30 MHz	QP/AV	9 kHz	30 kHz	9 kHz	QP/AV
30 MHz-1000 MHz	Peak	100 kHz	300 kHz	/	PK
	QP	/	/	120 kHz	QP

Above 1GHz:**Pre-scan:**

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 1 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	10 Hz	PK

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was required in Quasi-peak measurement for frequency range of 9 kHz-1 GHz except 9-90 kHz, 110-490 kHz, employing an average measurement, peak and Average measurement for frequencies above 1 GHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

For Radiated 26.5-40GHz test:

Which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.0 dB

For 40-90GHz:

Test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$ dB= 9.54 dB.

For 90-100GHz:

Test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 0.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [0.5m]})$ dB=15.56 dB.

External harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.10-2013:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

λ is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-100GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance R_m (m)
M19RH	40-60	46.3	0.86
M12RH	60-90	30.02	0.55
M08RH	90-140	19.7	0.39

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 100GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

4.2.5 Corrected Amplitude & Margin Calculation

The basic equation except 26.5-100GHz test is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For Radiated 26.5-100GHz test:

Factor = Antenna Factor + Cable Loss - Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Serial Number:	2TL1-3	Test Date:	Below 1GHz: 2024/11/7 Above 1GHz: 2024/12/14
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Leesin Xiang, Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.8~26.2	Relative Humidity: (%)	31~48	ATM Pressure: (kPa)	102~102.1
----------------------	-----------	---------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
OML	Waveguide Mixer	WR19/M19HWD	U60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M19RH	11648-01	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR12/M12HWD	E60120-1	2023/2/16	2026/2/15
OML	Horn Antenna	M12RH	E60120-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR08/M08HWD	F60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M08RH	F60313-2	2023/2/27	2026/2/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 9kHz~30MHz(High channel was tested)

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

Project No.: 2402Y101434E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:


Serial No.: 2TL1-3
Tester: Leesin Xiang

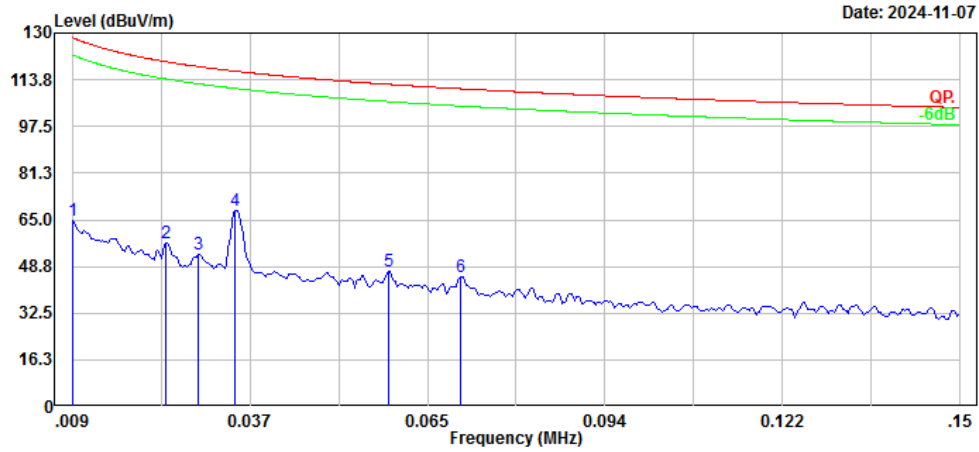

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.009	11.33	53.24	64.57	128.52	63.95	Peak
2	0.024	7.74	49.05	56.79	120.02	63.23	Peak
3	0.029	5.34	47.80	53.14	118.35	65.21	Peak
4	0.035	21.61	46.67	68.28	116.74	48.46	Peak
5	0.059	4.52	42.48	47.00	112.16	65.16	Peak
6	0.071	4.79	40.46	45.25	110.61	65.36	Peak

Project No.: 2402Y101434E-RF
Polarization: Parallel
Test Mode: Transmitting
Note:

Serial No.: 2TL1-3
Tester: Leesin Xiang

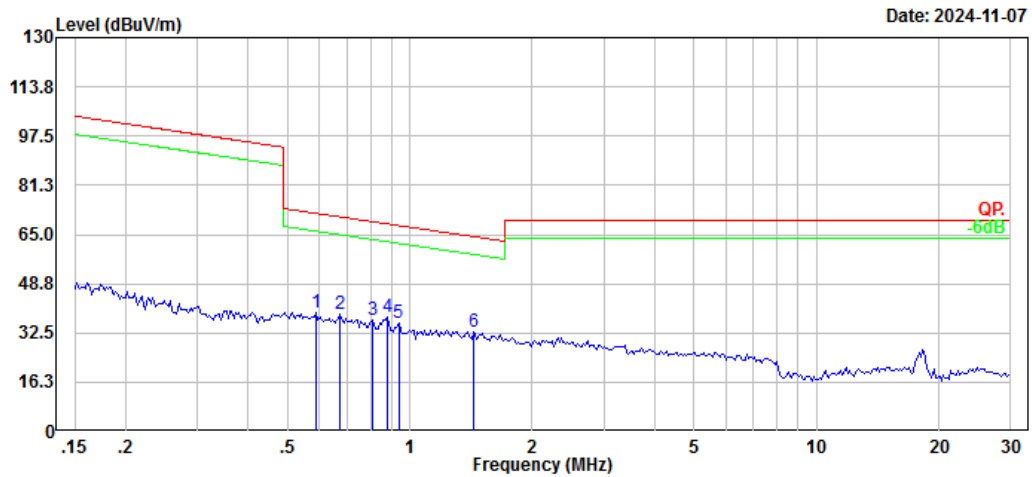

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.589	16.50	22.58	39.08	72.18	33.10	Peak
2	0.675	16.93	21.71	38.64	70.95	32.31	Peak
3	0.809	16.40	20.38	36.78	69.36	32.58	Peak
4	0.880	18.67	18.95	37.62	68.60	30.98	Peak
5	0.938	18.01	17.80	35.81	68.04	32.23	Peak
6	1.433	18.15	14.64	32.79	64.28	31.49	Peak

2) 30MHz-1GHz (High channel was tested)

Project No.: 2402Y101434E-RF


Serial No.: 2TL1-3

Polarization: Horizontal

Tester: Leesin Xiang

Test Mode: Transmitting


Note:

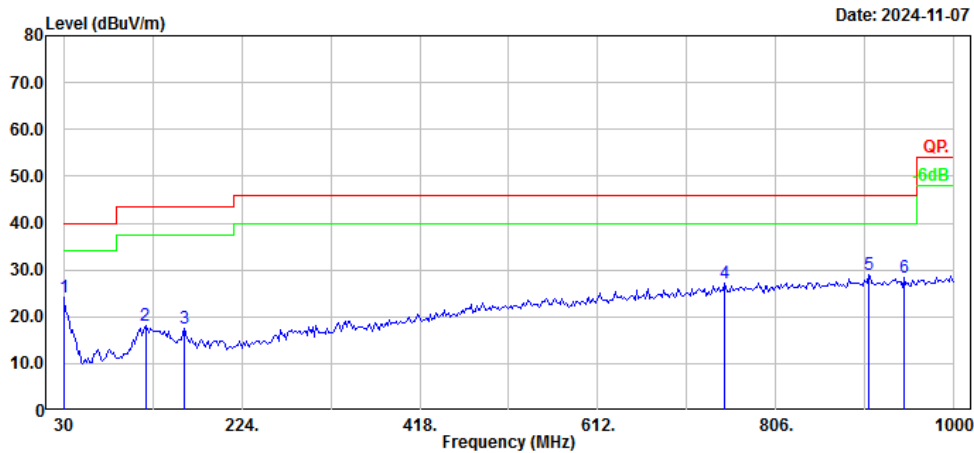

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	27.98	-3.80	24.18	40.00	15.82	Peak
2	119.24	28.25	-10.05	18.20	43.50	25.30	Peak
3	161.92	28.73	-11.27	17.46	43.50	26.04	Peak
4	749.74	27.51	-0.31	27.20	46.00	18.80	Peak
5	906.88	27.40	1.50	28.90	46.00	17.10	Peak
6	945.68	26.43	1.98	28.41	46.00	17.59	Peak

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note:

Serial No.: 2TL1-3
Tester: Leesin Xiang

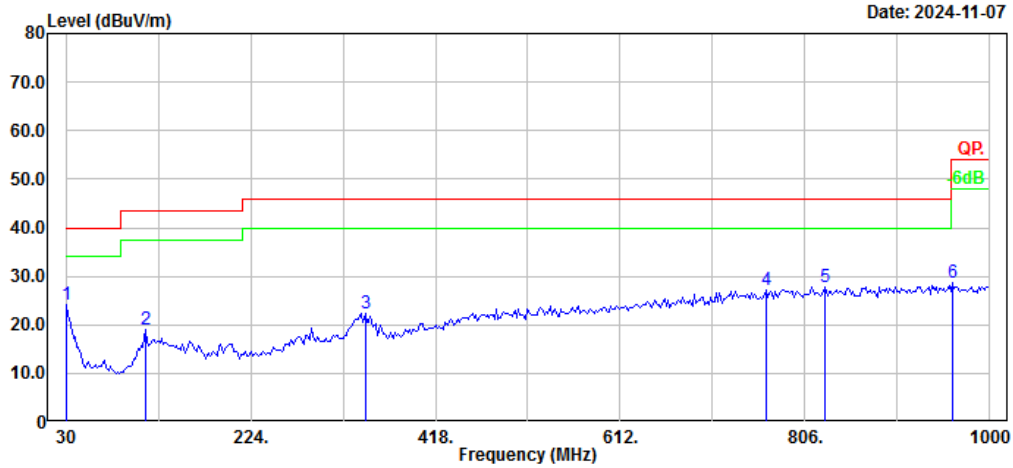


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	27.82	-3.80	24.02	40.00	15.98	Peak
2	113.42	29.85	-10.87	18.98	43.50	24.52	Peak
3	344.28	31.04	-8.68	22.36	46.00	23.64	Peak
4	765.26	27.34	-0.08	27.26	46.00	18.74	Peak
5	827.34	27.00	0.70	27.70	46.00	18.30	Peak
6	961.20	26.43	2.21	28.64	54.00	25.36	Peak

3) 1-40GHz:

Low Channel, Horizontal


Project No.: 2402Y101434E-RF Serial No.: 2TL1-3
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

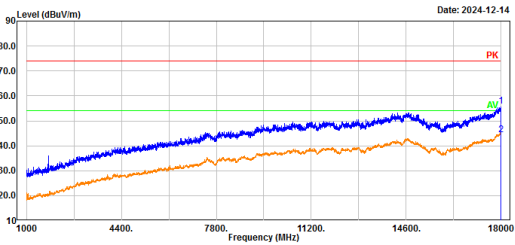

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	18000.00	47.61	8.13	55.74	74.00	18.26	Peak
2	18000.00	36.23	8.13	44.36	54.00	9.64	Average


Low Channel, Vertical

Project No.: 2402Y101434E-RF Serial No.: 2TL1-3
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

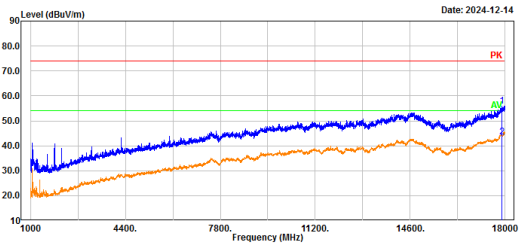


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	17870.80	48.65	7.21	55.86	74.00	18.14	Peak
2	17870.80	36.44	7.21	43.65	54.00	10.35	Average

Project No.: 2402Y101434E-RF Serial No.: 2TL1-3
Polarization: Horizontal Tester: Colin Yang
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

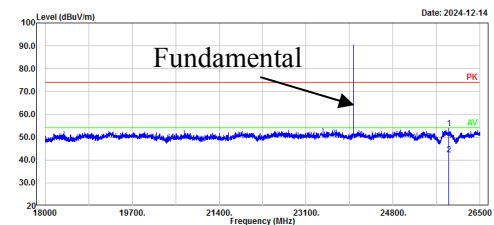

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	25888.00	43.06	10.64	53.70	74.00	20.30	Peak
2	25888.00	31.63	10.64	42.27	54.00	11.73	Average

Project No.: 2402Y101434E-RF Serial No.: 2TL1-3
Polarization: Vertical Tester: Colin Yang
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

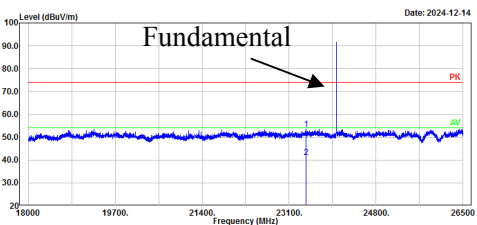


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	23429.80	44.85	8.71	53.56	74.00	20.44	Peak
2	23429.80	32.29	8.71	41.00	54.00	13.00	Average

Low Channel, Horizontal

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

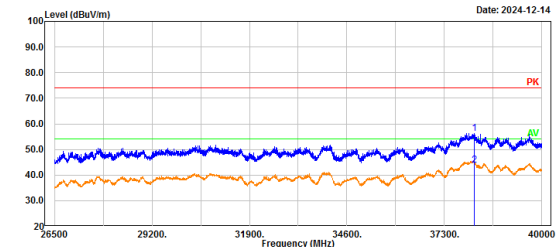


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38118.10	44.60	11.76	56.36	74.00	17.64	Peak
2	38118.10	32.13	11.76	43.89	54.00	10.11	Average

Low Channel, Vertical

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar low channel 24.025GHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

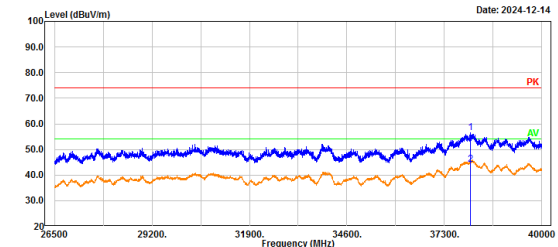


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38023.60	44.68	11.89	56.57	74.00	17.43	Peak
2	38023.60	32.39	11.89	44.28	54.00	9.72	Average

Middle Channel, Horizontal

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

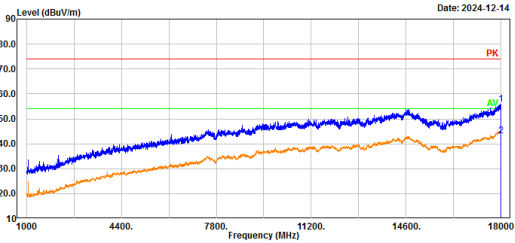


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	17989.80	47.83	8.06	55.89	74.00	18.11	Peak
2	17989.80	35.16	8.06	43.22	54.00	10.78	Average

Middle Channel, Vertical

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 2TL1-3
Tester: Colin Yang

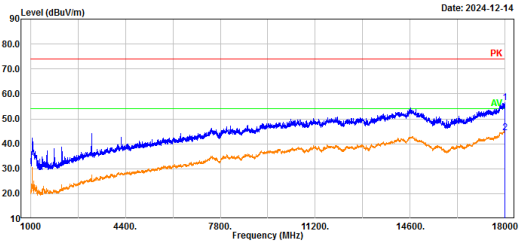

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	17993.20	48.38	8.09	56.47	74.00	17.53	Peak
2	17993.20	36.18	8.09	44.27	54.00	9.73	Average

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 2TL1-3
Tester: Colin Yang

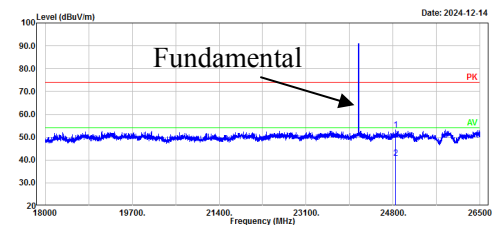

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24844.20	43.75	9.44	53.19	74.00	20.81	Peak
2	24844.20	31.28	9.44	40.72	54.00	13.28	Average

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

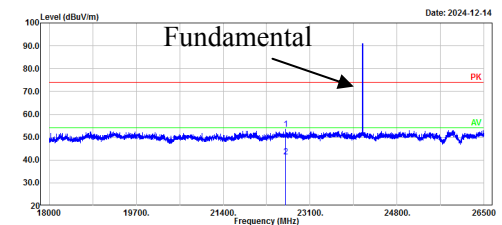


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	22627.40	45.57	8.07	53.64	74.00	20.36	Peak
2	22627.40	33.32	8.07	41.39	54.00	12.61	Average

Middle Channel, Horizontal

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

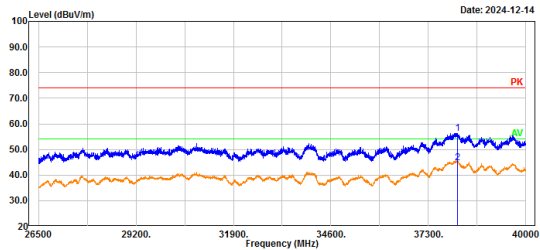


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38107.30	44.53	11.78	56.31	74.00	17.69	Peak
2	38107.30	32.83	11.78	44.61	54.00	9.39	Average

Middle Channel, Vertical

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar middle channel 24.125GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

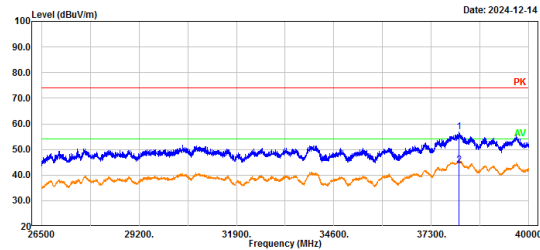


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38072.20	44.87	11.82	56.69	74.00	17.31	Peak
2	38072.20	32.16	11.82	43.98	54.00	10.02	Average

High Channel. Horizontal

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

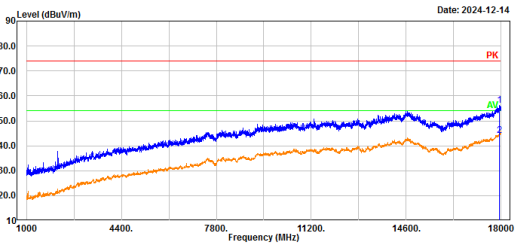


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	17932.00	48.67	7.65	56.32	74.00	17.68	Peak
2	17932.00	36.43	7.65	44.08	54.00	9.92	Average

High Channel. Vertical

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 2TL1-3
Tester: Colin Yang

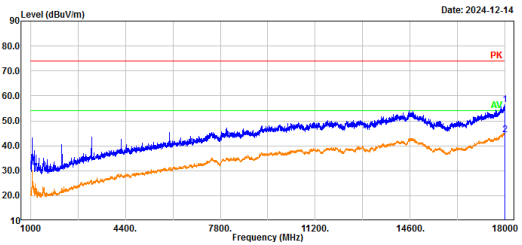

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	17996.60	48.24	8.11	56.35	74.00	17.65	Peak
2	17996.60	36.43	8.11	44.54	54.00	9.46	Average

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 2TL1-3
Tester: Colin Yang

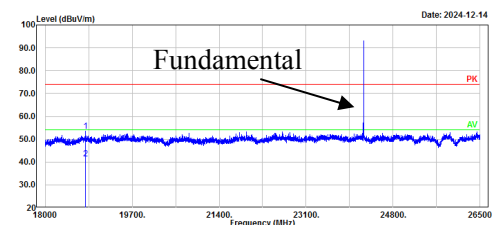

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	18792.20	47.06	6.31	53.37	74.00	20.63	Peak
2	18792.20	35.20	6.31	41.51	54.00	12.49	Average

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

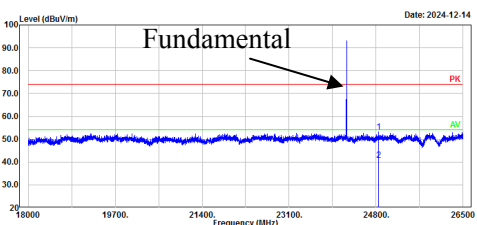


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24847.60	43.85	9.44	53.29	74.00	20.71	Peak
2	24847.60	31.52	9.44	40.96	54.00	13.04	Average

High Channel, Horizontal

Project No.: 2402Y101434E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz

Serial No.: 2TL1-3
Tester: Colin Yang

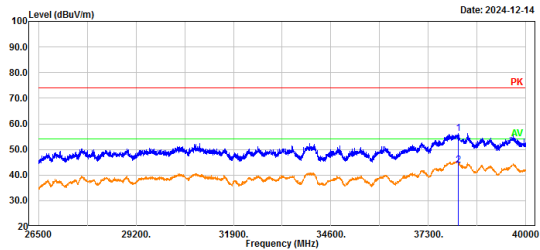


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38128.90	44.40	11.74	56.14	74.00	17.86	Peak
2	38128.90	32.11	11.74	43.85	54.00	10.15	Average

High Channel, Vertical

Project No.: 2402Y101434E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: Radar high channel 24.225GHz
Peak: RBW:1MHz, VBW:3MHz Ave:RBW:1MHz, VBW:5kHz


Serial No.: 2TL1-3
Tester: Colin Yang

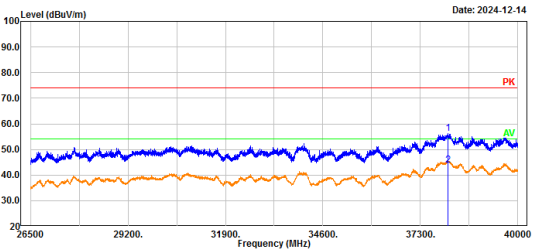

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38064.10	44.49	11.84	56.33	74.00	17.67	Peak
2	38064.10	32.16	11.84	44.00	54.00	10.00	Average


Fundamental And Bandedge

Low Channel, Horizontal

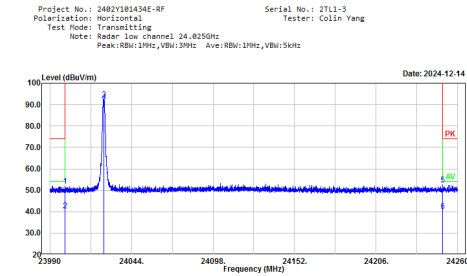


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24000.00	43.29	8.76	52.05	74.00	21.95	Peak
2	24000.00	31.75	8.76	40.51	54.00	13.49	Average
3	24025.64	83.63	8.78	92.41	127.96	35.55	Peak
4	24025.64	82.56	8.78	91.34	107.96	16.62	Average
5	24250.00	43.73	8.92	52.65	74.00	21.35	Peak
6	24250.00	31.25	8.92	40.17	54.00	13.83	Average

Low Channel, Vertical

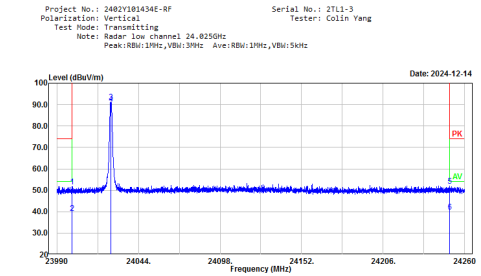


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24000.00	42.87	8.76	51.63	74.00	22.37	Peak
2	24000.00	30.69	8.76	39.45	54.00	14.55	Average
3	24025.69	82.52	8.78	91.30	127.96	36.66	Peak
4	24025.69	81.43	8.78	90.21	107.96	17.75	Average
5	24250.00	42.97	8.92	51.89	74.00	22.11	Peak
6	24250.00	30.91	8.92	39.83	54.00	14.17	Average

Middle Channel, Horizontal

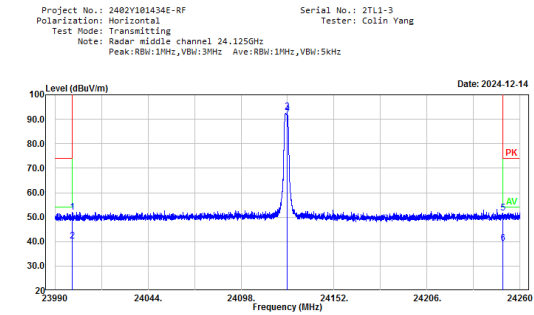


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24000.00	43.17	8.76	51.93	74.00	22.07	Peak
2	24000.00	31.36	8.76	40.12	54.00	13.88	Average
3	24124.68	84.16	8.83	92.99	127.96	34.97	Peak
4	24124.68	83.33	8.83	92.16	107.96	15.80	Average
5	24250.00	42.65	8.92	51.57	74.00	22.43	Peak
6	24250.00	30.25	8.92	39.17	54.00	14.83	Average

Middle Channel, Vertical

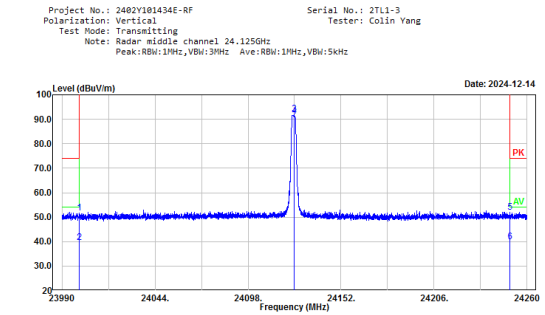

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	24000.00	42.79	8.76	51.55	74.00	22.45	Peak
2	24000.00	30.81	8.76	39.57	54.00	14.43	Average
3	24124.89	83.45	8.83	92.28	127.96	35.68	Peak
4	24124.89	82.27	8.83	91.10	107.96	16.86	Average
5	24250.00	43.08	8.92	52.00	74.00	22.00	Peak
6	24250.00	31.06	8.92	39.98	54.00	14.02	Average

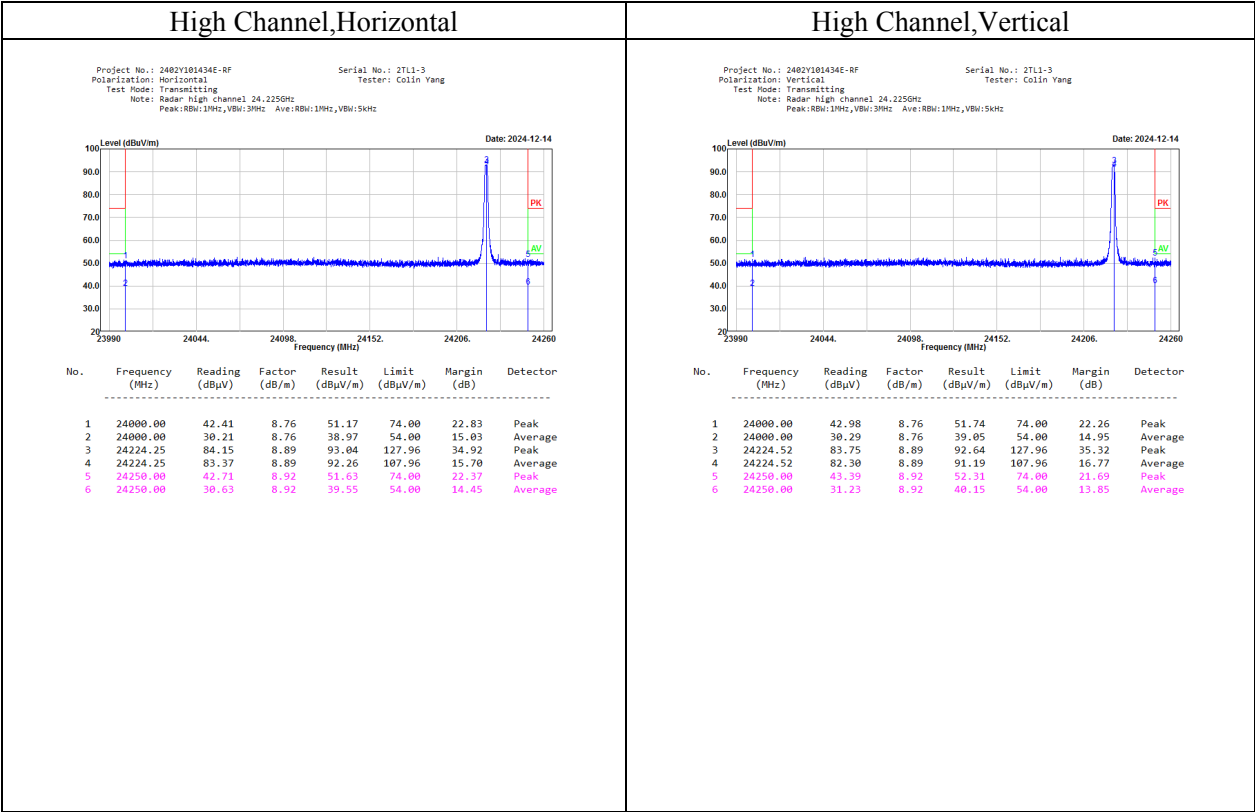

3) 40-100GHz:

Frequency (GHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
channel 24.025 GHz							
48.050	46.36	PK	H	40.05	76.87	87.96	11.09
48.050	34.11	AV	H	40.05	64.62	67.96	3.34
48.050	46.01	PK	V	40.05	76.52	87.96	11.44
48.050	34.26	AV	V	40.05	64.77	67.96	3.19
72.075	42.16	PK	H	43.79	76.41	87.96	11.55
72.075	30.13	AV	H	43.79	64.38	67.96	3.58
72.075	42.09	PK	V	43.79	76.34	87.96	11.62
72.075	30.58	AV	V	43.79	64.83	67.96	3.13
96.100	42.17	PK	H	45.86	72.47	87.96	15.49
96.100	30.55	AV	H	45.86	60.85	67.96	7.11
96.100	42.59	PK	V	45.86	72.89	87.96	15.07
96.100	30.19	AV	V	45.86	60.49	67.96	7.47
channel 24.125 GHz							
48.250	46.21	PK	H	40.08	76.75	87.96	11.21
48.250	34.06	AV	H	40.08	64.60	67.96	3.36
48.250	46.13	PK	V	40.08	76.67	87.96	11.29
48.250	34.23	AV	V	40.08	64.77	67.96	3.19
72.375	42.07	PK	H	43.84	76.37	87.96	11.59
72.375	30.22	AV	H	43.84	64.52	67.96	3.44
72.375	42.56	PK	V	43.84	76.86	87.96	11.10
72.375	30.18	AV	V	43.84	64.48	67.96	3.48
96.500	42.43	PK	H	45.91	72.78	87.96	15.18
96.500	30.09	AV	H	45.91	60.44	67.96	7.52
96.500	42.46	PK	V	45.91	72.81	87.96	15.15
96.500	30.27	AV	V	45.91	60.62	67.96	7.34

Frequency (GHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
	channel			24.225	GHz		
48.450	46.11	PK	H	40.11	76.68	87.96	11.28
48.450	34.35	AV	H	40.11	64.92	67.96	3.04
48.450	46.18	PK	V	40.11	76.75	87.96	11.21
48.450	34.30	AV	V	40.11	64.87	67.96	3.09
72.675	42.09	PK	H	43.89	76.44	87.96	11.52
72.675	30.05	AV	H	43.89	64.40	67.96	3.56
72.675	42.15	PK	V	43.89	76.50	87.96	11.46
72.675	30.23	AV	V	43.89	64.58	67.96	3.38
96.900	42.11	PK	H	45.96	72.51	87.96	15.45
96.900	30.42	AV	H	45.96	60.82	67.96	7.14
96.900	42.49	PK	V	45.96	72.89	87.96	15.07
96.900	30.58	AV	V	45.96	60.98	67.96	6.98

Result = Reading + Factor- Distance extrapolation Factor

For 40-90GHz:

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$ dB= 9.54 dB

For 90-100GHz:

Distance extrapolation Factor = $20 \log (\text{specific distance [3m]}/\text{test distance [0.5m]})$ dB= 15.56 dB


4.3 20 dB Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.215

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3.2 EUT Setup

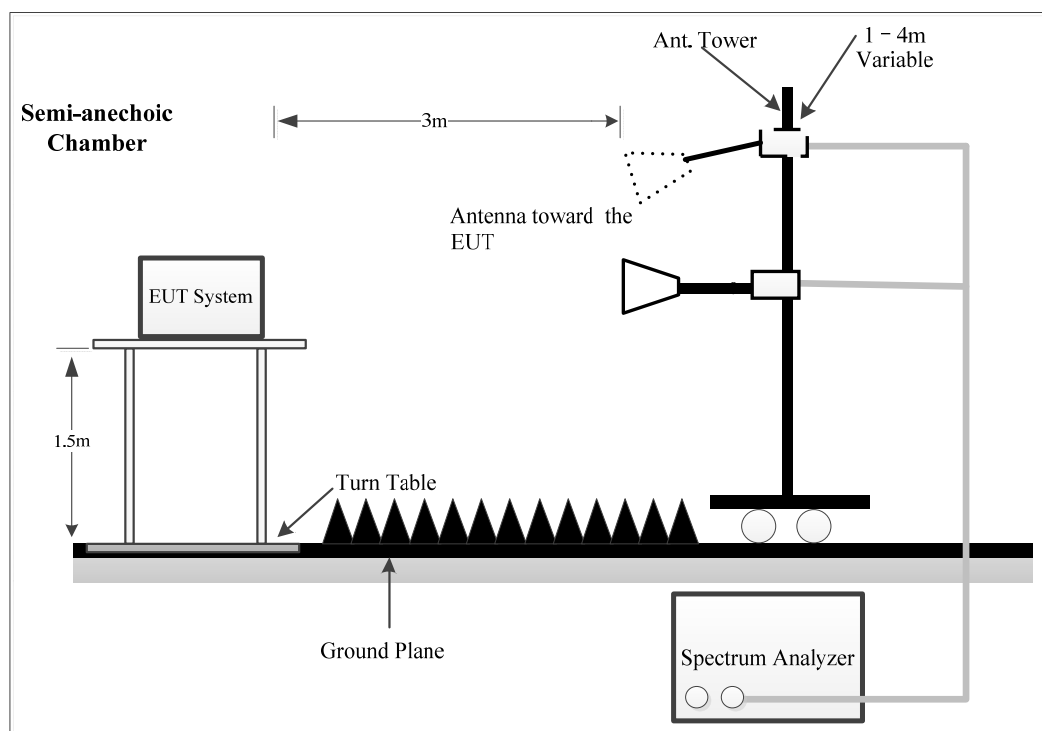

4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, unless otherwise specified by the applicable requirement.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

4.3.4 Test Result

Serial No.:	2TL1-3	Test Date:	2024/12/19
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	20.7	Relative Humidity: (%)	27	ATM Pressure: (kPa)	102.5
----------------------	------	------------------------------	----	---------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Mode	20 dB Bandwidth (MHz)
Sweep Mode	214.910
Note: the 20 dB bandwidth of the emission is contained within the operation frequency band. Please refer to the below plots.	

20 dB Bandwidth

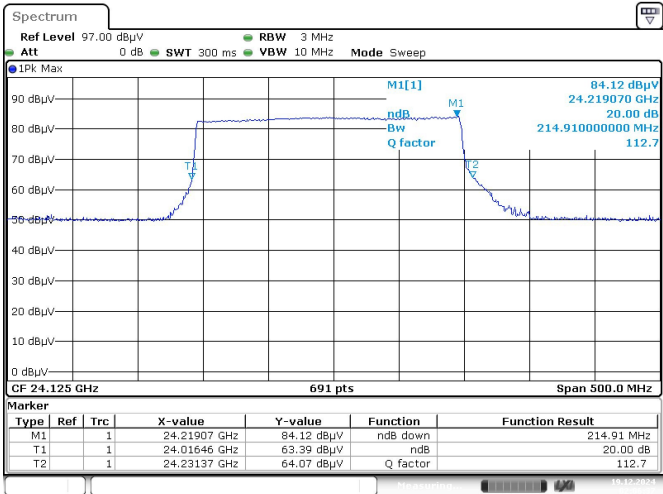

Project No.: 2402Y101434E-RF Tester: Colin Yang
Date: 19 DEC 2024 02:06:37

4.4 Antenna Requirement

4.4.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.4.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2402Y101434E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2402Y101434E-RF-INP EUT INTERNAL PHOTOGRAPHS

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402Y101434E-RF-00C-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******