



FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen,
518057 China

FCC ID: YAMPD70XIU1

Report Type: Original Report	Product Type: Digital Portable Radio
Report Number: RDG171207012-00A	
Report Date: 2018-01-12	
Candy Li <i>Candy Li</i>	
Reviewed By: RF Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1307(b) & §2.1093 - RF EXPOSURE.....	10
APPLICABLE STANDARD	10
FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1047 - MODULATION CHARACTERISTIC	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST DATA	14
FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK.....	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	26
FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST DATA	46
FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS.....	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY	60
APPLICABLE STANDARD	60

TEST PROCEDURE60

TEST DATA60

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....66

APPLICABLE STANDARD66

TEST PROCEDURE66

TEST DATA66

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Communications Corporation Limited's* product, model number: *PD702i U(1)* (FCC ID: *YAMPD70XIU1*) in this report is a *Digital Portable Radio*, which was measured approximately: 215.0 mm (L) x 61.0 mm (W) x 39.0 mm (H), rated input voltage: DC 7.4V or DC12.0V from adapter.

Adapter Information:

Model: HKA01212010-XQ

Input: 100-240V, 50/60Hz, 0.5A

Output: 12.0V, 1.0A.

Type	Parameter
Frequency Range(MHz)	400-470
Output power(Watts)	4 (High)/ 1(Low)
Modulation	FM/4FSK
Channel Spacing(kHz)	12.5/25

Notes: This series products model: PD705i U(1), PD706i U(1), PD708i U(1) and PD702i U(1) are identical schematics, and only are different for model number. Model PD702i U(1) was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 171207012 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-07.*

Objective

This test report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, and Part 22,74,80,90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		uncertainty
Occupied Channel Bandwidth		$\pm 5\%$
RF output power, conducted		$\pm 1.5\text{dB}$
Unwanted Emission, conducted		$\pm 1.5\text{dB}$
Emissions, Radiated	Below 1GHz	$\pm 4.75\text{dB}$
	Above 1GHz	$\pm 4.88\text{dB}$
Temperature		$\pm 1^\circ\text{C}$
Supply voltages		$\pm 0.4\%$

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Load	100W/50Ohm	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
N/A	N/A	N/A	N/A

Block Diagram of Test Setup

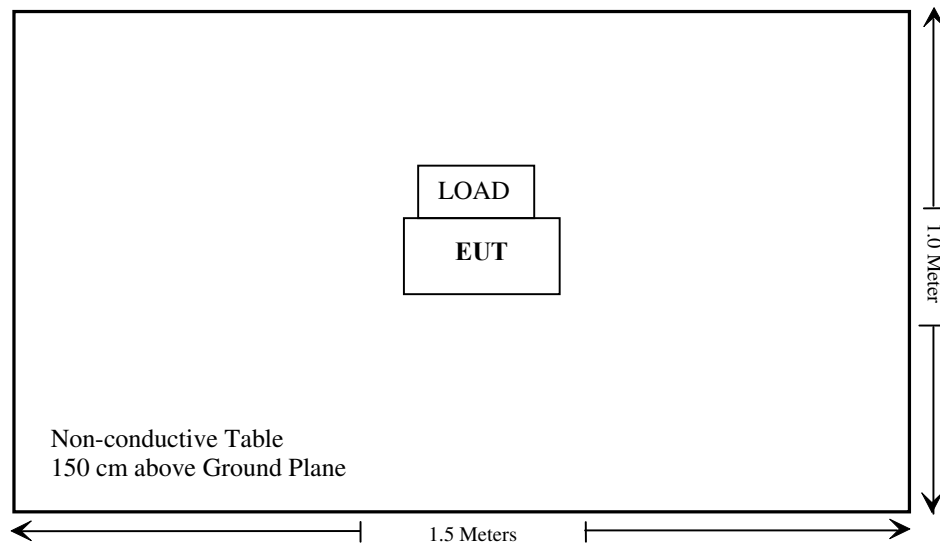

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
FCC §1.1307(b) & §2.1093	RF Exposure	Compliance
§2.1046; § 22.727; §74.461; § 80.215; §90.205	RF Output Power	Compliance
§2.1047	Modulation Characteristic	Compliance
§2.1049; §22.357; § 22.731; §74.462; § 80.205; § 80.207; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861; §74.462; § 80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861; §74.462; § 80.211; §90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; § 80.209; §90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal Generator	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-17
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-05	2018-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSW13	103533	2017-06-15	2018-06-14
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Vector Signal Generator	SMW200A	102522	2017-06-15	2018-06-14
MICABLE	RF Cable	D02	N/A	2017-06-15	2018-06-14
WEINSCHL	30dB Attenuator	53-30-43	PG633	2017-11-22	2018-05-22
HP Agilent	RF Communication Test Set	HP8920	3325U00859	2017-05-07	2018-05-07
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2017-04-24	2018-04-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

Result: Compliance.

Please refer to SAR Report Number: RDG171207012-20.

FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER**Applicable Standard**

FCC §2.1046, § 22.727, §74.461, § 80.215 and §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-12-14.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Output Power (dBm)	Output Power (W)	Remark
Analog	12.5	400.0125	High	36.72	4.70	For Federal
			Low	30.49	1.12	
	12.5	453.2125	High	36.68	4.66	For Part 90
			Low	30.62	1.15	
	12.5	454.9875	High	36.72	4.70	For Part 22
			Low	30.57	1.14	
	12.5	455.2125	High	36.15	4.12	For Part 74
			Low	30.16	1.04	
	12.5	469.9875	High	36.09	4.06	For Part 90
			Low	30.13	1.03	

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Output Power (dBm)	Output Power (W)	Remark
Analog	25	455.2125	High	36.22	4.19	For Part 74
			Low	30.22	1.05	
	25	454.9875	High	36.73	4.71	For Part 22
			Low	30.53	1.13	
	25	459.9875	High	36.63	4.60	For Part 80
			Low	30.59	1.15	

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	Output Power (dBm)	Output Power (W)	Remark
Digital	12.5	400.0125	High	36.19	4.16	For Federal
			Low	30.57	1.14	
	12.5	453.2125	High	36.72	4.70	For Part 90
			Low	30.49	1.12	
	12.5	454.9875	High	36.28	4.25	For Part 22
			Low	30.19	1.04	
	12.5	455.2125	High	36.21	4.18	For Part 74
			Low	30.51	1.12	
	12.5	469.9875	High	36.22	4.19	For Federal
			Low	30.17	1.04	

Note: The high rated power is 4W, limit is 3.2-4.8W

The low rated power is 1W, limit is 0.8-1.2W

FCC §2.1047 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047, §74.463, §80.213 and §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-12-14.


Test Mode: Transmitting

Result: Compliance.

MODULATION LIMITING

Carrier Frequency: 453.2125MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	1.565	0.059	1.546	0.058	2.5
400	1.904	0.076	1.901	0.054	2.5
500	2.074	0.100	2.046	0.084	2.5
600	2.128	0.114	2.092	0.091	2.5
700	2.144	0.133	2.005	0.115	2.5
800	2.156	0.146	2.150	0.138	2.5
900	2.164	0.163	1.979	0.158	2.5
1000	2.176	0.179	1.998	0.152	2.5
1200	2.181	0.215	2.121	0.197	2.5
1400	2.168	0.239	2.054	0.209	2.5
1600	2.165	0.257	2.124	0.232	2.5
1800	2.182	0.298	2.060	0.256	2.5
2000	2.191	0.321	2.063	0.302	2.5
2100	2.186	0.341	2.010	0.258	2.5
2200	2.166	0.358	2.066	0.348	2.5
2300	2.139	0.359	2.124	0.323	2.5
2400	2.101	0.357	1.918	0.292	2.5
2500	2.046	0.377	1.869	0.366	2.5
2600	1.975	0.379	1.888	0.292	2.5
2700	1.889	0.368	1.872	0.364	2.5
2800	1.788	0.362	1.690	0.333	2.5
2900	1.648	0.351	1.487	0.349	2.5
3000	1.495	0.327	1.369	0.247	2.5

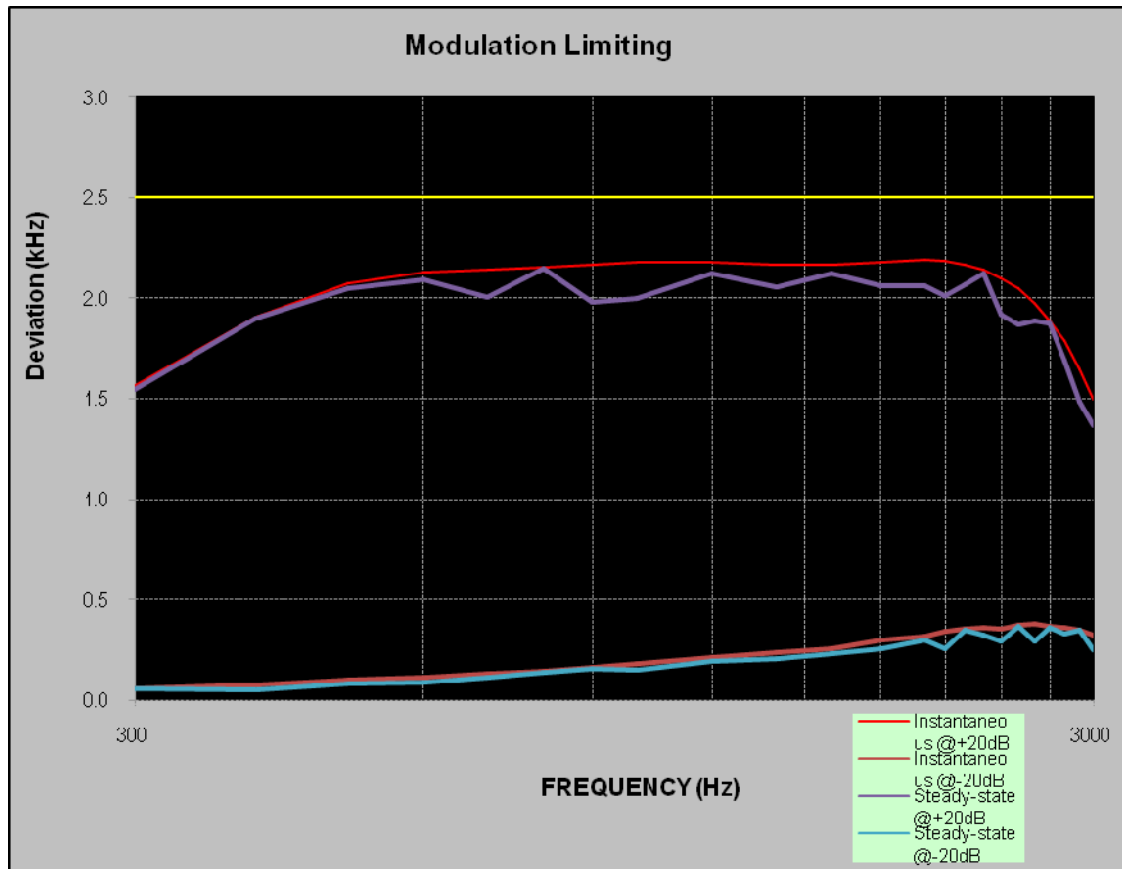

Audio Frequency Response

Carrier Frequency: 453.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.32
400	-8.50
500	-6.27
600	-4.10
700	-3.17
800	-2.11
900	-0.90
1000	0
1200	1.35
1400	2.84
1600	3.65
1800	4.87
2000	5.46
2100	6.06
2200	6.53
2300	6.66
2400	6.79
2500	7.00
2600	7.20
2700	6.95
2800	6.68
2900	6.71
3000	5.89

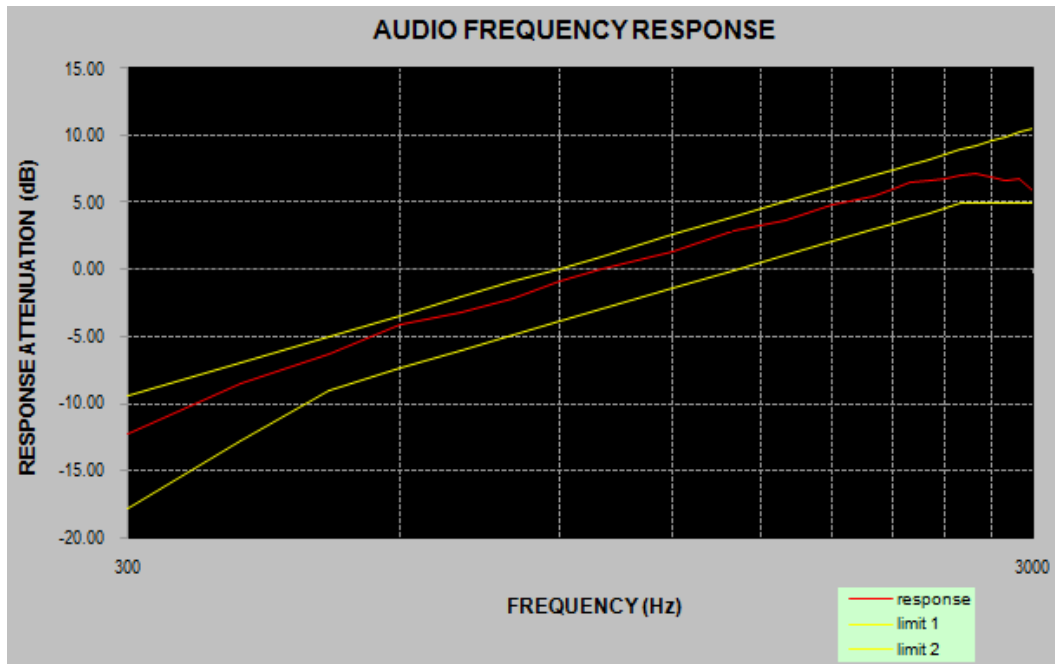

Audio frequency lows pass filter response

Carrier Frequency: 453.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0	/
3.0	-35.70	0
4.0	-71.63	-12.5
5.0	-76.39	-22.2
6.0	-86.13	-30.1
7.0	-88.35	-36.8
8.0	-88.73	-42.6
9.0	-87.54	-47.7
10.0	-88.63	-52.3
12.0	-87.26	-60.2
14.0	-85.10	-66.9
16.0	-83.59	-72.7
18.0	-87.98	-77.8
20.0	-88.05	-82.5

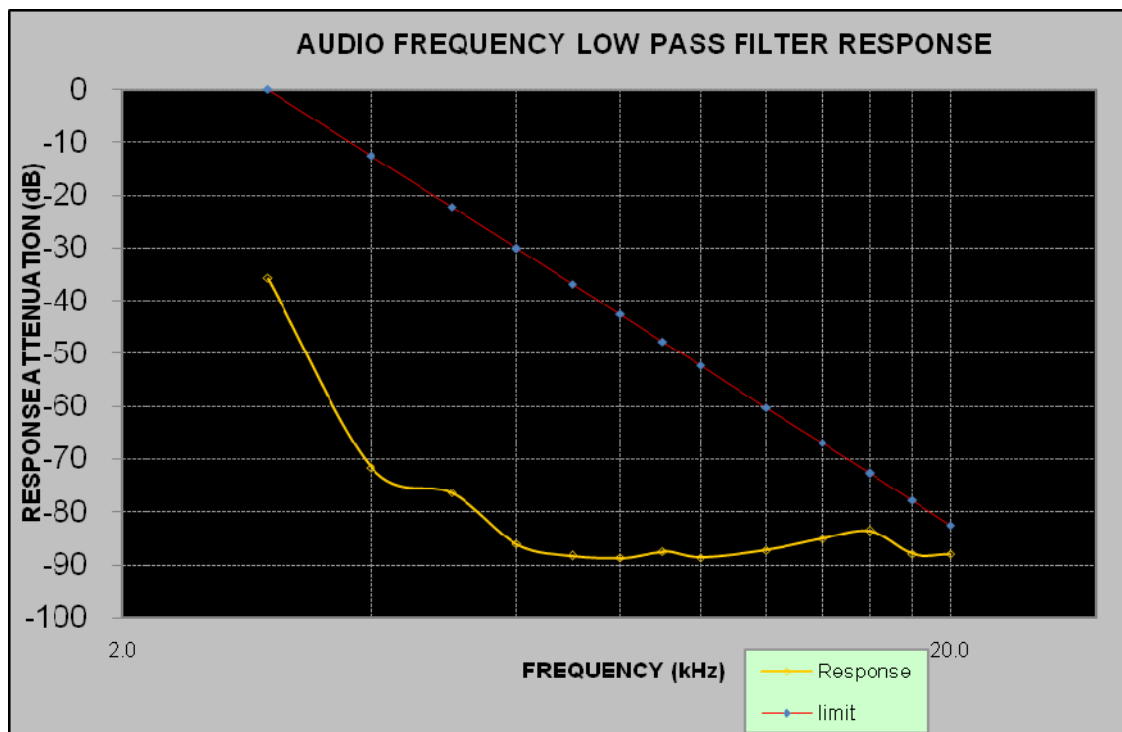

MODULATION LIMITING

Carrier Frequency: 454.9875MHz, Channel Separation= 25.0 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	3.106	0.111	3.079	0.096	5.0
400	3.761	0.163	3.738	0.141	5.0
500	4.115	0.190	4.092	0.176	5.0
600	4.279	0.132	4.270	0.129	5.0
700	4.250	0.207	4.227	0.188	5.0
800	4.235	0.235	4.221	0.207	5.0
900	4.236	0.342	4.227	0.319	5.0
1000	4.258	0.356	4.248	0.339	5.0
1200	4.320	0.397	4.319	0.377	5.0
1400	4.307	0.491	4.291	0.485	5.0
1600	4.351	0.532	4.340	0.509	5.0
1800	4.350	0.508	4.348	0.498	5.0
2000	4.305	0.670	4.294	0.649	5.0
2100	4.379	0.671	4.350	0.654	5.0
2200	4.257	0.748	4.256	0.735	5.0
2300	4.362	0.690	4.353	0.662	5.0
2400	4.194	0.788	4.191	0.766	5.0
2500	4.215	0.710	4.189	0.687	5.0
2600	4.059	0.751	4.054	0.750	5.0
2700	3.805	0.683	3.796	0.673	5.0
2800	3.707	0.702	3.692	0.694	5.0
2900	3.488	0.660	3.462	0.655	5.0
3000	3.077	0.571	3.074	0.556	5.0

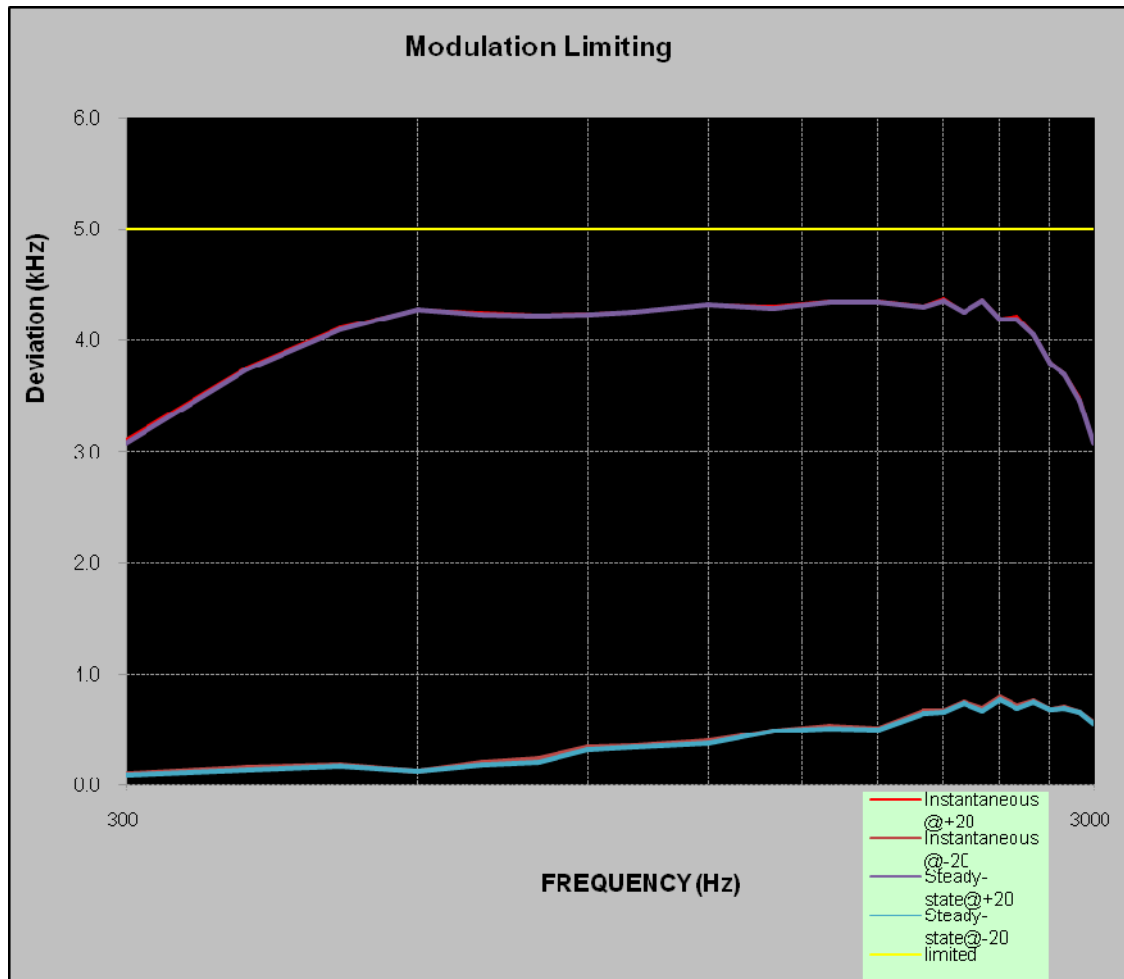

Audio Frequency Response

Carrier Frequency: 454.9875 MHz, Channel Separation=25.0 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-12.96
400	-9.12
500	-6.16
600	-4.39
700	-3.38
800	-2.30
900	-1.02
1000	0
1200	1.27
1400	2.91
1600	3.65
1800	4.96
2000	5.66
2100	6.24
2200	6.75
2300	6.93
2400	7.03
2500	7.30
2600	7.54
2700	7.38
2800	7.17
2900	7.11
3000	6.39

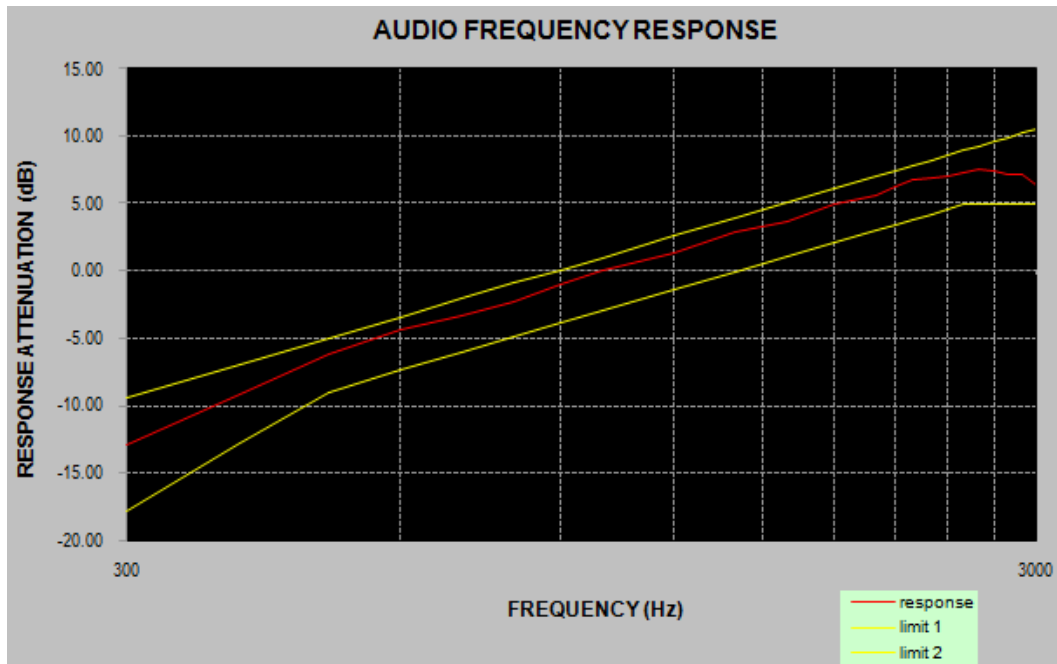

Audio frequency lows pass filter response

Carrier Frequency: 454.9875 MHz, Channel Separation=25.0 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0	/
3.0	-30.29	0.0
4.0	-73.22	-7.5
5.0	-86.32	-13.3
6.0	-87.03	-18.1
7.0	-87.68	-22.1
8.0	-88.27	-25.6
9.0	-88.24	-28.6
10.0	-87.35	-31.4
15.0	-86.51	-41.9
20.0	-87.92	-50.0
30.0	-86.57	-50.0
40.0	-88.25	-50.0
50.0	-89.03	-50.0
60.0	-87.51	-50.0
70.0	-88.93	-50.0

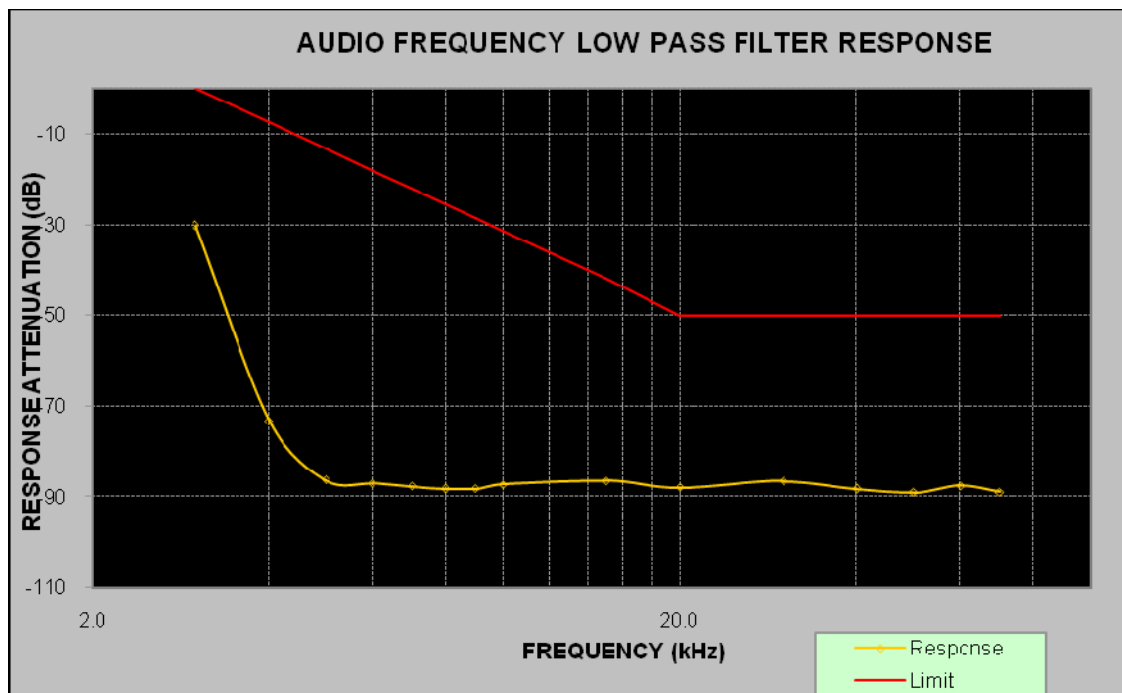

FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §22.357, § 22.731, §74.462, § 80.205, § 80.207, §90.209 and §90.210

Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B - 25 kHz channel bandwidth equipment. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test Data**Environmental Conditions**

Temperature:	21~24 °C
Relative Humidity:	47~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Vincent Zheng from 2017-12-14 to 2018-01-19.

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	12.5	453.2125	High	9.94	10.34	For Part 90
	12.5		Low	9.86	10.34	
	12.5	454.9875	High	9.86	10.34	For Part 22
	12.5		Low	9.86	10.34	
	12.5	455.2125	High	9.94	10.34	For Part 74
	12.5		Low	9.94	10.34	
Digital	12.5	453.2125	High	7.61	9.46	For Part 90
	12.5		Low	7.29	8.65	
	12.5	454.9875	High	7.29	9.29	For Part 22
	12.5		Low	7.69	9.78	
	12.5	455.2124	High	6.97	8.97	For Part 74
	12.5		Low	7.21	9.21	

Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.


For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.69 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

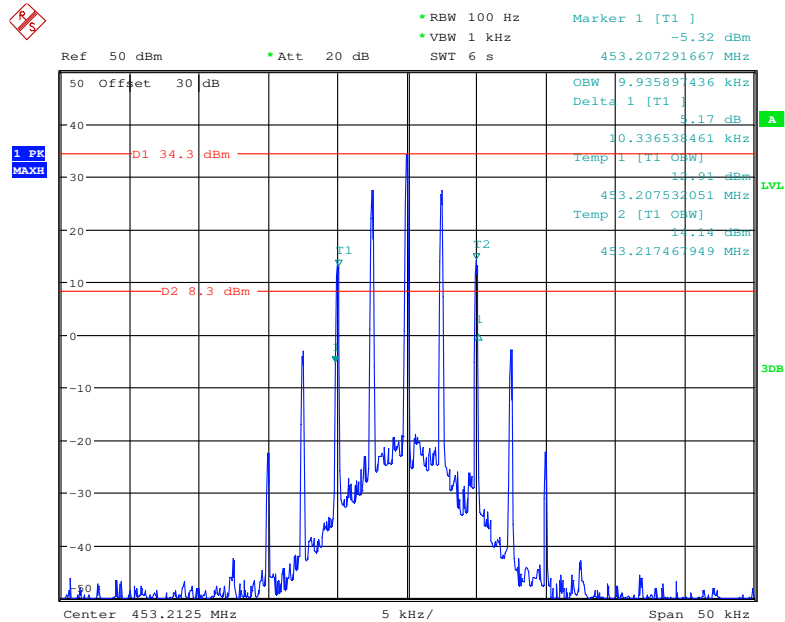
Analog Modulation:**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

Date: 5.JAN.2018 20:37:05

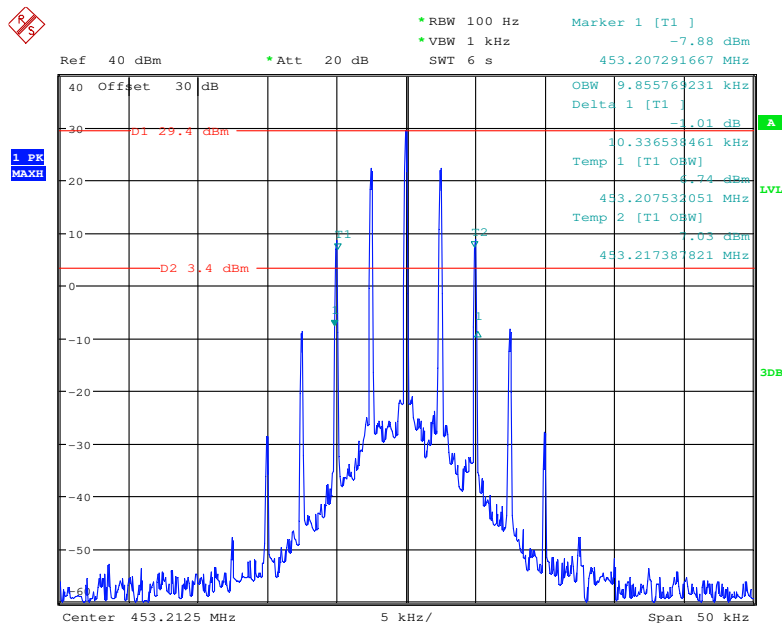Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power


Date: 5.JAN.2018 20:47:02

Frequency 453.2125 MHz: Emission Mask D, High Power

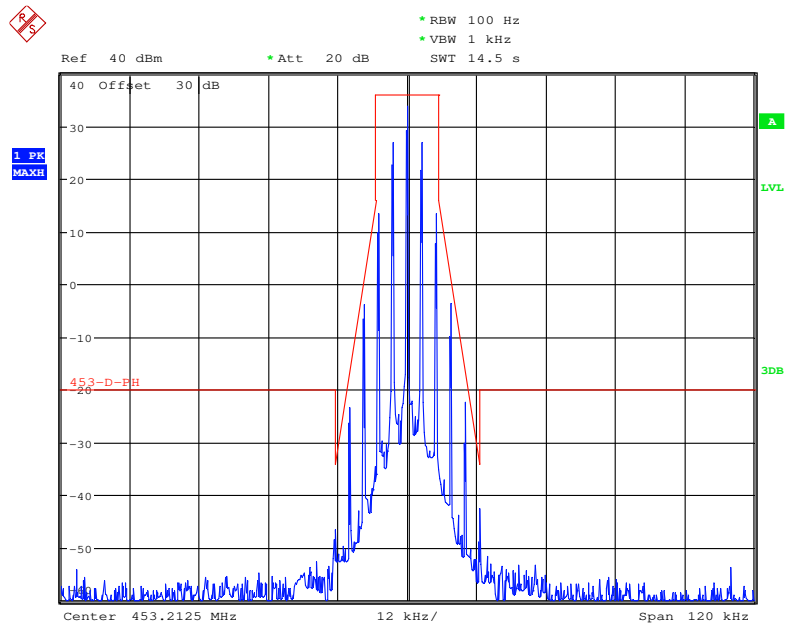


Date: 5.JAN.2018 21:16:16

Frequency 453.2125 MHz: Emission Mask D, Low Power

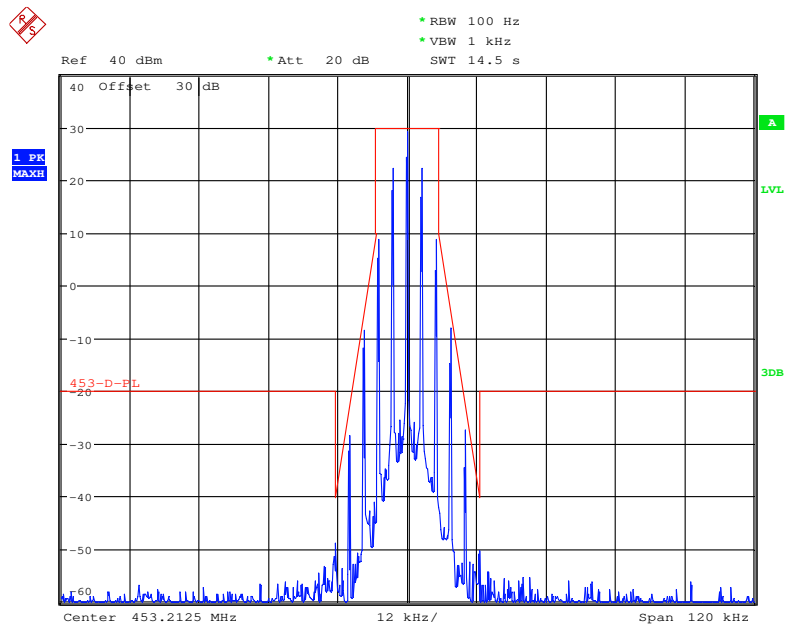


Date: 5.JAN.2018 21:17:10

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power

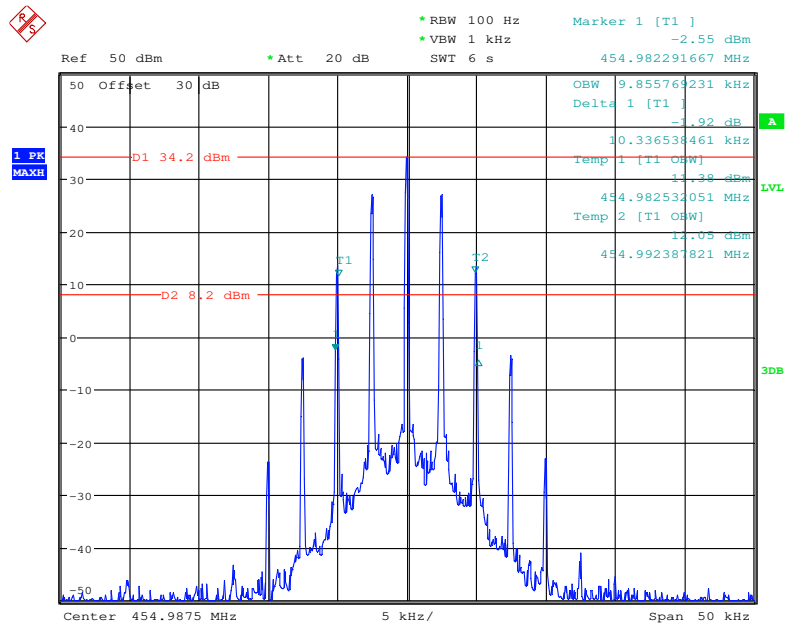


Date: 5.JAN.2018 20:49:14

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

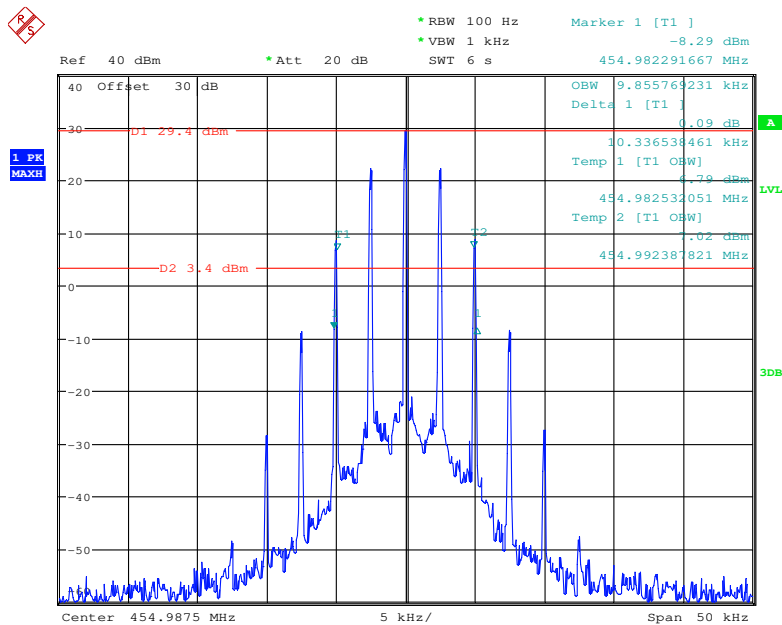


Date: 5.JAN.2018 20:48:03

Frequency 454.9875 MHz: Emission Mask, High Power, FCC part 22.359

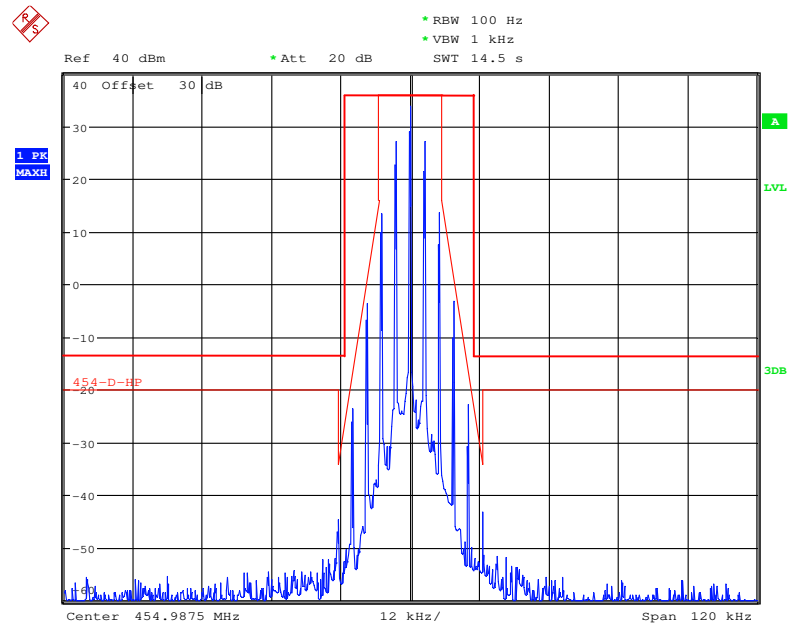


Date: 5.JAN.2018 21:11:57


Frequency 454.9875 MHz: Emission Mask, Low Power, FCC part 22.359

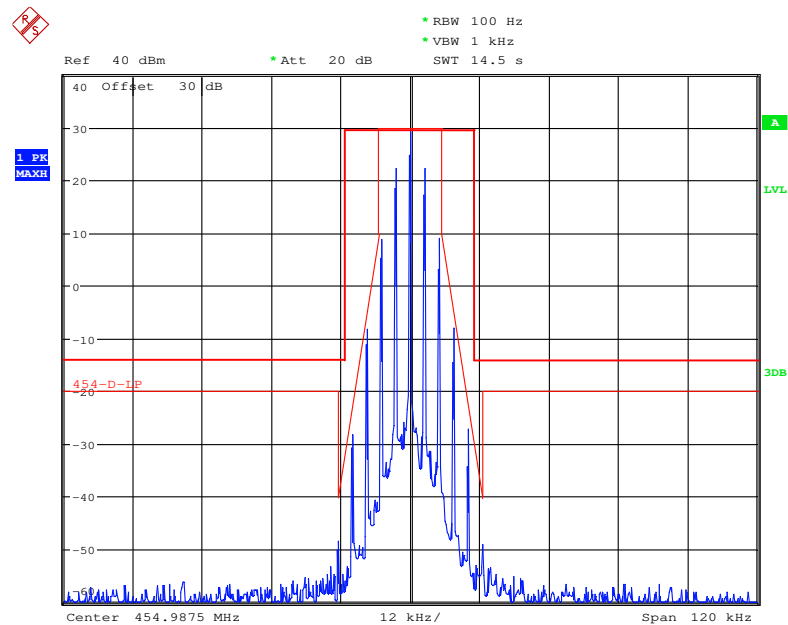

Date: 5.JAN.2018 21:13:21

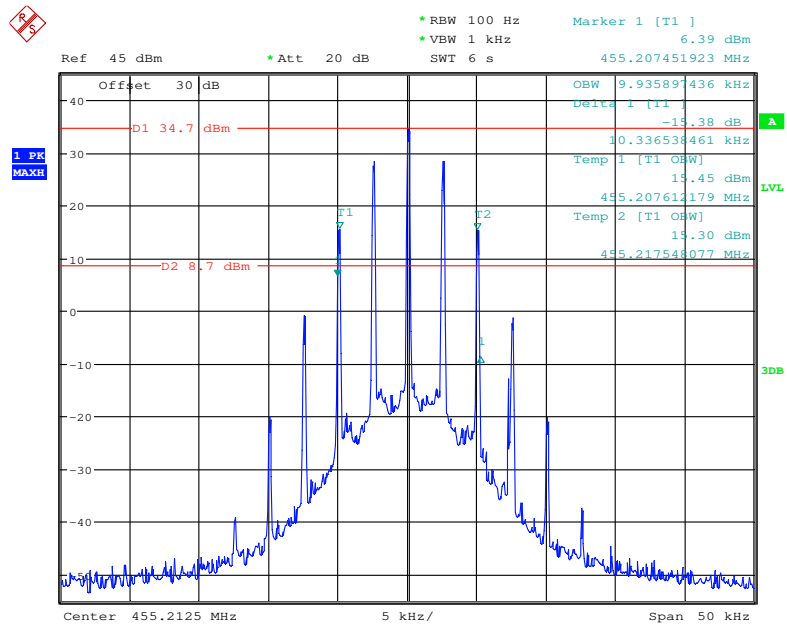
Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

Date: 19.JAN.2018 21:17:53

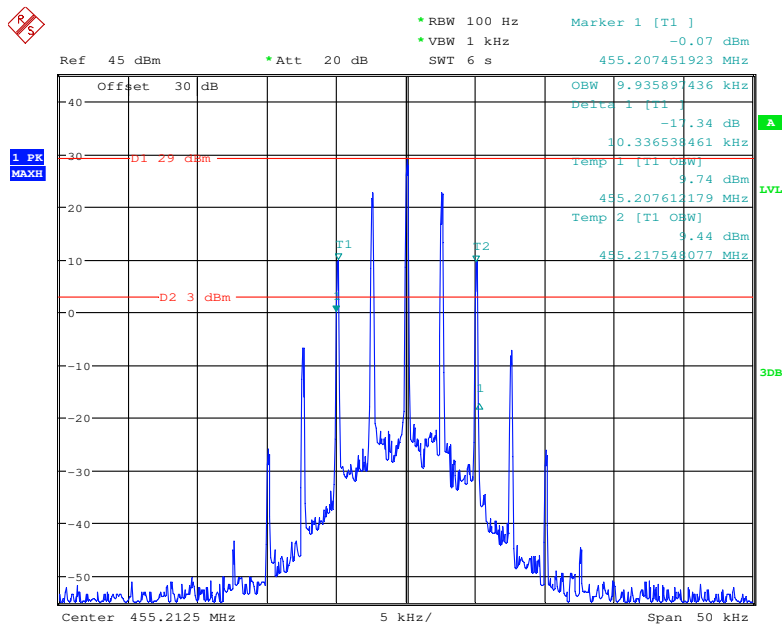Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power


Date: 19.JAN.2018 21:19:15

Frequency 455.2125 MHz: Emission Mask D, High Power, FCC part 74.462

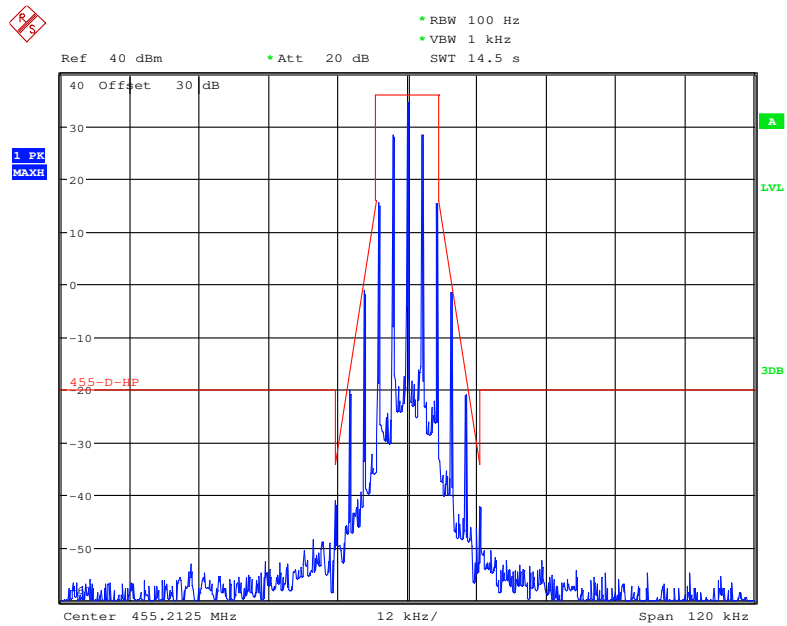

Date: 19.JAN.2018 21:40:27


Frequency 455.2125 MHz: Emission Mask D, Low Power, FCC part 74.462

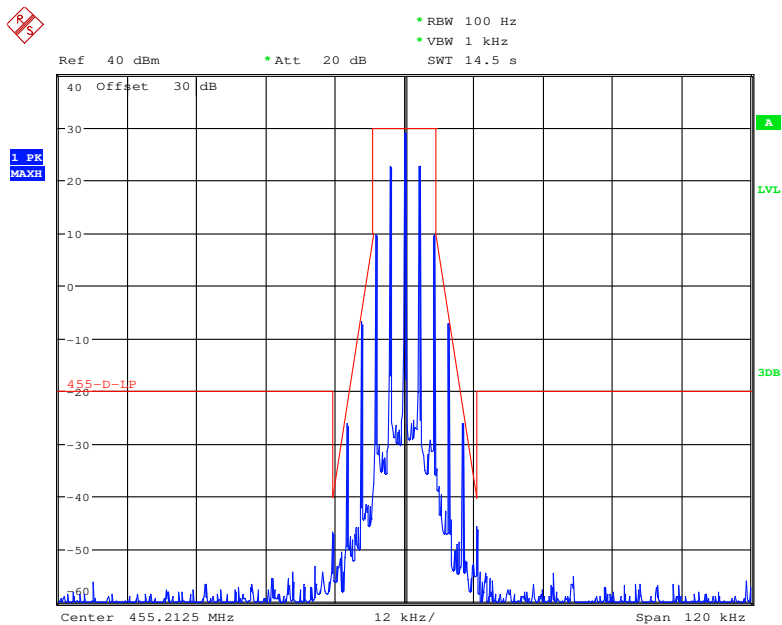

Date: 19.JAN.2018 21:42:02


Digital Modulation:

Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

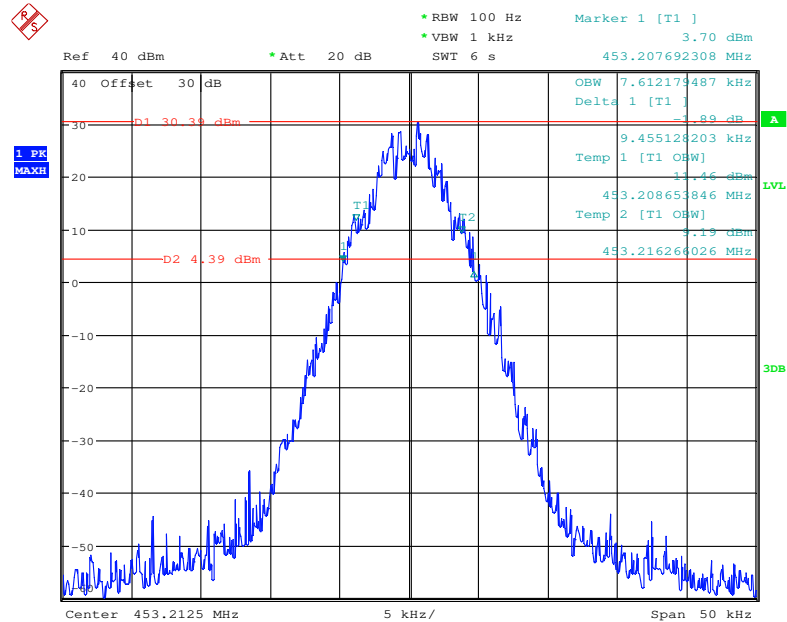


Date: 14.DEC.2017 19:54:23

Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

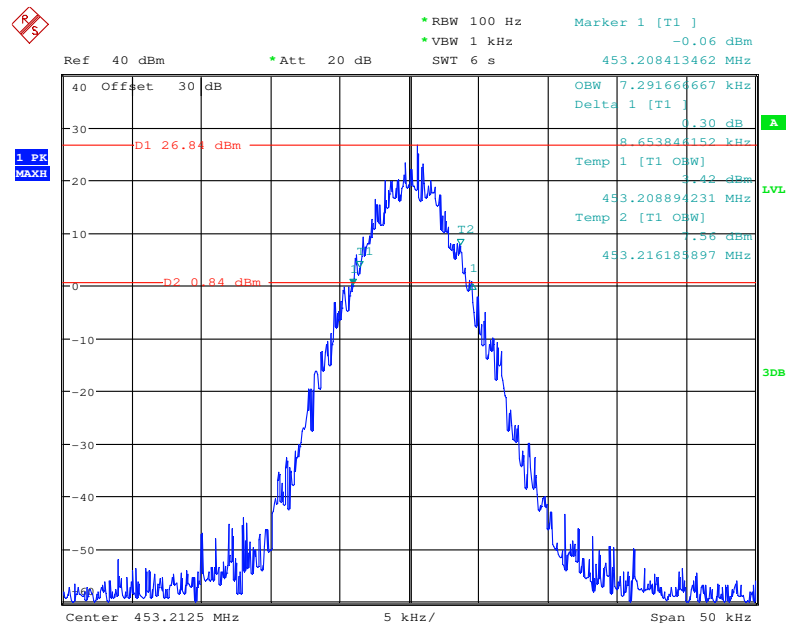


Date: 14.DEC.2017 19:57:22

Frequency 453.2125 MHz: Emission Mask D, High Power

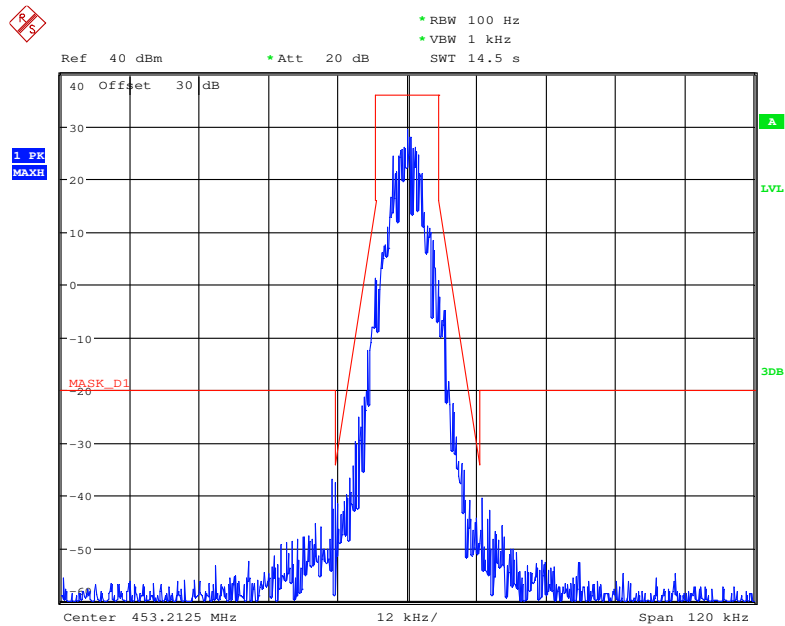


Date: 14.DEC.2017 20:49:30

Frequency 453.2125 MHz: Emission Mask D, Low Power

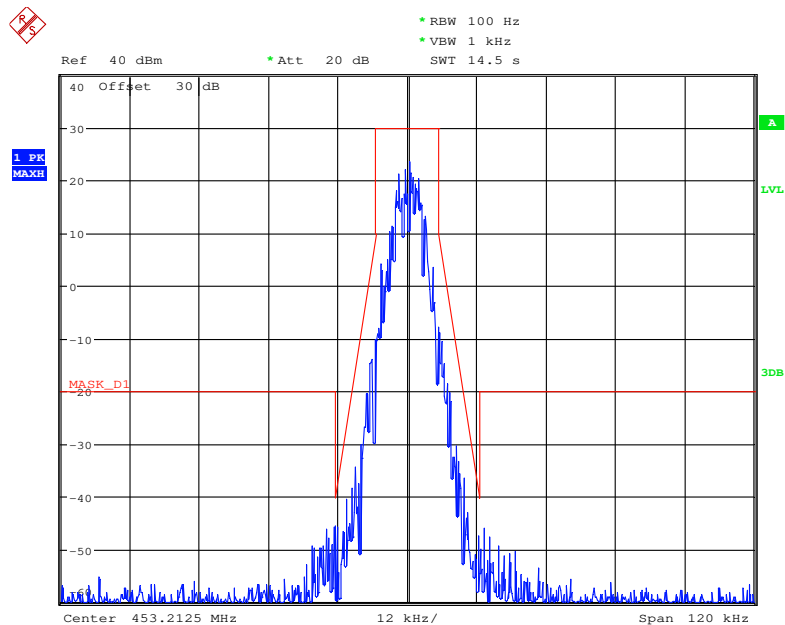


Date: 14.DEC.2017 20:32:18

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power

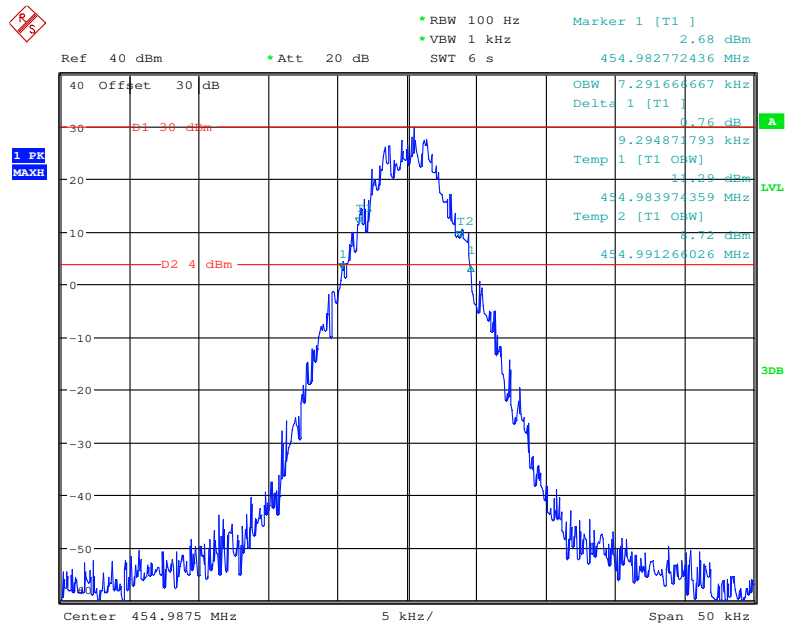


Date: 14.DEC.2017 19:59:32

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

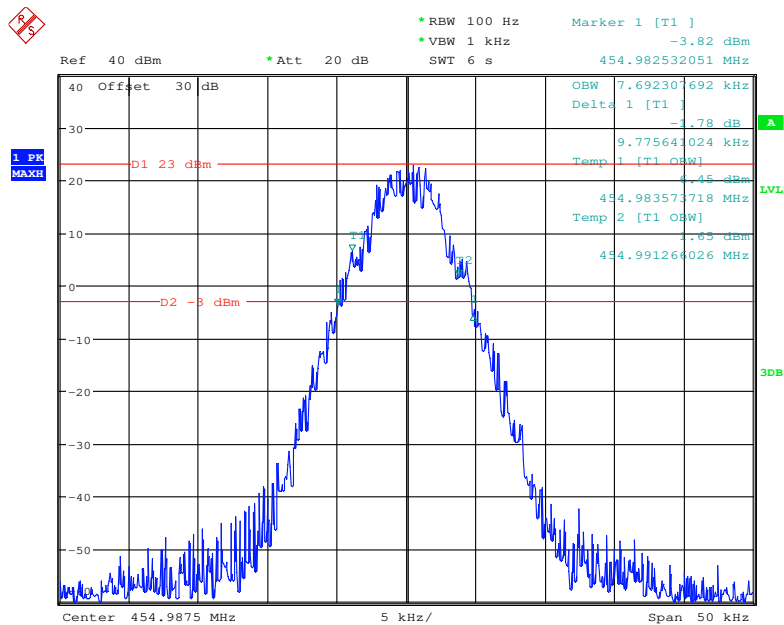


Date: 14.DEC.2017 20:01:27

Frequency 454.9875 MHz: Emission Mask, High Power, FCC part 22.359

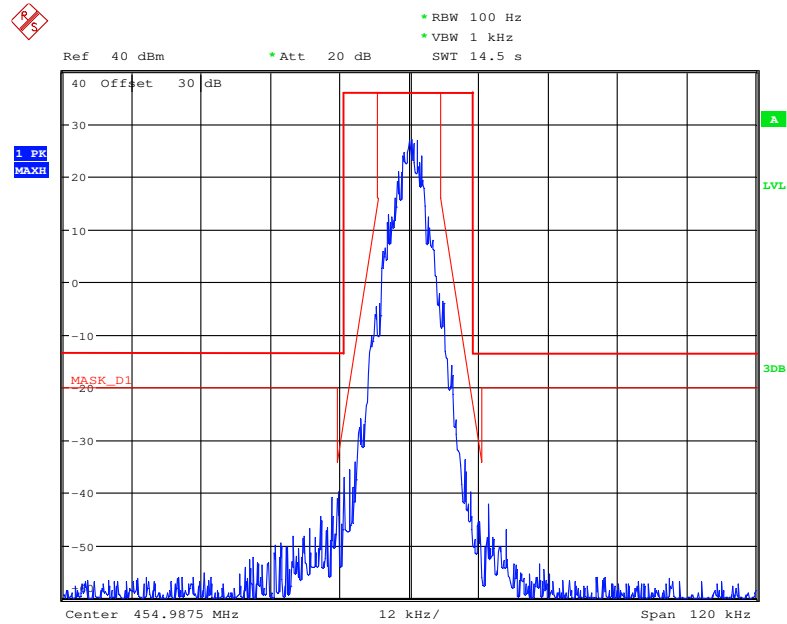


Date: 14.DEC.2017 20:45:03

Frequency 454.9875 MHz: Emission Mask, Low Power, FCC part 22.359

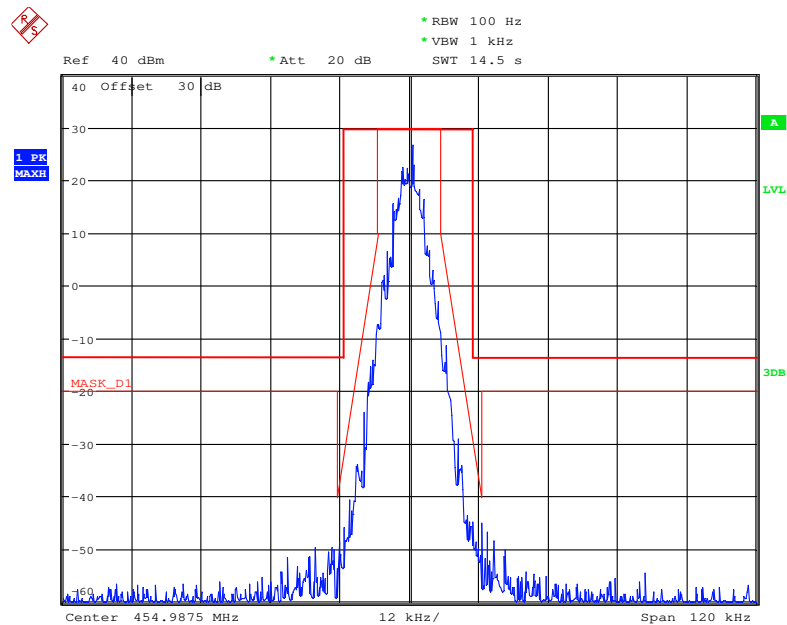


Date: 14.DEC.2017 20:41:01

Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

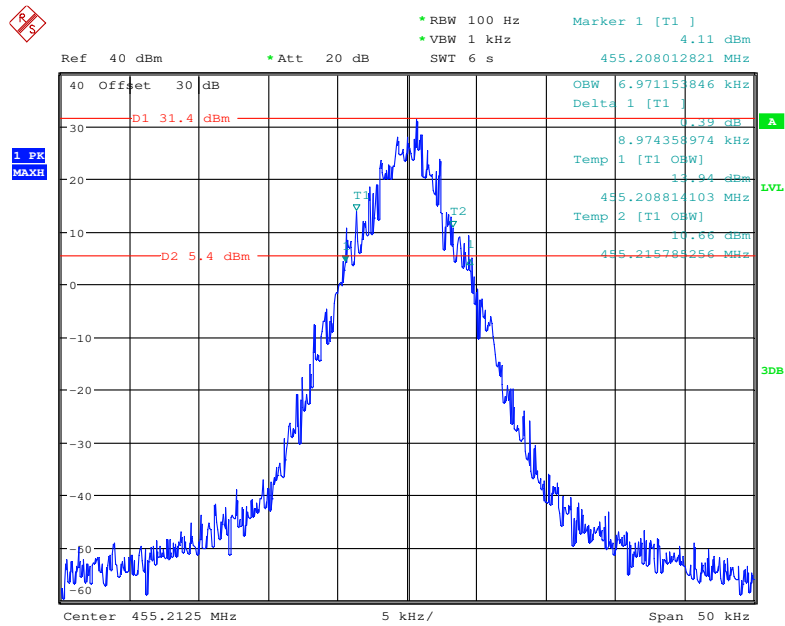


Date: 19.JAN.2018 21:25:11

Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

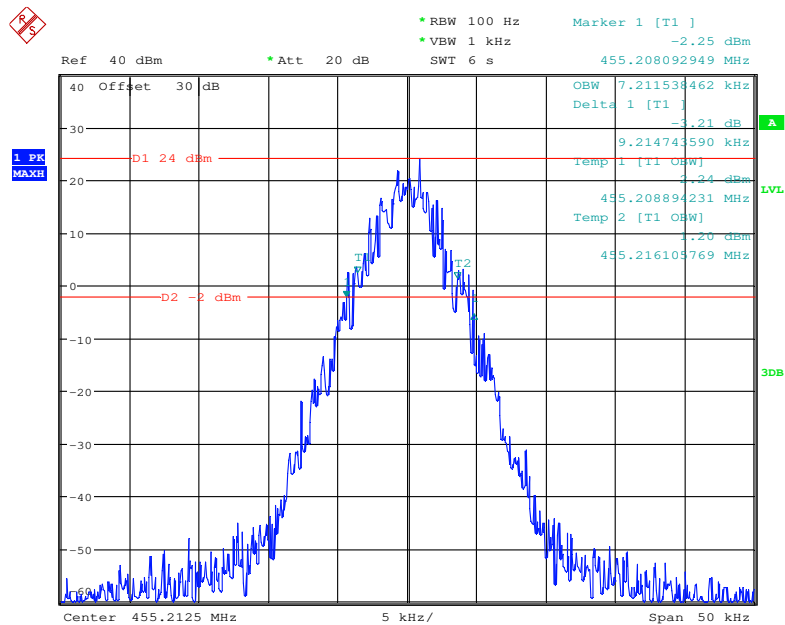


Date: 19.JAN.2018 21:21:07

Frequency 455.2125 MHz: Emission Mask D, High Power, FCC part 74.462

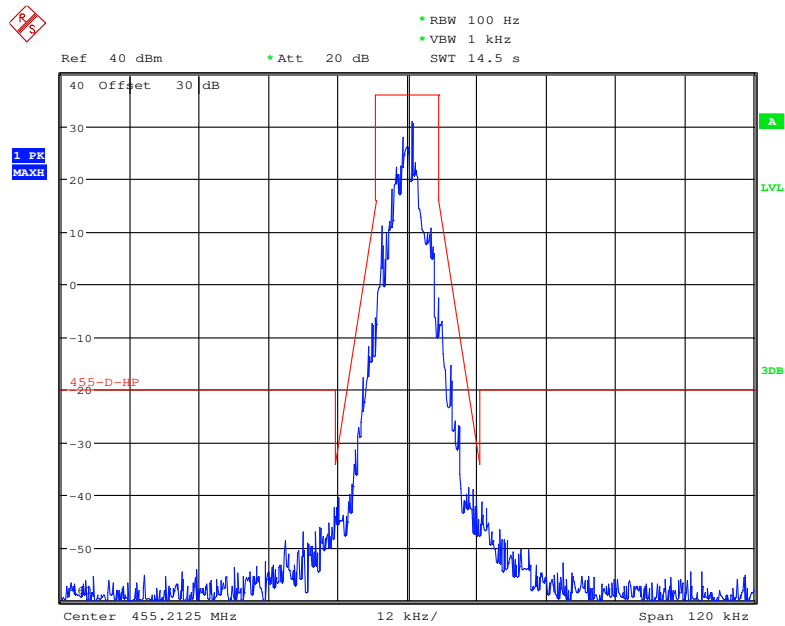

Date: 19.JAN.2018 21:42:59

Frequency 455.2125 MHz: Emission Mask D, Low Power, FCC part 74.462

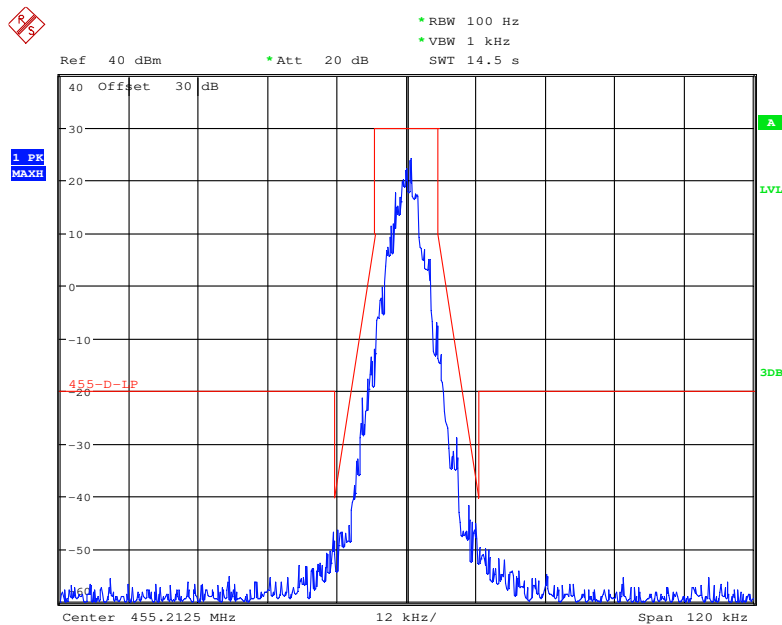

Date: 19.JAN.2018 21:46:06

For 25K

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	25	454.9875	High	14.82	15.63	For Part 22
	25		Low	14.82	15.63	
	25	455.2125	High	15.06	15.71	For Part 74
	25		Low	15.06	15.71	
	25	459.9875	High	14.82	15.63	For Part 80
	25		Low	14.90	15.71	

Emission Designator Per CFR 47 §2.201 & §2.202, $B_n = 2M + 2D$


For FM Mode (Channel Spacing: 25 kHz)

Emission Designator 16K0F3E In this case, the maximum modulating frequency is 5.0 kHz with a 3 kHz deviation. $BW = 2(M+D) = 2(5 \text{ kHz} + 3 \text{ kHz}) = 16 \text{ kHz} \rightarrow 16K0$*

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.


Analog Modulation

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power

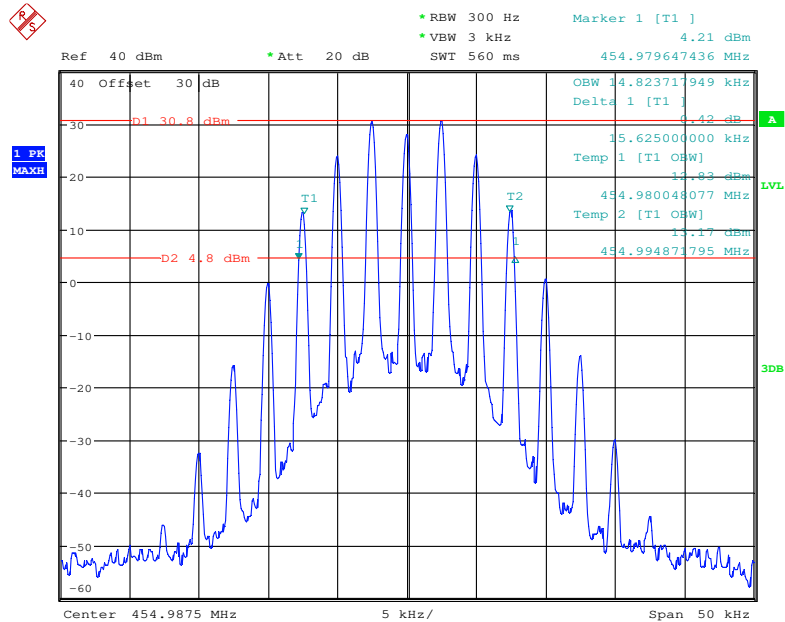


Date: 5.JAN.2018 20:51:08

Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

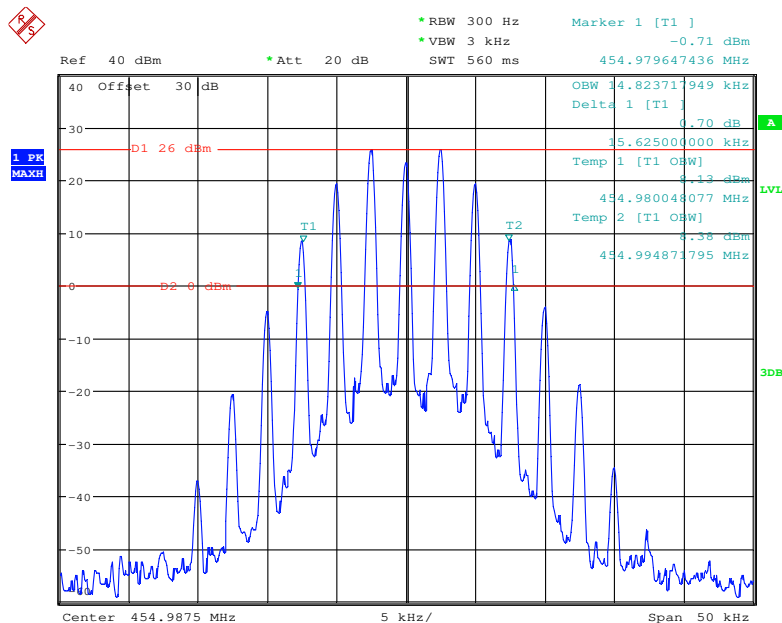


Date: 5.JAN.2018 20:51:53

Frequency 454.9875 MHz: Emission Mask, High Power, FCC part 22.359

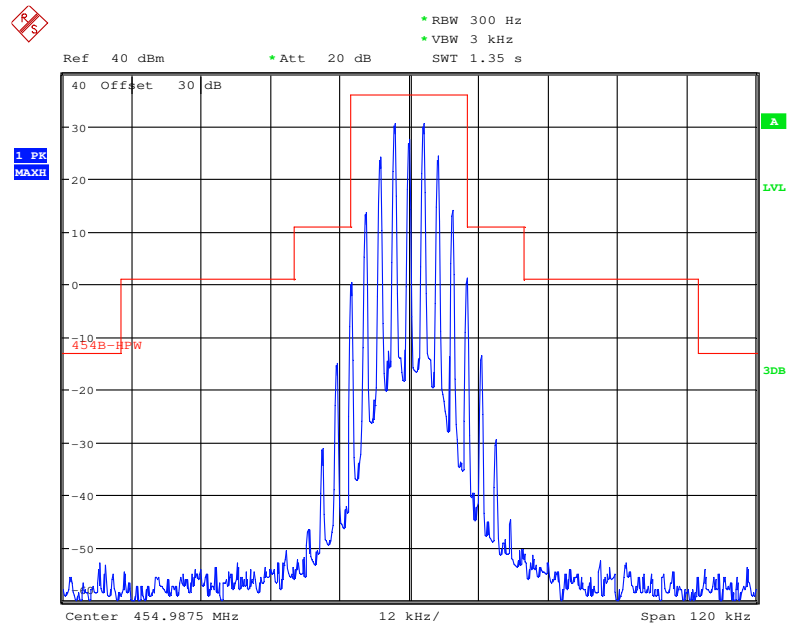


Date: 5.JAN.2018 21:10:15

Frequency 454.9875 MHz: Emission Mask, Low Power, FCC part 22.359

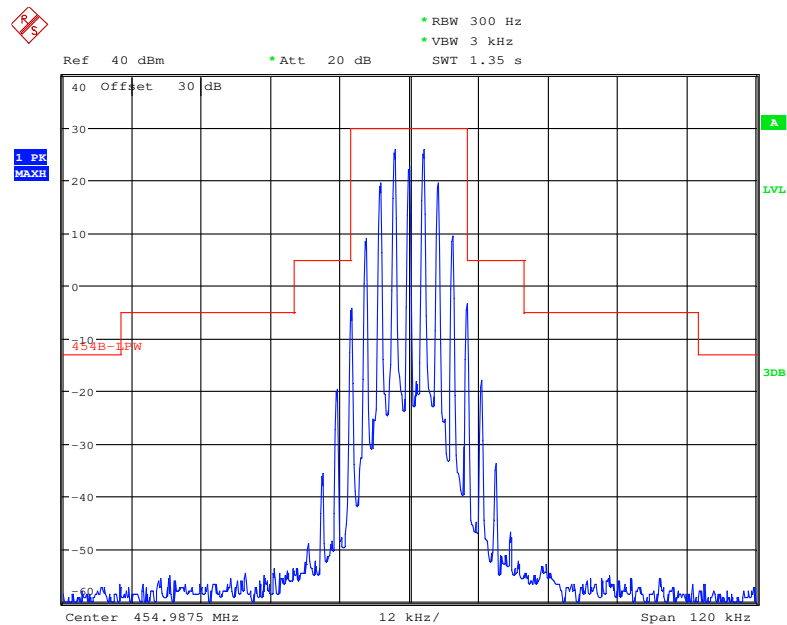


Date: 5.JAN.2018 21:09:34

Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power

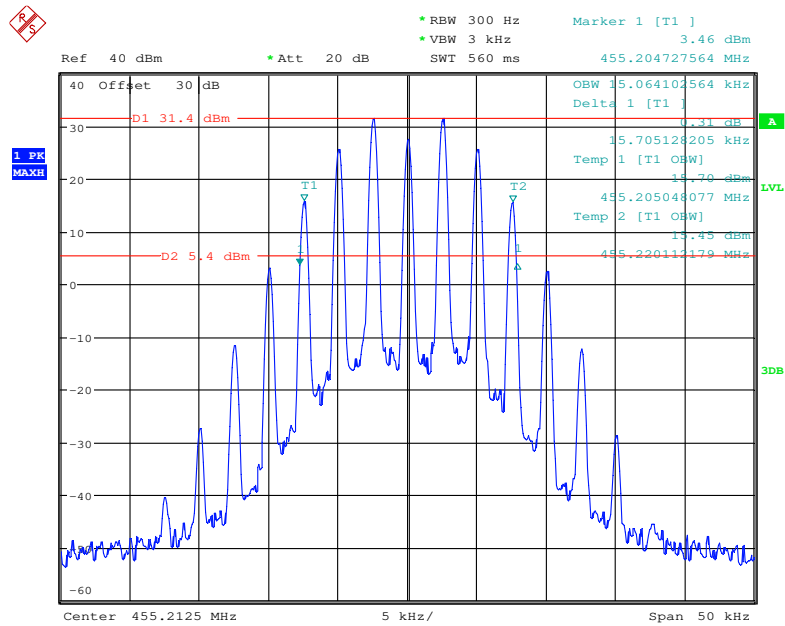


Date: 19.JAN.2018 21:26:21

Frequency 455.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

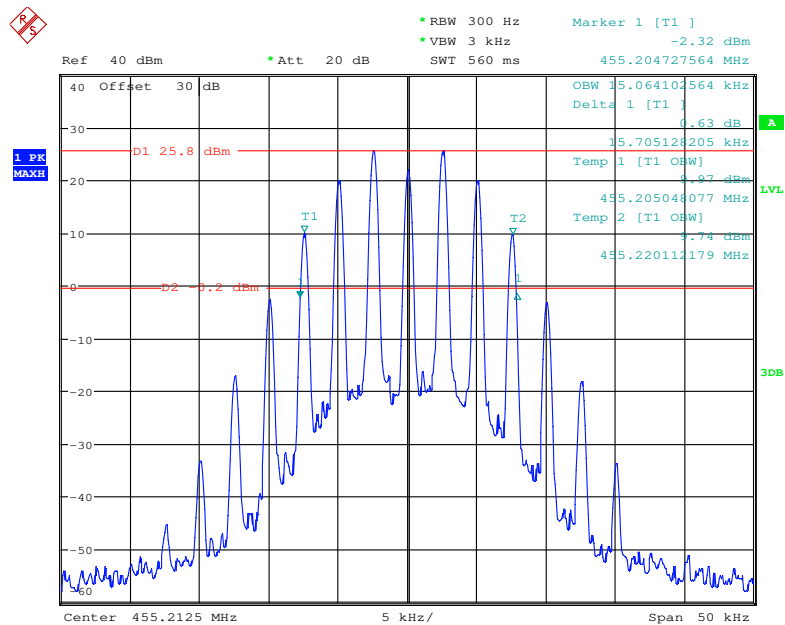


Date: 19.JAN.2018 21:27:01

Frequency 455.2125 MHz: Emission Mask B, High Power, FCC Part 74.462

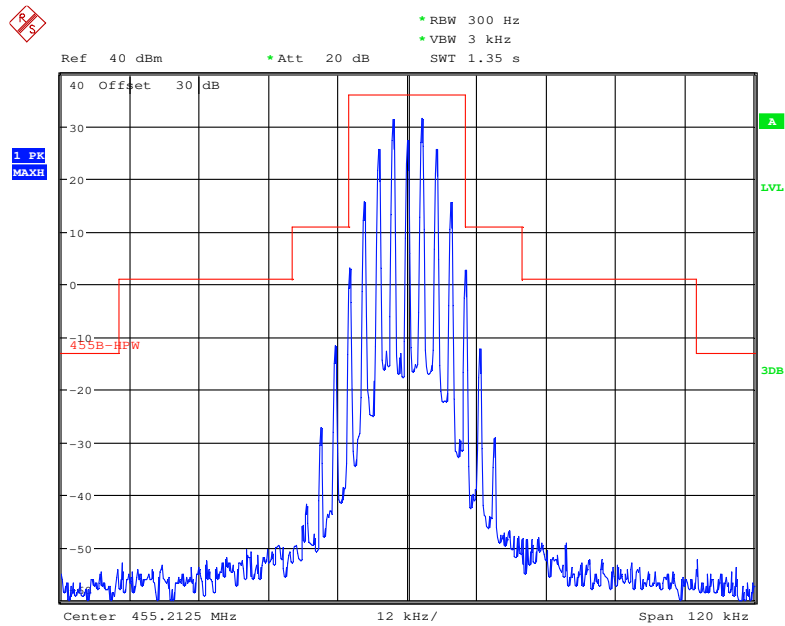


Date: 19.JAN.2018 21:39:04

Frequency 455.2125 MHz: Emission Mask B, Low Power, FCC Part 74.462

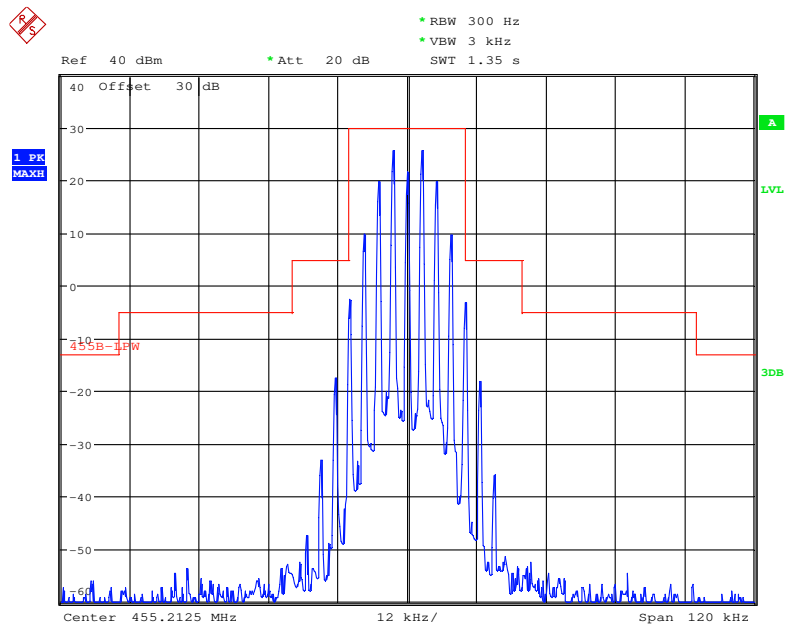


Date: 19.JAN.2018 21:38:16

Frequency 459.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power

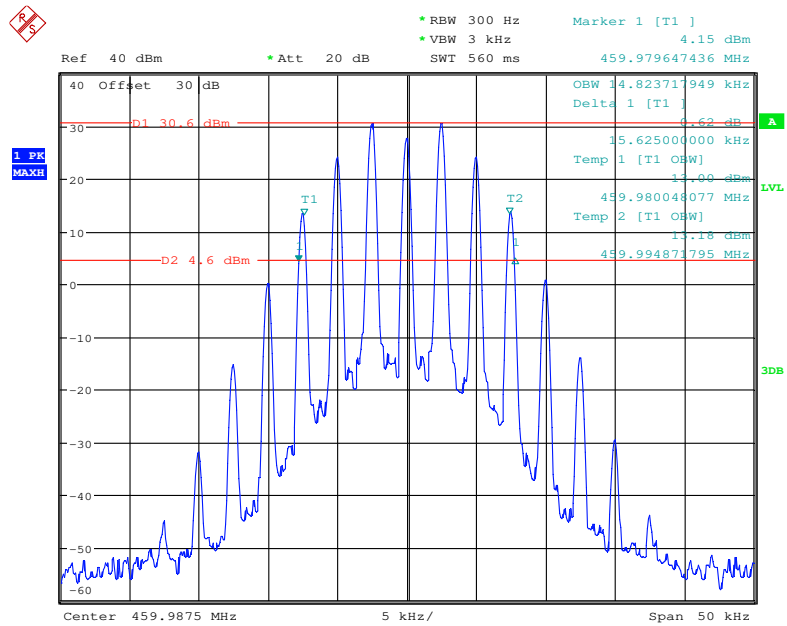


Date: 5.JAN.2018 20:53:10

Frequency 459.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

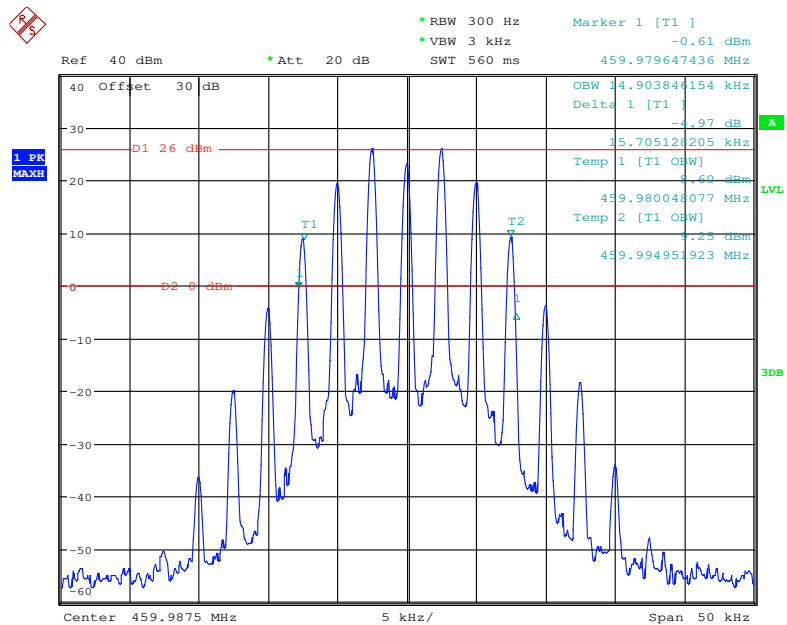


Date: 5.JAN.2018 20:52:31

Frequency 459.9875 MHz: Emission Mask B, High Power, FCC part 80.211

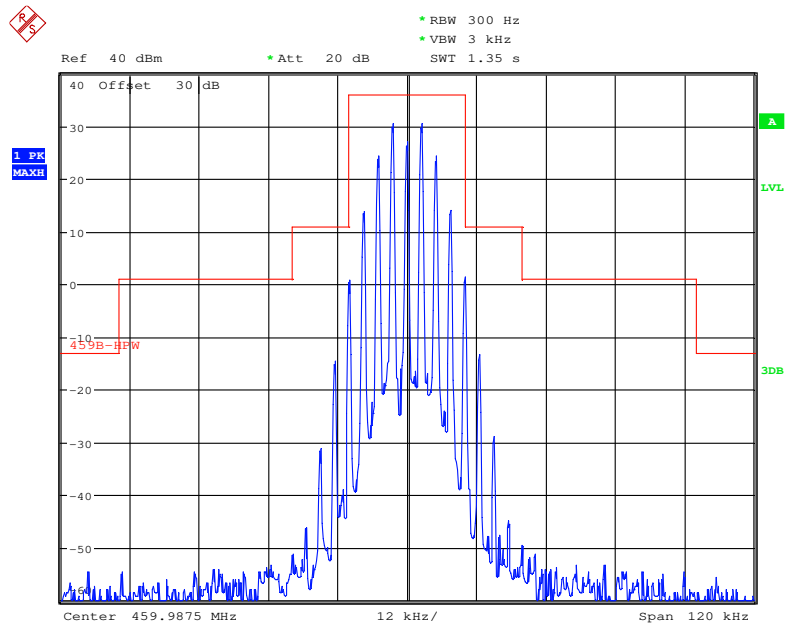

Date: 5.JAN.2018 21:08:36

Frequency 459.9875 MHz: Emission Mask B, Low Power, FCC part 80.211

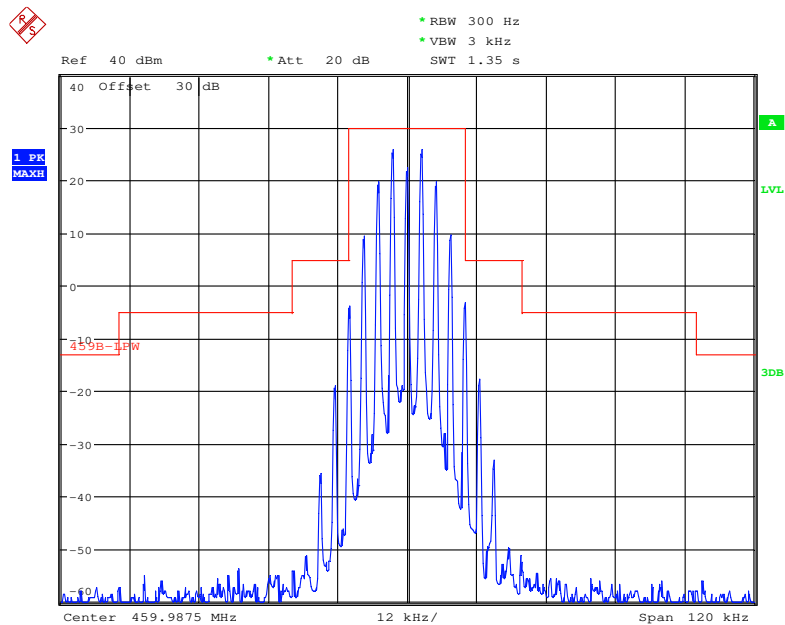

Date: 5.JAN.2018 21:08:16

FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B - 25 kHz channel bandwidth equipment. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng from 2017-12-14 to 2018-01-22.

Test Mode: Transmitting, please refer to the following plots.


Analog Modulation:

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz For FCC part 90

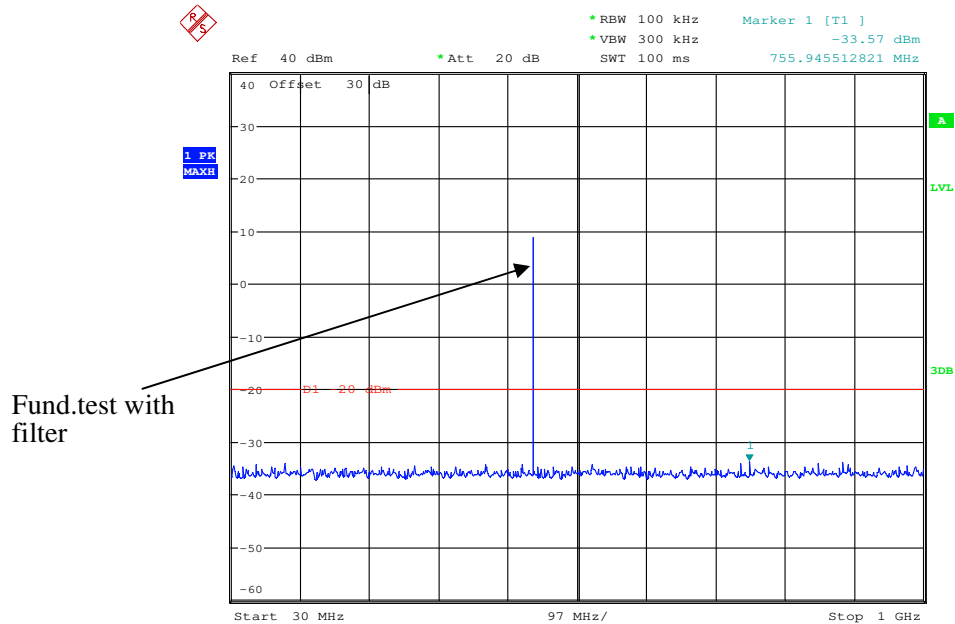


Date: 14.DEC.2017 21:11:01

1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz For FCC part 90

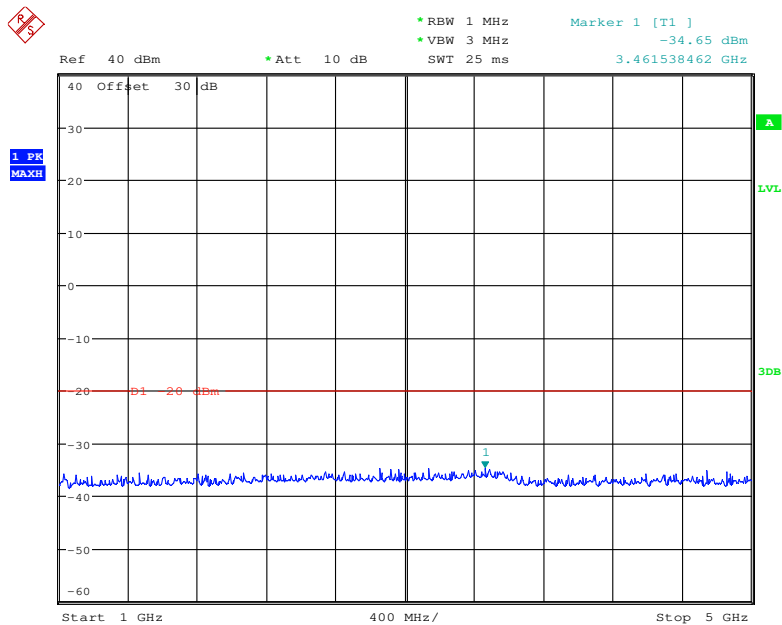


Date: 14.DEC.2017 21:19:05

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 454.9875 MHz For FCC part 22

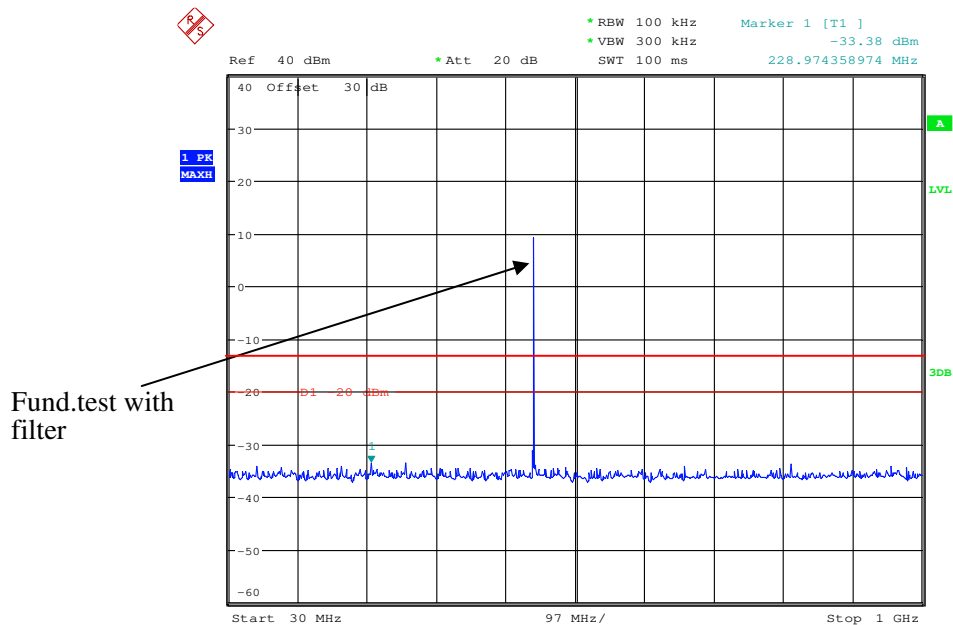


Date: 14.DEC.2017 21:12:09

1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 454.9875 MHz For FCC part 22

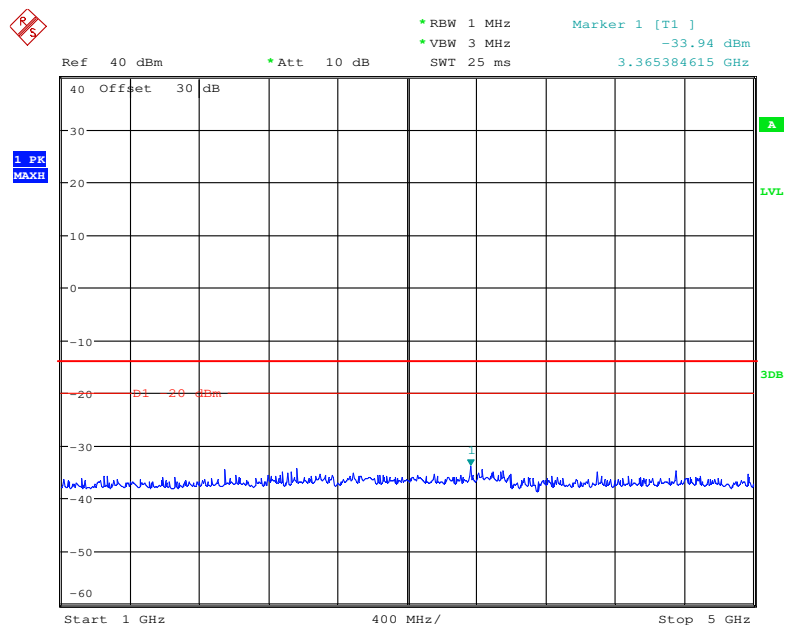


Date: 14.DEC.2017 21:18:46

30MHz – 1 GHz, Channel Spacing 25kHz, 454.9875 MHz For FCC part 22

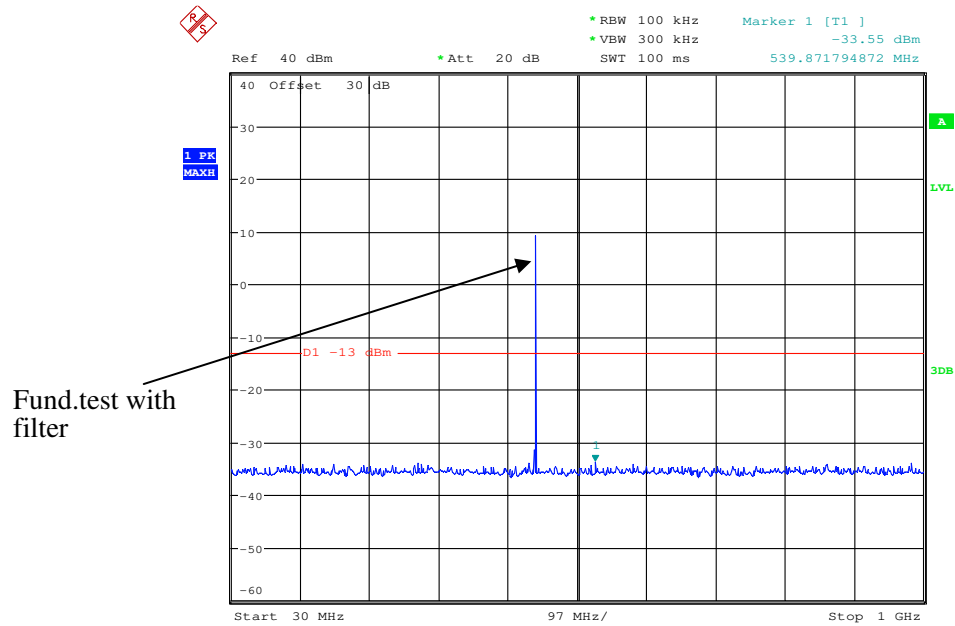


Date: 14.DEC.2017 21:14:05

1 GHz – 5 GHz, Channel Spacing 25kHz, 454.9875 MHz For FCC part 22

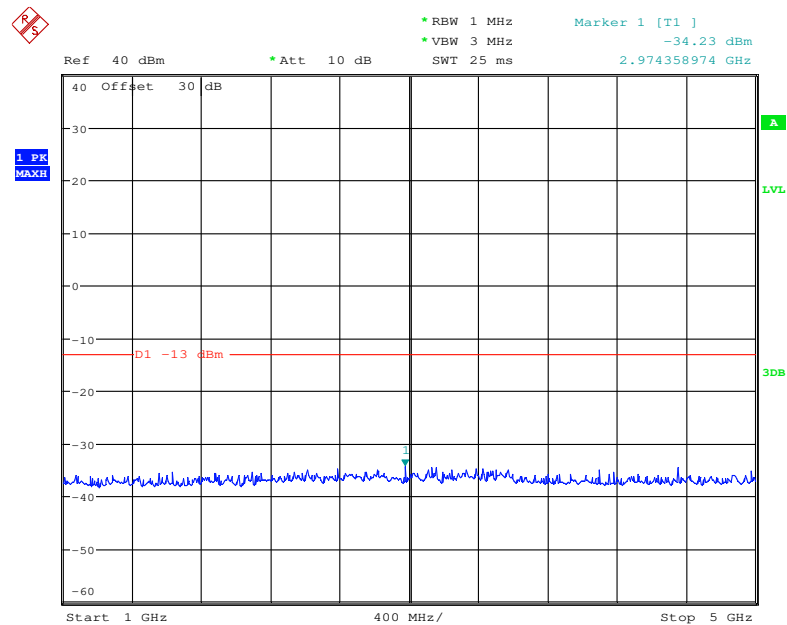


Date: 14.DEC.2017 21:18:16

30MHz – 1 GHz, Channel Spacing 12.5 kHz, 455.2125MHz For FCC part 74

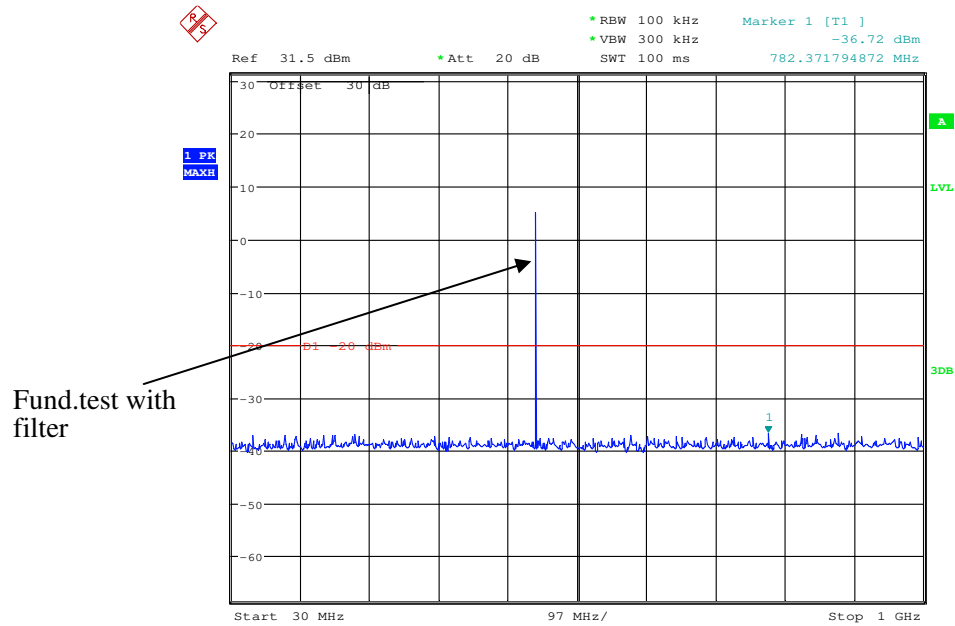

Date: 17.JAN.2018 17:54:20

1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 455.2125 MHz For FCC part 74

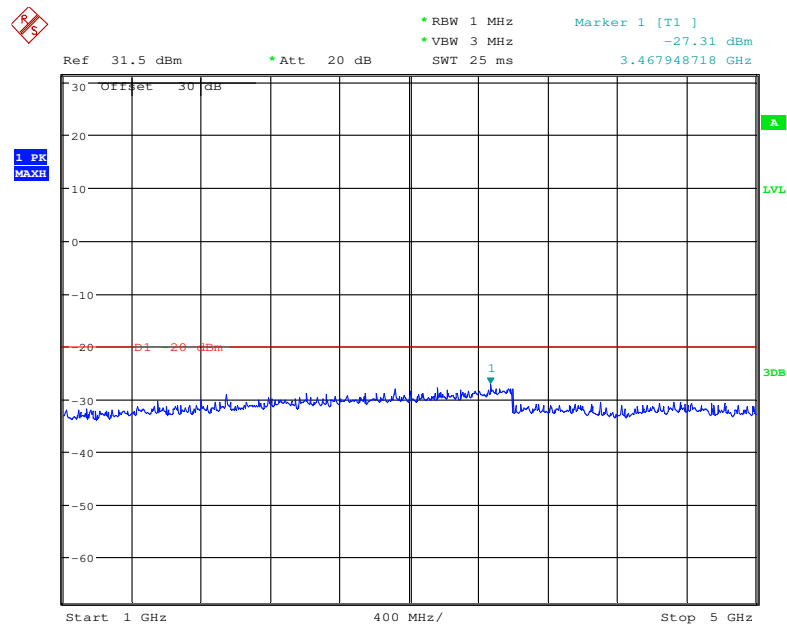

Date: 17.JAN.2018 18:03:35

Ref 31.5 dBm * Att 20 dB * RBW 100 kHz Marker 1 [T1] -36.76 dBm
 * VBW 300 kHz SWT 100 ms 870.977564103 MHz

30 Offset 30 dB


1 PR
MAXH

30
20
10
0
-10
-20
-30
-40
-50
-60

30 MHz 97 MHz/ Stop 1 GHz


Fund. test with filter

1 GHz – 5 GHz, Channel Spacing 25 kHz, 455.2125 MHz For FCC part 74

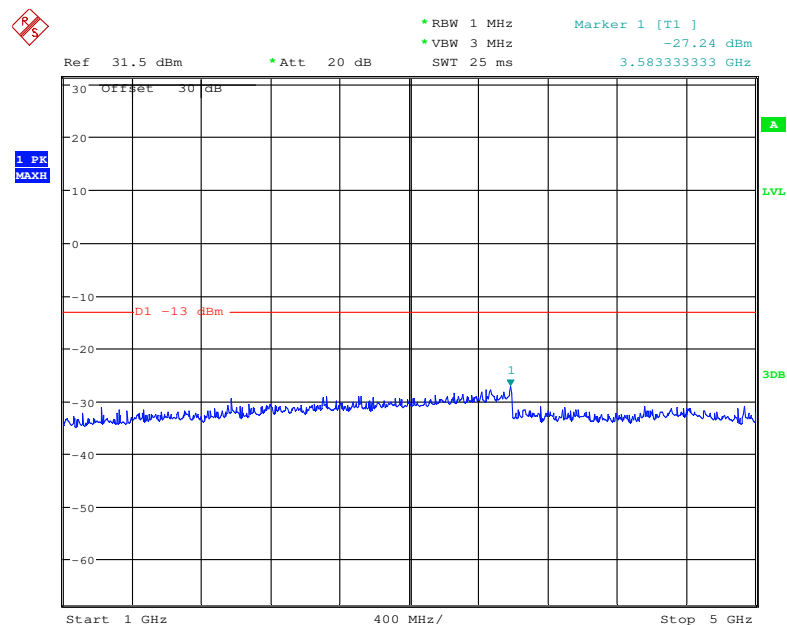


Page 51 of 68

30MHz – 1 GHz, Channel Spacing 25kHz, 459.9875MHz For FCC part 80

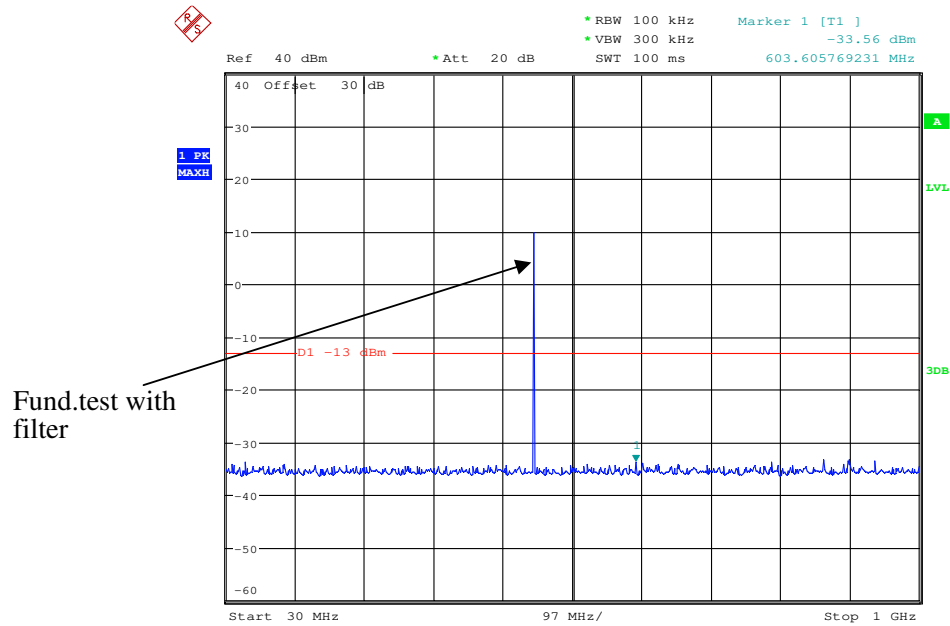

Date: 14.DEC.2017 21:15:57


1 GHz – 5 GHz, Channel Spacing 25kHz, 459.9875 MHz For FCC part 80

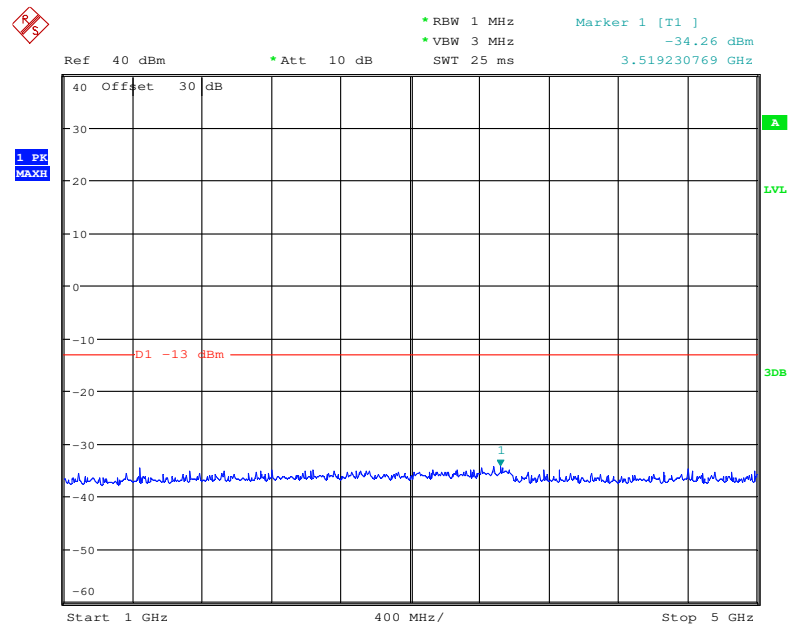

Date: 14.DEC.2017 21:17:33


Digital Modulation:

30MHz – 1 GHz, 453.2125 MHz For FCC part 90

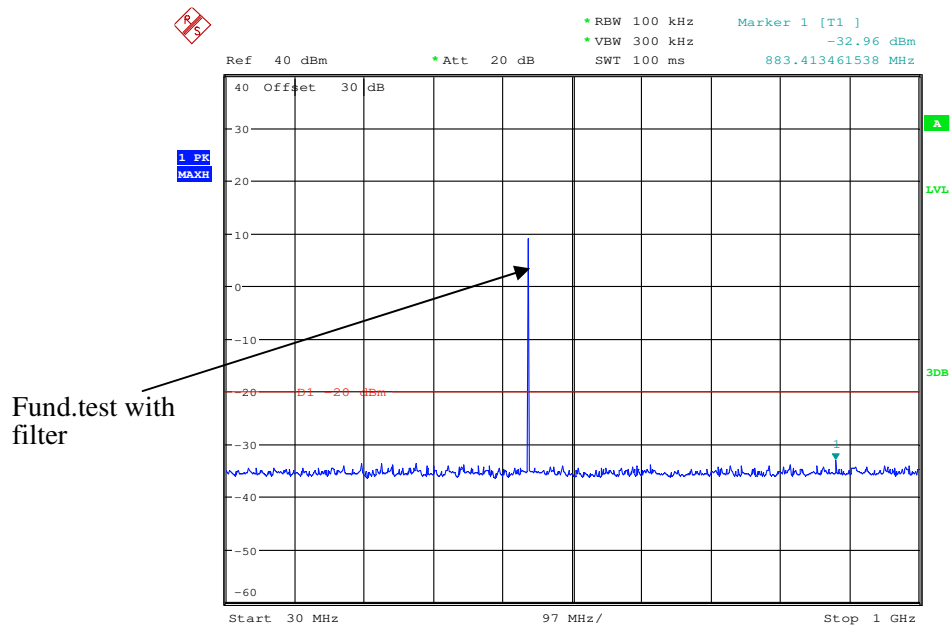


Date: 14.DEC.2017 21:03:35

1 GHz – 5 GHz, 453.2125 MHz For FCC part 90

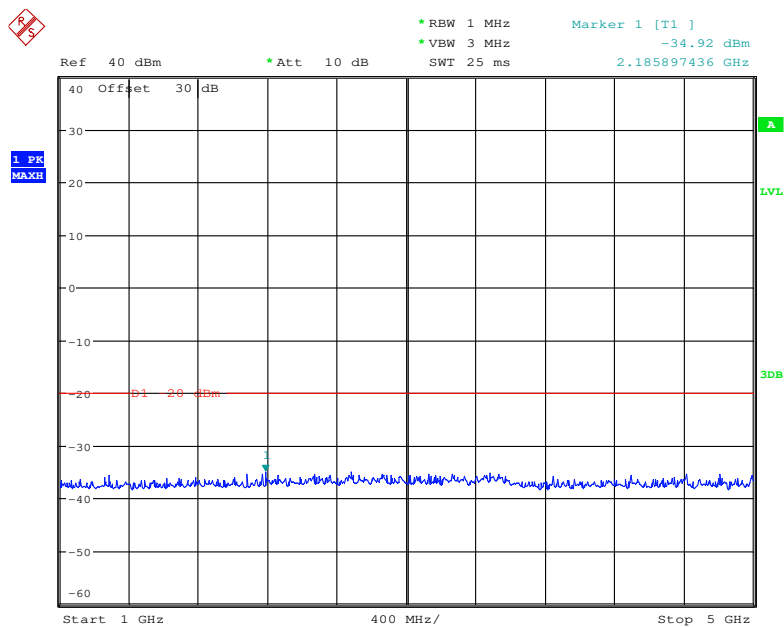


Date: 14.DEC.2017 21:20:18

30MHz – 1 GHz, 454.9875MHz For FCC part 22

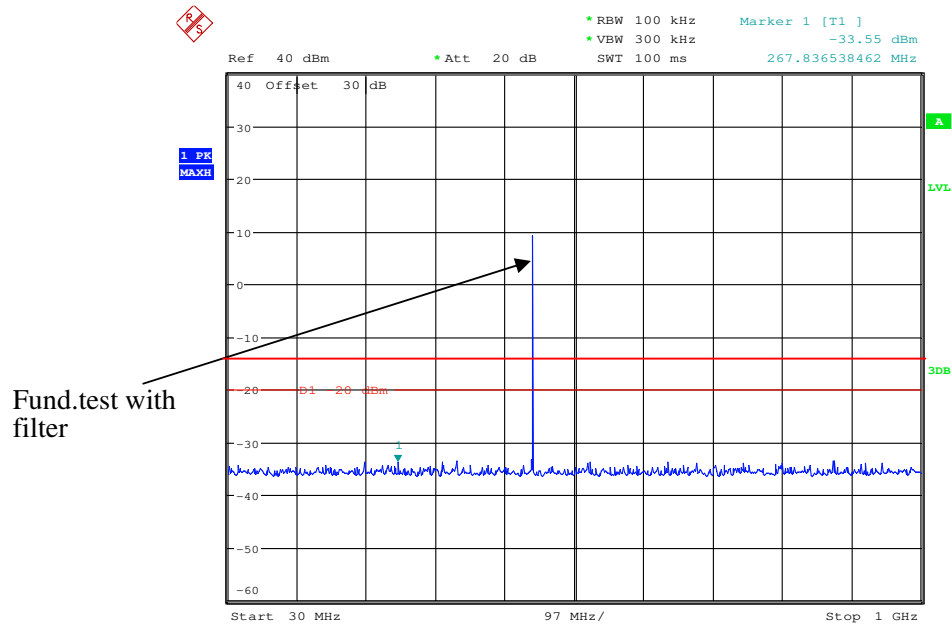


Date: 14.DEC.2017 21:05:29

1 GHz – 5 GHz, 454.9875MHz For FCC part 22

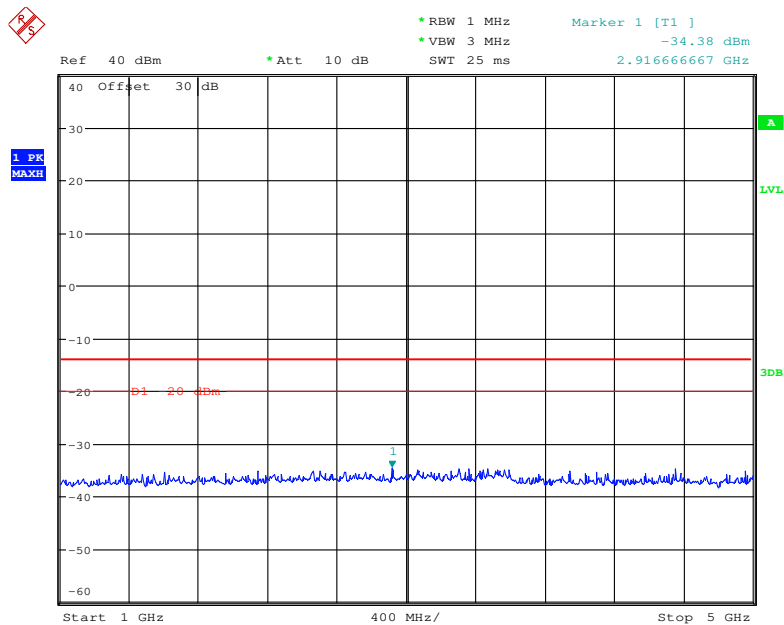


Date: 14.DEC.2017 21:20:45

30MHz – 1 GHz, 455.2125 MHz For FCC part 74

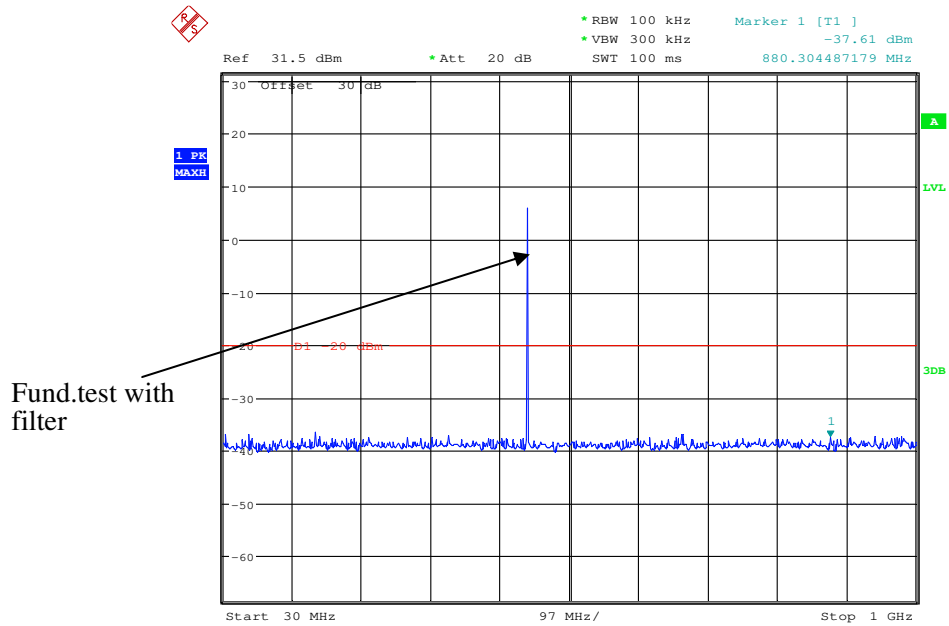

Date: 17.JAN.2018 18:01:17

1 GHz – 5 GHz, 455.2125MHz For FCC part 74

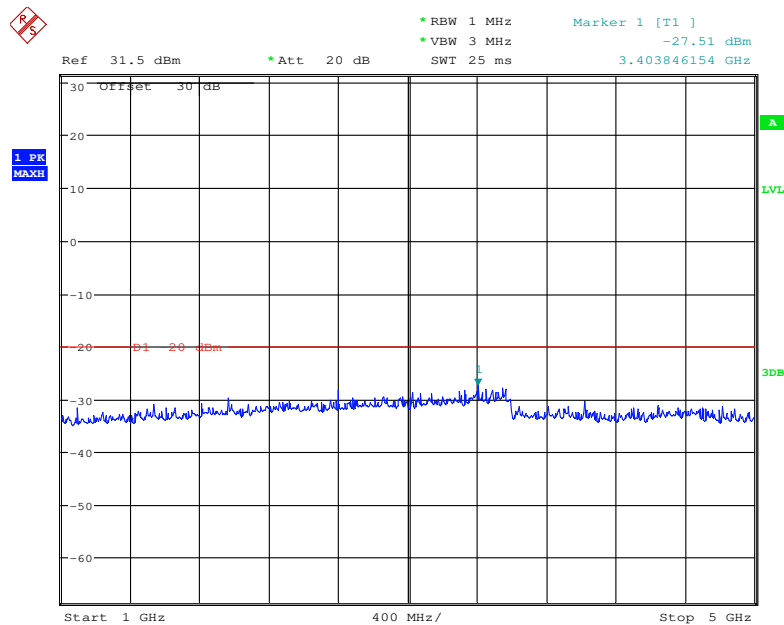

Date: 17.JAN.2018 18:03:43

FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts) for EUT with a 25 kHz channel bandwidth.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2017-12-17.

Test Mode: Transmitting

30MHz - 5GHz:

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 453.2125MHz-12.5 kHz For FCC part 90										
906.425	40.16	261	1.1	H	-55.8	0.80	0	-56.60	-20	36.60
906.425	38.96	163	1.7	V	-57.0	0.80	0	-57.80	-20	37.80
1359.64	45.06	156	1.5	H	-62.9	1.60	8.30	-56.20	-20	36.20
1359.64	44.29	231	2.4	V	-63.9	1.60	8.30	-57.20	-20	37.20
1812.85	46.18	283	1.2	H	-60.3	1.30	8.50	-53.10	-20	33.10
1812.85	44.35	55	1.4	V	-61.7	1.30	8.50	-54.50	-20	34.50
Digital Modulation 453.2125MHz-12.5 kHz For FCC part 90										
906.425	40.28	245	1.6	H	-55.7	0.80	0	-56.50	-20	36.50
906.425	39.81	204	2.4	V	-56.2	0.80	0	-57.00	-20	37.00
1359.64	43.65	214	2.1	H	-64.3	1.60	8.30	-57.60	-20	37.60
1359.64	45.06	28	1.4	V	-63.2	1.60	8.30	-56.50	-20	36.50
1812.85	42.63	69	1.9	H	-63.8	1.30	8.50	-56.60	-20	36.60
1812.85	44.09	143	2.0	V	-62.0	1.30	8.50	-54.80	-20	34.80
Analog Modulation 454.9875MHz -12.5 kHz For FCC part 22										
909.975	41.34	231	2.2	H	-54.7	0.80	0	-55.50	-13	42.50
909.975	40.06	327	2.3	V	-55.9	0.80	0	-56.70	-13	43.70
1364.96	46.04	175	2.1	H	-61.9	1.60	8.30	-55.20	-13	42.20
1364.96	45.83	217	2.3	V	-62.4	1.60	8.30	-55.70	-13	42.70
1819.95	45.76	121	1.9	H	-60.7	1.30	8.50	-53.50	-13	40.50
1819.95	43.16	151	1.5	V	-62.9	1.30	8.50	-55.70	-13	42.70
Digital Modulation 454.9875MHz -12.5 kHz For FCC part 22										
909.975	40.59	46	1.5	H	-55.4	0.80	0	-56.20	-13	43.20
909.975	39.55	42	2.0	V	-56.5	0.80	0	-57.30	-13	44.30
1364.96	45.05	226	1.1	H	-62.9	1.60	8.30	-56.20	-13	43.20
1364.96	46.32	0	1.9	V	-61.9	1.60	8.30	-55.20	-13	42.20
1819.95	43.95	58	2.3	H	-62.5	1.30	8.50	-55.30	-13	42.30
1819.95	44.16	244	2.3	V	-61.9	1.30	8.50	-54.70	-13	41.70

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 455.2125MHz-12.5kHz For FCC part 74										
910.425	41.62	180	1.2	H	-54.4	0.30	0	-54.70	-20	34.70
910.425	42.83	337	1.3	V	-53.2	0.30	0	-53.50	-20	33.50
1365.64	46.21	335	1.3	H	-61.6	1.60	8.30	-54.90	-20	34.90
1365.64	45.51	96	1.0	V	-62.6	1.60	8.30	-55.90	-20	35.90
1820.85	45.03	215	1.5	H	-61.1	1.30	8.50	-53.90	-20	33.90
1820.85	44.82	297	1.7	V	-60.9	1.30	8.50	-53.70	-20	33.70
Digital Modulation 455.2125MHz -12.5 kHz For FCC part 74										
910.425	41.93	357	1.6	H	-54.1	0.80	0	-54.90	-20	34.90
910.425	40.83	138	2.2	V	-55.2	0.80	0	-56.00	-20	36.00
1365.64	45.75	298	2.2	H	-62.1	1.60	8.30	-55.40	-20	35.40
1365.64	46.03	341	2.4	V	-62.1	1.60	8.30	-55.40	-20	35.40
1820.85	44.27	139	2.2	H	-61.8	1.30	8.50	-54.60	-20	34.60
1820.85	45.03	216	2.0	V	-60.7	1.30	8.50	-53.50	-20	33.50
Analog Modulation 454.9875MHz-25 kHz For FCC part 22										
909.975	39.51	41	1.1	H	-56.5	0.80	0	-57.30	-13	44.30
909.975	42.53	200	1.8	V	-53.5	0.80	0	-54.30	-13	41.30
1364.96	47.59	69	2.2	H	-60.4	1.60	8.30	-53.70	-13	40.70
1364.96	46.19	83	1.4	V	-62.0	1.60	8.30	-55.30	-13	42.30
1819.95	46.75	330	1.3	H	-59.7	1.30	8.50	-52.50	-13	39.50
1819.95	44.89	104	2.4	V	-61.2	1.30	8.50	-54.00	-13	41.00
Analog Modulation 455.2125MHz-25 kHz For FCC part 74										
910.425	42.06	126	1.2	H	-53.9	0.80	0	-54.70	-13	41.70
910.425	43.72	31	1.4	V	-52.3	0.80	0	-53.10	-13	40.10
1365.64	45.68	282	2.0	H	-62.2	1.60	8.30	-55.50	-13	42.50
1365.64	44.93	130	1.7	V	-63.2	1.60	8.30	-56.50	-13	43.50
1820.85	45.03	114	1.6	H	-61.1	1.30	8.50	-53.90	-13	40.90
1820.85	44.82	233	2.2	V	-60.9	1.30	8.50	-53.70	-13	40.70

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 459.9875MHz-25 kHz For FCC part 80										
918.425	38.25	164	1.7	H	-57.8	0.80	0	-58.60	-13	45.60
918.425	40.16	94	1.7	V	-55.8	0.80	0	-56.60	-13	43.60
1379.96	46.83	250	1.0	H	-61.0	1.60	8.30	-54.30	-13	41.30
1379.96	45.73	113	1.3	V	-62.4	1.60	8.30	-55.70	-13	42.70
1839.95	47.55	348	1.0	H	-58.5	1.30	8.50	-51.30	-13	38.30
1839.95	46.21	352	1.2	V	-59.5	1.30	8.50	-52.30	-13	39.30

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, § 22.355, §74.464, § 80.209 and §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Vincent Zheng on 2018-01-07.

Test Mode: Transmitting

For 12.5 kHz:

Analog Modulation, Reference Frequency: 453.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	453.21254	0.0883
40	7.40	453.21258	0.1765
30	7.40	453.21255	0.1103
20	7.40	453.21258	0.1765
10	7.40	453.21251	0.0221
0	7.40	453.21256	0.1324
-10	7.40	453.21251	0.0221
-20	7.40	453.21254	0.0883
-30	7.40	453.21254	0.0883
Frequency Stability versus Input Voltage			
20	6.40	453.21252	0.0441

Digital Modulation, Reference Frequency: 453.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	453.21253	0.0662
40	7.40	453.21251	0.0221
30	7.40	453.21250	0.0000
20	7.40	453.21256	0.1324
10	7.40	453.21258	0.1765
0	7.40	453.21257	0.1545
-10	7.40	453.21252	0.0441
-20	7.40	453.21250	0.0000
-30	7.40	453.21248	-0.0441
Frequency Stability versus Input Voltage			
20	6.40	453.21254	0.0883

Analog Modulation, Reference Frequency: 454.9875 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	454.98754	0.0879
40	7.40	454.98755	0.1099
30	7.40	454.98749	-0.0220
20	7.40	454.98759	0.1978
10	7.40	454.98752	0.0440
0	7.40	454.98755	0.1099
-10	7.40	454.98753	0.0659
-20	7.40	454.98755	0.1099
-30	7.40	454.98754	0.0879
Frequency Stability versus Input Voltage			
20	6.40	454.98759	0.1978

Digital Modulation, Reference Frequency: 454.9875 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	454.98754	0.0879
40	7.40	454.98756	0.1319
30	7.40	454.98752	0.0440
20	7.40	454.98758	0.1758
10	7.40	454.98759	0.1978
0	7.40	454.98756	0.1319
-10	7.40	454.98758	0.1758
-20	7.40	454.98753	0.0659
-30	7.40	454.98755	0.1099
Frequency Stability versus Input Voltage			
20	6.40	454.98758	0.1758

Analog Modulation, Reference Frequency: 455.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	455.21258	0.1757
40	7.40	455.21257	0.1538
30	7.40	455.21259	0.1977
20	7.40	455.21255	0.1098
10	7.40	455.21253	0.0659
0	7.40	455.21257	0.1538
-10	7.40	455.21258	0.1757
-20	7.40	455.21254	0.0879
-30	7.40	455.21253	0.0659
Frequency Stability versus Input Voltage			
20	6.40	455.21254	0.0879

Digital Modulation, Reference Frequency: 455.2125 MHz, Limit: ± 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	455.21258	0.1757
40	7.40	455.21255	0.1098
30	7.40	455.21252	0.0439
20	7.40	455.21253	0.0659
10	7.40	455.21259	0.1977
0	7.40	455.21256	0.1318
-10	7.40	455.21254	0.0879
-20	7.40	455.21252	0.0439
-30	7.40	455.21246	-0.0879
Frequency Stability versus Input Voltage			
20	6.40	455.21253	0.0659

For 25 kHz:

Analog Modulation, Reference Frequency: 454.9875MHz, Limit: ± 5.0 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	454.98754	0.0879
40	7.40	454.98753	0.0659
30	7.40	454.98758	0.1758
20	7.40	454.98751	0.0220
10	7.40	454.98753	0.0659
0	7.40	454.98758	0.1758
-10	7.40	454.98751	0.0220
-20	7.40	454.98752	0.0440
-30	7.40	454.98758	0.1758
Frequency Stability versus Input Voltage			
20	6.40	454.98752	0.0440

Analog Modulation, Reference Frequency: : 455.2125 MHz, Limit: ± 5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	455.21256	0.1318
40	7.40	455.21257	0.1538
30	7.40	455.21256	0.1318
20	7.40	455.21257	0.1538
10	7.40	455.21252	0.0439
0	7.40	455.21258	0.1757
-10	7.40	455.21256	0.1318
-20	7.40	455.21253	0.0659
-30	7.40	455.21259	0.1977
Frequency Stability versus Input Voltage			
20	6.40	455.21255	0.1098

Analog Modulation, Reference Frequency: 459.9875 MHz, Limit: ± 5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.40	459.98753	0.0652
40	7.40	459.98755	0.1087
30	7.40	459.98757	0.1522
20	7.40	459.98753	0.0652
10	7.40	459.98754	0.0870
0	7.40	459.98753	0.0652
-10	7.40	459.98749	-0.0217
-20	7.40	459.98754	0.0870
-30	7.40	459.98756	0.1304
Frequency Stability versus Input Voltage			
20	6.40	459.98752	0.0435

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

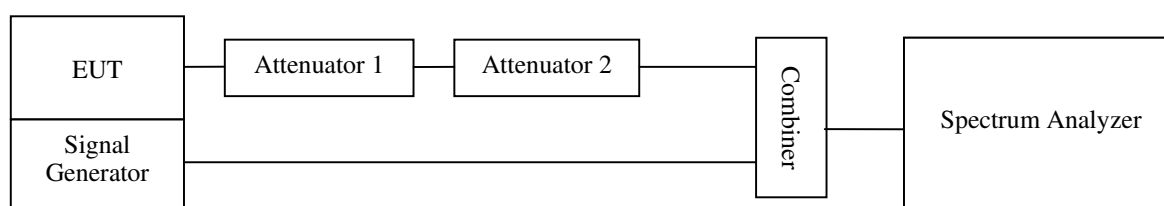

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Vincent Zheng on 2018-01-9.

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10 (t1)	<+/-12.5 kHz	Pass
	25(t2)	<+/-6.25 kHz	
	10 (t3)	<+/-12.5 kHz	


Please refer to the following plots.

Channel: 453.2125 MHz

Turn on

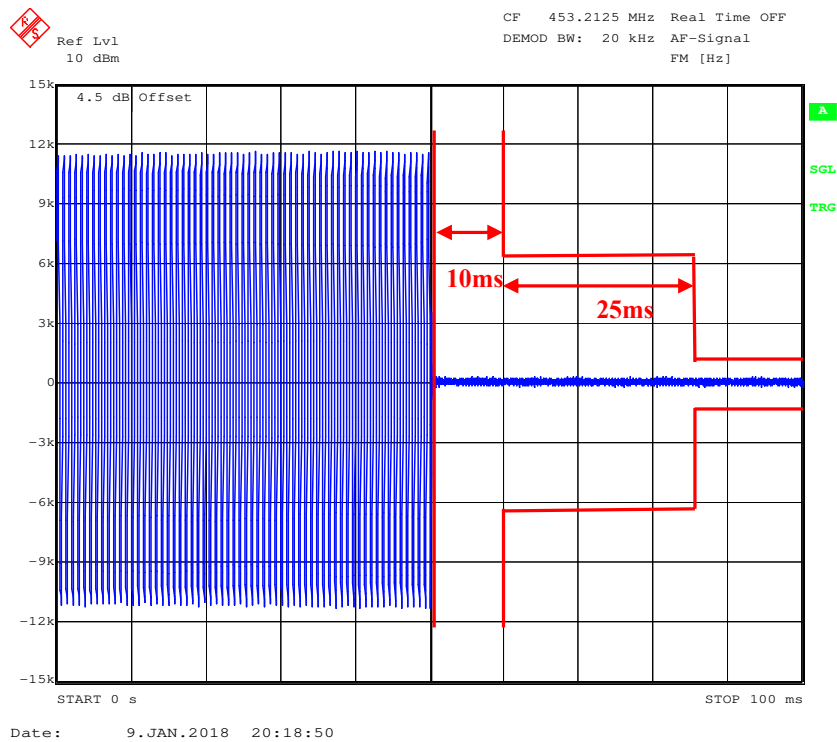

Turn off

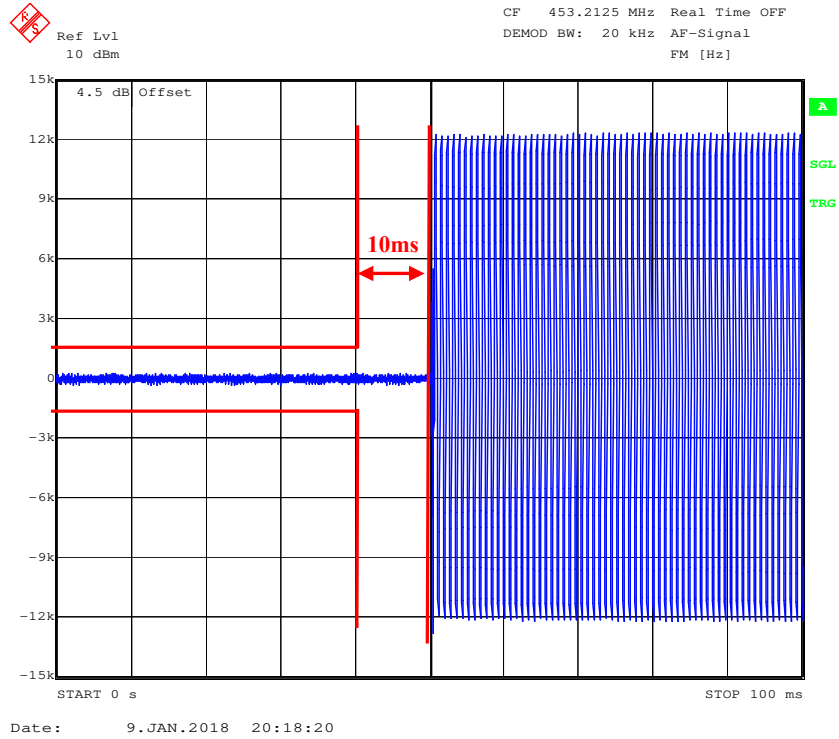

***** END OF REPORT *****