






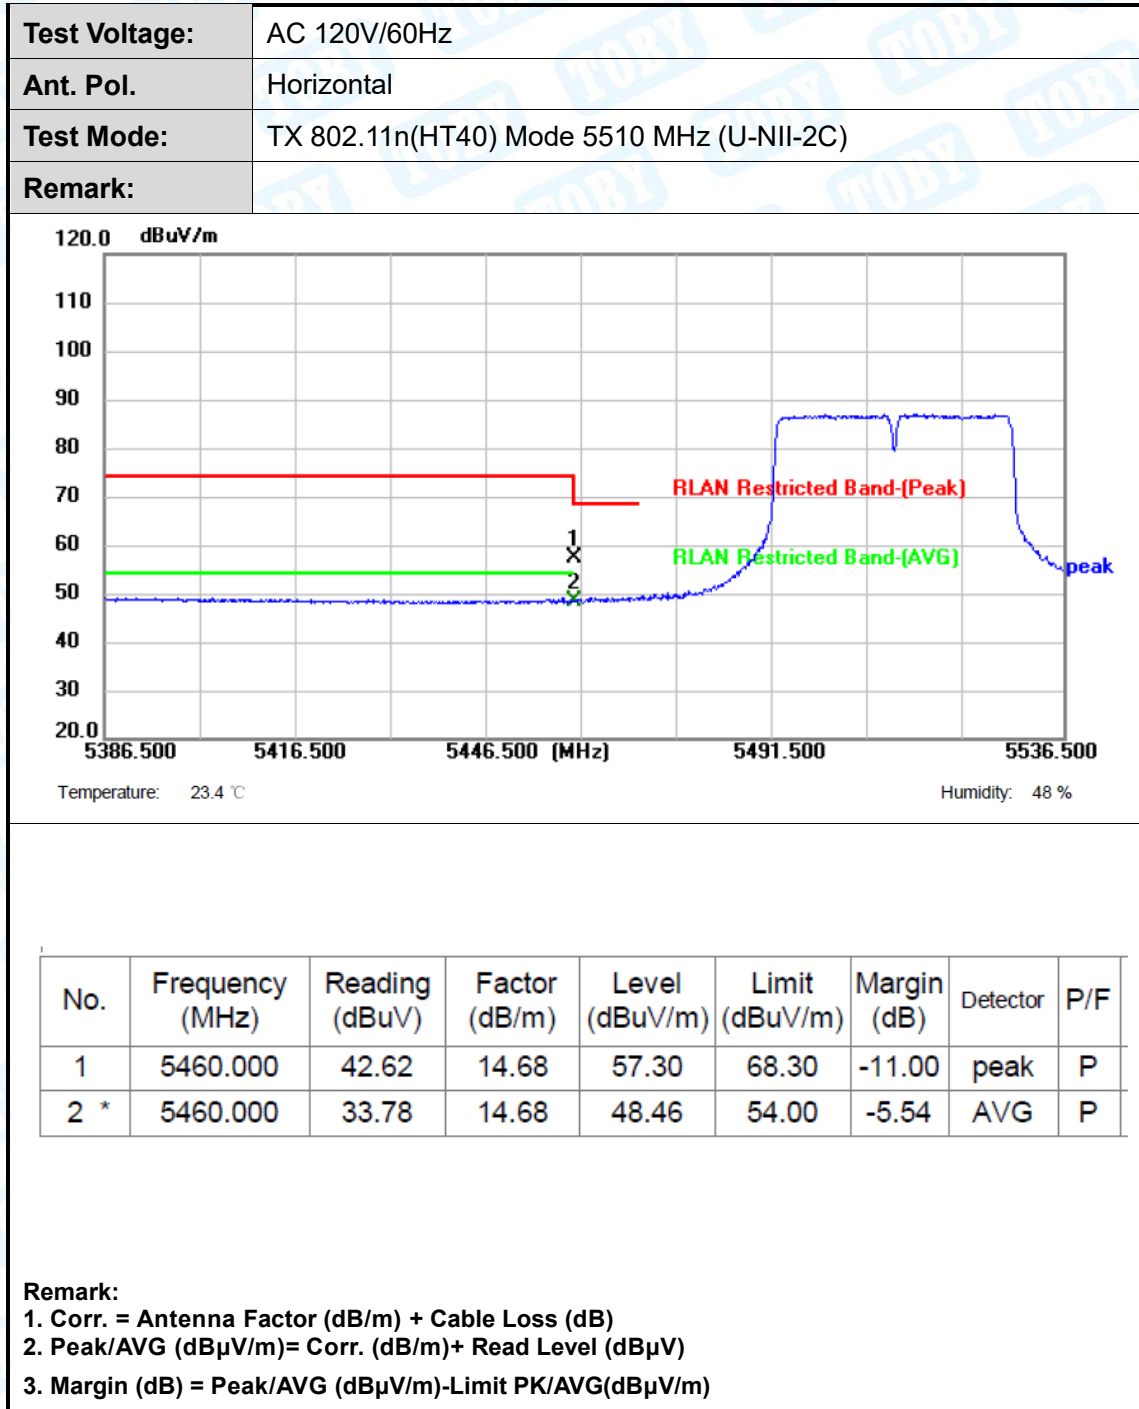


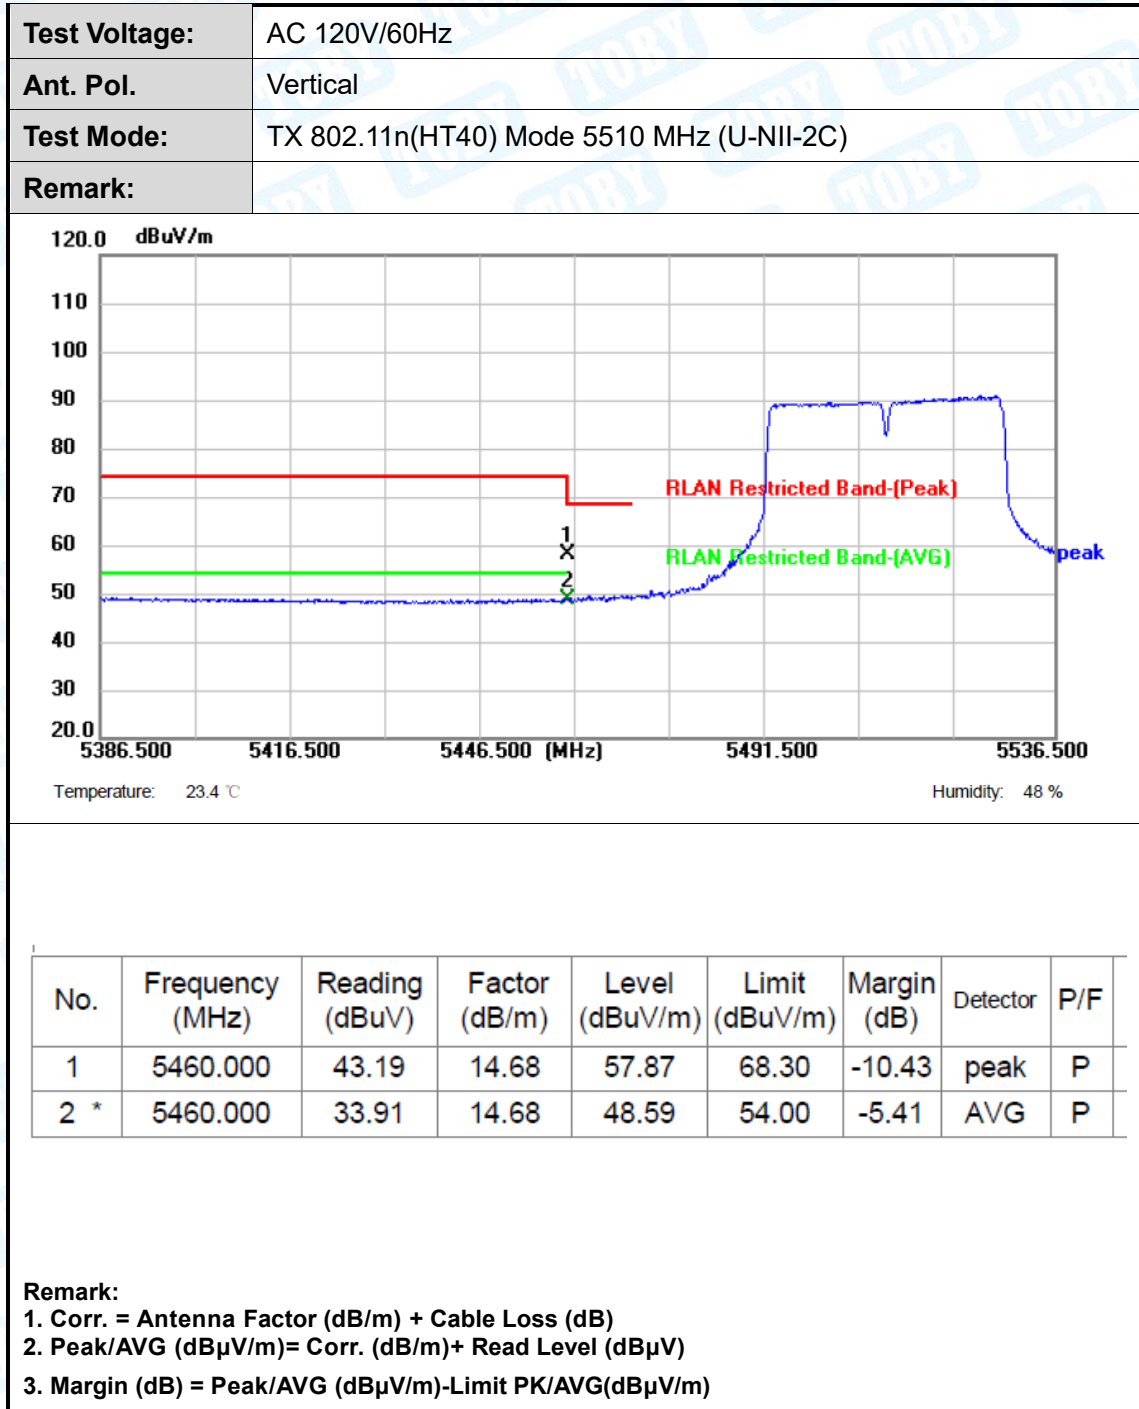

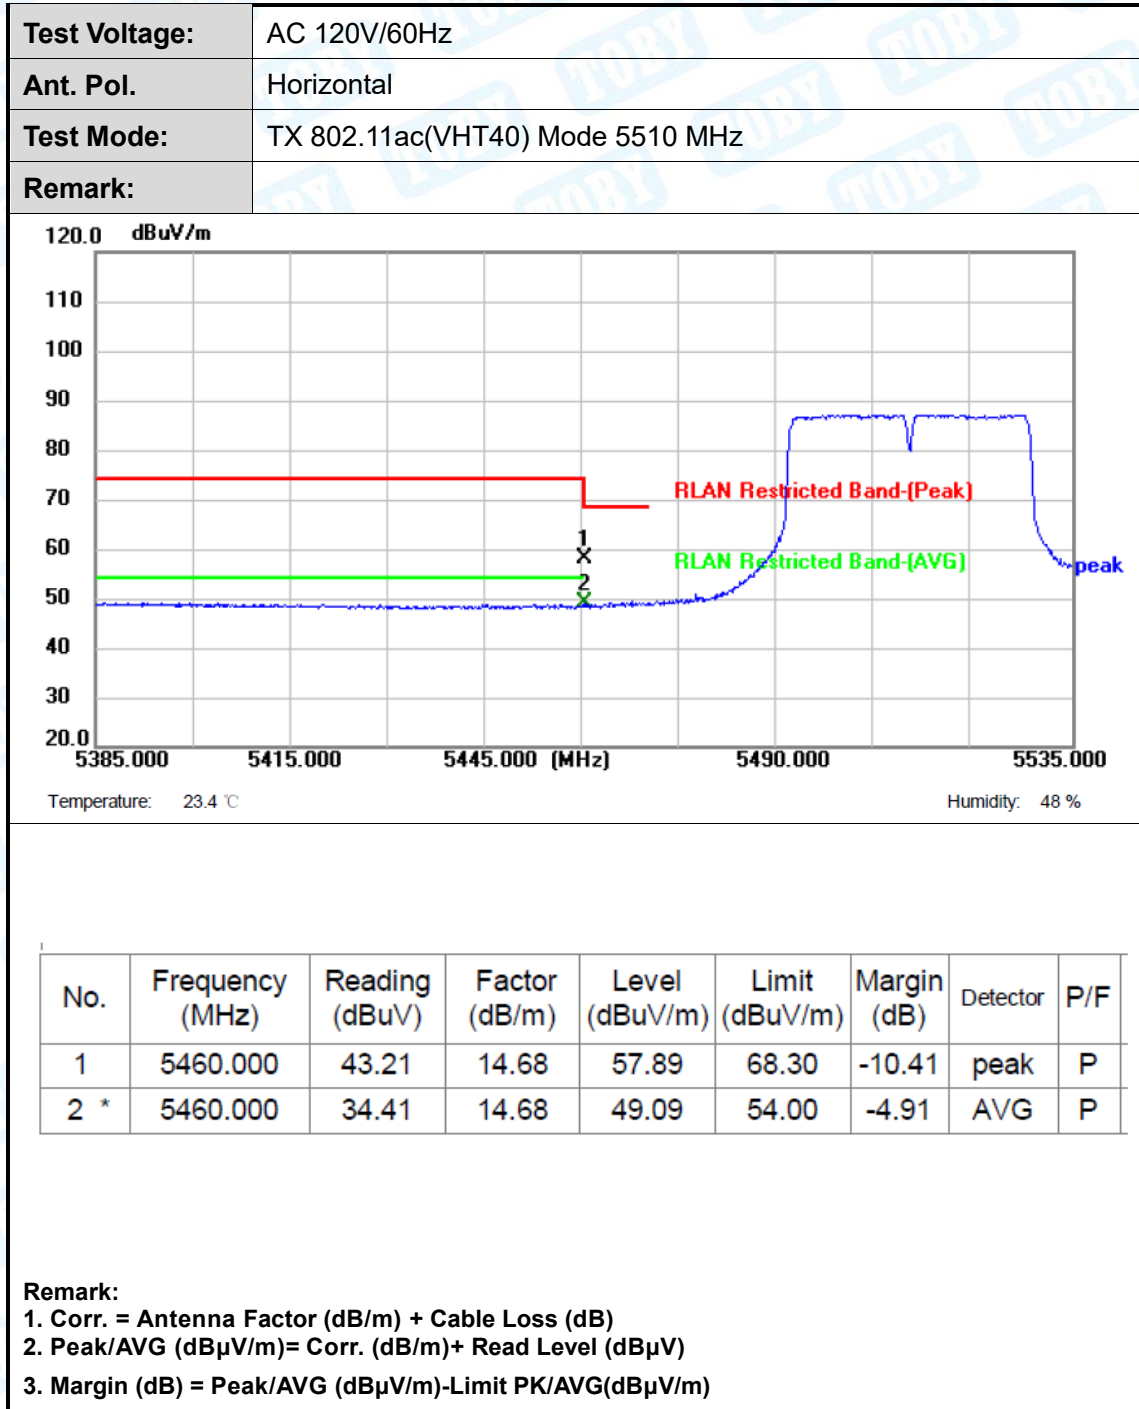


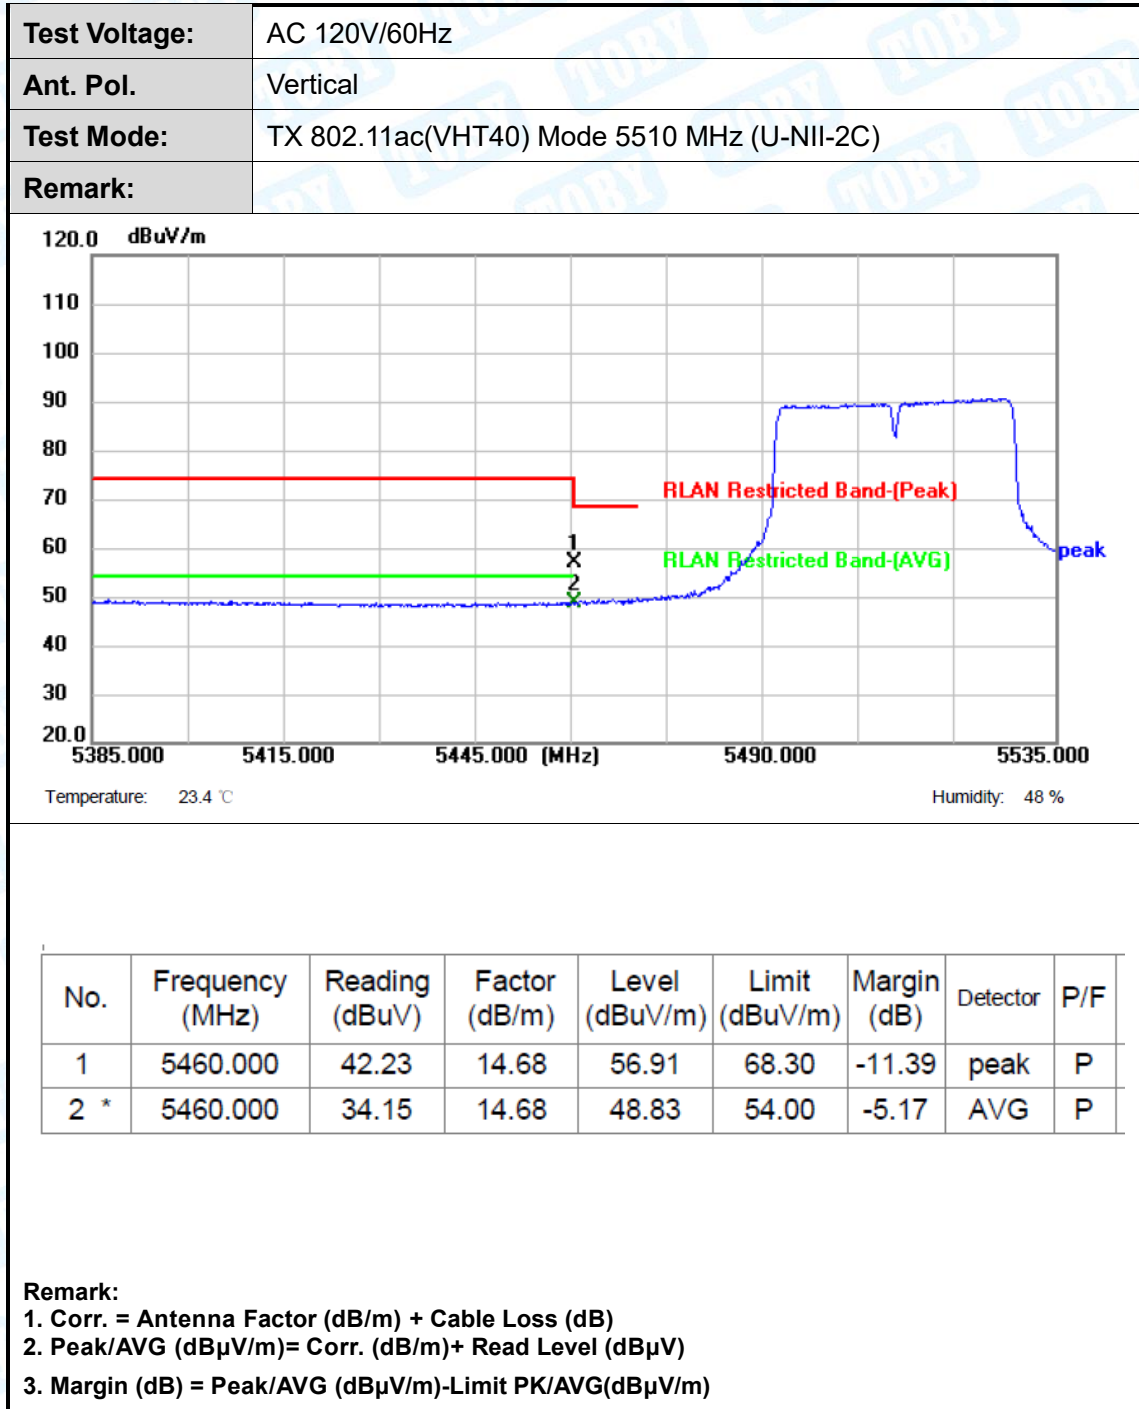

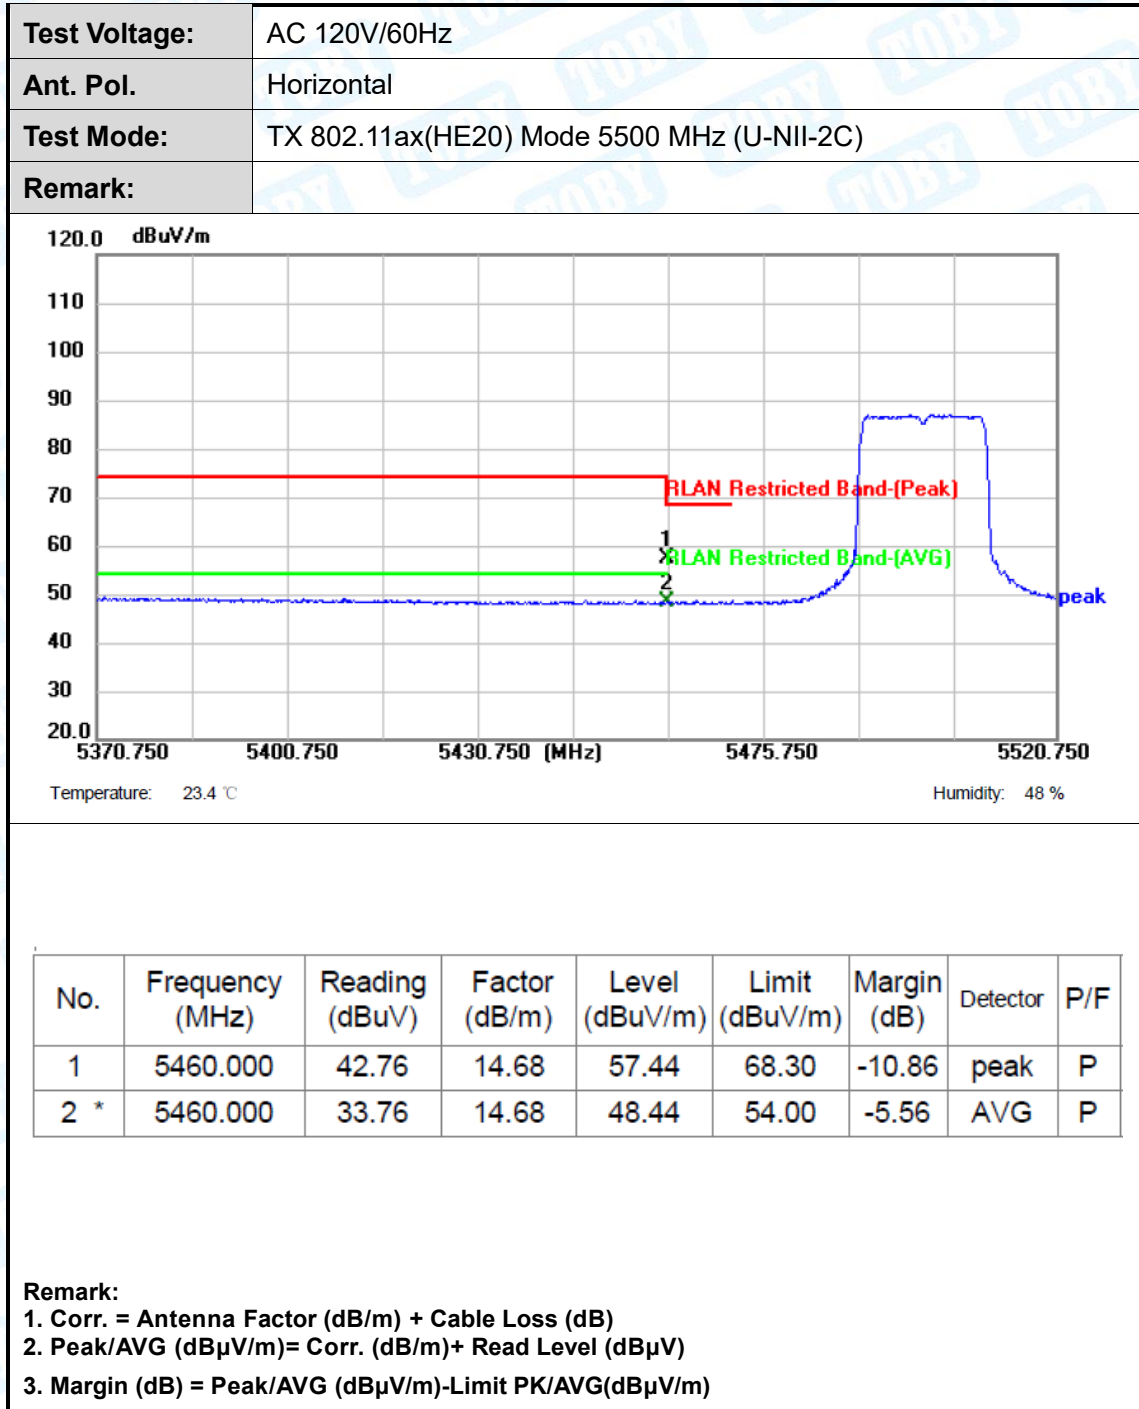

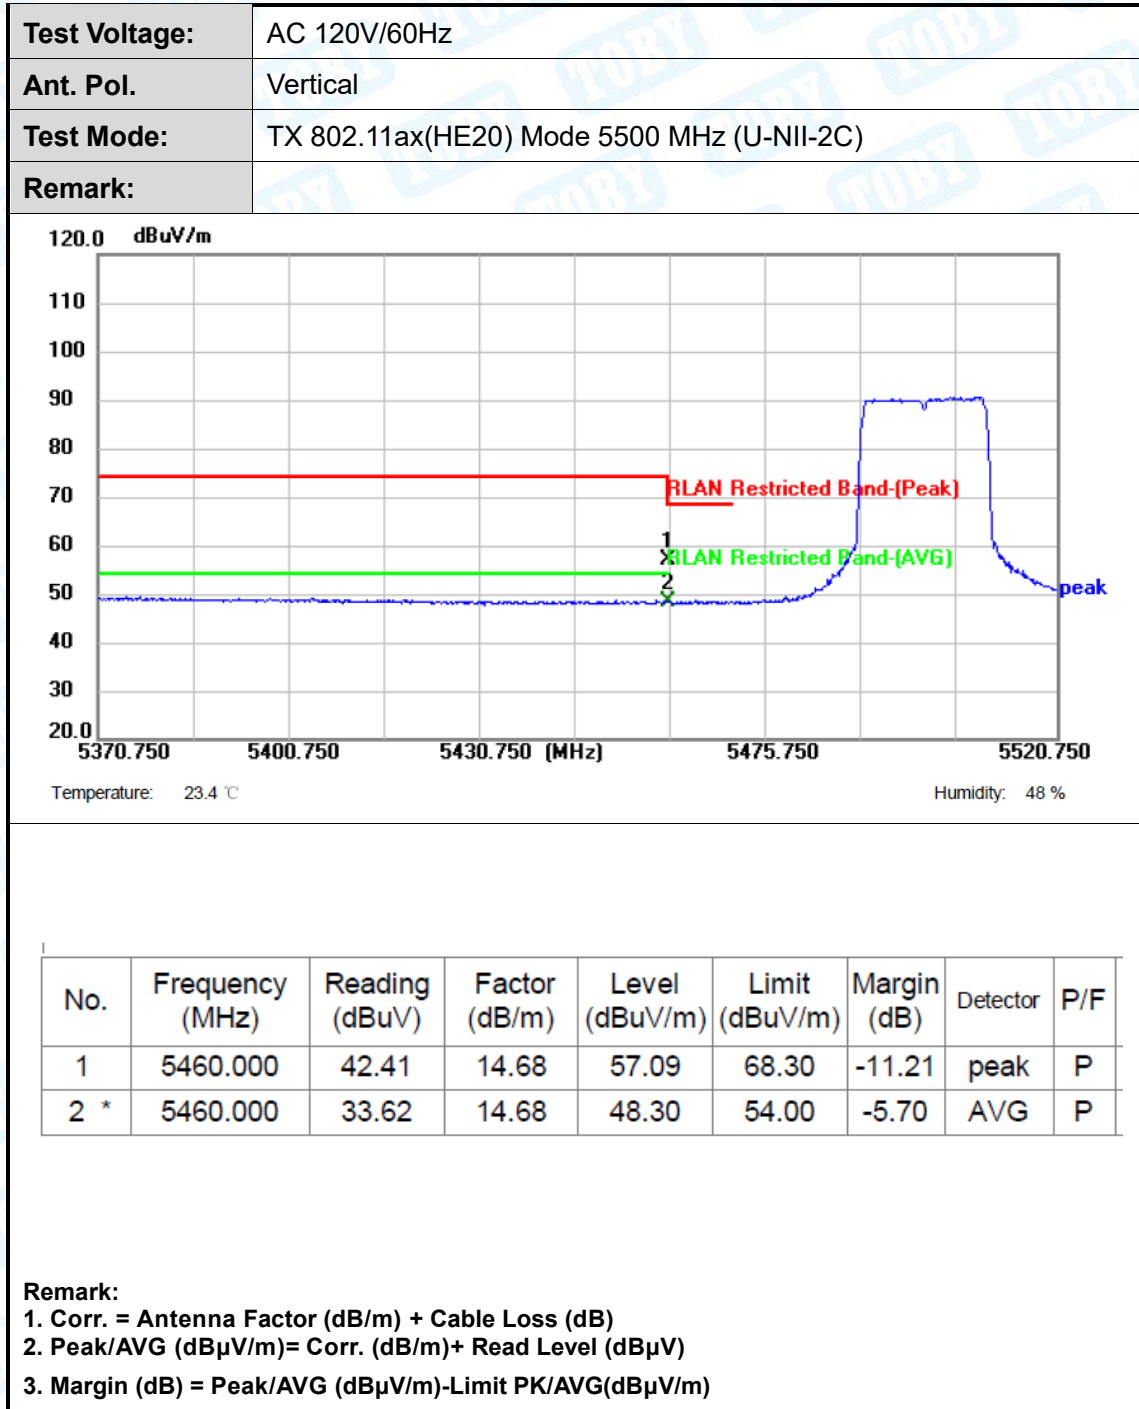

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C)
Remark:	

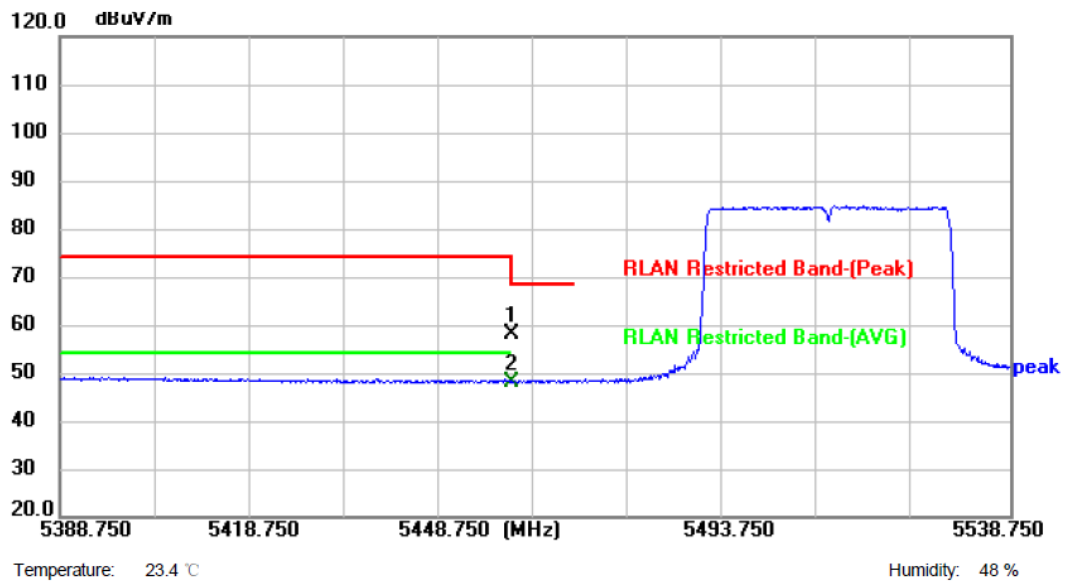



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.35	14.68	58.03	68.30	-10.27	peak	P
2 *	5460.000	33.39	14.68	48.07	54.00	-5.93	AVG	P


Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)




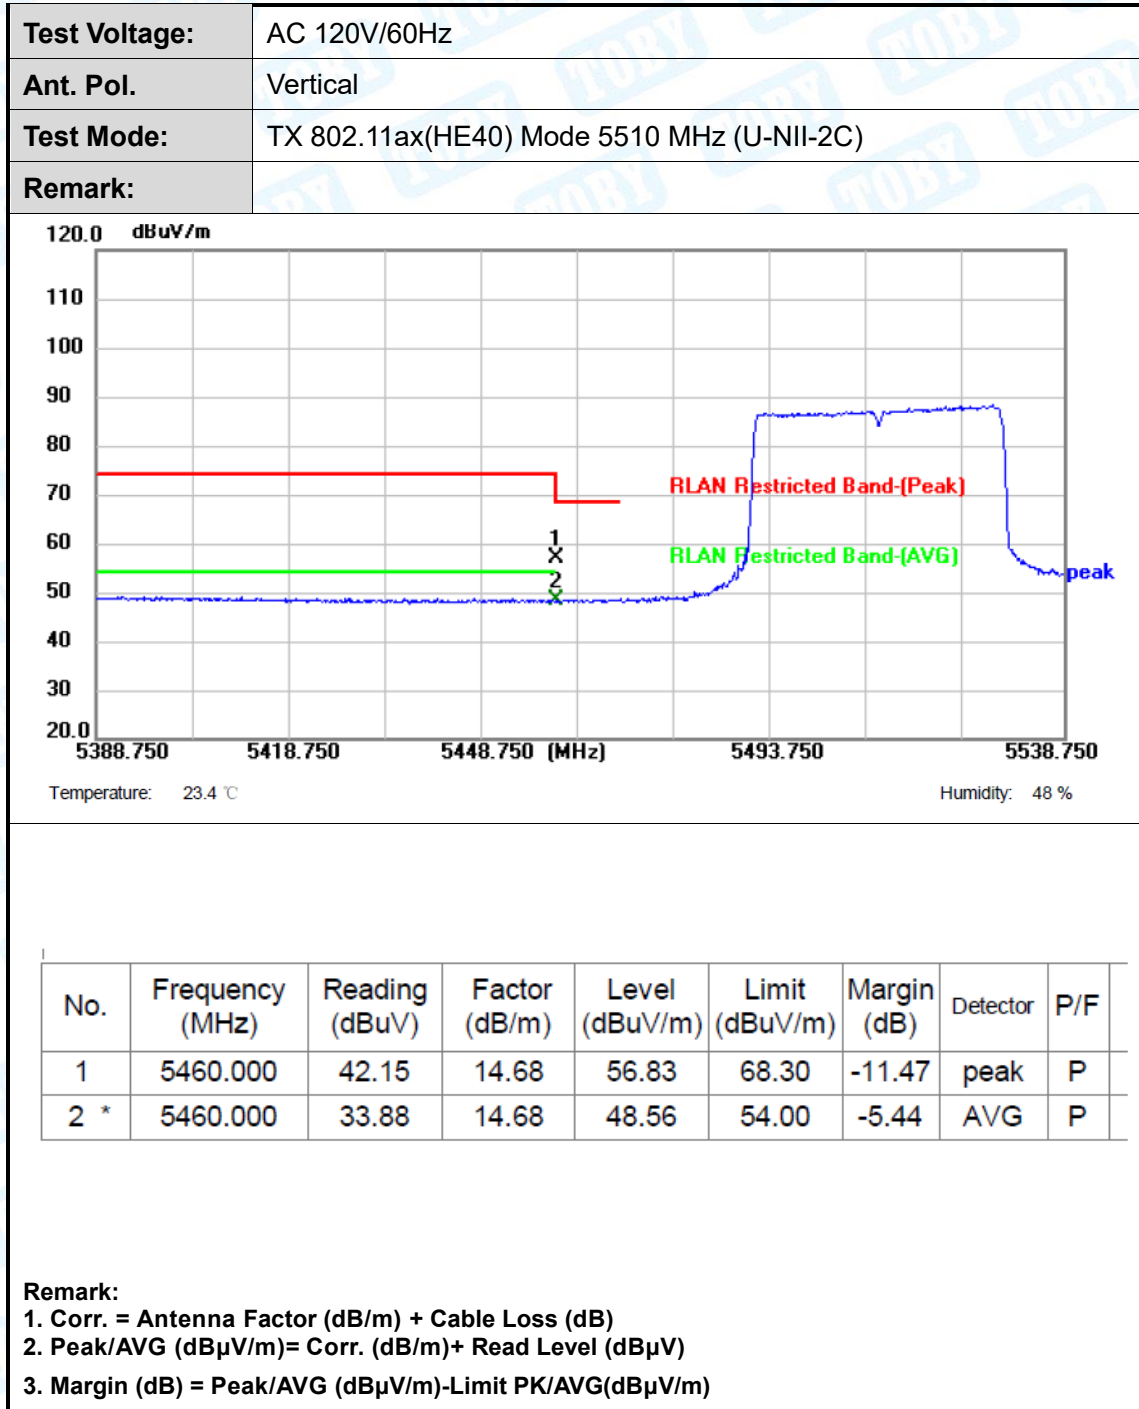


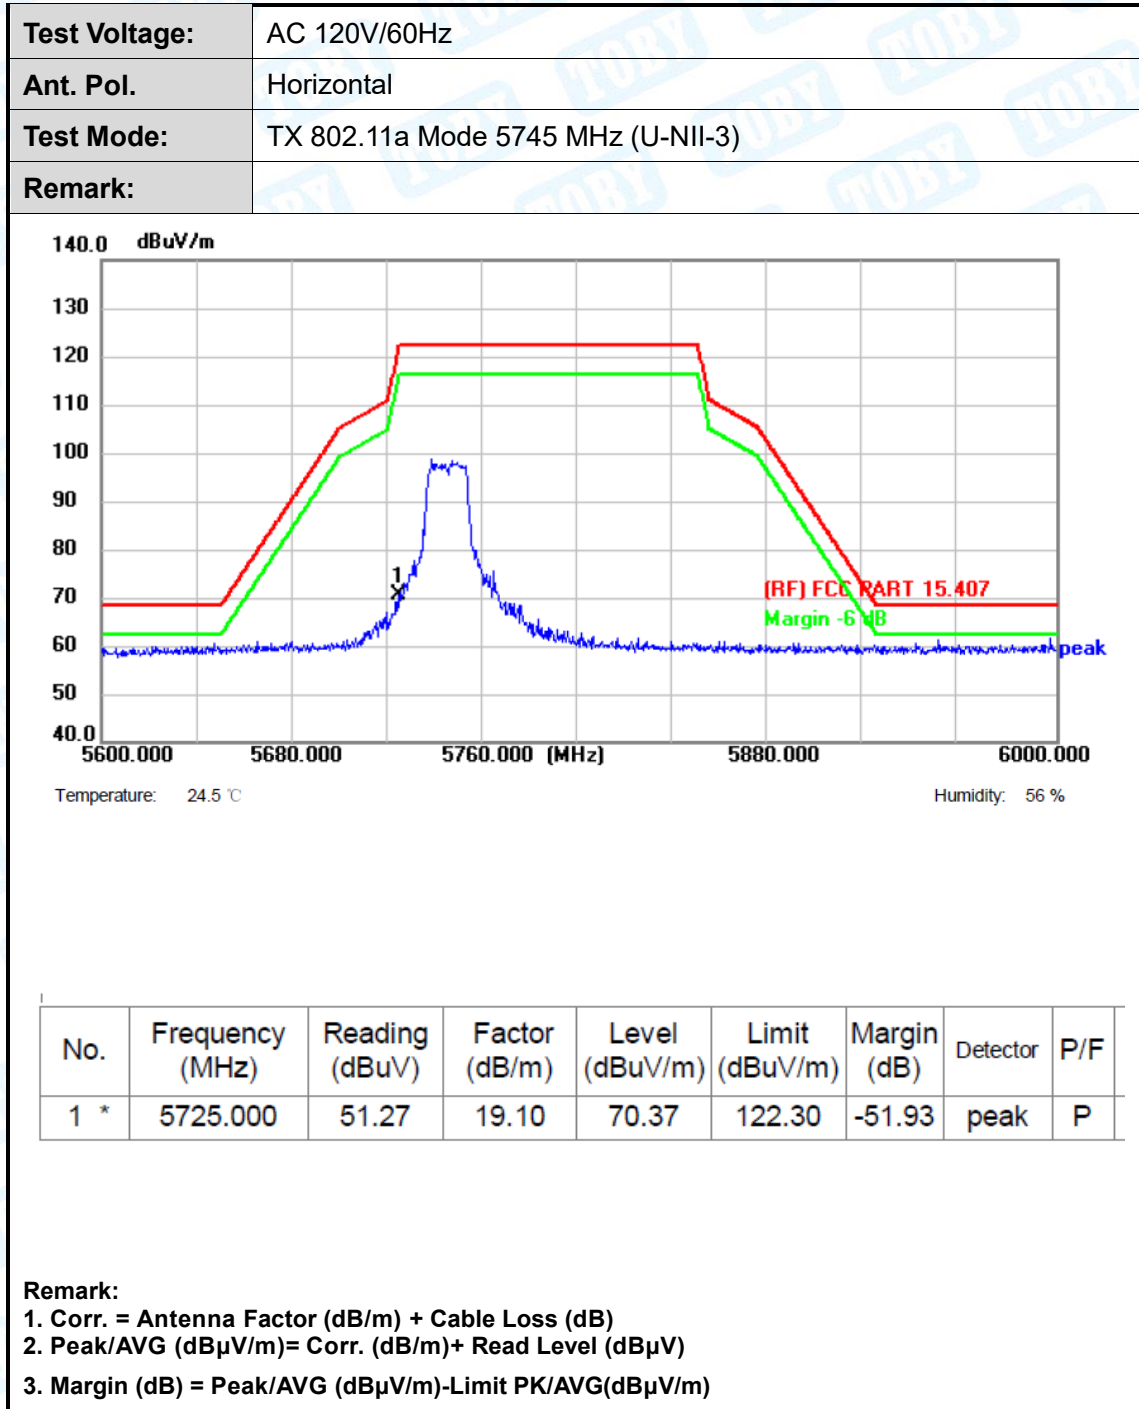


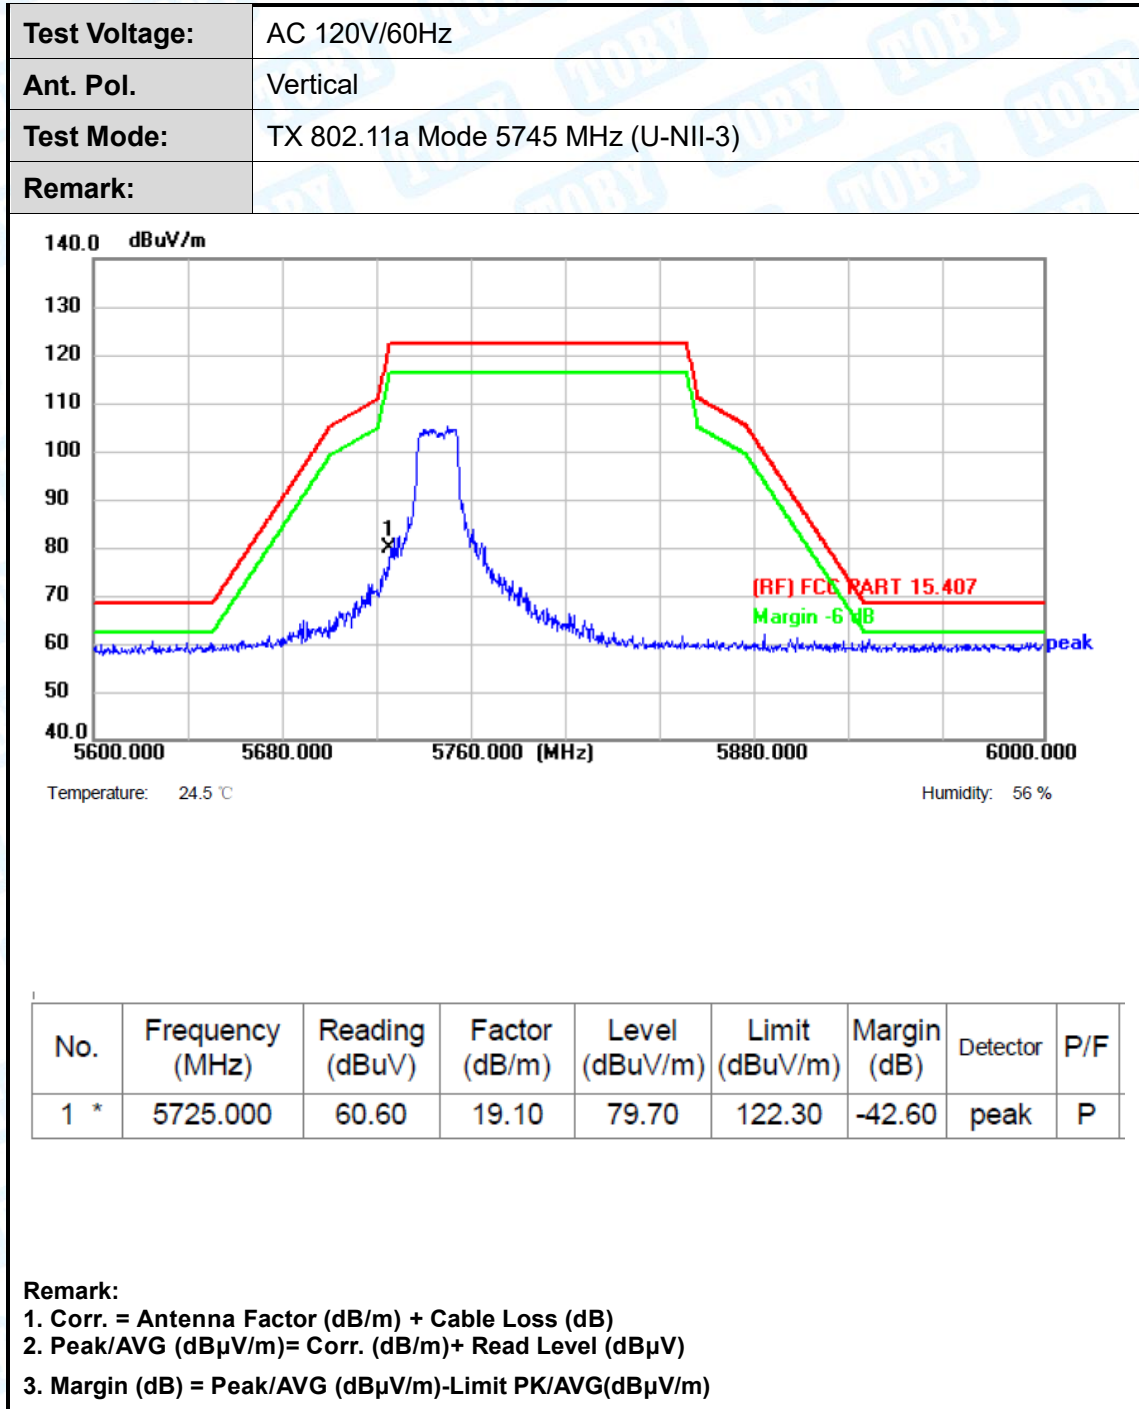


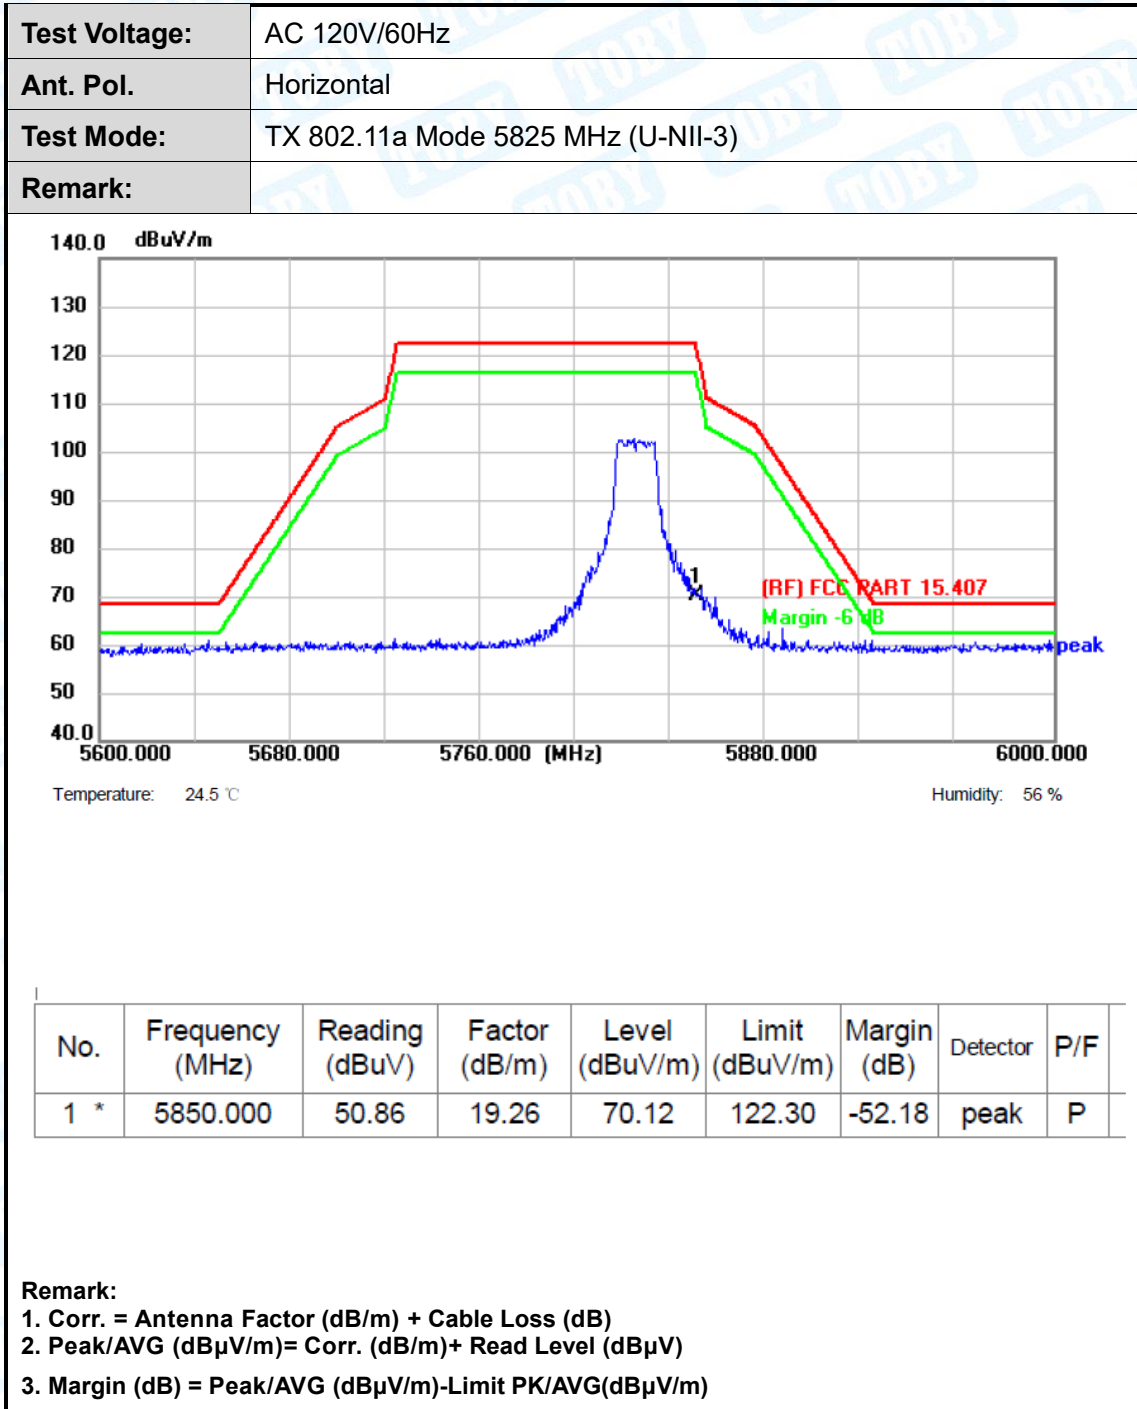


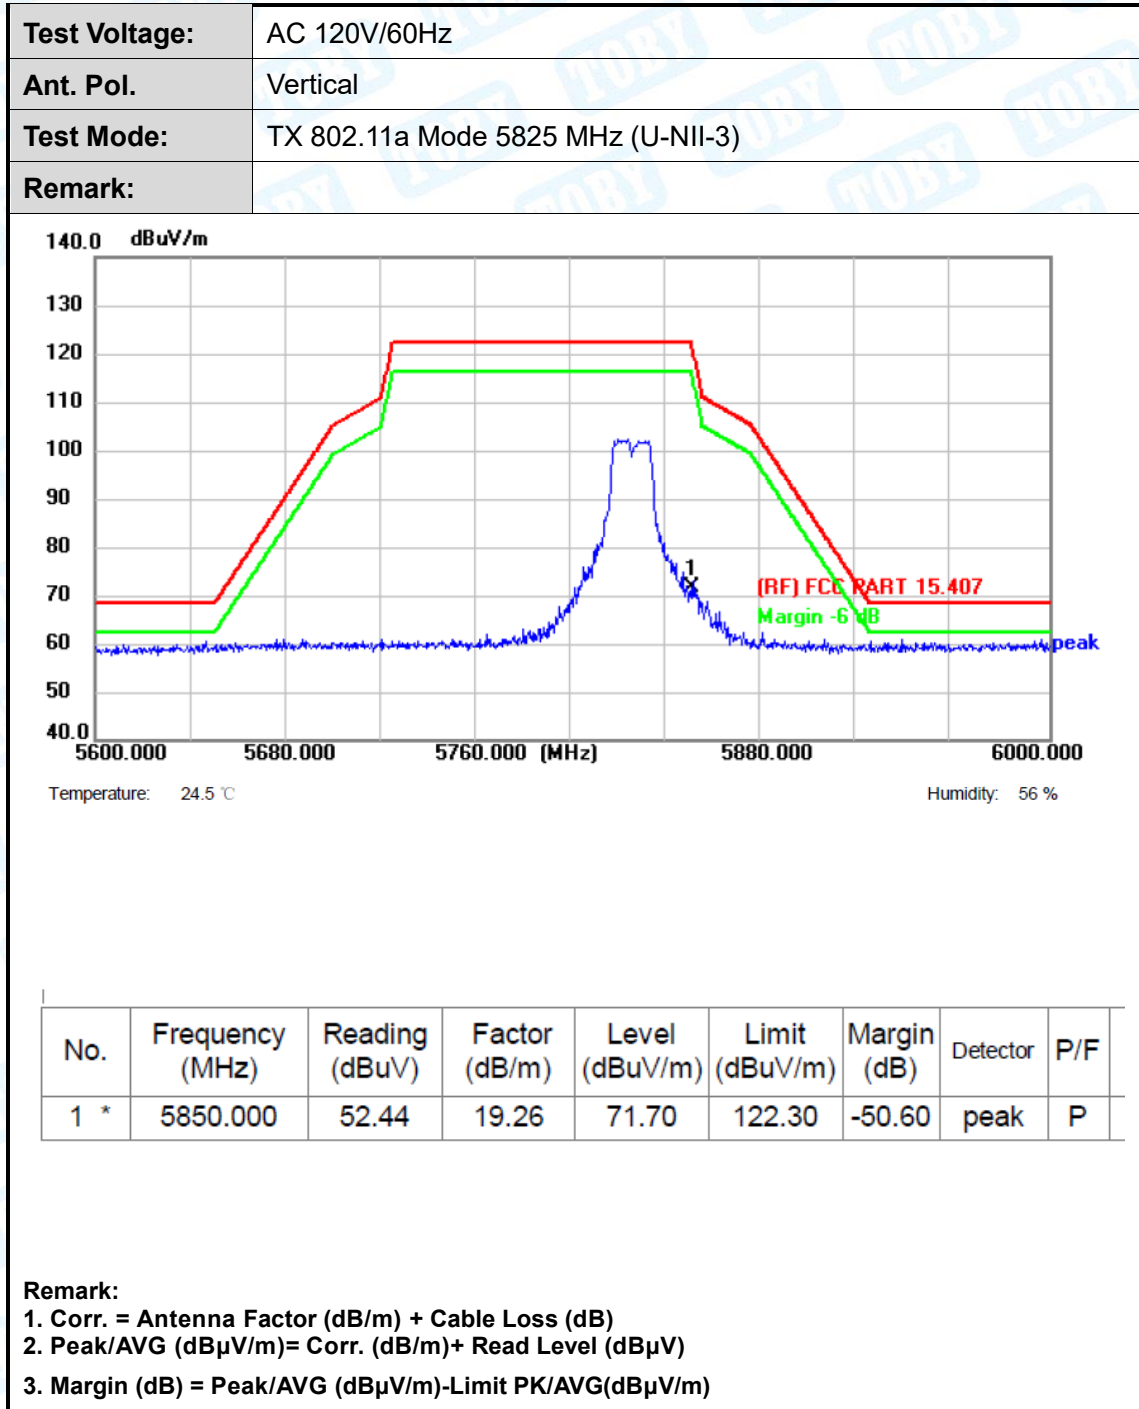


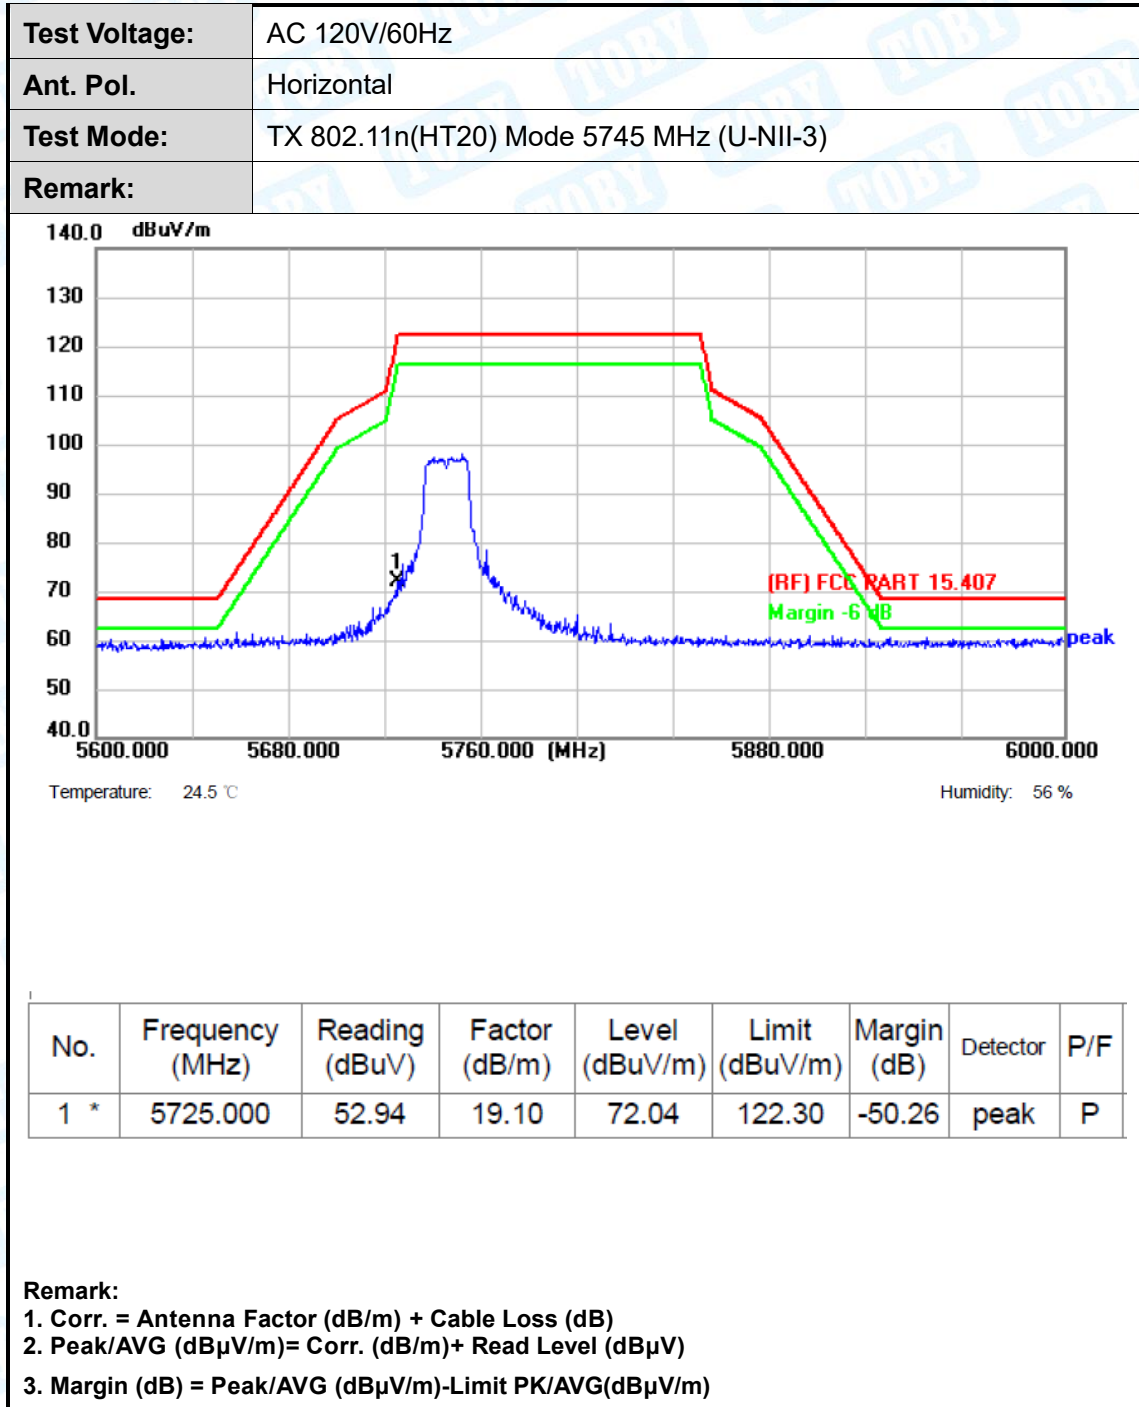


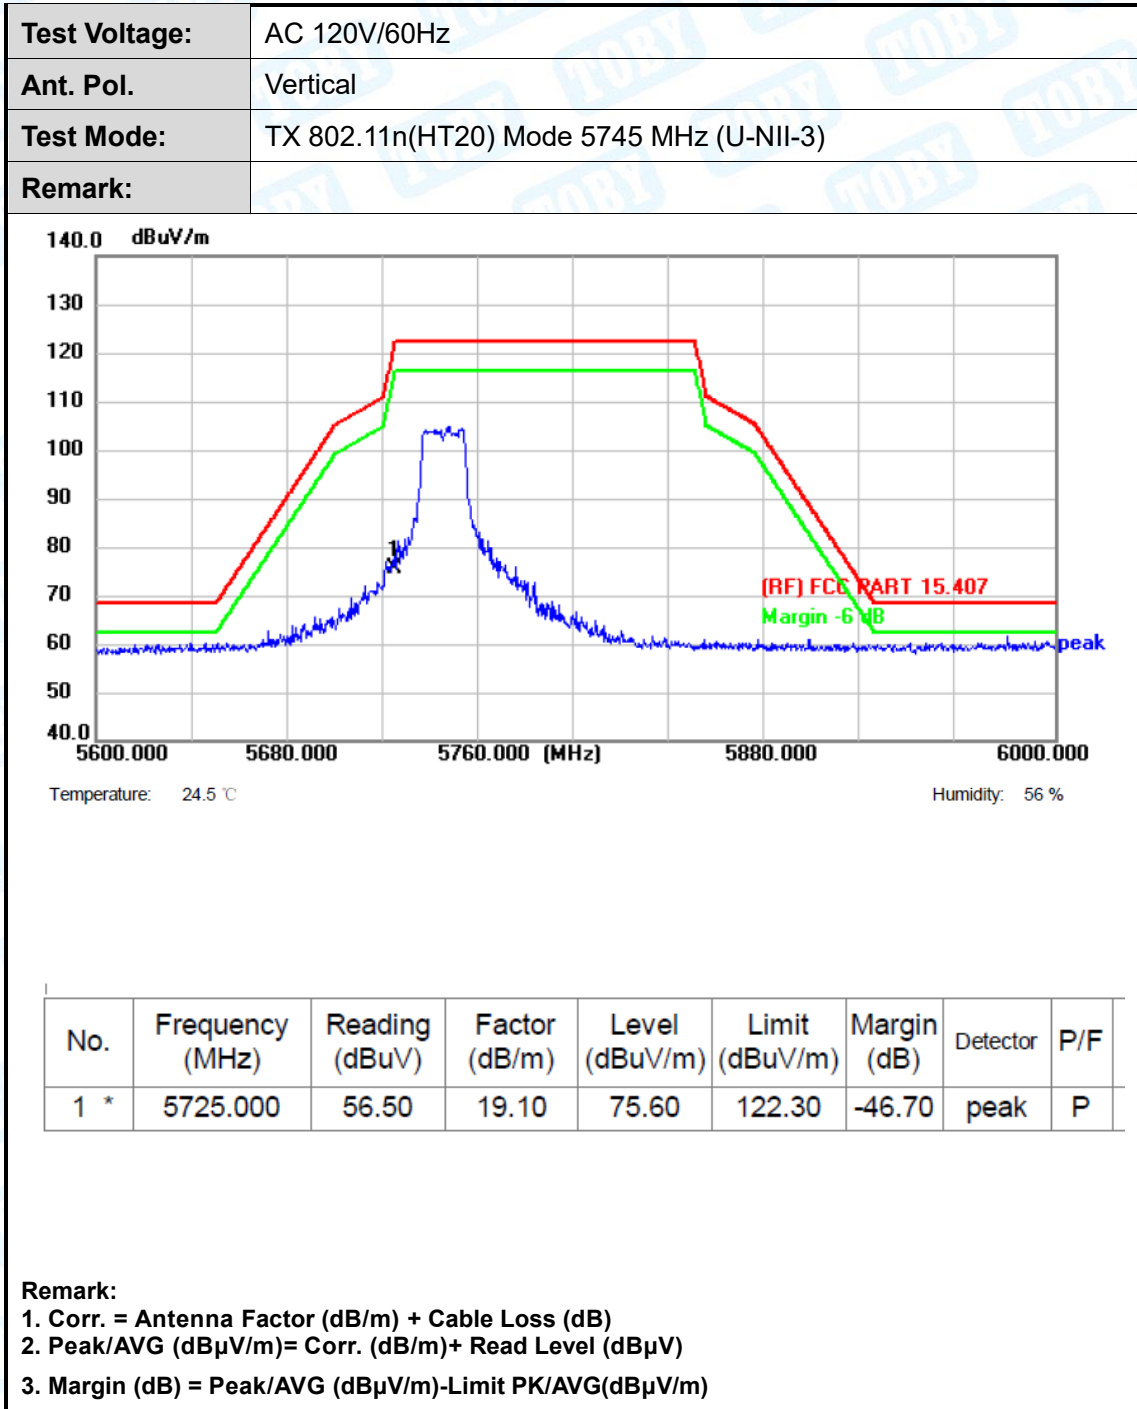


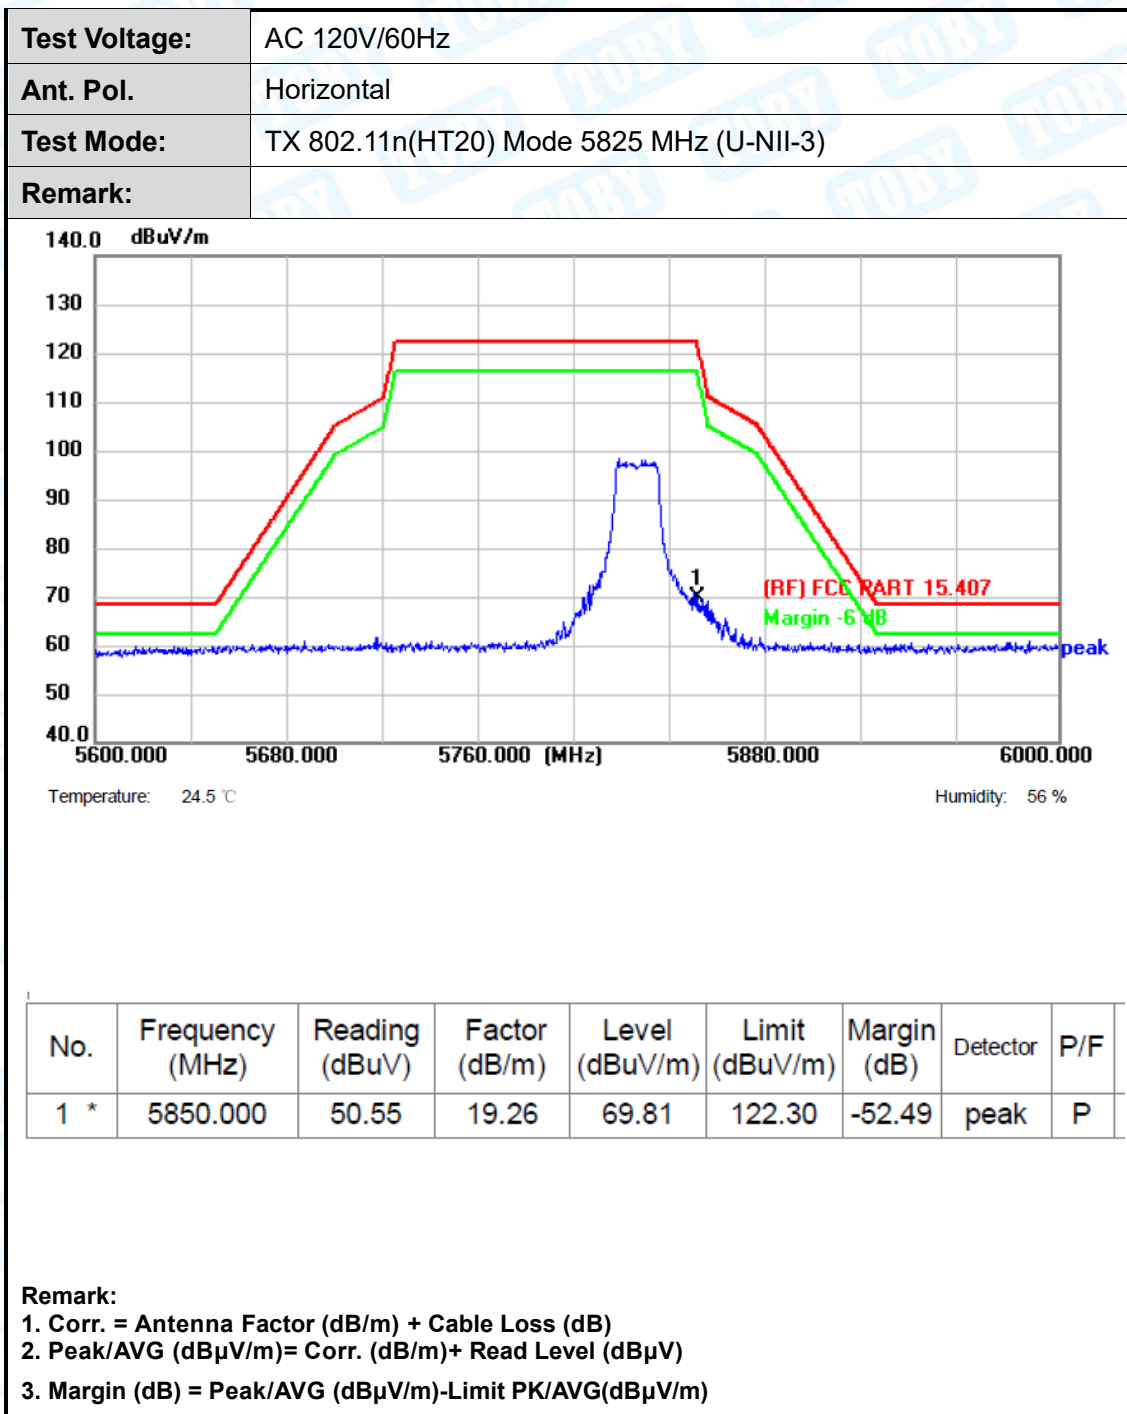


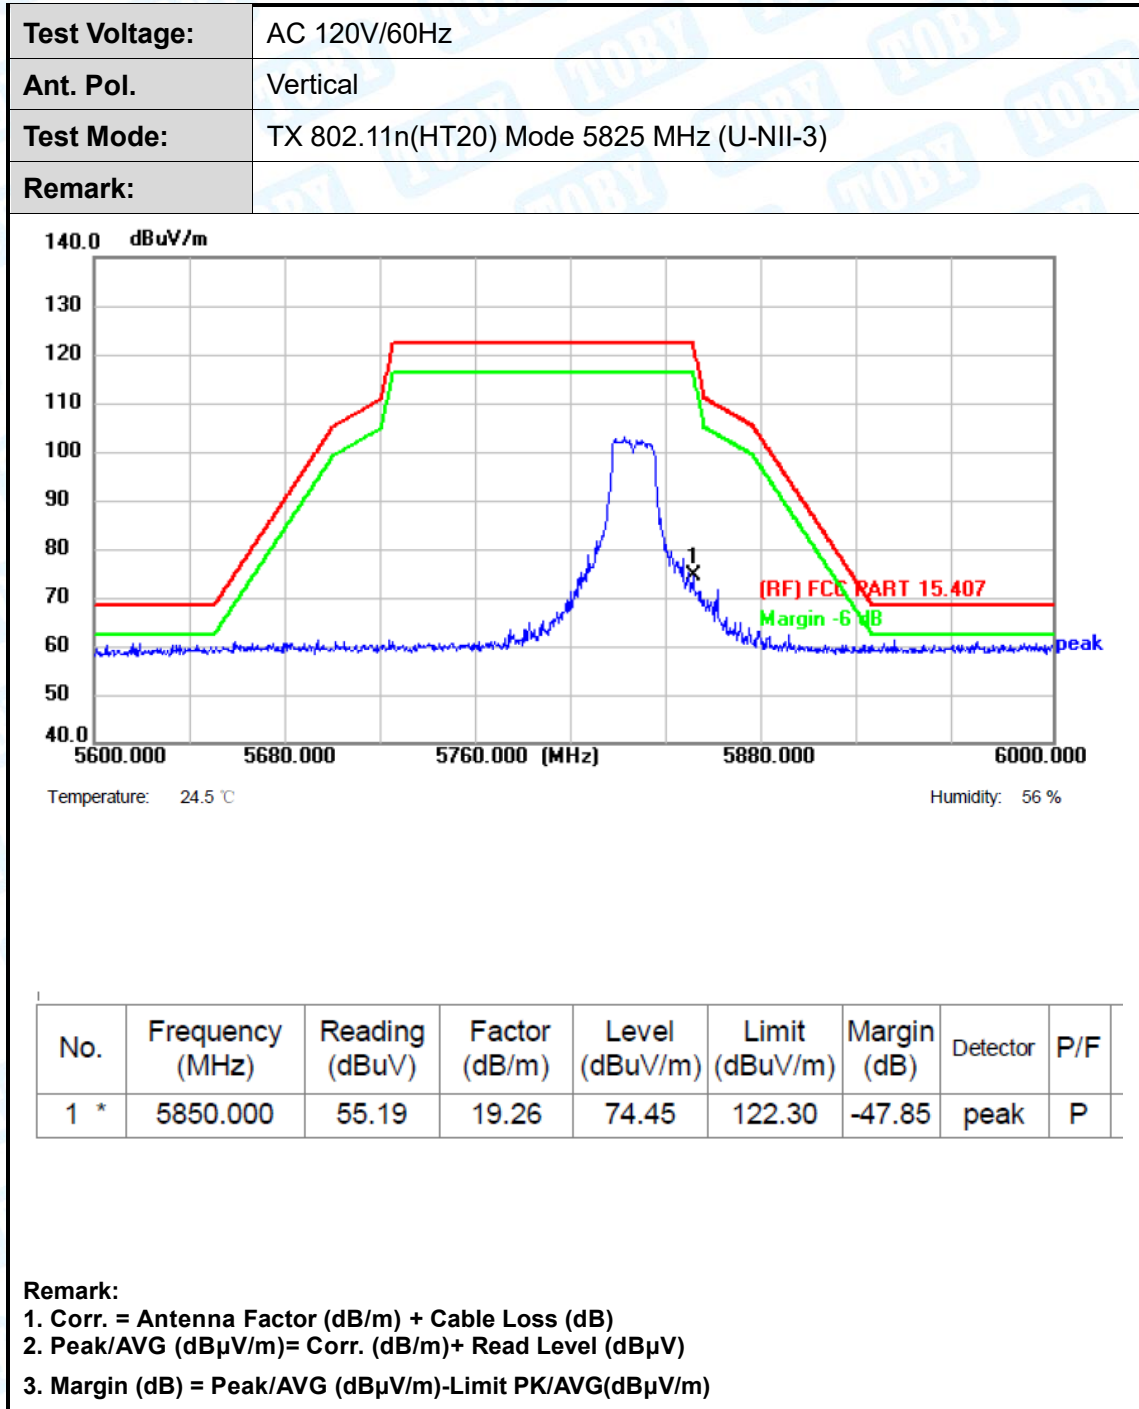


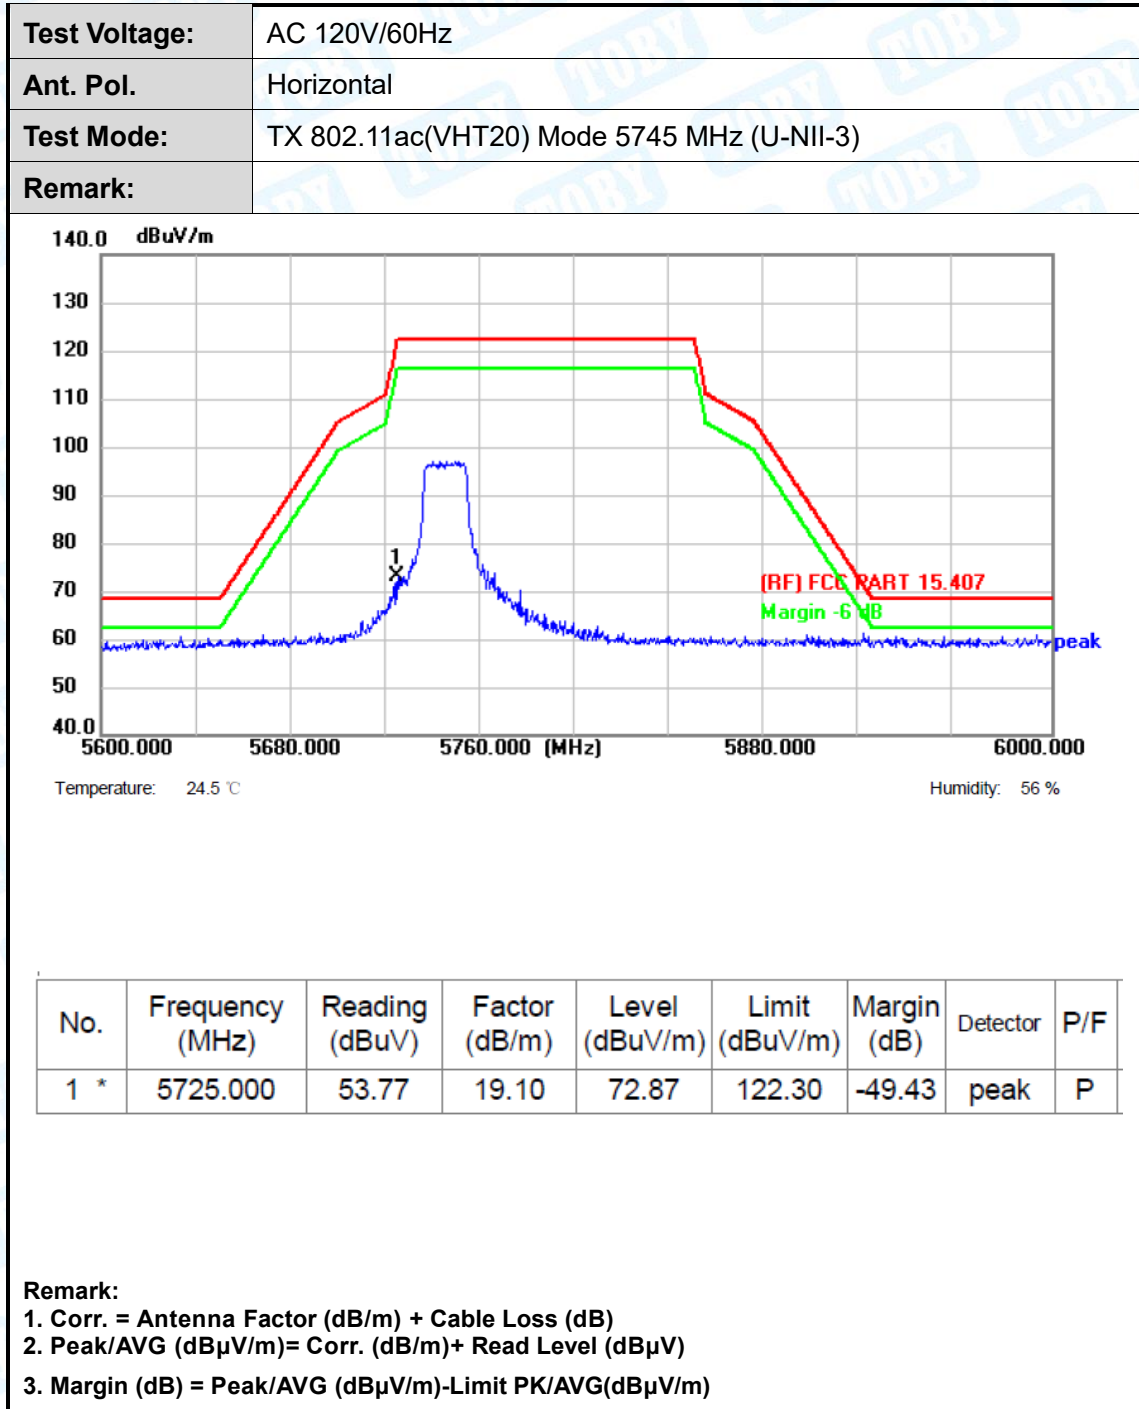


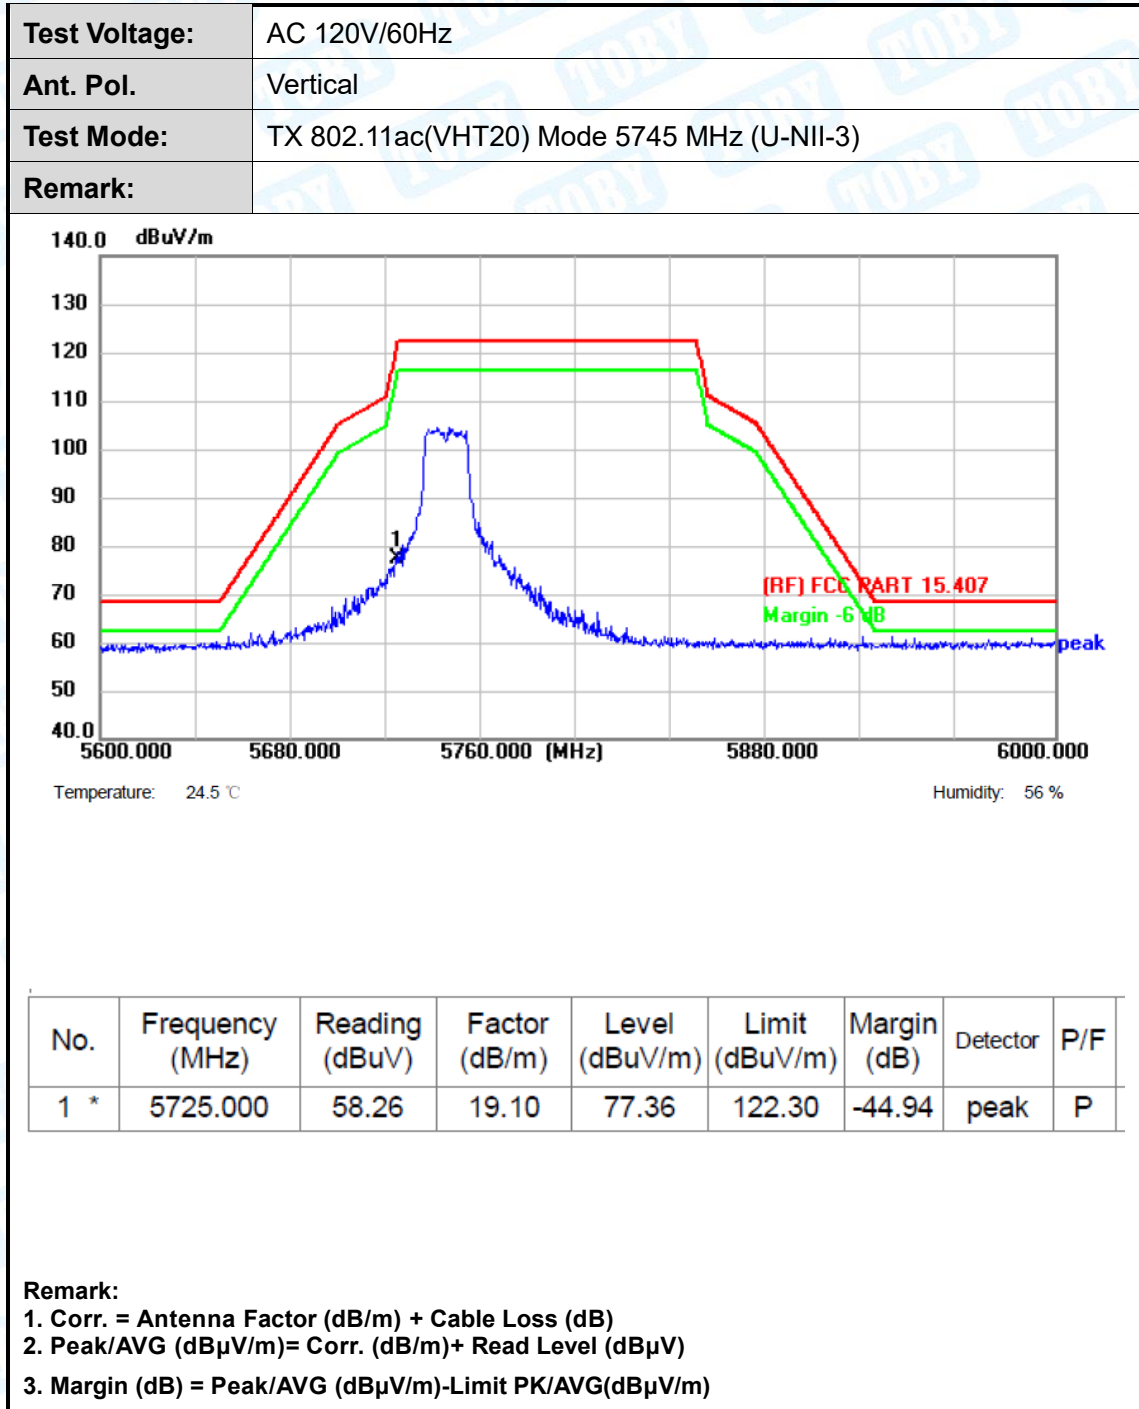


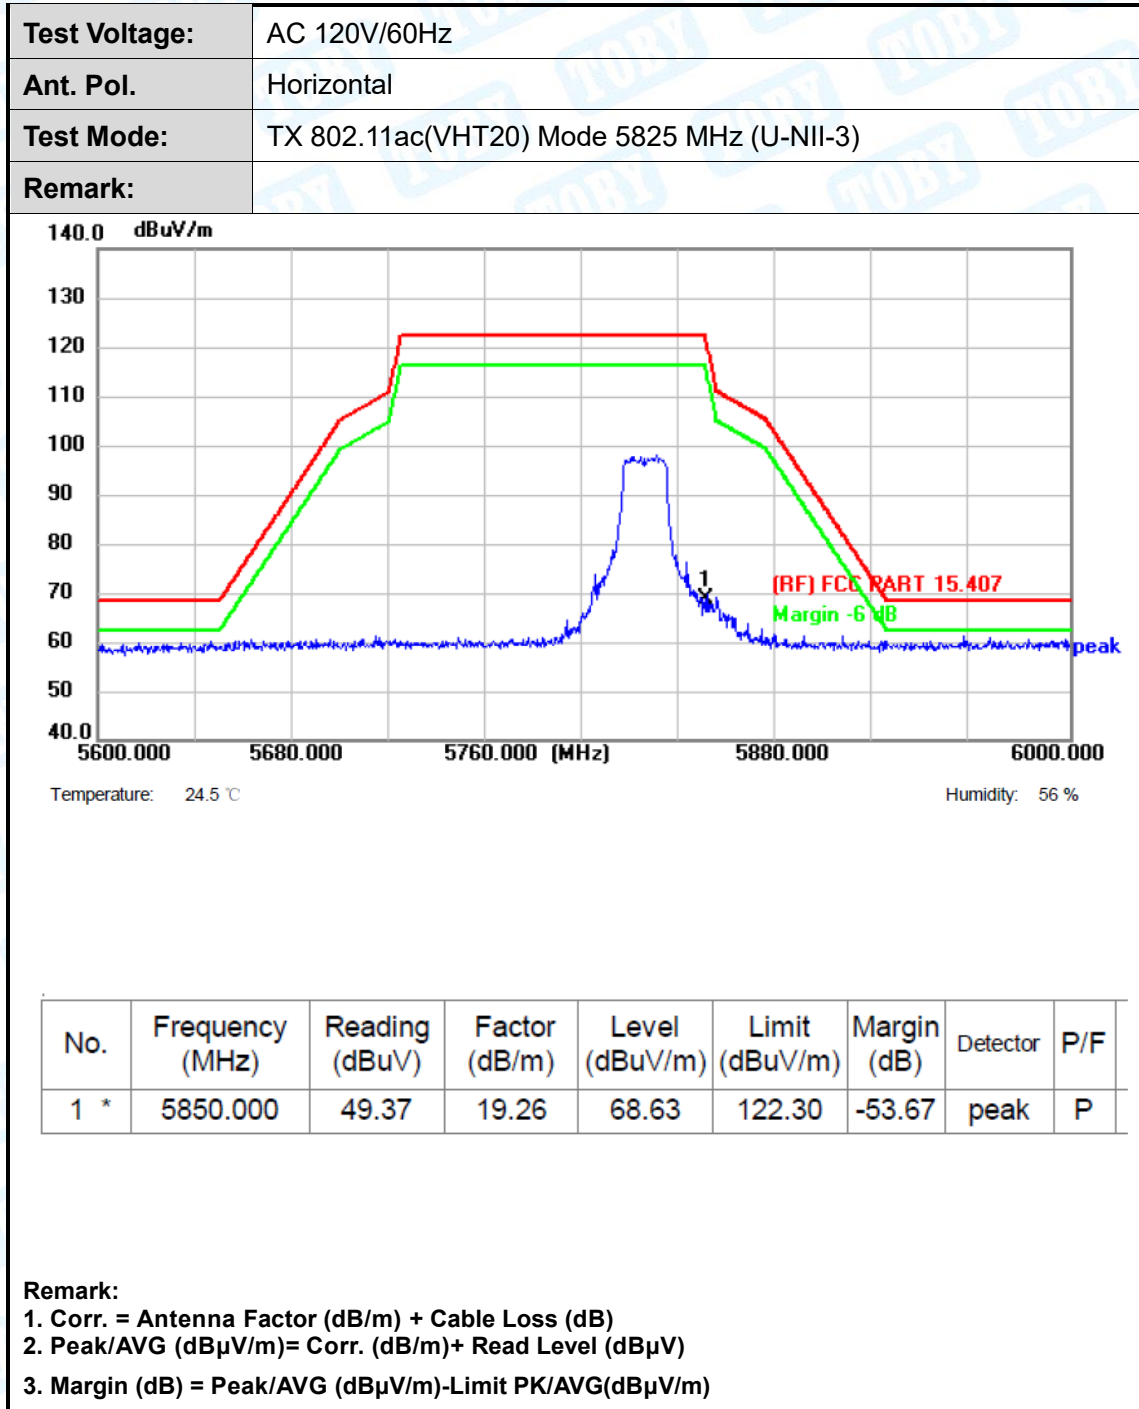


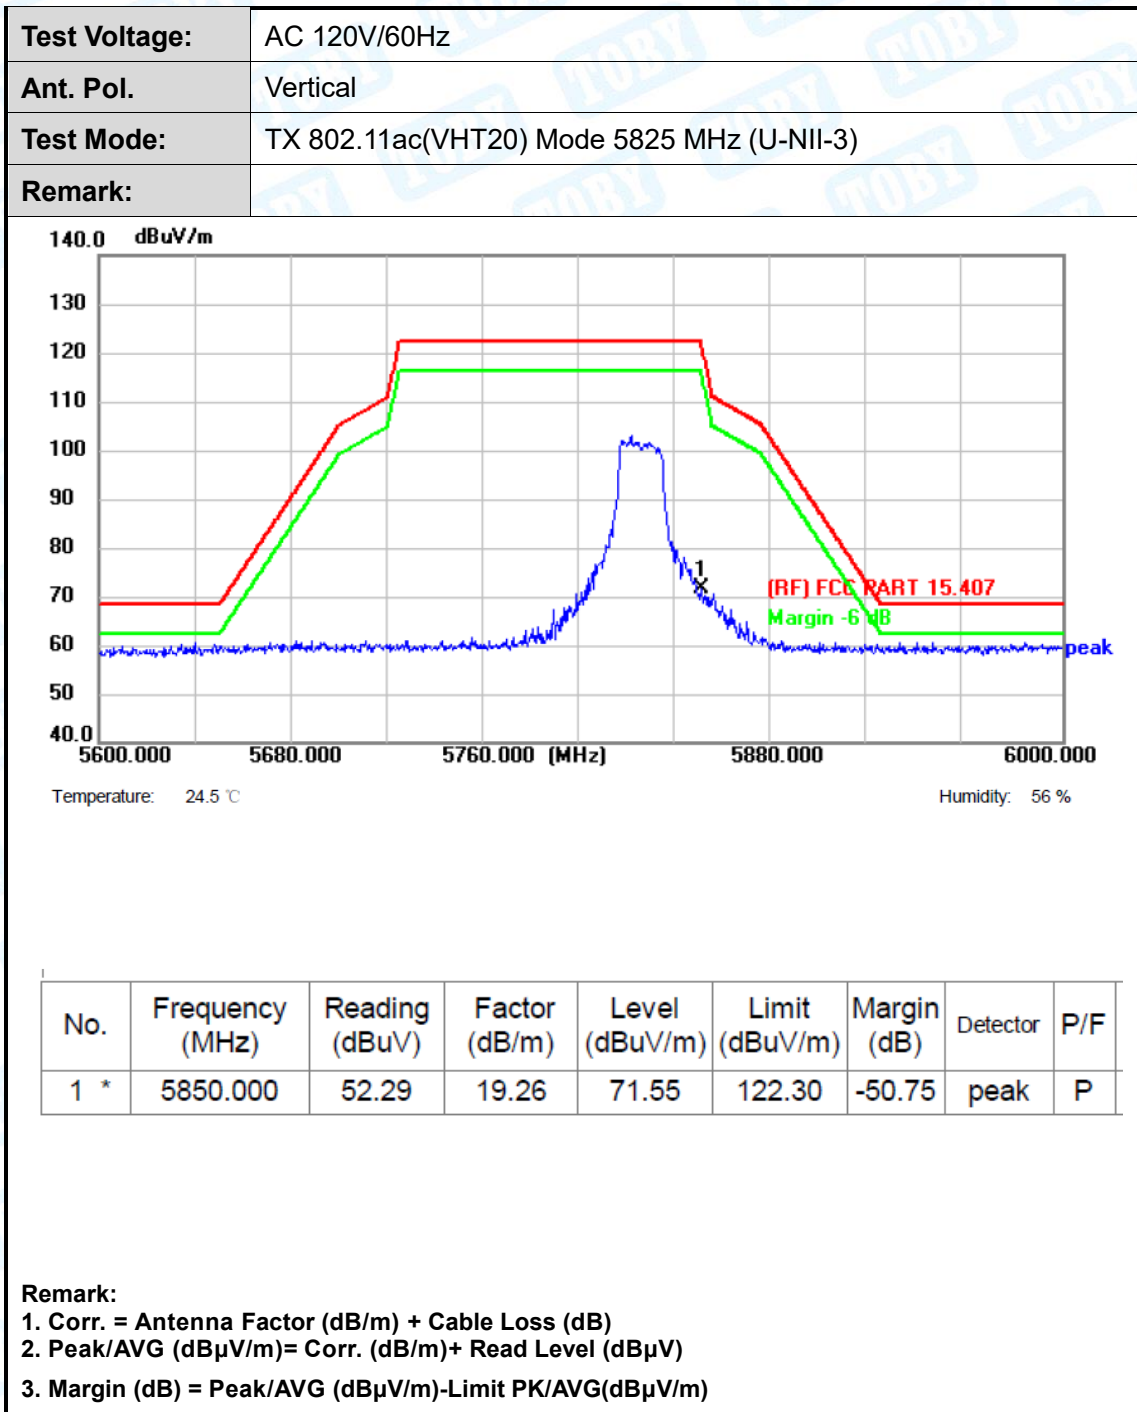


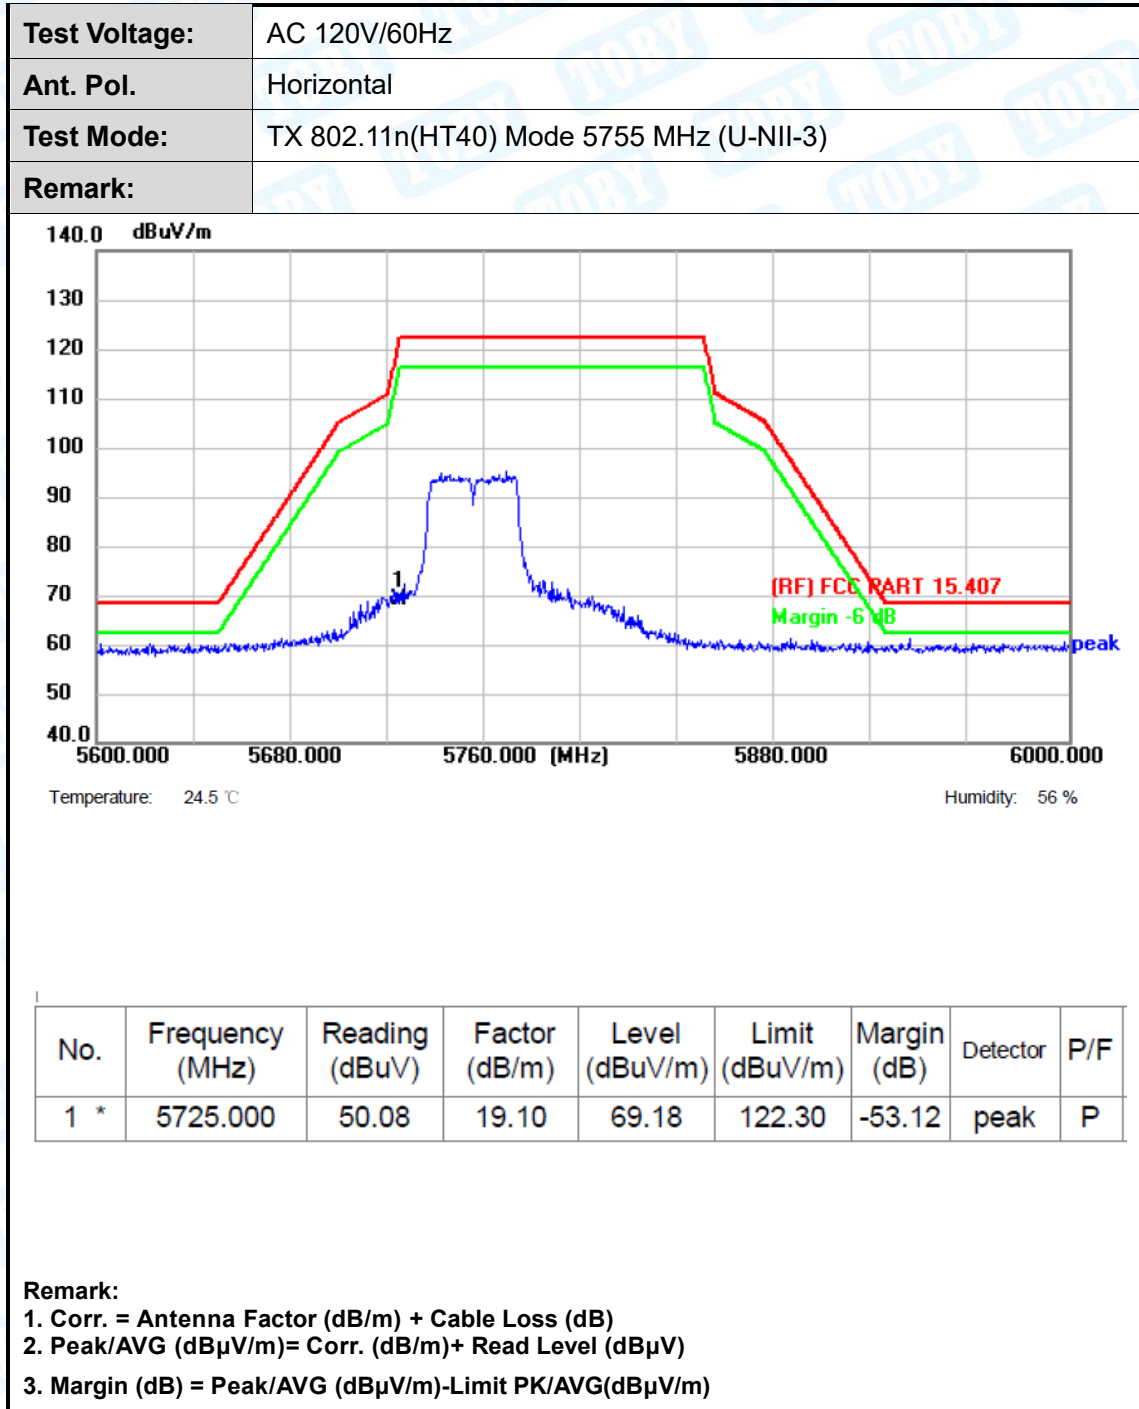


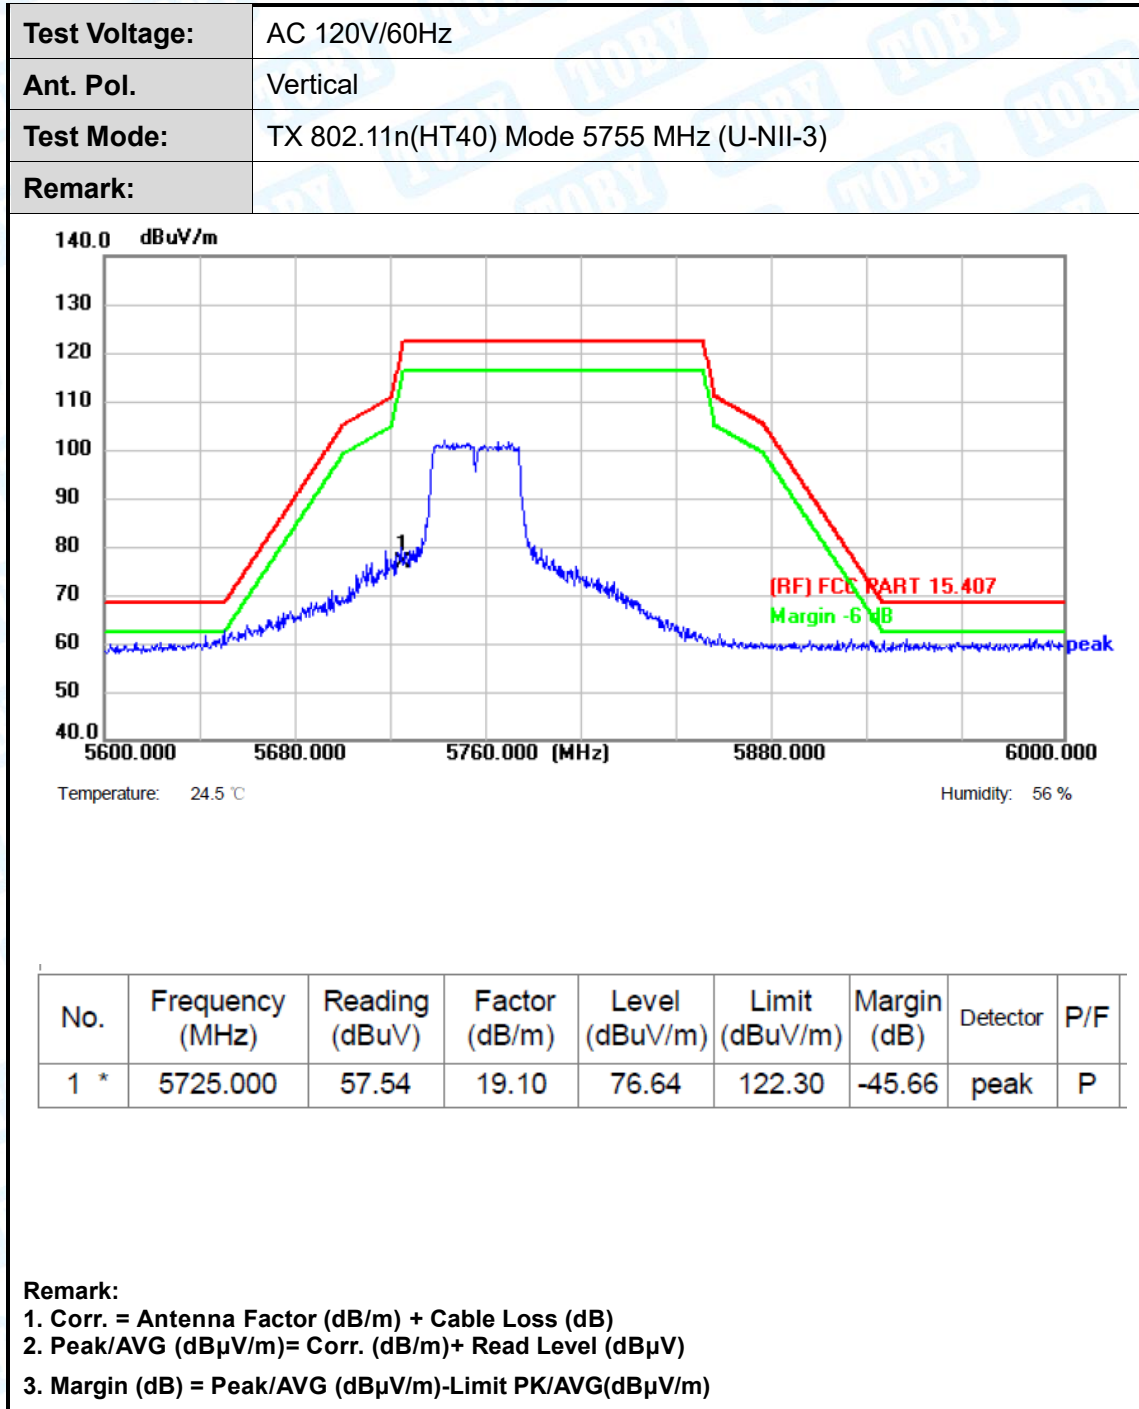


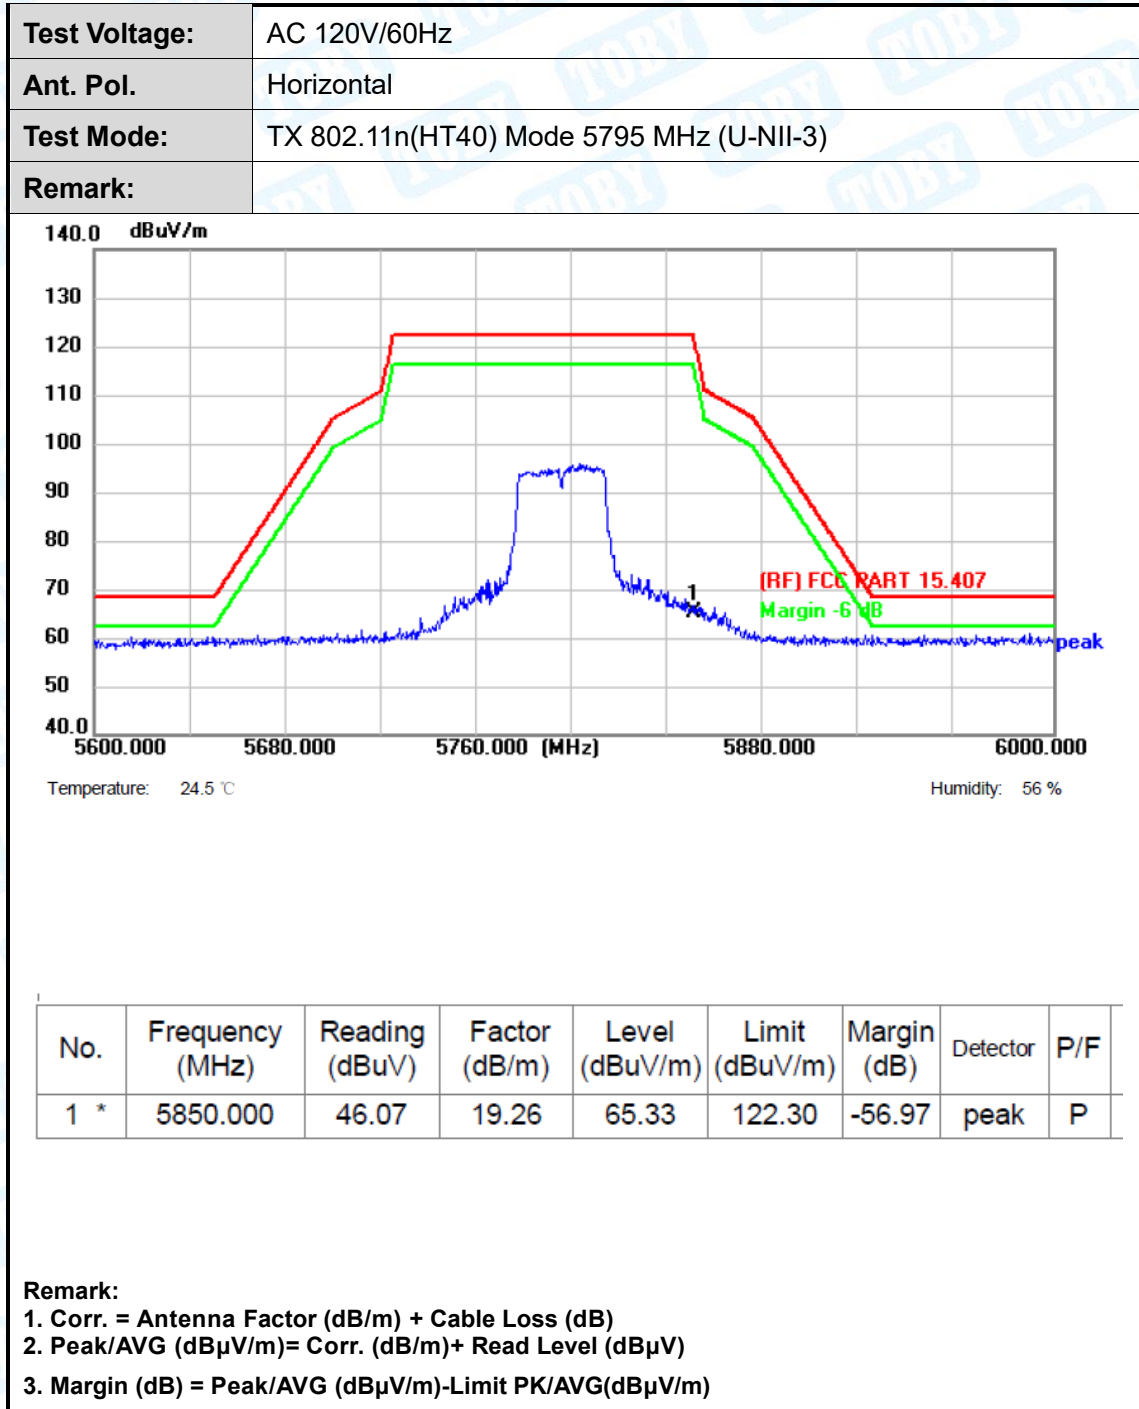


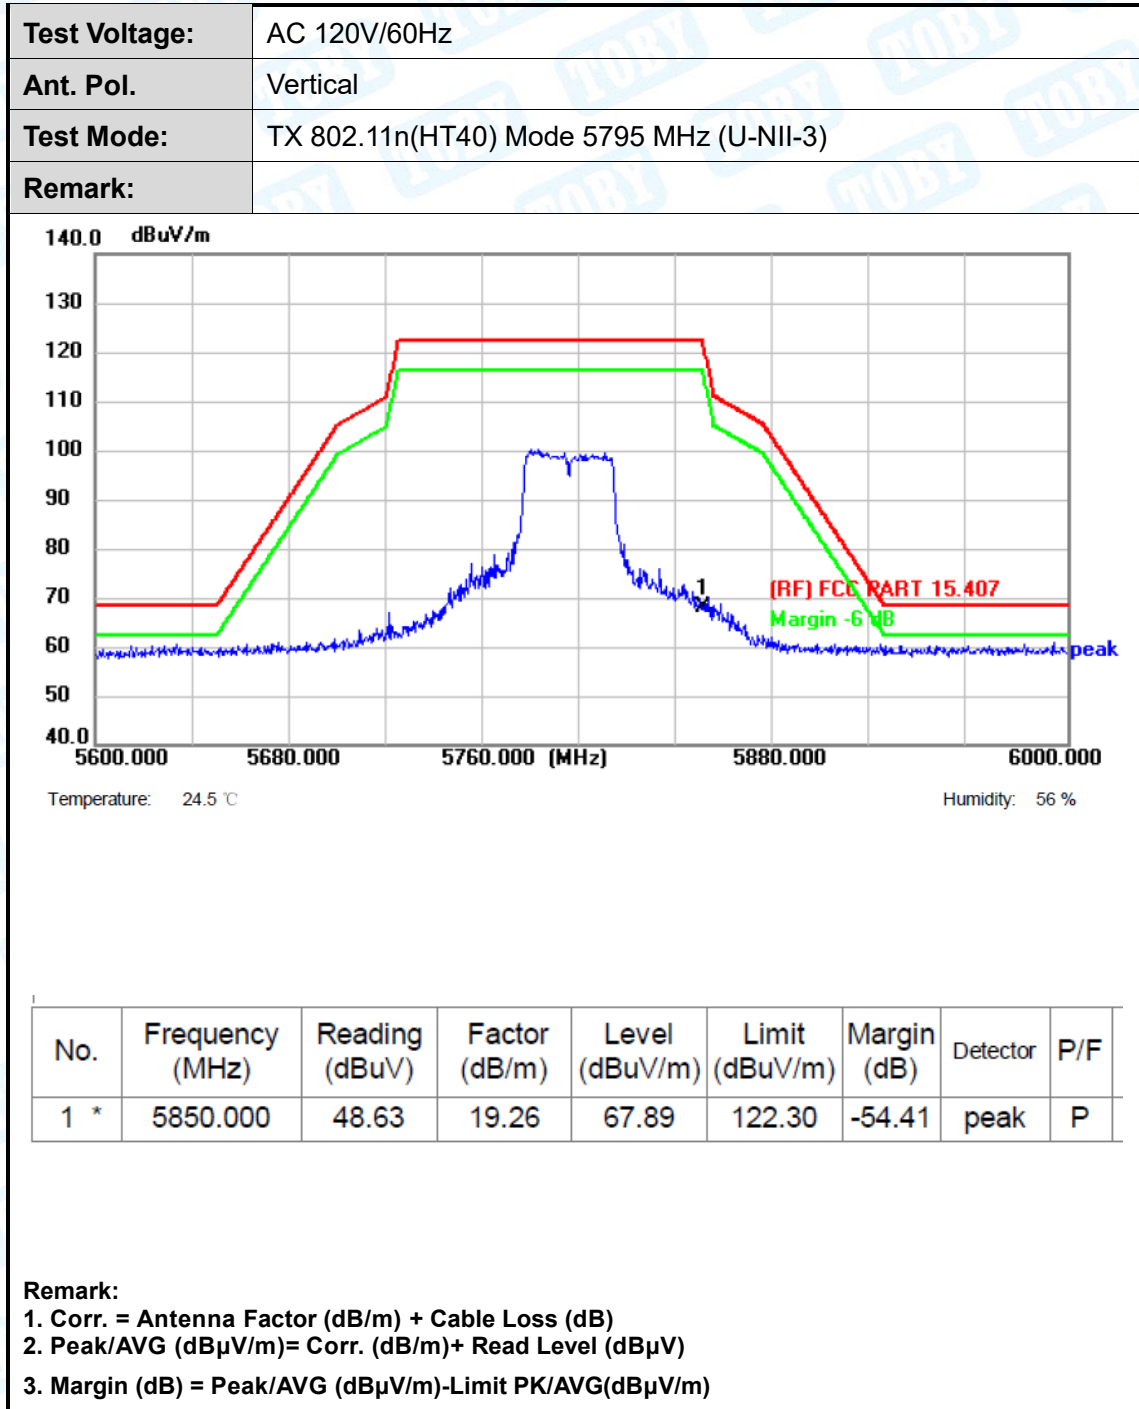


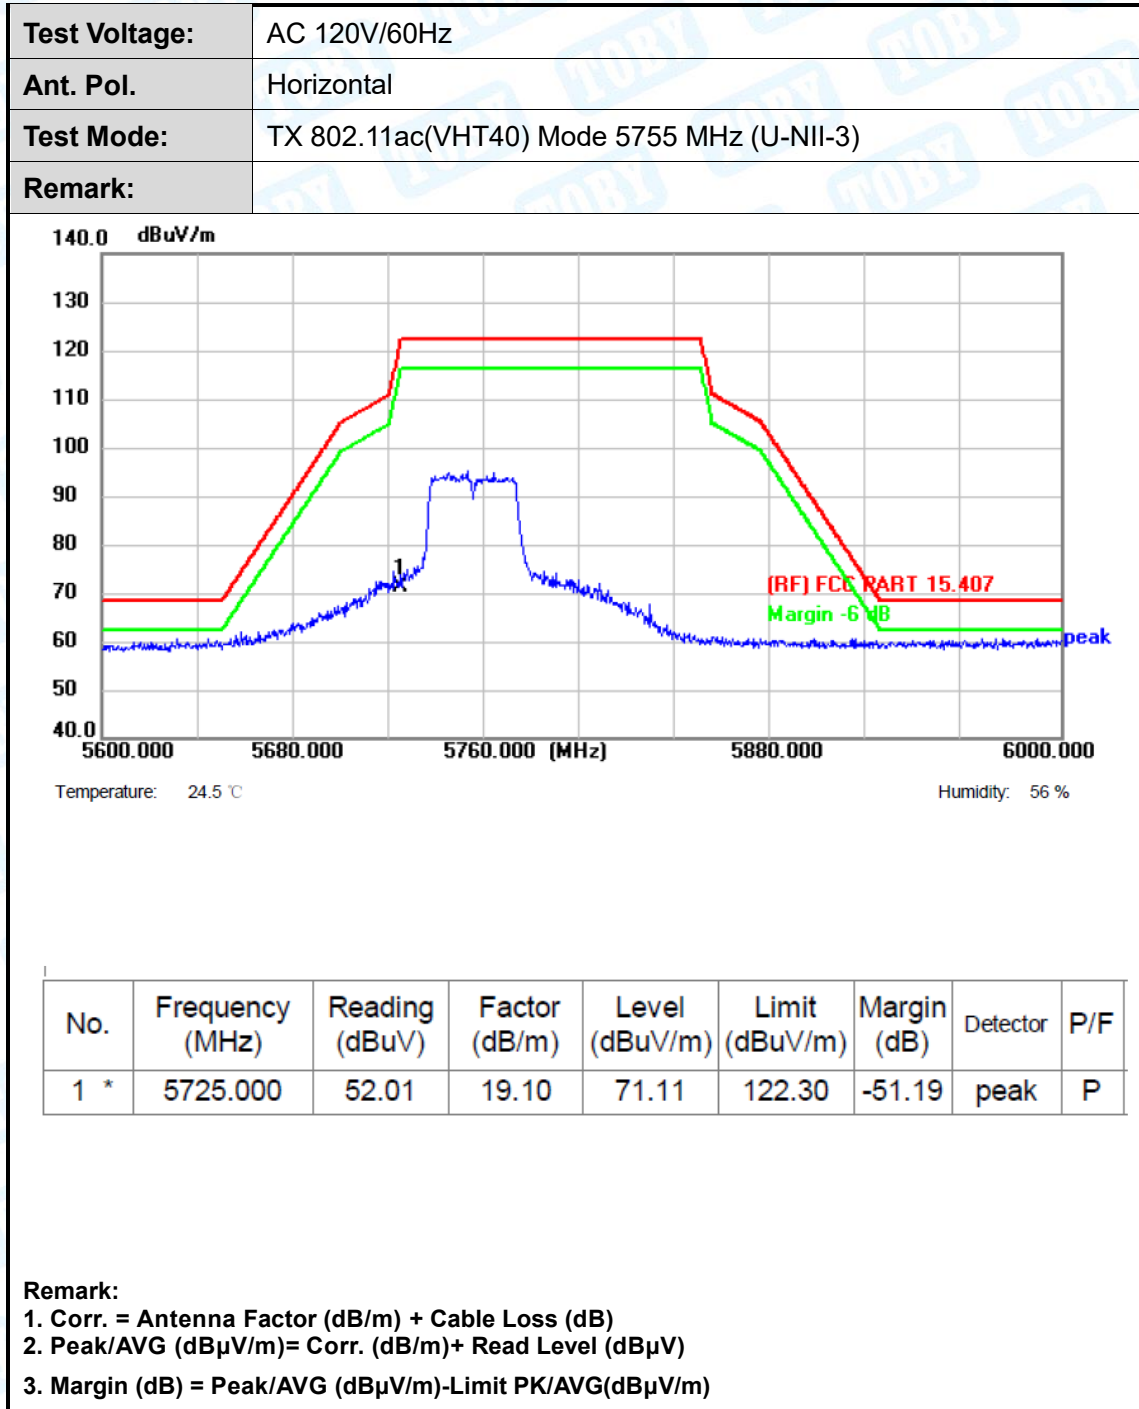


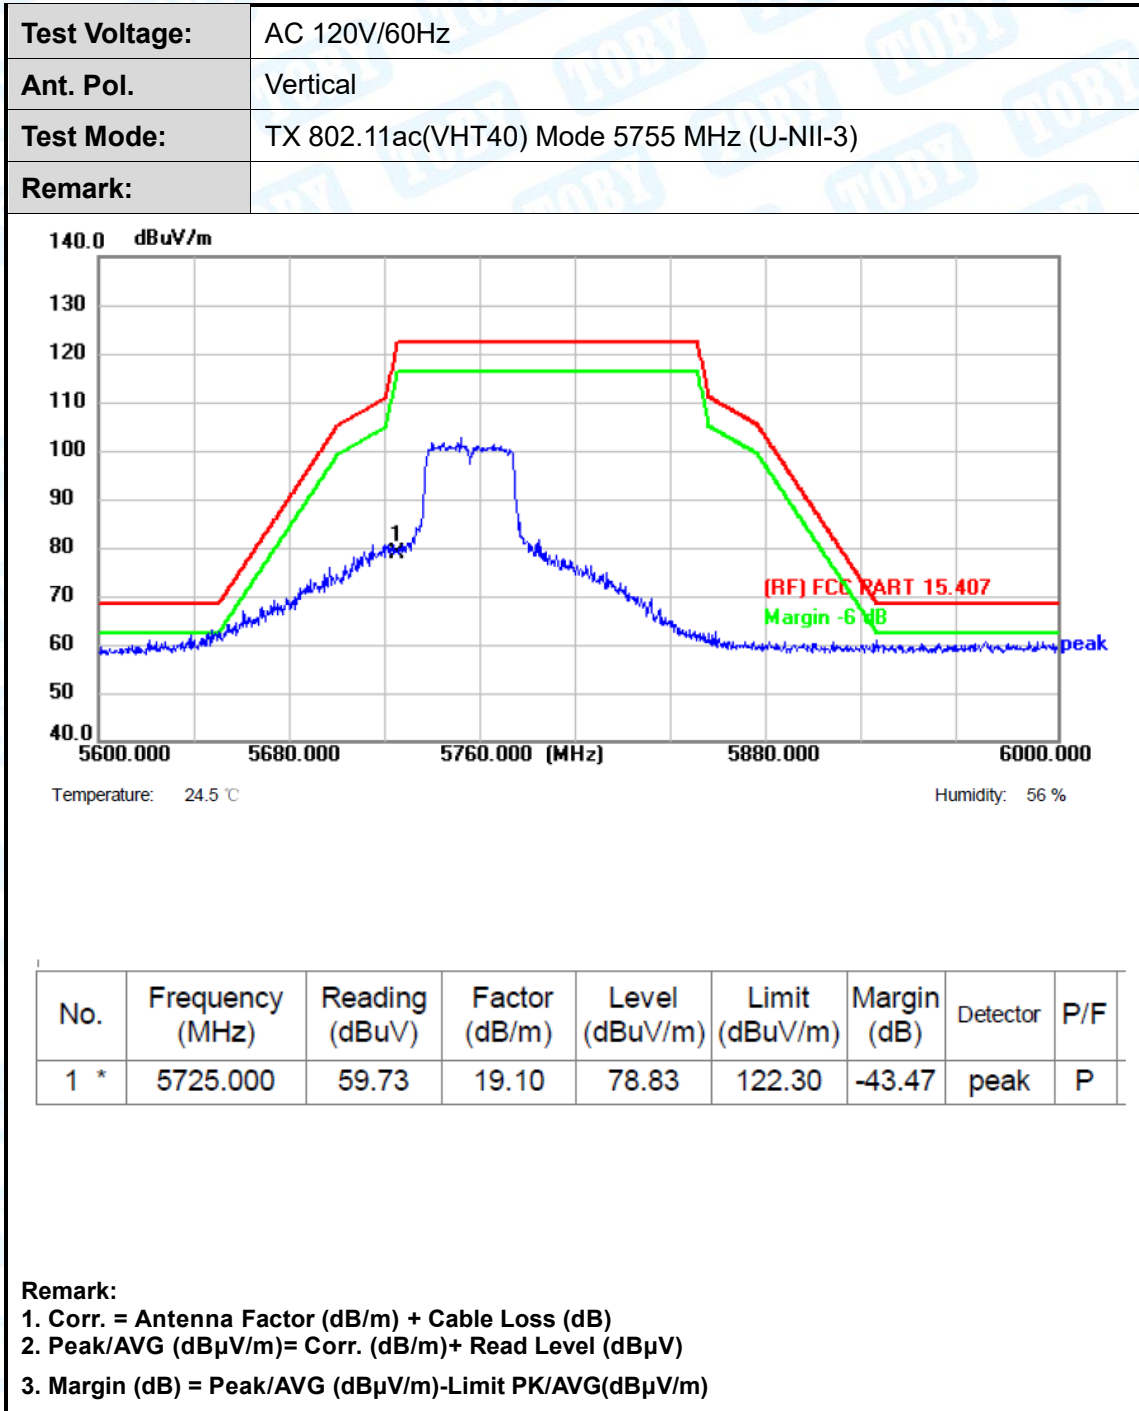


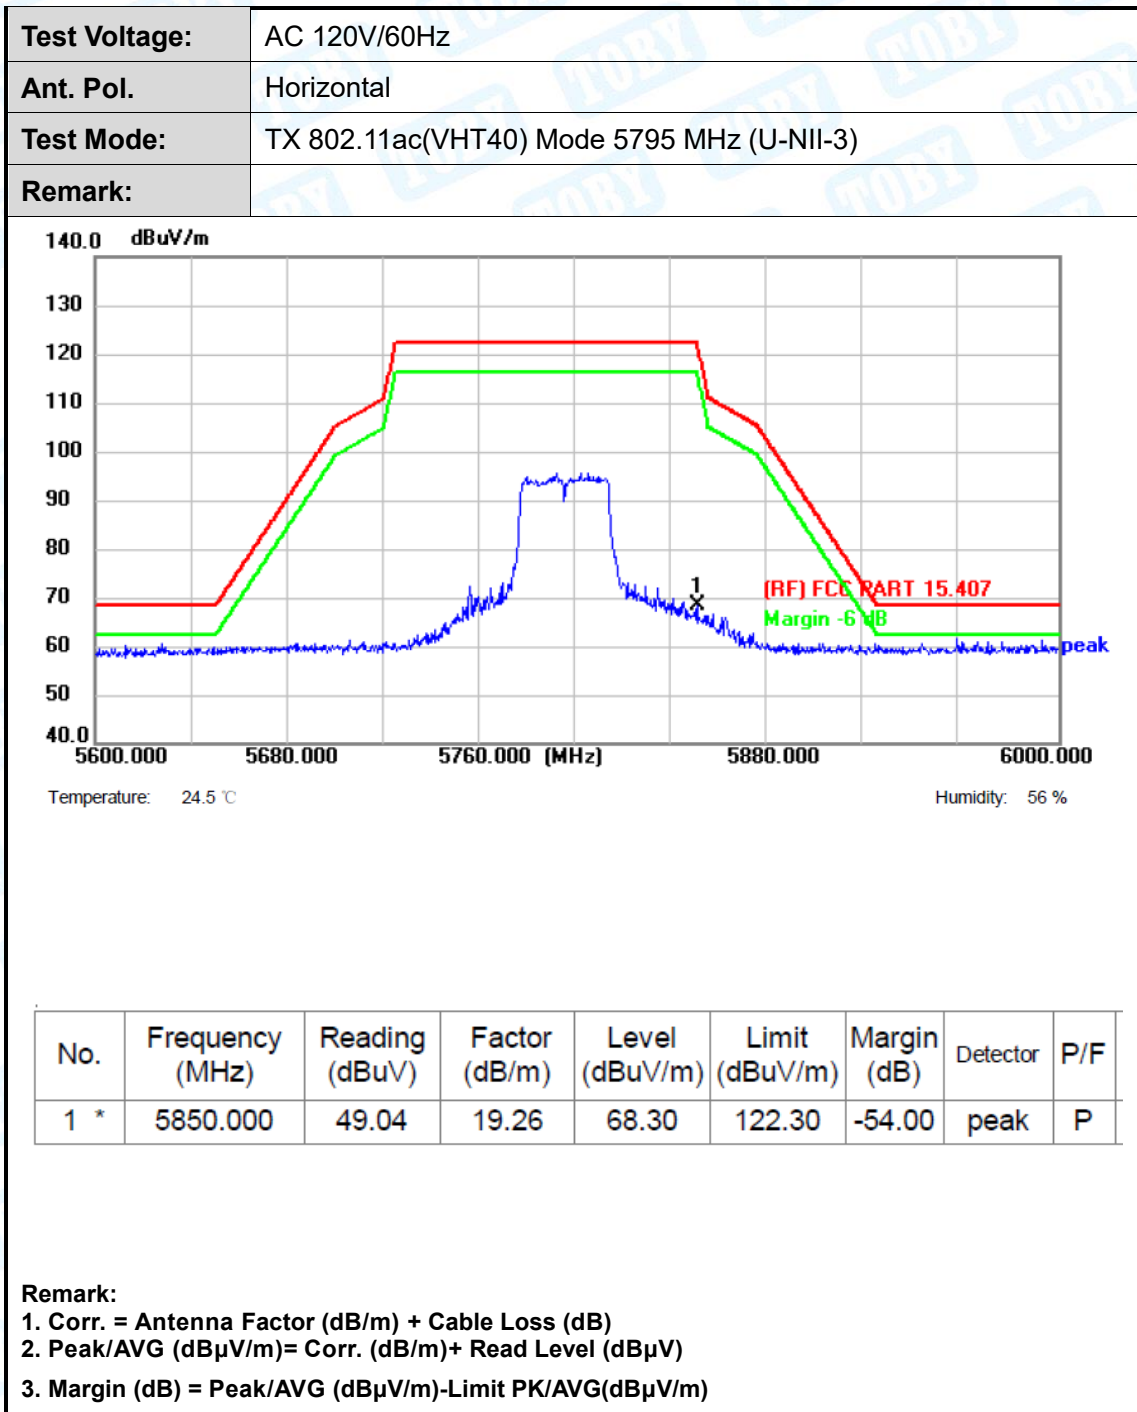


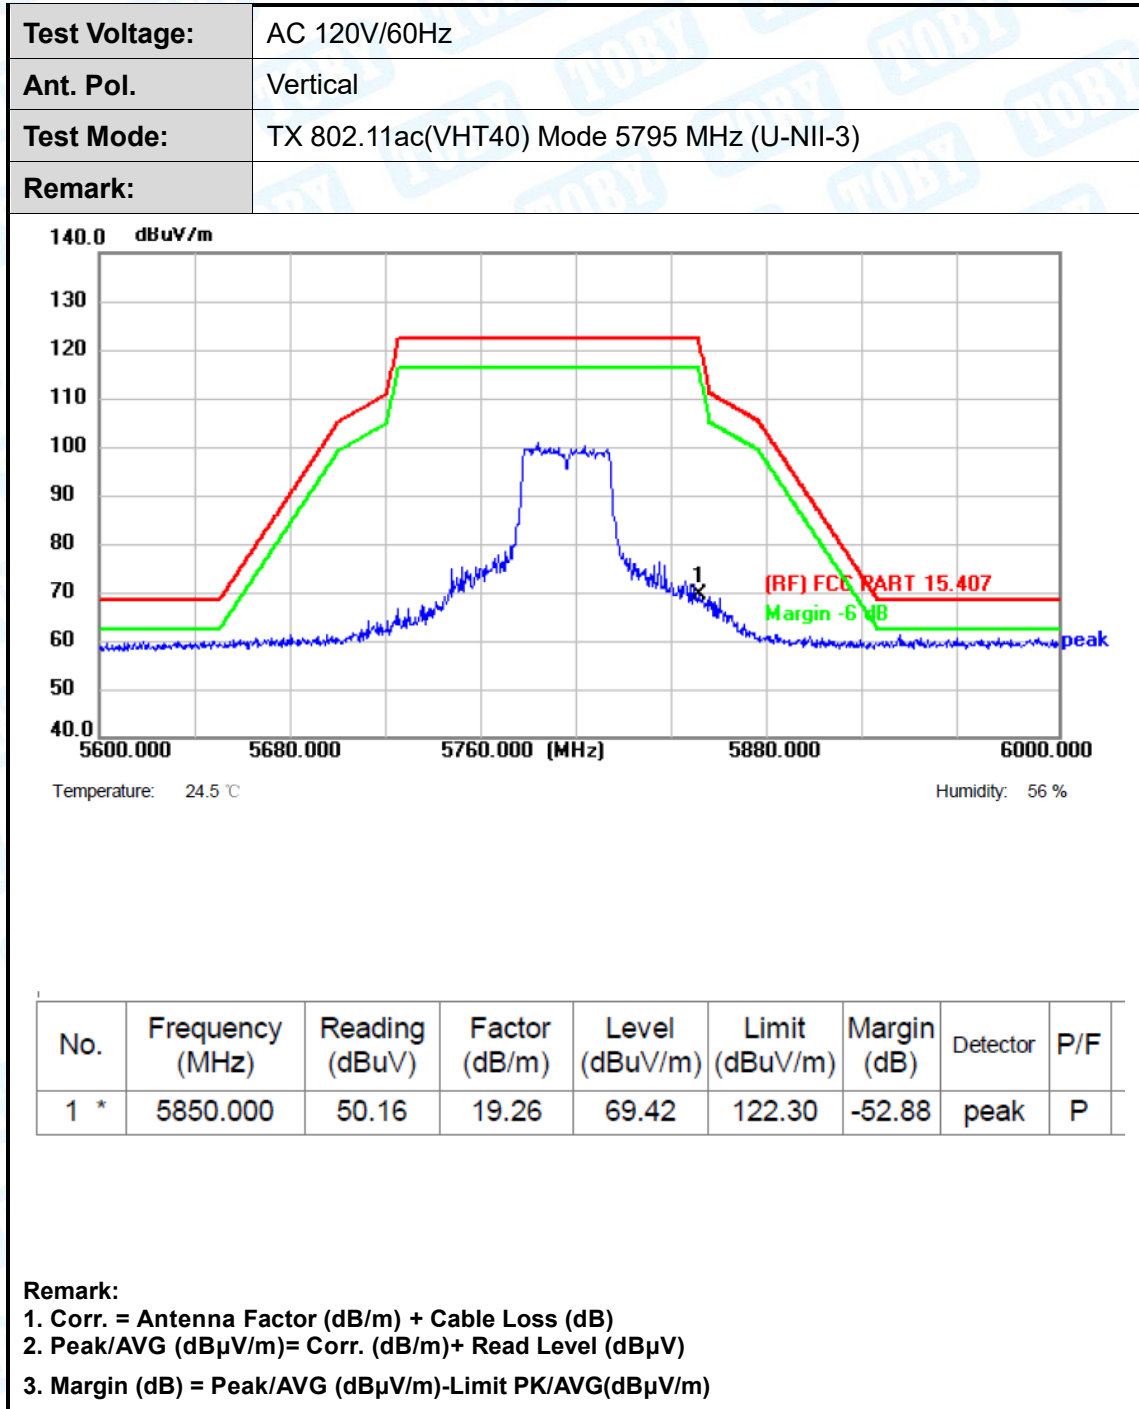


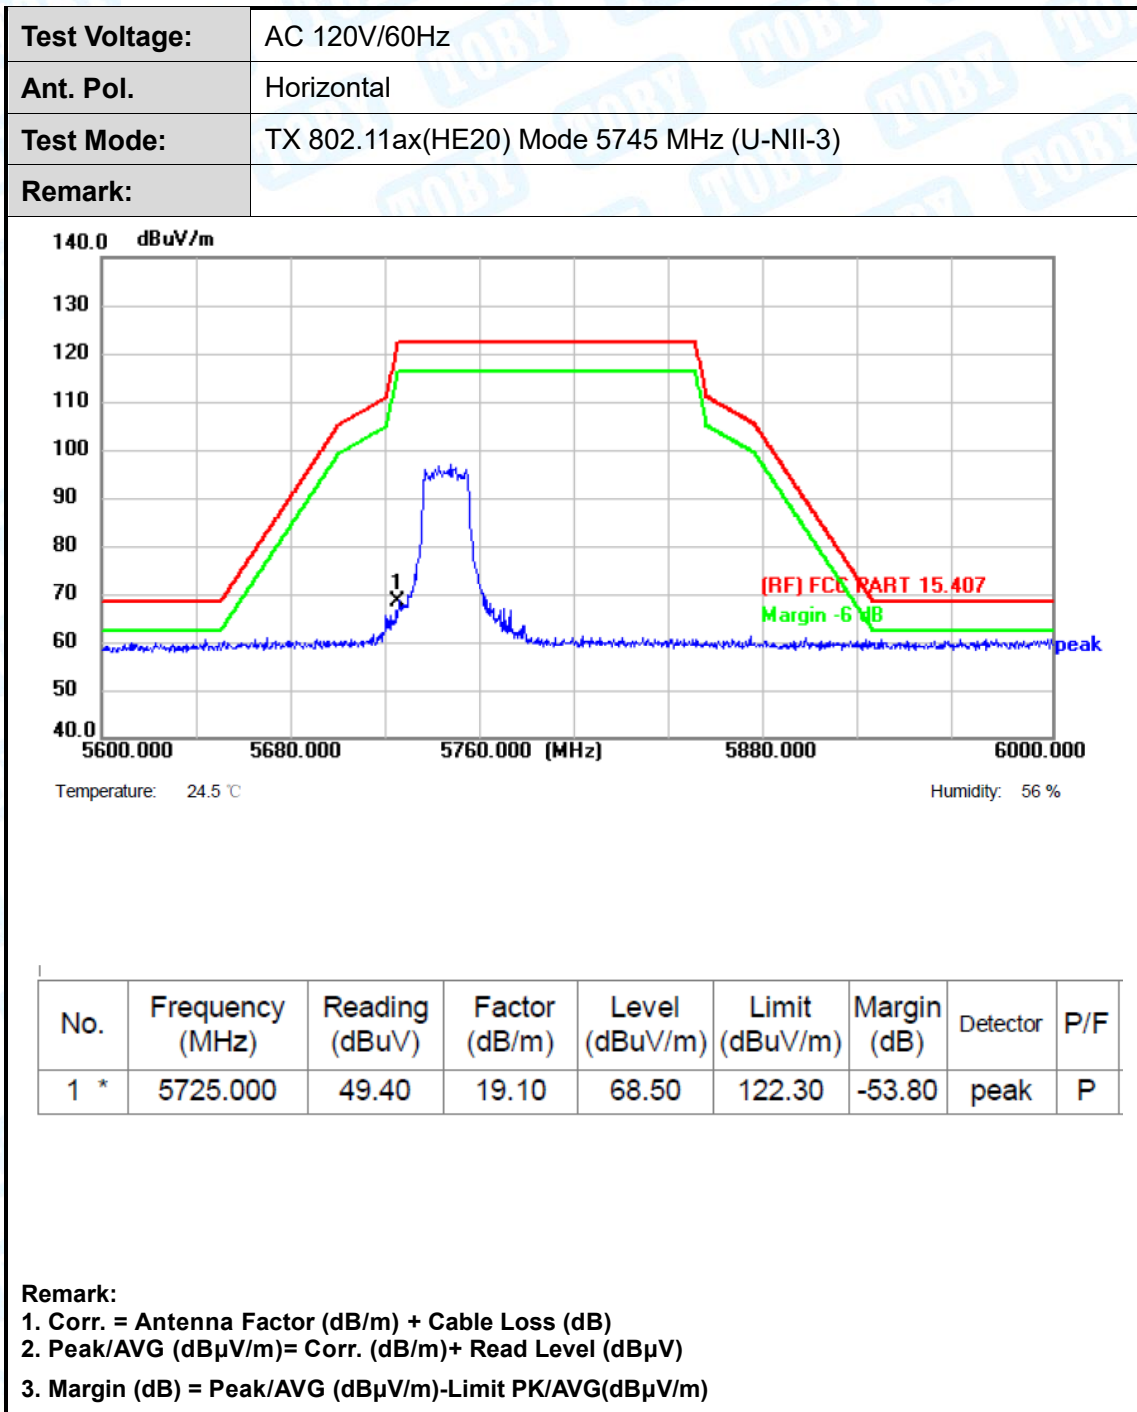


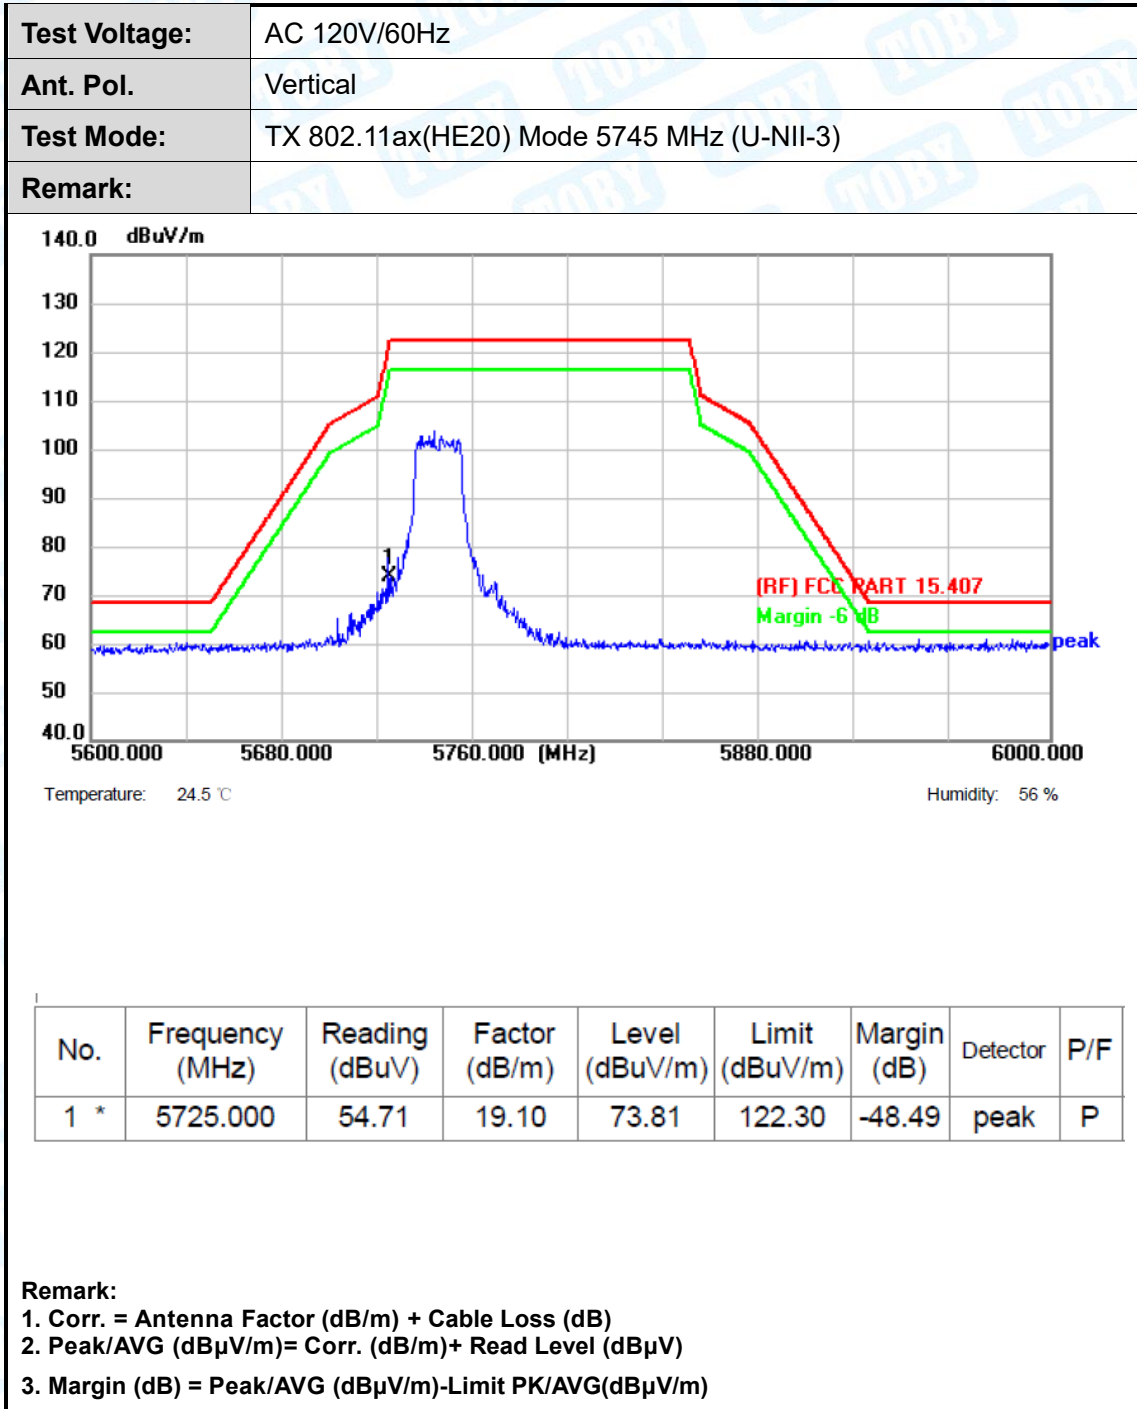


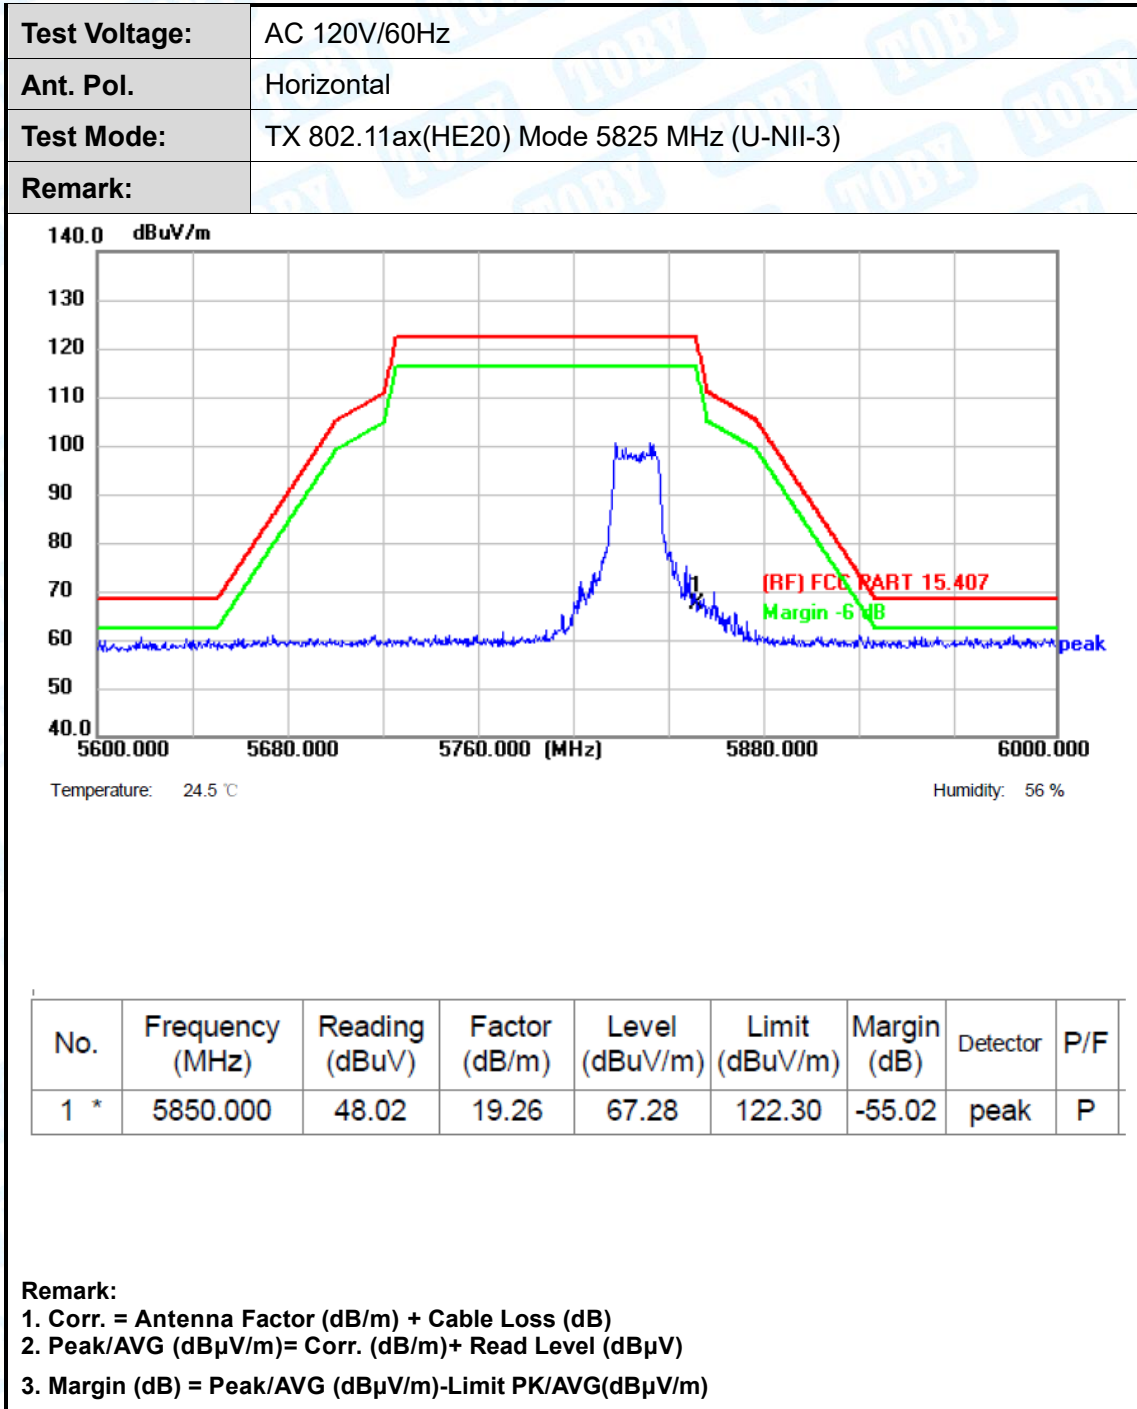


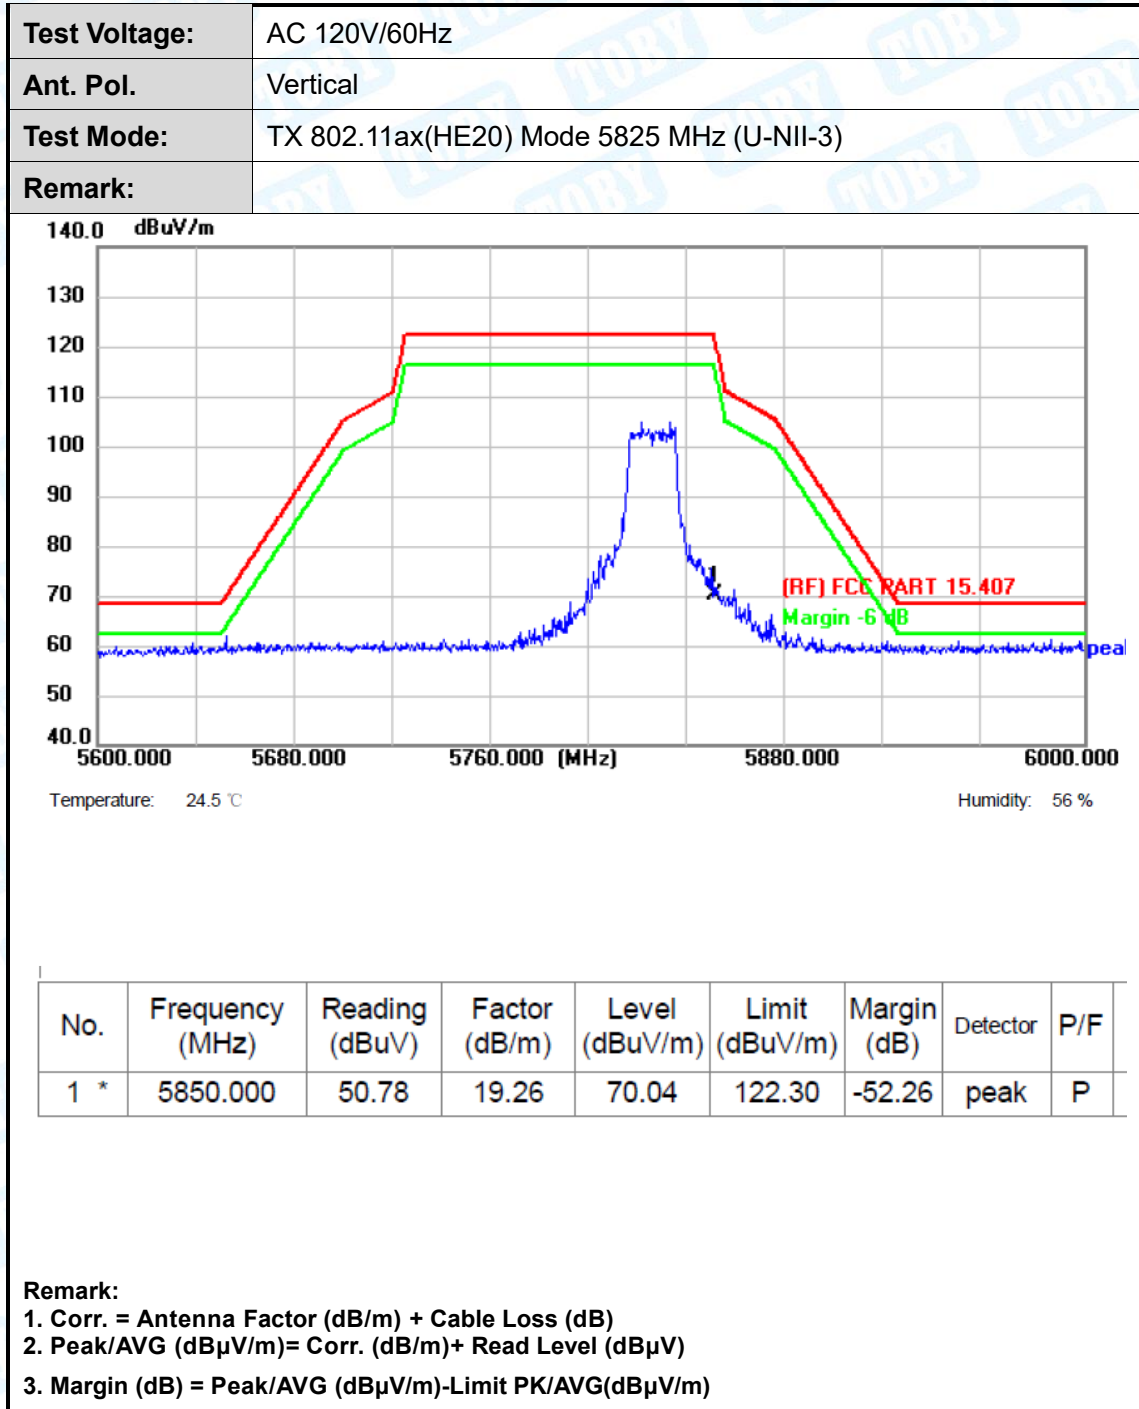

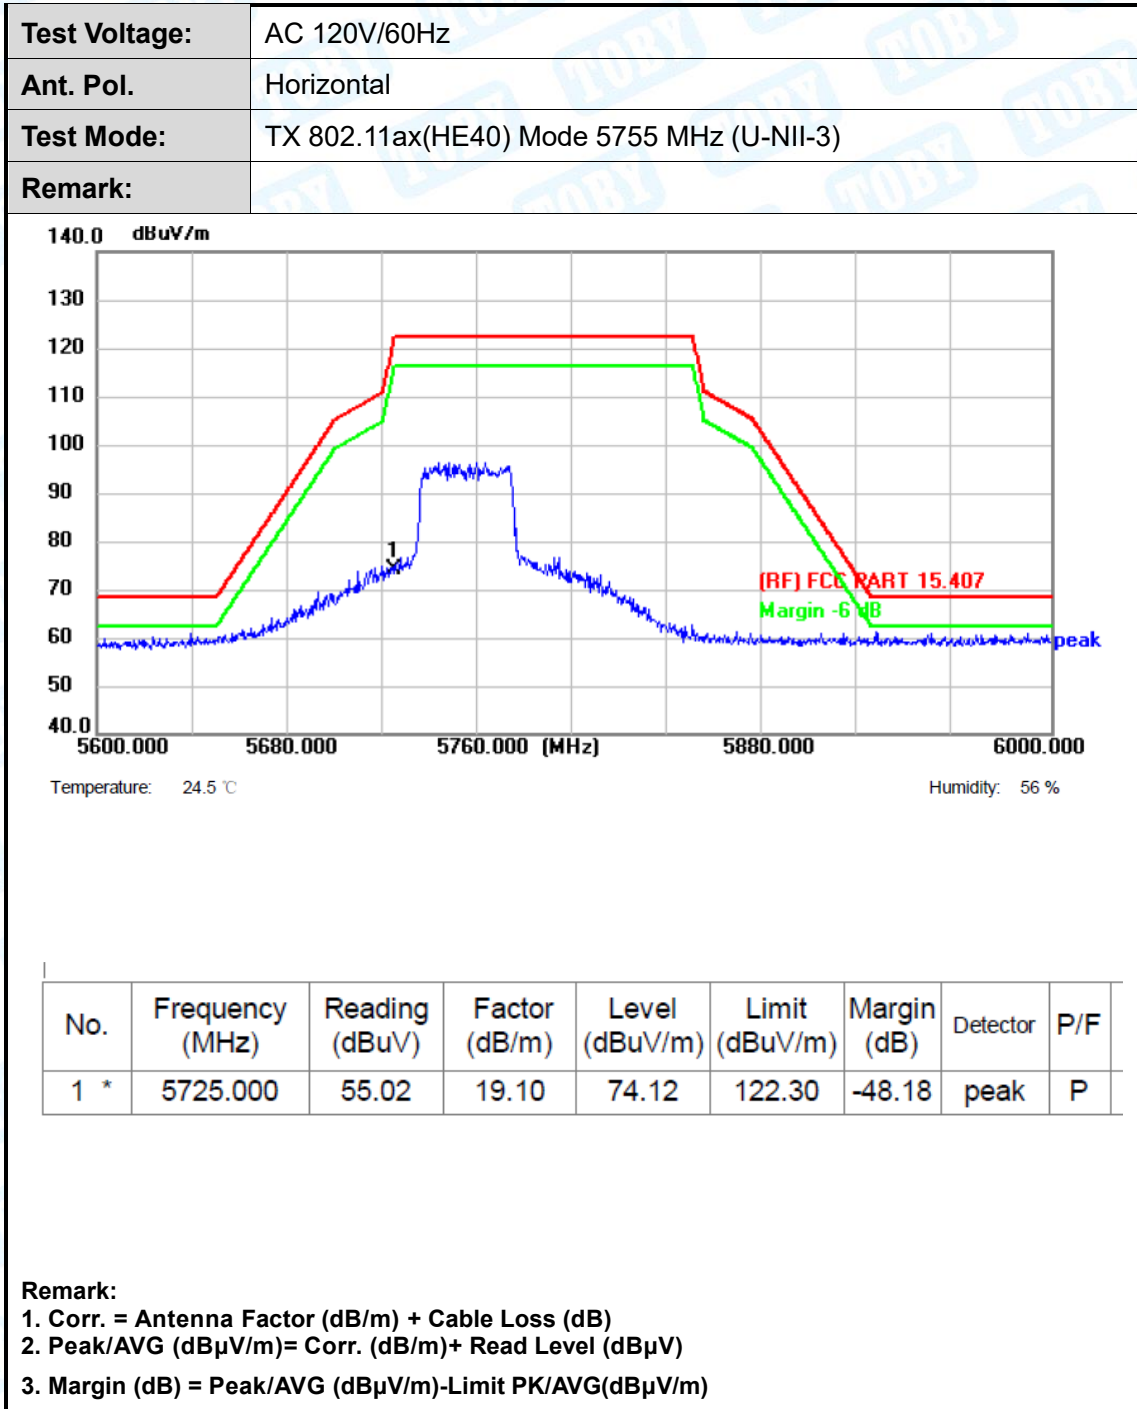

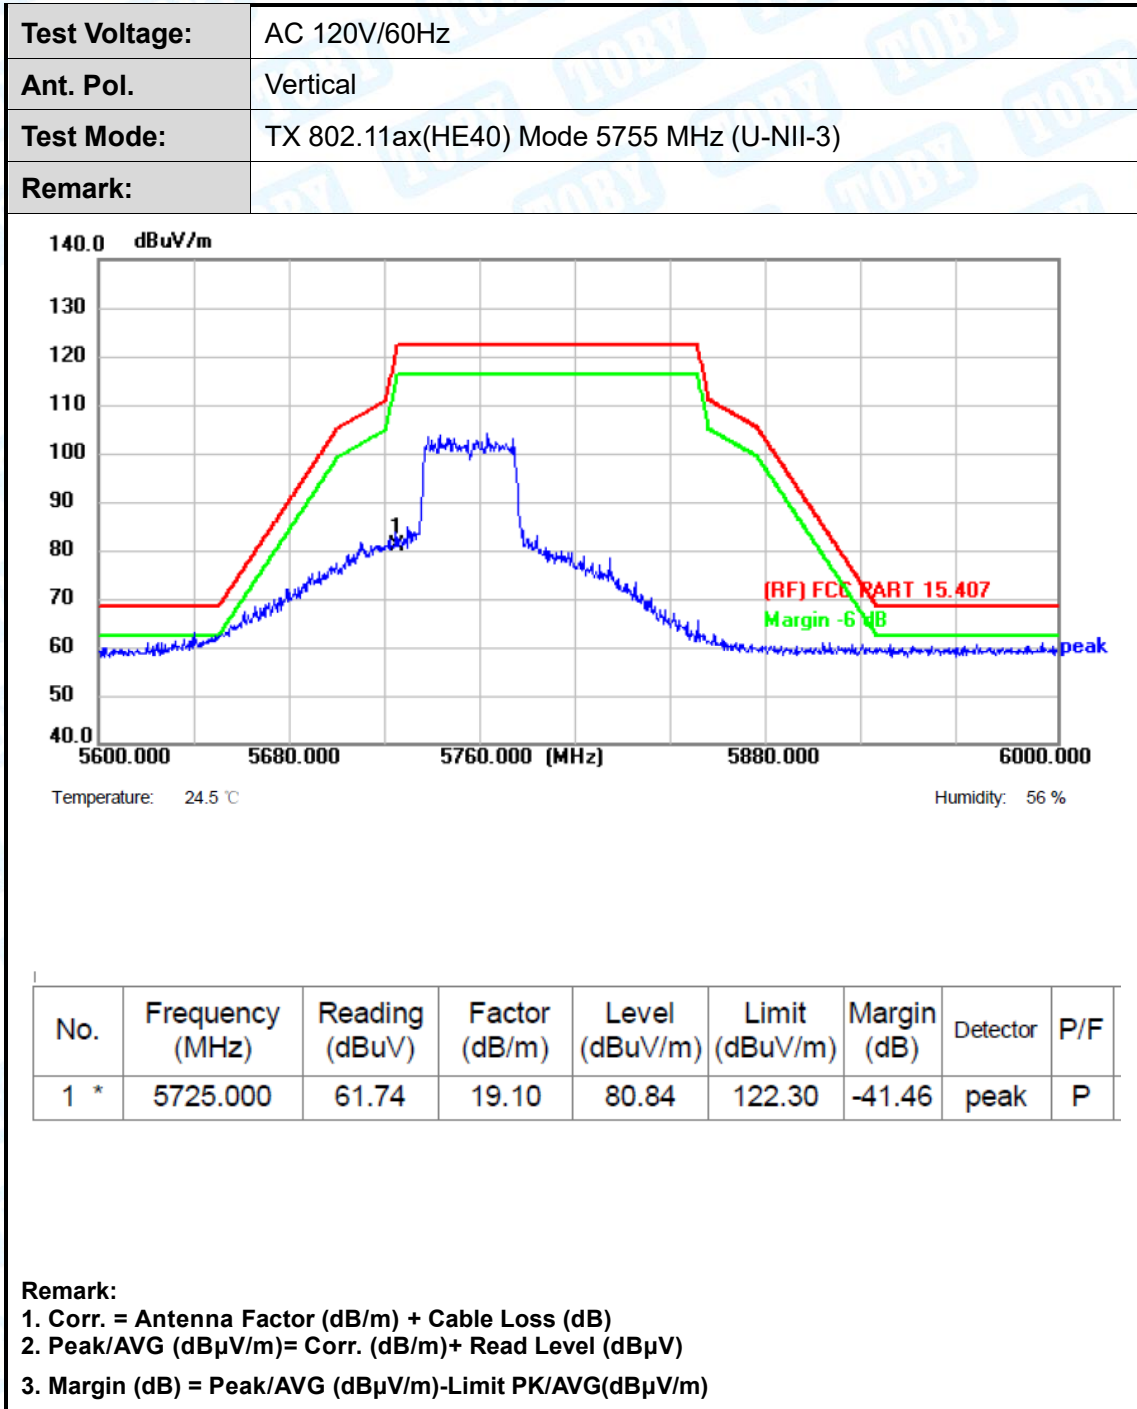

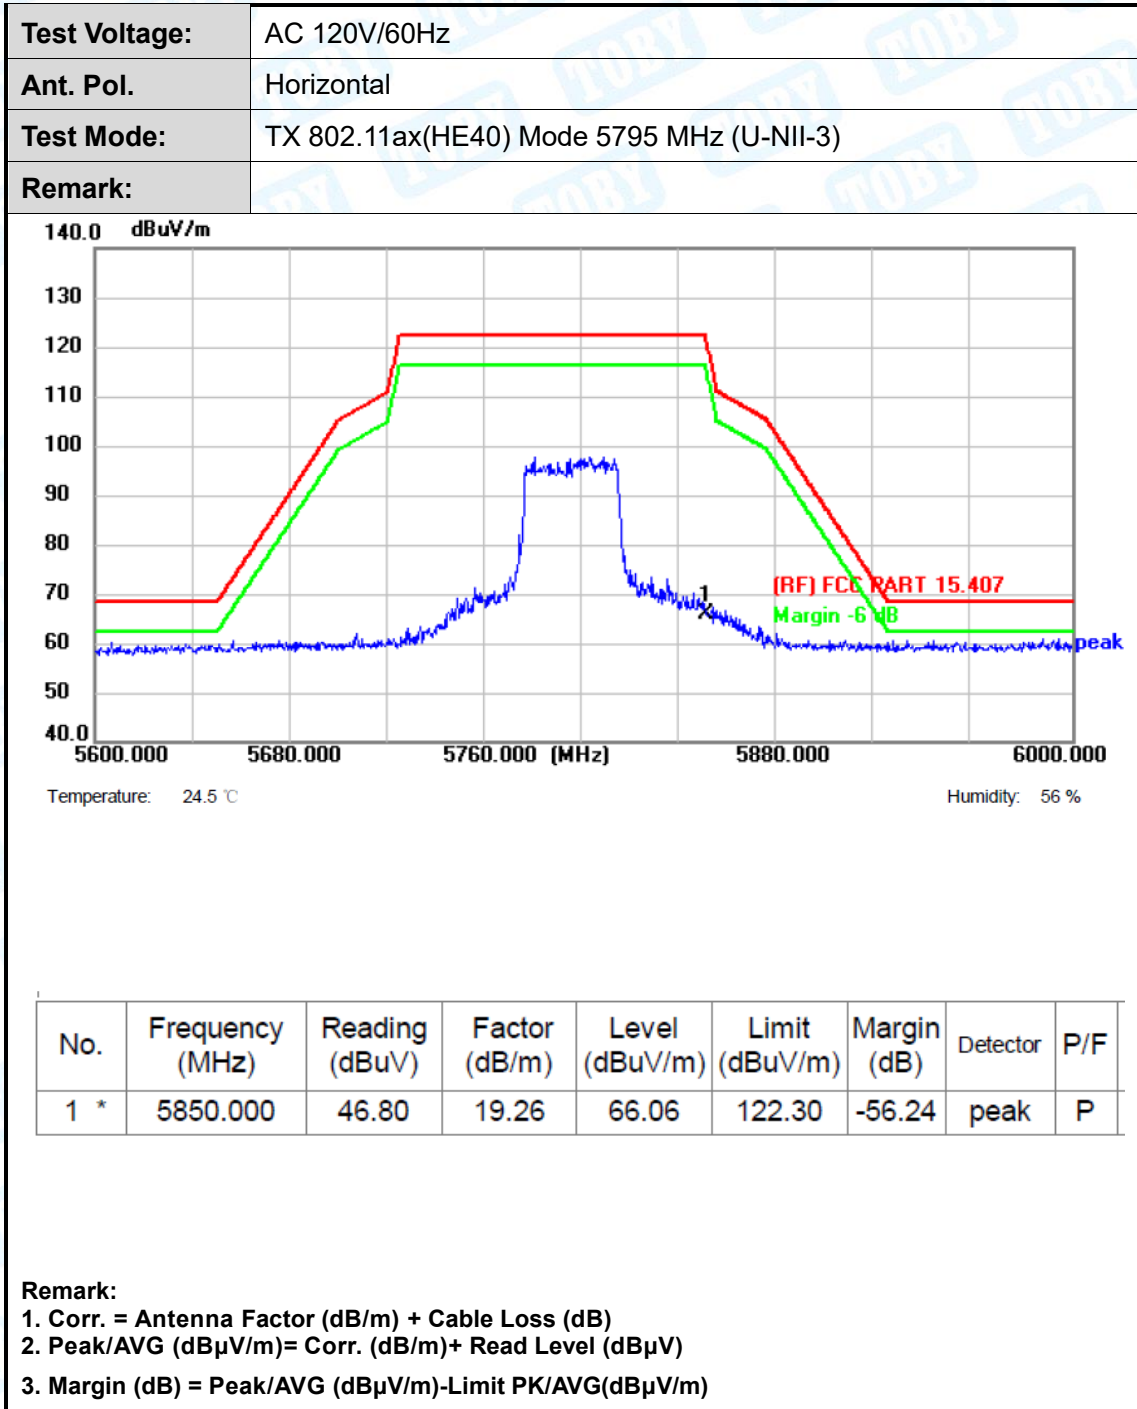

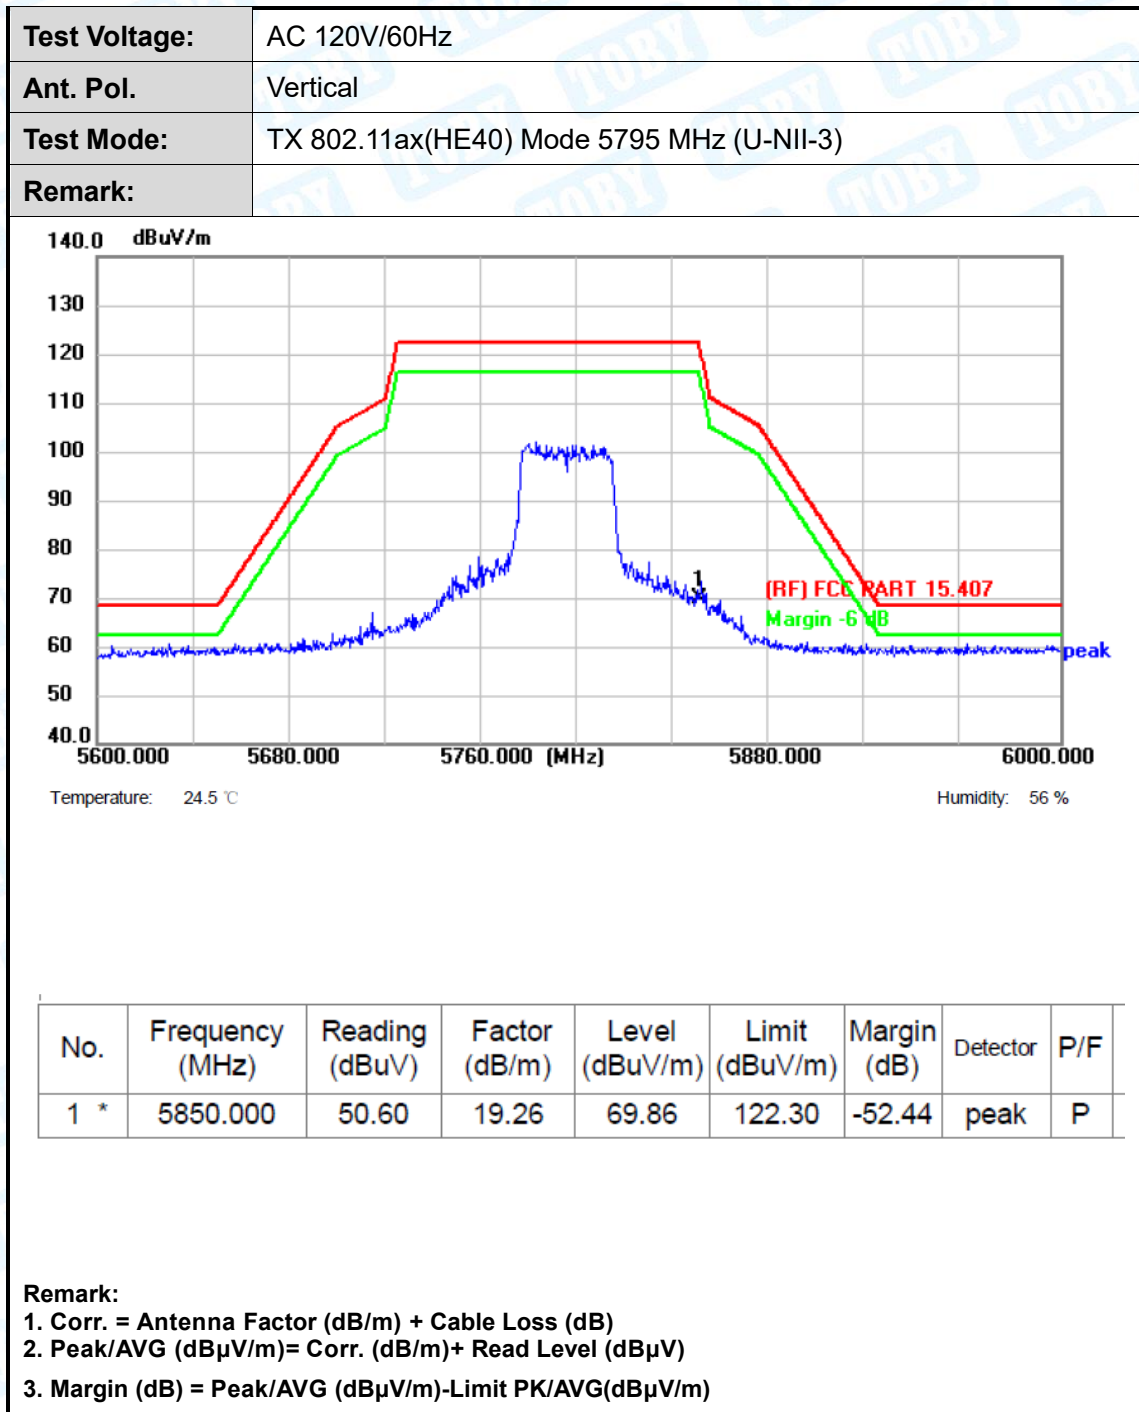

-----END OF THE REPORT-----

