



REPORT No.: SZ22100134W03

TEST REPORT

APPLICANT : Xingtera Inc.

PRODUCT NAME : Xingtera IP Camera Series

MODEL NAME : XTEE50216, XTEE51216

BRAND NAME : Xingtera

FCC ID : 2AWQ9-XTEE50216

STANDARD(S) : 47 CFR Part 96.47

RECEIPT DATE : 2022-11-11

TEST DATE : 2022-11-11 to 2022-11-14

ISSUE DATE : 2022-11-29

Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
2. Summary Test Results and Description	4
2.1. Applied Reference Documents	4
2.2. Test Conditions	4
2.3. Test Results Lists	4
2.4. Test Equipment list	4
Appendix A : Measurement Results	5

Change History		
Version	Date	Reason for change
1.0	2022-11-29	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Xingtera Inc.
Applicant Address:	4633 Old Ironsides Dr, Suite 460, Santa Clara, California, USA, 95054
Manufacturer:	Xiamen Four-Faith Communication Technology Co., Ltd.
Manufacturer Address:	11th Floor, A-06 Area, No.370, Chengyi Street, Jimei District, Xiamen City, Fujian Province, China

1.2. Equipment Under Test (EUT) Description

Product Name:	Xingtera IP Camera Series
Sample No.:	3#
Hardware Version:	V1.0.1.0
Software Version:	FFIPC_11.1.0.6-r29

Note 1: This is a variant report of original report (Report No.: SZ22090060W04, FCC ID: 2A8OE-F-SC241), based on the similarity between before, only changed the applicant information, product name, brand name, model name and FCC ID. No other changes, all RF parameters remain the same. The changes do not affect the results in this report.

Note 2: According to the certificate holder, they declared that the models XTEE50216 and XTEE51216 are accordant in both hardware and basic software, these models only differ in software function, XTEE51216 software support AI process function. Manufacturer information, product name and brand name are the same. Their electrical circuit design, layout, components used and internal wiring are identical.



2. Summary Test Results and Description

2.1. Applied Reference Documents

Reference documents for testing:

Identity	Document Title
FCC Part 96	CITIZENS BROADBAND RADIO SERVICE
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

2.2. Test Conditions

Test Environment Conditions:

Relative Humidity:	30%-75%
Air Pressure:	98kPa-102kPa
Test Verdict:	PASS (P) Not Performed (NP) Not Applicable (NA) F(Fail)

2.3. Test Results Lists

No.	Test Description	Result
Part96.47	End User Device Additional Requirements (CBSD Protocol)	P

2.4. Test Equipment list

Description	Series Number	Manufacture	Cal Due Date	Calibration Interval
Spectrum Analyzer	MY54170556	Keysight	2023-10-09	1 year



Appendix A : Measurement Results

RUN#1

A.1 End User Device Additional Requirement (CBSD Protocol)

A. 11 Measurement Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Baicells pBS31010 FCC ID:2AG32PBS31010) as a companion device to show compliance with Part 96.47. End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operation power level within 10 seconds of receiving instructions from its associated CBSD.

A.1.2 Measurement Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer

1.Run#1:


- a. Setup frequency with 3615MHz - 3635MHz
- b. Check EUT Tx frequency.
- c. Disable AP service and check EUT stop transmission within 10s.

2.Run#2:

- a. Setup frequency with 3660MHz - 3680MHz
- b. Check EUT Tx frequency.
- c. Disable AP service and check EUT stop transmission within 10s



Run#1

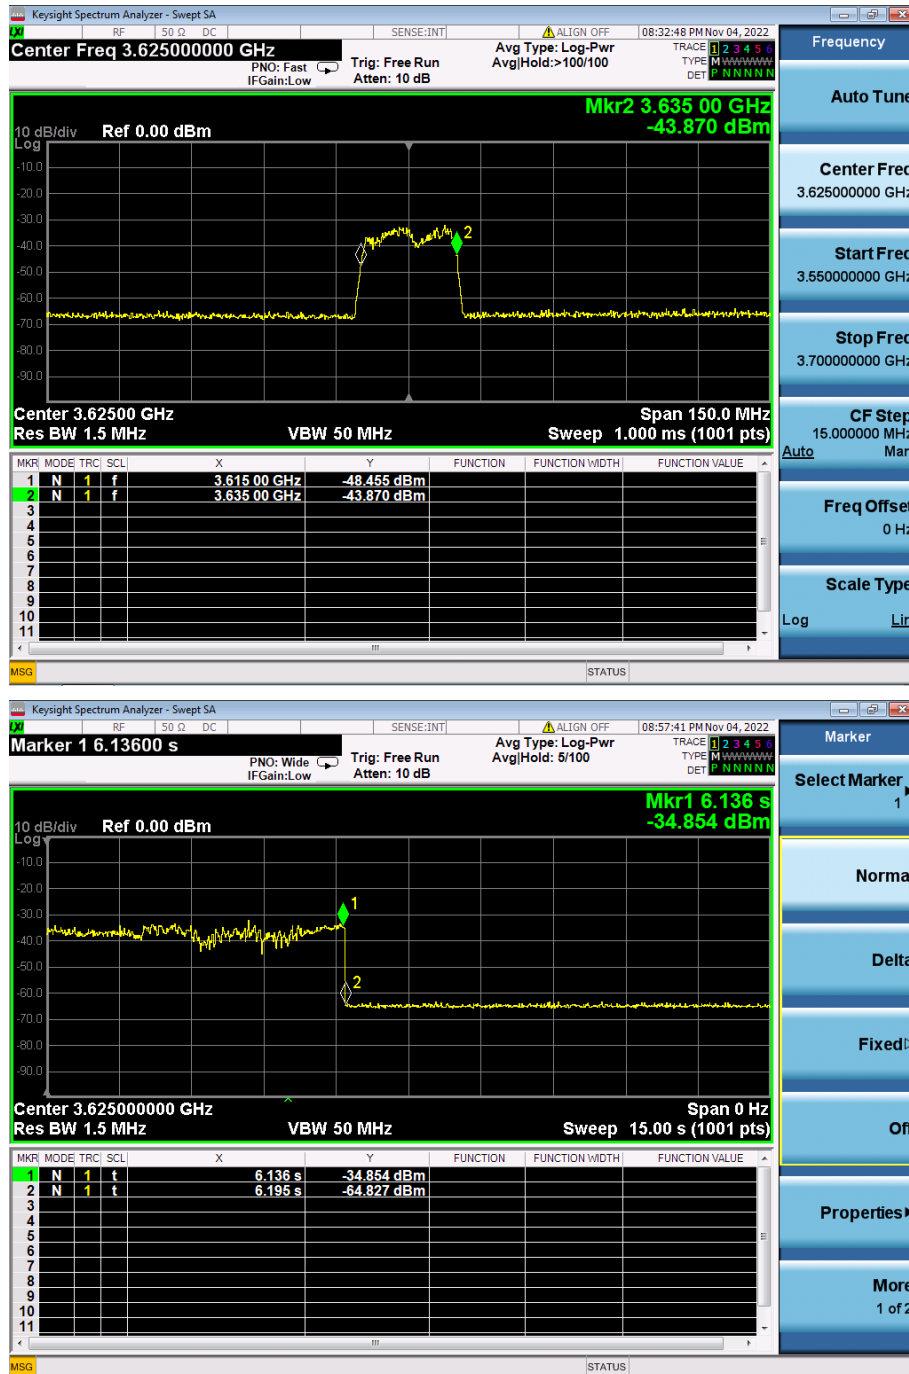


Note

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation



Run#2

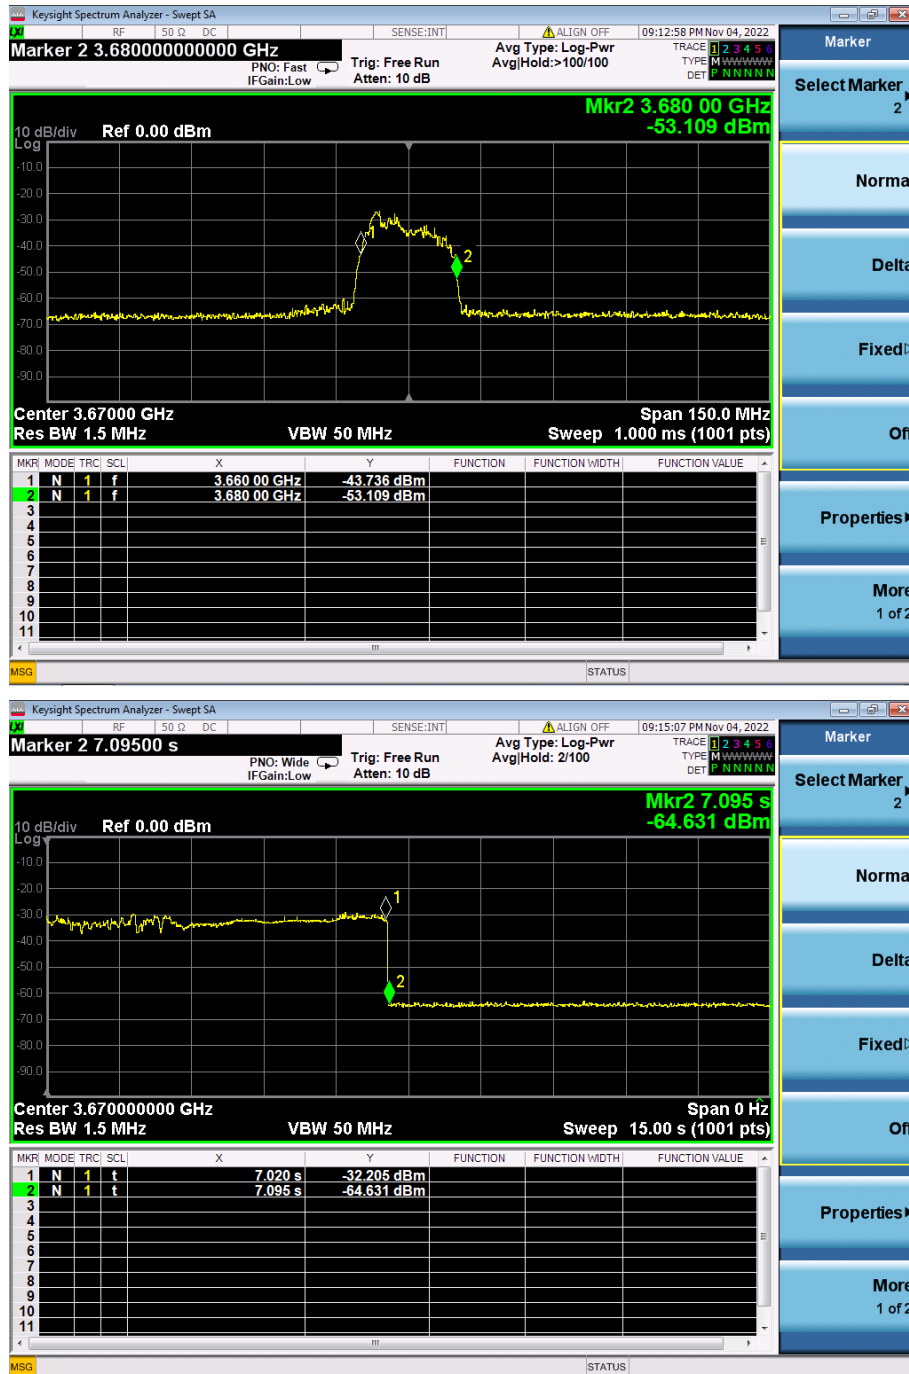

Note

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation

END OF REPORT