



**No. I20Z62129-SEM06**

**For**

**HMD Global Oy**

**GSM/WCDMA/LTE phone**

**Model Name: TA-1295**

**with**

**Hardware Version: 0301**

**Software Version: 0.2047.11.01**

**FCC ID: 2AJOTTA-1295**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)




**Picture 1: Constituents of the sample**




**Picture 2: Left Hand Touch Cheek Position**

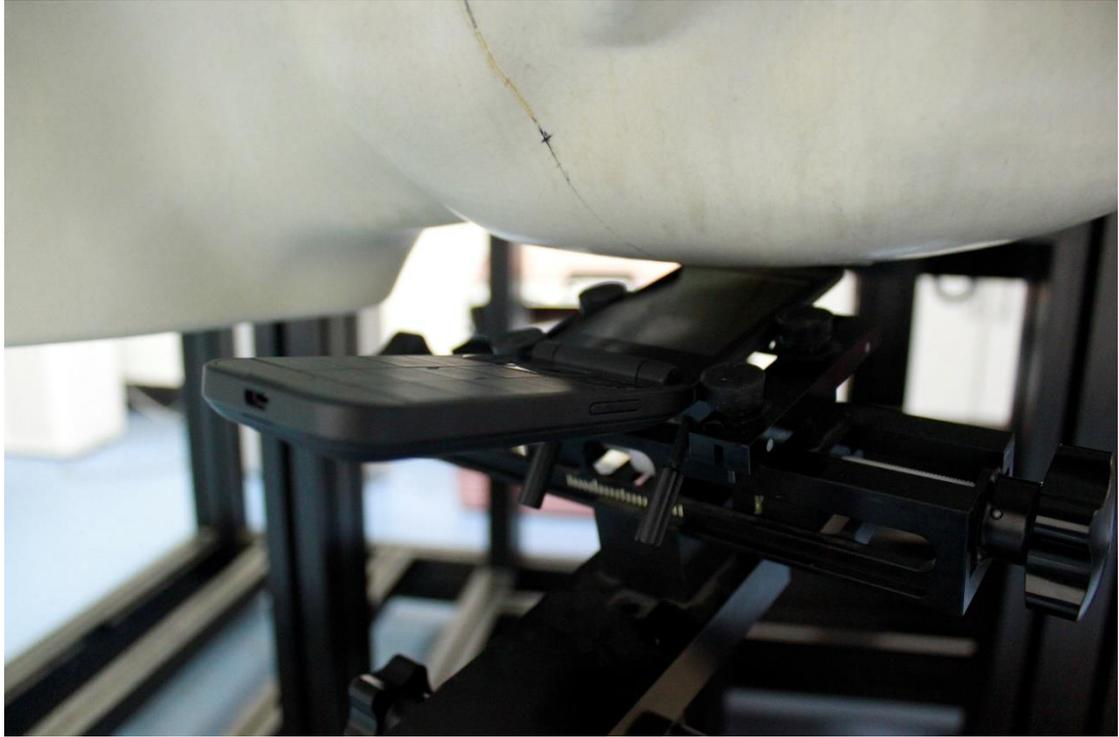

**Picture 3: Left Hand Tilt 15° Position**

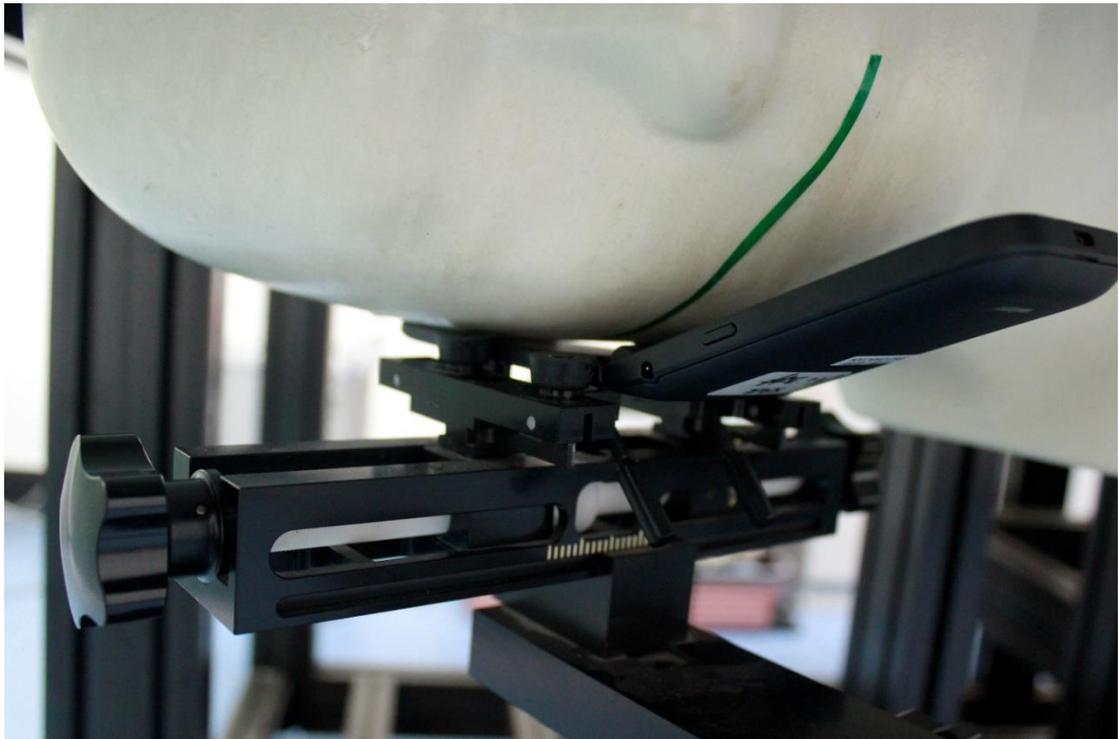


**Picture 4: Right Hand Touch Cheek Position**

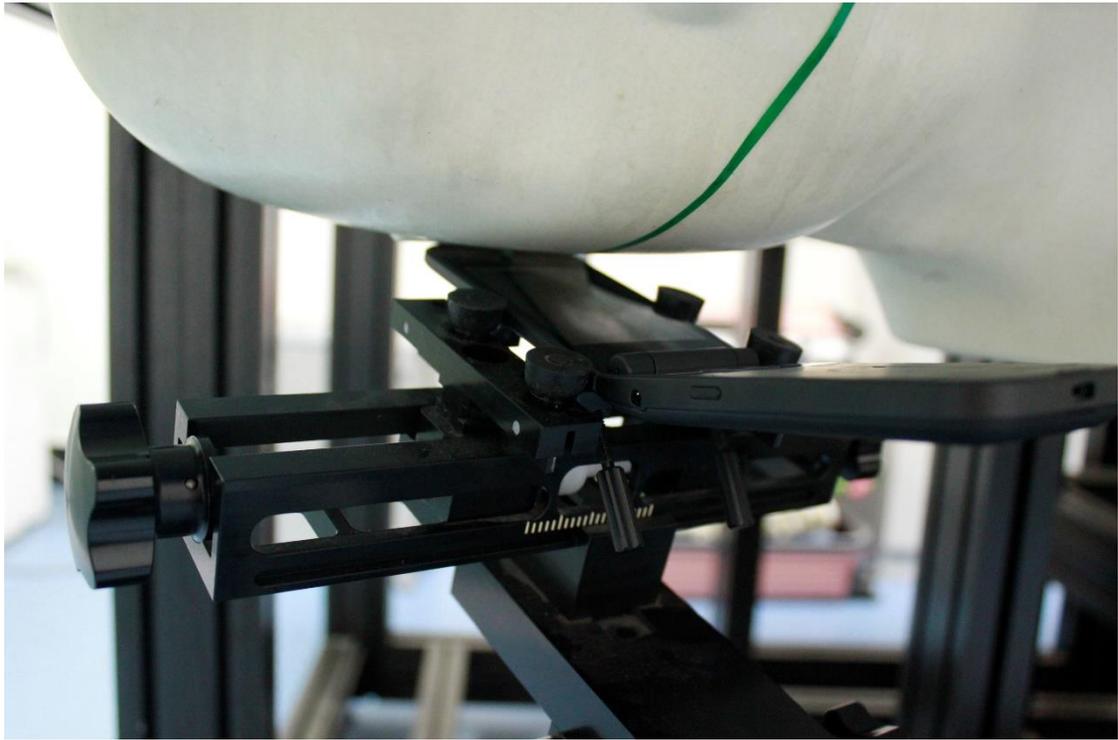


**Picture 5: Right Hand Tilt 15° Position**

**Test positions for body:**


The Body SAR is tested at the following 9 test positions all with the distance =10/15mm between the EUT and the phantom bottom:

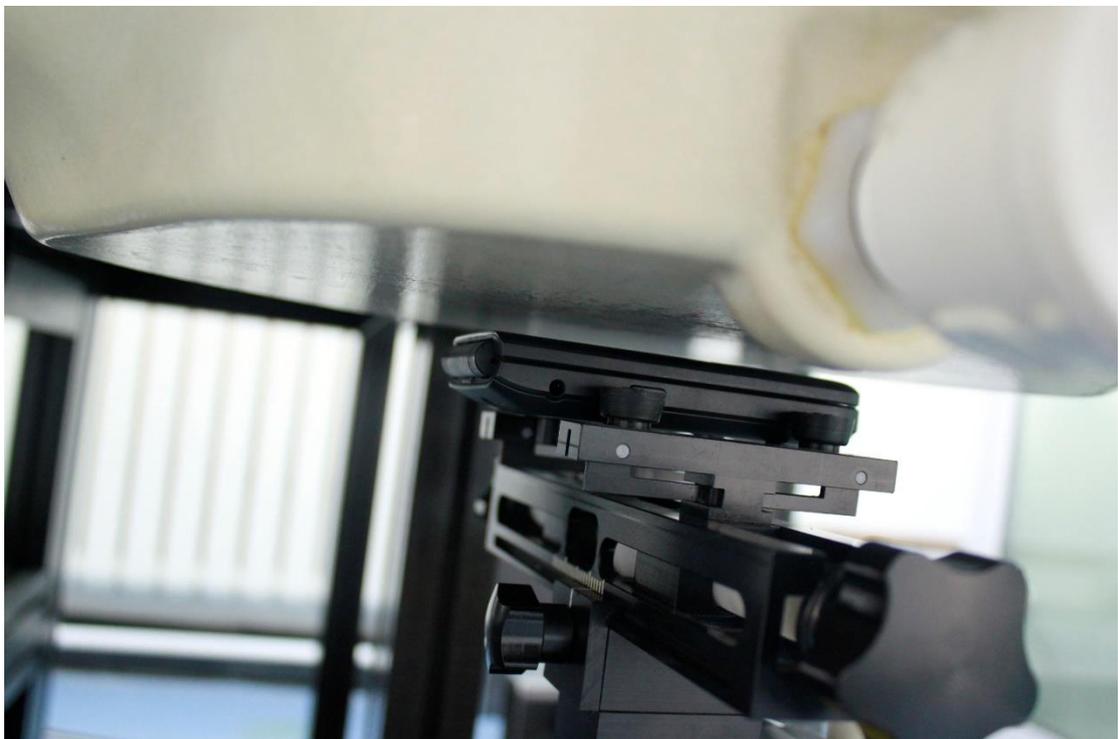

**Picture 6: Front 10mm**

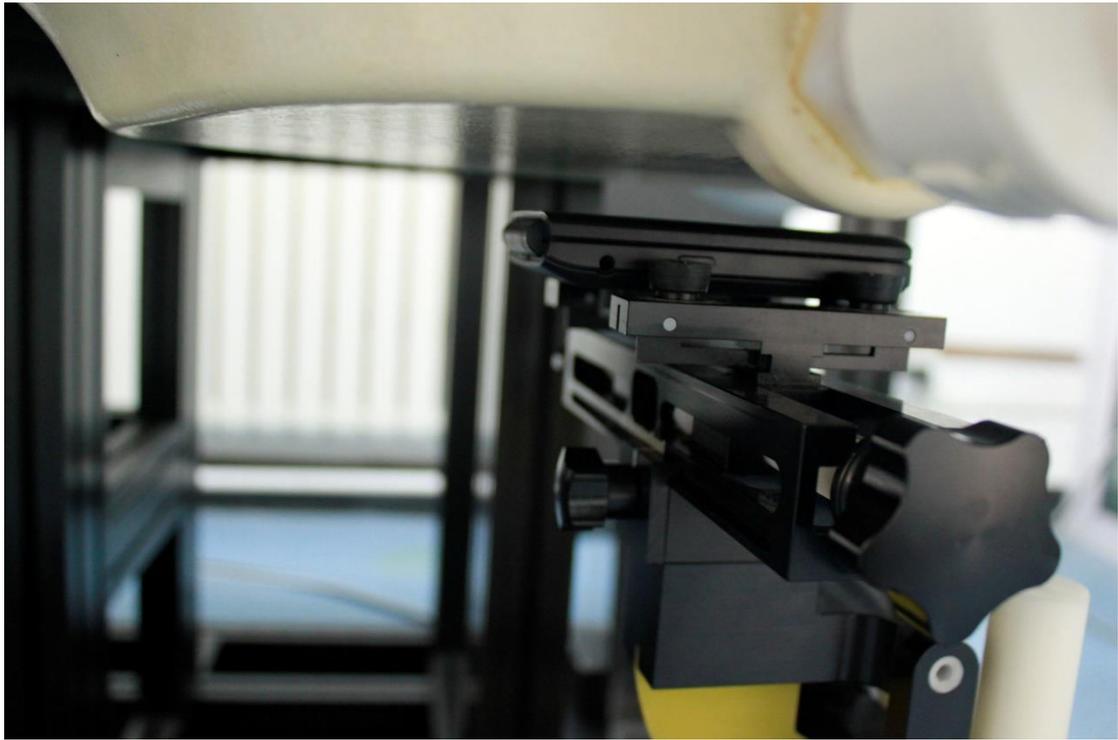


**Picture 7: Front 15mm**

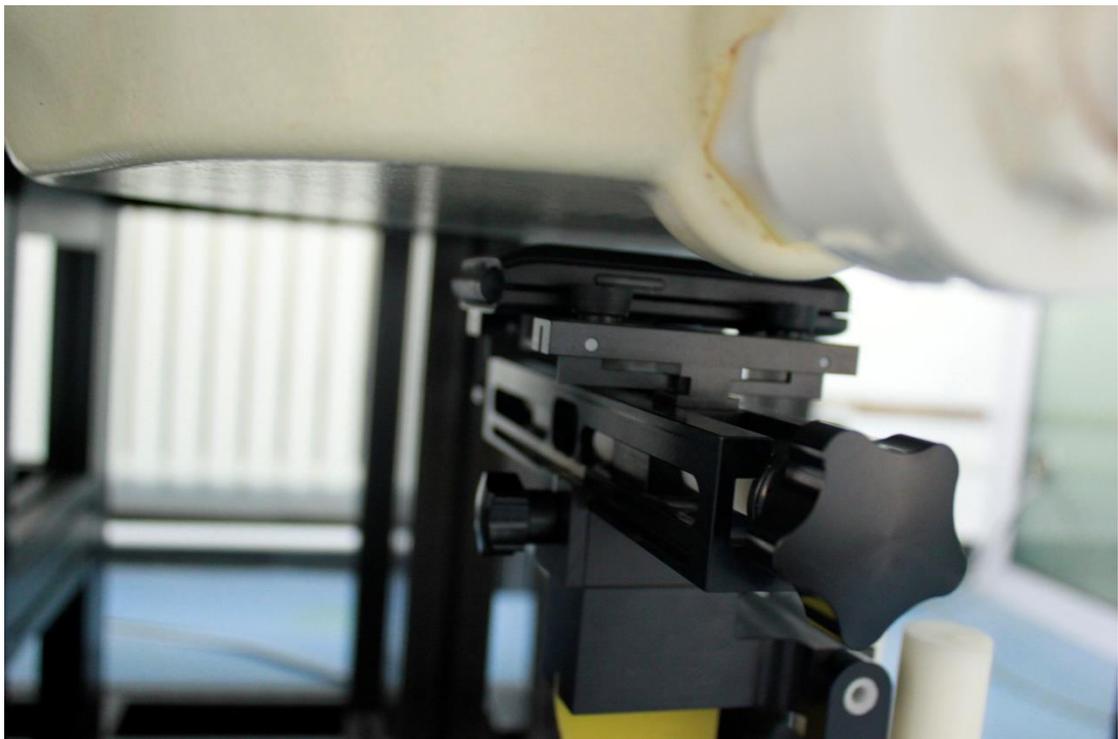

**Picture 8: Rear 10mm**



**Picture 9: Rear 15mm**

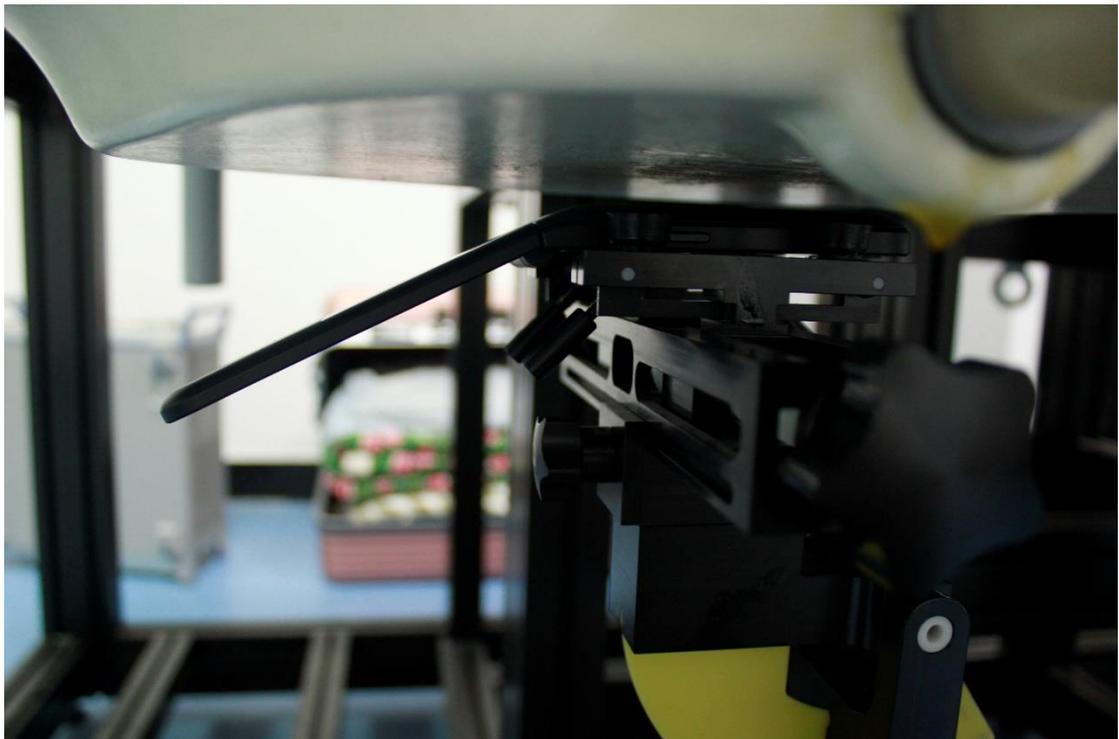

**Picture 10: unfold Rear 10mm**




**Picture 11: unfold Rear 15mm**



**Picture 12: Left 10mm**




**Picture 13: Right 10mm**

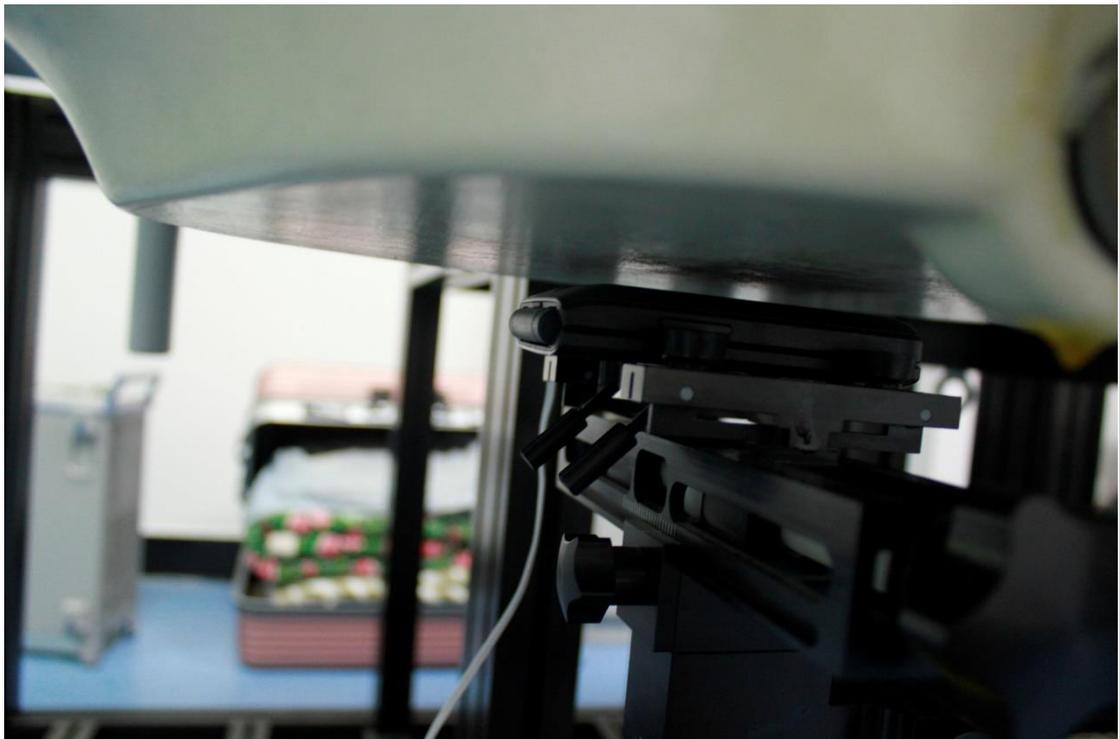

**Picture 14: Top 10mm**



**Picture 15: Bottom 10mm**

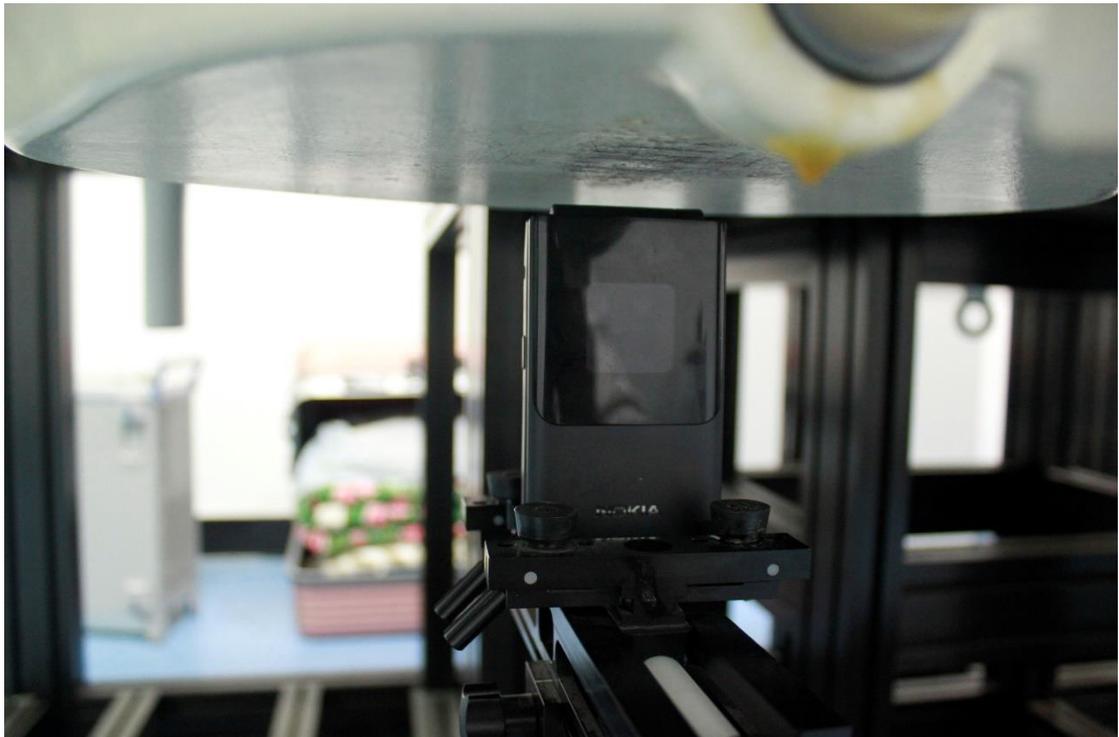

**Picture 16: Headset Rear 10mm**