



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT  
FOR  
WLAN 2X2 MIMO 802.11a/b/g/n/ac with BLUETOOTH**

**MODEL NUMBER: P2180**

**FCC ID: VOB-P2180  
IC: 7361A-P2180**

**REPORT NUMBER: 15U21878-E1V2**

**ISSUE DATE: NOVEMBER 5, 2015**

*Prepared for*  
**NVIDIA CORP.  
2701 SAN TOMAS EXPY  
SANTA CLARA, CA 95050**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| Rev. | Issue Date | Revisions                             | Revised By  |
|------|------------|---------------------------------------|-------------|
| V1   | 10/23/15   | Initial Issue                         |             |
| V2   | 11/5/15    | Updated Section 8.8.1 & Section 8.8.2 | C. Vergonio |

## TABLE OF CONTENTS

|                                                 |           |
|-------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>     | <b>5</b>  |
| <b>2. TEST METHODOLOGY .....</b>                | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>    | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>     | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....     | 6         |
| 4.2. SAMPLE CALCULATION .....                   | 6         |
| 4.3. MEASUREMENT UNCERTAINTY.....               | 6         |
| <b>5. EQUIPMENT UNDER TEST .....</b>            | <b>7</b>  |
| 5.1. DESCRIPTION OF EUT .....                   | 7         |
| 5.2. MAXIMUM OUTPUT POWER.....                  | 7         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....    | 7         |
| 5.4. SOFTWARE AND FIRMWARE.....                 | 7         |
| 5.5. WORST-CASE CONFIGURATION AND MODE.....     | 7         |
| 5.6. DESCRIPTION OF TEST SETUP.....             | 8         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>  | <b>10</b> |
| <b>7. SUMMARY TABLE .....</b>                   | <b>11</b> |
| <b>8. ANTENNA PORT TEST RESULTS .....</b>       | <b>12</b> |
| 8.1. ON TIME, DUTY CYCLE .....                  | 12        |
| 8.2. 20 dB AND 99% BANDWIDTH .....              | 14        |
| 8.2.1. BASIC DATA RATE GFSK MODULATION .....    | 14        |
| 8.2.2. ENHANCED DATA RATE 8PSK MODULATION ..... | 14        |
| 20 dB AND 99% BANDWIDTH PLOTS .....             | 15        |
| 8.3. HOPPING FREQUENCY SEPARATION .....         | 27        |
| 8.4. NUMBER OF HOPPING CHANNELS.....            | 29        |
| 8.5. AVERAGE TIME OF OCCUPANCY.....             | 34        |
| 8.6. OUTPUT POWER.....                          | 41        |
| 8.6.1. BASIC DATA RATE GFSK MODULATION .....    | 41        |
| 8.6.2. ENHANCED DATA RATE 8PSK MODULATION ..... | 41        |
| 8.6.1. OUTPUT POWER PLOTS.....                  | 42        |
| 8.7. AVERAGE POWER.....                         | 48        |
| 8.7.1. BASIC DATA RATE GFSK MODULATION .....    | 48        |
| 8.7.2. ENHANCED DATA RATE 8PSK MODULATION ..... | 48        |
| 8.8. CONDUCTED SPURIOUS EMISSIONS.....          | 49        |
| 8.8.1. BASIC DATA RATE GFSK MODULATION .....    | 50        |
| 8.8.2. ENHANCED DATA RATE 8PSK MODULATION ..... | 58        |

|                                                    |            |
|----------------------------------------------------|------------|
| <b>9. RADIATED TEST RESULTS.....</b>               | <b>66</b>  |
| 9.1. LIMITS AND PROCEDURE .....                    | 66         |
| 9.2. TRANSMITTER ABOVE 1 GHz .....                 | 67         |
| 9.2.1. BASIC DATA RATE GFSK MODULATION .....       | 67         |
| 9.2.2. ENHANCED DATA RATE 8PSK MODULATION .....    | 80         |
| 9.3. WORST-CASE BELOW 1 GHz.....                   | 93         |
| <b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b> | <b>96</b>  |
| <b>11. SETUP PHOTOS .....</b>                      | <b>99</b>  |
| <b>12. EUT PHOTOS .....</b>                        | <b>101</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** NVIDIA CORP.  
**EUT DESCRIPTION:** WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth  
**MODEL:** P2180  
**SERIAL NUMBER:** 333715030009, 333615050430, 333715030024, 333815010589  
**DATE TESTED:** OCTOBER 09 TO 19, 2015

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C        | Pass         |
| INDUSTRY CANADA RSS-247 ISSUE 1 | Pass         |
| INDUSTRY CANADA RSS-GEN ISSUE 4 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL VERIFICATION SERVICES INC



STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009 for FCC and ANSI C63.10-2013 for IC, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                       | 47266 Benicia Street                            |
|------------------------------------------------------------|-------------------------------------------------|
| <input type="checkbox"/> Chamber A(IC: 2324B-1)            | <input type="checkbox"/> Chamber D(IC: 2324B-4) |
| <input type="checkbox"/> Chamber B(IC: 2324B-2)            | <input type="checkbox"/> Chamber E(IC: 2324B-5) |
| <input checked="" type="checkbox"/> Chamber C(IC: 2324B-3) | <input type="checkbox"/> Chamber F(IC: 2324B-6) |
|                                                            | <input type="checkbox"/> Chamber G(IC: 2324B-7) |
|                                                            | <input type="checkbox"/> Chamber H(IC: 2324B-8) |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range<br>(MHz) | Mode          | Output Power<br>(dBm) | Output Power<br>(mW) |
|--------------------------|---------------|-----------------------|----------------------|
| 2402 - 2480              | Basic GFSK    | 10.63                 | 11.56                |
| 2402 - 2480              | Enhanced 8PSK | 9.97                  | 9.93                 |

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.5.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dual band dipole antenna, with a maximum gain of 2.86 dBi.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Nvidia Rev. 7.10.RC 0.0

The EUT driver software installed during testing Nvidia Rev 7.35 2200 <r532988 wlttest>

### 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three transmitting antenna degrees: 0, 45, and 90. It was determined that 90 degrees was the worst case antenna position; therefore all final radiated testing was performed with the antenna position at 90 degrees.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |          |               |        |
|------------------------|--------------|----------|---------------|--------|
| Description            | Manufacturer | Model    | Serial Number | FCC ID |
| Base board             | NVIDIA       | P2597    | 333715040297  | DoC    |
| AC Adapter             | Mean Well    | GST90A19 | EB58E32121    | N/A    |
| Laptop                 | Lenovo       | T430     | PFB1R5R       | N/A    |


### I/O CABLES

| I/O Cable List |      |                      |                |            |                  |                  |
|----------------|------|----------------------|----------------|------------|------------------|------------------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks          |
| 1              | AC   | 1                    | US115V         | Unshielded | 0.5              |                  |
| 2              | DC   | 1                    | 19 Vdc         | Unshielded | 1                | Ferrite Attached |
| 3              | USB  | 1                    | USB            | Shielded   | 1.5              |                  |

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

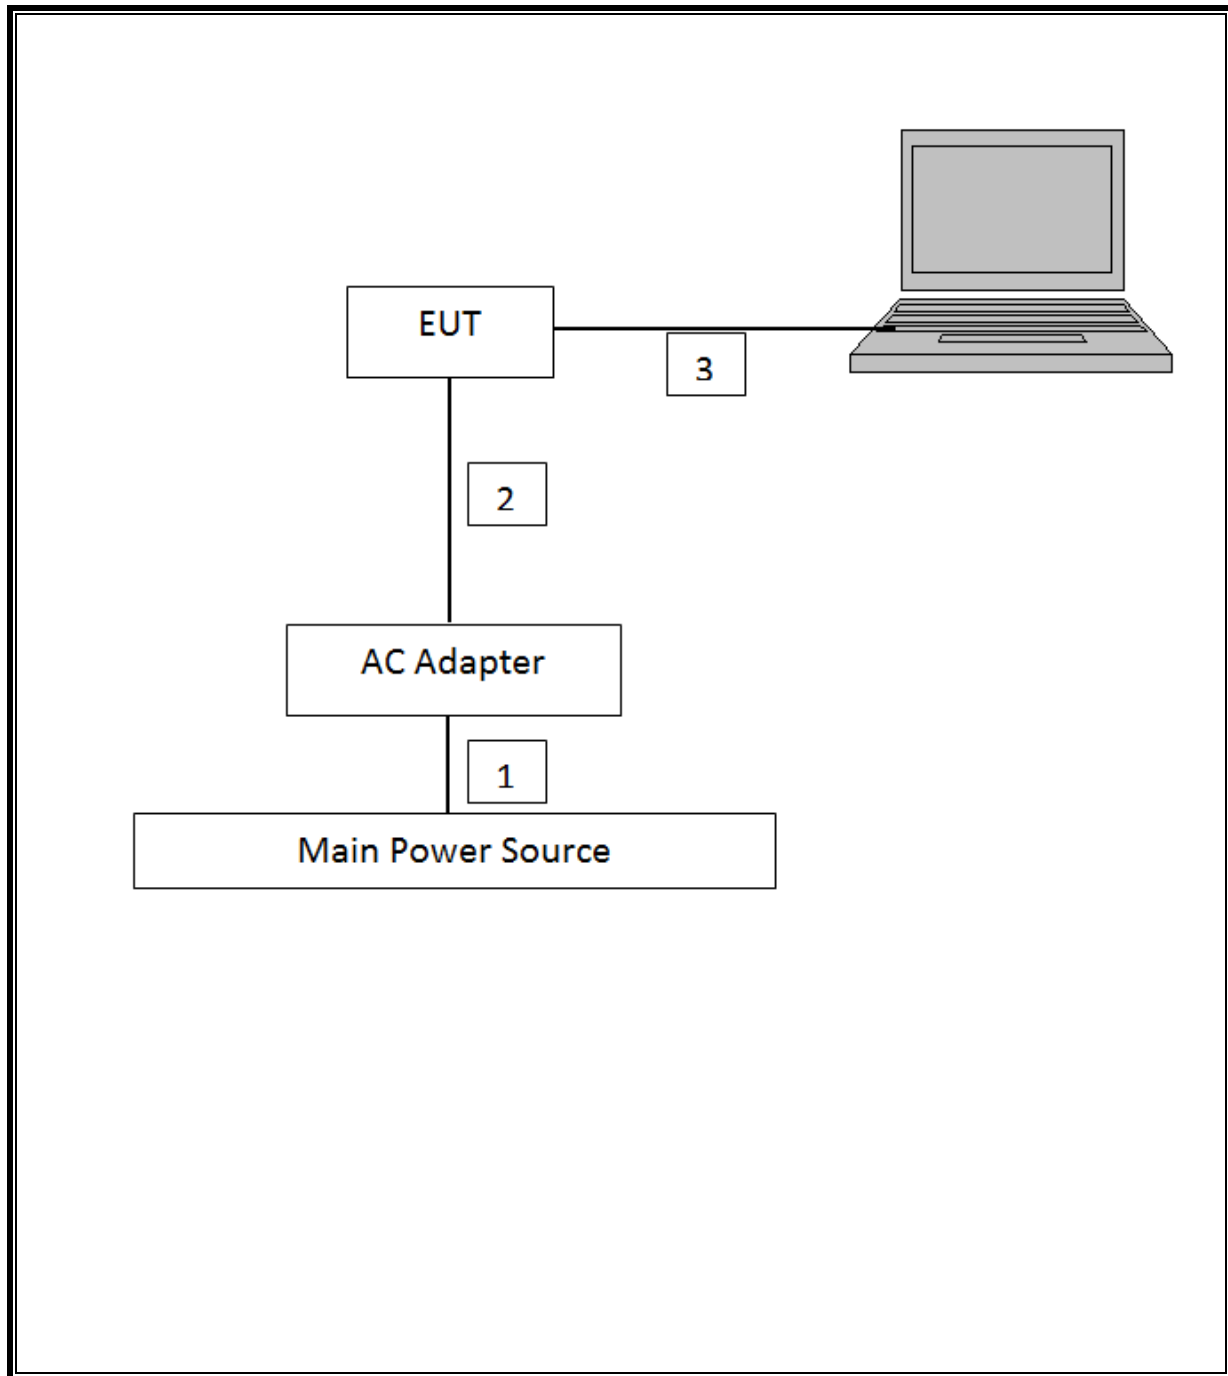

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                |                |             |        |          |
|------------------------------------|----------------|-------------|--------|----------|
| Description                        | Manufacturer   | Model       | Asset  | Cal Due  |
| Antenna, Biconolog, 30MHz-1 GHz    | Sunol Sciences | JB1         | C01171 | 02/13/16 |
| Antenna, Horn, 18GHz               | EMCO           | 3115        | C00783 | 10/25/15 |
| Antenna, Horn, 26.5 GHz            | ARA            | MWH-1826/B  | C00980 | 11/14/15 |
| RF Preamplifier, 100KHz -> 1300MHz | HP             | TBD         | C00825 | 06/01/16 |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | NSP4000-SP2 | 924343 | 03/23/16 |
| RF Preamplifier, 1GHz - 26.5GHz    | HP             | 8449B       | F00351 | 06/27/15 |
| Spectrum Analyzer, 44 GHz          | Agilent / HP   | E4446A      | C01069 | 12/20/15 |
| Peak Power Meter                   | Agilent / HP   | E4416A      | C00963 | 12/13/15 |
| Peak / Average Power Sensor        | Agilent / HP   | E9327A      | C00964 | 12/13/15 |
| LISN, 30 MHz                       | FCC            | 50/250-25-2 | C00626 | 01/14/16 |
| Reject Filter, 2.4GHz              | Micro-Tronics  | BRM50702    | N02684 | CNR      |

| Test Software List    |              |        |                          |
|-----------------------|--------------|--------|--------------------------|
| Description           | Manufacturer | Model  | Version                  |
| Radiated Software     | UL           | UL EMC | Ver 9.5, July 22, 2014   |
| Conducted Software    | UL           | UL EMC | Ver 9.5, May 17 2012     |
| CLT Software          | UL           | UL RF  | Ver 1.0, Feb 2 2015      |
| Antenna Port Software | UL           | UL RF  | Ver 2.1.1.1, Jan 20 2015 |

## 7. SUMMARY TABLE

| FCC Part Section   | RSS Section(s) | Test Description                        | Test Limit                            | Test Condition | Test Result | Worst Case     |
|--------------------|----------------|-----------------------------------------|---------------------------------------|----------------|-------------|----------------|
| 2.1049             | RSS-GEN 4.6    | Occupied Band width (99%)               | N/A                                   | Conducted      | Pass        | 1.2012 MHz     |
| 2.1051, 15.247 (d) | RSS-247 5.5    | Band Edge / Conducted Spurious Emission | -20dBc                                |                | Pass        | -50.37 dBm     |
| 15.247 (b)(1)      | RSS-247 5.4.2  | TX conducted output power               | <21dBm                                |                | Pass        | 10.63 dBm      |
| 15.247 (a)(1)      | RSS-247 5.1.2  | Hopping frequency separation            | > 25KHz                               |                | Pass        | 1 MHz          |
| 15.247 (a)(1)(iii) | RSS-247 5.1.4  | Number of Hopping channels              | More than 15 non-overlapping channels |                | Pass        | 79             |
| 15.247 (a)(1)(iii) | RSS-247 5.1.4  | Avg Time of Occupancy                   | < 0.4sec                              |                | Pass        | 0.287 sec      |
| 15.207 (a)         | RSS-GEN 8.8    | AC Power Line conducted emissions       | Section 10                            | Radiated       | Pass        | 34.28 dBuV(PK) |
| 15.205, 15.209     | RSS-GEN 8.9/7  | Radiated Spurious Emission              | < 54dBuV/m                            |                | Pass        | 41.29 dBuV/m   |

## 8. ANTENNA PORT TEST RESULTS

### 8.1. ON TIME, DUTY CYCLE

#### LIMITS

None; for reporting purposes only.



#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time<br>B<br>(msec) | Period<br>(msec) | Duty Cycle<br>x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction Factor<br>(dB) | 1/B<br>Minimum VBW<br>(kHz) |
|------|------------------------|------------------|-----------------------------|----------------------|-----------------------------------------|-----------------------------|
| GFSK | 2.884                  | 3.738            | 0.772                       | 77.15%               | 1.13                                    | 0.347                       |
| 8PSK | 1.044                  | 3.750            | 0.278                       | 27.84%               | 5.55                                    | 0.958                       |

## DUTY CYCLE PLOTS

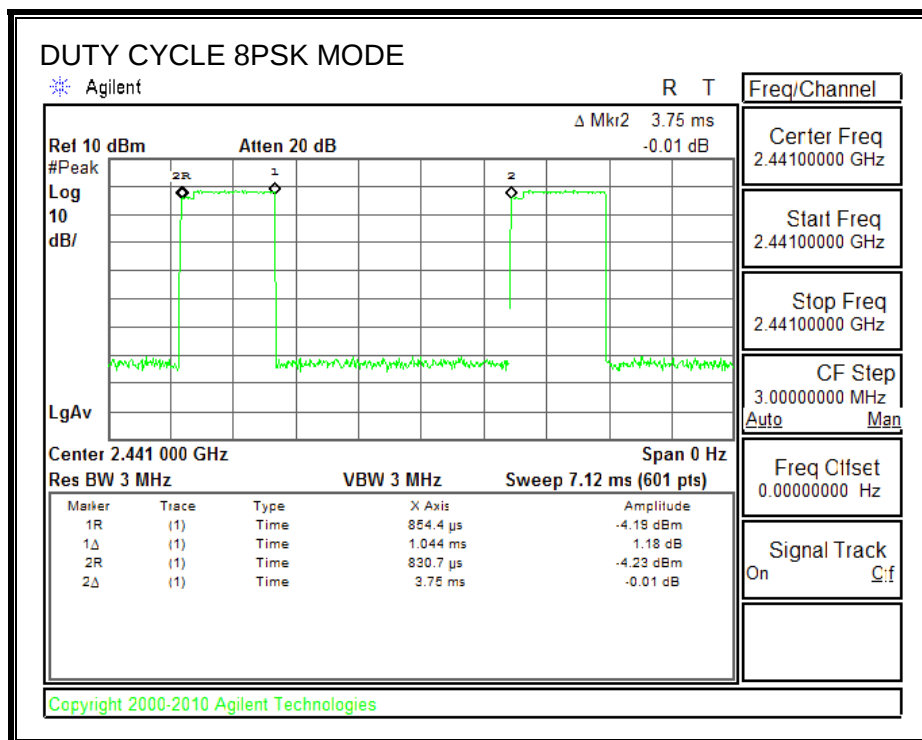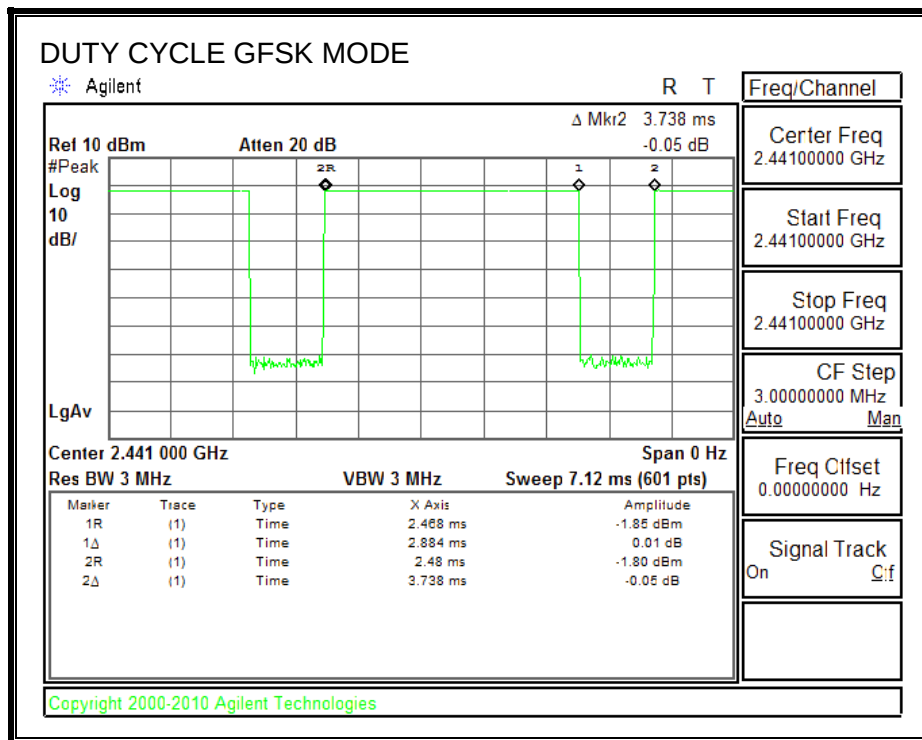

## 8.2. 20 dB AND 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq$  1% of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

### RESULTS

#### 8.2.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|-----------------------|---------------------|
| Low     | 2402            | 0.928                 | 0.8890              |
| Middle  | 2441            | 0.948                 | 0.8922              |
| High    | 2480            | 0.938                 | 0.8947              |
| Worst   |                 | 0.948                 | 0.8947              |


#### 8.2.2. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|-----------------------|---------------------|
| Low     | 2402            | 1.344                 | 1.2012              |
| Middle  | 2441            | 1.371                 | 1.1881              |
| High    | 2480            | 1.305                 | 1.1864              |
| Worst   |                 | 1.371                 | 1.2012              |


## 20 dB AND 99% BANDWIDTH PLOTS

### GFSK 20 dB BANDWIDTH


#### LOW CHANNEL

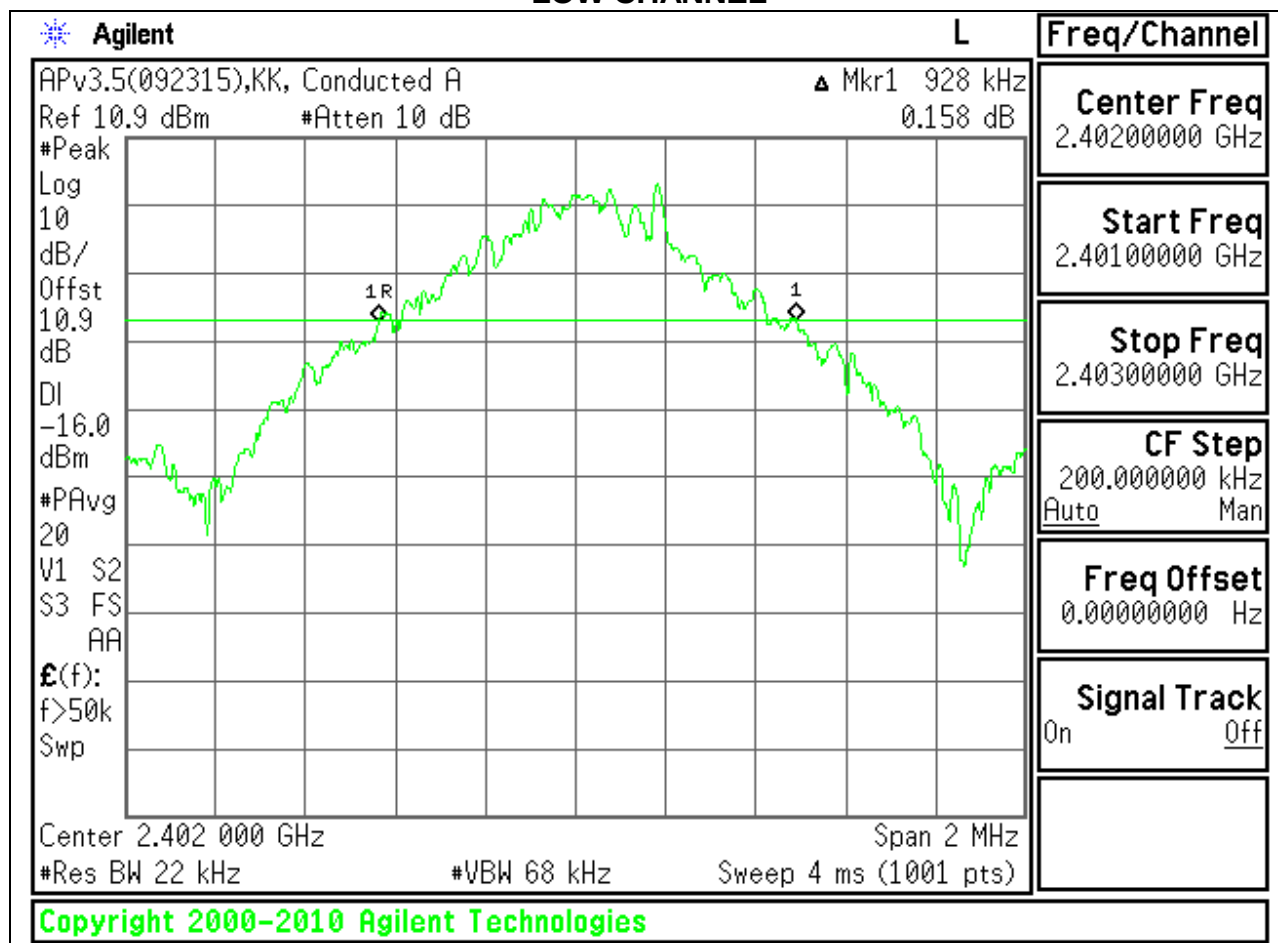

# MID CHANNEL

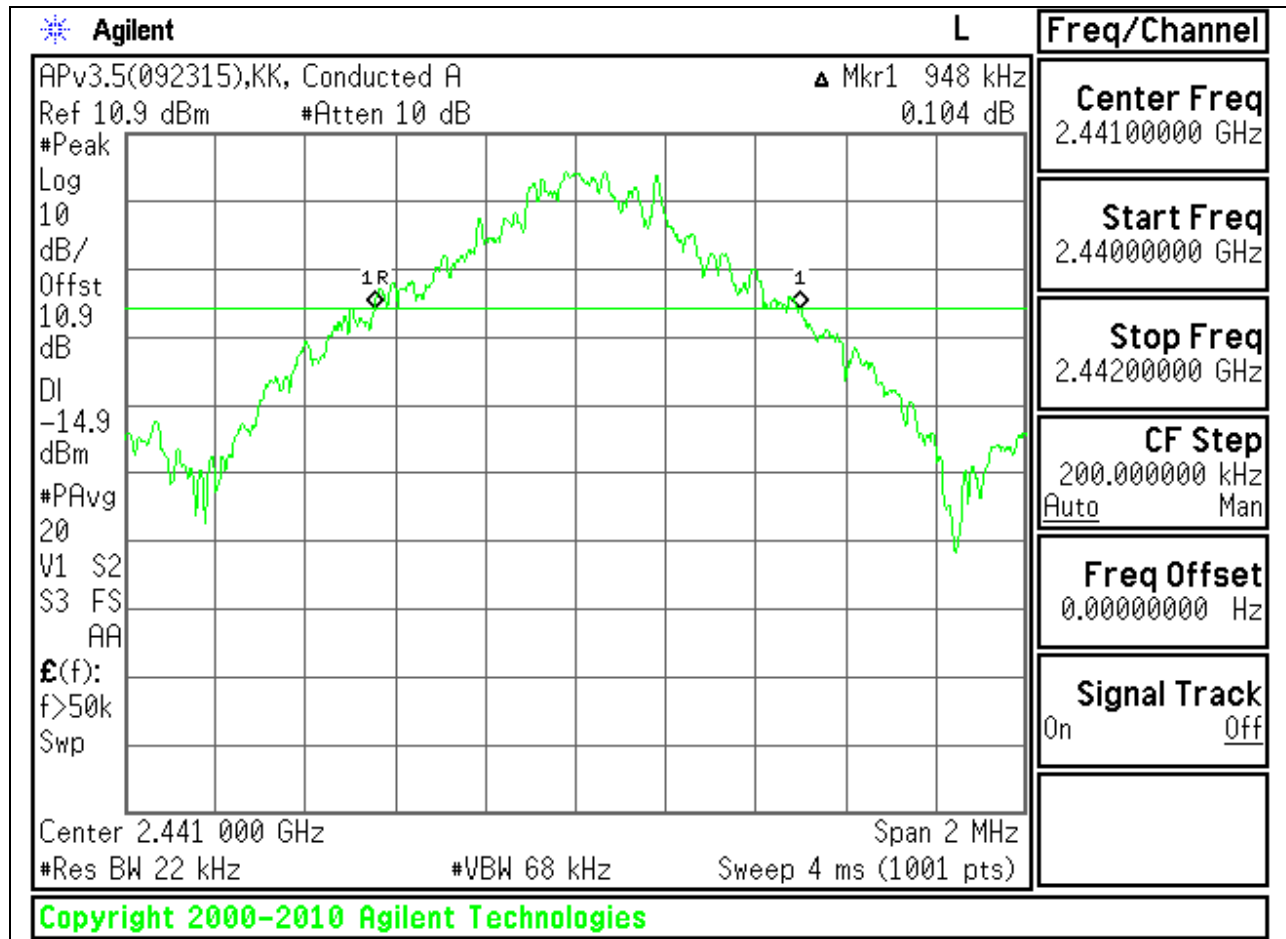


# HIGH CHANNEL

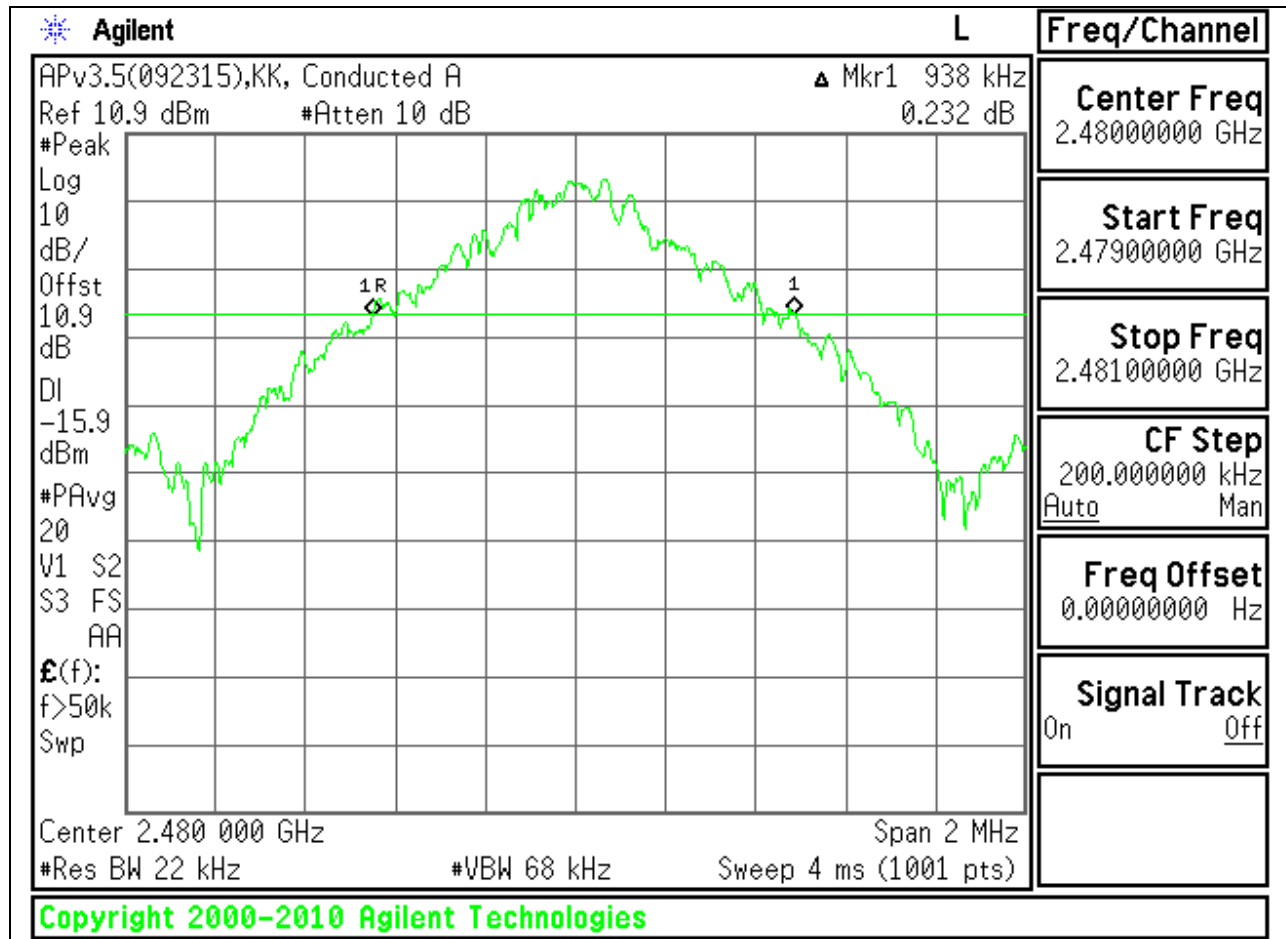


**GFSK 99% BANDWIDTH**


**LOW CHANNEL**

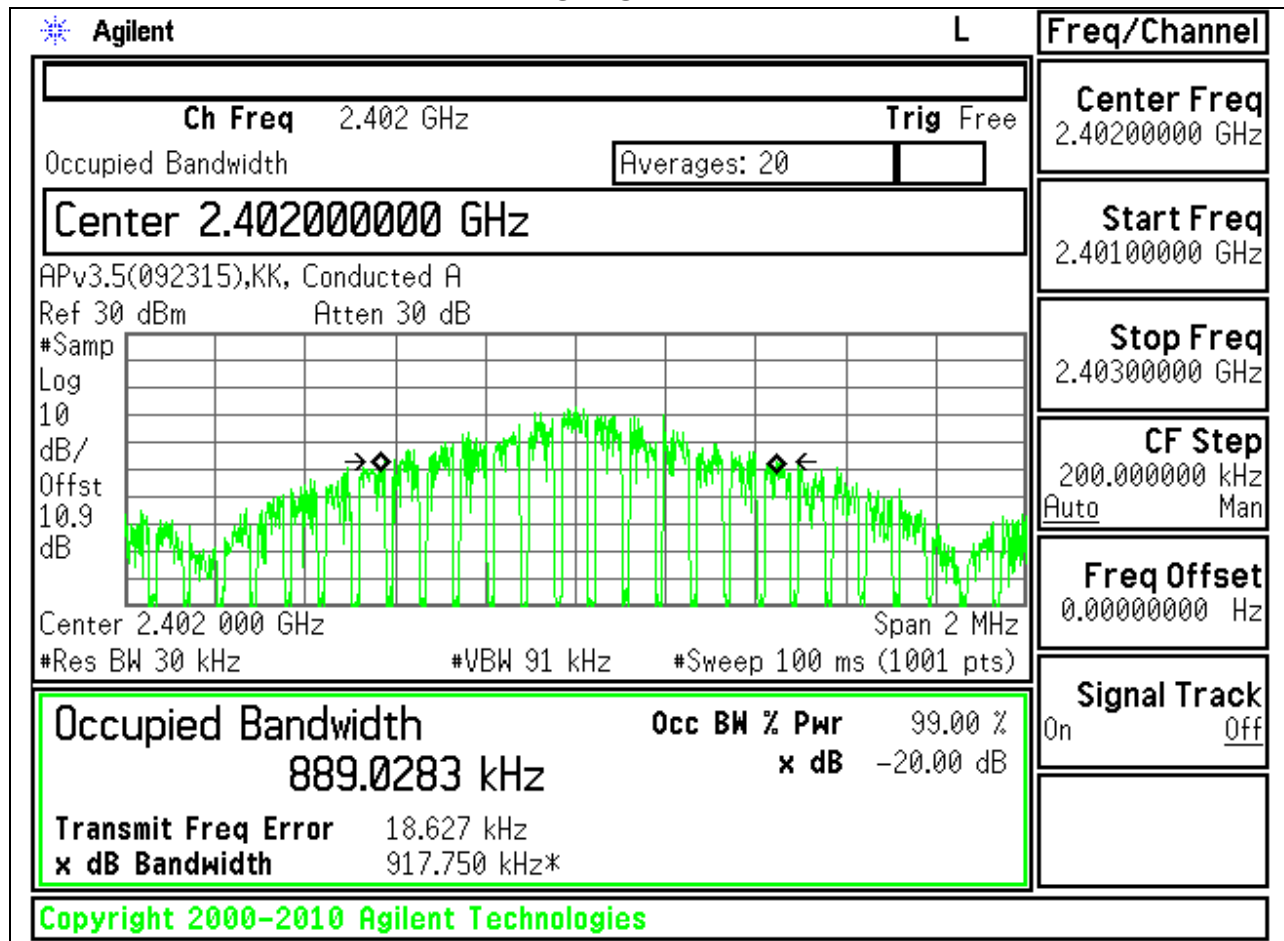

# MID CHANNEL

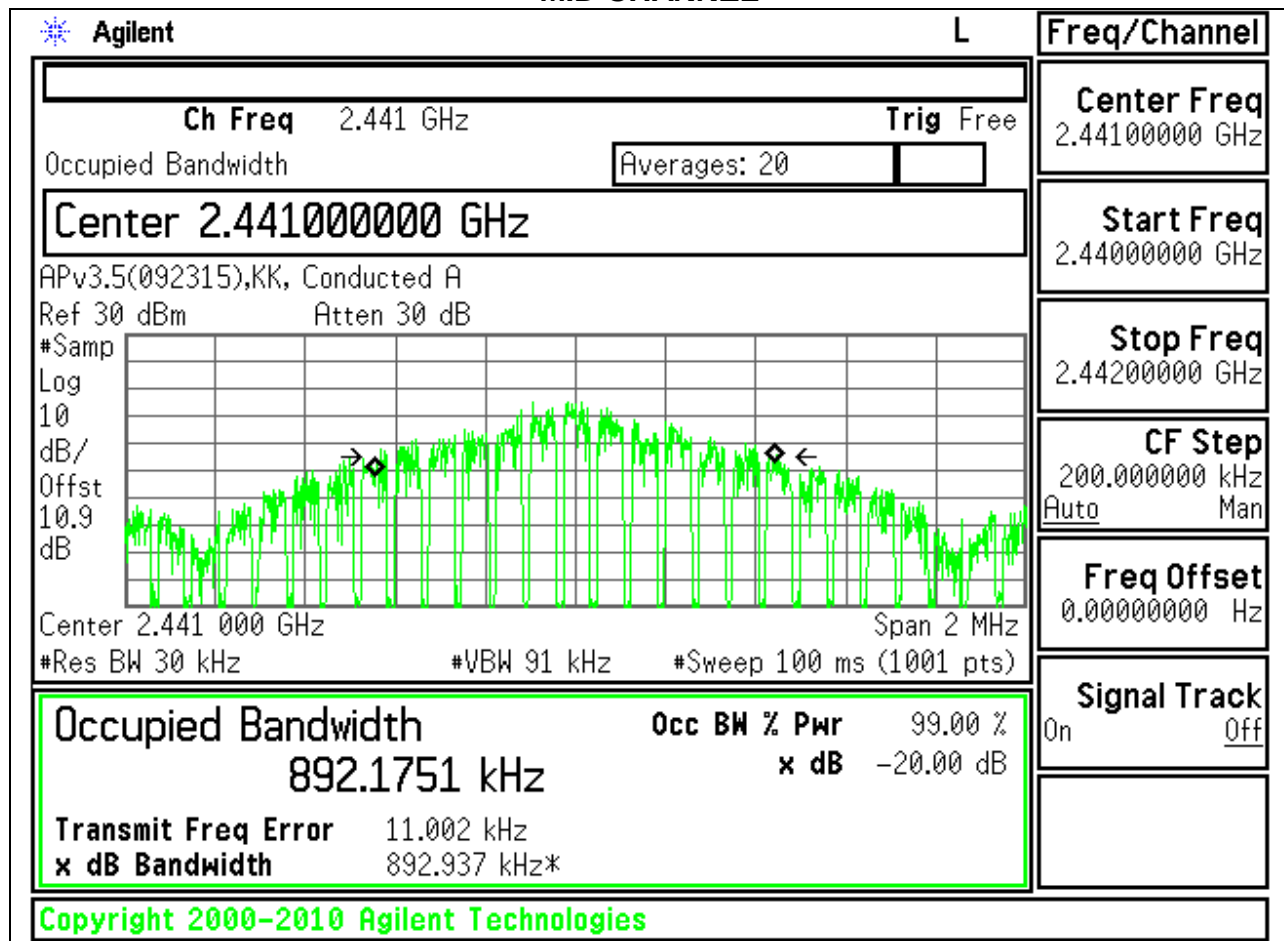


# HIGH CHANNEL

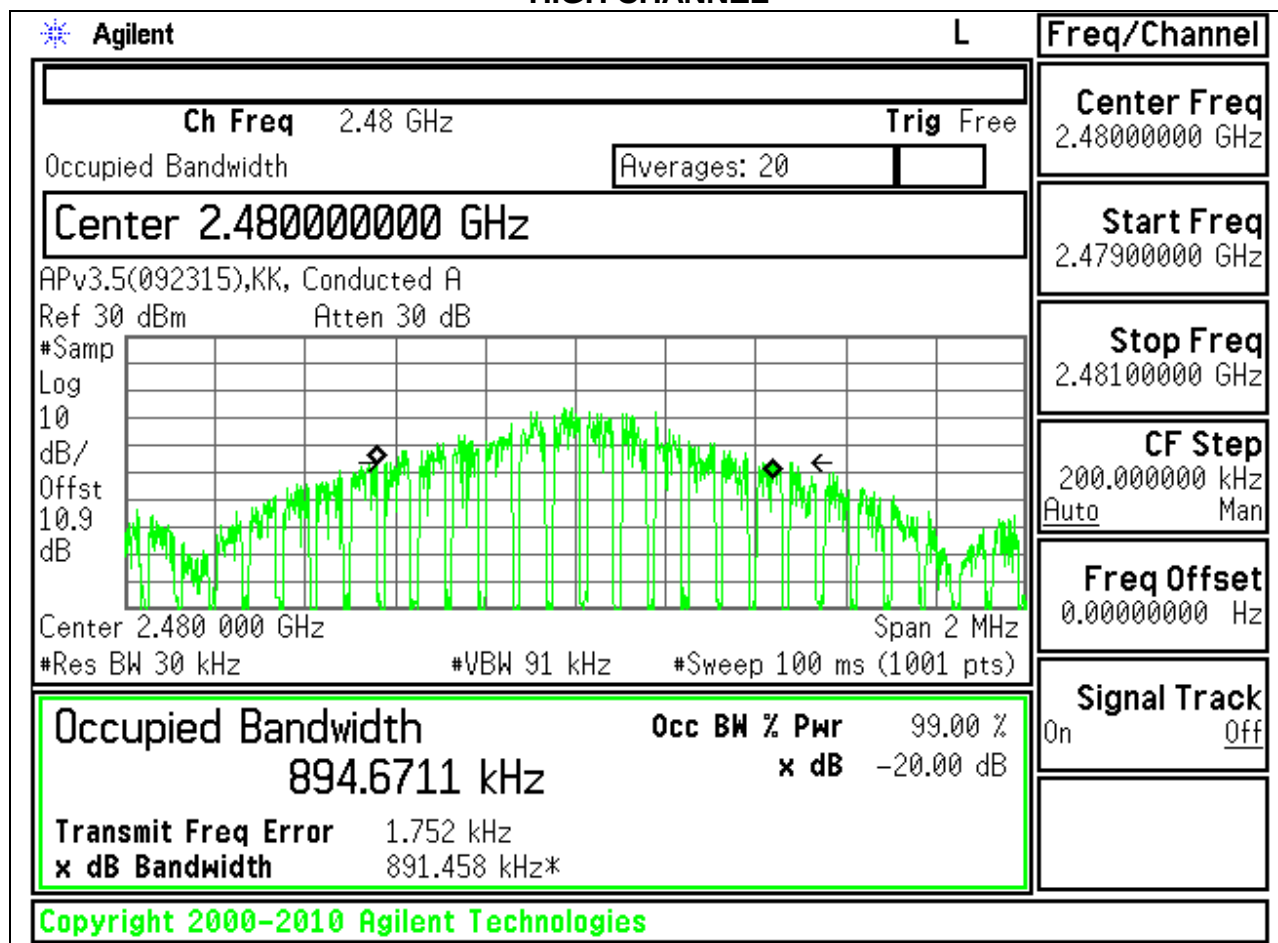


**8PSK 20 dB BANDWIDTH**


**LOW CHANNEL**

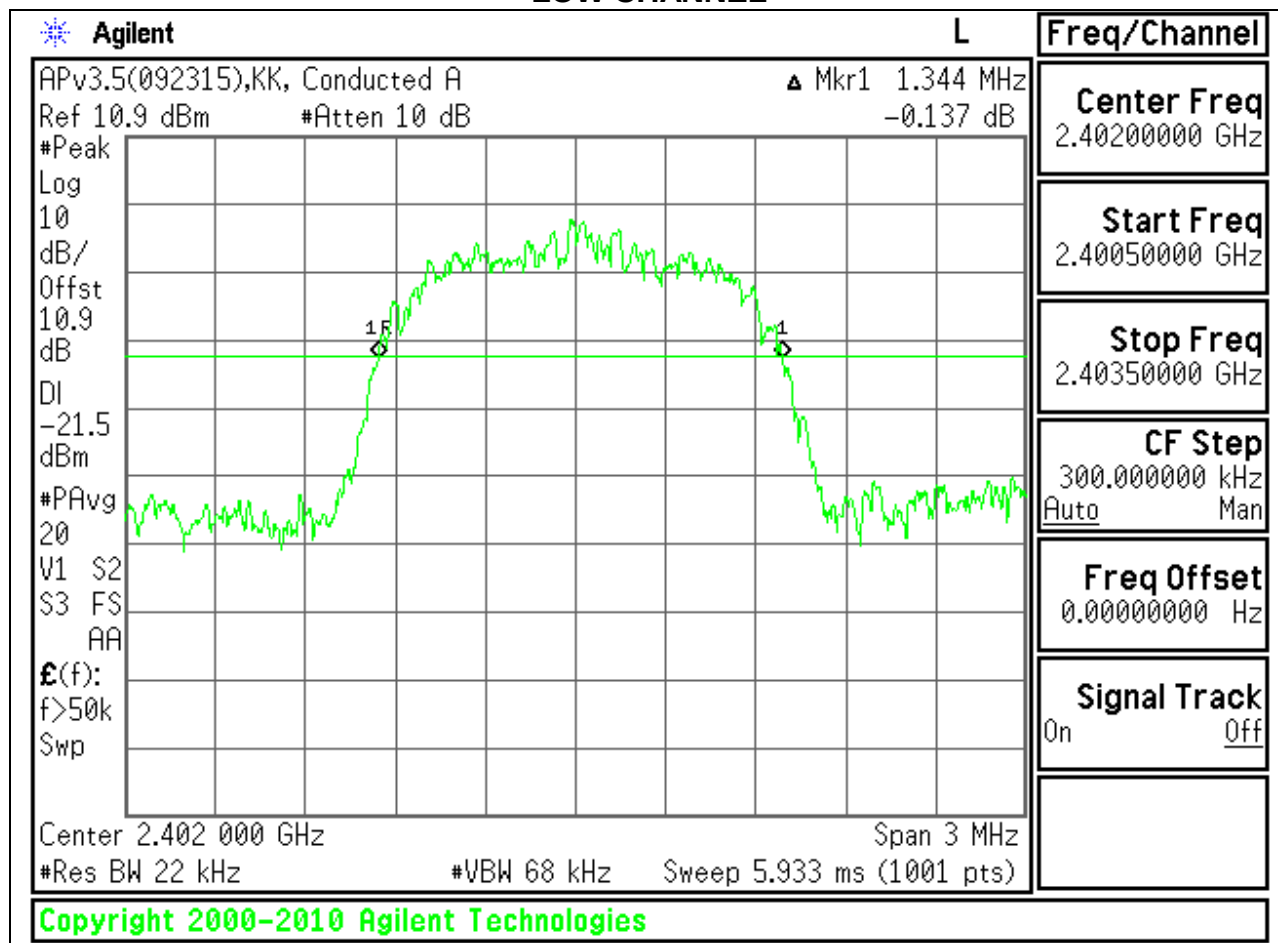

# MID CHANNEL

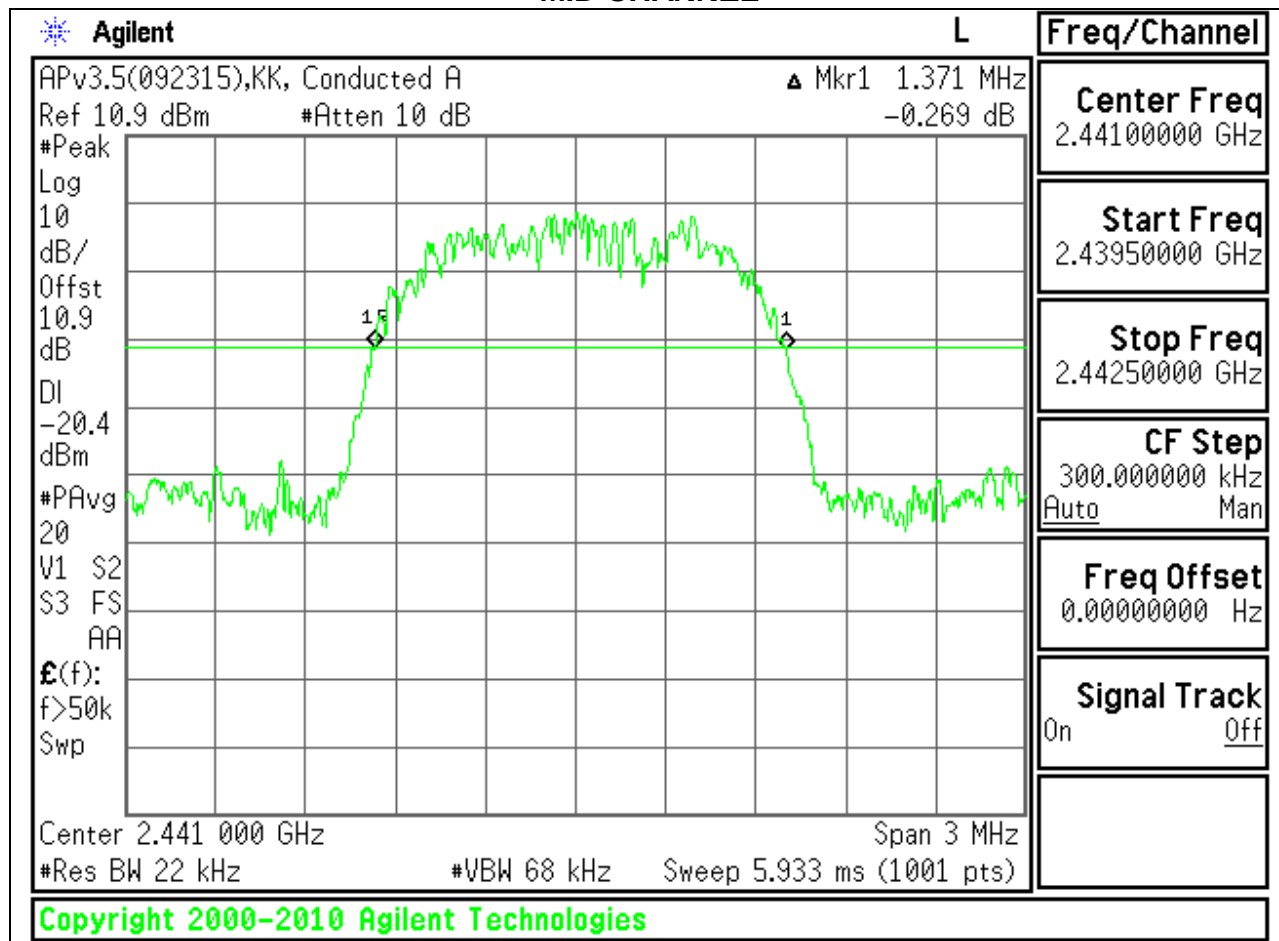


# HIGH CHANNEL

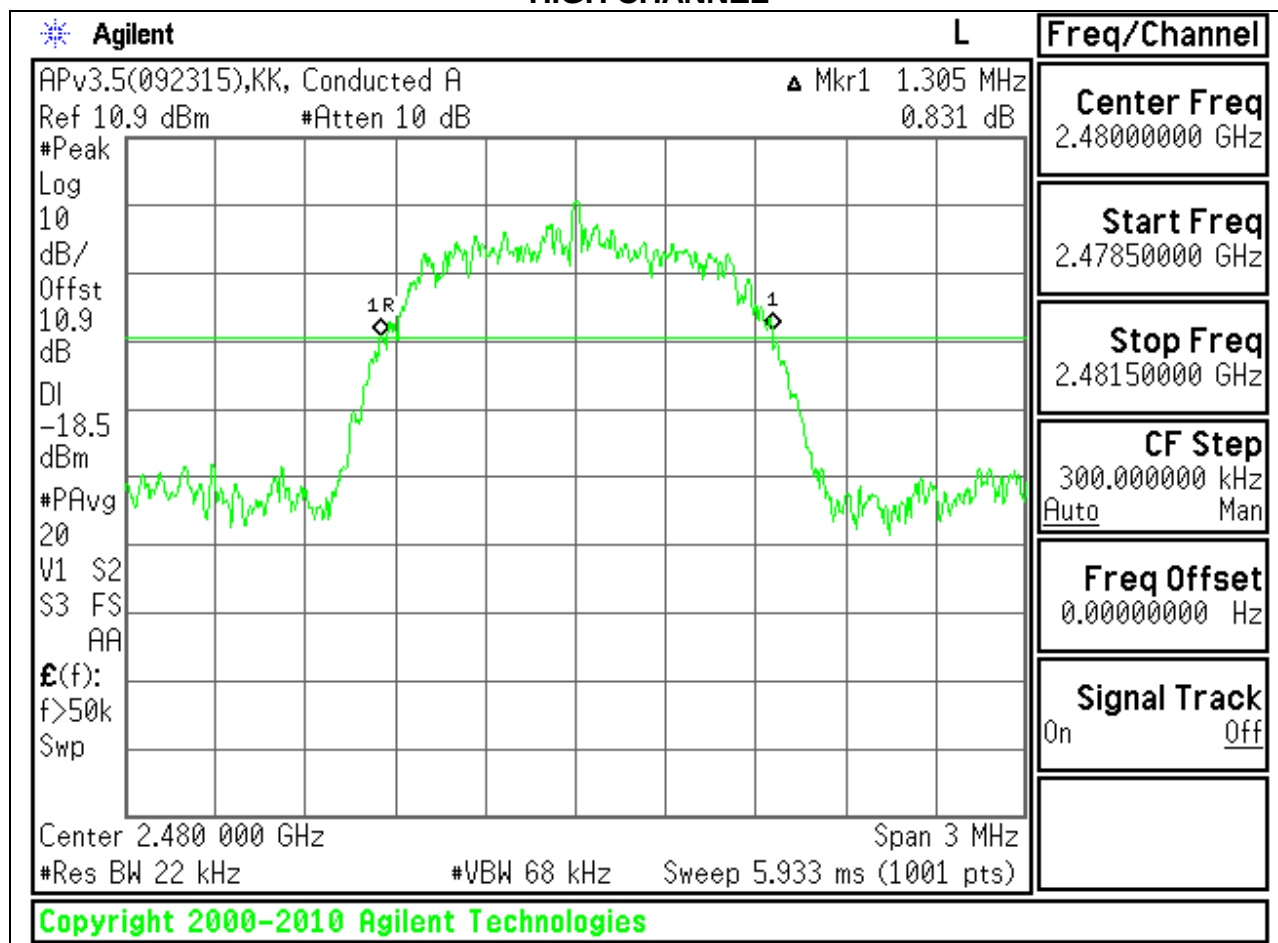


**8PSK 99% BANDWIDTH**


**LOW CHANNEL**

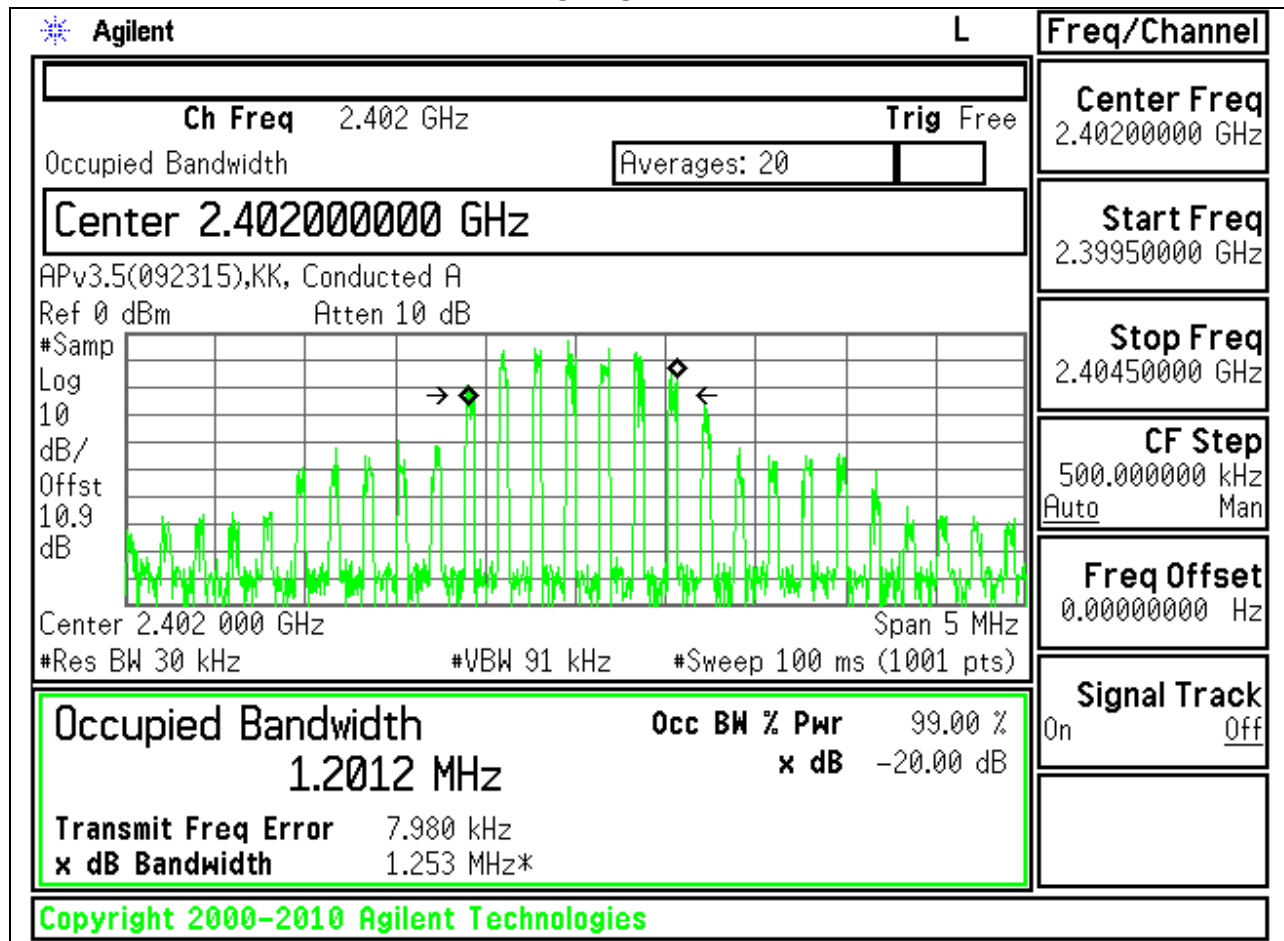

# MID CHANNEL

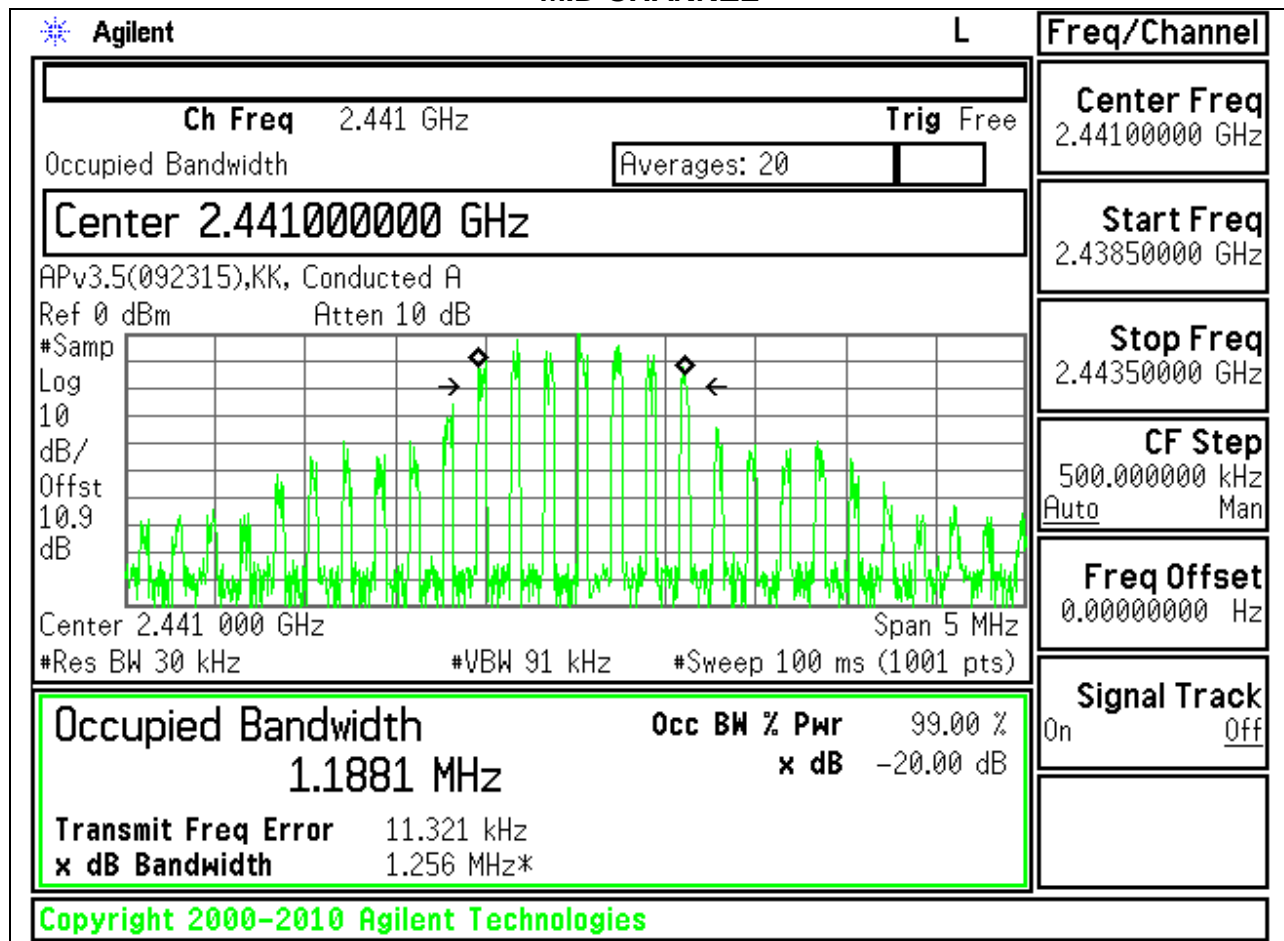

# HIGH CHANNEL

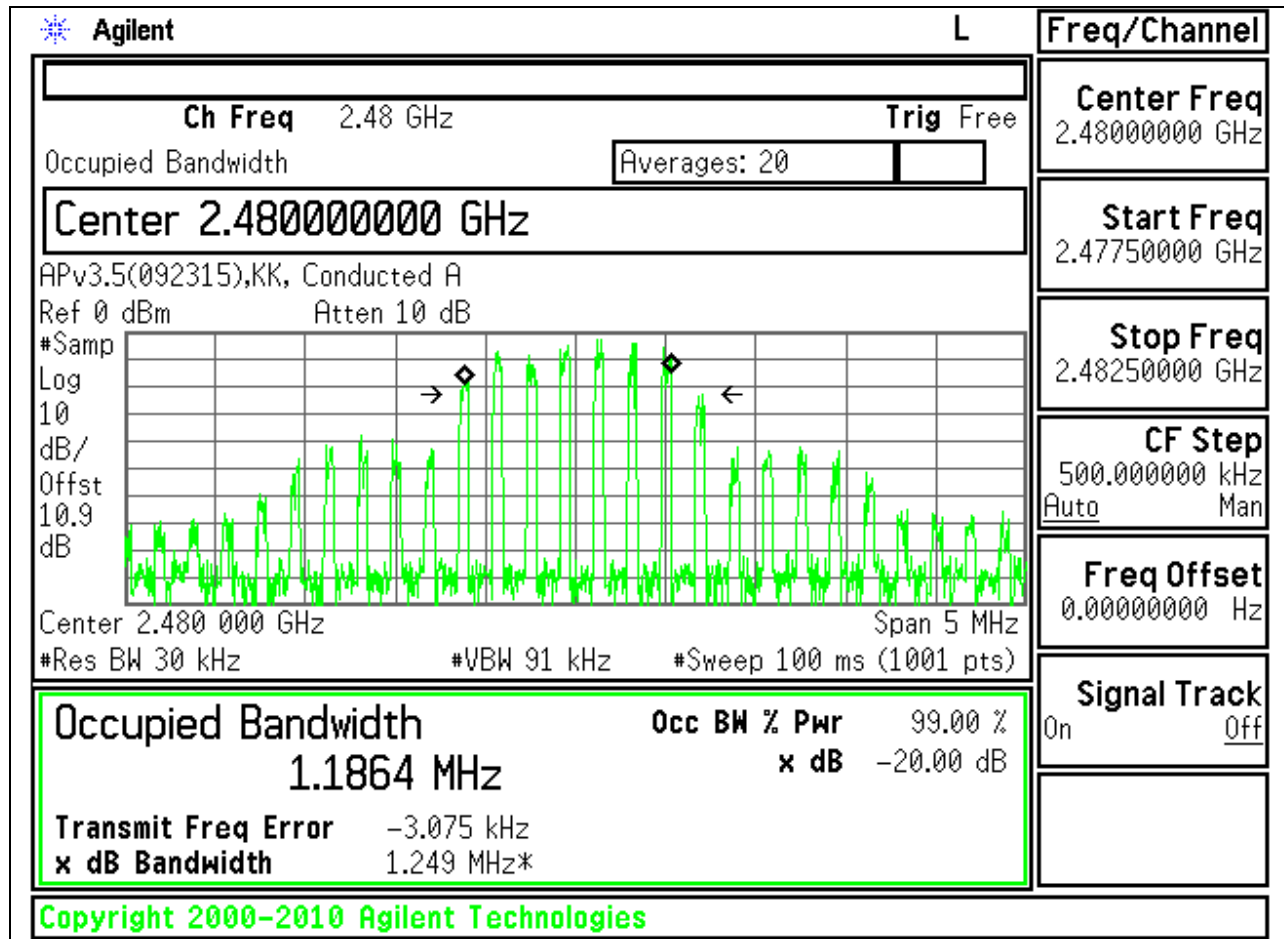

### **8.3. HOPPING FREQUENCY SEPARATION**

#### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-247 5.1.2

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### **RESULTS**

# HOPPING FREQUENCY SEPARATION PLOT

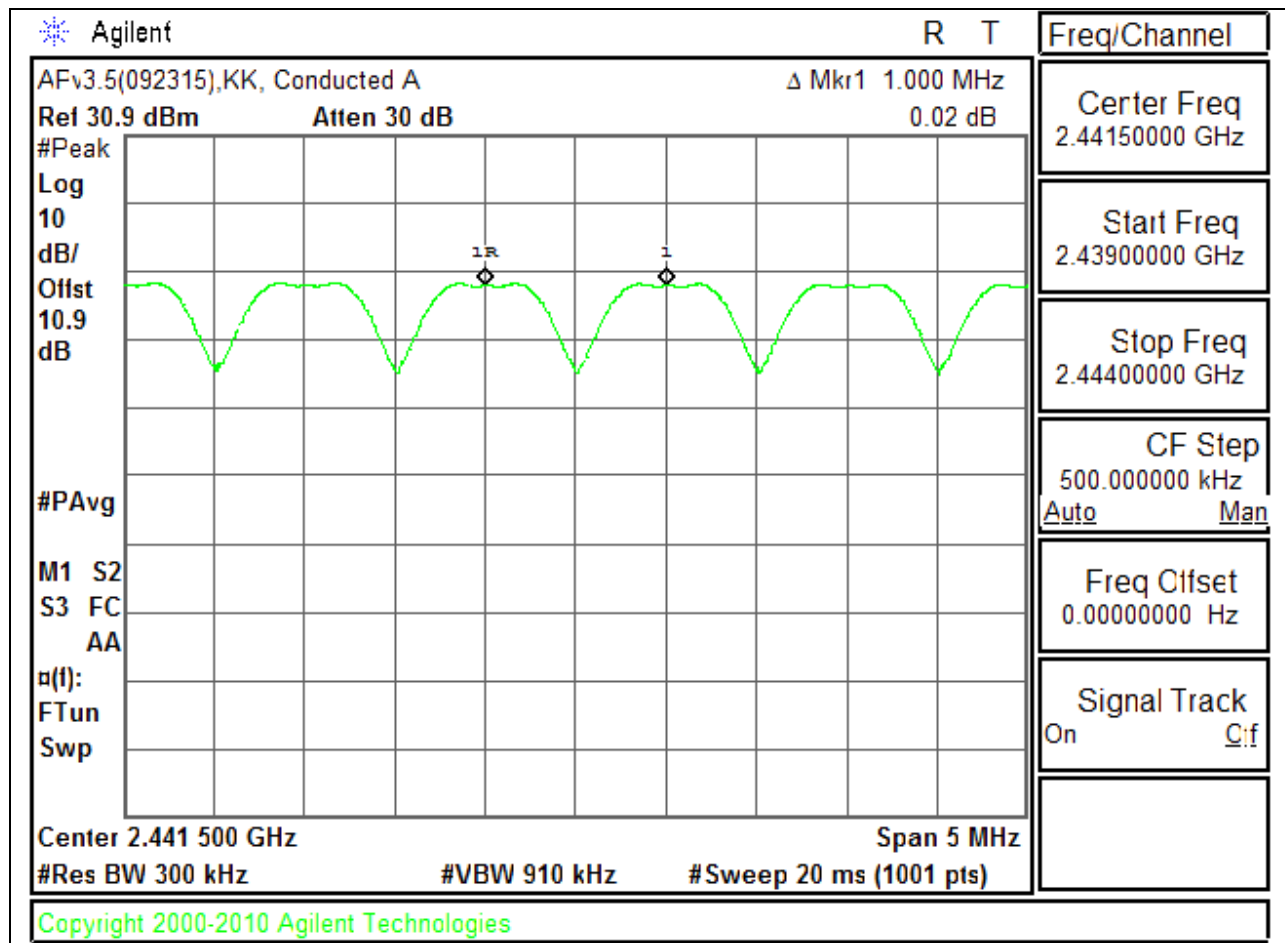

## **8.4. NUMBER OF HOPPING CHANNELS**

### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1.4

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

### **TEST PROCEDURE**


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

### **RESULTS**


Normal Mode: 79 Channels observed.

**NUMBER OF HOPPING CHANNELS PLOTS**


**NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)**

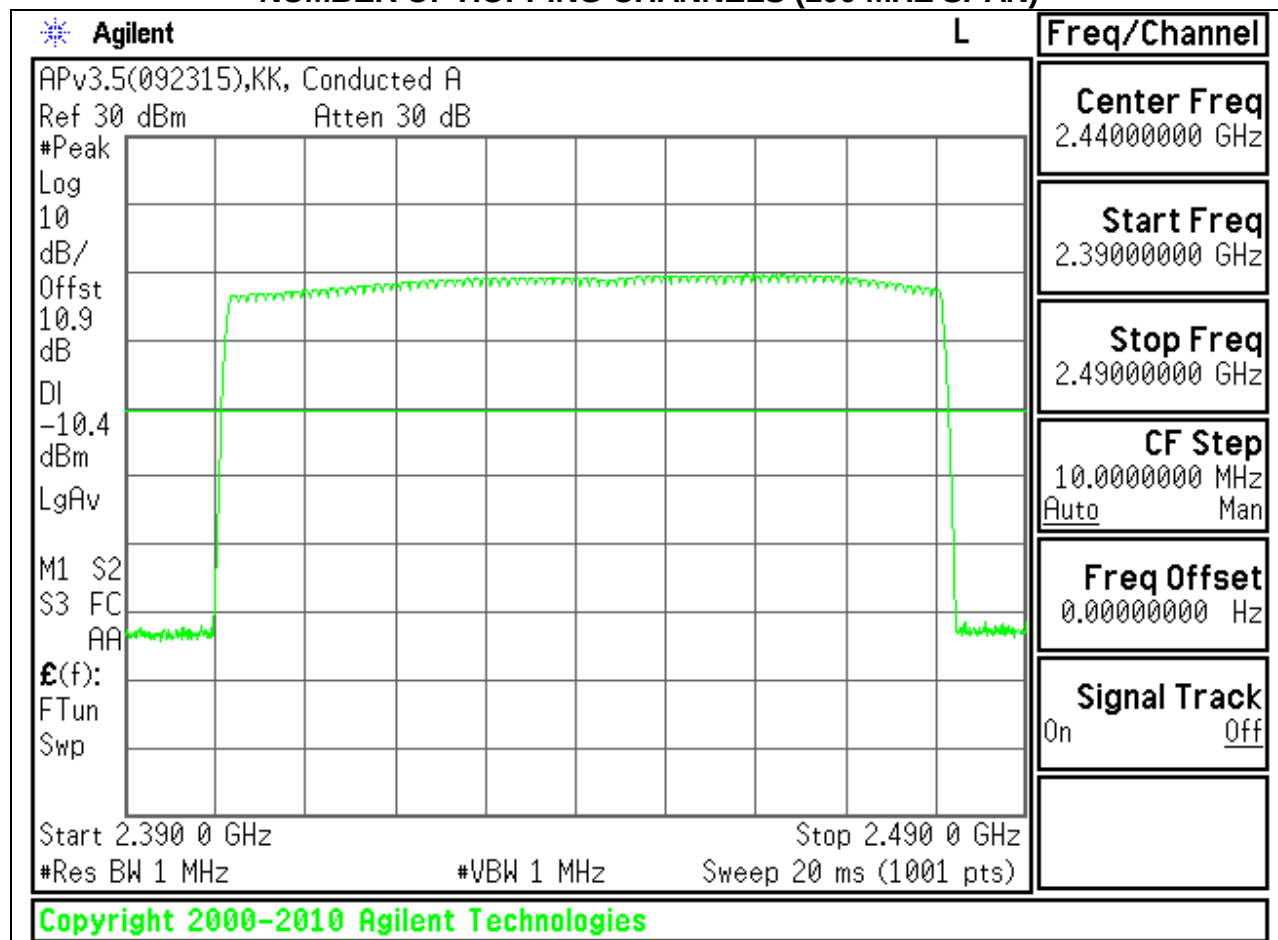


# NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

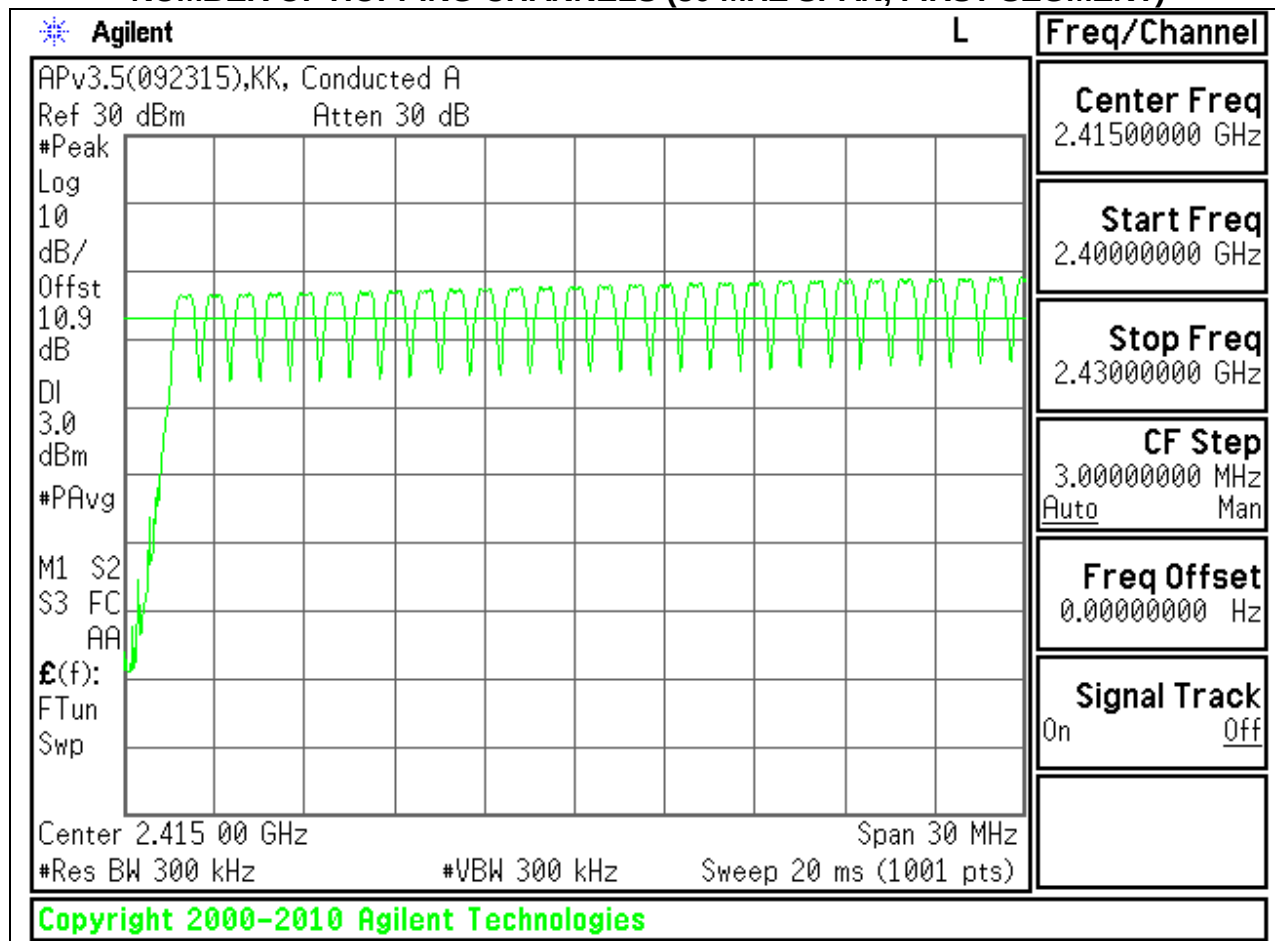

# NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

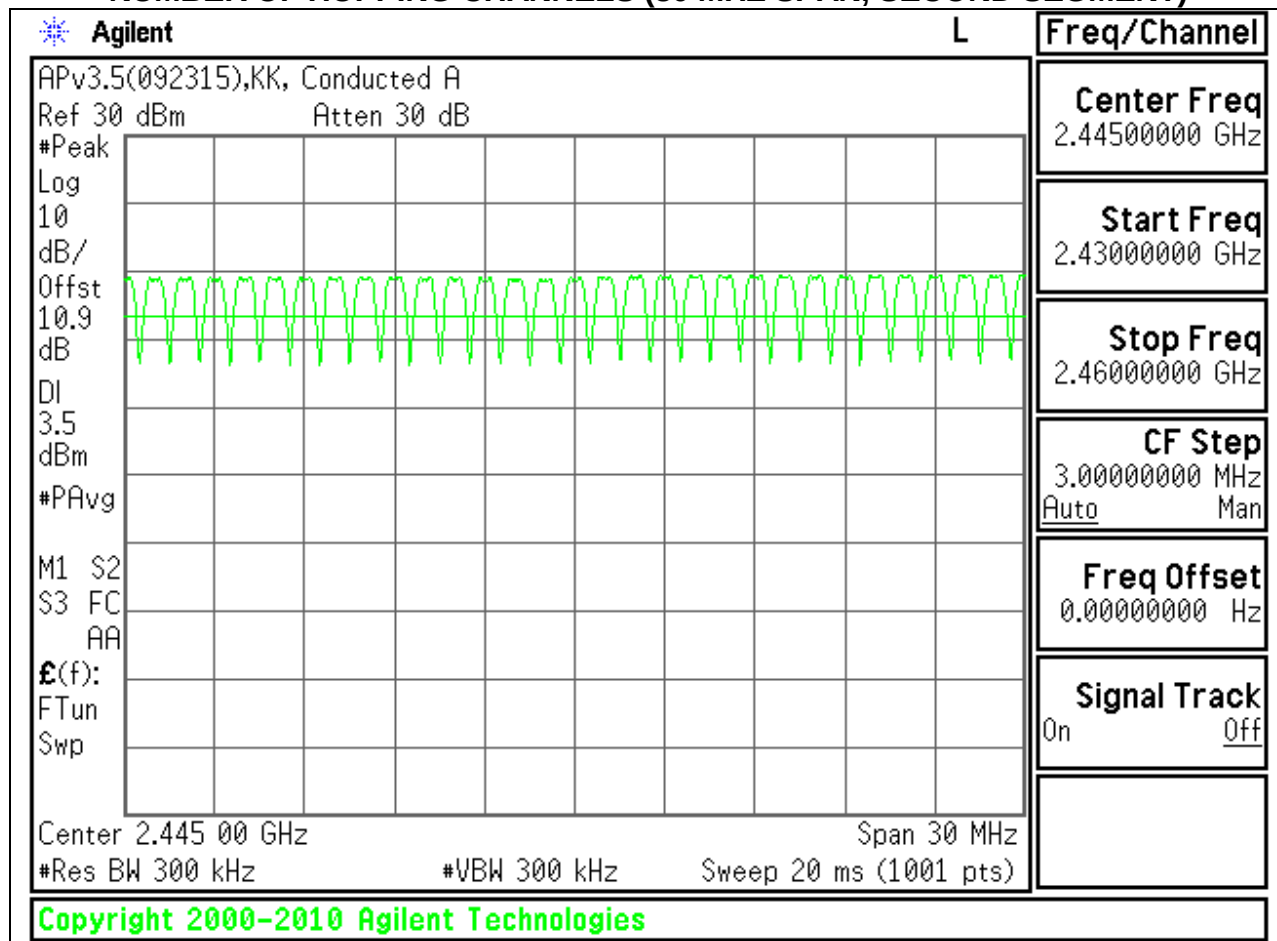

# NUMBER OF HOPPING CHANNELS (30 MHz SPAN, THIRD SEGMENT)

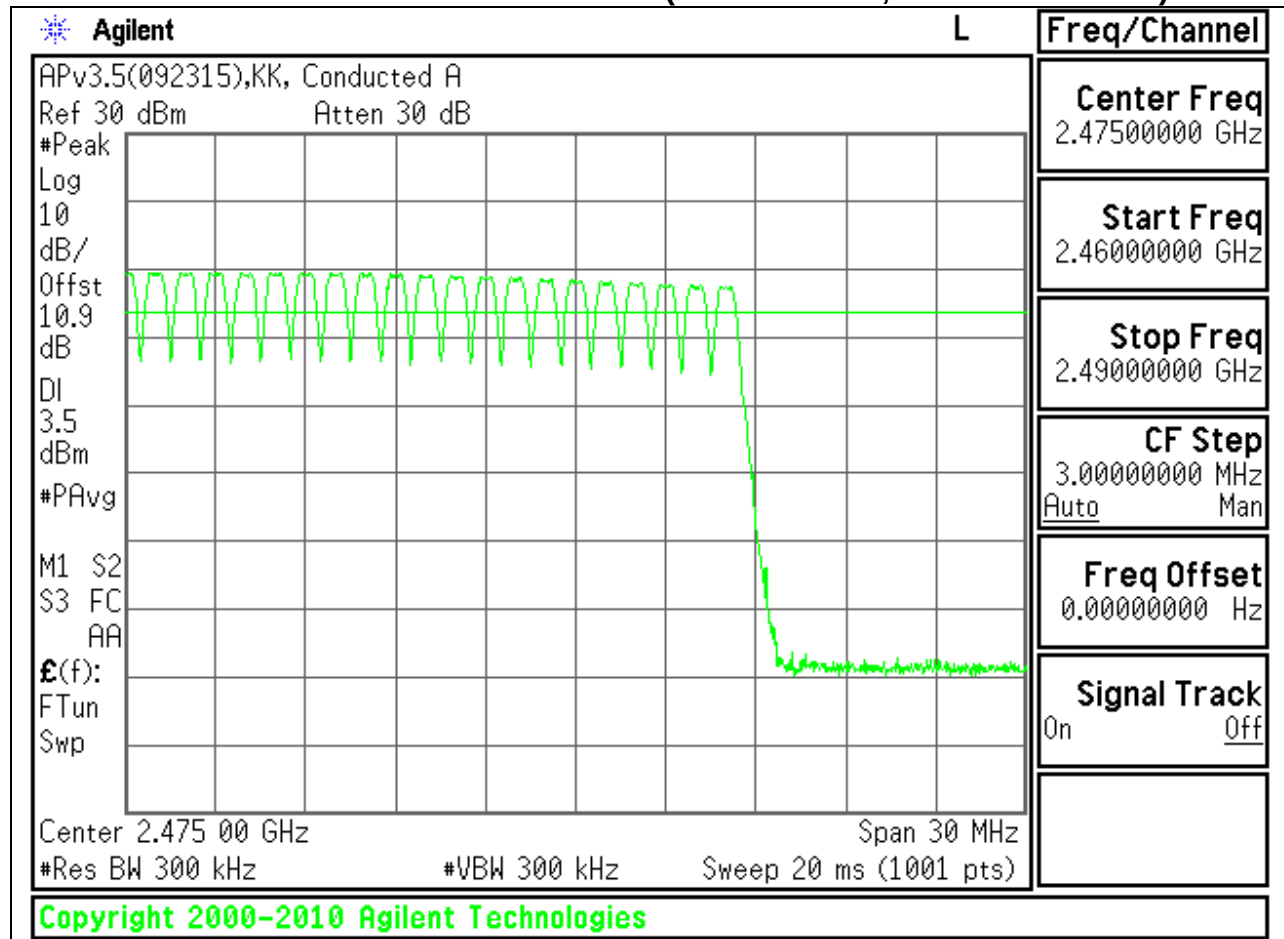

## 8.5. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1.4

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .


### RESULTS

| DH Packet        | Pulse Width (msec) | Number of Pulses in 3.16 seconds | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
|------------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| GFSK Normal Mode |                    |                                  |                                 |             |              |
| DH1              | 0.3818             | 32                               | 0.122176                        | 0.4         | -0.27782     |
| DH3              | 1.677              | 14                               | 0.23478                         | 0.4         | -0.16522     |
| DH5              | 2.87               | 10                               | 0.287                           | 0.4         | -0.113       |
|                  |                    |                                  |                                 |             |              |
| DH Packet        | Pulse Width (msec) | Number of Pulses in 0.8 seconds  | Average Time of Occupancy (sec) | Limit (sec) | Margin (sec) |
| GFSK AFH Mode    |                    |                                  |                                 |             |              |
| DH1              | 0.3818             | 8                                | 0.030544                        | 0.4         | -0.36946     |
| DH3              | 1.677              | 3.5                              | 0.058695                        | 0.4         | -0.34131     |
| DH5              | 2.87               | 2.5                              | 0.07175                         | 0.4         | -0.32825     |


# PULSE WIDTH - DH1

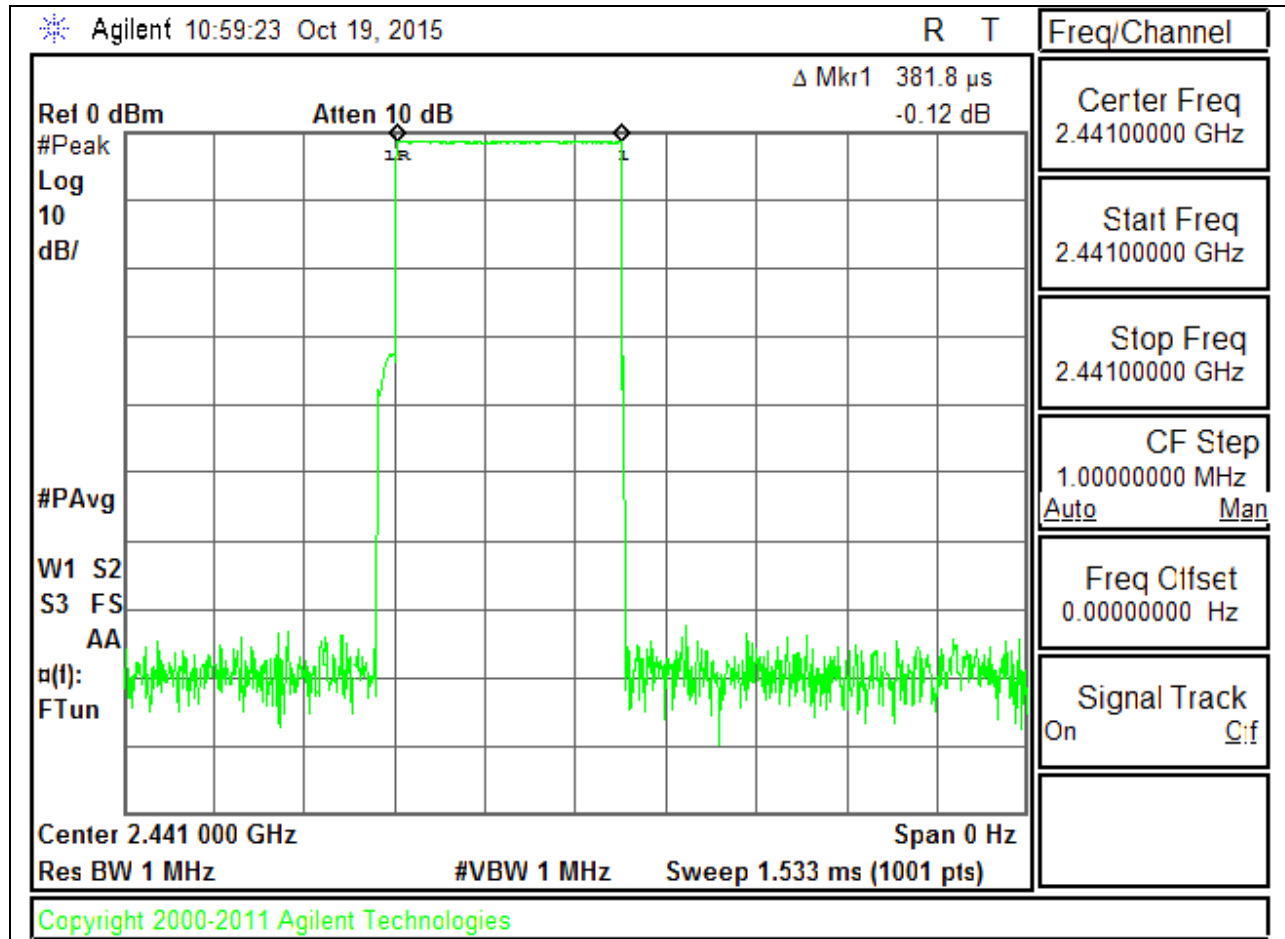


# NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

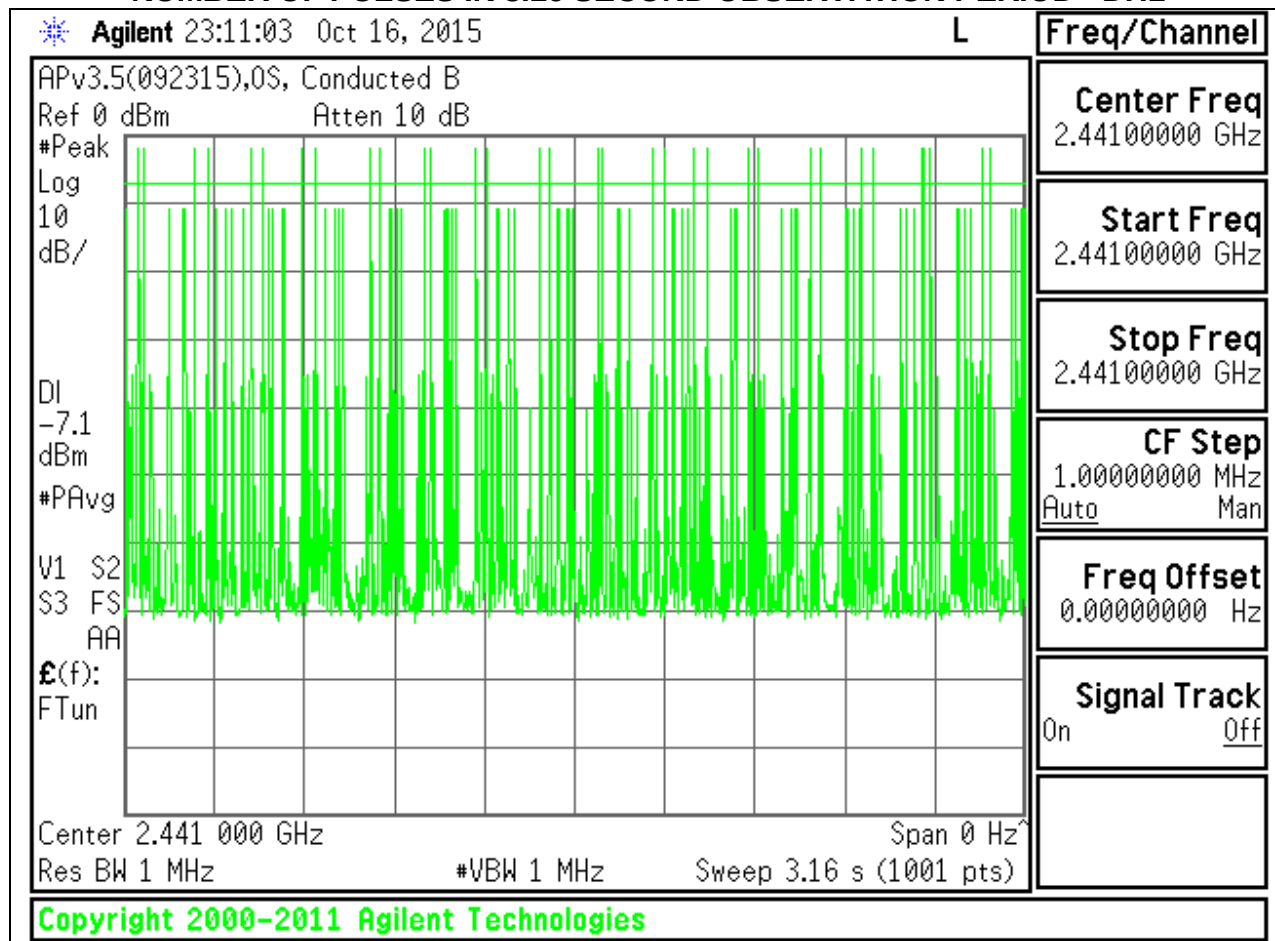


### PULSE WIDTH - DH3

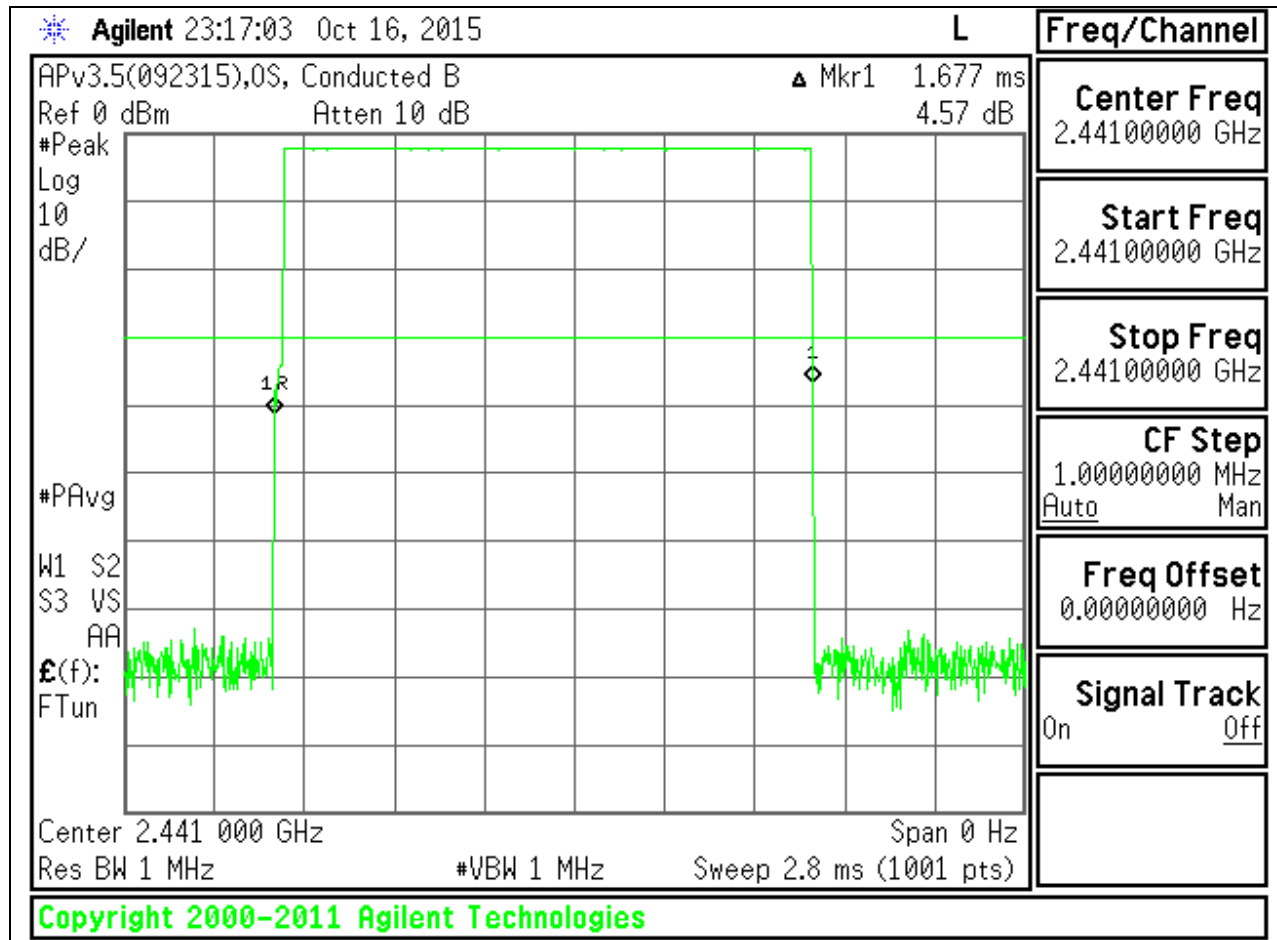


### NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

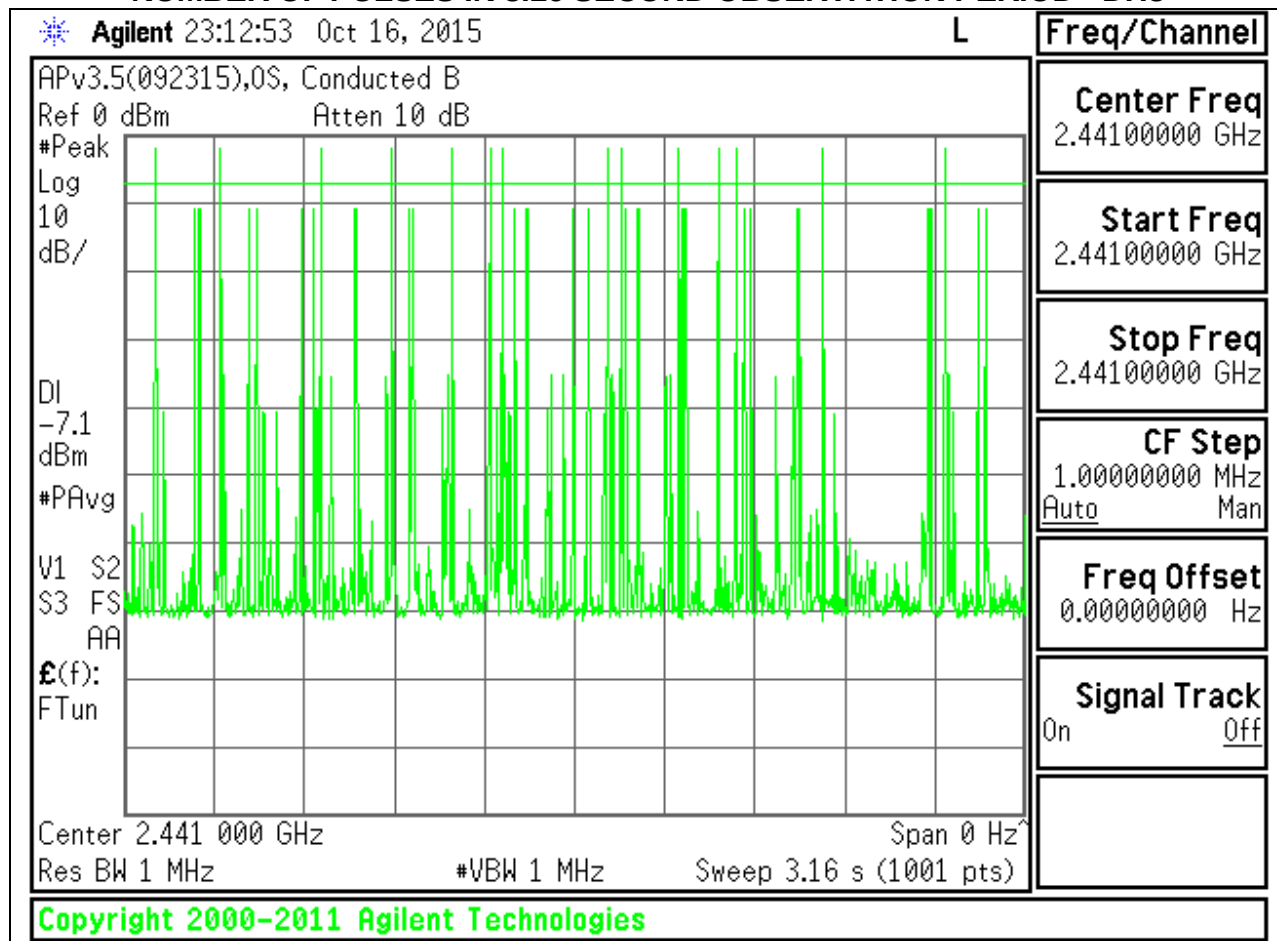

# PULSE WIDTH - DH5

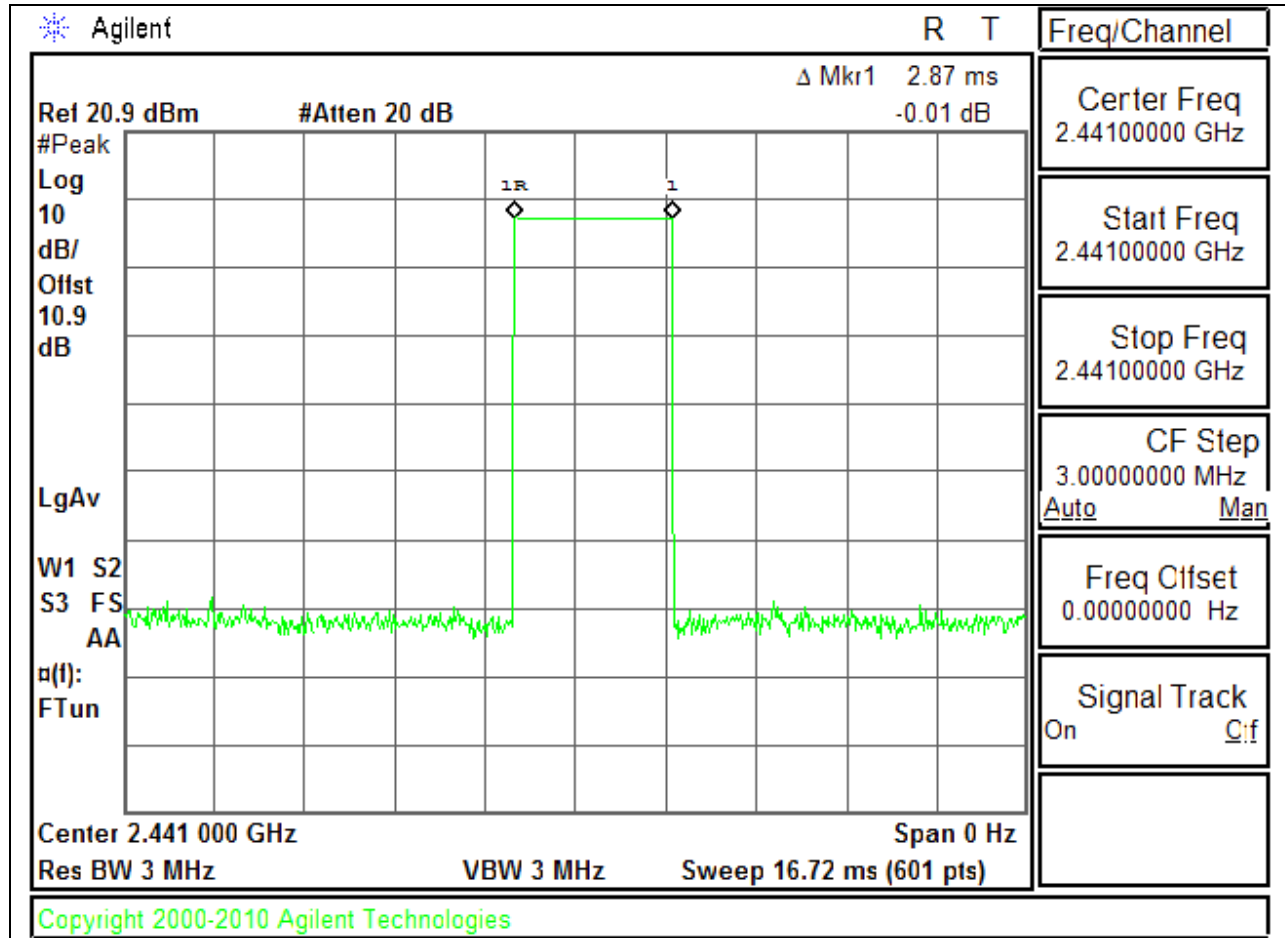

# NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

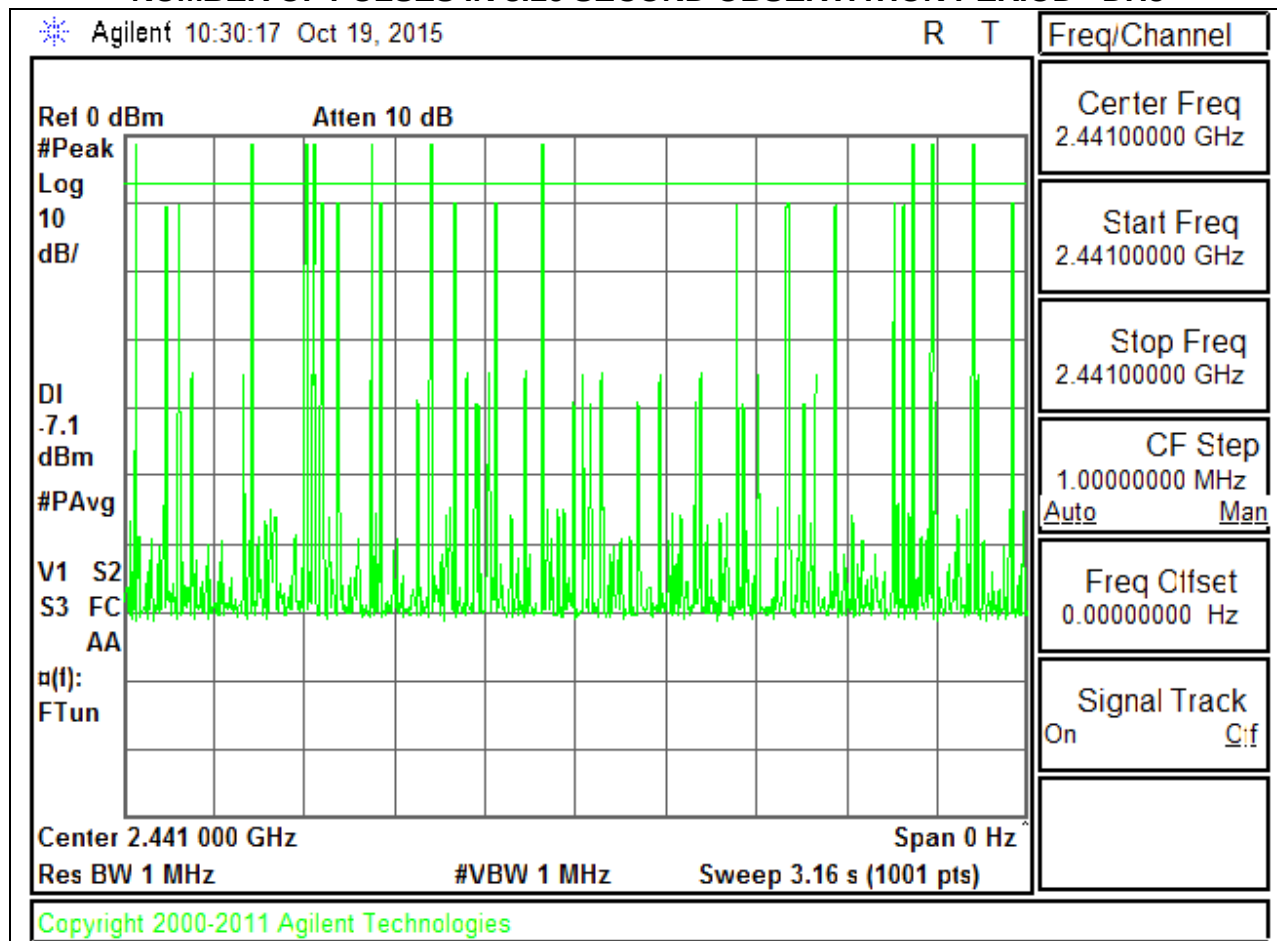

## 8.6. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-247 5.4.2

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 8.6.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low     | 2402            | 7.21               | 21          | -13.79      |
| Middle  | 2441            | 10.63              | 21          | -10.37      |
| High    | 2480            | 9.29               | 21          | -11.71      |
| Worst   |                 | 10.63              |             | -10.37      |


#### 8.6.2. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|--------------------|-------------|-------------|
| Low     | 2402            | 6.92               | 21          | -14.08      |
| Middle  | 2441            | 9.97               | 21          | -11.03      |
| High    | 2480            | 8.99               | 21          | -12.01      |
| Worst   |                 | 9.97               |             | -11.03      |


## 8.6.1. OUTPUT POWER PLOTS

### GFSK OUTPUT POWER


#### LOW CHANNEL

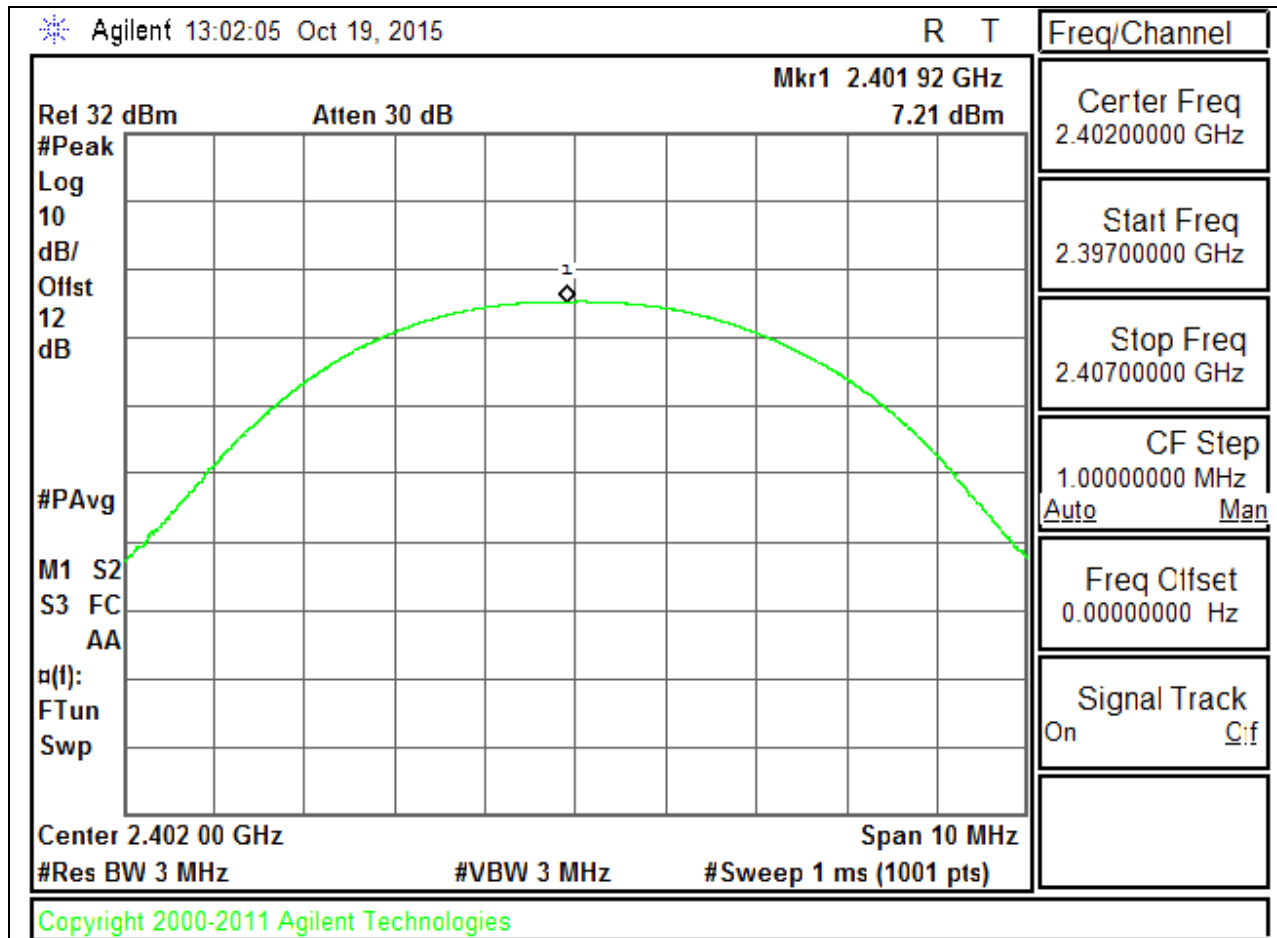

# MID CHANNEL

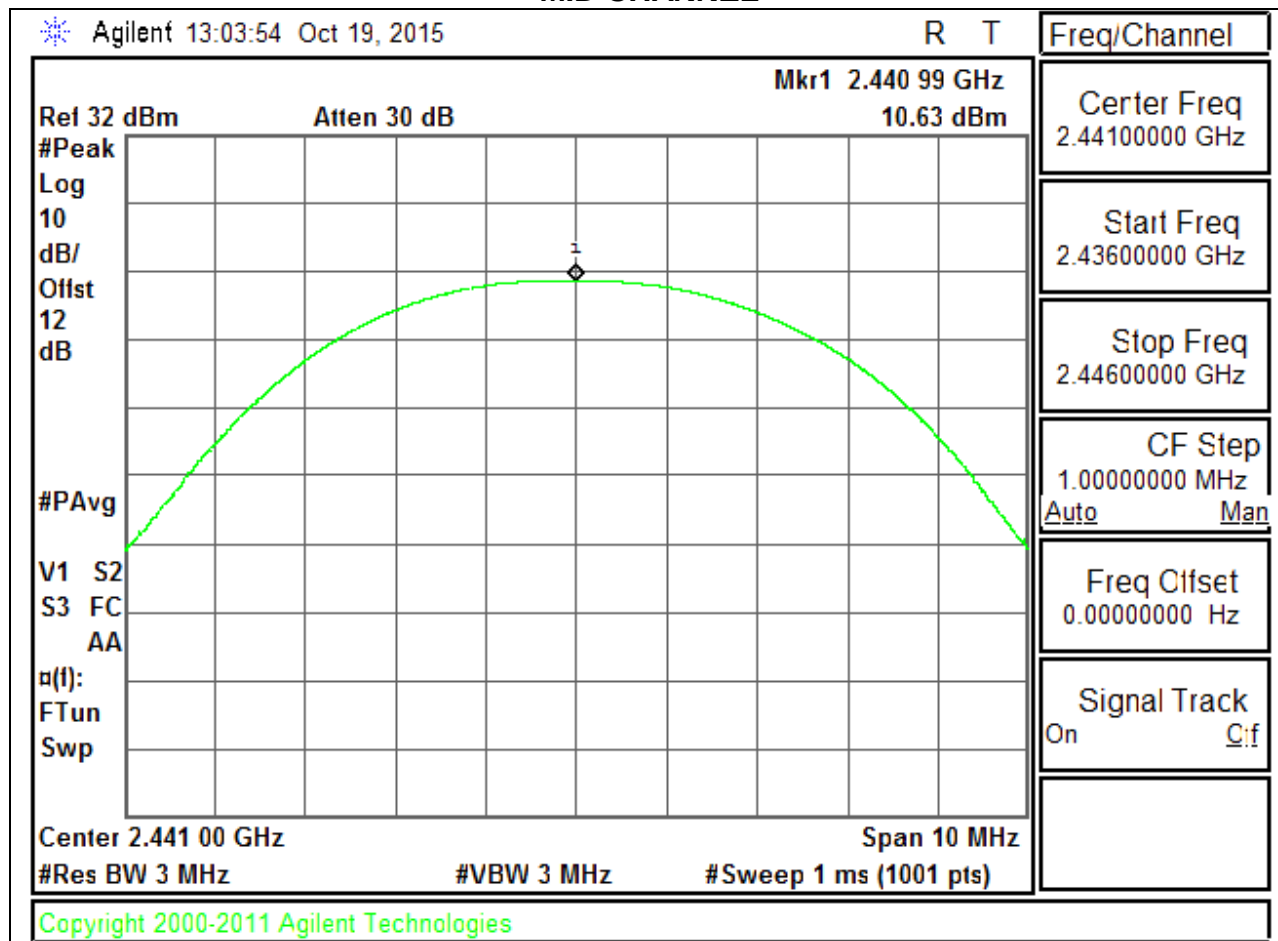


# HIGH CHANNEL

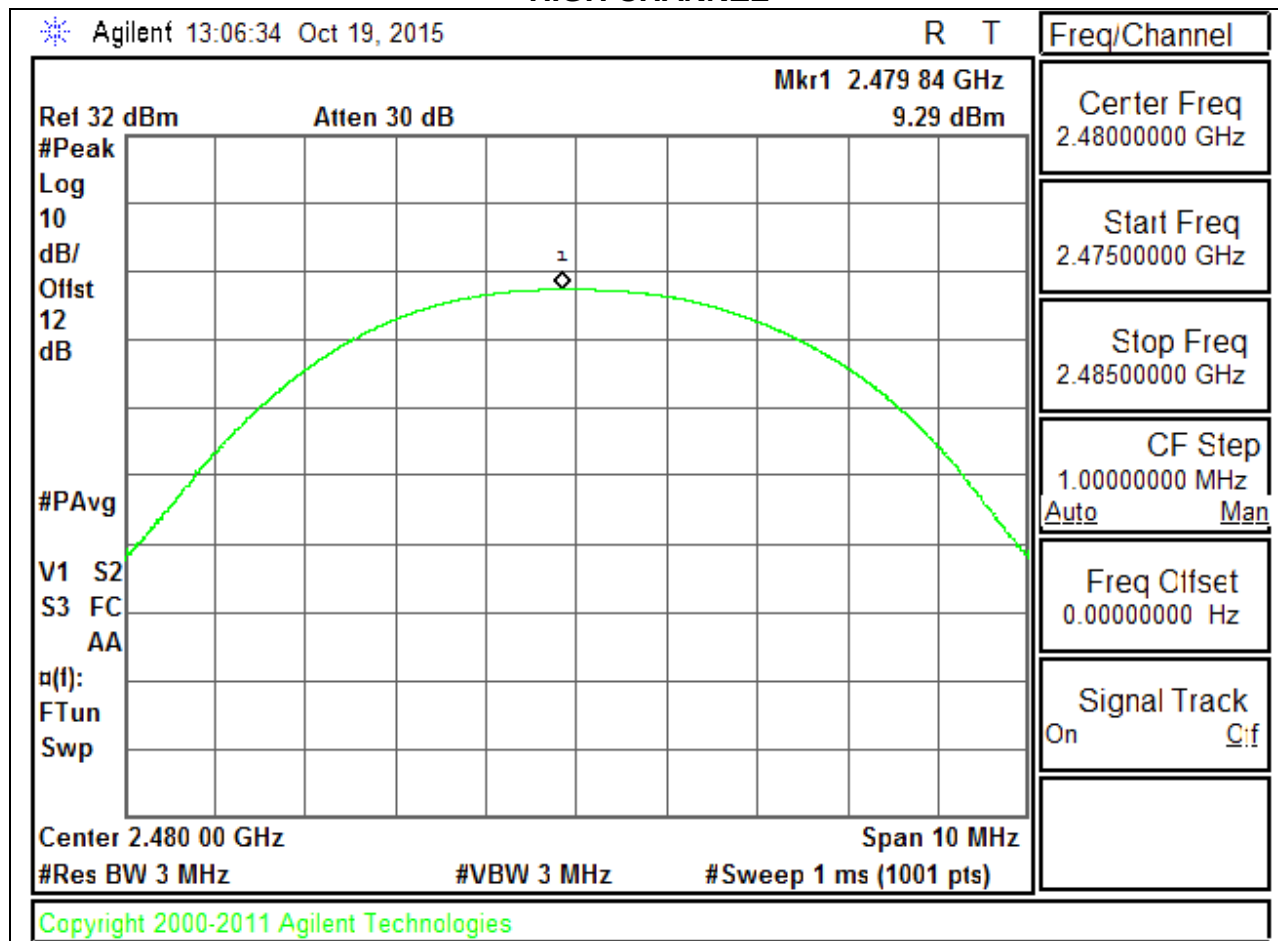


**8PSK OUTPUT POWER**


**LOW CHANNEL**

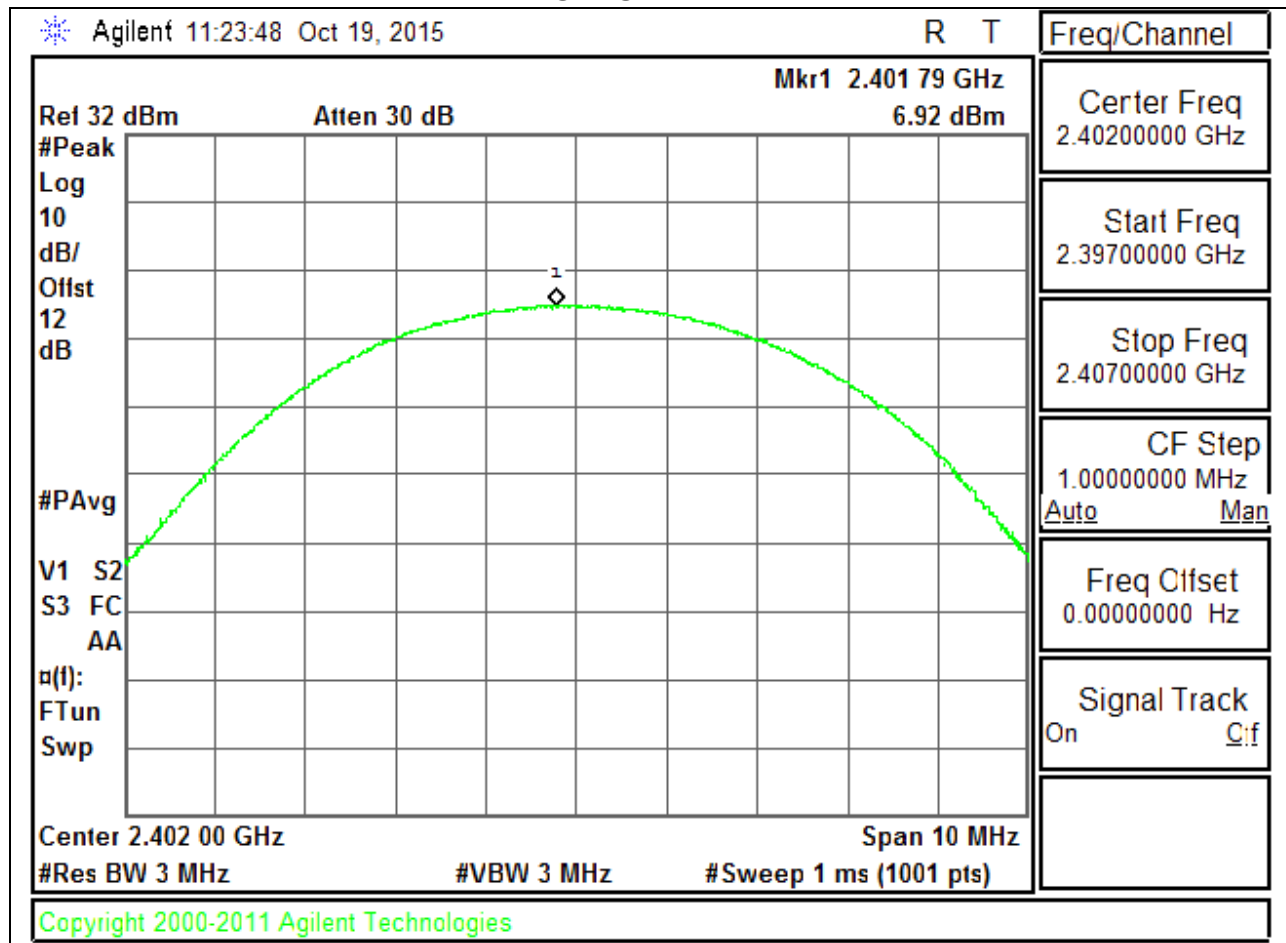

# MID CHANNEL

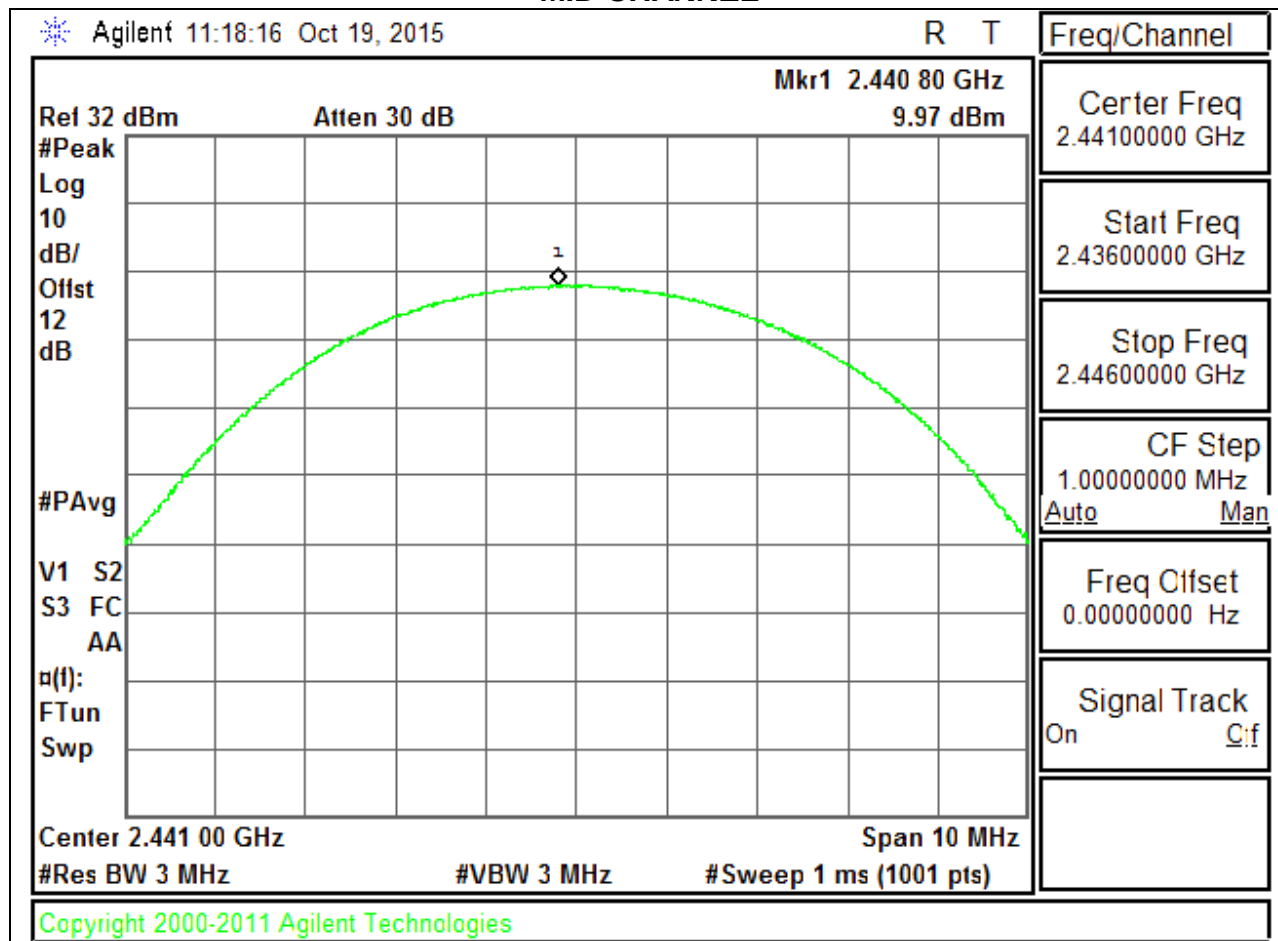

# HIGH CHANNEL

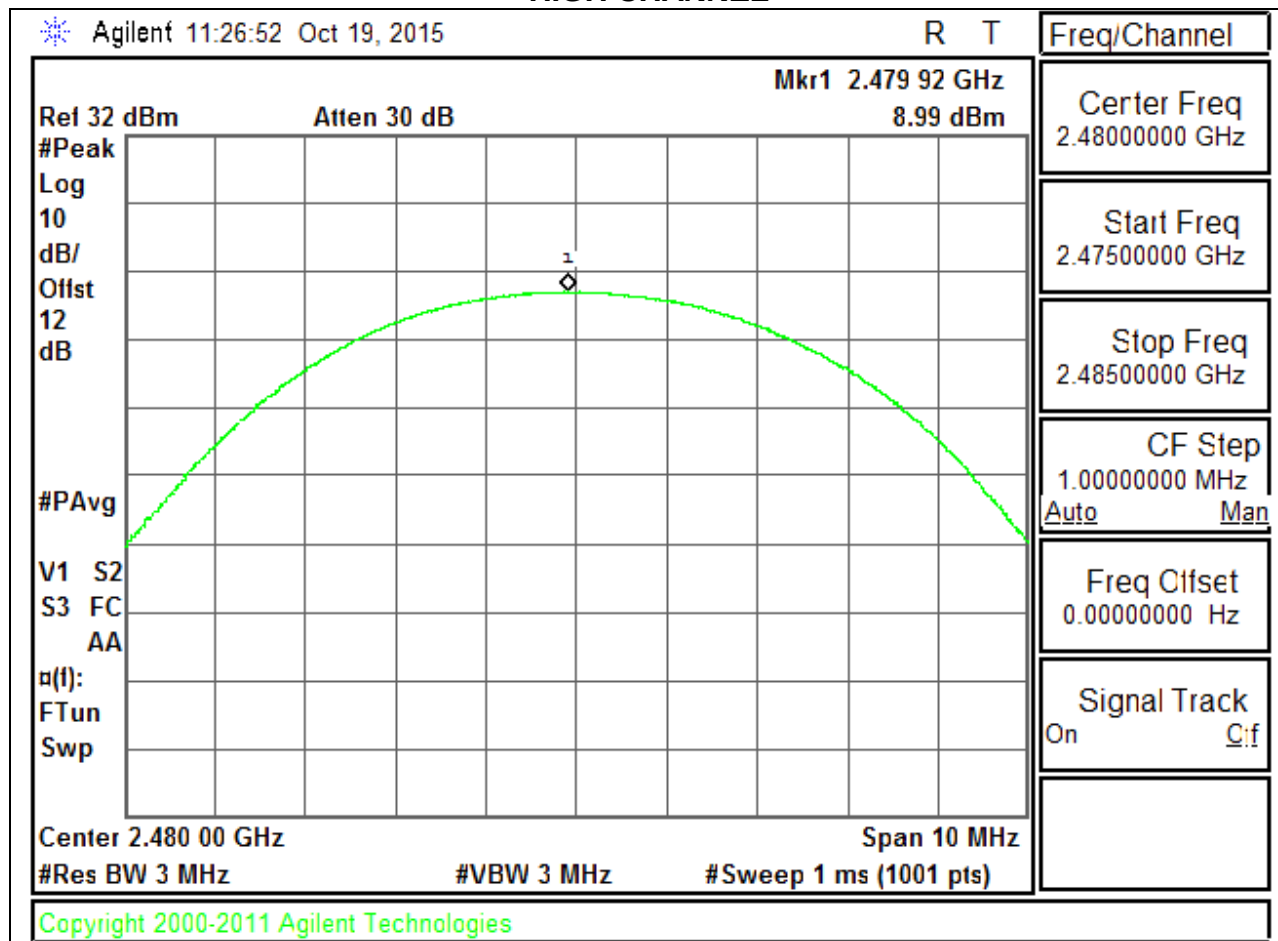

## 8.7. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 8.7.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low     | 2402            | 6.30                |
| Middle  | 2441            | 8.90                |
| High    | 2480            | 7.21                |
| Worst   |                 | 8.90                |

#### 8.7.2. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency (MHz) | Average Power (dBm) |
|---------|-----------------|---------------------|
| Low     | 2402            | 3.50                |
| Middle  | 2441            | 6.50                |
| High    | 2480            | 4.90                |
| Worst   |                 | 6.50                |

## **8.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

IC RSS-247 5.5

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### **RESULTS**


## 8.8.1. BASIC DATA RATE GFSK MODULATION

### SPURIOUS EMISSIONS, LOW CHANNEL

#### LOW CHANNEL BANDEDGE

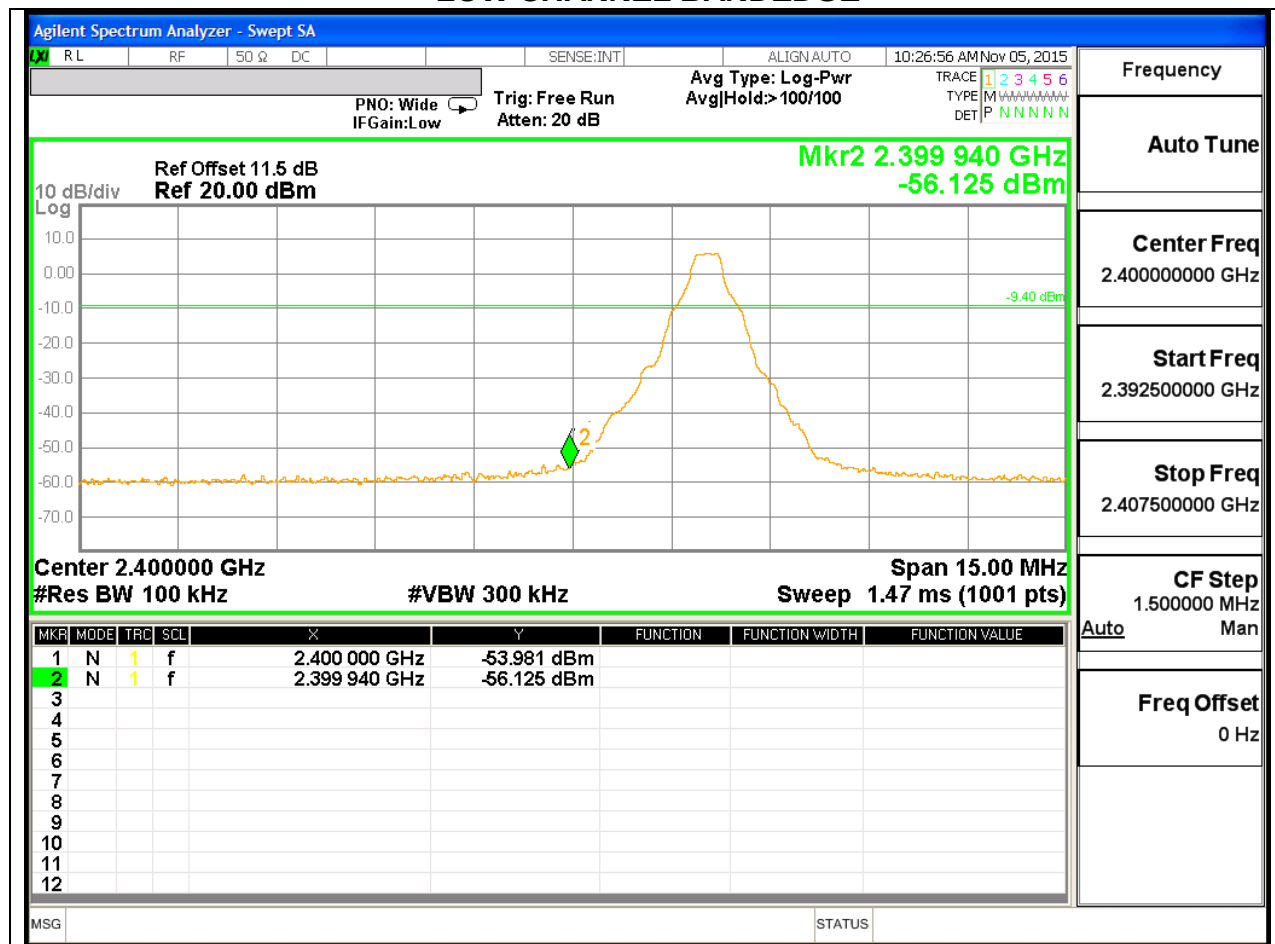


## LOW CHANNEL SPURIOUS

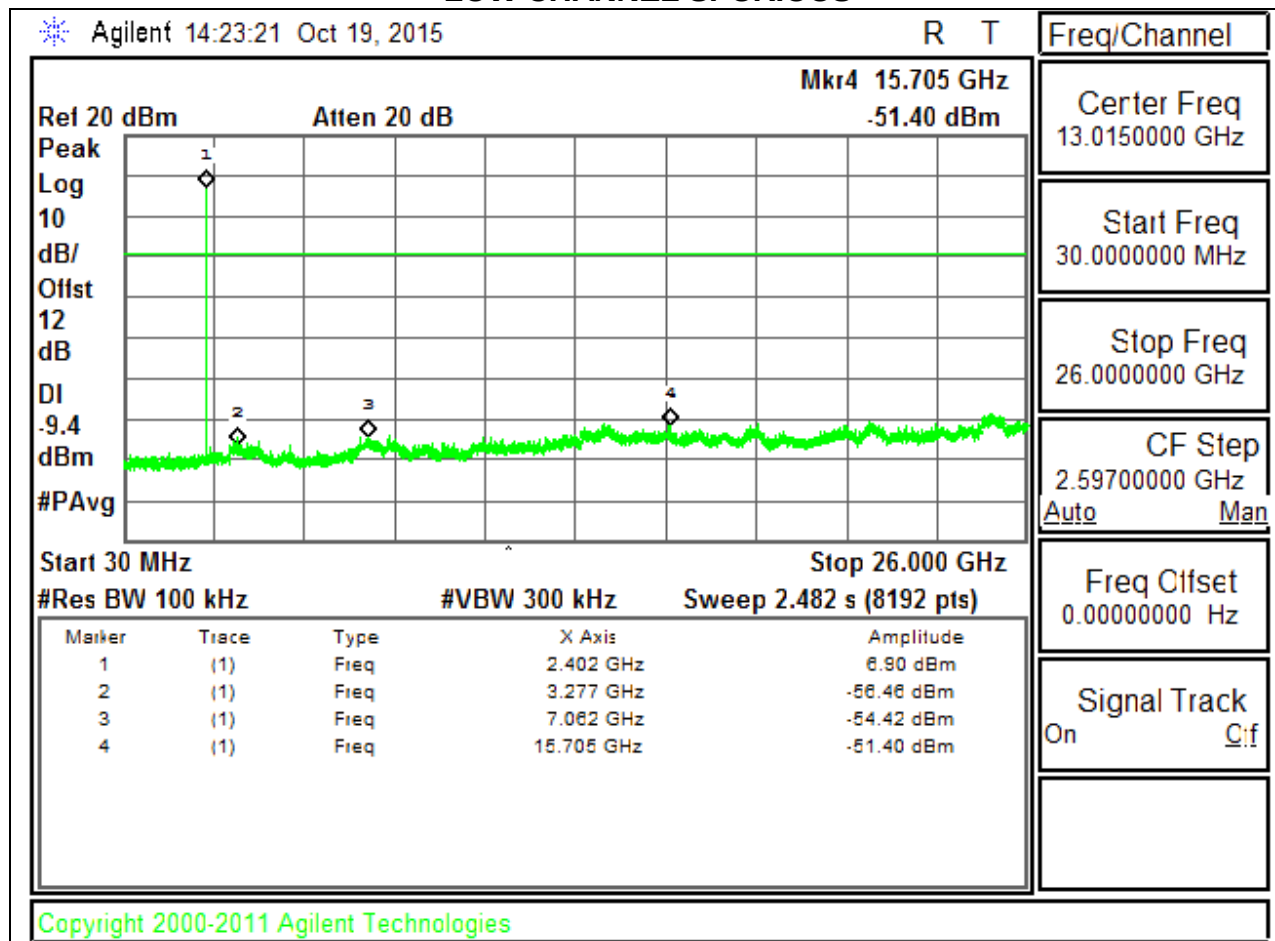


**SPURIOUS EMISSIONS, MID CHANNEL**

**MID CHANNEL BANDEDGE**

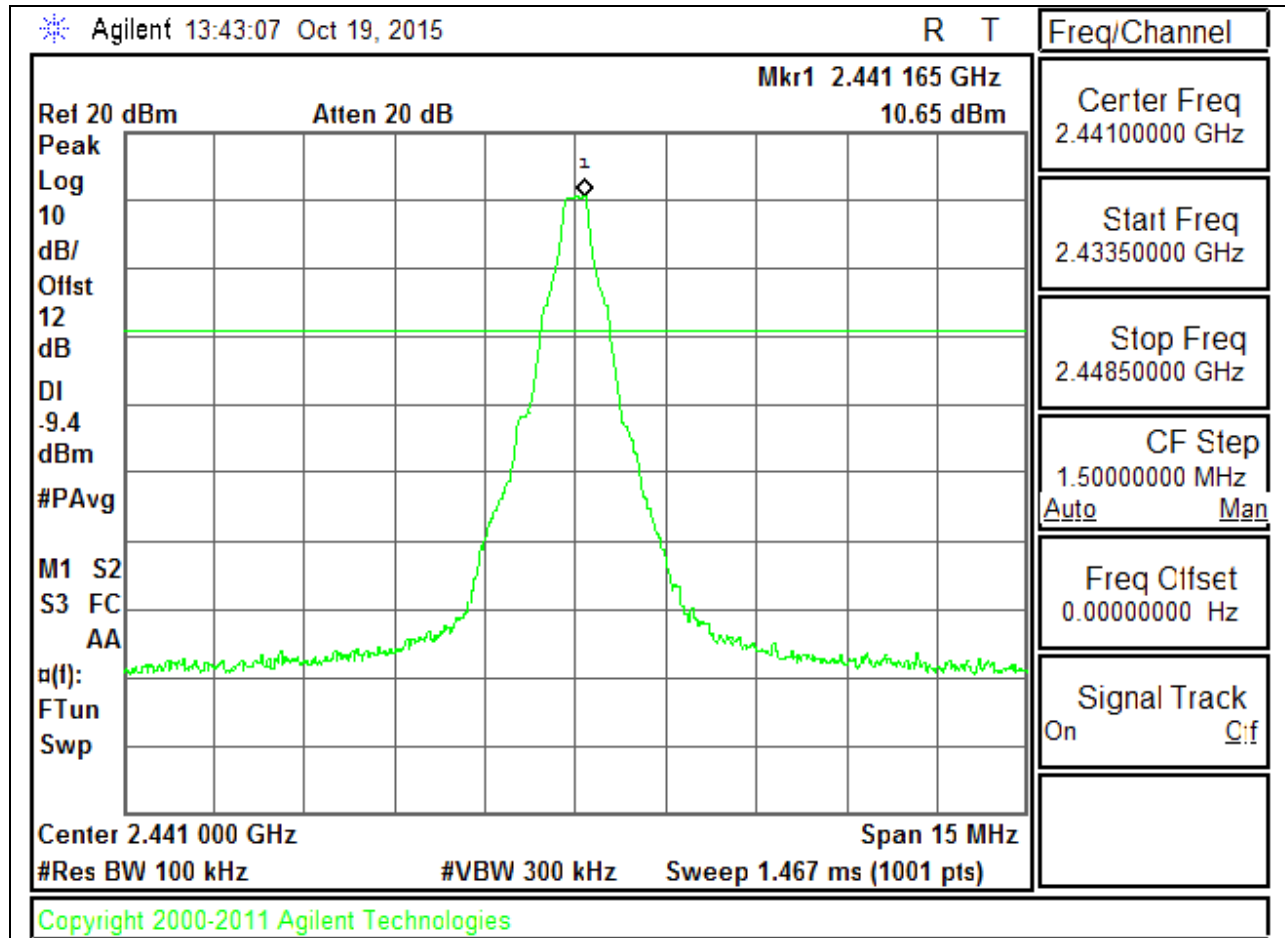


### MID CHANNEL SPURIOUS

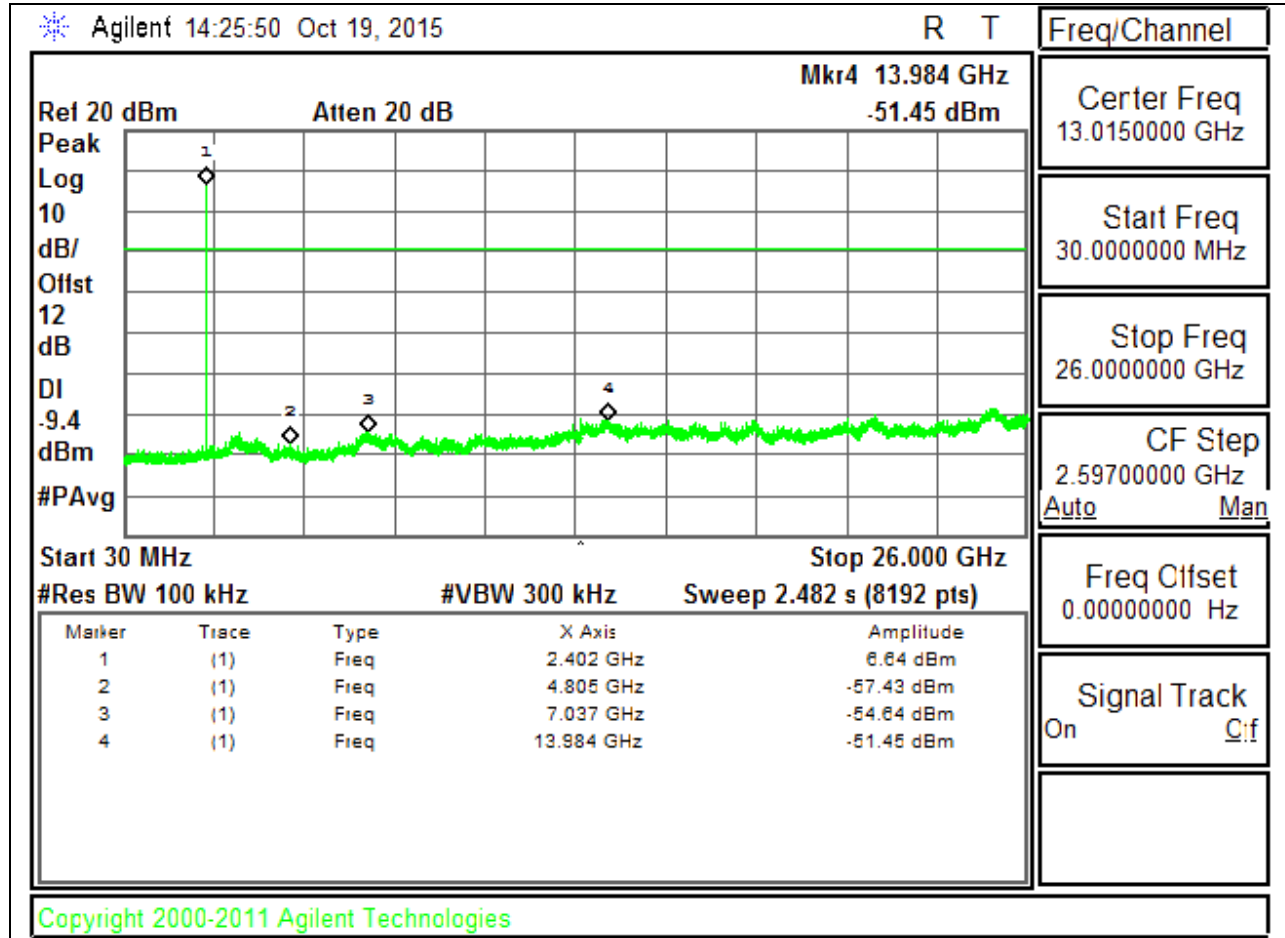


**SPURIOUS EMISSIONS, HIGH CHANNEL**

**HIGH CHANNEL BANDEDGE**

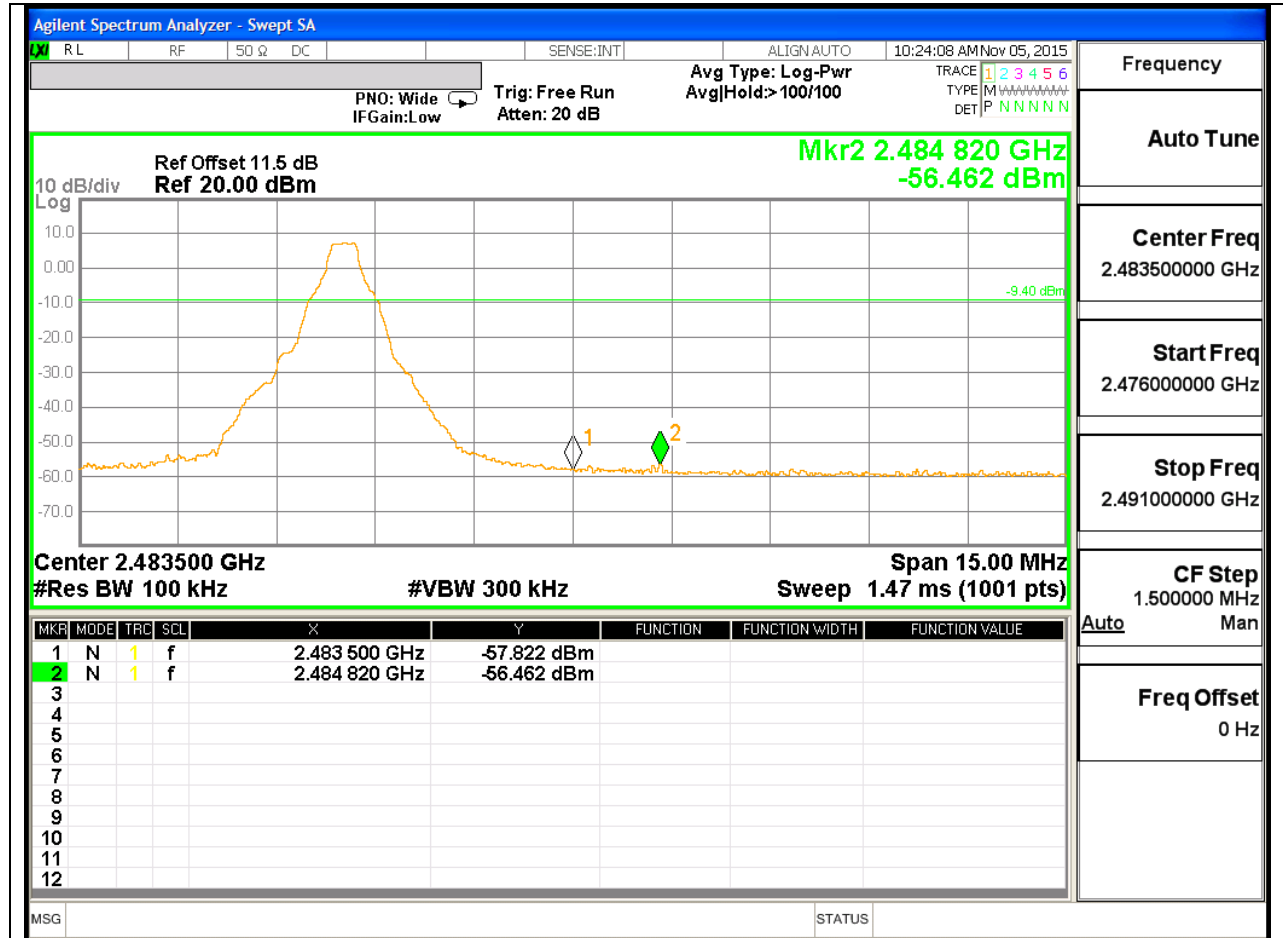


# HIGH CHANNEL SPURIOUS

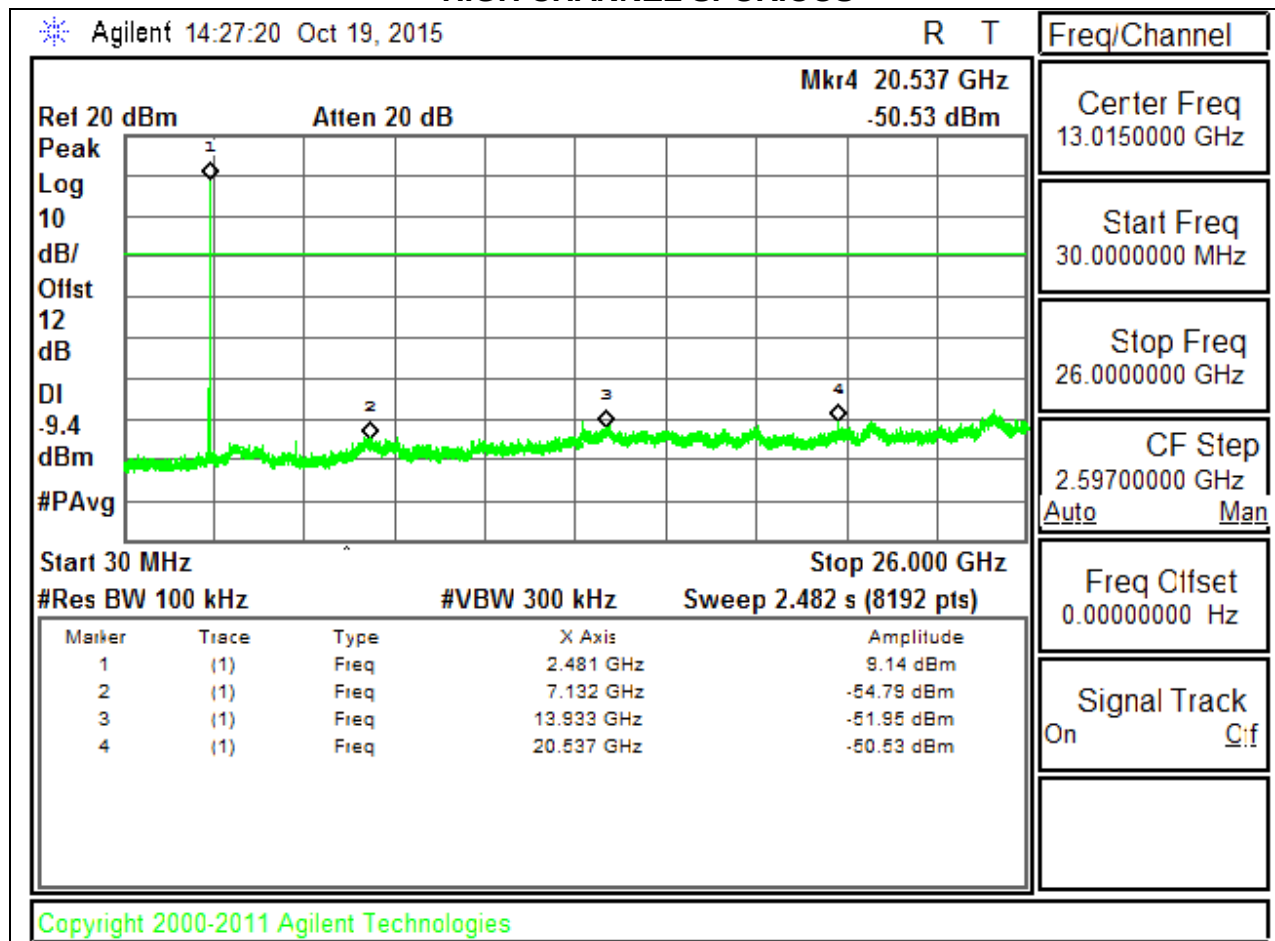


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

**LOW BANDEDGE WITH HOPPING ON**

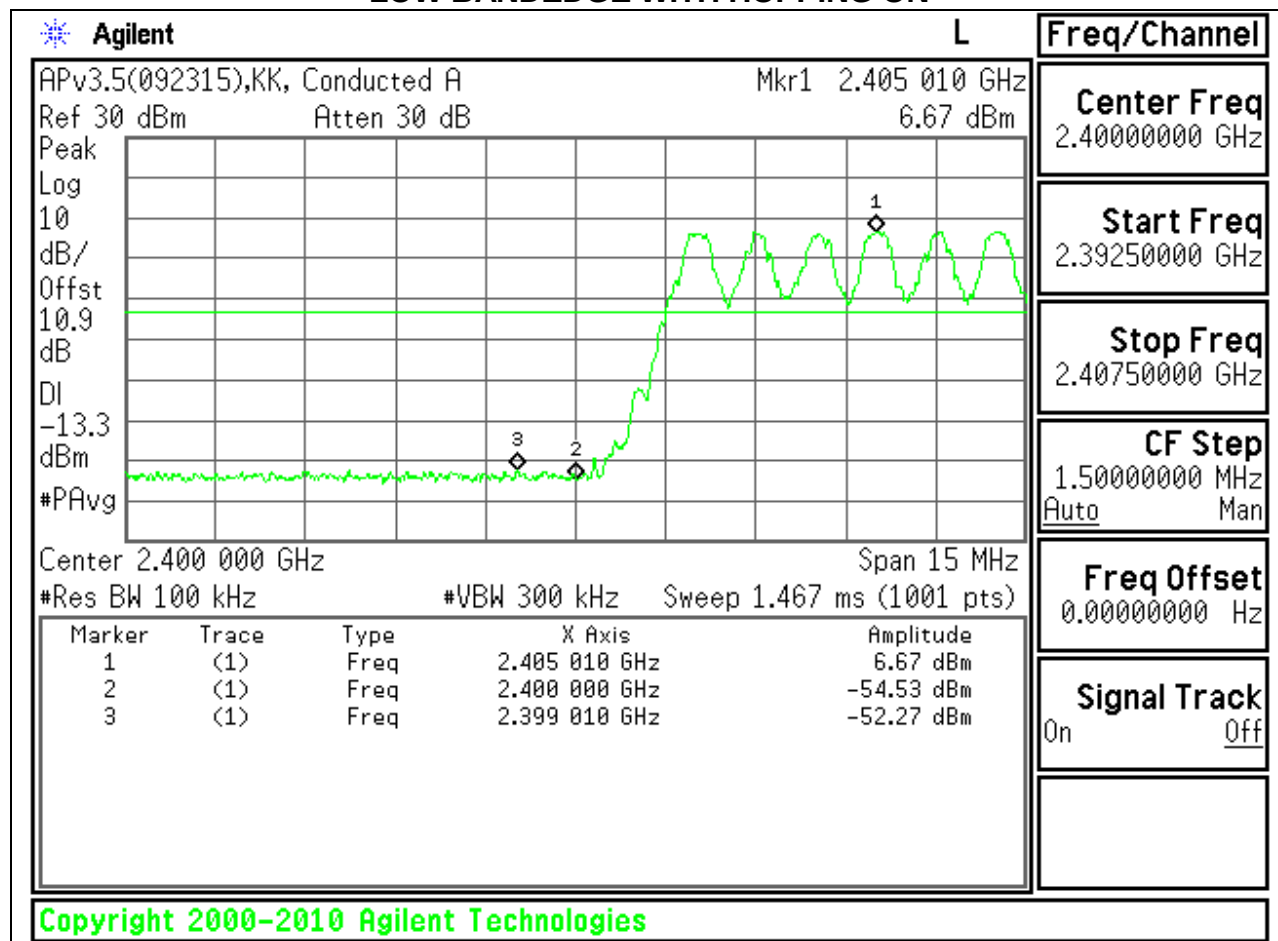


# HIGH BANDEDGE WITH HOPPING ON

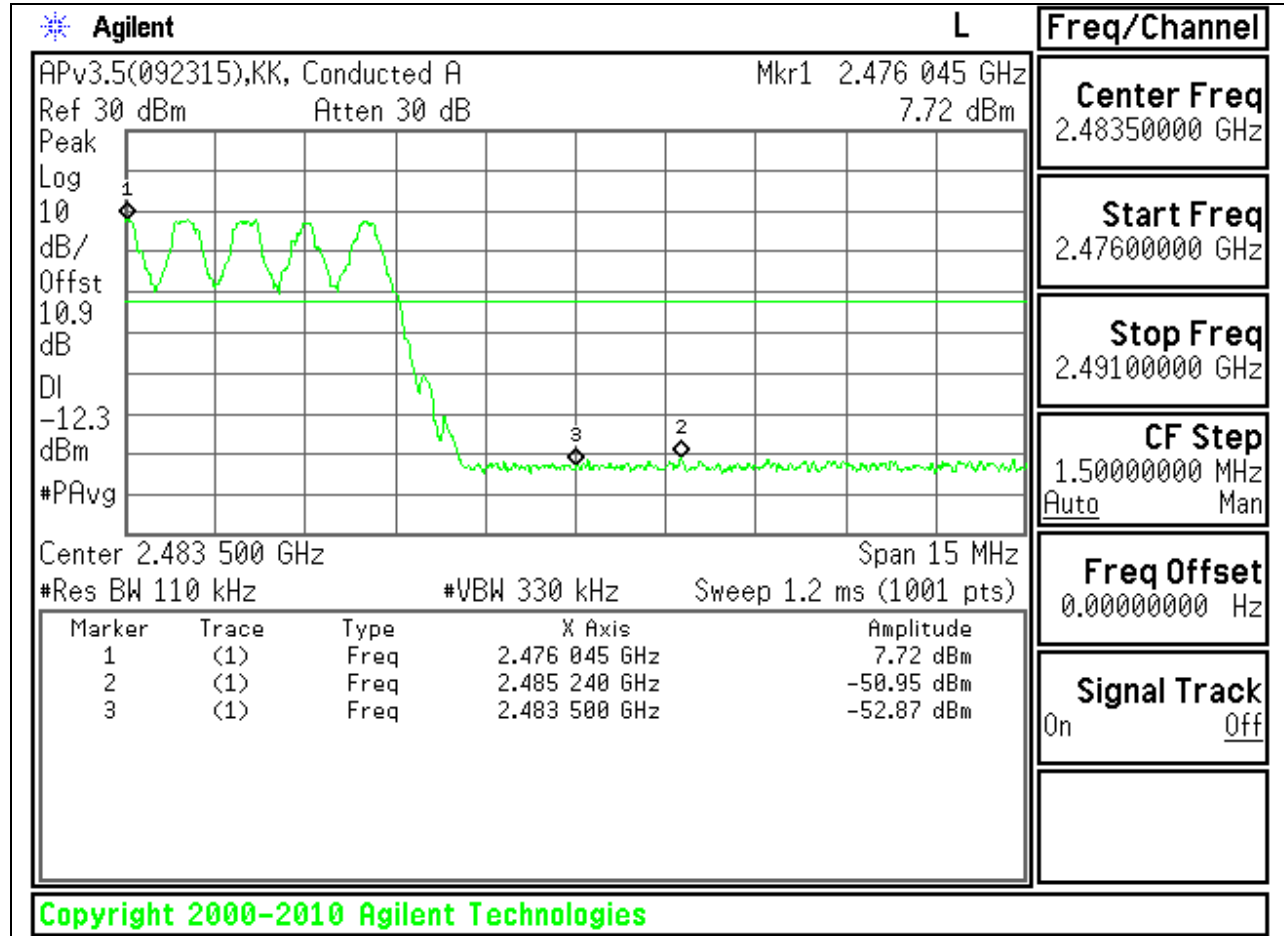


## 8.8.2. ENHANCED DATA RATE 8PSK MODULATION

### SPURIOUS EMISSIONS, LOW CHANNEL

#### LOW CHANNEL BANDEDGE

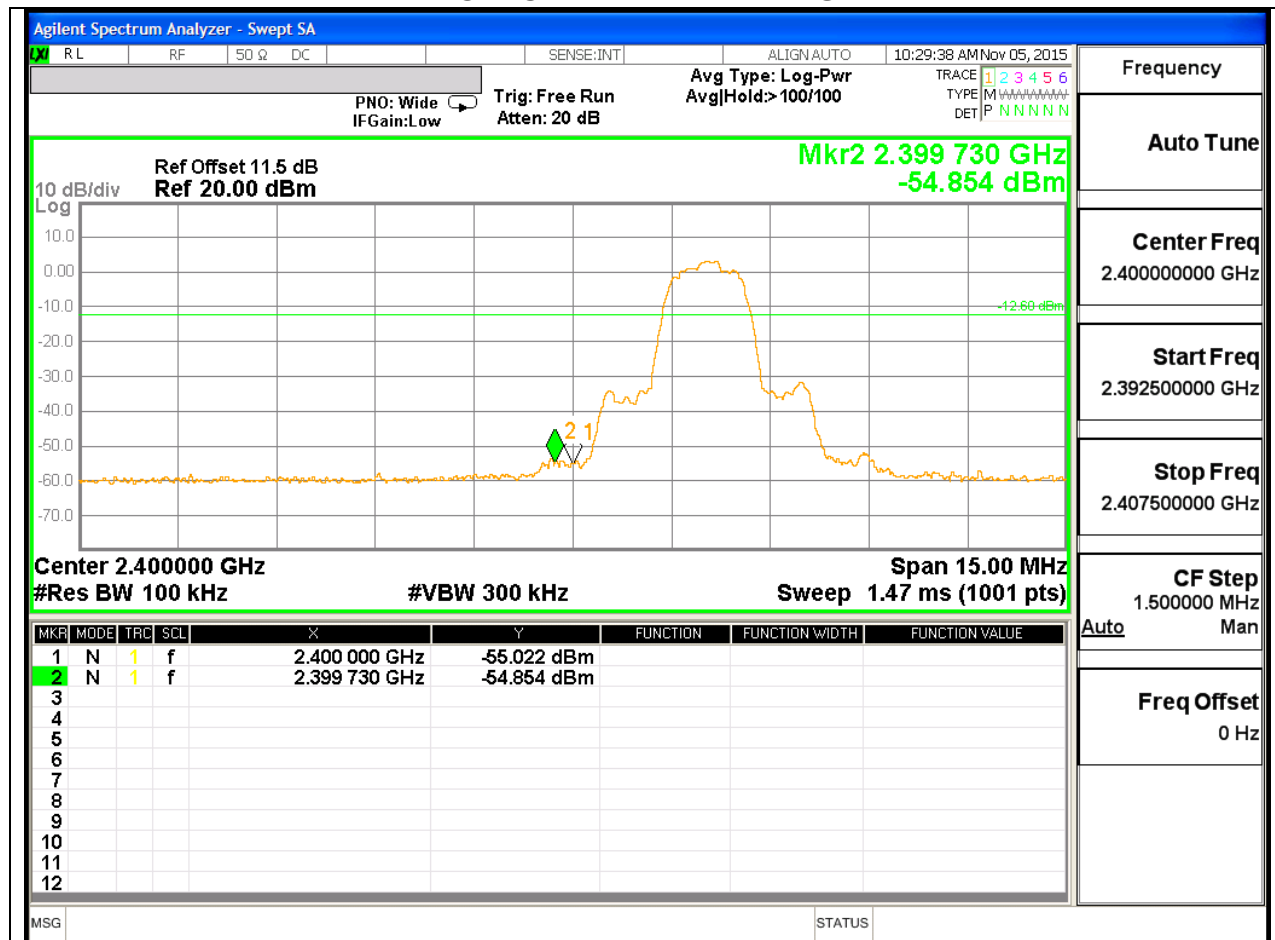


## LOW CHANNEL SPURIOUS

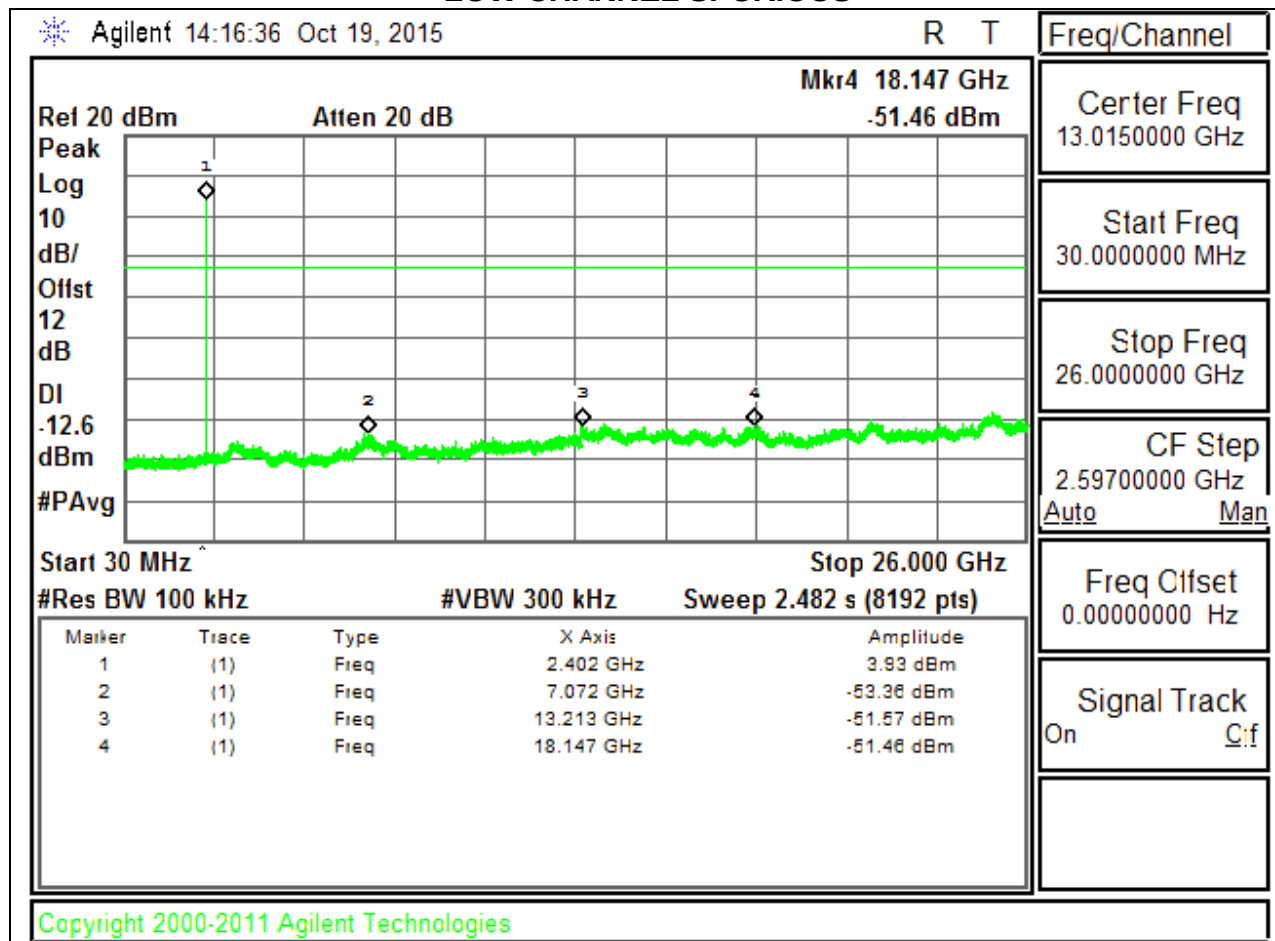


**SPURIOUS EMISSIONS, MID CHANNEL**

**MID CHANNEL BANDEDGE**

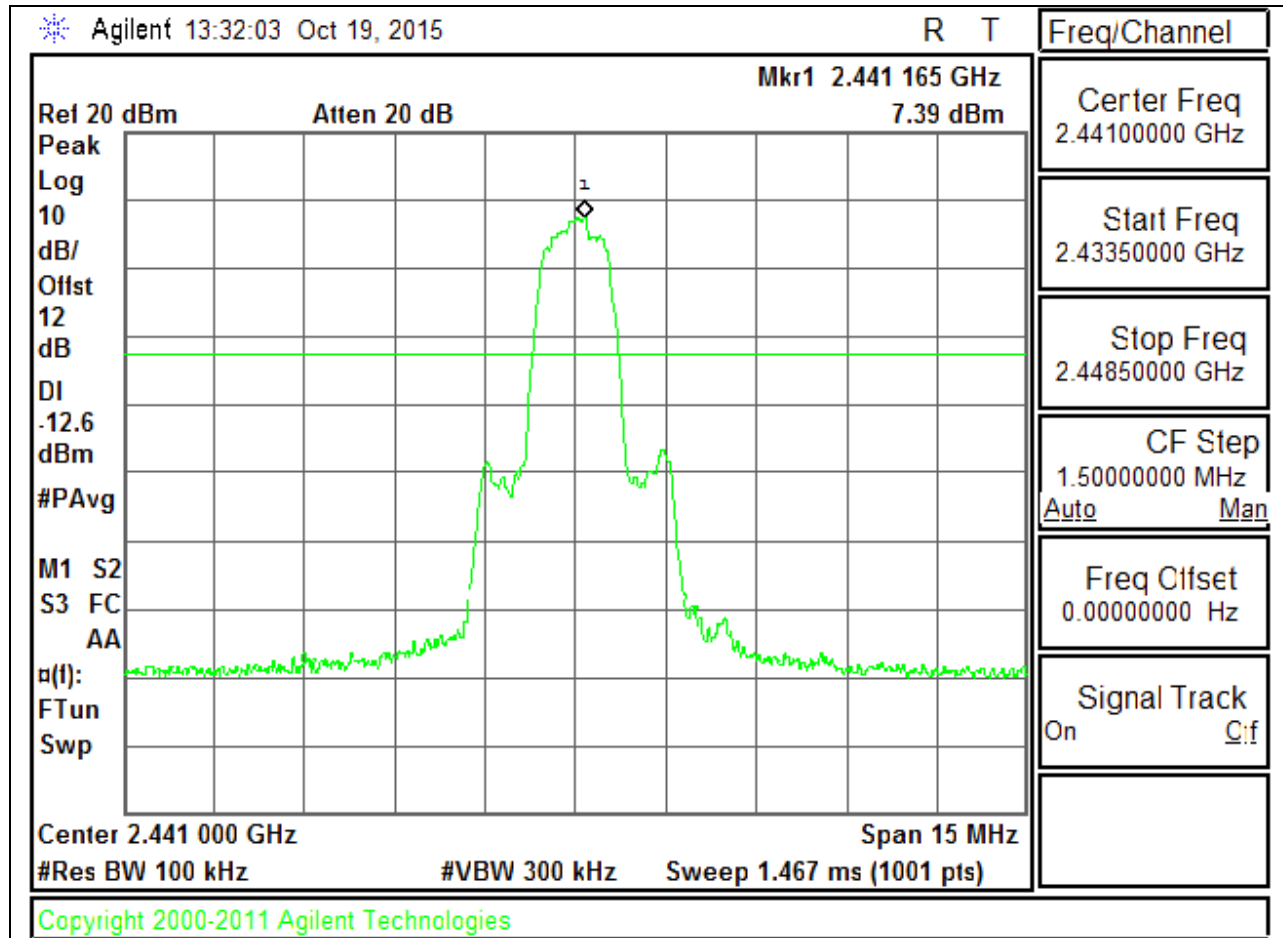


### MID CHANNEL SPURIOUS

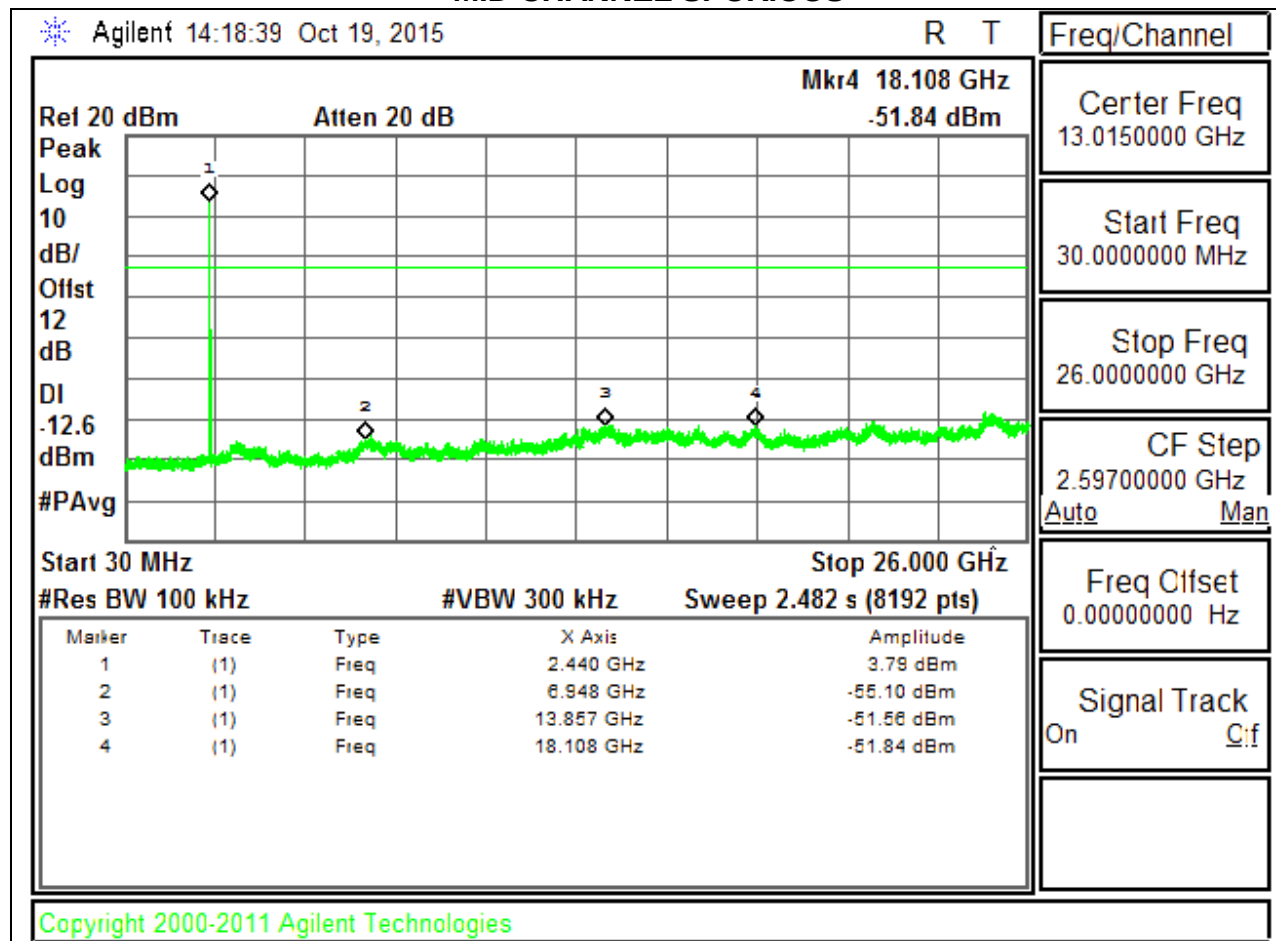


**SPURIOUS EMISSIONS, HIGH CHANNEL**

**HIGH CHANNEL BANDEDGE**

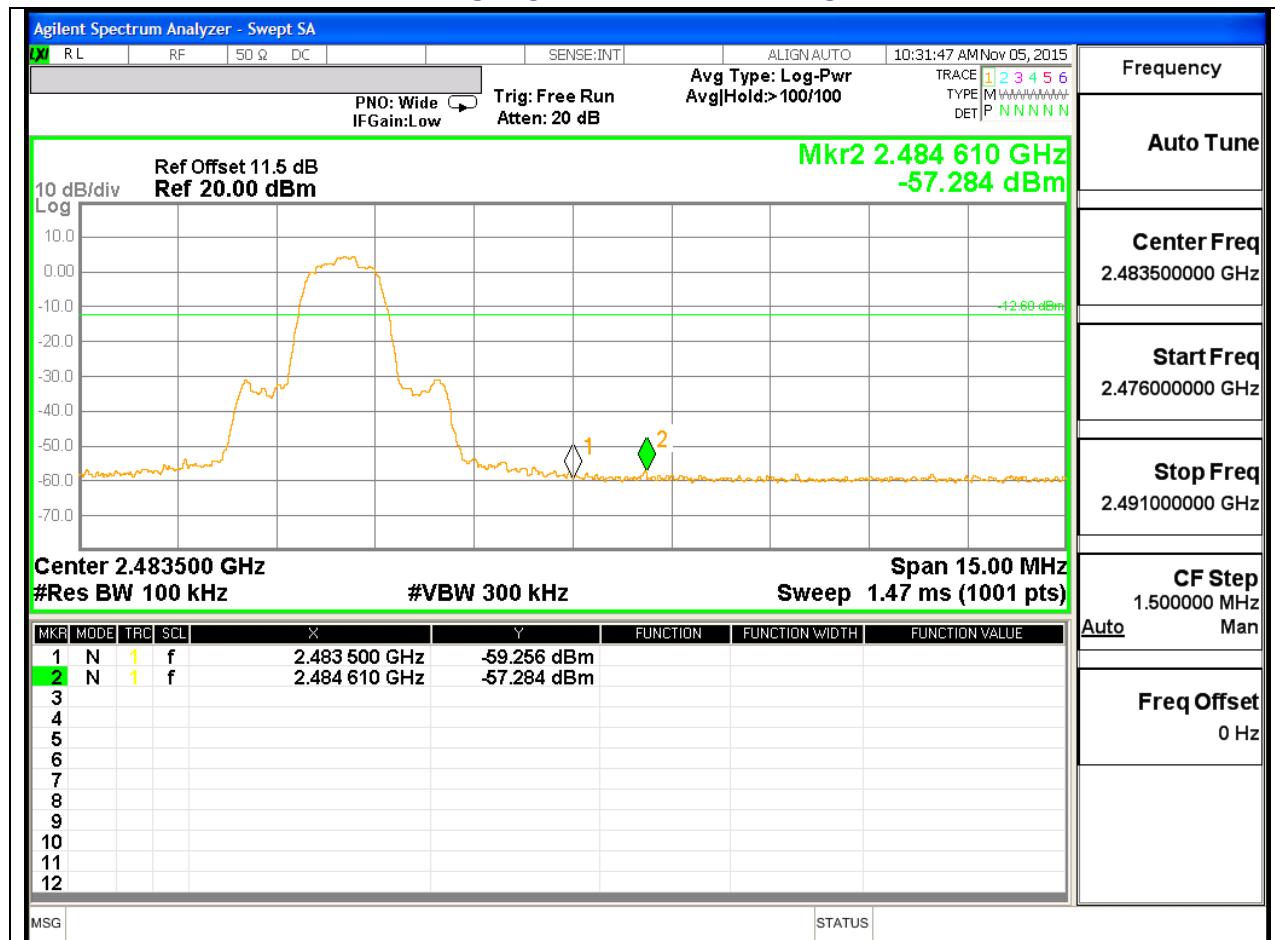


## HIGH CHANNEL SPURIOUS

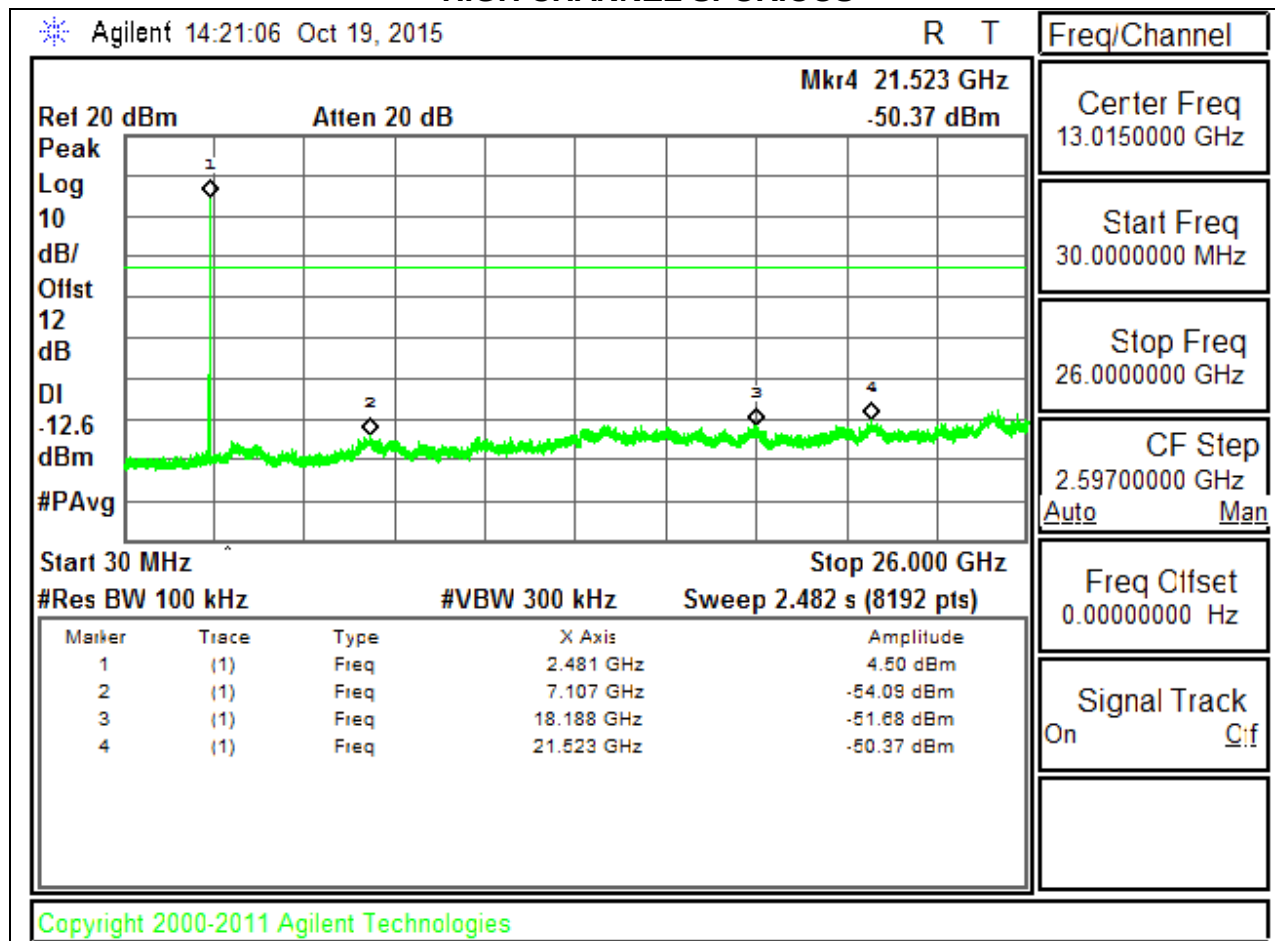


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

**LOW BANDEDGE WITH HOPPING ON**

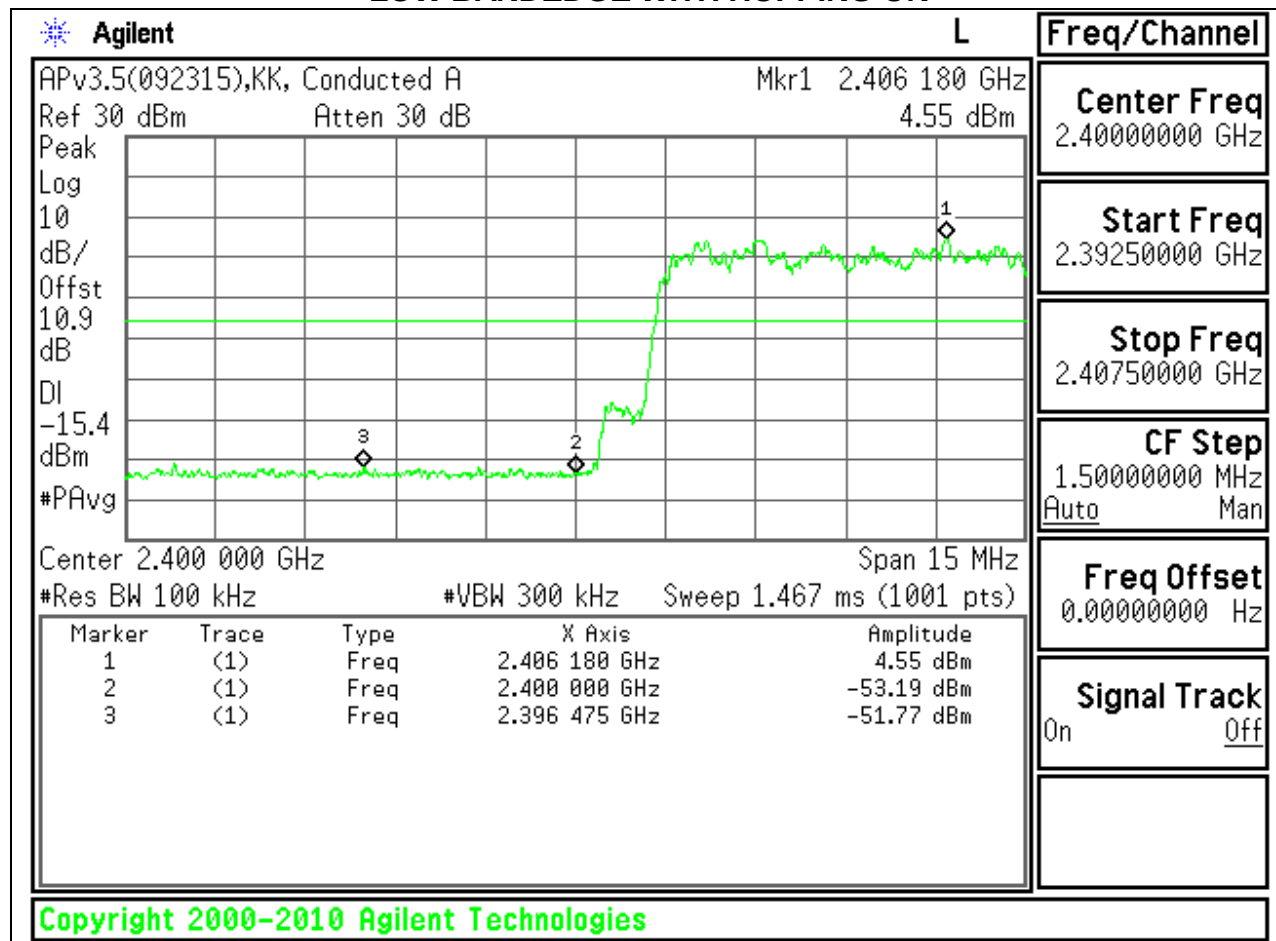

# HIGH BANDEDGE WITH HOPPING ON

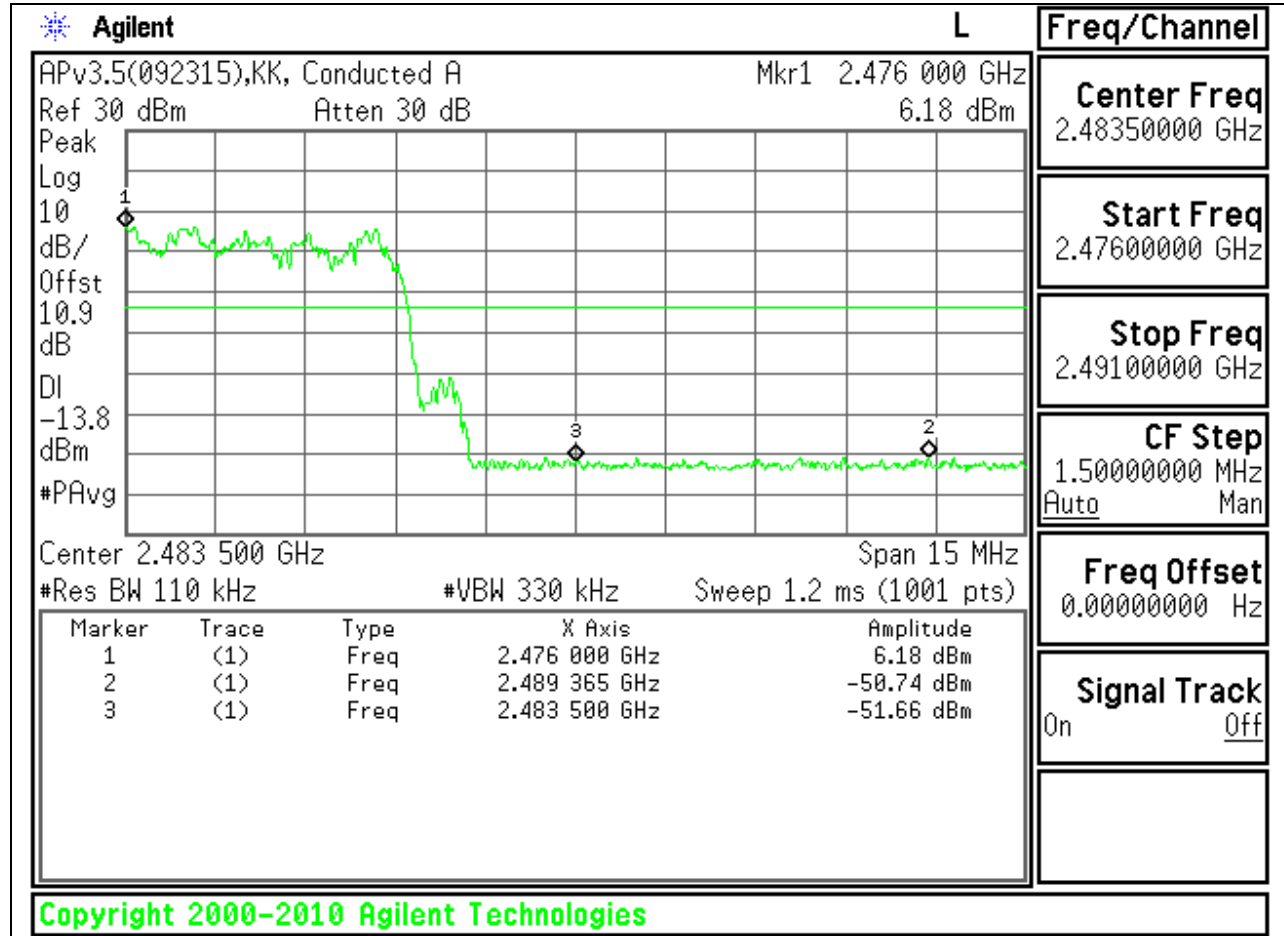

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-GEN Clause 8.9 (Transmitter)

IC RSS-GEN Clause 7 (Receiver)

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$GFSK = 1/T = 1 / 0.002884S = 347Hz$ .

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz

### 9.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL)


##### HORIZONTAL PEAK AND AVERAGE PLOT

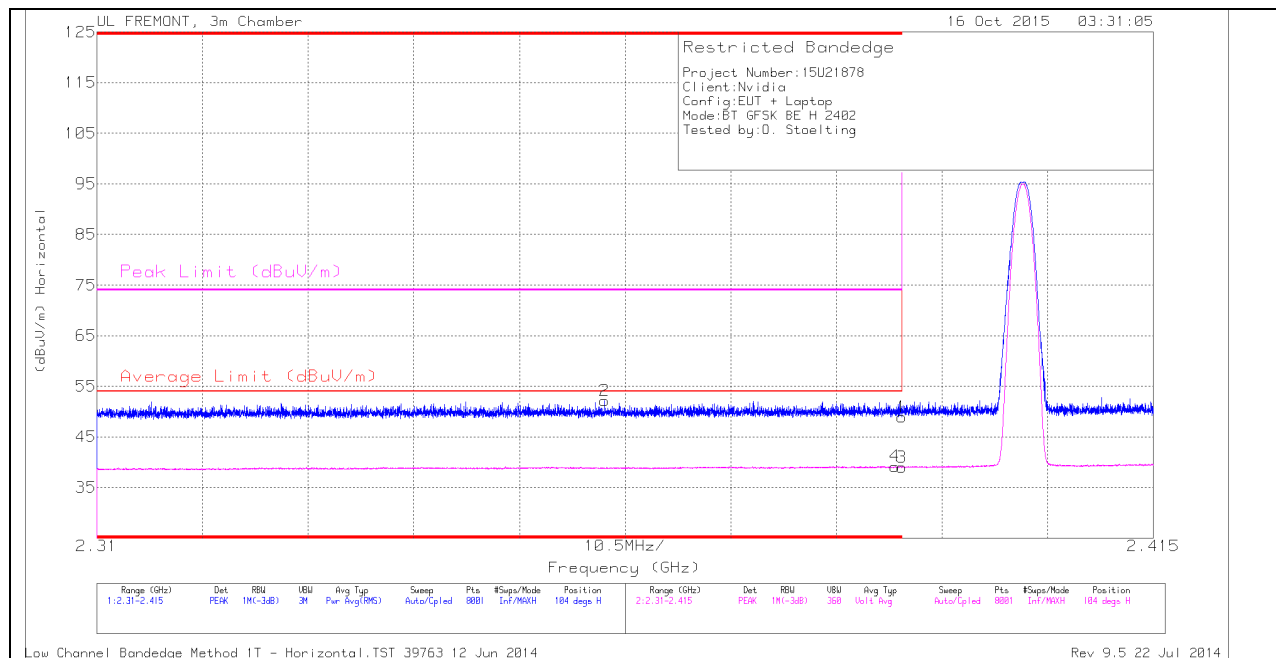

##### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/ Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 39.35                | PK   | 32             | -22.4                  | 48.95                      | -                      | -           | 74                  | -25.05         | 104            | 381         | H        |
| 2      | * 2.36          | 42.7                 | PK   | 31.9           | -22.5                  | 52.1                       | -                      | -           | 74                  | -21.9          | 104            | 381         | H        |
| 3      | * 2.39          | 29.36                | VB1T | 32             | -22.4                  | 38.96                      | 54                     | -15.04      | -                   | -              | 104            | 381         | H        |
| 4      | * 2.389         | 29.58                | VB1T | 32             | -22.4                  | 39.18                      | 54                     | -14.82      | -                   | -              | 104            | 381         | H        |

### VERTICAL PEAK AND AVERAGE PLOT

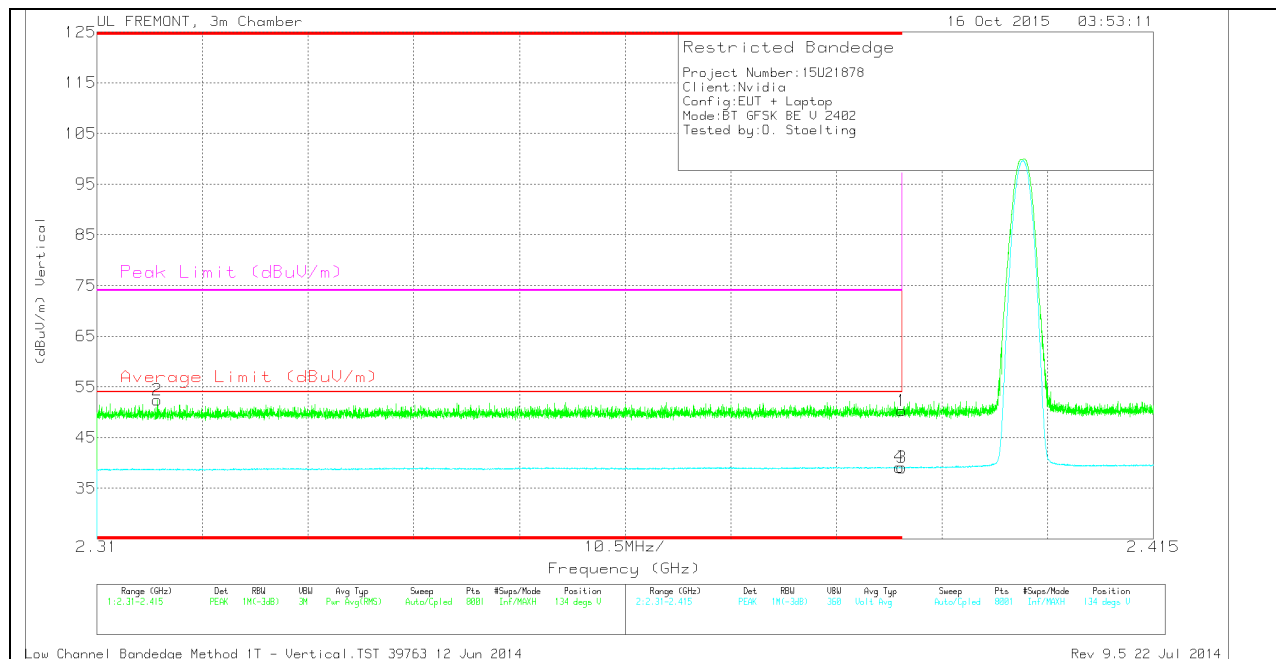


### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.316         | 43.05                | PK   | 31.7          | -22.4                  | 52.35                      | -                      | -           | 74                  | -21.65         | 134            | 327         | V        |
| 1      | * 2.39          | 40.69                | PK   | 32            | -22.4                  | 50.29                      | -                      | -           | 74                  | -23.71         | 134            | 327         | V        |
| 3      | * 2.39          | 29.46                | VB1T | 32            | -22.4                  | 39.06                      | 54                     | -14.94      | -                   | -              | 134            | 327         | V        |
| 4      | * 2.39          | 29.58                | VB1T | 32            | -22.4                  | 39.18                      | 54                     | -14.82      | -                   | -              | 134            | 327         | V        |

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

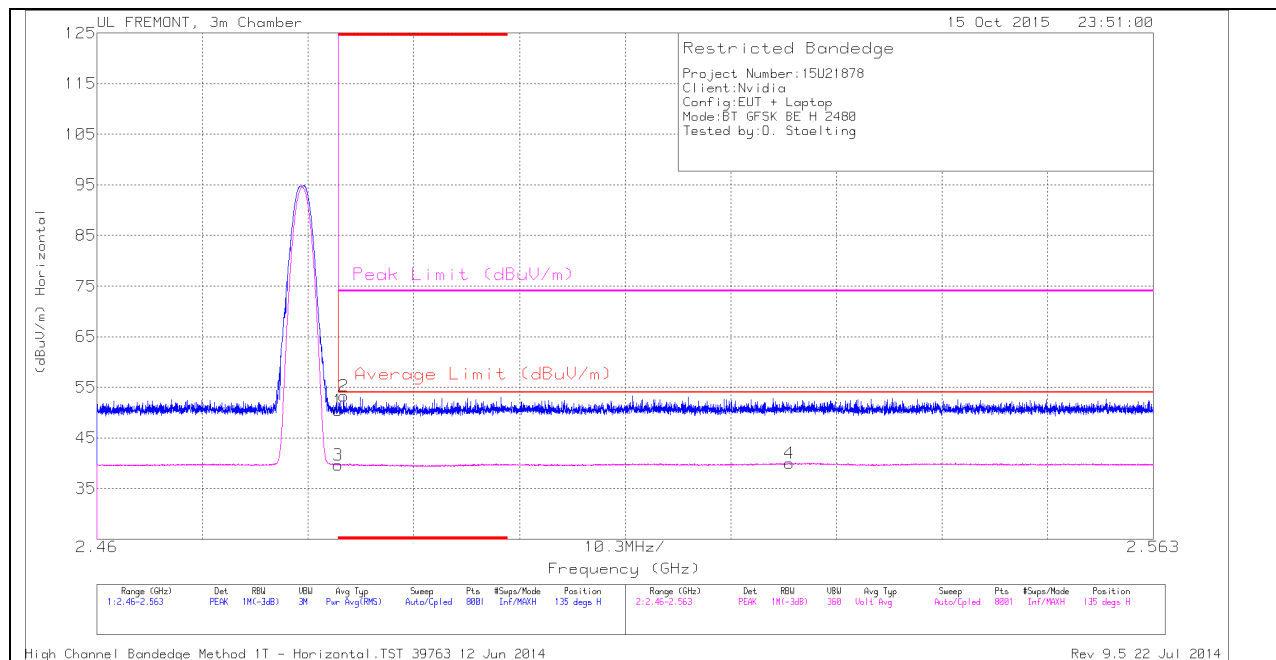

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 40.21                | PK   | 32.3           | -22.1                  | 50.41                      | -                      | -           | 74                  | -23.59         | 135            | 113         | H        |
| 2      | * 2.484         | 43.12                | PK   | 32.3           | -22.1                  | 53.32                      | -                      | -           | 74                  | -20.68         | 135            | 113         | H        |
| 3      | * 2.484         | 29.47                | VB1T | 32.3           | -22.1                  | 39.67                      | 54                     | -14.33      | -                   | -              | 135            | 113         | H        |
| 4      | 2.528           | 29.63                | VB1T | 32.4           | -22                    | 40.03                      | 54                     | -13.97      | -                   | -              | 135            | 113         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## VERTICAL PEAK AND AVERAGE PLOT

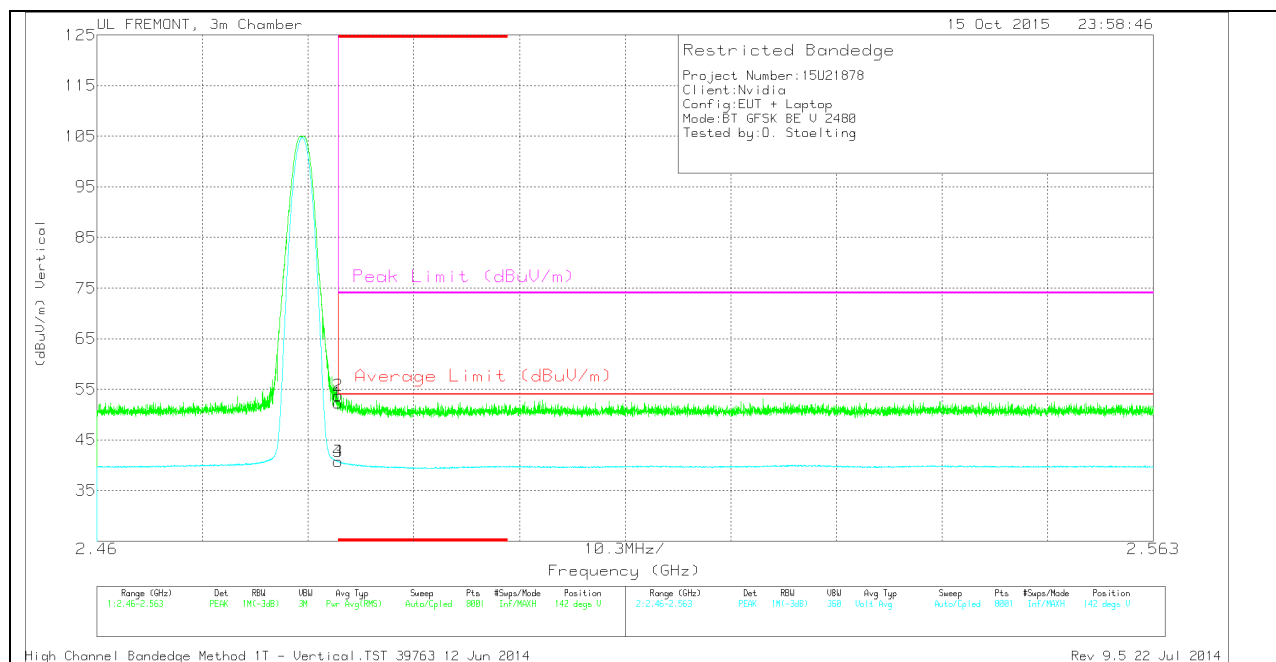

## VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/ Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 42.04                | PK   | 32.3          | -22.1                  | 52.24                      | -                      | -           | 74                  | -21.76         | 142            | 188         | V        |
| 2      | * 2.484         | 43.62                | PK   | 32.3          | -22.1                  | 53.82                      | -                      | -           | 74                  | -20.18         | 142            | 188         | V        |
| 3      | * 2.484         | 30.55                | VB1T | 32.3          | -22.1                  | 40.75                      | 54                     | -13.25      | -                   | -              | 142            | 188         | V        |
| 4      | * 2.484         | 30.54                | VB1T | 32.3          | -22.1                  | 40.74                      | 54                     | -13.26      | -                   | -              | 142            | 188         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

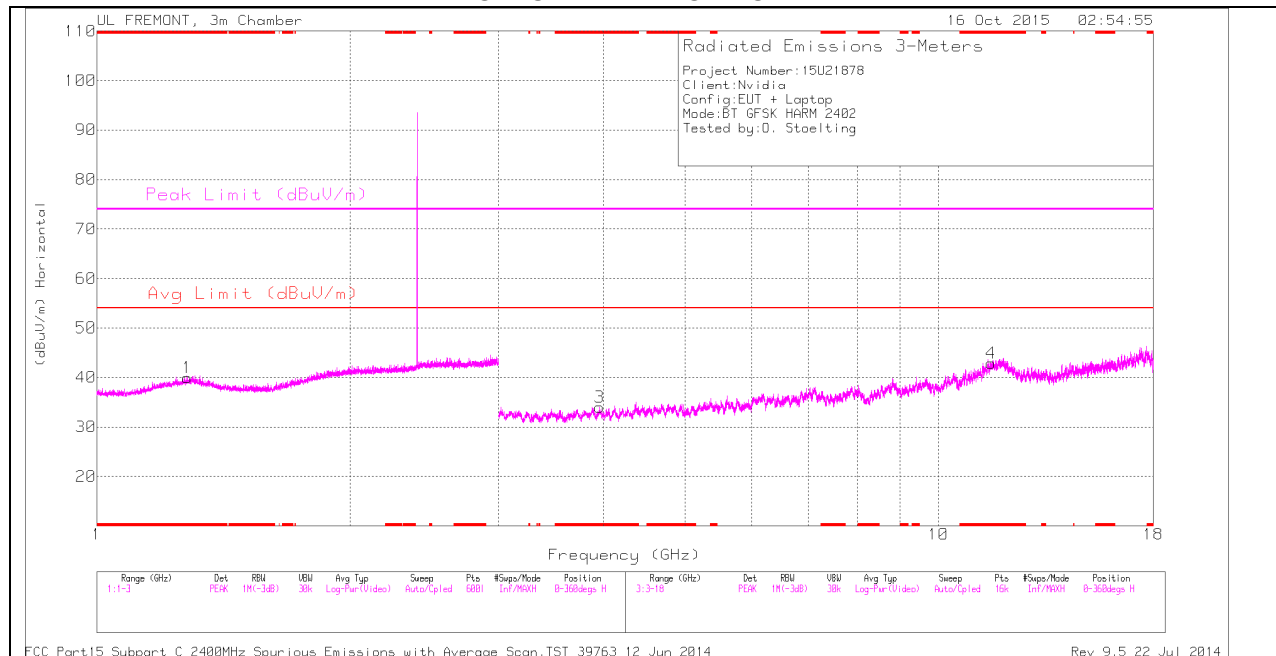

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

# LOW CHANNEL VERTICAL

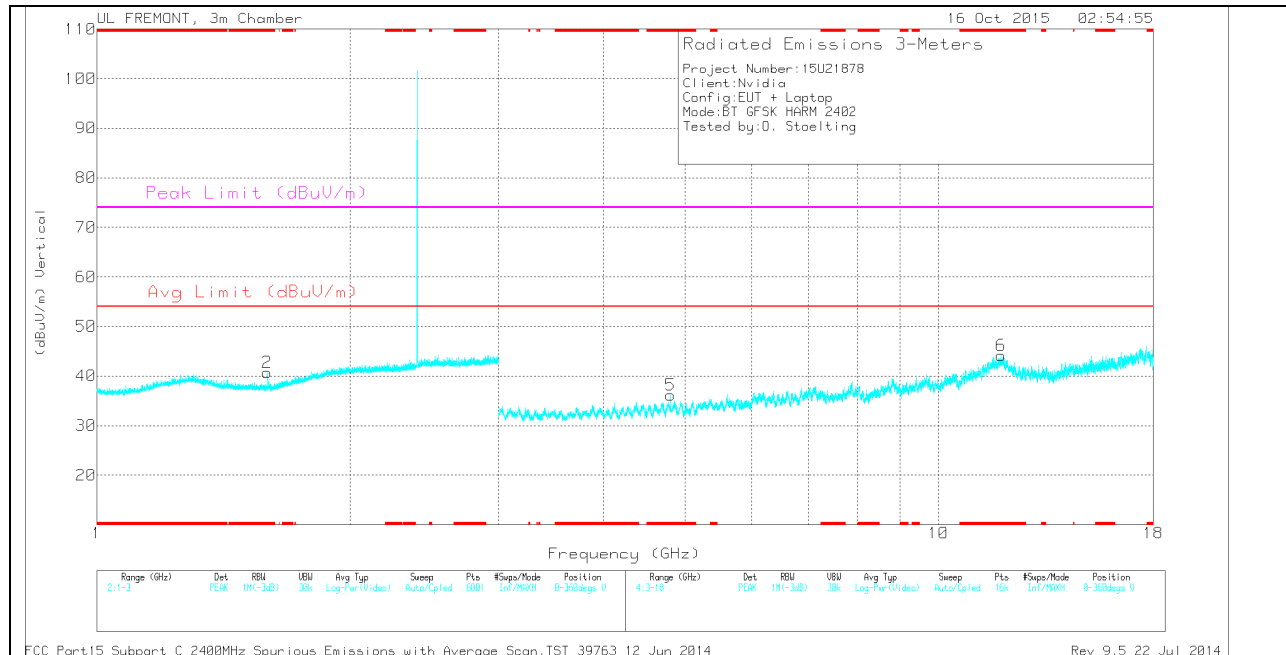

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.281         | 33.44                | PK  | 29.7           | -23.2                  | 39.94                      | -                  | -           | 74                  | -34.06         | 0-360          | 200         | H        |
| 2      | * 1.594         | 35.37                | PK  | 28             | -22.7                  | 40.67                      | -                  | -           | 74                  | -33.33         | 0-360          | 100         | V        |
| 3      | * 3.955         | 31.22                | PK  | 33.2           | -30.4                  | 34.02                      | -                  | -           | 74                  | -39.98         | 0-360          | 200         | H        |
| 4      | * 11.551        | 26.92                | PK  | 38.5           | -22.5                  | 42.92                      | -                  | -           | 74                  | -31.08         | 0-360          | 200         | H        |
| 5      | * 4.804         | 31.61                | PK  | 34             | -29.4                  | 36.21                      | -                  | -           | 74                  | -37.79         | 0-360          | 200         | V        |
| 6      | * 11.862        | 27.74                | PK  | 39.1           | -22.7                  | 44.14                      | -                  | -           | 74                  | -29.86         | 0-360          | 200         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.28          | 42.74                | PK3  | 29.7           | -23.2                  | 49.24                      | -                  | -           | 74                  | -24.76         | 148            | 161         | H        |
| * 1.282         | 30                   | VB1T | 29.7           | -23.2                  | 36.5                       | 54                 | -17.5       | -                   | -              | 148            | 161         | H        |
| * 1.594         | 45.6                 | PK3  | 28             | -22.7                  | 50.9                       | -                  | -           | 74                  | -23.1          | 269            | 399         | V        |
| * 1.593         | 29.86                | VB1T | 28             | -22.8                  | 35.06                      | 54                 | -18.94      | -                   | -              | 269            | 399         | V        |
| * 3.953         | 41.11                | PK3  | 33.2           | -30.3                  | 44.01                      | -                  | -           | 74                  | -29.99         | 217            | 183         | H        |
| * 3.957         | 27.76                | VB1T | 33.2           | -30.4                  | 30.56                      | 54                 | -23.44      | -                   | -              | 217            | 183         | H        |
| * 11.553        | 36.56                | PK3  | 38.5           | -22.5                  | 52.56                      | -                  | -           | 74                  | -21.44         | 62             | 148         | H        |
| * 11.551        | 23.93                | VB1T | 38.5           | -22.5                  | 39.93                      | 54                 | -14.07      | -                   | -              | 62             | 148         | H        |
| * 4.804         | 42.68                | PK3  | 34             | -29.4                  | 47.28                      | -                  | -           | 74                  | -26.72         | 149            | 225         | V        |
| * 4.804         | 33.36                | VB1T | 34             | -29.4                  | 37.96                      | 54                 | -16.04      | -                   | -              | 149            | 225         | V        |
| * 11.863        | 36.74                | PK3  | 39.1           | -22.7                  | 53.14                      | -                  | -           | 74                  | -20.86         | 107            | 371         | V        |
| * 11.861        | 23.96                | VB1T | 39.1           | -22.7                  | 40.36                      | 54                 | -13.64      | -                   | -              | 107            | 371         | V        |

# MID CHANNEL HORIZONTAL

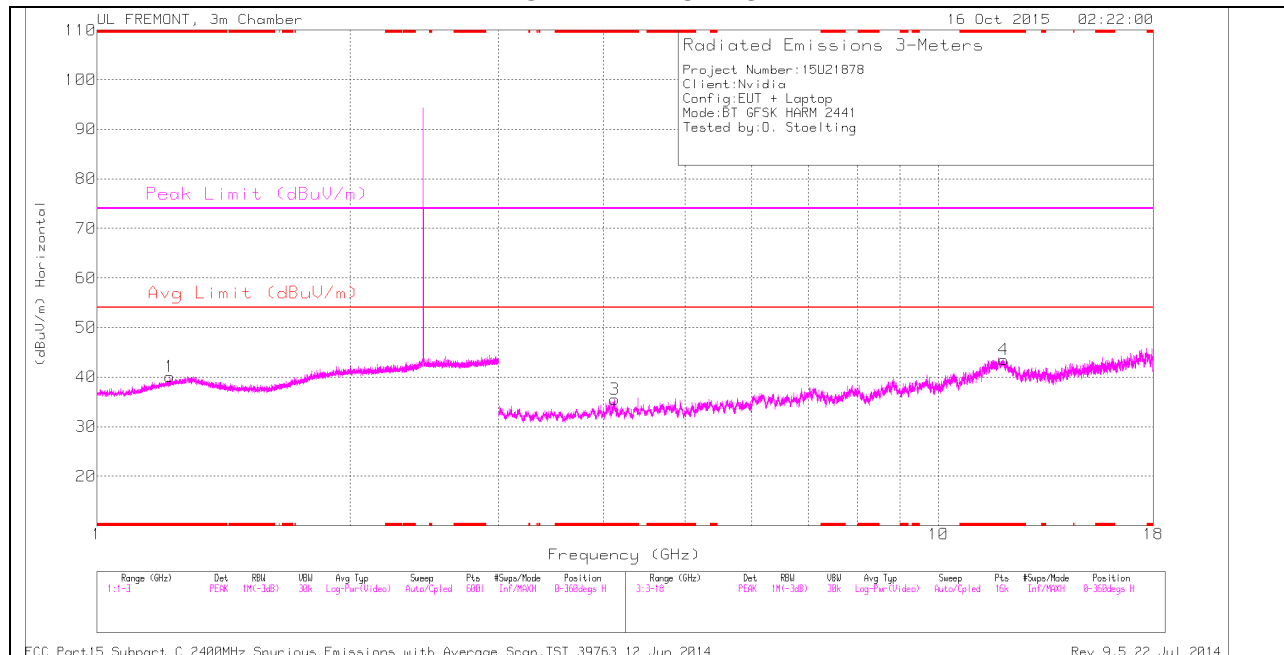

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

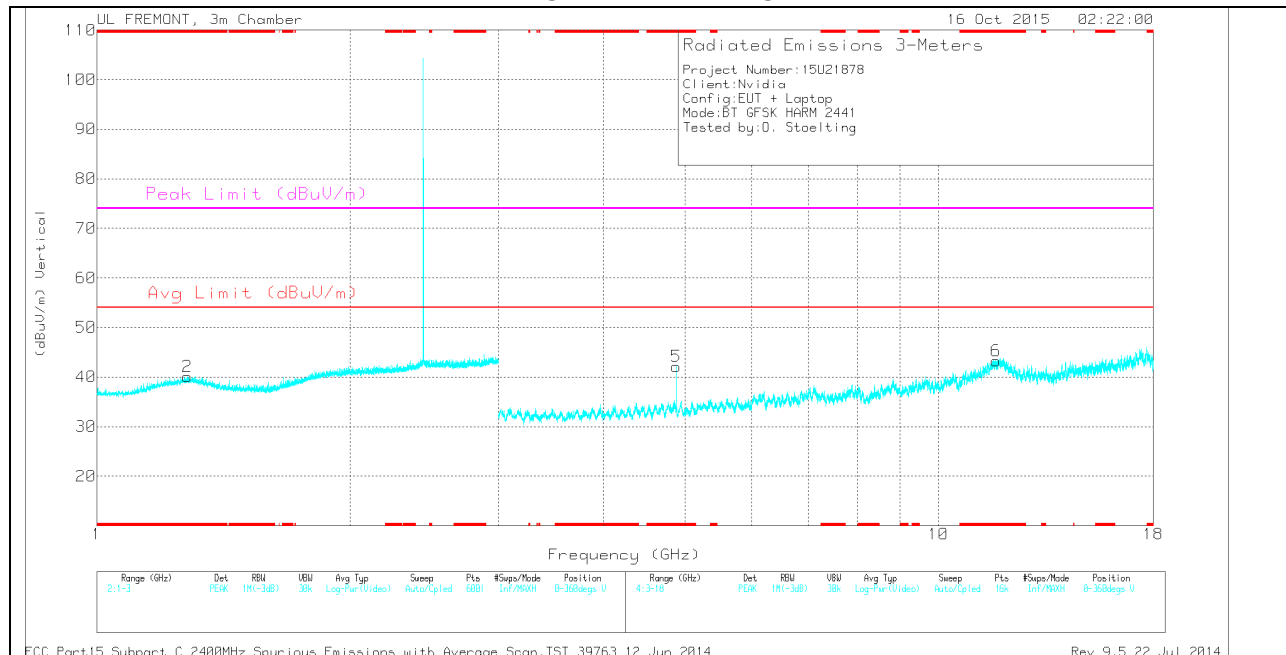

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.22          | 34.18                | PK  | 29.1           | -23.2                  | 40.08                      | -                  | -           | 74                  | -33.92         | 0-360          | 200         | H        |
| 2      | * 1.28          | 33.59                | PK  | 29.7           | -23.2                  | 40.09                      | -                  | -           | 74                  | -33.91         | 0-360          | 100         | V        |
| 3      | * 4.121         | 32.64                | PK  | 33.3           | -30.4                  | 35.54                      | -                  | -           | 74                  | -38.46         | 0-360          | 200         | H        |
| 4      | * 11.953        | 27.47                | PK  | 39.1           | -23                    | 43.57                      | -                  | -           | 74                  | -30.43         | 0-360          | 100         | H        |
| 5      | * 4.882         | 37.28                | PK  | 34             | -29.1                  | 42.18                      | -                  | -           | 74                  | -31.82         | 0-360          | 200         | V        |
| 6      | * 11.713        | 26.86                | PK  | 38.8           | -22.4                  | 43.26                      | -                  | -           | 74                  | -30.74         | 0-360          | 100         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.22          | 43.62                | PK3  | 29.1           | -23.2                  | 49.52                      | -                  | -           | 74                  | -24.48         | 189            | 172         | H        |
| * 1.222         | 29.97                | VB1T | 29.1           | -23.2                  | 35.87                      | 54                 | -18.13      | -                   | -              | 189            | 172         | H        |
| * 1.28          | 43.73                | PK3  | 29.7           | -23.2                  | 50.23                      | -                  | -           | 74                  | -23.77         | 35             | 120         | V        |
| * 1.282         | 30.03                | VB1T | 29.7           | -23.2                  | 36.53                      | 54                 | -17.47      | -                   | -              | 35             | 120         | V        |
| * 4.12          | 40.97                | PK3  | 33.3           | -30.4                  | 43.87                      | -                  | -           | 74                  | -30.13         | 188            | 145         | H        |
| * 4.12          | 28.12                | VB1T | 33.3           | -30.4                  | 31.02                      | 54                 | -22.98      | -                   | -              | 188            | 145         | H        |
| * 11.954        | 37.08                | PK3  | 39.1           | -23                    | 53.18                      | -                  | -           | 74                  | -20.82         | 184            | 106         | H        |
| * 11.955        | 24.38                | VB1T | 39.1           | -22.9                  | 40.58                      | 54                 | -13.42      | -                   | -              | 184            | 106         | H        |
| * 4.882         | 42.43                | PK3  | 34             | -29.1                  | 47.33                      | -                  | -           | 74                  | -26.67         | 156            | 216         | V        |
| * 4.882         | 35.77                | VB1T | 34             | -29.1                  | 40.67                      | 54                 | -13.33      | -                   | -              | 156            | 216         | V        |
| * 11.711        | 35.71                | PK3  | 38.8           | -22.4                  | 52.11                      | -                  | -           | 74                  | -21.89         | 2              | 397         | V        |
| * 11.711        | 23.06                | VB1T | 38.8           | -22.4                  | 39.46                      | 54                 | -14.54      | -                   | -              | 2              | 397         | V        |

### HIGH CHANNEL HORIZONTAL

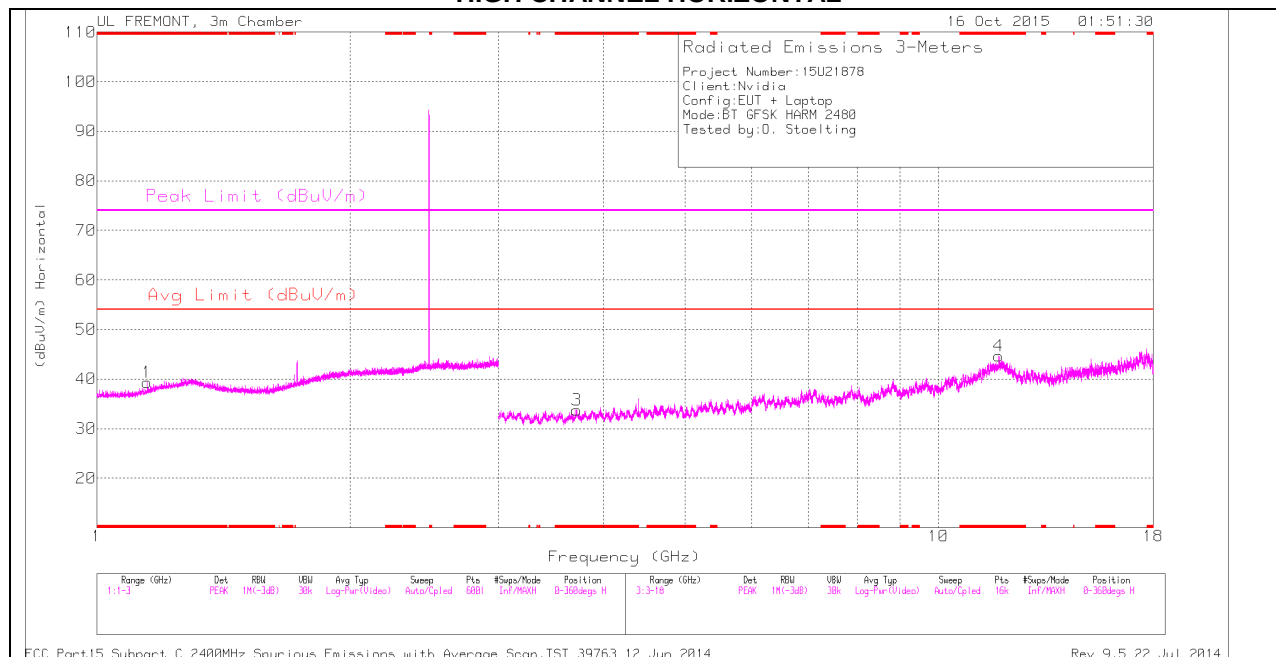

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL VERTICAL

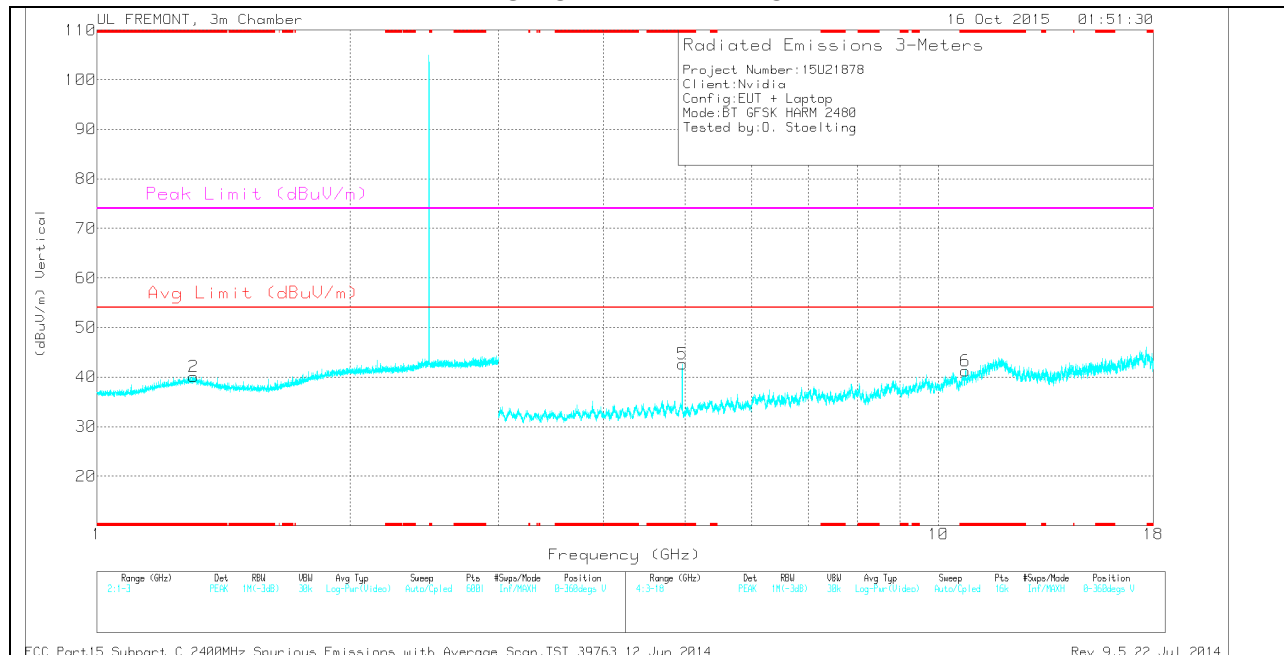

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.148         | 34.4                 | PK  | 28.1           | -23.2                  | 39.3                       | -                  | -           | 74                  | -34.7          | 0-360          | 200         | H        |
| 2      | * 1.302         | 33.43                | PK  | 29.9           | -23.2                  | 40.13                      | -                  | -           | 74                  | -33.87         | 0-360          | 100         | V        |
| 3      | * 3.716         | 30.79                | PK  | 33             | -30                    | 33.79                      | -                  | -           | 74                  | -40.21         | 0-360          | 100         | H        |
| 4      | * 11.798        | 28.11                | PK  | 39             | -22.4                  | 44.71                      | -                  | -           | 74                  | -29.29         | 0-360          | 100         | H        |
| 5      | * 4.96          | 38.99                | PK  | 34             | -30.3                  | 42.69                      | -                  | -           | 74                  | -31.31         | 0-360          | 200         | V        |
| 6      | * 10.755        | 26.79                | PK  | 37.8           | -23.3                  | 41.29                      | -                  | -           | 74                  | -32.71         | 0-360          | 200         | V        |


PK - Peak detector

### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.149         | 42.7                 | PK3  | 28.1           | -23.2                  | 47.6                       | -                  | -           | 74                  | -26.4          | 210            | 333         | H        |
| * 1.149         | 30.1                 | VB1T | 28.1           | -23.2                  | 35                         | 54                 | -19         | -                   | -              | 210            | 333         | H        |
| * 1.304         | 43.05                | PK3  | 29.8           | -23.1                  | 49.75                      | -                  | -           | 74                  | -24.25         | 243            | 311         | V        |
| * 1.302         | 30                   | VB1T | 29.9           | -23.2                  | 36.7                       | 54                 | -17.3       | -                   | -              | 243            | 311         | V        |
| * 3.717         | 40.56                | PK3  | 33             | -29.9                  | 43.66                      | -                  | -           | 74                  | -30.34         | 174            | 345         | H        |
| * 3.718         | 27.59                | VB1T | 33             | -29.9                  | 30.69                      | 54                 | -23.31      | -                   | -              | 174            | 345         | H        |
| * 11.798        | 37.05                | PK3  | 39             | -22.4                  | 53.65                      | -                  | -           | 74                  | -20.35         | 112            | 112         | H        |
| * 11.796        | 24.33                | VB1T | 39             | -22.4                  | 40.93                      | 54                 | -13.07      | -                   | -              | 112            | 112         | H        |
| * 4.96          | 43.54                | PK3  | 34             | -30.3                  | 47.24                      | -                  | -           | 74                  | -26.76         | 165            | 213         | V        |
| * 4.96          | 36.61                | VB1T | 34             | -30.3                  | 40.31                      | 54                 | -13.69      | -                   | -              | 165            | 213         | V        |
| * 10.755        | 35.52                | PK3  | 37.8           | -23.3                  | 50.02                      | -                  | -           | 74                  | -23.98         | 314            | 309         | V        |
| * 10.755        | 23.08                | VB1T | 37.8           | -23.3                  | 37.58                      | 54                 | -16.42      | -                   | -              | 314            | 309         | V        |

## 9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)


### HORIZONTAL PEAK AND AVERAGE PLOT

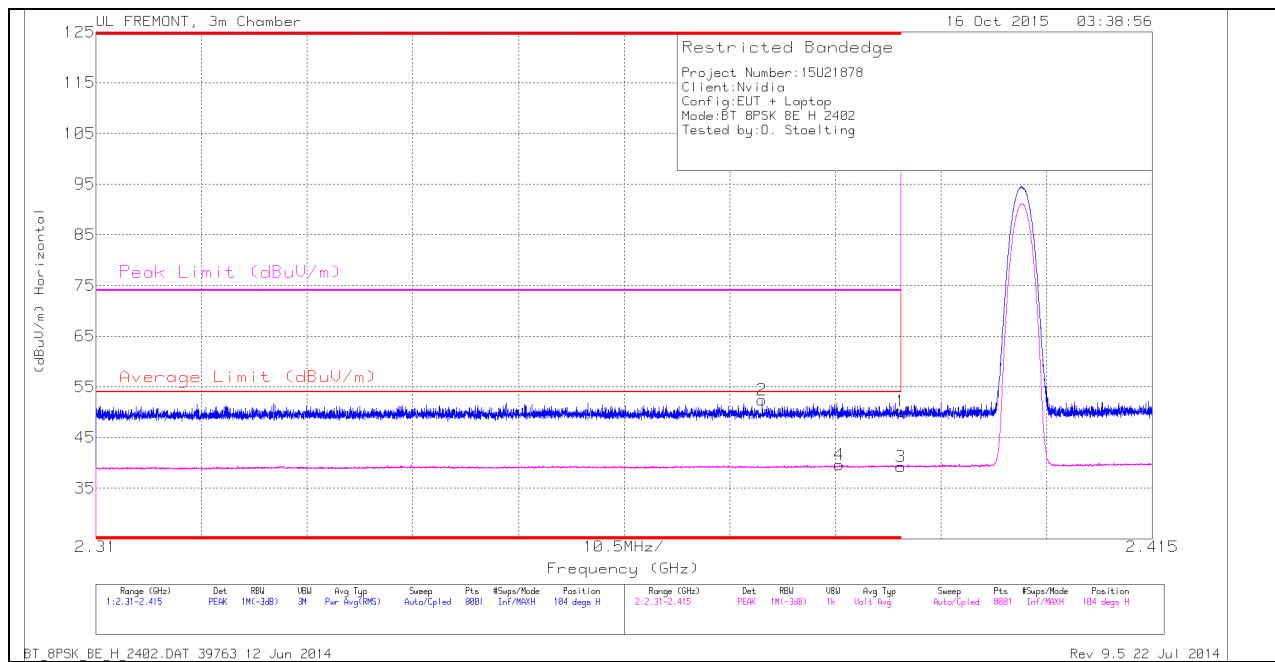

### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/ Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.376         | 42.91                | PK   | 31.9          | -22.4                  | 52.41                      | -                      | -           | 74                  | -21.59         | 104            | 381         | H        |
| 4      | * 2.384         | 30                   | VB1T | 32            | -22.4                  | 39.6                       | 54                     | -14.4       | -                   | -              | 104            | 381         | H        |
| 1      | * 2.39          | 40.55                | PK   | 32            | -22.4                  | 50.15                      | -                      | -           | 74                  | -23.85         | 104            | 381         | H        |
| 3      | * 2.39          | 29.61                | VB1T | 32            | -22.4                  | 39.21                      | 54                     | -14.79      | -                   | -              | 104            | 381         | H        |

### VERTICAL PEAK AND AVERAGE PLOT

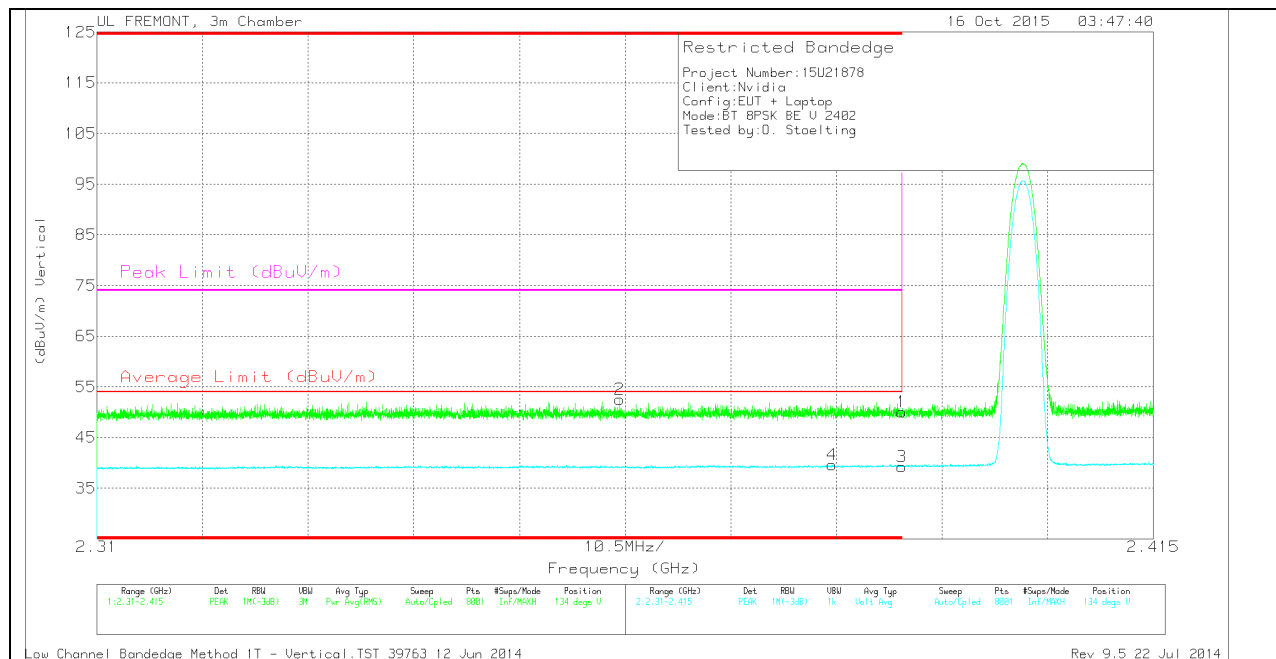


### VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/ Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.362         | 43.09                | PK   | 31.9           | -22.5                  | 52.49                      | -                      | -           | 74                  | -21.51         | 134            | 327         | V        |
| 4      | * 2.383         | 30.04                | VB1T | 32             | -22.4                  | 39.64                      | 54                     | -14.36      | -                   | -              | 134            | 327         | V        |
| 1      | * 2.39          | 40.39                | PK   | 32             | -22.4                  | 49.99                      | -                      | -           | 74                  | -24.01         | 134            | 327         | V        |
| 3      | * 2.39          | 29.64                | VB1T | 32             | -22.4                  | 39.24                      | 54                     | -14.76      | -                   | -              | 134            | 327         | V        |

## AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

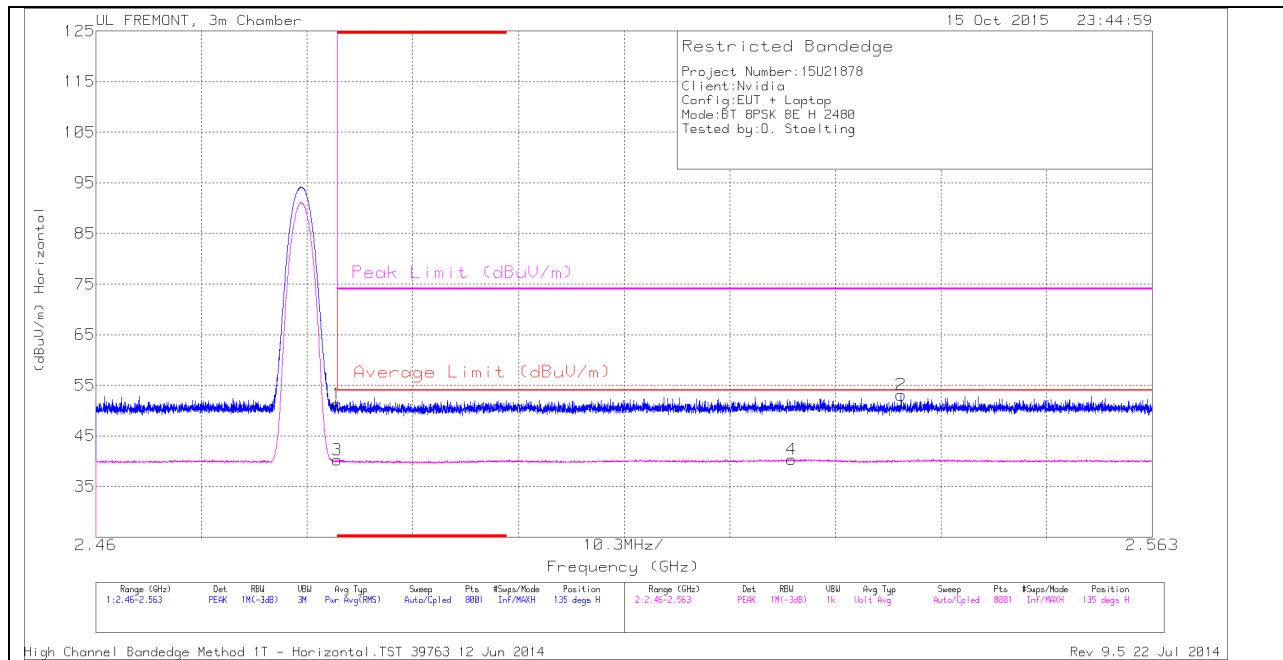

### HORIZONTAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.05                | PK   | 32.3           | -22.1                  | 51.25                      | -                      | -           | 74                  | -22.75         | 135            | 113         | H        |
| 3      | * 2.484         | 30.01                | VB1T | 32.3           | -22.1                  | 40.21                      | 54                     | -13.79      | -                   | -              | 135            | 113         | H        |
| 4      | 2.528           | 30.01                | VB1T | 32.4           | -22                    | 40.41                      | 54                     | -13.59      | -                   | -              | 135            | 113         | H        |
| 2      | 2.539           | 42.69                | PK   | 32.4           | -22                    | 53.09                      | -                      | -           | 74                  | -20.91         | 135            | 113         | H        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

## VERTICAL PEAK AND AVERAGE PLOT

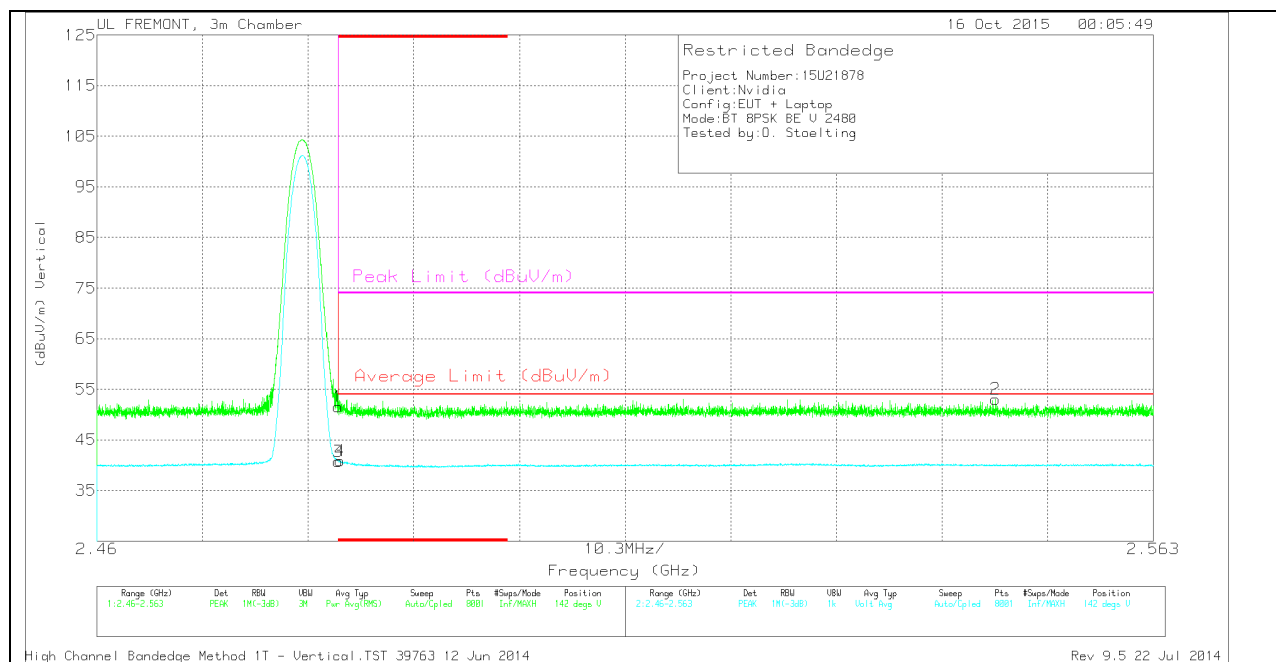

## VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/ Filt/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.3                 | PK   | 32.3          | -22.1                  | 51.5                       | -                      | -           | 74                  | -22.5          | 142            | 188         | V        |
| 3      | * 2.484         | 30.55                | VB1T | 32.3          | -22.1                  | 40.75                      | 54                     | -13.25      | -                   | -              | 142            | 188         | V        |
| 4      | * 2.484         | 30.66                | VB1T | 32.3          | -22.1                  | 40.86                      | 54                     | -13.14      | -                   | -              | 142            | 188         | V        |
| 2      | 2.548           | 42.68                | PK   | 32.4          | -22                    | 53.08                      | -                      | -           | 74                  | -20.92         | 142            | 188         | V        |


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

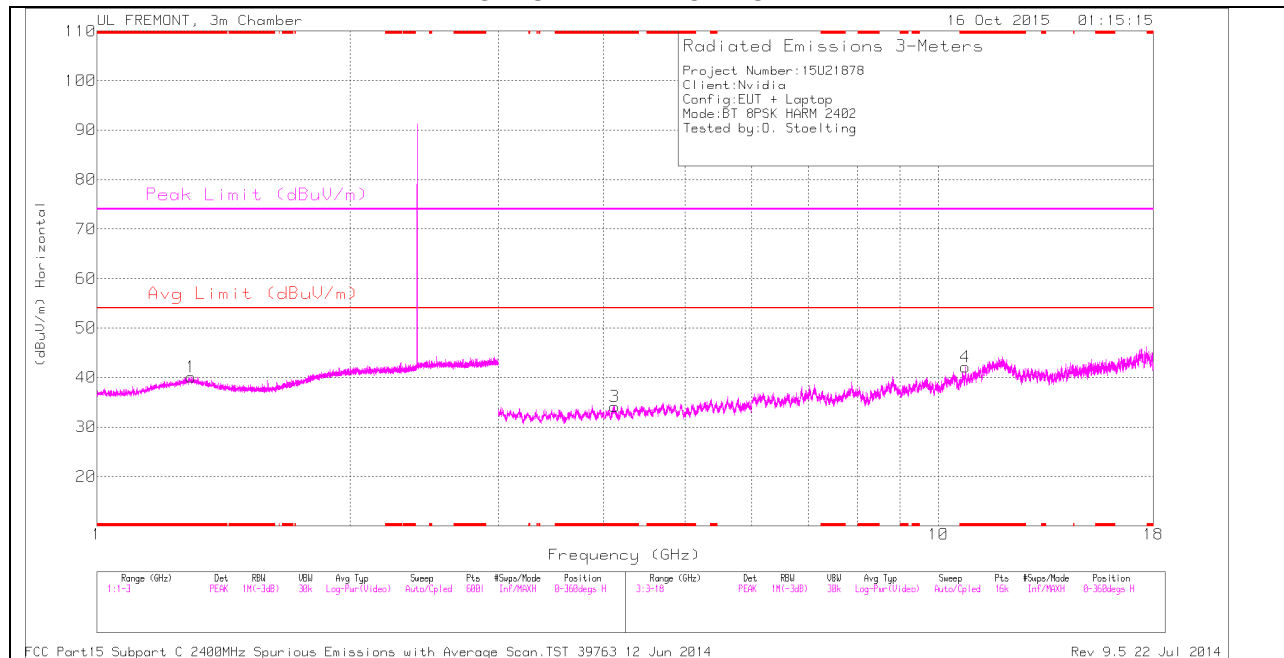

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL VERTICAL

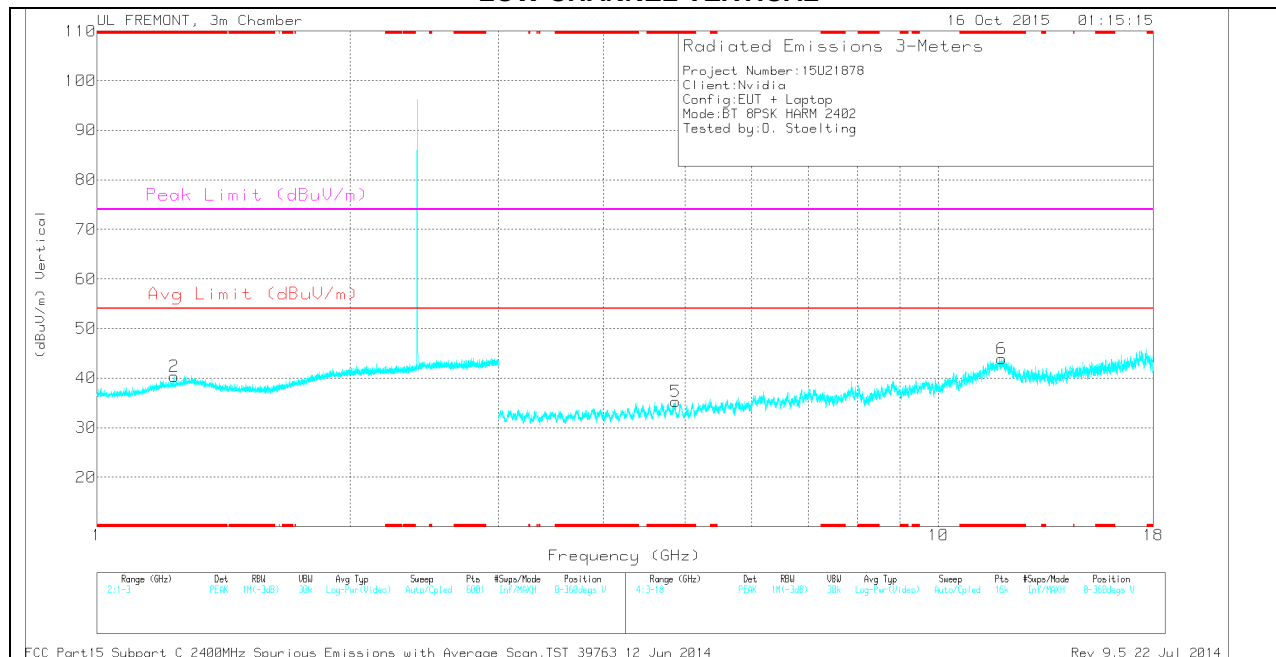

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.295         | 33.55                | PK  | 29.8           | -23.2                  | 40.15                      | -                  | -           | 74                  | -33.85         | 0-360          | 200         | H        |
| 2      | * 1.235         | 34.2                 | PK  | 29.3           | -23.2                  | 40.3                       | -                  | -           | 74                  | -33.7          | 0-360          | 200         | V        |
| 3      | * 4.123         | 31.24                | PK  | 33.3           | -30.4                  | 34.14                      | -                  | -           | 74                  | -39.86         | 0-360          | 200         | H        |
| 4      | * 10.77         | 27.27                | PK  | 37.9           | -23                    | 42.17                      | -                  | -           | 74                  | -31.83         | 0-360          | 200         | H        |
| 5      | * 4.867         | 30.32                | PK  | 34             | -29.1                  | 35.22                      | -                  | -           | 74                  | -38.78         | 0-360          | 100         | V        |
| 6      | * 11.881        | 27.58                | PK  | 39.1           | -22.8                  | 43.88                      | -                  | -           | 74                  | -30.12         | 0-360          | 200         | V        |

PK - Peak detector

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.295         | 42.29                | PK3  | 29.8           | -23.2                  | 48.89                      | -                  | -           | 74                  | -25.11         | 240            | 163         | H        |
| * 1.295         | 30.41                | VB1T | 29.8           | -23.2                  | 37.01                      | 54                 | -16.99      | -                   | -              | 240            | 163         | H        |
| * 1.236         | 42.75                | PK3  | 29.3           | -23.2                  | 48.85                      | -                  | -           | 74                  | -25.15         | 312            | 248         | V        |
| * 1.236         | 30.31                | VB1T | 29.3           | -23.2                  | 36.41                      | 54                 | -17.59      | -                   | -              | 312            | 248         | V        |
| * 4.124         | 41.04                | PK3  | 33.3           | -30.4                  | 43.94                      | -                  | -           | 74                  | -30.06         | 203            | 400         | H        |
| * 4.121         | 28.38                | VB1T | 33.3           | -30.4                  | 31.28                      | 54                 | -22.72      | -                   | -              | 203            | 400         | H        |
| * 10.768        | 36.35                | PK3  | 37.9           | -23.1                  | 51.15                      | -                  | -           | 74                  | -22.85         | 24             | 131         | H        |
| * 10.771        | 23.96                | VB1T | 37.9           | -23.1                  | 38.76                      | 54                 | -15.24      | -                   | -              | 24             | 131         | H        |
| * 4.866         | 40.16                | PK3  | 34             | -29.1                  | 45.06                      | -                  | -           | 74                  | -28.94         | 220            | 364         | V        |
| * 4.866         | 27.13                | VB1T | 34             | -29.1                  | 32.03                      | 54                 | -21.97      | -                   | -              | 220            | 364         | V        |
| * 11.883        | 36.56                | PK3  | 39.1           | -22.8                  | 52.86                      | -                  | -           | 74                  | -21.14         | 354            | 303         | V        |
| * 11.883        | 24.02                | VB1T | 39.1           | -22.8                  | 40.32                      | 54                 | -13.68      | -                   | -              | 354            | 303         | V        |

# MID CHANNEL HORIZONTAL

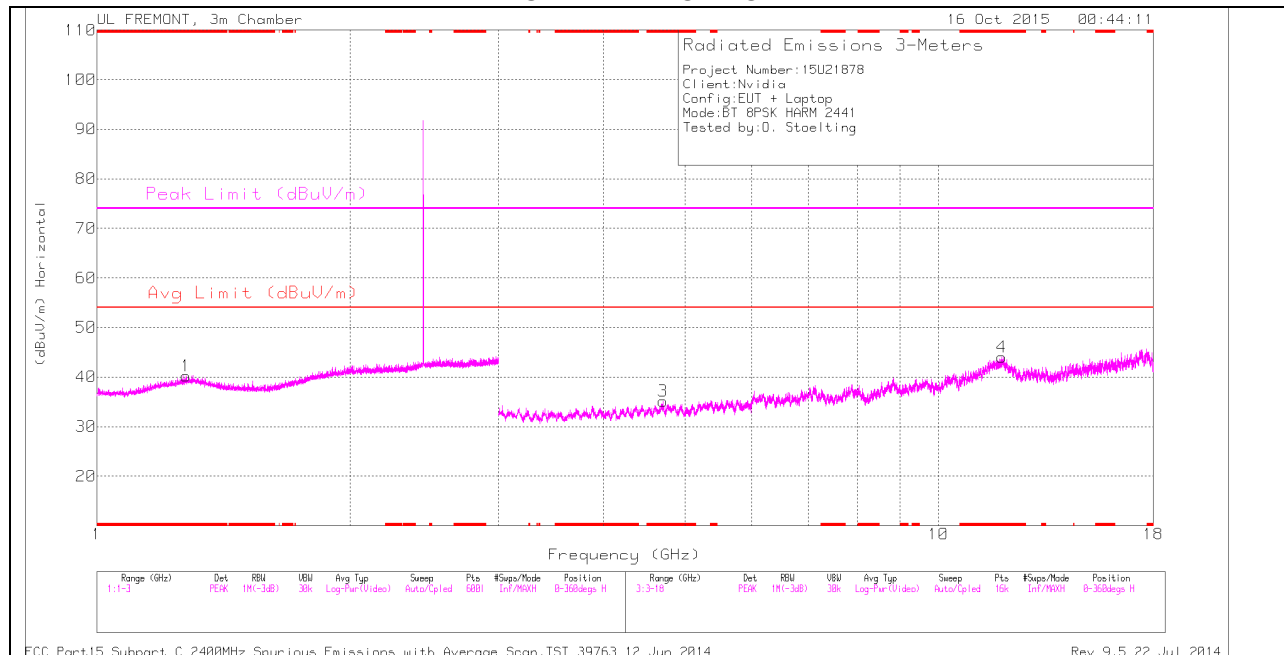

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL VERTICAL

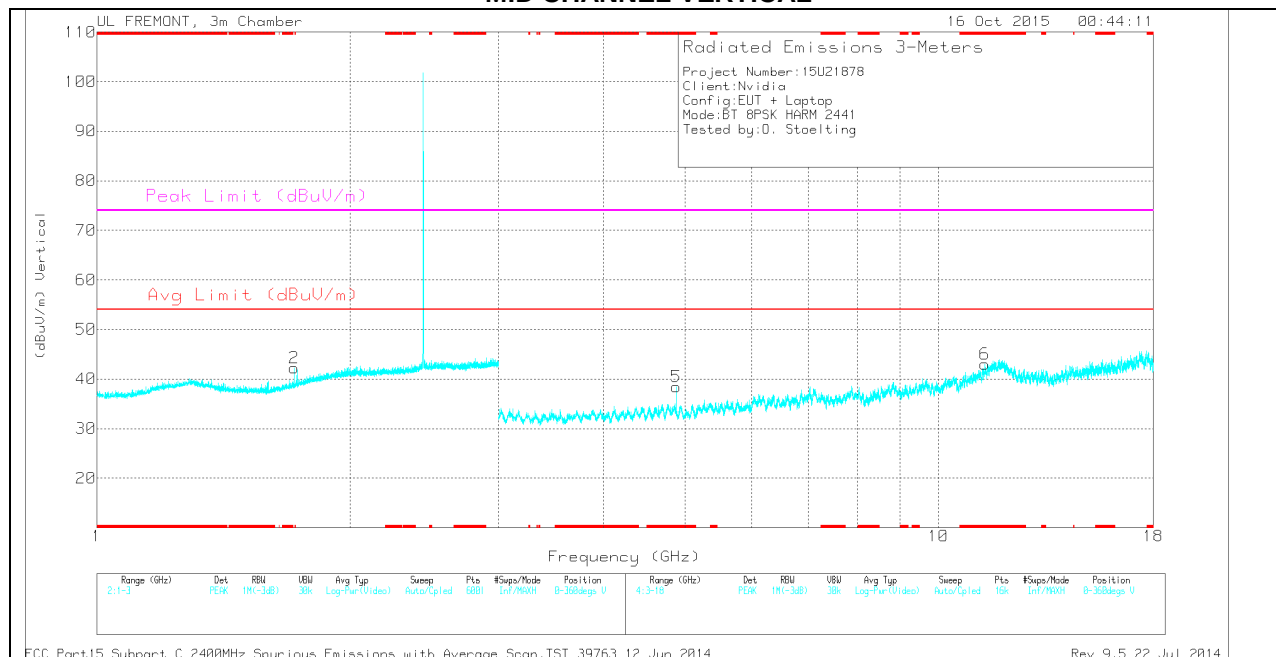

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.276         | 33.59                | PK  | 29.7           | -23.1                  | 40.19                      | -                  | -           | 74                  | -33.81         | 0-360          | 200         | H        |
| 3      | * 4.704         | 31.27                | PK  | 34.1           | -30.2                  | 35.17                      | -                  | -           | 74                  | -38.83         | 0-360          | 200         | H        |
| 4      | * 11.888        | 27.72                | PK  | 39.1           | -22.8                  | 44.02                      | -                  | -           | 74                  | -29.98         | 0-360          | 200         | H        |
| 5      | * 4.881         | 33.55                | PK  | 34             | -29.1                  | 38.45                      | -                  | -           | 74                  | -35.55         | 0-360          | 200         | V        |
| 6      | * 11.359        | 28.21                | PK  | 38.1           | -23.3                  | 43.01                      | -                  | -           | 74                  | -30.99         | 0-360          | 200         | V        |
| 2      | 1.716           | 35.73                | PK  | 29.2           | -22.7                  | 42.23                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions


| Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|---------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.276         | 42.88                | PK3  | 29.7          | -23.1                  | 49.48                      | -                  | -           | 74                  | -24.52         | 282            | 355         | H        |
| * 1.274         | 30.36                | VB1T | 29.6          | -23.1                  | 36.86                      | 54                 | -17.14      | -                   | -              | 282            | 355         | H        |
| * 4.705         | 40.45                | PK3  | 34.1          | -30.2                  | 44.35                      | -                  | -           | 74                  | -29.65         | 260            | 367         | H        |
| * 4.703         | 27.96                | VB1T | 34.1          | -30.2                  | 31.86                      | 54                 | -22.14      | -                   | -              | 260            | 367         | H        |
| * 11.889        | 36.66                | PK3  | 39.1          | -22.8                  | 52.96                      | -                  | -           | 74                  | -21.04         | 116            | 195         | H        |
| * 11.89         | 24.46                | VB1T | 39.1          | -22.8                  | 40.76                      | 54                 | -13.24      | -                   | -              | 116            | 195         | H        |
| * 4.882         | 41.55                | PK3  | 34            | -29.1                  | 46.45                      | -                  | -           | 74                  | -27.55         | 164            | 207         | V        |
| * 4.882         | 31.37                | VB1T | 34            | -29.1                  | 36.27                      | 54                 | -17.73      | -                   | -              | 164            | 207         | V        |
| * 11.361        | 36.74                | PK3  | 38.1          | -23.3                  | 51.54                      | -                  | -           | 74                  | -22.46         | 326            | 311         | V        |
| * 11.361        | 24.9                 | VB1T | 38.1          | -23.3                  | 39.7                       | 54                 | -14.3       | -                   | -              | 326            | 311         | V        |
| 1.714           | 42.72                | PK3  | 29.2          | -22.7                  | 49.22                      | -                  | -           | -                   | -              | 78             | 222         | V        |
| 1.716           | 30.76                | VB1T | 29.2          | -22.8                  | 37.16                      | -                  | -           | -                   | -              | 78             | 222         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

### HIGH CHANNEL HORIZONTAL

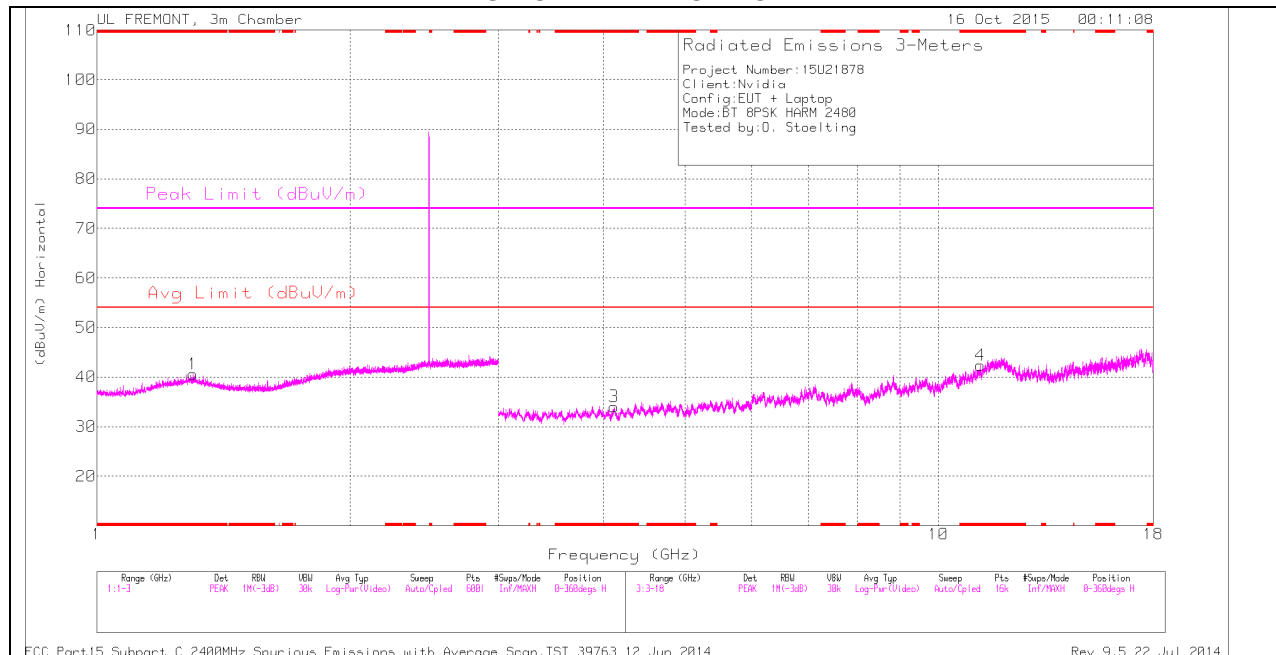

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

# HIGH CHANNEL VERTICAL

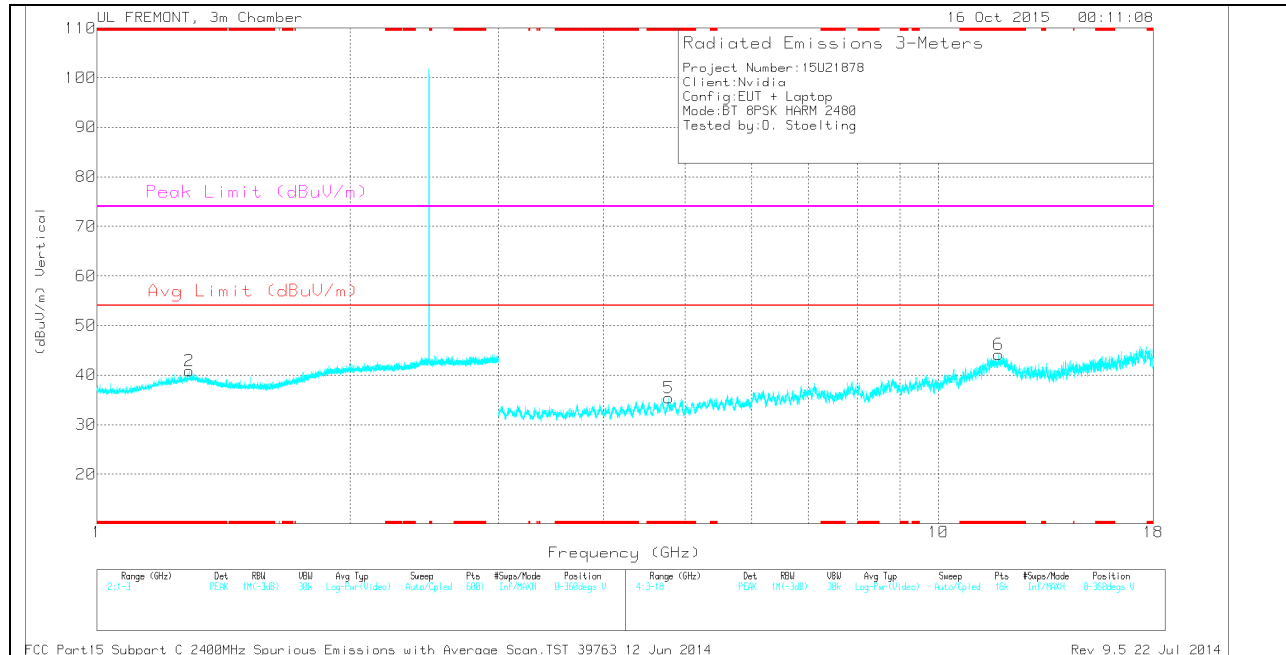

FCC Part15 Subpart C 2400MHz Spurious Emissions with Average Scan.TST 39763 12 Jun 2014

Rev 9.5 22 Jul 2014

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### HIGH CHANNEL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 1.287         | 34.2                 | PK  | 29.8           | -23.1                  | 40.9                       | -                  | -           | 74                  | -33.1          | 0-360          | 100         | V        |
| 1      | * 1.301         | 33.9                 | PK  | 29.9           | -23.2                  | 40.6                       | -                  | -           | 74                  | -33.4          | 0-360          | 100         | H        |
| 4      | * 11.219        | 26.9                 | PK  | 37.9           | -22.4                  | 42.4                       | -                  | -           | 74                  | -31.6          | 0-360          | 100         | H        |
| 6      | * 11.786        | 27.45                | PK  | 39             | -22.3                  | 44.15                      | -                  | -           | 74                  | -29.85         | 0-360          | 200         | V        |
| 3      | * 4.113         | 31.16                | PK  | 33.3           | -30.4                  | 34.06                      | -                  | -           | 74                  | -39.94         | 0-360          | 100         | H        |
| 5      | * 4.78          | 31.41                | PK  | 34             | -30                    | 35.41                      | -                  | -           | 74                  | -38.59         | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### Radiated Emissions

| Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|---------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| * 1.3           | 42.64                | PK3  | 29.9          | -23.2                  | 49.34                      | -                  | -           | 74                  | -24.66         | 219            | 392         | H        |
| * 1.301         | 30.39                | VB1T | 29.9          | -23.2                  | 37.09                      | 54                 | -16.91      | -                   | -              | 219            | 392         | H        |
| * 1.286         | 43.12                | PK3  | 29.8          | -23.1                  | 49.82                      | -                  | -           | 74                  | -24.18         | 63             | 263         | V        |
| * 1.287         | 30.37                | VB1T | 29.8          | -23.1                  | 37.07                      | 54                 | -16.93      | -                   | -              | 63             | 263         | V        |
| * 4.113         | 40.78                | PK3  | 33.3          | -30.4                  | 43.68                      | -                  | -           | 74                  | -30.32         | 55             | 205         | H        |
| * 4.114         | 28.42                | VB1T | 33.3          | -30.4                  | 31.32                      | 54                 | -22.68      | -                   | -              | 55             | 205         | H        |
| * 11.221        | 36.52                | PK3  | 37.9          | -22.4                  | 52.02                      | -                  | -           | 74                  | -21.98         | 98             | 156         | H        |
| * 11.22         | 23.59                | VB1T | 37.9          | -22.4                  | 39.09                      | 54                 | -14.91      | -                   | -              | 98             | 156         | H        |
| * 4.779         | 43.38                | PK3  | 34            | -30                    | 47.38                      | -                  | -           | 74                  | -26.62         | 284            | 107         | V        |
| * 4.778         | 27.98                | VB1T | 34            | -30                    | 31.98                      | 54                 | -22.02      | -                   | -              | 284            | 107         | V        |
| * 11.784        | 36.97                | PK3  | 39            | -22.4                  | 53.57                      | -                  | -           | 74                  | -20.43         | 158            | 111         | V        |
| * 11.785        | 24.59                | VB1T | 39            | -22.3                  | 41.29                      | 54                 | -12.71      | -                   | -              | 158            | 111         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


### 9.3. WORST-CASE BELOW 1 GHz

#### FSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

##### HORIZONTAL PLOT

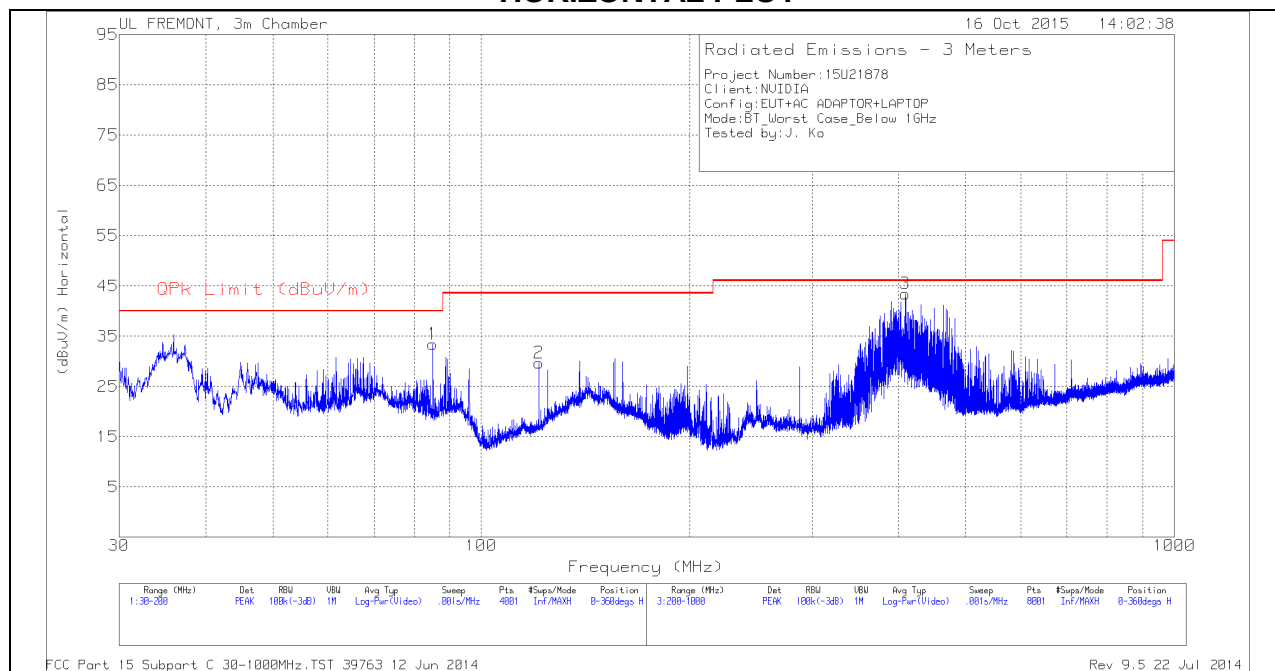

## VERTICAL PLOT

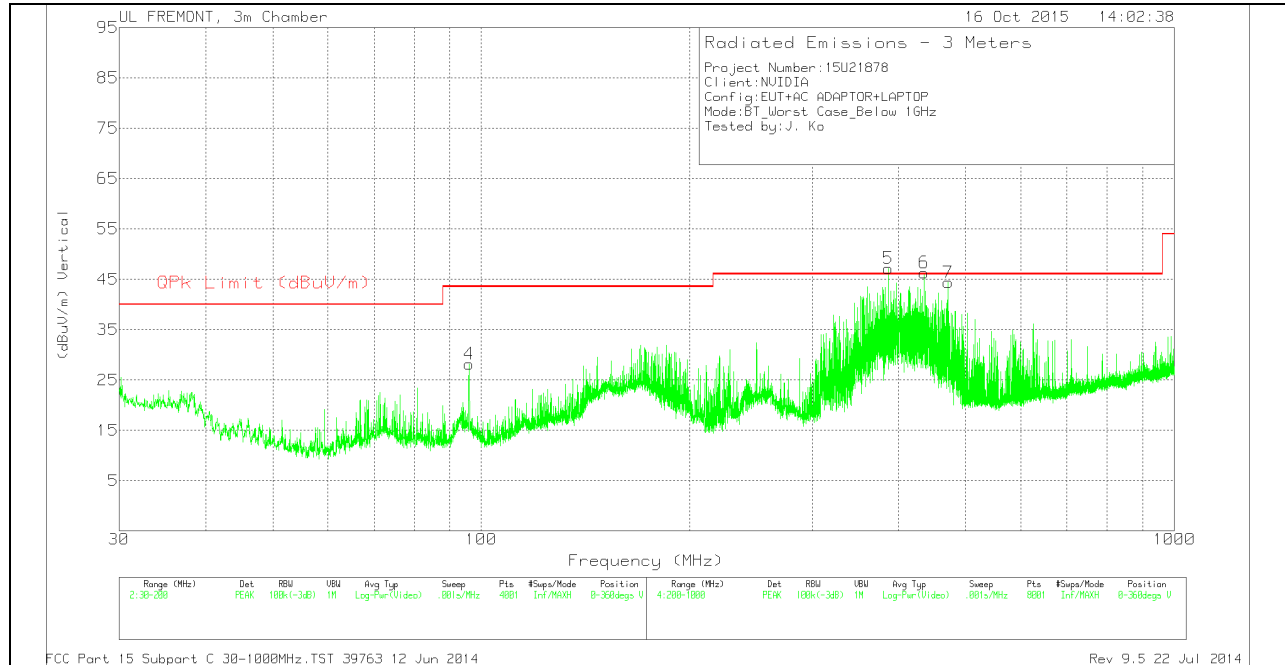

## BELOW 1 GHz TABLE

### Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T185 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 85.1225         | 52.33                | PK  | 7.6            | -26.5        | 33.43                      | 40                 | -6.57       | 0-360          | 200         | H        |
| 4      | 96.0025         | 45.67                | PK  | 8.8            | -26.3        | 28.17                      | 43.52              | -15.35      | 0-360          | 100         | V        |
| 2      | 121.035         | 41.99                | PK  | 13.8           | -26.1        | 29.69                      | 43.52              | -13.83      | 0-360          | 200         | H        |
| 5      | 386.8           | 56.96                | PK  | 15             | -24.8        | 47.16                      | 46.02              | 1.14        | 0-360          | 100         | V        |
| 3      | 409.2           | 52.75                | PK  | 15.5           | -24.8        | 43.45                      | 46.02              | -2.57       | 0-360          | 100         | H        |
| 6      | 435.3           | 54.51                | PK  | 16.7           | -24.9        | 46.31                      | 46.02              | .29         | 0-360          | 100         | V        |
| 7      | 471.9           | 52.16                | PK  | 17.2           | -25          | 44.36                      | 46.02              | -1.66       | 0-360          | 200         | V        |

PK - Peak detector

### Radiated Emissions

| Frequency (MHz) | Meter Reading (dBuV) | Det | AF T185 (dB/m) | Amp/Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 386.33          | 38.93                | QP  | 15             | -24.7        | 29.23                      | 46.02              | -16.79      | 117            | 178         | V        |
| 409.255         | 41.47                | QP  | 15.5           | -24.8        | 32.17                      | 46.02              | -13.85      | 294            | 105         | H        |
| 435.512         | 39.68                | QP  | 16.7           | -24.9        | 31.48                      | 46.02              | -14.54      | 211            | 212         | V        |
| 471.953         | 34.22                | QP  | 17.2           | -25          | 26.42                      | 46.02              | -19.6       | 327            | 105         | V        |

QP - Quasi-Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |                       |
|-----------------------------|------------------------|-----------------------|
|                             | Quasi-peak             | Average               |
| 0.15-0.5                    | 66 to 56 <sup>*</sup>  | 56 to 46 <sup>*</sup> |
| 0.5-5                       | 56                     | 46                    |
| 5-30                        | 60                     | 50                    |

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

## 6 WORST EMISSIONS

### LINE 1 PLOT

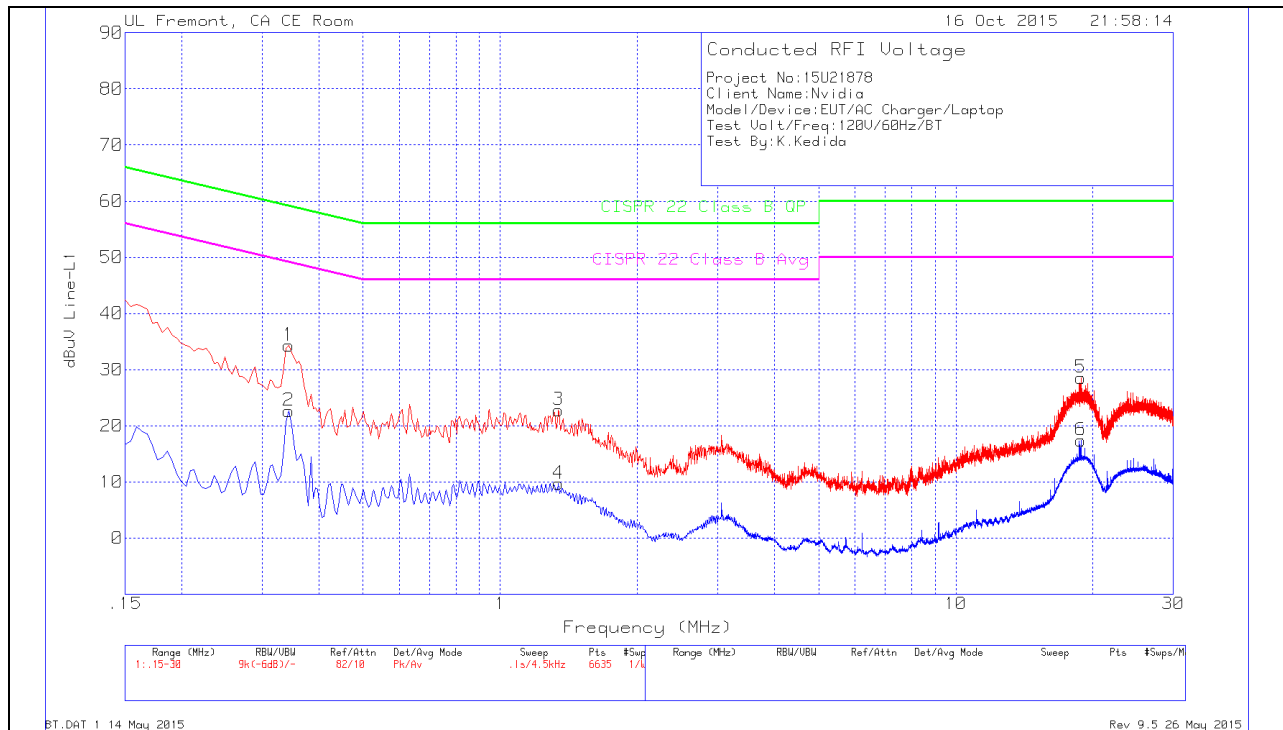

### LINE 1 RESULTS


Range 1: Line-L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 1      | .3435           | 33.78                | Pk  | .5        | 0             | 34.28                  | 59.12               | -24.84      |                      |             |
| 2      | .3435           | 22.14                | Av  | .5        | 0             | 22.64                  | -                   | -           | 49.12                | -26.48      |
| 3      | 1.3425          | 22.52                | Pk  | .2        | .1            | 22.82                  | 56                  | -33.18      |                      |             |
| 4      | 1.3425          | 9.39                 | Av  | .2        | .1            | 9.69                   | -                   | -           | 46                   | -36.31      |
| 5      | 18.8115         | 28.04                | Pk  | .3        | .2            | 28.54                  | 60                  | -31.46      |                      |             |
| 6      | 18.8115         | 16.94                | Av  | .3        | .2            | 17.44                  | -                   | -           | 50                   | -32.56      |

Pk - Peak detector

Av - Average detection

## LINE 2 PLOT

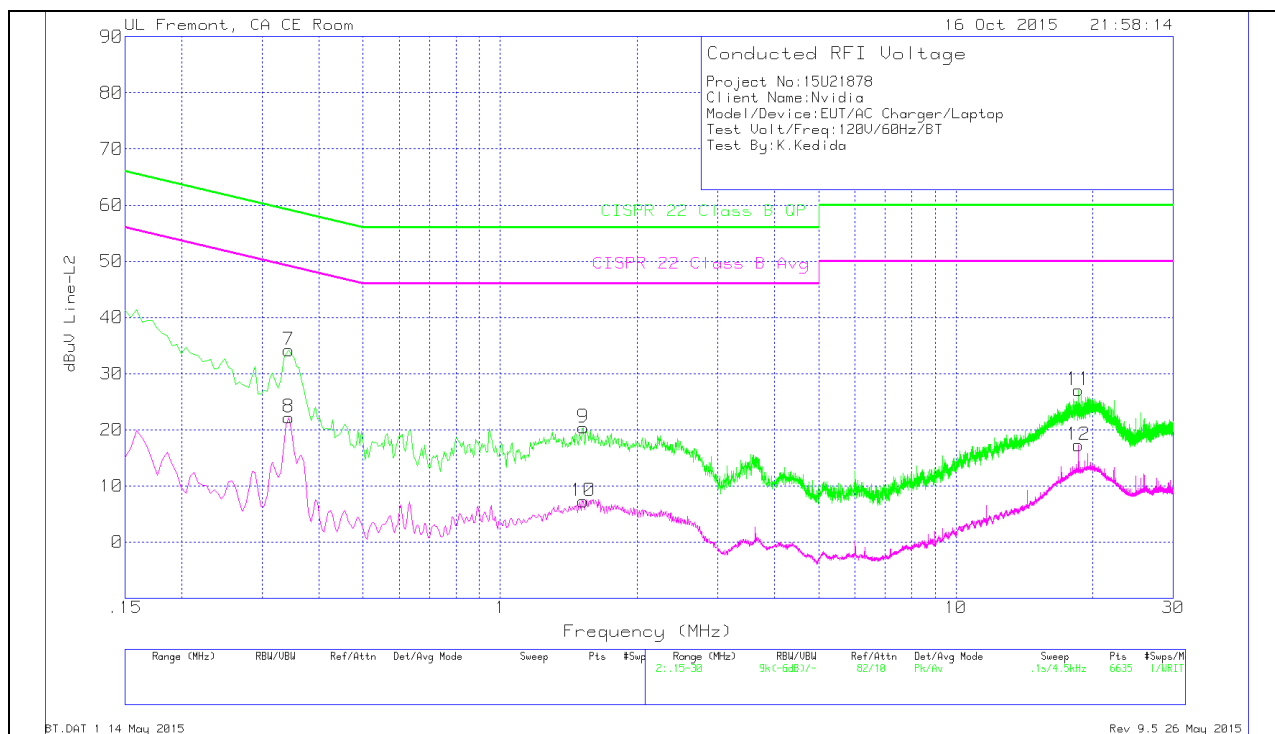

## LINE 2 RESULTS

Range 2: Line-L2 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 7      | .3435           | 33.67                | Pk  | .5        | 0             | 34.17                  | 59.12               | -24.95      |                      |             |
| 8      | .3435           | 21.7                 | Av  | .5        | 0             | 22.2                   | -                   | -           | 49.12                | -26.92      |
| 9      | 1.5225          | 20.12                | Pk  | .2        | .1            | 20.42                  | 56                  | -35.58      |                      |             |
| 10     | 1.5225          | 7.03                 | Av  | .2        | .1            | 7.33                   | -                   | -           | 46                   | -38.67      |
| 11     | 18.591          | 26.59                | Pk  | .3        | .2            | 27.09                  | 60                  | -32.91      |                      |             |
| 12     | 18.591          | 16.76                | Av  | .3        | .2            | 17.26                  | -                   | -           | 50                   | -32.74      |

Pk - Peak detector

Av - Average detection