



Valued Quality. Delivered.

## TEST REPORT

**Report Number: 17011114HKG-001R1**

This report supersedes previous report with report number 17011114HKG-001 dated March 06, 2017

Application  
for  
Original Grant of 47 CFR Part 15 Certification  
New Family of RSS-247 Issue 1 Equipment Certification

720p WiFi Baby Monitor

**FCC ID: VIXPNMWIFIAC**

**IC: 21578-PNMWIFIAC**

Prepared and Checked by:

Approved by:

***Signed On File***

Yao Xin Lu, Josie  
Engineer

---

Koo Wai Ip  
Technical Supervisor  
March 30, 2017

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)



## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

<b>Applicant Name:</b>	Voxx Accessories Corporation
<b>Applicant Address:</b>	3502 Woodview Trace, Suite 220, Indianapolis, Indiana 46268, United States.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2015 Edition
<b>FCC ID:</b>	VIXPNMWIFIAC
<b>FCC Model(s):</b>	PNMWIFIAC
<b>IC Specification Standard:</b>	RSS-247 Issue 1, May 2015 RSS-Gen Issue 4, December 2014
<b>IC:</b>	21578-PNMWIFIAC
<b>PMN:</b>	PNMWIFIAC
<b>HVIN:</b>	PNMWIFIAC
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	720p WiFi Baby Monitor
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	January 24, 2017
<b>Date of Test:</b>	February 17, 2017 to February 28, 2017
<b>Report Date:</b>	March 30, 2017
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%



# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 Test Results Summary &amp; Statement of Compliance</b>	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
<b>2.0 General Description</b>	6
2.1 Product Description	6
2.2 Test Methodology	7
2.3 Test Facility	7
2.4 Related Submittal(s) Grants	7
<b>3.0 System Test Configuration</b>	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
<b>4.0 Test Results</b>	13
4.1 Maximum Conducted Output Power at Antenna Terminals	13
4.2 Minimum 6dB RF Bandwidth	22
4.3 Maximum Power Spectral Density	31
4.4 Out of Band Conducted Emissions	40
4.5 Field Strength Calculation	53
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	54
4.6.1 Radiated Emission Configuration Photograph	54
4.6.2 Radiated Emission Data	54
4.6.3 Radiated Emission Test Setup	72
4.6.4 Transmitter Duty Cycle Calculation	73
4.7 AC Power Line Conducted Emission	74
4.7.1 AC Power Line Conducted Emission Configuration Photograph	74
4.7.2 AC Power Line Conducted Emission Data	74
4.7.3 Conducted Emission Test Setup	83
<b>5.0 Equipment List</b>	85



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**



## INTERTEK TESTING SERVICES

---

### 1.0 Test Results Summary & Statement of Compliance

#### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details see section
Antenna Requirement	15.203	7.1.2#	Pass	2.1
Max. Conducted Output Power (peak/ average)	15.247(b)(3)&(4)	5.4(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	5.2(1)	Pass	4.2
Max. Power Density (peak/ average)	15.247(e)	5.2(2)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	5.5	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4#	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2015 Edition  
RSS-247 Issue 1, May 2015  
RSS-Gen Issue 4, November 2014



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 2 GENERAL DESCRIPTION**



## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The PNMWIFIAC is a 720p WiFi Baby Monitor.

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels. For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps. For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps. For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps. For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 7 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

The EUT is power by a 100-240VAC to 5.0VDC 1000mA adaptor.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.



## INTERTEK TESTING SERVICES

---

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v03r05 (08-April-2016) and 662911 D01 Multiple Transmitter Output v02r01 (31-October-2013). All other measurements were made in accordance with the procedures in 47 CFR Part 2 and RSS-Gen Issue 4 (2014).

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada No.: 2042V-1.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver.



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 3 SYSTEM TEST CONFIGURATION**



## INTERTEK TESTING SERVICES

---

### 3.0 System Test Configuration

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 100-240VAC to 5.0VDC 1000mA adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.



## INTERTEK TESTING SERVICES

---

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes using both shielded and unshielded USB cable have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.



## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC to 5.0VDC 1000mA, Model: S005AYU0500100)  
(Provided by Intertek)

#### Description of Accessories:

- (1) iPhone (Provided by Intertek)
- (2) Micro SD Card (Provided by Intertek)
- (3) 1 x USB shielded cable (charging only) with length of 2 meter long with ferrite  
(Provided by Client)
- (4) 1 x USB cable (charging only) with length of 0.5 meter long (Provided by Intertek)

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 4 TEST RESULTS**




## INTERTEK TESTING SERVICES

### 4.0 Test Results

#### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

##### RF Conduct measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to the obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	21.4	138.038
Middle Channel: 2437	20.8	120.226
High Channel: 2462	20.3	107.152

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	24.0	251.189
Middle Channel: 2437	23.6	229.087
High Channel: 2462	23.1	204.174



## INTERTEK TESTING SERVICES

### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	23.5	223.872
Middle Channel: 2437	23.1	204.174
High Channel: 2462	22.8	190.546

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading




## INTERTEK TESTING SERVICES

### 4.1 Maximum Conducted (Average) Output Power at Antenna Terminals

#### RF Conduct measurement Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☐ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to the obtain power at the EUT antenna terminals. The measurement procedure 9.1.2 was used.
- ☒ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

#### Occupied Bandwidth

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 1 dBi	
Frequency (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2412	36.64
Middle Channel: 2437	36.48
High Channel: 2462	36.48

The plots of occupied bandwidth are saved as below.








# INTERTEK TESTING SERVICES

## Plots of Occupied Bandwidth 802.11n (40MHz), Highest Channel

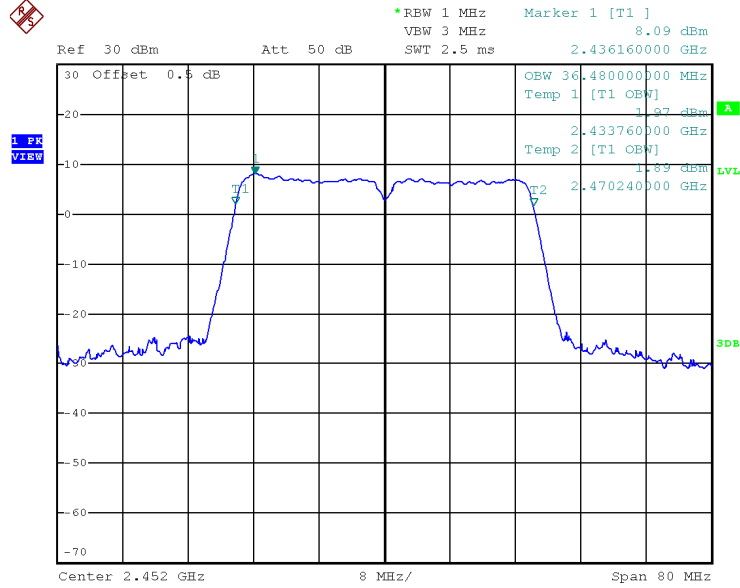



## INTERTEK TESTING SERVICES

---

### 4.1 Maximum Conducted (Average) Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 1 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	15.65	36.728
Middle Channel: 2437	15.48	35.318
High Channel: 2452	15.07	32.137

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading

The plots of Maximum Conducted (Average) Output Power are saved as below.











## INTERTEK TESTING SERVICES

---

### 4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11b (DSSS, 1 Mbps)  
max. conducted (peak) output level = 21.4 dBm

IEEE 802.11g (OFDM, 9 Mbps)  
max. conducted (peak) output level = 24.0 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)  
max. conducted (peak) output level = 23.5 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)  
max. conducted (average) output level = 15.65 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.



## INTERTEK TESTING SERVICES

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	10.30
Middle Channel: 2437	10.24
High Channel: 2462	10.30

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.8
Middle Channel: 2437	16.8
High Channel: 2462	16.8

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	17.9
Middle Channel: 2437	17.9
High Channel: 2462	17.9

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2422	36.68
Middle Channel: 2437	36.68
High Channel: 2452	36.68

#### Limits

6 dB bandwidth shall be at least 500kHz


The plots of 6dB RF bandwidth are saved as below.




## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

#### 802.11b, Lowest Channel

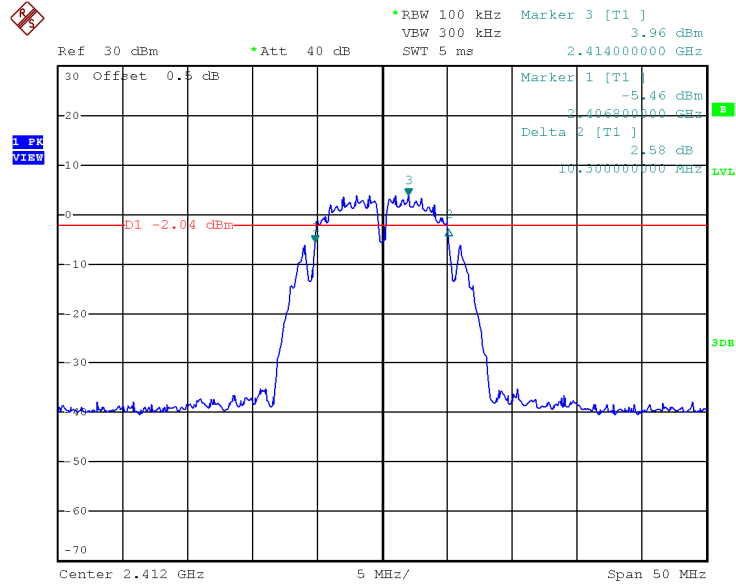

#### 802.11b, Middle Channel

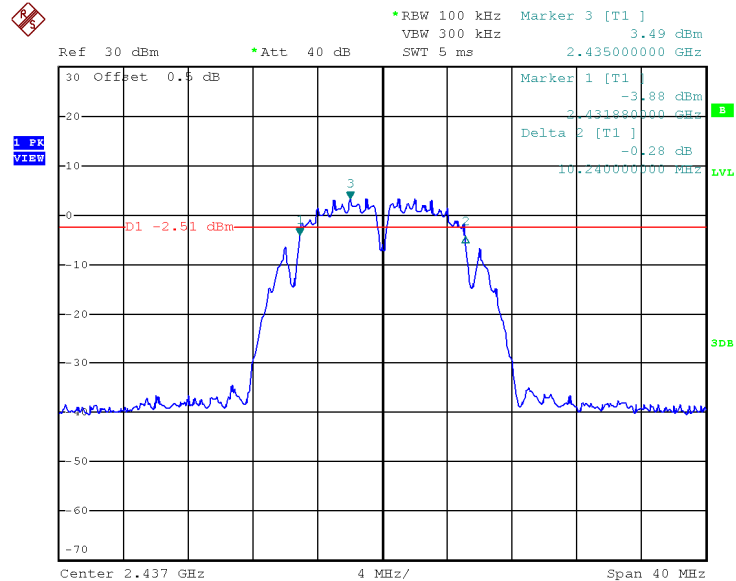




## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11b, Highest Channel

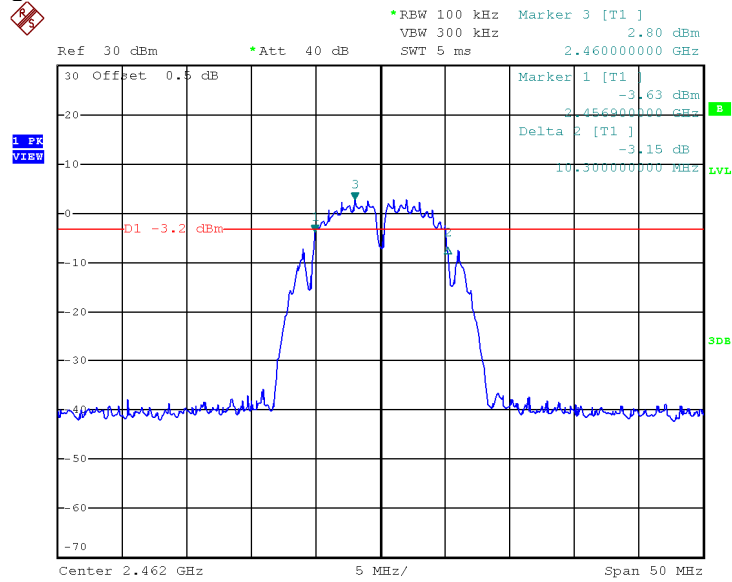





# INTERTEK TESTING SERVICES

## Plots of 6dB RF bandwidth

### 802.11g, Lowest Channel

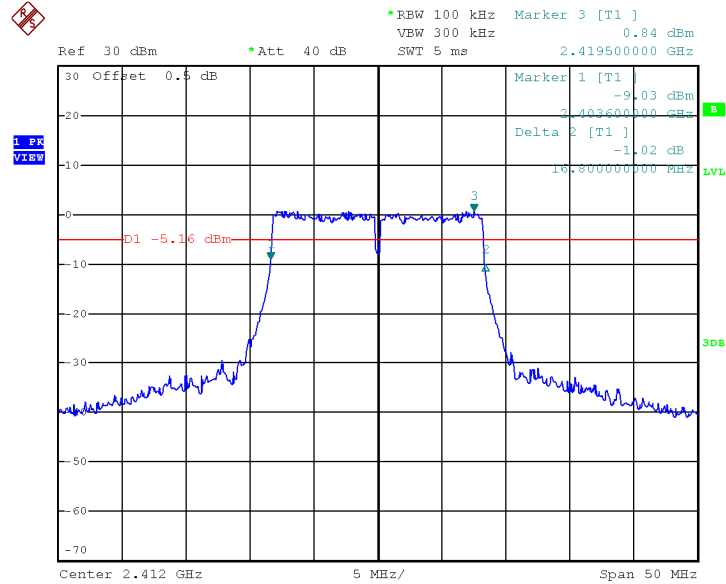

### 802.11g, Middle Channel

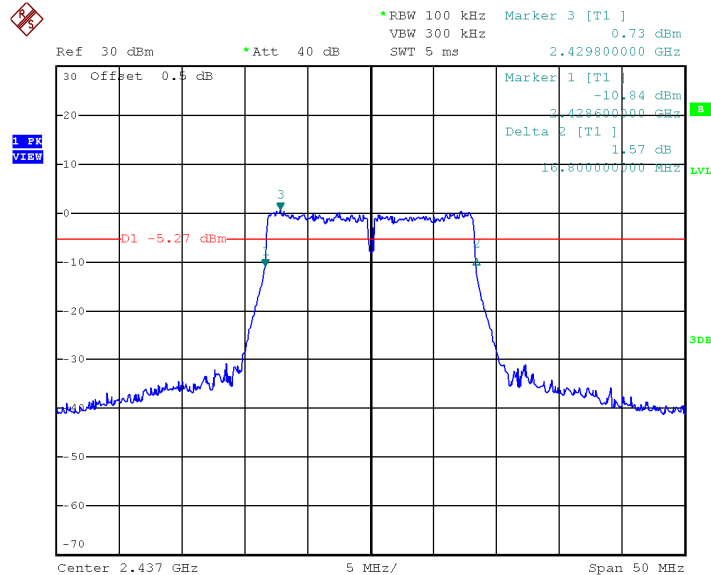




## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11g, Highest Channel

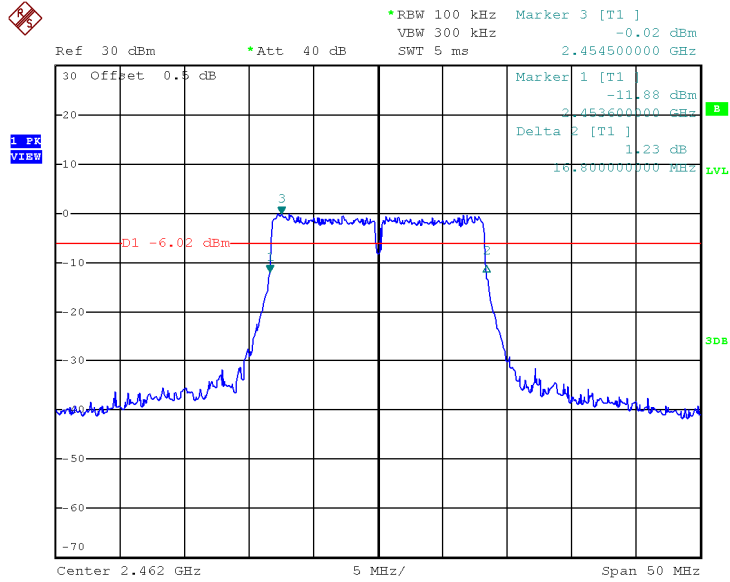





## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11n(20M), Lowest Channel

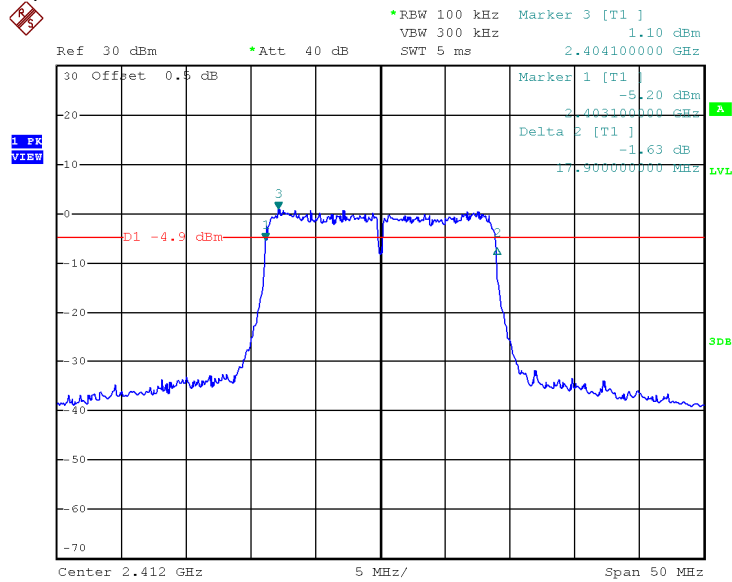

802.11n(20M), Middle Channel

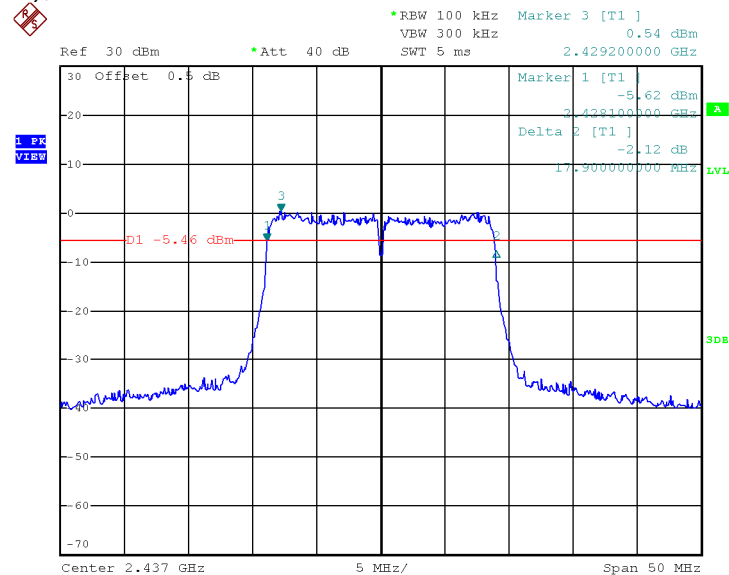




## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11n(20M), Highest Channel

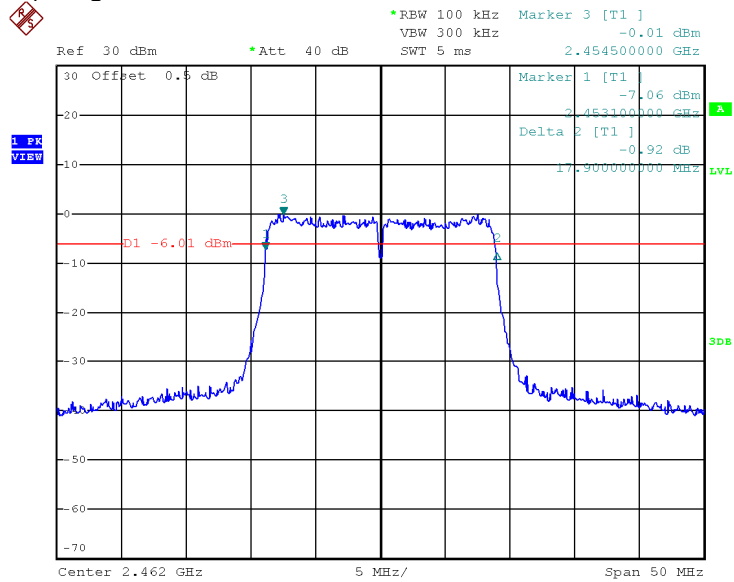





## INTERTEK TESTING SERVICES

### Plots of 6dB RF bandwidth

802.11n(40M), Lowest Channel

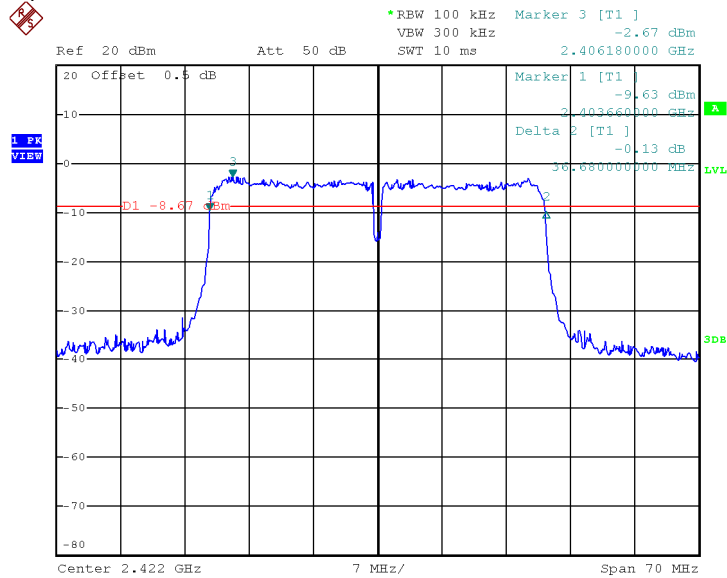

802.11n(40M), Middle Channel

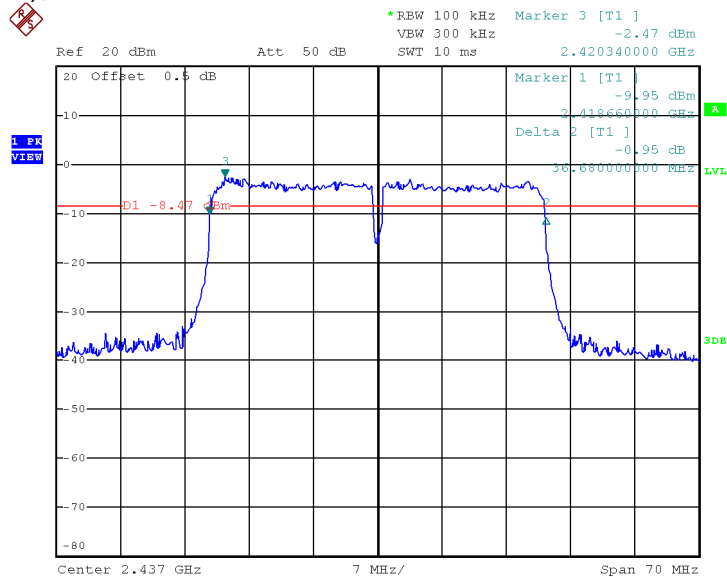







---

## INTERTEK TESTING SERVICES

---

### 4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used for 802.11b/g/n20MHz. The measurement procedure 10.3 AVGPSD was used for 802.11n40MHz. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	4.03
Middle Channel: 2437	3.57
High Channel: 2462	2.80

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.98
Middle Channel: 2437	0.60
High Channel: 2462	0.04

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	0.86
Middle Channel: 2437	0.26
High Channel: 2462	-0.16

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422	-4.72
Middle Channel: 2437	-5.33
High Channel: 2452	-5.44

Cable Loss: 0.5 dB

Limit:  
8dBm


The plots of power spectral density are as below.




# INTERTEK TESTING SERVICES

## Plots of power spectral density

802.11b, Lowest channel

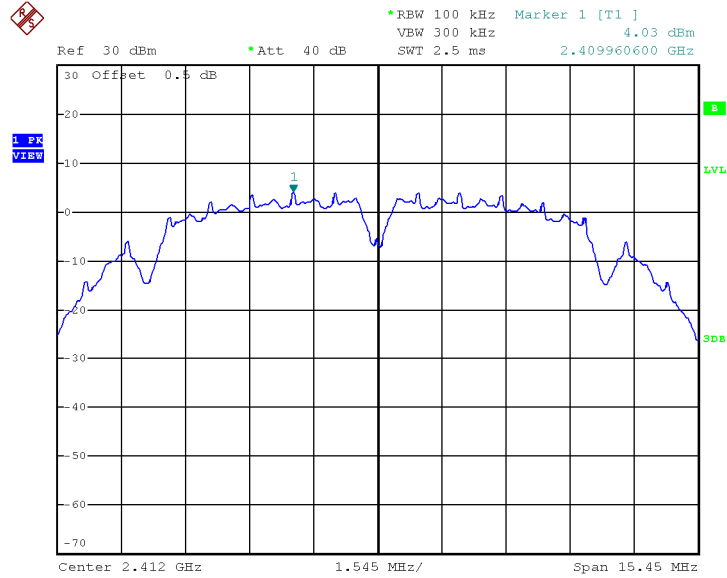

802.11b, Middle channel

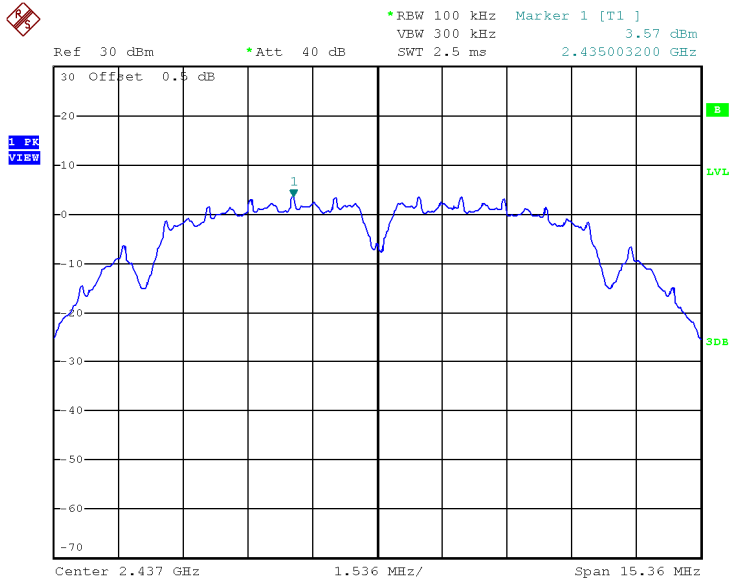




## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11b, Highest channel

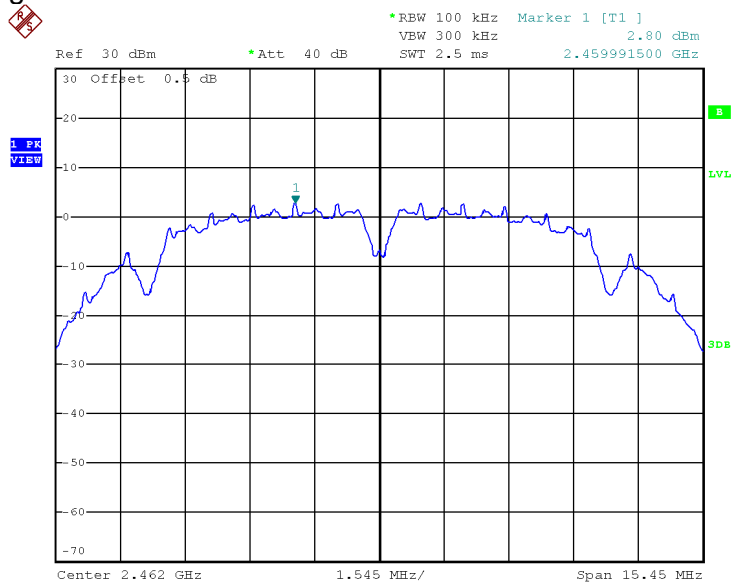





## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11g, Lowest channel

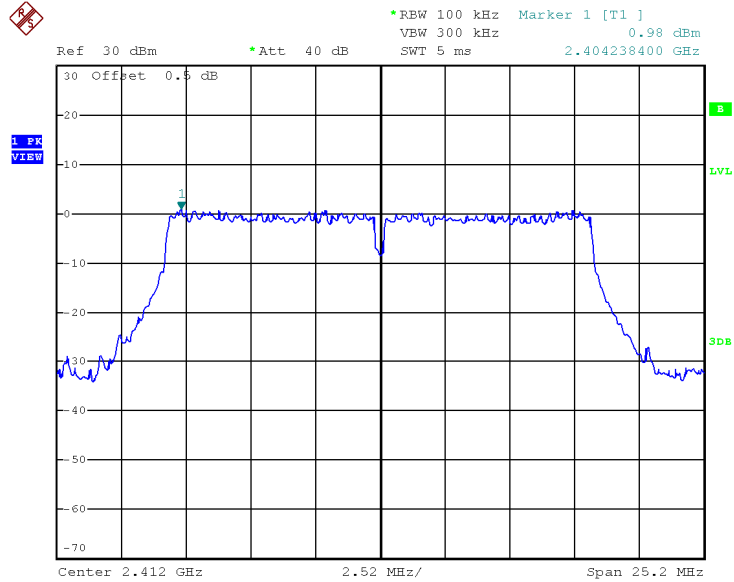

802.11g, Middle channel

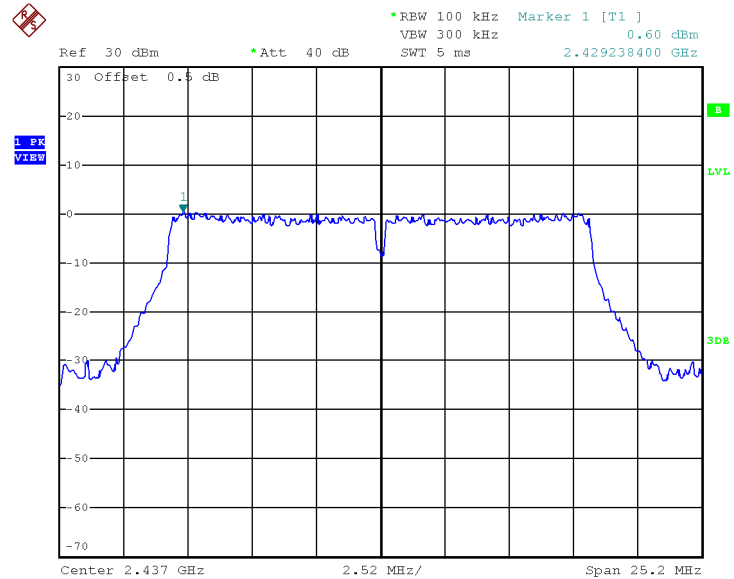




## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11g, Highest channel

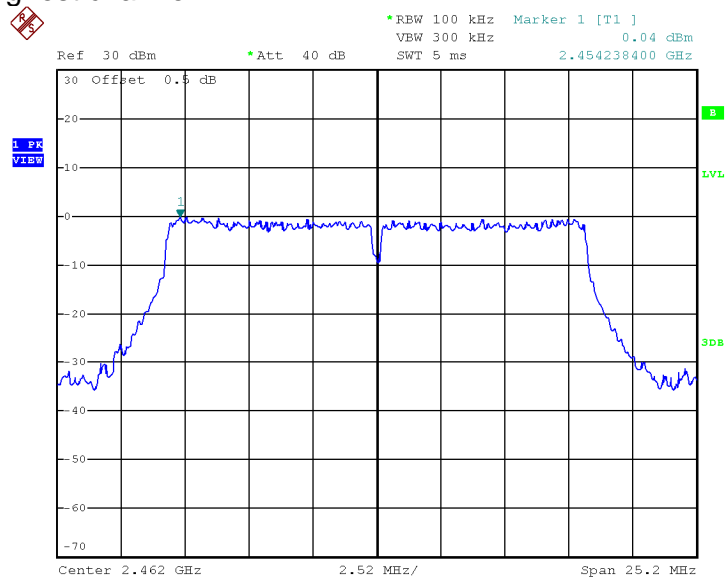





## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11n(20M), Lowest channel

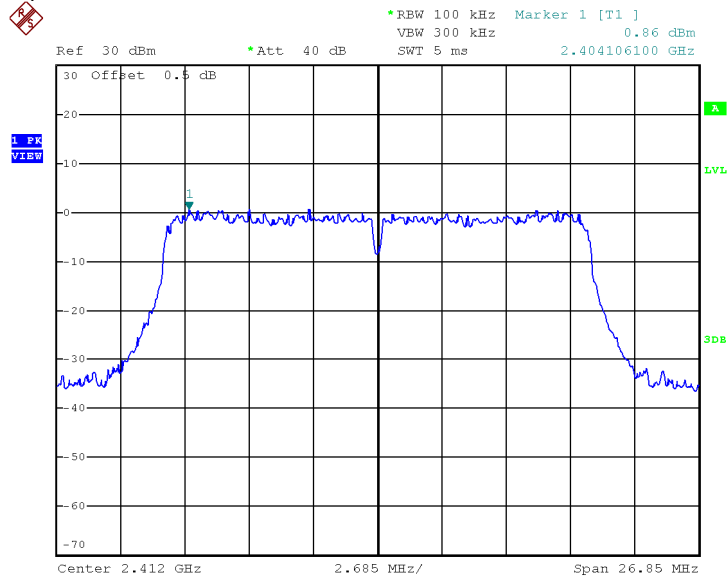

802.11n(20M), Middle channel

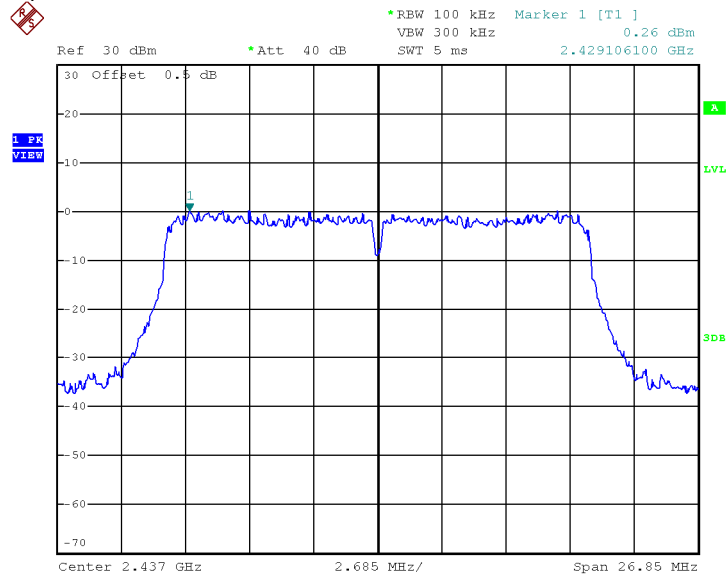




## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11n(20M), Highest channel

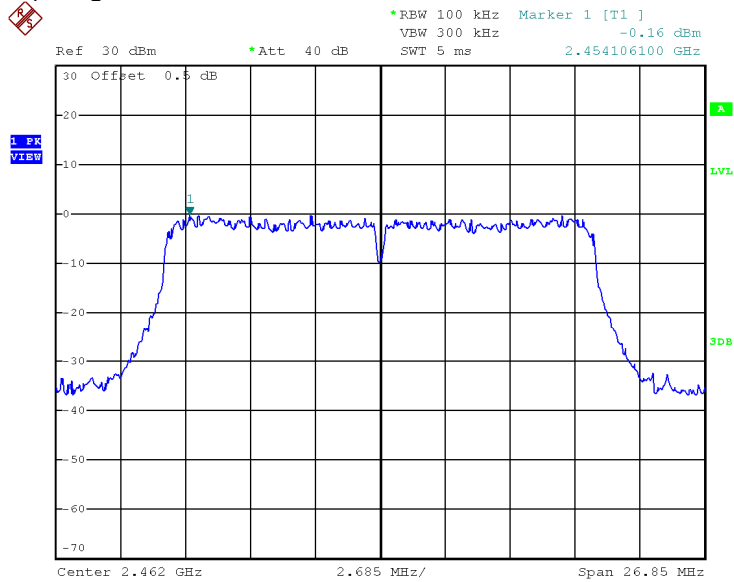





## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11n(40M), Lowest channel

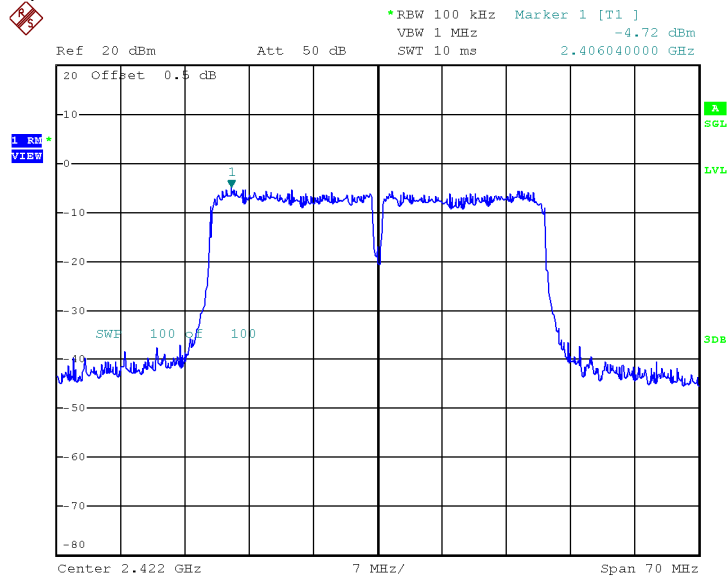

802.11n(40M), Middle channel

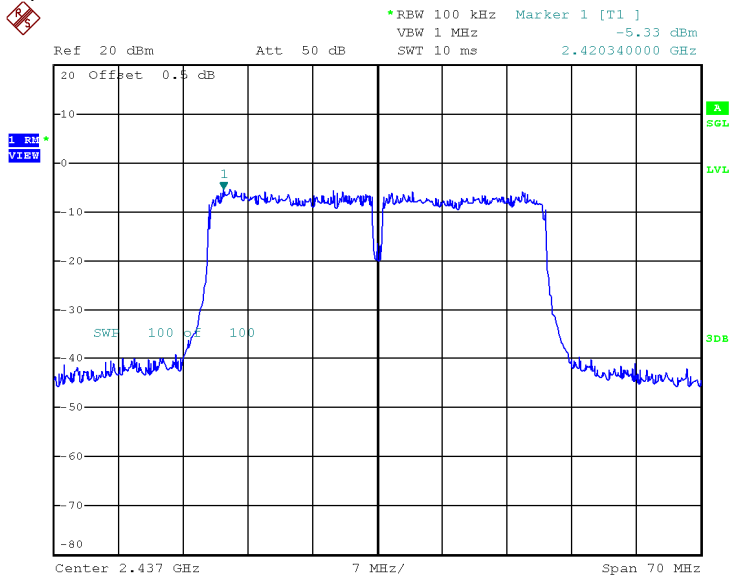




## INTERTEK TESTING SERVICES

### Plots of power spectral density

802.11n(40M), Highest channel

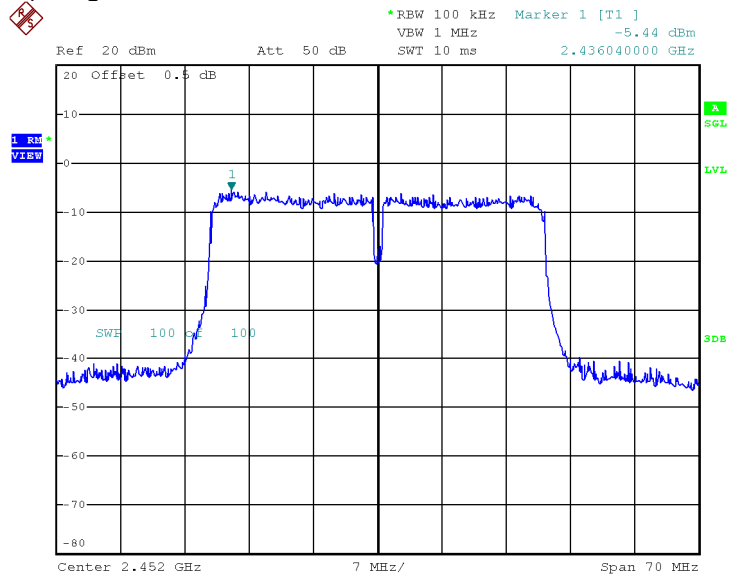



## INTERTEK TESTING SERVICES

---

### 4.4 Out of Band Conducted Emissions

For 802.11b/g/n20/n40MHz, the maximum conducted output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11b/g/n20MHz and the limit at 30dB below maximum measured in-band peak PSD level in 100 KHz bandwidth for 802.11n40MHz.

The measurement procedures under sections 11 of KDB558074 D01 v03r05 (08-April-2016) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

#### Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB for 802.11b,g,n20MHz below the maximum measured in-band peak PSD level.

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 30 dB for 802.11n40MHz below the maximum measured in-band peak PSD level.


The plots of out of band conducted emissions are as below.




## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

#### 802.11b, Lowest Channel, Plot A

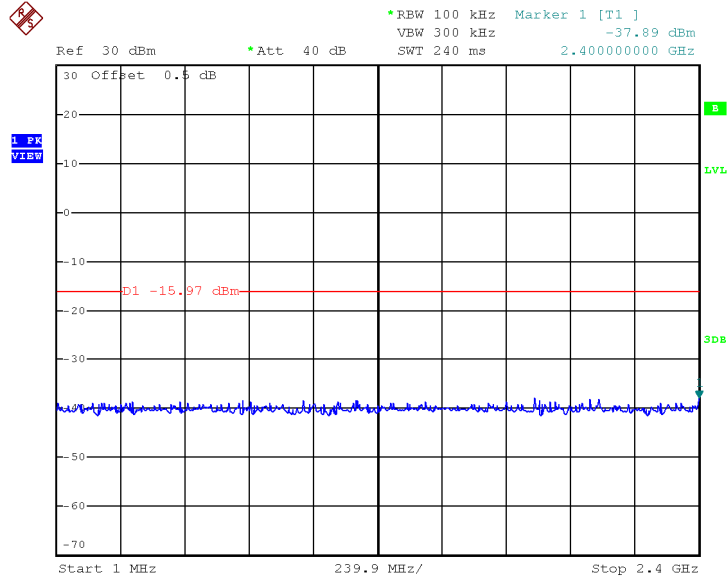

#### 802.11b, Lowest Channel, Plot B

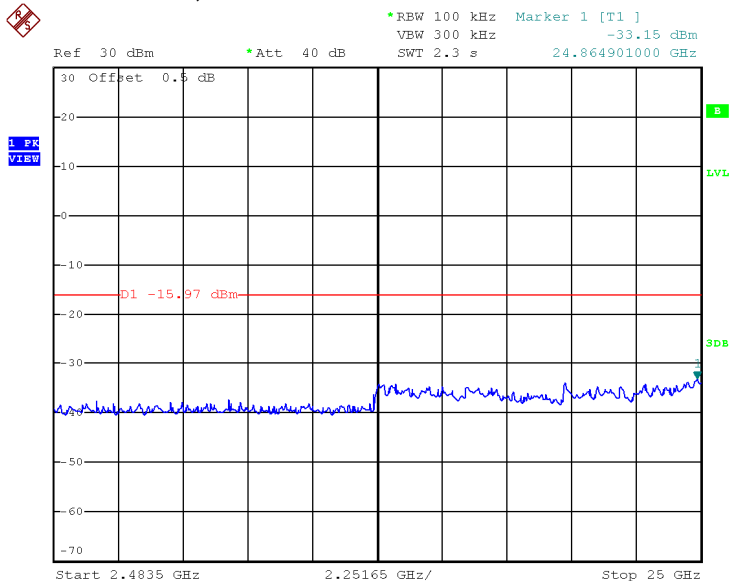





# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

### 802.11b, Middle Channel, Plot A

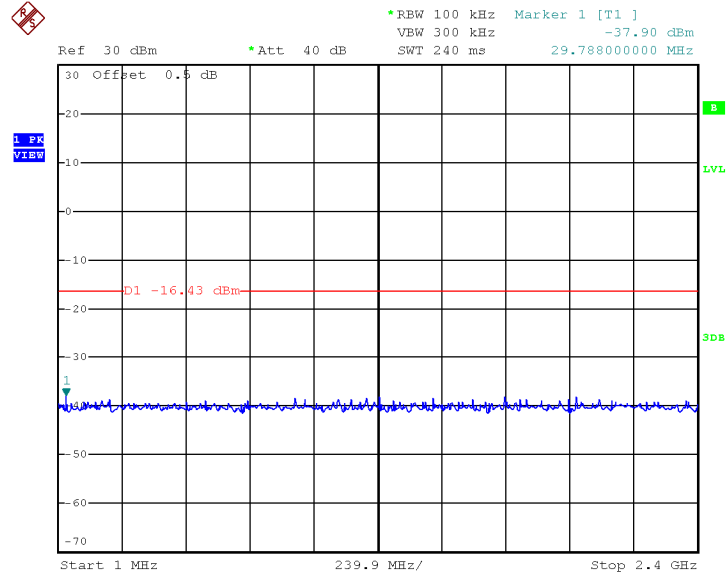

### 802.11b, Middle Channel, Plot B

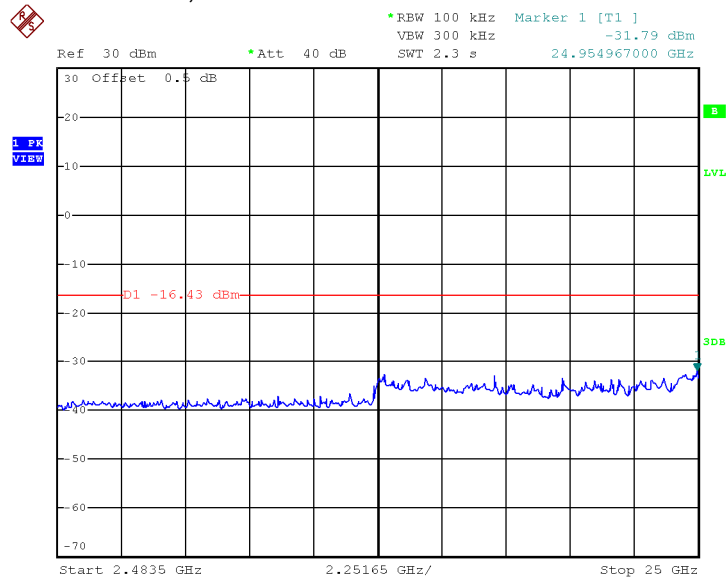





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

#### 802.11b, Highest Channel, Plot A

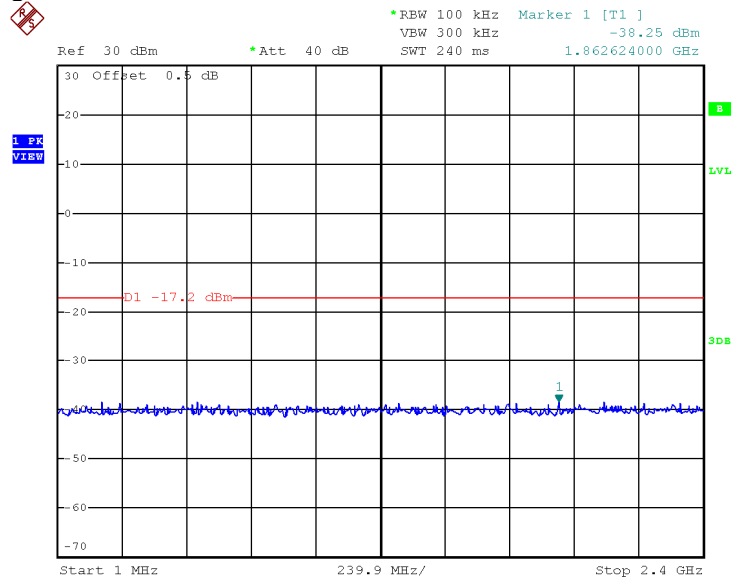

#### 802.11b, Highest Channel, Plot B

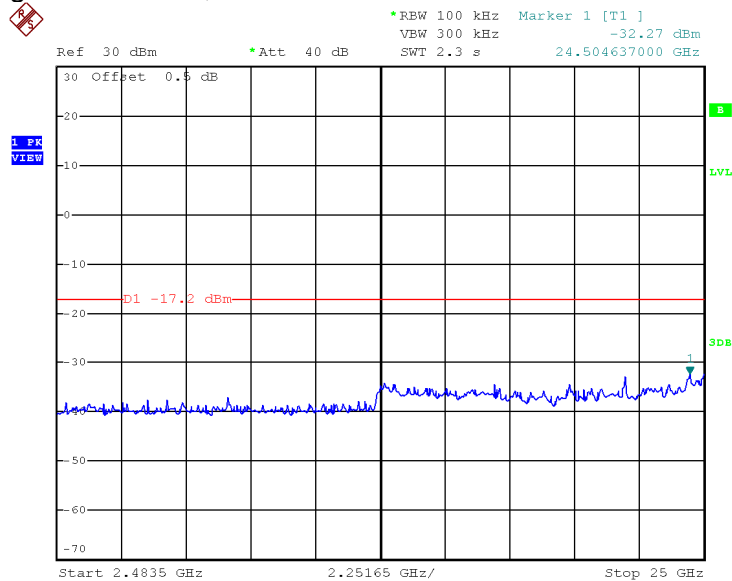





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

#### 802.11g, Lowest Channel, Plot A

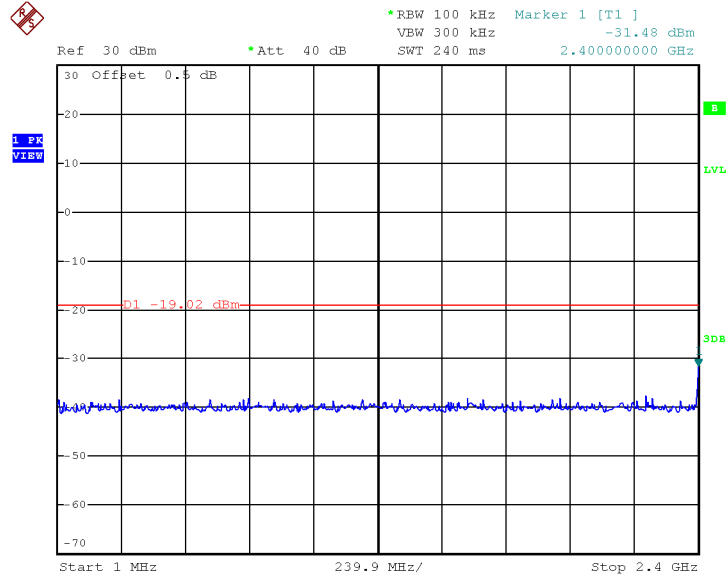

#### 802.11g, Lowest Channel, Plot B

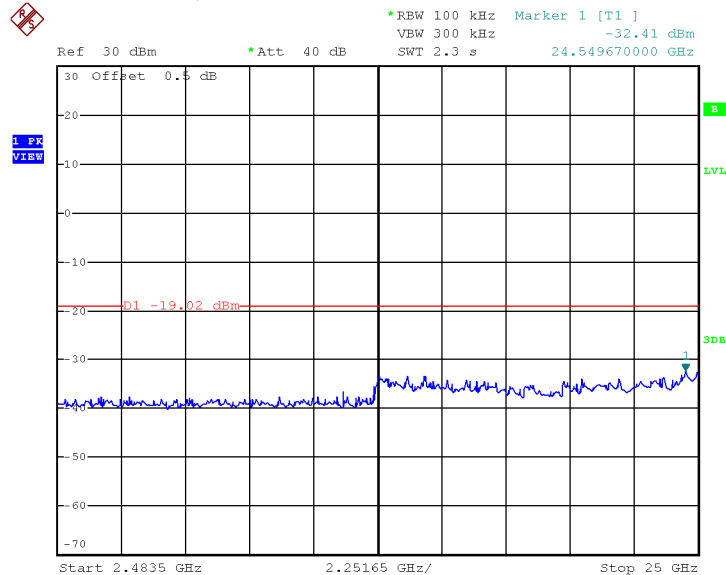





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

#### 802.11g, Middle Channel, Plot A

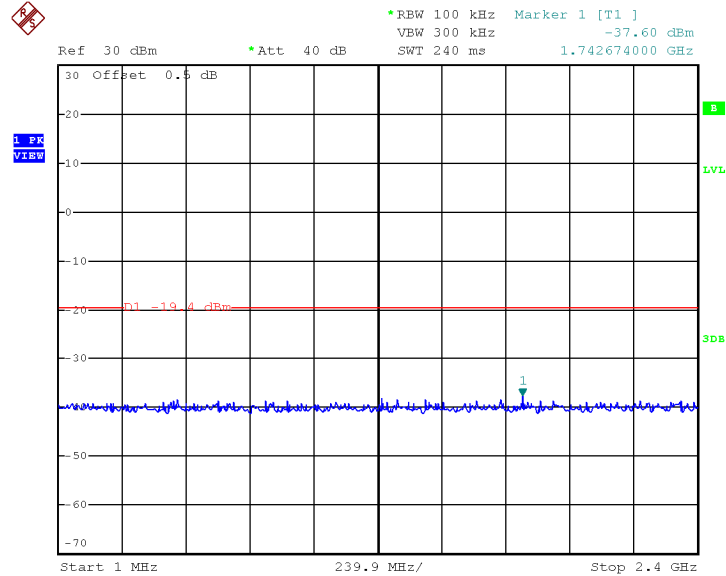

#### 802.11g, Middle Channel, Plot B

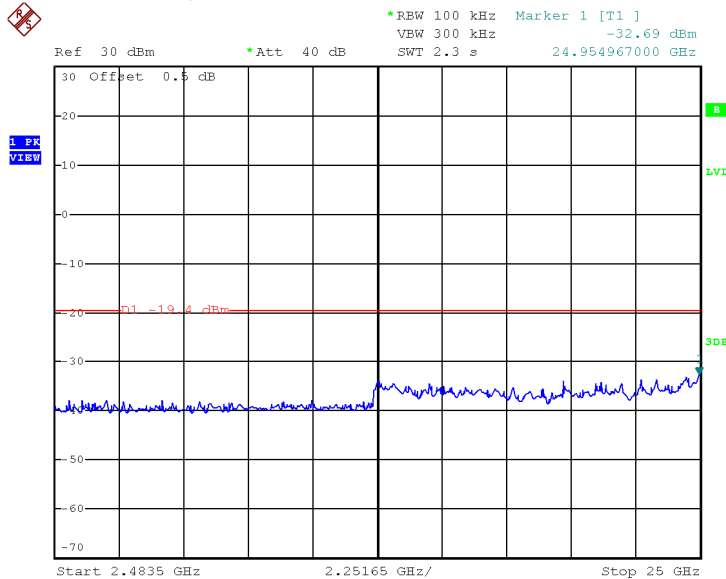





# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

### 802.11g, Highest Channel, Plot A

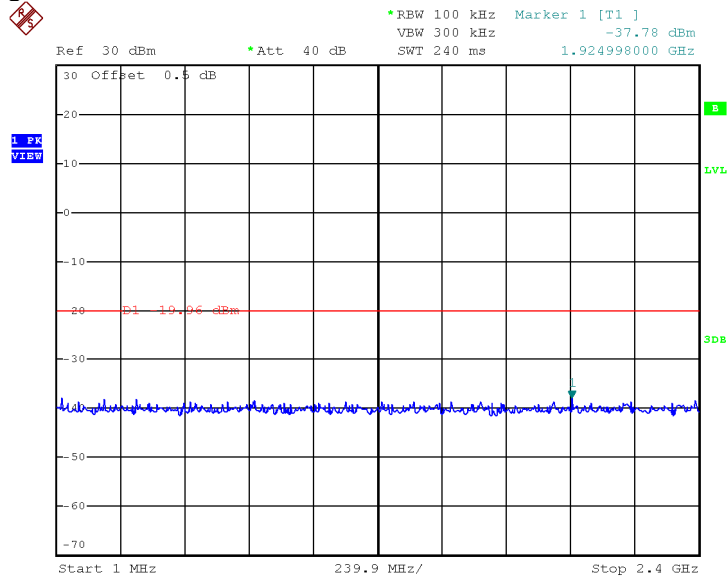

### 802.11g, Highest Channel, Plot B

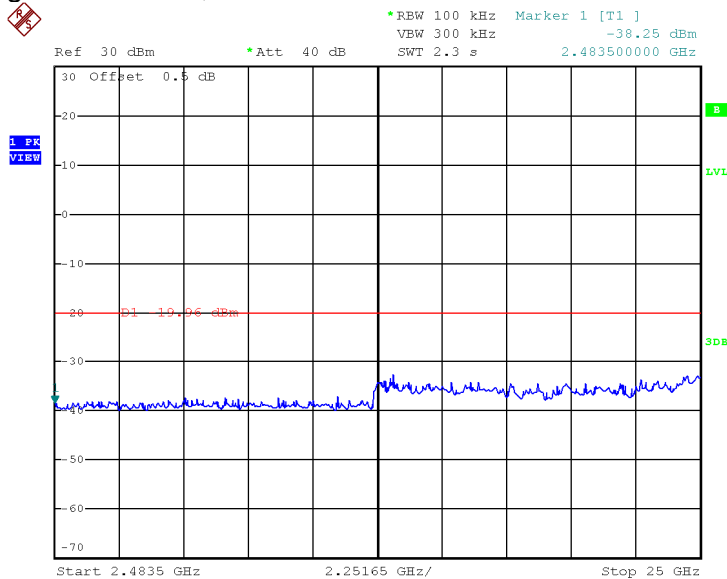





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (20M), Lowest Channel, Plot A

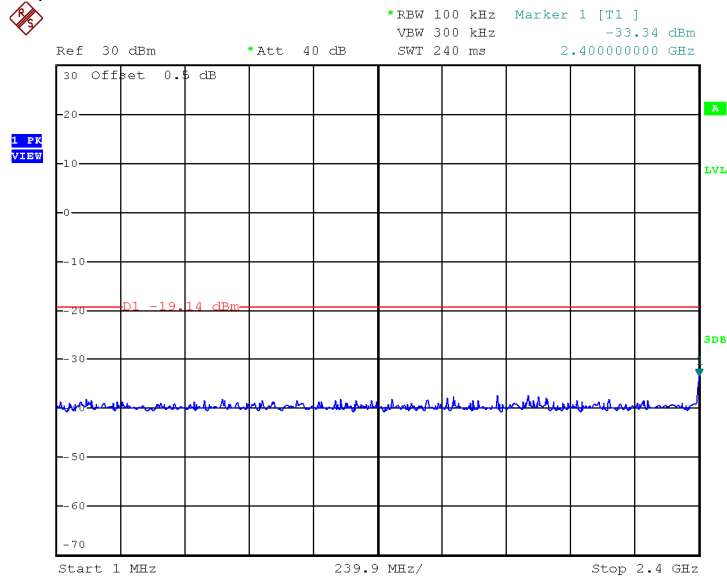

802.11n (20M), Lowest Channel, Plot B

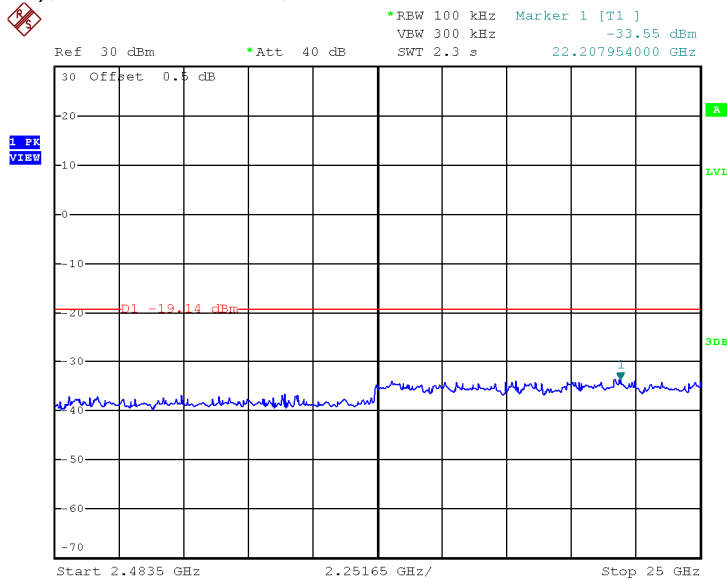





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (20M), Middle Channel, Plot A

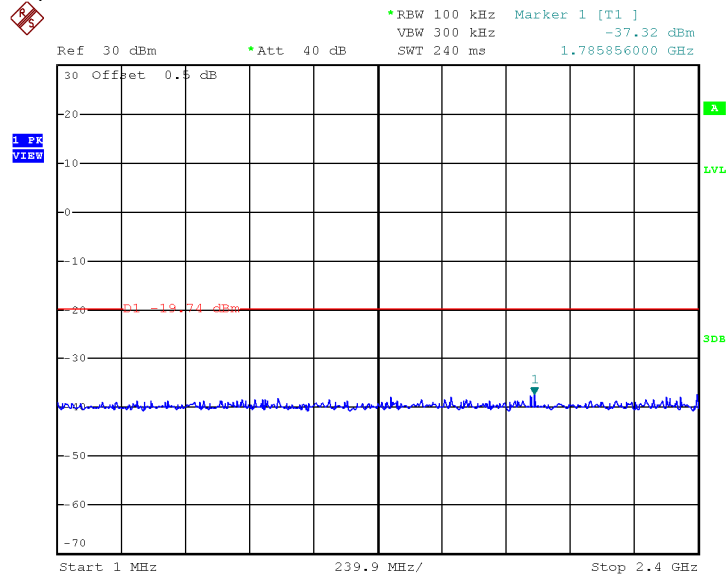

802.11n (20M), Middle Channel, Plot B

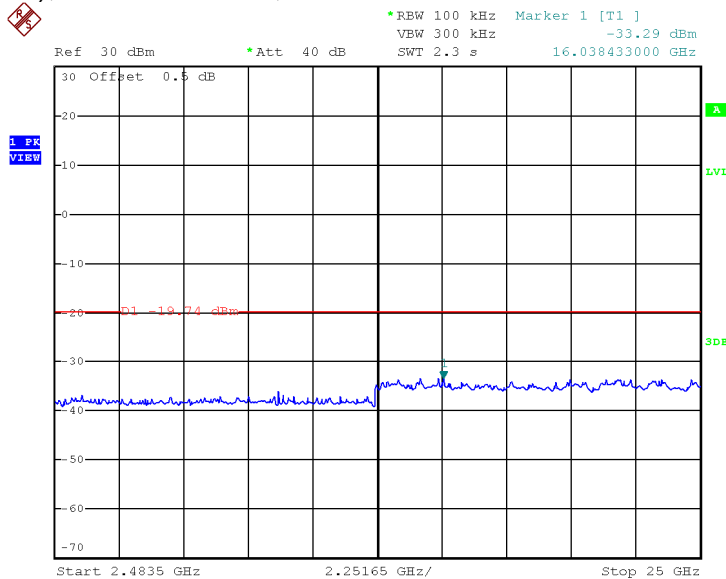





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (20M), Highest Channel, Plot A

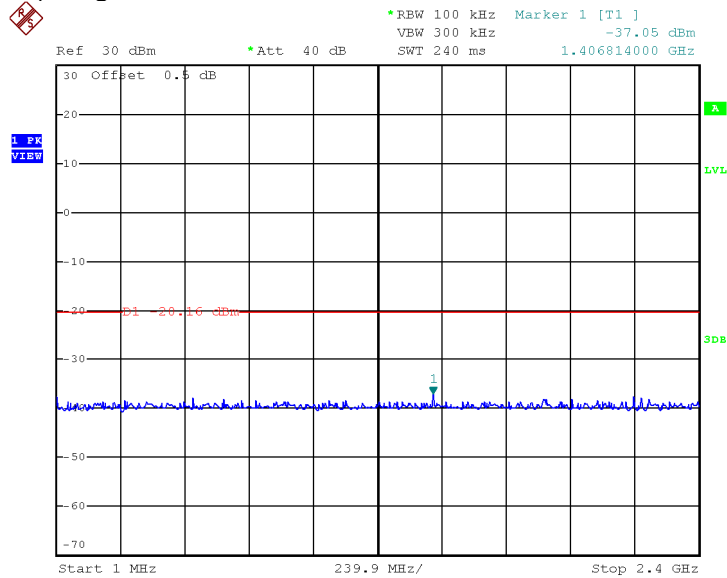

802.11n (20M), Highest Channel, Plot B

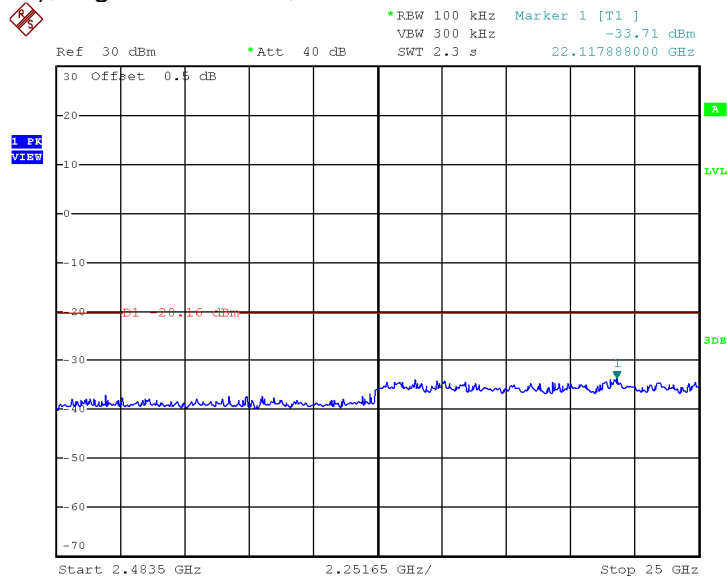





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (40M), Lowest Channel, Plot A

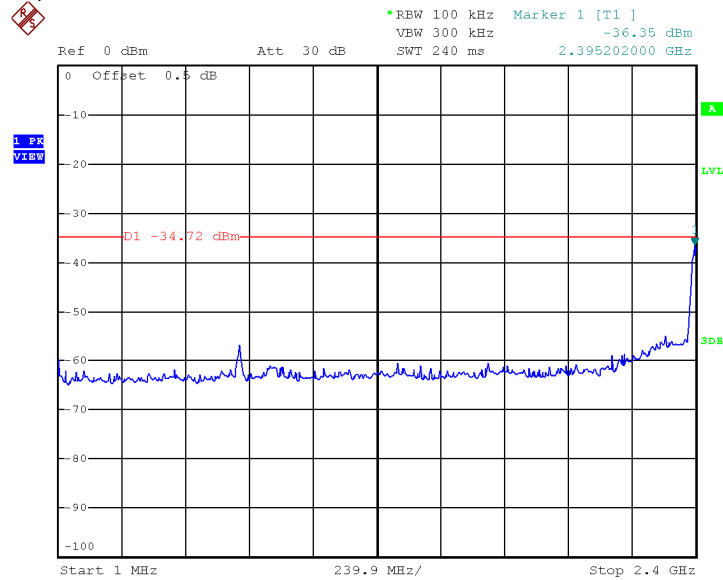

802.11n (40M), Lowest Channel, Plot B

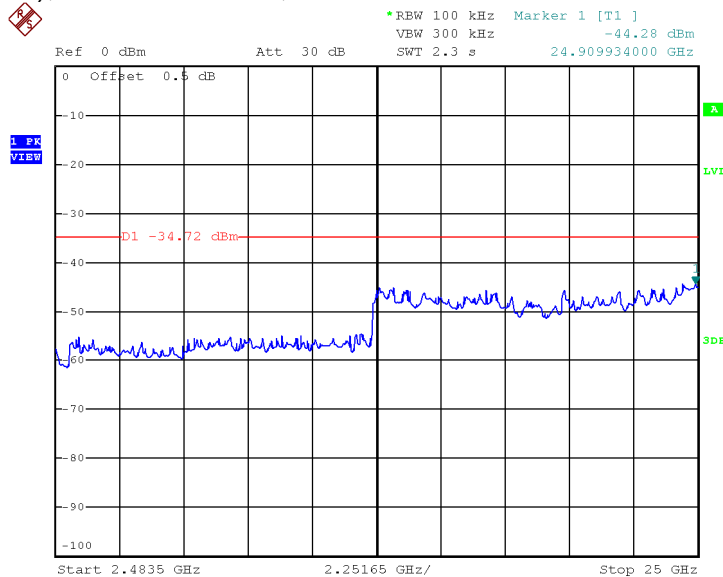





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (40M), Middle Channel, Plot A

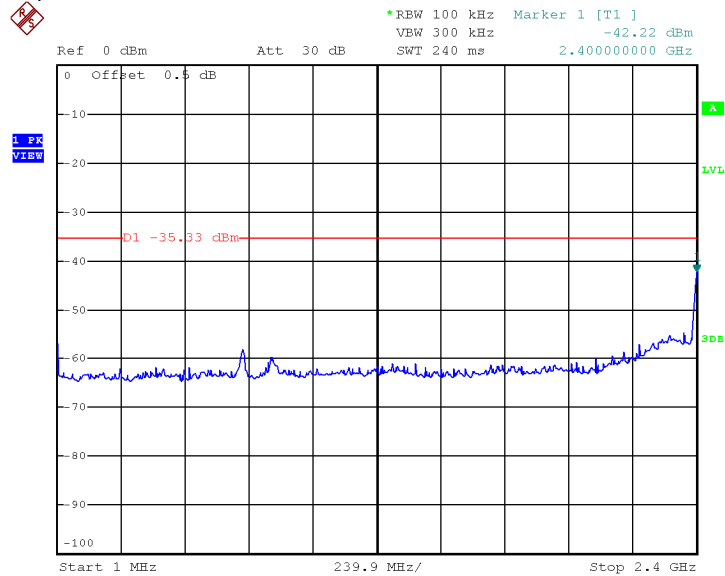

802.11n (40M), Middle Channel, Plot B

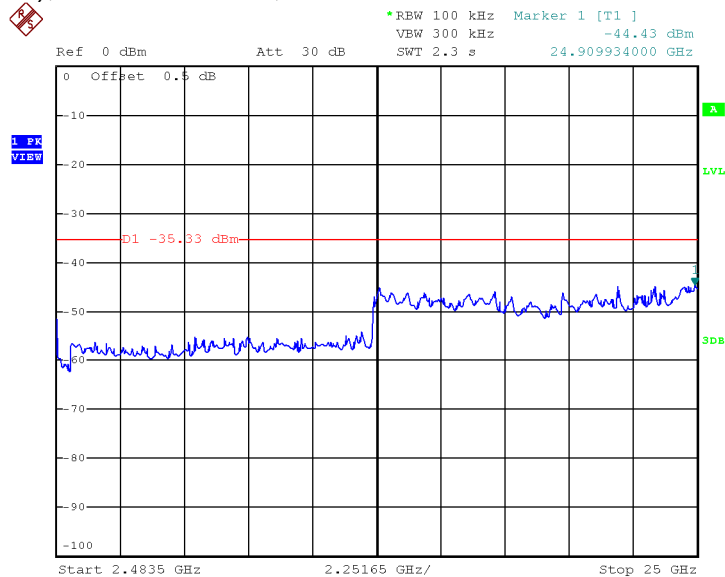





## INTERTEK TESTING SERVICES

### Plots of out of band conducted emissions

802.11n (40M), Highest Channel, Plot A

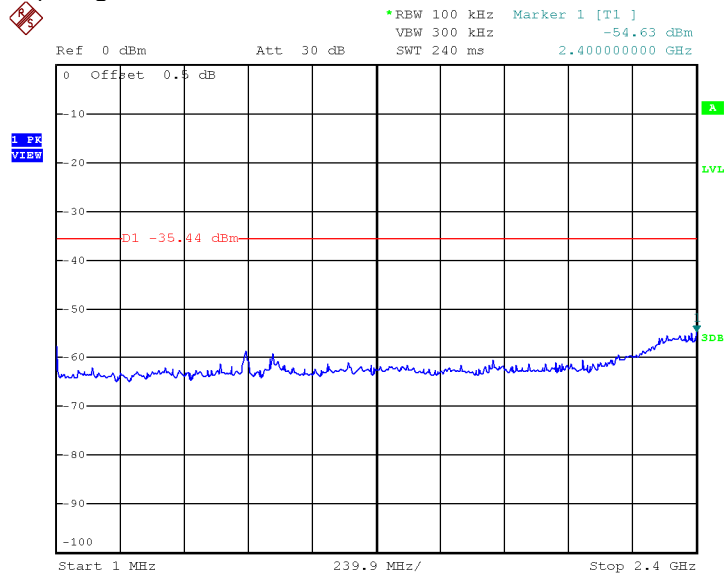

802.11n (40M), Highest Channel, Plot B

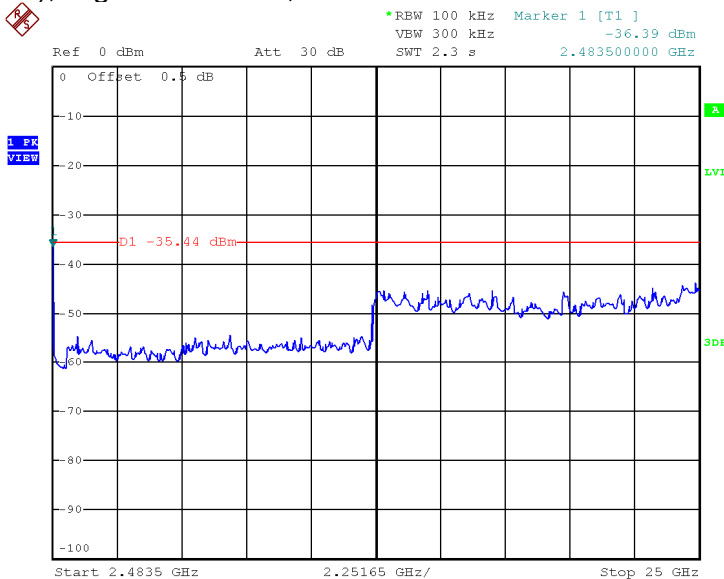



---

## INTERTEK TESTING SERVICES

---

### 4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where      FS = Field Strength in dB $\mu$ V/m  
             RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
             CF = Cable Attenuation Factor in dB  
             AF = Antenna Factor in dB  
             AG = Amplifier Gain in dB  
             PD = Pulse Desensitization in dB  
             AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
AF = 7.4 dB  
CF = 1.6 dB  
AG = 29.0 dB  
PD = 0.0 dB  
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$



## INTERTEK TESTING SERVICES

---

### 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

2390.000MHz

The worst case radiated emission configuration photographs are saved with filename:  
config photos.pdf

#### 4.6.2 Radiated Emission Data

The data in tables 1-17 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.3 dB margin compare with average limit



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 1  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>50.8</b>	<b>33</b>	<b>29.4</b>	<b>47.2</b>	<b>54.0</b>	<b>-6.8</b>
V	<b>4824.000</b>	<b>38.3</b>	<b>33</b>	<b>34.9</b>	<b>40.2</b>	<b>54.0</b>	<b>-13.8</b>
V	<b>12060.000</b>	<b>34.6</b>	<b>33</b>	<b>40.5</b>	<b>42.1</b>	<b>54.0</b>	<b>-11.9</b>
V	<b>14472.000</b>	<b>36.0</b>	<b>33</b>	<b>40.0</b>	<b>43.0</b>	<b>54.0</b>	<b>-11.0</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>61.9</b>	<b>33</b>	<b>29.4</b>	<b>58.3</b>	<b>74.0</b>	<b>-15.7</b>
V	<b>4824.000</b>	<b>43.2</b>	<b>33</b>	<b>34.9</b>	<b>45.1</b>	<b>74.0</b>	<b>-28.9</b>
V	<b>12060.000</b>	<b>44.9</b>	<b>33</b>	<b>40.5</b>	<b>52.4</b>	<b>74.0</b>	<b>-21.6</b>
V	<b>14472.000</b>	<b>46.3</b>	<b>33</b>	<b>40.0</b>	<b>53.3</b>	<b>74.0</b>	<b>-20.7</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 2  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>38.3</b>	<b>33</b>	<b>34.9</b>	<b>40.2</b>	<b>54.0</b>	<b>-13.8</b>
V	<b>7311.000</b>	<b>34.6</b>	<b>33</b>	<b>37.9</b>	<b>39.5</b>	<b>54.0</b>	<b>-14.5</b>
V	<b>12185.000</b>	<b>34.7</b>	<b>33</b>	<b>40.5</b>	<b>42.2</b>	<b>54.0</b>	<b>-11.8</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>43.3</b>	<b>33</b>	<b>34.9</b>	<b>45.2</b>	<b>74.0</b>	<b>-28.8</b>
V	<b>7311.000</b>	<b>42.2</b>	<b>33</b>	<b>37.9</b>	<b>47.1</b>	<b>74.0</b>	<b>-26.9</b>
V	<b>12185.000</b>	<b>45.0</b>	<b>33</b>	<b>40.5</b>	<b>52.5</b>	<b>74.0</b>	<b>-21.5</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



## INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 3  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>51.4</b>	<b>33</b>	<b>29.4</b>	<b>47.8</b>	<b>54.0</b>	<b>-6.2</b>
V	<b>4924.000</b>	<b>38.6</b>	<b>33</b>	<b>34.9</b>	<b>40.5</b>	<b>54.0</b>	<b>-13.5</b>
V	<b>7386.000</b>	<b>33.9</b>	<b>33</b>	<b>37.9</b>	<b>38.8</b>	<b>54.0</b>	<b>-15.2</b>
V	<b>12310.000</b>	<b>34.8</b>	<b>33</b>	<b>40.5</b>	<b>42.3</b>	<b>54.0</b>	<b>-11.7</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>62.7</b>	<b>33</b>	<b>29.4</b>	<b>59.1</b>	<b>74.0</b>	<b>-14.9</b>
V	<b>4924.000</b>	<b>43.5</b>	<b>33</b>	<b>34.9</b>	<b>45.4</b>	<b>74.0</b>	<b>-28.6</b>
V	<b>7386.000</b>	<b>41.5</b>	<b>33</b>	<b>37.9</b>	<b>46.4</b>	<b>74.0</b>	<b>-27.6</b>
V	<b>12310.000</b>	<b>45.1</b>	<b>33</b>	<b>40.5</b>	<b>52.6</b>	<b>74.0</b>	<b>-21.4</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 4  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>53.4</b>	<b>33</b>	<b>29.4</b>	<b>49.8</b>	<b>54.0</b>	<b>-4.2</b>
V	<b>4824.000</b>	<b>32.6</b>	<b>33</b>	<b>34.9</b>	<b>34.5</b>	<b>54.0</b>	<b>-19.5</b>
V	<b>12060.000</b>	<b>34.8</b>	<b>33</b>	<b>40.5</b>	<b>42.3</b>	<b>54.0</b>	<b>-11.7</b>
V	<b>14472.000</b>	<b>36.1</b>	<b>33</b>	<b>40.0</b>	<b>43.1</b>	<b>54.0</b>	<b>-10.9</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>68.6</b>	<b>33</b>	<b>29.4</b>	<b>65.0</b>	<b>74.0</b>	<b>-9.0</b>
V	<b>4824.000</b>	<b>41.9</b>	<b>33</b>	<b>34.9</b>	<b>43.8</b>	<b>74.0</b>	<b>-30.2</b>
V	<b>12060.000</b>	<b>45.0</b>	<b>33</b>	<b>40.5</b>	<b>52.5</b>	<b>74.0</b>	<b>-21.5</b>
V	<b>14472.000</b>	<b>46.4</b>	<b>33</b>	<b>40.0</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 5  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>32.5</b>	<b>33</b>	<b>34.9</b>	<b>34.4</b>	<b>54.0</b>	<b>-19.6</b>
V	<b>7311.000</b>	<b>35.0</b>	<b>33</b>	<b>37.9</b>	<b>39.9</b>	<b>54.0</b>	<b>-14.1</b>
V	<b>12185.000</b>	<b>34.7</b>	<b>33</b>	<b>40.5</b>	<b>42.2</b>	<b>54.0</b>	<b>-11.8</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>41.8</b>	<b>33</b>	<b>34.9</b>	<b>43.7</b>	<b>74.0</b>	<b>-30.3</b>
V	<b>7311.000</b>	<b>43.7</b>	<b>33</b>	<b>37.9</b>	<b>48.6</b>	<b>74.0</b>	<b>-25.4</b>
V	<b>12185.000</b>	<b>44.9</b>	<b>33</b>	<b>40.5</b>	<b>52.4</b>	<b>74.0</b>	<b>-21.6</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 6  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>53.0</b>	<b>33</b>	<b>29.4</b>	<b>49.4</b>	<b>54.0</b>	<b>-4.6</b>
V	<b>4924.000</b>	<b>32.5</b>	<b>33</b>	<b>34.9</b>	<b>34.4</b>	<b>54.0</b>	<b>-19.6</b>
V	<b>7386.000</b>	<b>34.7</b>	<b>33</b>	<b>37.9</b>	<b>39.6</b>	<b>54.0</b>	<b>-14.4</b>
V	<b>12310.000</b>	<b>34.5</b>	<b>33</b>	<b>40.5</b>	<b>42.0</b>	<b>54.0</b>	<b>-12.0</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>67.9</b>	<b>33</b>	<b>29.4</b>	<b>64.3</b>	<b>74.0</b>	<b>-9.7</b>
V	<b>4924.000</b>	<b>41.7</b>	<b>33</b>	<b>34.9</b>	<b>43.6</b>	<b>74.0</b>	<b>-30.4</b>
V	<b>7386.000</b>	<b>43.5</b>	<b>33</b>	<b>37.9</b>	<b>48.4</b>	<b>74.0</b>	<b>-25.6</b>
V	<b>12310.000</b>	<b>44.8</b>	<b>33</b>	<b>40.5</b>	<b>52.3</b>	<b>74.0</b>	<b>-21.7</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 7  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>54.5</b>	<b>33</b>	<b>29.4</b>	<b>50.9</b>	<b>54.0</b>	<b>-3.1</b>
V	<b>4824.000</b>	<b>31.9</b>	<b>33</b>	<b>34.9</b>	<b>33.8</b>	<b>54.0</b>	<b>-20.2</b>
V	<b>12060.000</b>	<b>34.9</b>	<b>33</b>	<b>40.5</b>	<b>42.4</b>	<b>54.0</b>	<b>-11.6</b>
V	<b>14472.000</b>	<b>36.2</b>	<b>33</b>	<b>40.0</b>	<b>43.2</b>	<b>54.0</b>	<b>-10.8</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>70.6</b>	<b>33</b>	<b>29.4</b>	<b>67.0</b>	<b>74.0</b>	<b>-7.0</b>
V	<b>4824.000</b>	<b>40.8</b>	<b>33</b>	<b>34.9</b>	<b>42.7</b>	<b>74.0</b>	<b>-31.3</b>
V	<b>12060.000</b>	<b>45.1</b>	<b>33</b>	<b>40.5</b>	<b>52.6</b>	<b>74.0</b>	<b>-21.4</b>
V	<b>14472.000</b>	<b>46.5</b>	<b>33</b>	<b>40.0</b>	<b>53.5</b>	<b>74.0</b>	<b>-20.5</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



## INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 8  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>32.3</b>	<b>33</b>	<b>34.9</b>	<b>34.2</b>	<b>54.0</b>	<b>-19.8</b>
V	<b>7311.000</b>	<b>34.6</b>	<b>33</b>	<b>37.9</b>	<b>39.5</b>	<b>54.0</b>	<b>-14.5</b>
V	<b>12185.000</b>	<b>34.7</b>	<b>33</b>	<b>40.5</b>	<b>42.2</b>	<b>54.0</b>	<b>-11.8</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>41.1</b>	<b>33</b>	<b>34.9</b>	<b>43.0</b>	<b>74.0</b>	<b>-31.0</b>
V	<b>7311.000</b>	<b>43.4</b>	<b>33</b>	<b>37.9</b>	<b>48.3</b>	<b>74.0</b>	<b>-25.7</b>
V	<b>12185.000</b>	<b>45.0</b>	<b>33</b>	<b>40.5</b>	<b>52.5</b>	<b>74.0</b>	<b>-21.5</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



## INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 9  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>54.2</b>	<b>33</b>	<b>29.4</b>	<b>50.6</b>	<b>54.0</b>	<b>-3.4</b>
V	<b>4924.000</b>	<b>31.9</b>	<b>33</b>	<b>34.9</b>	<b>33.8</b>	<b>54.0</b>	<b>-20.2</b>
V	<b>7386.000</b>	<b>34.7</b>	<b>33</b>	<b>37.9</b>	<b>39.6</b>	<b>54.0</b>	<b>-14.4</b>
V	<b>12310.000</b>	<b>35.1</b>	<b>33</b>	<b>40.5</b>	<b>42.6</b>	<b>54.0</b>	<b>-11.4</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>69.8</b>	<b>33</b>	<b>29.4</b>	<b>66.2</b>	<b>74.0</b>	<b>-7.8</b>
V	<b>4924.000</b>	<b>40.9</b>	<b>33</b>	<b>34.9</b>	<b>42.8</b>	<b>74.0</b>	<b>-31.2</b>
V	<b>7386.000</b>	<b>43.6</b>	<b>33</b>	<b>37.9</b>	<b>48.5</b>	<b>74.0</b>	<b>-25.5</b>
V	<b>12310.000</b>	<b>45.2</b>	<b>33</b>	<b>40.5</b>	<b>52.7</b>	<b>74.0</b>	<b>-21.3</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



## INTERTEK TESTING SERVICES

Mode: TX-Channel 03

Table 10  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>57.3</b>	<b>33</b>	<b>29.4</b>	<b>53.7</b>	<b>54.0</b>	<b>-0.3</b>
V	<b>4844.000</b>	<b>31.6</b>	<b>33</b>	<b>34.9</b>	<b>33.5</b>	<b>54.0</b>	<b>-20.5</b>
V	<b>7266.000</b>	<b>32.2</b>	<b>33</b>	<b>37.9</b>	<b>37.1</b>	<b>54.0</b>	<b>-16.9</b>
V	<b>12110.000</b>	<b>34.3</b>	<b>33</b>	<b>40.5</b>	<b>41.8</b>	<b>54.0</b>	<b>-12.2</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2390.000</b>	<b>72.4</b>	<b>33</b>	<b>29.4</b>	<b>68.8</b>	<b>74.0</b>	<b>-5.2</b>
V	<b>4844.000</b>	<b>40.4</b>	<b>33</b>	<b>34.9</b>	<b>42.3</b>	<b>74.0</b>	<b>-31.7</b>
V	<b>7266.000</b>	<b>42.2</b>	<b>33</b>	<b>37.9</b>	<b>47.1</b>	<b>74.0</b>	<b>-26.9</b>
V	<b>12110.000</b>	<b>44.7</b>	<b>33</b>	<b>40.5</b>	<b>52.2</b>	<b>74.0</b>	<b>-21.8</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 11  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>31.8</b>	<b>33</b>	<b>34.9</b>	<b>33.7</b>	<b>54.0</b>	<b>-20.3</b>
V	<b>7311.000</b>	<b>32.4</b>	<b>33</b>	<b>37.9</b>	<b>37.3</b>	<b>54.0</b>	<b>-16.7</b>
V	<b>12185.000</b>	<b>34.4</b>	<b>33</b>	<b>40.5</b>	<b>41.9</b>	<b>54.0</b>	<b>-12.1</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>4874.000</b>	<b>40.7</b>	<b>33</b>	<b>34.9</b>	<b>42.6</b>	<b>74.0</b>	<b>-31.4</b>
V	<b>7311.000</b>	<b>42.5</b>	<b>33</b>	<b>37.9</b>	<b>47.4</b>	<b>74.0</b>	<b>-26.6</b>
V	<b>12185.000</b>	<b>44.8</b>	<b>33</b>	<b>40.5</b>	<b>52.3</b>	<b>74.0</b>	<b>-21.7</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 09

Table 12  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>56.2</b>	<b>33</b>	<b>29.4</b>	<b>52.6</b>	<b>54.0</b>	<b>-1.4</b>
V	<b>4904.000</b>	<b>31.2</b>	<b>33</b>	<b>34.9</b>	<b>33.1</b>	<b>54.0</b>	<b>-20.9</b>
V	<b>7356.000</b>	<b>32.1</b>	<b>33</b>	<b>37.9</b>	<b>37.0</b>	<b>54.0</b>	<b>-17.0</b>
V	<b>12260.000</b>	<b>34.3</b>	<b>33</b>	<b>40.5</b>	<b>41.8</b>	<b>54.0</b>	<b>-12.2</b>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	<b>2483.500</b>	<b>71.1</b>	<b>33</b>	<b>29.4</b>	<b>67.5</b>	<b>74.0</b>	<b>-6.5</b>
V	<b>4904.000</b>	<b>40.3</b>	<b>33</b>	<b>34.9</b>	<b>42.2</b>	<b>74.0</b>	<b>-31.8</b>
V	<b>7356.000</b>	<b>42.1</b>	<b>33</b>	<b>37.9</b>	<b>47.0</b>	<b>74.0</b>	<b>-27.0</b>
V	<b>12260.000</b>	<b>44.6</b>	<b>33</b>	<b>40.5</b>	<b>52.1</b>	<b>74.0</b>	<b>-21.9</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the average data of emission measurement.
  3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
  7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.



---

## INTERTEK TESTING SERVICES

---

Mode: WiFi Tx Other

Table 13

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	78.015	45.6	16	6.0	35.6	40.0	-4.4
V	99.718	43.2	16	12.0	39.2	43.5	-4.3
<b>V</b>	<b>116.936</b>	<b>41.9</b>	<b>16</b>	<b>14.0</b>	<b>39.9</b>	<b>43.5</b>	<b>-3.6</b>
V	336.035	31.4	16	24.0	39.4	46.0	-6.6
<b>V</b>	<b>400.055</b>	<b>32.7</b>	<b>16</b>	<b>24.0</b>	<b>40.7</b>	<b>46.0</b>	<b>-5.3</b>
H	450.010	32.6	16	26.0	42.6	46.0	-3.4
H	887.358	25.4	16	32.0	41.4	46.0	-4.6

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 2.2.



---

## INTERTEK TESTING SERVICES

---

Mode: Download from SD Card

Table 14

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	77.895	47.2	16	6.0	37.2	40.0	-2.8
<b>V</b>	<b>124.940</b>	<b>36.2</b>	<b>16</b>	<b>14.0</b>	<b>34.2</b>	<b>43.5</b>	<b>-9.3</b>
V	191.997	35.4	16	16.0	35.4	43.5	-8.1
V	224.970	42.7	16	18.0	44.7	46.0	-1.3
H	336.030	35.2	16	24.0	43.2	46.0	-2.8
H	349.978	32.9	16	24.0	40.9	46.0	-5.1
<b>V</b>	<b>408.300</b>	<b>31.5</b>	<b>16</b>	<b>24.0</b>	<b>39.5</b>	<b>46.0</b>	<b>-6.5</b>
V	425.035	31.3	16	25.0	40.3	46.0	-5.7
V	550.523	30.1	16	28.0	42.1	46.0	-3.9

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 2.2.



---

## INTERTEK TESTING SERVICES

---

Mode: Recording to Smart Phone

Table 15

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	77.894	46.5	16	6.0	36.5	40.0	-3.5
<b>V</b>	<b>123.725</b>	<b>35.2</b>	<b>16</b>	<b>14.0</b>	<b>33.2</b>	<b>43.5</b>	<b>-10.3</b>
V	224.998	42.5	16	18.0	44.5	46.0	-1.5
<b>H</b>	<b>274.944</b>	<b>36.6</b>	<b>16</b>	<b>22.0</b>	<b>42.6</b>	<b>46.0</b>	<b>-3.4</b>
H	374.963	32.1	16	24.0	40.1	46.0	-5.9
V	425.032	32.2	16	25.0	41.2	46.0	-4.8
V	444.553	33.8	16	26.0	43.8	46.0	-2.2
H	575.018	28.3	16	28.0	40.3	46.0	-5.7

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 2.2.



---

## INTERTEK TESTING SERVICES

---

Mode: Recording to SD Card

Table 16

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	77.880	46.5	16	6.0	36.5	40.0	-3.5
<b>V</b>	<b>124.938</b>	<b>36.3</b>	<b>16</b>	<b>14.0</b>	<b>34.3</b>	<b>43.5</b>	<b>-9.2</b>
V	191.995	34.5	16	16.0	34.5	43.5	-9.0
V	225.000	43.0	16	18.0	45.0	46.0	-1.0
<b>H</b>	<b>274.922</b>	<b>35.9</b>	<b>16</b>	<b>22.0</b>	<b>41.9</b>	<b>46.0</b>	<b>-4.1</b>
H	374.950	33.6	16	24.0	41.6	46.0	-4.4
V	431.949	33.8	16	25.0	42.8	46.0	-3.2
V	543.615	28.4	16	28.0	40.4	46.0	-5.6
H	675.050	29.6	16	29.0	42.6	46.0	-3.4

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 2.2.



---

## INTERTEK TESTING SERVICES

---

Mode: Talkback

Table 17

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	77.893	46.0	16	6.0	36.0	40.0	-4.0
<b>V</b>	<b>124.453</b>	<b>36.5</b>	<b>16</b>	<b>14.0</b>	<b>34.5</b>	<b>43.5</b>	<b>-9.0</b>
V	191.990	34.5	16	16.0	34.5	43.5	-9.0
V	224.985	42.2	16	18.0	44.2	46.0	-1.8
<b>H</b>	<b>274.925</b>	<b>34.6</b>	<b>16</b>	<b>22.0</b>	<b>40.6</b>	<b>46.0</b>	<b>-5.4</b>
H	374.956	31.7	16	24.0	39.7	46.0	-6.3
H	431.943	34.4	16	25.0	43.4	46.0	-2.6
H	549.313	27.2	16	28.0	39.2	46.0	-6.8

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 2.2.




---

## INTERTEK TESTING SERVICES


---

### 4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

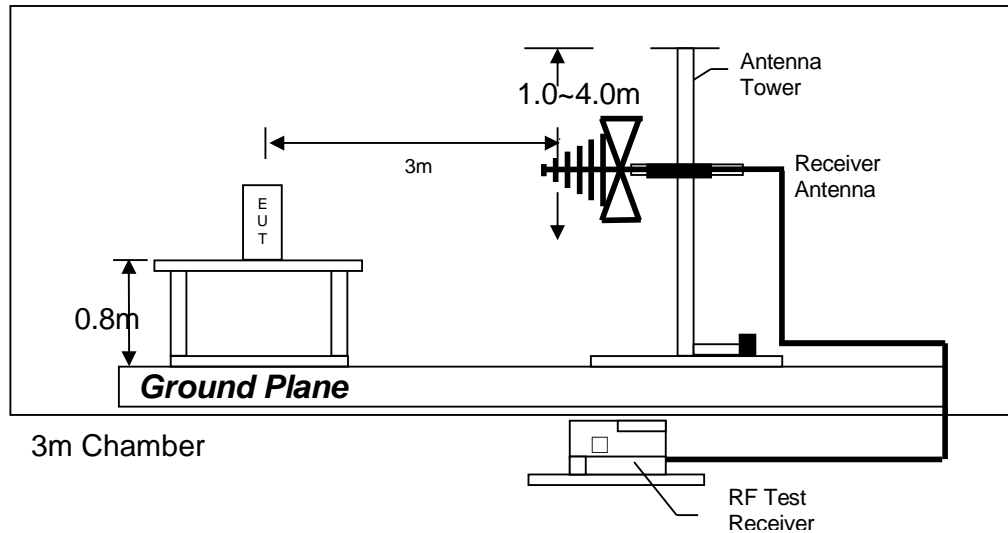

Test setup of radiated emissions up to 1GHz

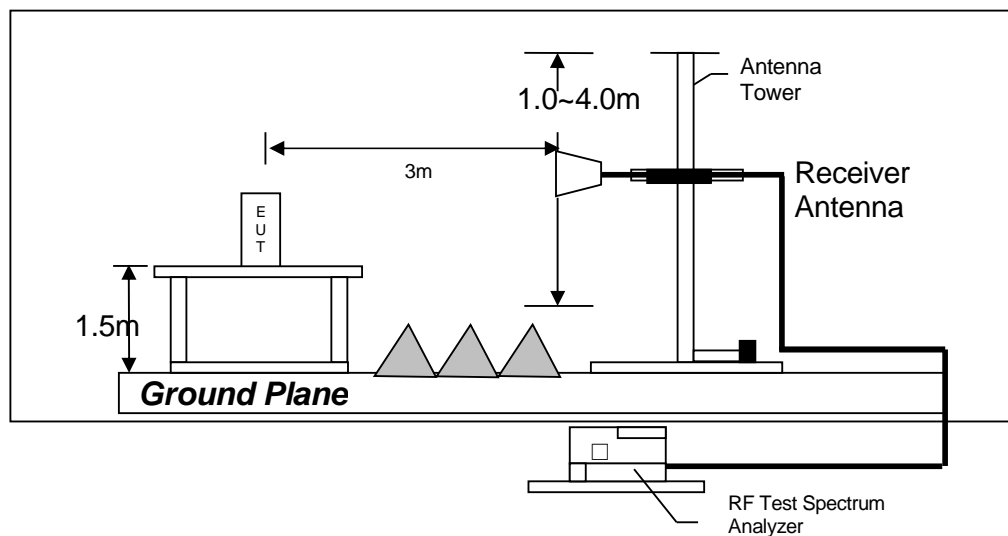

Test setup of radiated emissions above 1GHz



## **INTERTEK TESTING SERVICES**

---

### 4.6.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.



## INTERTEK TESTING SERVICES

---

### 4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

451.5 kHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.7.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 4.78 dB margin compare with CISPR Average limit



## INTERTEK TESTING SERVICES

### Worst Case: Download from SD Card

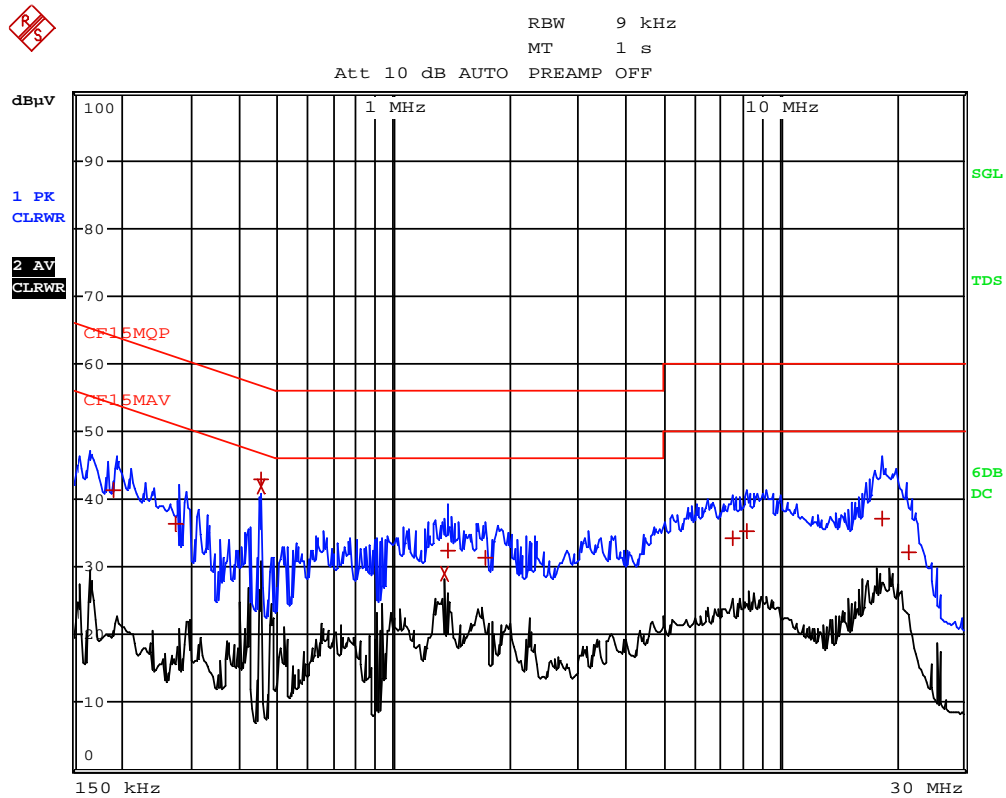



## INTERTEK TESTING SERVICES


Worst Case: Download from SD Card

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
1 Quasi Peak	190.5 kHz	41.41	L1 gnd	-22.60
1 Quasi Peak	276 kHz	36.24	L1 gnd	-24.68
1 Quasi Peak	451.5 kHz	42.80	N gnd	-14.04
2 CISPR Average	451.5 kHz	41.94	N gnd	-4.90
2 CISPR Average	1.3515 MHz	29.05	N gnd	-16.94
1 Quasi Peak	1.383 MHz	32.44	N gnd	-23.55
1 Quasi Peak	1.7295 MHz	31.28	N gnd	-24.71
1 Quasi Peak	7.557 MHz	34.16	L1 gnd	-25.83
1 Quasi Peak	8.25 MHz	35.28	L1 gnd	-24.71
1 Quasi Peak	18.4245 MHz	37.25	L1 gnd	-22.74
1 Quasi Peak	21.5475 MHz	32.16	L1 gnd	-27.83



## INTERTEK TESTING SERVICES

### Worst Case: Recording to Phone

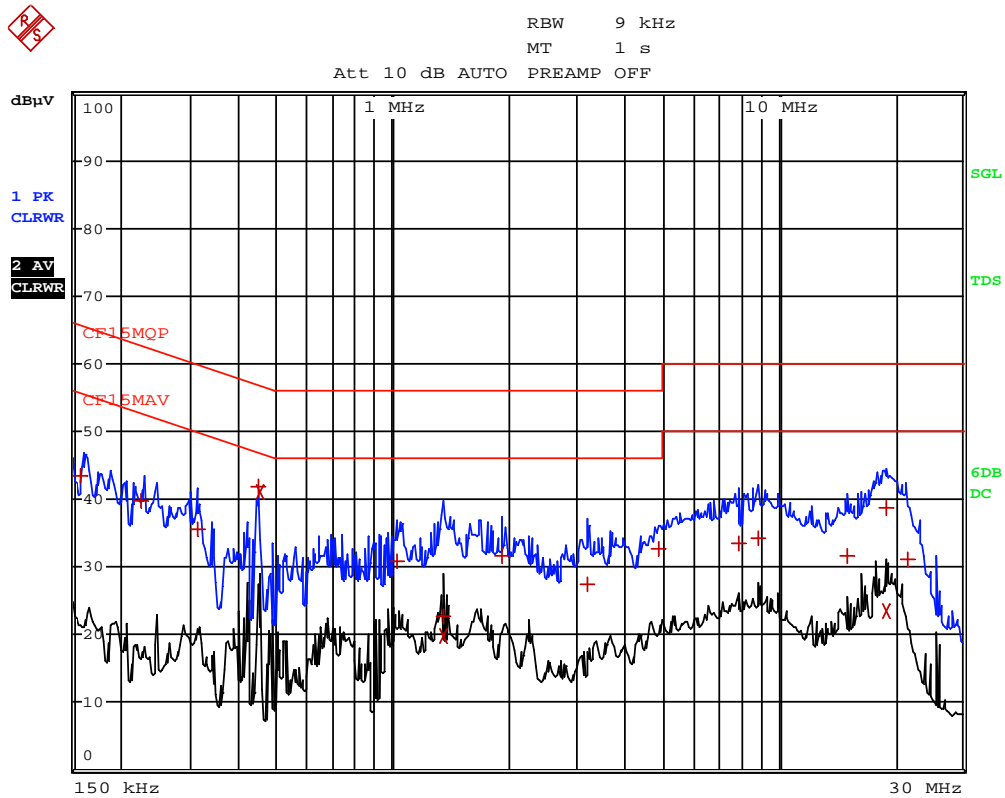



## INTERTEK TESTING SERVICES


Worst Case: Recording to Phone

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	159 kHz	43.39	N gnd	-22.11
1 Quasi Peak	226.5 kHz	39.88	N gnd	-22.69
1 Quasi Peak	312 kHz	35.49	L1 gnd	-24.42
1 Quasi Peak	447 kHz	41.89	N gnd	-15.03
2 CISPR Average	451.5 kHz	41.03	N gnd	-5.81
1 Quasi Peak	1.0275 MHz	30.89	N gnd	-25.10
2 CISPR Average	1.356 MHz	19.78	N gnd	-26.21
1 Quasi Peak	1.3605 MHz	22.65	N gnd	-33.34
1 Quasi Peak	1.9185 MHz	31.52	N gnd	-24.47
1 Quasi Peak	3.201 MHz	27.44	N gnd	-28.55
1 Quasi Peak	4.893 MHz	32.67	N gnd	-23.32
1 Quasi Peak	7.935 MHz	33.38	L1 gnd	-26.61
1 Quasi Peak	8.9025 MHz	34.23	L1 gnd	-25.76
1 Quasi Peak	15.0135 MHz	31.61	L1 gnd	-28.38
1 Quasi Peak	19.113 MHz	38.74	L1 gnd	-21.25
2 CISPR Average	19.113 MHz	23.43	L1 gnd	-26.56
1 Quasi Peak	21.651 MHz	31.17	L1 gnd	-28.82



# INTERTEK TESTING SERVICES

## Worst Case: Recording to SD Card

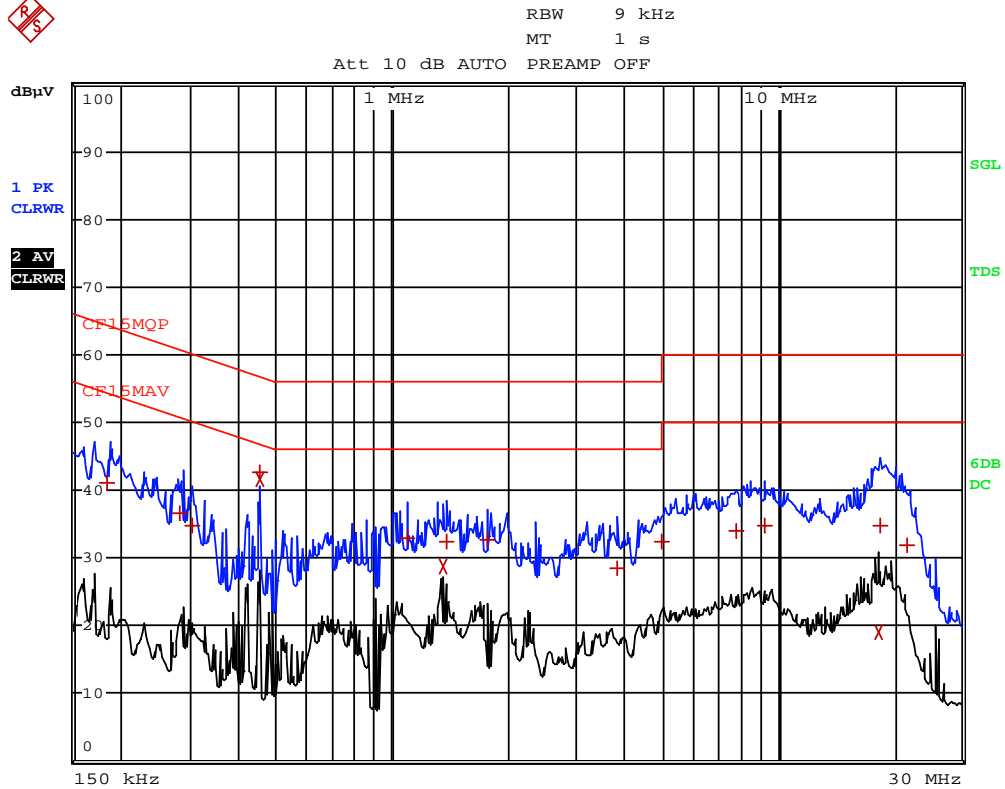



## INTERTEK TESTING SERVICES

Worst Case: Recording to SD Card

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	186 kHz	41.07	L1 gnd	-23.13
1 Quasi Peak	285 kHz	36.63	L1 gnd	-24.03
1 Quasi Peak	303 kHz	34.88	L1 gnd	-25.27
1 Quasi Peak	451.5 kHz	42.62	N gnd	-14.22
2 CISPR Average	451.5 kHz	41.58	N gnd	-5.25
1 Quasi Peak	1.0905 MHz	32.99	N gnd	-23.00
2 CISPR Average	1.3515 MHz	28.70	N gnd	-17.29
1 Quasi Peak	1.383 MHz	32.40	N gnd	-23.59
1 Quasi Peak	1.77 MHz	32.64	N gnd	-23.36
1 Quasi Peak	3.831 MHz	28.45	N gnd	-27.54
1 Quasi Peak	4.9875 MHz	32.30	N gnd	-23.69
1 Quasi Peak	7.8405 MHz	34.01	L1 gnd	-25.98
1 Quasi Peak	9.2895 MHz	34.68	L1 gnd	-25.31
2 CISPR Average	18.222 MHz	18.95	L1 gnd	-31.04
1 Quasi Peak	18.3885 MHz	34.82	L1 gnd	-25.17
1 Quasi Peak	21.633 MHz	31.80	L1 gnd	-28.20




# INTERTEK TESTING SERVICES

Worst Case: Talkback



RBW 9 kHz  
MT 1 s  
Att 10 dB AUTO PREAMP OFF

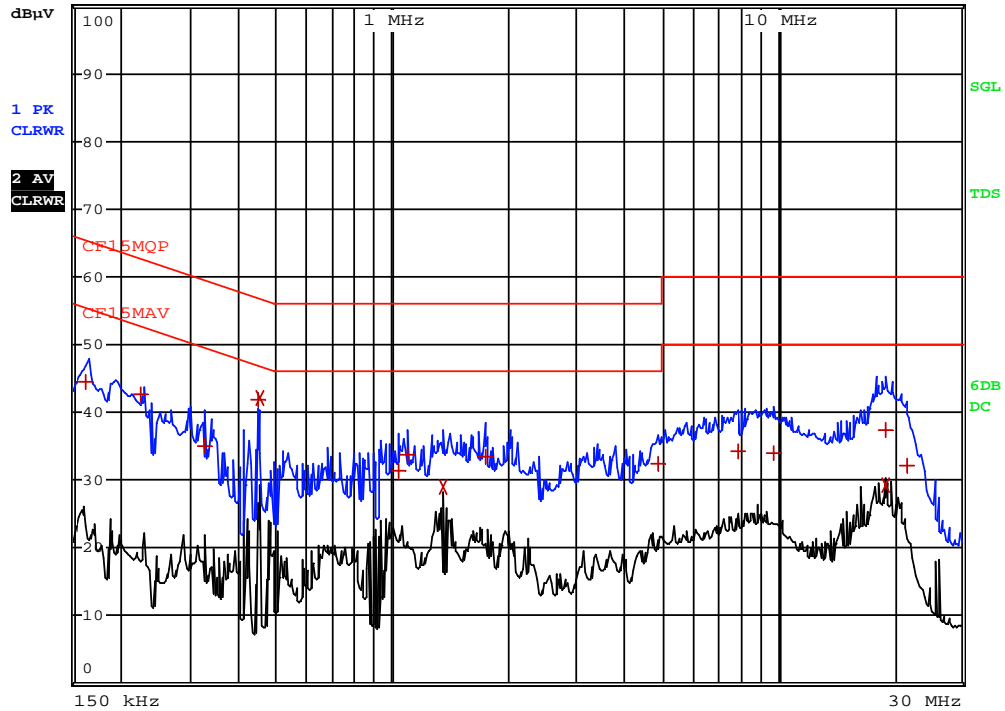



## INTERTEK TESTING SERVICES

Worst Case: Talkback

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	163.5 kHz	44.53	L1 gnd	-20.74
1 Quasi Peak	226.5 kHz	42.54	L1 gnd	-20.03
1 Quasi Peak	325.5 kHz	35.05	L1 gnd	-24.50
1 Quasi Peak	447 kHz	41.98	N gnd	-14.95
2 CISPR Average	451.5 kHz	42.06	N gnd	-4.78
1 Quasi Peak	1.041 MHz	31.32	N gnd	-24.67
1 Quasi Peak	1.0995 MHz	33.84	N gnd	-22.15
2 CISPR Average	1.3515 MHz	28.92	N gnd	-17.07
1 Quasi Peak	1.7565 MHz	33.44	N gnd	-22.55
1 Quasi Peak	4.911 MHz	32.45	N gnd	-23.54
1 Quasi Peak	7.9305 MHz	34.32	L1 gnd	-25.67
1 Quasi Peak	9.7035 MHz	33.92	L1 gnd	-26.07
1 Quasi Peak	19.0725 MHz	37.49	L1 gnd	-22.50
2 CISPR Average	19.113 MHz	29.27	L1 gnd	-20.72
1 Quasi Peak	21.57 MHz	32.22	L1 gnd	-27.77




---

## INTERTEK TESTING SERVICES

---

### 4.7.3 Conducted Emission Test Setup

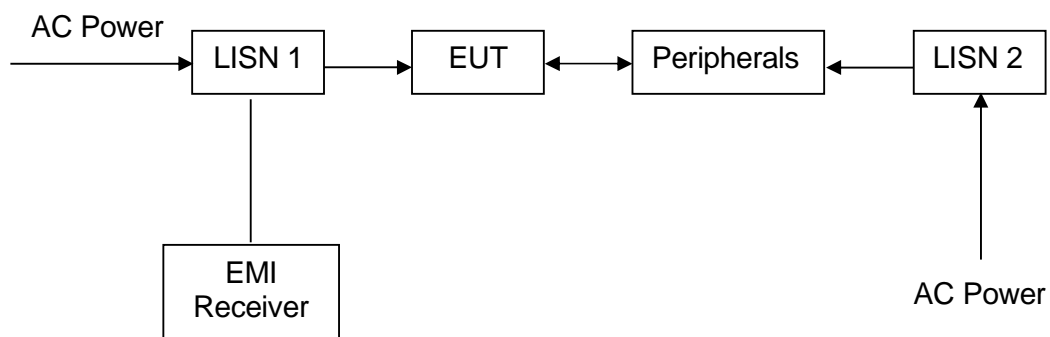



---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 5 EQUIPMENT LIST**



## INTERTEK TESTING SERVICES

### 5.0 Equipment List

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	Broad-Band Horn Antenna with frequency range 14G - 40GHz
Registration No.	EW-3156	EW-2253	EW-1679
Manufacturer	R&S	R&S	SCHWARZBECK
Model No.	ESR26	FSP40	BBHA9170
Calibration Date	Dec. 06, 2016	Jun. 15, 2016	June. 28, 2016
Calibration Due Date	Dec. 06, 2017	Jun. 15, 2017	June. 28, 2017

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna
Registration No.	EW-0571	EW-0447	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	May. 18, 2016	May. 18, 2016	Nov. 05, 2015
Calibration Due Date	Nov. 18, 2017	Nov. 18, 2017	May 05, 2017

#### 2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN	Pulse Limiter
Registration No.	EW-2666	EW-0192	EW-3248
Manufacturer	R&S	R&S	R&S
Model No.	ESC17	ESH3-Z5	ESH3-Z2
Calibration Date	Jun. 17, 2016	Aug. 26, 2016	Oct. 12, 2016
Calibration Due Date	Jun. 17, 2017	Aug. 26, 2017	Oct. 12, 2017

#### 3) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor	Spectrum Analyzer
Registration No.	EW-2270	EW-2466
Manufacturer	AGILENTTECH	R&S
Model No.	N1911A	FSP30
Calibration Date	Jan. 04, 2017	Oct. 03, 2016
Calibration Due Date	Jan. 04, 2018	Aug. 20, 2017

**END OF TEST REPORT**