



FCC TEST REPORT
FCC ID: 2AMRO-VLXWCG212

On Behalf of

iOttie, Inc.

Velox Mini Qi2 Wireless Air Vent Mount

Model No.: VLXWCG212, VLXWCG213, VLXWCG214

Prepared for : iOttie, Inc.
Address : 470 7th Avenue, 6 FL, New York, NY 10018

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2401019-C01-R07
Date of Receipt : January 8, 2024
Date of Test : January 8, 2024 – February 21, 2024
Date of Report : March 18, 2024
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

	Description	Page
1	Test Result Summary	5
2	EUT Description	6
	2.1 Description of Device (EUT).....	6
	2.2 Accessories of Device (EUT)	8
	2.3 Tested Supporting System Details	8
	2.4 Block Diagram of Connection between EUT and Simulators.....	8
	2.5 Description of Test Modes.....	8
	2.6 Test Conditions	8
	2.7 Test Facility	9
	2.8 Measurement Uncertainty	9
3	Test Results and Measurement Data	10
	3.1 RF Exposure Test	10
	3.1.1 Test Specification	10
	3.1.2 Test Instruments	11
	3.1.3 Test data	11
5	Photographs of EUT	18

TEST REPORT DECLARATION

Applicant : iOttie, Inc.
Address : 470 7th Avenue, 6 FL, New York, NY 10018
Manufacturer : iOttie, Inc.
Address : 470 7th Avenue, 6 FL, New York, NY 10018
EUT Description : Velox Mini Qi2 Wireless Air Vent Mount
(A) Model No. : VLXWCG212, VLXWCG213, VLXWCG214
(B) Trademark : **iOttie**

Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Yannis Wen
Project Engineer

Yannis Wen

Approved by (name + signature).....:

Reak Yang
Project Manager

Reak Yang

Date of issue.....

March 18, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 18, 2024	Initial released Issue	Yannis Wen

1 Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1) & KDB680106	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

2 EUT Description

2.1 Description of Device (EUT)

EUT Name	:	Velox Mini Qi2 Wireless Air Vent Mount
Model No.	:	VLXWCG212, VLXWCG213, VLXWCG214
DIFF.	:	There is no difference except the name of the model and sale territory. All tests are made with the VLXWCG212 model.
Power supply	:	DC 5V/9V/12V from adapter
EUT information	:	Type-C Input: 5V $\overline{\text{---}}$ 3A, 9V $\overline{\text{---}}$ 2.22A, 12V $\overline{\text{---}}$ 2A Wireless Output: 5W, 7.5W, 15W
Operation frequency	:	115~205KHz, 360KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna, Maximum Gain is 0dBi (This value is supplied by applicant).
Software version	:	V1.0
Hardware version	:	V1.1
Connector cable loss	:	Max. coaxial cable loss:0.5dB (Cable lossvalue is provided by applicant.)
Intend use environment	:	Residential, commercial and light industrial environment

The EUT does comply with section 5 b) of KDB 680106 D01 RF Exposure Wireless charging App V03r01.

Conditions requirement	Answers
Power transfer frequency is less than 1 MHz.	After measuring the product the transfer frequency is 0.115-0.205MHz&0, 360MHz
Output power from each primary coil is less than or equal to 15 watts.	After measuring the product the each primary coil power is 15 watts
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	The transfer system only include one primary.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	After measuring the product the Max H-field Strength is 0.808A/m Far less than 50% of the MPE limit.


2.2 Accessories of Device (EUT)

Accessories1 : Cable
 Manufacturer : iOttie, Inc.
 Model : /
 Ratings : /

2.3 Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Smart phone	Apple	iPhone X	--	--

2.4 Block Diagram of Connection between EUT and Simulators

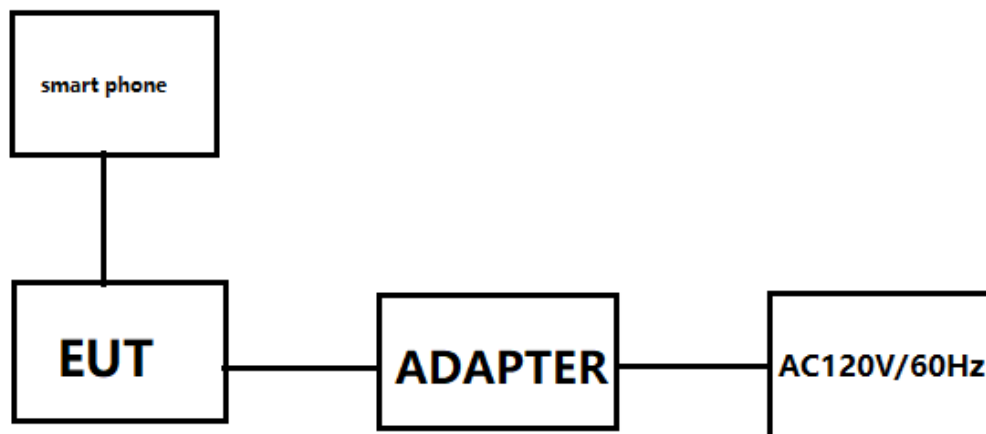

2.5 Description of Test Modes

Channel	Frequency (KHz)
1	145
2	360

2.6 Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7 Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8 Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

3 Test Results and Measurement Data

3.1 RF Exposure Test

3.1.1 Test Specification

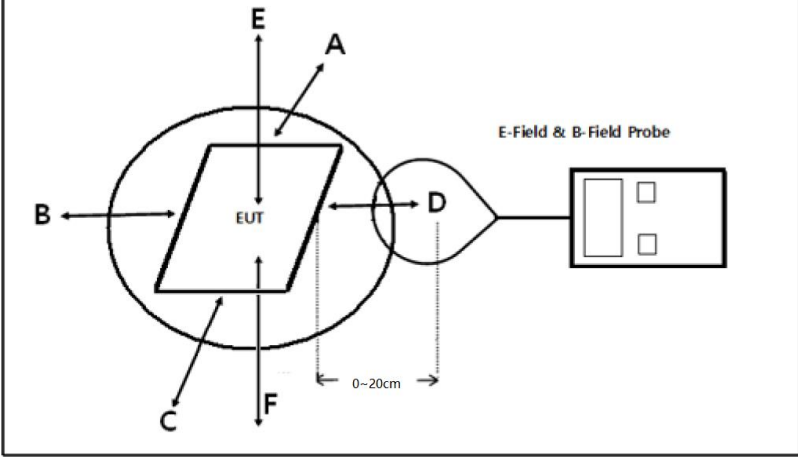Test Requirement:	FCC Rules and Regulations KDB680106
Test Method:	§1.1307(b)(1) & KDB680106
Limits:	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03r01: RF Exposure Wireless Charging.
Test Setup:	
Test Mode:	Wireless charging load has been charge at no load, middle load and full load. All test modes were pre-tested, but we only recorded the worse case in this report.
Test Procedure:	<ol style="list-style-type: none"> 1. The RF exposure test was performed in shielded chamber 2. The measurement probe was placed at test distance(0~20cm) , step by 2cm, which is between the edge of the charger and the geometric centre of probe. 3. The measurement probe used to search of highest strength. 4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A,B,C,D,E,F) were completed. 5. The EUT were measured according to the dictates of KDB 680106 DR03-44118.
Test Result:	PASS

3.1.2 Test Instruments

Item	Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal Interval
1	Exposure Level Tester	narda	ELT-400	/	N-0231	2023.08.22	1Year
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	/	M0675	2023.08.22	1Year
3	Isotropic Electric Field Probe	narda	EP-601	/	511WX60706	2023.08.16	1Year

3.1.3 Test data

For Wireless output (7.5W) mode:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	4.700	4.529	4.218	4.346	4.189	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.807	0.793	0.783	0.798	0.724	0.815	1.63

For Null load mode:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	3.991	4.005	4.002	3.992	4.000	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.695	0.681	0.686	0.695	0.618	0.815	1.63

For Wireless output (15W) mode:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)


Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.360	4.690	4.538	4.235	4.346	4.190	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.360	0.808	0.796	0.785	0.807	0.724	0.815	1.63


4 Photos of test setup

For Full load mode

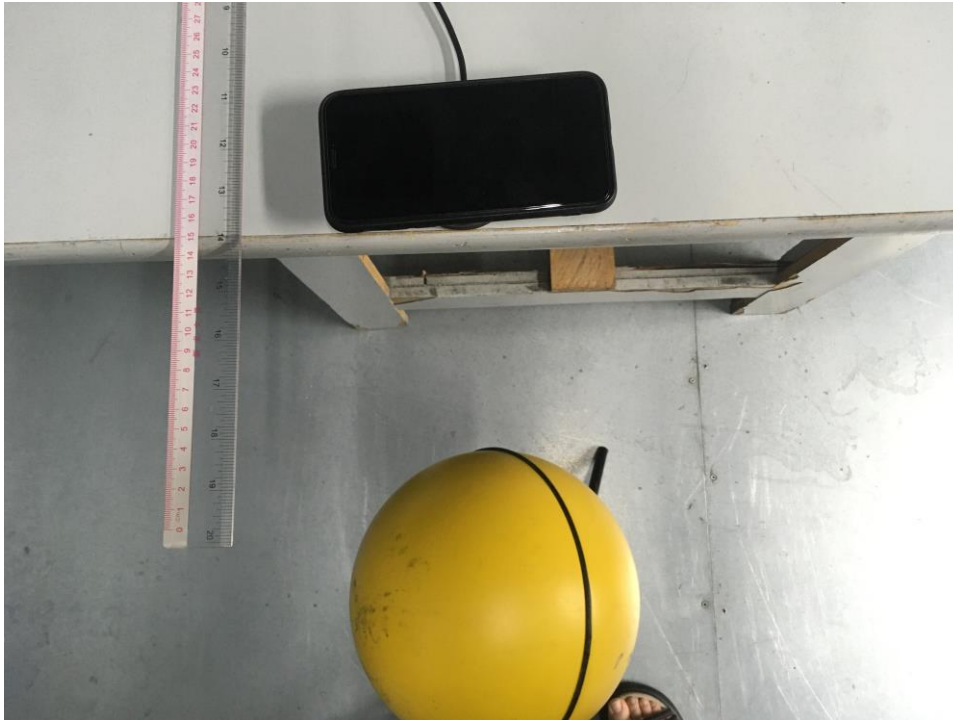


15cm B Position

For Full load mode

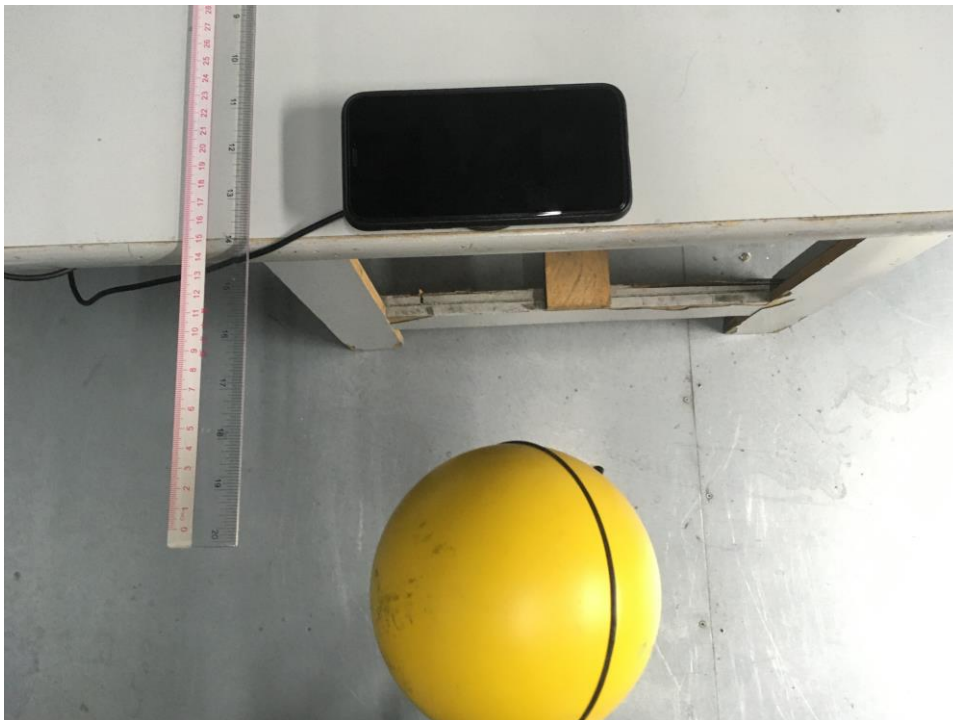

15cm B Position

For Full load mode

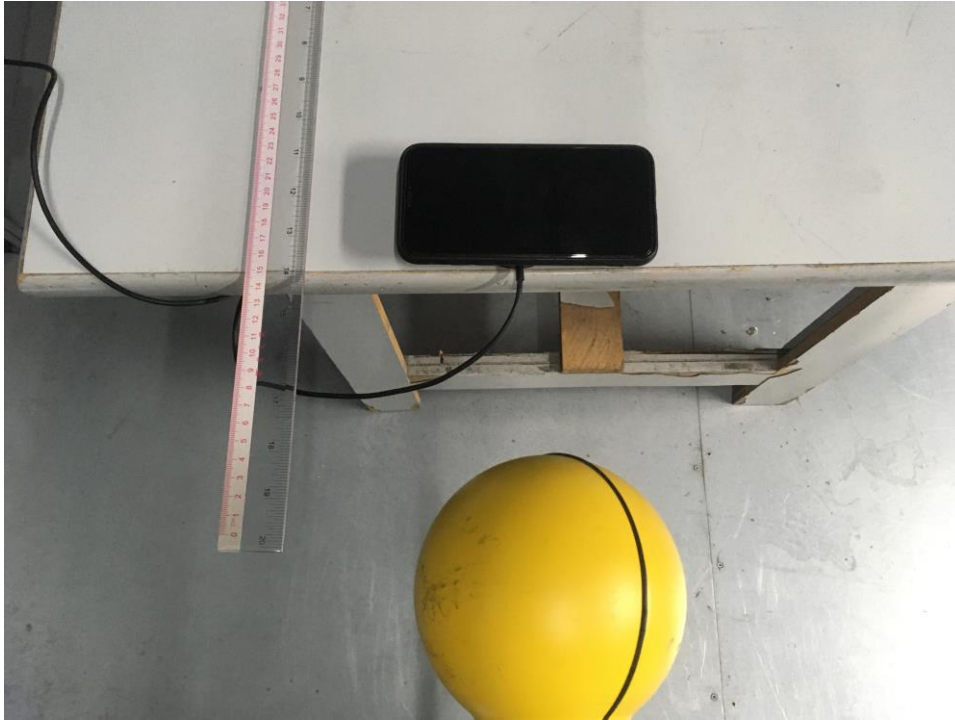


15cm C Position

For Full load mode




15cm D Position

For Full load mode

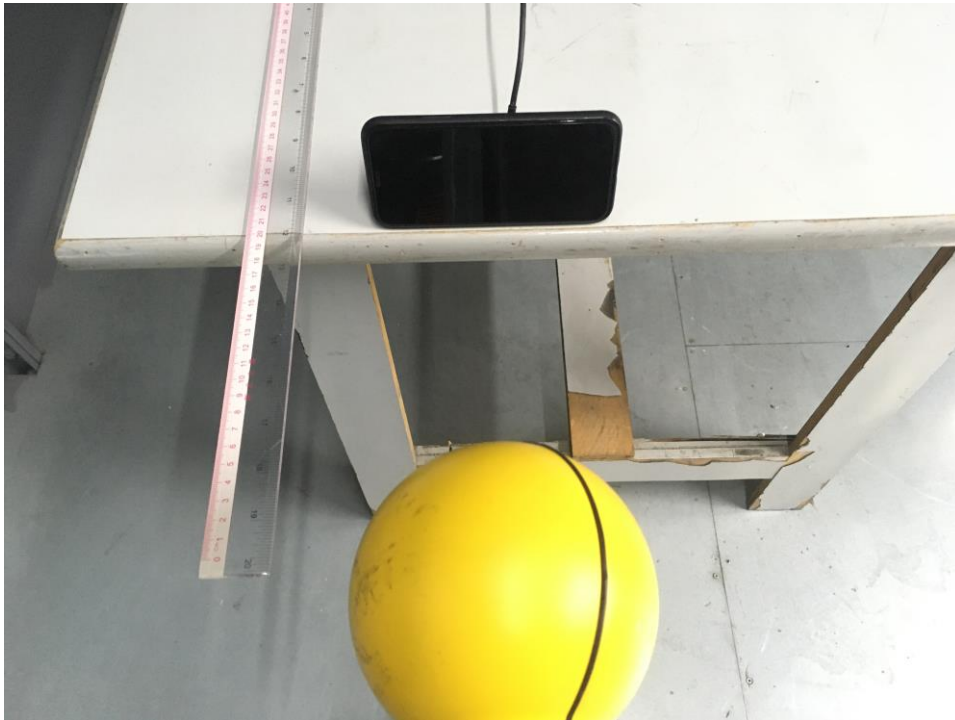

20cm F Position

For Full load mode

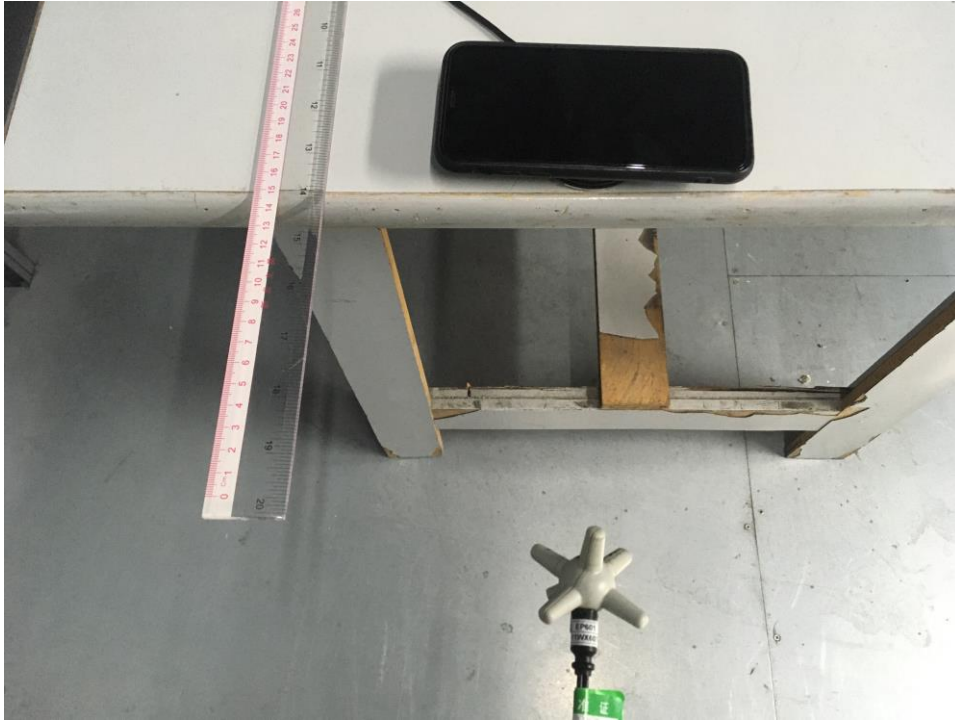

15cm A Position

For Full load mode



15cm B Position

For Full load mode




15cm C Position

For Full load mode



15cm D Position

For Full load mode

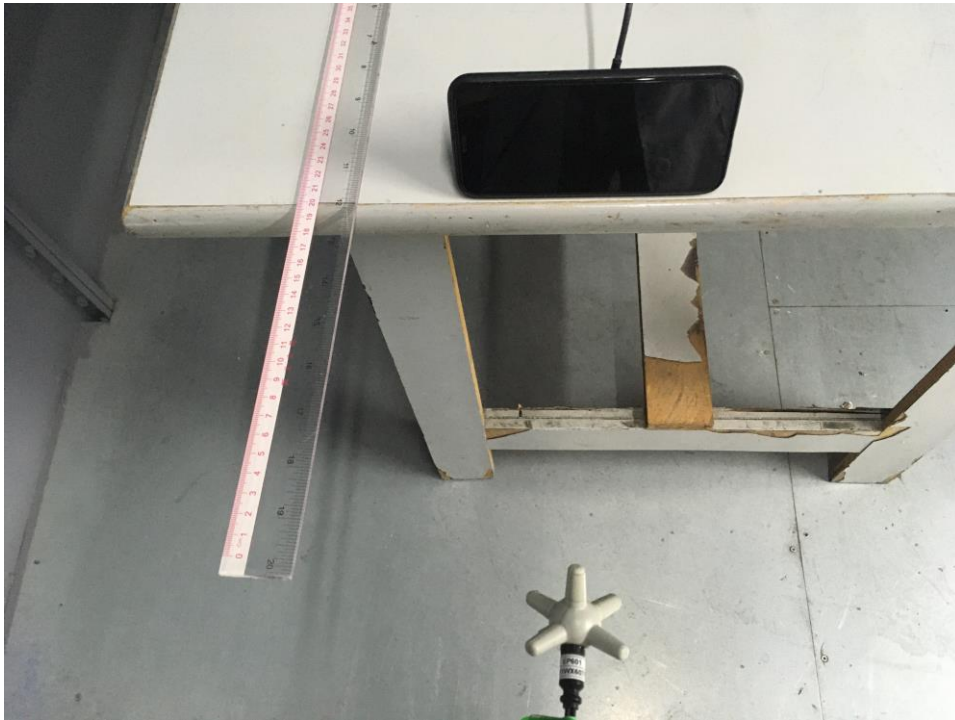

20cm E Position

5 Photographs of EUT

Please refer to the report A2401019-C01-R06.

-----End of Report-----