



TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.
Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Report Number : RA230620-35489E-RF-00B
FCC ID: 2ATZ4-G5Z23

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Smart phone
Model No.: G5A
Multiple Model(s) No.: N/A
Trade Mark: UMIDIGI
Date Received: 2023/06/20
Report Date: 2023/07/21

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:

Roger Ling

Candy Li

Roger Ling
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	8
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE	13
APPLICABLE STANDARD	13
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
FACTOR & OVER LIMIT CALCULATION.....	16
TEST DATA	16
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
FACTOR & OVER LIMIT/MARGIN CALCULATION	22
TEST DATA	22
FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
APPENDIX WI-FI.....	39
APPENDIX A: DTS BANDWIDTH	39
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	46
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	53
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	54
APPENDIX E: BAND EDGE MEASUREMENTS	61
APPENDIX F: DUTY CYCLE	65
APPENDIX BLE.....	68
APPENDIX A: DTS BANDWIDTH	68
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	72
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	76
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	80
APPENDIX E: BAND EDGE MEASUREMENTS	84
APPENDIX F: DUTY CYCLE	86

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230620-35489E-RF-00B	Original Report	2023/07/21

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	BLE 1M/2M: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: -1.42dBm Wi-Fi: 17.52dBm(802.11b), 21.78dBm(802.11g) 21.69dBm(802.11n20), 20.10dBm(802.11n40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	1.76dBi (provided by the applicant)
Voltage Range	DC3.85V from battery or DC5V from adapter
Test Sample serial number	281O-1 for Conducted and Radiated Emissions Test 281O-2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: HF-0502000U Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5.0V, 2A
Adapter 2 information	Model: HJ-0502000W2-US Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5V, 2A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40, EUT was tested with Channel 3, 6 and 9.

For BLE 1M/2M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

EUT was testing in engineering mode.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	16	16	16
802.11n-HT20	MCS0	16	16	16
802.11n-HT40	MCS0	14	14	14
BLE	1Mbps	Default	Default	Default
	2Mbps	Default	Default	Default

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

The power level was provided by the applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	earphone	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

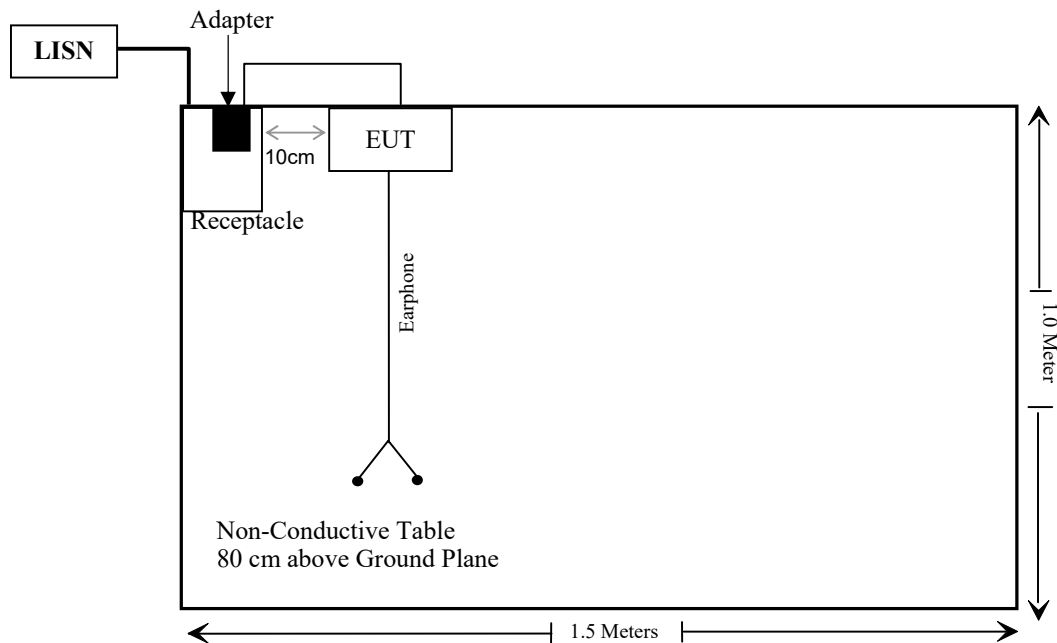

For Radiated Emissions:

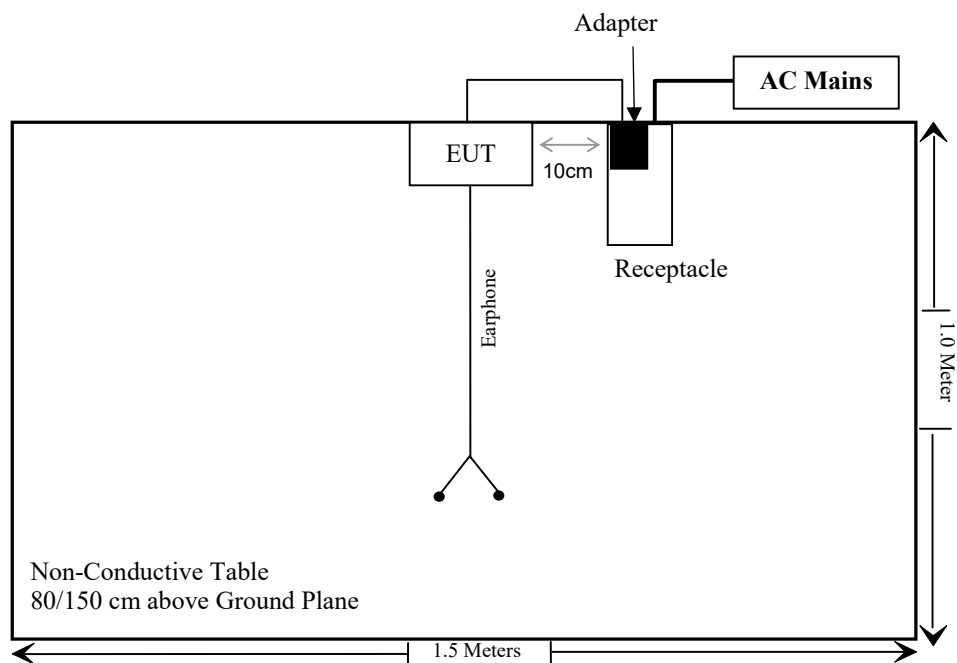

Note: the support table edge was flush with the center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software:e3 191218 (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
Anritsu	Microwave Peak Power Sensor	MA24418A	12619	2023/05/09	2024/05/08
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

- a) According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

For BLE:

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2402-2480	-1.0	0.79	5	0.3	3.0	Yes

Result: No Standalone SAR test is required

For Wi-Fi mode, please refer to SAR report: Please refer to SAR test report: RA230620-35489E-SA.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached for Bluetooth/Wi-Fi and the maximum antenna gain is 1.76 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

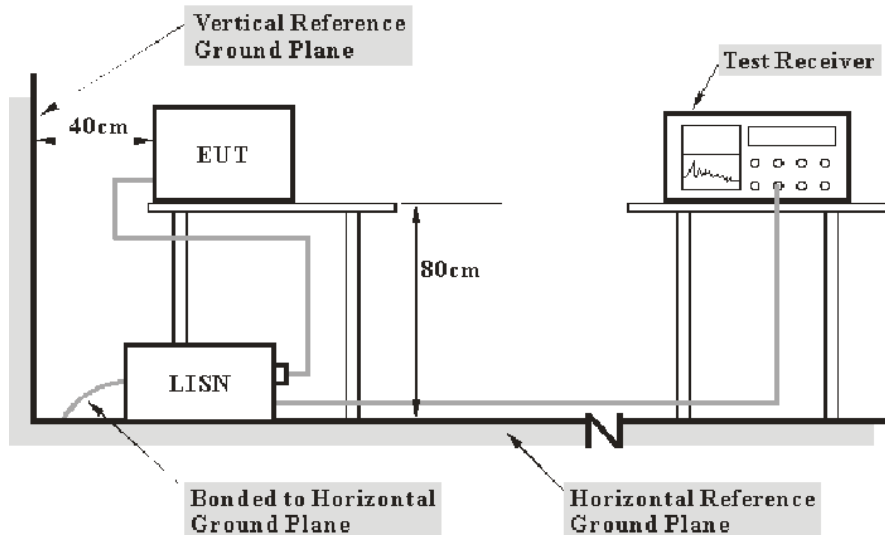

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	100.19 kPa


The testing was performed by Jeef Huang on 2023-07-18.

EUT operation mode: Transmitting (Worst case is 802.11b, low channel)

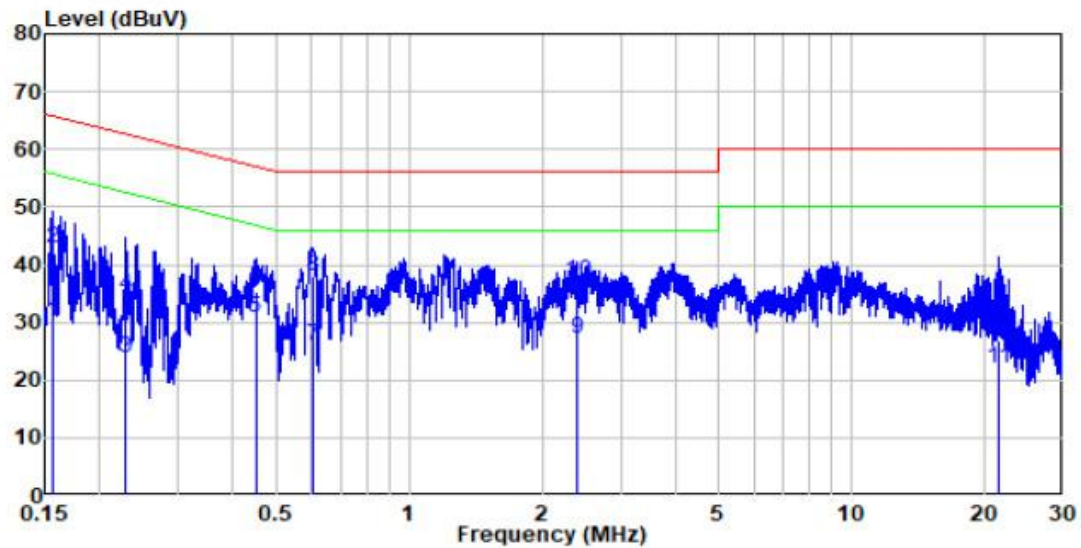
Adapter 1**AC 120V/60 Hz, Line**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	10.37	19.88	30.25	55.64	-25.39	Average
2	0.157	10.37	32.58	42.95	65.64	-22.69	QP
3	0.229	10.33	13.52	23.85	52.48	-28.63	Average
4	0.229	10.33	24.53	34.86	62.48	-27.62	QP
5	0.449	10.54	20.32	30.86	46.89	-16.03	Average
6	0.449	10.54	24.78	35.32	56.89	-21.57	QP
7	0.605	10.63	15.41	26.04	46.00	-19.96	Average
8	0.605	10.63	27.28	37.91	56.00	-18.09	QP
9	2.398	10.44	16.88	27.32	46.00	-18.68	Average
10	2.398	10.44	26.74	37.18	56.00	-18.82	QP
11	21.472	10.30	11.74	22.04	50.00	-27.96	Average
12	21.472	10.30	16.56	26.86	60.00	-33.14	QP

AC 120V/60 Hz, Neutral

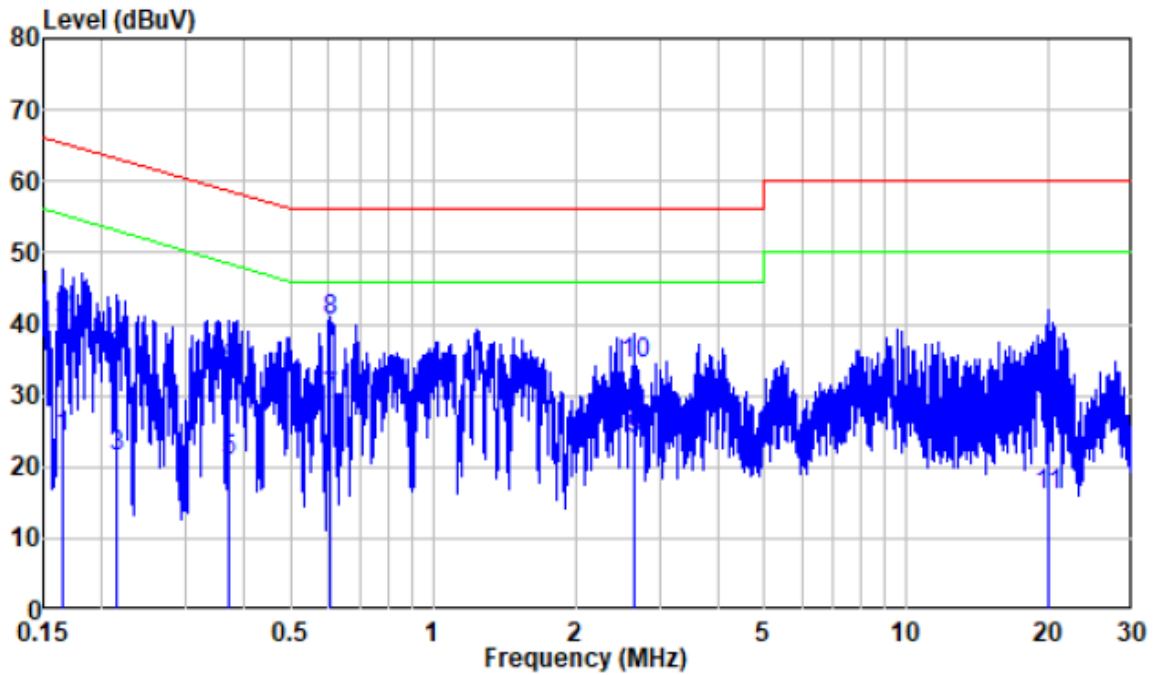


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.165	10.28	13.96	24.24	55.20	-30.96	Average
2	0.165	10.28	30.61	40.89	65.20	-24.31	QP
3	0.214	10.30	11.06	21.36	53.05	-31.69	Average
4	0.214	10.30	25.78	36.08	63.05	-26.97	QP
5	0.371	10.40	10.33	20.73	48.47	-27.74	Average
6	0.371	10.40	23.08	33.48	58.47	-24.99	QP
7	0.604	10.47	19.21	29.68	46.00	-16.32	Average
8	0.604	10.47	30.06	40.53	56.00	-15.47	QP
9	2.655	10.52	13.21	23.73	46.00	-22.27	Average
10	2.655	10.52	23.81	34.33	56.00	-21.67	QP
11	19.858	10.22	5.70	15.92	50.00	-34.08	Average
12	19.858	10.22	17.75	27.97	60.00	-32.03	QP

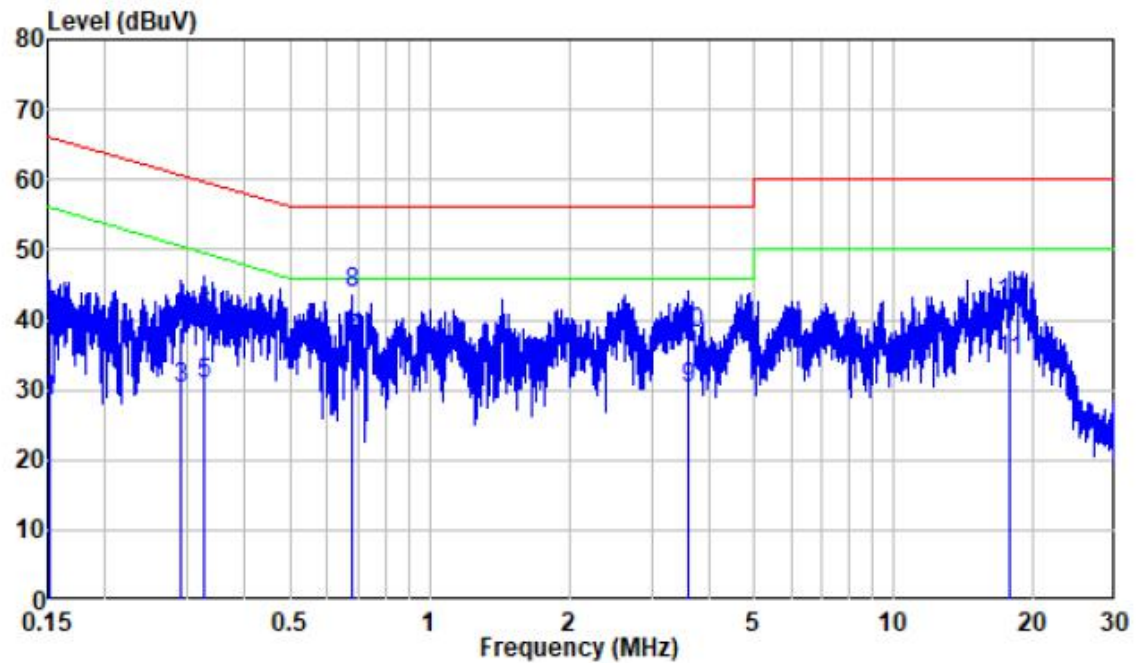Adapter 2**AC 120V/60 Hz, Line**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.152	10.37	18.13	28.50	55.90	-27.40	Average
2	0.152	10.37	29.55	39.92	65.90	-25.98	QP
3	0.292	10.39	19.75	30.14	50.48	-20.34	Average
4	0.292	10.39	28.56	38.95	60.48	-21.53	QP
5	0.326	10.43	20.32	30.75	49.54	-18.79	Average
6	0.326	10.43	30.03	40.46	59.54	-19.08	QP
7	0.679	10.66	26.42	37.08	46.00	-8.92	Average
8	0.679	10.66	33.13	43.79	56.00	-12.21	QP
9	3.601	10.52	19.82	30.34	46.00	-15.66	Average
10	3.601	10.52	27.54	38.06	56.00	-17.94	QP
11	17.778	10.26	23.90	34.16	50.00	-15.84	Average
12	17.778	10.26	31.89	42.15	60.00	-17.85	QP

AC 120V/60 Hz, Neutral

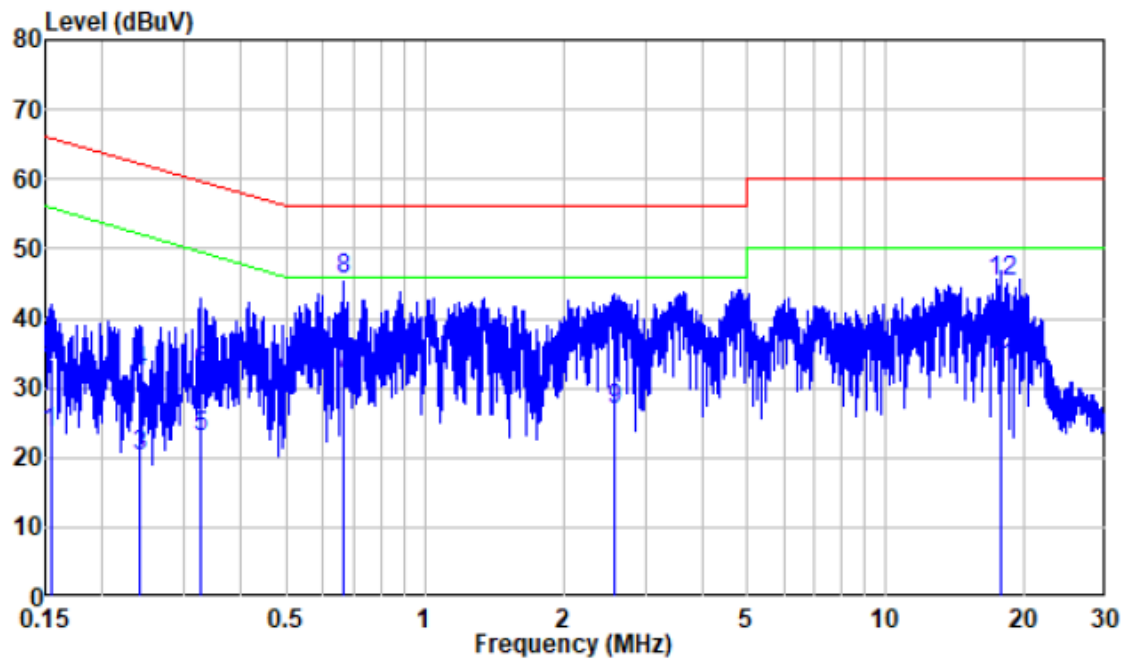

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	10.27	13.28	23.55	55.78	-32.23	Average
2	0.154	10.27	23.71	33.98	65.78	-31.80	QP
3	0.242	10.32	9.78	20.10	52.04	-31.94	Average
4	0.242	10.32	21.99	32.31	62.04	-29.73	QP
5	0.325	10.37	12.61	22.98	49.57	-26.59	Average
6	0.325	10.37	21.98	32.35	59.57	-27.22	QP
7	0.666	10.47	21.57	32.04	46.00	-13.96	Average
8	0.666	10.47	35.15	45.62	56.00	-10.38	QP
9	2.588	10.52	16.22	26.74	46.00	-19.26	Average
10	2.588	10.52	27.07	37.59	56.00	-18.41	QP
11	17.696	10.20	22.76	32.96	50.00	-17.04	Average
12	17.696	10.20	35.00	45.20	60.00	-14.80	QP


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

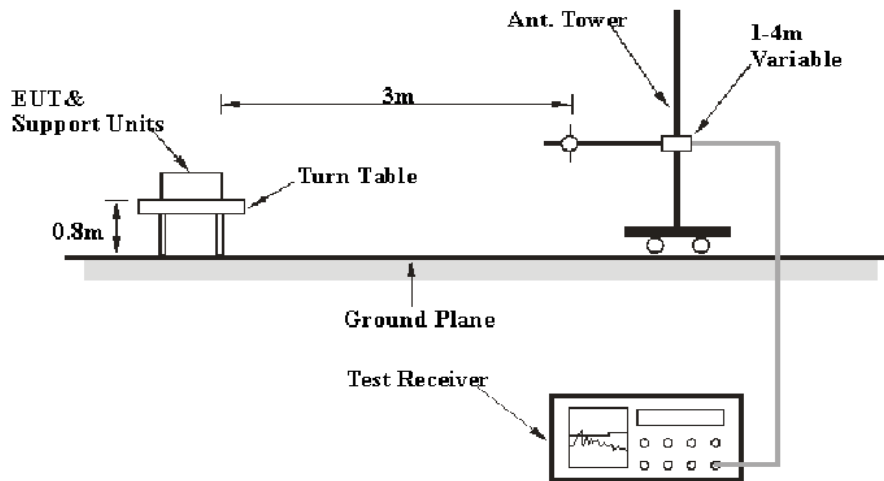

Above 1GHz:

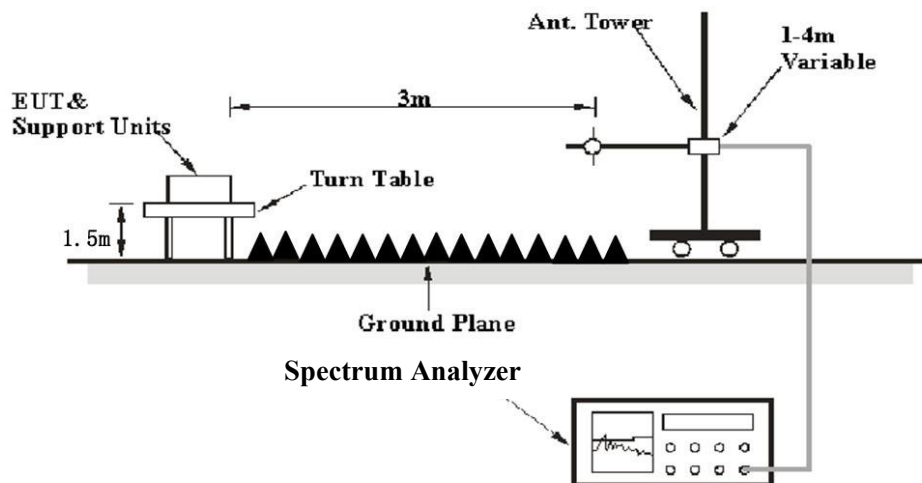

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	22°C
Relative Humidity:	53 %
ATM Pressure:	101kPa

The testing was performed by Jason Liu on 2023-07-18 for below 1GHz and Jimi Zheng on 2023-07-19 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


30MHz-1GHz: (Worst case is 802.11b, low channel)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.

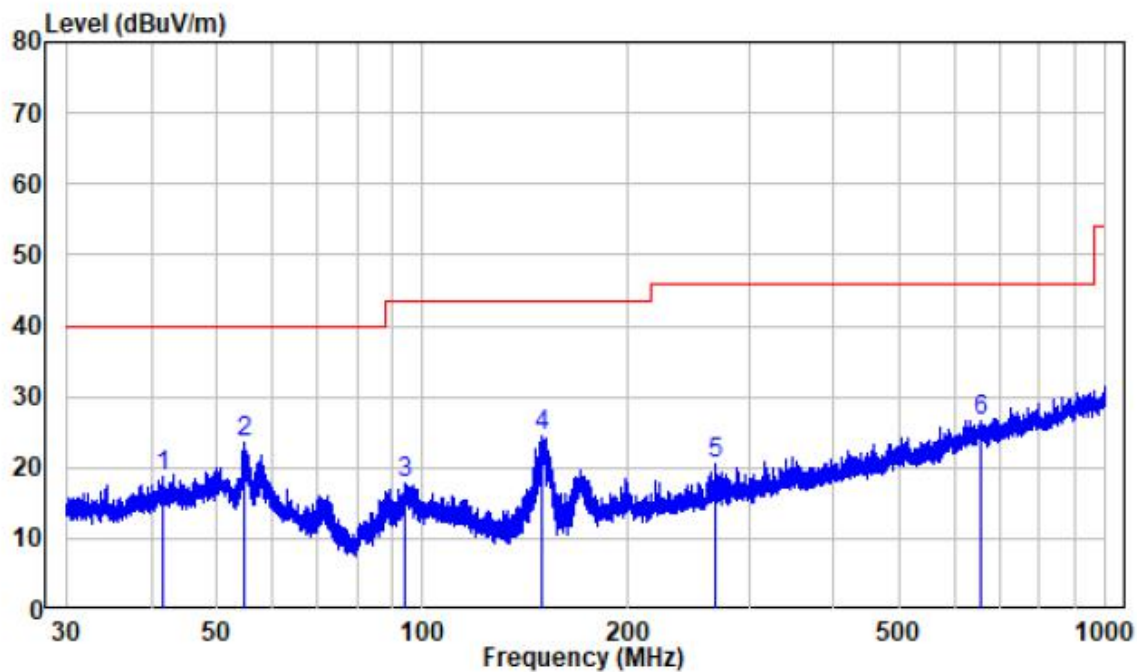Adapter 1**Horizontal:**

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	41.531	-10.10	28.80	18.70	40.00	-21.30	Peak
2	54.811	-10.29	33.83	23.54	40.00	-16.46	Peak
3	94.387	-12.61	30.32	17.71	43.50	-25.79	Peak
4	148.963	-15.33	39.76	24.43	43.50	-19.07	Peak
5	268.368	-10.31	30.79	20.48	46.00	-25.52	Peak
6	656.242	-1.59	28.25	26.66	46.00	-19.34	Peak


Vertical

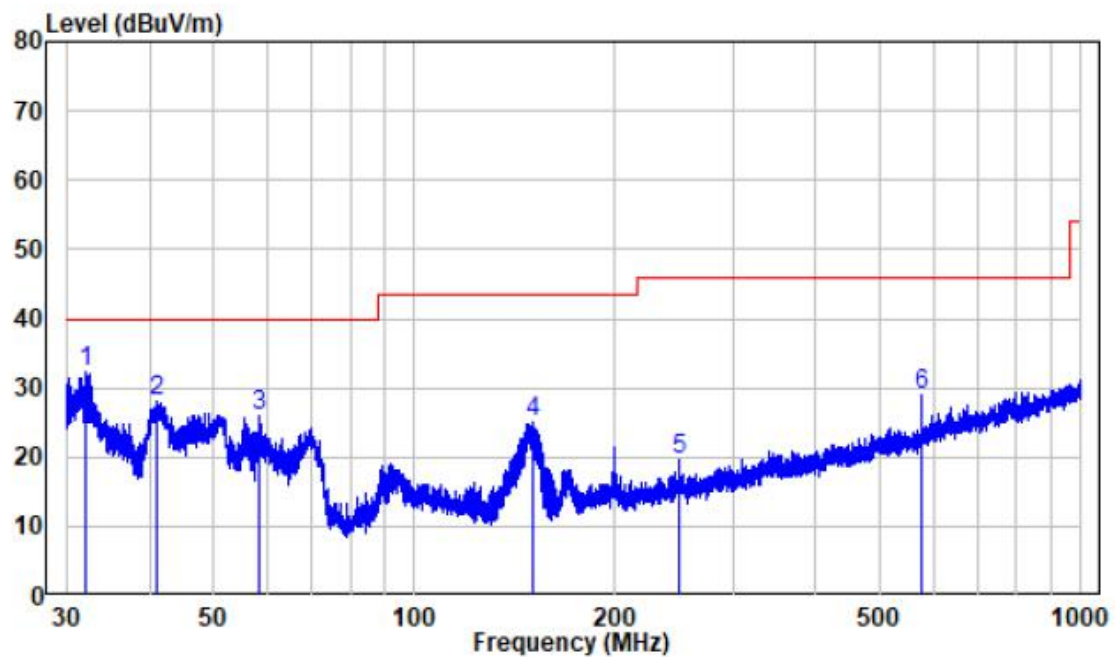

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	32.151	-12.15	44.54	32.39	40.00	-7.61	Peak
2	41.060	-10.17	38.19	28.02	40.00	-11.98	Peak
3	58.280	-10.00	35.97	25.97	40.00	-14.03	Peak
4	150.736	-15.23	40.43	25.20	43.50	-18.30	Peak
5	248.770	-10.70	30.29	19.59	46.00	-26.41	Peak
6	576.139	-3.70	32.58	28.88	46.00	-17.12	Peak


Adapter 2

Horizontal:

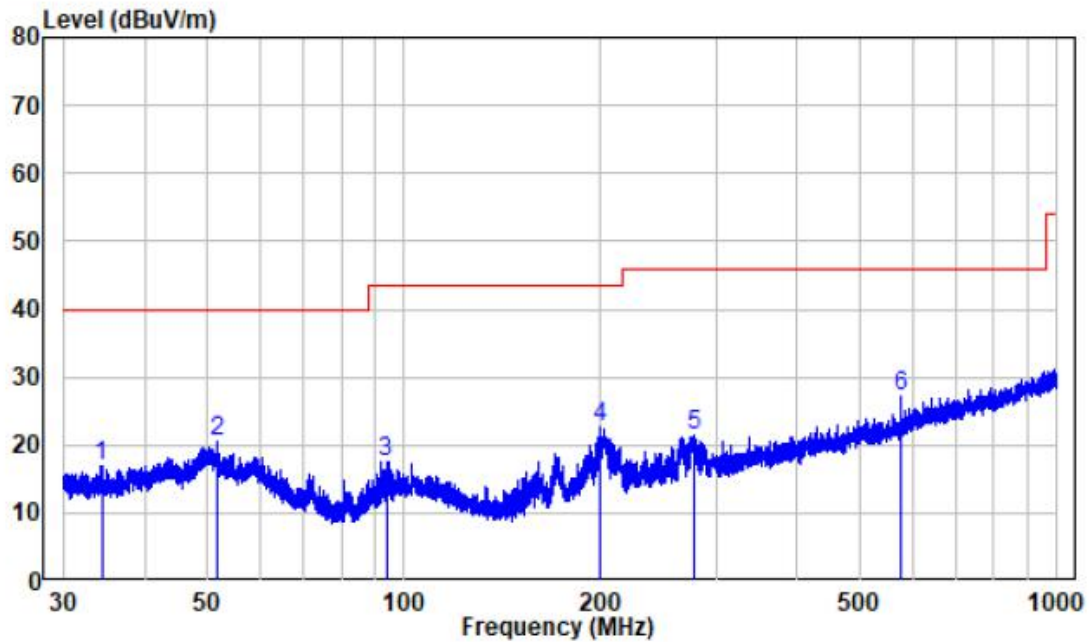

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	34.366	-11.74	28.75	17.01	40.00	-22.99	Peak
2	51.662	-9.96	30.40	20.44	40.00	-19.56	Peak
3	93.768	-12.76	30.38	17.62	43.50	-25.88	Peak
4	199.810	-11.41	33.95	22.54	43.50	-20.96	Peak
5	277.702	-9.73	31.07	21.34	46.00	-24.66	Peak
6	576.139	-3.70	30.86	27.16	46.00	-18.84	Peak

Vertical

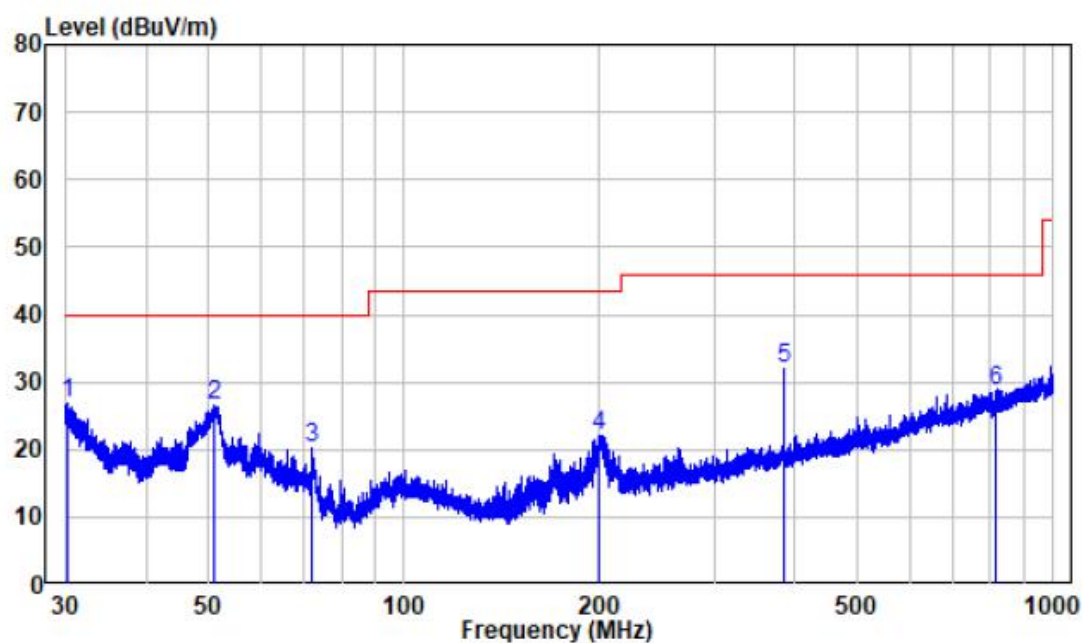

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.211	-12.38	39.10	26.72	40.00	-13.28	Peak
2	50.897	-9.93	36.61	26.68	40.00	-13.32	Peak
3	71.990	-15.62	35.78	20.16	40.00	-19.84	Peak
4	199.810	-11.41	33.35	21.94	43.50	-21.56	Peak
5	384.100	-7.08	39.04	31.96	46.00	-14.04	Peak
6	813.468	-0.28	28.93	28.65	46.00	-17.35	Peak

1-25 GHz: (worst case is adapter 2)

BLE 1M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2355.48	67.25	PK	2	1.5	H	-10.74	56.51	74	-17.49
2355.48	52.40	AV	2	1.5	H	-10.74	41.66	54	-12.34
2353.39	67.37	PK	175	1.8	V	-10.75	56.62	74	-17.38
2353.39	52.53	AV	175	1.8	V	-10.75	41.78	54	-12.22
2390	65.99	PK	275	1.9	H	-10.62	55.37	74	-18.63
2390	51.90	AV	275	1.9	H	-10.62	41.28	54	-12.72
2390	66.11	PK	70	1.9	V	-10.62	55.49	74	-18.51
2390	52.02	AV	70	1.9	V	-10.62	41.40	54	-12.60
4804	60.49	PK	299	2.1	H	-5.57	54.92	74	-19.08
4804	44.85	AV	299	2.1	H	-5.57	39.28	54	-14.72
4804	60.30	PK	184	1	V	-5.57	54.73	74	-19.27
4804	44.72	AV	184	1	V	-5.57	39.15	54	-14.85
Middle Channel 2440MHz									
4880	60.11	PK	84	1.7	H	-5.24	54.87	74	-19.13
4880	44.39	AV	84	1.7	H	-5.24	39.15	54	-14.85
4880	59.94	PK	275	2.3	V	-5.24	54.7	74	-19.30
4880	44.22	AV	275	2.3	V	-5.24	38.98	54	-15.02
High Channel 2480MHz									
2483.5	66.27	PK	177	1.5	H	-10.46	55.81	74	-18.19
2483.5	52.39	AV	177	1.5	H	-10.46	41.93	54	-12.07
2483.5	66.38	PK	359	1.2	V	-10.46	55.92	74	-18.08
2483.5	52.50	AV	359	1.2	V	-10.46	42.04	54	-11.96
2485.69	68.13	PK	327	1.5	H	-10.44	57.69	74	-16.31
2485.69	52.91	AV	327	1.5	H	-10.44	42.47	54	-11.53
2484.36	68.25	PK	34	2.5	V	-10.45	57.8	74	-16.20
2484.36	53.03	AV	34	2.5	V	-10.45	42.58	54	-11.42
4960	59.54	PK	236	1.1	H	-4.90	54.64	74	-19.36
4960	43.90	AV	236	1.1	H	-4.90	39.00	54	-15.00
4960	59.36	PK	312	1.4	V	-4.90	54.46	74	-19.54
4960	43.73	AV	312	1.4	V	-4.90	38.83	54	-15.17

BLE 2M:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2356.73	67.73	PK	102	1.1	H	-10.74	56.99	74	-17.01
2356.73	52.77	AV	102	1.1	H	-10.74	42.03	54	-11.97
2355.44	67.84	PK	297	1.3	V	-10.74	57.10	74	-16.90
2355.44	52.89	AV	297	1.3	V	-10.74	42.15	54	-11.85
2390	66.13	PK	194	2.4	H	-10.62	55.51	74	-18.49
2390	52.28	AV	194	2.4	H	-10.62	41.66	54	-12.34
2390	66.24	PK	254	1.8	V	-10.62	55.62	74	-18.38
2390	52.39	AV	254	1.8	V	-10.62	41.77	54	-12.23
4804	60.55	PK	348	1	H	-5.57	54.98	74	-19.02
4804	45.24	AV	348	1	H	-5.57	39.67	54	-14.33
4804	60.36	PK	356	1.6	V	-5.57	54.79	74	-19.21
4804	45.03	AV	356	1.6	V	-5.57	39.46	54	-14.54
Middle Channel 2440MHz									
4880	60.18	PK	100	1.5	H	-5.24	54.94	74	-19.06
4880	44.86	AV	100	1.5	H	-5.24	39.62	54	-14.38
4880	59.99	PK	263	1.7	V	-5.24	54.75	74	-19.25
4880	44.65	AV	263	1.7	V	-5.24	39.41	54	-14.59
High Channel 2480MHz									
2483.5	66.53	PK	210	1.9	H	-10.46	56.07	74	-17.93
2483.5	52.92	AV	210	1.9	H	-10.46	42.46	54	-11.54
2483.5	66.65	PK	21	1.5	V	-10.46	56.19	74	-17.81
2483.5	53.04	AV	21	1.5	V	-10.46	42.58	54	-11.42
2484.57	68.46	PK	16	1.9	H	-10.45	58.01	74	-15.99
2484.57	56.37	AV	16	1.9	H	-10.45	45.92	54	-8.08
2483.96	68.59	PK	132	2.2	V	-10.46	58.13	74	-15.87
2483.96	53.50	AV	132	2.2	V	-10.46	43.04	54	-10.96
4960	59.76	PK	356	1.9	H	-4.90	54.86	74	-19.14
4960	44.29	AV	356	1.9	H	-4.90	39.39	54	-14.61
4960	59.58	PK	176	1.5	V	-4.90	54.68	74	-19.32
4960	44.10	AV	176	1.5	V	-4.90	39.20	54	-14.80

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11b									
Low Channel (2412MHz)									
2385.78	68.00	PK	338	2	H	-10.63	57.37	74	-16.63
2385.78	52.83	AV	338	2	H	-10.63	42.20	54	-11.80
2386.57	68.12	PK	31	1.1	V	-10.63	57.49	74	-16.51
2386.57	52.94	AV	31	1.1	V	-10.63	42.31	54	-11.69
2390	65.85	PK	164	1.7	H	-10.62	55.23	74	-18.77
2390	52.26	AV	164	1.7	H	-10.62	41.64	54	-12.36
2390	65.98	PK	184	2.4	V	-10.62	55.36	74	-18.64
2390	52.37	AV	184	2.4	V	-10.62	41.75	54	-12.25
4824	62.93	PK	263	1.3	H	-5.55	57.38	74	-16.62
4824	55.07	AV	263	1.3	H	-5.55	49.52	54	-4.48
4824	62.32	PK	6	1.4	V	-5.55	56.77	74	-17.23
4824	54.50	AV	6	1.4	V	-5.55	48.95	54	-5.05
Middle Channel(2437MHz)									
4874	64.19	PK	162	1.8	H	-5.29	58.9	74	-15.10
4874	56.03	AV	162	1.8	H	-5.29	50.74	54	-3.26
4874	63.51	PK	99	1.1	V	-5.29	58.22	74	-15.78
4874	55.40	AV	99	1.1	V	-5.29	50.11	54	-3.89
High Channel(2462 MHz)									
2483.5	66.37	PK	353	1.6	H	-10.46	55.91	74	-18.09
2483.5	53.93	AV	353	1.6	H	-10.46	43.47	54	-10.53
2483.5	66.49	PK	291	1.9	V	-10.46	56.03	74	-17.97
2483.5	54.06	AV	291	1.9	V	-10.46	43.6	54	-10.40
2484.45	68.87	PK	72	1.9	H	-10.45	58.42	74	-15.58
2484.45	54.54	AV	72	1.9	H	-10.45	44.09	54	-9.91
2483.86	69.00	PK	262	1.9	V	-10.46	58.54	74	-15.46
2483.86	54.67	AV	262	1.9	V	-10.46	44.21	54	-9.79
4924	63.47	PK	126	1.7	H	-5.03	58.44	74	-15.56
4924	55.51	AV	126	1.7	H	-5.03	50.48	54	-3.52
4924	62.86	PK	276	1.6	V	-5.03	57.83	74	-16.17
4924	54.98	AV	276	1.6	V	-5.03	49.95	54	-4.05

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11g									
Low Channel(2412MHz)									
2389.15	72.23	PK	243	2	H	-10.62	61.61	74	-12.39
2389.15	55.62	AV	243	2	H	-10.62	45.00	54	-9.00
2389.68	72.44	PK	244	1.3	V	-10.62	61.82	74	-12.18
2389.68	55.81	AV	244	1.3	V	-10.62	45.19	54	-8.81
2390	70.98	PK	40	1.7	H	-10.62	60.36	74	-13.64
2390	55.09	AV	40	1.7	H	-10.62	44.47	54	-9.53
2390	71.20	PK	214	1.4	V	-10.62	60.58	74	-13.42
2390	55.27	AV	214	1.4	V	-10.62	44.65	54	-9.35
4824	61.88	PK	332	1.8	H	-5.55	56.33	74	-17.67
4824	47.07	AV	332	1.8	H	-5.55	41.52	54	-12.48
4824	61.51	PK	89	1.9	V	-5.55	55.96	74	-18.04
4824	46.63	AV	89	1.9	V	-5.55	41.08	54	-12.92
Middle Channel(2437MHz)									
4874	61.40	PK	126	1.2	H	-5.29	56.11	74	-17.89
4874	46.59	AV	126	1.2	H	-5.29	41.3	54	-12.70
4874	61.07	PK	160	1.8	V	-5.29	55.78	74	-18.22
4874	46.21	AV	160	1.8	V	-5.29	40.92	54	-13.08
High Channel(2462 MHz)									
2483.5	73.19	PK	3	2	H	-10.46	62.73	74	-11.27
2483.5	56.83	AV	3	2	H	-10.46	46.37	54	-7.63
2483.5	73.38	PK	305	2.1	V	-10.46	62.92	74	-11.08
2483.5	56.96	AV	305	2.1	V	-10.46	46.5	54	-7.50
2483.94	75.07	PK	125	1.7	H	-10.46	64.61	74	-9.39
2483.94	57.24	AV	125	1.7	H	-10.46	46.78	54	-7.22
2483.75	75.30	PK	48	1.9	V	-10.46	64.84	74	-9.16
2483.75	57.45	AV	48	1.9	V	-10.46	46.99	54	-7.01
4924	60.83	PK	192	2.4	H	-5.03	55.80	74	-18.20
4924	46.01	AV	192	2.4	H	-5.03	40.98	54	-13.02
4924	60.45	PK	170	1.7	V	-5.03	55.42	74	-18.58
4924	45.62	AV	170	1.7	V	-5.03	40.59	54	-13.41

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
Low Channel (2412MHz)									
2389.89	74.37	PK	359	1.5	H	-10.62	63.75	74	-10.25
2389.89	56.79	AV	359	1.5	H	-10.62	46.17	54	-7.83
2389.45	74.60	PK	215	2.5	V	-10.62	63.98	74	-10.02
2389.45	56.98	AV	215	2.5	V	-10.62	46.36	54	-7.64
2390	73.05	PK	192	2.4	H	-10.62	62.43	74	-11.57
2390	56.26	AV	192	2.4	H	-10.62	45.64	54	-8.36
2390	73.23	PK	146	1.2	V	-10.62	62.61	74	-11.39
2390	56.44	AV	146	1.2	V	-10.62	45.82	54	-8.18
4824	61.75	PK	354	1.7	H	-5.55	56.20	74	-17.80
4824	46.84	AV	354	1.7	H	-5.55	41.29	54	-12.71
4824	61.38	PK	212	1.6	V	-5.55	55.83	74	-18.17
4824	46.47	AV	212	1.6	V	-5.55	40.92	54	-13.08
Middle Channel(2437MHz)									
4874	61.29	PK	284	1.2	H	-5.29	56	74	-18.00
4874	46.37	AV	284	1.2	H	-5.29	41.08	54	-12.92
4874	60.92	PK	214	2.1	V	-5.29	55.63	74	-18.37
4874	46.03	AV	214	2.1	V	-5.29	40.74	54	-13.26
High Channel(2462 MHz)									
2483.5	74.32	PK	160	1.6	H	-10.46	63.86	74	-10.14
2483.5	57.63	AV	160	1.6	H	-10.46	47.17	54	-6.83
2483.5	74.49	PK	238	2.3	V	-10.46	64.03	74	-9.97
2483.5	57.77	AV	238	2.3	V	-10.46	47.31	54	-6.69
2483.69	77.15	PK	190	1.9	H	-10.46	66.69	74	-7.31
2483.69	58.06	AV	190	1.9	H	-10.46	47.6	54	-6.40
2483.8	76.38	PK	243	1.6	V	-10.46	65.92	74	-8.08
2483.8	58.29	AV	243	1.6	V	-10.46	47.83	54	-6.17
4924	60.67	PK	150	2.4	H	-5.03	55.64	74	-18.36
4924	45.82	AV	150	2.4	H	-5.03	40.79	54	-13.21
4924	60.33	PK	257	1.1	V	-5.03	55.30	74	-18.70
4924	45.50	AV	257	1.1	V	-5.03	40.47	54	-13.53

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
Low Channel (2422MHz)									
2389.36	78.38	PK	287	1.2	H	-10.62	67.76	74	-6.24
2389.36	59.97	AV	287	1.2	H	-10.62	49.35	54	-4.65
2388.45	78.61	PK	127	2	V	-10.62	67.99	74	-6.01
2388.45	60.20	AV	127	2	V	-10.62	49.58	54	-4.42
2390	77.03	PK	174	1.8	H	-10.62	66.41	74	-7.59
2390	59.41	AV	174	1.8	H	-10.62	48.79	54	-5.21
2390	77.25	PK	263	1.9	V	-10.62	66.63	74	-7.37
2390	59.62	AV	263	1.9	V	-10.62	49.00	54	-5.00
4844	60.63	PK	31	1.3	H	-5.52	55.11	74	-18.89
4844	46.04	AV	31	1.3	H	-5.52	40.52	54	-13.48
4844	60.40	PK	221	1.3	V	-5.52	54.88	74	-19.12
4844	45.81	AV	221	1.3	V	-5.52	40.29	54	-13.71
Middle Channel 2442MHz									
4874	60.40	PK	190	1.8	H	-5.29	55.11	74	-18.89
4874	45.74	AV	190	1.8	H	-5.29	40.45	54	-13.55
4874	60.18	PK	111	1.9	V	-5.29	54.89	74	-19.11
4874	45.51	AV	111	1.9	V	-5.29	40.22	54	-13.78
High Channel 2452MHz									
2483.5	79.37	PK	165	1	H	-10.46	68.91	74	-5.09
2483.5	60.18	AV	165	1	H	-10.46	49.72	54	-4.28
2483.5	79.59	PK	170	1.8	V	-10.46	69.13	74	-4.87
2483.5	60.34	AV	170	1.8	V	-10.46	49.88	54	-4.12
2483.85	81.22	PK	39	2.4	H	-10.46	70.76	74	-3.24
2483.85	60.83	AV	39	2.4	H	-10.46	50.37	54	-3.63
2483.68	81.46	PK	55	2.2	V	-10.46	71	74	-3.00
2483.68	61.05	AV	55	2.2	V	-10.46	50.59	54	-3.41
4904	60.04	PK	348	1	H	-5.06	54.98	74	-19.02
4904	45.47	AV	348	1	H	-5.06	40.41	54	-13.59
4904	59.85	PK	221	2.4	V	-5.06	54.79	74	-19.21
4904	45.26	AV	221	2.4	V	-5.06	40.20	54	-13.80

Note:

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected Amplitude - Limit

The other spurious emission which is 20dB to the limit or in the noise floor level was not recorded.


1-18 GHz:

Pre-scan for 802.11b, Middle Channel

Horizontal

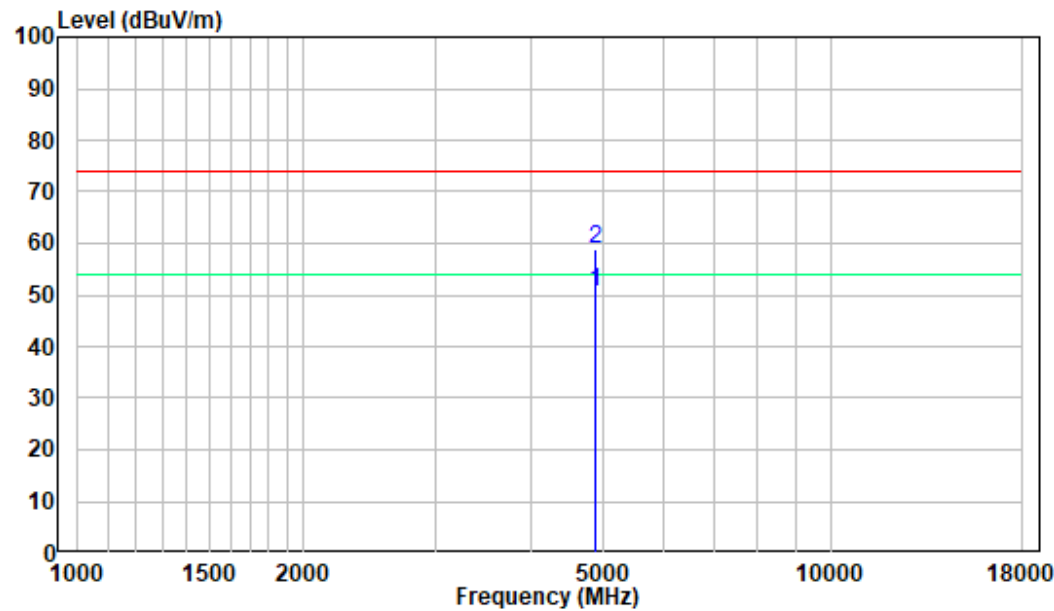


Vertical

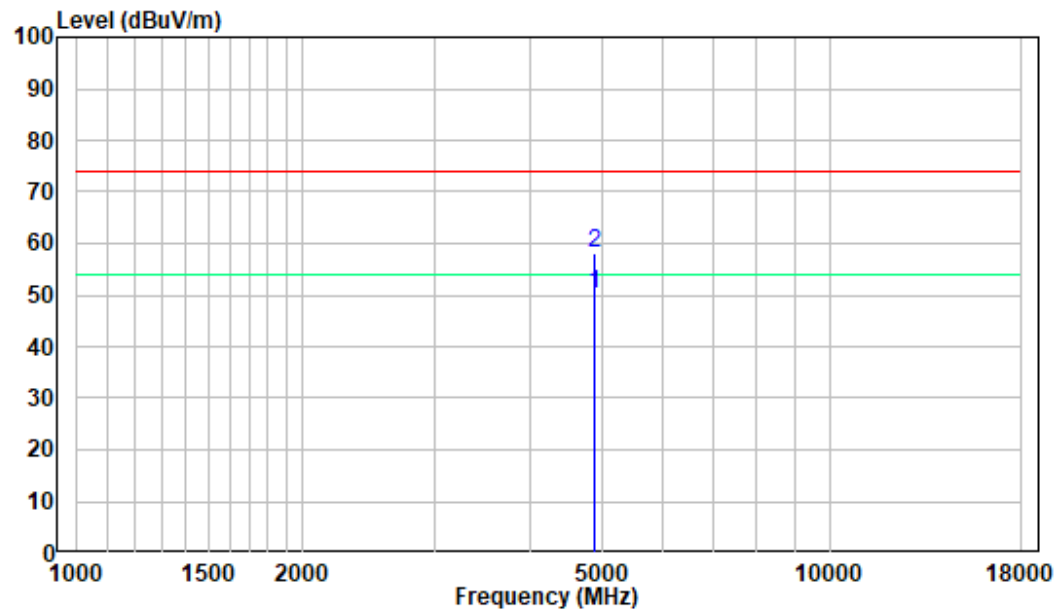


18 -25GHz:

Pre-scan for 802.11b, Middle Channel

Horizontal

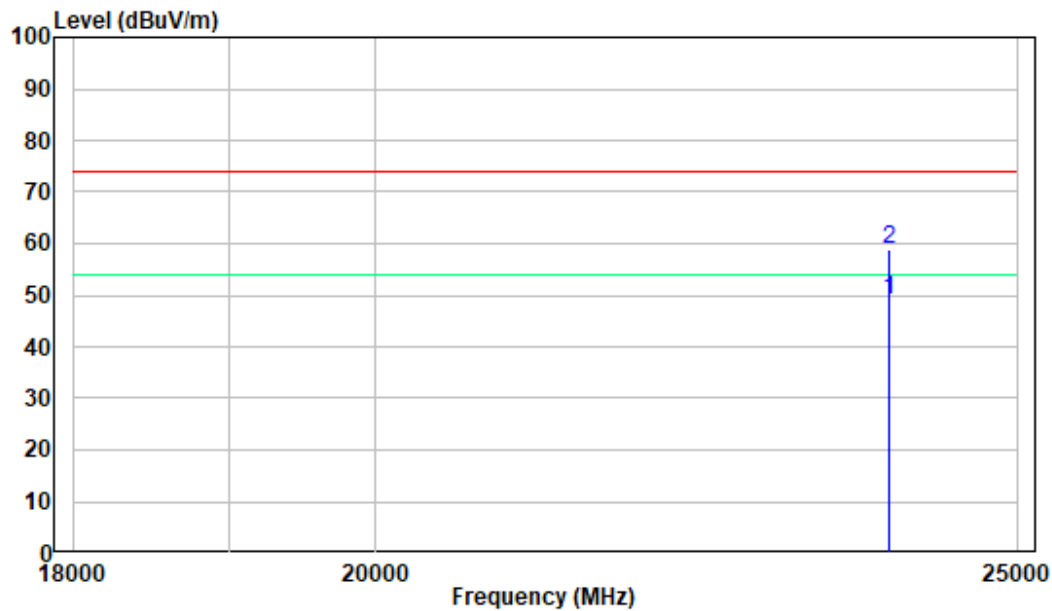

Vertical

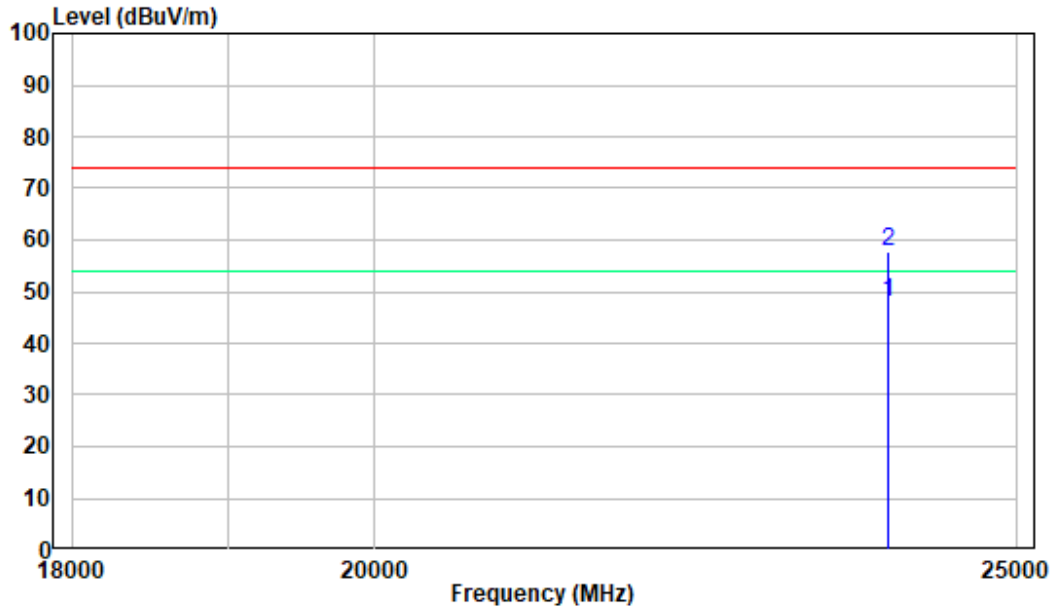

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

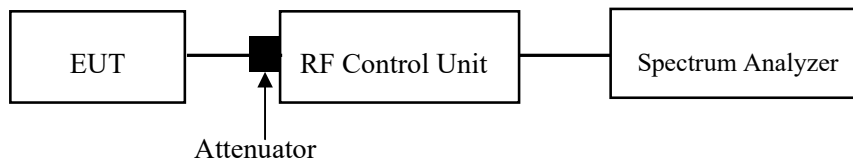

Test Data

Environmental Conditions

Temperature:	25.6~26 °C
Relative Humidity:	52~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-07-19 and 2023-07-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.1.3 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

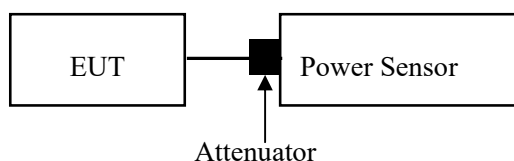

For BLE mode:

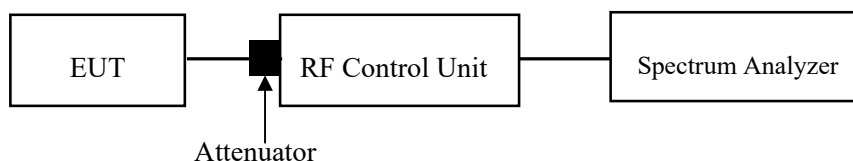

Test Data

Environmental Conditions

Temperature:	25.6~26 °C
Relative Humidity:	52~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-07-19 and 2023-07-20.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

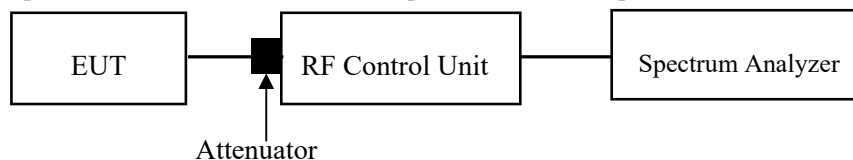**Test Data****Environmental Conditions**

Temperature:	25.6~26 °C
Relative Humidity:	52~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-07-19 and 2023-07-20.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

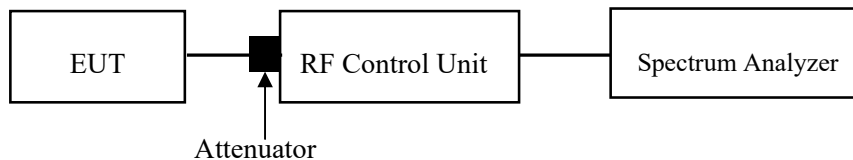

Test Data

Environmental Conditions

Temperature:	25.6~26 °C
Relative Humidity:	52~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Liang on 2023-07-19 and 2023-07-20.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.12	2408.44	2415.56	0.5	PASS
		2437	8.52	2433.00	2441.52	0.5	PASS
		2462	7.56	2458.00	2465.56	0.5	PASS
11G	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
		2437	15.12	2429.44	2444.56	0.5	PASS
		2462	15.12	2454.44	2469.56	0.5	PASS
11N20SISO	Ant1	2412	15.32	2404.44	2419.76	0.5	PASS
		2437	15.44	2429.44	2444.88	0.5	PASS
		2462	15.12	2454.44	2469.56	0.5	PASS
11N40SISO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
		2437	35.12	2419.48	2454.60	0.5	PASS
		2452	35.12	2434.48	2469.60	0.5	PASS

Test Graphs

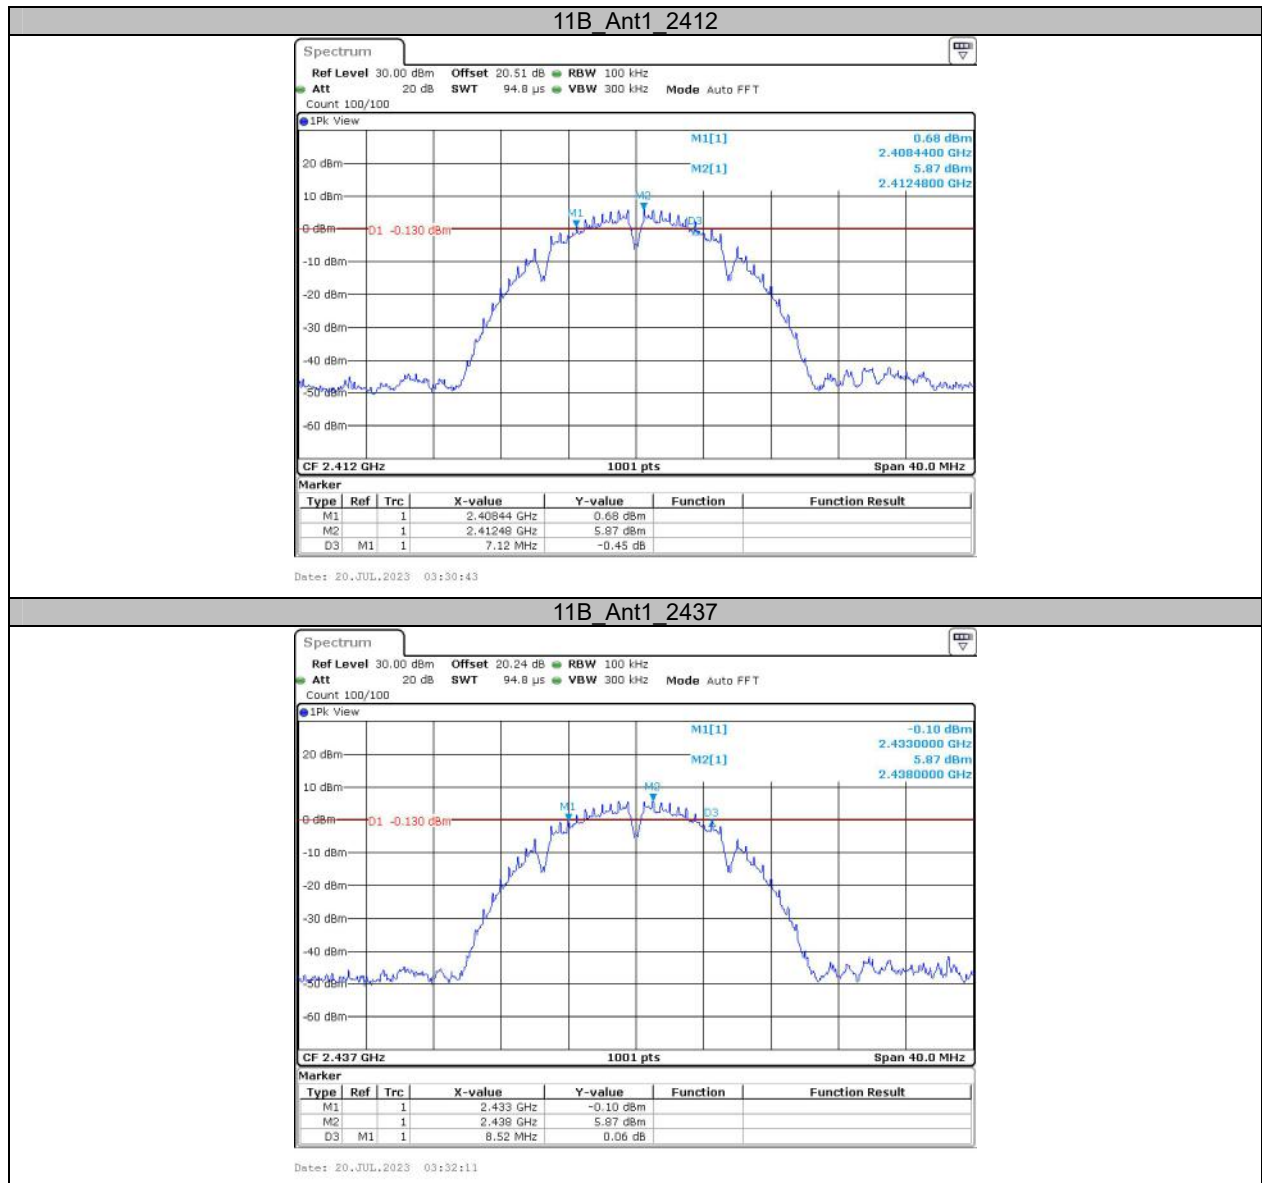


11B_Ant1_2462

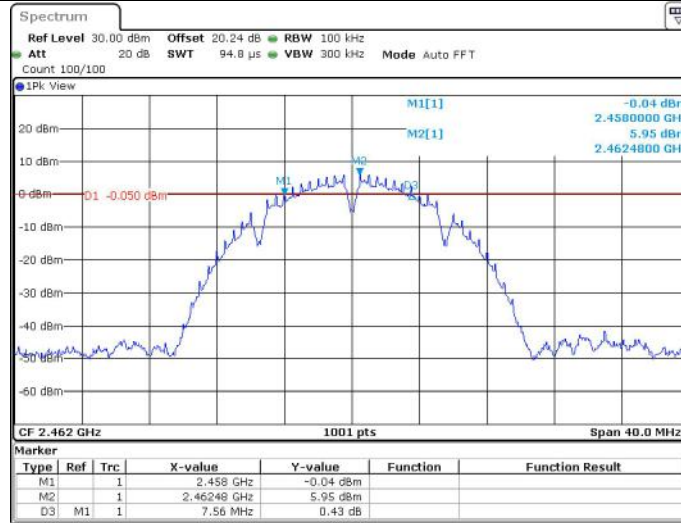


Date: 20.JUL.2023 03:33:39

11G_Ant1_2412

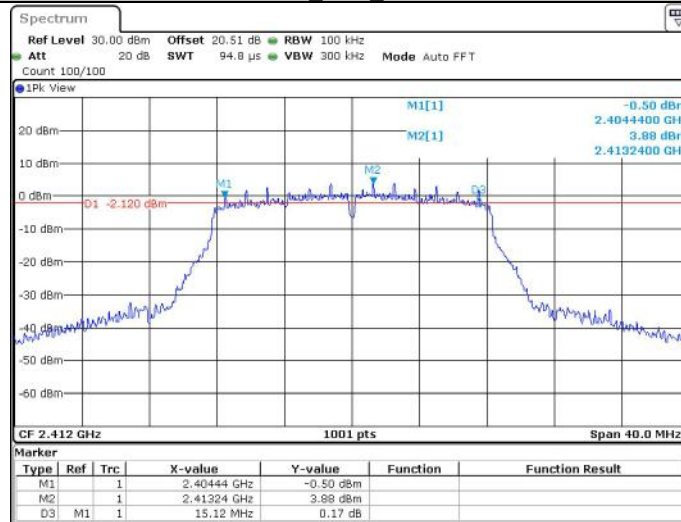


Date: 20.JUL.2023 03:35:04

11G_Ant1_2437

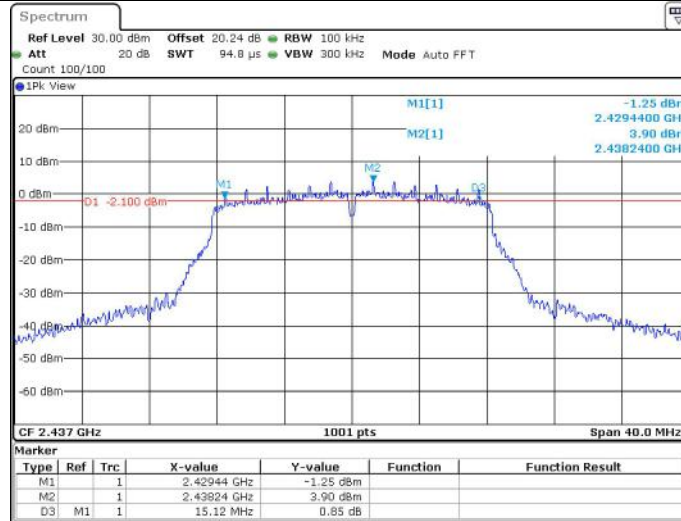



Date: 20.JUL.2023 03:36:40


11G_Ant1_2462

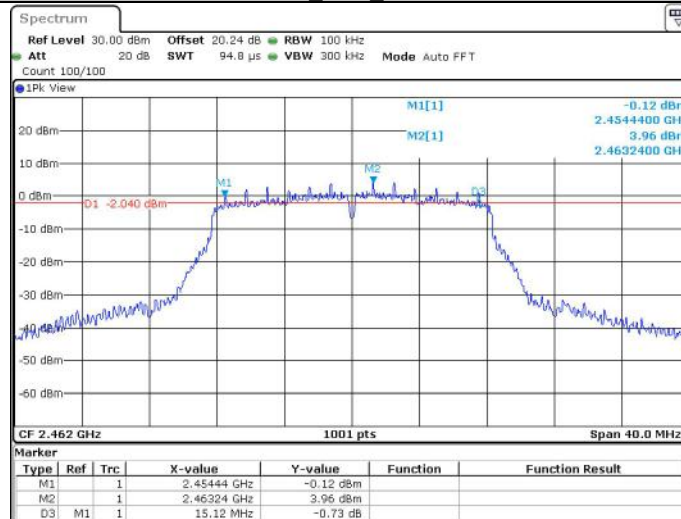

Date: 20.JUL.2023 03:38:49

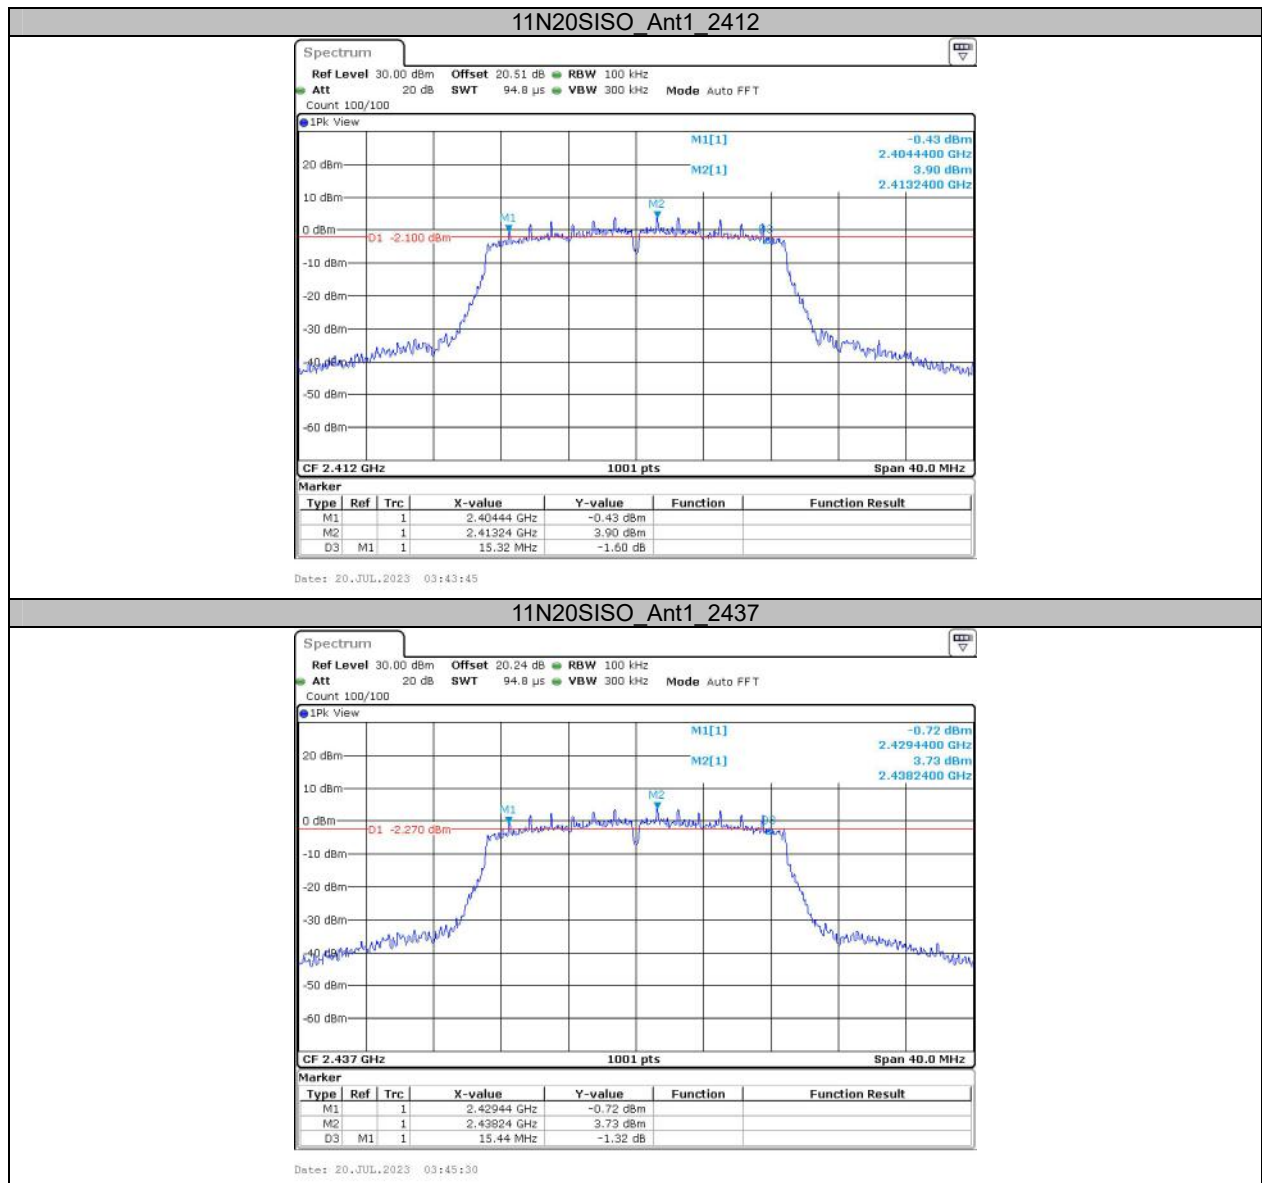

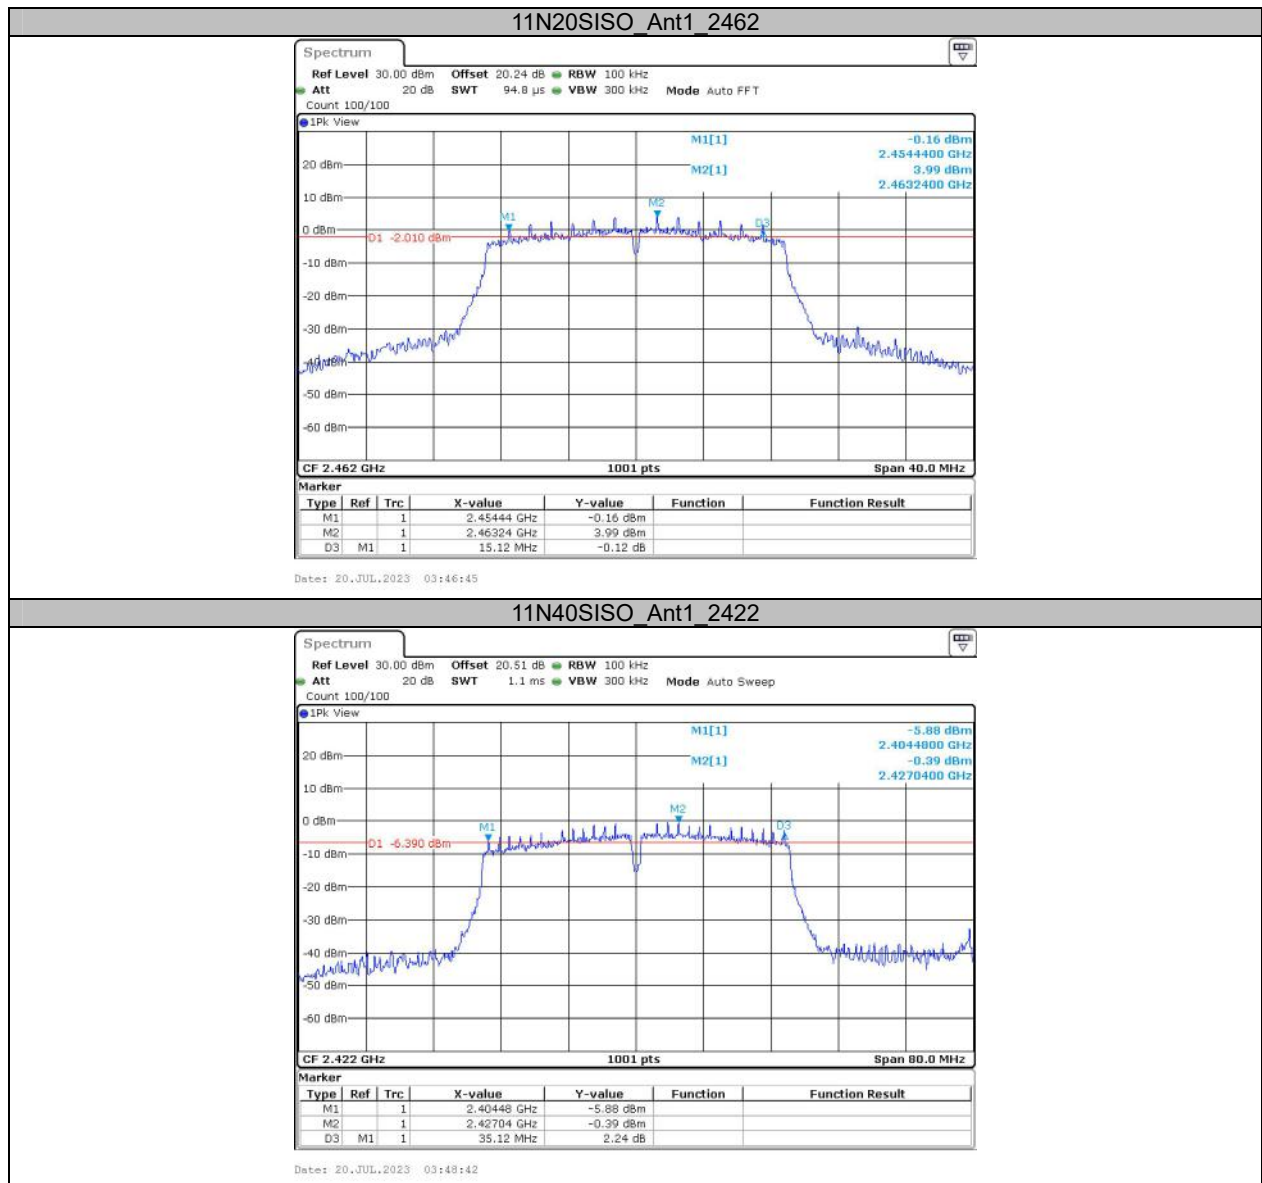


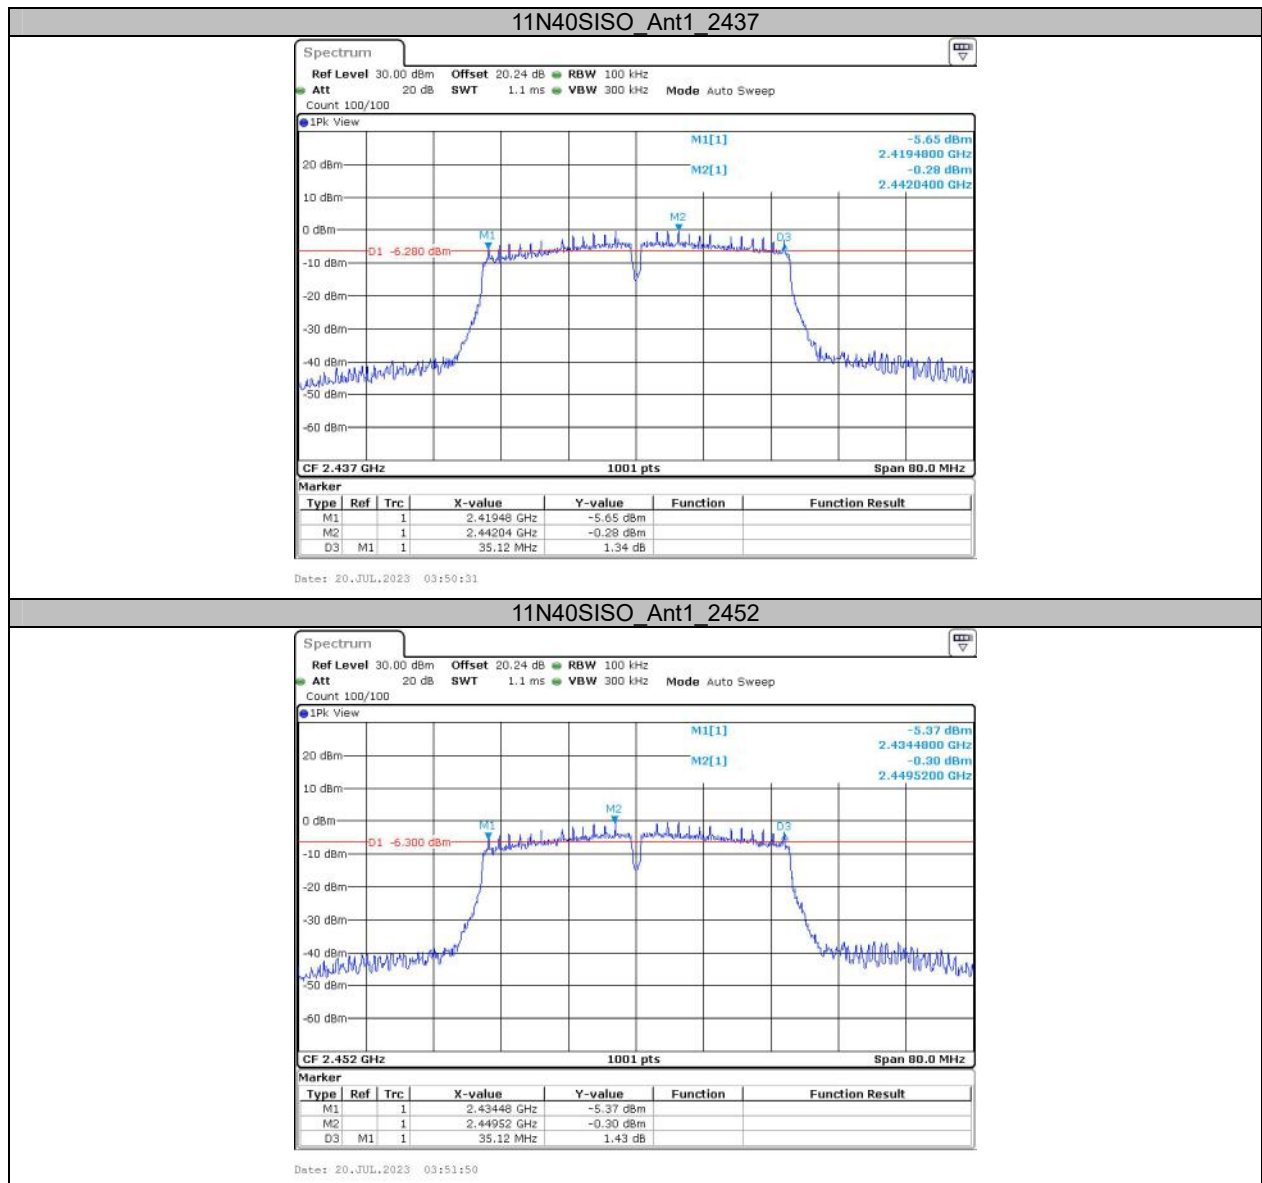


**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.827	2405.686	2418.513	---	---
		2437	12.747	2430.726	2443.474	---	---
		2462	12.787	2455.646	2468.434	---	---
11G	Ant1	2412	17.263	2403.449	2420.711	---	---
		2437	17.263	2428.449	2445.711	---	---
		2462	17.303	2453.369	2470.671	---	---
11N20SISO	Ant1	2412	18.142	2403.009	2421.151	---	---
		2437	18.142	2427.969	2446.111	---	---
		2462	18.142	2452.969	2471.111	---	---
11N40SISO	Ant1	2422	36.523	2404.018	2440.541	---	---
		2437	36.523	2418.938	2455.462	---	---
		2452	36.523	2433.938	2470.462	---	---


Test Graphs

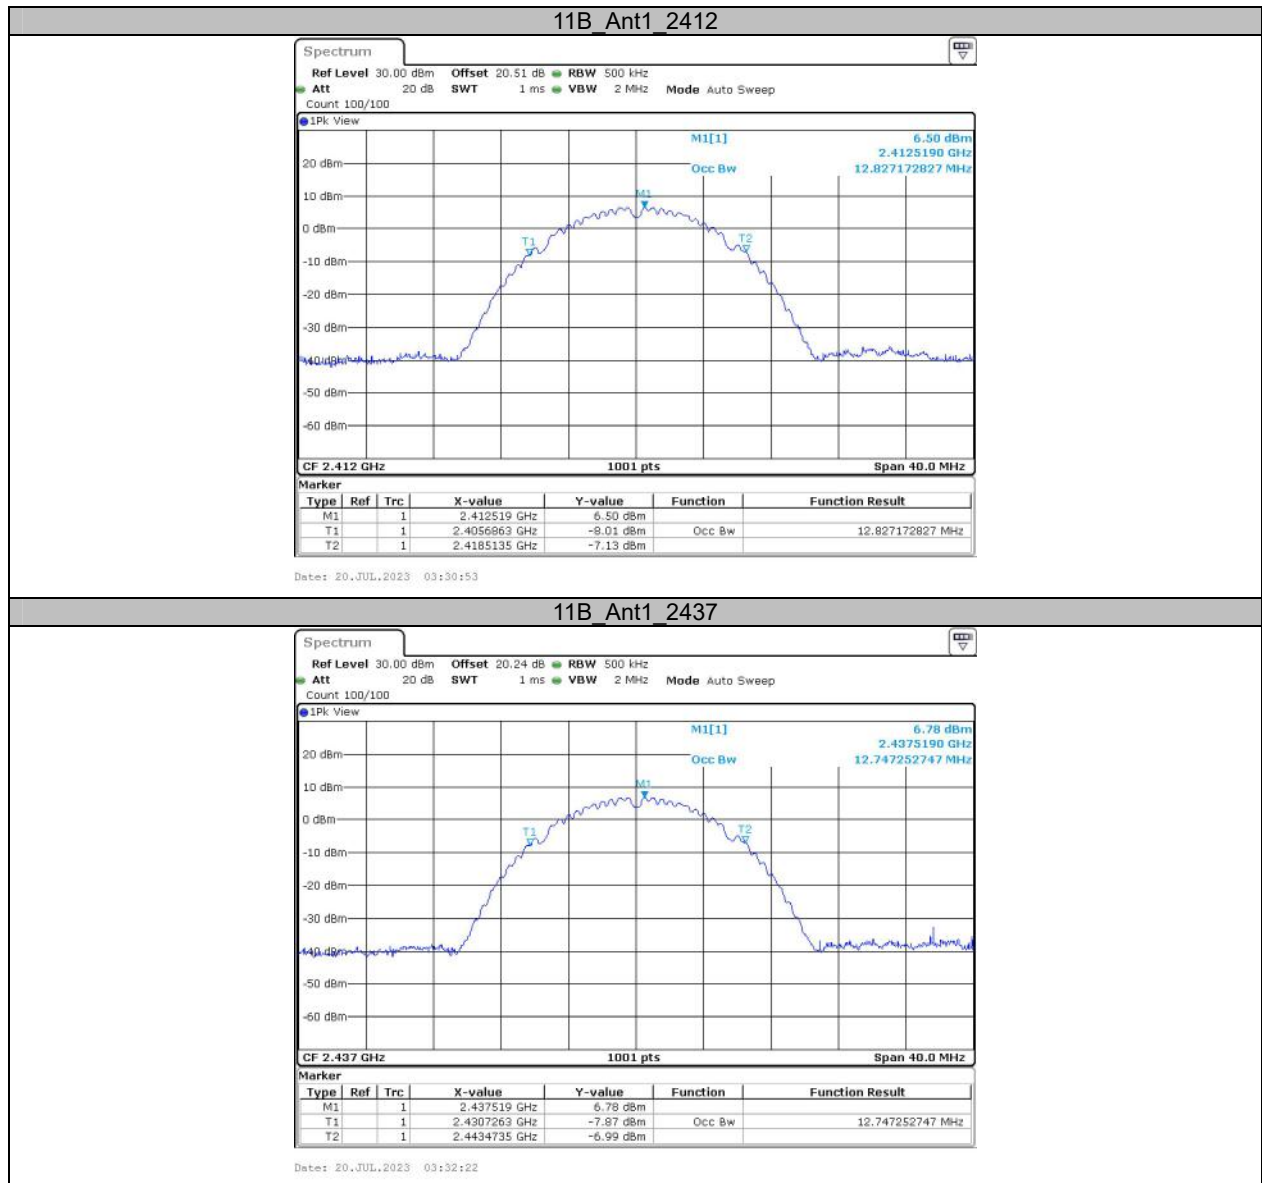


11B_Ant1_2462

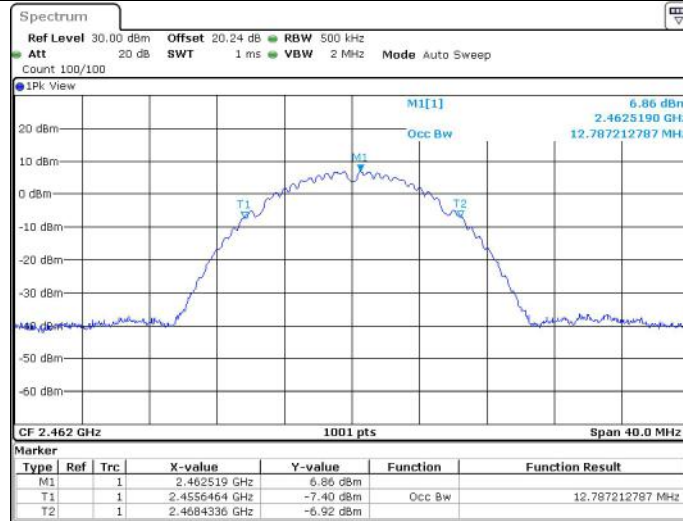

11G_Ant1_2412

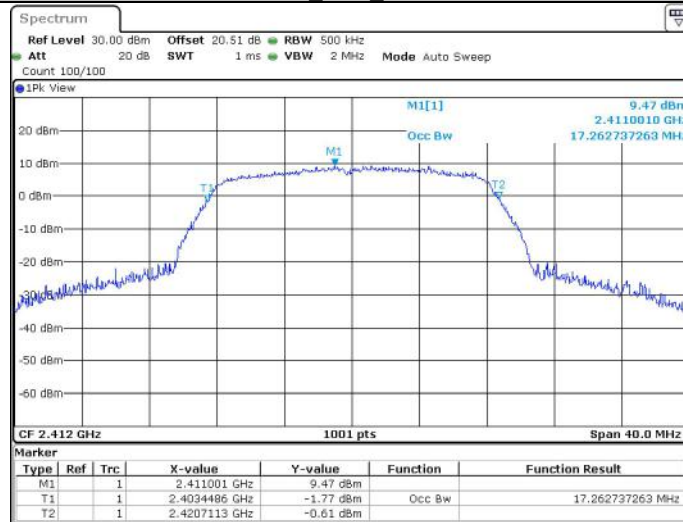


11G_Ant1_2437

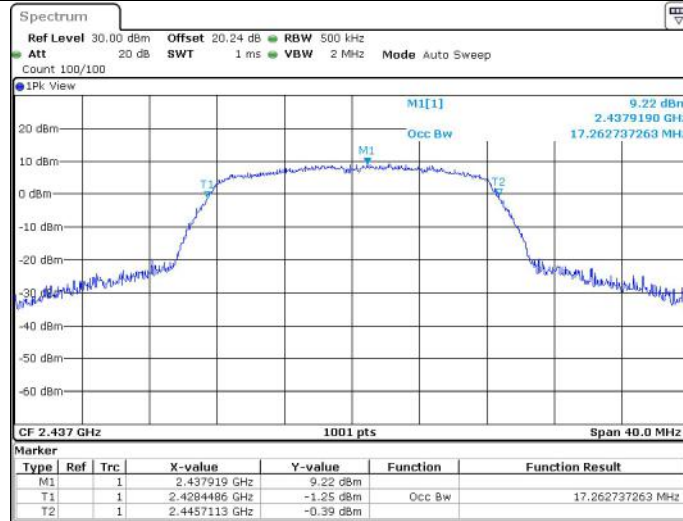


Date: 20.JUL.2023 03:36:50

11G_Ant1_2462

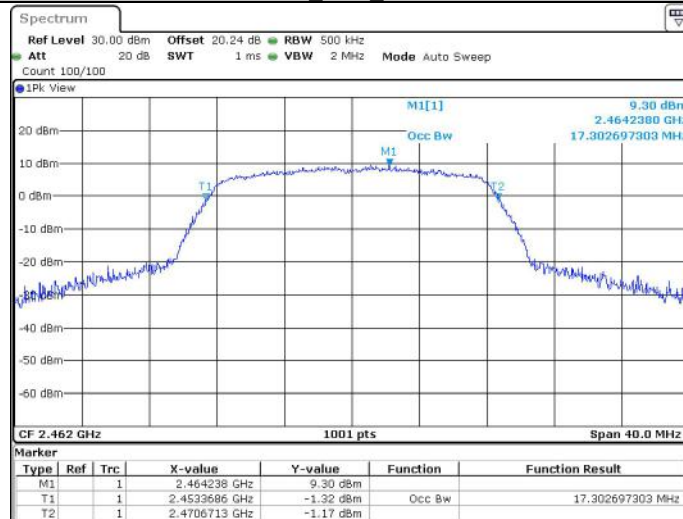


Date: 20.JUL.2023 03:38:59


11N20SISO_Ant1_2412

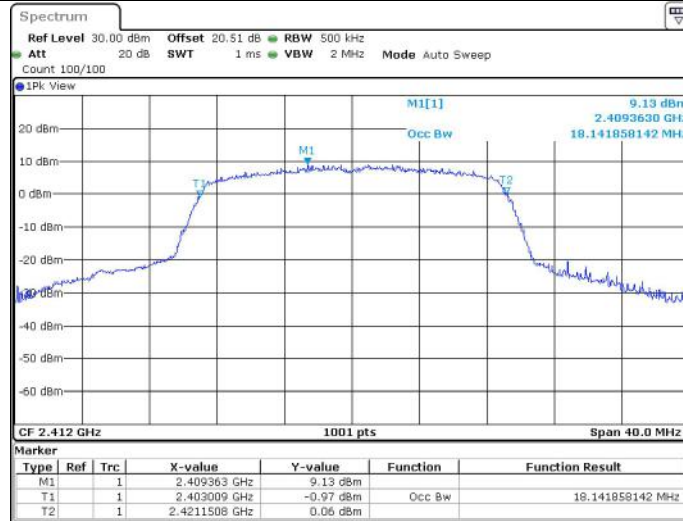

11N20SISO_Ant1_2437



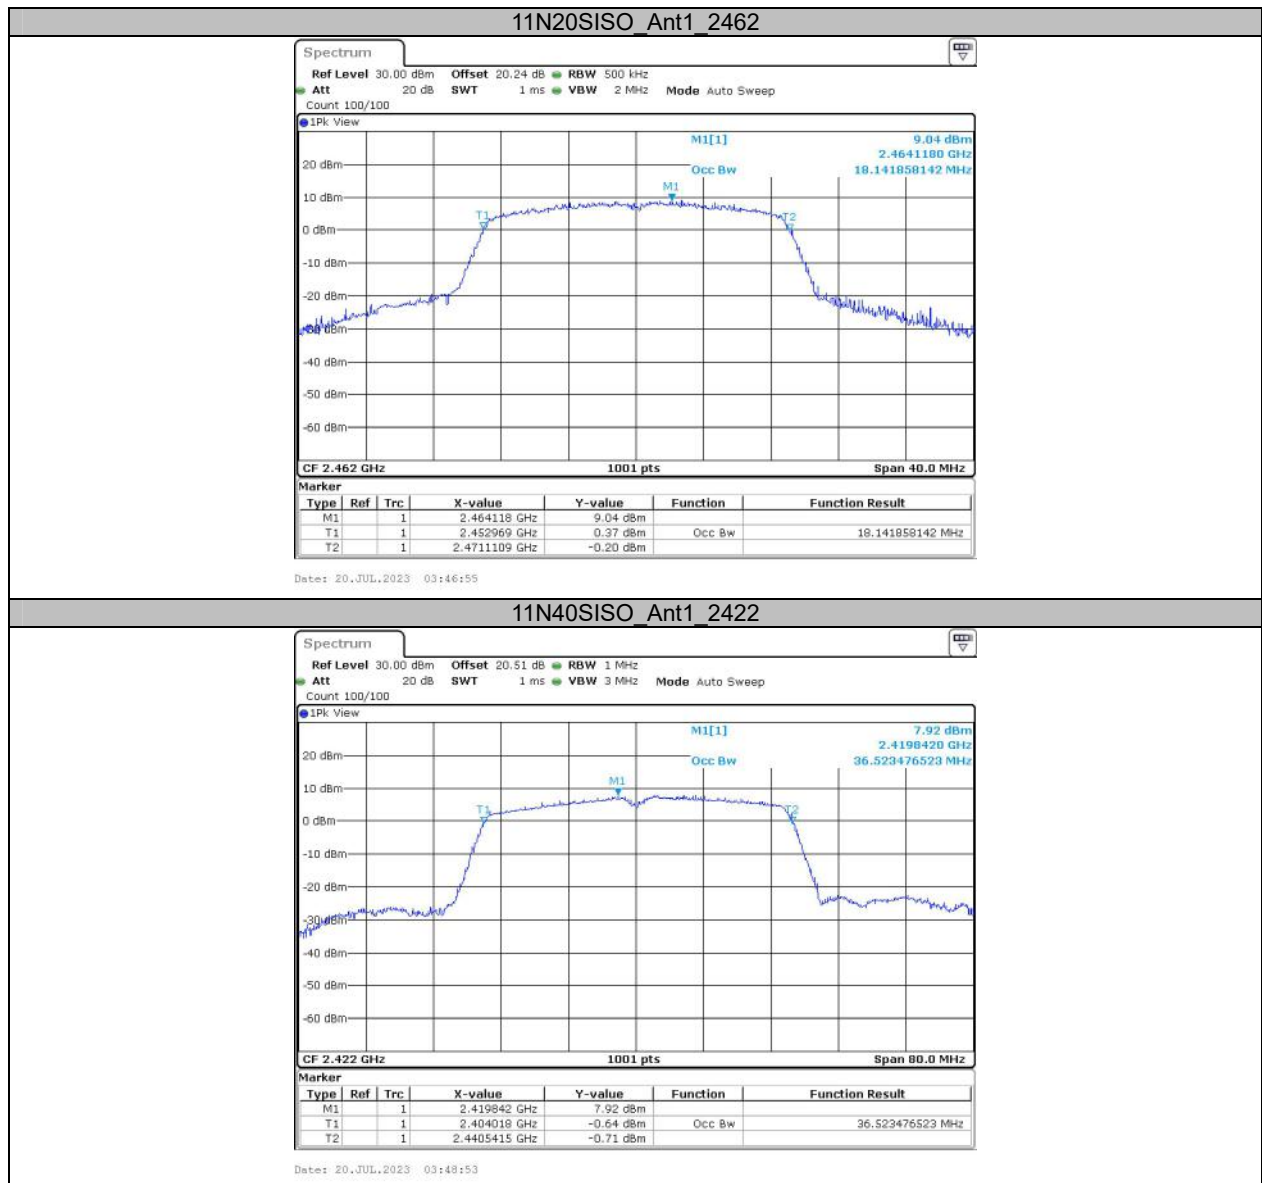

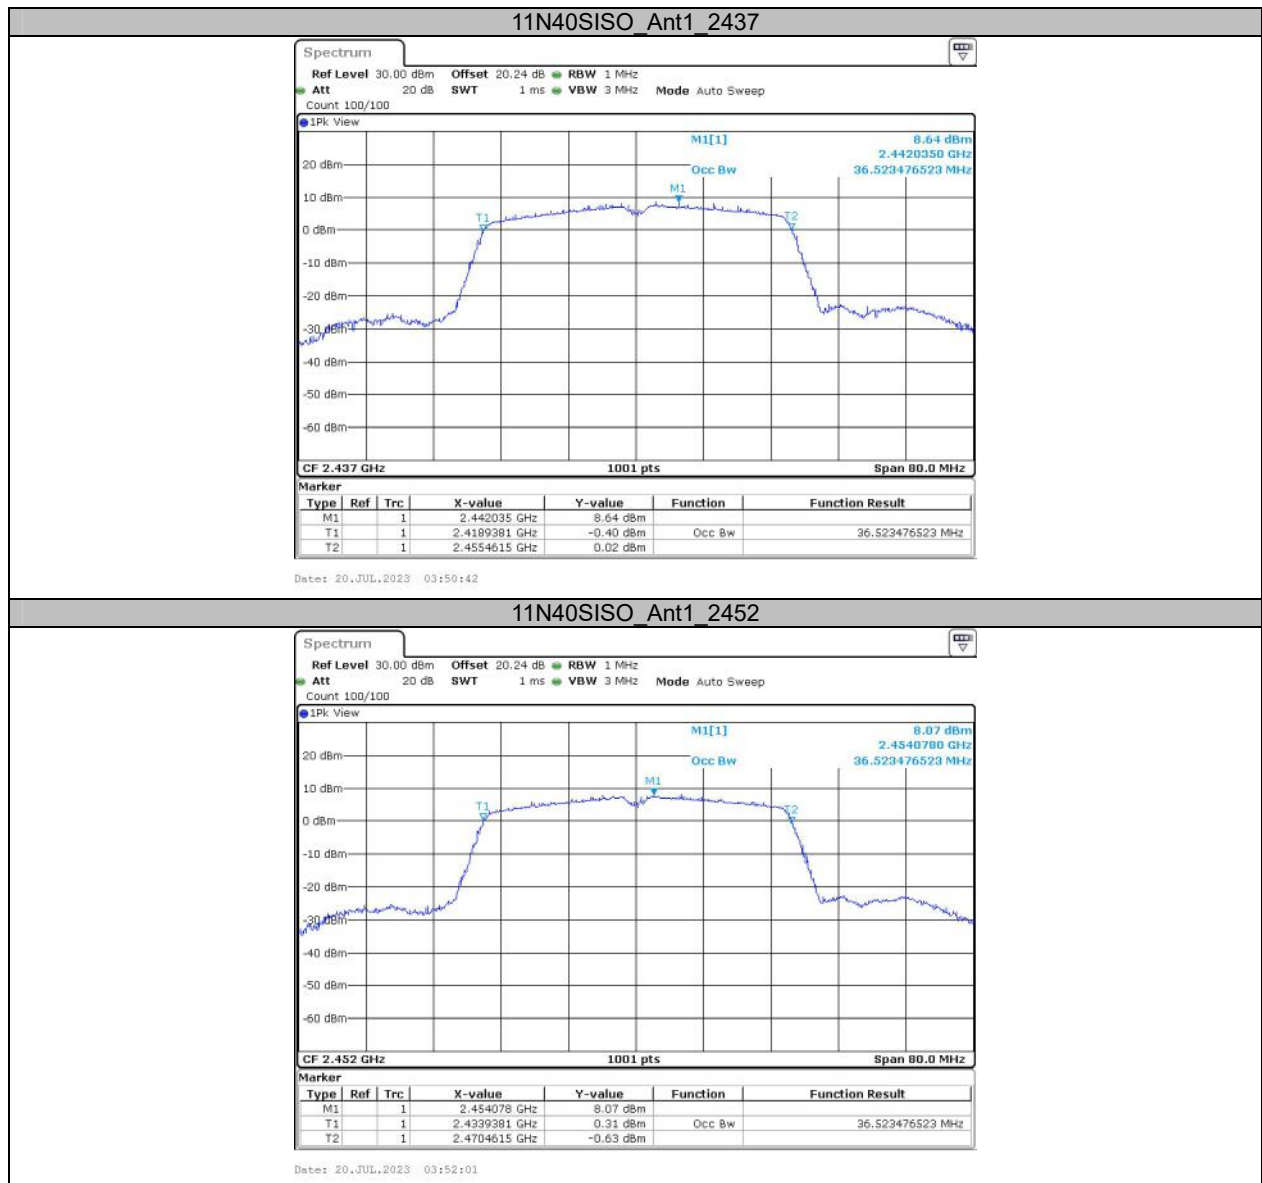

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	17.52	≤30.00	PASS
		2437	16.78	≤30.00	PASS
		2462	17.17	≤30.00	PASS
11G	Ant1	2412	21.56	≤30.00	PASS
		2437	21.62	≤30.00	PASS
		2462	21.78	≤30.00	PASS
11N20SISO	Ant1	2412	21.53	≤30.00	PASS
		2437	21.65	≤30.00	PASS
		2462	21.69	≤30.00	PASS
11N40SISO	Ant1	2422	19.85	≤30.00	PASS
		2437	20.03	≤30.00	PASS
		2452	20.10	≤30.00	PASS


Test Result Average


Test Mode	Antenna	Frequency[MHz]	Average Power [dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	11.87	≤30.00	PASS
		2437	11.28	≤30.00	PASS
		2462	11.55	≤30.00	PASS
11G	Ant1	2412	11.09	≤30.00	PASS
		2437	11.76	≤30.00	PASS
		2462	11.82	≤30.00	PASS
11N20SISO	Ant1	2412	11.14	≤30.00	PASS
		2437	11.63	≤30.00	PASS
		2462	11.69	≤30.00	PASS
11N40SISO	Ant1	2422	9.91	≤30.00	PASS
		2437	10.00	≤30.00	PASS
		2452	10.02	≤30.00	PASS

**Appendix D: Maximum power spectral density
Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-6.82	≤8.00	PASS
		2437	-8.19	≤8.00	PASS
		2462	-7.35	≤8.00	PASS
11G	Ant1	2412	-9.45	≤8.00	PASS
		2437	-9.03	≤8.00	PASS
		2462	-8.73	≤8.00	PASS
11N20SISO	Ant1	2412	-9.88	≤8.00	PASS
		2437	-9.47	≤8.00	PASS
		2462	-8.89	≤8.00	PASS
11N40SISO	Ant1	2422	-15.00	≤8.00	PASS
		2437	-14.37	≤8.00	PASS
		2452	-13.89	≤8.00	PASS

Test Graphs

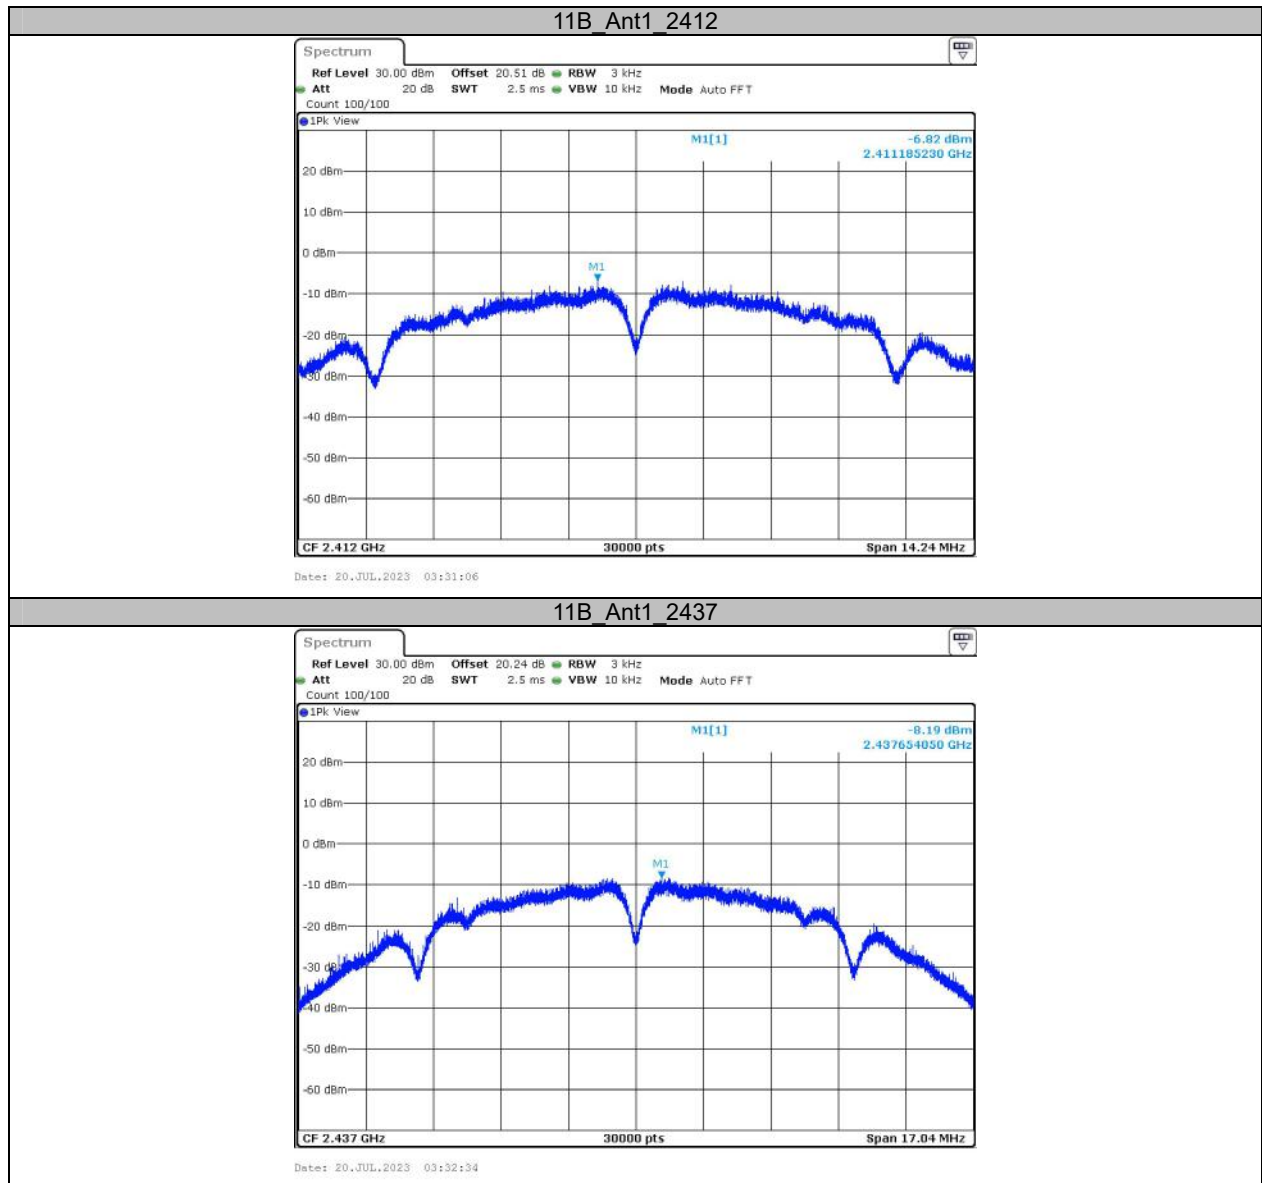

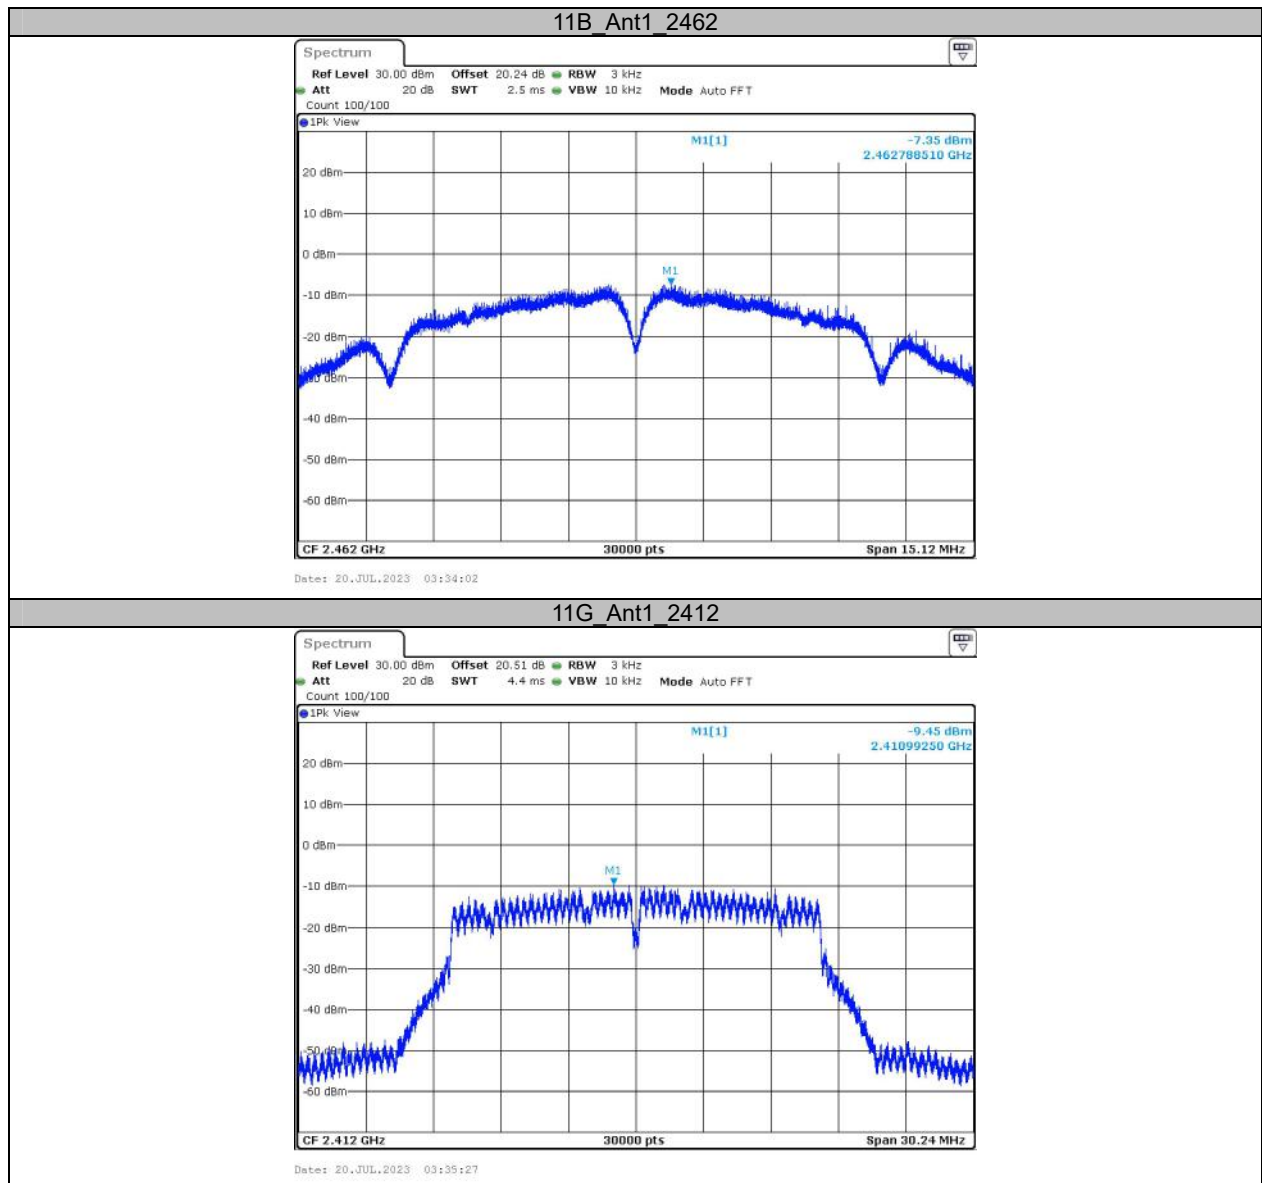


11G_Ant1_2437

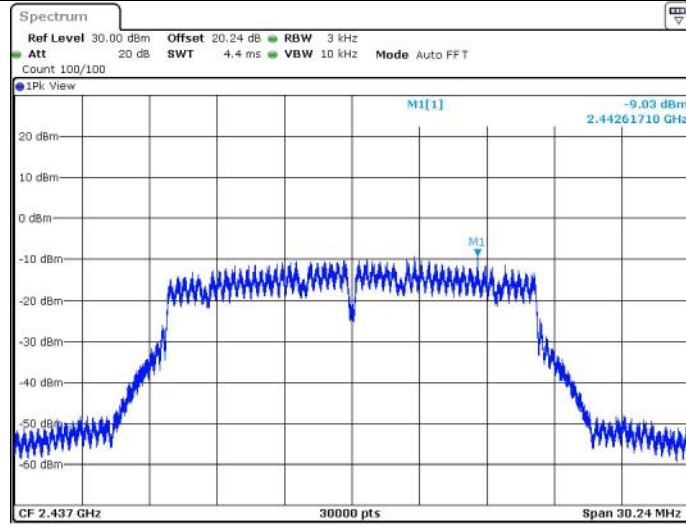



Date: 20.JUL.2023 03:37:03


11G_Ant1_2462

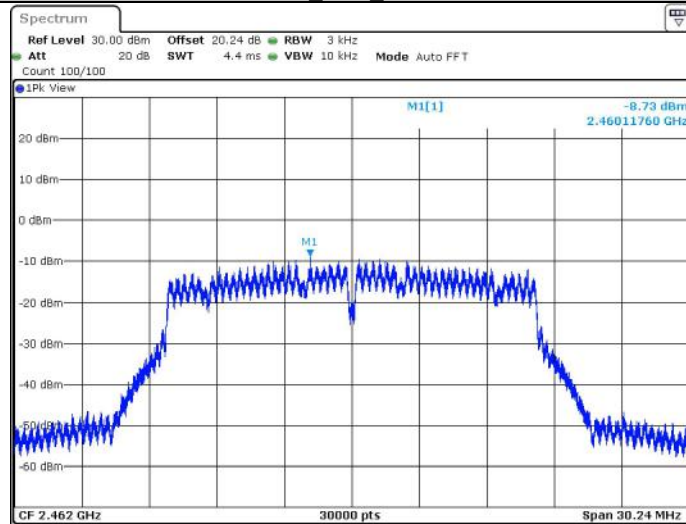

Date: 20.JUL.2023 03:39:12

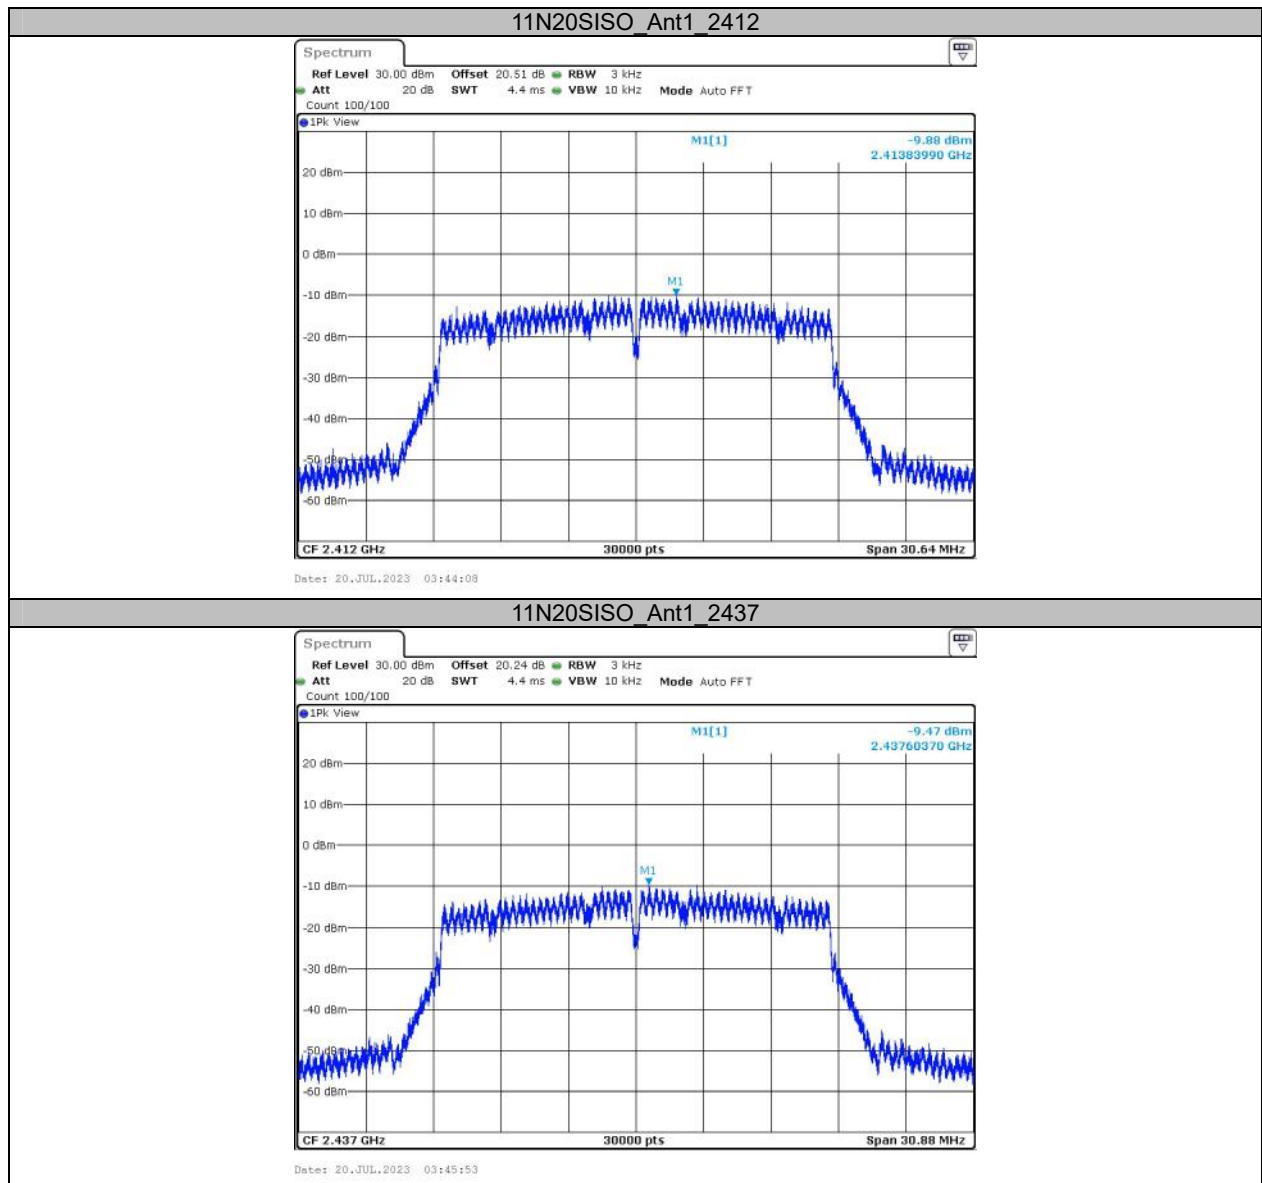


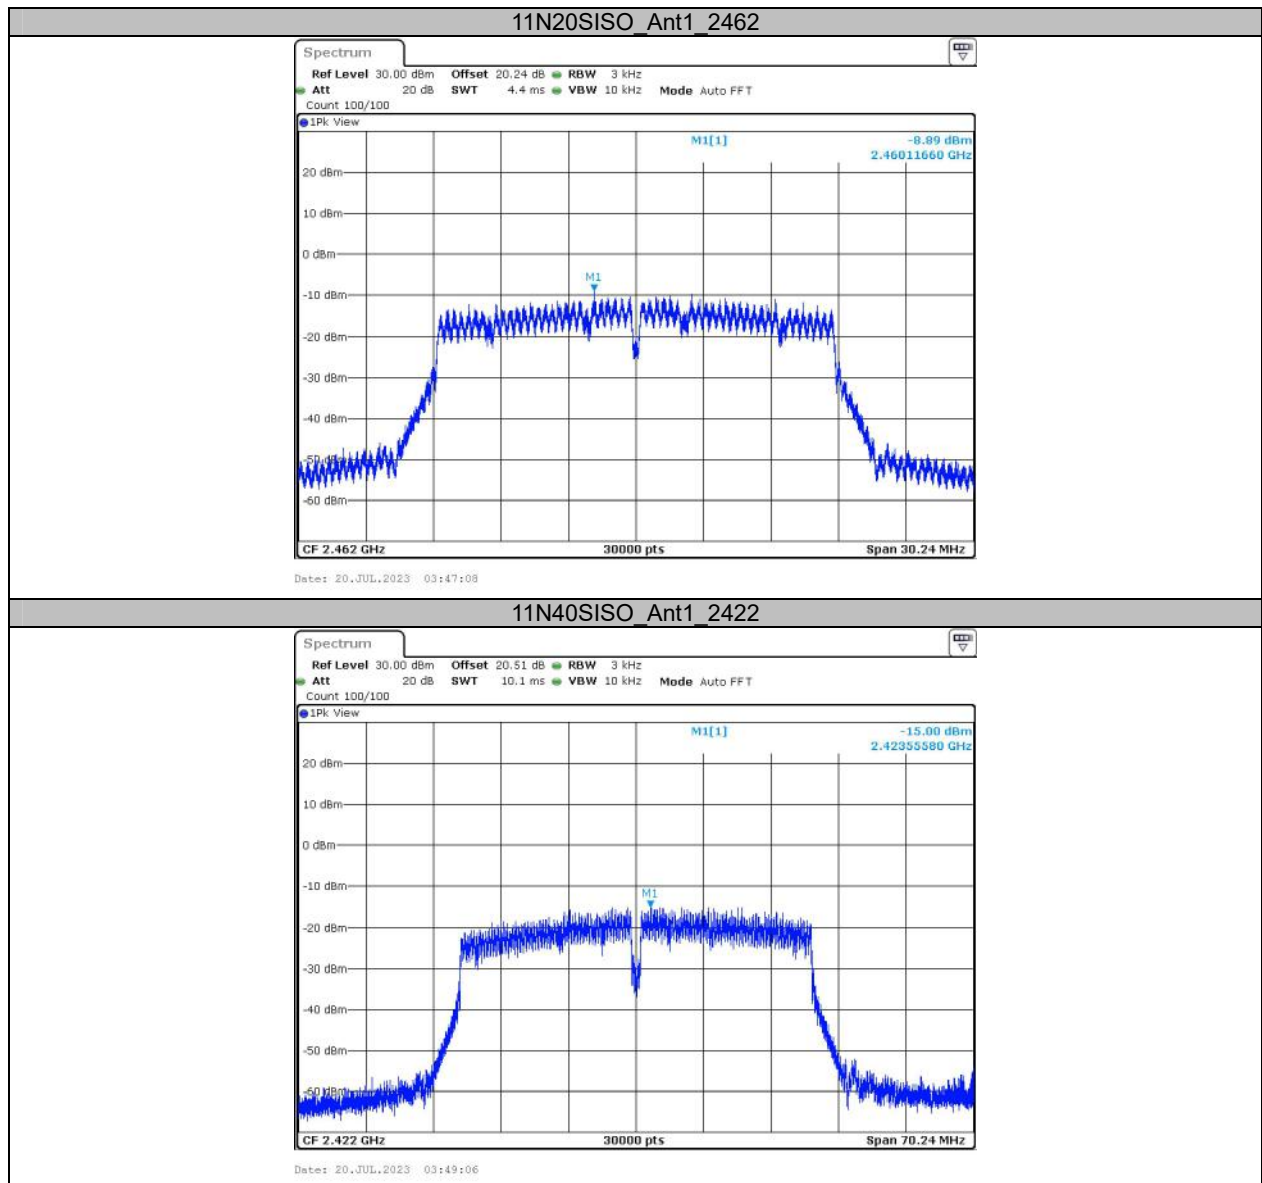

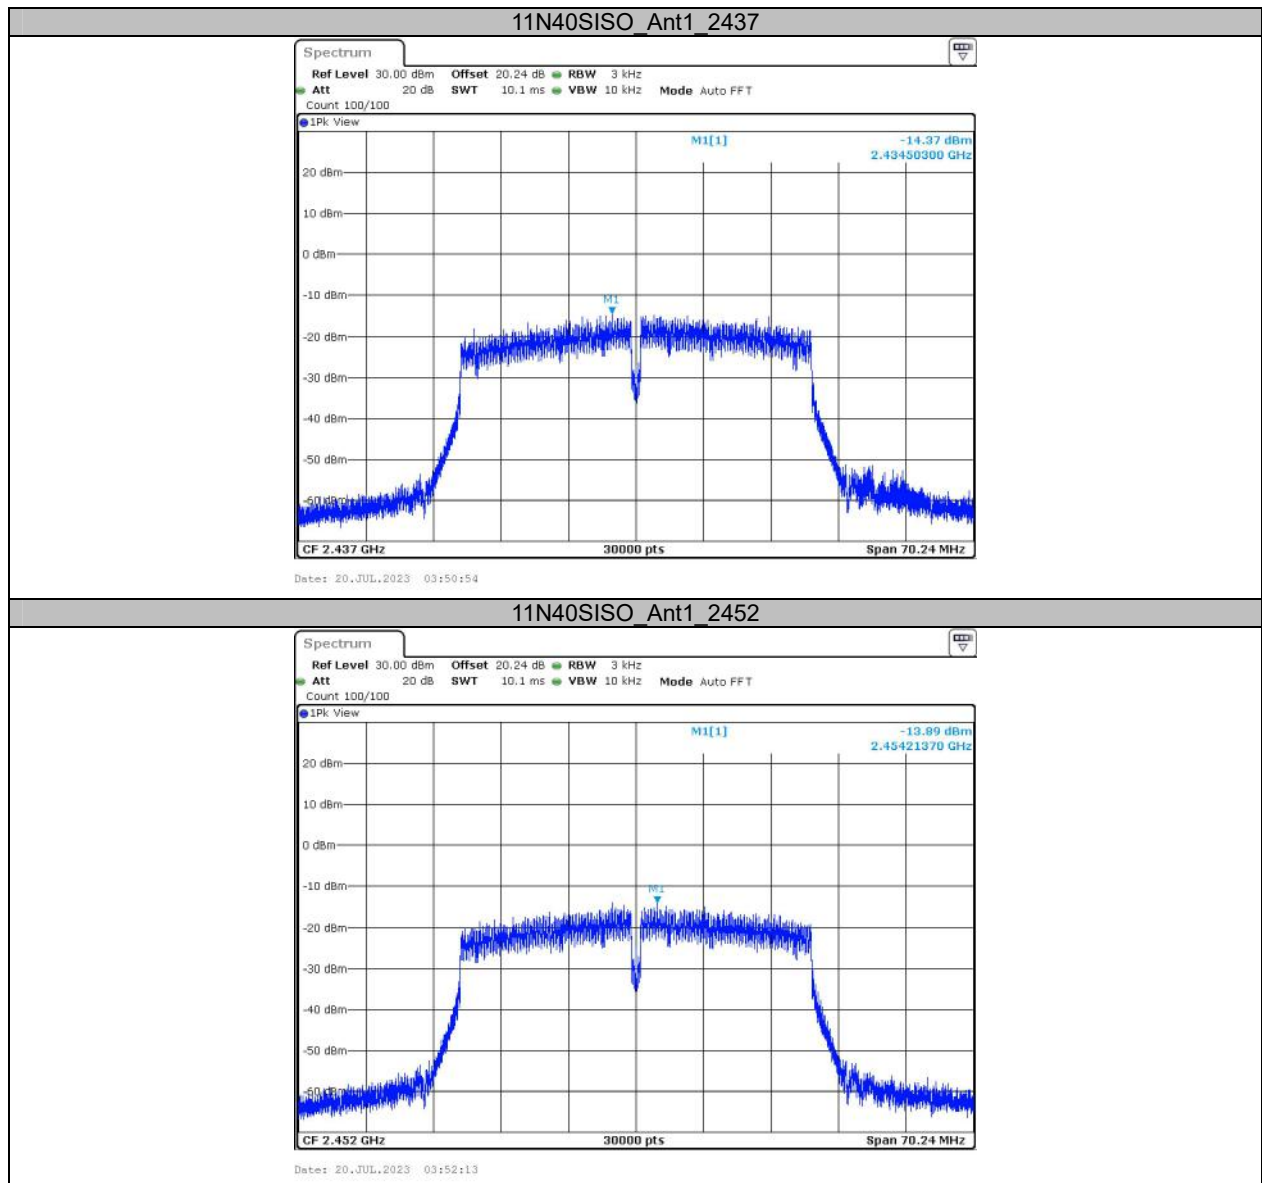

Appendix E: Band edge measurements

Test Graphs

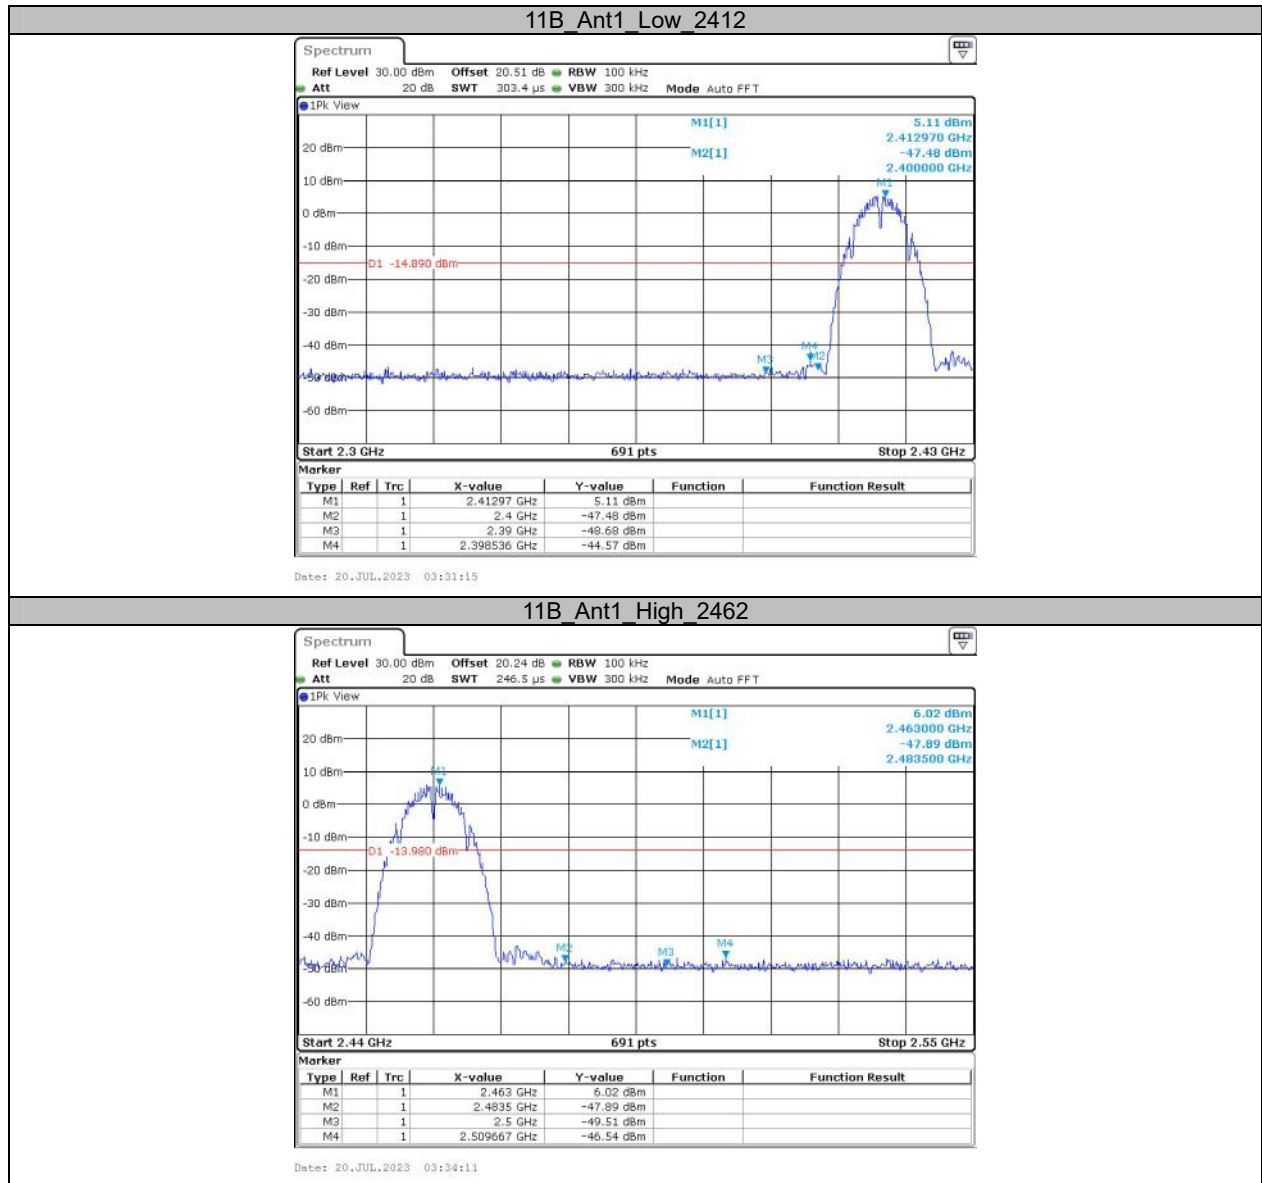


11G Ant1 Low 2412





Date: 20.JUL.2023 03:39:36

11G Ant1 High 2462

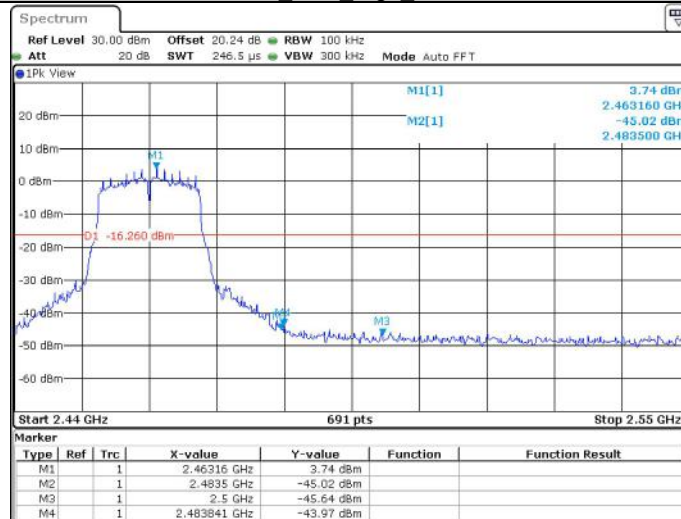

Date: 20.JUL.2023 03:39:21

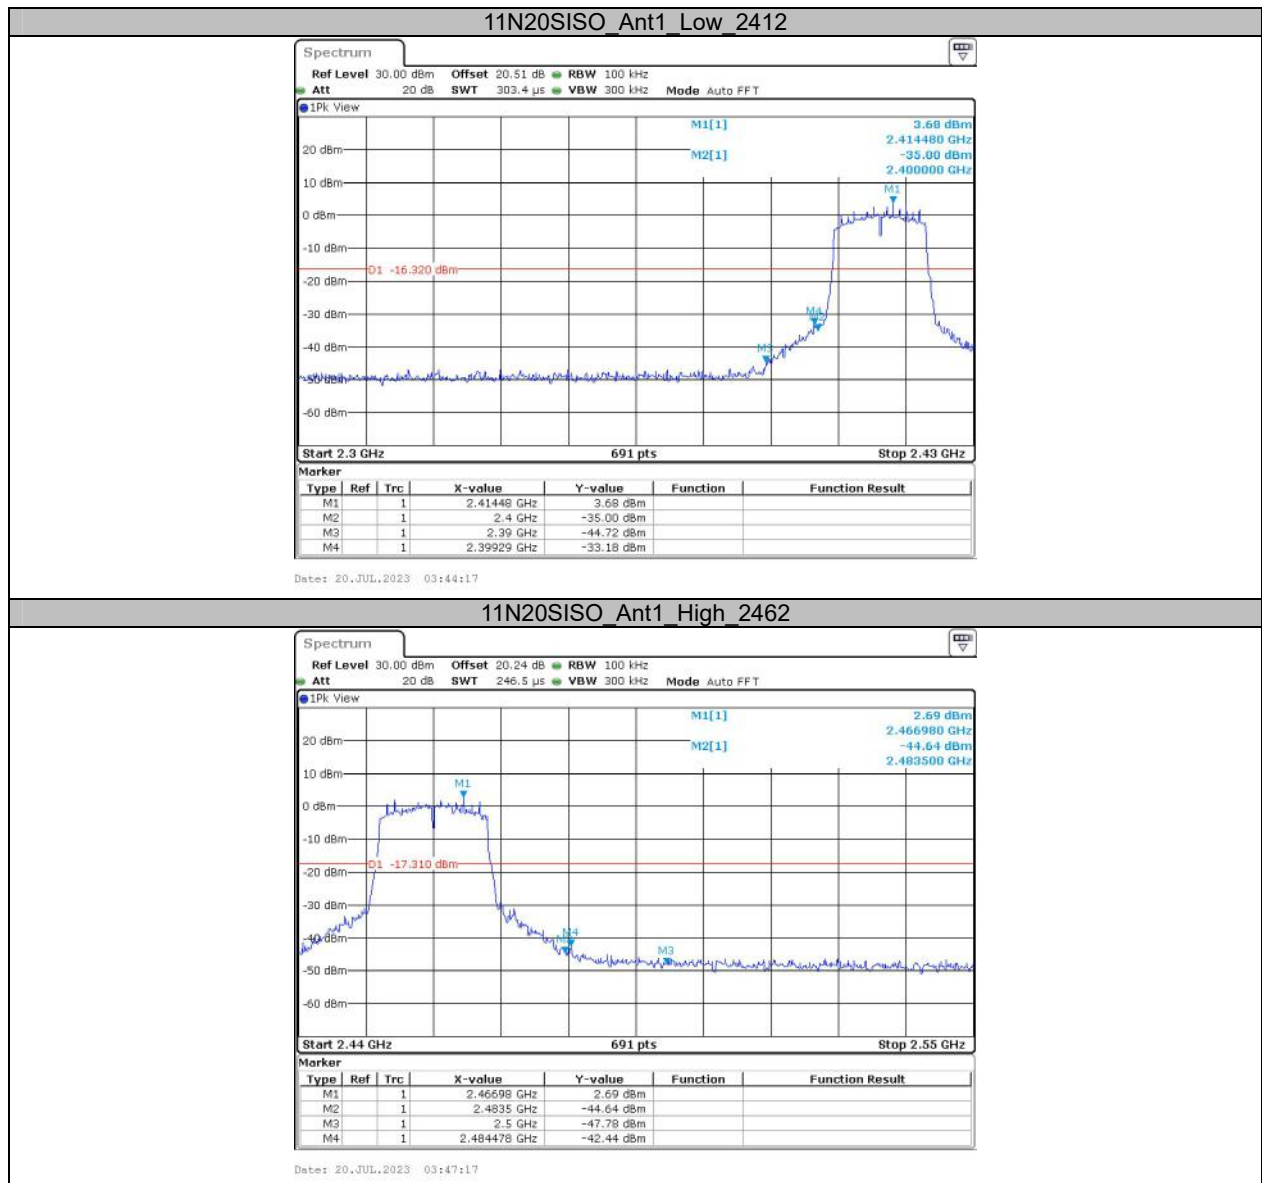


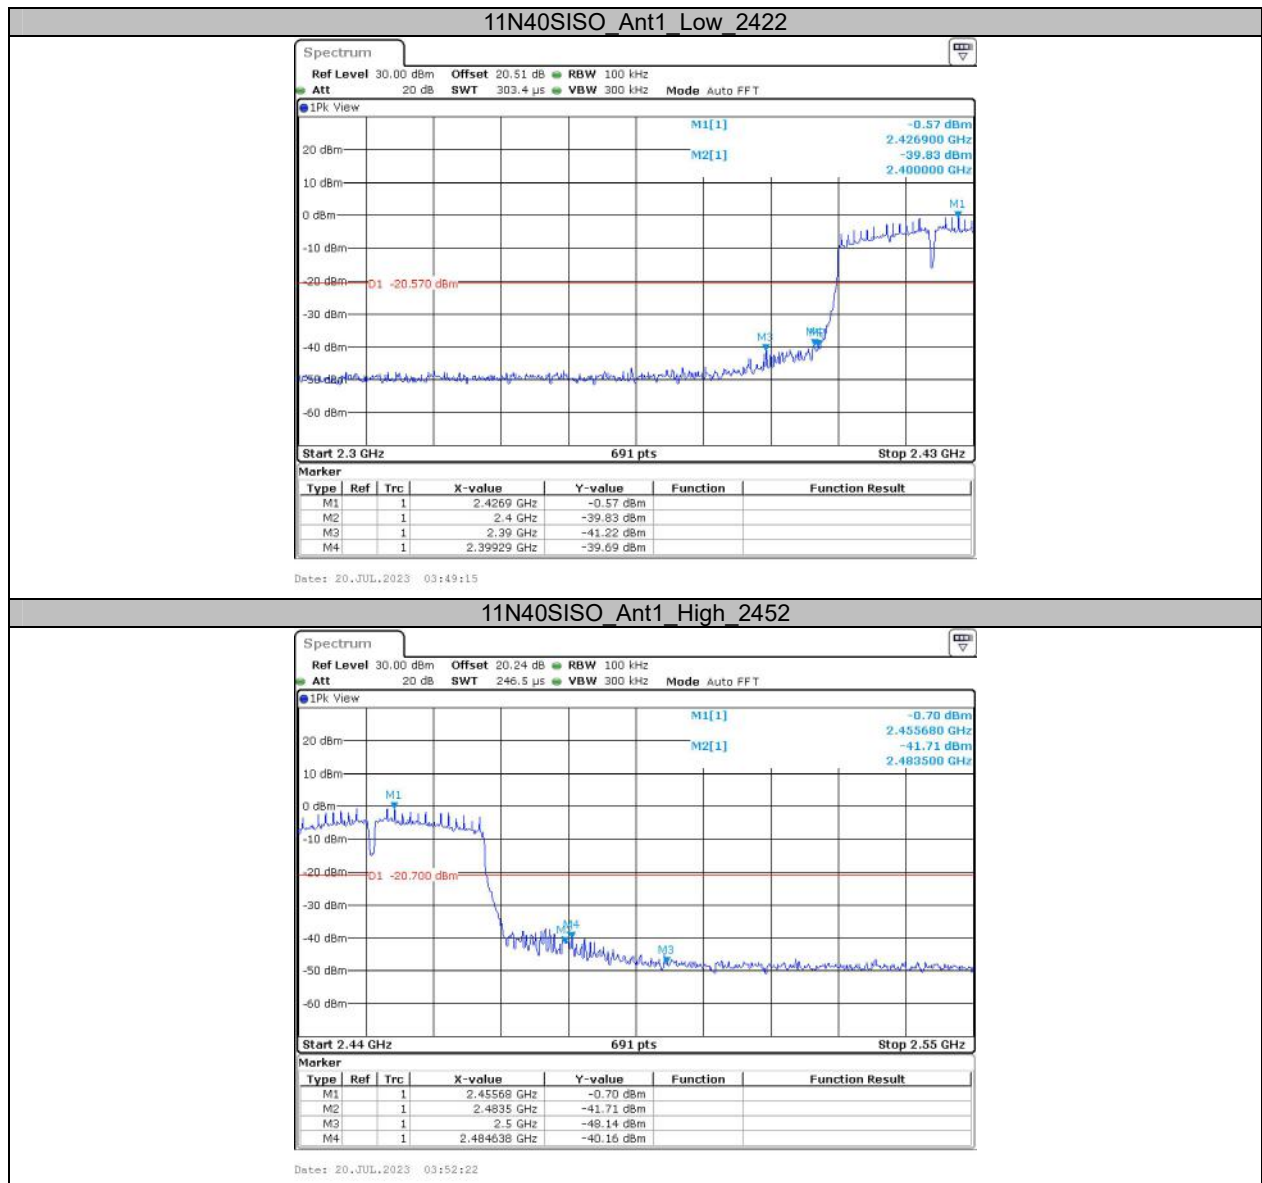


**Appendix F: Duty Cycle
Test Result**

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)
11B	Ant1	2412	8.39	8.42	99.64	/
11G	Ant1	2412	1.39	1.43	97.20	0.72
11N20SISO	Ant1	2412	1.30	1.35	96.30	0.77
11N40SISO	Ant1	2422	0.64	0.69	92.75	1.56

Test Graphs

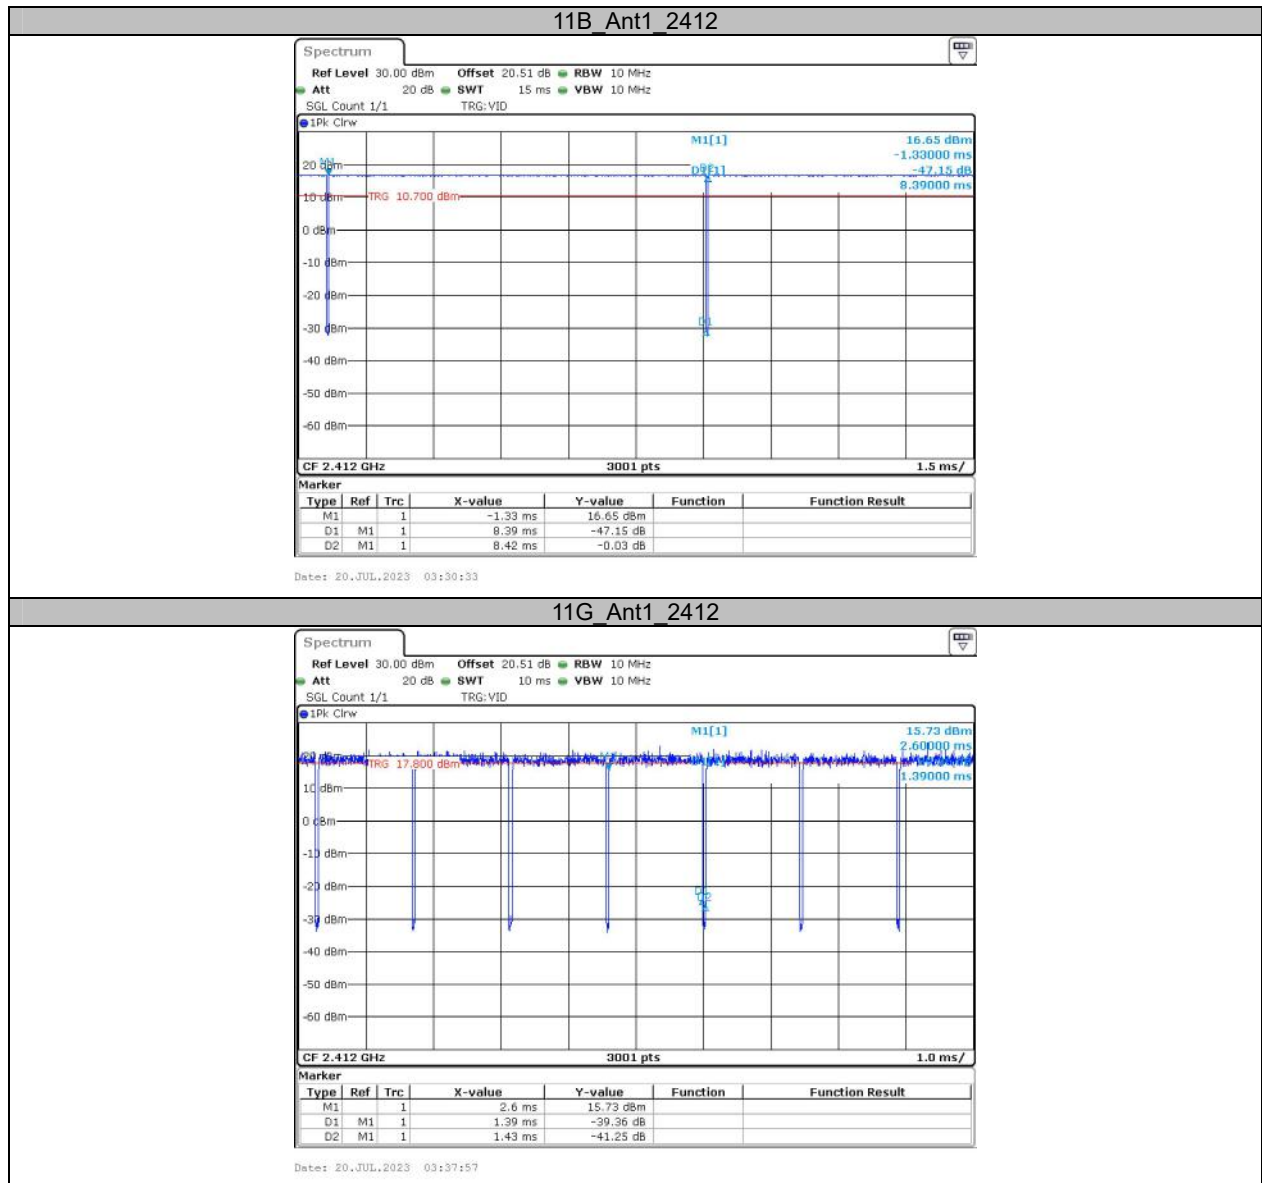

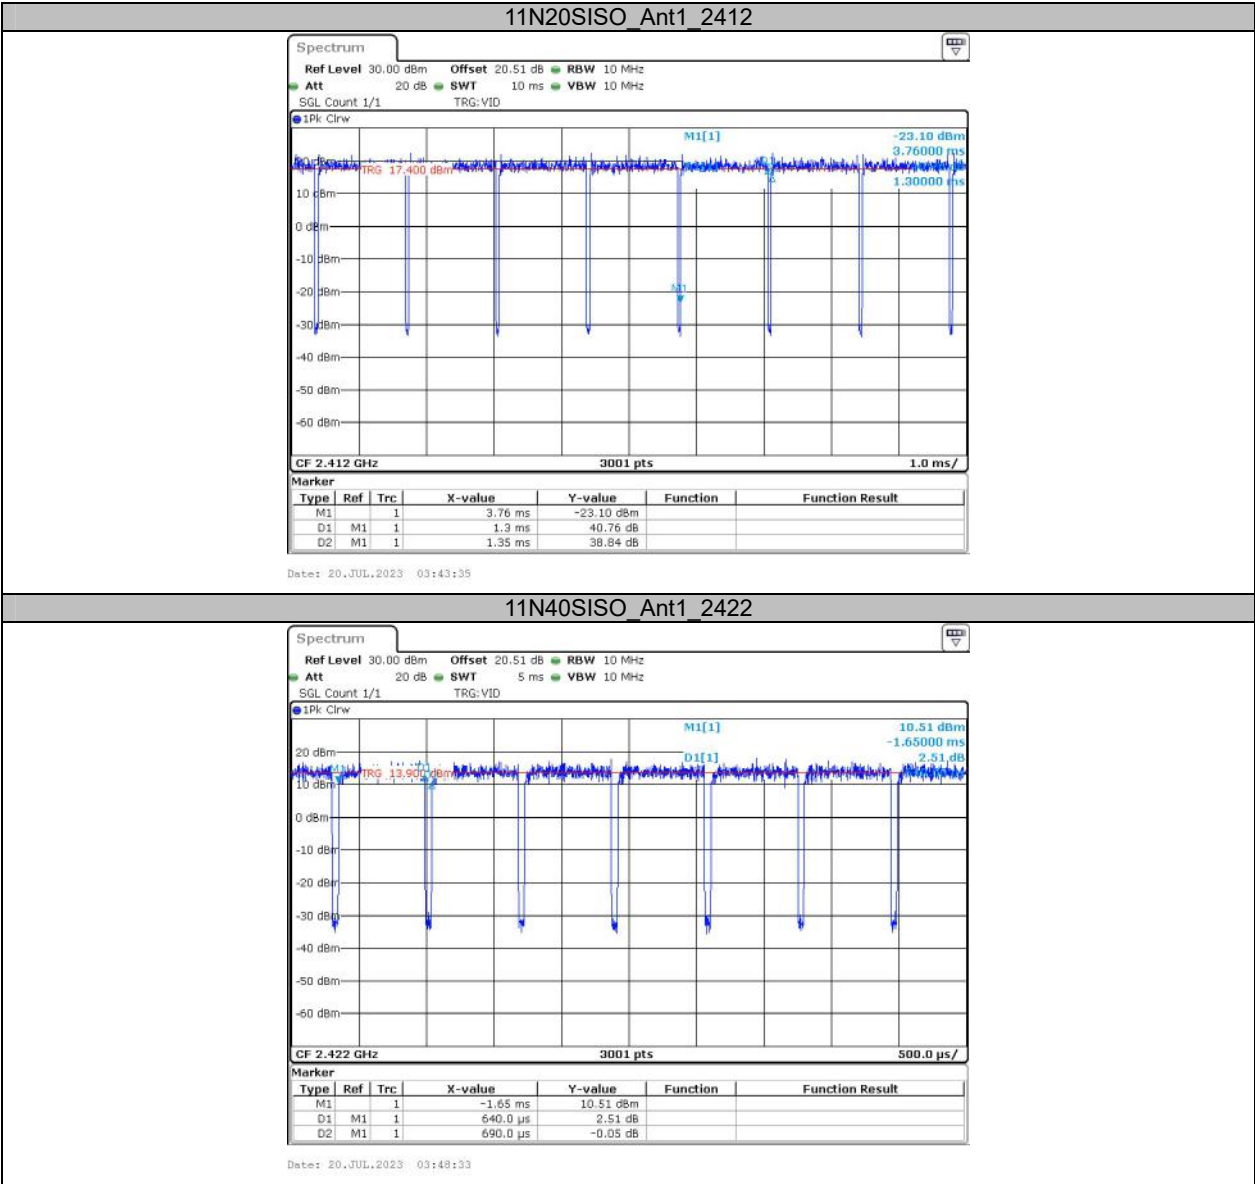



APPENDIX BLE


Appendix A: DTS Bandwidth Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	2401.66	2402.32	0.5	PASS
		2440	0.66	2439.66	2440.32	0.5	PASS
		2480	0.66	2479.66	2480.32	0.5	PASS
BLE_2M	Ant1	2402	1.16	2401.41	2402.57	0.5	PASS
		2440	1.16	2439.41	2440.57	0.5	PASS
		2480	1.16	2479.41	2480.57	0.5	PASS

Test Graphs

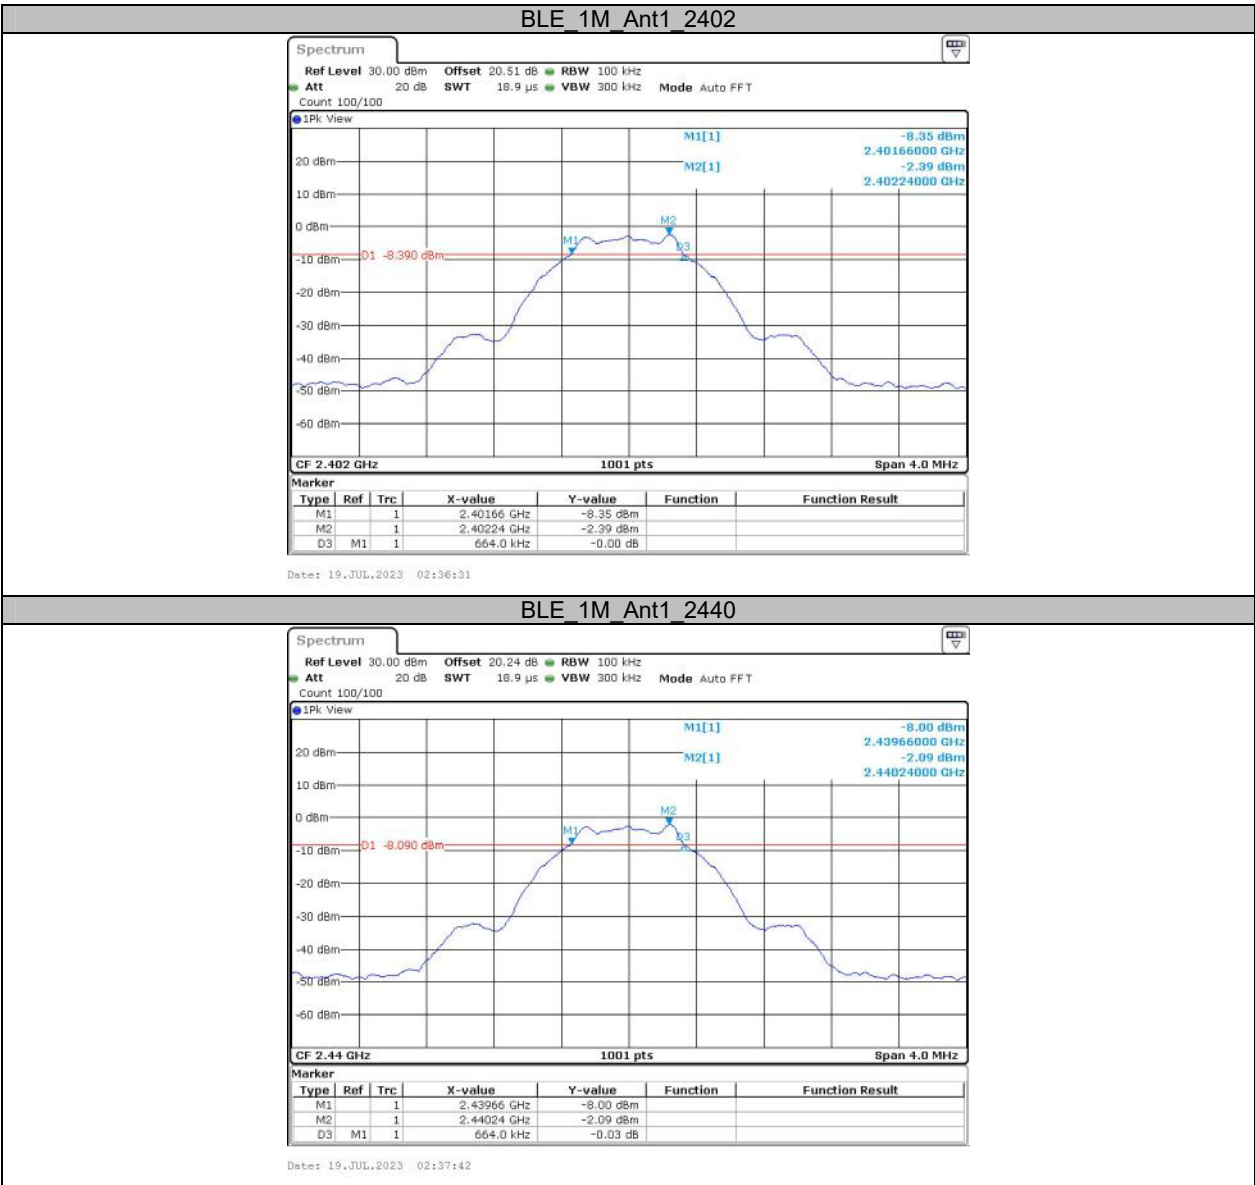

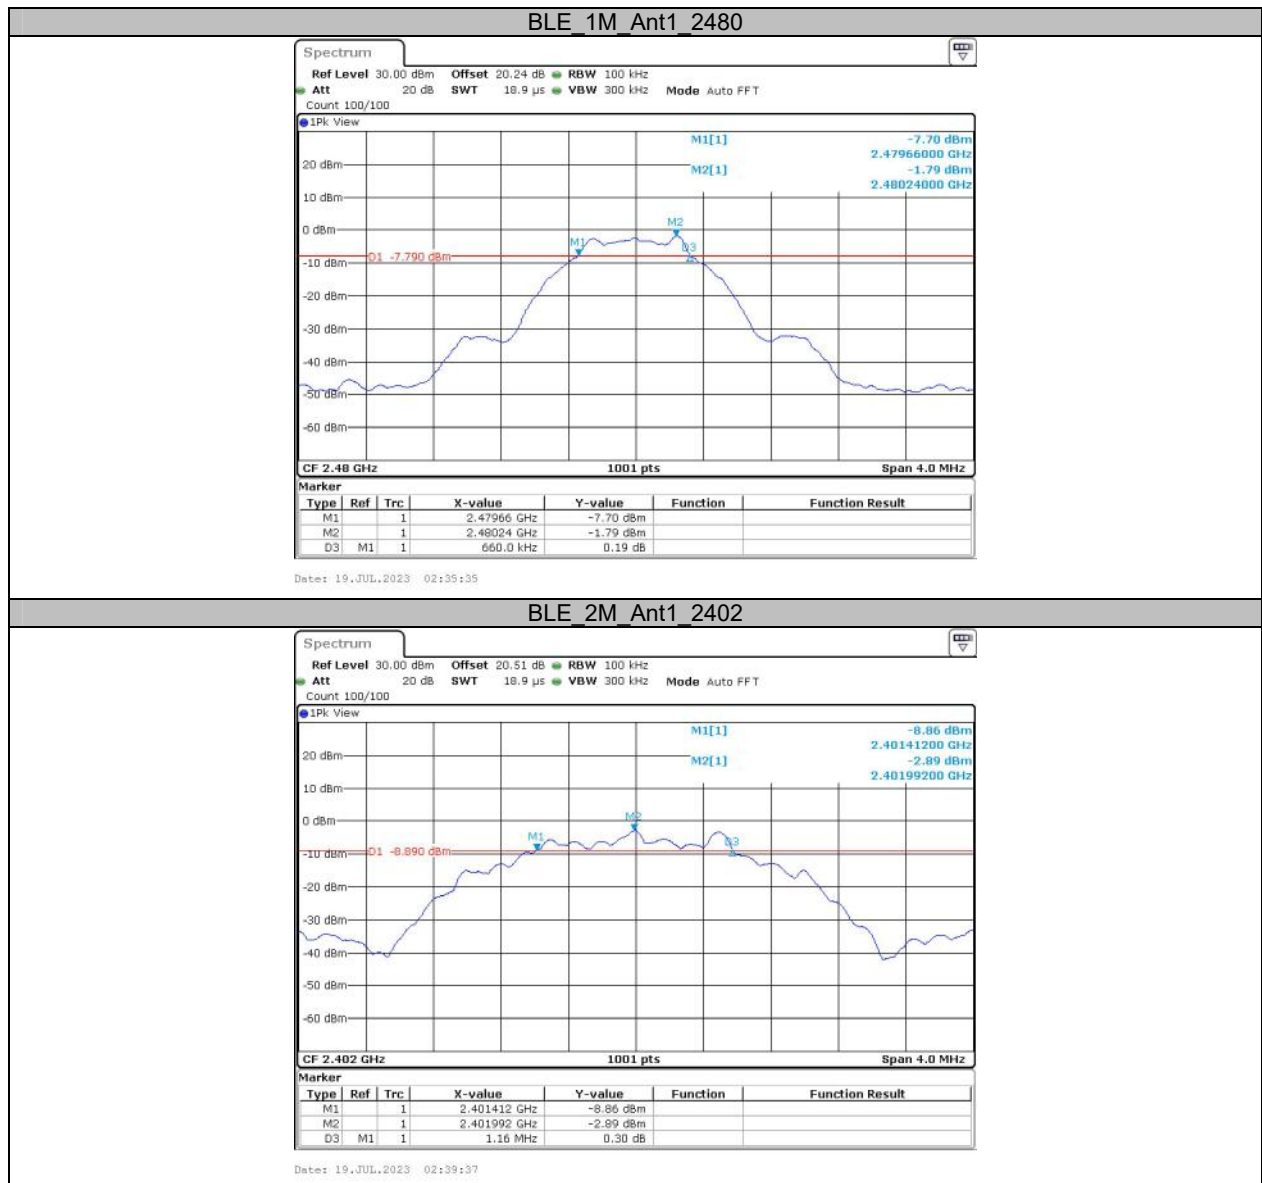


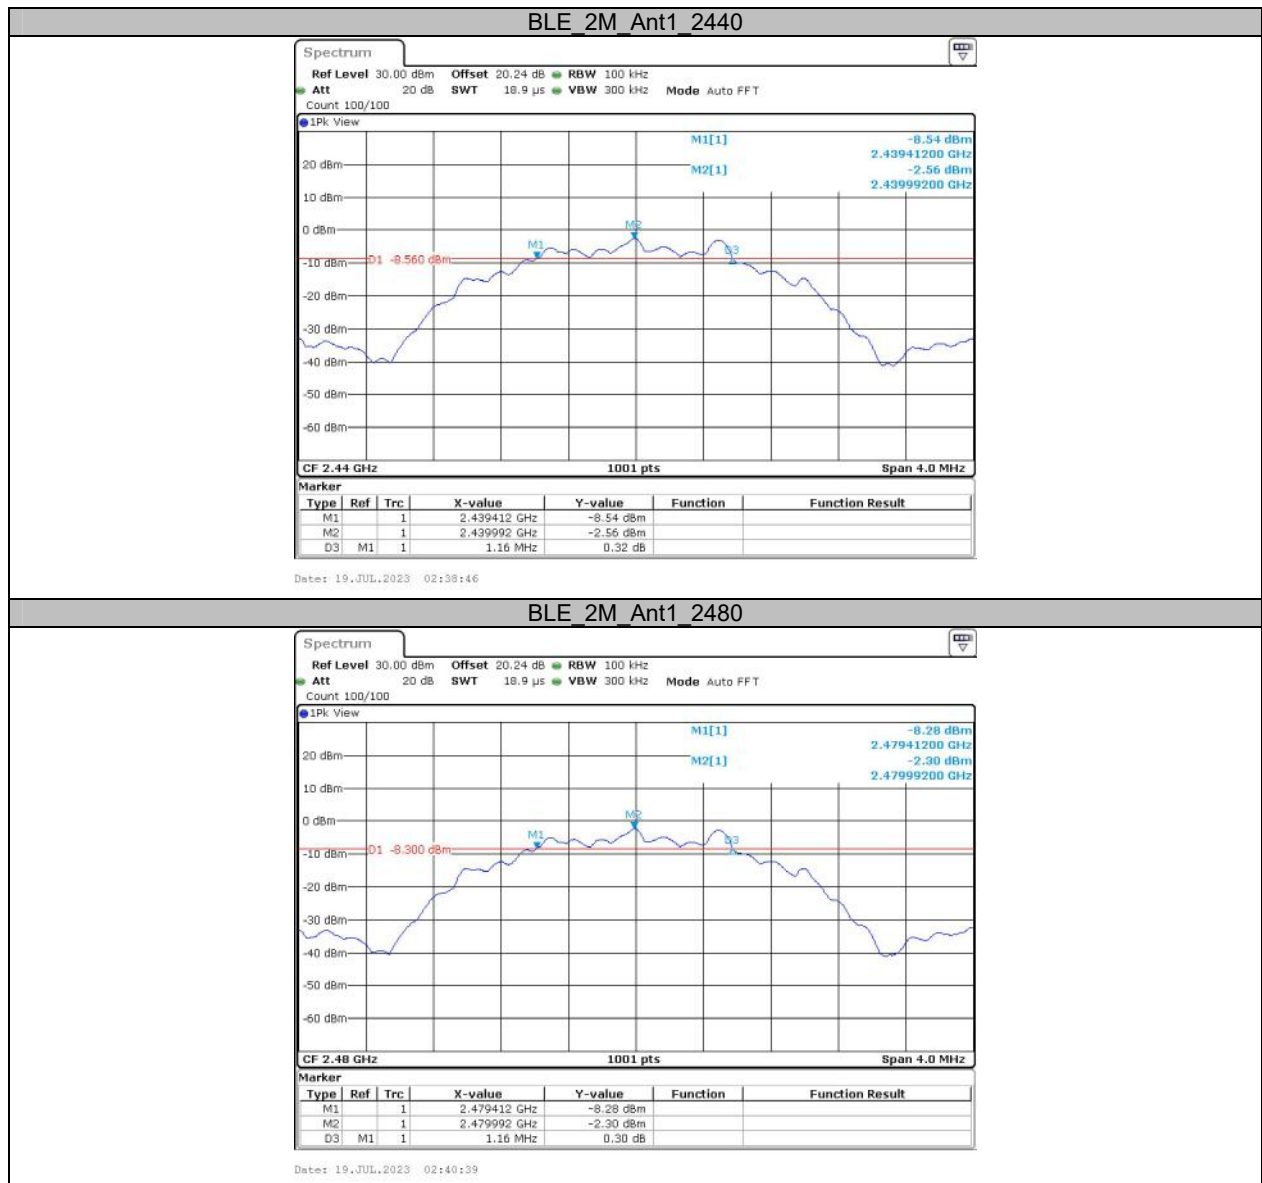



**Appendix B: Occupied Channel Bandwidth
Test Result**

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	2401.481	2402.519	---	---
		2440	1.039	2439.481	2440.519	---	---
		2480	1.035	2479.481	2480.515	---	---
BLE_2M	Ant1	2402	2.070	2400.969	2403.039	---	---
		2440	2.070	2438.969	2441.039	---	---
		2480	2.070	2478.969	2481.039	---	---

Test Graphs

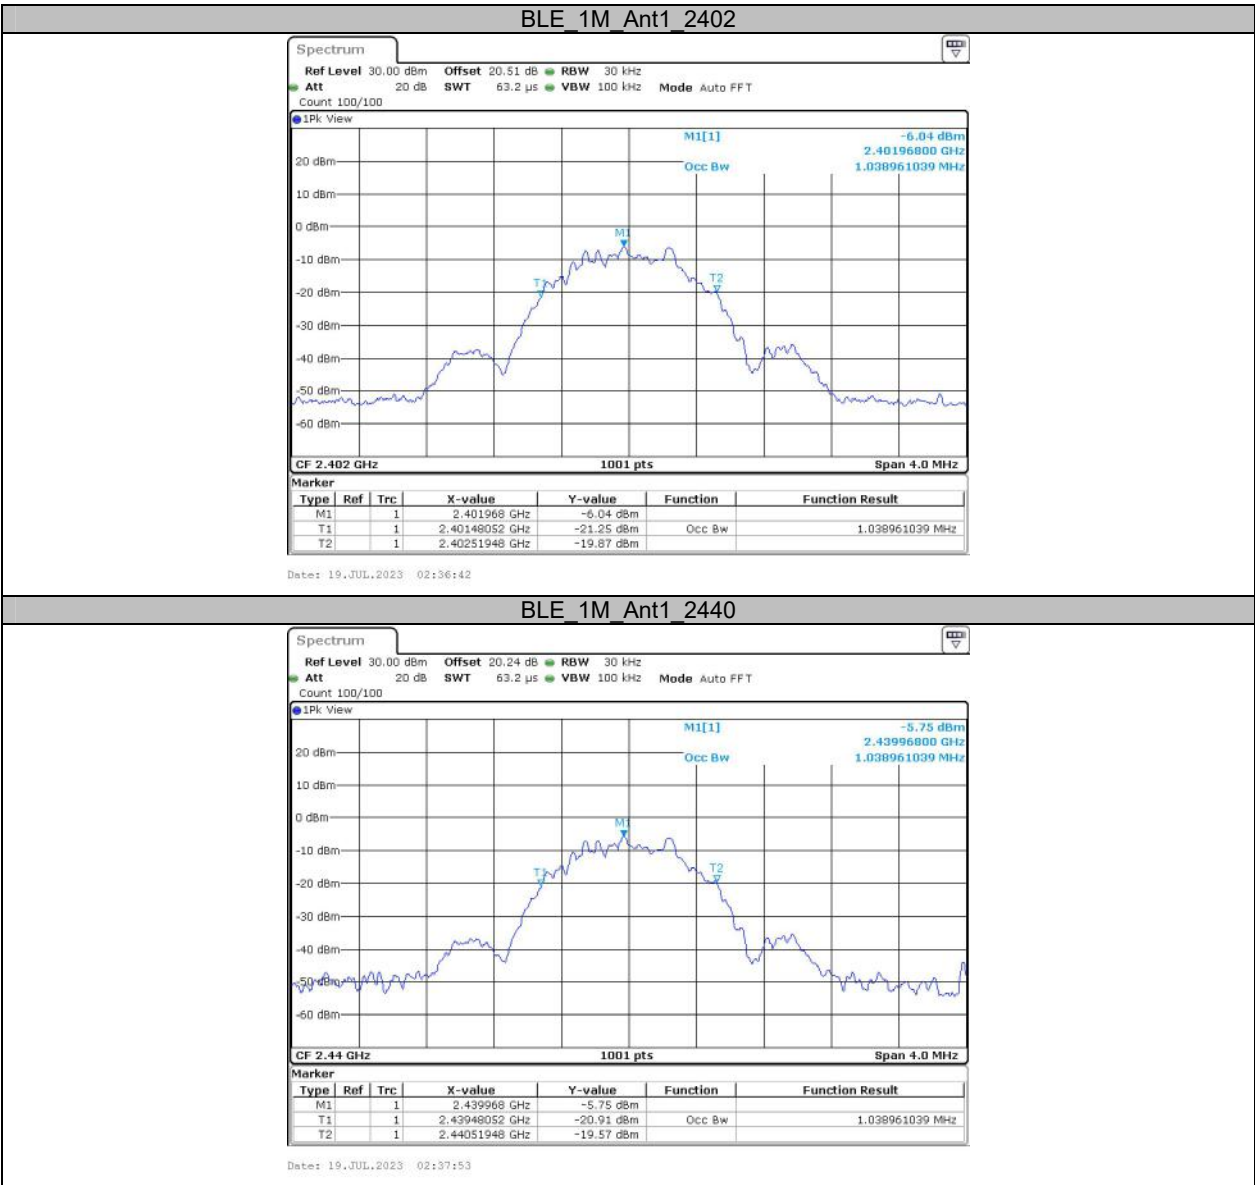

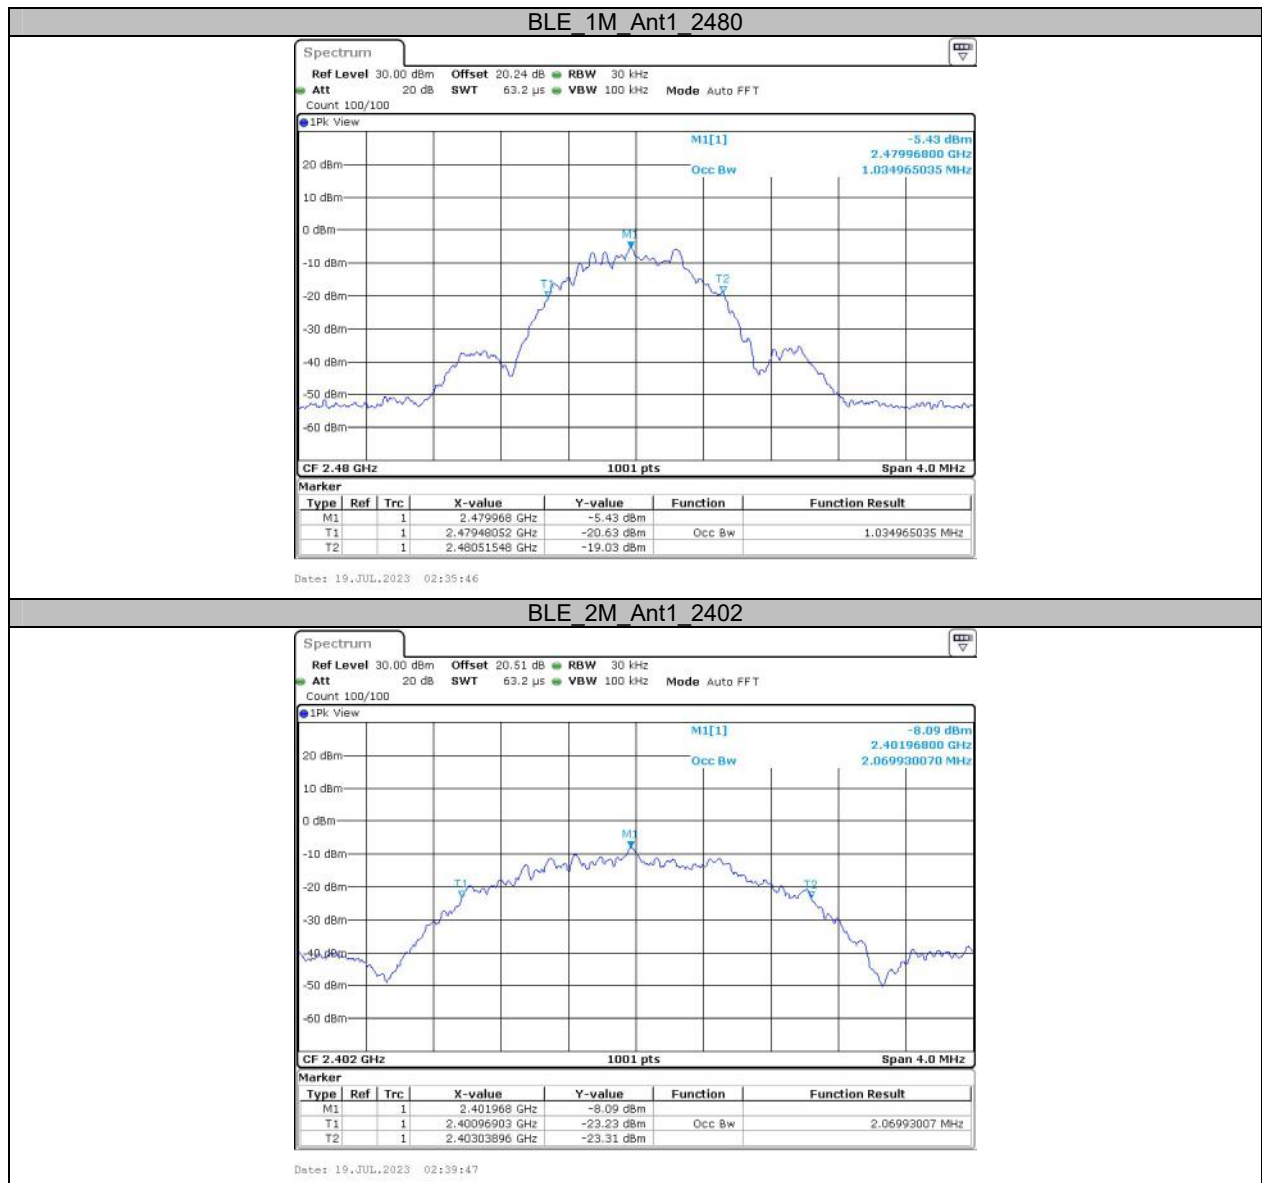


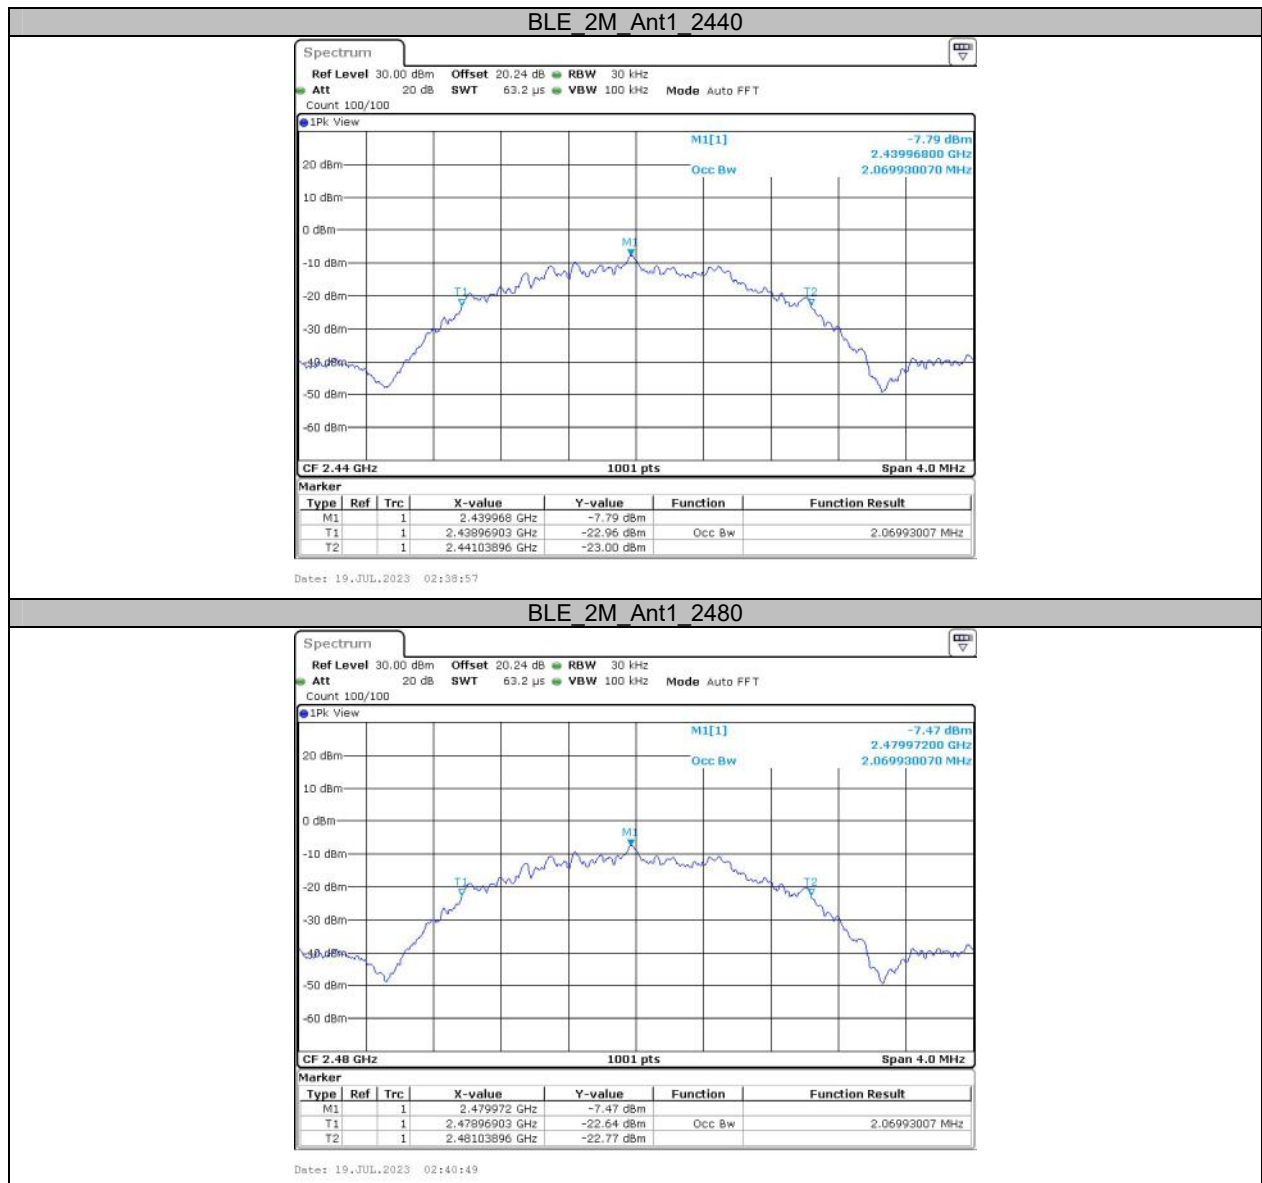



**Appendix C: Maximum conducted output power
Test Result Peak**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-2.04	≤30	PASS
		2440	-1.64	≤30	PASS
		2480	-1.42	≤30	PASS
BLE_2M	Ant1	2402	-2.09	≤30	PASS
		2440	-1.68	≤30	PASS
		2480	-1.46	≤30	PASS

Test Graphs Peak

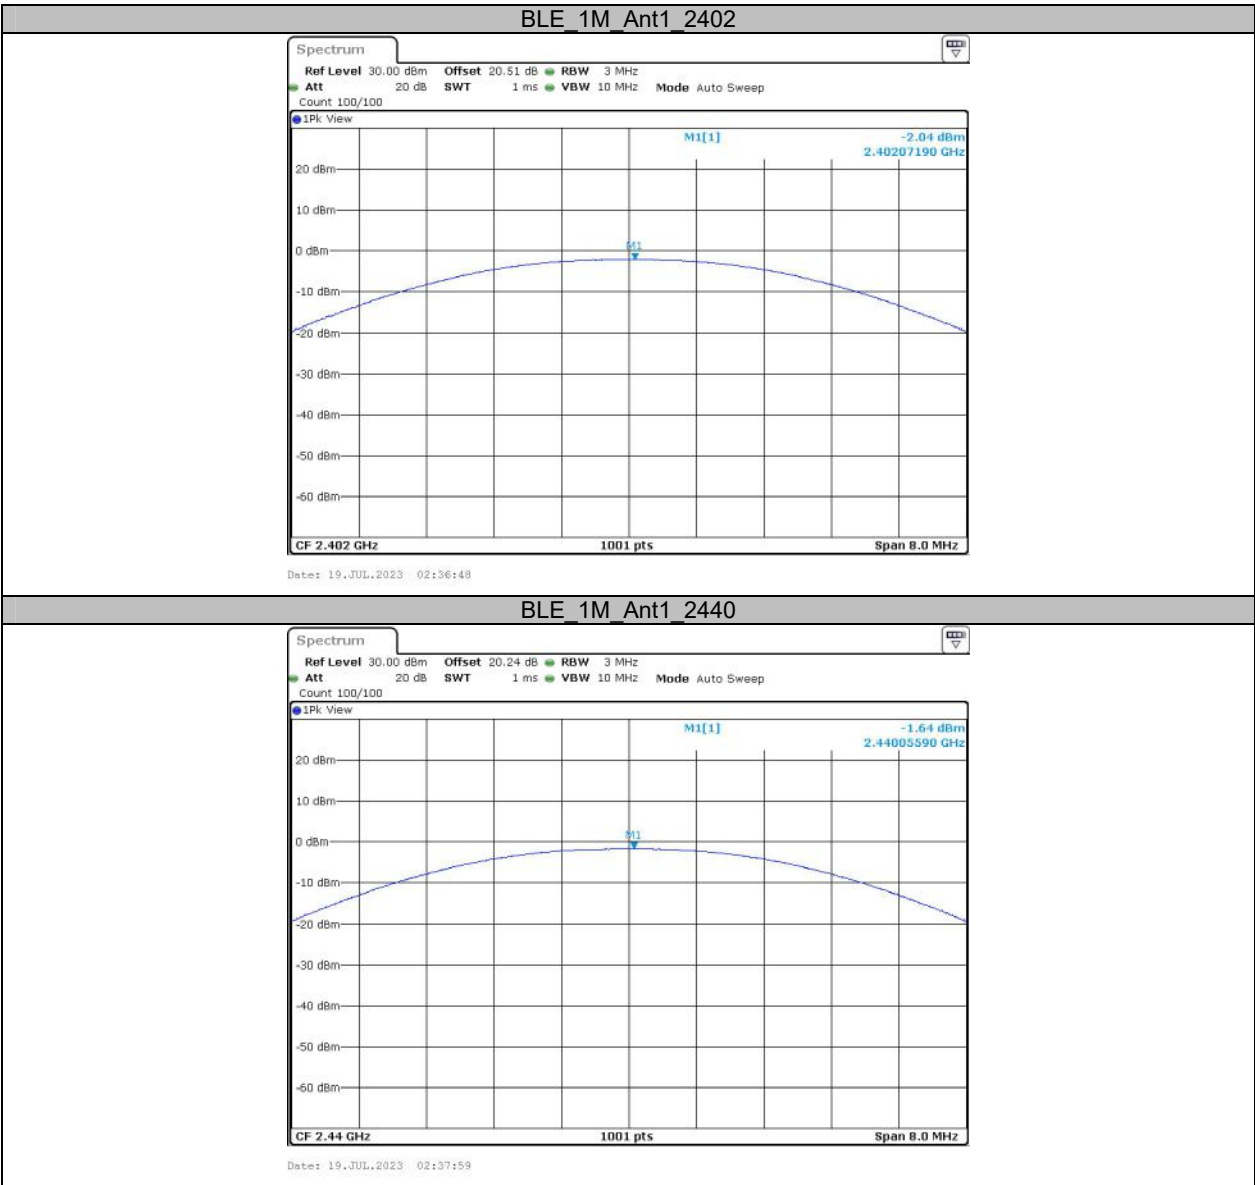

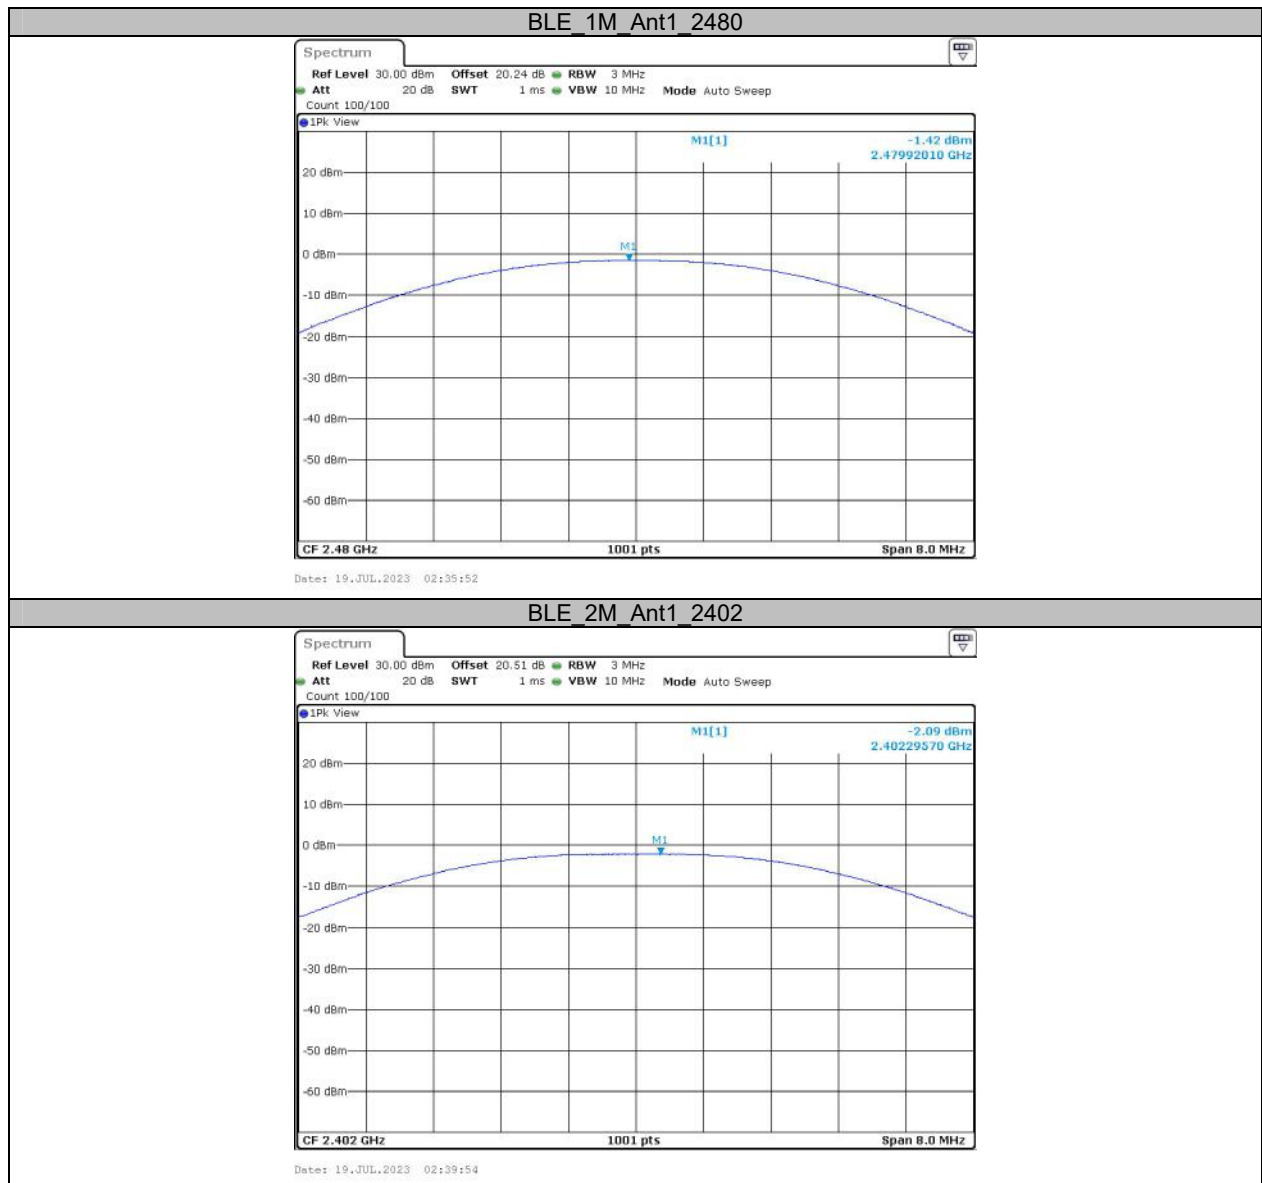


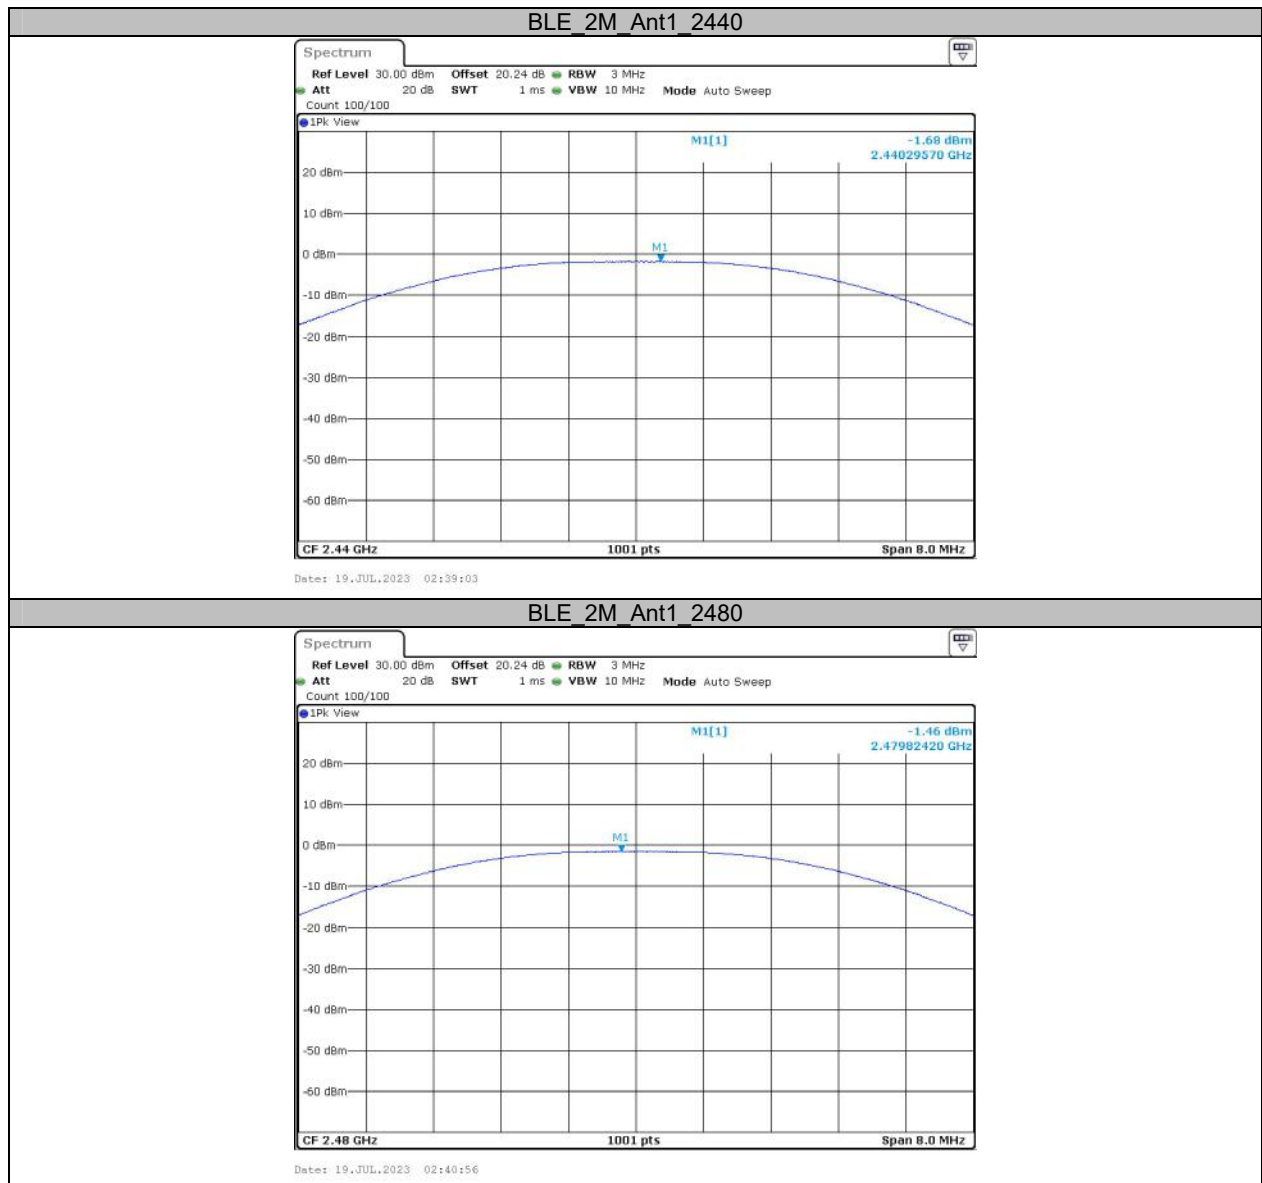



**Appendix D: Maximum power spectral density
Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-18.92	≤8.00	PASS
		2440	-18.53	≤8.00	PASS
		2480	-18.26	≤8.00	PASS
BLE_2M	Ant1	2402	-21.12	≤8.00	PASS
		2440	-20.68	≤8.00	PASS
		2480	-20.46	≤8.00	PASS

Test Graphs

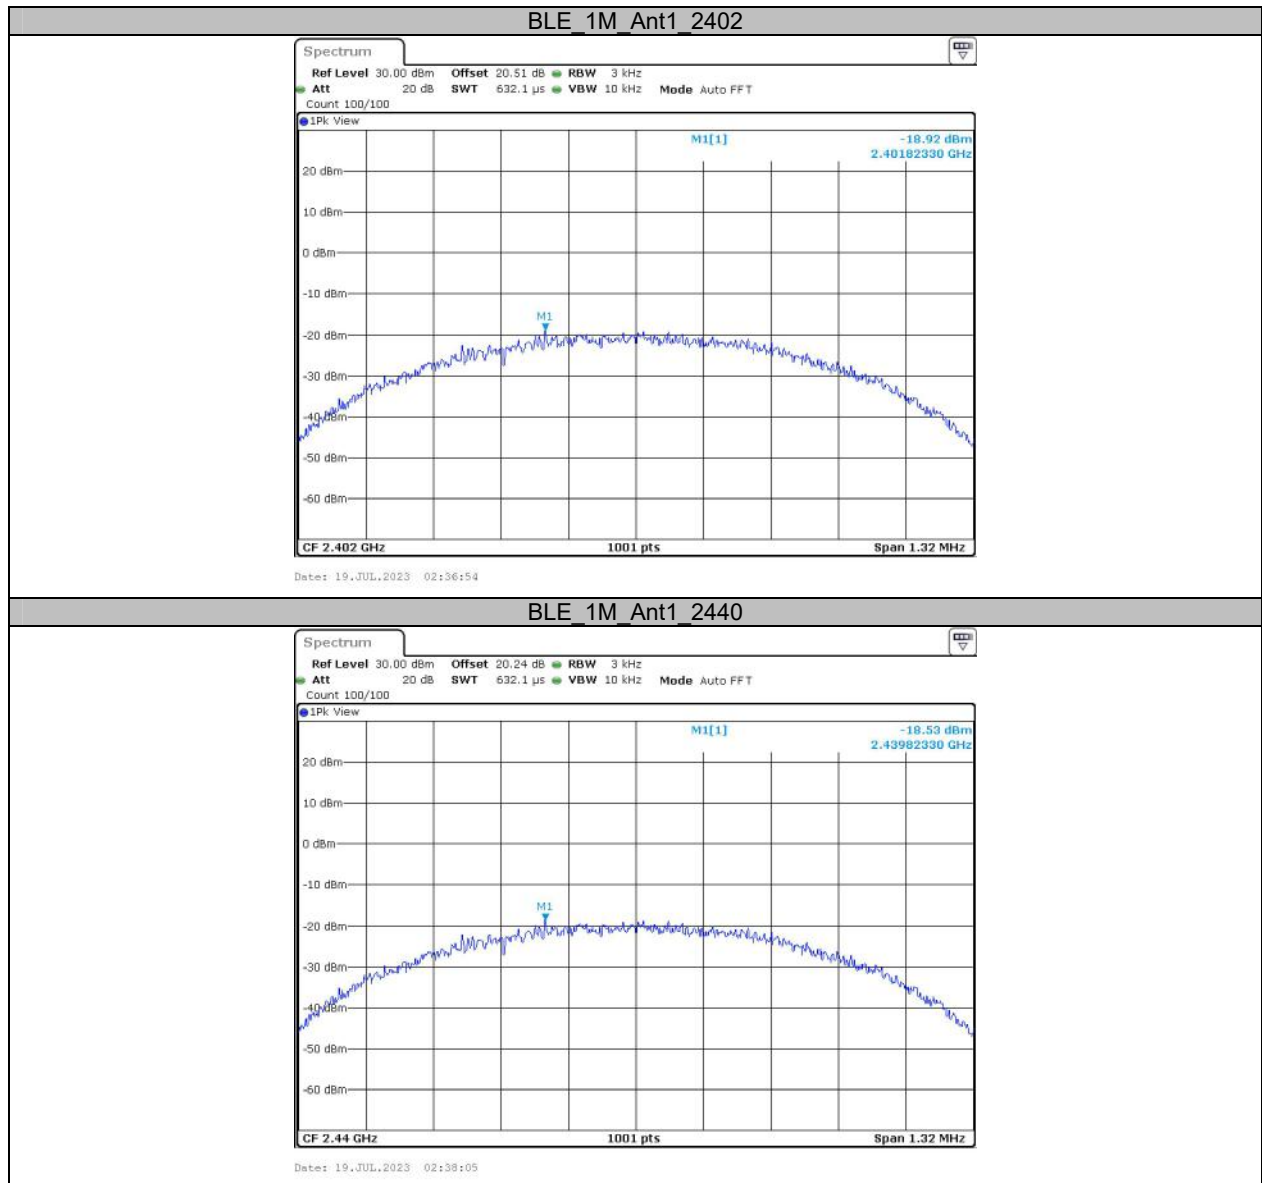


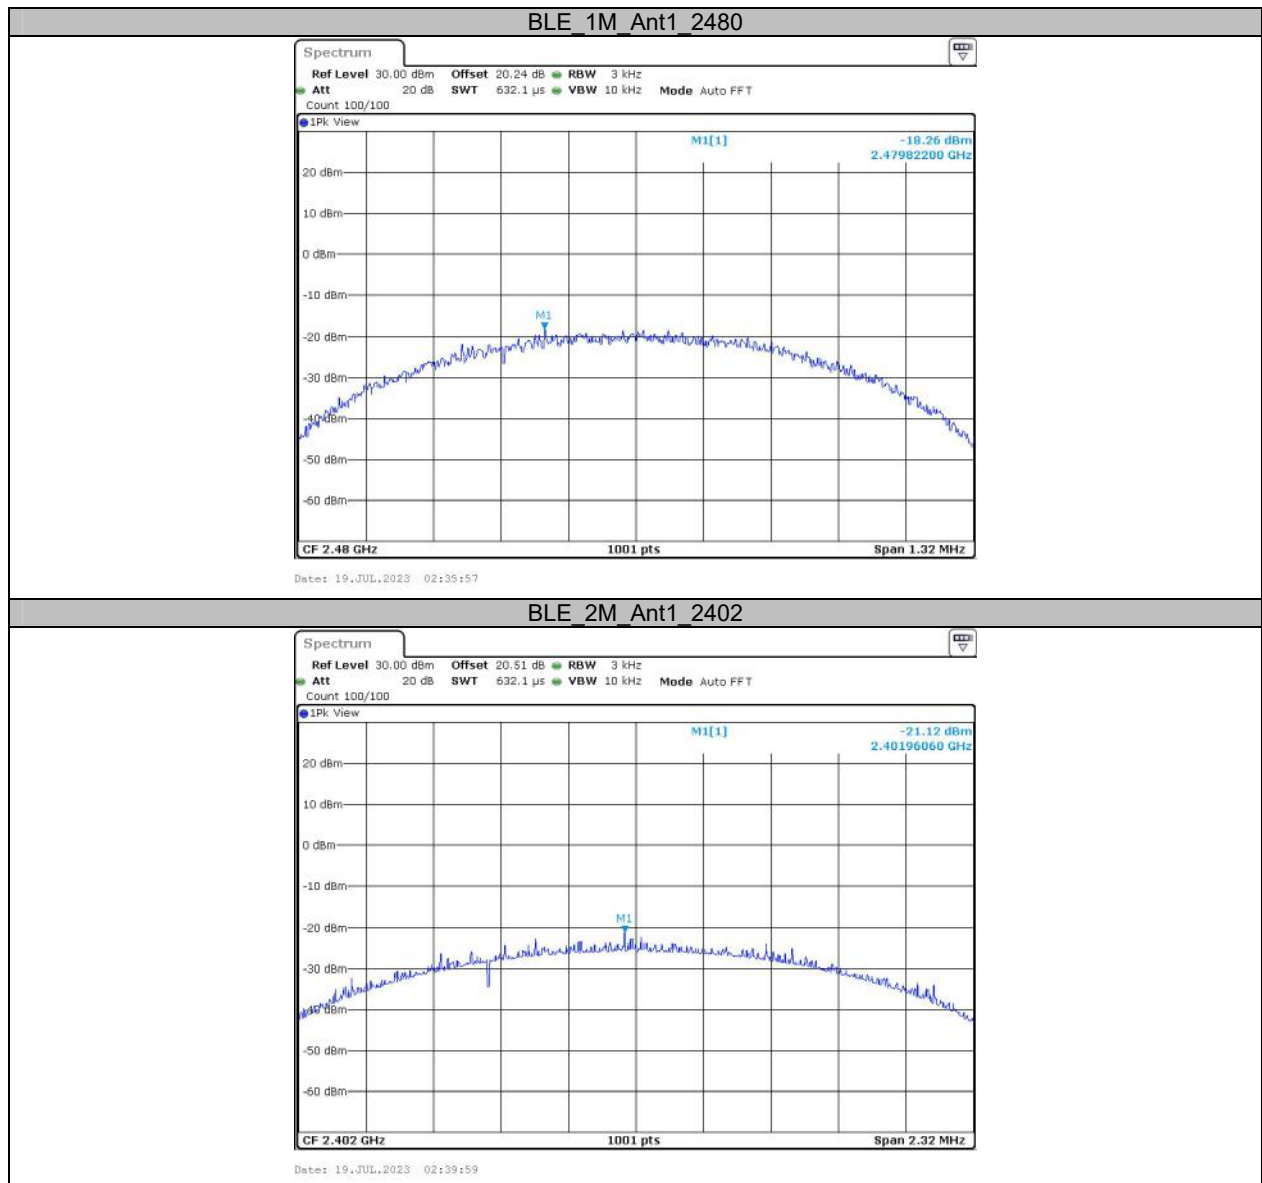

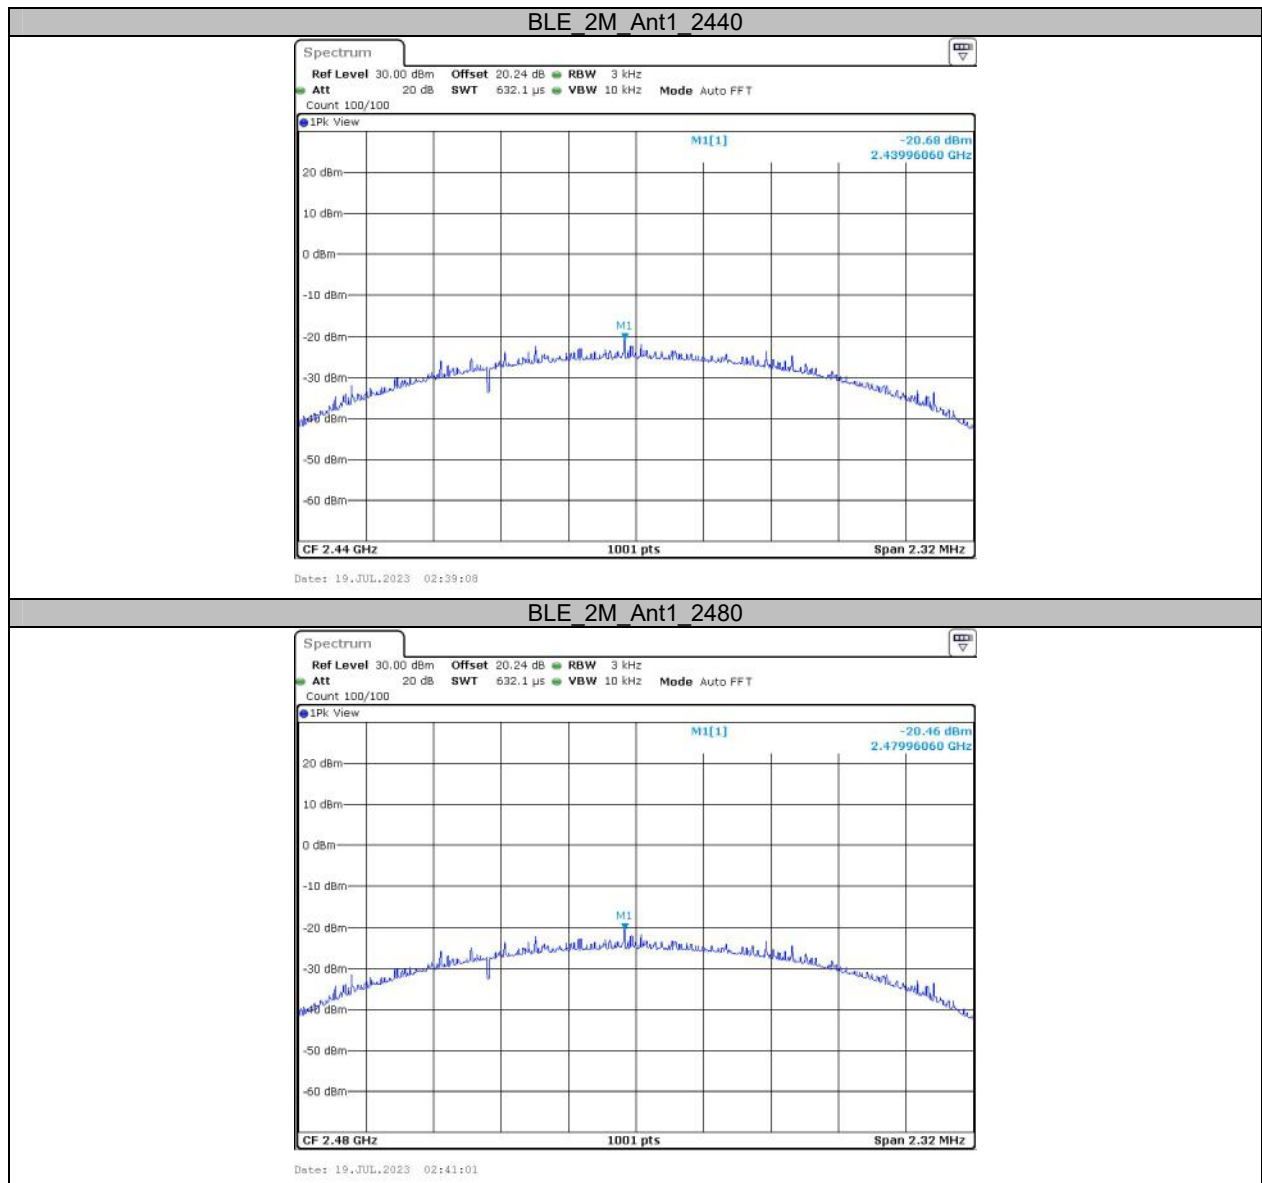


Appendix E: Band edge measurements

Test Graphs

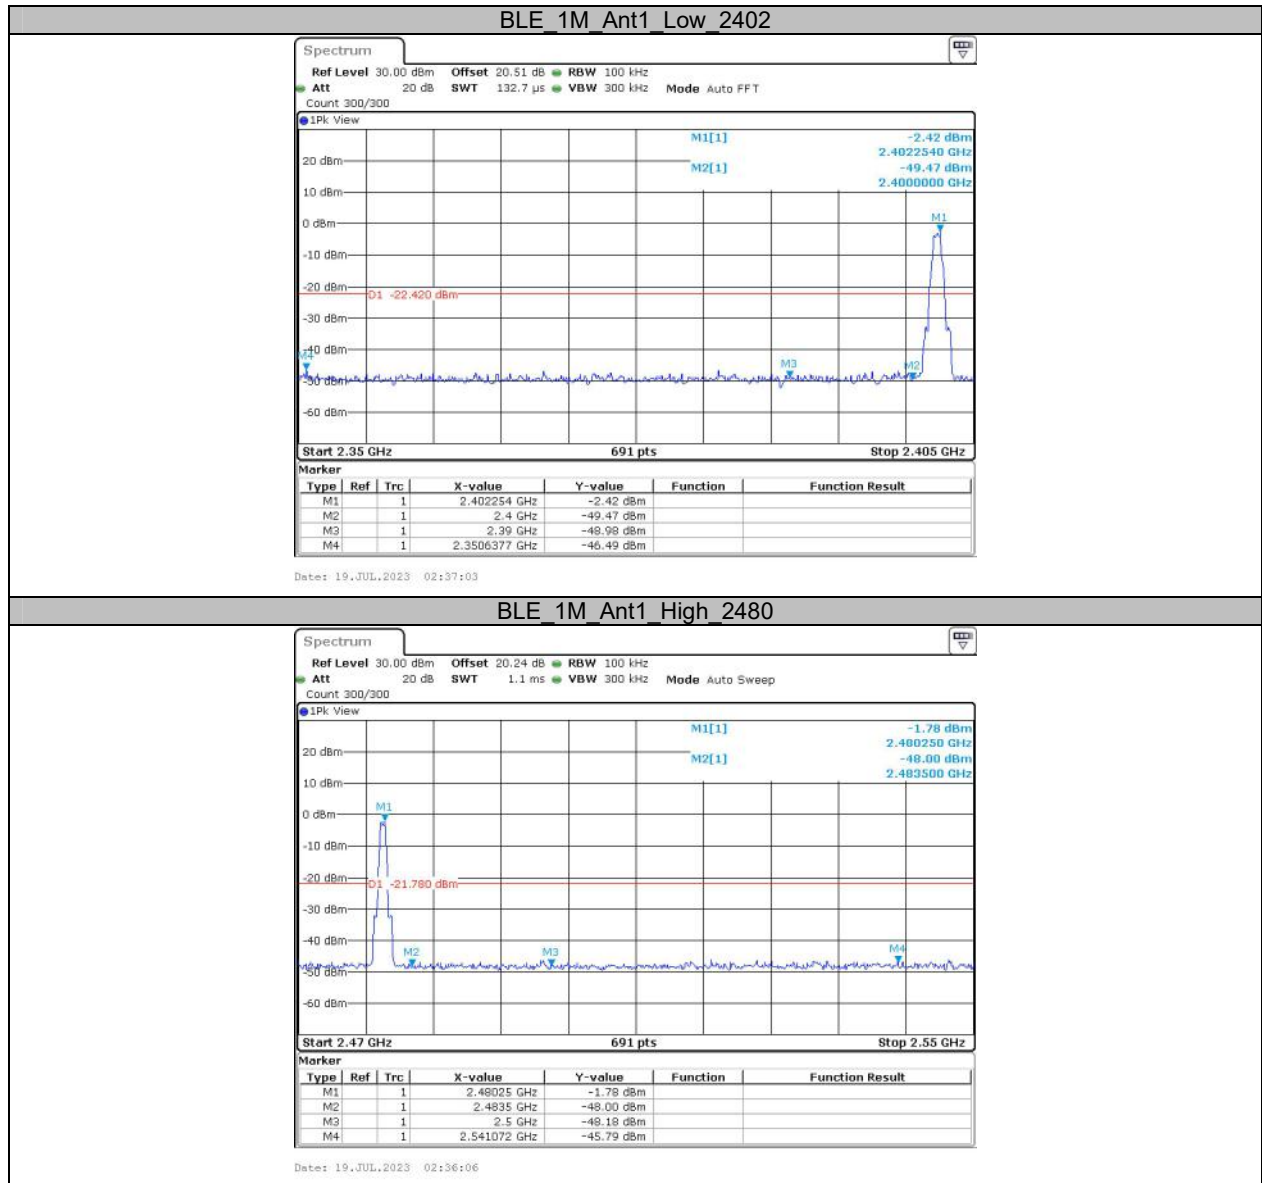

BLE 2M Ant1 Low 2402

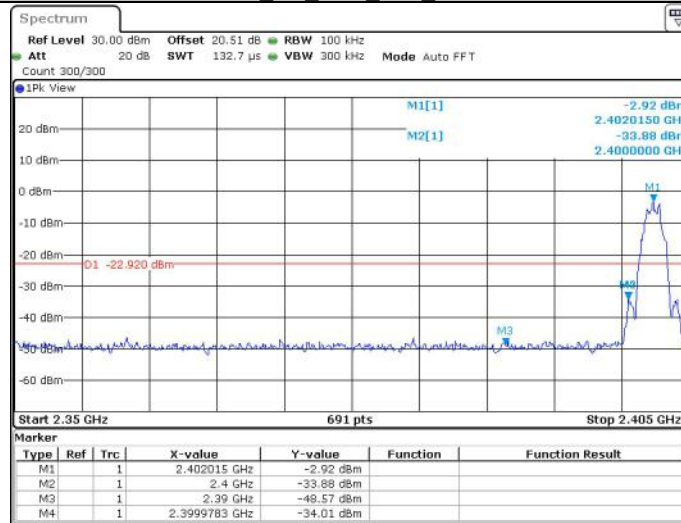

Date: 19.JUL.2023 02:40:08

BLE 2M Ant1 High 2480




Date: 19.JUL.2023 02:41:10

**Appendix F: Duty Cycle
Test Result**

Test Mode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)
BLE_1M	Ant1	2440	2.13	2.50	85.20	0.47
BLE_2M	Ant1	2440	1.07	1.88	56.91	0.93

Test Graphs

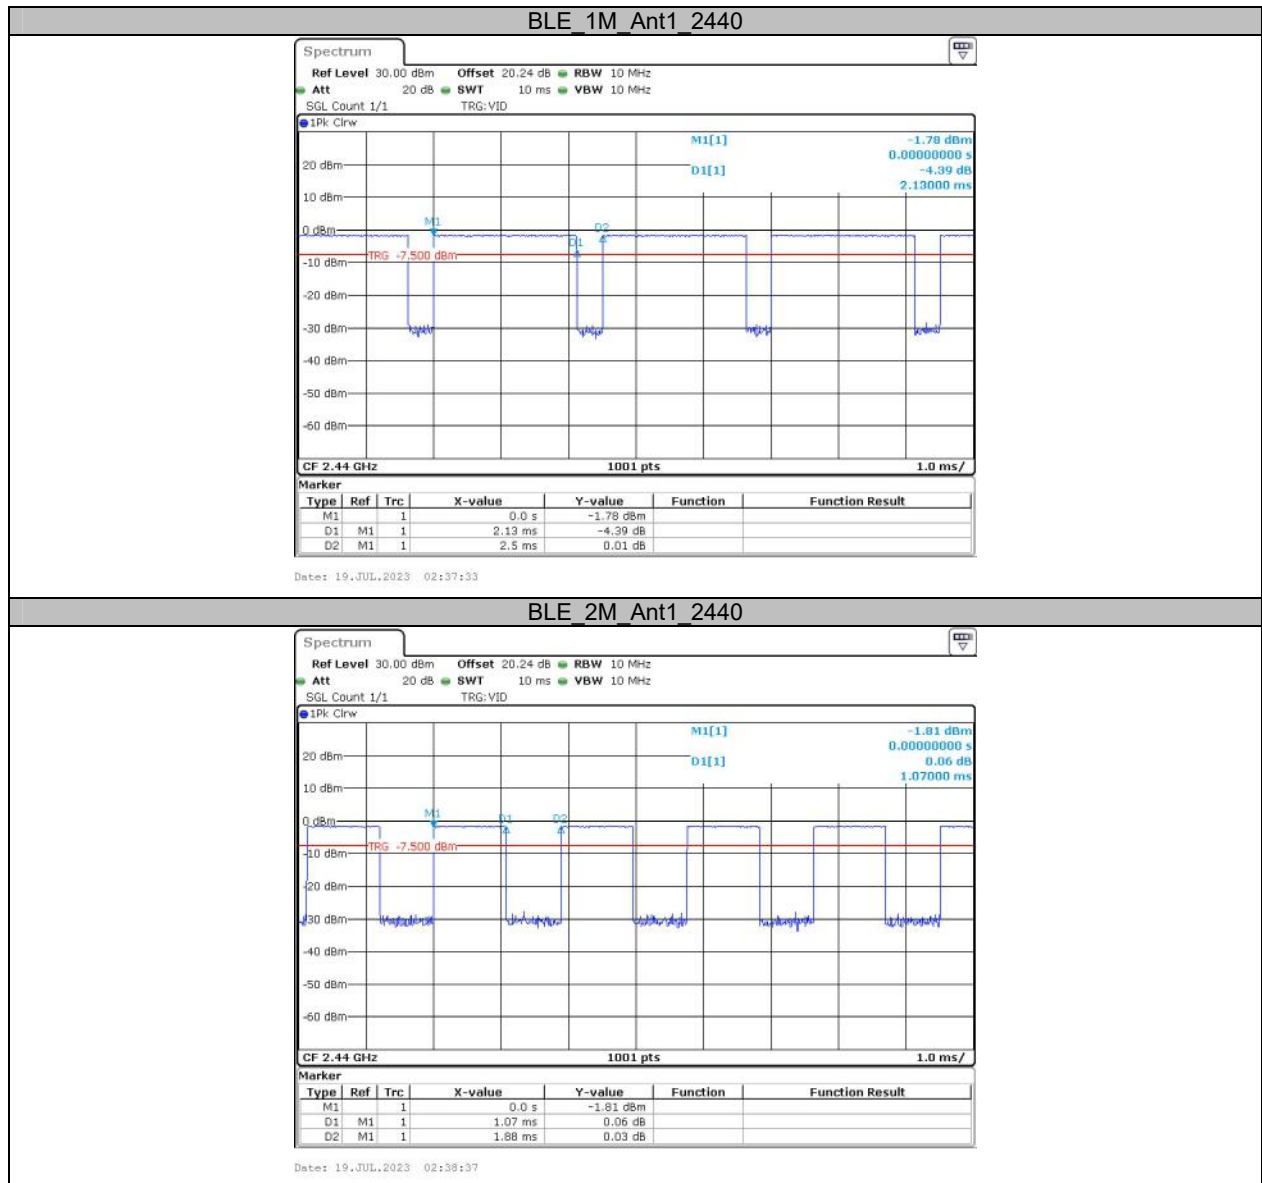

***** END OF REPORT *****