


Conducted Bandedge Peak, 2412 MHz, CCK, 1 to 11 Mbps





Antenna A Antenna B



Conducted Bandedge Peak, 2412 MHz, CCK, 1 to 11 Mbps










Antenna C



## Conducted Bandedge Peak, 2412 MHz, 6 to 54 Mbps



Antenna A



## Conducted Bandedge Peak, 2412 MHz, 6 to 54 Mbps







Antenna B



## Conducted Bandedge Peak, 2412 MHz, 6 to 54 Mbps





Antenna C



Antenna B



Conducted Bandedge Peak, 2412 MHz, 6 to 54 Mbps Beam Forming





Antenna A Antenna B



Conducted Bandedge Peak, 2412 MHz, 6 to 54 Mbps Beam Forming





Antenna A





Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss




Antenna A

Page No: 283 of 339



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss






Antenna A Antenna B



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss





Antenna B




Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M8 to M15, M0 to M9 2ss







Antenna A Antenna B



## Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M8 to M15, M0 to M9 2ss










Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20, M16 to M23, M0 to M9 3ss










Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss






Antenna A Antenna B



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss










Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss






Antenna A Antenna B



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss










Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss





Antenna B




Antenna C



# Conducted Bandedge Peak, 2412 MHz, HT/VHT20 STBC, M0 to M7






Antenna A Antenna B




## Conducted Bandedge Peak, 2412 MHz, HT/VHT20 STBC, M0 to M7






Antenna B



Antenna C



## Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps




Antenna A

Page No: 296 of 339



Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps







Antenna A Antenna B




Conducted Bandedge Peak, 2462 MHz, CCK, 1 to 11 Mbps





Antenna B



Antenna C




## Conducted Bandedge Peak, 2462 MHz, 6 to 54 Mbps



Antenna A



## Conducted Bandedge Peak, 2462 MHz, 6 to 54 Mbps








Antenna B



## Conducted Bandedge Peak, 2462 MHz, 6 to 54 Mbps






Antenna C



Antenna B



Conducted Bandedge Peak, 2462 MHz, 6 to 54 Mbps Beam Forming







Antenna A Antenna B




Conducted Bandedge Peak, 2462 MHz, 6 to 54 Mbps Beam Forming





Antenna B



Antenna C



# Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss





Antenna A

Page No: 304 of 339



# Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss





Antenna A Antenna B



## Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M0 to M7, M0 to M9 1ss



# 

#### Antenna A




Antenna C


Page No: 306 of 339

Antenna B



# Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M8 to M15, M0 to M9 2ss






Antenna A Antenna B



## Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M8 to M15, M0 to M9 2ss





Antenna B




Antenna C



# Conducted Bandedge Peak, 2462 MHz, HT/VHT20, M16 to M23, M0 to M9 3ss










Antenna C



# Conducted Bandedge Peak, 2462 MHz, HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss







Antenna A Antenna B




# Conducted Bandedge Peak, 2462 MHz, HT/VHT20 Beam Forming, M0 to M7, M0 to M9 1ss





#### Antenna A






Antenna C

Antenna B



## Conducted Bandedge Peak, 2462 MHz, HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss





Antenna A Antenna B



## Conducted Bandedge Peak, 2462 MHz, HT/VHT20 Beam Forming, M8 to M15, M0 to M9 2ss





#### Antenna A






Antenna C



## Conducted Bandedge Peak, 2462 MHz, HT/VHT20 Beam Forming, M16 to M23, M0 to M9 3ss





#### Antenna A






Antenna C



### Conducted Bandedge Peak, 2462 MHz, HT/VHT20 STBC, M0 to M7






Antenna A Antenna B



### Conducted Bandedge Peak, 2462 MHz, HT/VHT20 STBC, M0 to M7





#### Antenna A


Antenna B



Antenna C



**Test Setup for conducted Measurements** 

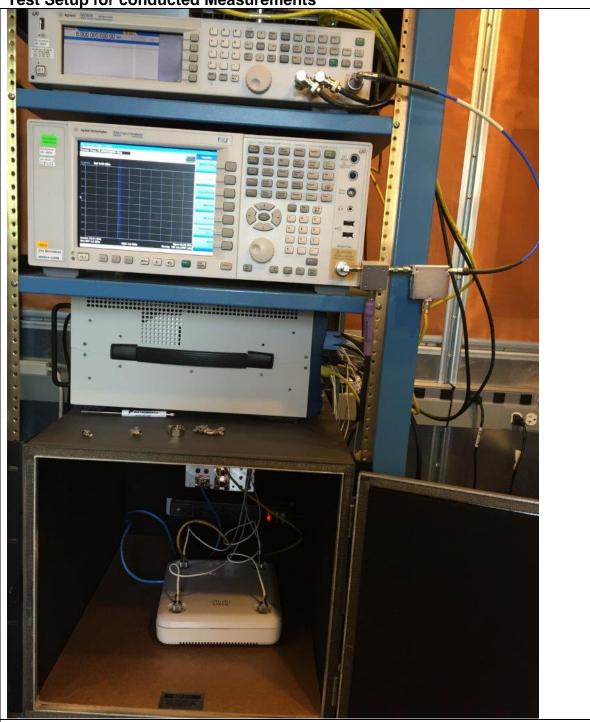

Title: Conducted Test Setup



### Appendix B: Emission Test Results

Testing Laboratory: Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

# Radiated Spurious Emissions

15.205 / RSS-210 2.7: Radiated emissions which fall in the restricted bands, as defined in Section

15.205(a), must also comply with the radiated emission limits specified in Section

15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz/18GHz-26G/26GHz-40GHz/30M-1GHz

Reference Level: 80 dBuV Attenuation: 10 dB Sweep Time: Coupled Resolution Bandwidth: 1MHz

Video Bandwidth: 1 MHz for peak, 10 Hz for average

Detector: Peak

Terminate the access Point RF ports with 50 ohm loads.

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV/m @3m

2) Peak plot (Vertical and Horizontal), Limit = 74dBuV/m @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands.

This report represents the worst case data for all supported operating modes and antennas. Antenna ports are terminated in 50 ohm loads

Page No: 318 of 339





**Transmitter Radiated Spurious Emissions-Average** 

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2442	Legacy CCK, 1 to 11 Mbps	11	50.7	54	3.3
2412	HT-20 Beam Forming, 6 to 54 Mbps	6	50.6	54	3.4
2442	Legacy CCK, 1 to 11 Mbps	11	50.7	54	3.3
	HT-20 Beam Forming, 6 to 54 Mbps	6	50.7	54	3.3
2462	Legacy CCK, 1 to 11 Mbps	11	50.7	54	3.3
	HT-20 Beam Forming,6 to 54 Mbps	6	50.8	54	3.2




### **Transmitter Radiated Spurious Emissions (1GHz-18GHz)**

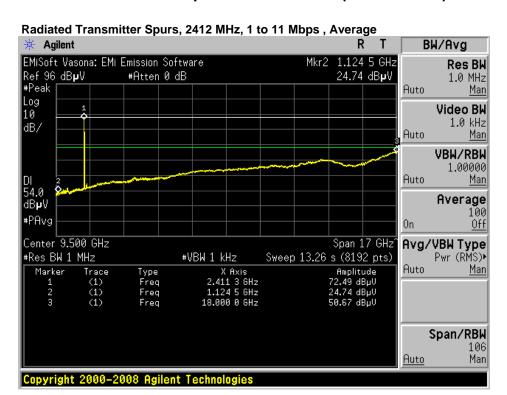


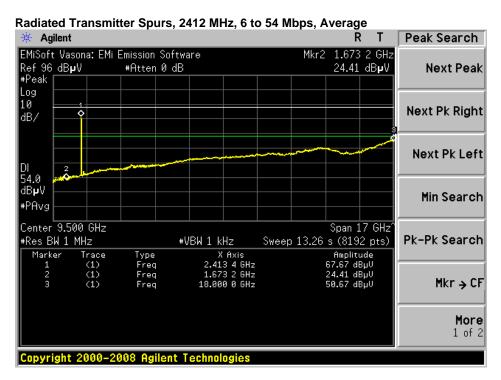

Page No: 320 of 339




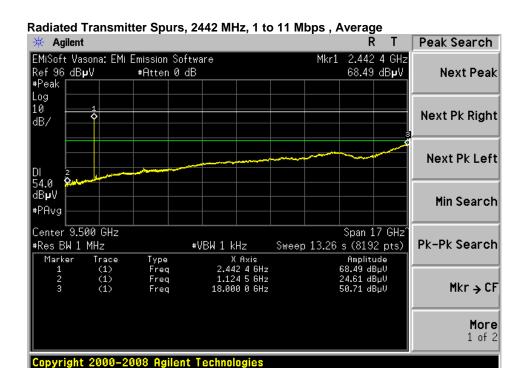








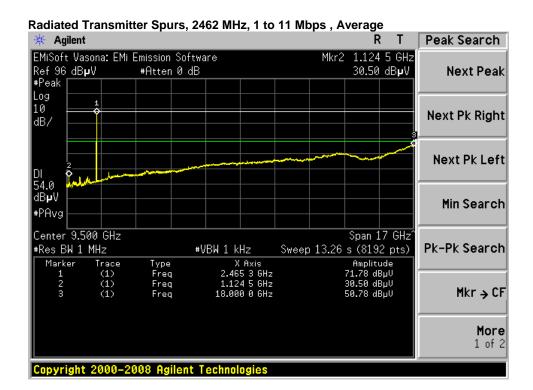

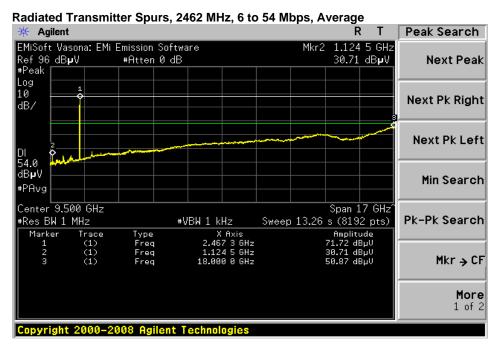




# **Transmitter Radiated Spurious Emissions-Peak**

Frequency (MHz)	Mode	Data Rate (Mbps)	Spurious Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	Legacy CCK, 1 to 11 Mbps	11	58.4	74	15.6
2412	HT-20 Beam Forming, 6 to 54 Mbps	6	59.6	74	14.4
2442	Legacy CCK, 1 to 11 Mbps	11	57.8	74	16.2
2442	HT-20 Beam Forming, 6 to 54 Mbps	6	58.6	74	15.4
2462	Legacy CCK, 1 to 11 Mbps	11	58.9	74	15.1
	HT-20 Beam Forming,6 to 54 Mbps	6	57.4	74	16.6


Page No: 323 of 339





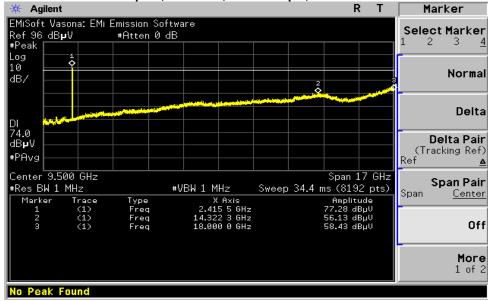


#### Radiated Transmitter Spurs, 2412 MHz, 6 to 54 Mbps, Peak

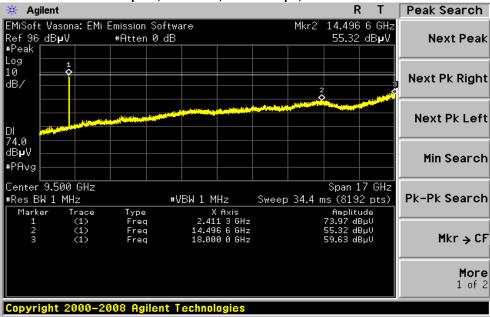






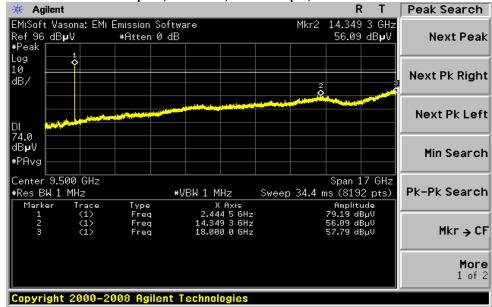


#### Radiated Transmitter Spurs, 2442 MHz, 6 to 54 Mbps, Peak

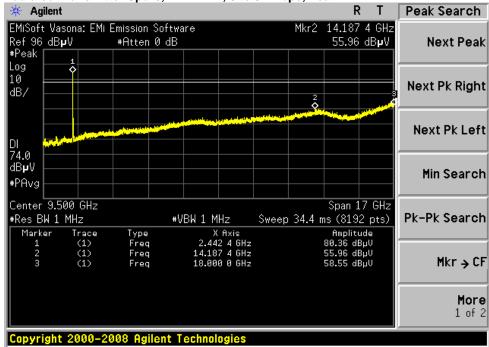






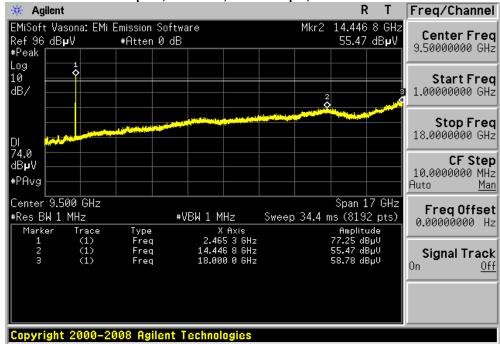


#### Radiated Transmitter Spurs, 2462 MHz, 6 to 54 Mbps, Peak

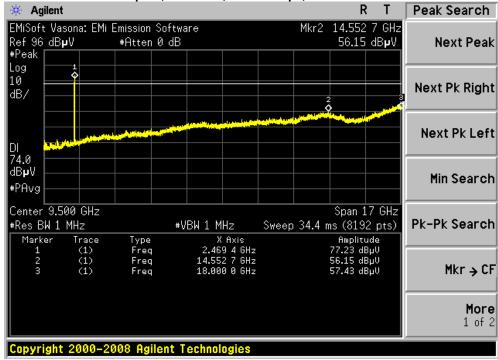




### **Transmitter Radiated Spurious Emissions (18GHz-26GHz)**

### Radiated Transmitter Spurs, All rate, All modes, Average

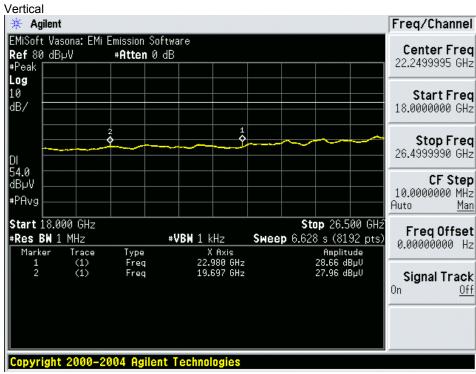


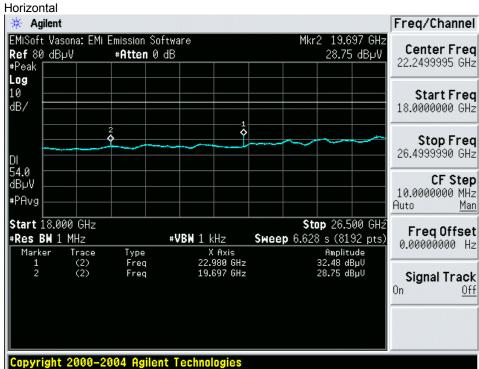

Page No: 327 of 339



#### Radiated Transmitter Spurs, All rate, All modes, Peak

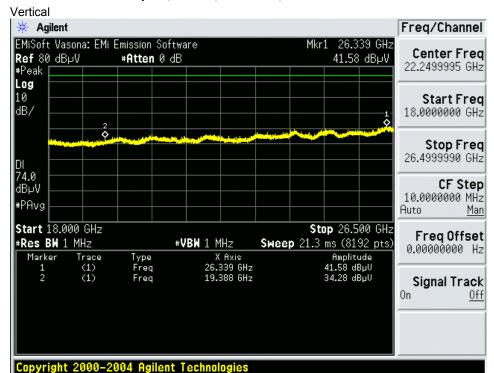


#### Horizontal 🔆 Agilent Freq/Channel EMiSoft Vasona: EMi Emission Software Center Freq #Atten 0 dB Ref 80 dBµV 22.2499995 GHz #Peak Log 10 Start Freq dB/ 18.0000000 GHz Stop Freq 26.4999990 GHz 74.0 **CF Step** dBµV 10.0000000 MHz #PAvg Auto Start 18.000 GHz Stop 26.500 GHz Freq Offset 0.00000000 Hz #Res BW 1 MHz #VBW 1 MHz **Sweep** 21.3 ms (8192 pts) Type Freq X Axis Amplitude 41.74 dBµV Marker (2) 26.291 GHz Signal Track Off Copyright 2000-2004 Agilent Technologies


Page No: 328 of 339



### Transmitter Radiated Spurious Emissions (26GHz-40GHz)

#### Radiated Transmitter Spurs, All rate, All modes, Average

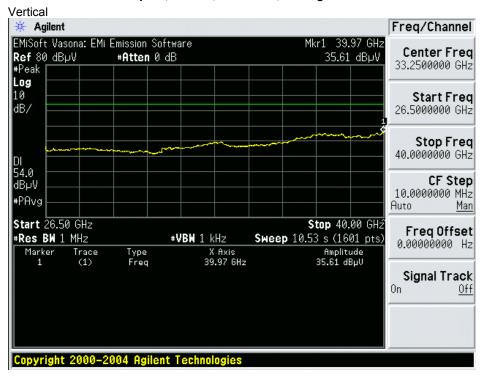


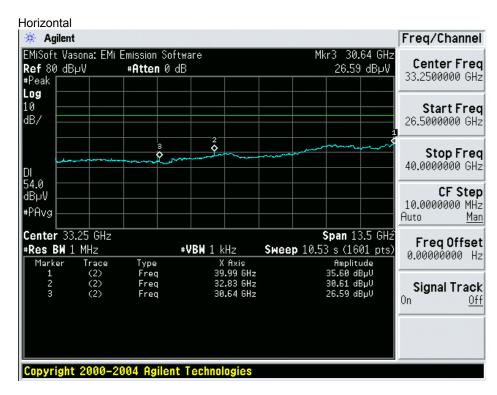


Page No: 329 of 339



#### Radiated Transmitter Spurs, All rate, All modes, Peak

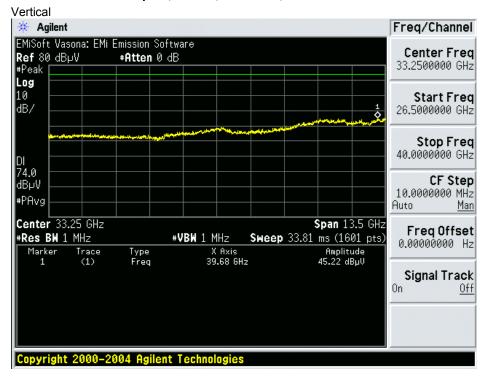

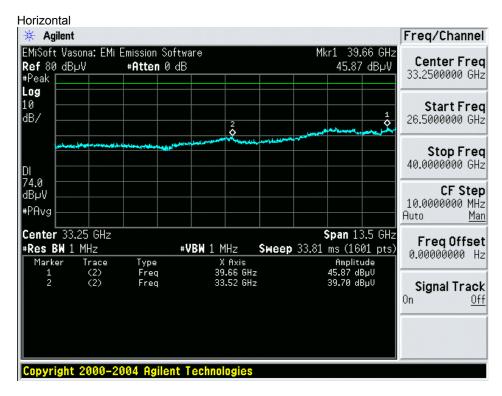

Page No: 330 of 339




### Receiver Radiated Spurious Emissions (1GHz-18GHz)





#### Radiated Receiver Spurs, All rates, All Mode, Peak

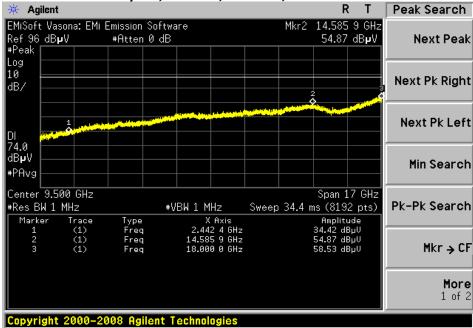


Page No: 331 of 339




### Receiver Radiated Spurious Emissions (18GHz-26GHz)

### Radiated Receiver Spurs, All rates, All Mode, Average

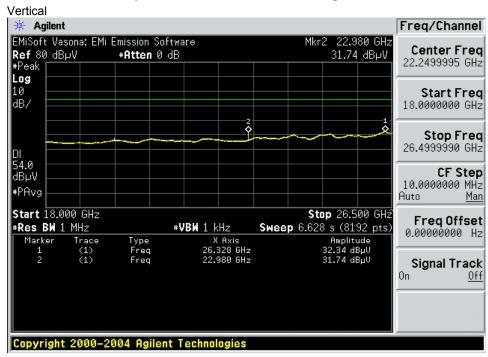


#### Horizontal

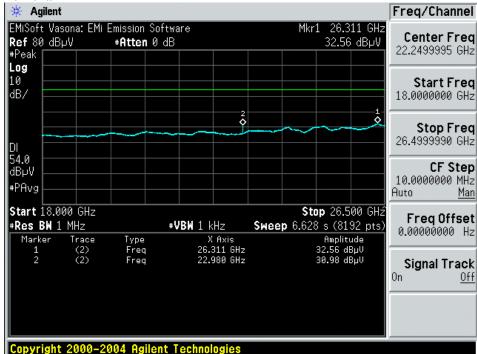


Page No: 332 of 339



#### Radiated Receiver Spurs, All rates, All Mode, Peak

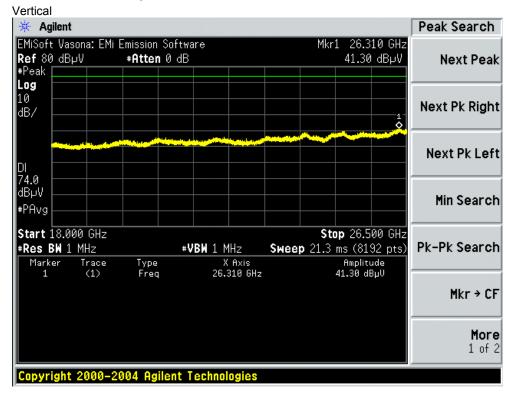

#### Horizontal

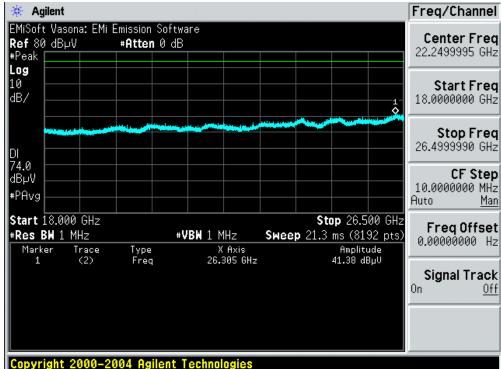


Page No: 333 of 339




### Receiver Radiated Spurious Emissions (26GHz-40GHz)

### Radiated Receiver Spurs, All rates, All Mode, Average

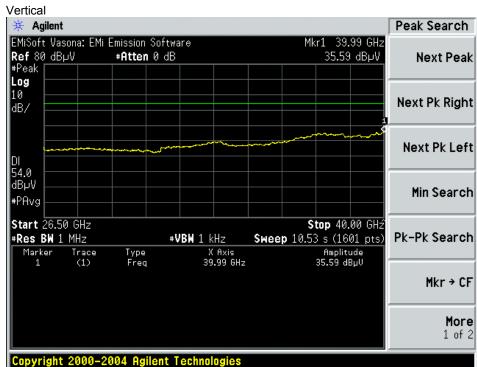


#### Horizontal

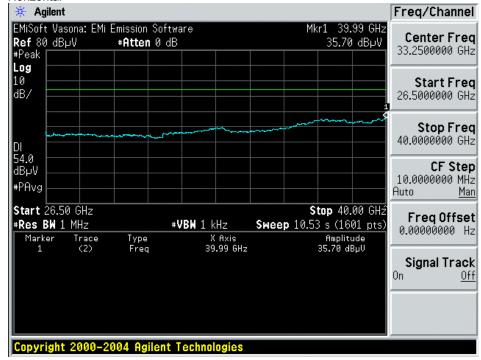

Page No: 334 of 339



### Radiated Receiver Spurs, All rates, All Mode, Peak

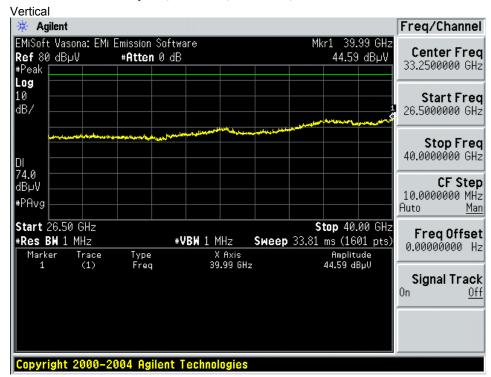

# Horizontal 🔆 Agilent



Page No: 335 of 339



# Radiated Emissions (30M-1G)





#### Receiver Radiated Emission



Page No: 336 of 339





Title: Radiated Emissions Configuration Photograph



### Appendix C: Test Equipment/Software Used to perform the test

Cis Number	Manufacturer	Model	Description	Calibration
			·	Due Date
3003	HP	83731B	Synthesized Signal Generator	3/13/2016
4882	EMC Test Systems	3115	Double Ridged Guide Horn Antenna	7/24/2015
5691	Miteq	NSP1800-25-S1	Broadband Preamplifier (1-18GHz)	1/29/2016
8166	HP	8491B Opt 010	10dB Attenuator	2/2/2016
20975	Micro-Coax	UFB311A-0-1344-520520	RF Coaxial Cable, to 18GHz, 134.4 in	2/18/2016
30559	Micro-Coax	UFB311A-1-0950-504504	RF Coaxial Cable, to 18GHz, 95 in	2/20/2016
30652	Sunol Sciences	JB1	Combination Antenna, 30MHz-2GHz	11/5/2015
33988	Agilent	E4446A	Spectrum Analyzer, 3Hz-44GHz	12/9/2015
41929	Newport	iBTHP-5-DB9	5 inch Temp/RH/Press Sensor w/20ft cable	12/20/2015
41979	Cisco	1840	18-40GHz EMI Test Head/Verification Fixture	7/9/2015
43124	Cisco	Above 1GHz Site Cal	Above 1GHz Cispr Site Verification	1/15/2016
CIS-50378	Agilent	N9030A	PXA Spectrum Analyzer	1/5/2016
47282	Huber + Suhner	Sucoflex 102E	40GHz Cable K Connector	5/2/2015
47410	Agilent	N9038A	EMI Receiver	1/5/2016
51642	Huber+Suhner	Sucoflex 106PA	RF N Type Cable 8.5m	2/10/2016
51684	Dynaware	5400-9810-6251	SMA 50 Ohm Termination 18GHz	5/22/2015
51690	Dynaware	5400-9810-6251	SMA 50 Ohm Termination 18GHz	5/22/2015
51692	Dynaware	5400-9810-6251	SMA 50 Ohm Termination 18GHz	5/22/2015
51695	Dynaware	5400-9810-6251	SMA 50 Ohm Termination 18GHz	5/22/2015
CIS-32307	Micro-Tronics	BRM50702-02	2.4-2.5G Notch Filter	10/3/2015
CIS-35606	Micro-Tronics	BRC50704-02	5.47-5.725G Notch Filter	10/3/2015
CIS-43988	Micro-Tronics	BRC50703-02	5.15-5.35G Notch Filter	10/3/2015
CIS-43989	Micro-Tronics	BRC50705-02	5.725-5.875G Notch Filter	10/3/2015

Page No: 338 of 339




Page No: 339 of 339

### 1.1. Test Result of AC Power Ports

Temperature	<b>21</b> ℃	Humidity	60%
Test Engineer	Parody Lin	Frequency Range	0.15 MHz to 30 MHz
Test Mode	Mode 1		


- Corrected Reading (dBuV) = LISN Factor + Cable Loss + Read Level = Level
- Margin = Limit + (Read Level + LISN Factor + Cable Loss)
  All emissions not reported here are more than 10 dB below the prescribed limit.
- The test was passed at the minimum margin that marked by a frame in the following table

#### Line

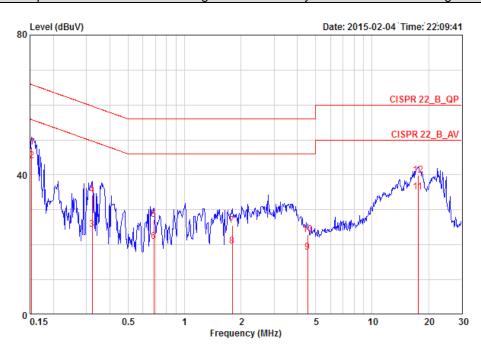

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss		Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15321	47.93	-17.89	65.82	37.70	10.03	0.20	QP	LINE
2 @	0.15321	43.94	-11.88	55.82	33.71	10.03	0.20	AVERAGE	LINE
3	0.32169	24.31	-25.35	49.66	14.00	10.03	0.28	AVERAGE	LINE
4	0.32169	34.31	-25.35	59.66	24.00	10.03	0.28	QP	LINE
5	0.68626	27.17	-28.83	56.00	16.83	10.02	0.32	QP	LINE
6	0.68626	20.97	-25.03	46.00	10.63	10.02	0.32	AVERAGE	LINE
7	1.800	25.59	-30.41	56.00	15.21	10.03	0.35	QP	LINE
8	1.800	19.52	-26.48	46.00	9.14	10.03	0.35	AVERAGE	LINE
9	4.525	17.91	-28.09	46.00	7.50	10.04	0.38	AVERAGE	LINE
10	4.525	22.97	-33.03	56.00	12.56	10.04	0.38	QP	LINE
11 @	17.568	35.05	-14.95	50.00	24.38	10.20	0.47	AVERAGE	LINE
12	17.568	39.81	-20.19	60.00	29.14	10.20	0.47	OP	LINE

# Neutral

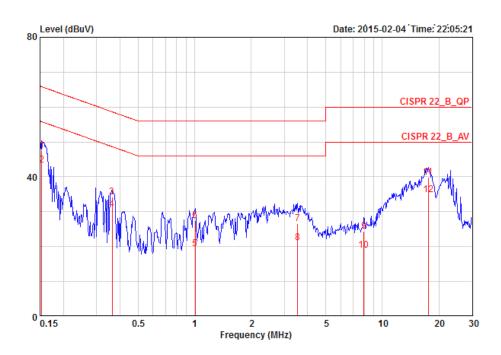

			Over	Limit	Read	LISN	Cable		
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15321	47.54	-18.28	65.82	37.40	9.94	0.20	QP	NEUTRAL
2 @	0.15321	43.29	-12.53	55.82	33.15	9.94	0.20	AVERAGE	NEUTRAL
3	0.36338	34.12	-24.53	58.65	23.93	9.89	0.29	QP	NEUTRAL
4	0.36338	30.84	-17.81	48.65	20.65	9.89	0.29	AVERAGE	NEUTRAL
5	1.005	19.43	-26.57	46.00	9.21	9.89	0.33	AVERAGE	NEUTRAL
6	1.005	27.40	-28.60	56.00	17.18	9.89	0.33	QP	NEUTRAL
7	3.547	26.61	-29.39	56.00	16.35	9.89	0.37	QP	NEUTRAL
8	3.547	21.05	-24.95	46.00	10.79	9.89	0.37	AVERAGE	NEUTRAL
9	7.977	24.34	-35.66	60.00	14.04	9.90	0.40	QP	NEUTRAL
10	7.977	18.93	-31.07	50.00	8.63	9.90	0.40	AVERAGE	NEUTRAL
11	17.568	39.84	-20.16	60.00	29.34	10.02	0.47	QP	NEUTRAL
12 @	17.568	34.88	-15.12	50.00	24.38	10.02	0.47	AVERAGE	NEUTRAL