

FCC TEST REPORT
FCC ID:2BBONYW160

Report Number..... : ZHT-231113037E-1

Date of Test..... : Nov. 13, 2023 to Nov. 24, 2023

Date of issue: Nov. 24, 2023

Test Result : PASS

Testing Laboratory..... : Guangdong Zhonghan Testing Technology Co., Ltd.

Address : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : Shenzhen ONEJ Technology Co., Ltd.

Address B309, Huiju Xinqiao 107, Chuangzhi Park, Xinqiao Street, Baoan District, Shenzhen, China

Manufacturer's name: Shenzhen ONEJ Technology Co., Ltd.

Address : B309, Huiju Xinqiao 107, Chuangzhi Park, Xinqiao Street, Baoan District, Shenzhen, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

Test procedure : KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013

Non-standard test method : N/A

This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.

Product name.....: Window Cleaning Robot

Trademark : /

Model/Type reference : YW160, YW130, YW131, YW132, YW133, YW134, YW135, YW136,
YW137, YW138, YW139, YW161, YW162, YW163, YW164, YW165,
YW166, YW167, YW168, YW169

Model Difference	Only model name is different.
Model 1	Model 2

Ratings.....	Adapter 1:
	Model: RY72A240300M2
	Input: 100- 240V~50/60Hz 2.0A
	Output : 24.0V, 3.0A
	Adapter 2:
	Model: BZ065-240300-E2
	Input: 100-240v~ 50/60Hz 1.5A
	Output: 24V,3.0A

Testing procedure and testing location:

Testing Laboratory.....: Guangdong Zhonghan Testing Technology Co., Ltd.

Address.....: Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tested by (name + signature): Leon Li

Leon Li

Reviewer (name + signature).....: Baret Wu

Baret Wu

Approved (name + signature): Levi Lee

Levi Lee

Table of Contents

	Page
1. VERSION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY.....	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES.....	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED.....	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT.....	13
4.1.1 POWER LINE CONDUCTED EMISSION Limits	13
4.1.2 TEST PROCEDURE.....	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP.....	14
4.1.5 EUT OPERATING CONDITIONS.....	14
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS.....	19
4.2.2 TEST PROCEDURE.....	19
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP.....	20
4.2.5 EUT OPERATING CONDITIONS.....	21
4.2.6 TEST RESULTS	21
5. RADIATED BAND EMISSIONMEASUREMENT	28
5.1 TEST REQUIREMENT:	28
5.2 TEST PROCEDURE.....	28
5.3 DEVIATION FROM TEST STANDARD.....	28
5.4 TEST SETUP.....	29
5.5 EUT OPERATING CONDITIONS.....	29
5.6 TEST RESULT.....	30
6. POWER SPECTRAL DENSITY TEST	32
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE.....	32
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS.....	32



6.6 TEST RESULT	33
7. CHANNEL BANDWIDTH	34
7.1 APPLIED PROCEDURES / LIMIT	34
7.2 TEST PROCEDURE.....	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS.....	34
7.6 TEST RESULT.....	35
8. PEAK OUTPUT POWER TEST	36
8.1 APPLIED PROCEDURES/LIMIT	36
8.2 TEST PROCEDURE.....	36
8.3 DEVIATION FROM STANDARD	36
8.4 TEST SETUP	36
8.5 EUT OPERATION CONDITIONS.....	36
8.6 TEST RESULT.....	36
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION.....	37
9.1 APPLICABLE STANDARD	37
9.2 TEST PROCEDURE.....	37
9.3 DEVIATION FROM STANDARD	37
9.4 TEST SETUP	37
9.5 EUT OPERATION CONDITIONS.....	37
9.6 TEST RESULTS	37
10. ANTENNA REQUIREMENT.....	38
11. APPENDIX WIFI	39
11.1. DUTY CYCLE	39
11.2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	45
11.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	51
11.4. -6DB BANDWIDTH	57
11.5. OCCUPIED CHANNEL BANDWIDTH.....	63
11.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	69
11.7. BAND EDGE	75
11.8. CONDUCTED RF SPURIOUS EMISSION	82
12. TEST SETUP PHOTO	92
13. EUT CONSTRUCTIONAL DETAILS.....	92

1. VERSION

Report No.	Version	Description	Approved
ZHT-231113037E-1	Rev.01	Initial issue of report	Nov. 24, 2023

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (b)(4)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add. : Room 104, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF powerconducted	$\pm 0.16\text{dB}$
3	Spurious emissionsconducted	$\pm 0.21\text{dB}$
4	All emissions radiated(9k-30MHz)	$\pm 4.68\text{dB}$
5	All emissionsradiated(<1G)	$\pm 4.68\text{dB}$
6	All emissionsradiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	Occupied Bandwidth	$\pm 4.96\text{dB}$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Window Cleaning Robot
Model No.:	YW160
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20):11,
Operation Frequency:	802.11b/802.11g /802.11n(HT20): 2412-2462MHz
Channel separation:	5MHz
Modulation technology:	IEEE 802.11b: DQPSK/DBPSK/DSSS/CCK IEEE 802.11g: QPSK/BPSK/16QAM/64QAM/OFDM IEEE 802.11n: QPSK/BPSK/16QAM/64QAM/OFDM
Antenna Type:	PCB antenna
Antenna gain:	2.54dBi
Power supply:	Adapter 1: Model: RY72A240300M2 Input: 100- 240V~50/60Hz 2.0A Output : 24.0V, 3.0A Adapter 2: Model: BZ065-240300-E2 Input: 100-240v~ 50/60Hz 1.5A Output: 24V,3.0A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: EUT use new battery during the test,the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
Mode	802.11b	802.11g	802.11n(HT20)
Data rate	1Mbps	6Mbps	6.5Mbps

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Instrument number	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	ZH-E005	May 12, 2023	May 11, 2024
2	Loop antenna	EMCI	LAP600	ZH-E036	May 12, 2023	May 11, 2024
3	Amplifier	Schwarzbeck	BBV 9743 B	ZH-E019	May 12, 2023	May 11, 2024
4	Amplifier	Schwarzbeck	BBV 9718 B	ZH-E021	May 12, 2023	May 11, 2024
5	Bilog Antenna	Schwarzbeck	VULB9162	ZH-E017	May 17, 2023	May 16, 2024
6	Horn Antenna	Schwarzbeck	BBHA9120D	ZH-E020	May 17, 2023	May 16, 2024
7	Horn Antenna	A.H.SYSTEMS	SAS574	ZH-E062	May 12, 2023	May 11, 2024
8	Amplifier	AEROFLEX	100KHz-40GHz	ZH-E063	May 12, 2023	May 11, 2024
9	Spectrum Analyzer	R&S	FSV40	ZH-E064	May 12, 2023	May 11, 2024
10	CDNE	Schwarzbeck	CDNE M2 + CDNE M3	ZH-E029	May 12, 2023	May 11, 2024
11	966 Anechoic Chamber	EMToni	9m6m6m	ZH-E001	Nov. 25, 2021	Nov. 24, 2024
12	Spectrum Analyzer	KEYSIGHT	N9020A	ZH-E032	May 12, 2023	May 11, 2024
13	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	ZH-E033	May 12, 2023	May 11, 2024
14	Single Generator	Agilent	N5182A	ZH-E034	May 12, 2023	May 11, 2024
15	Power Sensor	MWRFTest	MW100-RFCB	ZH-E066	May 12, 2023	May 11, 2024
16	Audio analyzer	R&S	UPL	ZH-E067	May 12, 2023	May 11, 2024
17	Single Generator	R&S	SMB100A	ZH-E068	May 12, 2023	May 11, 2024
18	Power Amplifier Shielding Room	EMToni	2m3m3m	ZH-E003	Nov. 25, 2021	Nov. 24, 2024



Equipment	Manufacturer	Model	Instrument number	Last Cal.	Next Cal.
Receiver	R&S	ESCI	ZH-E005	May 12, 2023	May 11, 2024
LISN	R&S	ENV216	ZH-E006	May 12, 2023	May 11, 2024
ISN CAT 6	Schwarzbeck	NTFM 8158	ZH-E012	May 12, 2023	May 11, 2024
ISN CAT 5	Schwarzbeck	CAT5 8158	ZH-E013	May 12, 2023	May 11, 2024
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	ZH-E014	May 12, 2023	May 11, 2024
Current Transformer Clamp	Schwarzbeck	SW 9605	ZH-E015	May 12, 2023	May 11, 2024
CE Shielding Room	EMToni	9m4m3m	ZH-E002	Nov. 25, 2021	Nov. 24, 2024

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

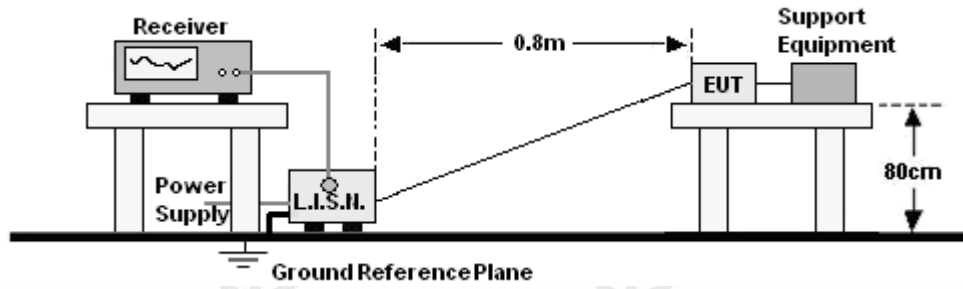

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 test result

Adapter 1:

Model: RY72A240300M2

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

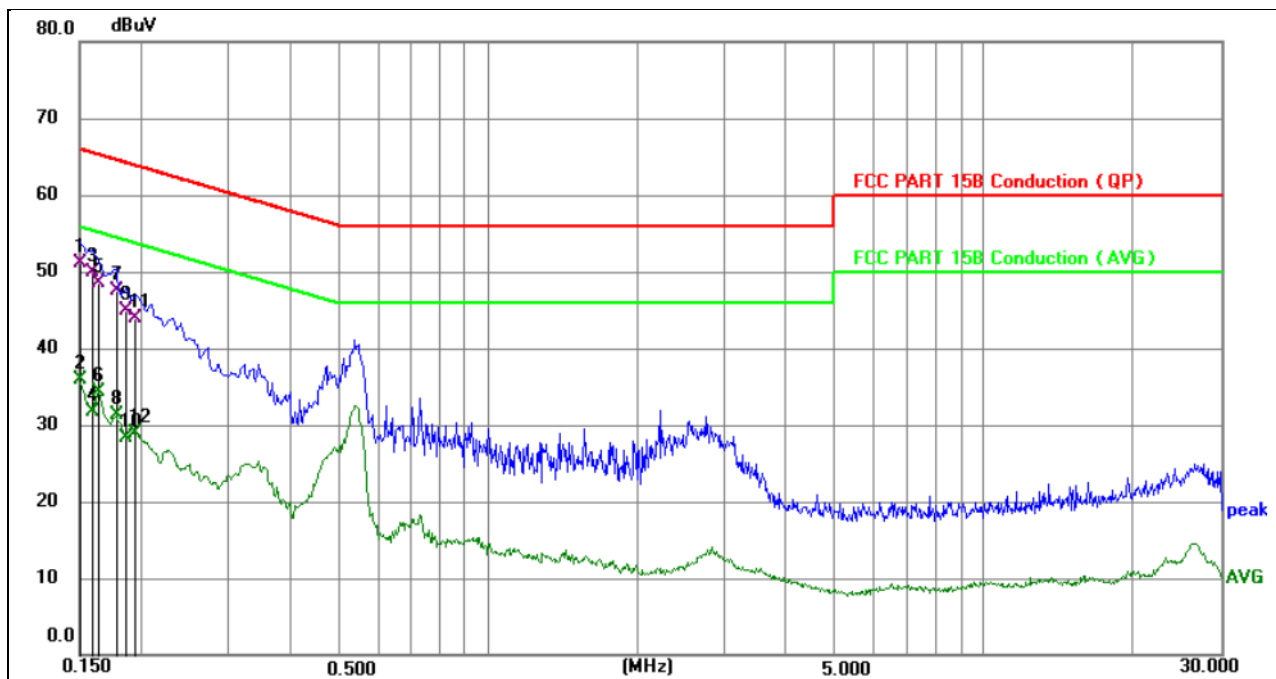


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1507	41.26	9.89	51.15	65.96	-14.81	QP	P	
2	0.1507	26.09	9.89	35.98	55.96	-19.98	AVG	P	
3	0.1590	39.96	9.89	49.85	65.52	-15.67	QP	P	
4	0.1590	21.87	9.89	31.76	55.52	-23.76	AVG	P	
5	0.1632	38.69	9.90	48.59	65.30	-16.71	QP	P	
6	0.1632	24.42	9.90	34.32	55.30	-20.98	AVG	P	
7	0.1770	37.53	9.90	47.43	64.63	-17.20	QP	P	
8	0.1770	21.33	9.90	31.23	54.63	-23.40	AVG	P	
9	0.1860	35.05	9.90	44.95	64.21	-19.26	QP	P	
10	0.1860	18.49	9.90	28.39	54.21	-25.82	AVG	P	
11	0.1949	34.04	9.91	43.95	63.83	-19.88	QP	P	
12	0.1949	19.00	9.91	28.91	53.83	-24.92	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

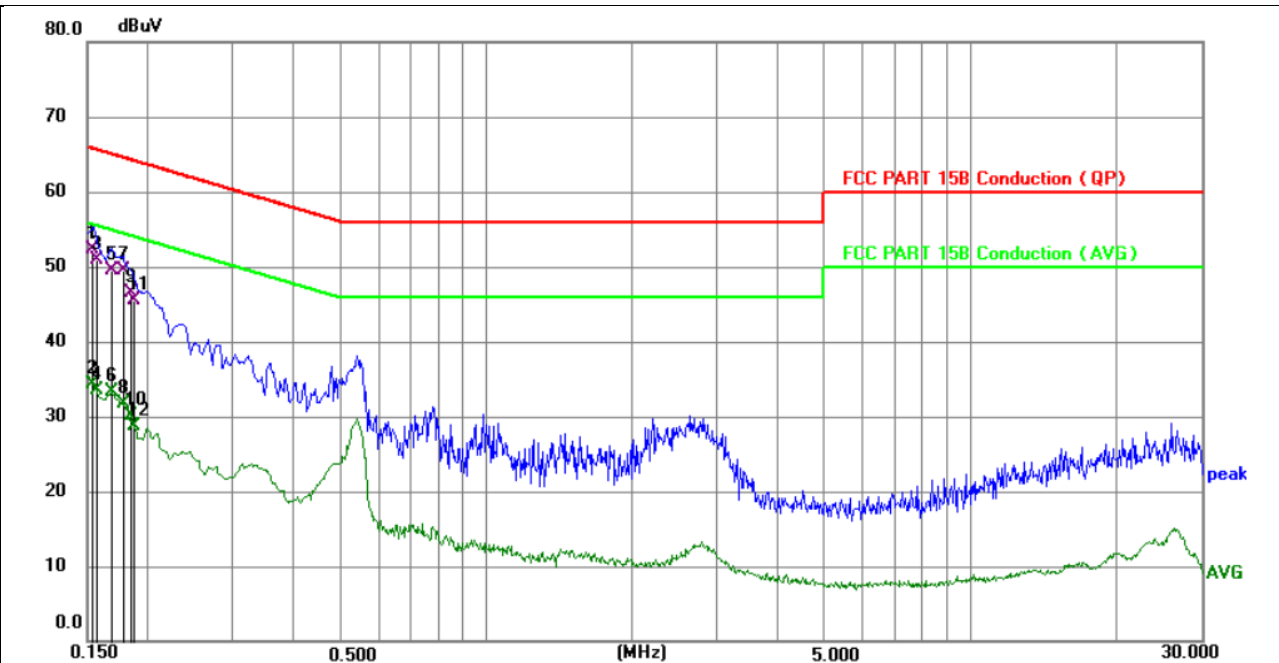


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1539	42.39	9.89	52.28	65.79	-13.51	QP	P	
2	0.1539	24.42	9.89	34.31	55.79	-21.48	AVG	P	
3	0.1564	41.08	9.89	50.97	65.65	-14.68	QP	P	
4	0.1564	23.53	9.89	33.42	55.65	-22.23	AVG	P	
5	0.1680	39.59	9.90	49.49	65.06	-15.57	QP	P	
6	0.1680	23.35	9.90	33.25	55.06	-21.81	AVG	P	
7	0.1770	39.51	9.90	49.41	64.63	-15.22	QP	P	
8	0.1770	21.74	9.90	31.64	54.63	-22.99	AVG	P	
9	0.1844	36.60	9.90	46.50	64.29	-17.79	QP	P	
10	0.1844	20.16	9.90	30.06	54.29	-24.23	AVG	P	
11	0.1872	35.65	9.90	45.55	64.16	-18.61	QP	P	
12	0.1872	18.86	9.90	28.76	54.16	-25.40	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).

Adapter 2:
Model: BZ065-240300-E2

Temperature:	24.3°C	Relative Humidity :	50%
Pressure:	101kPa	Phase :	N
Test Voltage:	AC 120V/60Hz		

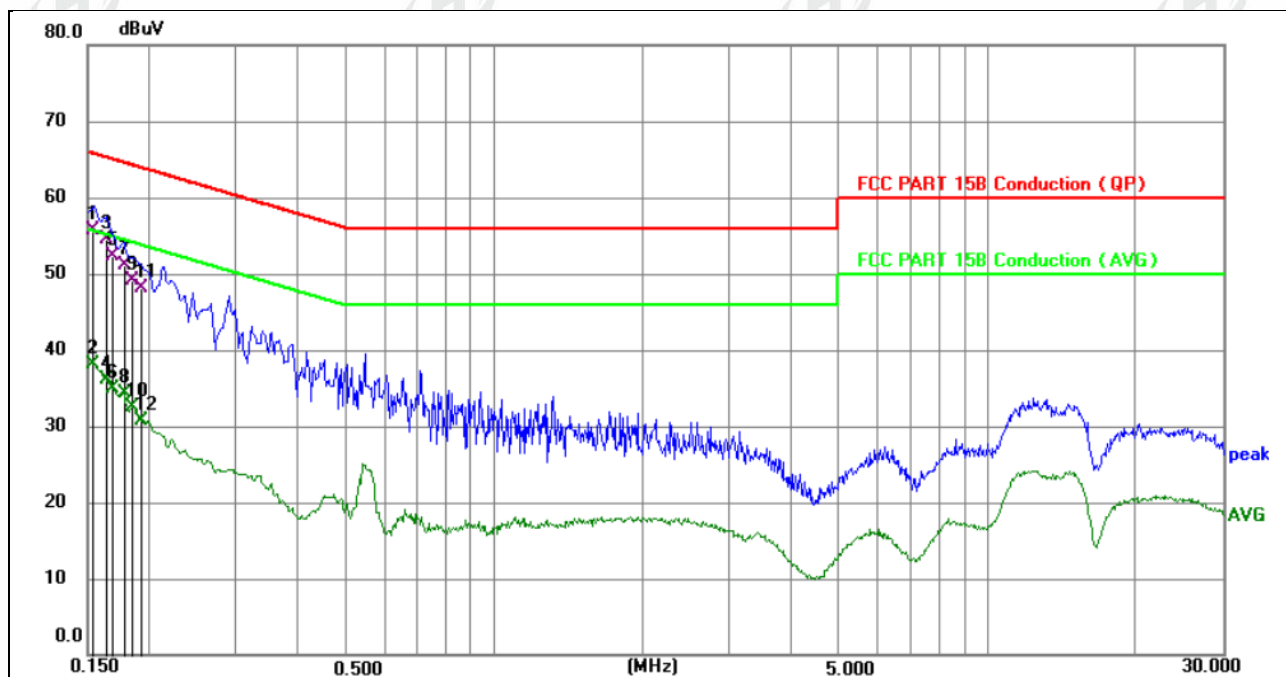


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1539	45.89	9.89	55.78	65.79	-10.01	QP	P	
2	0.1539	28.23	9.89	38.12	55.79	-17.67	AVG	P	
3	0.1632	44.62	9.90	54.52	65.30	-10.78	QP	P	
4	0.1632	26.16	9.90	36.06	55.30	-19.24	AVG	P	
5	0.1680	42.32	9.90	52.22	65.06	-12.84	QP	P	
6	0.1680	25.08	9.90	34.98	55.06	-20.08	AVG	P	
7	0.1770	41.28	9.90	51.18	64.63	-13.45	QP	P	
8	0.1770	24.37	9.90	34.27	54.63	-20.36	AVG	P	
9	0.1844	39.18	9.90	49.08	64.29	-15.21	QP	P	
10	0.1844	22.51	9.90	32.41	54.29	-21.88	AVG	P	
11	0.1924	38.11	9.91	48.02	63.93	-15.91	QP	P	
12	0.1924	20.81	9.91	30.72	53.93	-23.21	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).

Temperature:	24.3℃	Relative Humidity :	50%
Pressure:	101kPa	Phase :	L
Test Voltage:	AC 120V/60Hz		

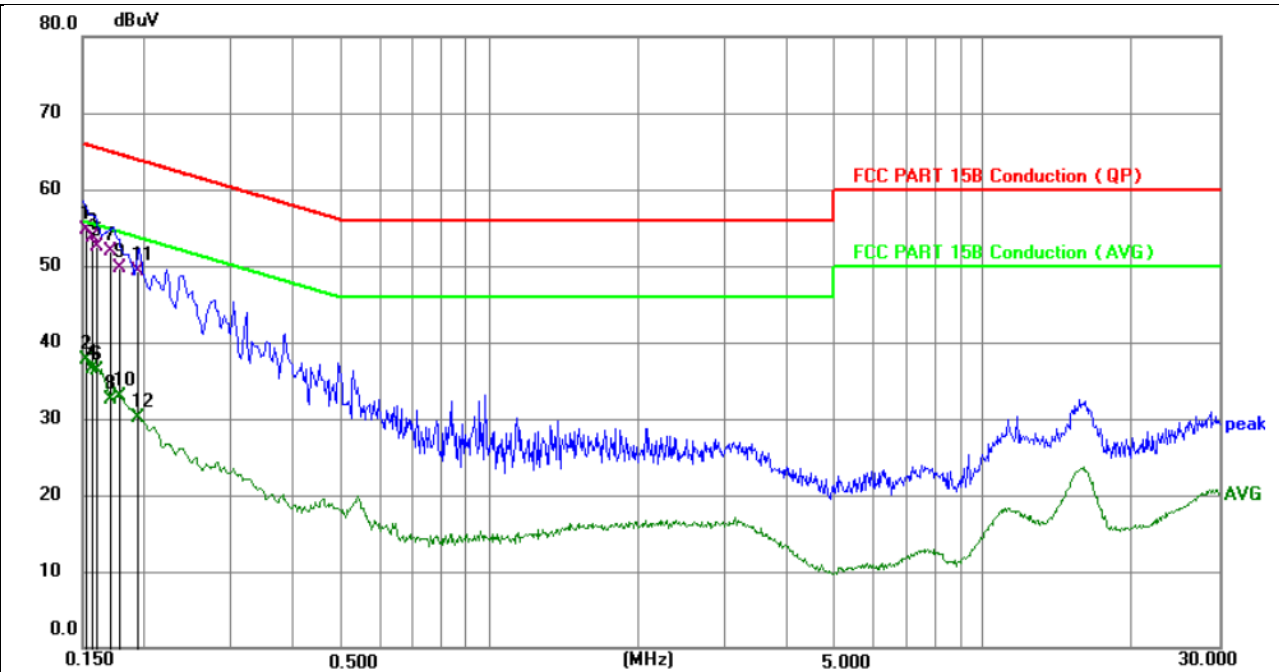

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1524	44.87	9.89	54.76	65.87	-11.11	QP	P	
2	0.1524	27.91	9.89	37.80	55.87	-18.07	AVG	P	
3	0.1573	43.72	9.89	53.61	65.61	-12.00	QP	P	
4	0.1573	26.61	9.89	36.50	55.61	-19.11	AVG	P	
5	0.1606	42.64	9.89	52.53	65.43	-12.90	QP	P	
6	0.1606	26.46	9.89	36.35	55.43	-19.08	AVG	P	
7	0.1720	42.08	9.90	51.98	64.86	-12.88	QP	P	
8	0.1720	22.65	9.90	32.55	54.86	-22.31	AVG	P	
9	0.1785	39.84	9.90	49.74	64.56	-14.82	QP	P	
10	0.1785	22.91	9.90	32.81	54.56	-21.75	AVG	P	
11	0.1949	39.35	9.91	49.26	63.83	-14.57	QP	P	
12	0.1949	20.18	9.91	30.09	53.83	-23.74	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.





- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

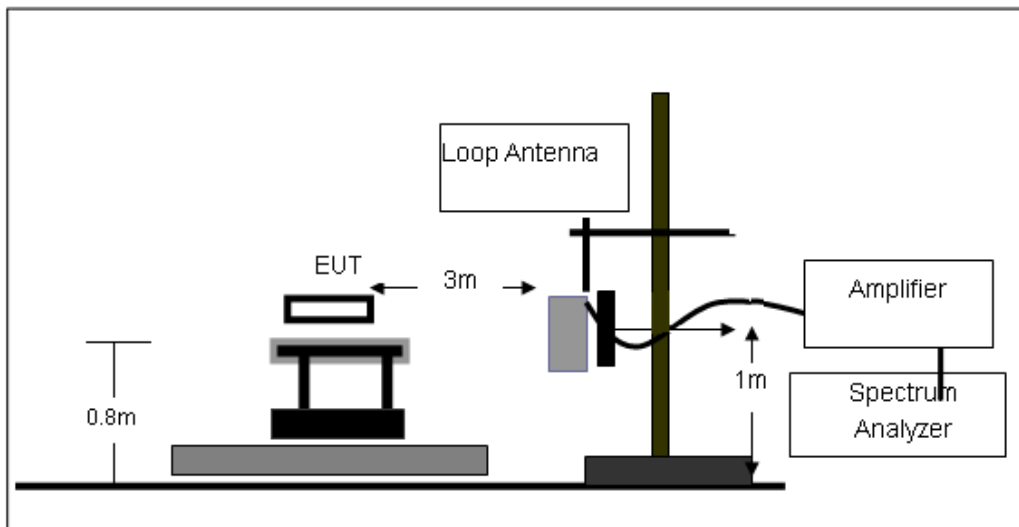

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

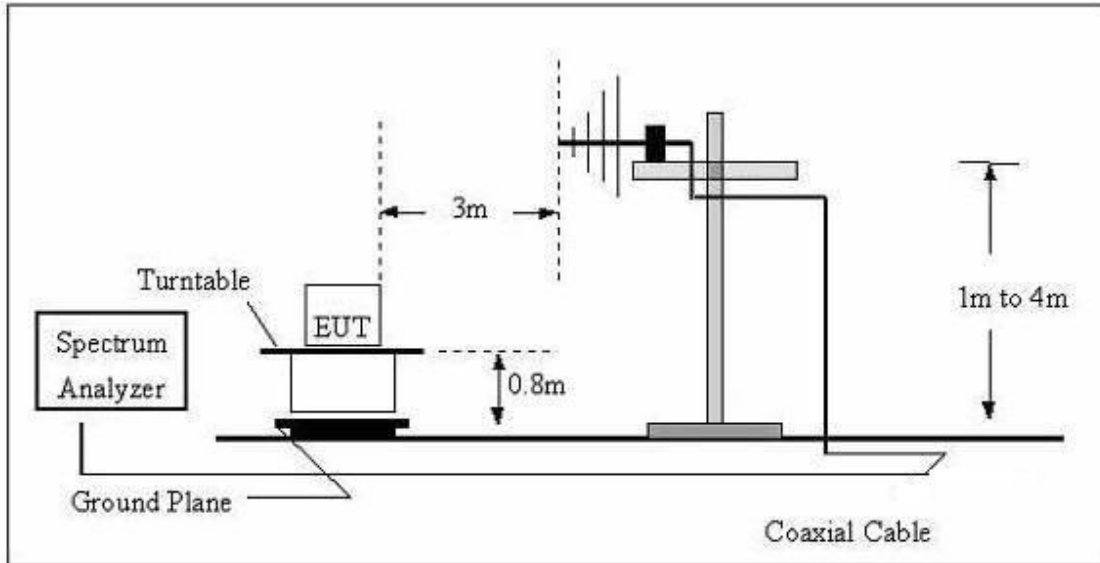

(C) Radiated Emission Test-Up Frequency Above 1GHz

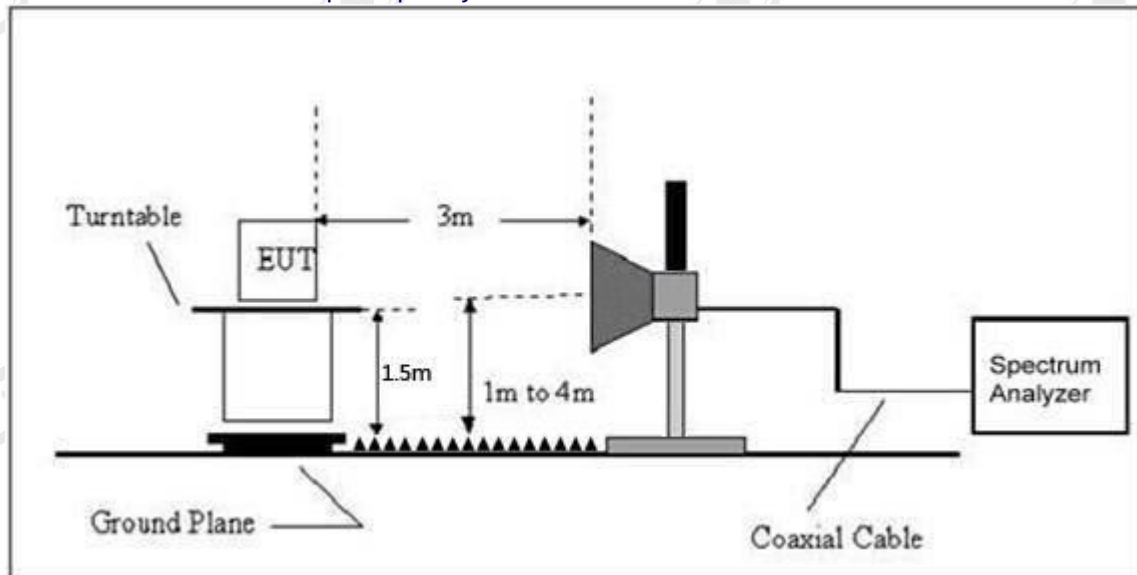

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Adapter 1:


Model: RY72A240300M2

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V		

No.1 ADAPTER:

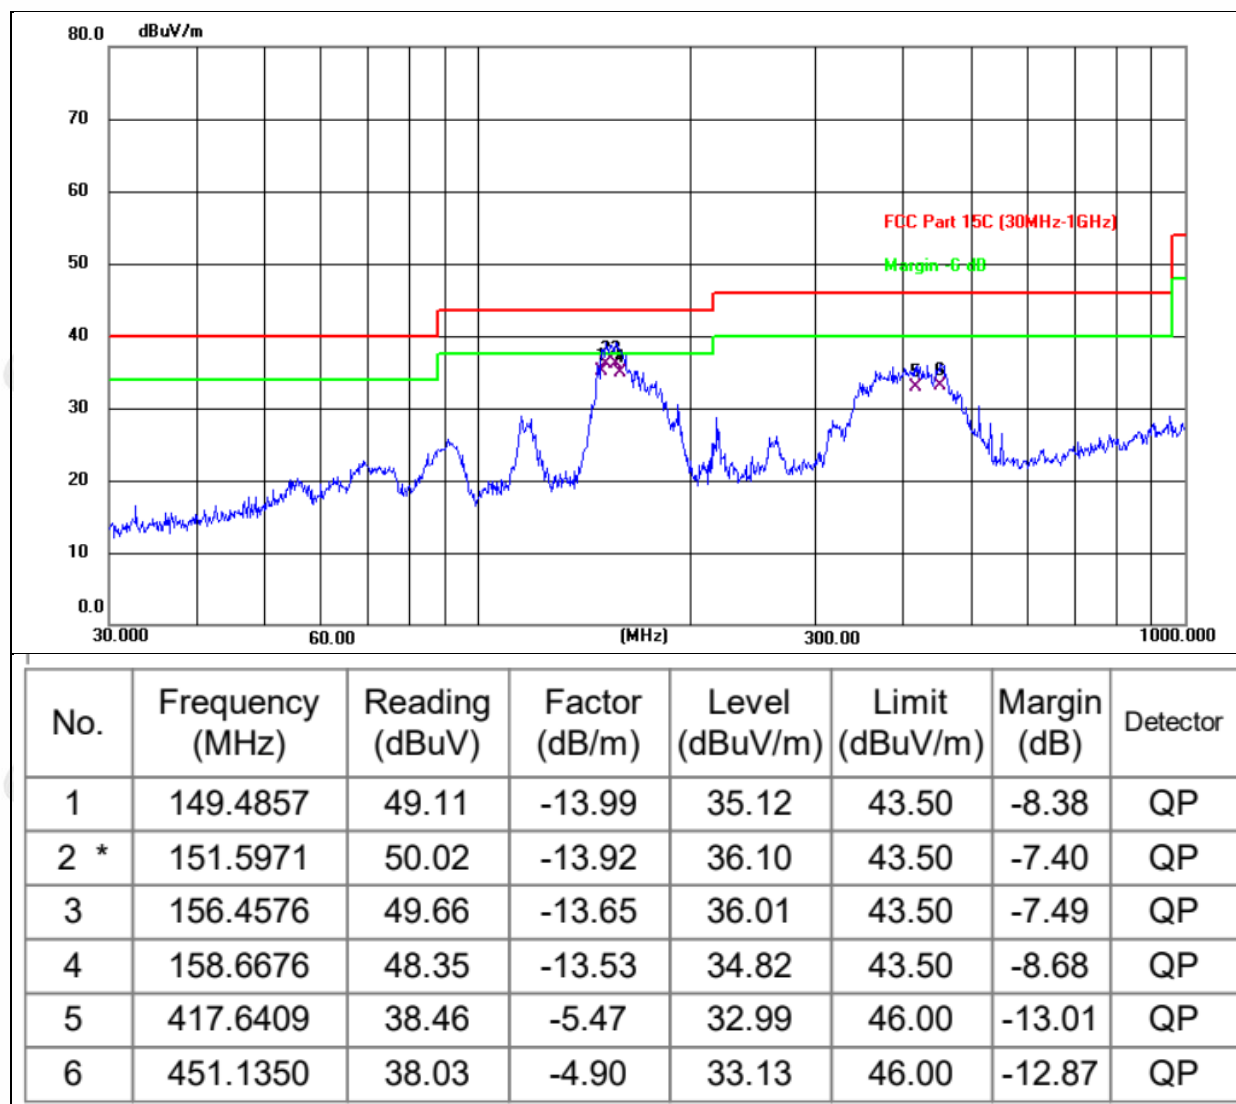

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V		

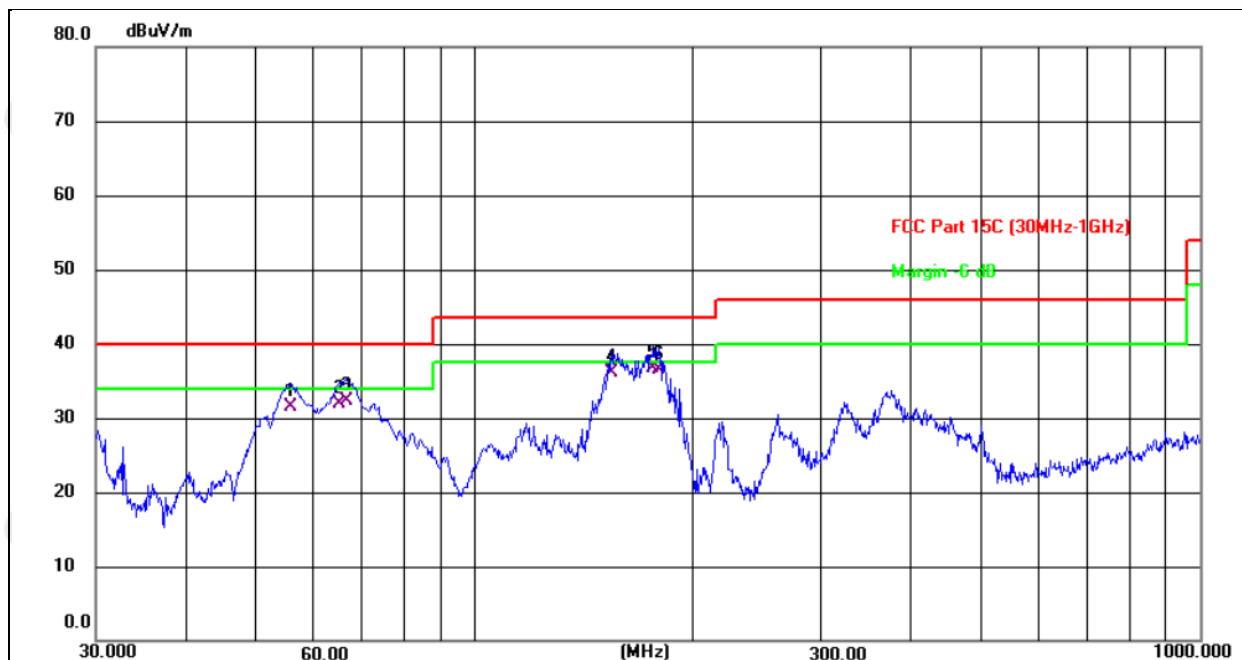

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.8046	40.97	-9.37	31.60	40.00	-8.40	QP
2	65.1144	43.47	-11.47	32.00	40.00	-8.00	QP
3	66.4990	44.21	-11.91	32.30	40.00	-7.70	QP
4	154.2785	49.86	-13.77	36.09	43.50	-7.41	QP
5 *	176.2684	49.33	-12.54	36.79	43.50	-6.71	QP
6	179.3863	48.94	-12.37	36.57	43.50	-6.93	QP




ZHONGHAN

Adapter 2:
Model: BZ065-240300-E2


Project No.: ZHT-231113037E-1

Page 24 of 92

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V		

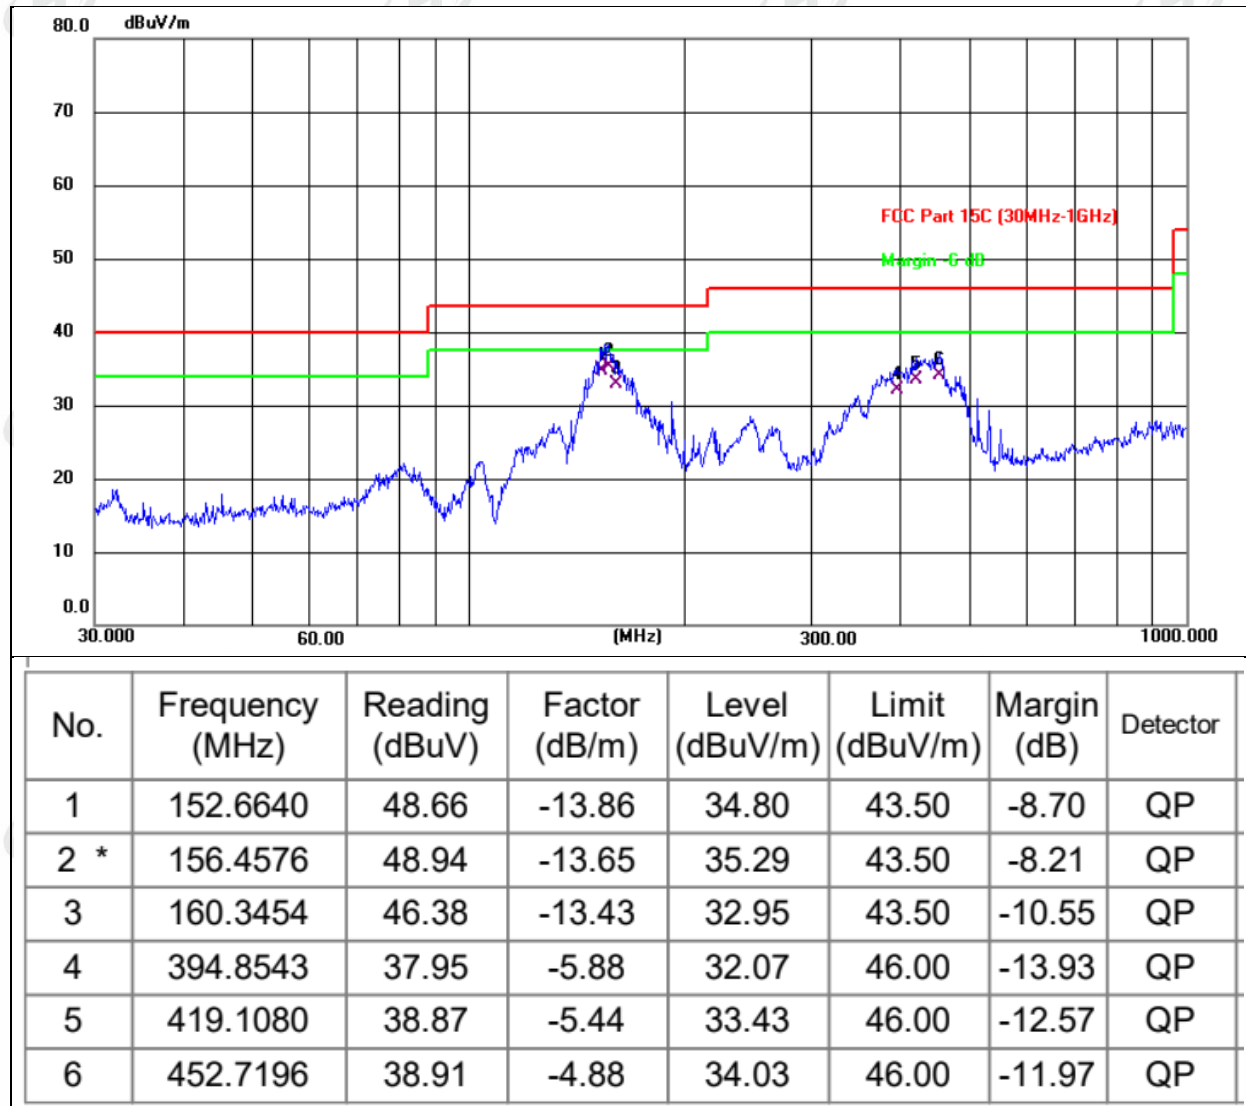

Temperature :	25.1℃	Relative Humidity :	50%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V		

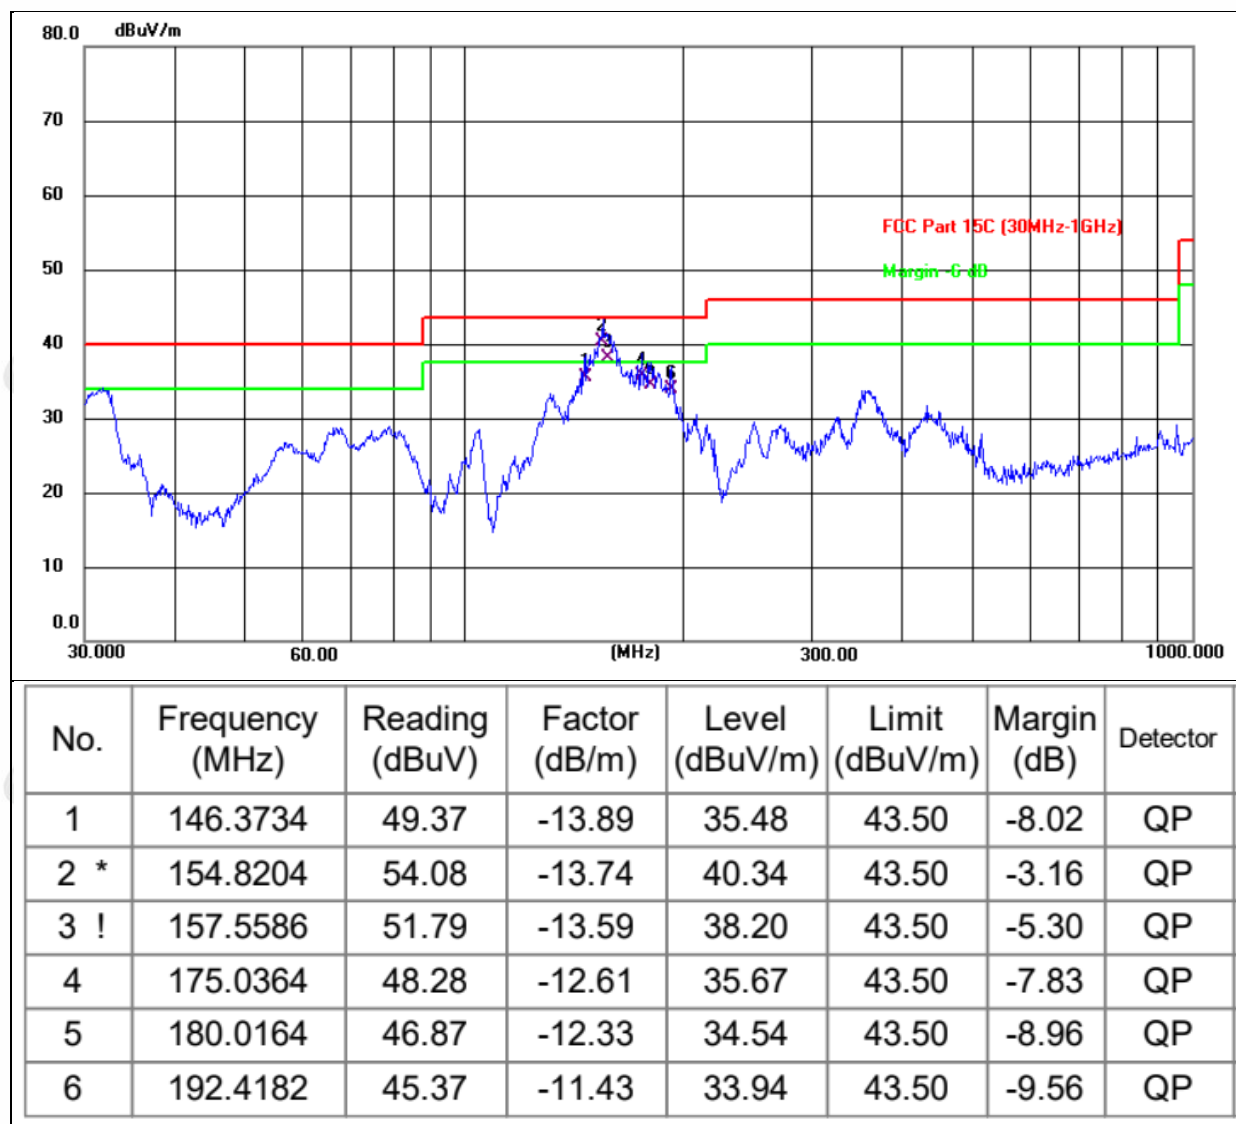

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11b mode (Low Channel:2412MHz).

1GHz~25GHz

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
802.11b									
Low Channel:2412MHz									
V	4824.00	57.54	30.55	5.77	24.66	57.42	74	-16.58	Pk
V	4824.00	42.49	30.55	5.77	24.66	42.37	54	-11.63	AV
H	4824.00	55.08	30.33	6.32	24.55	55.62	74	-18.38	Pk
H	4824.00	43.06	30.33	6.32	24.55	43.6	54	-10.4	AV
Middle Channel:2437MHz									
V	4874.00	59.09	30.55	5.77	24.66	58.97	74	-15.03	Pk
V	4874.00	41.46	30.55	5.77	24.66	41.34	54	-12.66	AV
H	4874.00	55.39	30.33	6.32	24.55	55.93	74	-18.07	Pk
H	4874.00	42.47	30.33	6.32	24.55	43.01	54	-10.99	AV
High Channel:2462MHz									
V	4924.00	55.38	30.55	5.77	24.66	55.26	74	-18.74	Pk
V	4924.00	41.56	30.55	5.77	24.66	41.44	54	-12.56	AV
H	4924.00	57.43	30.33	6.32	24.55	57.97	74	-16.03	Pk
H	4924.00	41.07	30.33	6.32	24.55	41.61	54	-12.39	AV
802.11g									
Low Channel:2412MHz									
V	4824.00	57.64	30.55	5.77	24.66	57.52	74	-16.48	Pk
V	4824.00	42.92	30.55	5.77	24.66	42.8	54	-11.2	AV
H	4824.00	59.44	30.33	6.32	24.55	59.98	74	-14.02	Pk
H	4824.00	44.79	30.33	6.32	24.55	45.33	54	-8.67	AV
Middle Channel:2437MHz									
V	4874.00	55.01	30.55	5.77	24.66	54.89	74	-19.11	Pk
V	4874.00	41.81	30.55	5.77	24.66	41.69	54	-12.31	AV
H	4874.00	59.06	30.33	6.32	24.55	59.6	74	-14.4	Pk
H	4874.00	41.89	30.33	6.32	24.55	42.43	54	-11.57	AV
High Channel:2462MHz									
V	4924.00	57.41	30.55	5.77	24.66	57.29	74	-16.71	Pk
V	4924.00	42.93	30.55	5.77	24.66	42.81	54	-11.19	AV
H	4924.00	57.92	30.33	6.32	24.55	58.46	74	-15.54	Pk
H	4924.00	42.49	30.33	6.32	24.55	43.03	54	-10.97	AV
802.11n 20									
Low Channel:2412MHz									
V	4824.00	59.9	30.55	5.77	24.66	59.78	74	-14.22	PK
V	4824.00	41.94	30.55	5.77	24.66	41.82	54	-12.18	
H	4824.00	58.32	30.33	6.32	24.55	58.86	74	-15.14	PK
H	4824.00	44.44	30.33	6.32	24.55	44.98	54	-9.02	
Middle Channel:2437MHz									
V	4874.00	59.44	30.55	5.77	24.66	59.32	74	-14.68	PK
V	4874.00	41.13	30.55	5.77	24.66	41.01	54	-12.99	
H	4874.00	56.22	30.33	6.32	24.55	56.76	74	-17.24	PK
	4874.00	42.93	30.33	6.32	24.55	43.47	54	-10.53	
High Channel:2462MHz									
V	4924.00	58.15	30.55	5.77	24.66	58.03	74	-15.97	PK
V	4924.00	41.58	30.55	5.77	24.66	41.46	54	-12.54	
H	4924.00	57.75	30.33	6.32	24.55	58.29	74	-15.71	PK
H	4924.00	41.76	30.33	6.32	24.55	42.3	54	-11.7	
802.11n 40									
Low Channel:2422MHz									
V	4844.00	56.46	30.55	5.77	24.66	56.34	74	-17.66	PK
V	4844.00	43.63	30.55	5.77	24.66	43.51	54	-10.49	



H	4844.00	59.16	30.33	6.32	24.55	59.7	74	-14.3	PK
H	4844.00	44.48	30.33	6.32	24.55	45.02	54	-8.98	
Middle Channel:2437MHz									
V	4874.00	56.42	30.55	5.77	24.66	56.3	74	-17.7	PK
V	4874.00	41.09	30.55	5.77	24.66	40.97	54	-13.03	
H	4874.00	57.59	30.33	6.32	24.55	58.13	74	-15.87	PK
H	4874.00	41.28	30.33	6.32	24.55	41.82	54	-12.18	
High Channel:2452MHz									
V	4904.00	56.89	30.55	5.77	24.66	56.77	74	-17.23	PK
V	4904.00	41.51	30.55	5.77	24.66	41.39	54	-12.61	
H	4904.00	57.66	30.33	6.32	24.55	58.2	74	-15.8	PK
H	4904.00	41.83	30.33	6.32	24.55	42.37	54	-11.63	

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

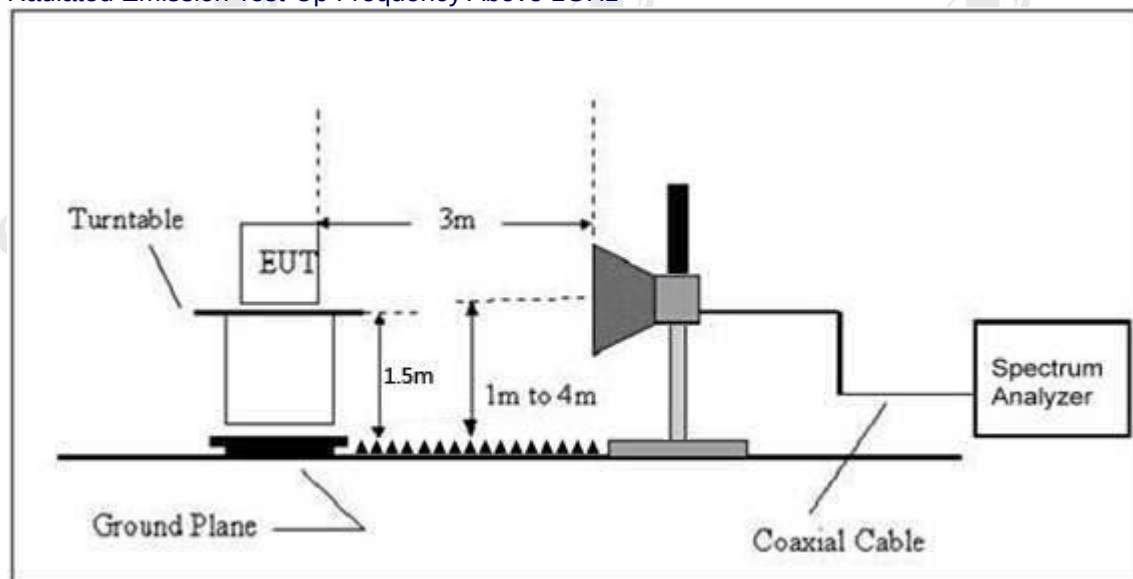

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Margi n (dB)	Detec tor Type	Result
802.11b	LowChannel 2412MHz										
	H	2390.00	60.20	30.22	4.85	23.98	58.81	74.00	-15.19	PK	PASS
	H	2390.00	47.80	30.22	4.85	23.98	46.41	54.00	-7.59	AV	PASS
	H	2400.00	62.47	30.22	4.85	23.98	61.08	74.00	-12.92	PK	PASS
	H	2400.00	48.77	30.22	4.85	23.98	47.38	54.00	-6.62	AV	PASS
	V	2390.00	60.91	30.22	4.85	23.98	59.52	74.00	-14.48	PK	PASS
	V	2390.00	48.62	30.22	4.85	23.98	47.23	54.00	-6.77	AV	PASS
	V	2400.00	59.46	30.22	4.85	23.98	58.07	74.00	-15.93	PK	PASS
	V	2400.00	47.04	30.22	4.85	23.98	45.65	54.00	-8.35	AV	PASS
	High Channel 2462MHz										
	H	2483.50	47.04	30.22	4.85	23.98	45.65	54.00	-8.35	AV	PASS
	H	2483.50	61.07	30.22	4.85	23.98	59.68	74.00	-14.32	PK	PASS
	H	2500.00	46.37	30.22	4.85	23.98	44.98	54.00	-9.02	AV	PASS
	H	2500.00	60.63	30.22	4.85	23.98	59.24	74.00	-14.76	PK	PASS
	V	2483.50	46.83	30.22	4.85	23.98	45.44	54.00	-8.56	AV	PASS
	V	2483.50	62.09	30.22	4.85	23.98	60.70	74.00	-13.30	PK	PASS
	V	2500.00	47.93	30.22	4.85	23.98	46.54	54.00	-7.46	AV	PASS
	V	2500.00	47.04	30.22	4.85	23.98	45.65	54.00	-8.35	AV	PASS
802.11g	Low Channel 2412MHz										
	H	2390.00	47.50	30.22	4.85	23.98	46.11	54.00	-7.89	PK	PASS
	H	2390.00	61.83	30.22	4.85	23.98	60.44	74.00	-13.56	AV	PASS
	H	2400.00	47.99	30.22	4.85	23.98	46.60	54.00	-7.40	PK	PASS
	H	2400.00	60.71	30.22	4.85	23.98	59.32	74.00	-14.68	AV	PASS
	V	2390.00	48.89	30.22	4.85	23.98	47.50	54.00	-6.50	PK	PASS
	V	2390.00	60.05	30.22	4.85	23.98	58.66	74.00	-15.34	AV	PASS
	V	2400.00	46.78	30.22	4.85	23.98	45.39	54.00	-8.61	PK	PASS
	V	2400.00	47.50	30.22	4.85	23.98	46.11	54.00	-7.89	AV	PASS
	High Channel 2462MHz										
	H	2483.50	59.45	30.22	4.85	23.98	58.06	74.00	-15.94	PK	PASS
	H	2483.50	46.17	30.22	4.85	23.98	44.78	54.00	-9.22	AV	PASS
	H	2500.00	61.18	30.22	4.85	23.98	59.79	74.00	-14.21	PK	PASS
	H	2500.00	47.52	30.22	4.85	23.98	46.13	54.00	-7.87	AV	PASS
	V	2483.50	60.60	30.22	4.85	23.98	59.21	74.00	-14.79	PK	PASS
	V	2483.50	47.63	30.22	4.85	23.98	46.24	54.00	-7.76	AV	PASS
	V	2500.00	60.09	30.22	4.85	23.98	58.70	74.00	-15.30	PK	PASS
	V	2500.00	48.87	30.22	4.85	23.98	47.48	54.00	-6.52	AV	PASS
802.11n2 0	Low Channel 2412MHz										
	H	2390.00	59.17	30.22	4.85	23.98	57.78	74.00	-16.22	PK	PASS
	H	2390.00	47.35	30.22	4.85	23.98	45.96	54.00	-8.04	AV	PASS
	H	2400.00	59.84	30.22	4.85	23.98	58.45	74.00	-15.55	PK	PASS
	H	2400.00	46.95	30.22	4.85	23.98	45.56	54.00	-8.44	AV	PASS
	V	2390.00	59.88	30.22	4.85	23.98	58.49	74.00	-15.51	PK	PASS
	V	2390.00	48.26	30.22	4.85	23.98	46.87	54.00	-7.13	AV	PASS
	V	2400.00	62.96	30.22	4.85	23.98	61.57	74.00	-12.43	PK	PASS
	V	2400.00	48.78	30.22	4.85	23.98	47.39	54.00	-6.61	AV	PASS
	High Channel 2462MHz										
	H	2483.50	62.21	30.22	4.85	23.98	60.82	74.00	-13.18	PK	PASS
	H	2483.50	47.19	30.22	4.85	23.98	45.80	54.00	-8.20	AV	PASS
	H	2500.00	61.59	30.22	4.85	23.98	60.20	74.00	-13.80	PK	PASS
	H	2500.00	46.67	30.22	4.85	23.98	45.28	54.00	-8.72	AV	PASS
	V	2483.50	60.92	30.22	4.85	23.98	59.53	74.00	-14.47	PK	PASS
	V	2483.50	46.42	30.22	4.85	23.98	45.03	54.00	-8.97	AV	PASS





802.11n 40	V	2500.00	62.95	30.22	4.85	23.98	61.56	74.00	-12.44	PK	PASS
	V	2500.00	46.77	30.22	4.85	23.98	45.38	54.00	-8.62	AV	PASS
	Low Channel 2422MHz										
	H	2390.00	61.63	30.22	4.85	23.98	60.24	74.00	-13.76	PK	PASS
	H	2390.00	48.88	30.22	4.85	23.98	47.49	54.00	-6.51	AV	PASS
	H	2400.00	59.33	30.22	4.85	23.98	57.94	74.00	-16.06	PK	PASS
	H	2400.00	48.05	30.22	4.85	23.98	46.66	54.00	-7.34	AV	PASS
	V	2390.00	59.78	30.22	4.85	23.98	58.39	74.00	-15.61	PK	PASS
	V	2390.00	47.69	30.22	4.85	23.98	46.30	54.00	-7.70	AV	PASS
	V	2400.00	61.19	30.22	4.85	23.98	59.80	74.00	-14.20	PK	PASS
	V	2400.00	47.88	30.22	4.85	23.98	46.49	54.00	-7.51	AV	PASS
	High Channel 2452MHz										
	H	2483.50	60.40	30.22	4.85	23.98	59.01	74.00	-14.99	PK	PASS
	H	2483.50	48.21	30.22	4.85	23.98	46.82	54.00	-7.18	AV	PASS
	H	2500.00	59.95	30.22	4.85	23.98	58.56	74.00	-15.44	PK	PASS
	H	2500.00	46.61	30.22	4.85	23.98	45.22	54.00	-8.78	AV	PASS
	V	2483.50	60.56	30.22	4.85	23.98	59.17	74.00	-14.83	PK	PASS
	V	2483.50	47.85	30.22	4.85	23.98	46.46	54.00	-7.54	AV	PASS
	V	2500.00	60.94	30.22	4.85	23.98	59.55	74.00	-14.45	PK	PASS
	V	2500.00	46.07	30.22	4.85	23.98	44.68	54.00	-9.32	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

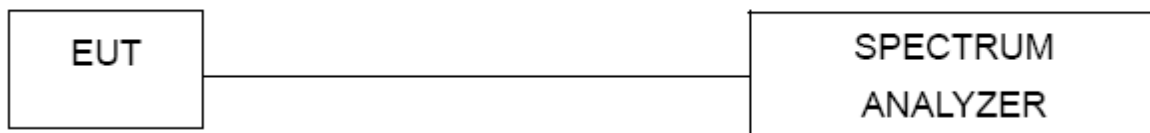

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



ZHONGHAN

6.6 TEST RESULT

Project No.: ZHT-231113037E-1
Page 33 of 92

Temperature :	25.9℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	AC 120V

Please refer to APPENDIX WIFI

7. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

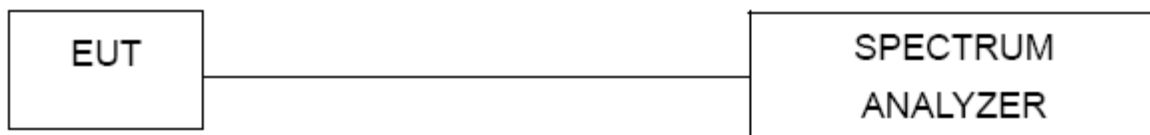

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Temperature :	25.8℃	Relative Humidity :	52%
Pressure :	101kPa	Test Voltage :	AC 120V
Test Mode :	TX Mode		

Please refer to APPENDIX WIFI

8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULT

Temperature :	25.3℃	Relative Humidity :	55%
Pressure :	101kPa	Test Voltage :	AC 120V

Please refer to APPENDIX WIFI

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS

Please refer to APPENDIX WIFI



10. ANTENNA REQUIREMENT



Standard requirement:	FCC Part15 C Section 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is PCB antenna, the best case gain of the antenna is 2.54dBi, reference to the appendix II for details	



11. APPENDIX WIFI



11.1. DUTY CYCLE


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.96	0	0.08
NVNT	b	2437	Ant1	98.96	0	0.08
NVNT	b	2462	Ant1	98.96	0	0.08
NVNT	g	2412	Ant1	94.06	0.27	0.49
NVNT	g	2437	Ant1	94.09	0.26	0.48
NVNT	g	2462	Ant1	94.06	0.27	0.49
NVNT	n20	2412	Ant1	93.66	0.28	0.52
NVNT	n20	2437	Ant1	93.66	0.28	0.52
NVNT	n20	2462	Ant1	93.66	0.28	0.52

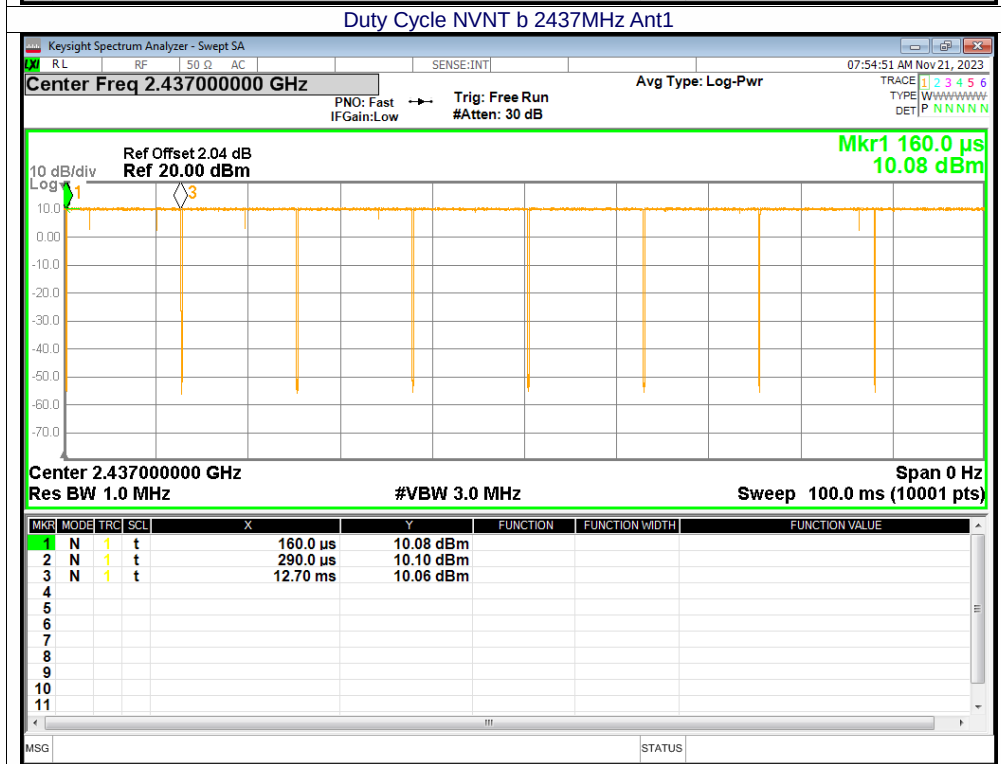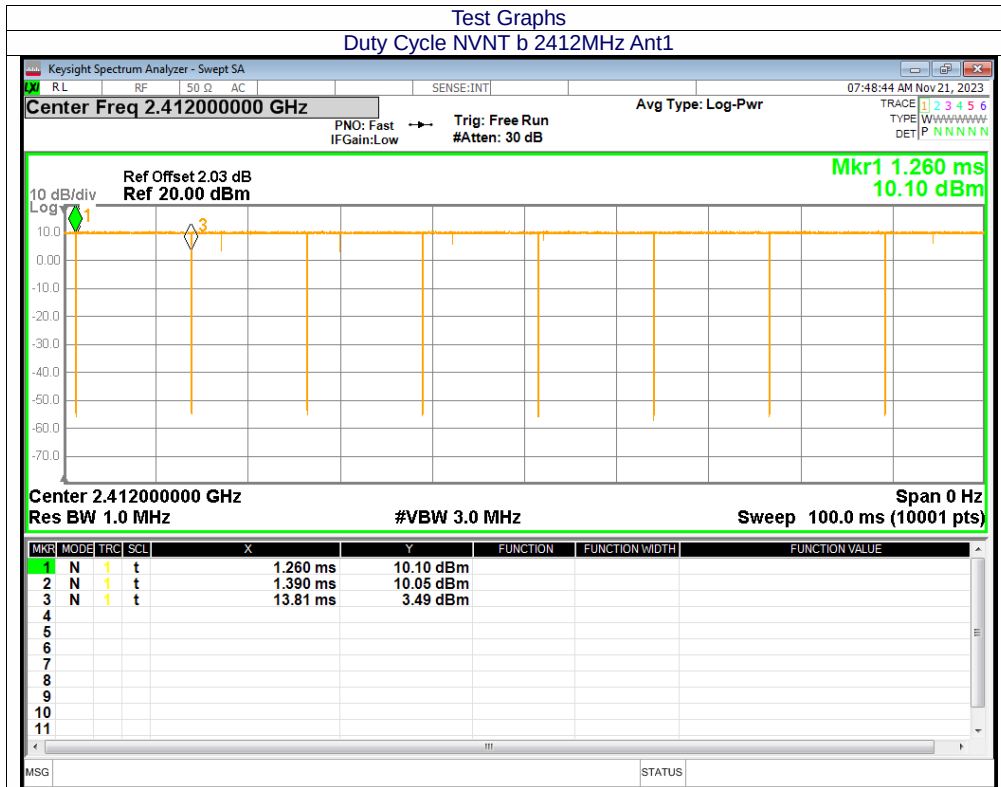

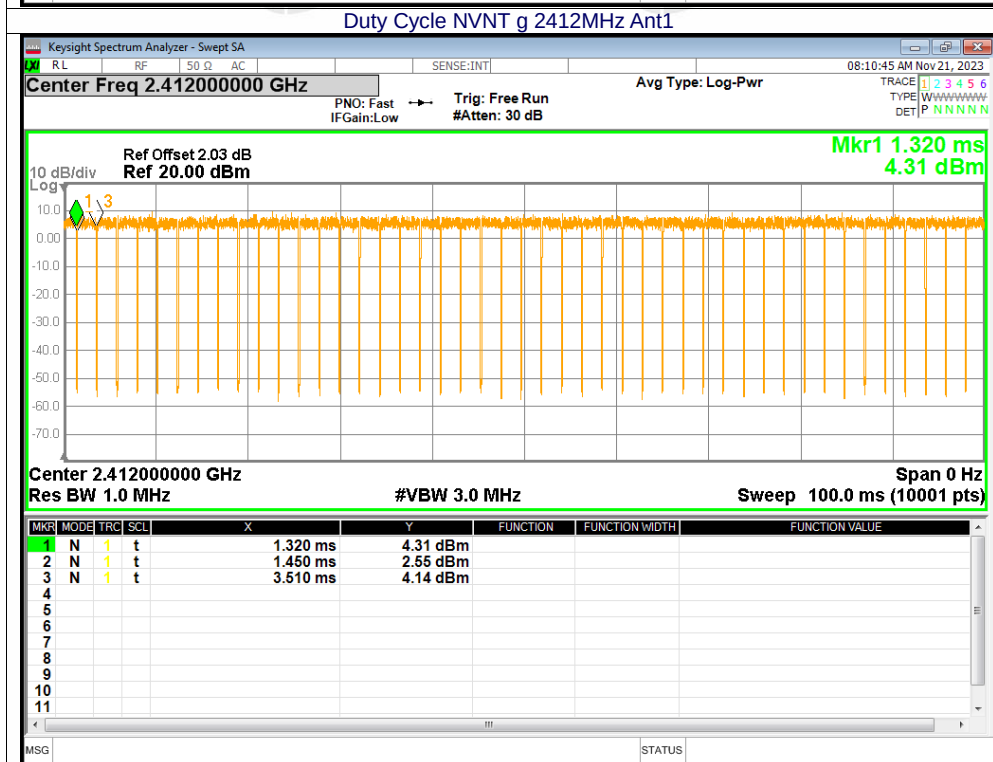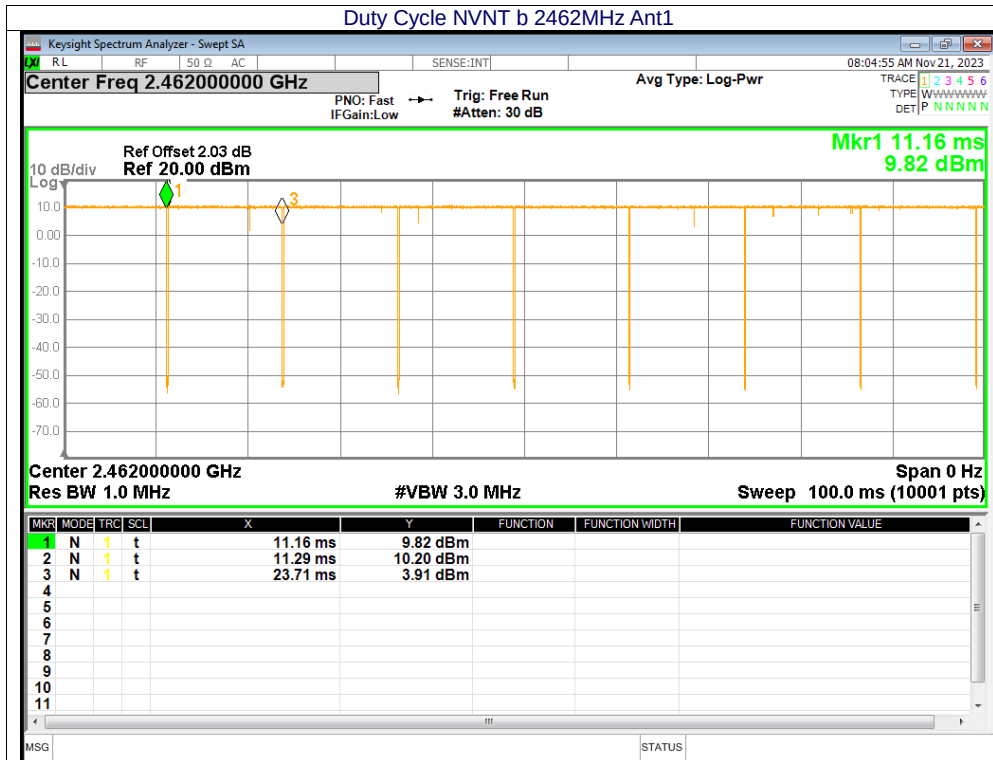

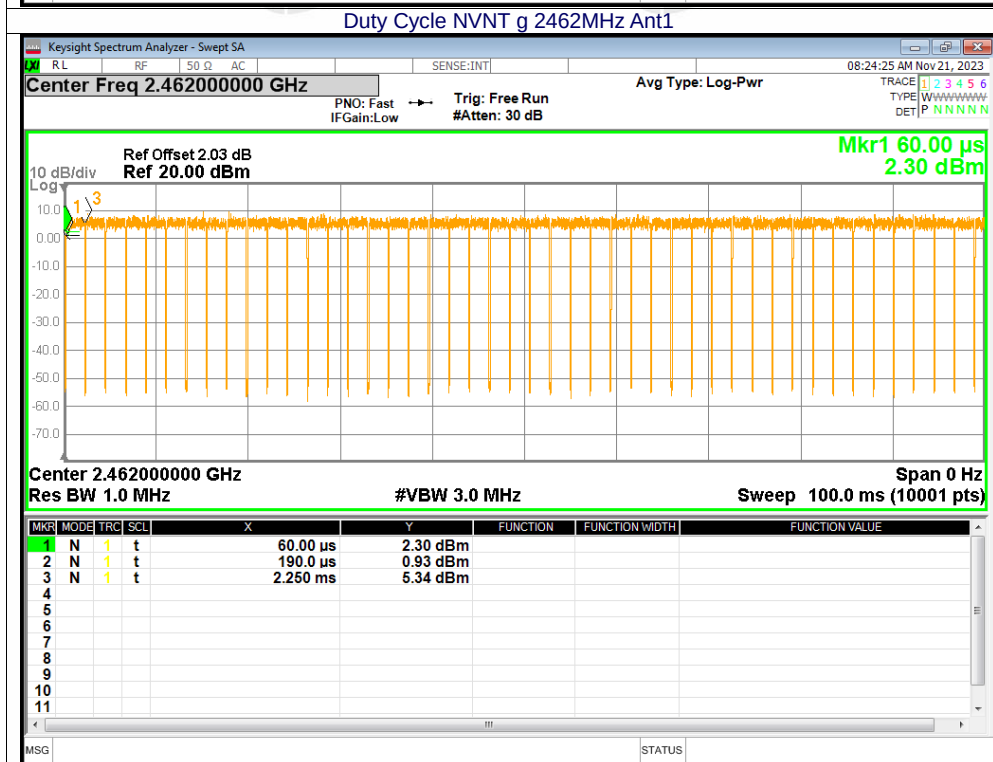
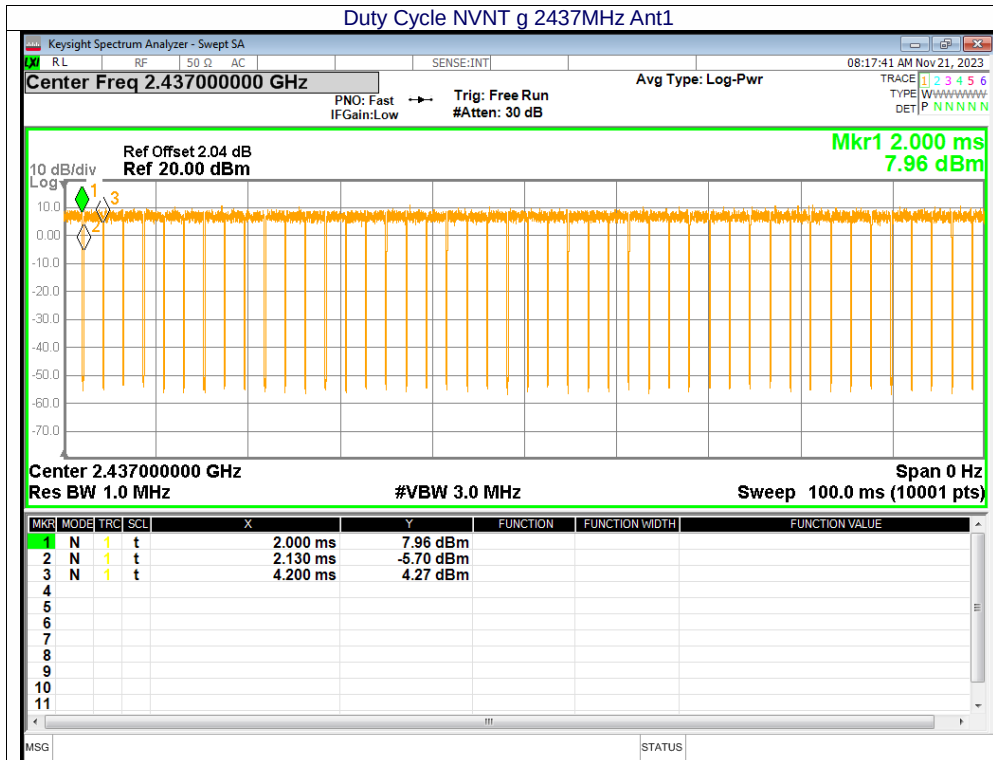


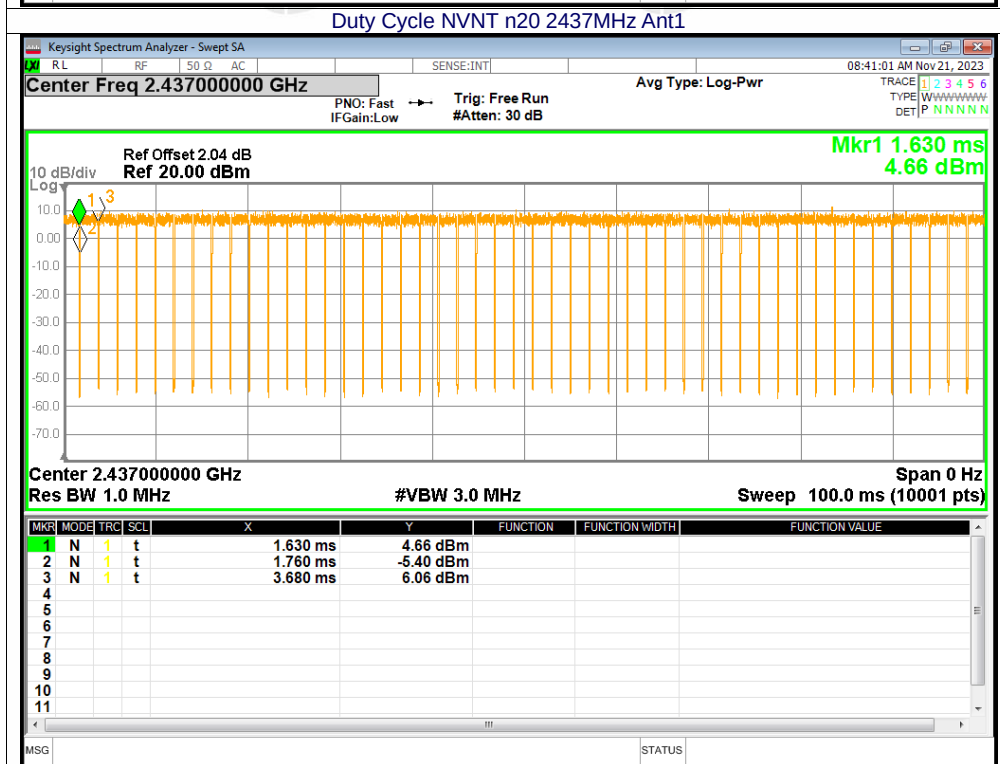
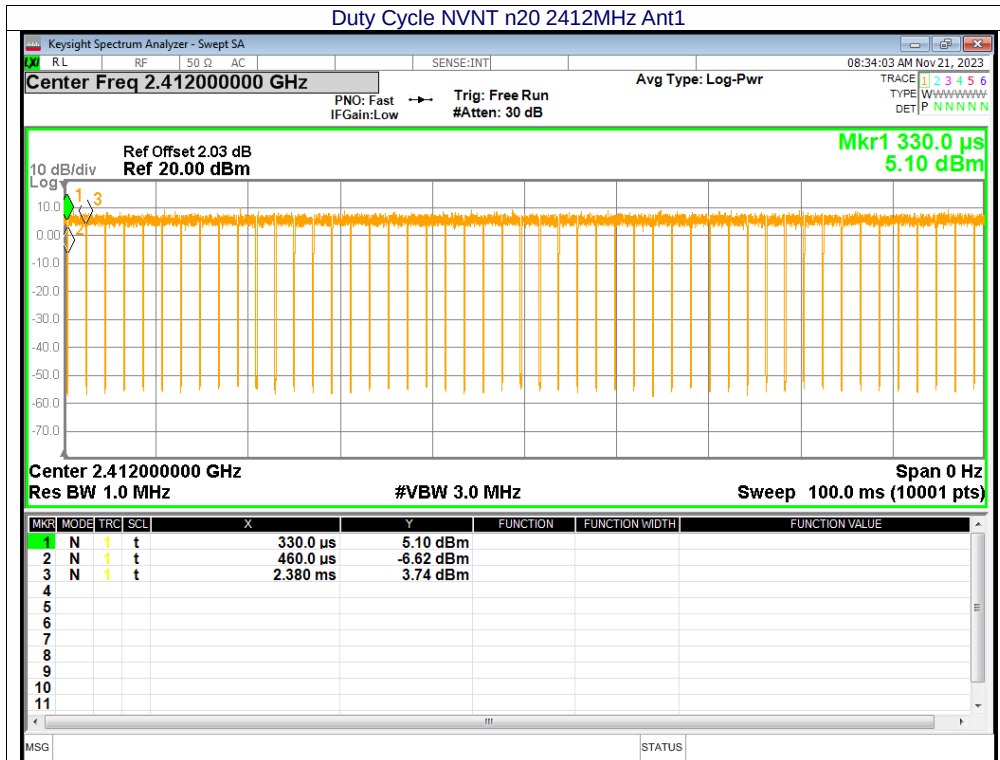



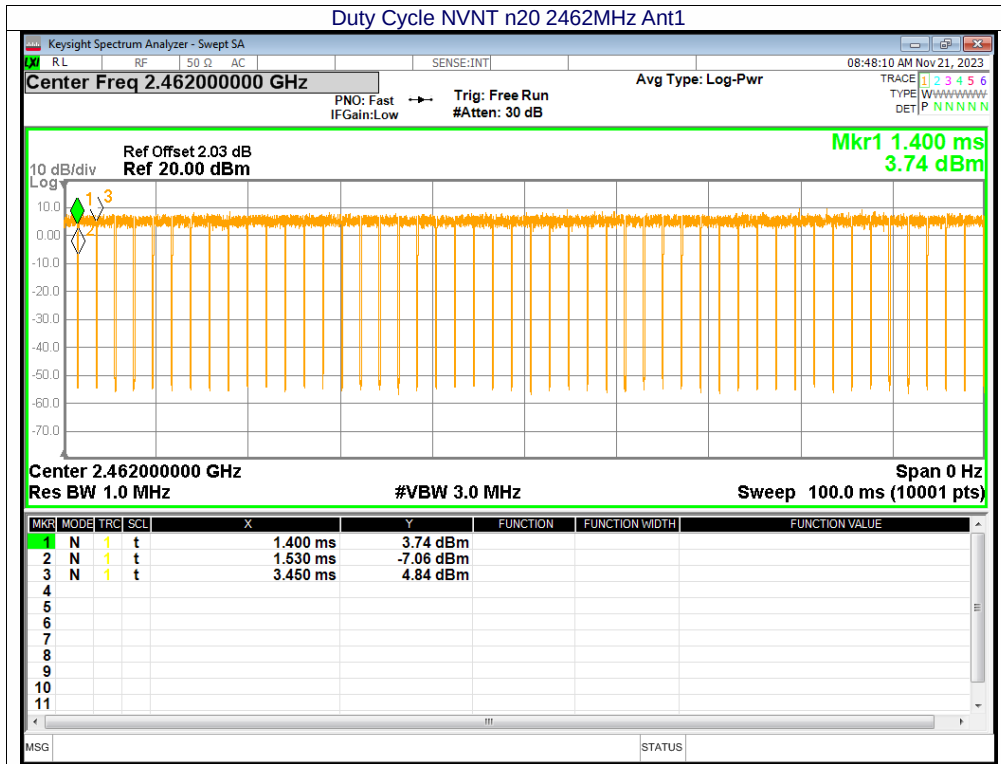




11.2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.87	0	14.87	30	Pass
NVNT	b	2437	Ant1	15.13	0	15.13	30	Pass
NVNT	b	2462	Ant1	15.06	0	15.06	30	Pass
NVNT	g	2412	Ant1	12.79	0.27	13.06	30	Pass
NVNT	g	2437	Ant1	14.08	0.26	14.34	30	Pass
NVNT	g	2462	Ant1	12.63	0.27	12.9	30	Pass
NVNT	n20	2412	Ant1	12.97	0.28	13.25	30	Pass
NVNT	n20	2437	Ant1	14.18	0.28	14.46	30	Pass
NVNT	n20	2462	Ant1	12.62	0.28	12.9	30	Pass

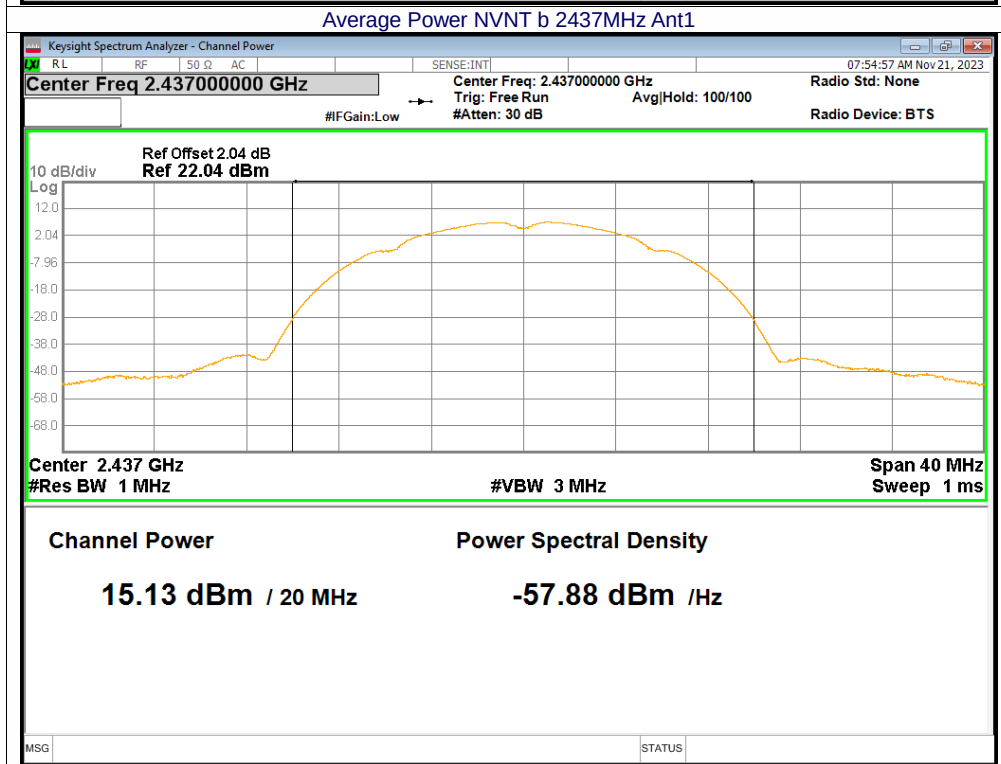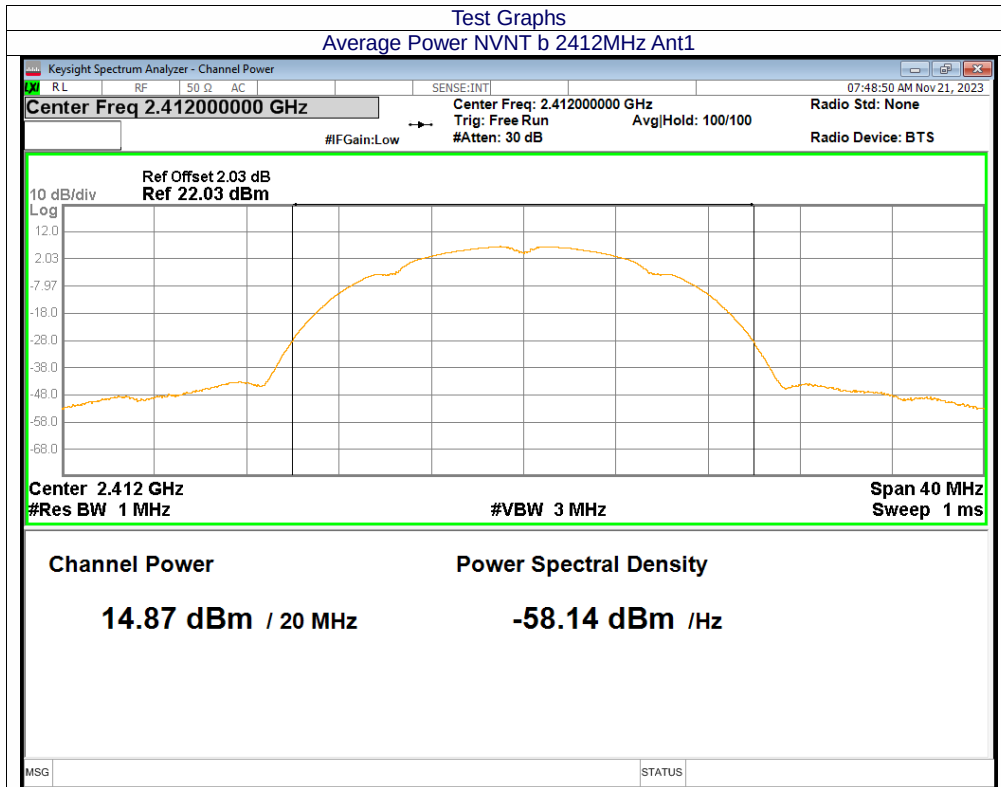

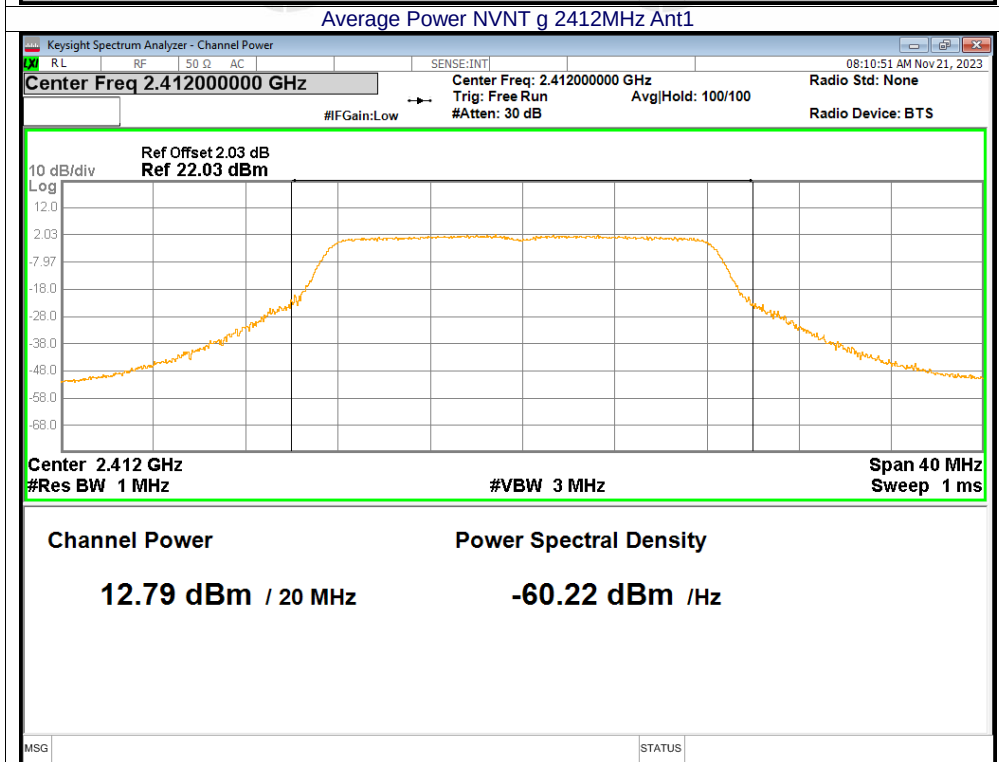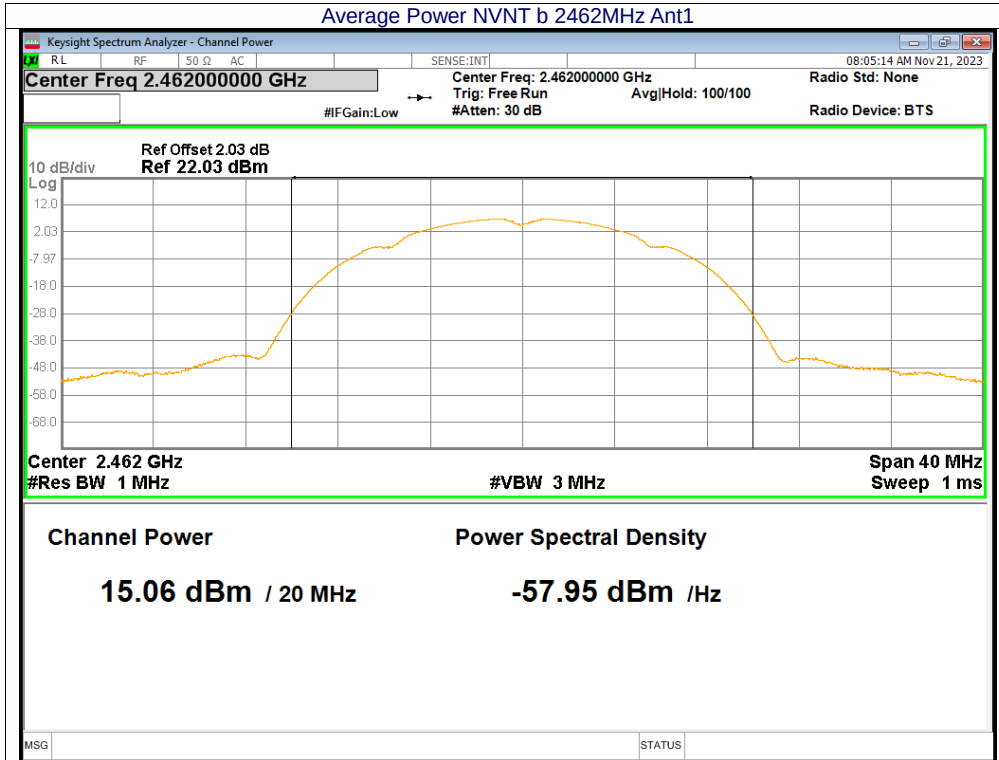

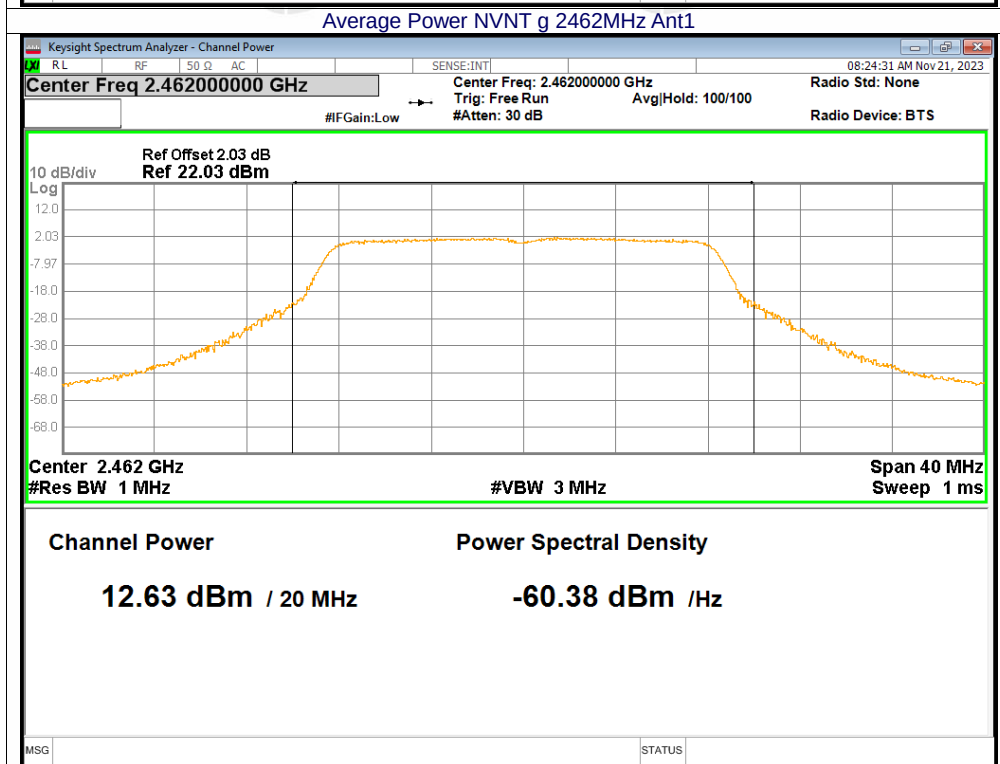
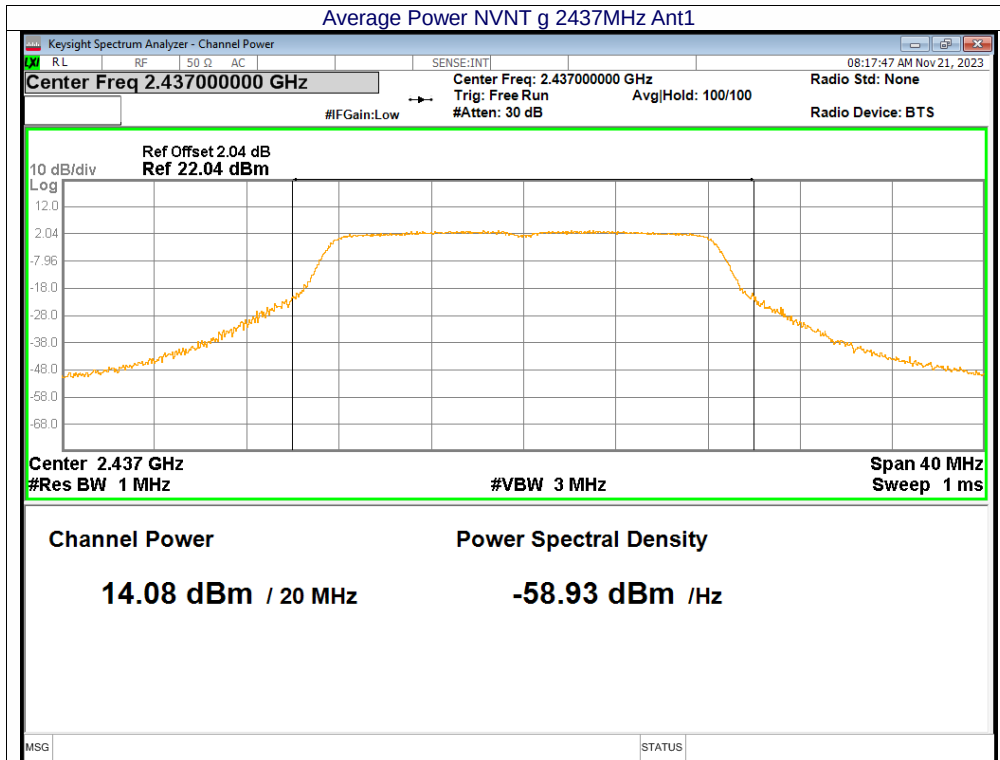


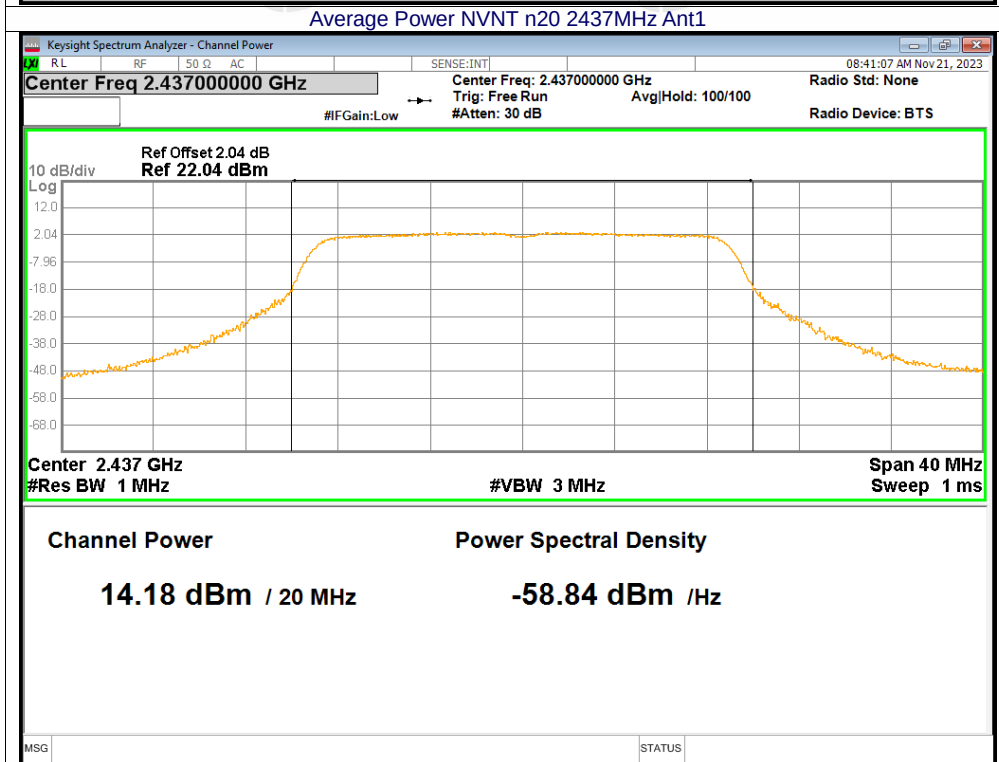
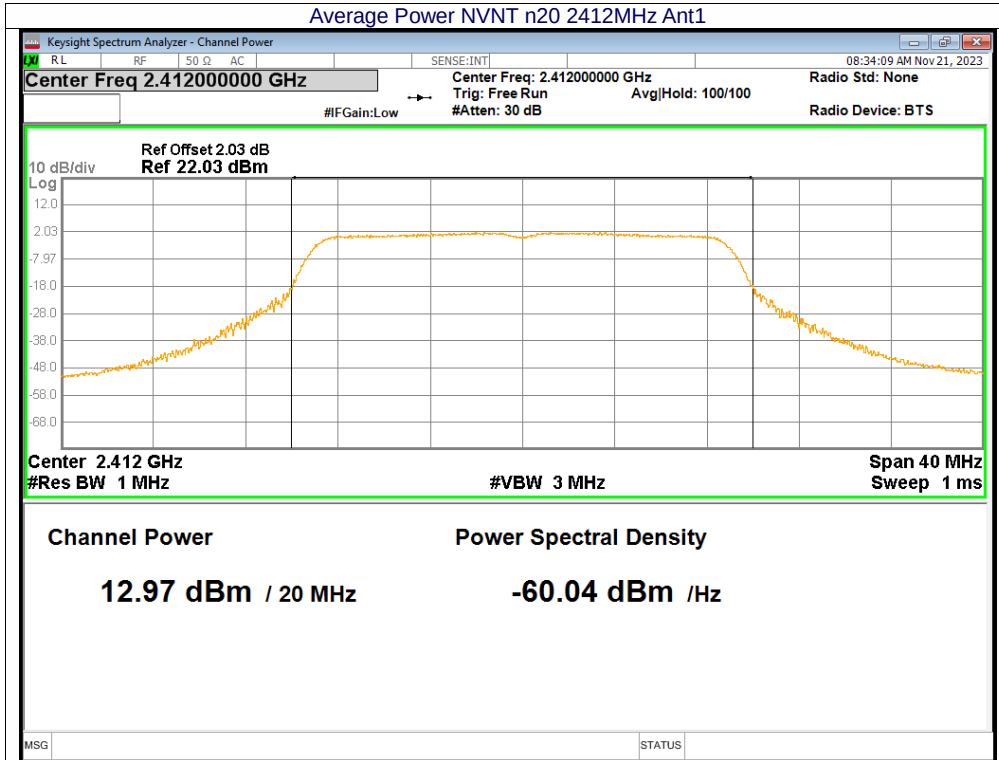



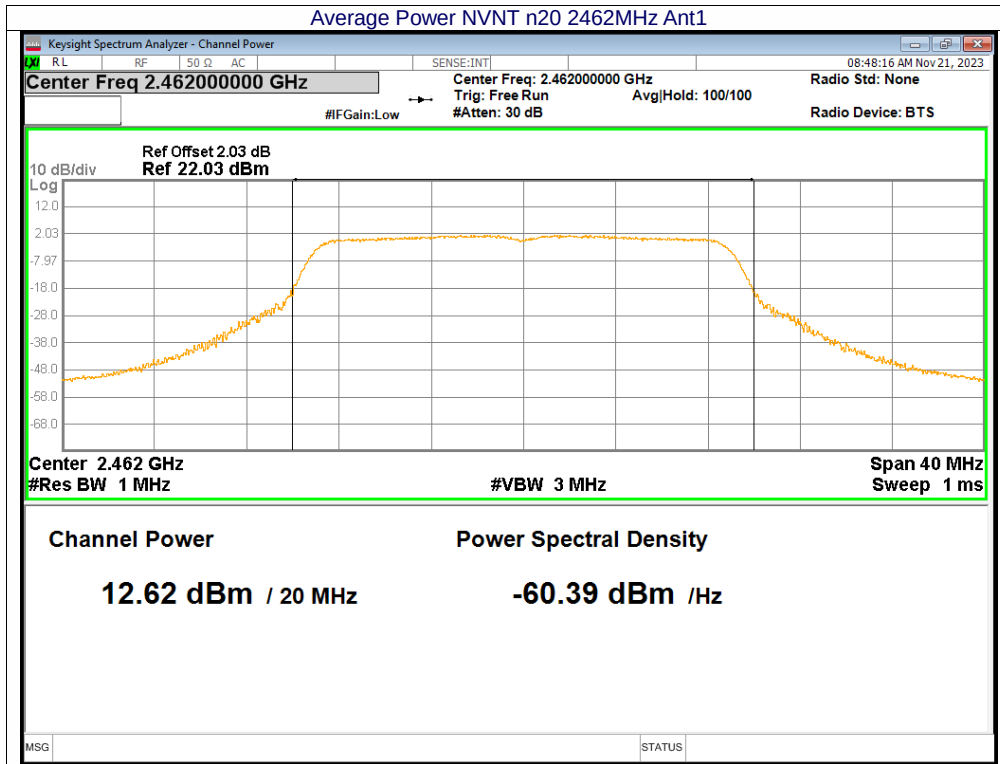


11.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	16.31	0	16.31	30	Pass
NVNT	b	2437	Ant1	16.56	0	16.56	30	Pass
NVNT	b	2462	Ant1	16.55	0	16.55	30	Pass
NVNT	g	2412	Ant1	17.54	0.27	17.81	30	Pass
NVNT	g	2437	Ant1	18.77	0.26	19.03	30	Pass
NVNT	g	2462	Ant1	17.27	0.27	17.54	30	Pass
NVNT	n20	2412	Ant1	17.65	0.28	17.93	30	Pass
NVNT	n20	2437	Ant1	18.87	0.28	19.15	30	Pass
NVNT	n20	2462	Ant1	17.34	0.28	17.62	30	Pass

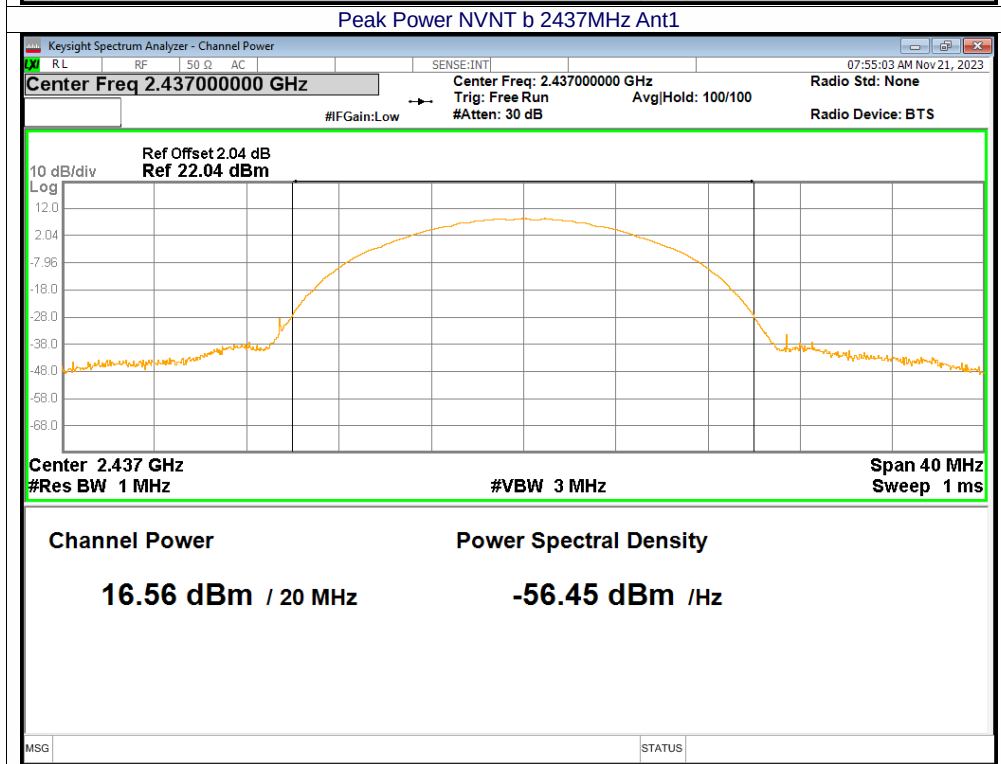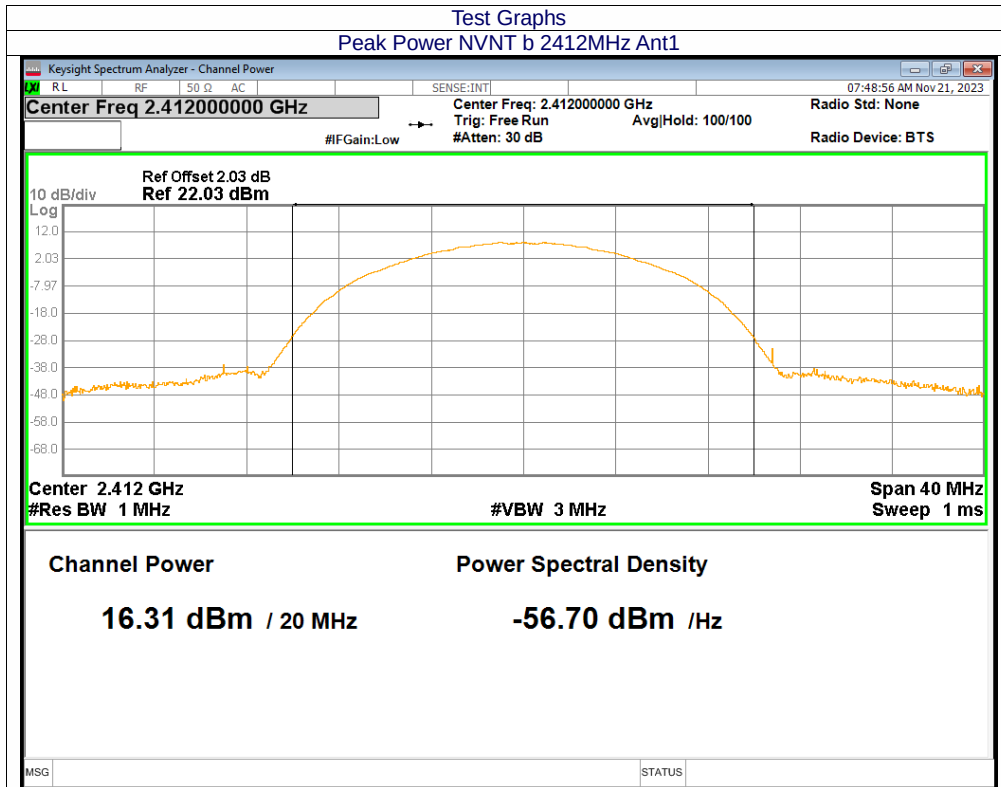

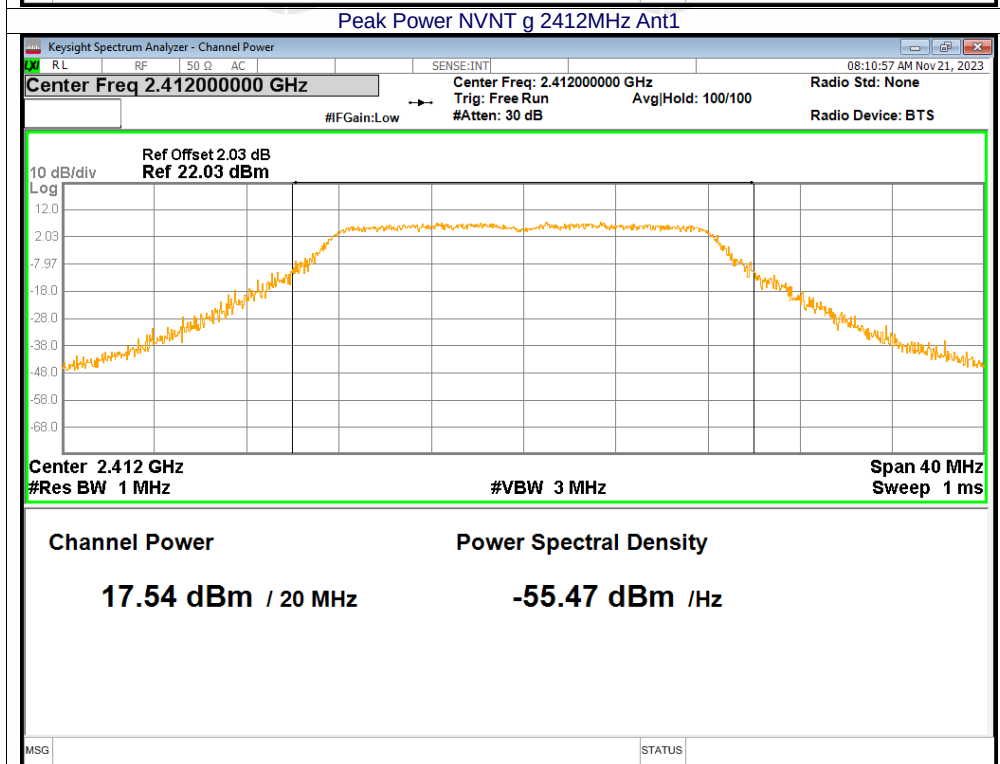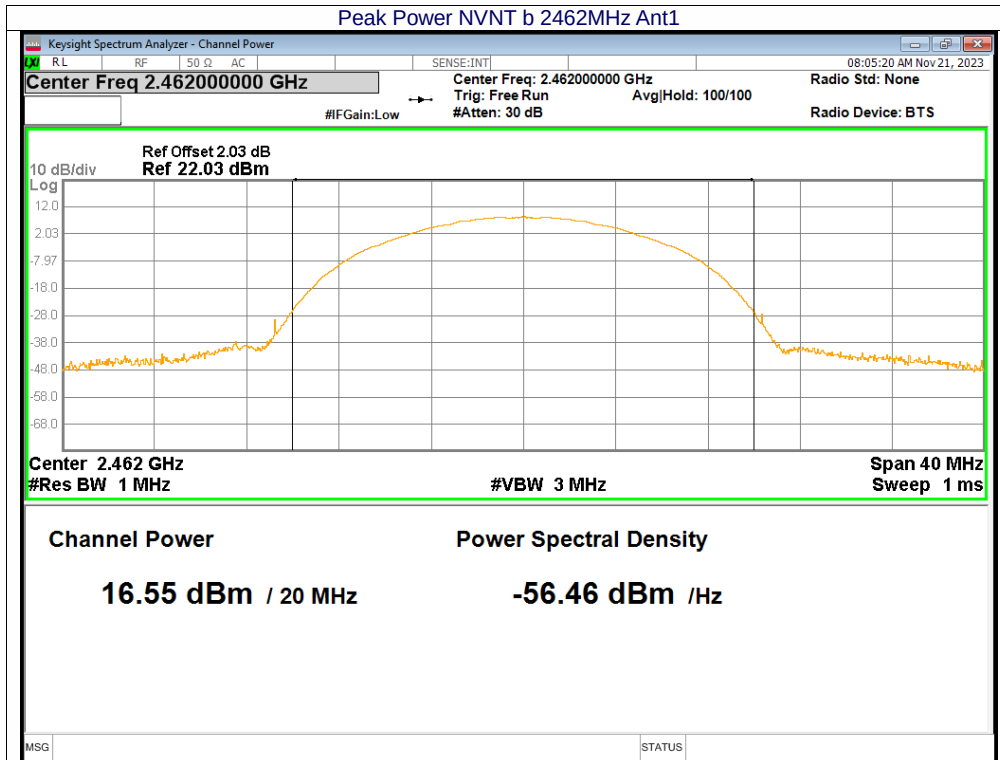


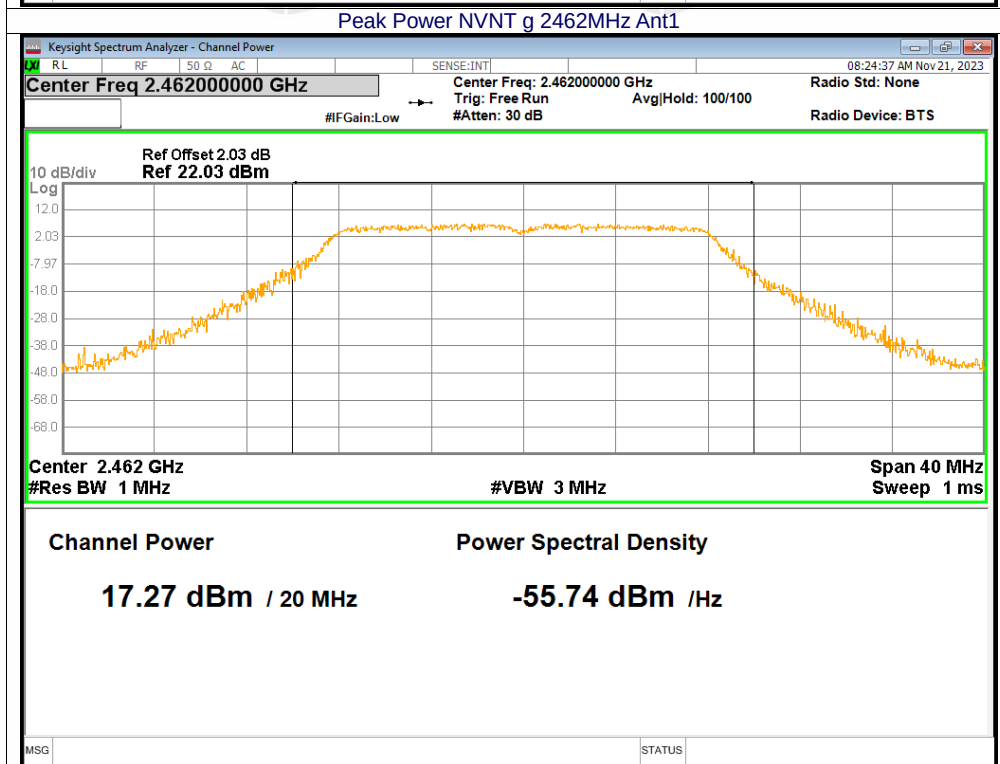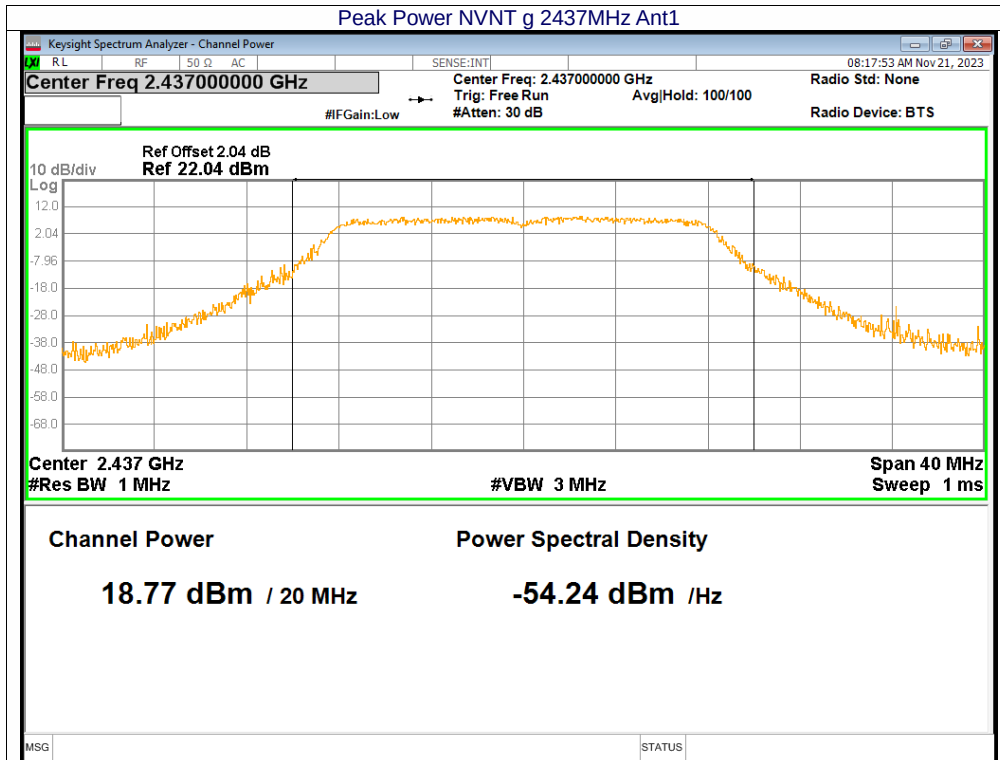


Peak Power NVNT n20 2412MHz Ant1

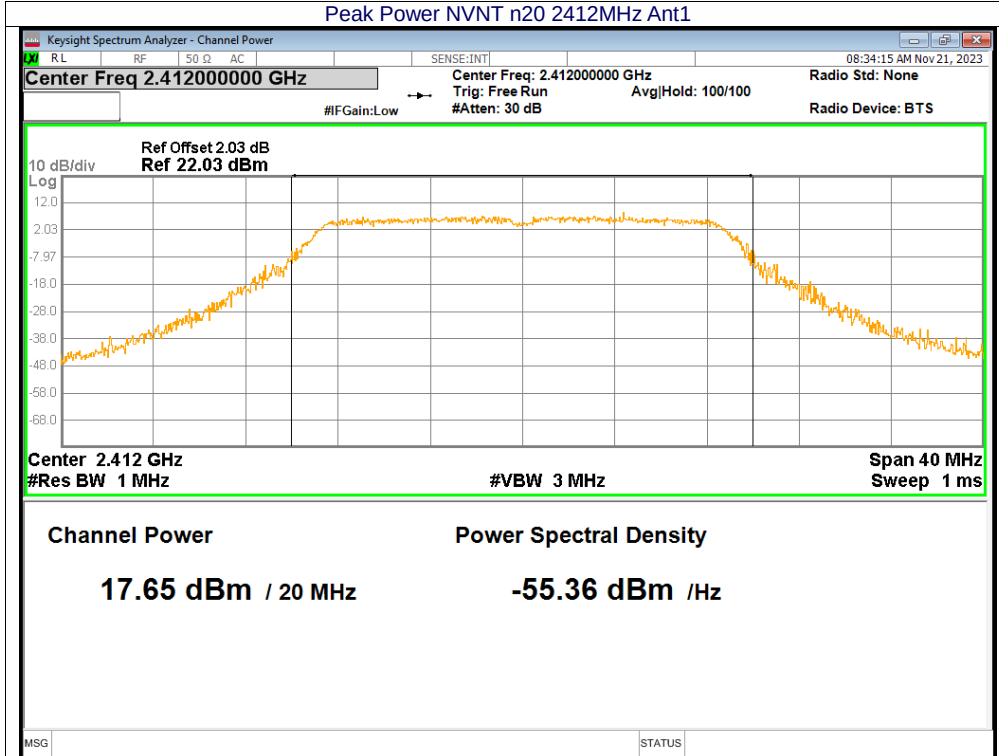

Peak Power NVNT n20 2437MHz Ant1


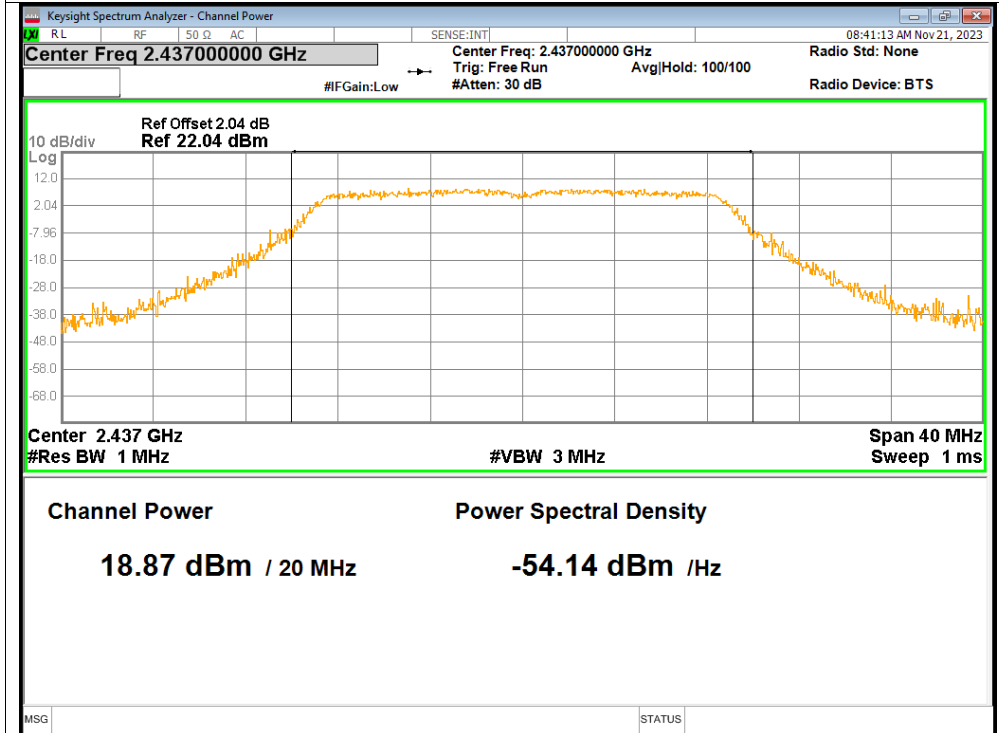


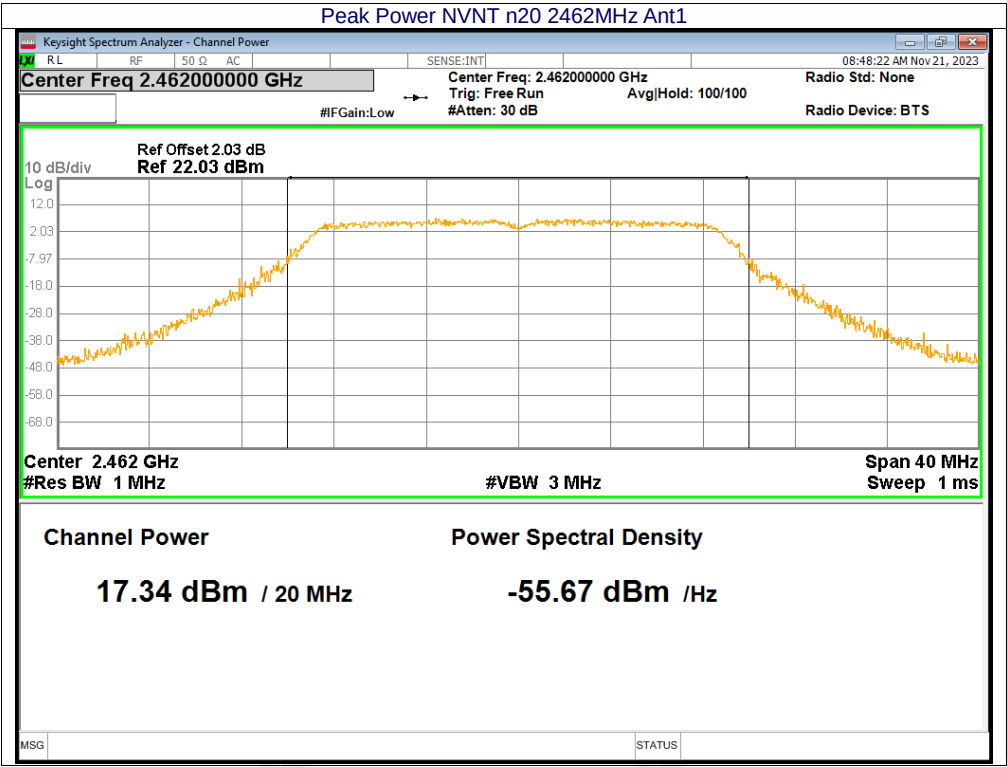




11.4. -6DB BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.036	0.5	Pass
NVNT	b	2437	Ant1	8.592	0.5	Pass
NVNT	b	2462	Ant1	8.574	0.5	Pass
NVNT	g	2412	Ant1	16.35	0.5	Pass
NVNT	g	2437	Ant1	16.314	0.5	Pass
NVNT	g	2462	Ant1	16.318	0.5	Pass
NVNT	n20	2412	Ant1	17.564	0.5	Pass
NVNT	n20	2437	Ant1	17.536	0.5	Pass
NVNT	n20	2462	Ant1	17.592	0.5	Pass

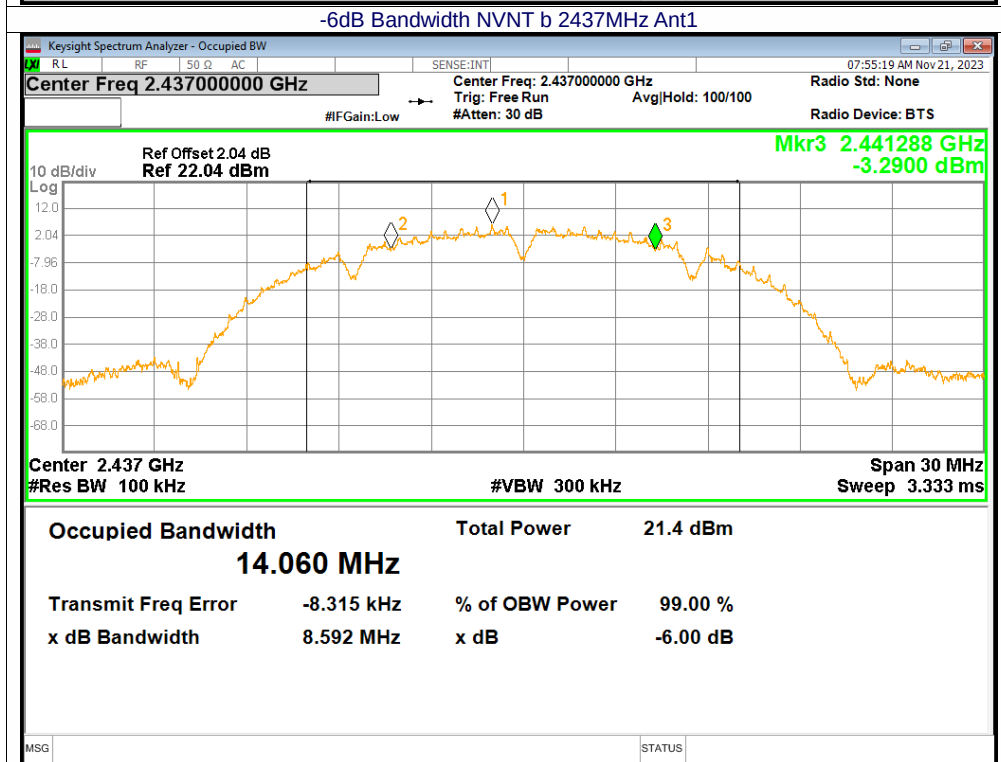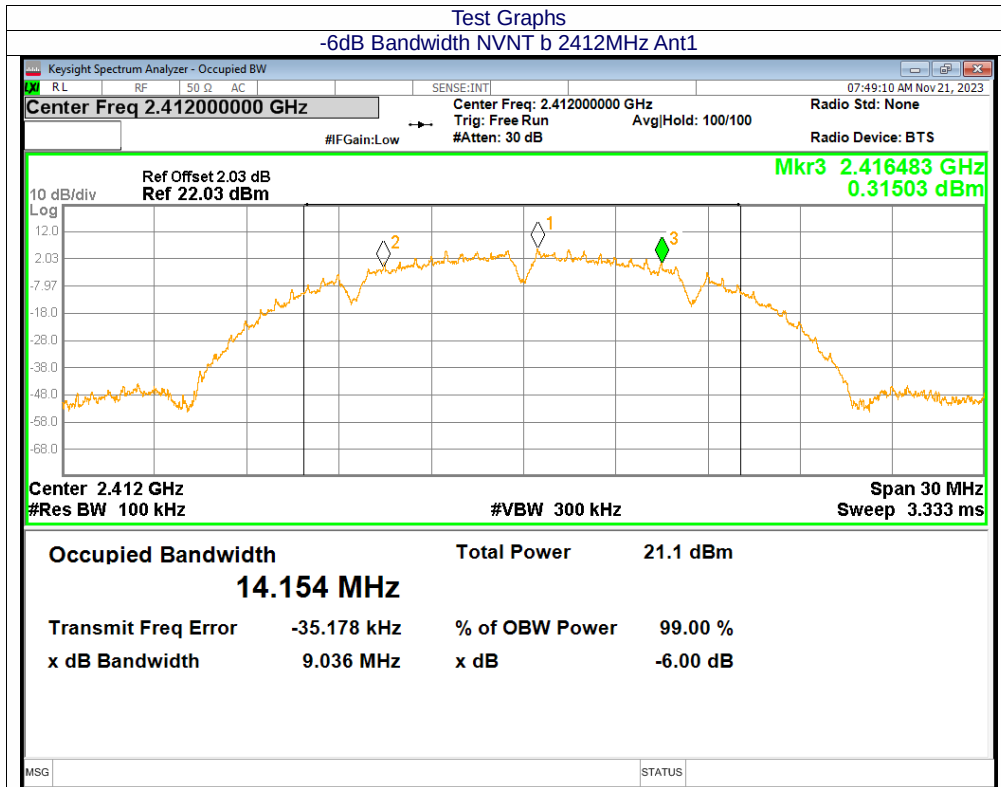


-6dB Bandwidth NVNT b 2462MHz Ant1

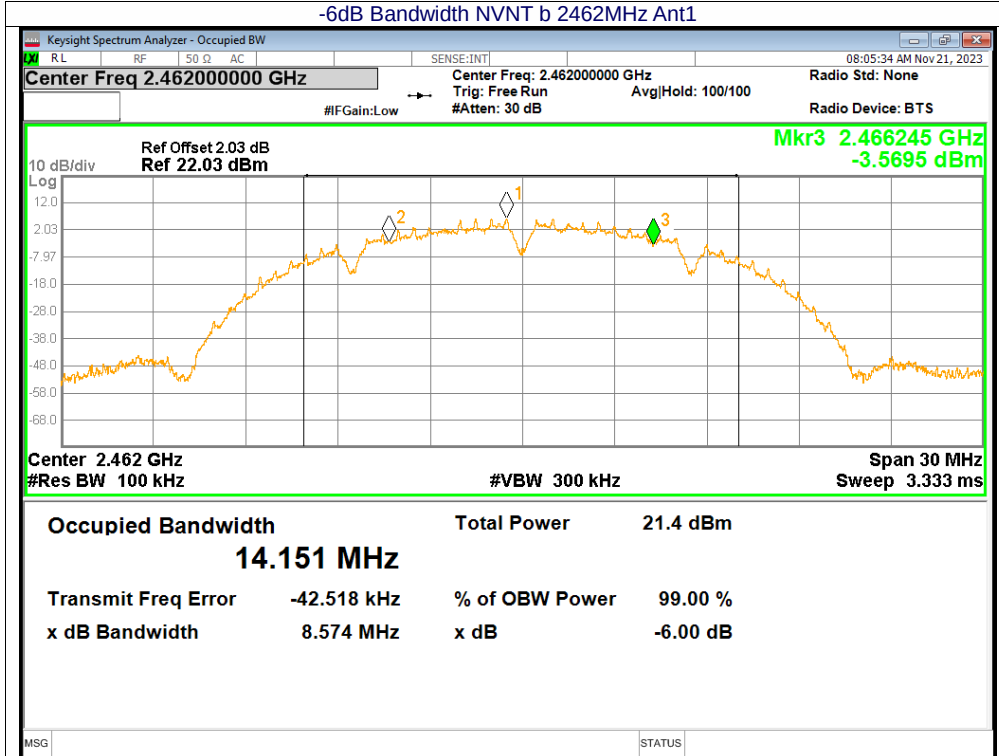


-6dB Bandwidth NVNT g 2412MHz Ant1

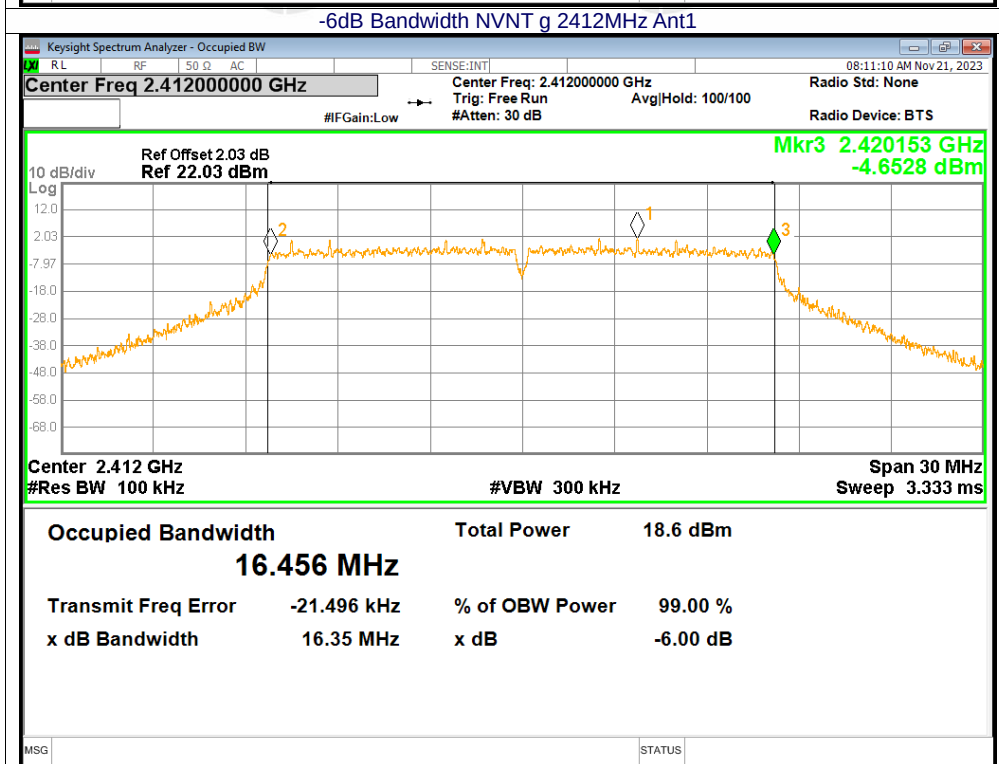


-6dB Bandwidth NVNT g 2437MHz Ant1

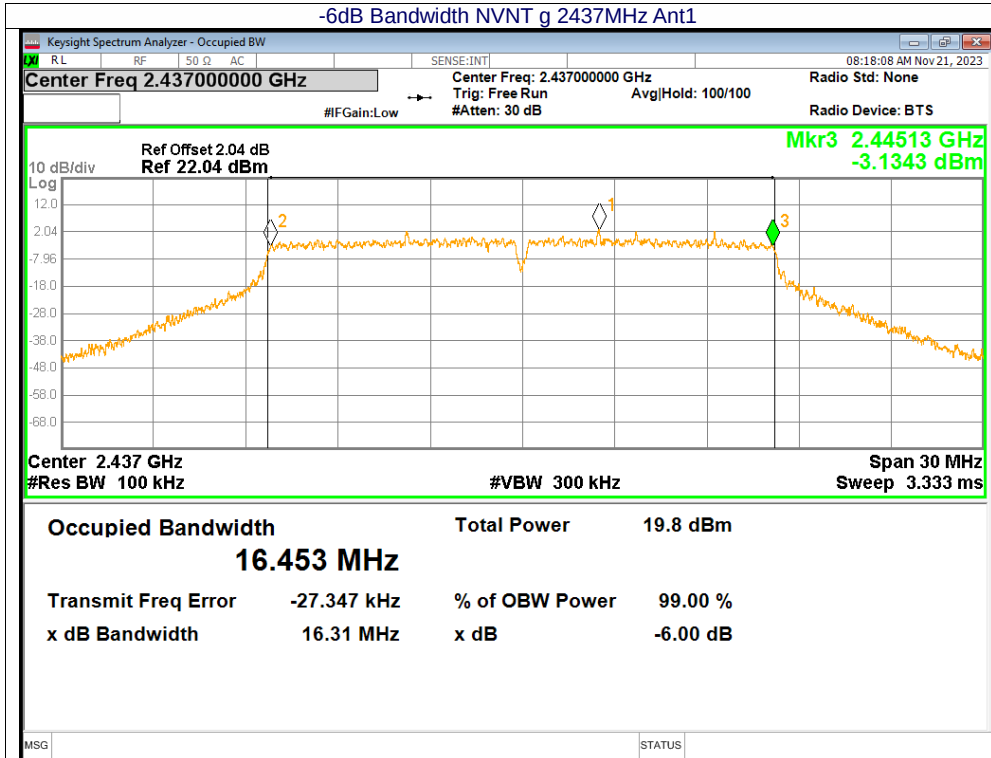


-6dB Bandwidth NVNT g 2462MHz Ant1

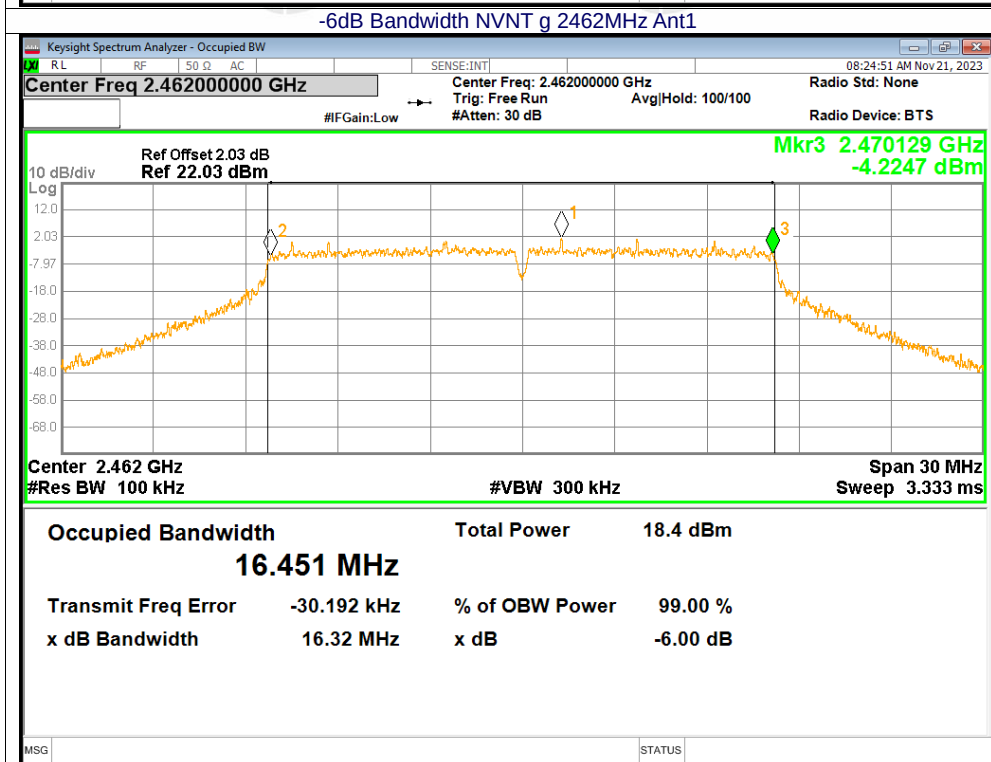


-6dB Bandwidth NVNT n20 2412MHz Ant1

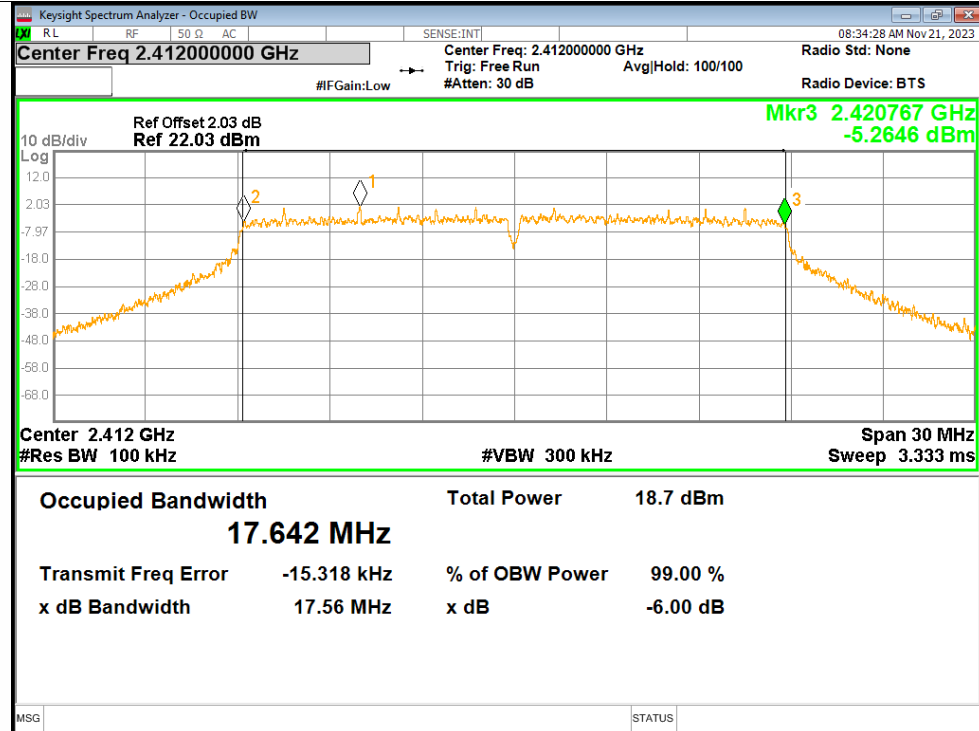

-6dB Bandwidth NVNT n20 2437MHz Ant1

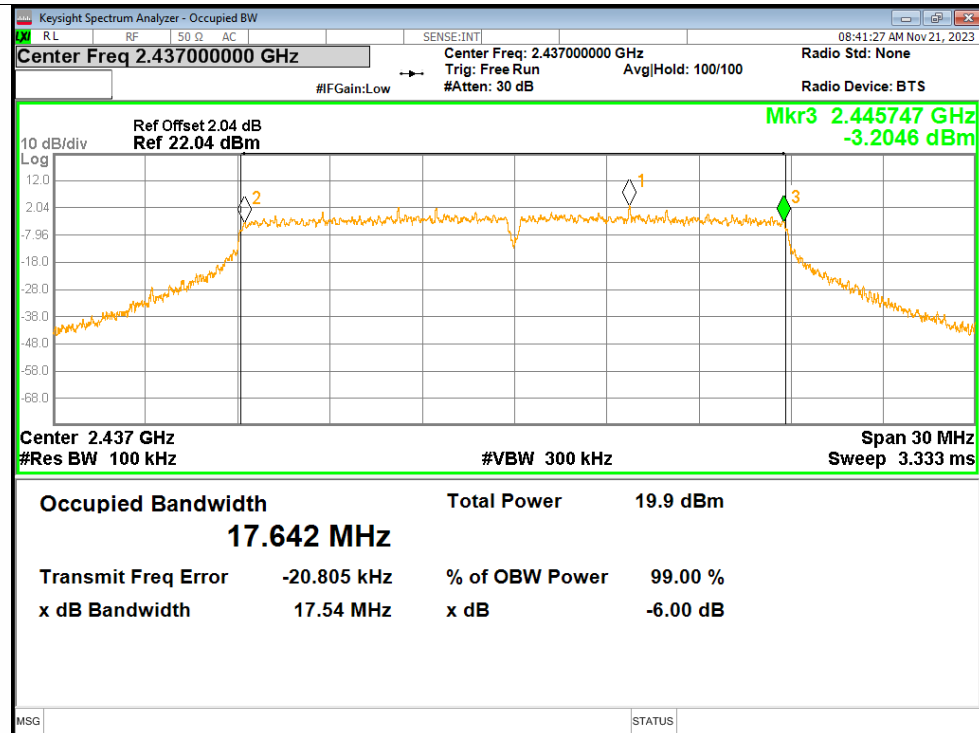

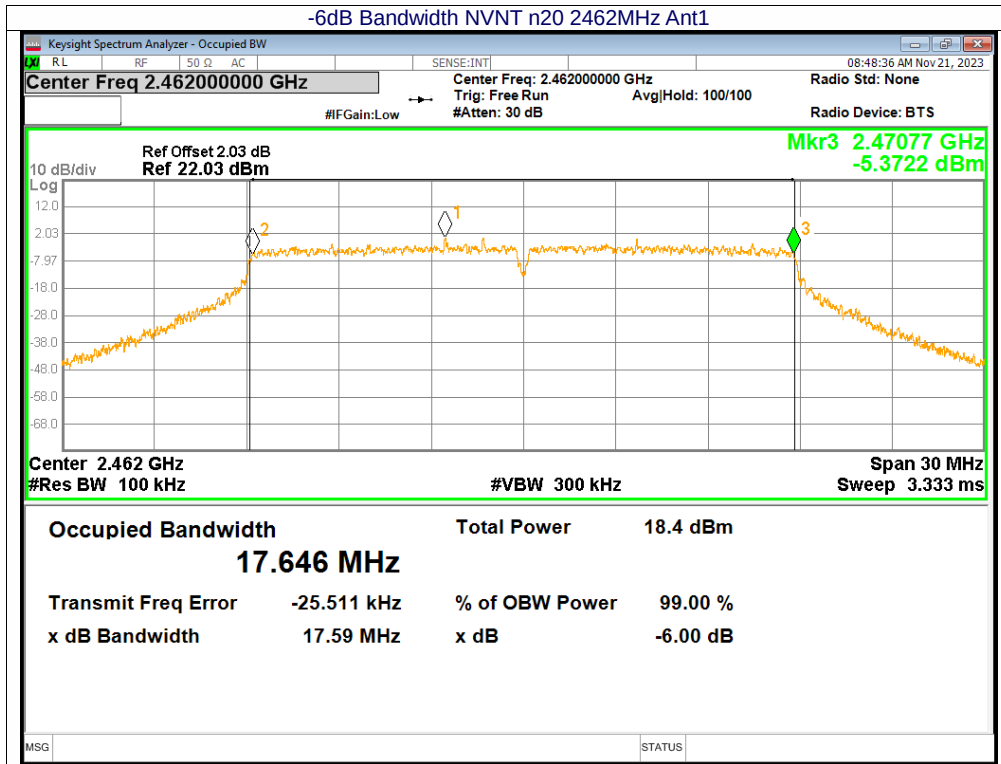





11.5. OCCUPIED CHANNEL BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.127
NVNT	b	2437	Ant1	14.053
NVNT	b	2462	Ant1	14.126
NVNT	g	2412	Ant1	16.622
NVNT	g	2437	Ant1	16.594
NVNT	g	2462	Ant1	16.588
NVNT	n20	2412	Ant1	17.726
NVNT	n20	2437	Ant1	17.728
NVNT	n20	2462	Ant1	17.764



Test Graphs
OBW NVNT b 2412MHz Ant1


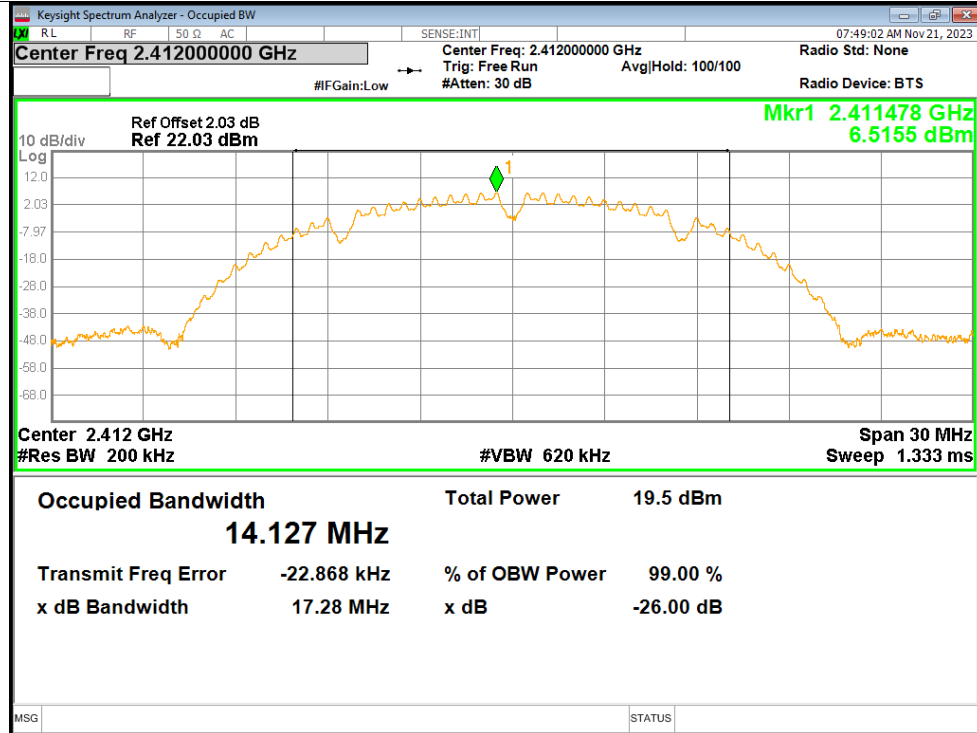



OBW NVNT b 2437MHz Ant1

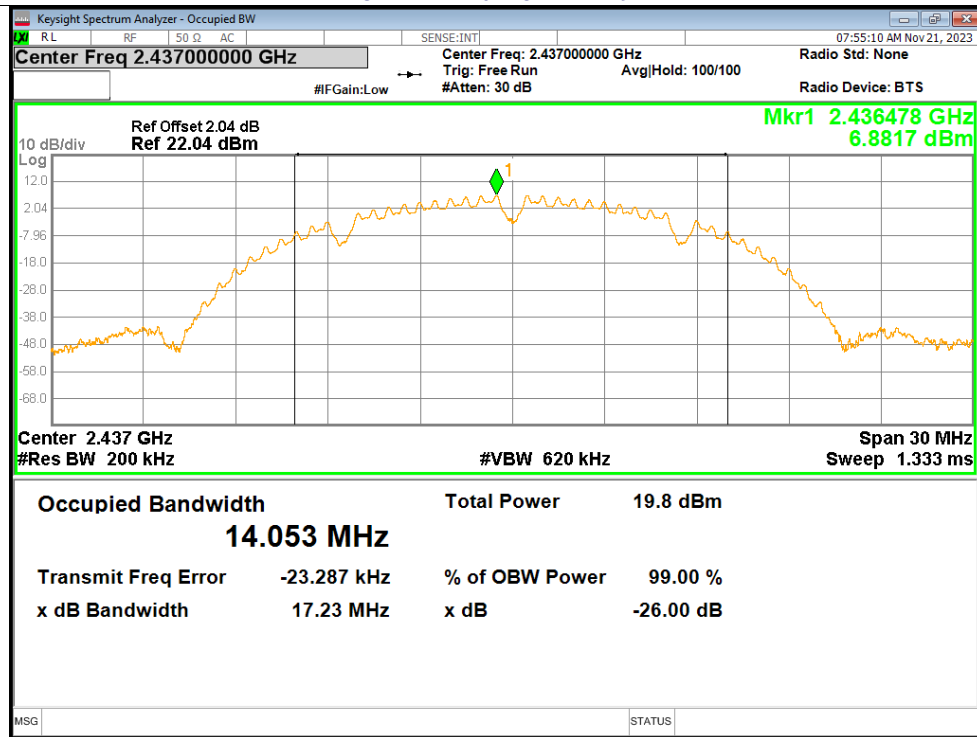

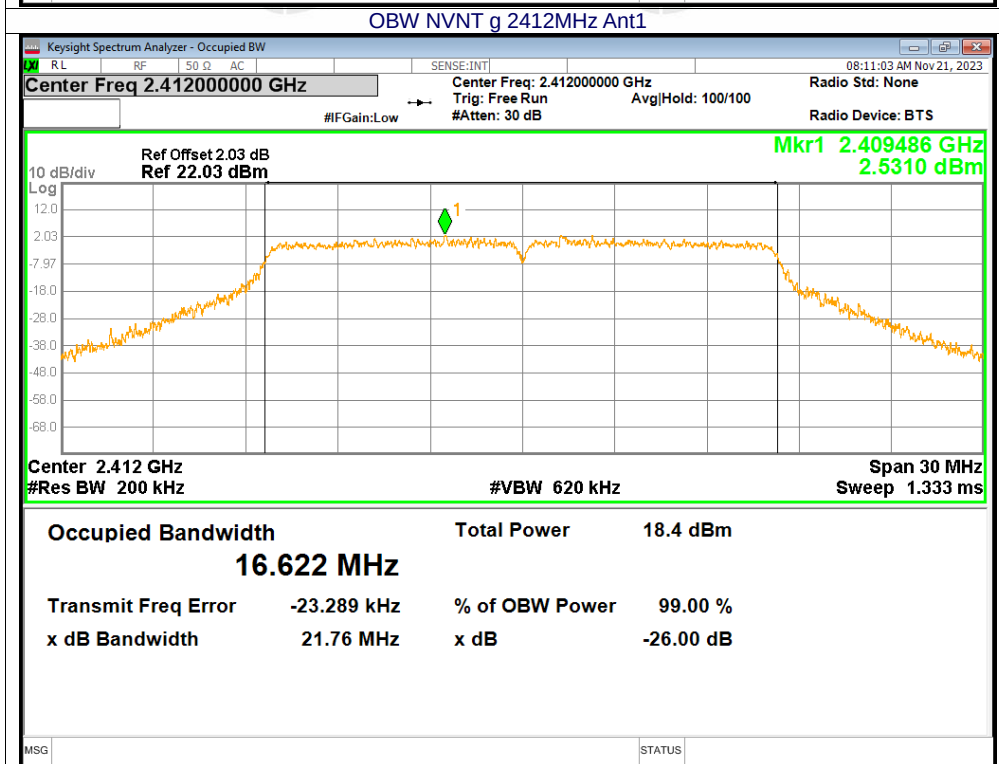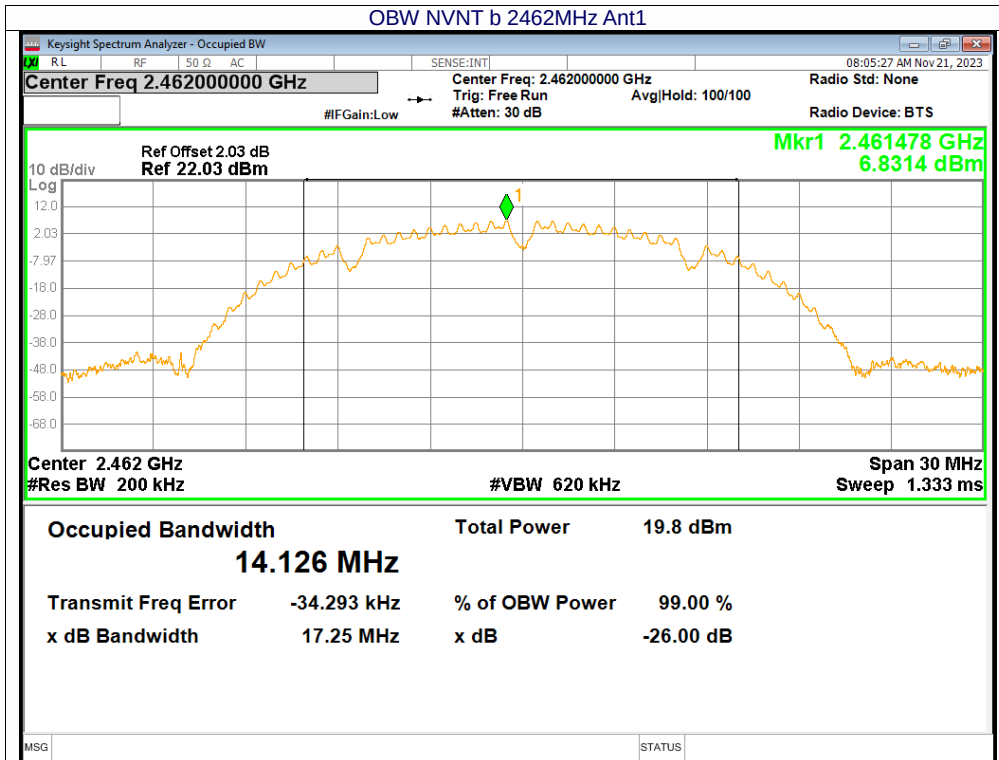

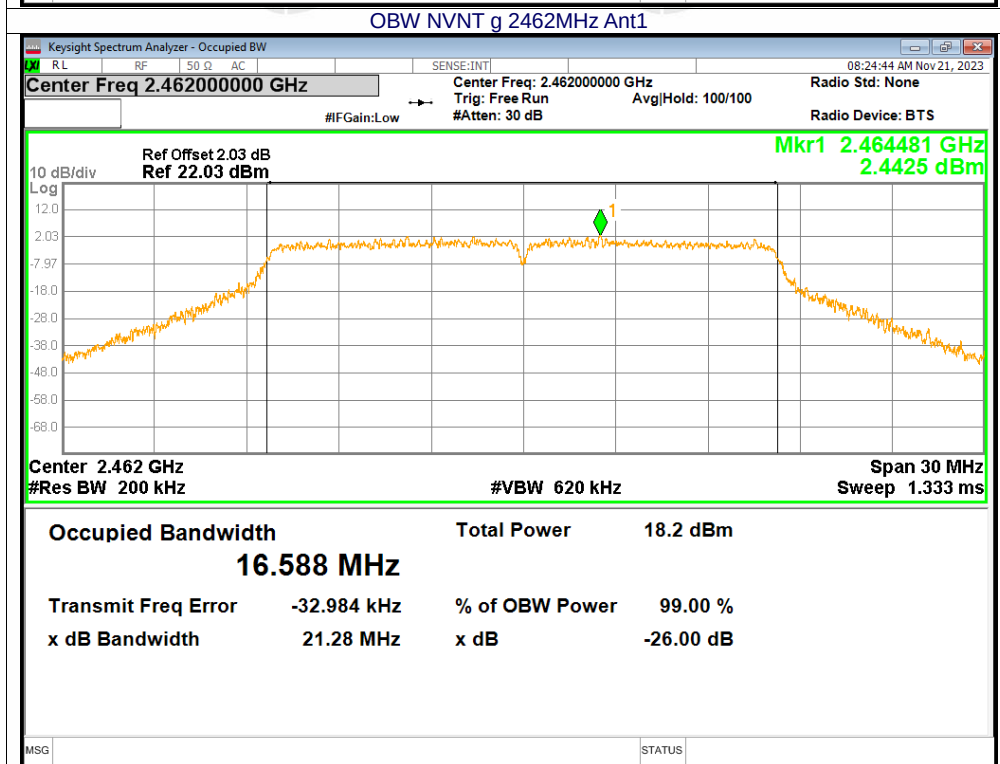
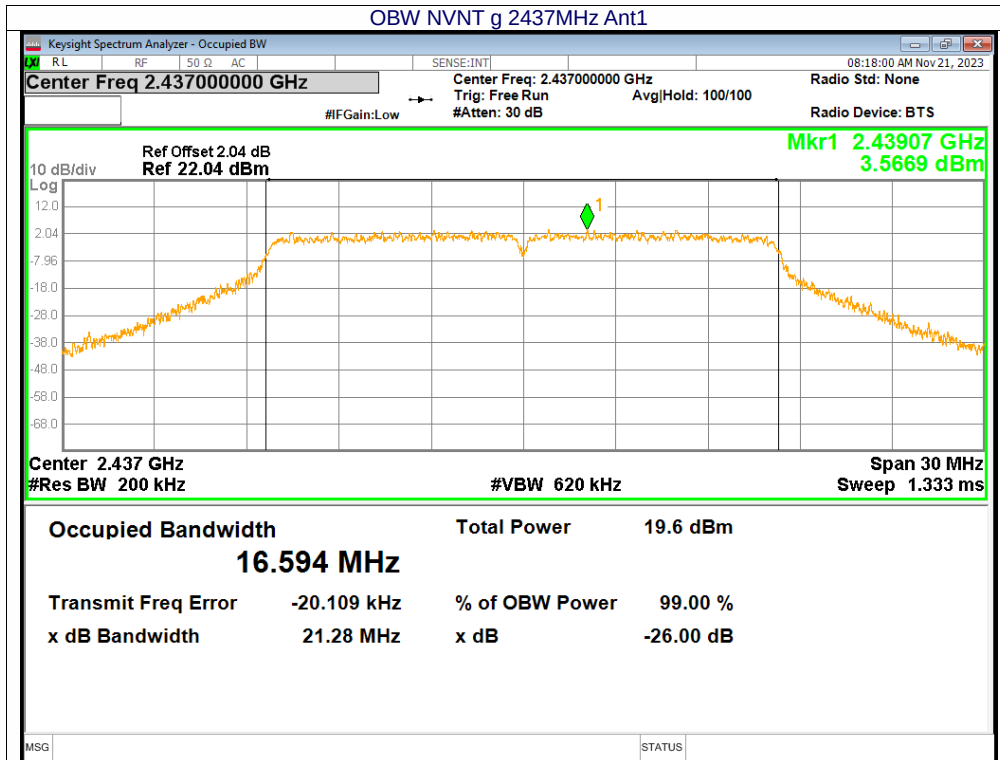


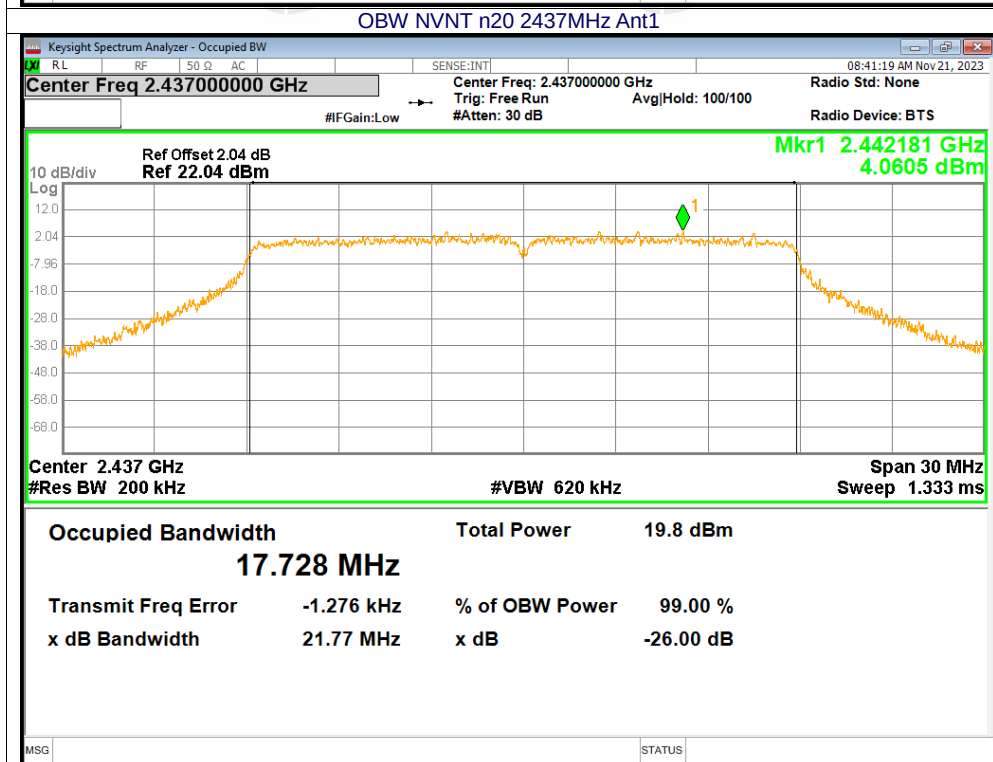
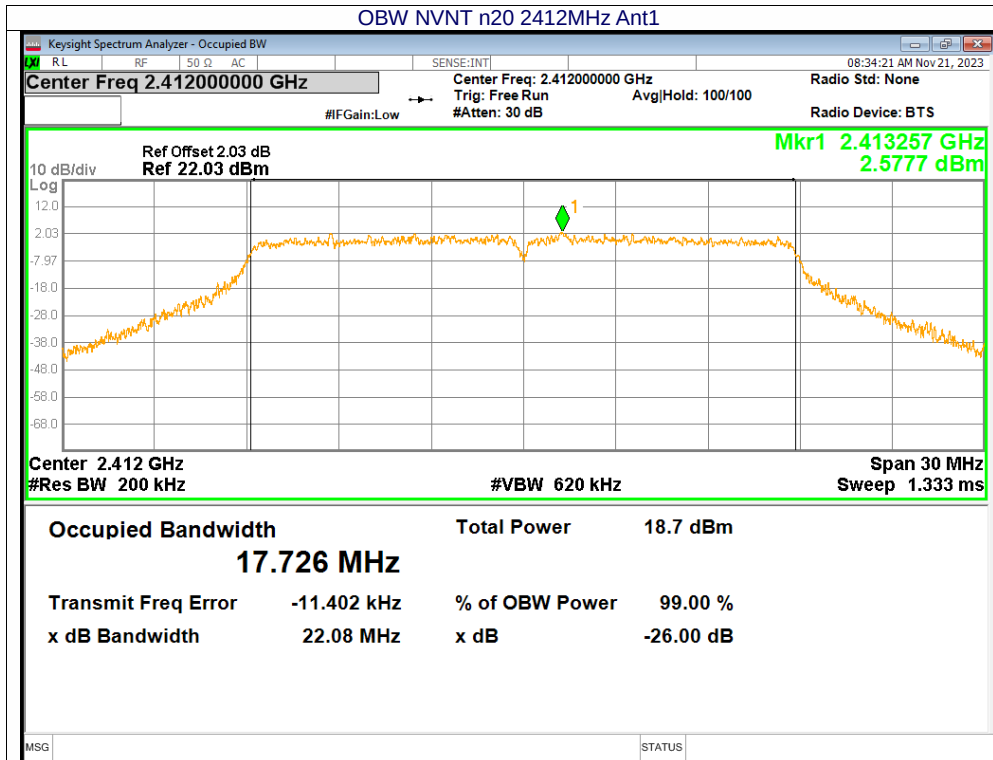



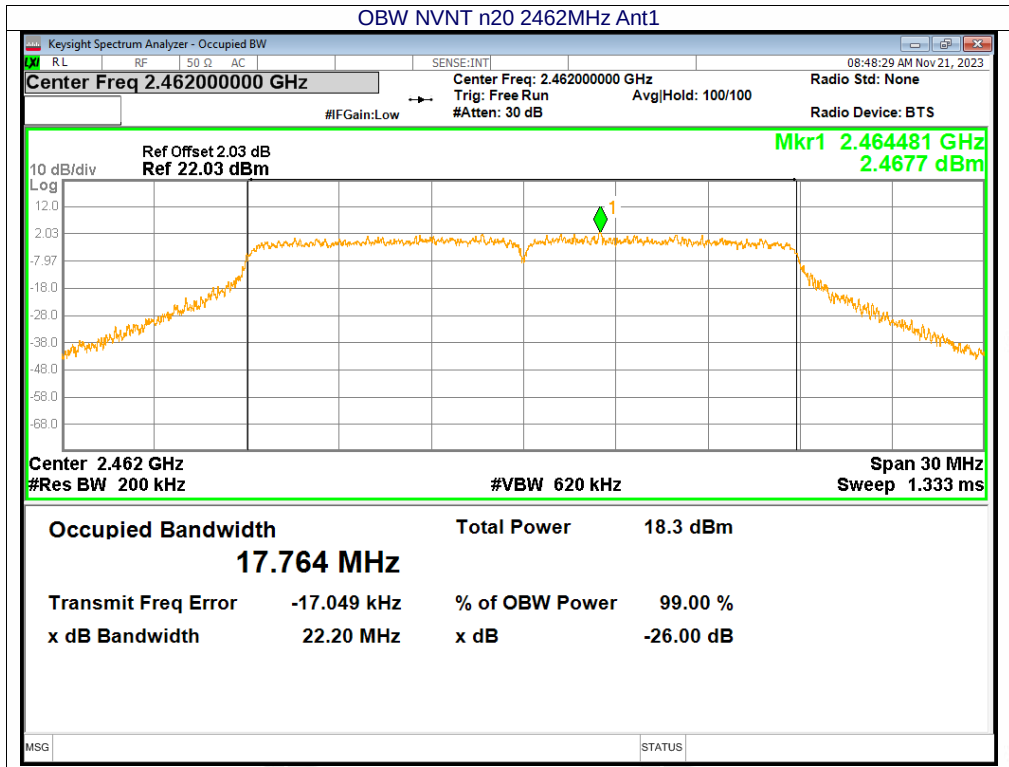




**11.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL**


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-7.17	0	-7.17	8	Pass
NVNT	b	2437	Ant1	-6.65	0	-6.65	8	Pass
NVNT	b	2462	Ant1	-6.48	0	-6.48	8	Pass
NVNT	g	2412	Ant1	-11.34	0.27	-11.07	8	Pass
NVNT	g	2437	Ant1	-8.95	0.26	-8.69	8	Pass
NVNT	g	2462	Ant1	-11.77	0.27	-11.5	8	Pass
NVNT	n20	2412	Ant1	-10.82	0.28	-10.54	8	Pass
NVNT	n20	2437	Ant1	-10.82	0.28	-10.54	8	Pass
NVNT	n20	2462	Ant1	-11.89	0.28	-11.61	8	Pass

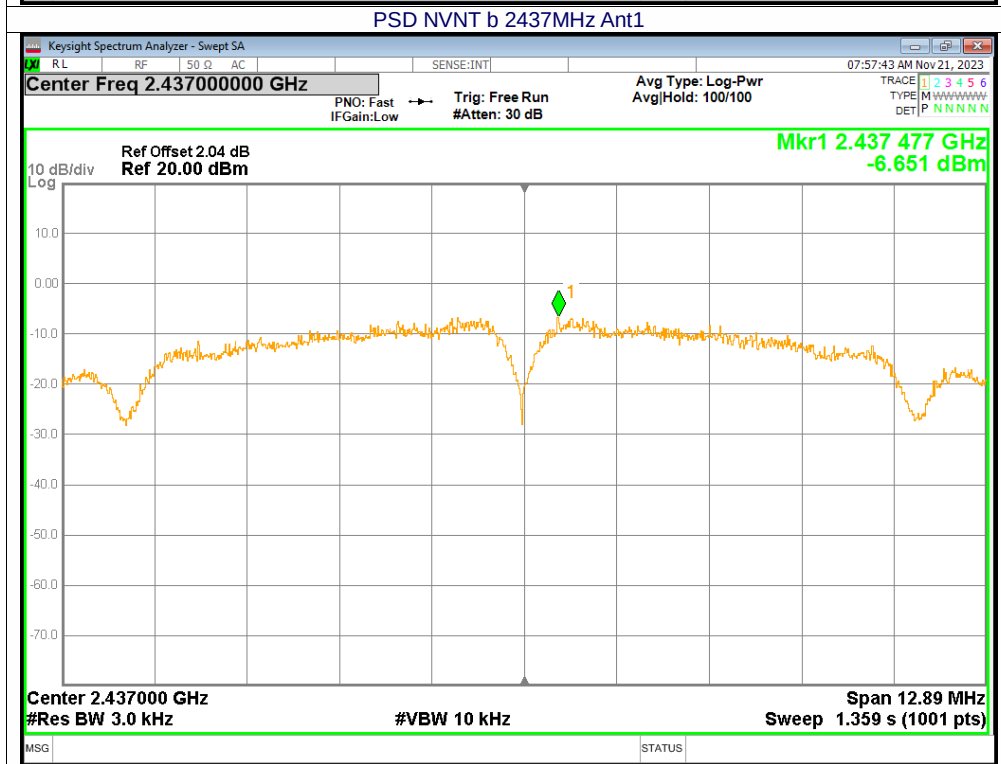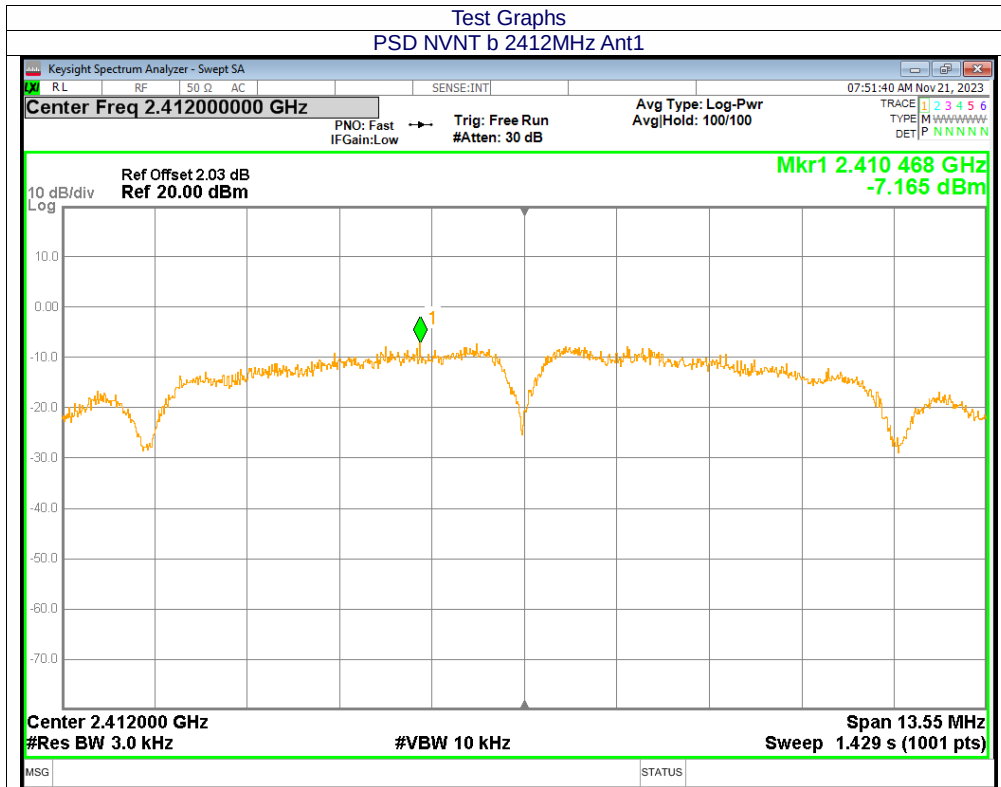

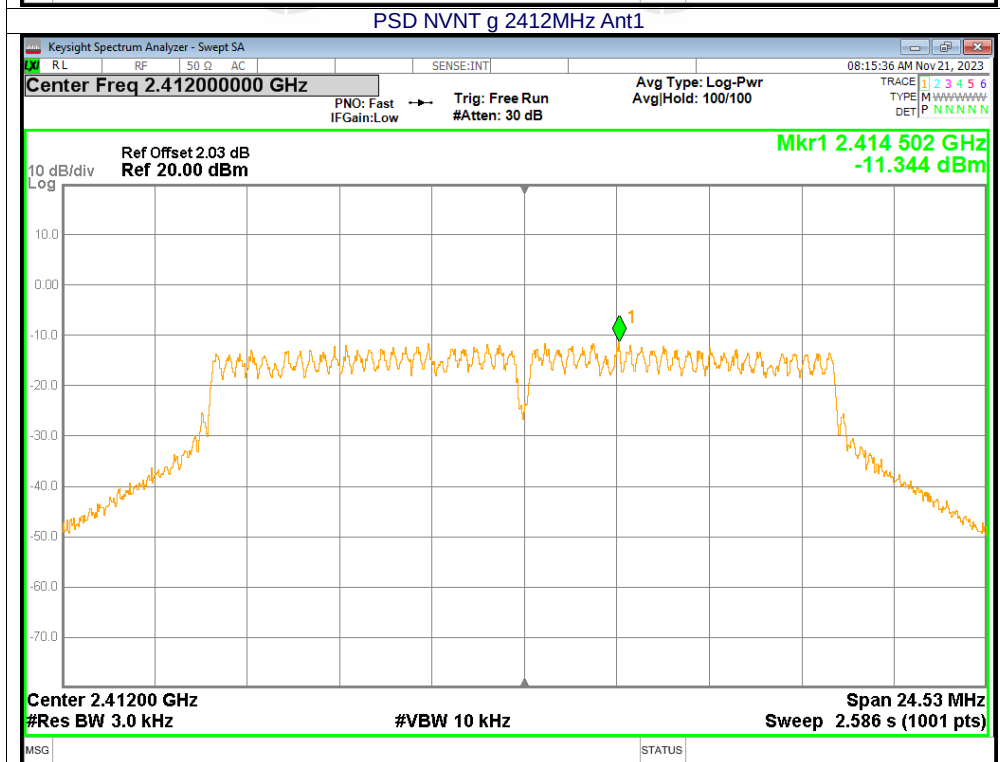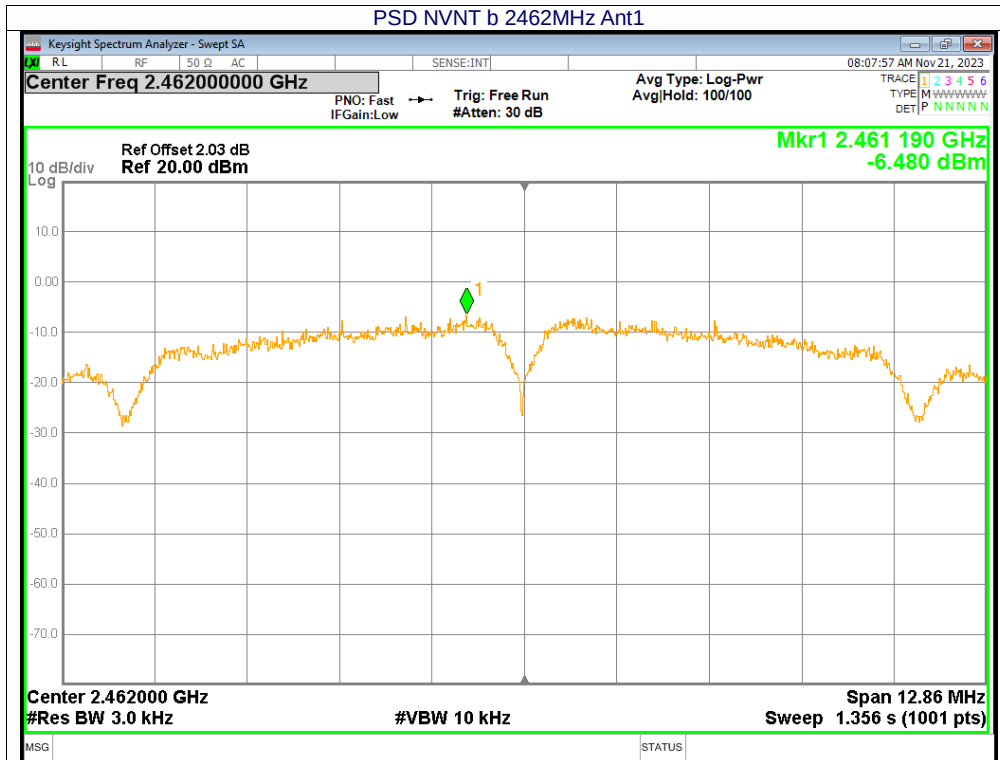

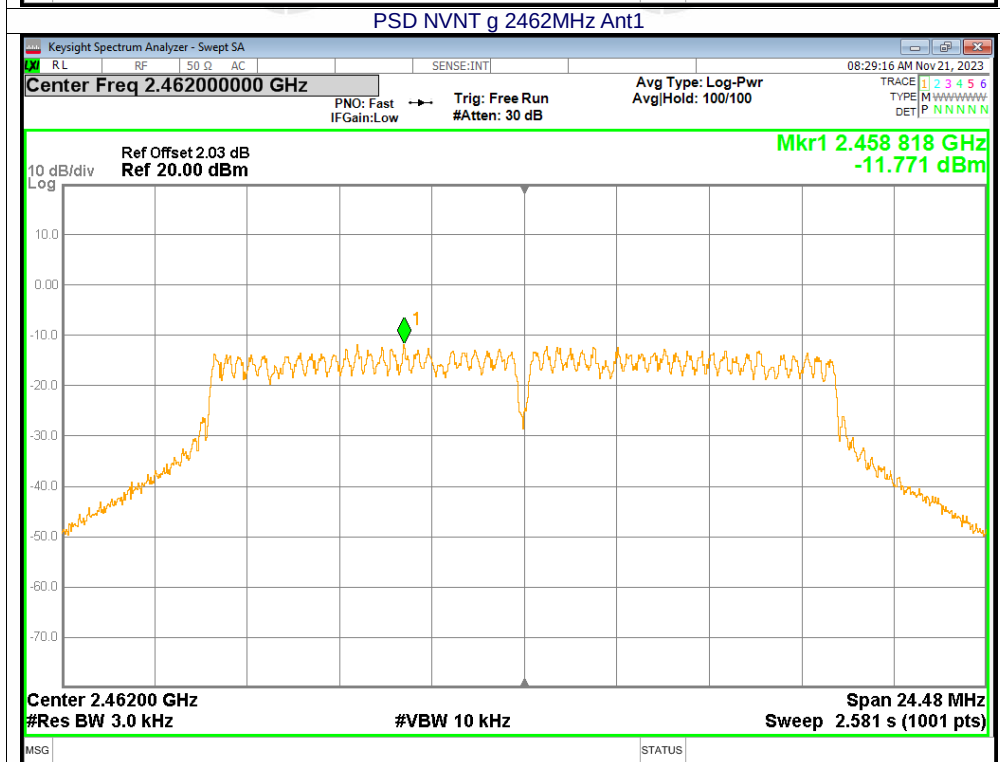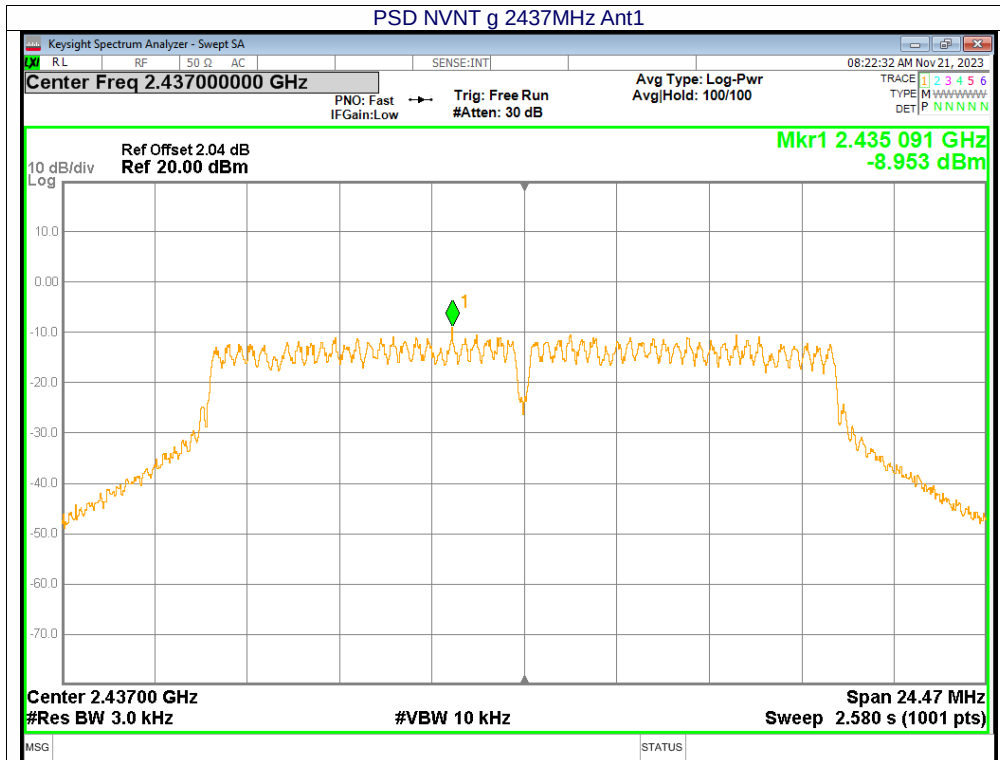

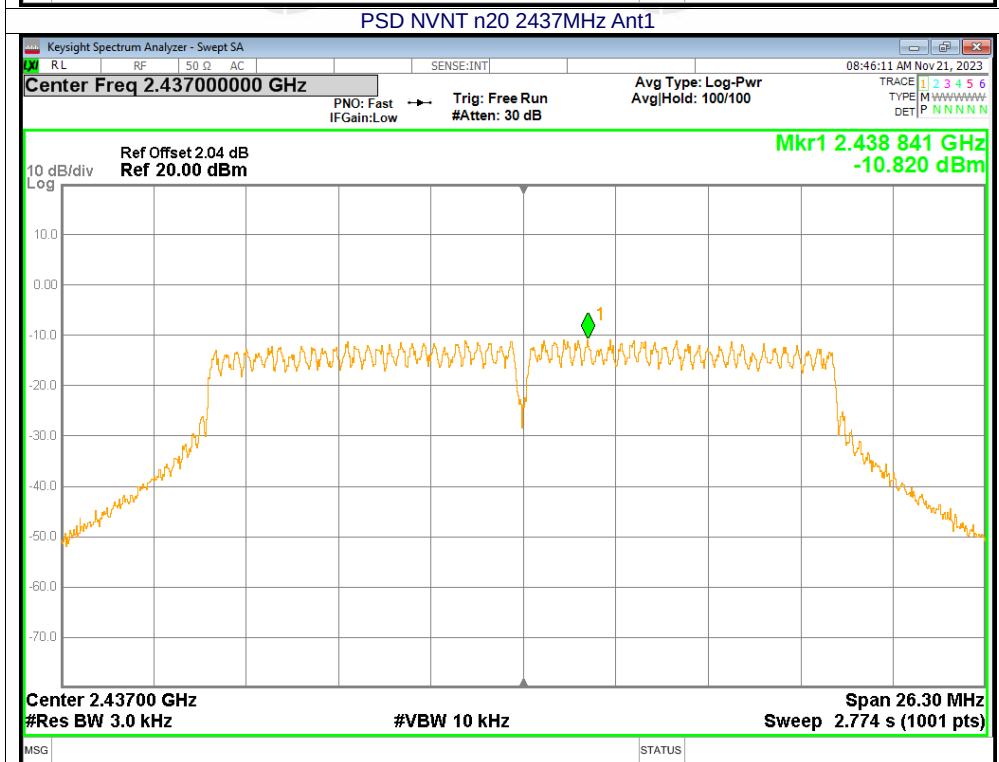
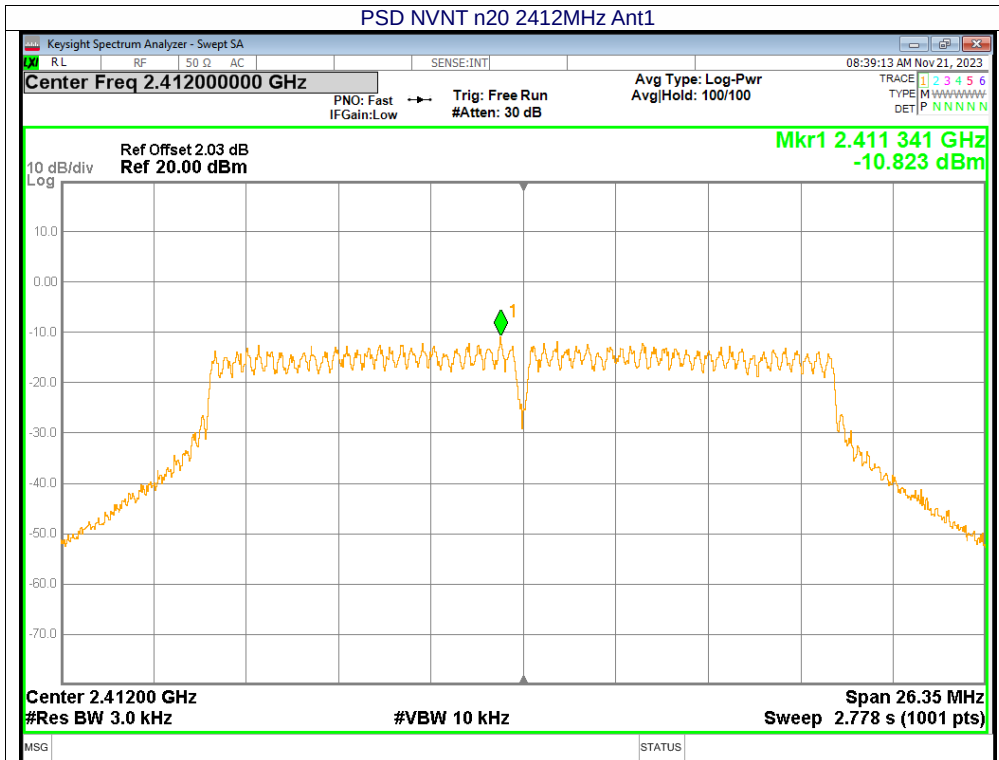



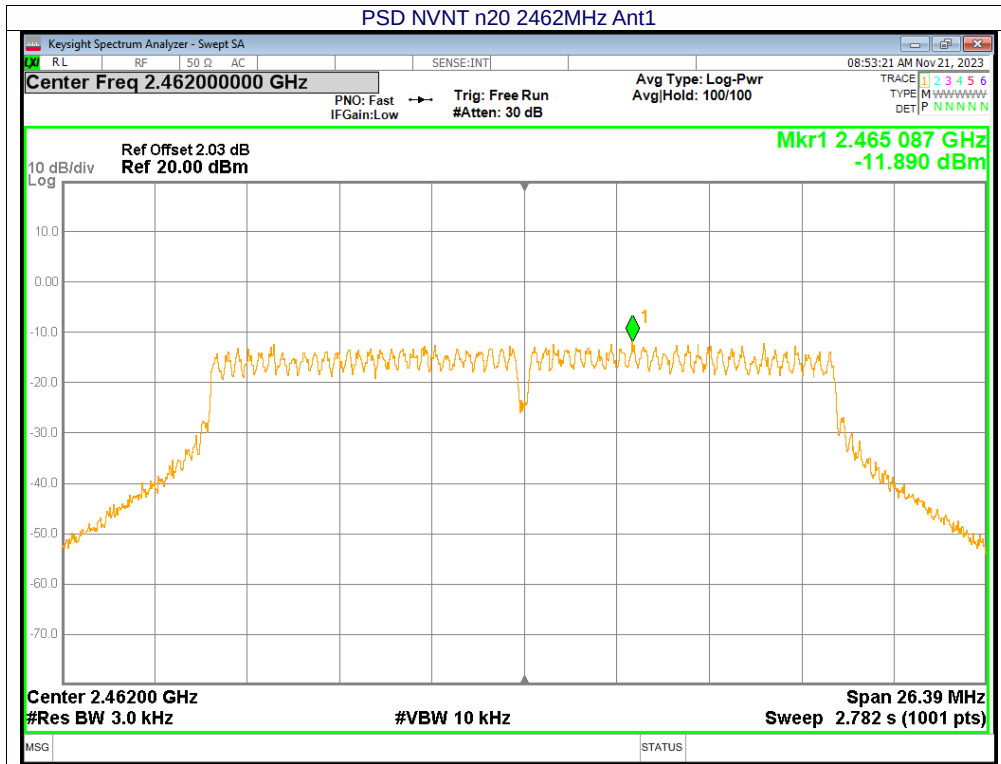








11.7. BAND EDGE



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-49.93	-20	Pass
NVNT	b	2462	Ant1	-60.33	-20	Pass
NVNT	g	2412	Ant1	-34.6	-20	Pass
NVNT	g	2462	Ant1	-54.13	-20	Pass
NVNT	n20	2412	Ant1	-34.29	-20	Pass
NVNT	n20	2462	Ant1	-54.03	-20	Pass

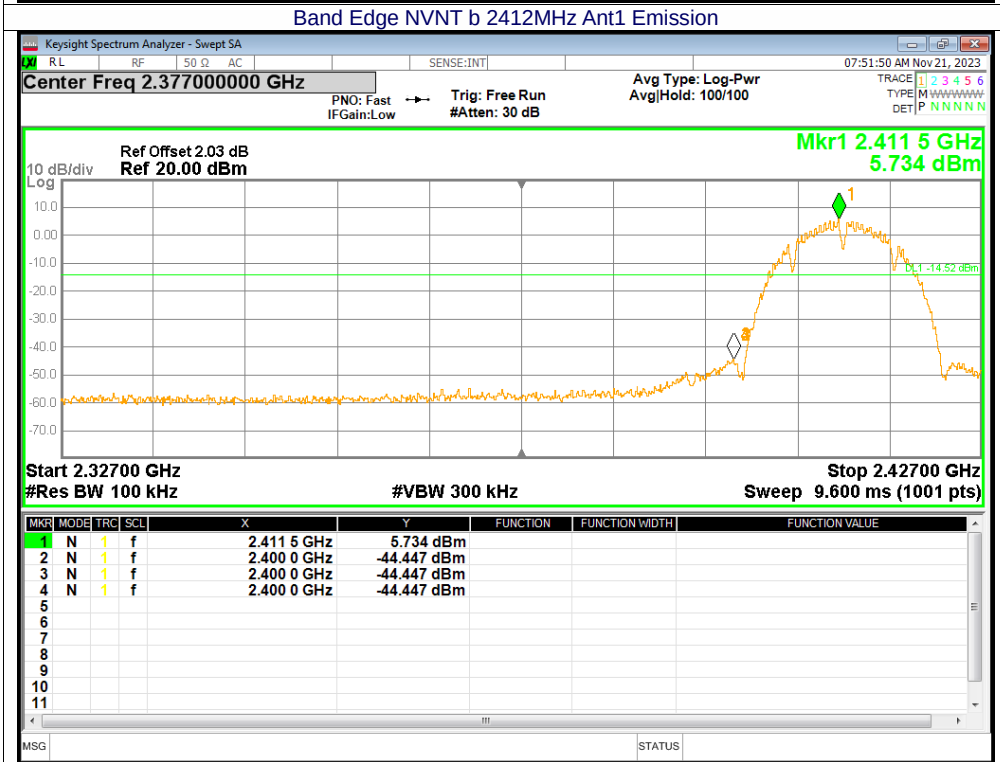
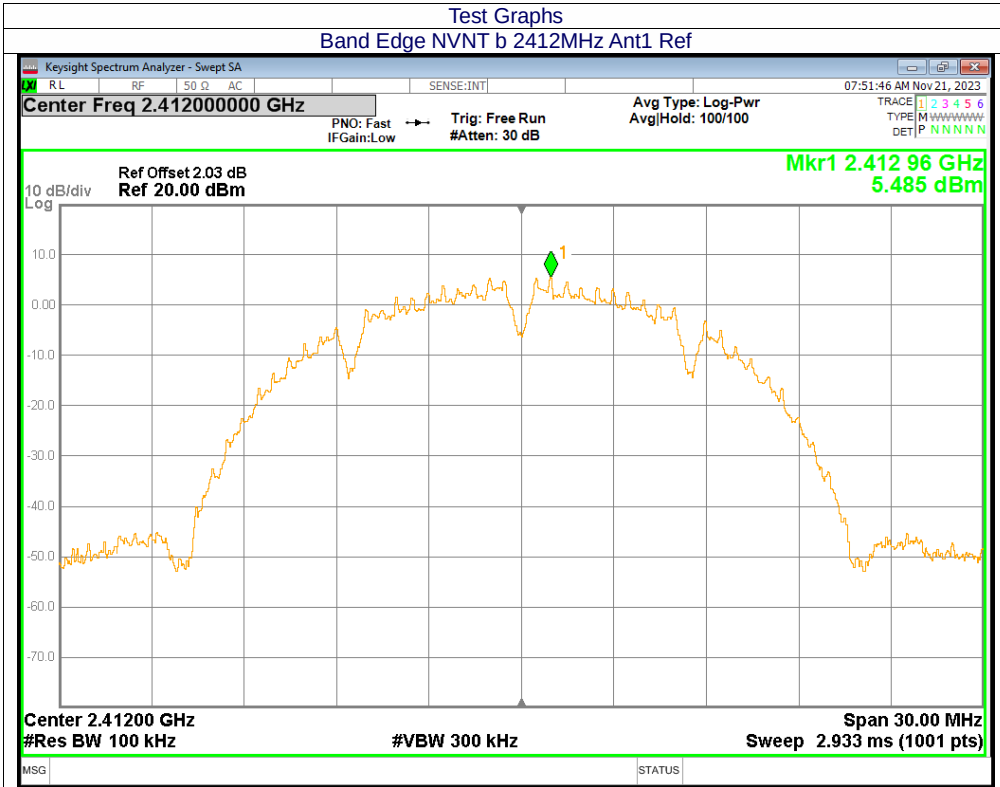


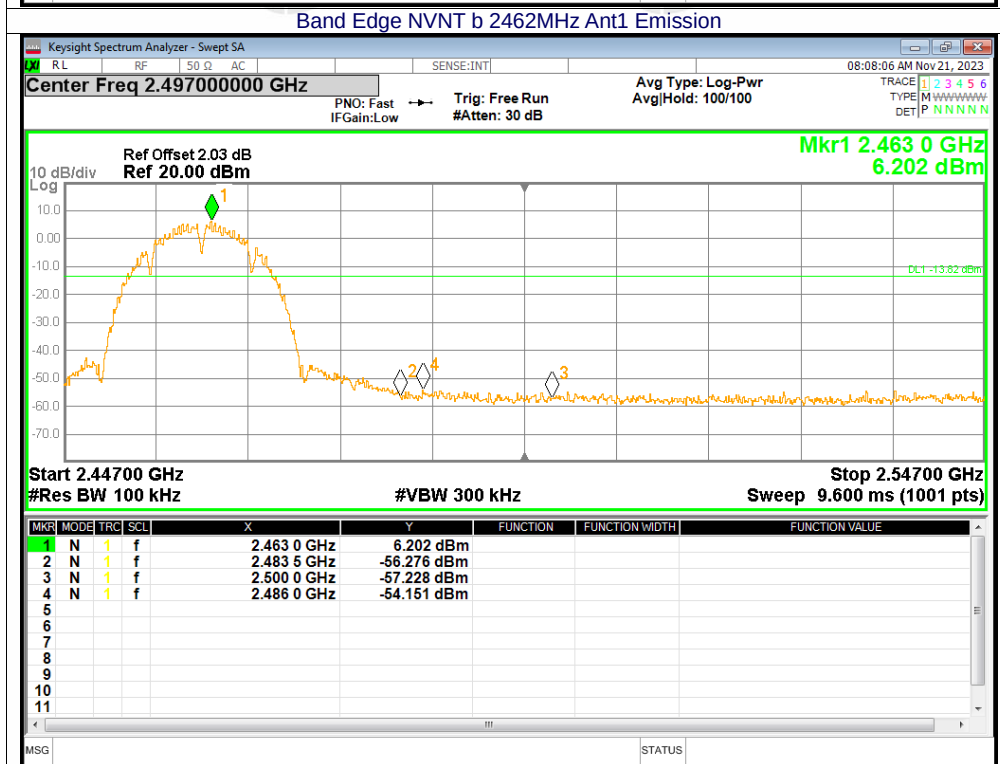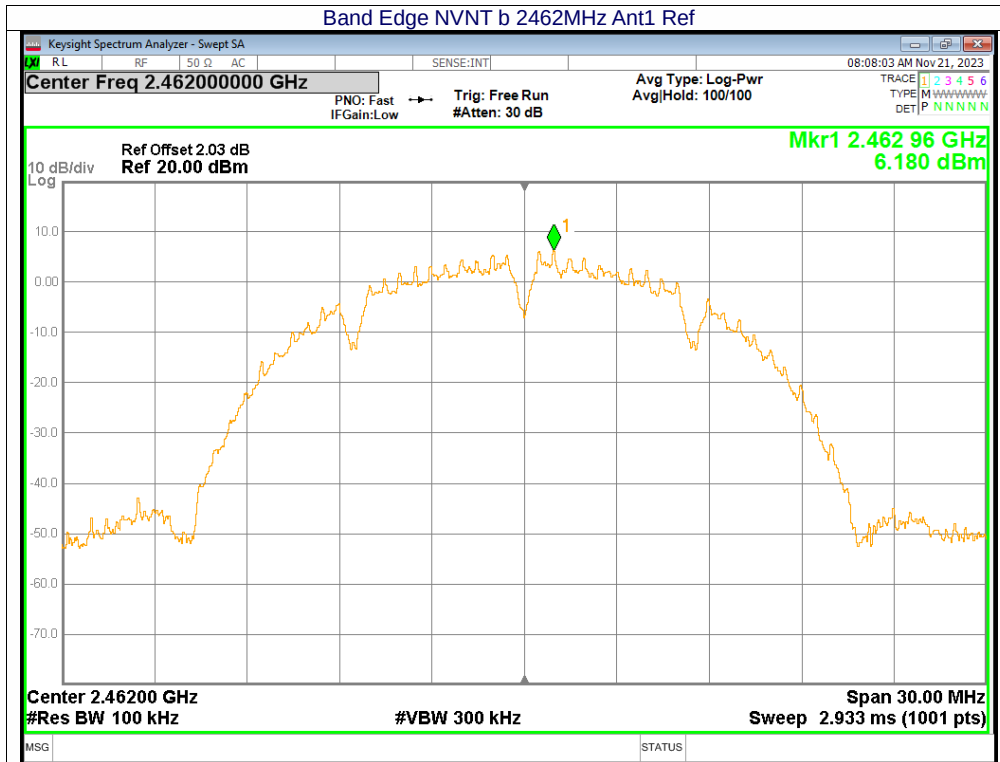

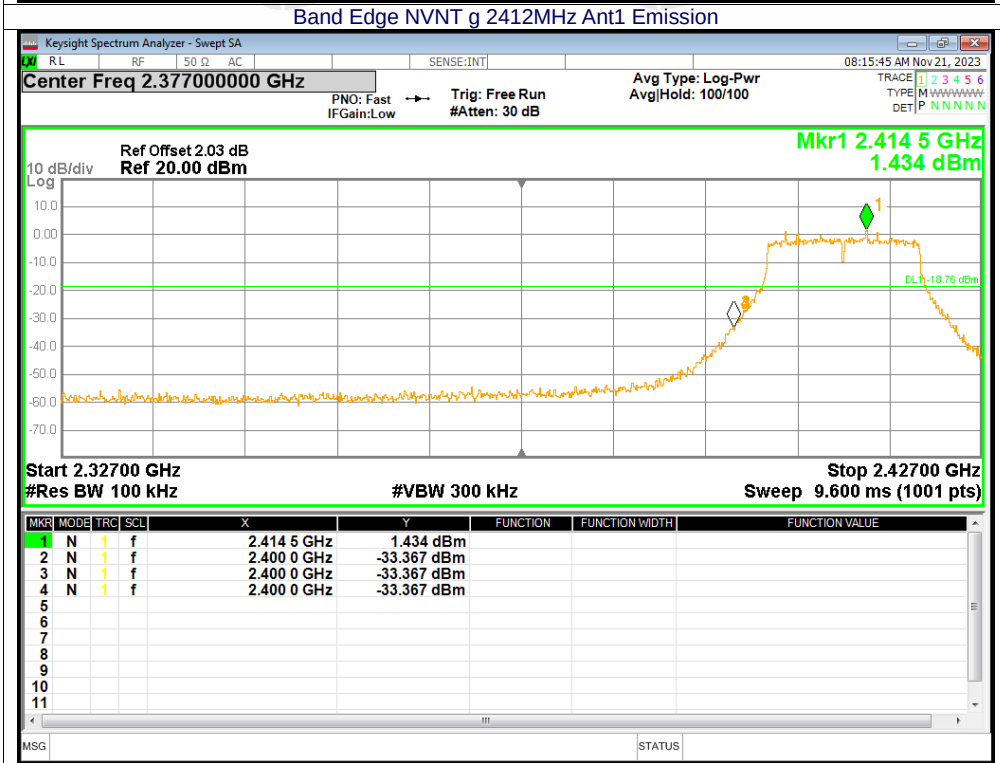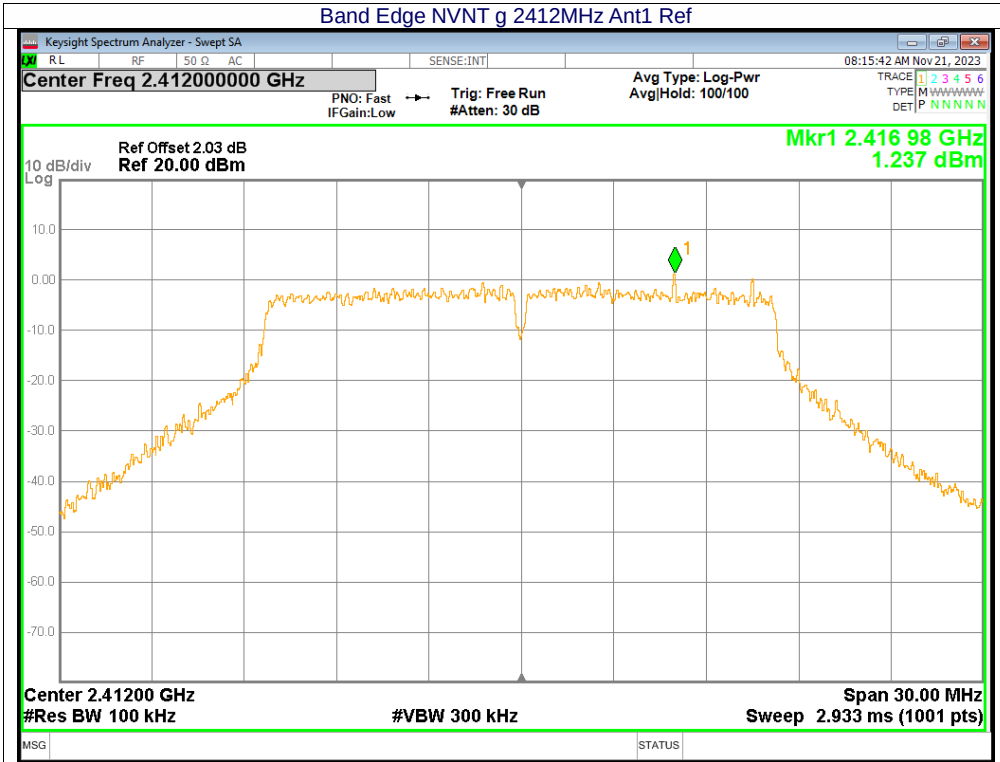

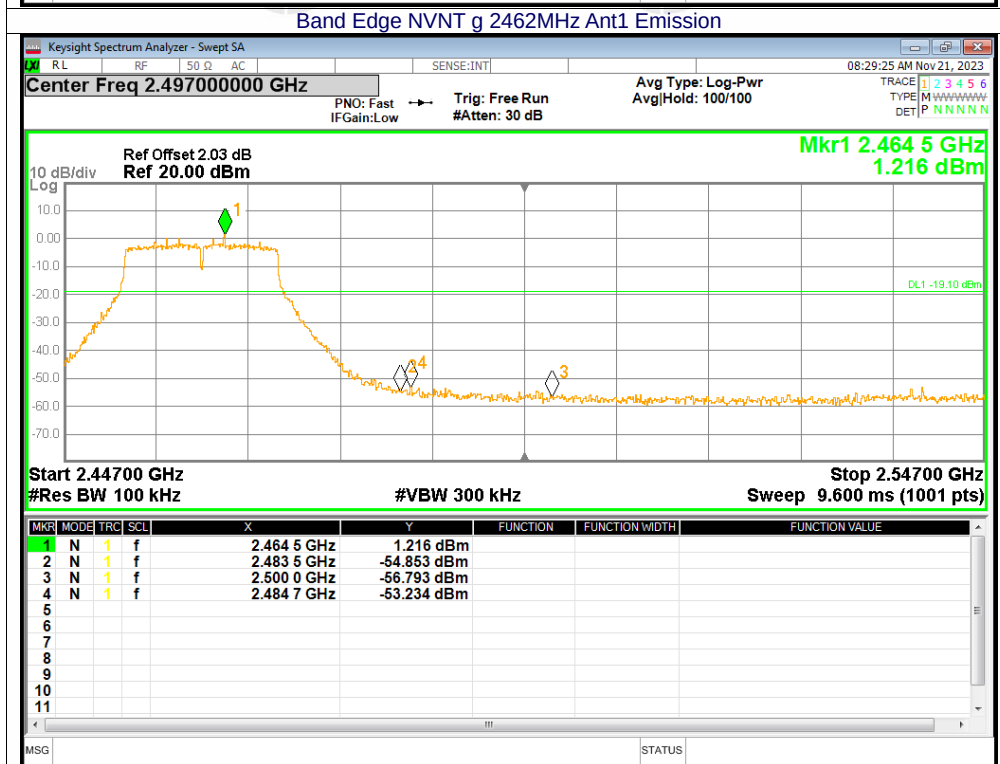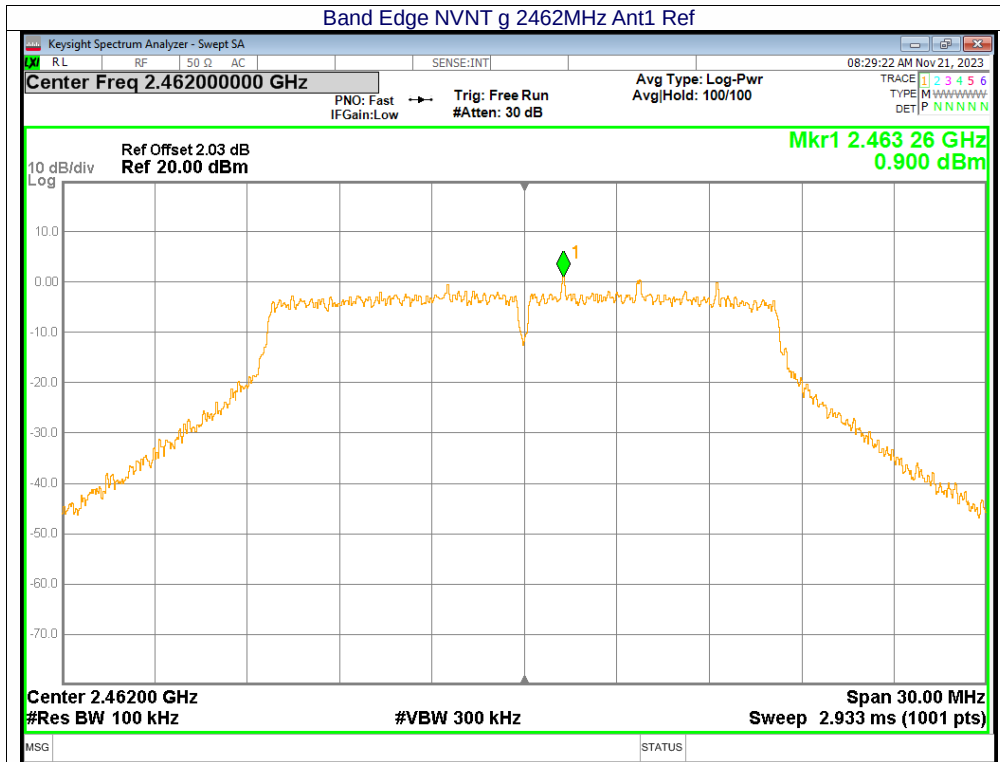

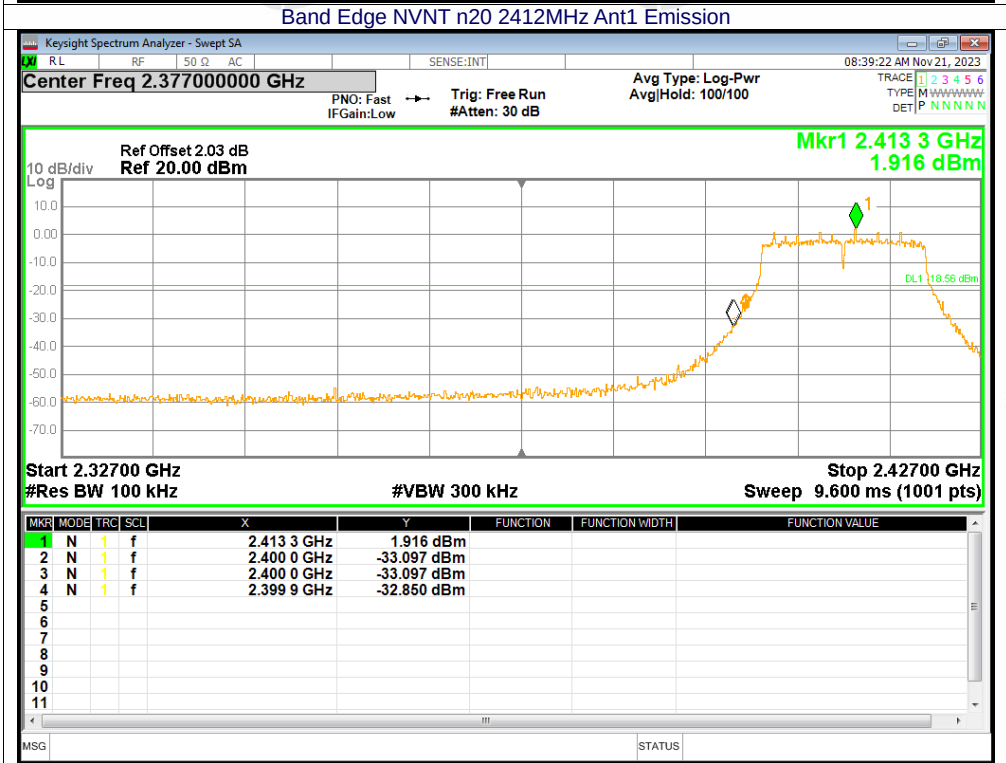
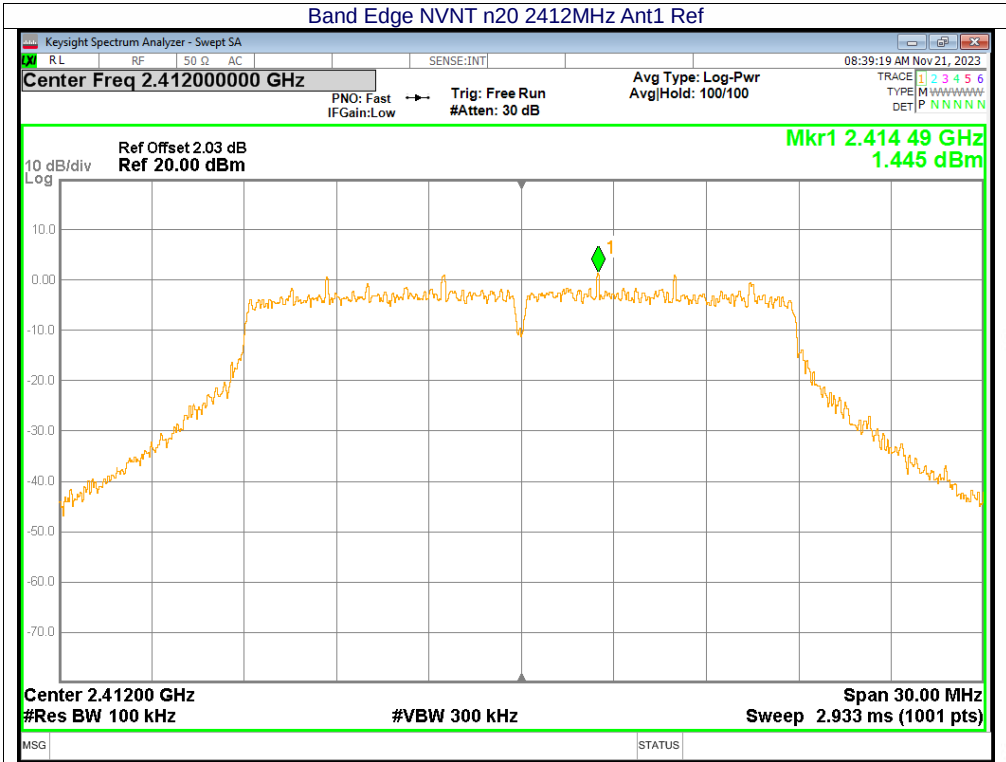


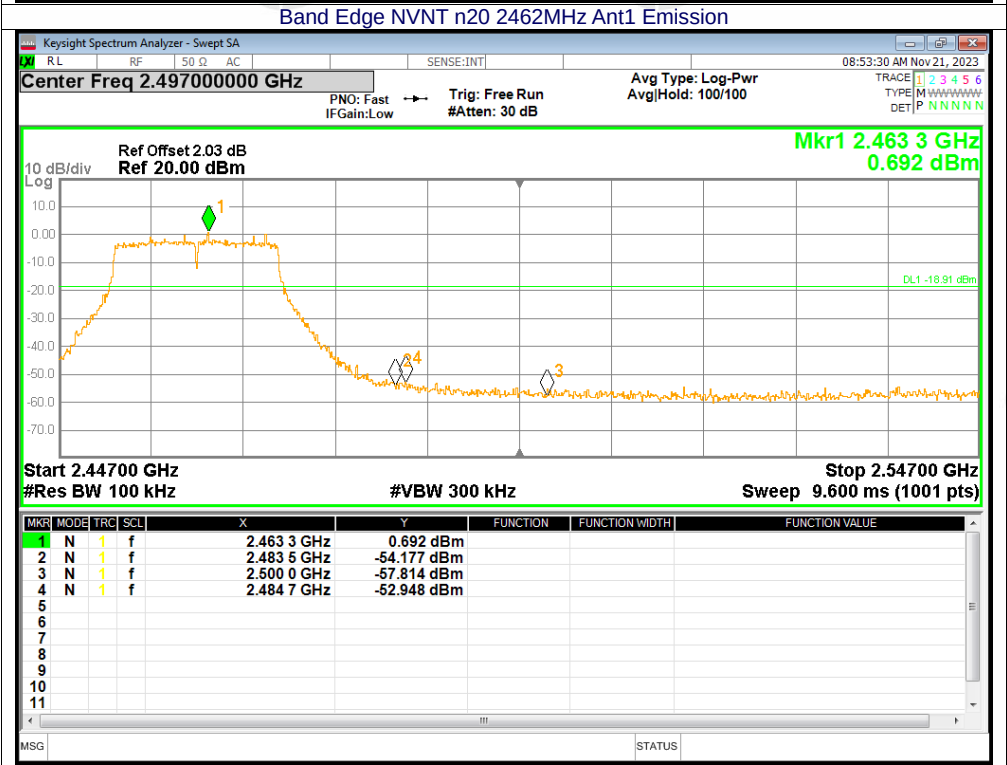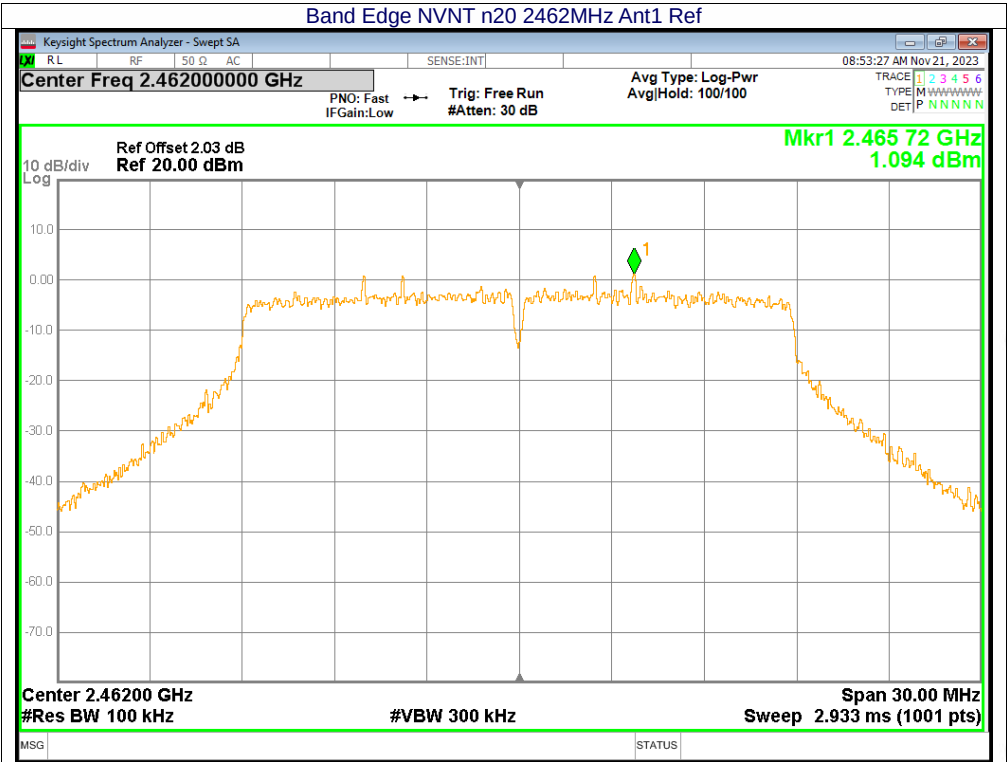




11.8. CONDUCTED RF SPURIOUS EMISSION


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-52.03	-20	Pass
NVNT	b	2437	Ant1	-53.76	-20	Pass
NVNT	b	2462	Ant1	-53.02	-20	Pass
NVNT	g	2412	Ant1	-49.21	-20	Pass
NVNT	g	2437	Ant1	-49.46	-20	Pass
NVNT	g	2462	Ant1	-48.96	-20	Pass
NVNT	n20	2412	Ant1	-47.76	-20	Pass
NVNT	n20	2437	Ant1	-48.9	-20	Pass
NVNT	n20	2462	Ant1	-48.02	-20	Pass

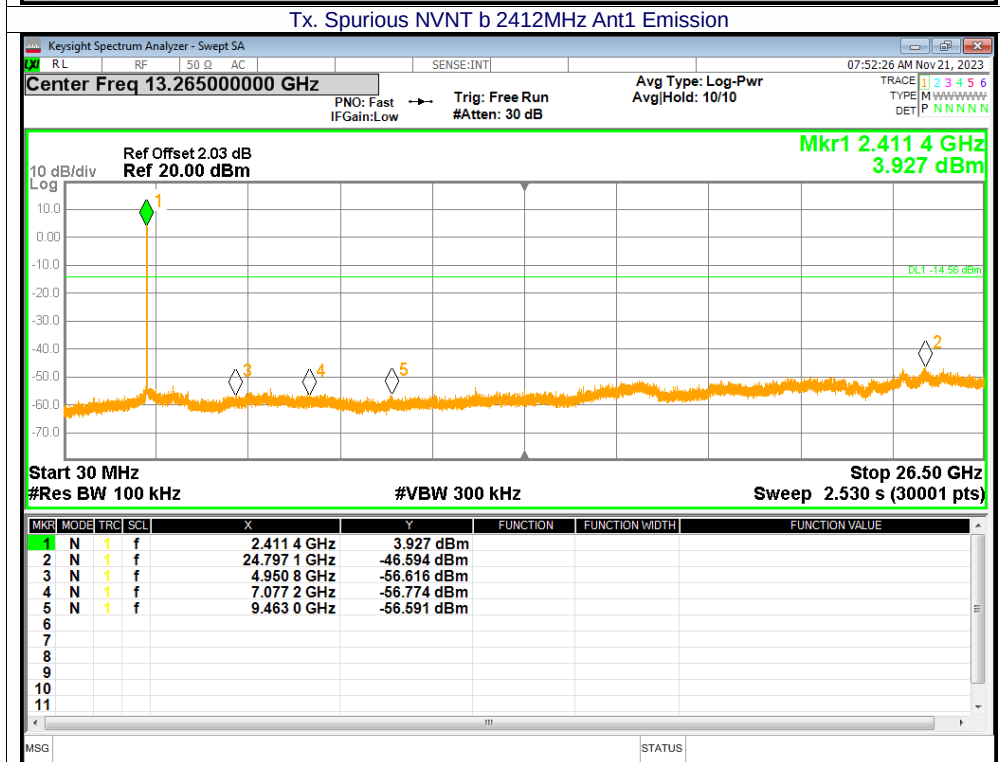
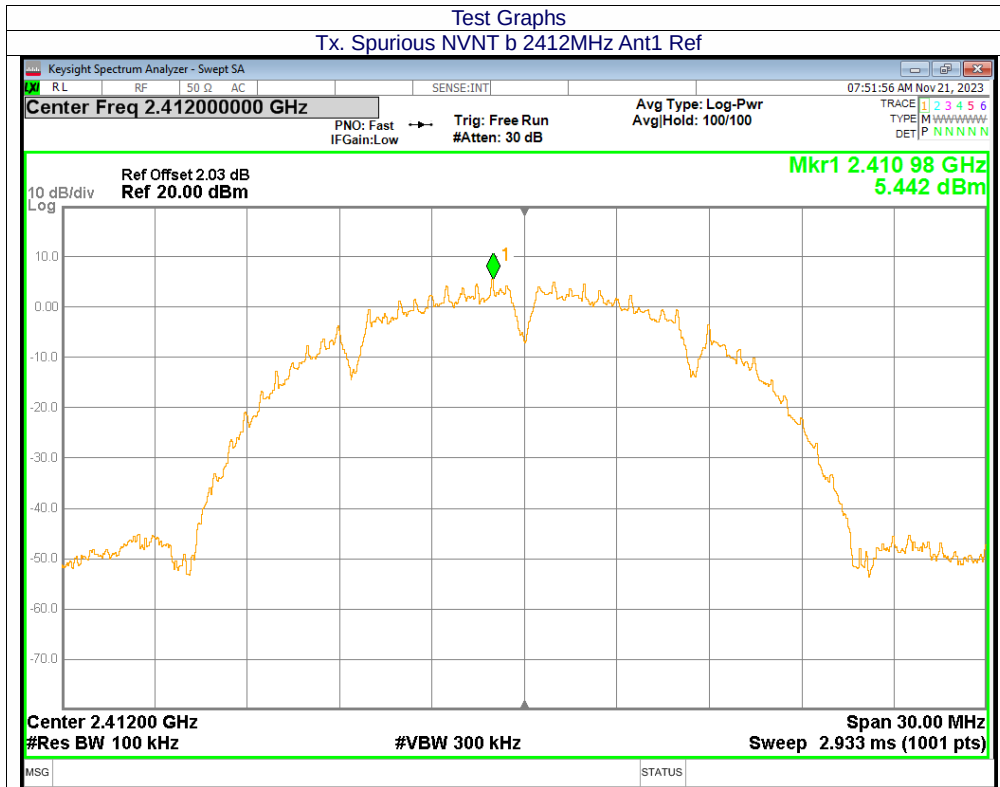




Tx. Spurious NVNT b 2437MHz Ant1 Ref


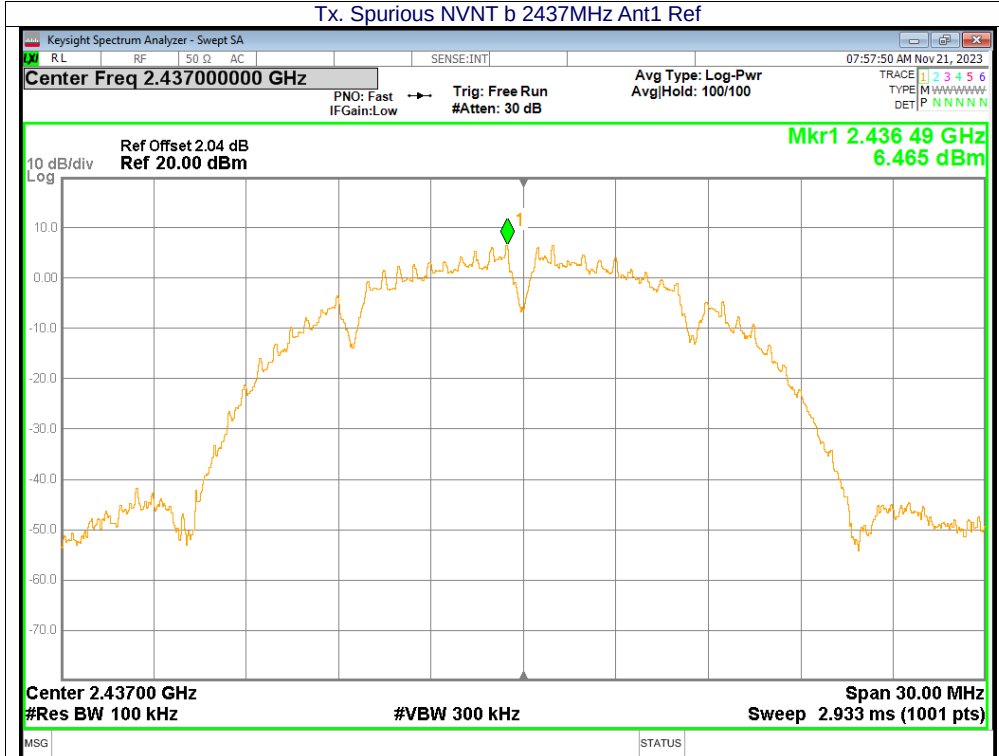


Tx. Spurious NVNT b 2437MHz Ant1 Emission

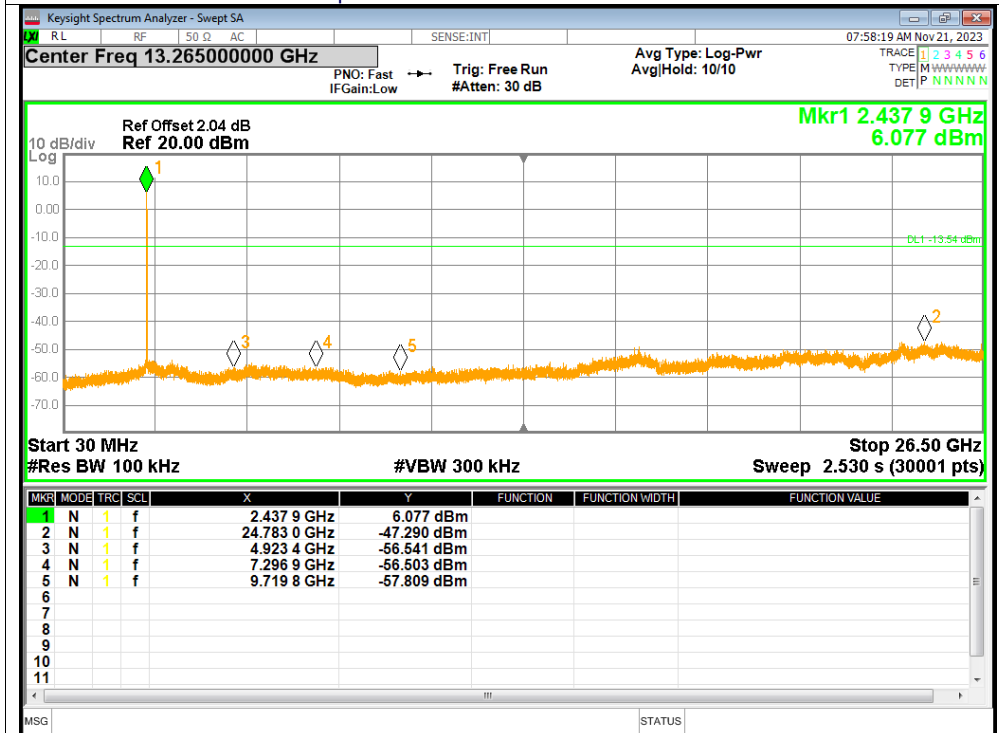


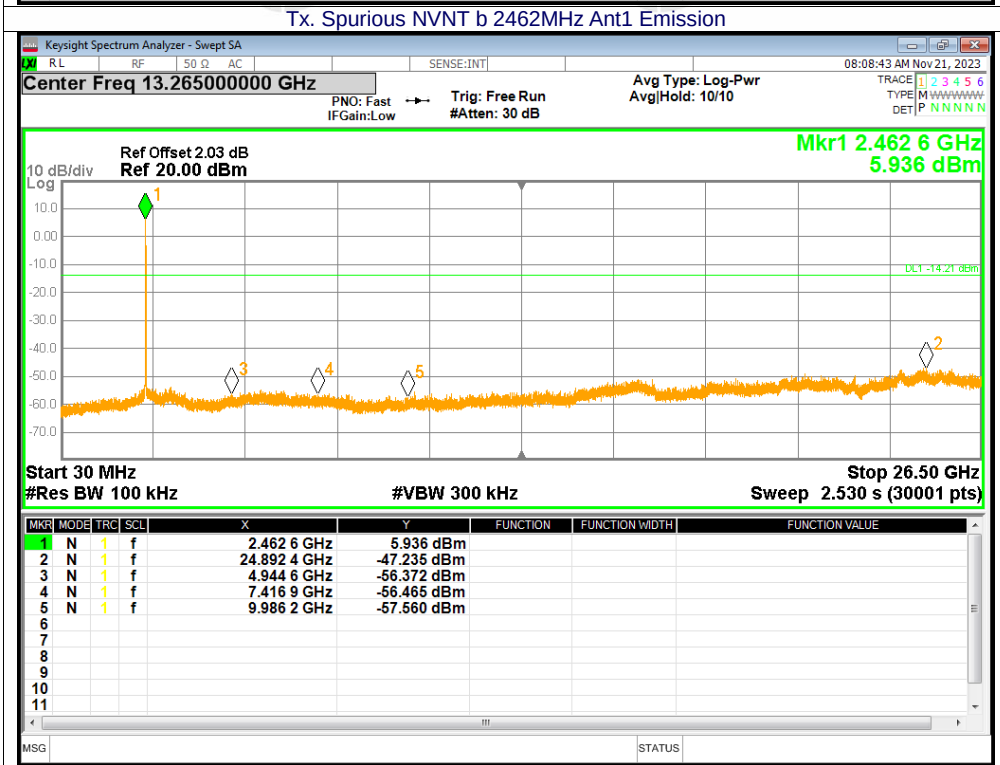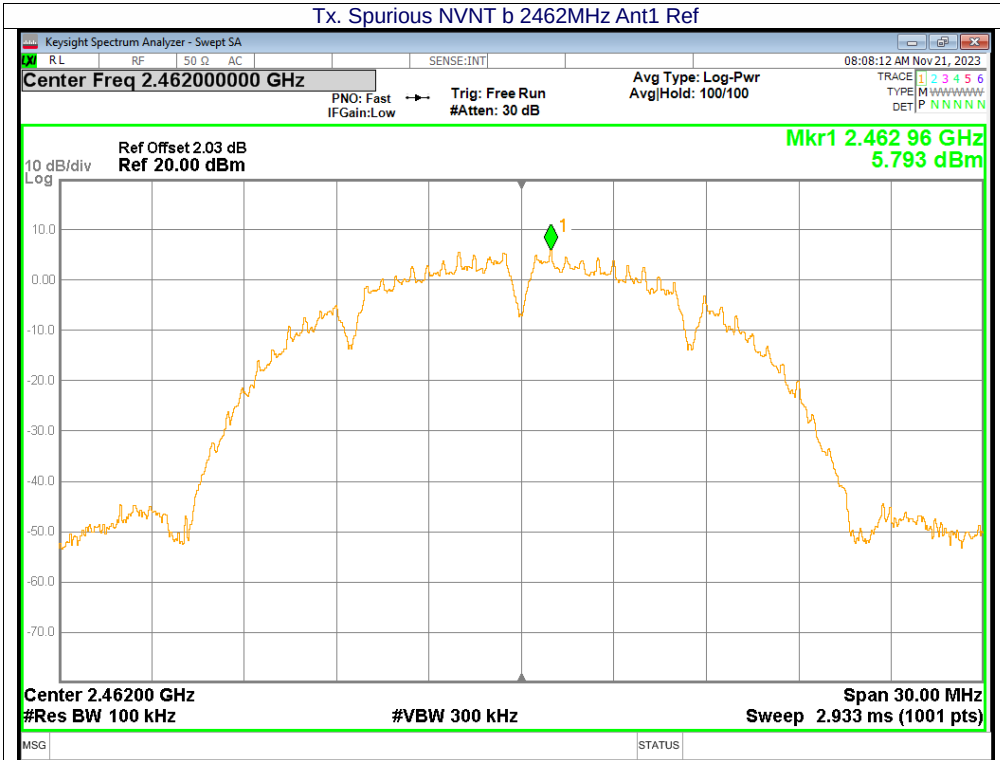

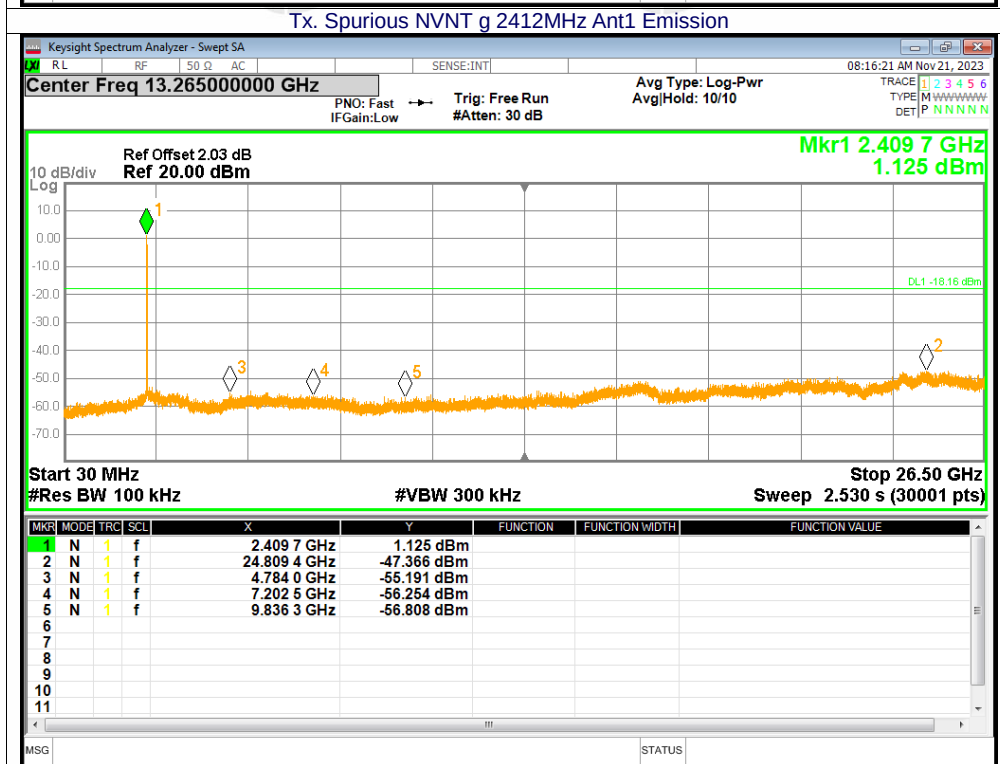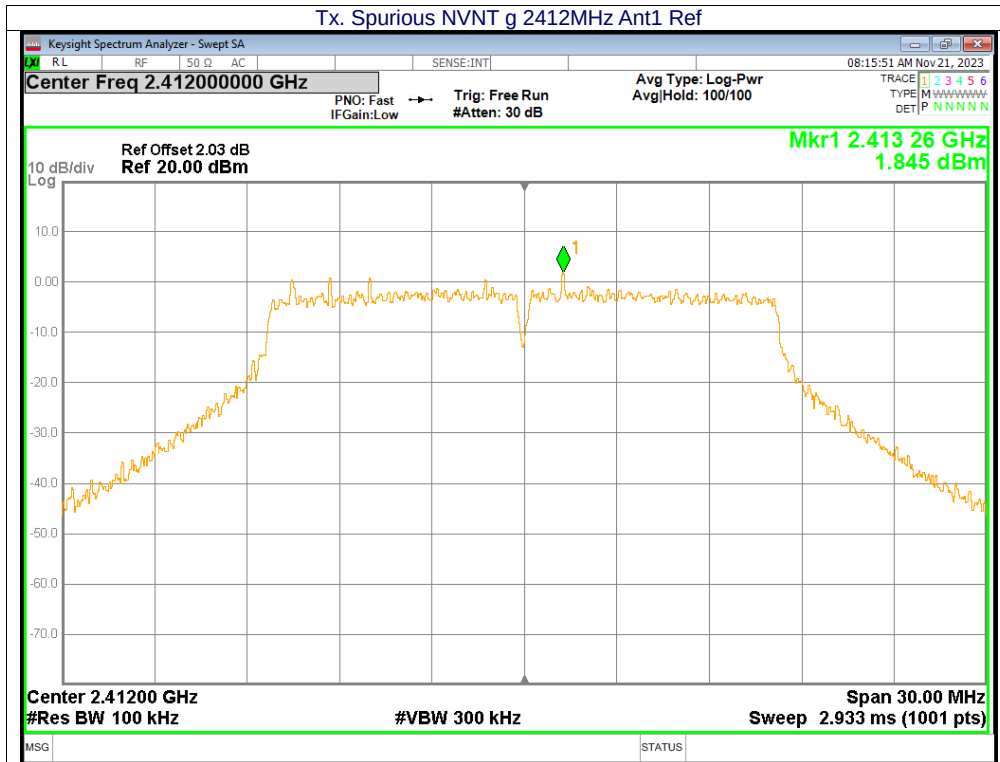


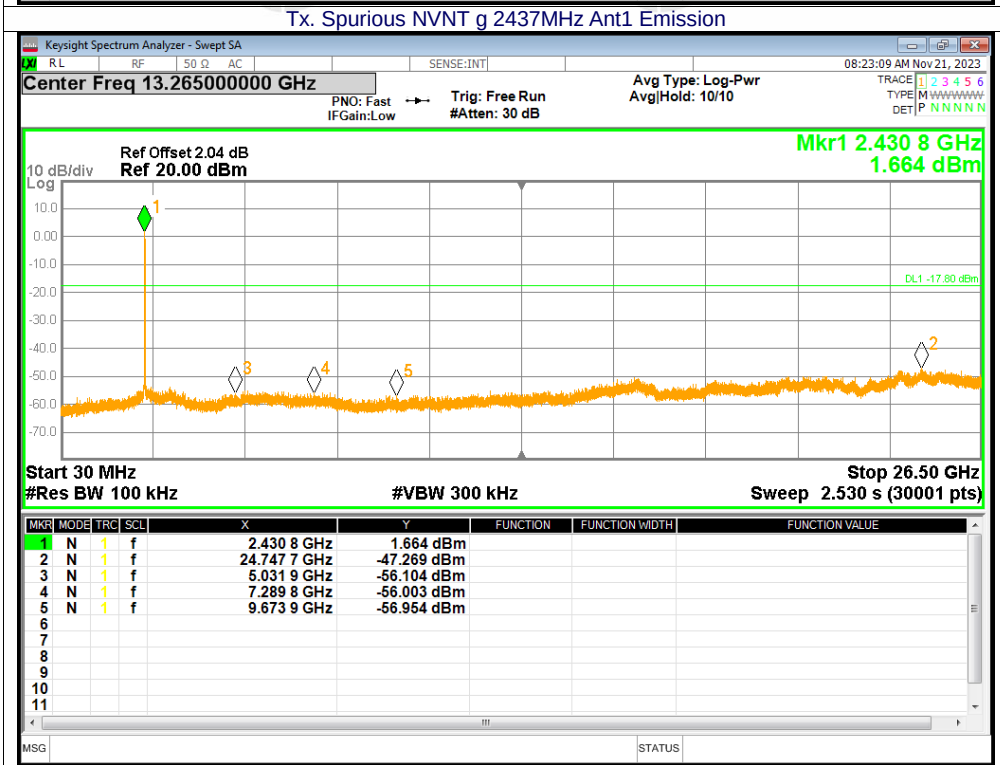
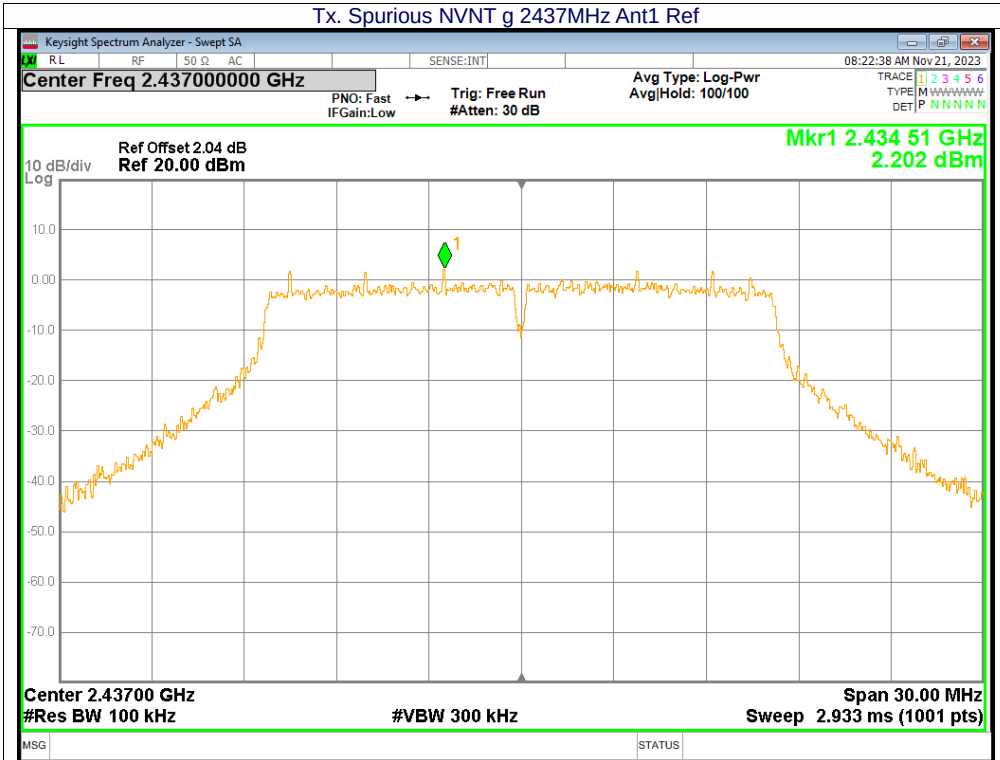




Tx. Spurious NVNT g 2462MHz Ant1 Ref


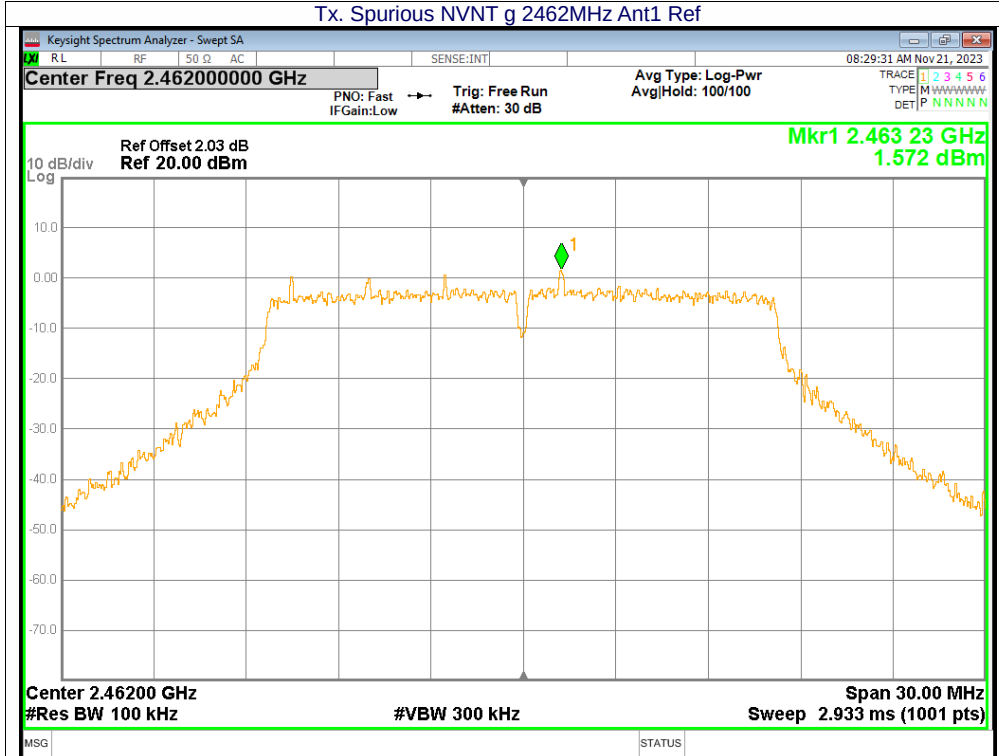


Tx. Spurious NVNT g 2462MHz Ant1 Emission

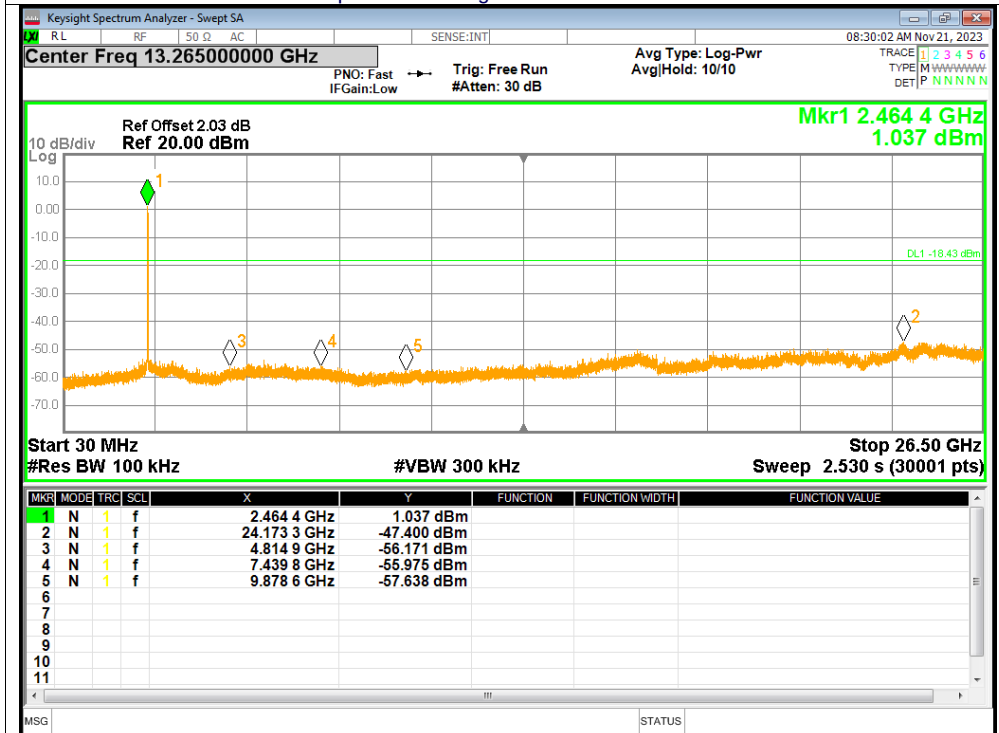

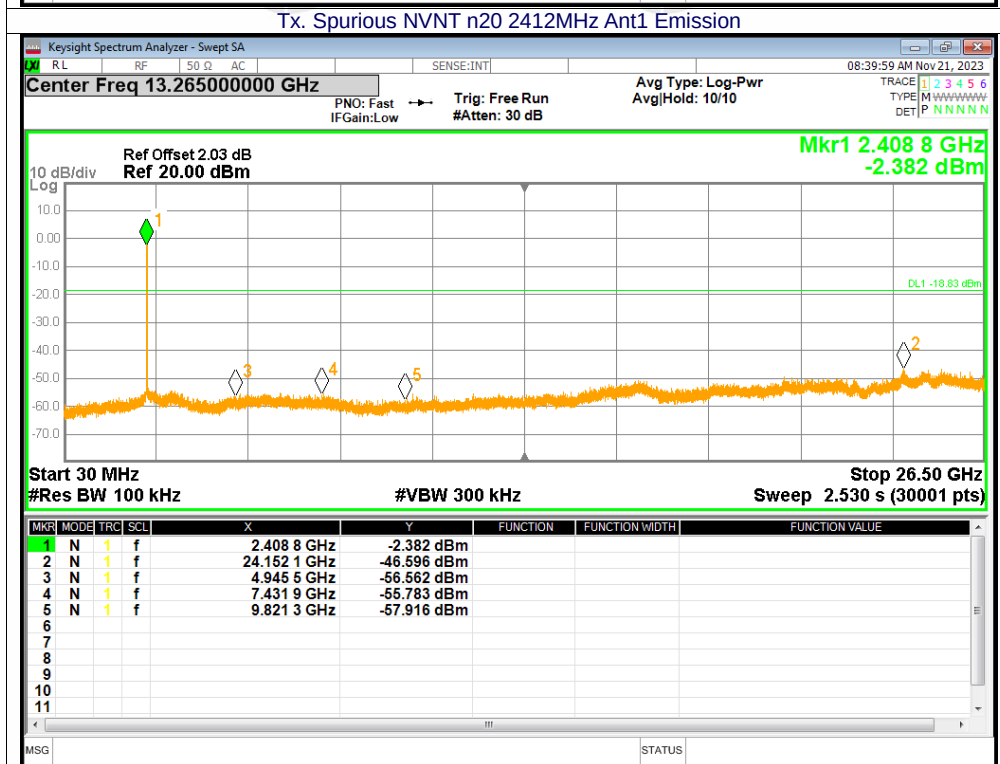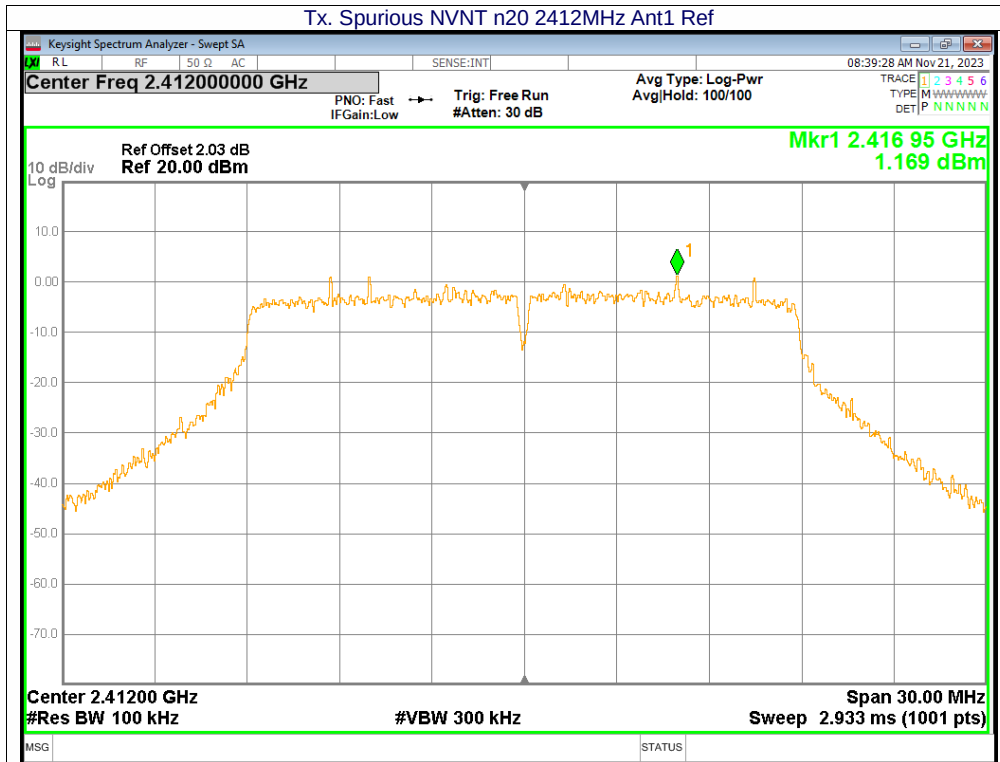

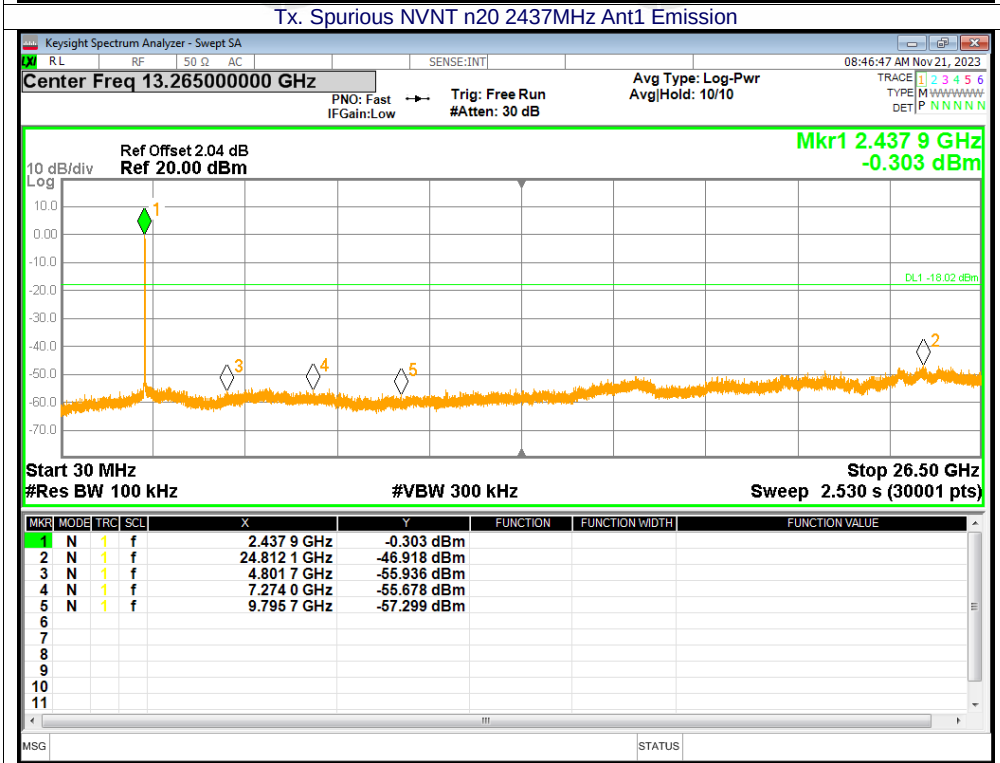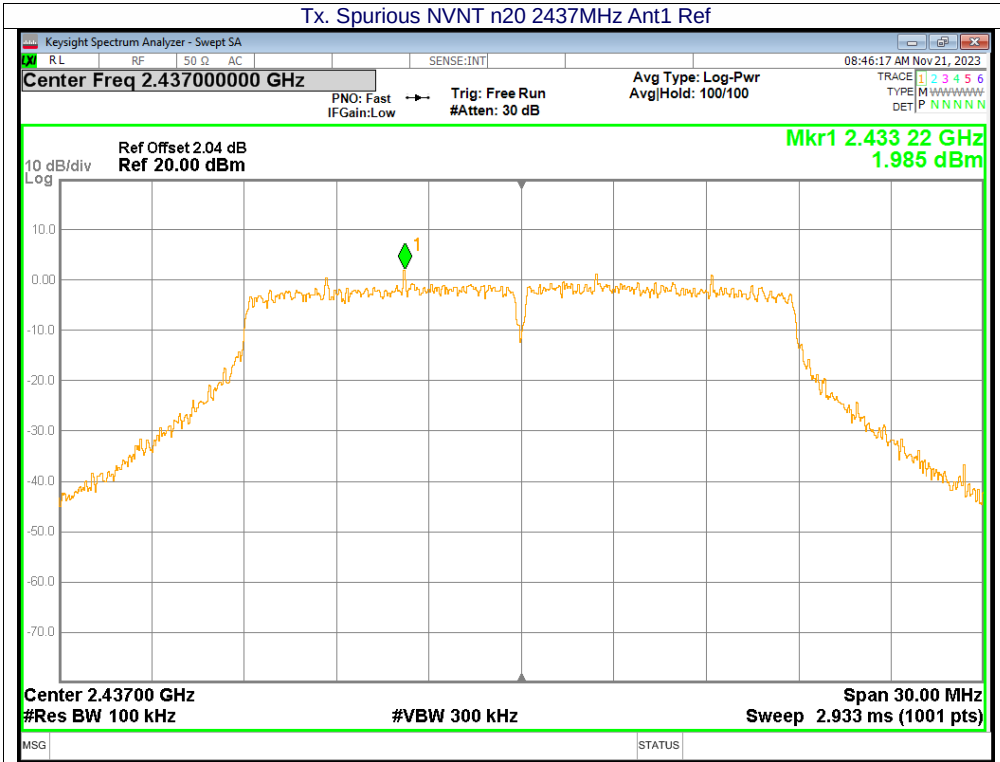

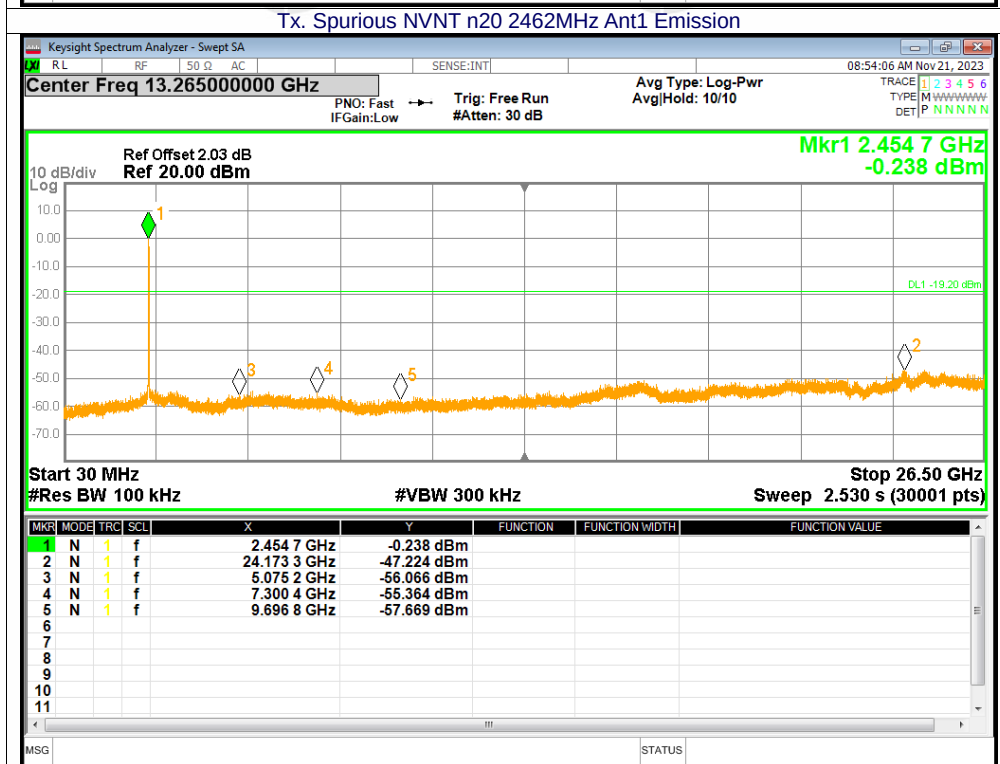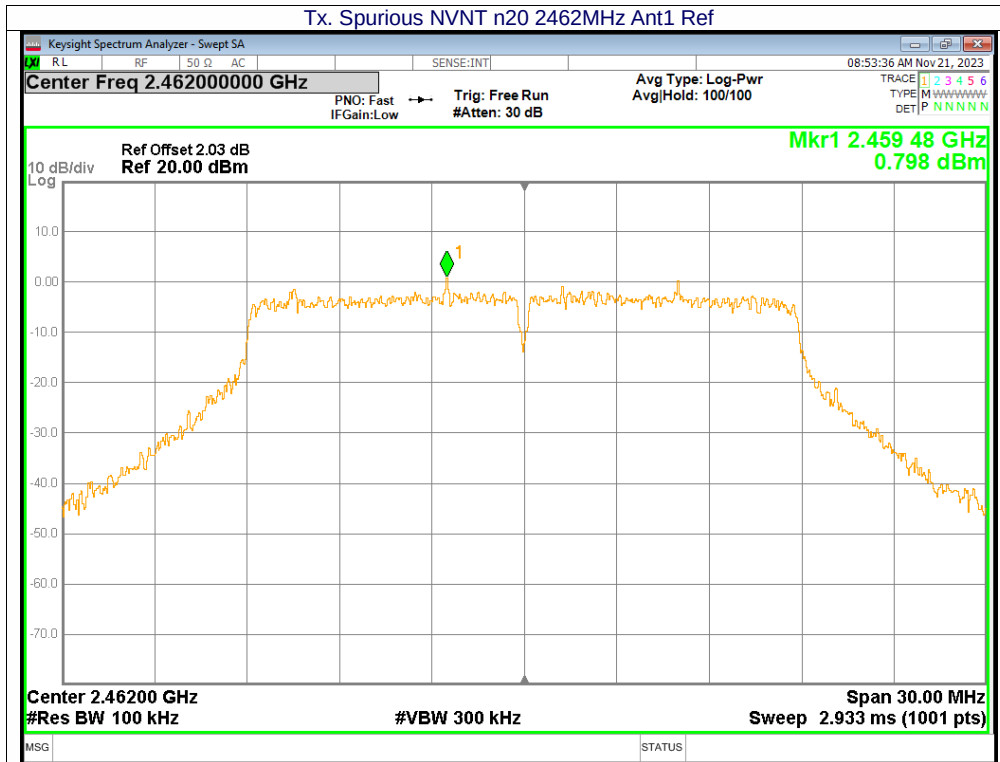

12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******