

TEST REPORT

Product : DIGITAL THERMOMETER
Trade mark : N/A
Model/Type reference : DMT-4751, OT 30
Serial Number : N/A
Report Number : EED32K00303801
FCC ID : 2AQVU0002
Date of Issue : Dec. 06, 2018
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

JOYTECH HEALTHCARE CO., LTD.

**No. 365, Wuzhou Road, Yuhang Economic Development Zone,
Hangzhou city, 311100 Zhejiang, China**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Tom-chen

Tom chen

Compiled by:

Kevin Lan

Kevin Lan

Reviewed by:

Kevin Yang

Kevin yang

Approved by:

Sheek Luo

Sheek Luo

Date:

Dec. 06, 2018

Check No.:3570177792



2 Version

Version No.	Date	Description
00	Dec. 06, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	N/A
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.

N/A:The device is only battery operated, the test related AC mains is not applicable.

Model No.: DMT-4751, OT 30

Only the model DMT-4751 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, only the model name is different.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
7 EQUIPMENT LIST	9
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
Appendix A): 6dB Occupied Bandwidth	12
Appendix B): Conducted Peak Output Power	14
Appendix C): Band-edge for RF Conducted Emissions	16
Appendix D): RF Conducted Spurious Emissions	17
Appendix E): Power Spectral Density	20
Appendix F): Antenna Requirement	22
Appendix G): Restricted bands around fundamental frequency (Radiated)	23
Appendix H): Radiated Spurious Emissions	26
PHOTOGRAPHS OF TEST SETUP	30
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	32

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

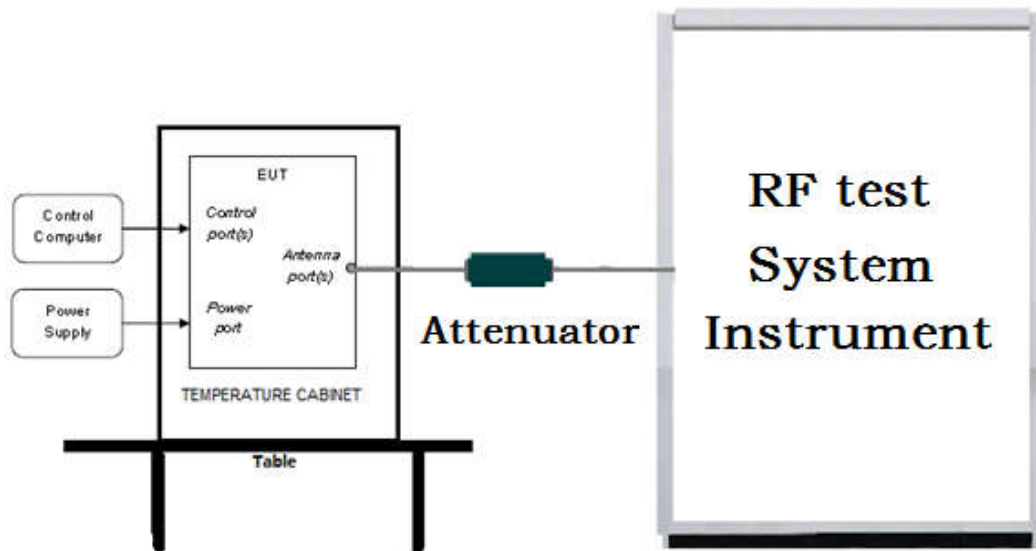

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

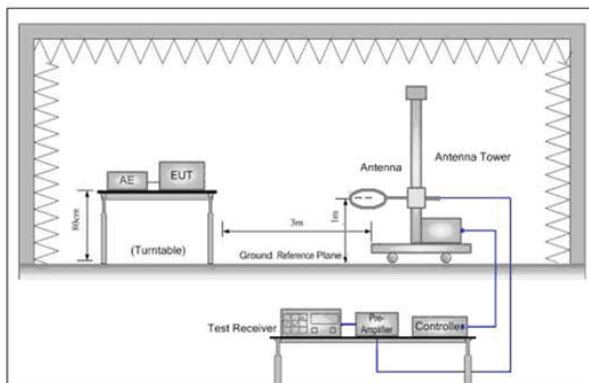


Figure 1. Below 30MHz

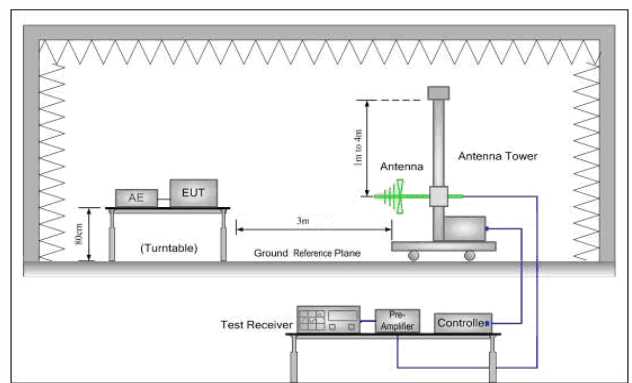


Figure 2. 30MHz to 1GHz

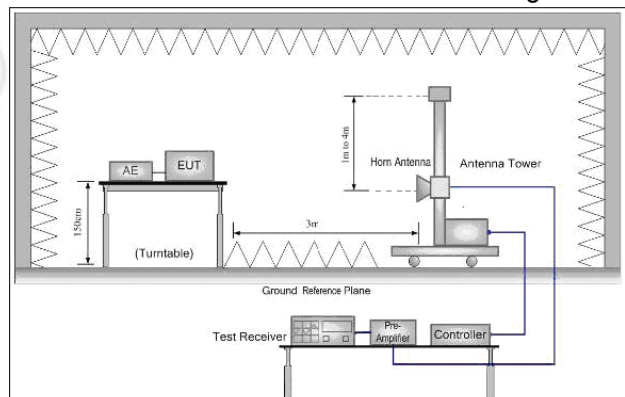


Figure 3. Above 1GHz

5.2 Test Environment

Operating Environment:	
Temperature:	21 °C
Humidity:	55 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	The EUT transmitted the continuous signal at the specific channel(s).			

6 General Information

6.1 Client Information

Applicant:	JOYTECH HEALTHCARE CO., LTD.
Address of Applicant:	No. 365, Wuzhou Road, Yuhang Economic Development Zone, Hangzhou city, 311100 Zhejiang, China
Manufacturer:	JOYTECH HEALTHCARE CO., LTD.
Address of Manufacturer:	No. 365, Wuzhou Road, Yuhang Economic Development Zone, Hangzhou city, 311100 Zhejiang, China
Factory:	JOYTECH HEALTHCARE CO., LTD..
Address of Factory:	No. 365, Wuzhou Road, Yuhang Economic Development Zone, Hangzhou city, 311100 Zhejiang, China

6.2 General Description of EUT

Product Name:	DIGITAL THERMOMETER
Model No.(EUT):	DMT-4751, OT 30
Test Model No.:	DMT-4751
Trade mark:	N/A
EUT Supports Radios application:	BT 4.0 Single mode, 2402-2480MHz
Power Supply:	Button battery (CR 2032) 3V
Firmware version of the sample:	V1.0(manufacturer declare)
Hardware version of the sample:	Z(manufacturer declare)
Sample Received Date:	Nov. 09, 2018
Sample tested Date:	Nov. 12, 2018 to Dec. 05, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Technique:	DSSS
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Power Grade:	N/A
Test Software of EUT:	N/A
Antenna Type :	PCB Antenna
Antenna Gain:	0dBi
Test Voltage:	Button battery (CR 2032) 3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz

4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
 Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
 Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-0 02	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRO NICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-13-2018	03-12-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	10-28-2018	10-27-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A024 25	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 1869	04-25-2018	04-23-2021
Horn Antenna	ETS- LINDGREN	3117	00057410	06-05-2018	06-03-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	6042	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041	06-05-2018	06-04-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Receiver	R&S	ESCI7	100938- 003	11-22-2017	11-23-2018
Receiver	R&S	ESCI7	100938- 003	11-23-2018	11-22-2019
Multi device Controller	maturo	NCD/070/107 11112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095 744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401 106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050 534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO- TRONICS	SPA-F- 63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA0 9CL12-0395- 001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA0 8CL12-0393- 001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA0 4CL12-0396- 002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA0 3CL12-0394- 001	---	01-10-2018	01-09-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	N/A	N/A
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix H)

Appendix A): 6dB Occupied Bandwidth

Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict	Remark
BLE	LCH	0.6715	1.0686	PASS	Peak detector
BLE	MCH	0.6506	1.0577	PASS	
BLE	HCH	0.6957	1.0802	PASS	

Test Graphs

Graphs	
LCH	Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 19.08 dB Ref 15.00 dBm Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.0686 MHz Total Power 9.43 dBm Transmit Freq Error 7.184 kHz OBW Power 99.00 % x dB Bandwidth 671.5 kHz x dB -6.00 dB
MCH	Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset 19.02 dB Ref 15.00 dBm Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.0577 MHz Total Power 8.09 dBm Transmit Freq Error 6.573 kHz OBW Power 99.00 % x dB Bandwidth 650.6 kHz x dB -6.00 dB
HCH	Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset 19.05 dB Ref 5.00 dBm Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1.067 ms Occupied Bandwidth 1.0802 MHz Total Power 6.41 dBm Transmit Freq Error 7.451 kHz OBW Power 99.00 % x dB Bandwidth 695.7 kHz x dB -6.00 dB

Appendix B): Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	3.014	PASS
BLE	MCH	1.719	PASS
BLE	HCH	-0.041	PASS

Test Graphs


Graphs	
LCH	Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref Offset 19.08 dB Ref 19.08 dBm Mkr1 2.401784 GHz 3.014 dBm Span 25.00 MHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)
MCH	Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.440000000 GHz Ref Offset 19.02 dB Ref 19.02 dBm Mkr1 2.439978 GHz 1.719 dBm Span 25.00 MHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)
HCH	Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 19.05 dB Ref 19.05 dBm Mkr1 2.480138 GHz -0.041 dBm Span 25.00 MHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)

Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BLE	LCH	2.966	-57.573	-17.03	PASS
BLE	HCH	-0.144	-48.109	-20.14	PASS

Test Graphs

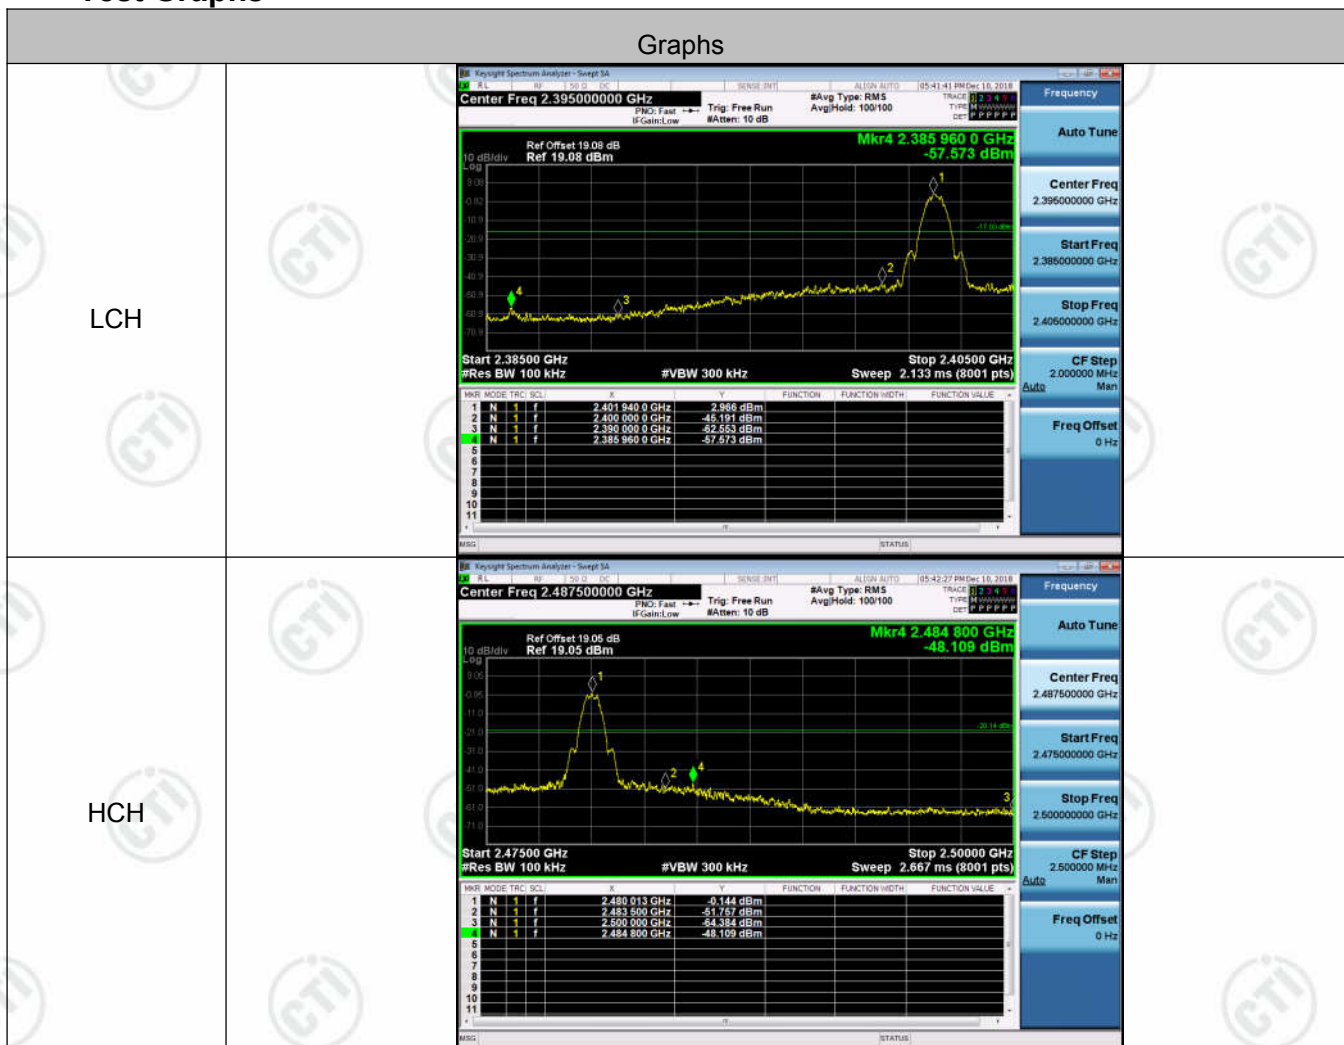



Appendix D): RF Conducted Spurious Emissions


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
BLE	LCH	2.933	<Limit	PASS
BLE	MCH	1.581	<Limit	PASS
BLE	HCH	-0.168	<Limit	PASS

Test Graphs

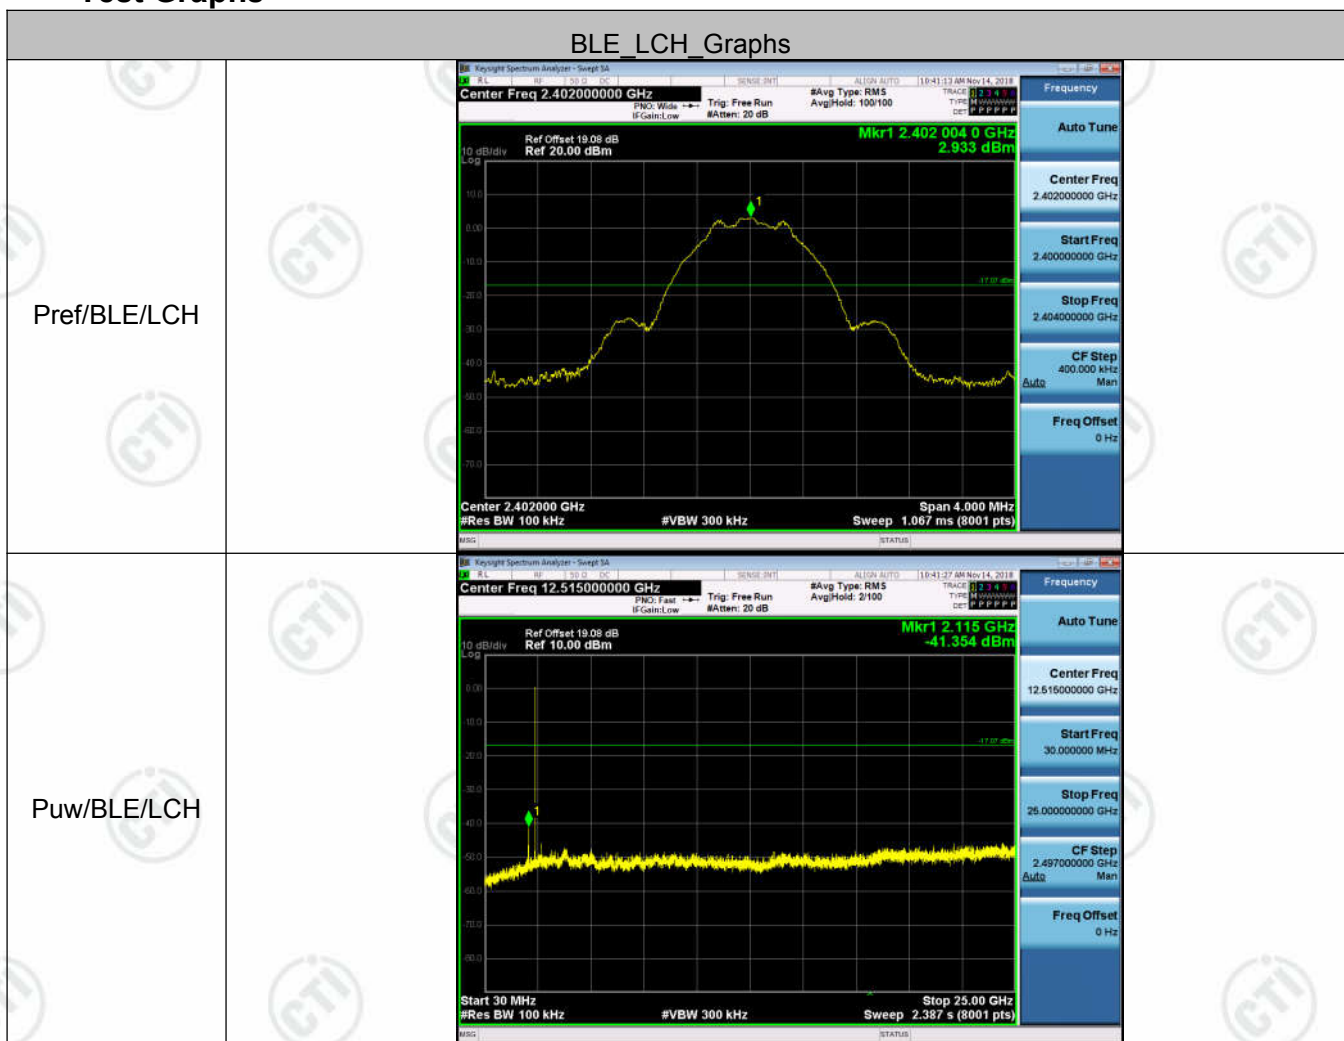

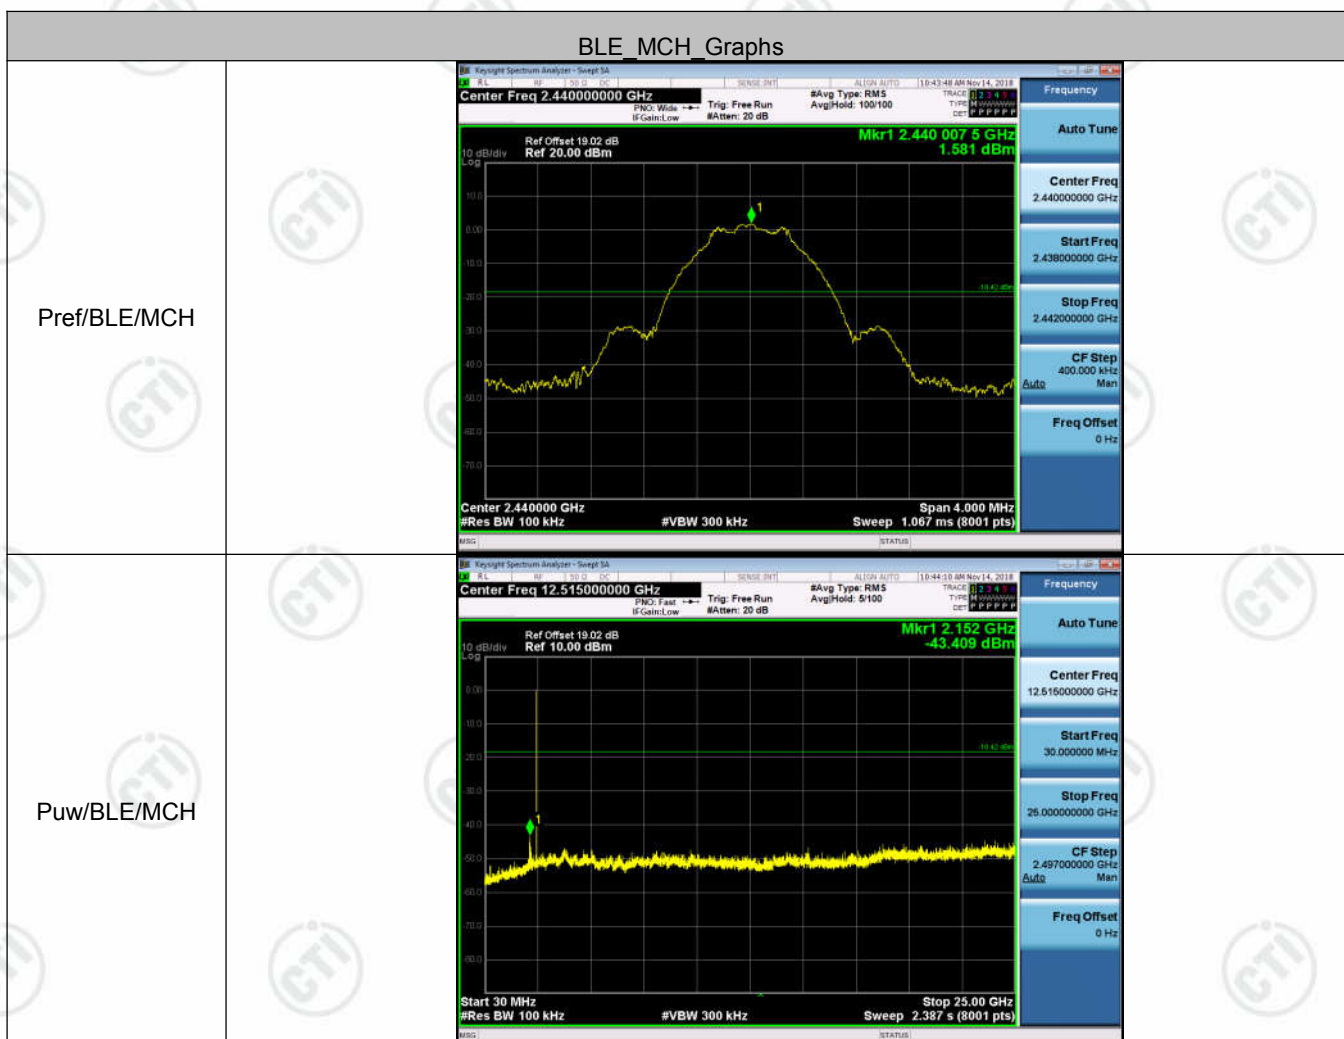


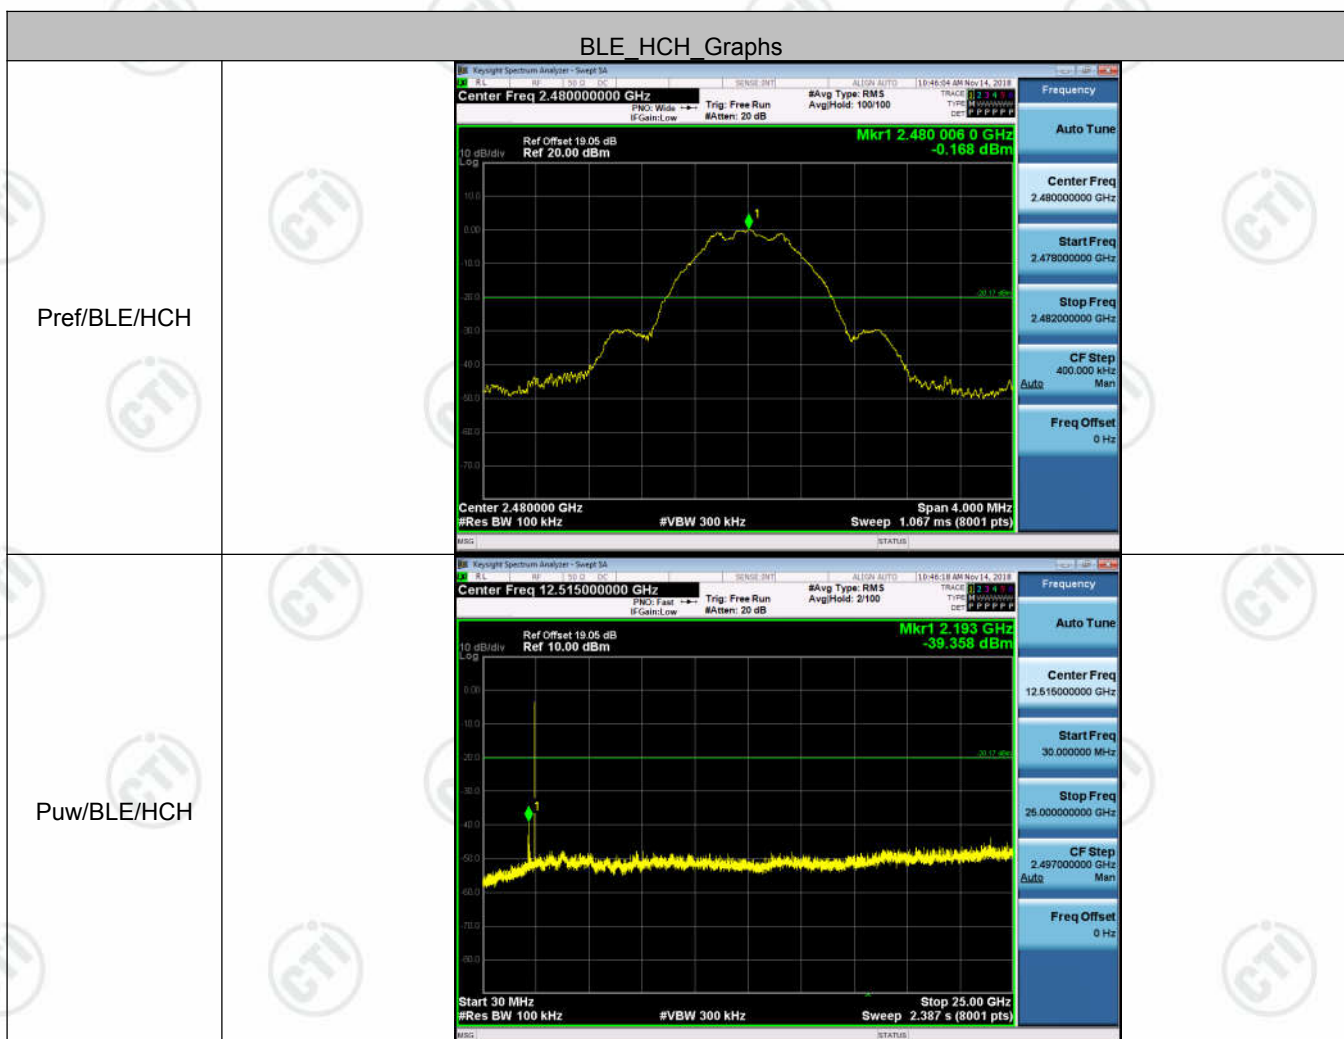


Appendix E): Power Spectral Density

Result Table

Mode	Channel	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE	LCH	-8.992	8	PASS
BLE	MCH	-10.764	8	PASS
BLE	HCH	-12.131	8	PASS

Test Graphs

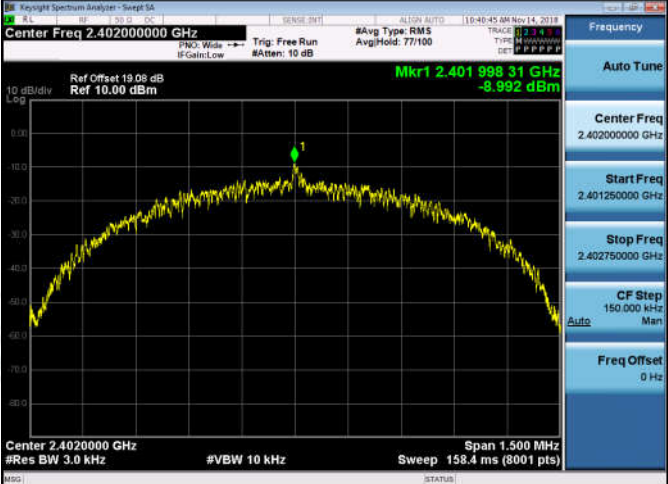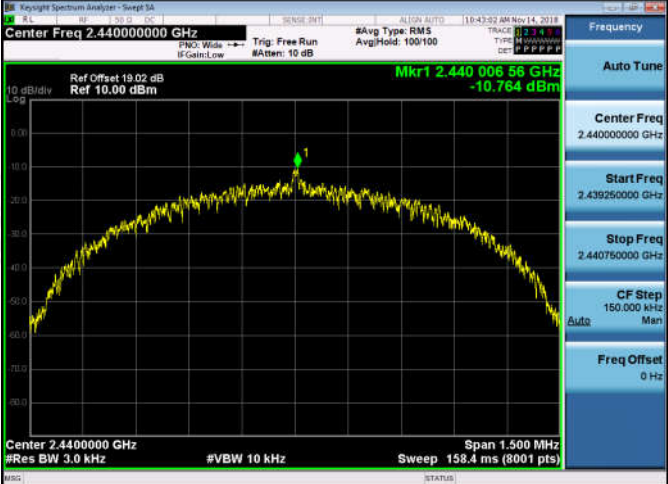Graphs	
LCH	
MCH	
HCH	

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

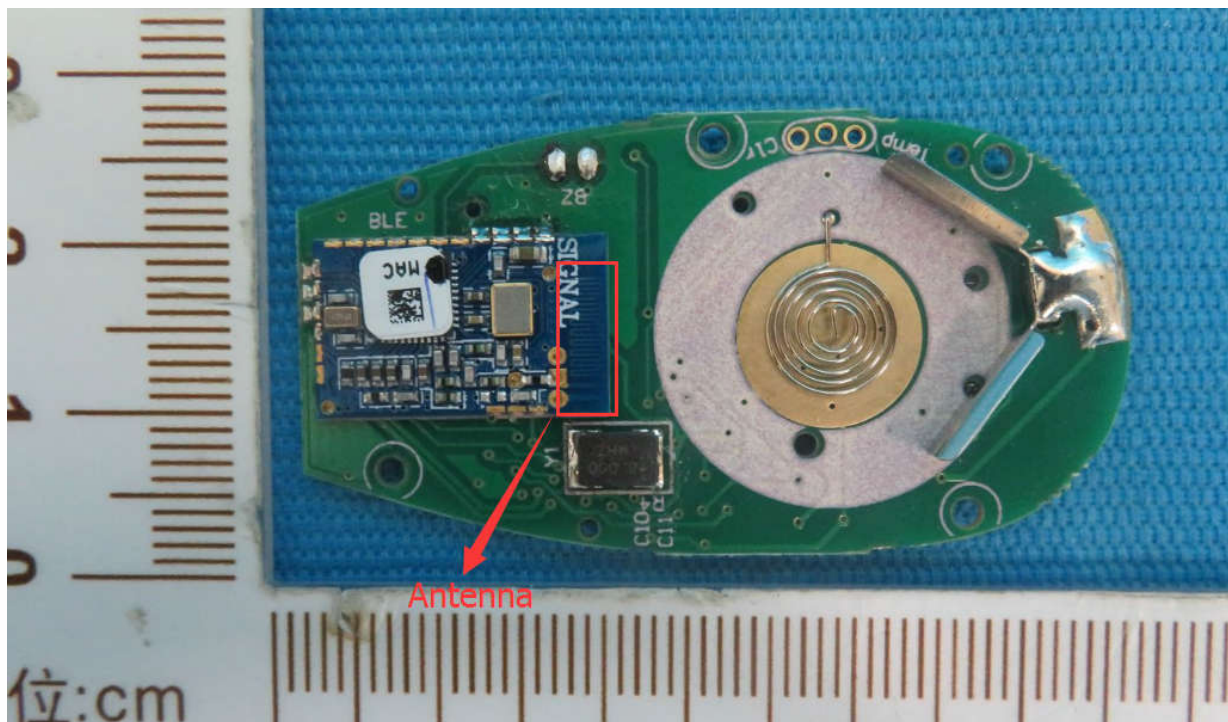


Appendix G): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		

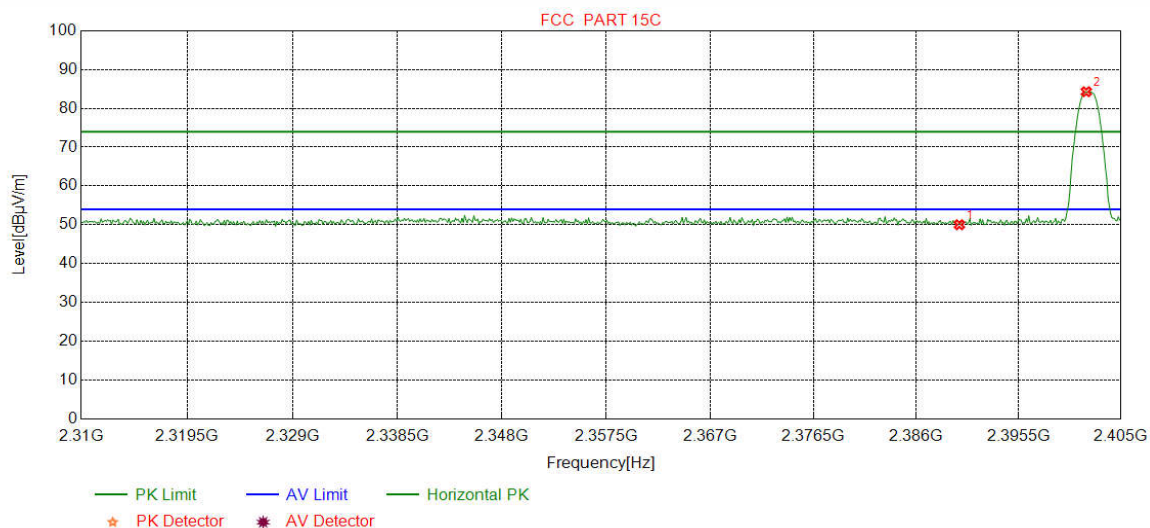


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-36.62	41.00	50.00	74.00	24.00	Pass	Horizontal
2	2401.7897	32.26	13.31	-36.60	75.33	84.30	74.00	-10.30	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	Peak		

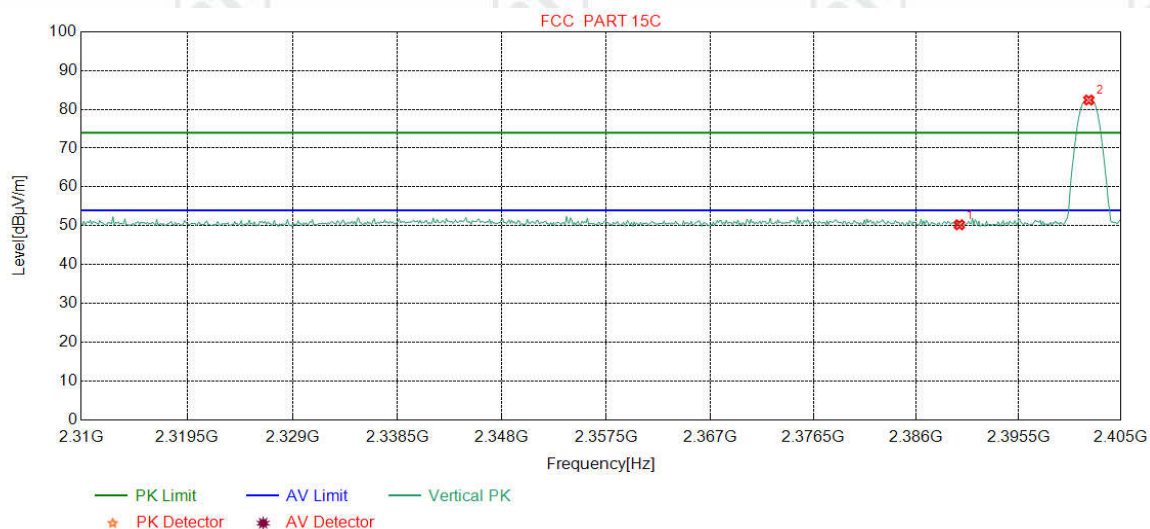


NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-36.62	41.25	50.25	74.00	23.75	Pass	Vertical
2	2402.0275	32.26	13.31	-36.60	73.44	82.41	74.00	-8.41	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		

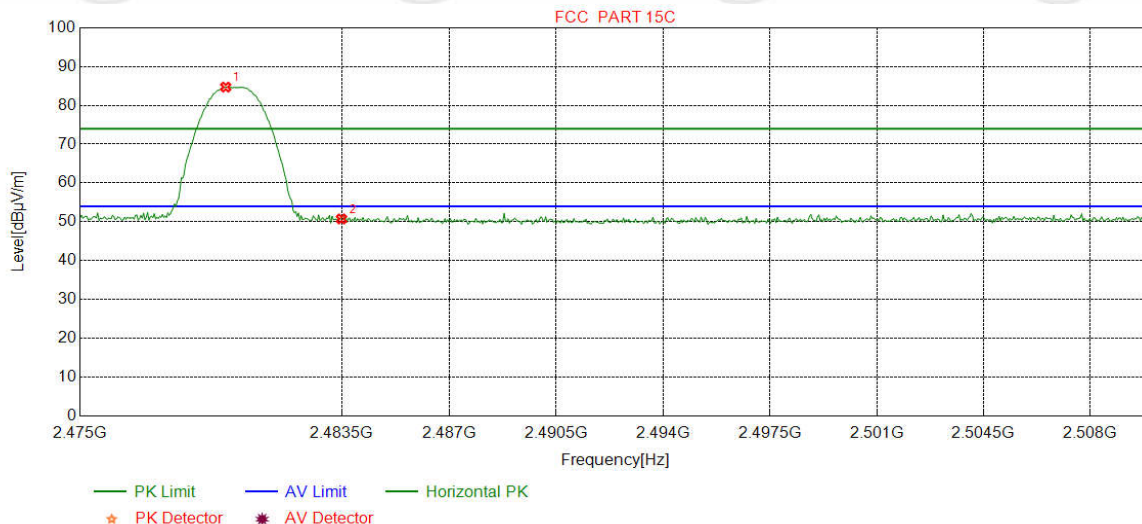

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7309	32.37	13.39	-36.77	75.73	84.72	74.00	-10.72	Pass	Horizontal
2	2483.5000	32.38	13.38	-36.80	41.76	50.72	74.00	23.28	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	Peak		

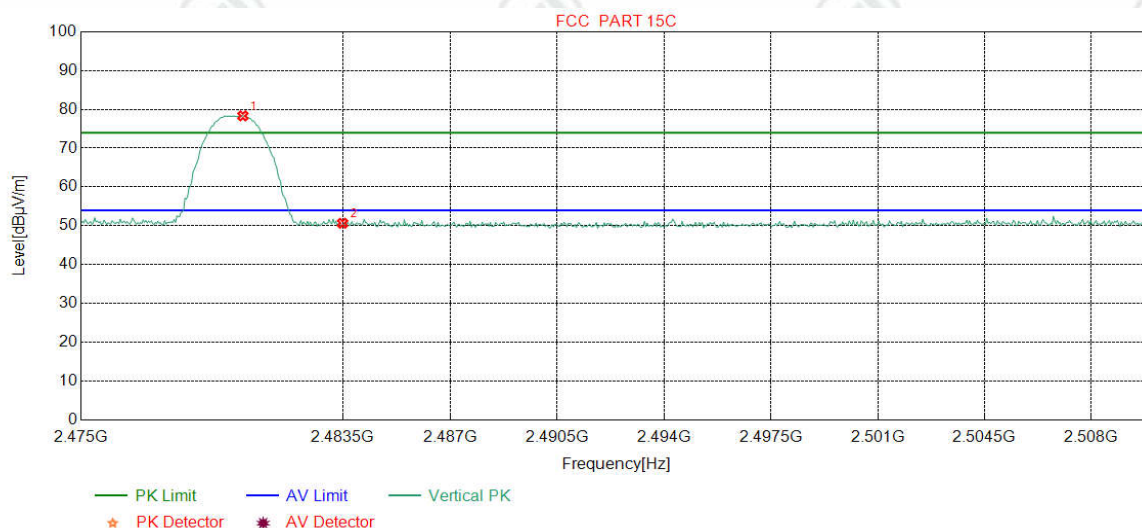

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.2566	32.37	13.39	-36.77	69.34	78.33	74.00	-4.33	Pass	Vertical
2	2483.5000	32.38	13.38	-36.80	41.69	50.65	74.00	23.35	Pass	Vertical

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix H): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Mode:		GFSK Transmitting								
Remark:		QP								
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	67.4457	9.66	0.93	-32.04	33.36	11.91	40.00	28.09	Pass	Horizontal
2	110.2270	10.86	1.24	-32.07	33.14	13.17	43.50	30.33	Pass	Horizontal
3	208.8859	11.13	1.71	-31.94	34.01	14.91	43.50	28.59	Pass	Horizontal
4	459.6560	16.35	2.56	-31.83	30.62	17.70	46.00	28.30	Pass	Horizontal
5	625.0575	19.20	2.97	-31.98	31.72	21.91	46.00	24.09	Pass	Horizontal
6	923.1683	22.24	3.65	-31.39	30.82	25.32	46.00	20.68	Pass	Horizontal

Mode:		GFSK Transmitting								
Remark:		QP								
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	57.1627	12.05	0.87	-32.06	43.22	24.08	40.00	15.92	Pass	Vertical
2	110.0330	10.89	1.24	-32.07	37.54	17.60	43.50	25.90	Pass	Vertical
3	150.0010	7.55	1.45	-32.01	39.67	16.66	43.50	26.84	Pass	Vertical
4	208.8859	11.13	1.71	-31.94	44.15	25.05	43.50	18.45	Pass	Vertical
5	289.9860	13.00	2.03	-31.88	33.49	16.64	46.00	29.36	Pass	Vertical
6	853.1273	21.54	3.52	-31.76	29.67	22.97	46.00	23.03	Pass	Vertical

Transmitter Emission above 1GHz

Mode:		BLE GFSK Transmitting			Channel:				2402		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	1894.6895	31.00	3.42	-36.79	47.18	44.81	74.00	29.19	Pass	H	Peak
2	3305.5204	33.32	4.57	-36.78	47.05	48.16	74.00	25.84	Pass	H	Peak
3	4804.0000	34.50	4.55	-36.15	66.63	69.53	74.00	4.47	Pass	H	Peak
4	4804.0000	34.50	4.55	-36.15	40.13	43.03	54.00	10.97	Pass	H	Average
5	6009.0506	35.80	5.32	-36.31	44.20	49.01	74.00	24.99	Pass	H	Peak
6	7206.0000	36.31	5.81	-36.43	47.80	53.49	74.00	20.51	Pass	H	Peak
7	7206.0000	36.31	5.82	-36.43	36.80	42.50	54.00	11.50	Pass	H	Average
8	9608.0000	37.64	6.63	-36.79	48.55	56.03	74.00	17.97	Pass	H	Peak
9	9608.0000	37.64	6.63	-36.79	36.01	43.49	54.00	10.51	Pass	H	Average
10	1798.6799	30.37	3.32	-36.81	47.80	44.68	74.00	29.32	Pass	V	Peak
11	3507.6838	33.41	4.48	-36.57	46.53	47.85	74.00	26.15	Pass	V	Peak
12	4804.0000	34.50	4.55	-36.15	64.39	67.29	74.00	6.71	Pass	V	Peak
13	4804.0000	34.50	4.55	-36.15	39.56	42.46	54.00	11.54	Pass	V	Average
14	5975.2484	35.76	5.33	-36.24	44.64	49.49	74.00	24.51	Pass	V	Peak
15	7206.0000	36.31	5.81	-36.43	52.01	57.70	74.00	16.30	Pass	V	Peak
16	7206.0000	36.31	5.82	-36.43	31.12	36.82	54.00	17.18	Pass	V	Average
17	9608.0000	37.64	6.63	-36.79	53.58	61.06	74.00	12.94	Pass	V	Peak
18	9608.0000	37.64	6.63	-36.79	37.94	45.42	54.00	8.58	Pass	V	Average

Mode:		BLE GFSK Transmitting			Channel:				2440		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity	Remark
1	1817.4817	30.50	3.34	-36.86	47.17	44.15	74.00	29.85	Pass	H	Peak
2	3575.2884	33.46	4.39	-36.51	45.48	46.82	74.00	27.18	Pass	H	Peak
3	4880.0000	34.50	4.80	-36.09	66.51	69.72	74.00	4.28	Pass	H	Peak
4	4880.0000	34.50	4.80	-36.10	43.21	46.41	54.00	7.59	Pass	H	Average
5	5523.4682	35.04	5.16	-36.10	44.67	48.77	74.00	25.23	Pass	H	Peak
6	7320.0000	36.42	5.85	-36.38	52.38	58.27	74.00	15.73	Pass	H	Peak
7	7320.0000	36.42	5.85	-36.38	30.99	36.88	54.00	17.12	Pass	H	Average
8	9760.0000	37.70	6.73	-36.81	50.40	58.02	74.00	15.98	Pass	H	Peak
9	9760.0000	37.70	6.73	-36.82	31.55	39.16	54.00	14.84	Pass	H	Average
10	1898.2898	31.03	3.42	-36.78	47.99	45.66	74.00	28.34	Pass	V	Peak
11	3311.3708	33.32	4.57	-36.77	46.39	47.51	74.00	26.49	Pass	V	Peak
12	4880.0000	34.50	4.80	-36.09	63.84	67.05	74.00	6.95	Pass	V	Peak
13	4880.0000	34.50	4.80	-36.10	42.09	45.29	54.00	8.71	Pass	V	Average
14	6312.6208	35.86	5.46	-36.20	45.13	50.25	74.00	23.75	Pass	V	Peak
15	7320.0000	36.42	5.85	-36.38	51.50	57.39	74.00	16.61	Pass	V	Peak
16	7320.0000	36.42	5.85	-36.38	37.25	43.14	54.00	10.86	Pass	V	Average
17	9760.0000	37.70	6.73	-36.81	49.79	57.41	74.00	16.59	Pass	V	Peak
18	9760.0000	37.70	6.73	-36.82	37.69	45.30	54.00	8.70	Pass	V	Average

Mode:		BLE GFSK Transmitting			Channel:				2480		
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1871.8872	30.85	3.40	-36.87	47.67	45.05	74.00	28.95	Pass	H	Peak
2	3174.8617	33.27	4.61	-36.83	46.88	47.93	74.00	26.07	Pass	H	Peak
3	4960.0000	34.50	4.82	-36.20	62.11	65.23	74.00	8.77	Pass	H	Peak
4	4960.0000	34.50	4.82	-36.21	41.18	44.29	54.00	9.71	Pass	H	Average
5	5925.8451	35.68	5.19	-36.19	44.84	49.52	74.00	24.48	Pass	H	Peak
6	7440.0000	36.54	5.85	-36.34	49.88	55.93	74.00	18.07	Pass	H	Peak
7	7440.0000	36.54	5.85	-36.34	36.19	42.24	54.00	11.76	Pass	H	Average
8	7440.0000	36.54	5.85	-36.34	36.19	42.24	54.00	11.76	Pass	H	Peak
9	9920.0000	37.77	6.79	-36.82	34.68	42.42	54.00	11.58	Pass	H	Average
10	1893.4893	31.00	3.41	-36.79	47.91	45.53	74.00	28.47	Pass	V	Peak
11	3412.1275	33.36	4.53	-36.62	45.87	47.14	74.00	26.86	Pass	V	Peak
12	4960.0000	34.50	4.82	-36.20	61.88	65.00	74.00	9.00	Pass	V	Peak
13	4960.0000	34.50	4.82	-36.21	39.76	42.87	54.00	11.13	Pass	V	Average
14	6105.2570	35.82	5.26	-36.32	44.73	49.49	74.00	24.51	Pass	V	Peak
15	7440.0000	36.54	5.85	-36.34	50.11	56.16	74.00	17.84	Pass	V	Peak
16	7440.0000	36.54	5.85	-36.34	36.21	42.26	54.00	11.74	Pass	V	Average
17	9920.0000	37.77	6.79	-36.82	48.70	56.44	74.00	17.56	Pass	V	Peak
18	9920.0000	37.77	6.79	-36.82	33.98	41.72	54.00	12.28	Pass	V	Average

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: DMT-4751



Radiated spurious emission Test Setup-1(Below 30MHz)



Radiated spurious emission Test Setup-2 (30MHz- 1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)

PHOTOGRAPHS OF EUT Constructional Details

Test model No.: DMT-4751



View of Product-1




View of Product-2



View of Product-3



View of Product-4

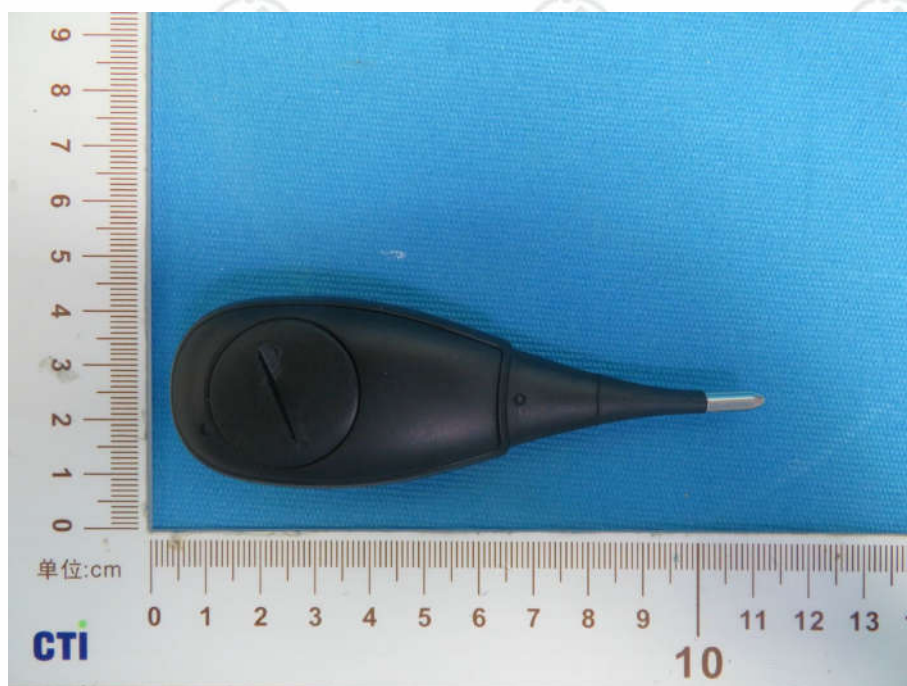

View of Product-5



View of Product-6




View of Product-7




View of Product-8




View of Product-9

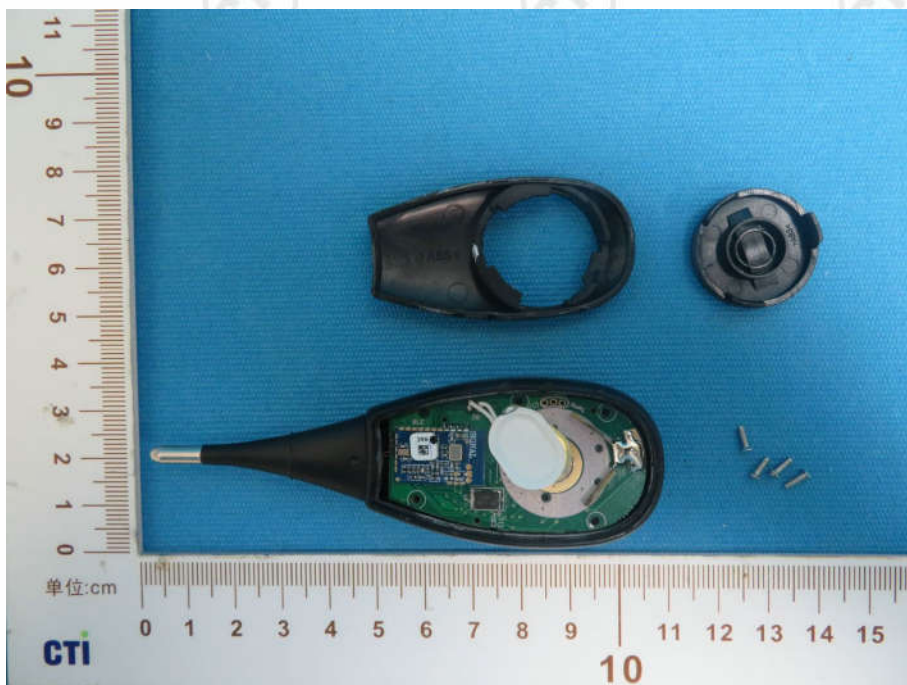


View of Product-10

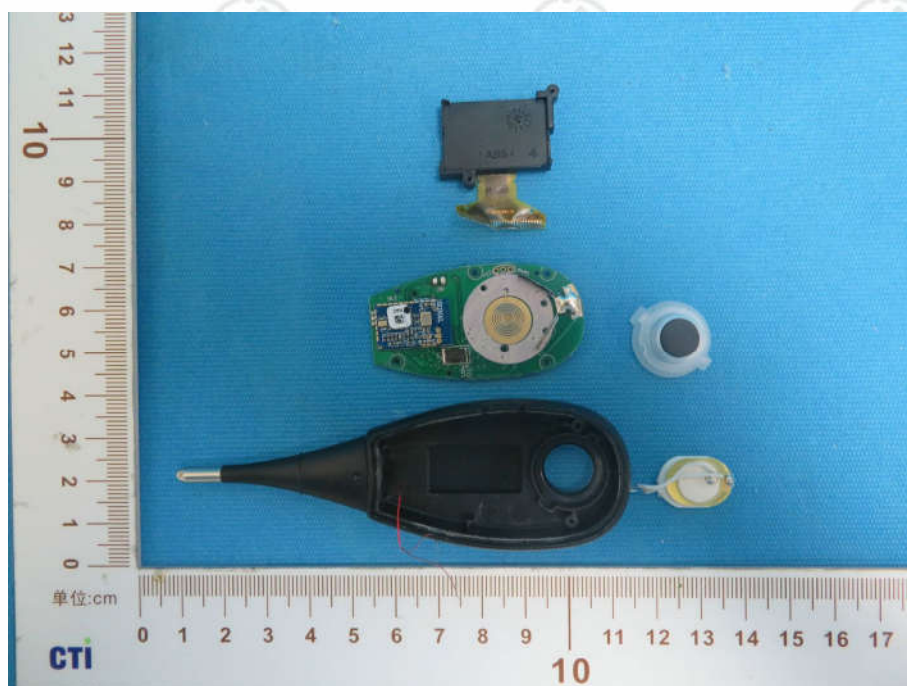


View of Product-11

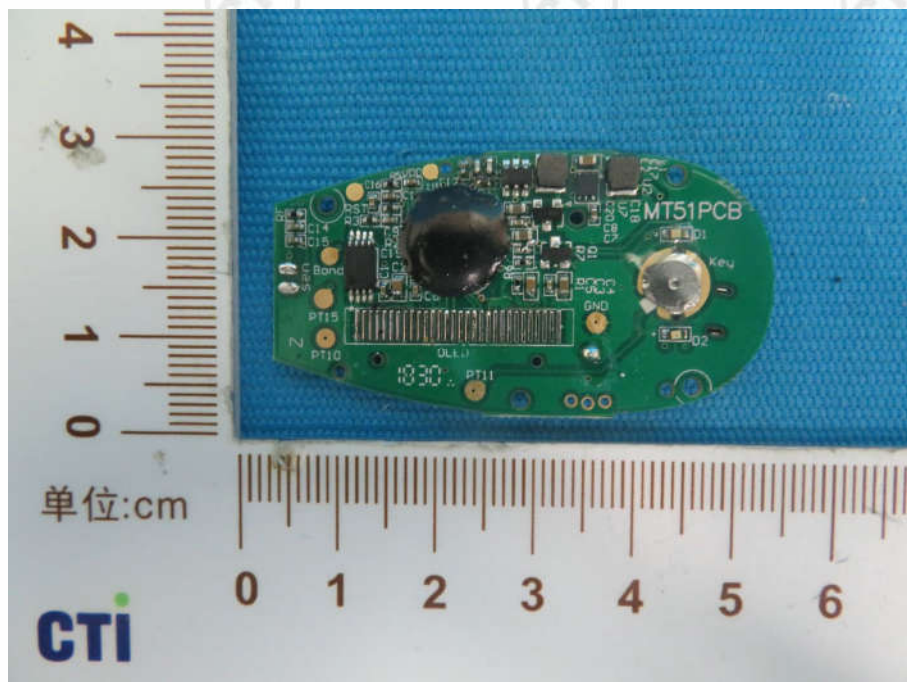


View of Product-12

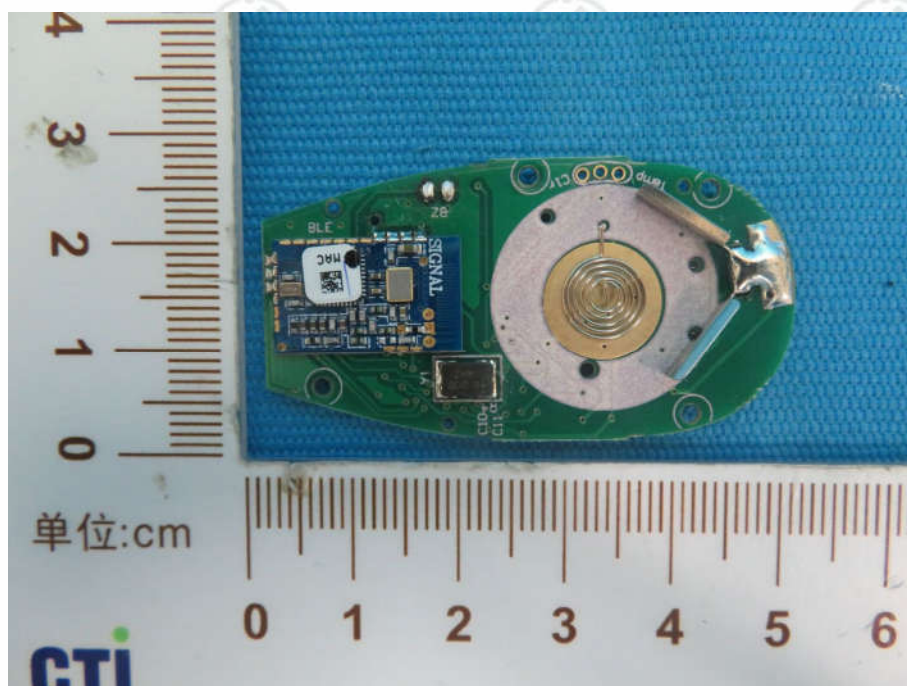


View of Product-13

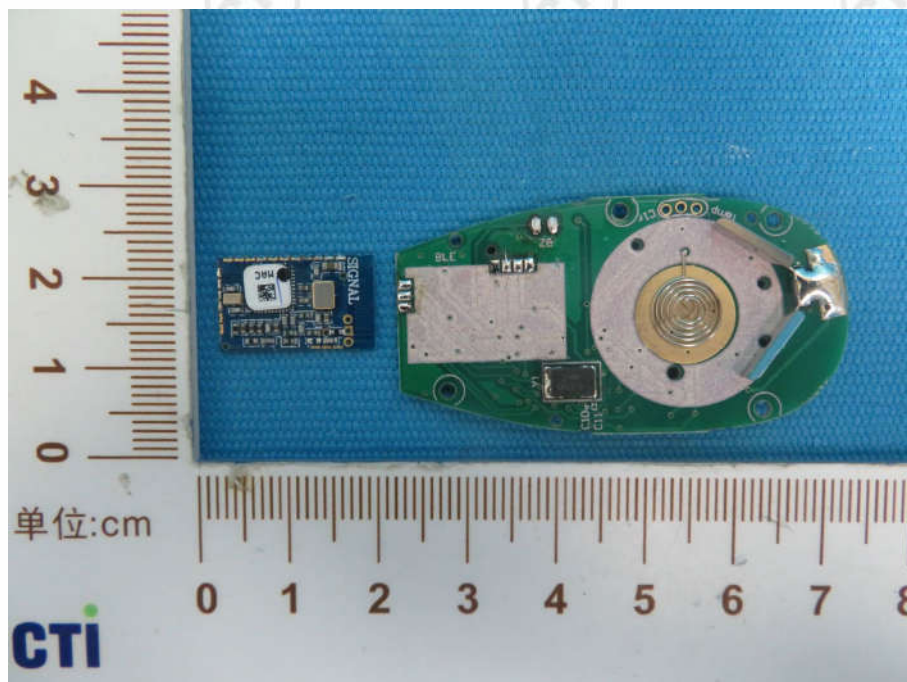


View of Product-14

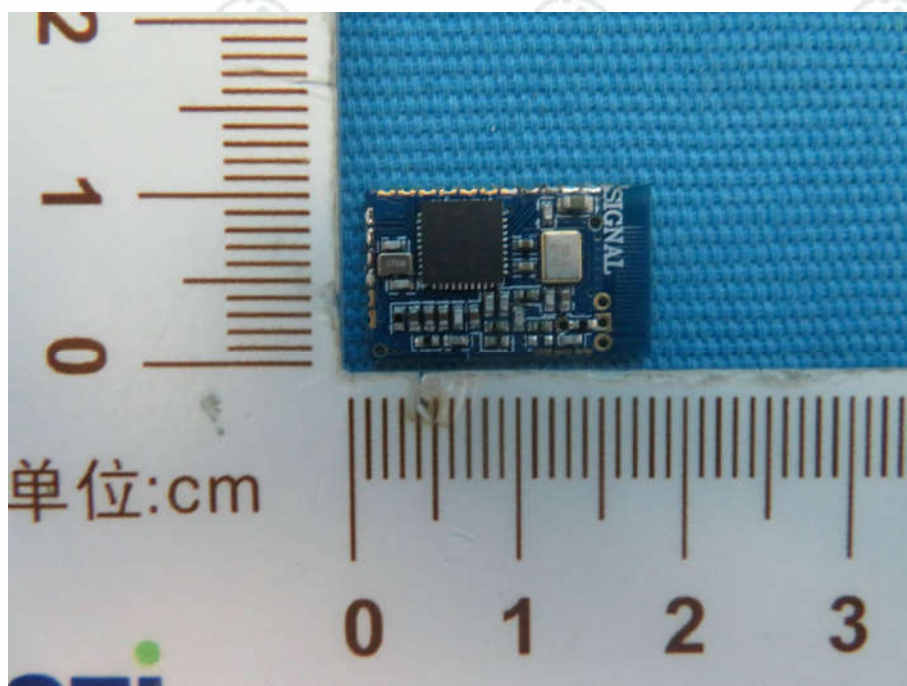

View of Product-15

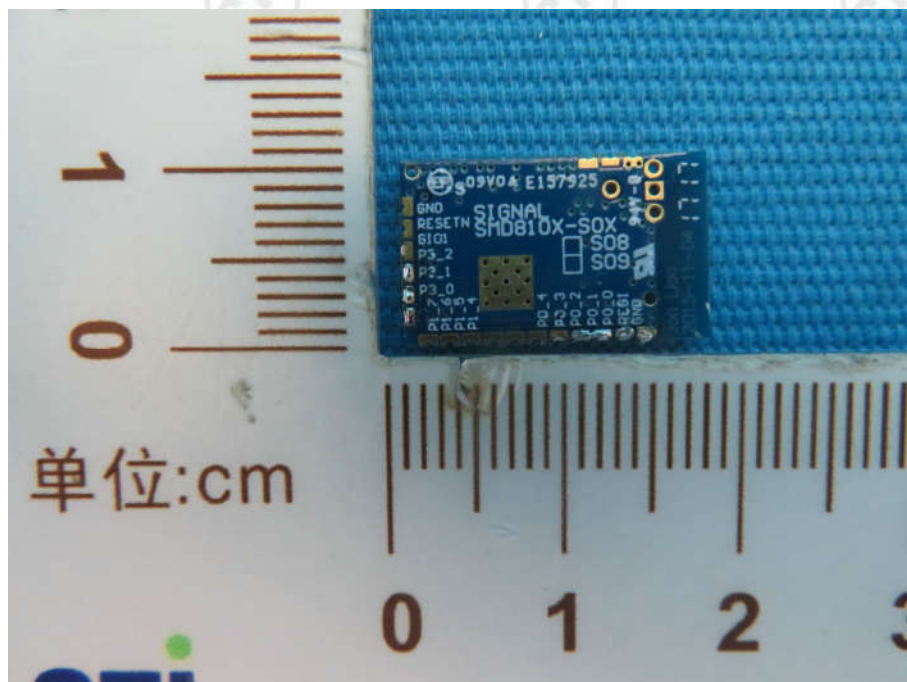

View of Product-16

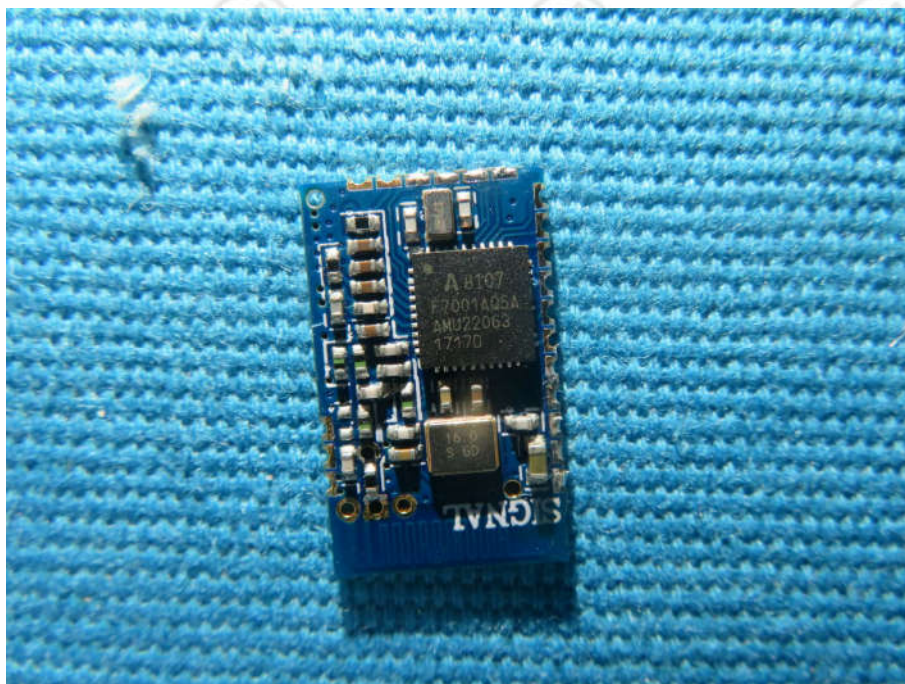

View of Product-17

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.