

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Microlab Electronics Co.,Ltd.

Portable Bluetooth Speaker

Model Number: DS1

FCC ID: OR8-DS1

Prepared for : Microlab Electronics Co.,Ltd.
South Baozi Rd., Shenzhen Microlab Industrial Park , Shenzhen 518122 ,China

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808



Report Number: ESTE-R1603047
Date of Test : Mar. 01, 2016~ Mar. 23, 2016
Date of Report : Mar. 25, 2016

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram	8
2.6. Test mode	9
2.7. Channel List for Bluetooth	9
2.8. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER	11
3.1. Limit	11
3.2. Test Procedure.....	11
3.3. Test Result.....	11
3.4. Test Data.....	12
4. 20 DB BANDWIDTH.....	18
4.1. Limit	18
4.2. Test Procedure.....	18
4.3. Test Result.....	18
4.4. Test Data.....	19
5. CARRIER FREQUENCY SEPARATION	25
5.1. Limit	25
5.2. Test Procedure	25
5.3. Test Result.....	25
5.4. Test Data.....	26
6. NUMBER OF HOPPING CHANNEL	32
6.1. Limit	32
6.2. Test Procedure.....	32
6.3. Test Result.....	32
6.4. Test Data.....	33
7. DWELL TIME	36
7.1. Limit	36
7.2. Test Procedure	36
7.3. Test Result.....	36
7.4. Test Data.....	37
8. RADIATED EMISSIONS.....	46
8.1. Limit	46
8.2. Block Diagram of Test setup.....	47
8.3. Test Procedure.....	47

8.4.	Test Result.....	48
8.5.	Test Data.....	49
9.	BAND EDGE COMPLIANCE	103
9.1.	Limit	103
9.2.	Block Diagram of Test setup	103
9.3.	Test Procedure	103
9.4.	Test Result.....	103
9.5.	Test Data.....	104
10.	CONDUCTED SPURIOUS EMISSION.....	128
10.1.	Limit	128
10.2.	Test Procedure	128
10.3.	Test Result.....	128
10.4.	Test Data.....	129
11.	POWER LINE CONDUCTED EMISSIONS.....	147
11.1.	Limit	147
11.2.	Test Procedure	147
12.	ANTENNA REQUIREMENTS	152
12.1.	Limit	152
12.2.	Result.....	152
13.	TEST SETUP PHOTO	153
14.	PHOTO EUT.....	155

Test Report Verification

Applicant:	Microlab Electronics Co.,Ltd.		
Address:	South Baozi Rd., Shenzhen Microlab Industrial Park , Shenzhen 518122 ,China		
Manufacturer	Klipsch Group, Inc.		
Address:	3502 Woodview Trace, Indianapolis, IN 46268		
E.U.T:	Portable Bluetooth Speaker		
Model Number:	DS1		
Power Supply:	DC 3.7V From Internal Battery DC 5V From USB for Charging		
Test Voltage:	DC 3.7V From Internal Battery		
Trade Name:	Jamo	Serial No.:	-----
Date of Receipt:	Mar. 01, 2016	Date of Test:	Mar. 01, - Mar. 23, 2016
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2015 ANSI C63.10:2013		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Mar 25, 2016		
Prepared by:	Tested by:	Approved by:	
 _____ Ada / Assistant	 _____ Tony.Tang/ Engineer	 _____ IcemanHu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Portable Bluetooth Speaker	
FCC ID	:	OR8-DS1	
Model Number	:	DS1	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	40
Antenna	:	Internal antenna, 0dBi gain	
Modulation	:	Dula-mode Bluetooth 4.0 BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK	Dula-mode Bluetooth 4.0 BLE: GFSK
Sample Type	:	Prototype production	

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	PASS
20dB Bandwidth	FCC Part 15: 15.247(a)(1)	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii)	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii)	PASS
Radiated Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted Spurious Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: December 07, 2015 Certificated by FCC, USA Registration No.: 989591 Date of registration: November 20, 2013 Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4. Assistant equipment used for test

2.4.1. PC

Manufacturer : DELL
 M/N : Latitude E6420
 Adapter : M/N: DA90PM111
 Input: AC 100-240V~50/60Hz 1.5A
 Output: DC 19.5V/4.62A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 or 1.5 meter high above ground. EUT was be set into BT test mode by software before test.

EUT

(EUT: Portable Bluetooth Speaker)

2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
$\pi/4$ -DQPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.7. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.8. Test Equipment

2.8.1. For conducted emissions test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June,28,15	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June,28,15	1 Year
Pulse Limiter	Rohde & Schwarz	ESDS1-Z2	101100	June,28,15	1 Year

2.8.2. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June,28,15	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June,28,15	1 Year
Signal Amplifier	Agilent	310N	187037	June,28,15	1 Year

2.8.3. For radio & radiated emissions test (above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1 002	June,28,15	1 Year
Board-Band Horn Antenna	SCHWARZB ECK	BBHA 9170	9170-497	June,28,15	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	June,28,15	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June,28,15	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	June,28,15	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June,28,15	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result


EUT: Portable Bluetooth Speaker					
M/N: DS1					
Test date: 2016-03-06		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	-1.570	21.00	0.125	22.570
	2441	1.350	21.00	0.125	19.650
	2480	2.878	21.00	0.125	18.122
$\pi/4$ -DQPSK	2402	-2.417	21.00	0.125	25.417
	2441	0.495	21.00	0.125	20.505
	2480	2.037	21.00	0.125	18.963
8-DPSK	2402	-1.993	21.00	0.125	22.993
	2441	1.045	21.00	0.125	19.955
	2480	2.616	21.00	0.125	18.384
Conclusion: PASS					

3.4. Test Data


GFSK 2402 MHz

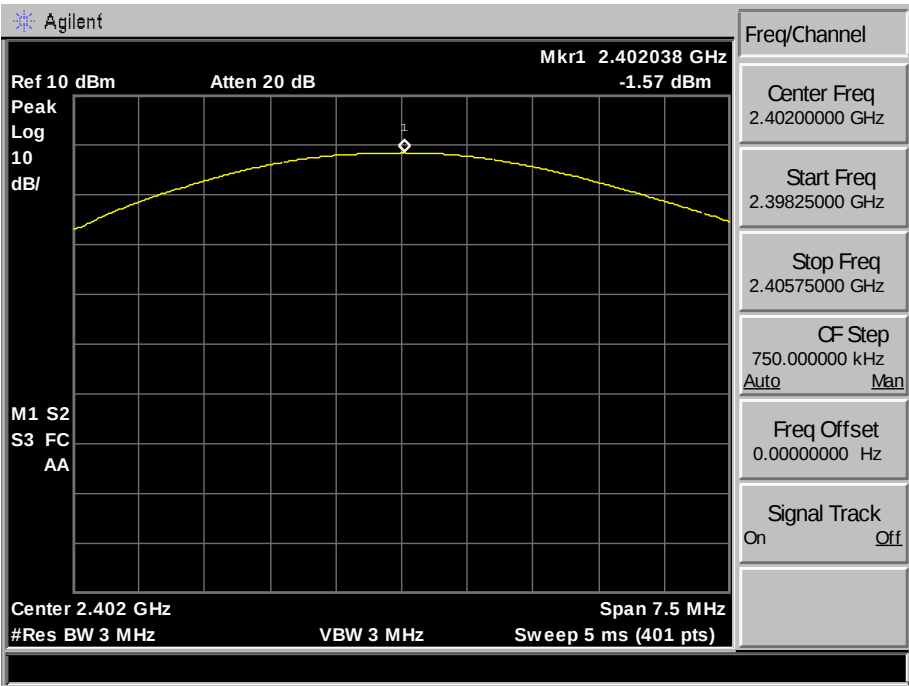


GFSK 2441 MHz

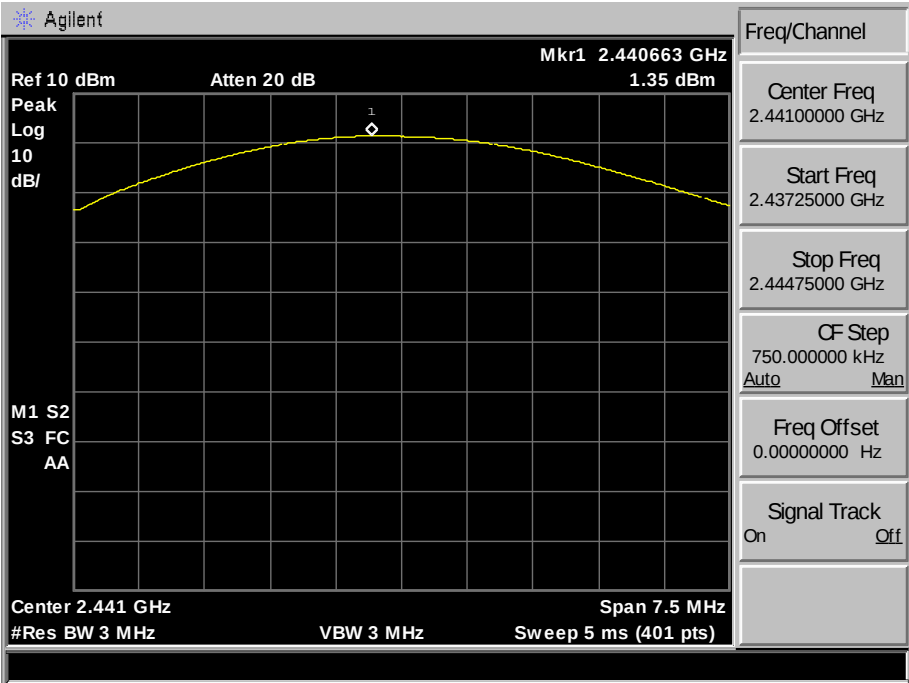


GFSK 2480 MHz

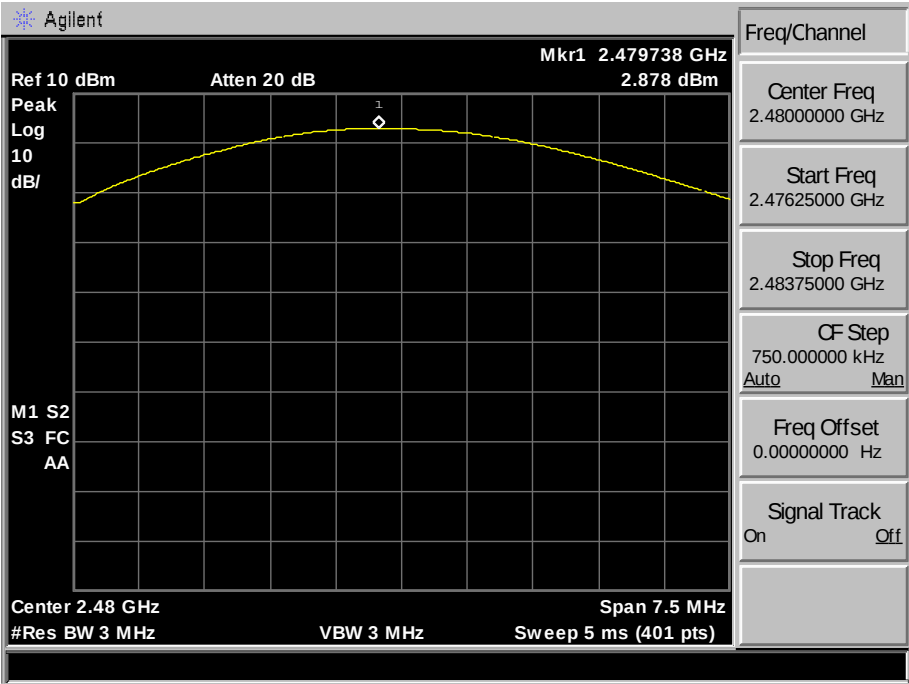


$\pi/4$ -DQPSK 2402MHz

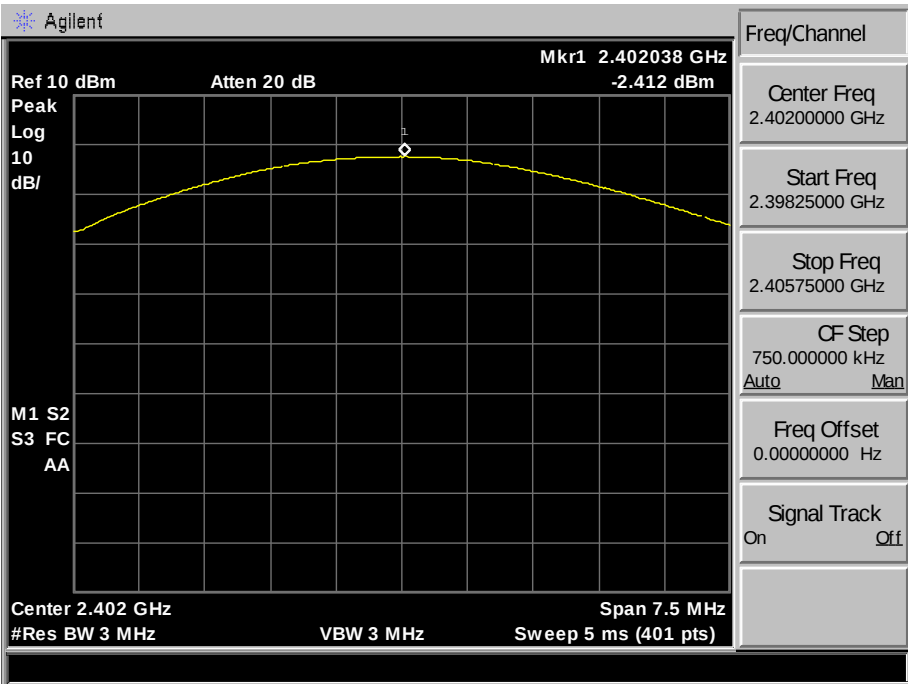


$\pi/4$ -DQPSK 2441MHz

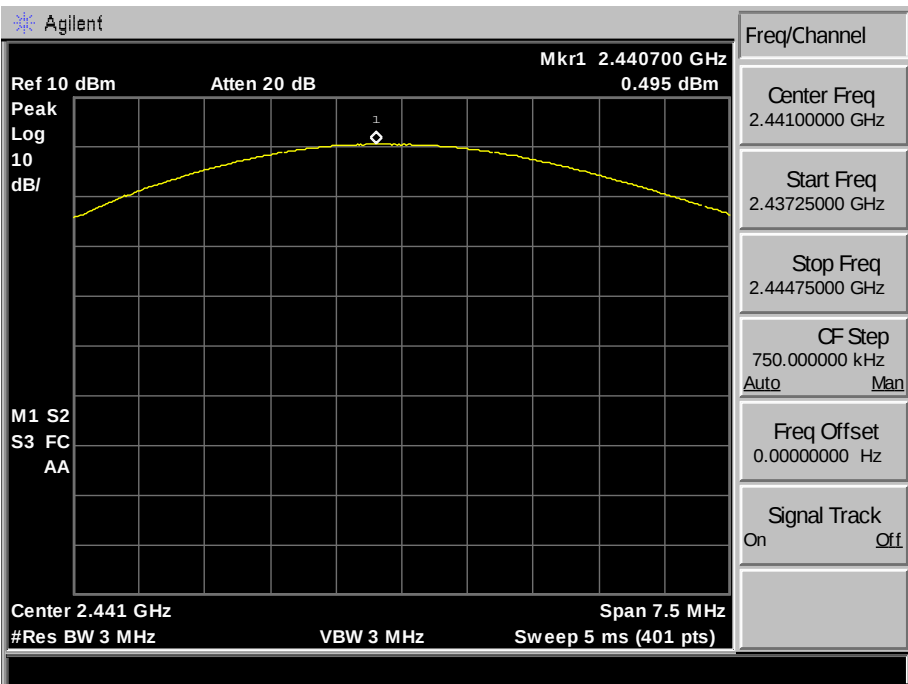


$\pi/4$ -DQPSK 2480MHz

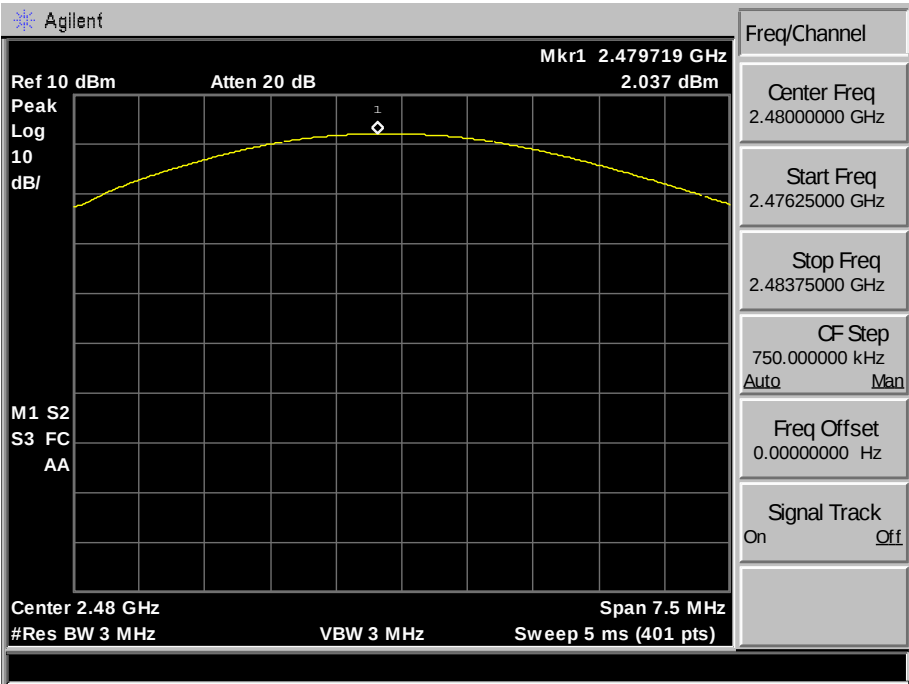


8-DPSK 2402 MHz

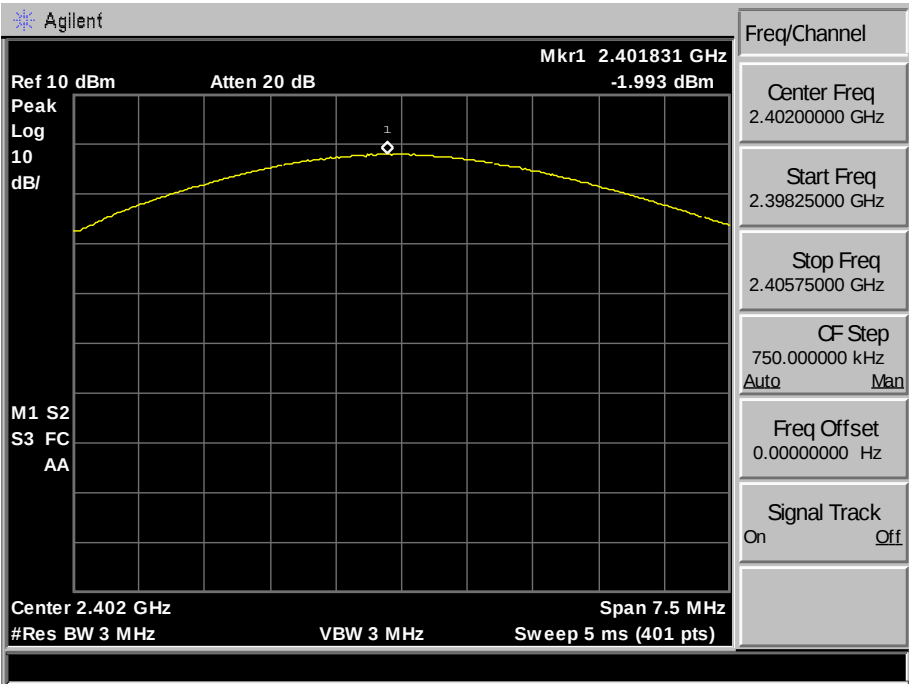

8-DPSK 2441 MHz

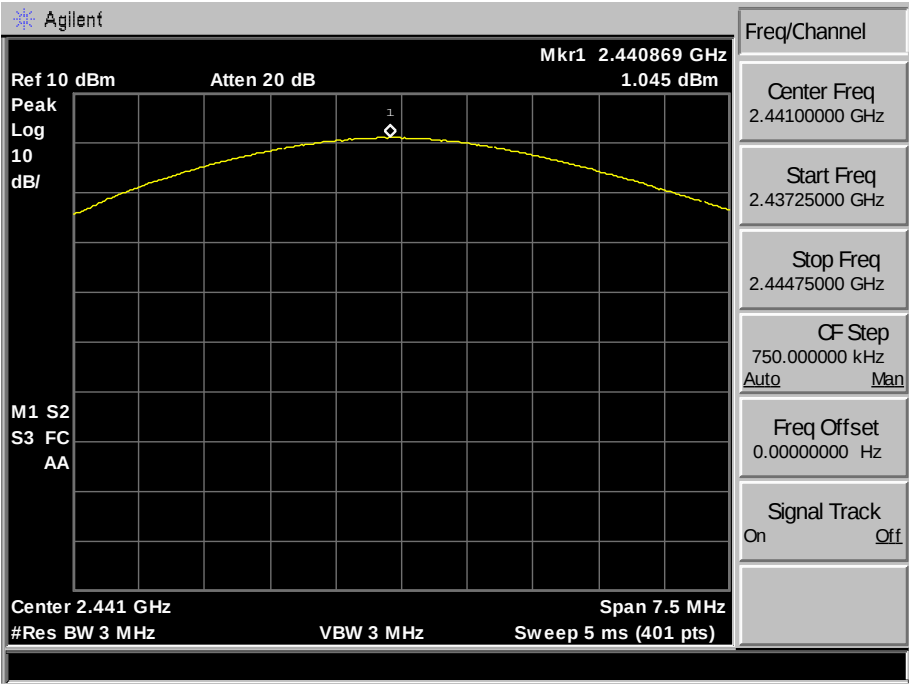

8-DPSK 2480 MHz

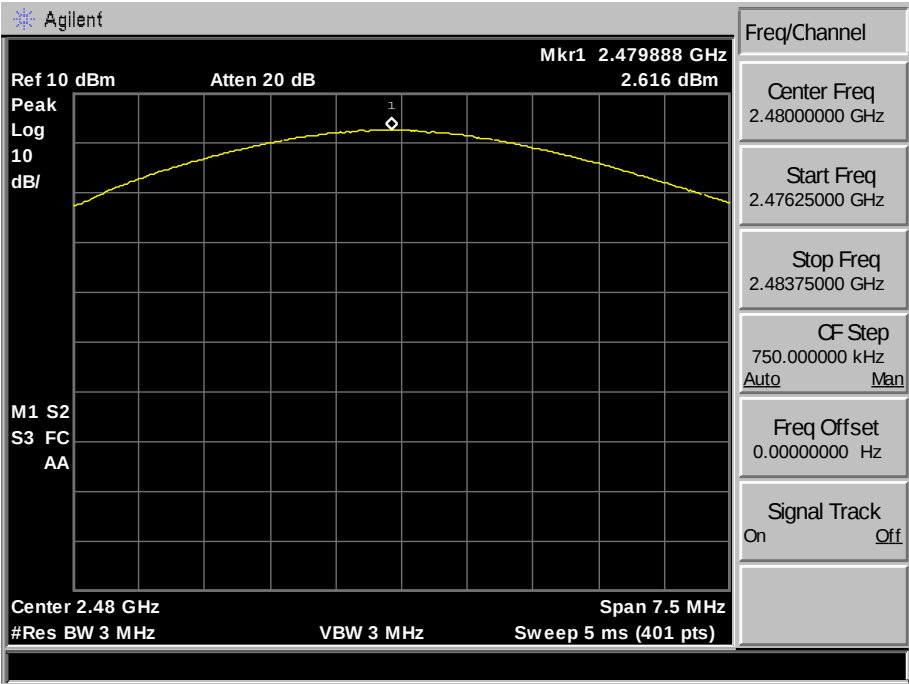

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: Portable Bluetooth Speaker				
M/N: DS1				
Test date: 2016-03-06		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.929	/	PASS
	2441	0.867	/	PASS
	2480	0.885	/	PASS
$\pi/4$ -DQPSK	2402	1.218	/	PASS
	2441	1.222	/	PASS
	2480	1.222	/	PASS
8-DPSK	2402	1.213	/	PASS
	2441	1.215	/	PASS
	2480	1.215	/	PASS

4.4. Test Data


GFSK 2402MHz

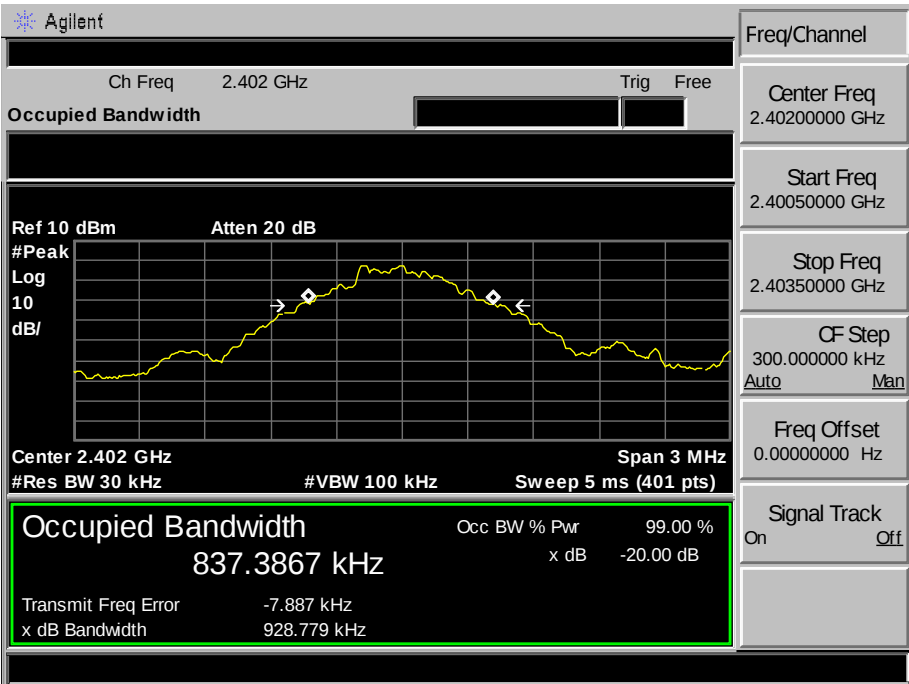


GFSK 2441MHz

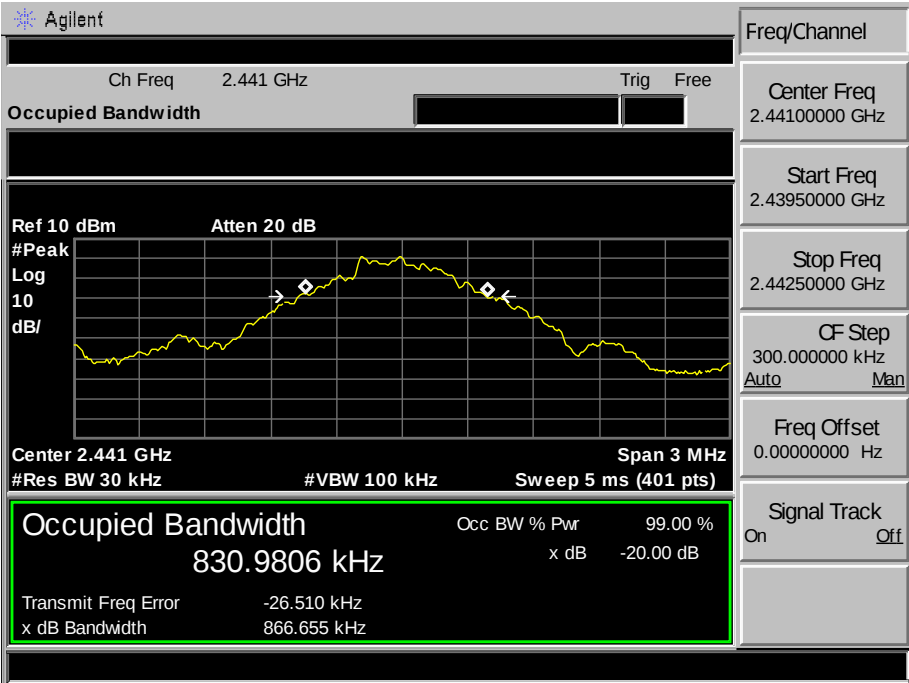


GFSK 2480MHz

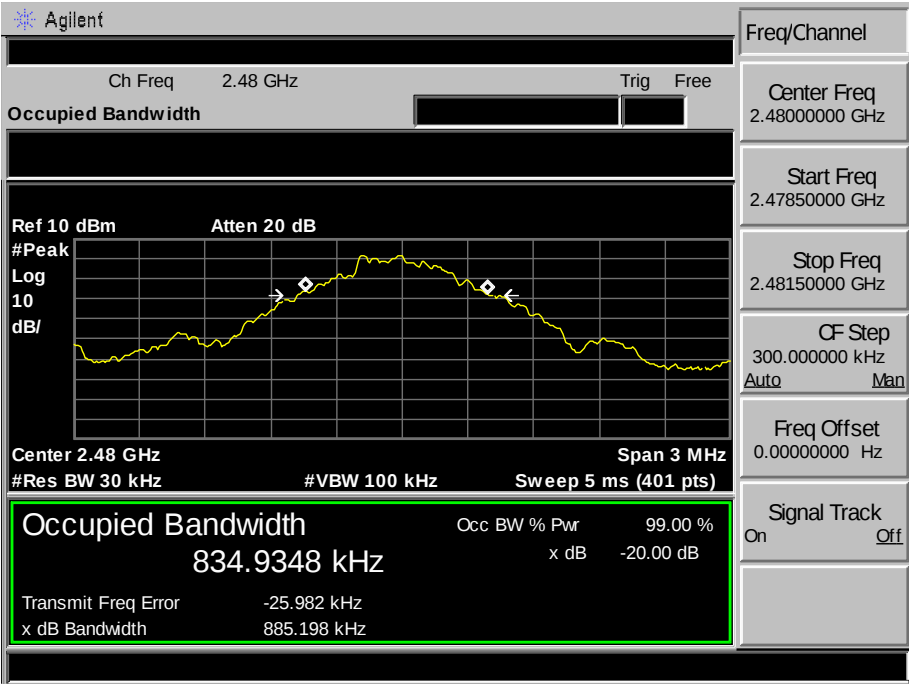


$\pi/4$ -DQPSK 2402MHz

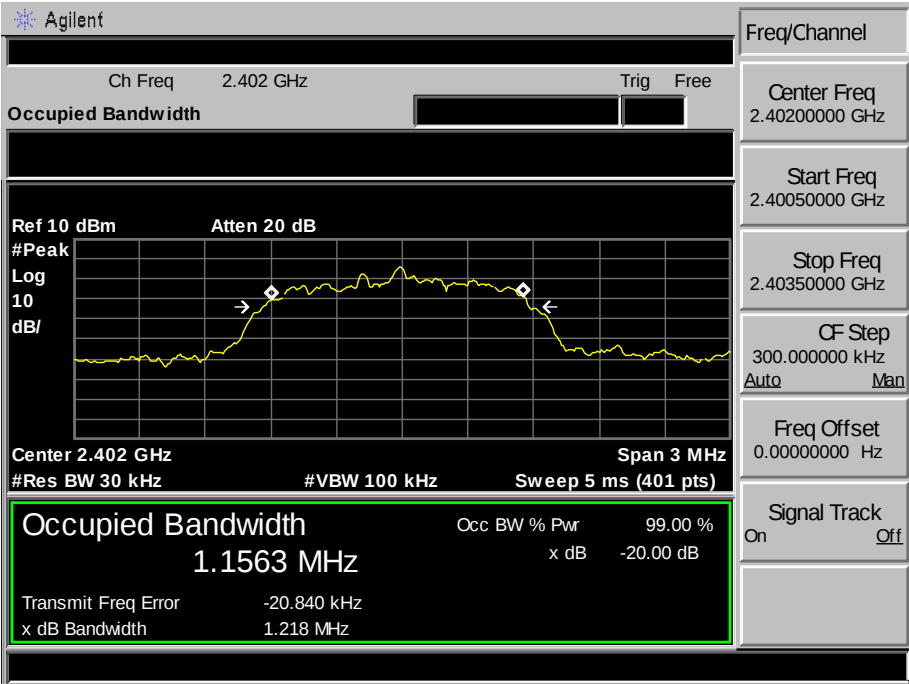


$\pi/4$ -DQPSK 2441MHz

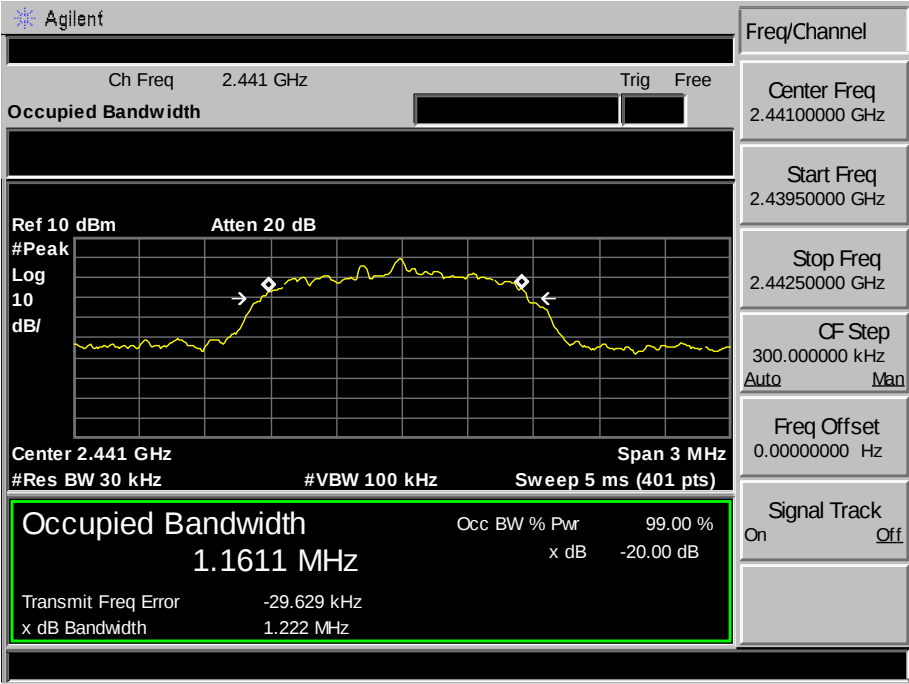


$\pi/4$ -DQPSK 2480MHz

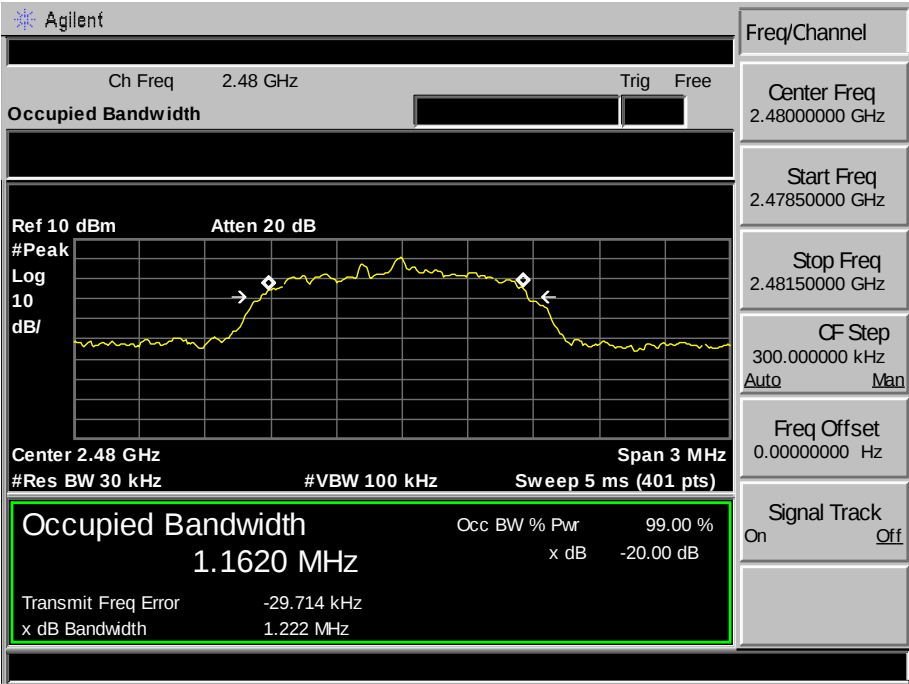


8-DPSK 2402MHz

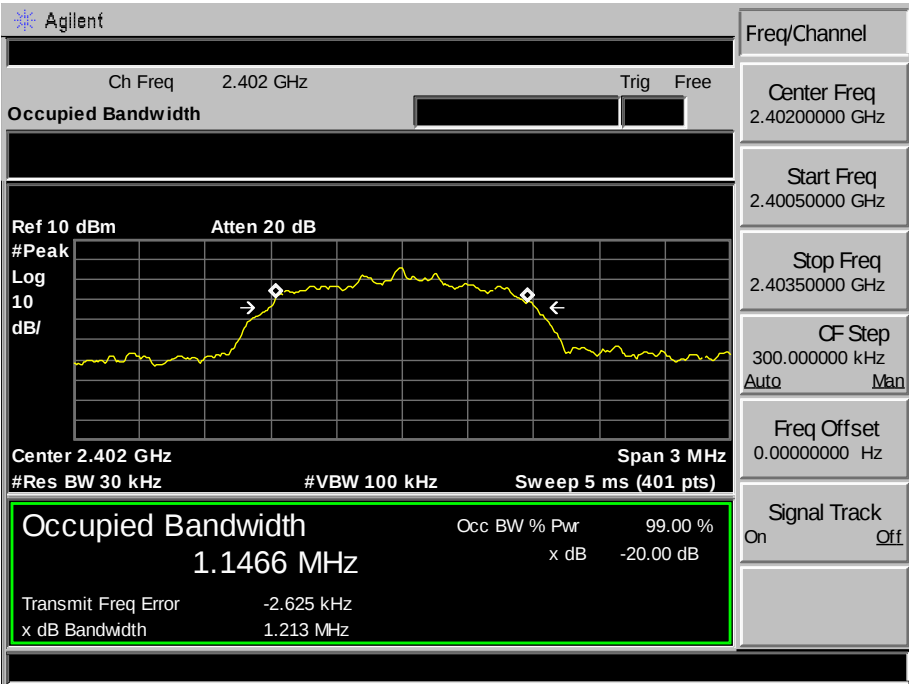

8-DPSK 2441MHz

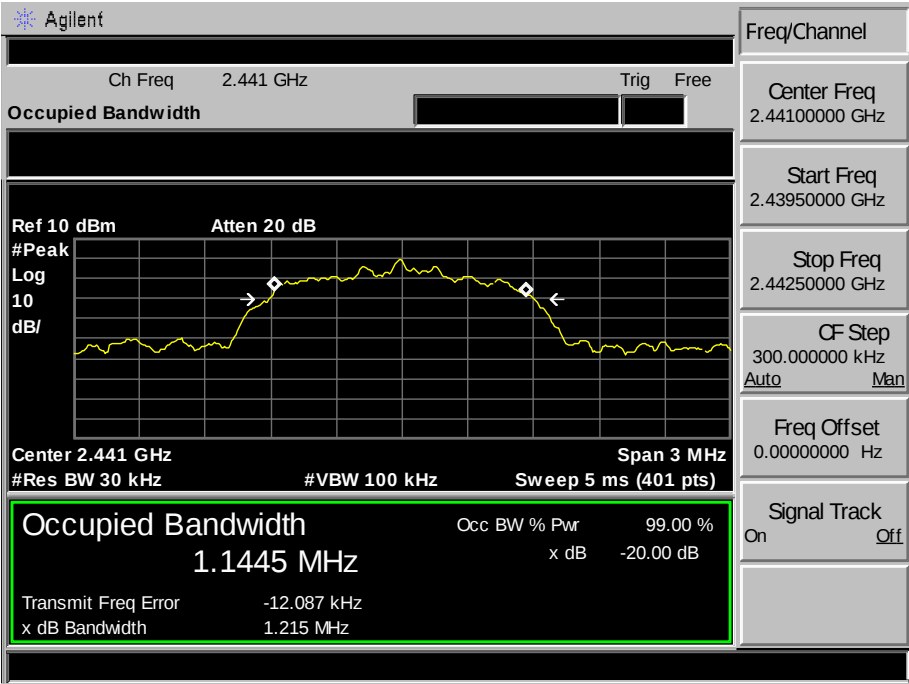

8-DPSK 2480MHz

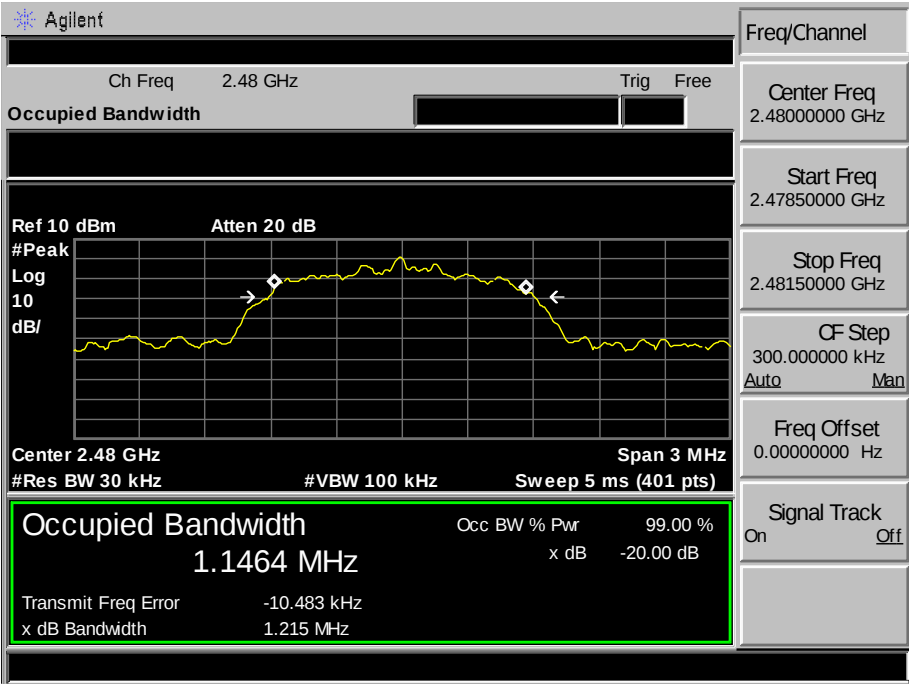

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.


5.3. Test Result

EUT: Portable Bluetooth Speaker				
M/N: DS1				
Test date: 2016-03-06			Test site: RF site	Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.929 MHz	PASS
	Mid CH	1.000	0.867 MHz	PASS
	High CH	1.000	0.885 MHz	PASS
$\pi/4$ -DQPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS
8-DPSK	Low CH	1.000		PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS


5.4. Test Data

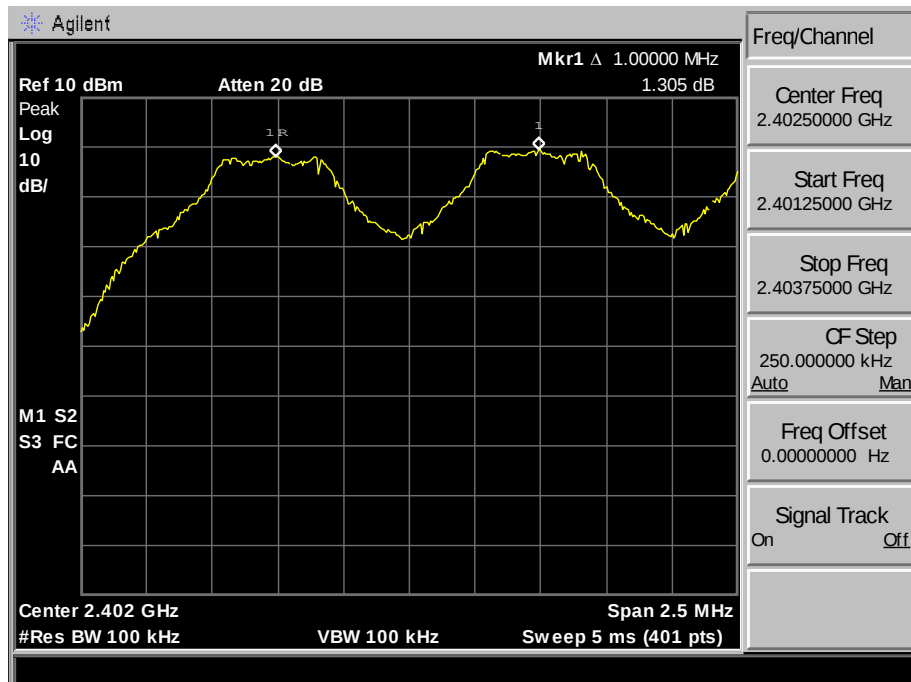GFSK
Low Channel


Mid Channel

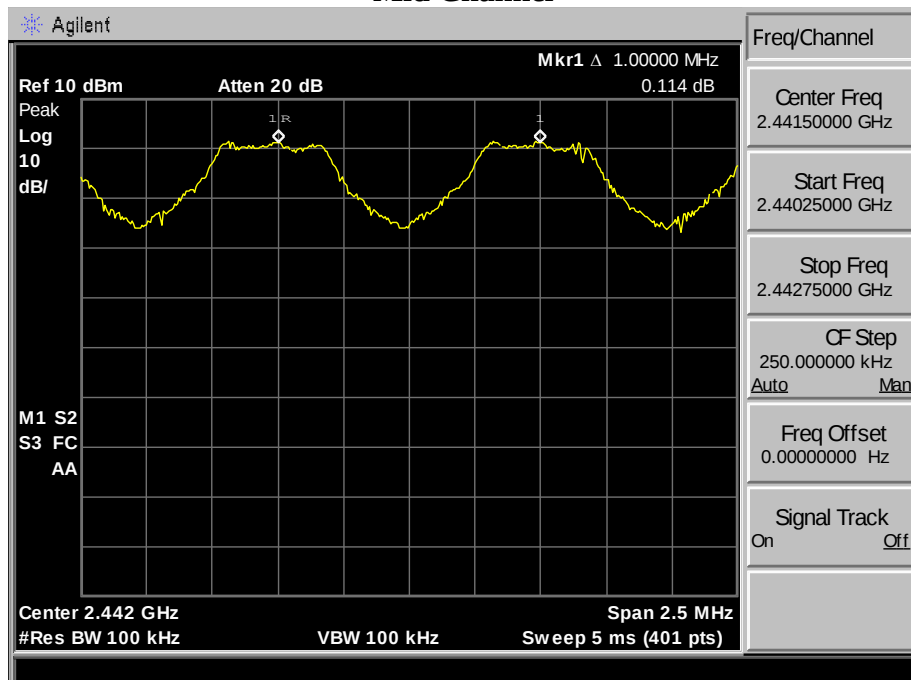


High Channel

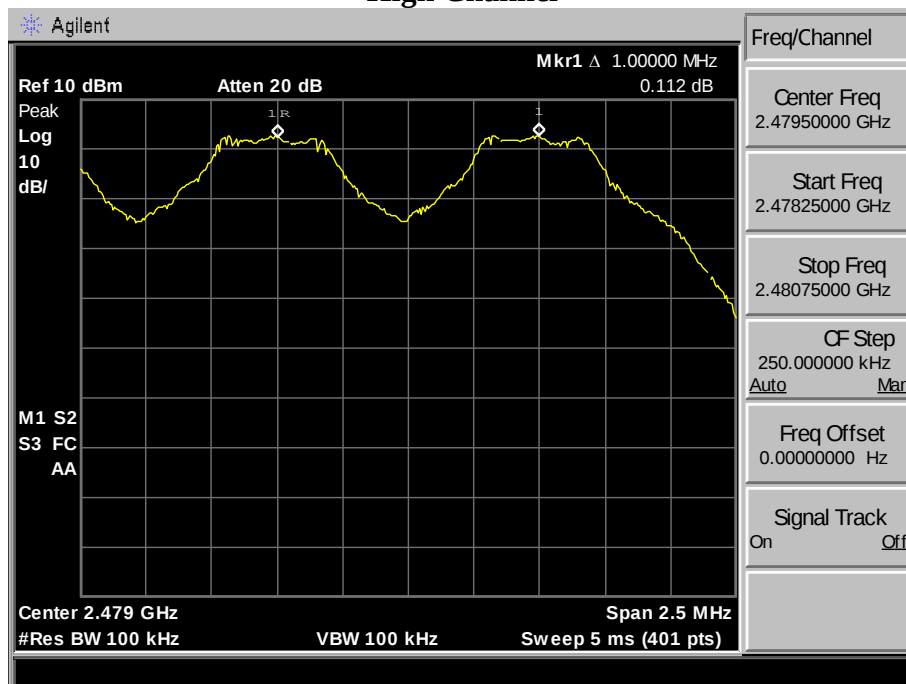


$\pi/4$ -DQPSK Low Channel

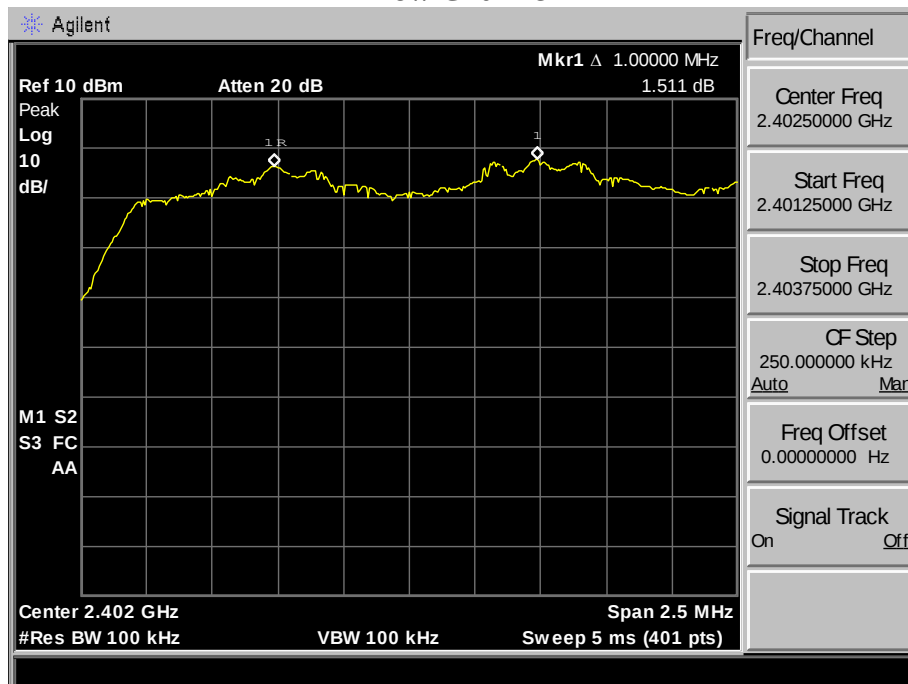


Mid Channel

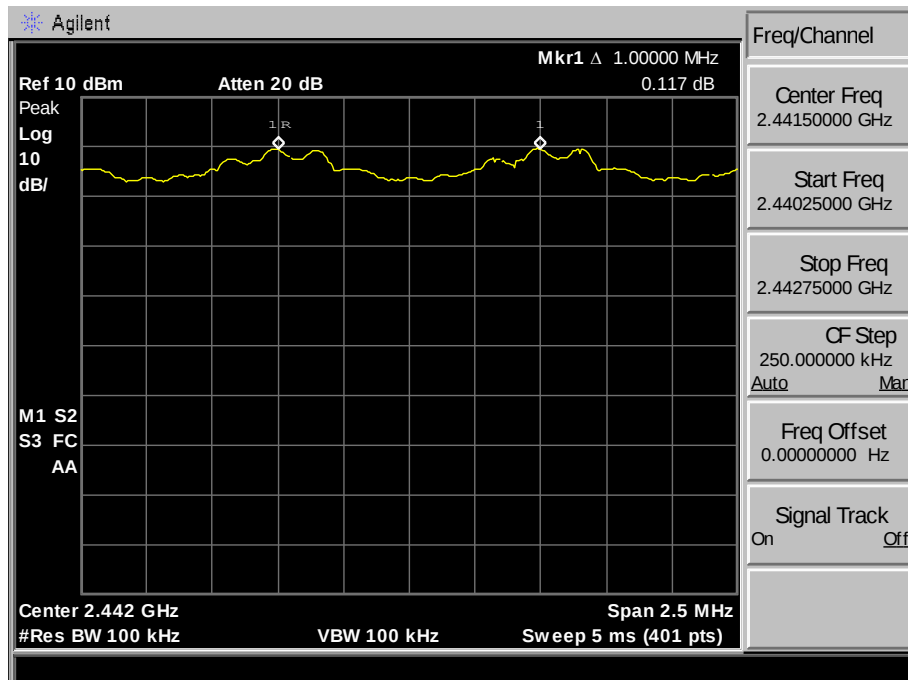


High Channel

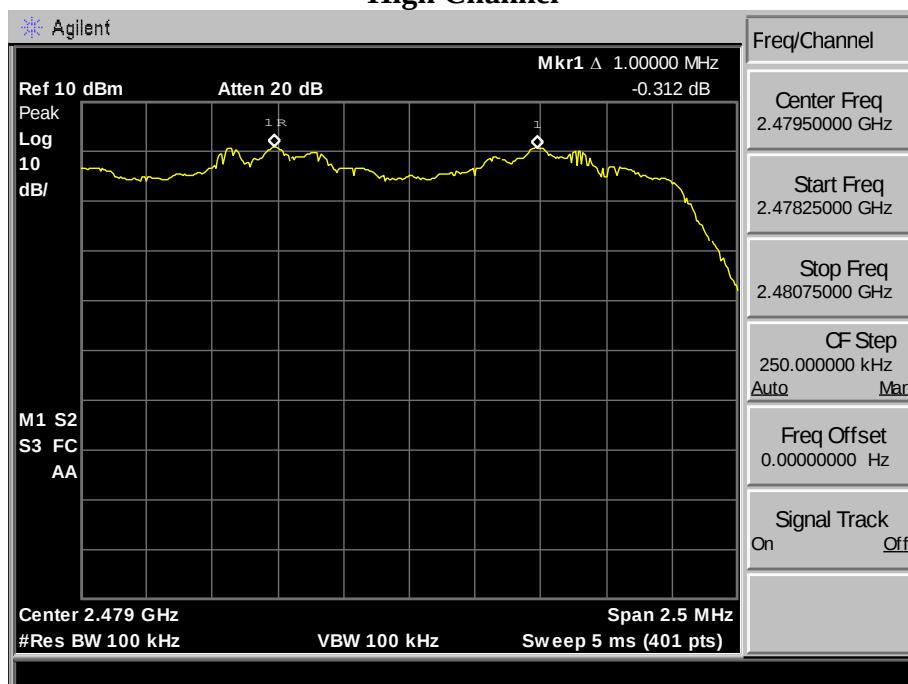


8-DPSK Low Channel

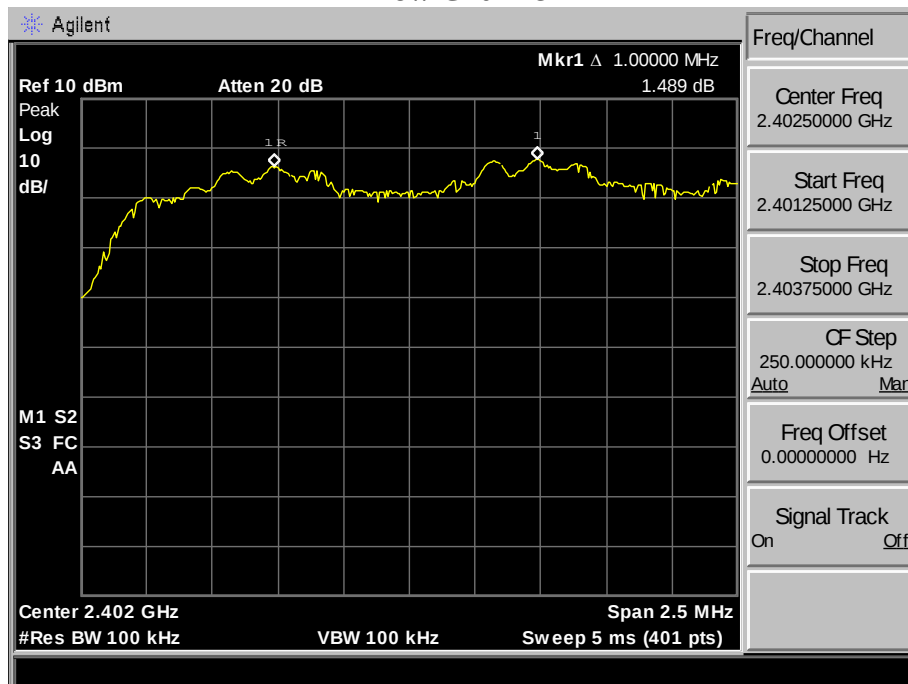

Mid Channel

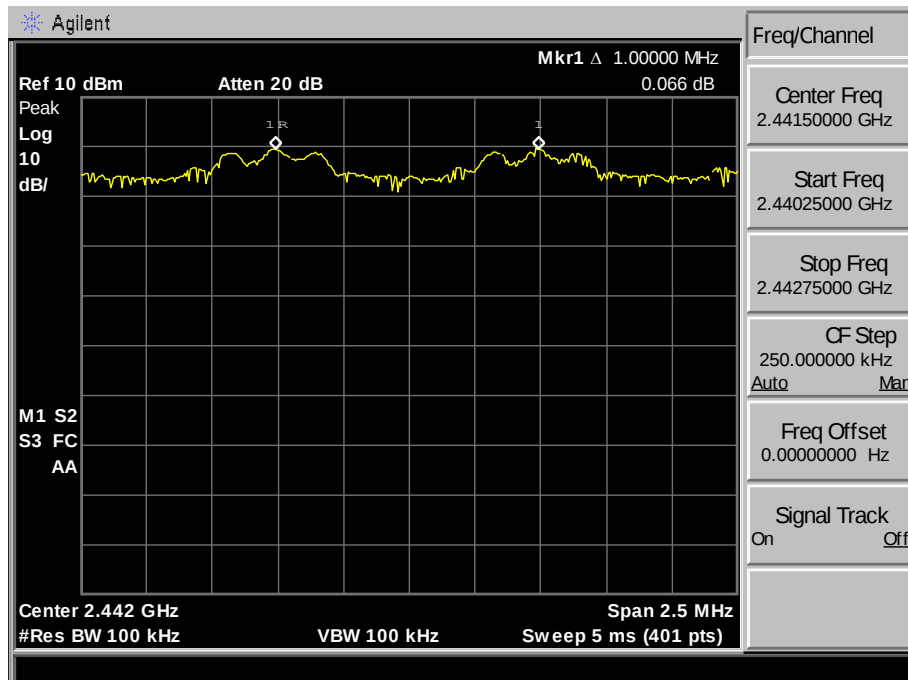

High Channel

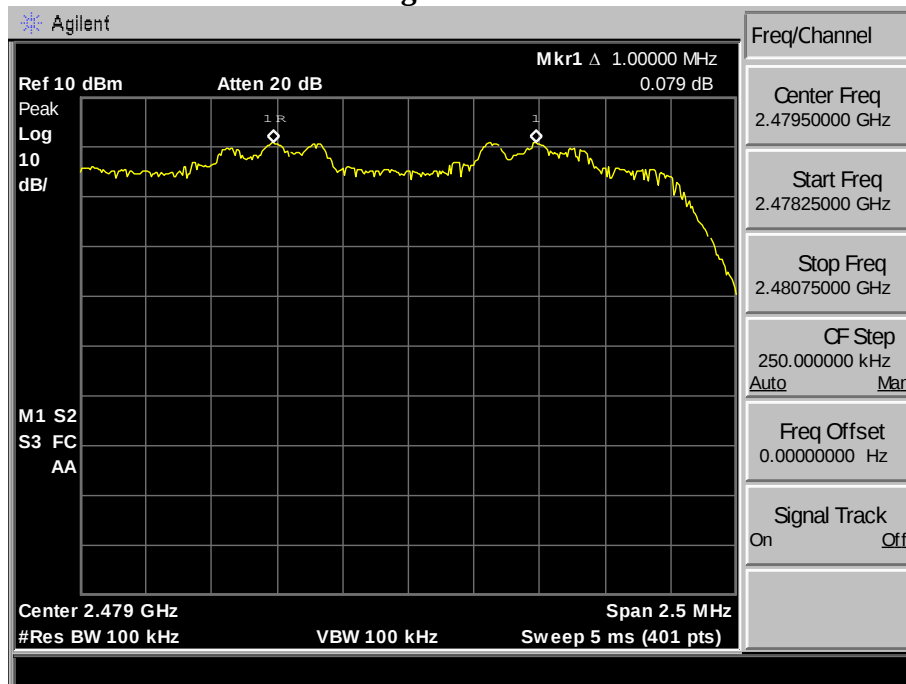

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output was coupled to a spectrum analyzer via an antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.




6.3. Test Result

EUT: Portable Bluetooth Speaker			
M/N: DS1			
Test date: 2016-03-06		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
$\pi/4$ -DQPSK	79	>15	PASS
8-DPSK	79	>15	PASS




6.4. Test Data

GFSK

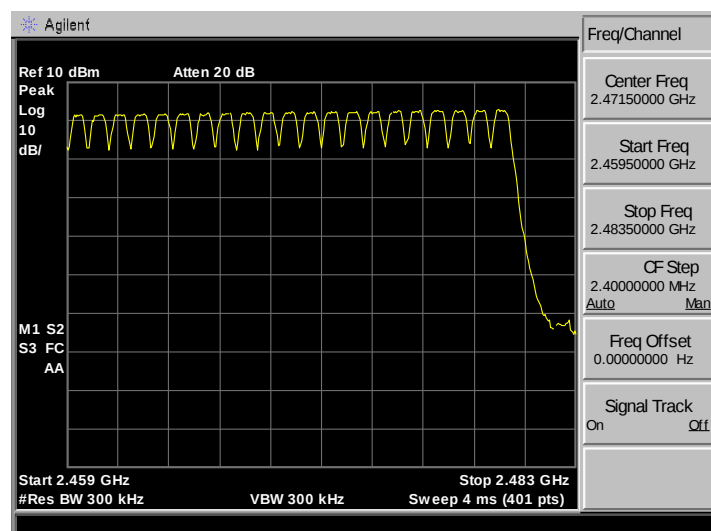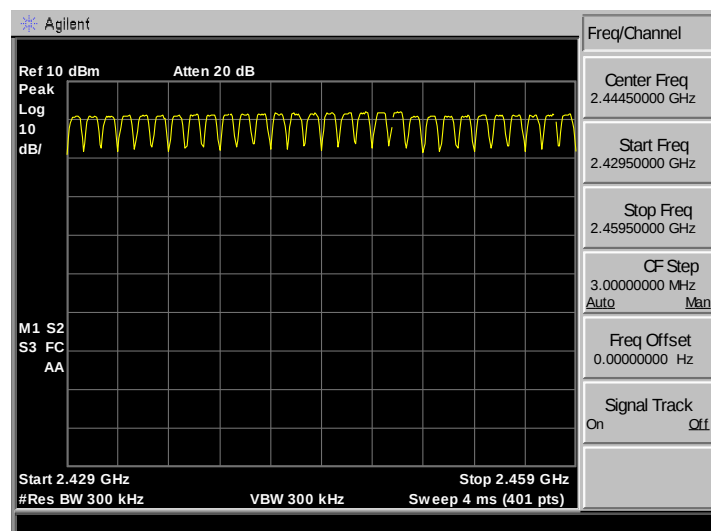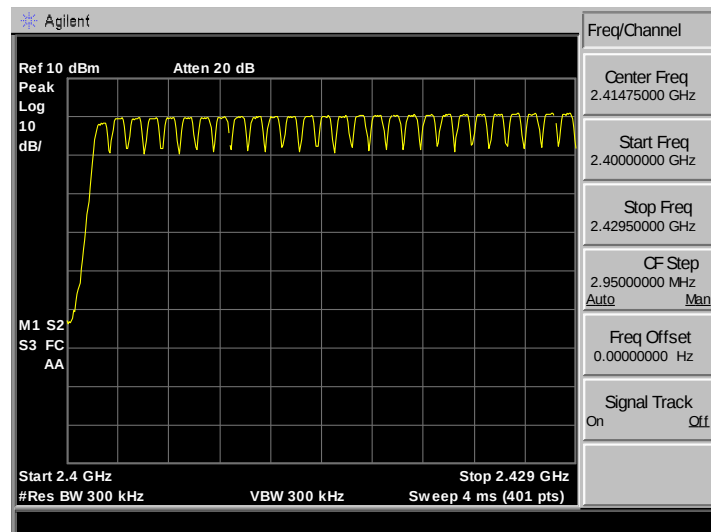

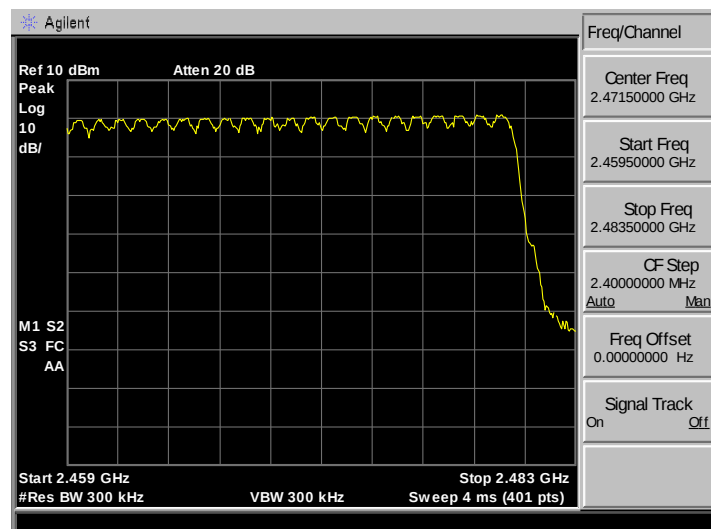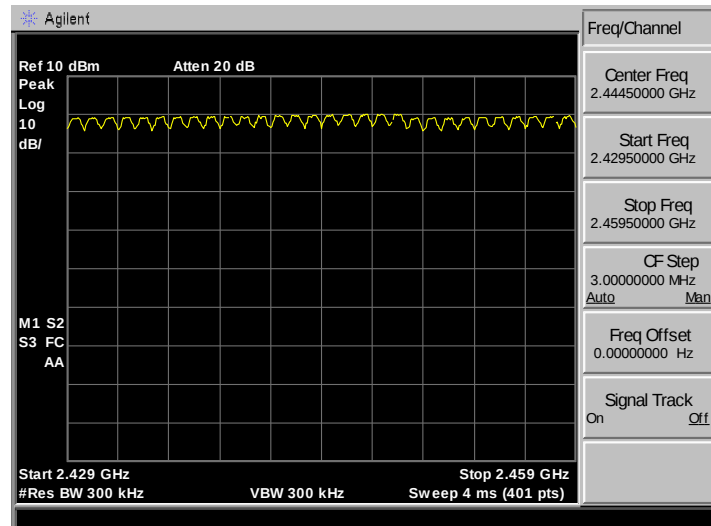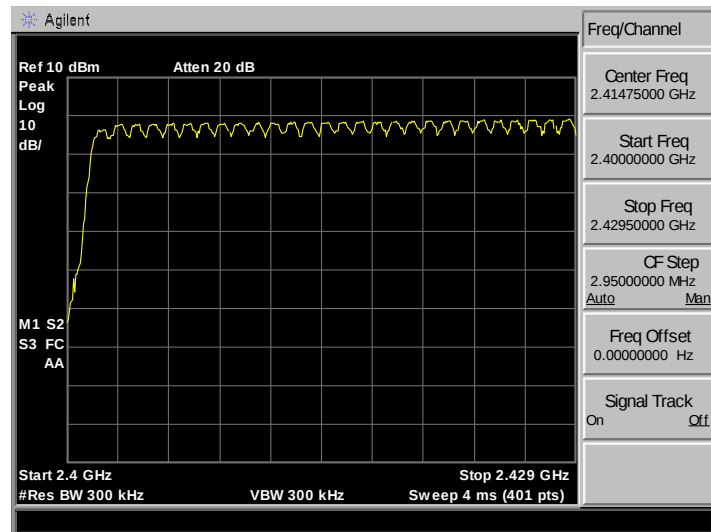$\pi/4$ -DQPSK

8-DPSK

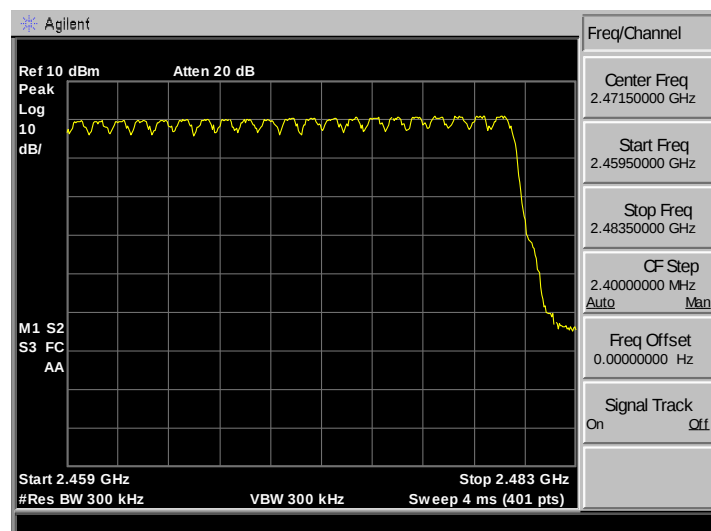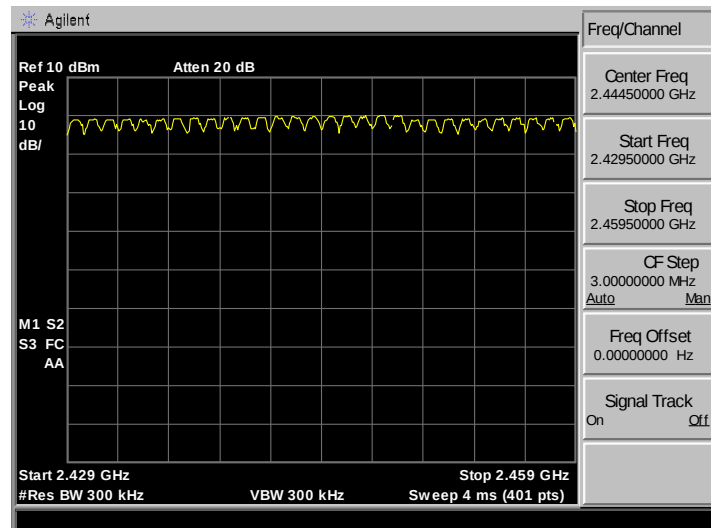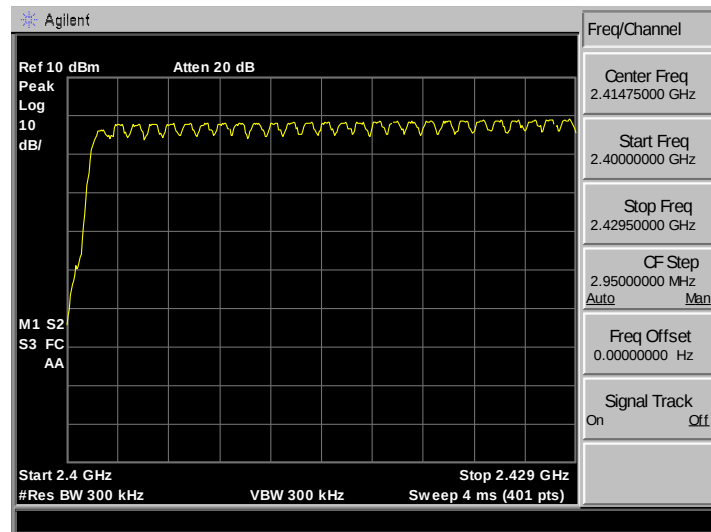

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure



1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW= 1MHz, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

7.3. Test Result



EUT: Portable Bluetooth Speaker			
M/N: DS1			
Test date: 2016-03-06		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time (ms)	Limit	Conclusion
GFSK DH1	148.52	<400ms	PASS
GFSK DH3	271.76	<400ms	PASS
GFSK DH5	319.10	<400ms	PASS
$\pi/4$ -DQPSK 2DH1	148.52	<400ms	PASS
$\pi/4$ -DQPSK 2DH3	274.92	<400ms	PASS
$\pi/4$ -DQPSK 2DH5	319.10	<400ms	PASS
8-DPSK 3DH1	151.68	<400ms	PASS
8-DPSK 3DH3	268.60	<400ms	PASS
8-DPSK 3DH5	322.32	<400ms	PASS

7.4. Test Data



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.47\text{ms} = 148.52$

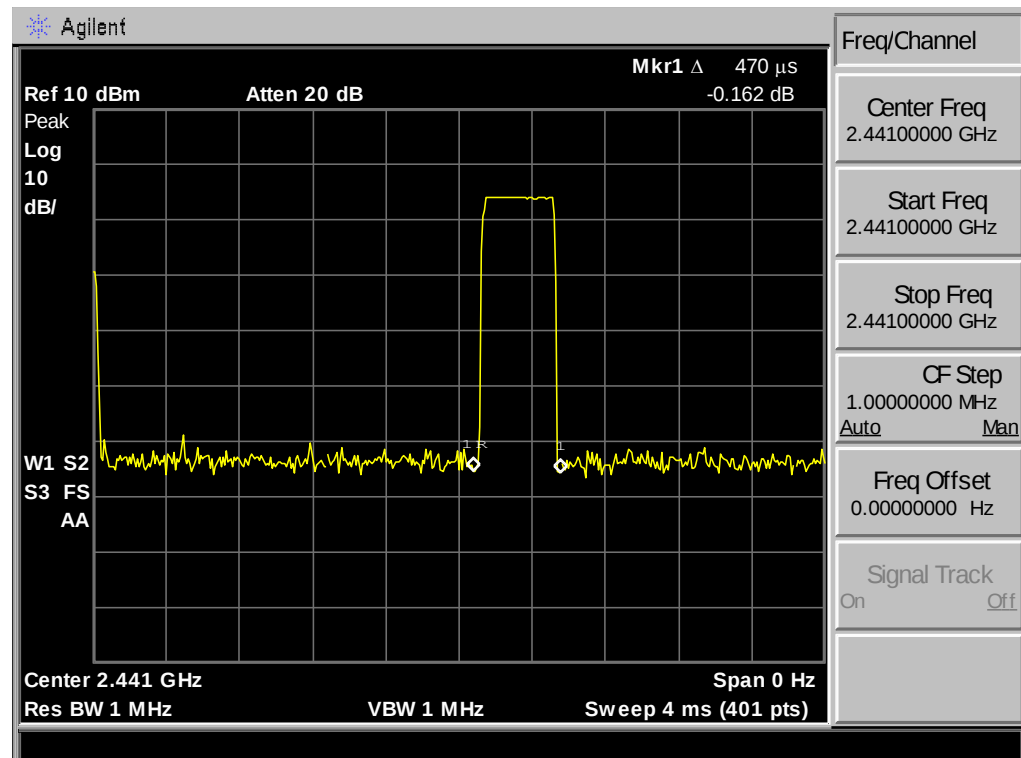
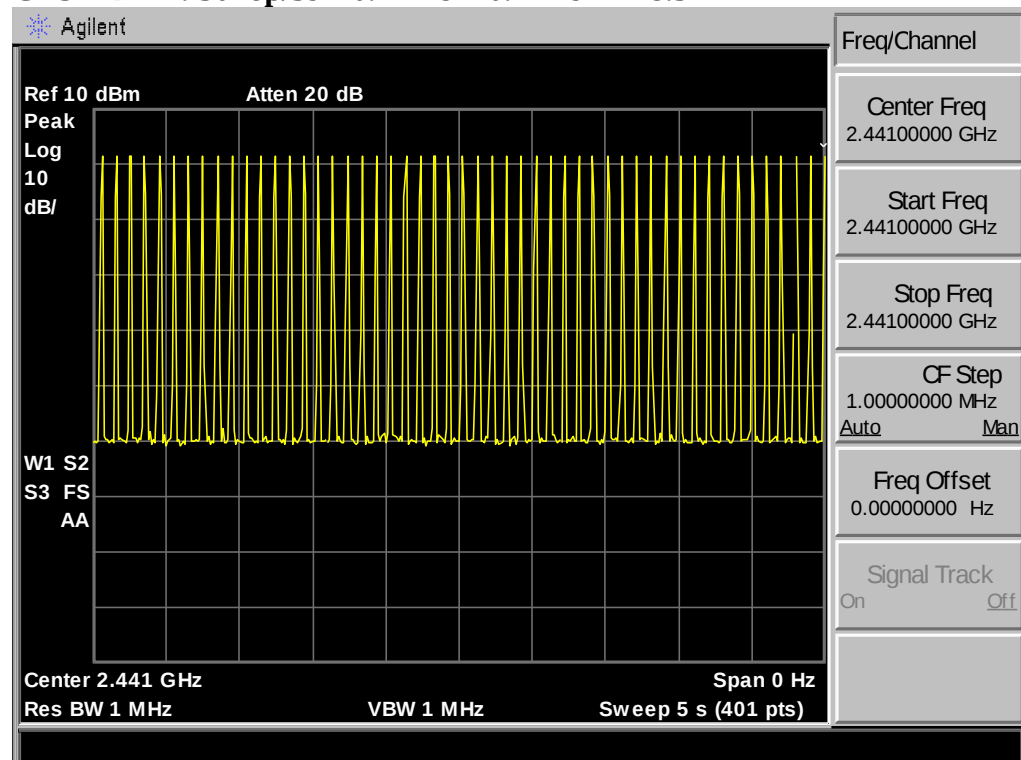




GFSK DH3 : 25hop/5s * 0.4 * 79 * 1.72ms= 271.76

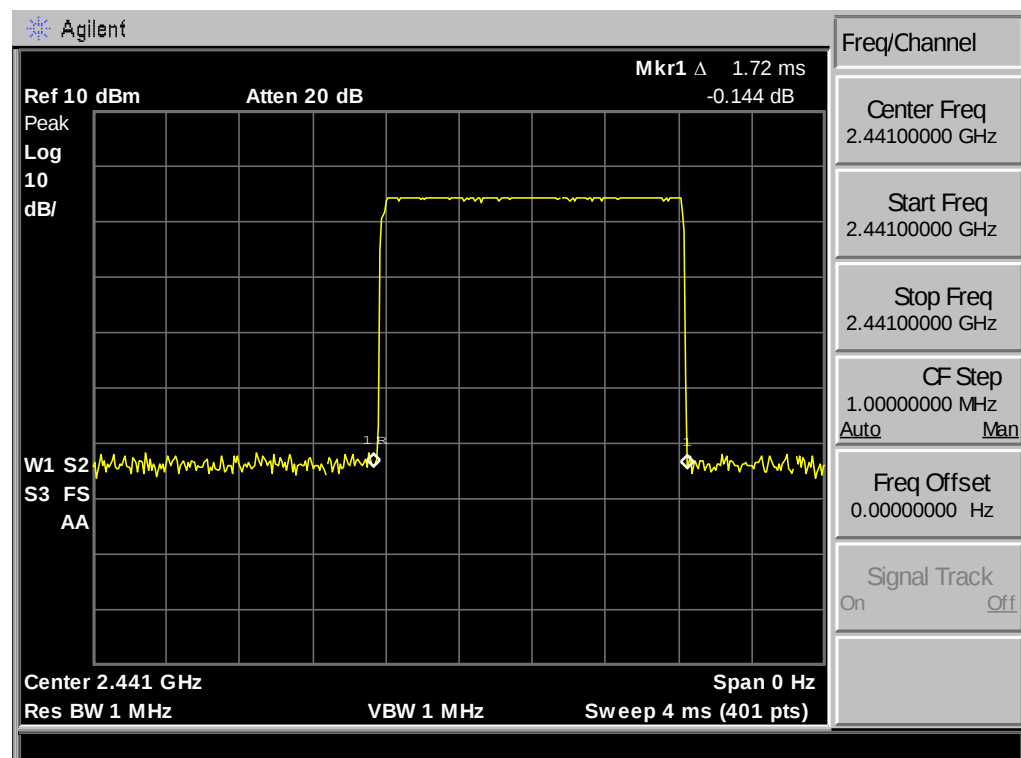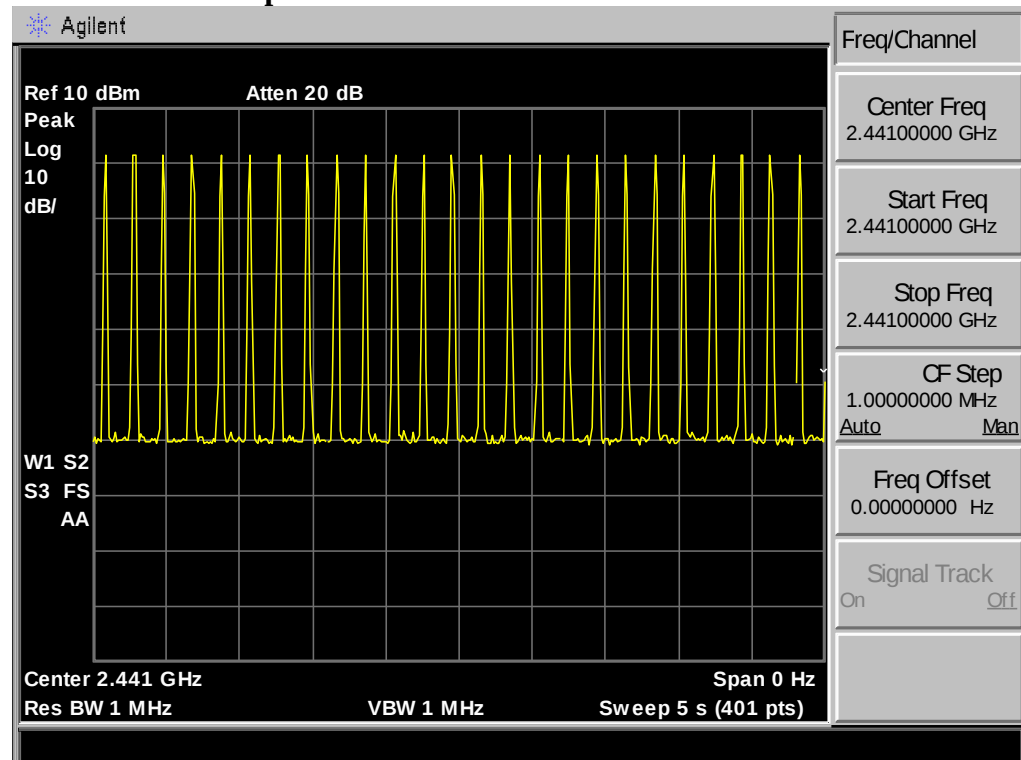



GSEK DH5 : 17hop/5s * 0.4 * 79 * 2.97ms = 319.10

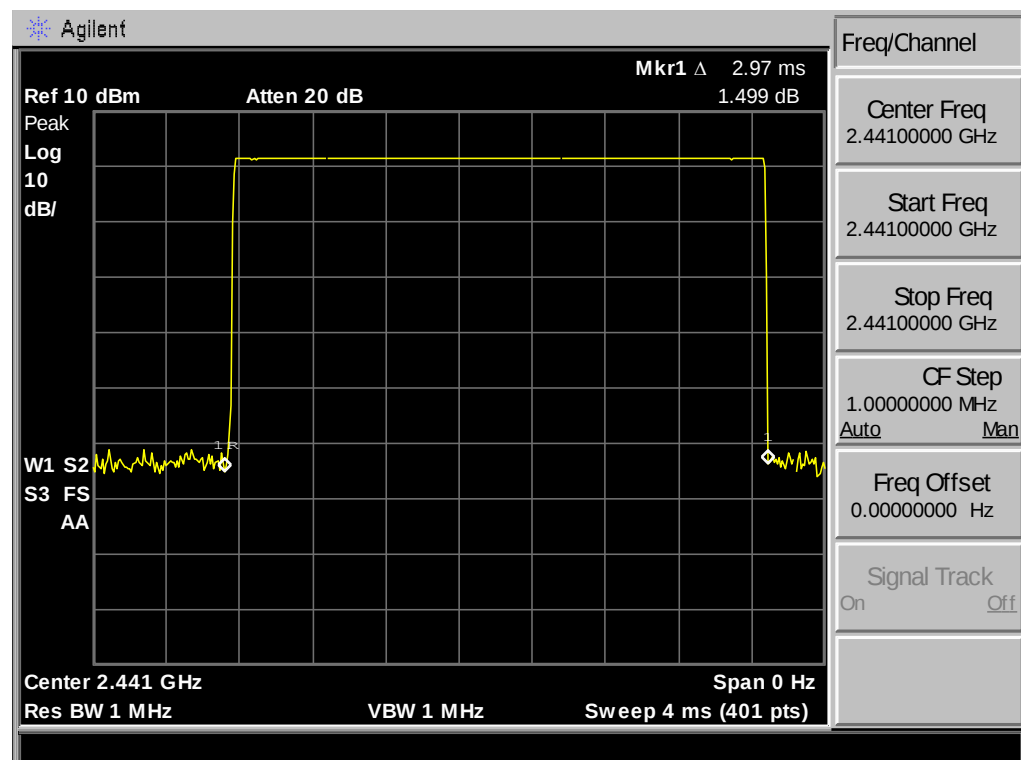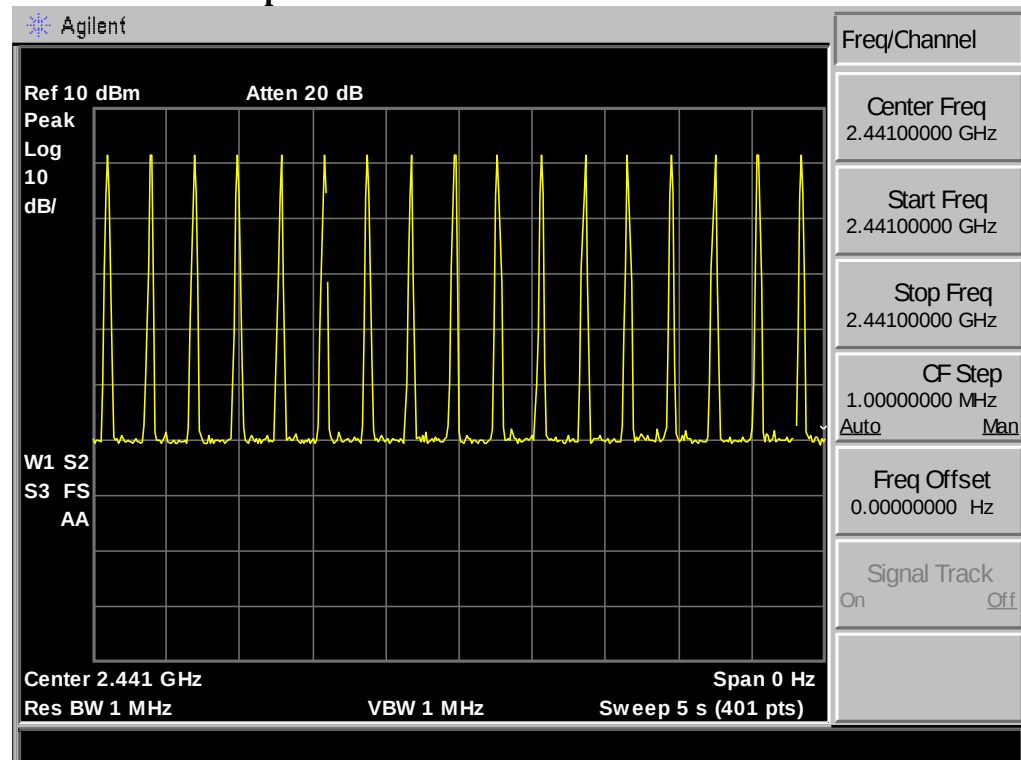

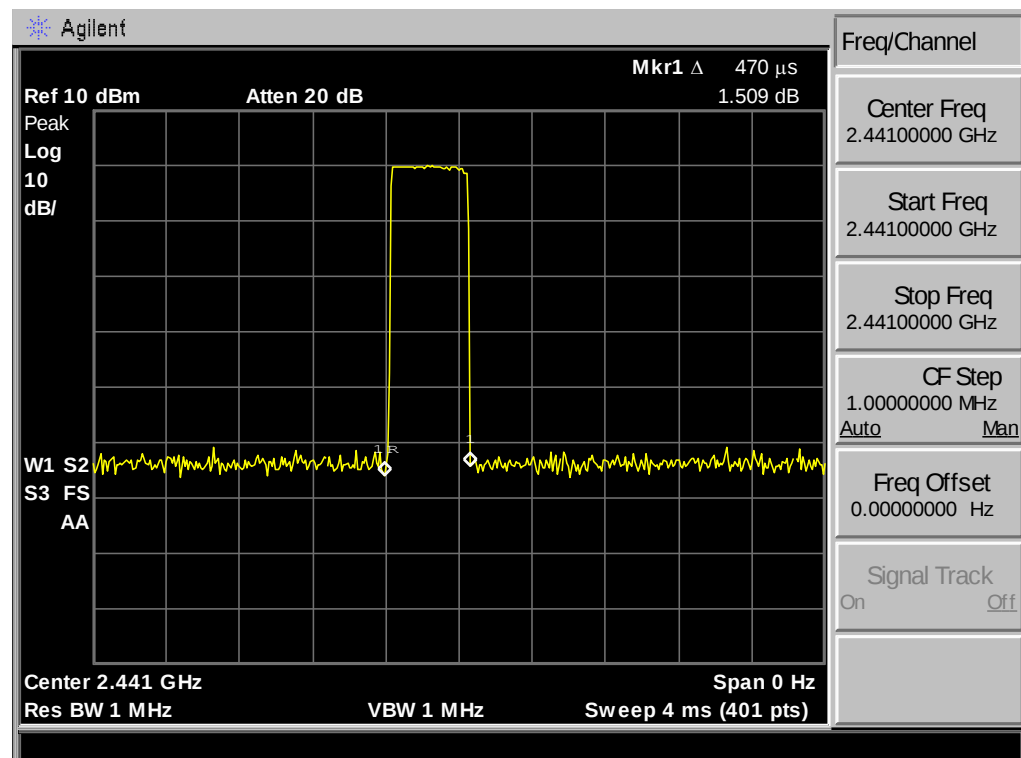
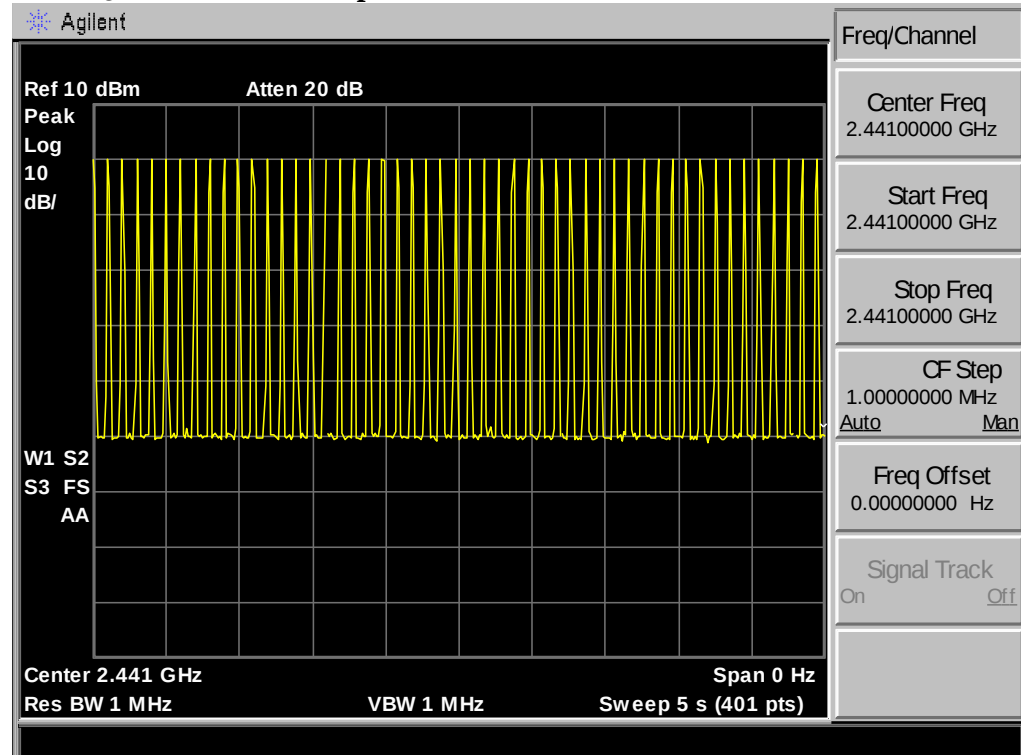
$$\pi/4\text{-DQPSK 2DH1 : } 50\text{hop}/5\text{s} * 0.4 * 79 * 0.47\text{ms} = 148.52$$

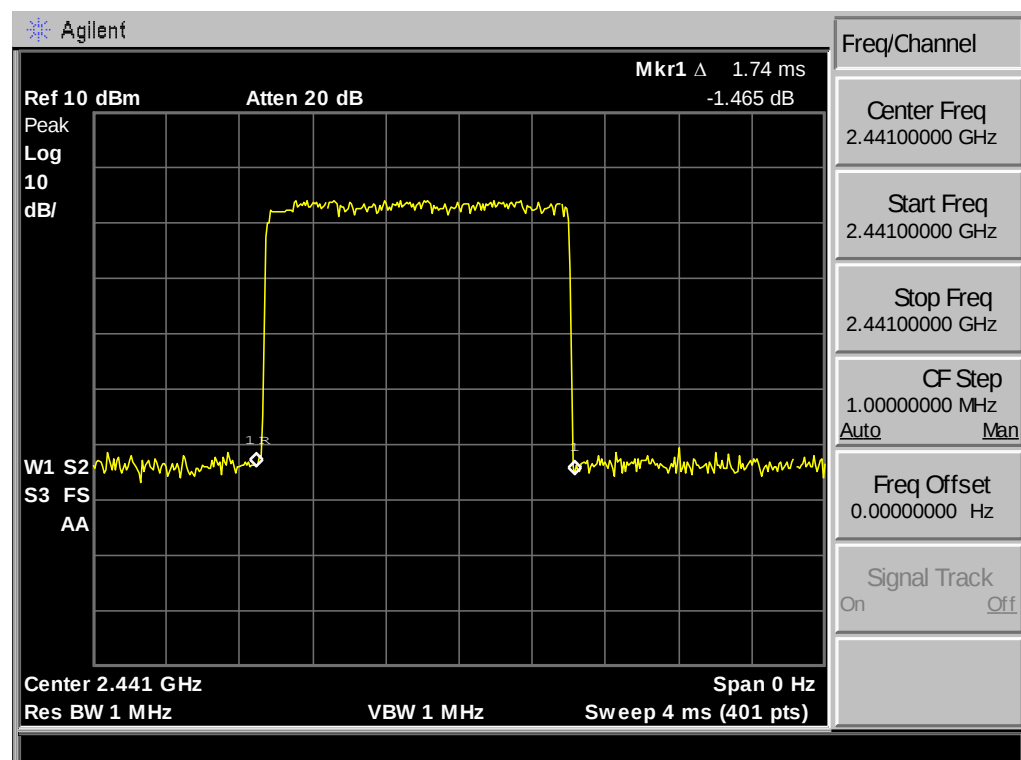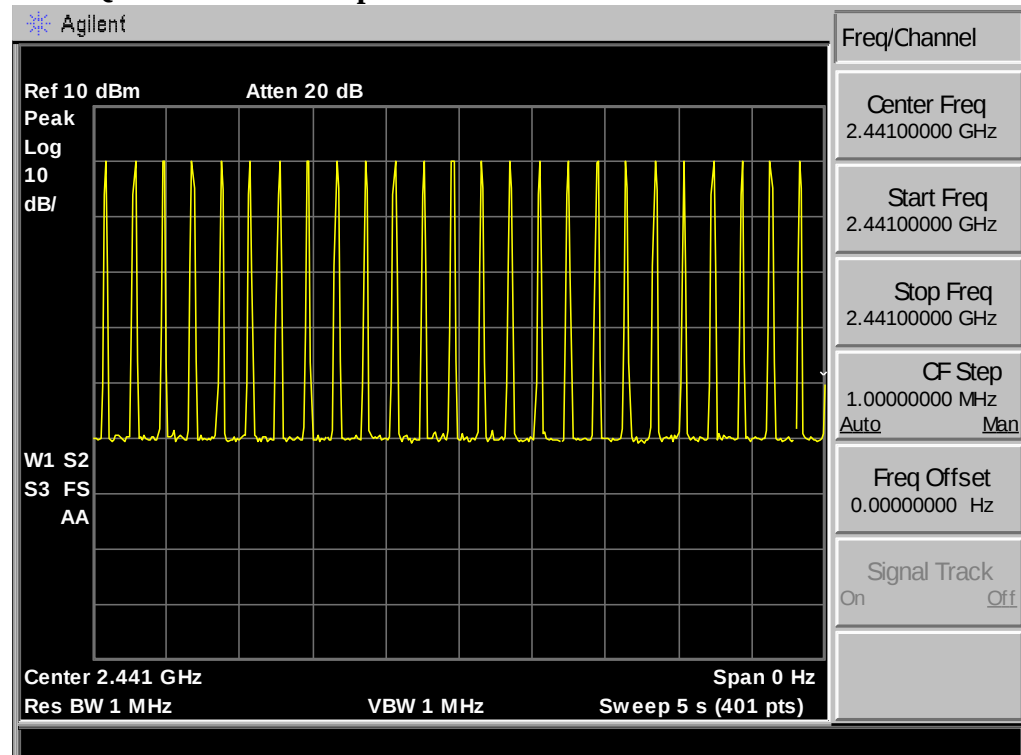
$\pi/4$ -DQPSK 2DH3 : 25hop/5s * 0.4 * 79 * 1.74ms= 274.92



$\pi/4$ -DQPSK 2DH5 : 17hop/5s * 0.4 * 79 * 2.97ms = 319.10

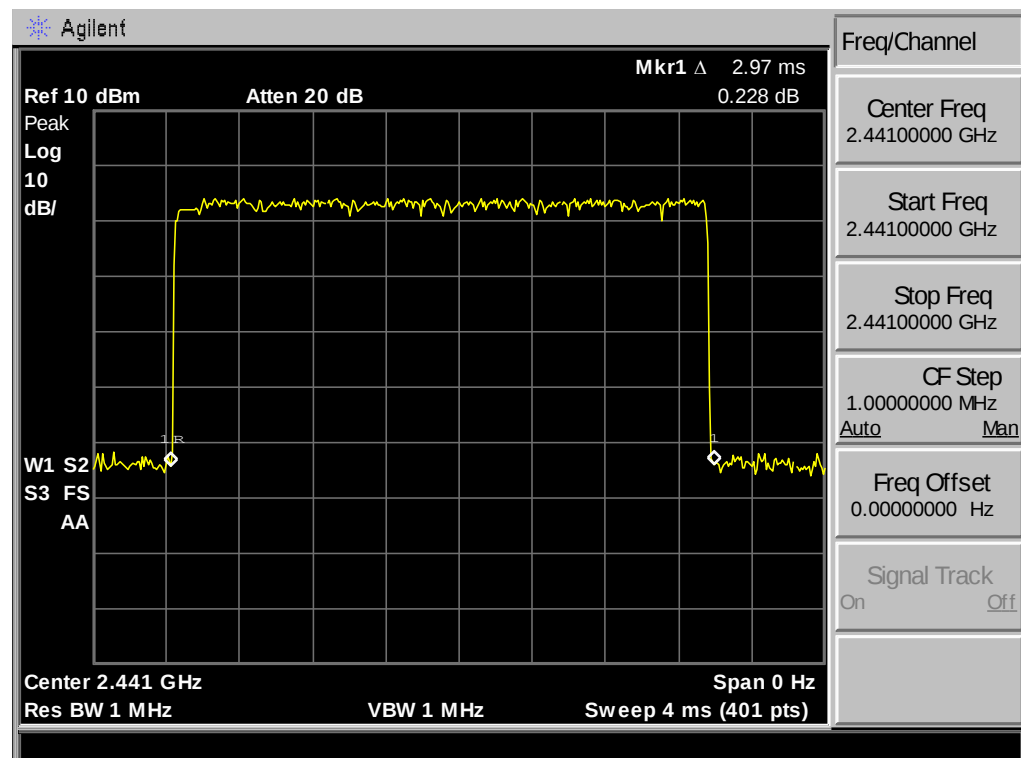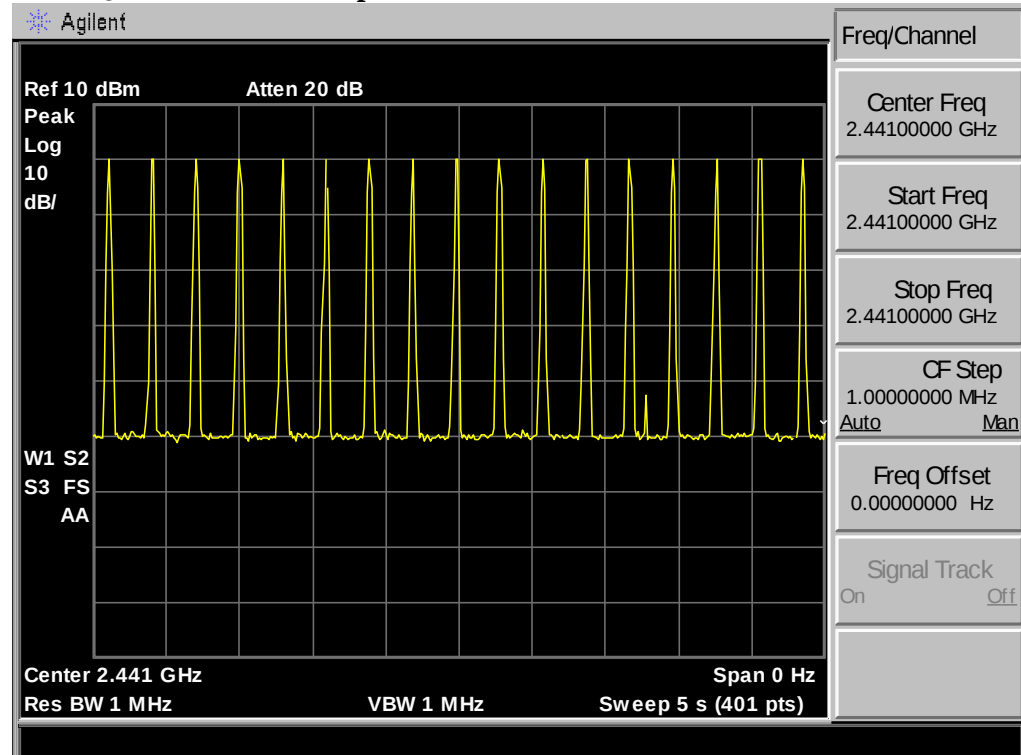



8-DPSK 3DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.48\text{ms} = 151.68$

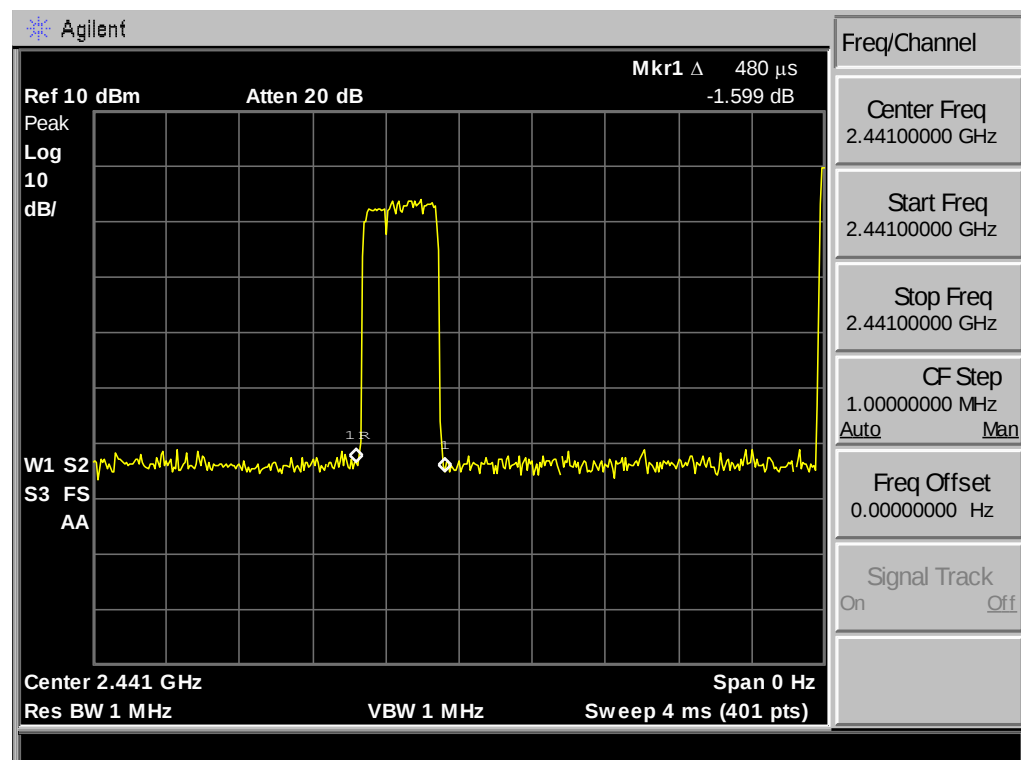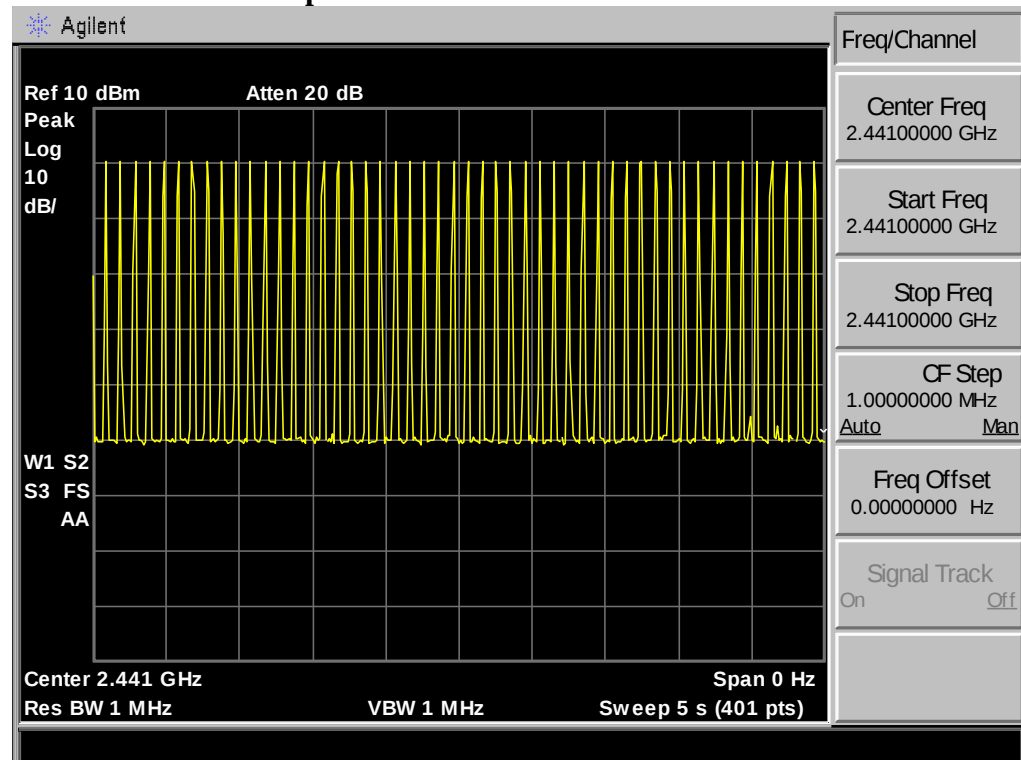

8-DPSK 3DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.70\text{ms} = 268.60$

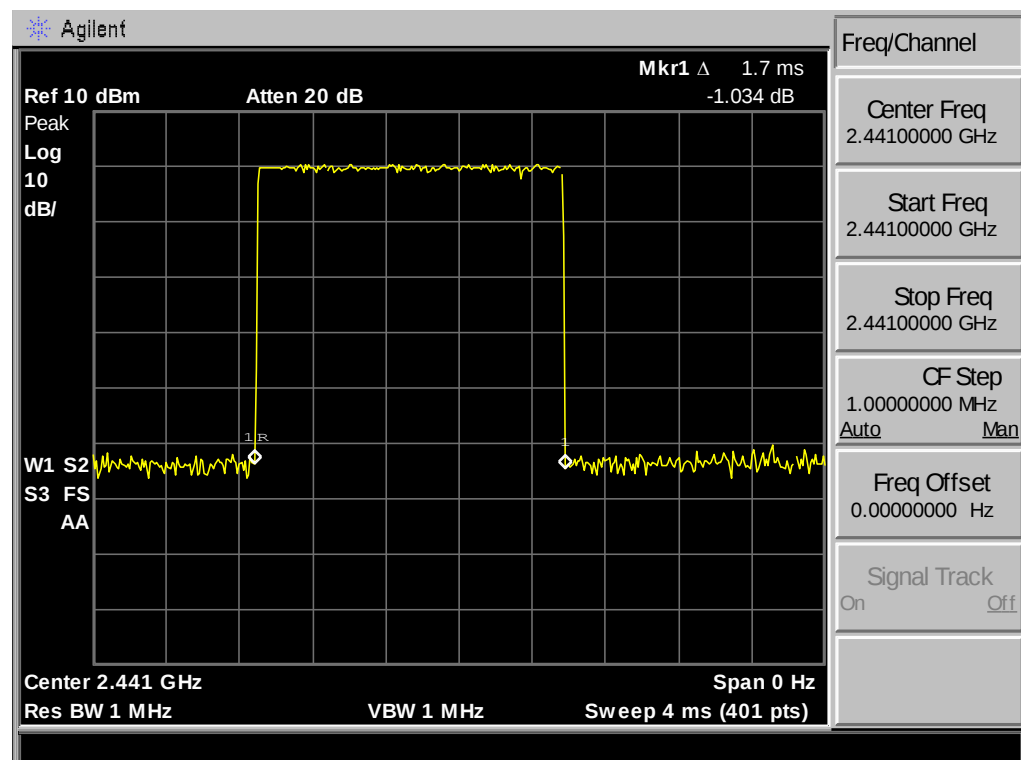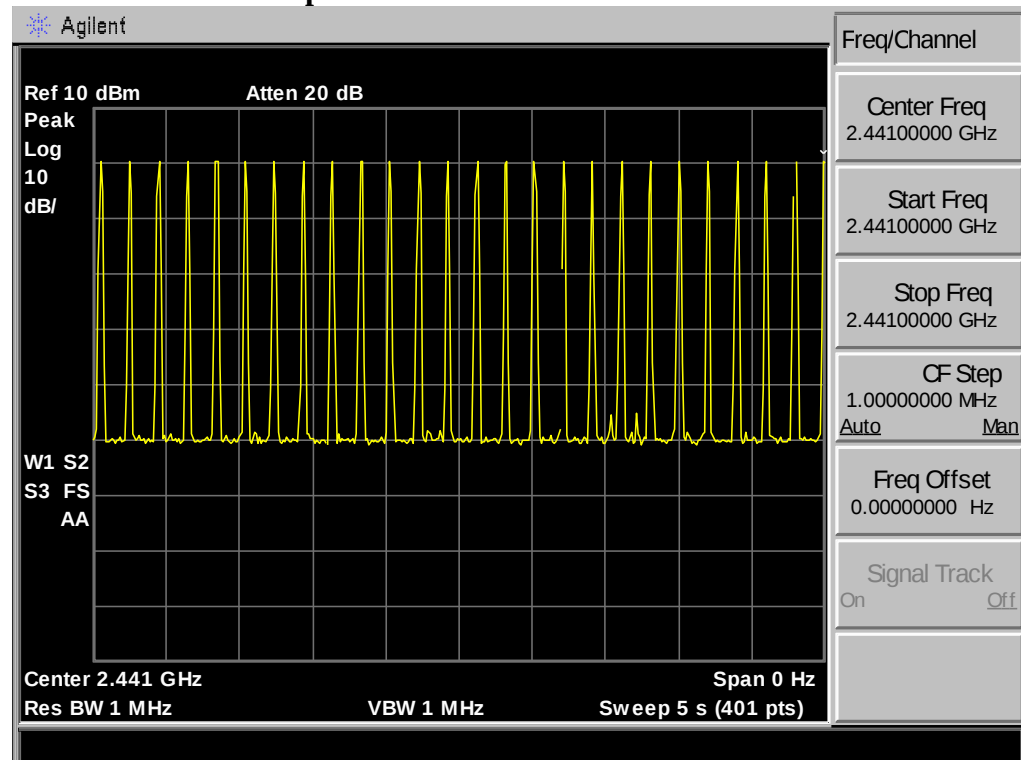

8-DPSK 3DH5 : 17hop/5s * 0.4 * 79 * 3.00ms = 322.32

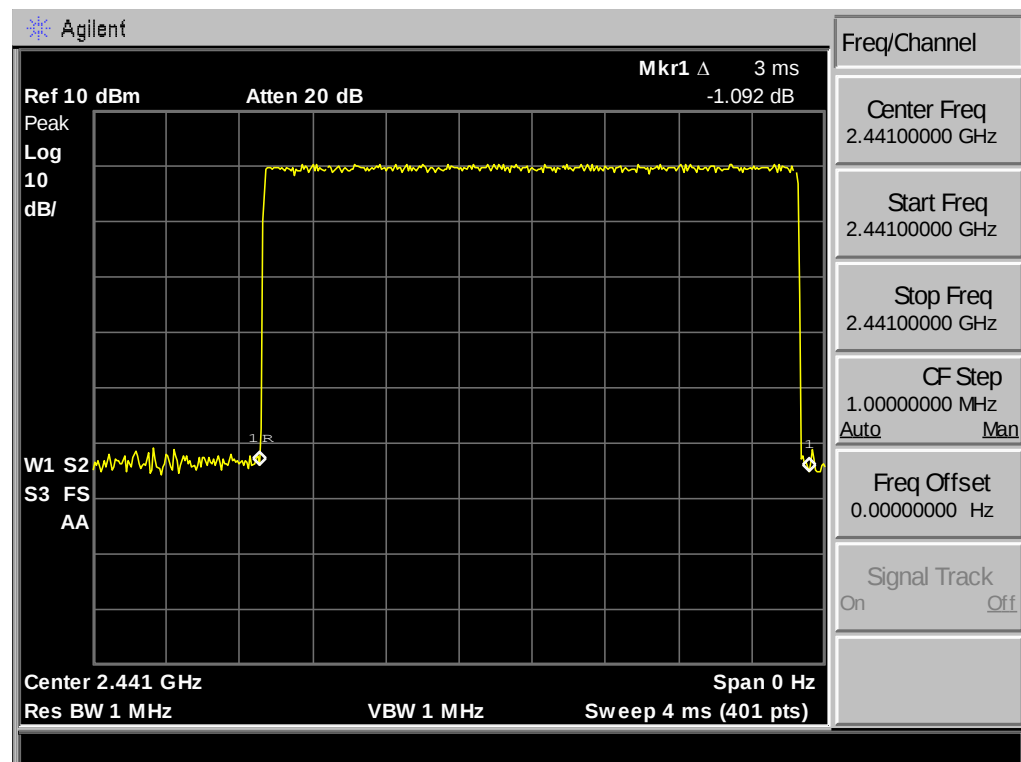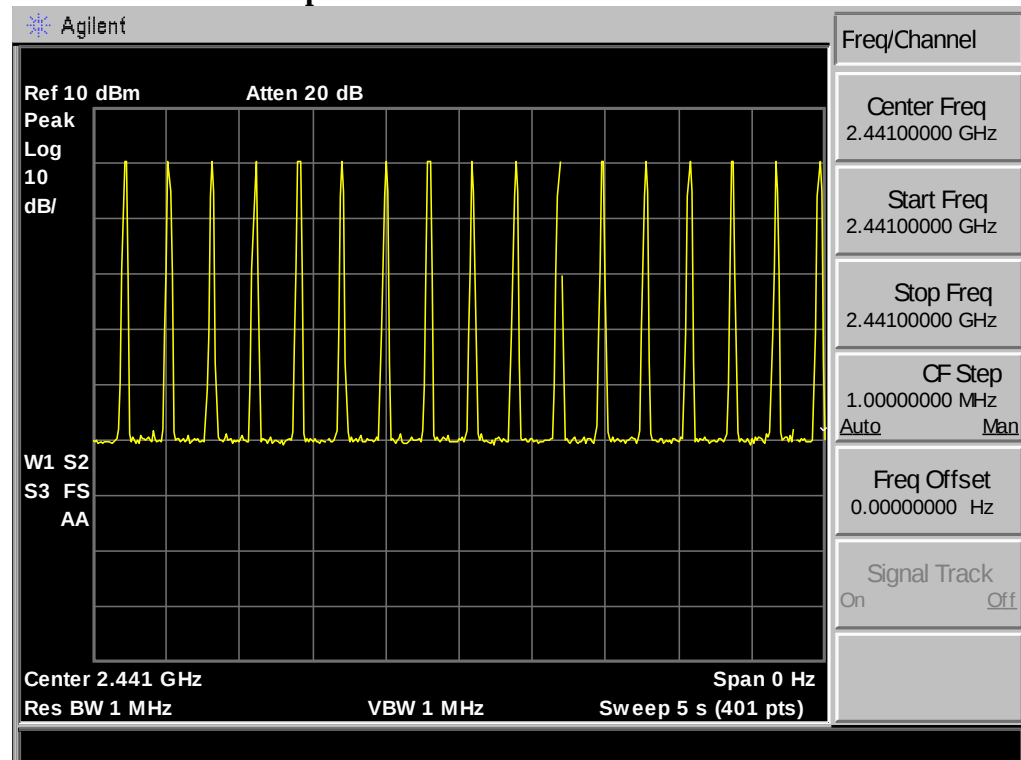

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

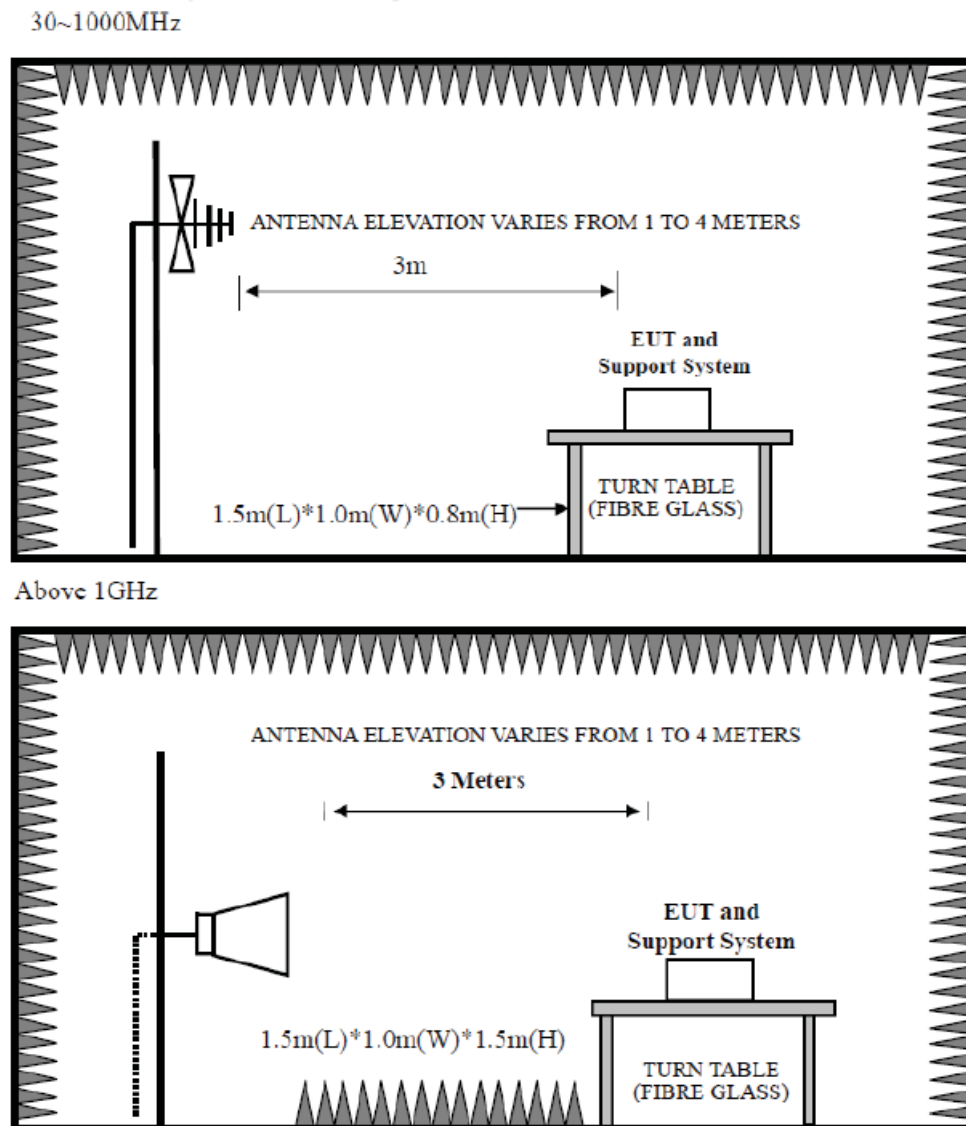

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 30~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emissison Test result
EUT: Portable Bluetooth Speaker
M/N: DS1
Power: DC 3.7V
Test date: 2016-03-07~03-09 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

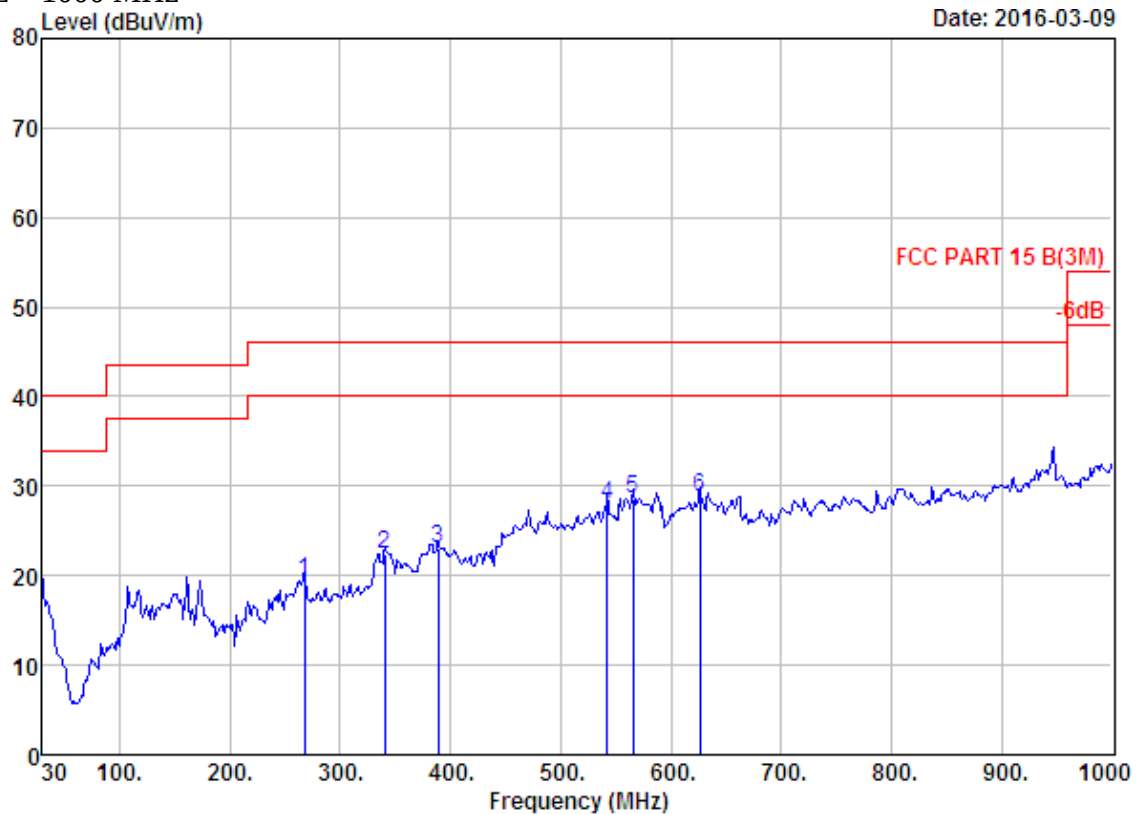


Site no. : 966 1# chamber Data no. : 116
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	267.65	12.71	5.01	1.74	19.46	46.00	26.54	QP
2	340.40	14.16	5.59	2.56	22.31	46.00	23.69	QP
3	388.90	15.54	5.86	1.59	22.99	46.00	23.01	QP
4	542.16	19.46	7.01	1.44	27.91	46.00	18.09	QP
5	565.44	19.65	7.13	1.79	28.57	46.00	17.43	QP
6	626.55	20.12	7.55	1.11	28.78	46.00	17.22	QP

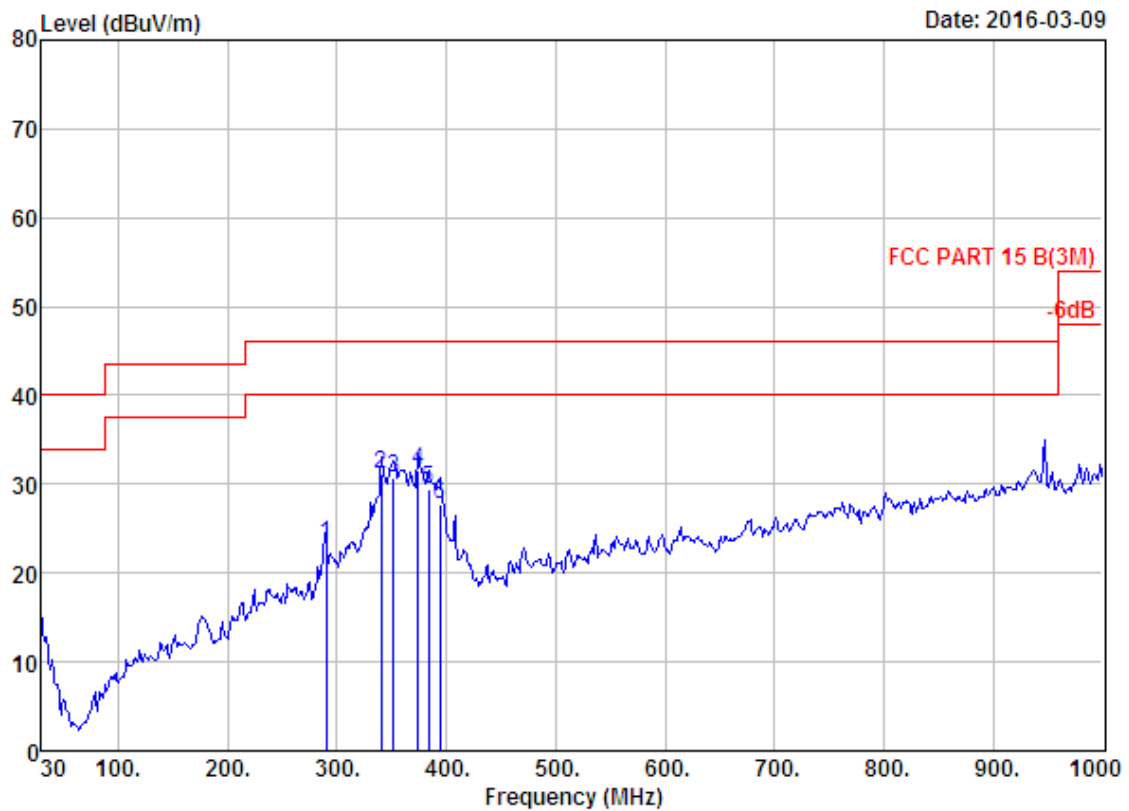


Site no. : 966 1# chamber Data no. : 117
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.96	12.73	5.17	5.31	23.21	46.00	22.79	QP
2	340.40	14.16	5.59	11.35	31.10	46.00	14.90	QP
3	352.04	14.47	5.69	10.53	30.69	46.00	15.31	QP
4	374.35	14.93	5.76	10.80	31.49	46.00	14.51	QP
5	384.05	15.24	5.81	8.47	29.52	46.00	16.48	QP
6	393.75	15.78	5.90	6.02	27.70	46.00	18.30	QP

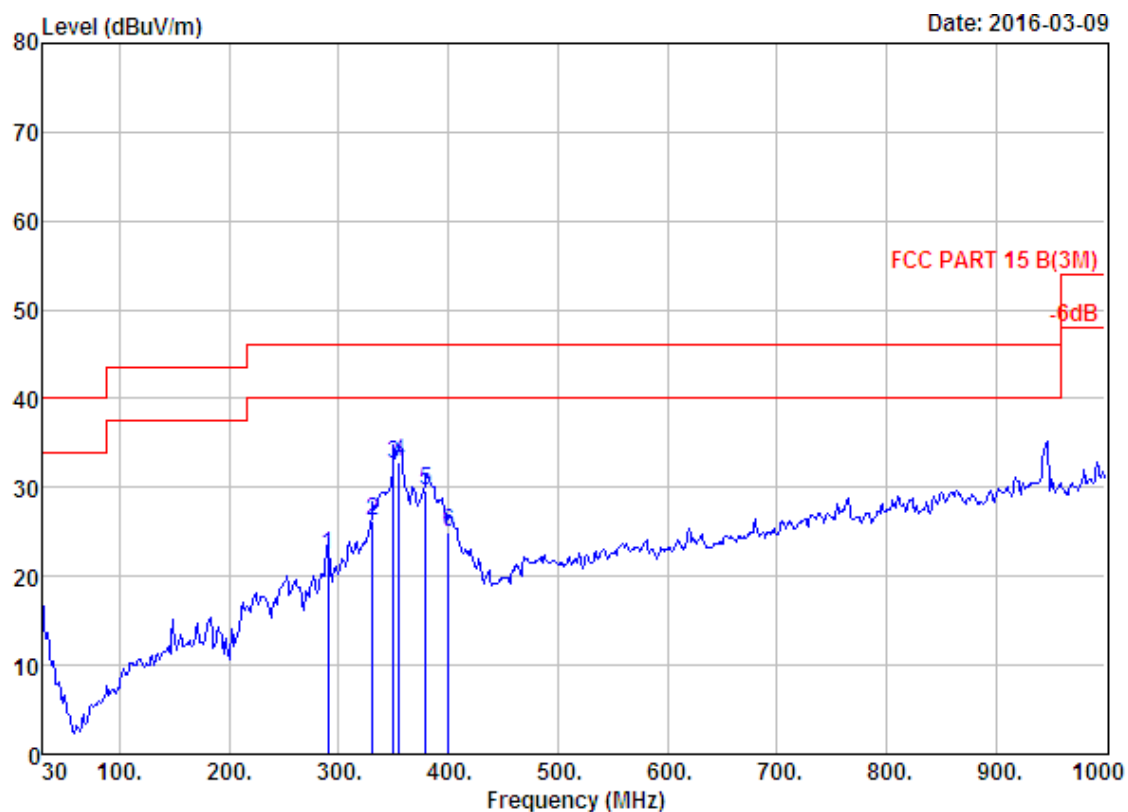


Site no. : 966 1# chamber Data no. : 118
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.96	12.73	5.17	4.45	22.35	46.00	23.65	QP
2	330.70	13.88	5.48	6.94	26.30	46.00	19.70	QP
3	350.10	14.47	5.67	12.53	32.67	46.00	13.33	QP
4	354.95	14.46	5.69	12.66	32.81	46.00	13.19	QP
5	379.20	14.99	5.78	8.91	29.68	46.00	16.32	QP
6	400.54	16.07	5.98	2.88	24.93	46.00	21.07	QP

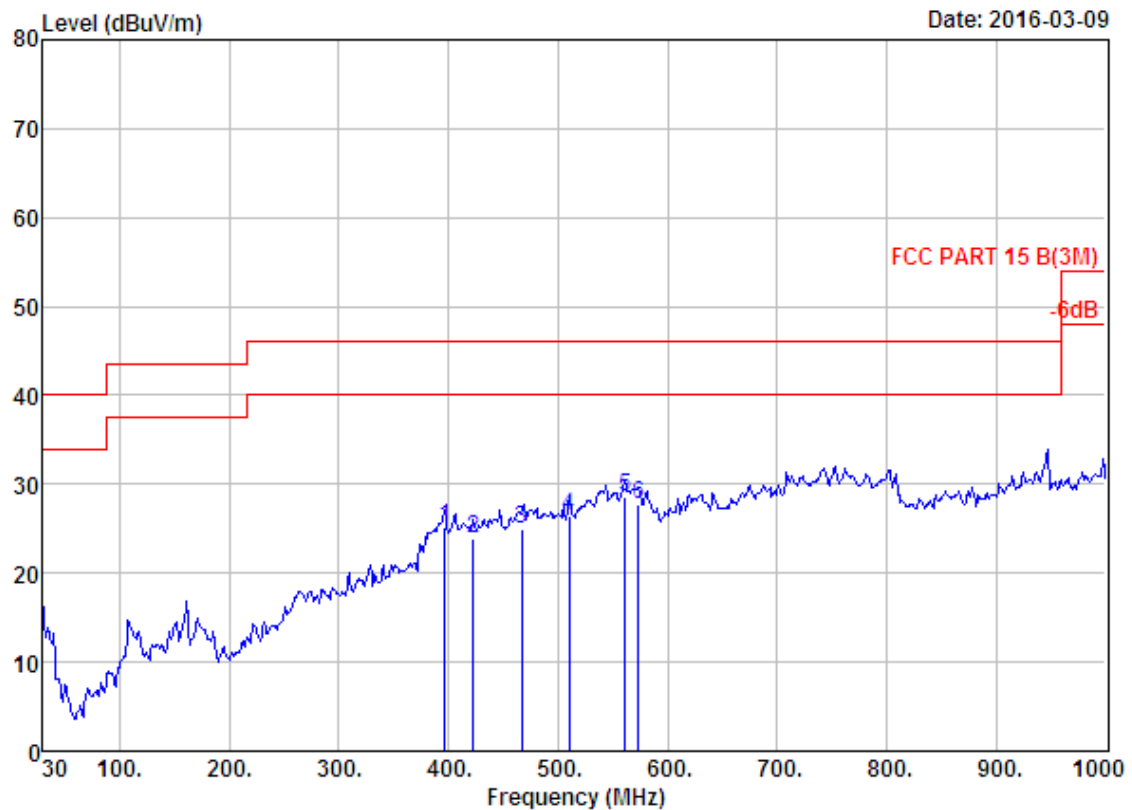


Site no. : 966 1# chamber Data no. : 119
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	396.66	15.91	5.96	3.20	25.07	46.00	20.93	QP
2	422.85	16.23	6.22	1.48	23.93	46.00	22.07	QP
3	466.50	17.08	6.52	1.39	24.99	46.00	21.01	QP
4	510.15	17.94	6.79	1.78	26.51	46.00	19.49	QP
5	561.56	19.69	7.12	1.68	28.49	46.00	17.51	QP
6	573.20	19.58	7.18	0.95	27.71	46.00	18.29	QP

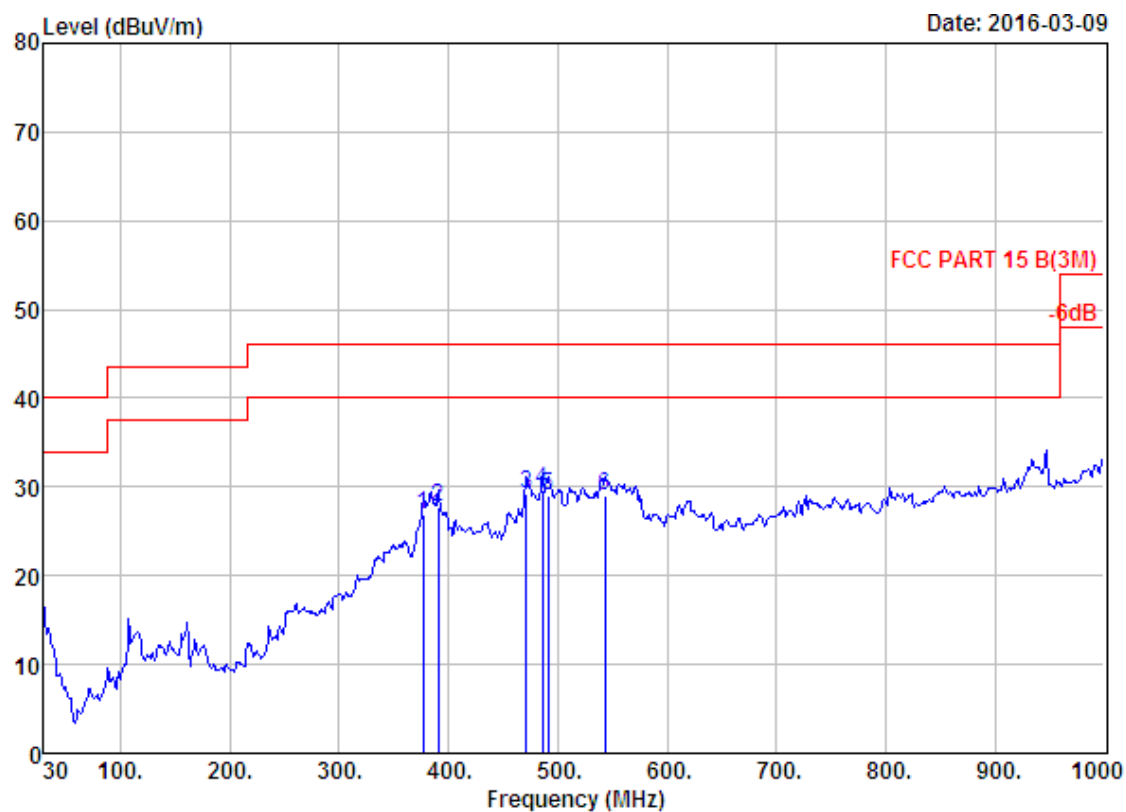


Site no. : 966 1# chamber Data no. : 120
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	377.26	14.96	5.78	6.07	26.81	46.00	19.19	QP
2	390.84	15.65	5.88	6.10	27.63	46.00	18.37	QP
3	471.35	17.23	6.57	5.43	29.23	46.00	16.77	QP
4	485.90	17.67	6.68	5.22	29.57	46.00	16.43	QP
5	490.75	17.82	6.70	4.56	29.08	46.00	16.92	QP
6	543.13	19.46	7.02	2.56	29.04	46.00	16.96	QP

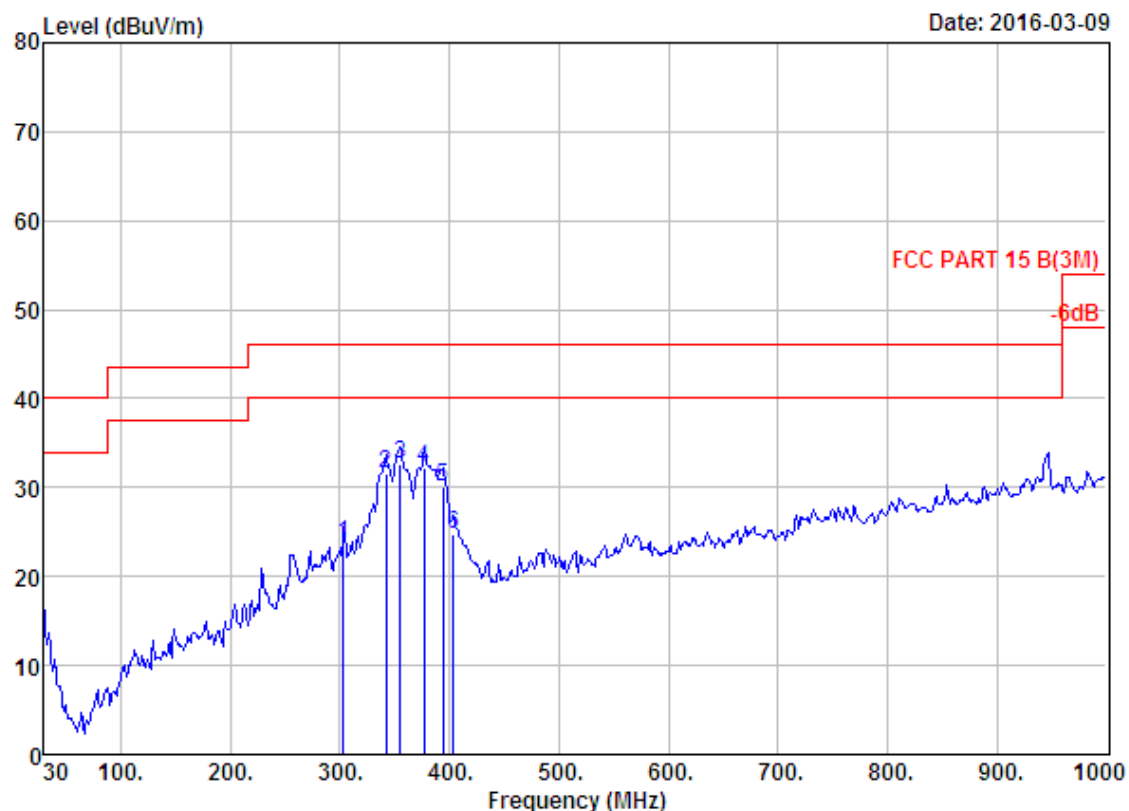


Site no. : 966 1# chamber Data no. : 121
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	303.54	13.08	5.27	5.33	23.68	46.00	22.32	QP
2	342.34	14.22	5.62	11.79	31.63	46.00	14.37	QP
3	354.95	14.46	5.69	12.47	32.62	46.00	13.38	QP
4	377.26	14.96	5.78	11.52	32.26	46.00	13.74	QP
5	393.75	15.78	5.90	8.46	30.14	46.00	15.86	QP
6	403.45	16.14	6.02	2.68	24.84	46.00	21.16	QP

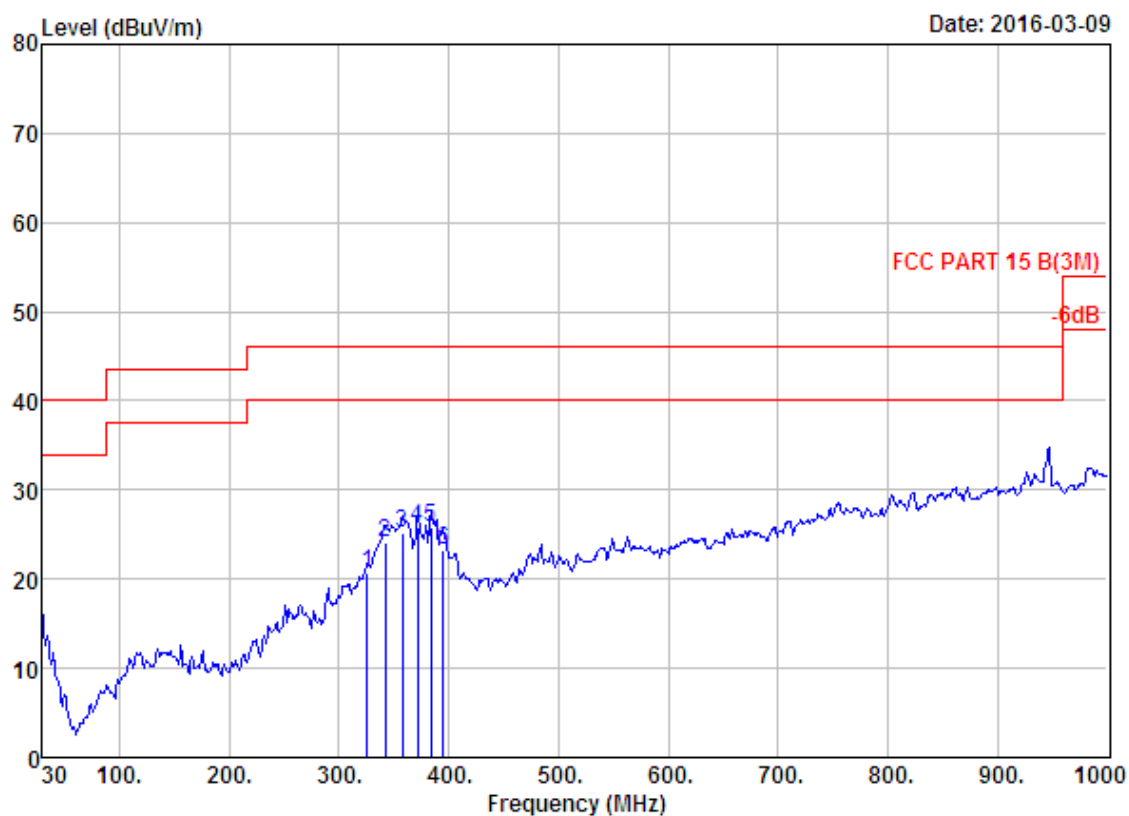


Site no. : 966 1# chamber Data no. : 122
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : ($\pi/4$)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	325.85	13.74	5.43	1.58	20.75	46.00	25.25	QP
2	342.34	14.22	5.62	4.21	24.05	46.00	21.95	QP
3	357.86	14.45	5.73	5.02	25.20	46.00	20.80	QP
4	371.44	14.89	5.77	5.22	25.88	46.00	20.12	QP
5	384.05	15.24	5.81	4.69	25.74	46.00	20.26	QP
6	394.72	15.82	5.90	1.56	23.28	46.00	22.72	QP

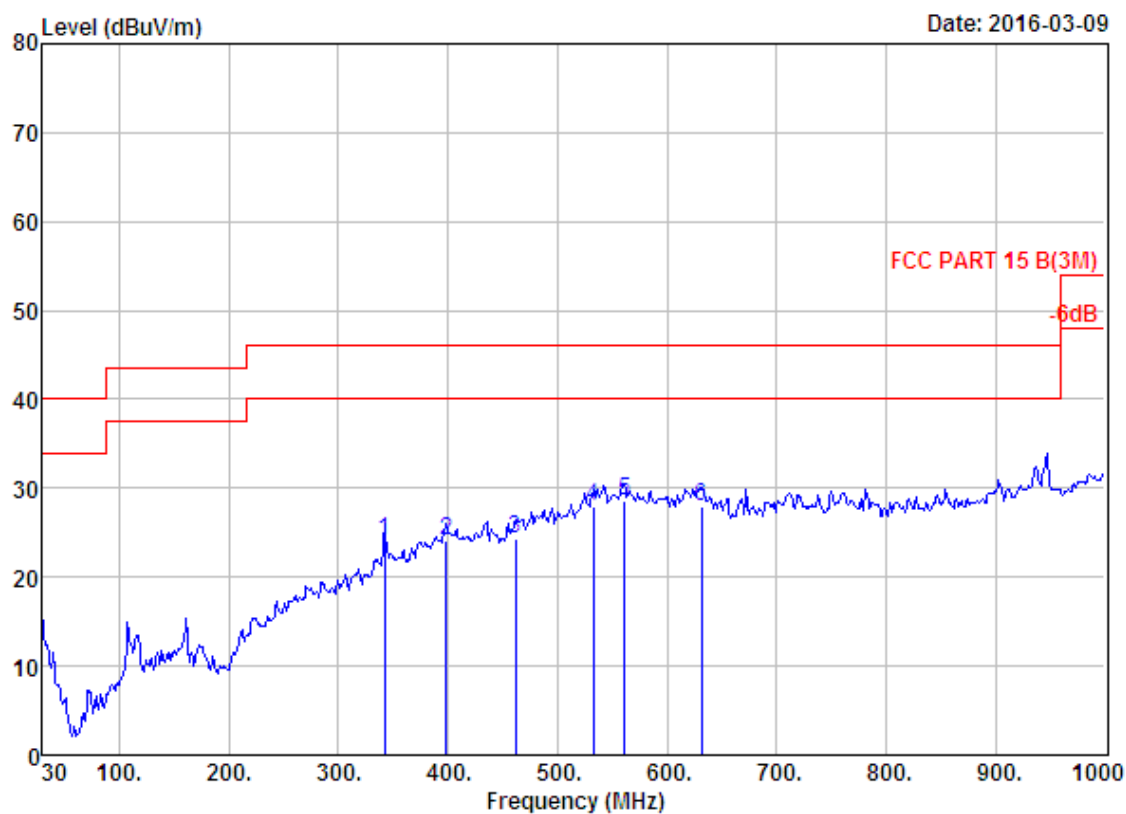


Site no. : 966 1# chamber Data no. : 123
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	342.34	14.22	5.62	4.27	24.11	46.00	21.89	QP
2	398.60	16.00	5.97	2.05	24.02	46.00	21.98	QP
3	461.65	16.91	6.47	0.99	24.37	46.00	21.63	QP
4	532.46	18.57	6.93	2.46	27.96	46.00	18.04	QP
5	561.56	19.69	7.12	1.78	28.59	46.00	17.41	QP
6	631.40	20.15	7.58	0.30	28.03	46.00	17.97	QP

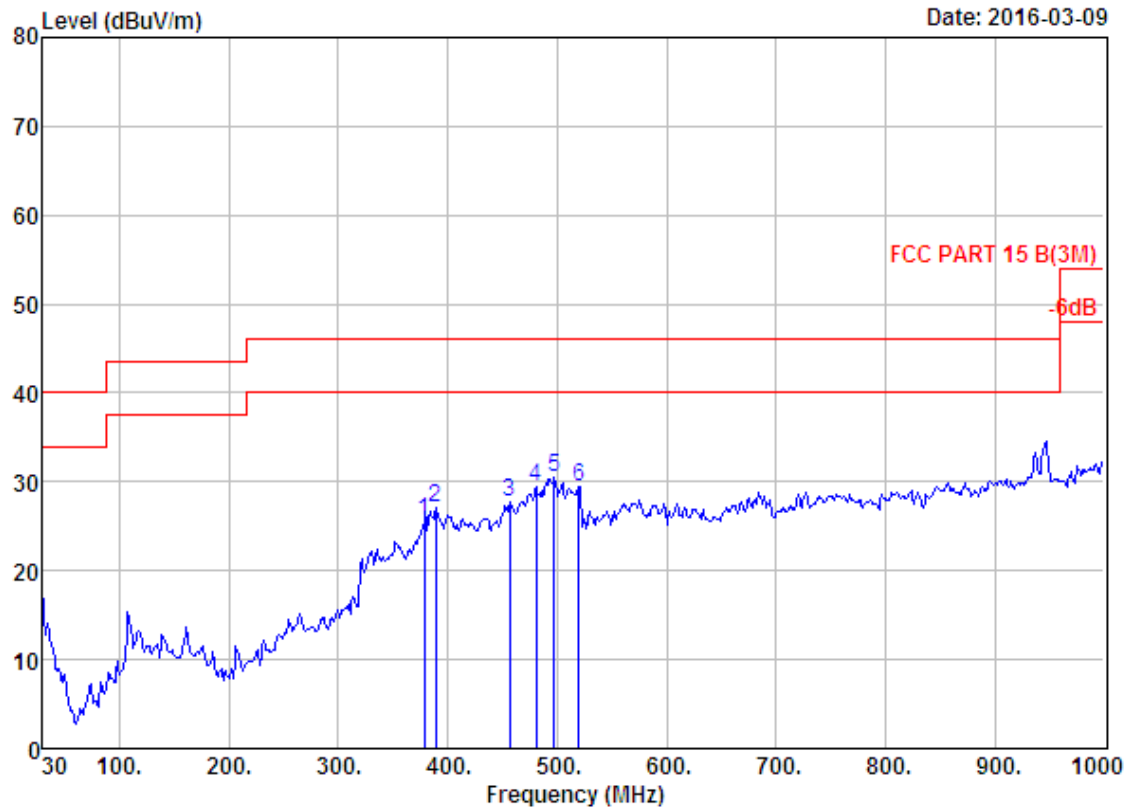

Site no. : 966 1# chamber Data no. : 124
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2441MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	378.23	14.98	5.78	4.90	25.66	46.00	20.34	QP
2	388.90	15.54	5.86	5.73	27.13	46.00	18.87	QP
3	456.80	16.73	6.43	4.55	27.71	46.00	18.29	QP
4	481.05	17.49	6.62	5.40	29.51	46.00	16.49	QP
5	497.54	17.86	6.73	5.89	30.48	46.00	15.52	QP
6	519.85	17.96	6.87	4.69	29.52	46.00	16.48	QP

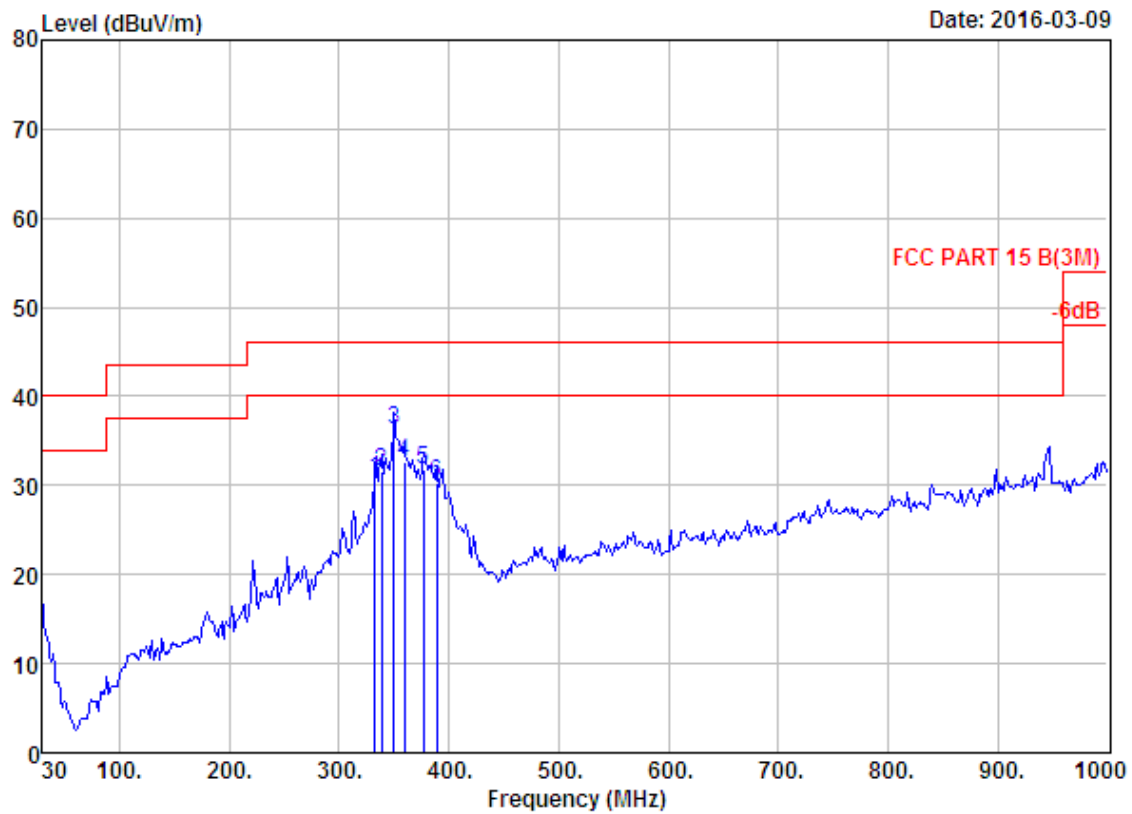

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : ($\pi/4$)DQPSK TX 2441MHz

Data no. : 125
Ant. pol. : HORIZONTAL


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	332.64	13.93	5.52	11.21	30.66	46.00	15.34	QP
2	338.46	14.10	5.56	11.93	31.59	46.00	14.41	QP
3	350.10	14.47	5.67	16.12	36.26	46.00	9.74	QP
4	359.80	14.45	5.74	12.48	32.67	46.00	13.33	QP
5	377.26	14.96	5.78	11.02	31.76	46.00	14.24	QP
6	388.90	15.54	5.86	8.92	30.32	46.00	15.68	QP

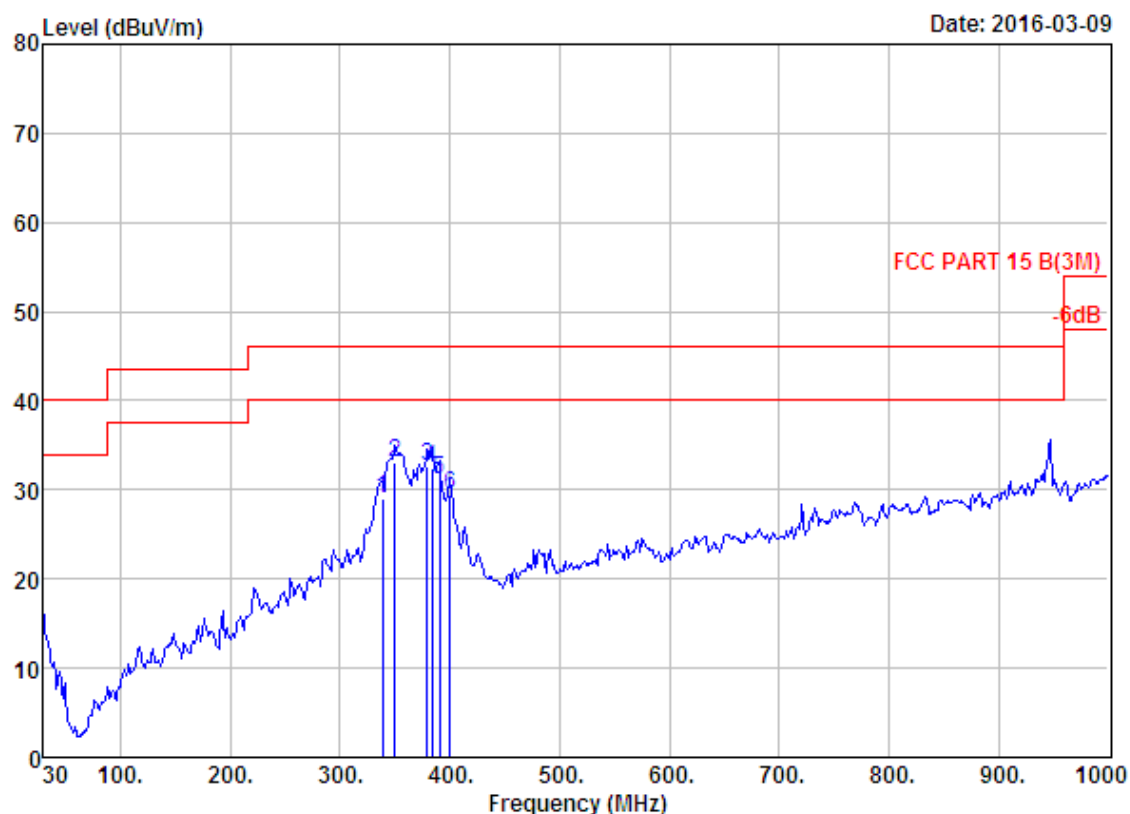

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2480MHz

Data no. : 126
Ant. pol. : HORIZONTAL


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	338.46	14.10	5.56	9.38	29.04	46.00	16.96	QP
2	350.10	14.47	5.67	12.86	33.00	46.00	13.00	QP
3	379.20	14.99	5.78	11.77	32.54	46.00	13.46	QP
4	384.05	15.24	5.81	11.44	32.49	46.00	13.51	QP
5	390.84	15.65	5.88	9.66	31.19	46.00	14.81	QP
6	400.54	16.07	5.98	7.34	29.39	46.00	16.61	QP

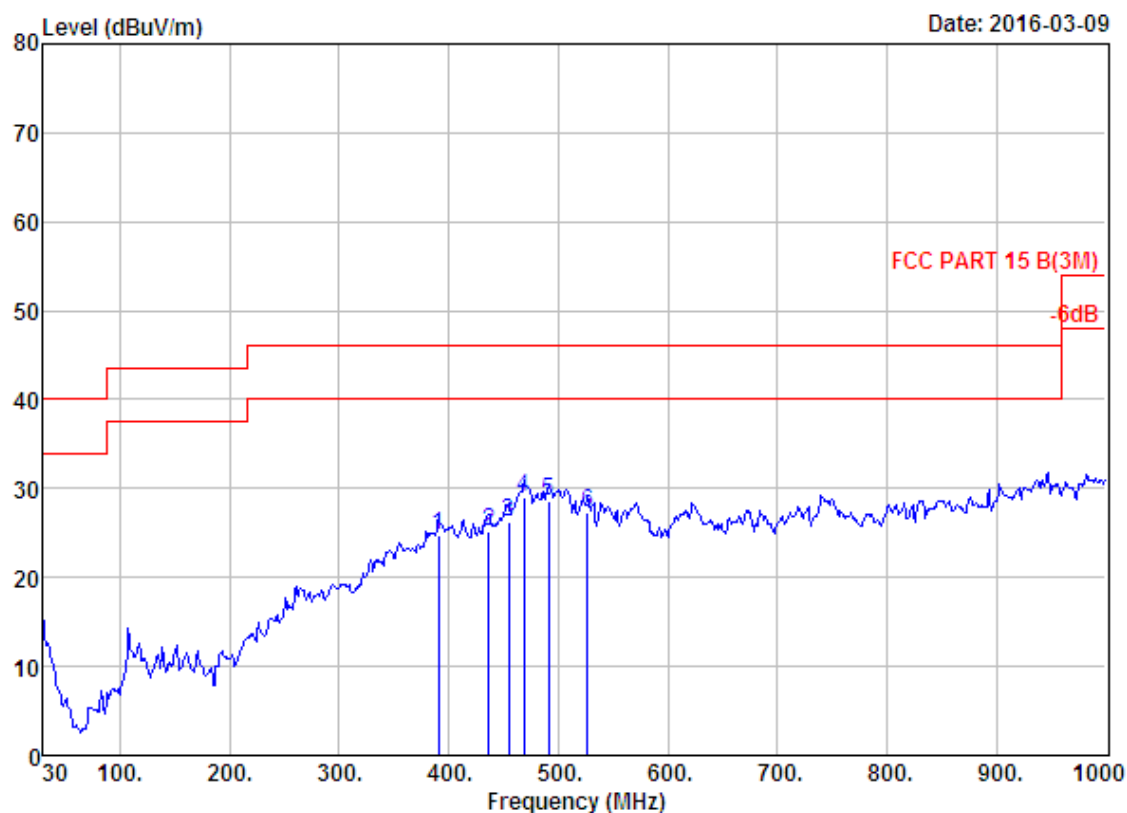

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz

Data no. : 127
Ant. pol. : VERTICAL


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	390.84	15.65	5.88	3.24	24.77	46.00	21.23	QP
2	436.43	16.18	6.29	2.70	25.17	46.00	20.83	QP
3	454.86	16.65	6.40	3.23	26.28	46.00	19.72	QP
4	468.44	17.14	6.54	5.24	28.92	46.00	17.08	QP
5	490.75	17.82	6.70	3.97	28.49	46.00	17.51	QP
6	526.64	18.15	6.92	2.23	27.30	46.00	18.70	QP

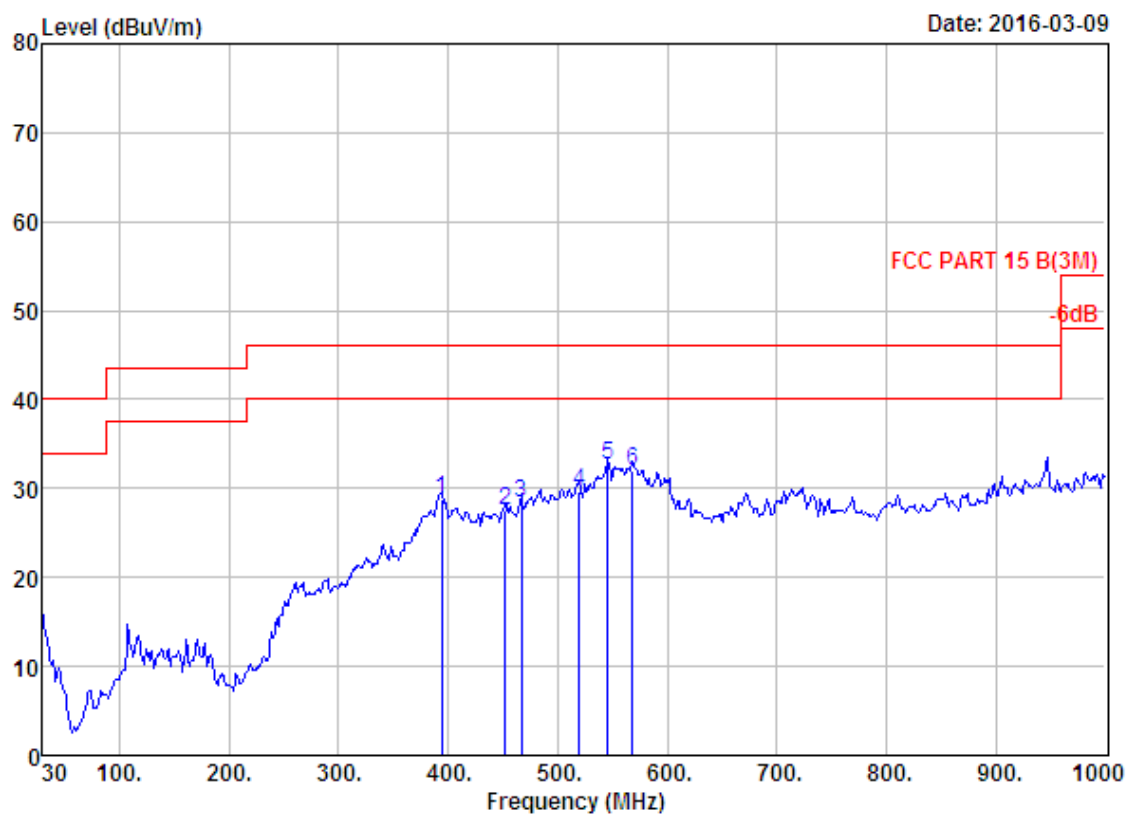

Site no. : 966 1# chamber
 Dis. / Ant. : 3m 27137
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz


Data no. : 128
 Ant. pol. : VERTICAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	393.75	15.78	5.90	7.05	28.73	46.00	17.27	QP
2	451.95	16.54	6.40	4.52	27.46	46.00	18.54	QP
3	466.50	17.08	6.52	4.73	28.33	46.00	17.67	QP
4	519.85	17.96	6.87	4.93	29.76	46.00	16.24	QP
5	546.04	19.45	7.05	6.05	32.55	46.00	13.45	QP
6	568.35	19.62	7.15	5.21	31.98	46.00	14.02	QP

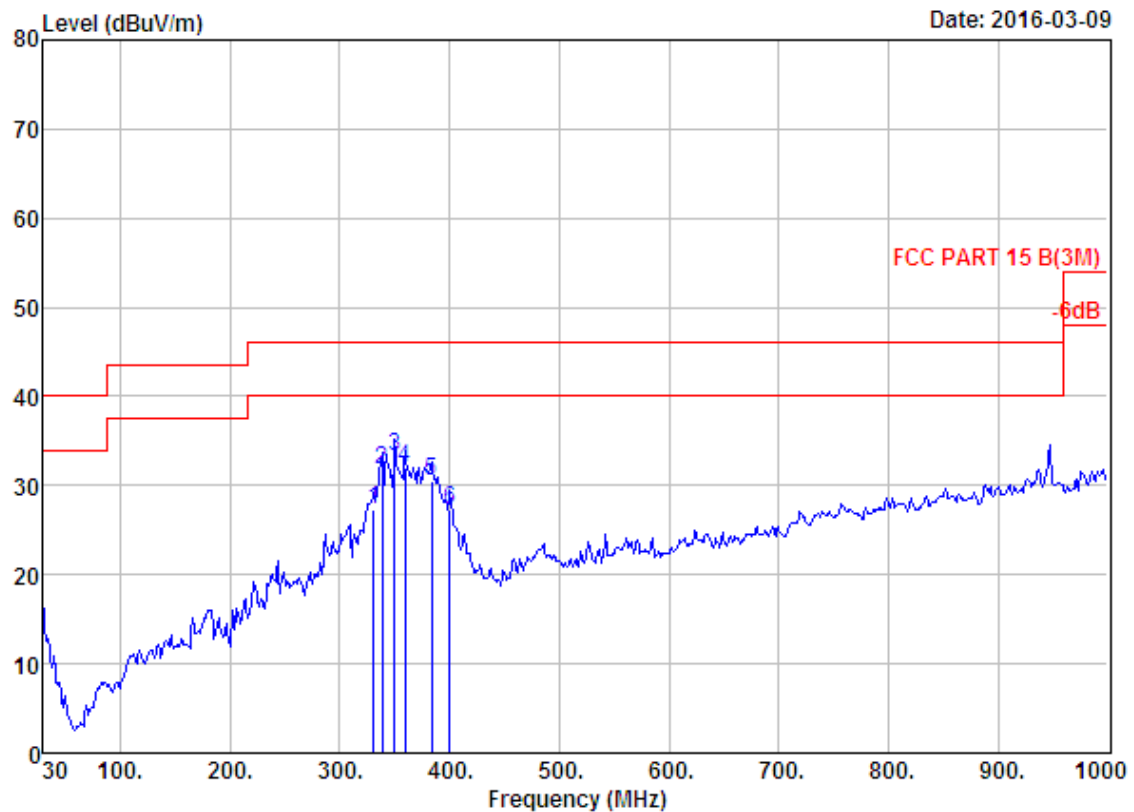


Site no. : 966 1# chamber Data no. : 129
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	330.70	13.88	5.48	7.97	27.33	46.00	18.67	QP
2	338.46	14.10	5.56	12.12	31.78	46.00	14.22	QP
3	350.10	14.47	5.67	13.09	33.23	46.00	12.77	QP
4	359.80	14.45	5.74	11.77	31.96	46.00	14.04	QP
5	384.05	15.24	5.81	9.56	30.61	46.00	15.39	QP
6	400.54	16.07	5.98	5.31	27.36	46.00	18.64	QP

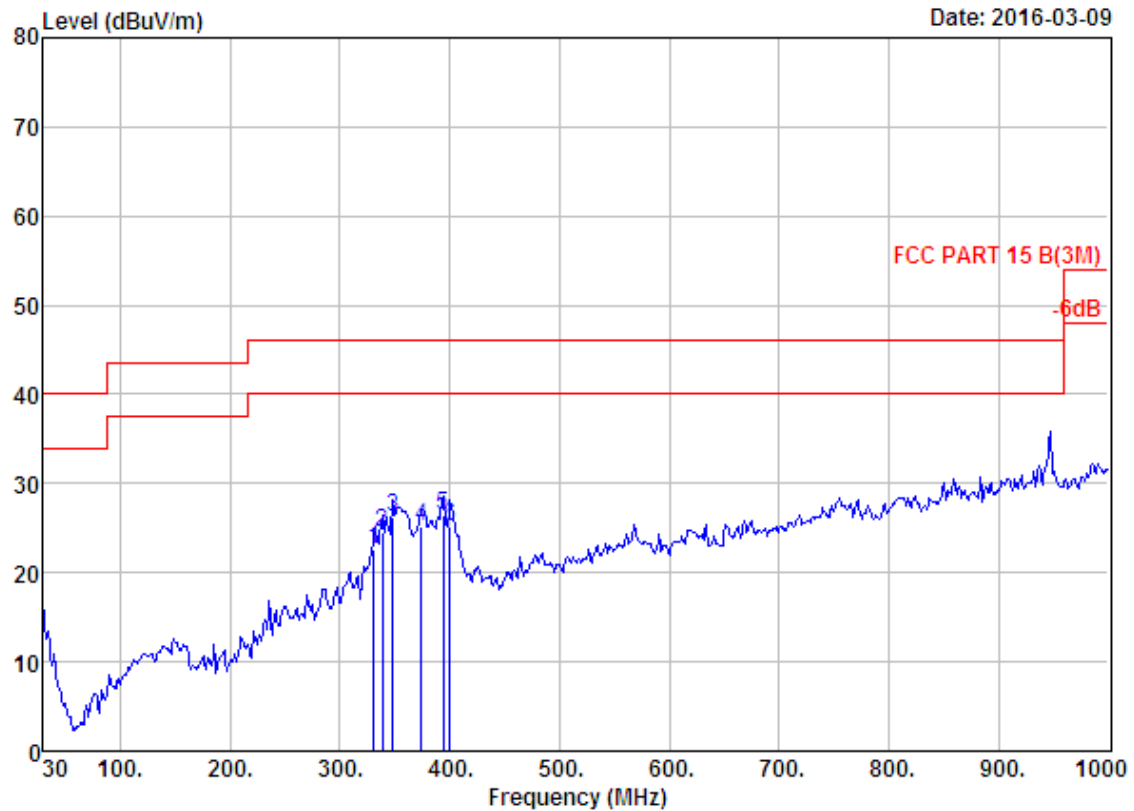


Site no. : 966 1# chamber Data no. : 130
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	330.70	13.88	5.48	3.29	22.65	46.00	23.35	QP
2	338.46	14.10	5.56	4.78	24.44	46.00	21.56	QP
3	348.16	14.41	5.67	6.12	26.20	46.00	19.80	QP
4	374.35	14.93	5.76	4.51	25.20	46.00	20.80	QP
5	393.75	15.78	5.90	4.87	26.55	46.00	19.45	QP
6	400.54	16.07	5.98	3.09	25.14	46.00	20.86	QP

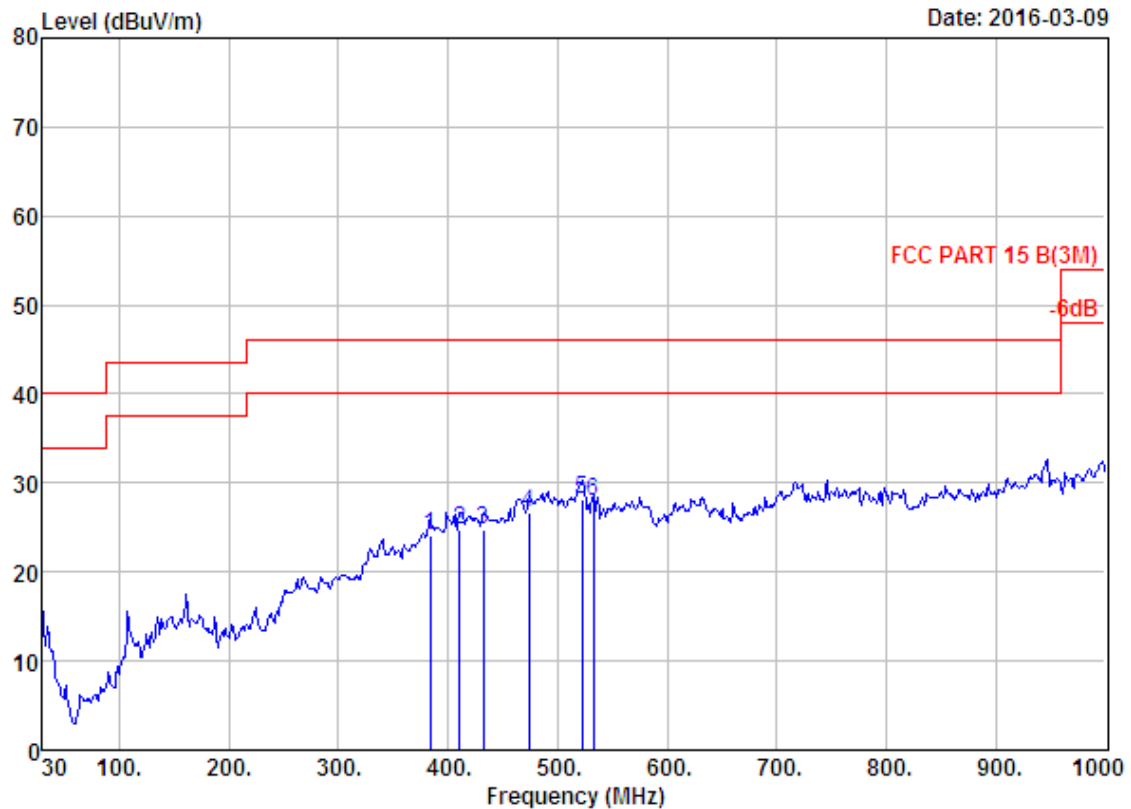


Site no. : 966 1# chamber Data no. : 131
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	384.05	15.24	5.81	3.08	24.13	46.00	21.87	QP
2	410.24	16.29	6.10	2.28	24.67	46.00	21.33	QP
3	432.55	16.11	6.26	2.39	24.76	46.00	21.24	QP
4	474.26	17.31	6.60	2.68	26.59	46.00	19.41	QP
5	522.76	18.04	6.89	3.30	28.23	46.00	17.77	QP
6	532.46	18.57	6.93	2.40	27.90	46.00	18.10	QP

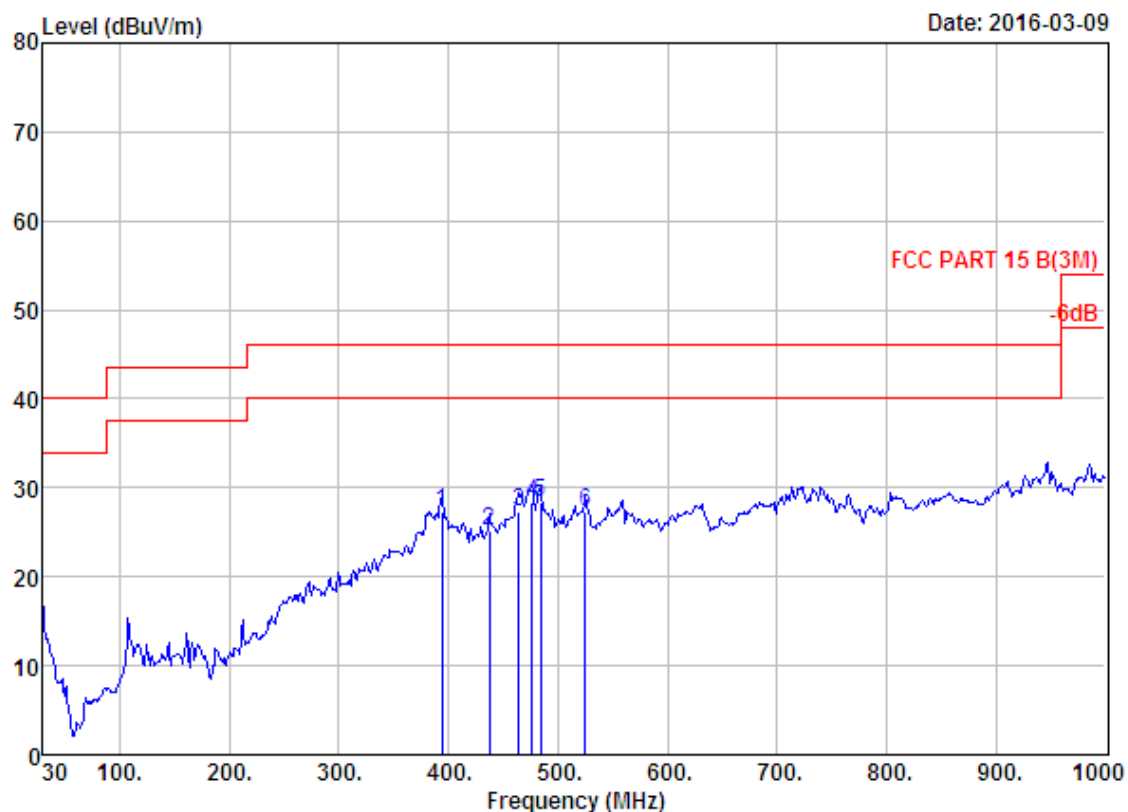

Site no. : 966 1# chamber Data no. : 132
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	393.75	15.78	5.90	5.56	27.24	46.00	18.76	QP
2	437.40	16.20	6.30	2.64	25.14	46.00	20.86	QP
3	464.56	17.01	6.51	3.86	27.38	46.00	18.62	QP
4	476.20	17.35	6.62	4.43	28.40	46.00	17.60	QP
5	483.96	17.59	6.67	4.09	28.35	46.00	17.65	QP
6	524.70	18.09	6.90	2.25	27.24	46.00	18.76	QP

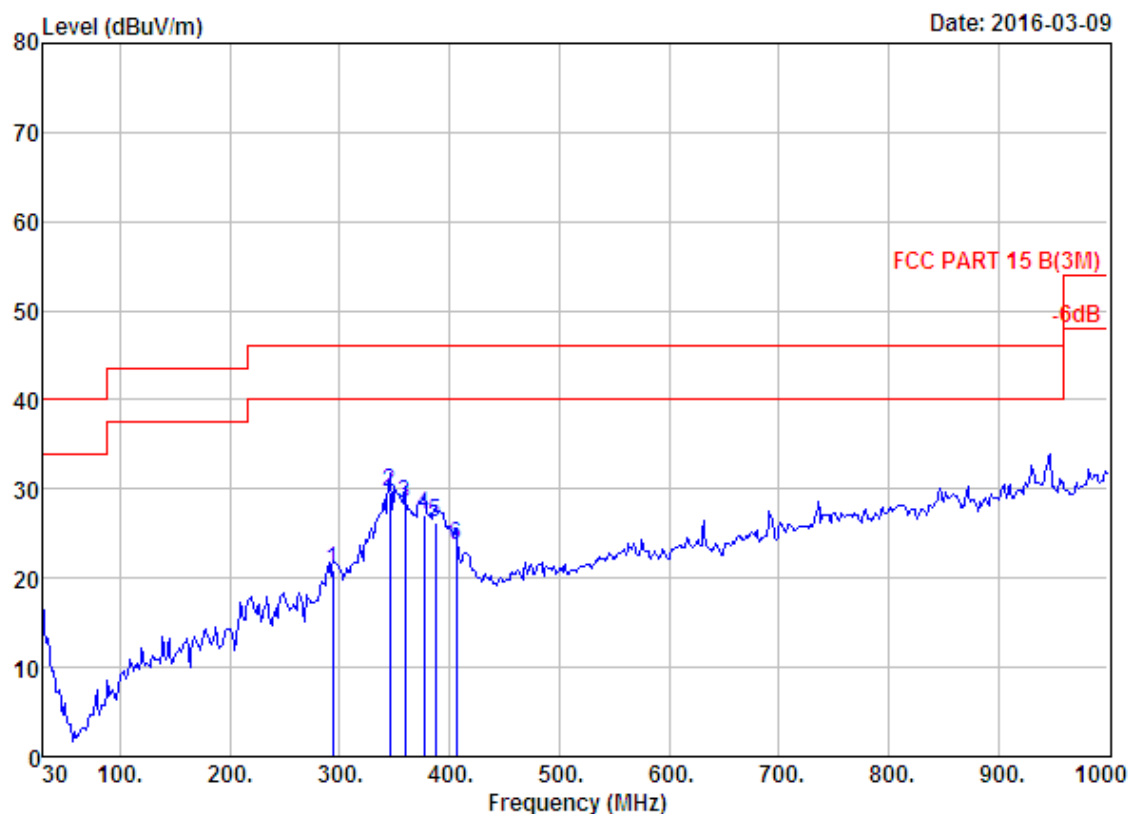


Site no. : 966 1# chamber Data no. : 133
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	293.84	12.92	5.21	2.77	20.90	46.00	25.10	QP
2	345.25	14.32	5.63	9.80	29.75	46.00	16.25	QP
3	359.80	14.45	5.74	8.12	28.31	46.00	17.69	QP
4	377.26	14.96	5.78	6.41	27.15	46.00	18.85	QP
5	386.96	15.42	5.87	4.87	26.16	46.00	19.84	QP
6	406.36	16.20	6.07	1.30	23.57	46.00	22.43	QP

1000 MHz – 18000MHz


Date: 2016-03-07

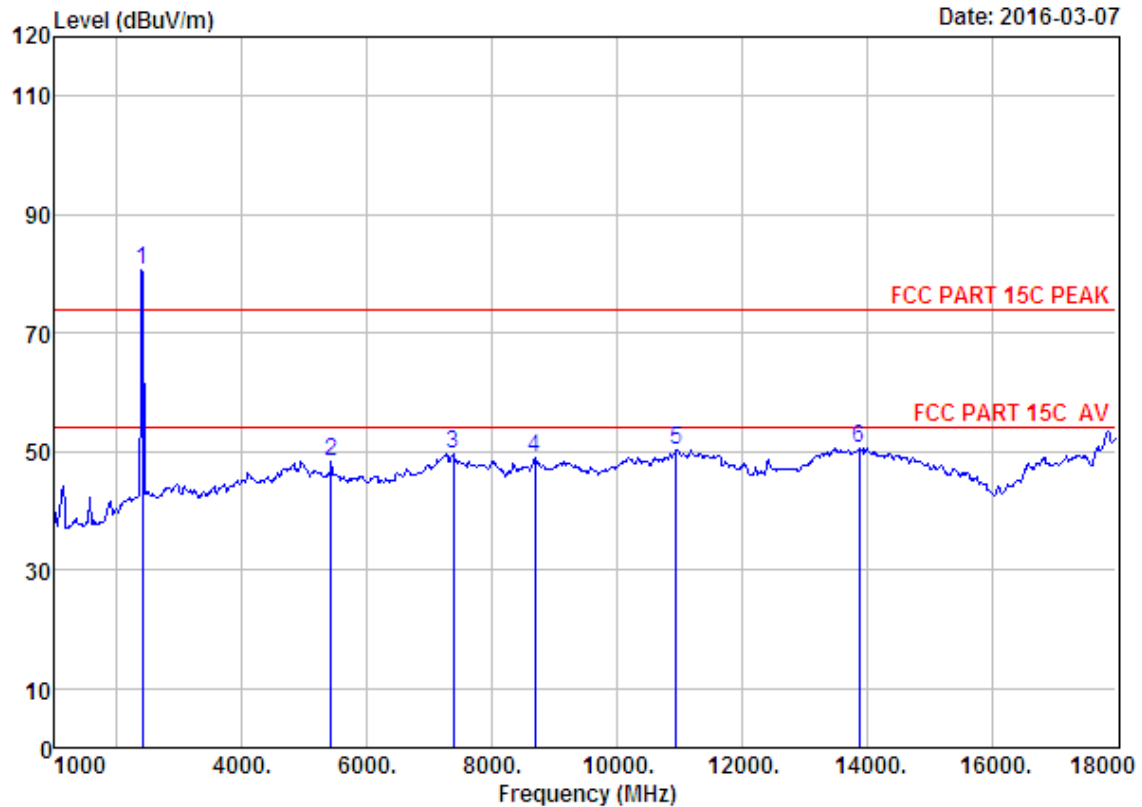

Site no. : 1# 966 chamber Data no. : 32
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	81.02	80.61	74.00	-6.61	Peak
2	5420.00	31.78	12.09	35.85	40.19	48.21	74.00	25.79	Peak
3	7375.00	36.57	11.59	34.21	35.65	49.60	74.00	24.40	Peak
4	8684.00	37.32	11.45	33.66	33.73	48.84	74.00	25.16	Peak
5	10945.00	39.46	11.29	34.13	33.70	50.32	74.00	23.68	Peak
6	13886.00	41.16	11.04	33.03	31.32	50.49	74.00	23.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

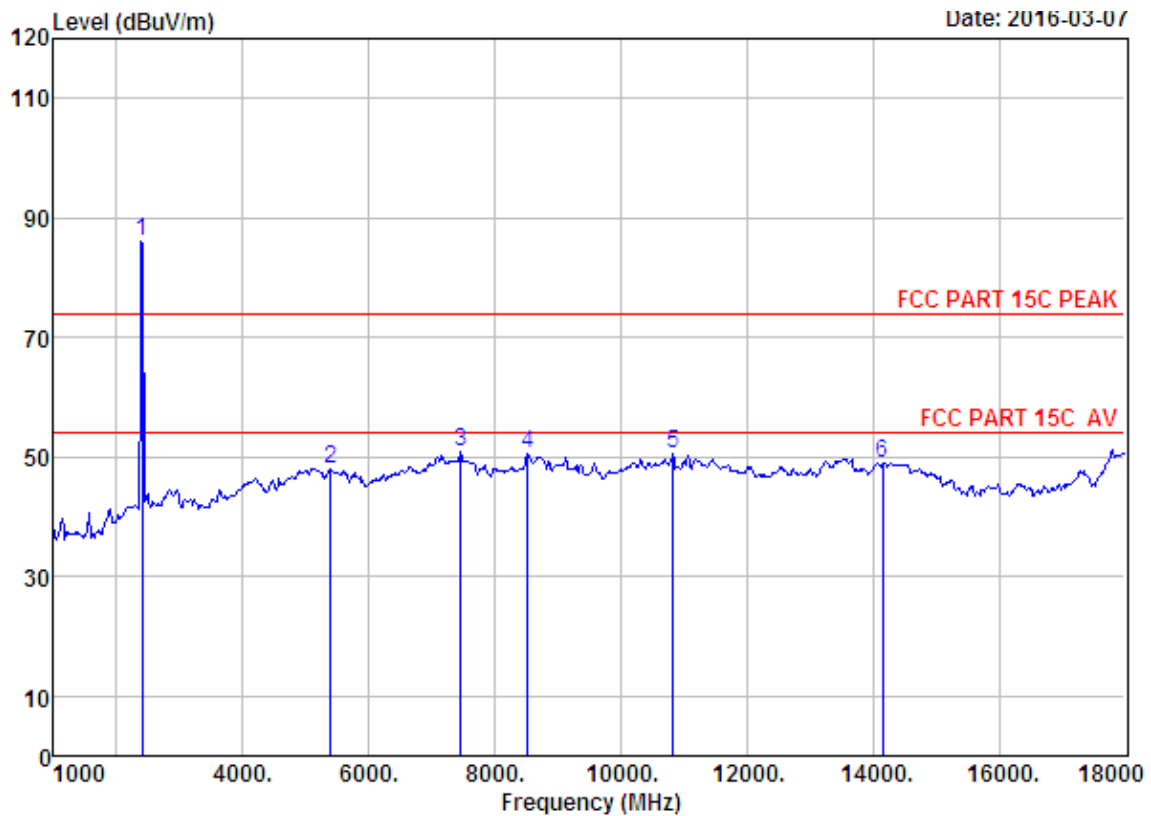

Site no. : 1# 966 chamber Data no. : 33
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	86.56	86.15	74.00	-12.15	Peak
2	5386.00	31.73	12.13	35.84	39.95	47.97	74.00	26.03	Peak
3	7460.00	36.52	11.61	34.21	36.81	50.73	74.00	23.27	Peak
4	8514.00	36.96	11.45	34.07	36.20	50.54	74.00	23.46	Peak
5	10826.00	39.33	11.30	34.00	33.78	50.41	74.00	23.59	Peak
6	14158.00	41.60	10.91	33.32	29.93	49.12	74.00	24.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

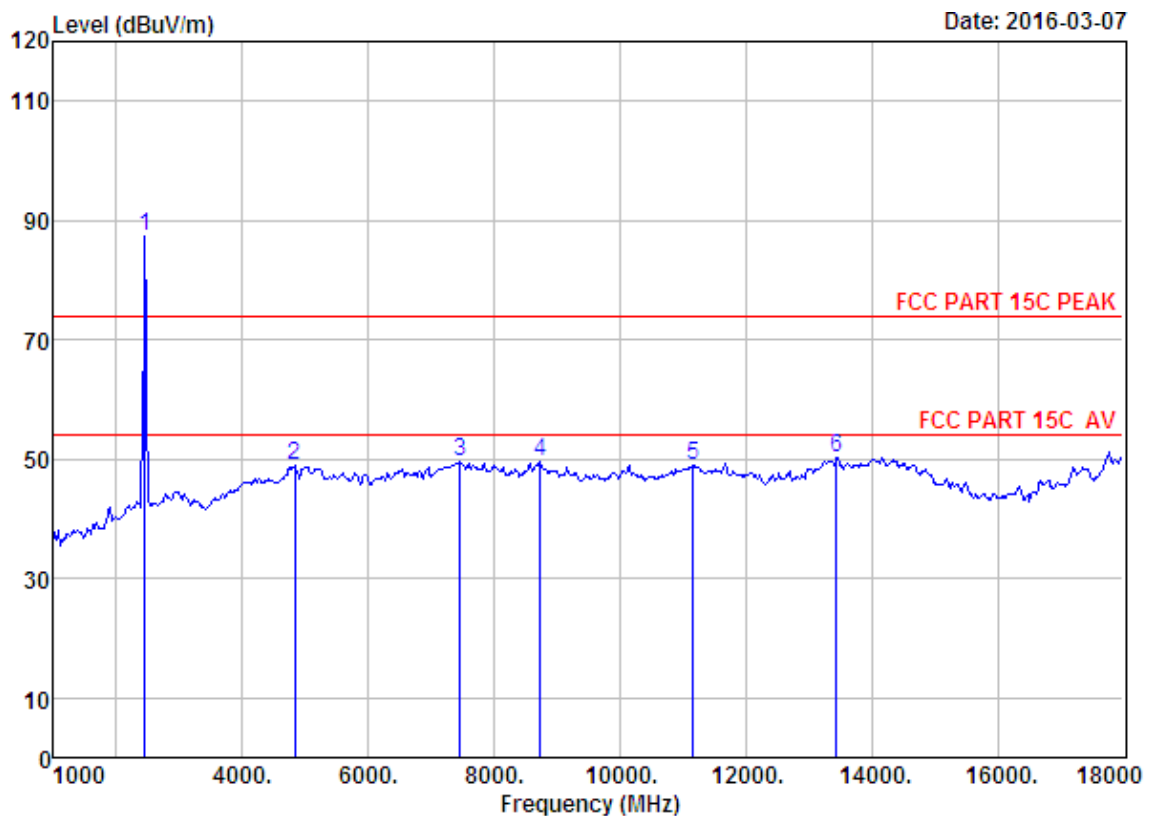

Site no. : 1# 966 chamber Data no. : 36
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	87.97	87.39	74.00	-13.39	Peak
2	4825.00	31.28	11.84	35.66	41.37	48.83	74.00	25.17	Peak
3	7460.00	36.52	11.61	34.21	35.56	49.48	74.00	24.52	Peak
4	8735.00	37.40	11.45	33.76	34.40	49.49	74.00	24.51	Peak
5	11166.00	39.41	11.17	33.31	31.72	48.99	74.00	25.01	Peak
6	13444.00	39.95	11.49	32.74	31.53	50.23	74.00	23.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

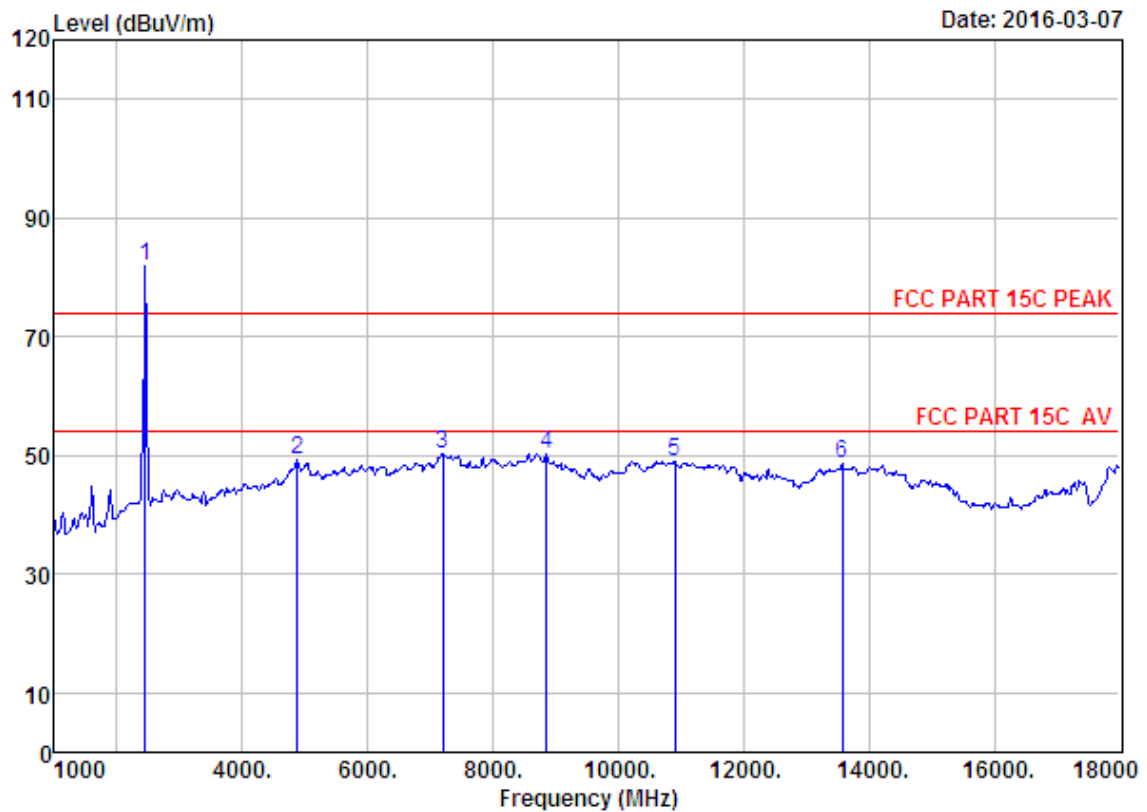

Site no. : 1# 966 chamber Data no. : 37
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	82.55	81.97	74.00	-7.97	Peak
2	4876.00	31.37	12.07	35.76	41.67	49.35	74.00	24.65	Peak
3	7205.00	36.52	11.54	33.92	36.23	50.37	74.00	23.63	Peak
4	8854.00	37.48	11.46	34.19	35.62	50.37	74.00	23.63	Peak
5	10911.00	39.43	11.29	34.08	32.44	49.08	74.00	24.92	Peak
6	13580.00	40.31	11.40	32.64	29.43	48.50	74.00	25.50	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

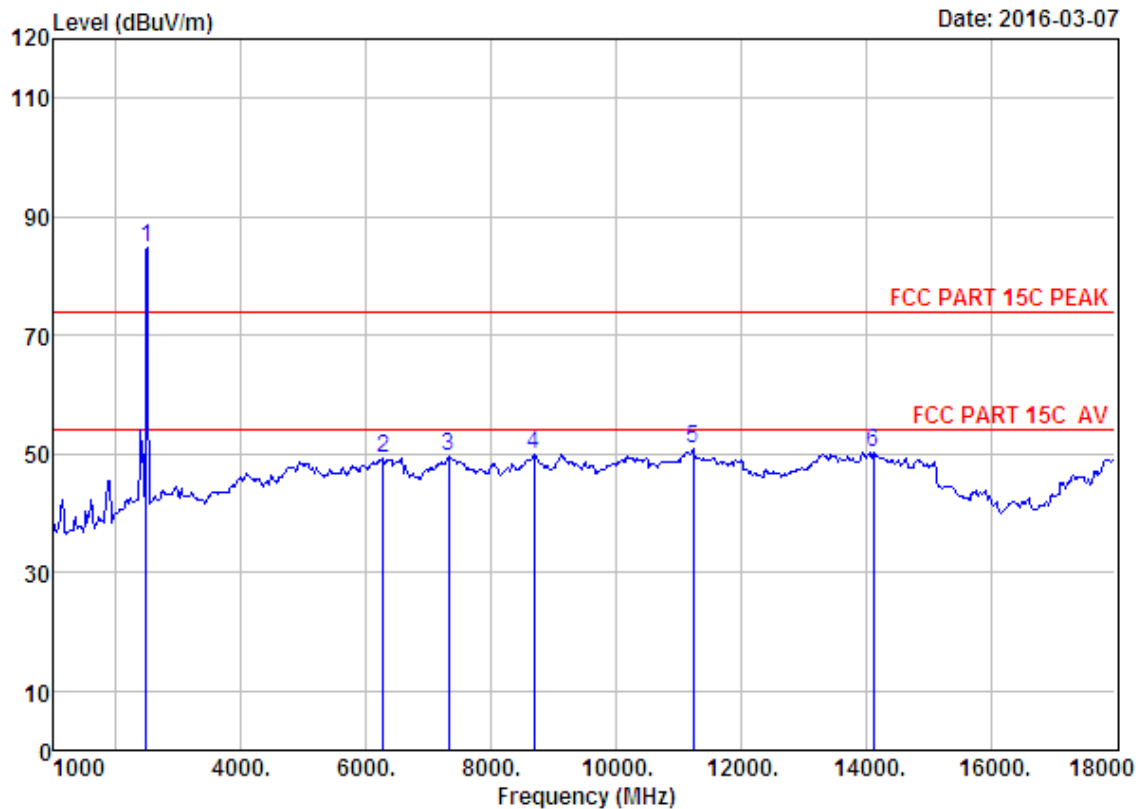

Site no. : 1# 966 chamber Data no. : 38
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	85.56	84.74	74.00	-10.74	Peak
2	6270.00	33.48	12.18	35.23	38.72	49.15	74.00	24.85	Peak
3	7324.00	36.55	11.57	34.14	35.56	49.54	74.00	24.46	Peak
4	8684.00	37.32	11.45	33.66	34.67	49.78	74.00	24.22	Peak
5	11234.00	39.37	11.12	33.25	33.53	50.77	74.00	23.23	Peak
6	14124.00	41.57	10.91	33.22	30.94	50.20	74.00	23.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

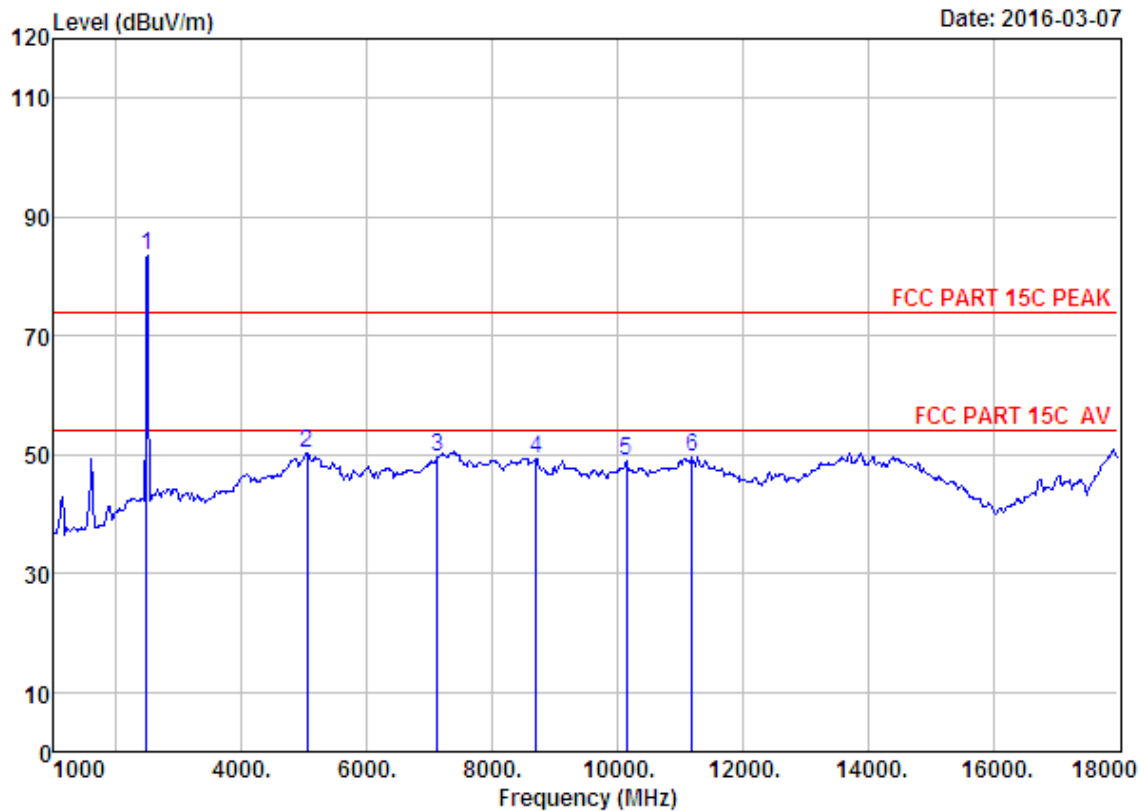

Site no. : 1# 966 chamber Data no. : 39
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	84.43	83.61	74.00	-9.61	Peak
2	5046.00	31.57	12.53	36.15	42.36	50.31	74.00	23.69	Peak
3	7120.00	36.08	11.51	33.86	35.97	49.70	74.00	24.30	Peak
4	8701.00	37.35	11.45	33.65	34.20	49.35	74.00	24.65	Peak
5	10146.00	38.36	11.51	34.58	33.79	49.08	74.00	24.92	Peak
6	11200.00	39.39	11.14	33.24	32.26	49.55	74.00	24.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

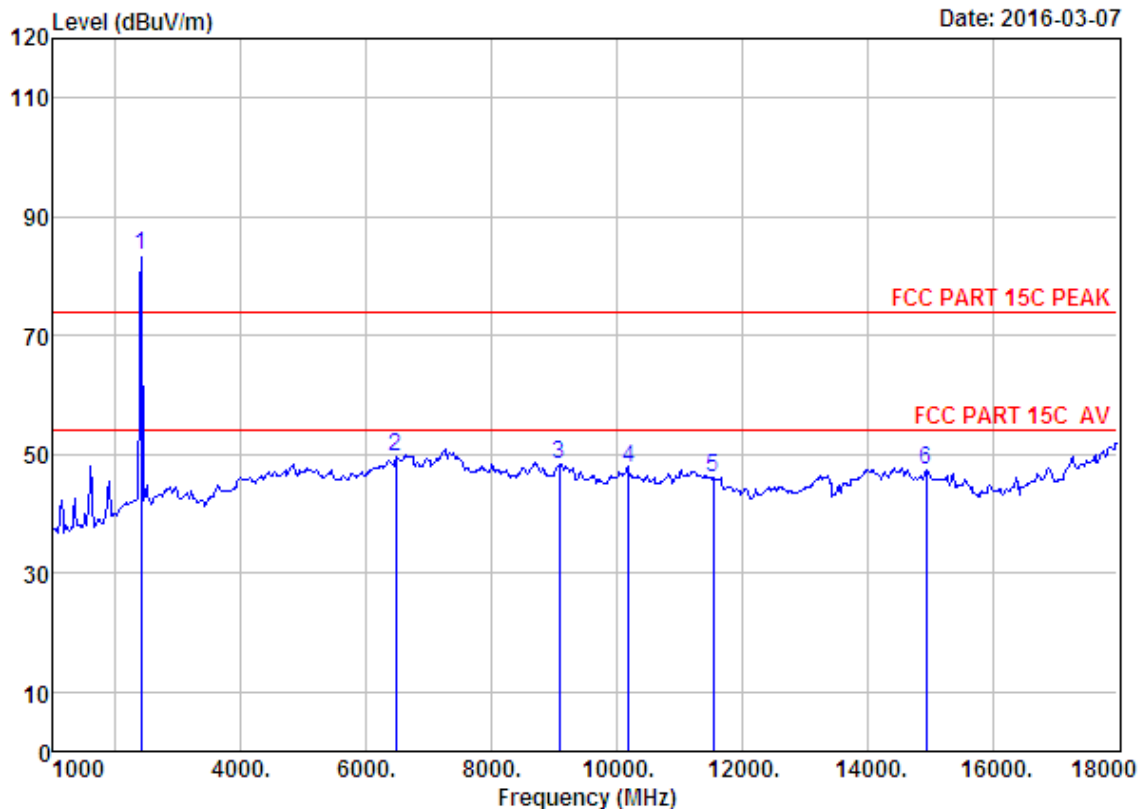

Site no. : 1# 966 chamber Data no. : 96
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	84.02	83.61	74.00	-9.61	Peak
2	6474.00	34.16	12.22	35.18	38.38	49.58	74.00	24.42	Peak
3	9075.00	37.53	11.49	34.20	33.46	48.28	74.00	25.72	Peak
4	10197.00	38.45	11.48	34.51	32.23	47.65	74.00	26.35	Peak
5	11540.00	39.16	10.95	33.36	29.21	45.96	74.00	28.04	Peak
6	14940.00	40.42	10.87	33.59	29.82	47.52	74.00	26.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

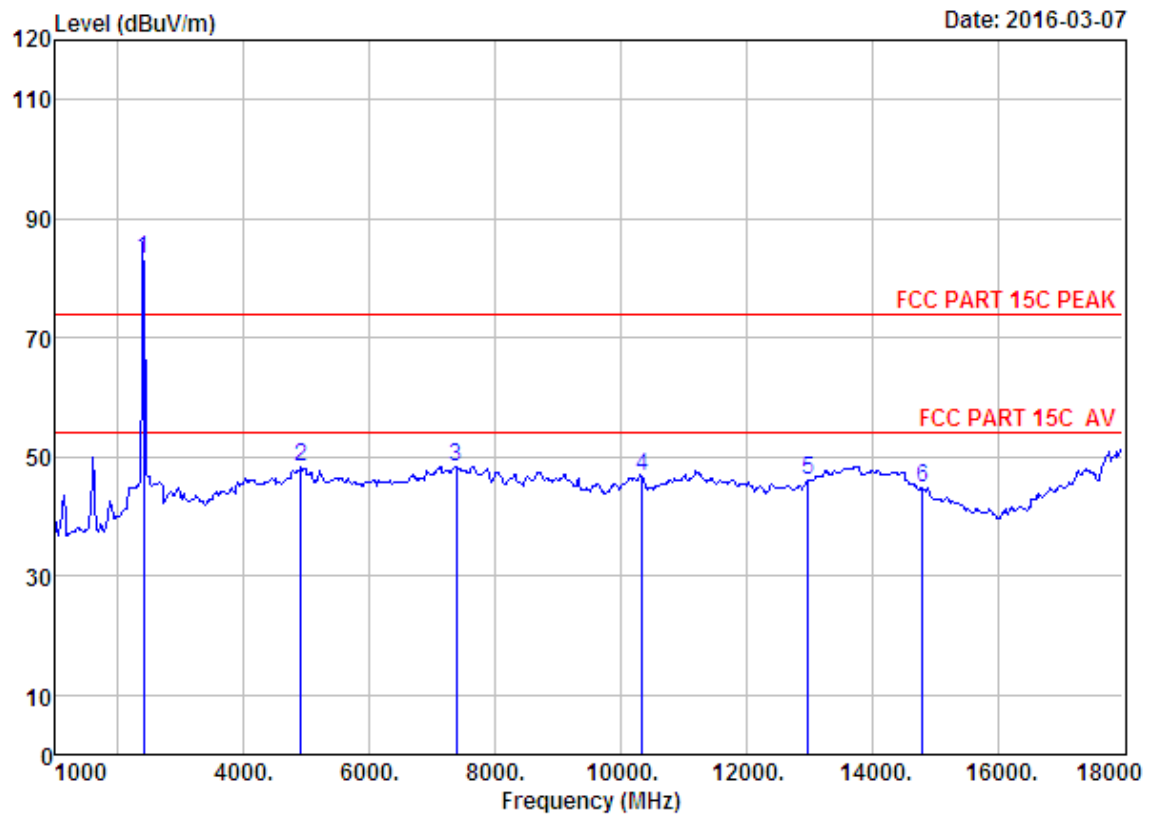

Site no. : 1# 966 chamber Data no. : 97
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	83.49	83.08	74.00	-9.08	Peak
2	4910.00	31.42	12.22	35.87	40.46	48.23	74.00	25.77	Peak
3	7375.00	36.57	11.59	34.21	34.42	48.37	74.00	25.63	Peak
4	10350.00	38.71	11.39	34.53	31.03	46.60	74.00	27.40	Peak
5	12985.00	38.89	11.41	33.04	28.77	46.03	74.00	27.97	Peak
6	14804.00	40.89	10.89	33.78	26.78	44.78	74.00	29.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

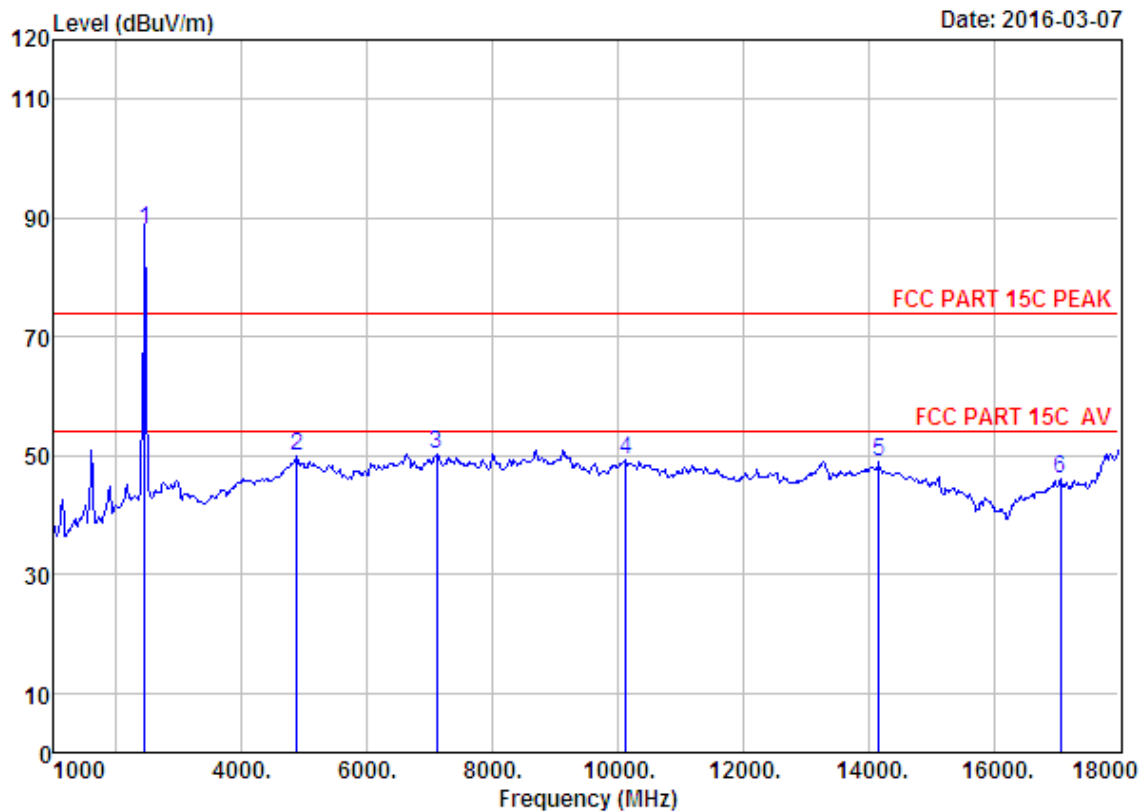

Site no. : 1# 966 chamber Data no. : 100
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	88.63	88.05	74.00	-14.05	Peak
2	4876.00	31.37	12.07	35.76	42.21	49.89	74.00	24.11	Peak
3	7103.00	35.99	11.51	33.87	36.73	50.36	74.00	23.64	Peak
4	10129.00	38.33	11.52	34.62	33.91	49.14	74.00	24.86	Peak
5	14175.00	41.61	10.91	33.35	29.77	48.94	74.00	25.06	Peak
6	17065.00	40.00	10.96	32.31	27.43	46.08	74.00	27.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

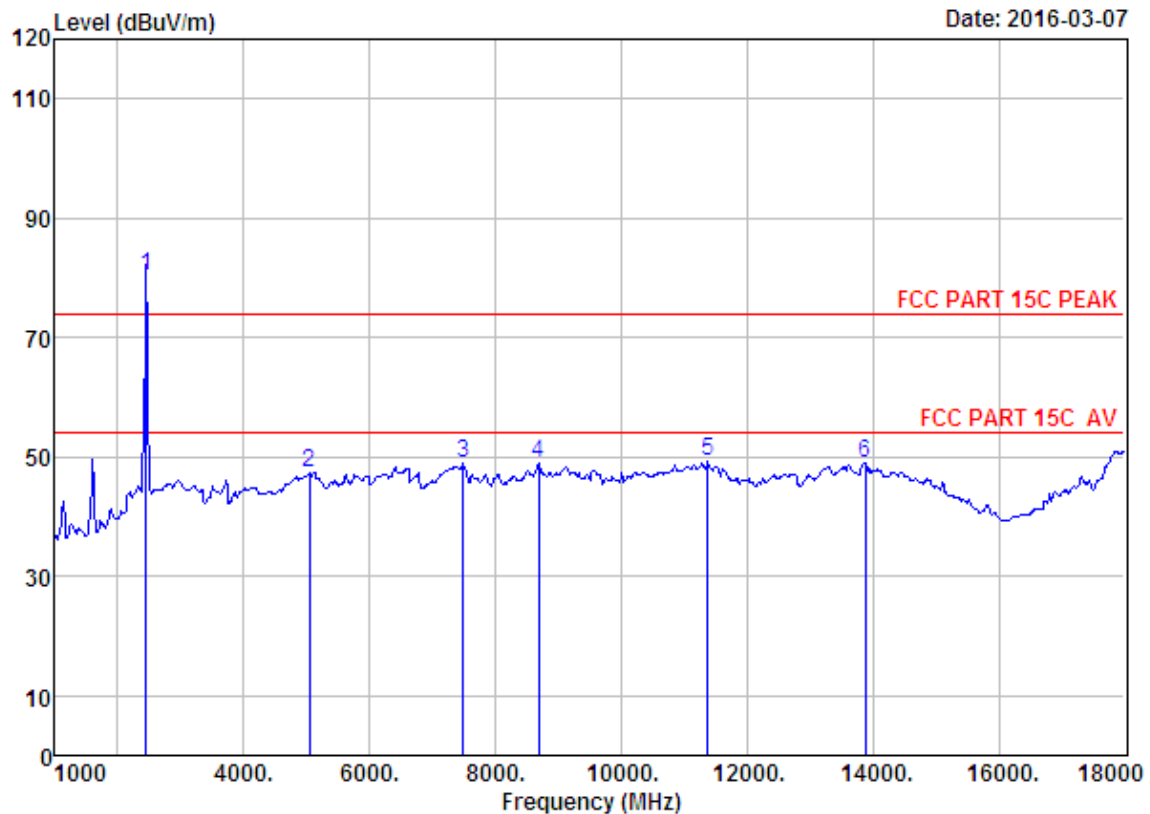

Site no. : 1# 966 chamber Data no. : 101
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	80.84	80.26	74.00	-6.26	Peak
2	5046.00	31.57	12.53	36.15	39.35	47.30	74.00	26.70	Peak
3	7494.00	36.48	11.62	34.18	35.14	49.06	74.00	24.94	Peak
4	8684.00	37.32	11.45	33.66	33.89	49.00	74.00	25.00	Peak
5	11370.00	39.28	11.02	33.51	32.39	49.18	74.00	24.82	Peak
6	13886.00	41.16	11.04	33.03	29.86	49.03	74.00	24.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

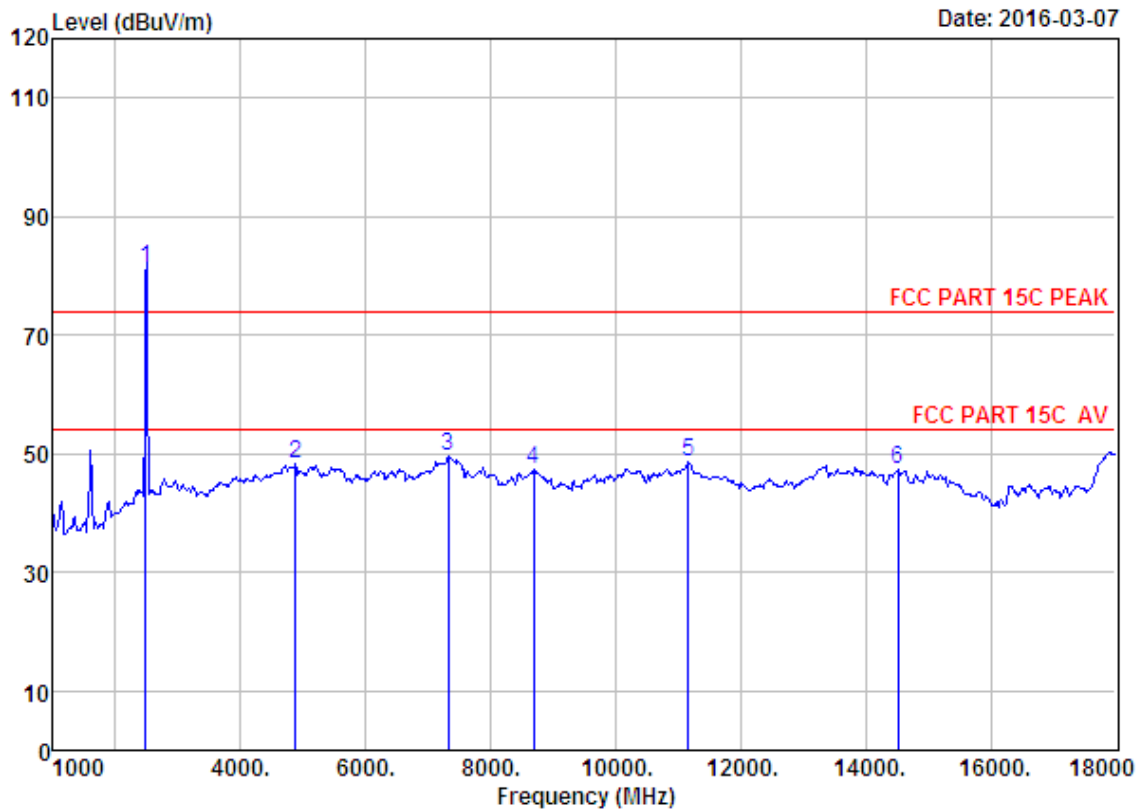

Site no. : 1# 966 chamber Data no. : 102
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	81.99	81.17	74.00	-7.17	Peak
2	4876.00	31.37	12.07	35.76	40.58	48.26	74.00	25.74	Peak
3	7324.00	36.55	11.57	34.14	35.66	49.64	74.00	24.36	Peak
4	8684.00	37.32	11.45	33.66	32.12	47.23	74.00	26.77	Peak
5	11166.00	39.41	11.17	33.31	31.40	48.67	74.00	25.33	Peak
6	14515.00	41.89	10.93	33.57	28.10	47.35	74.00	26.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

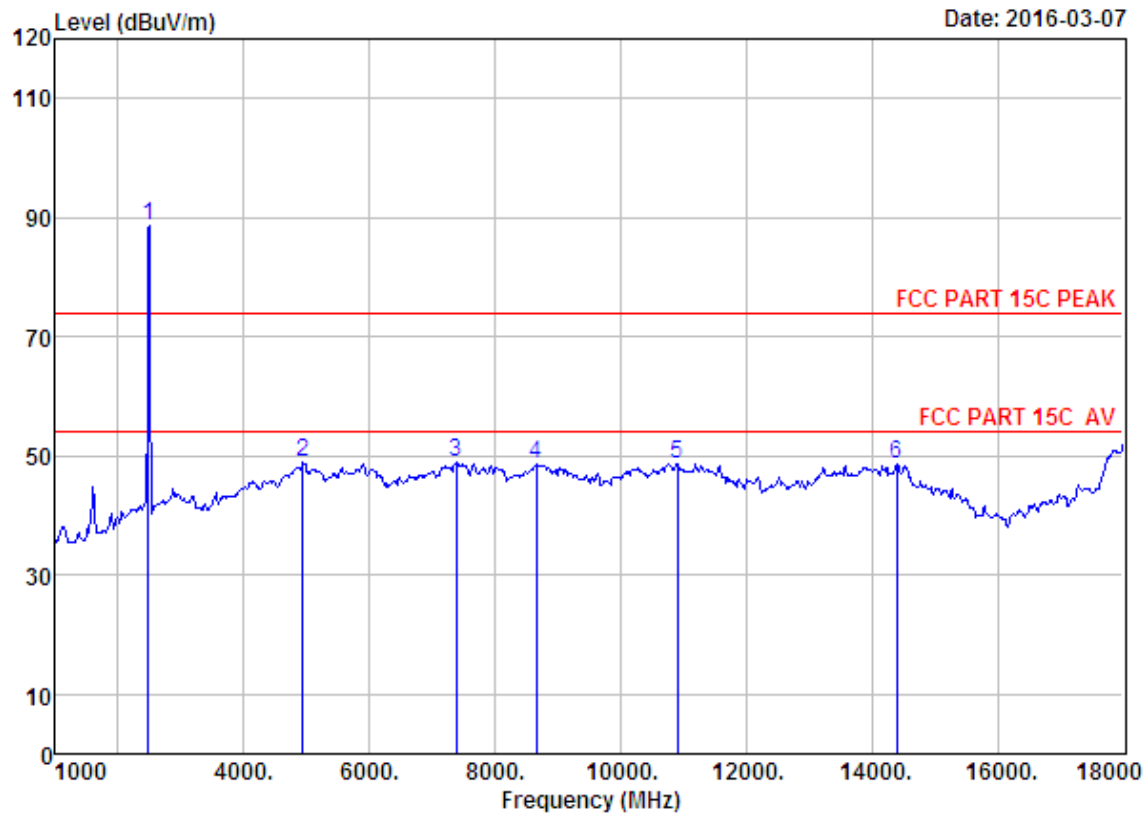

Site no. : 1# 966 chamber Data no. : 103
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.38	88.56	74.00	-14.56	Peak
2	4944.00	31.47	12.37	35.96	40.92	48.80	74.00	25.20	Peak
3	7375.00	36.57	11.59	34.21	35.09	49.04	74.00	24.96	Peak
4	8650.00	37.27	11.45	33.68	33.53	48.57	74.00	25.43	Peak
5	10911.00	39.43	11.29	34.08	32.08	48.72	74.00	25.28	Peak
6	14396.00	41.79	10.92	33.39	29.41	48.73	74.00	25.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

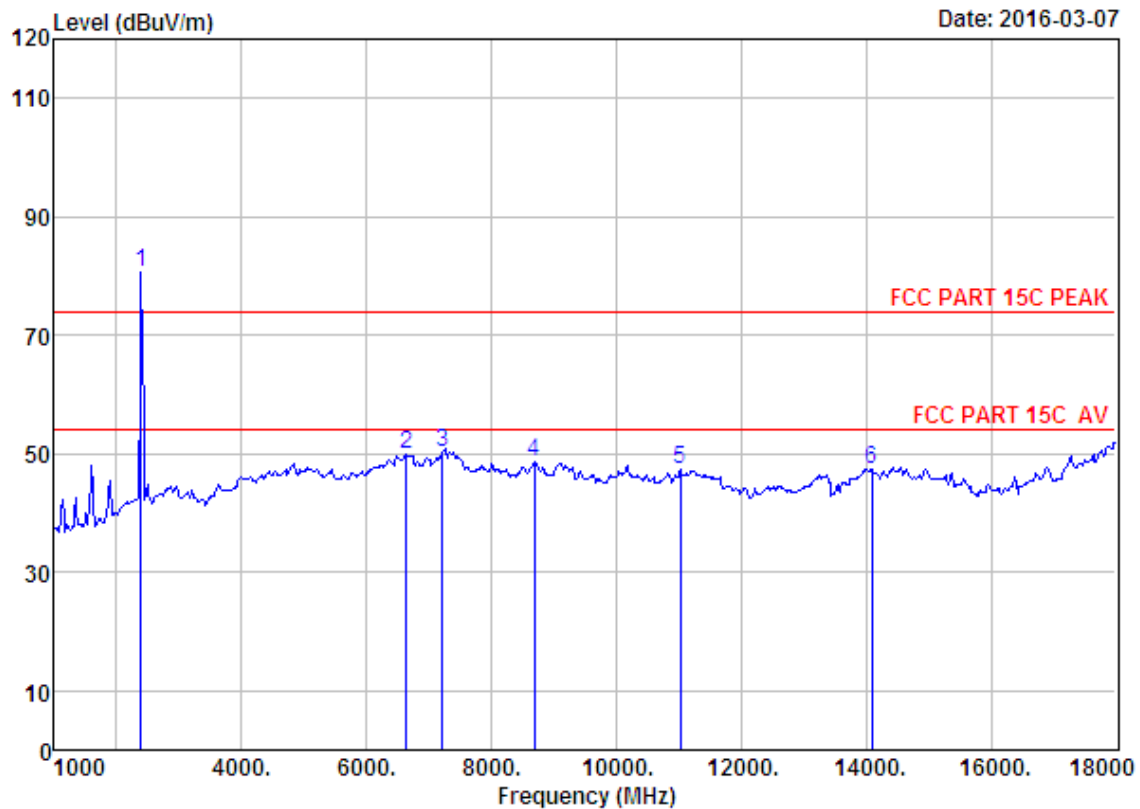

Site no. : 1# 966 chamber Data no. : 42
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2394.00	27.61	6.62	34.62	81.18	80.79	74.00	-6.79	Peak
2	6644.00	34.48	12.02	34.66	38.00	49.84	74.00	24.16	Peak
3	7222.00	36.52	11.54	33.95	36.26	50.37	74.00	23.63	Peak
4	8684.00	37.32	11.45	33.66	33.42	48.53	74.00	25.47	Peak
5	11030.00	39.50	11.27	33.98	30.59	47.38	74.00	26.62	Peak
6	14090.00	41.54	10.91	33.13	28.08	47.40	74.00	26.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

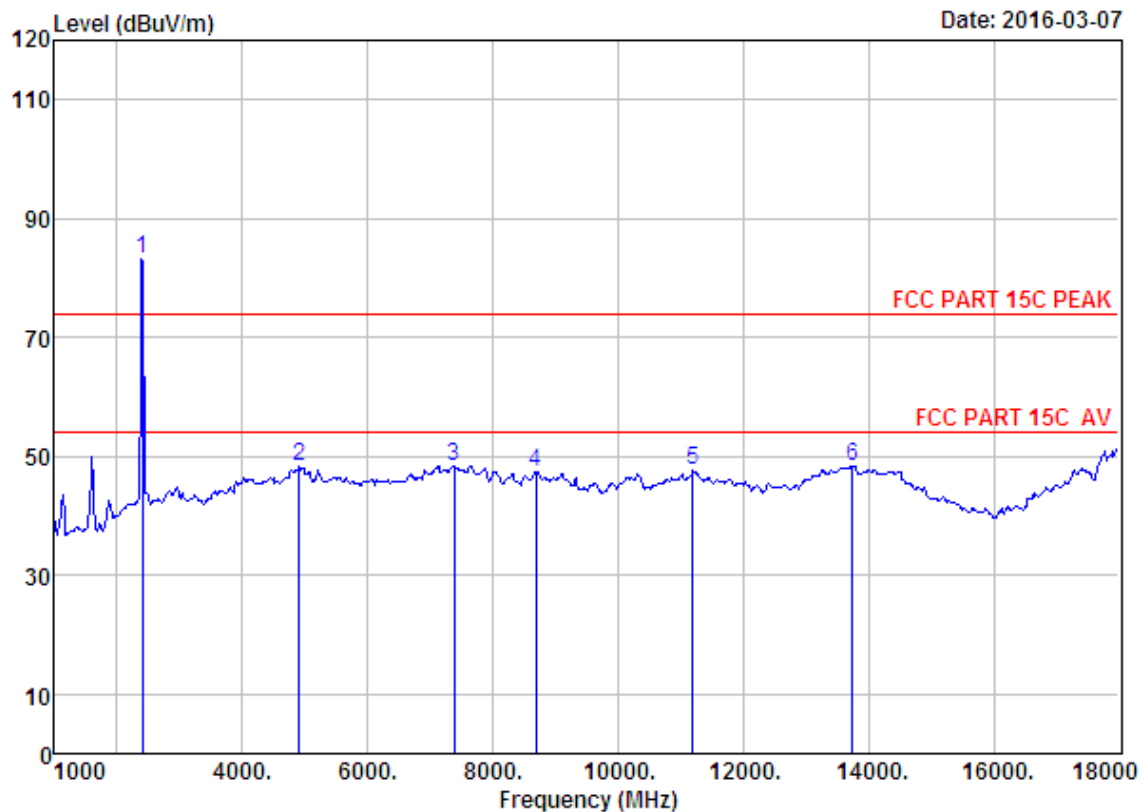

Site no. : 1# 966 chamber Data no. : 43
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	83.49	83.08	74.00	-9.08	Peak
2	4910.00	31.42	12.22	35.87	40.46	48.23	74.00	25.77	Peak
3	7375.00	36.57	11.59	34.21	34.42	48.37	74.00	25.63	Peak
4	8684.00	37.32	11.45	33.66	32.35	47.46	74.00	26.54	Peak
5	11200.00	39.39	11.14	33.24	30.25	47.54	74.00	26.46	Peak
6	13750.00	40.78	11.20	33.02	29.35	48.31	74.00	25.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

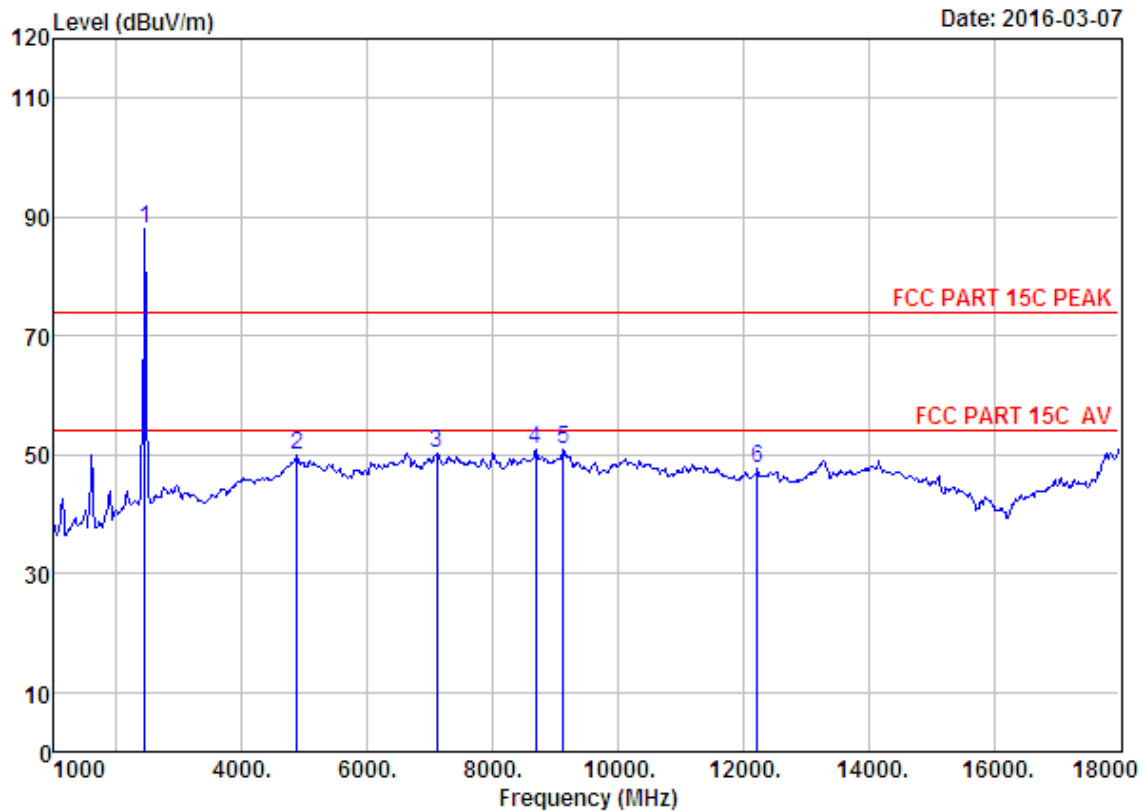

Site no. : 1# 966 chamber Data no. : 46
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	88.63	88.05	74.00	-14.05	Peak
2	4876.00	31.37	12.07	35.76	42.21	49.89	74.00	24.11	Peak
3	7103.00	35.99	11.51	33.87	36.73	50.36	74.00	23.64	Peak
4	8684.00	37.32	11.45	33.66	35.88	50.99	74.00	23.01	Peak
5	9126.00	37.62	11.52	34.09	35.73	50.78	74.00	23.22	Peak
6	12220.00	38.68	11.19	33.57	31.26	47.56	74.00	26.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

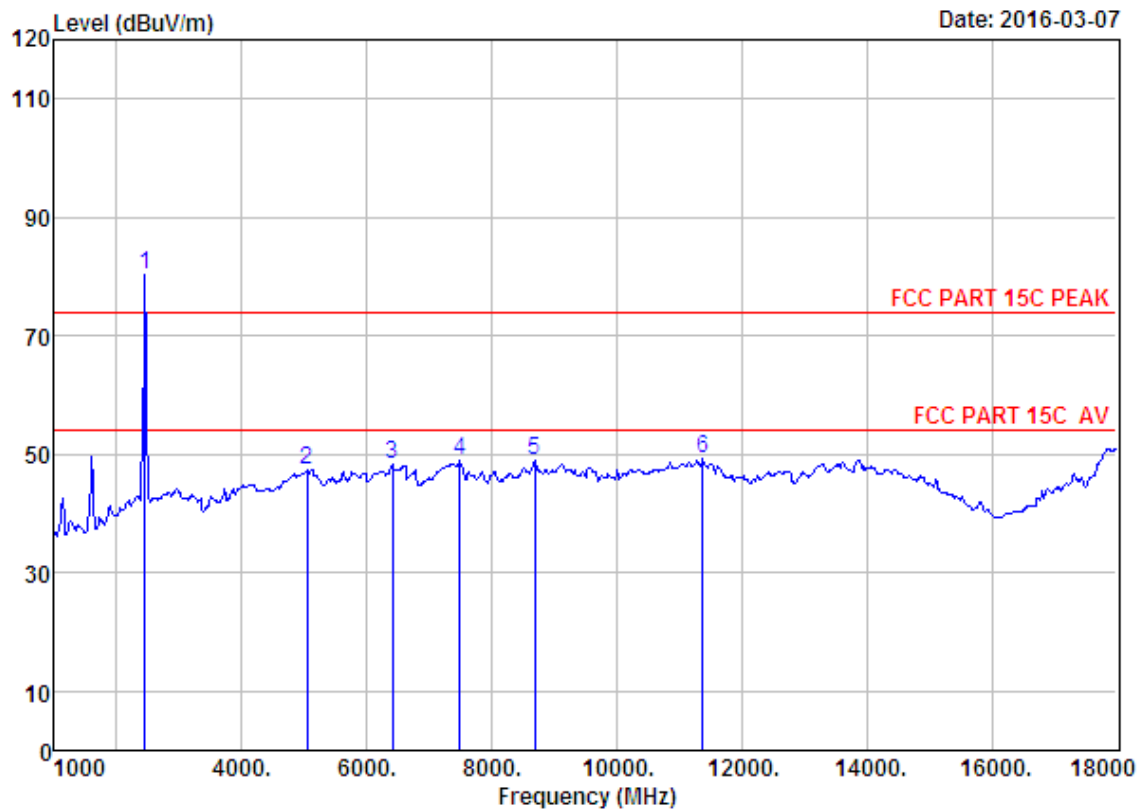

Site no. : 1# 966 chamber Data no. : 47
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	80.84	80.26	74.00	-6.26	Peak
2	5046.00	31.57	12.53	36.15	39.35	47.30	74.00	26.70	Peak
3	6406.00	33.99	12.21	35.35	37.47	48.32	74.00	25.68	Peak
4	7494.00	36.48	11.62	34.18	35.14	49.06	74.00	24.94	Peak
5	8684.00	37.32	11.45	33.66	33.89	49.00	74.00	25.00	Peak
6	11370.00	39.28	11.02	33.51	32.39	49.18	74.00	24.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

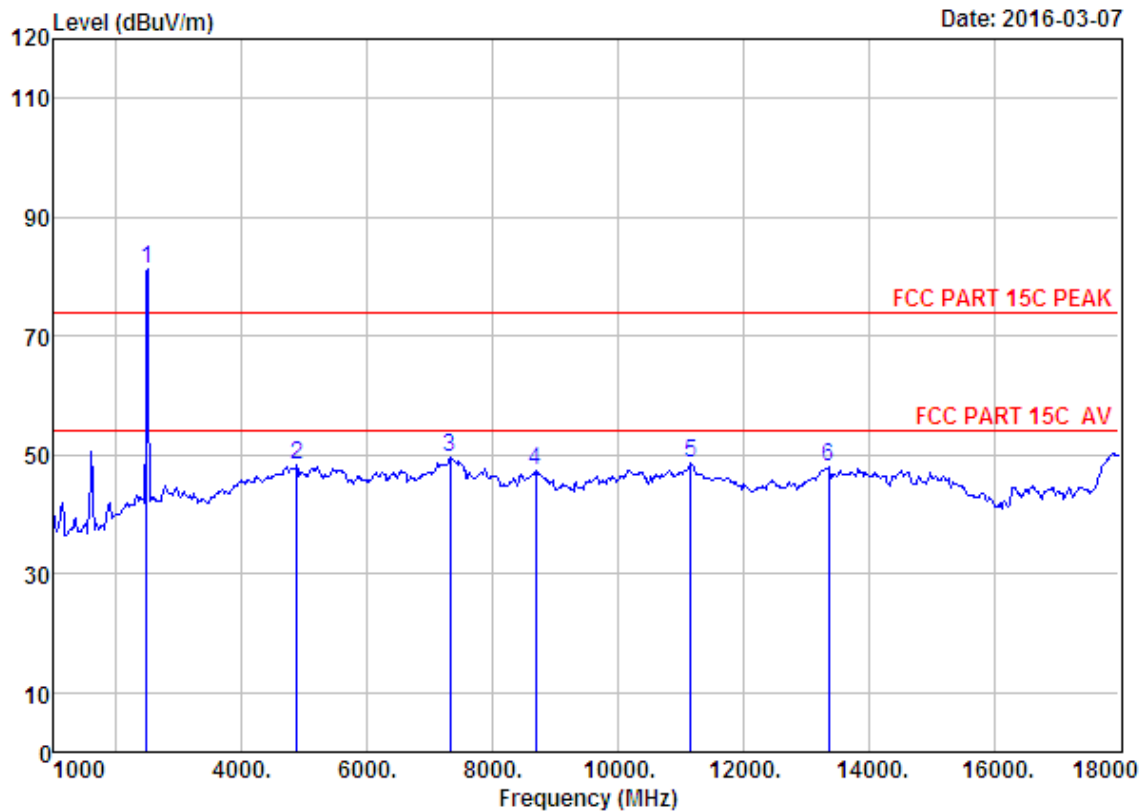

Site no. : 1# 966 chamber Data no. : 48
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	81.99	81.17	74.00	-7.17	Peak
2	4876.00	31.37	12.07	35.76	40.58	48.26	74.00	25.74	Peak
3	7324.00	36.55	11.57	34.14	35.66	49.64	74.00	24.36	Peak
4	8684.00	37.32	11.45	33.66	32.12	47.23	74.00	26.77	Peak
5	11166.00	39.41	11.17	33.31	31.40	48.67	74.00	25.33	Peak
6	13359.00	39.74	11.48	32.93	29.63	47.92	74.00	26.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

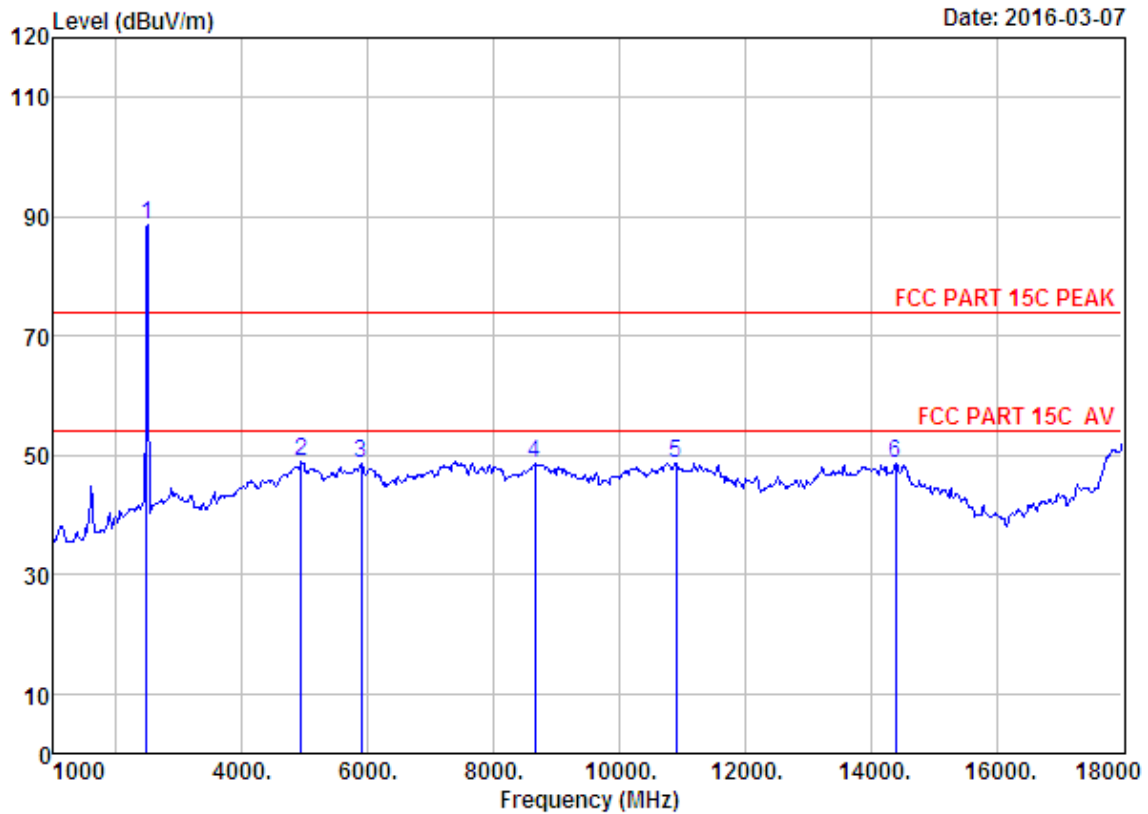


Site no. : 1# 966 chamber Data no. : 49
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.38	88.56	74.00	-14.56	Peak
2	4944.00	31.47	12.37	35.96	40.92	48.80	74.00	25.20	Peak
3	5896.00	32.56	12.09	35.75	39.69	48.59	74.00	25.41	Peak
4	8650.00	37.27	11.45	33.68	33.53	48.57	74.00	25.43	Peak
5	10911.00	39.43	11.29	34.08	32.08	48.72	74.00	25.28	Peak
6	14396.00	41.79	10.92	33.39	29.41	48.73	74.00	25.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz


Date: 2016-03-07

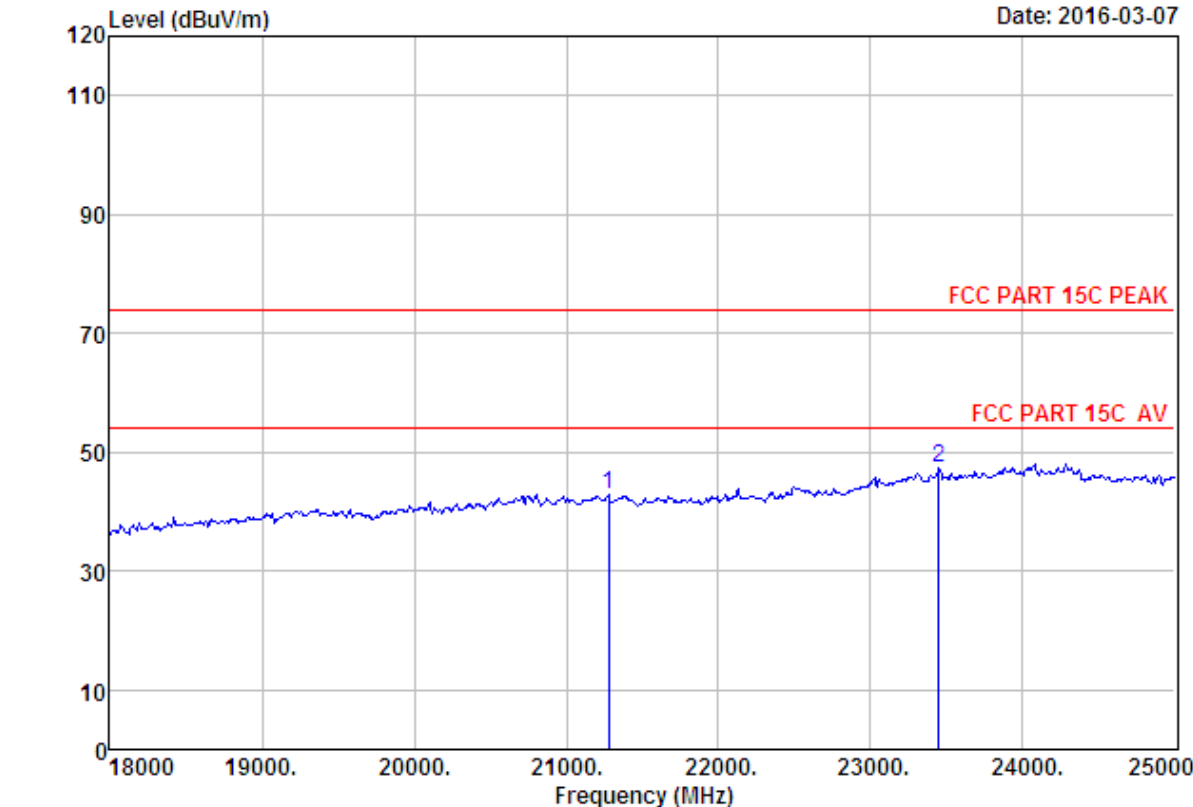

Site no. : 1# 966 chamber Data no. : 60
Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Portable Bluetooth Speaker
Power : DC 3.7V
M/N : DS1
Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21276.00	46.13	20.25	35.55	12.09	42.92	74.00	31.08	Peak
2	23446.00	45.69	21.55	33.38	13.36	47.22	74.00	26.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

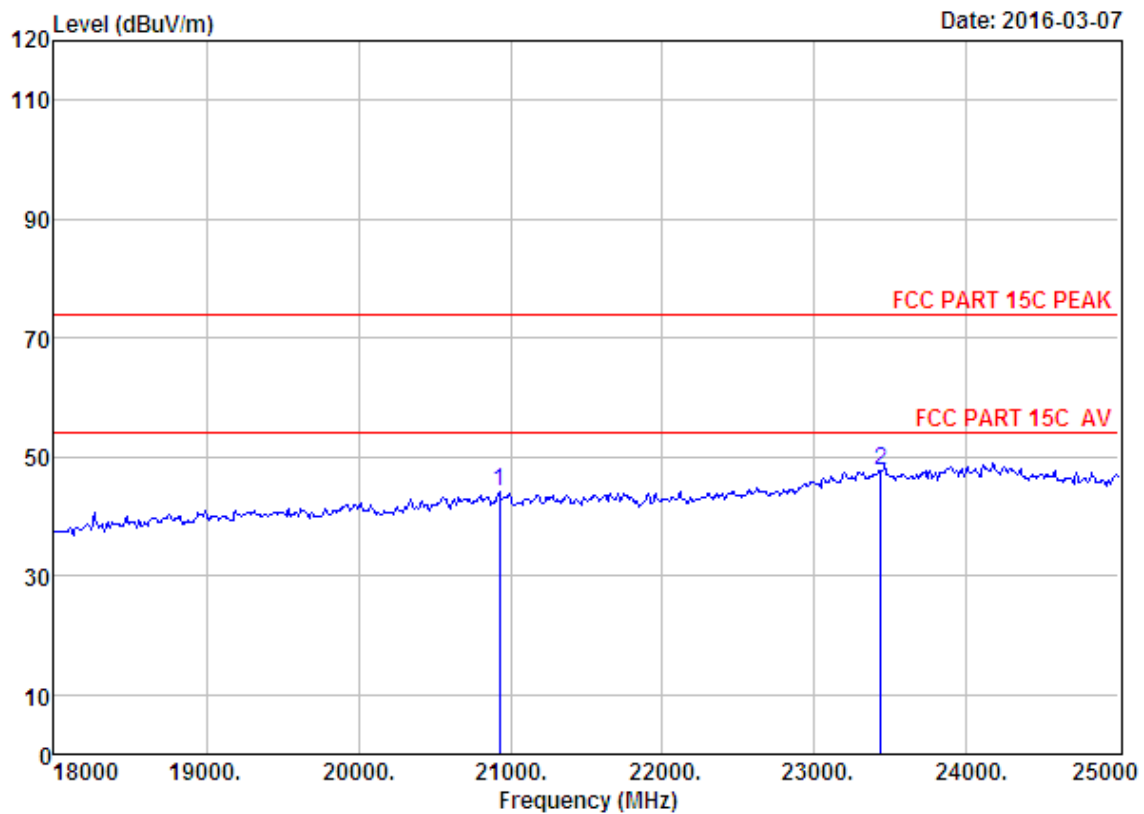

Site no. : 1# 966 chamber Data no. : 61
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	20926.00	46.26	20.10	35.87	13.52	44.01	74.00	29.99	Peak
2	23432.00	45.69	21.54	33.40	13.81	47.64	74.00	26.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

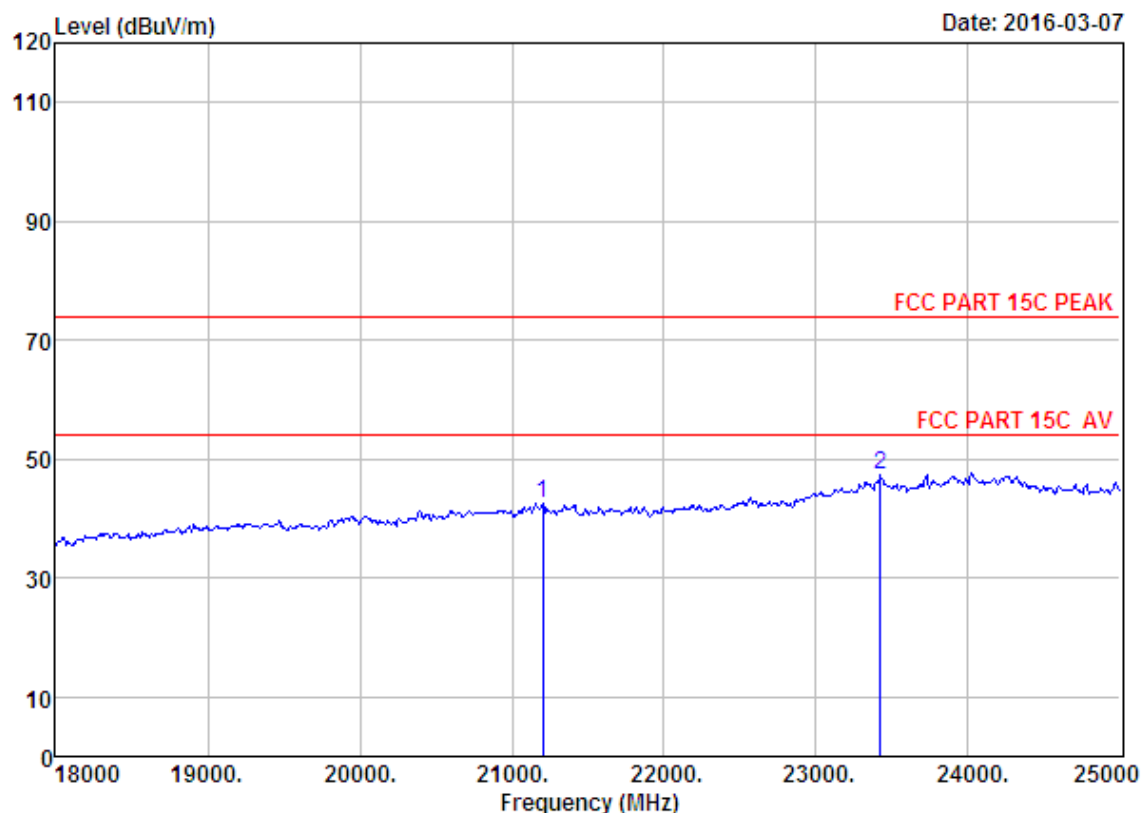

Site no. : 1# 966 chamber Data no. : 62
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21206.00	46.17	20.22	35.62	11.72	42.49	74.00	31.51	Peak
2	23425.00	45.69	21.53	33.40	13.47	47.29	74.00	26.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

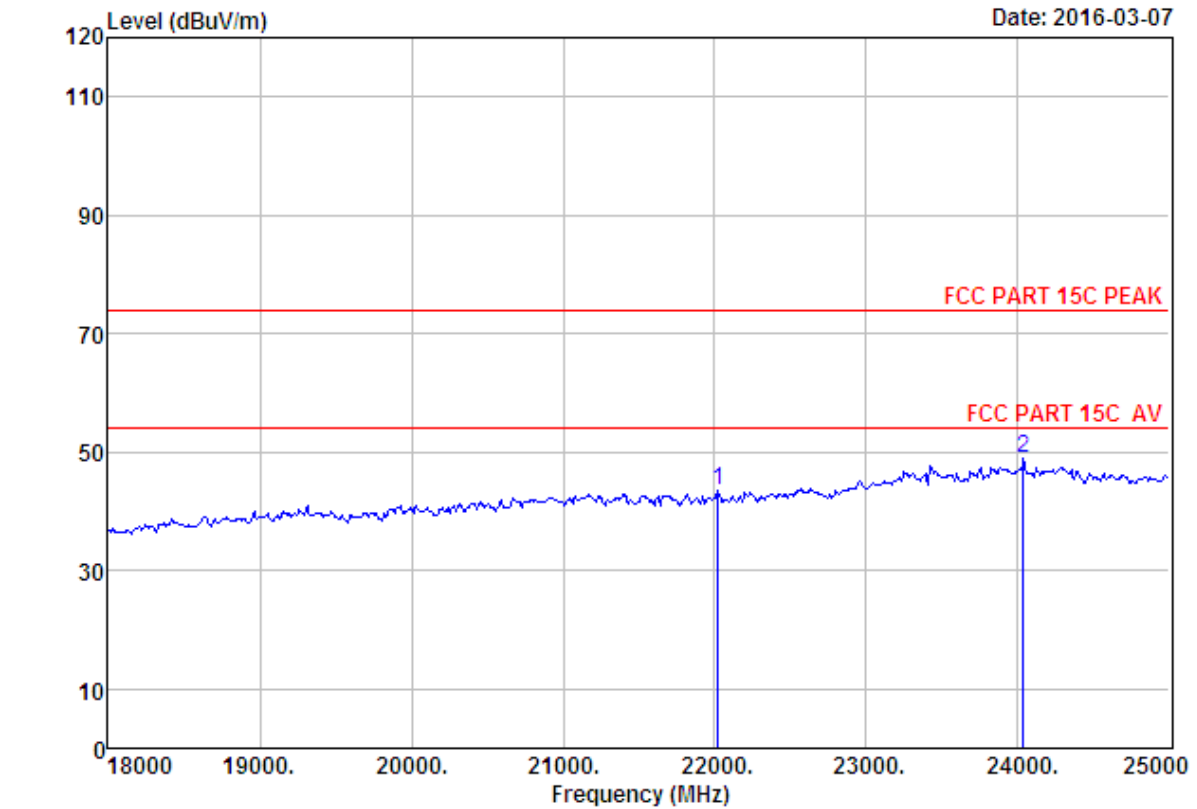

Site no. : 1# 966 chamber Data no. : 63
Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Portable Bluetooth Speaker
Power : DC 3.7V
M/N : DS1
Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22025.00	45.70	20.58	34.87	12.14	43.55	74.00	30.45	Peak
2	24034.00	45.60	22.06	32.84	14.19	49.01	74.00	24.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

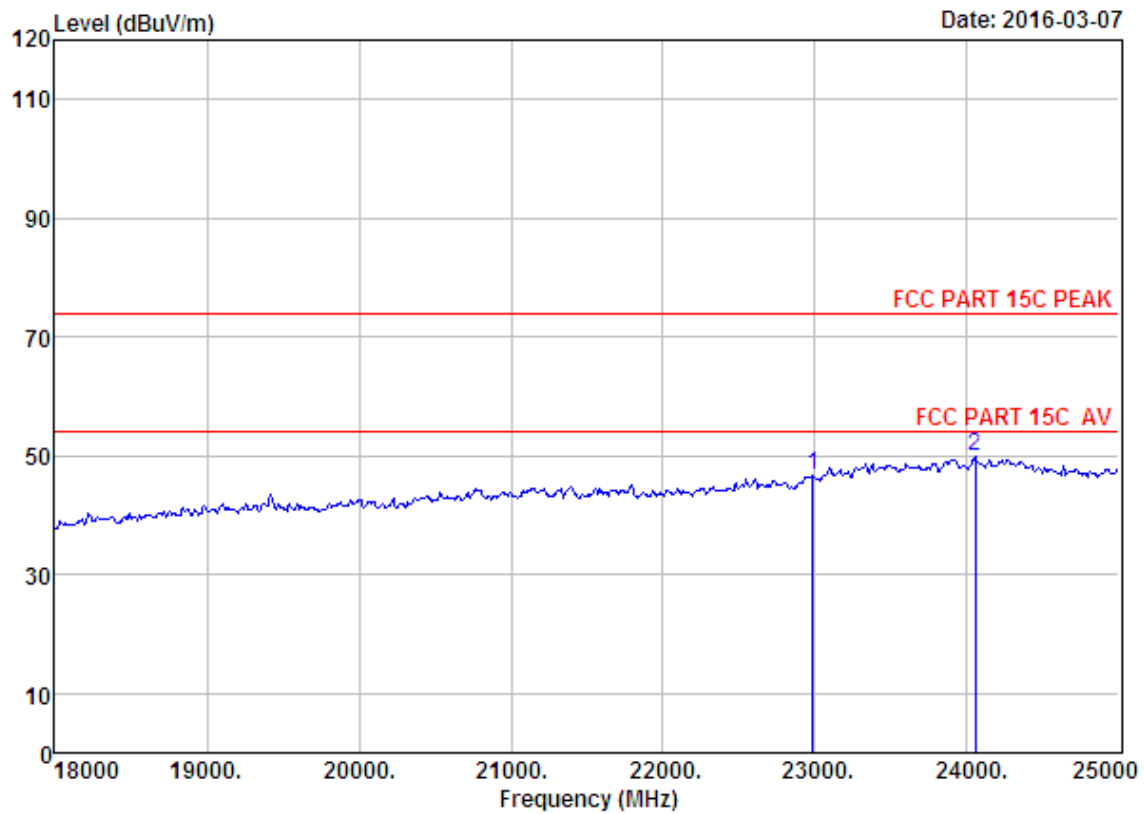

Site no. : 1# 966 chamber Data no. : 64
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22984.00	45.60	21.14	33.88	13.75	46.61	74.00	27.39	Peak
2	24055.00	45.61	22.08	32.88	15.05	49.86	74.00	24.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

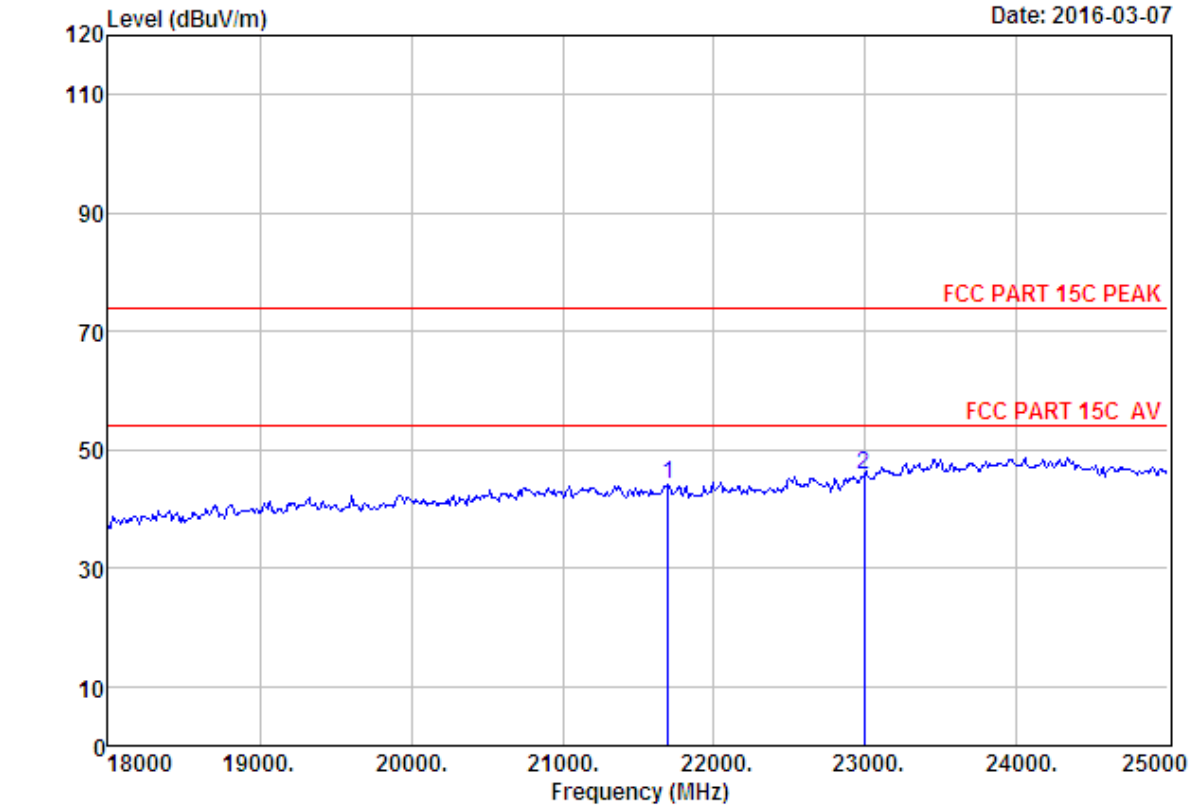

Site no. : 1# 966 chamber Data no. : 65
Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Portable Bluetooth Speaker
Power : DC 3.7V
M/N : DS1
Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21696.00	45.88	20.43	35.17	12.86	44.00	74.00	30.00	Peak
2	22991.00	45.60	21.14	33.85	12.88	45.77	74.00	28.23	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

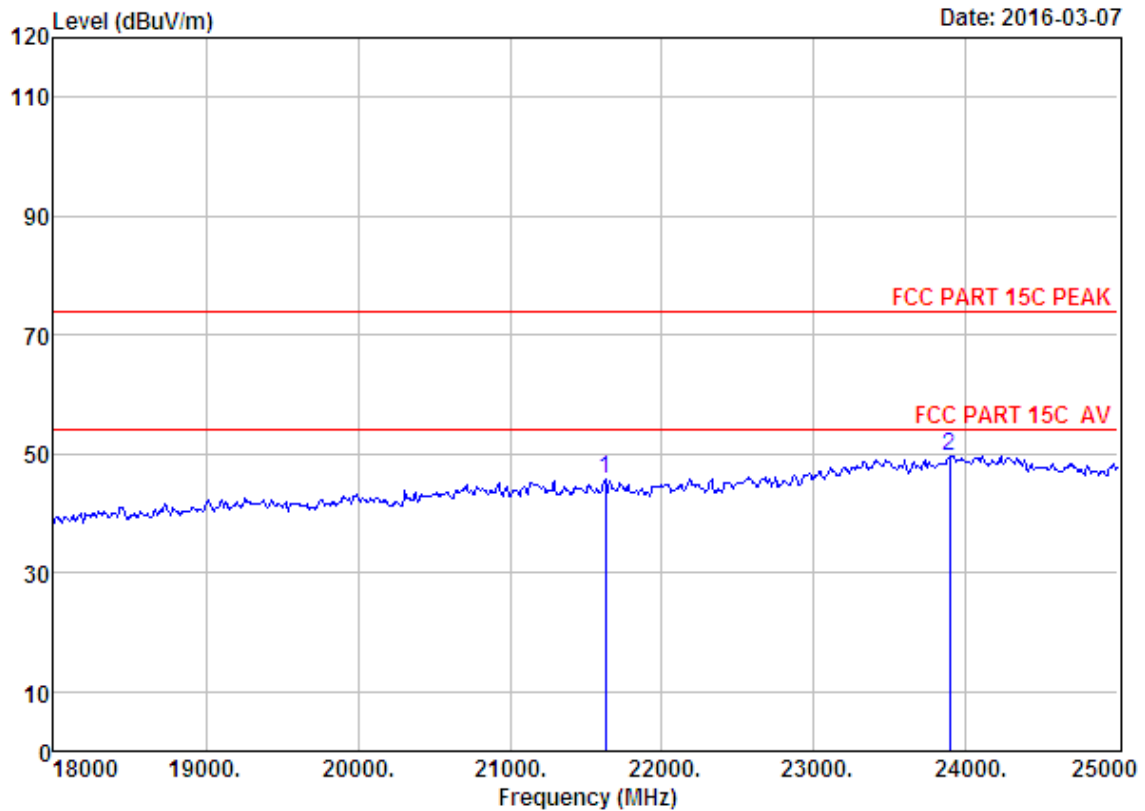

Site no. : 1# 966 chamber Data no. : 110
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21626.00	45.92	20.40	35.24	14.58	45.66	74.00	28.34	Peak
2	23894.00	45.62	21.95	32.90	14.85	49.52	74.00	24.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

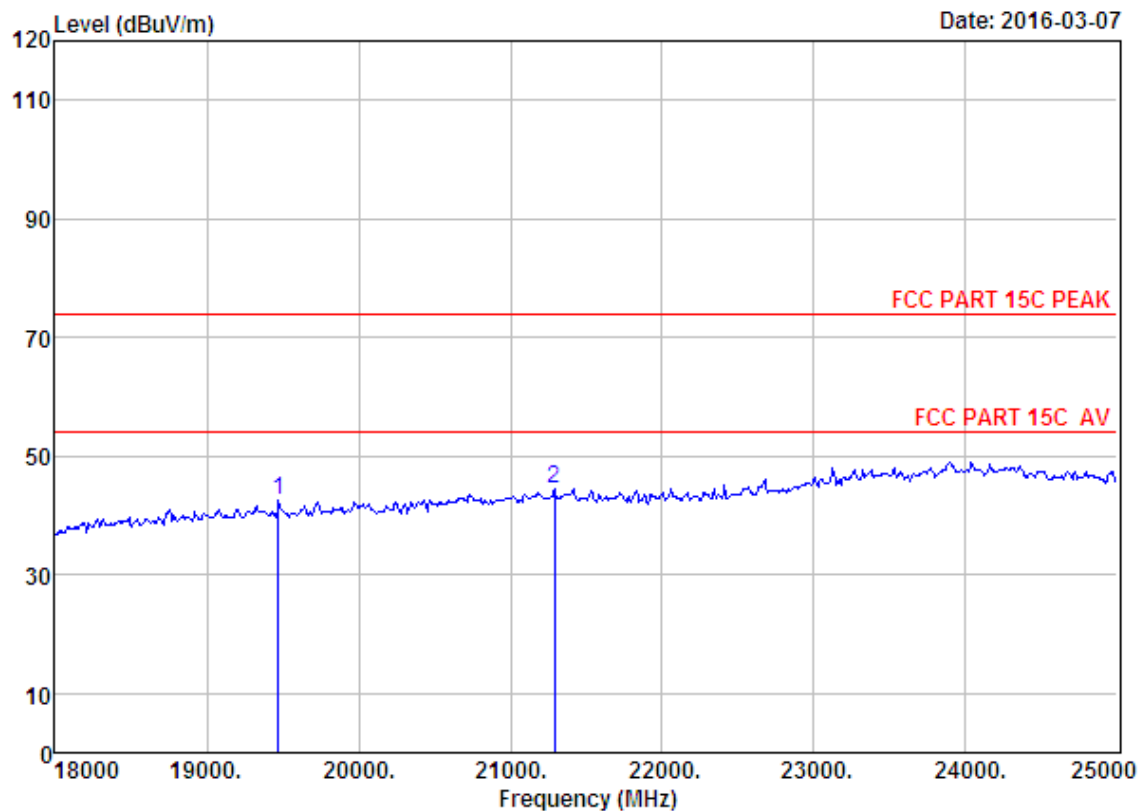

Site no. : 1# 966 chamber Data no. : 111
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	19470.00	45.88	19.07	36.25	13.94	42.64	74.00	31.36	Peak
2	21290.00	46.12	20.26	35.53	13.70	44.55	74.00	29.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

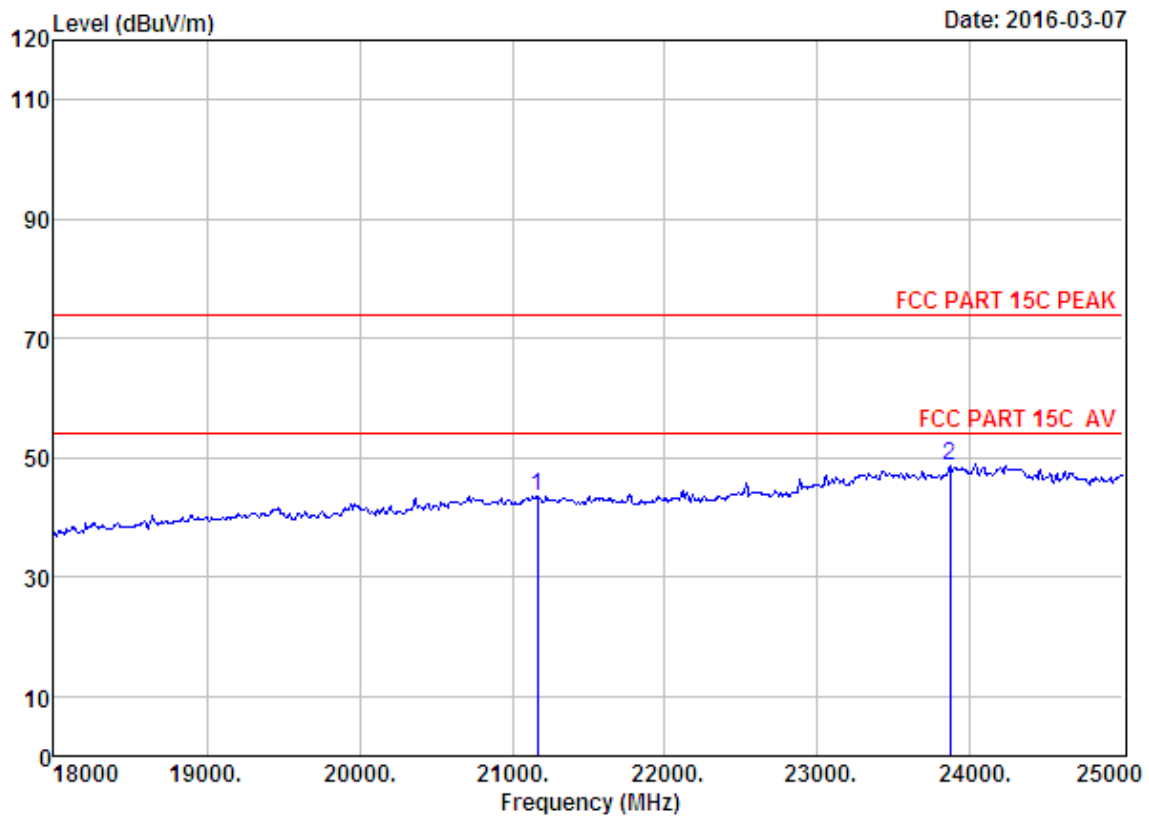

Site no. : 1# 966 chamber Data no. : 112
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	12.88	43.64	74.00	30.36	Peak
2	23866.00	45.63	21.93	32.93	14.15	48.78	74.00	25.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

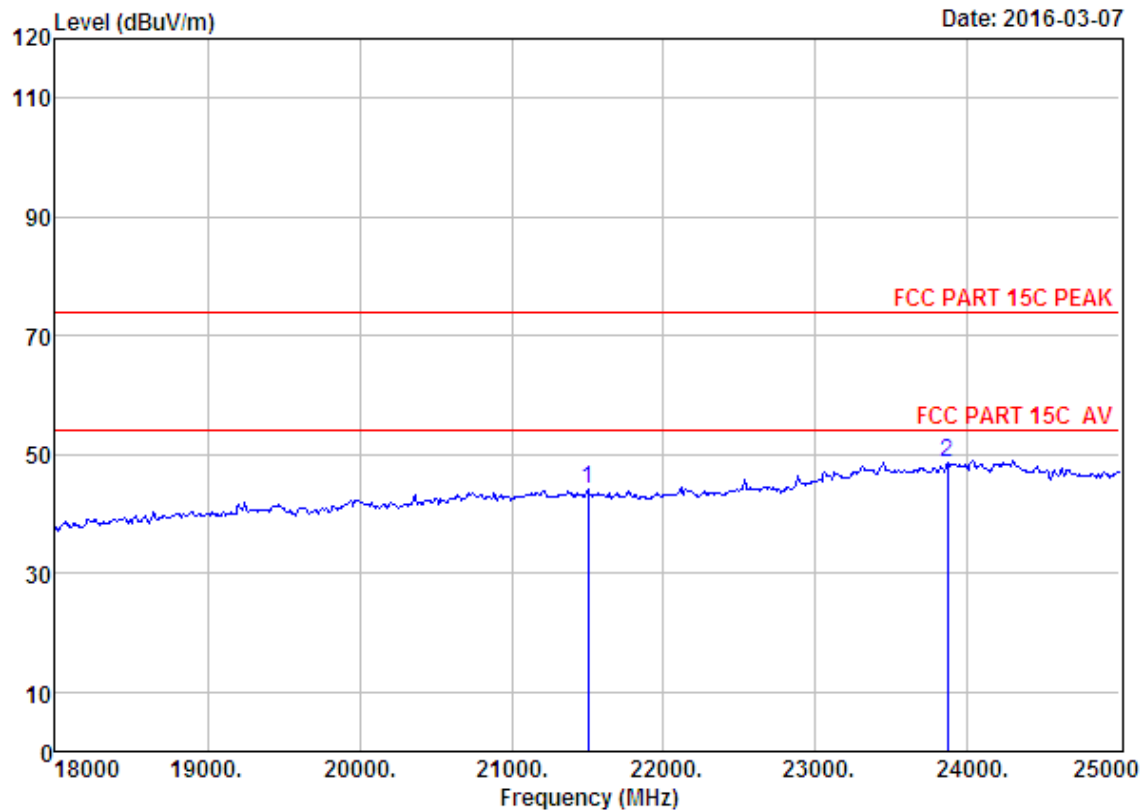

Site no. : 1# 966 chamber Data no. : 113
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21500.00	46.00	20.35	35.35	13.07	44.07	74.00	29.93	Peak
2	23866.00	45.63	21.93	32.93	14.15	48.78	74.00	25.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

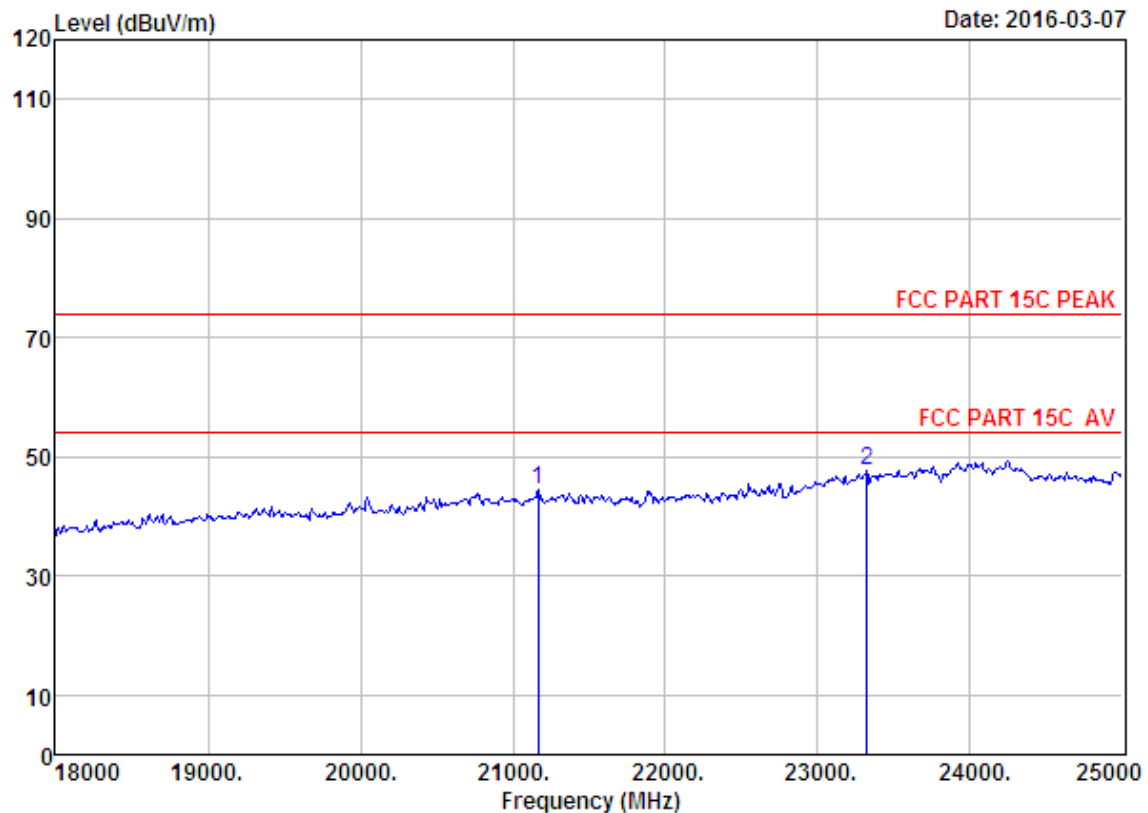

Site no. : 1# 966 chamber Data no. : 114
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	13.69	44.45	74.00	29.55	Peak
2	23320.00	45.67	21.43	33.51	13.97	47.56	74.00	26.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

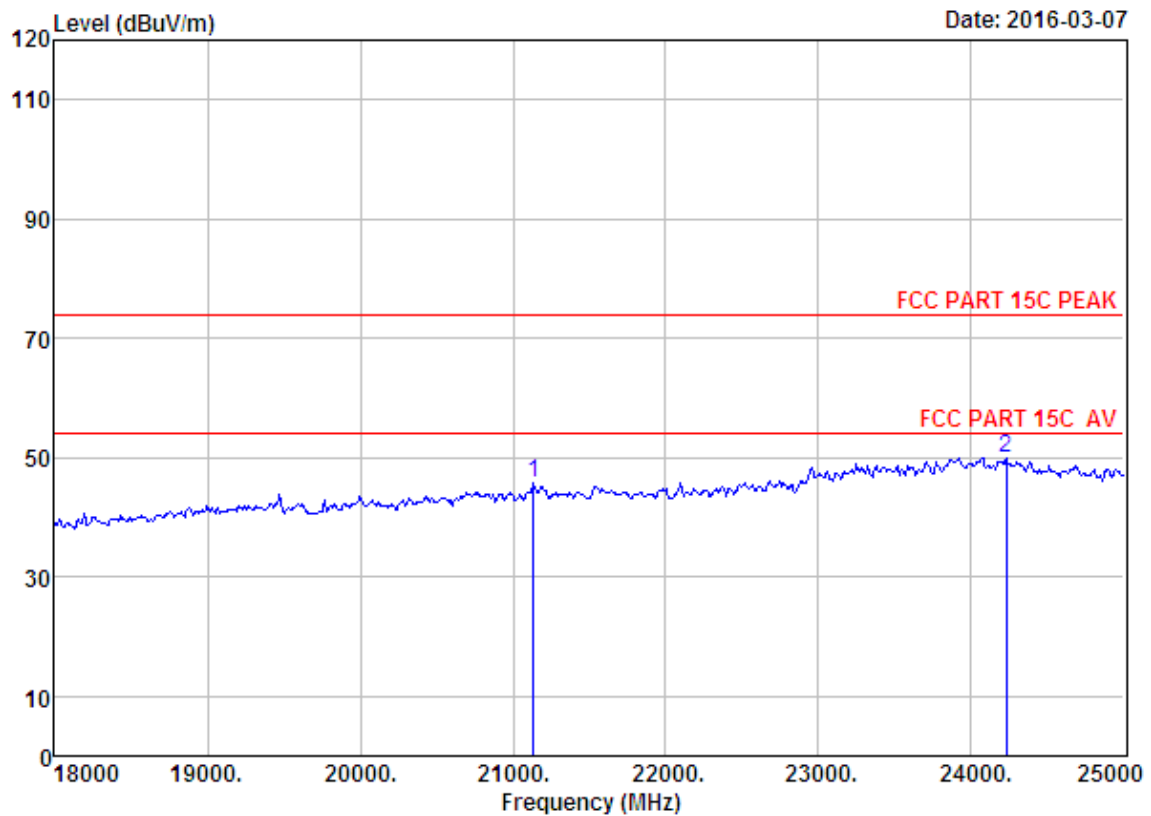

Site no. : 1# 966 chamber Data no. : 115
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21136.00	46.21	20.19	35.69	15.03	45.74	74.00	28.26	Peak
2	24230.00	45.65	22.17	33.15	15.37	50.04	74.00	23.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

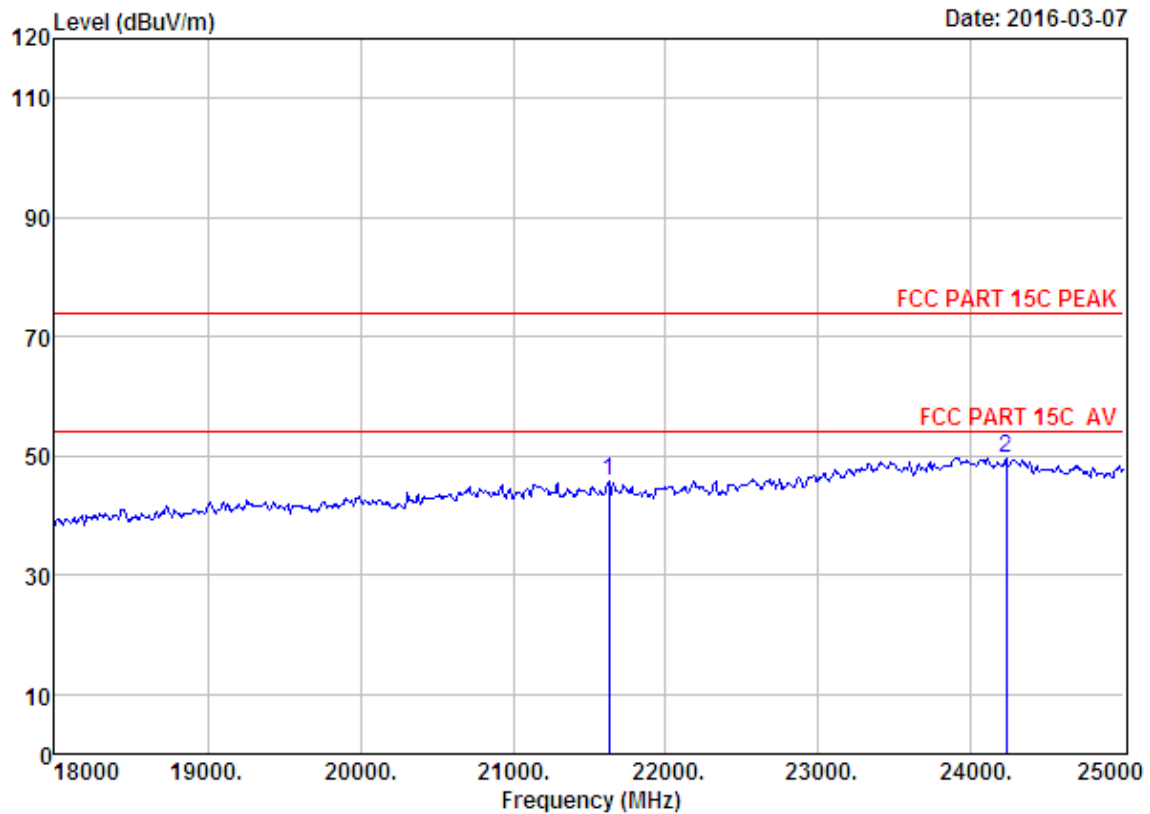

Site no. : 1# 966 chamber Data no. : 66
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21626.00	45.92	20.40	35.24	14.58	45.66	74.00	28.34	Peak
2	24230.00	45.65	22.17	33.15	14.98	49.65	74.00	24.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

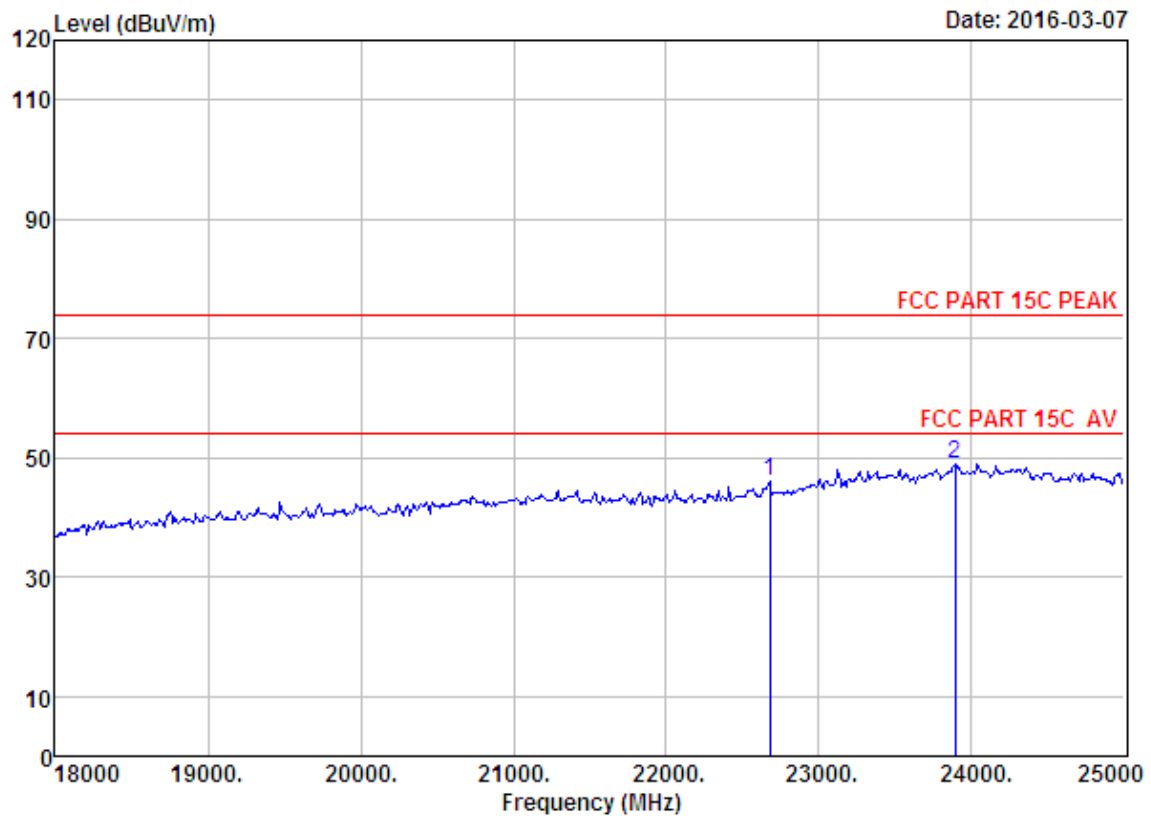

Site no. : 1# 966 chamber Data no. : 67
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22676.00	45.73	20.96	34.19	13.47	45.97	74.00	28.03	Peak
2	23894.00	45.62	21.95	32.90	14.28	48.95	74.00	25.05	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

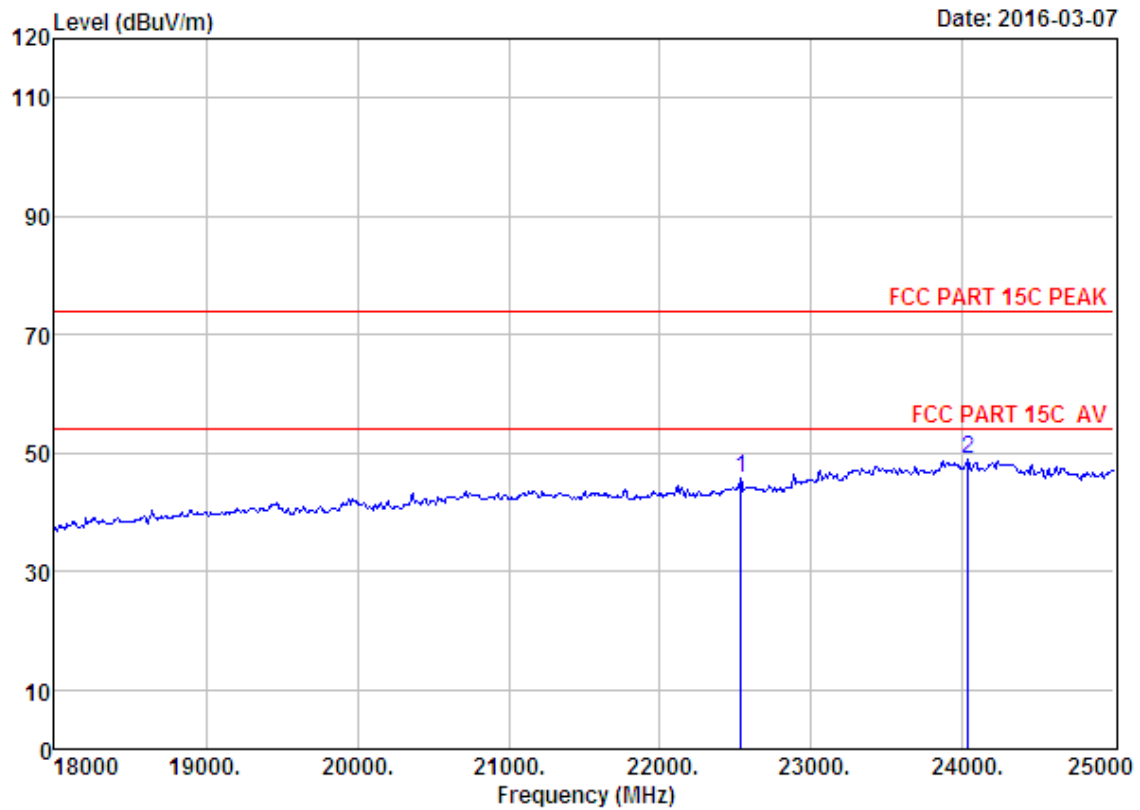

Site no. : 1# 966 chamber Data no. : 68
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22536.00	45.79	20.88	34.35	13.39	45.71	74.00	28.29	Peak
2	24034.00	45.60	22.06	32.84	14.27	49.09	74.00	24.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

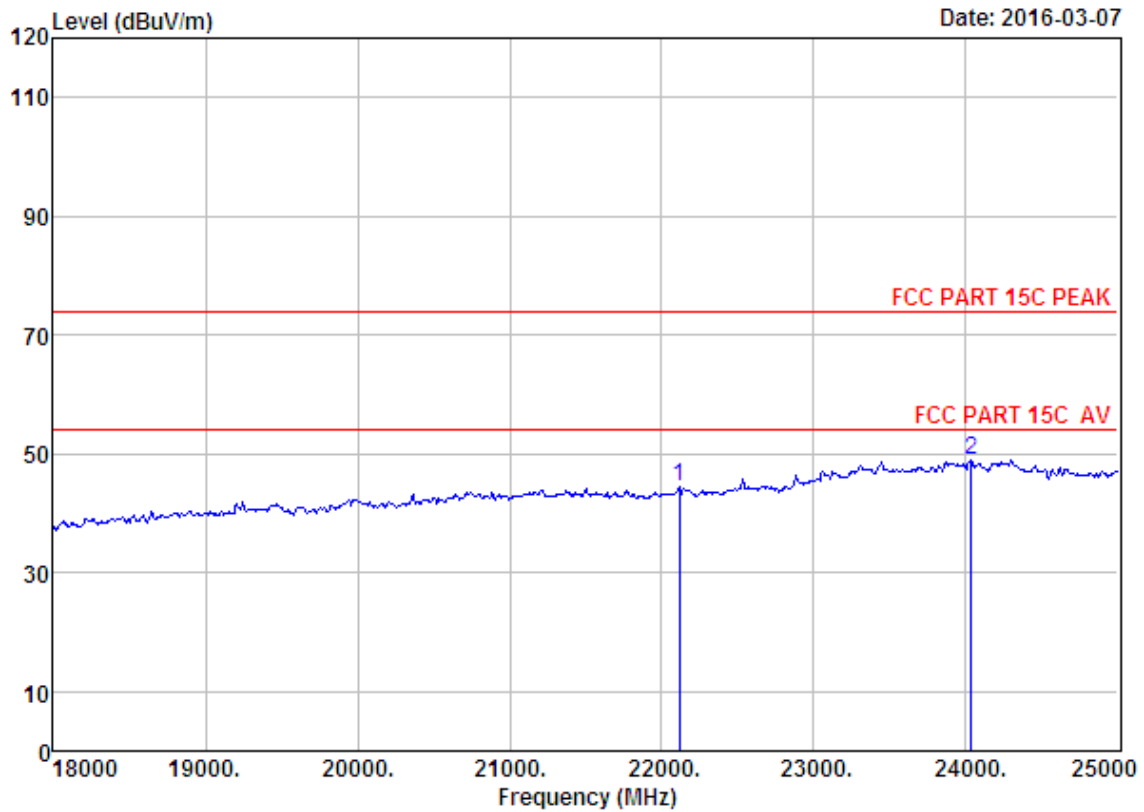

Site no. : 1# 966 chamber Data no. : 69
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	22116.00	45.72	20.63	34.77	12.84	44.42	74.00	29.58	Peak
2	24034.00	45.60	22.06	32.84	14.27	49.09	74.00	24.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

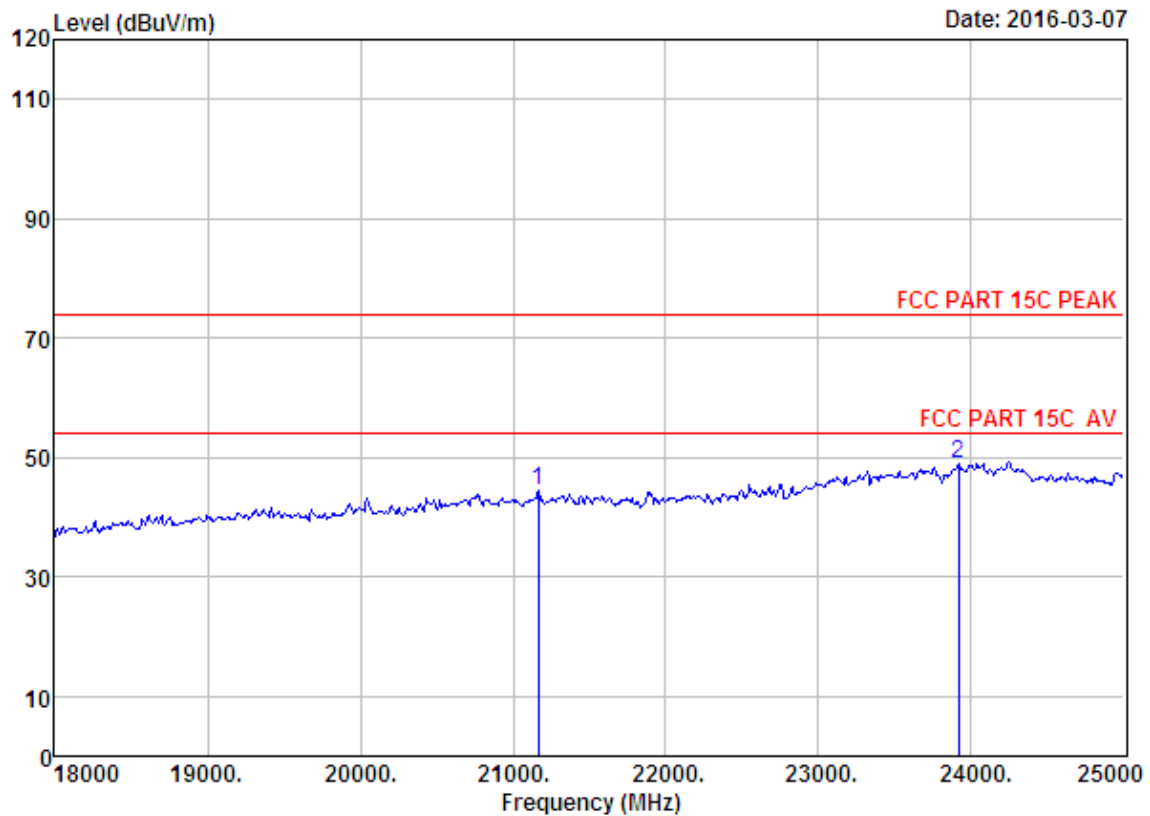

Site no. : 1# 966 chamber Data no. : 70
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	21164.00	46.20	20.20	35.64	13.69	44.45	74.00	29.55	Peak
2	23915.00	45.62	21.97	32.88	14.30	49.01	74.00	24.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

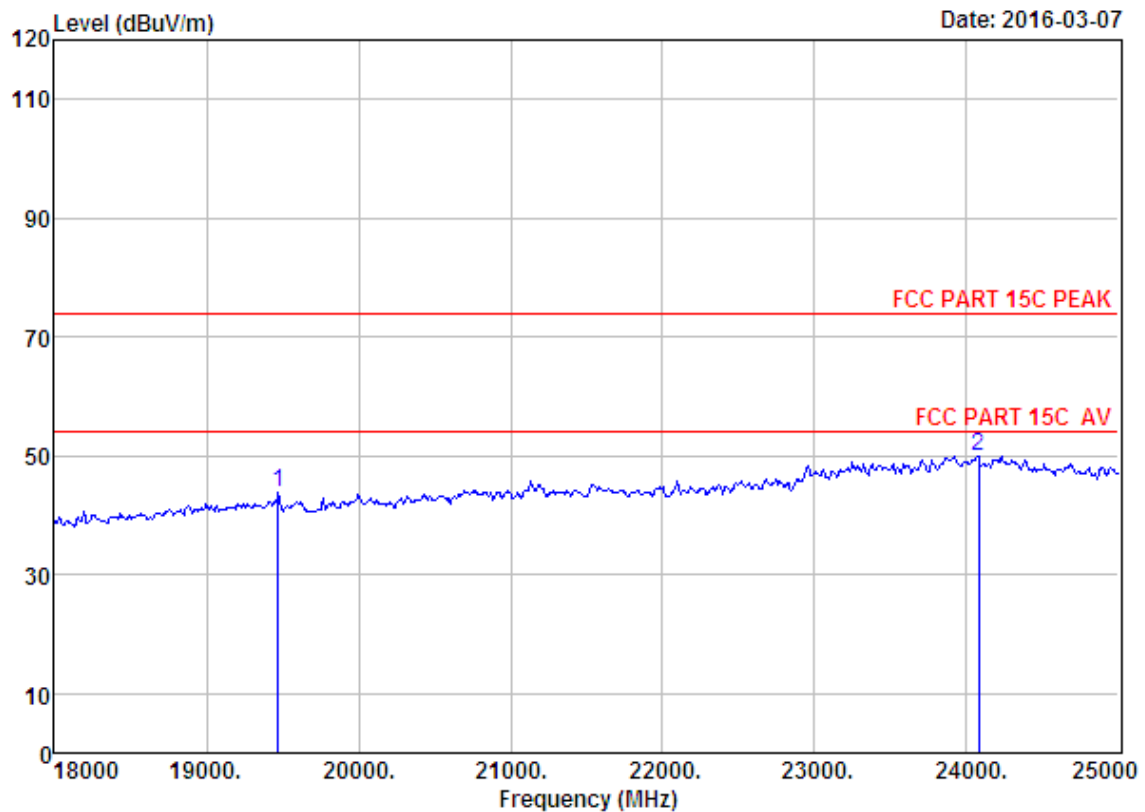

Site no. : 1# 966 chamber Data no. : 71
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	19470.00	45.88	19.07	36.25	15.15	43.85	74.00	30.15	Peak
2	24076.00	45.61	22.09	32.92	15.16	49.94	74.00	24.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

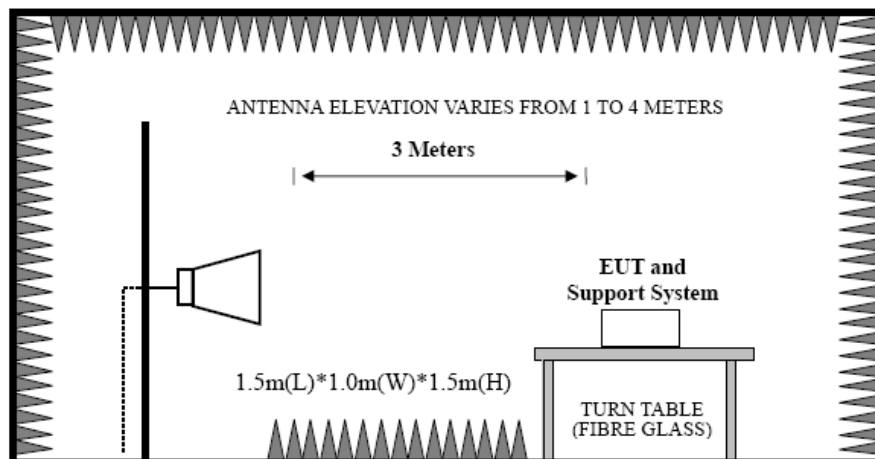

9.3. Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.


9.4. Test Result

EUT: Portable Bluetooth Speaker
M/N: DS1
Power: DC 3.7V
Test date: 2016-03-07 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


9.5. Test Data

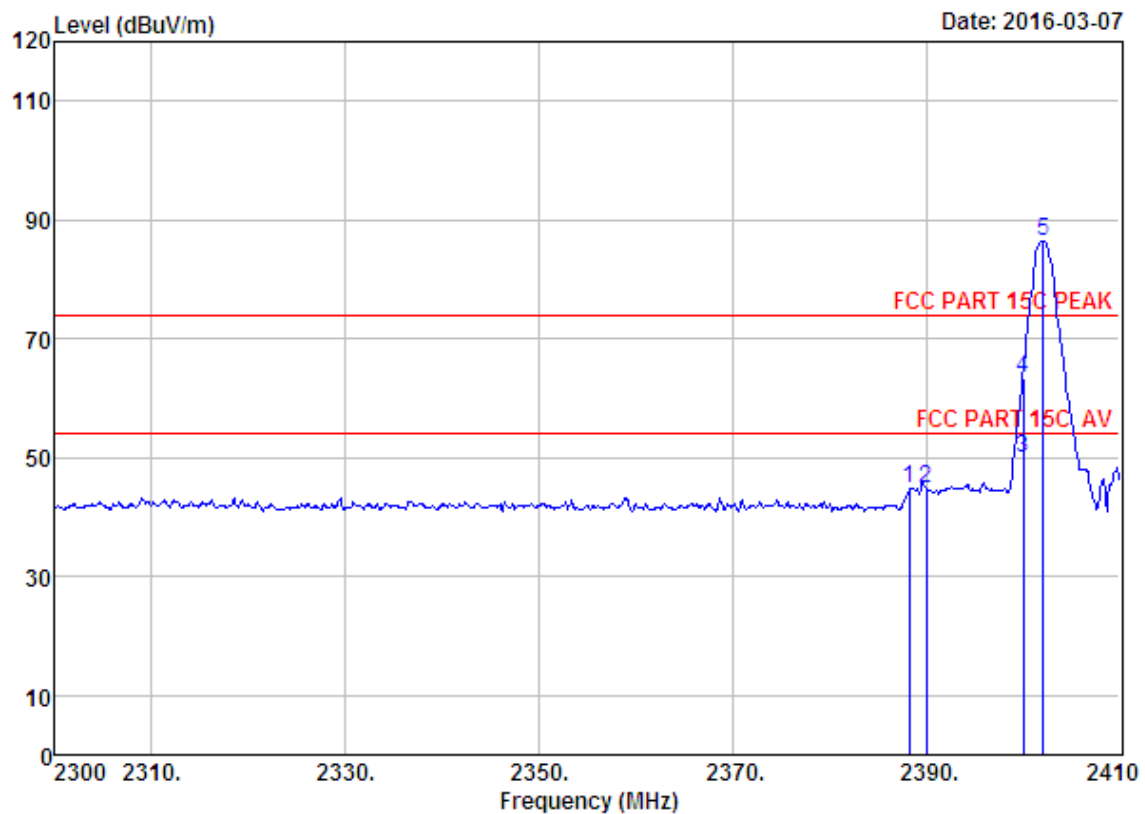

Site no. : 1# 966 chamber Data no. : 34
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.22	27.64	6.62	34.62	45.05	44.69	74.00	29.31	Peak
2	2390.00	27.64	6.62	34.62	45.16	44.80	74.00	29.20	Peak
3	2400.00	27.61	6.62	34.64	50.22	49.81	54.00	4.19	Average
4	2400.00	27.61	6.62	34.64	63.84	63.43	74.00	10.57	Peak
5	2402.08	27.61	6.62	34.64	86.86	86.45	74.00	-12.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

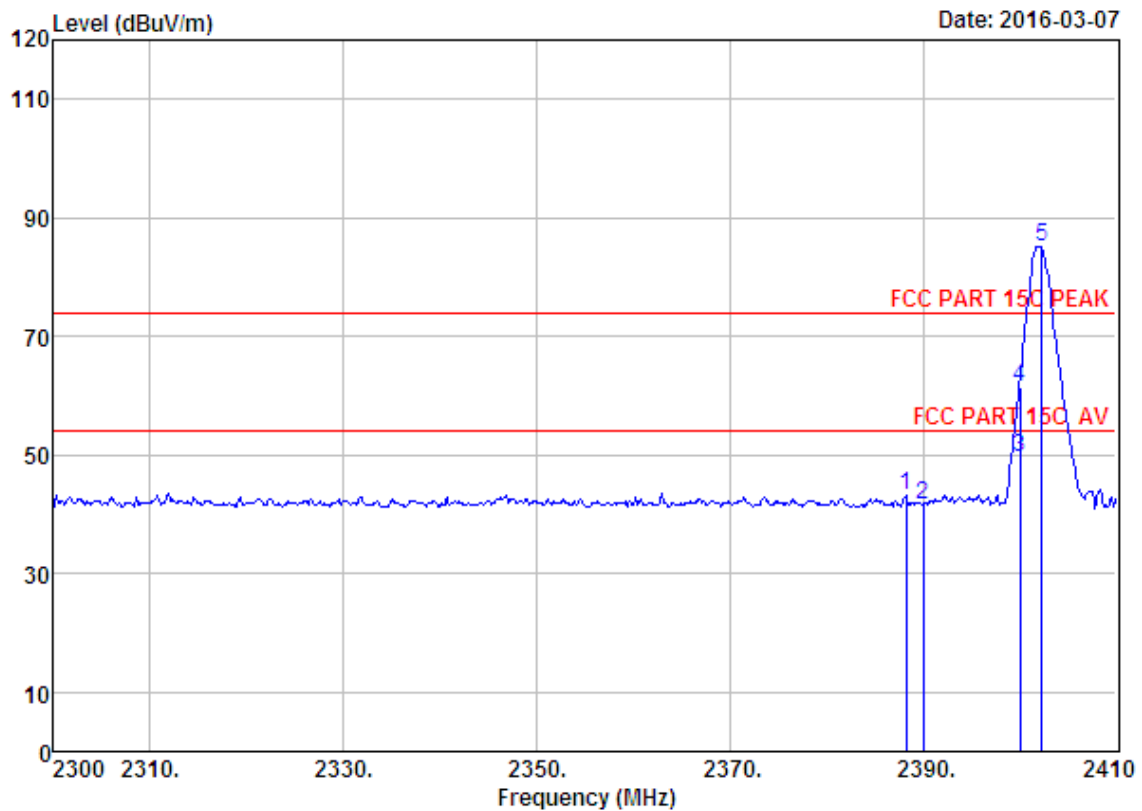


Site no. : 1# 966 chamber
 Dis. / Ant. : 3m ANT 1-18G
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz (No Hopping)

Data no. : 35
Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.22	27.64	6.62	34.62	43.59	43.23	74.00	30.77	Peak
2	2390.00	27.64	6.62	34.62	41.95	41.59	74.00	32.41	Peak
3	2400.00	27.61	6.62	34.64	50.09	49.68	54.00	4.32	Average
4	2400.00	27.61	6.62	34.64	62.00	61.59	74.00	12.41	Peak
5	2402.30	27.61	6.62	34.64	85.59	85.18	74.00	-11.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

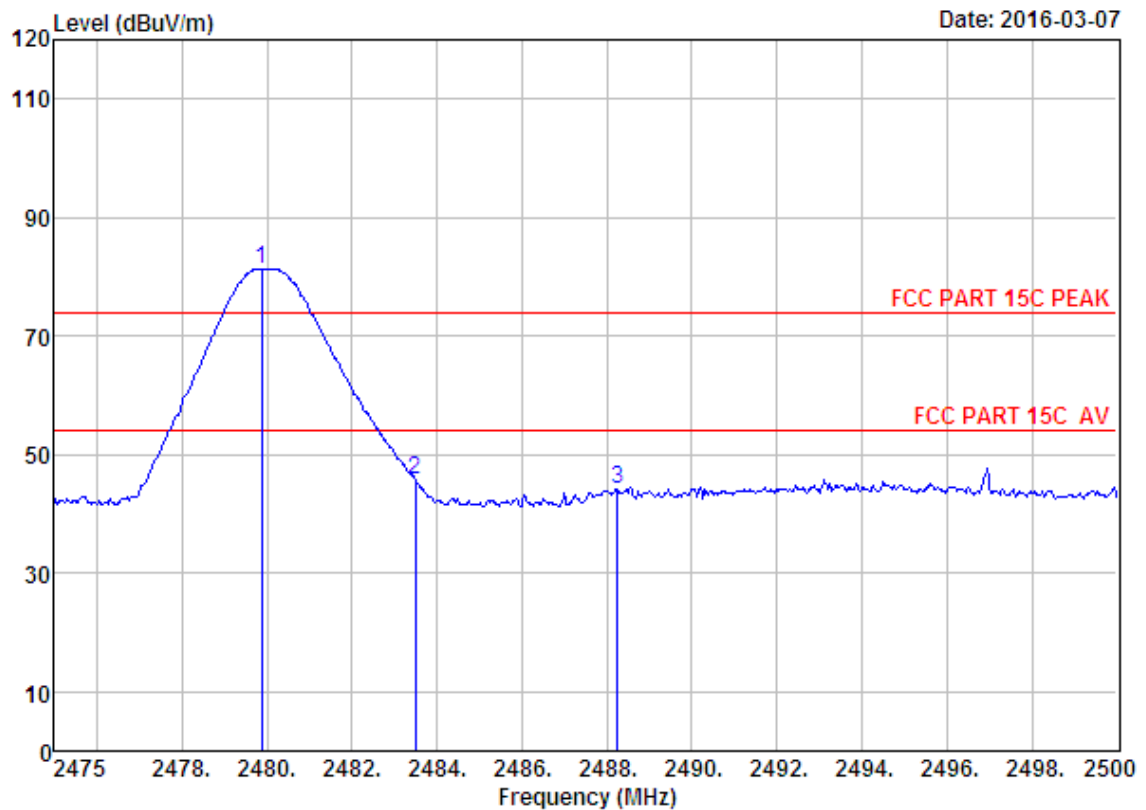

Site no. : 1# 966 chamber Data no. : 40
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.58	6.71	35.11	82.26	81.44	74.00	-7.44	Peak
2	2483.50	27.58	6.71	35.11	46.57	45.75	74.00	28.25	Peak
3	2488.25	27.58	6.73	35.11	44.89	44.09	74.00	29.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

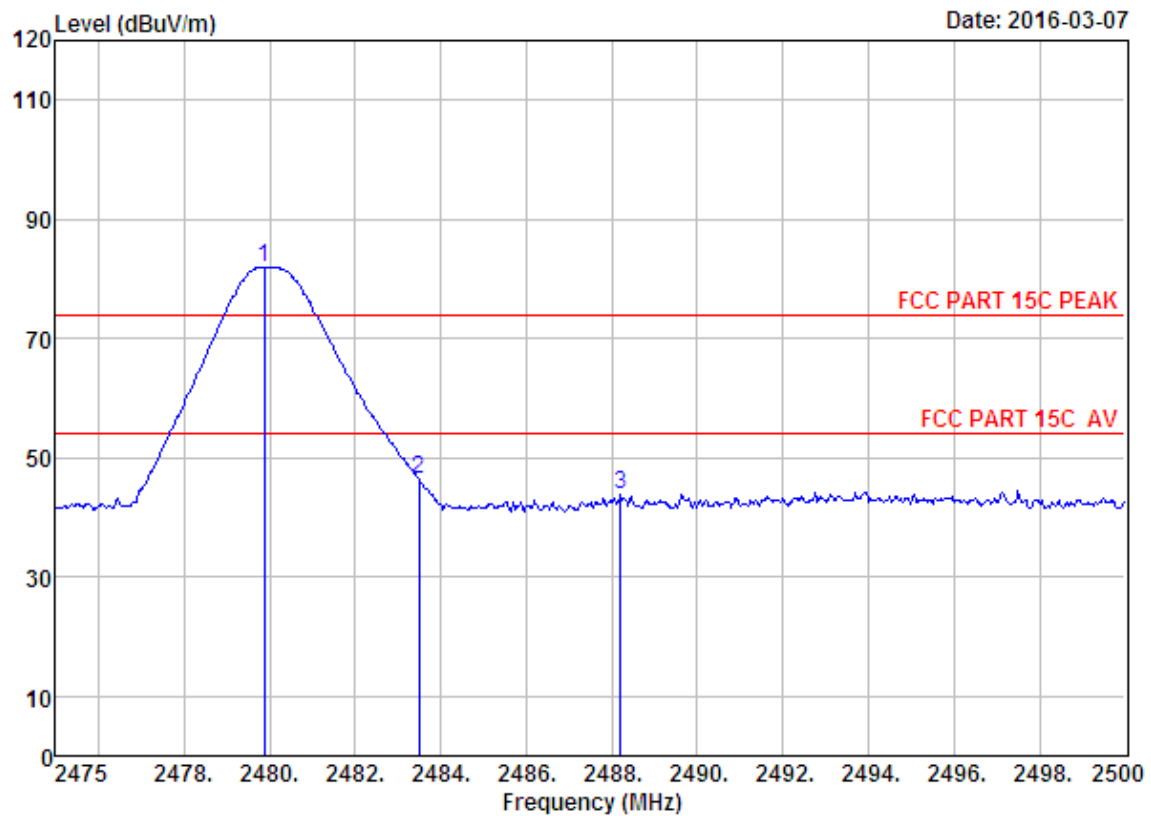

Site no. : 1# 966 chamber Data no. : 41
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.88	27.58	6.71	35.11	82.90	82.08	74.00	-8.08	Peak
2	2483.50	27.58	6.71	35.11	47.27	46.45	74.00	27.55	Peak
3	2488.20	27.58	6.73	35.11	44.50	43.70	74.00	30.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

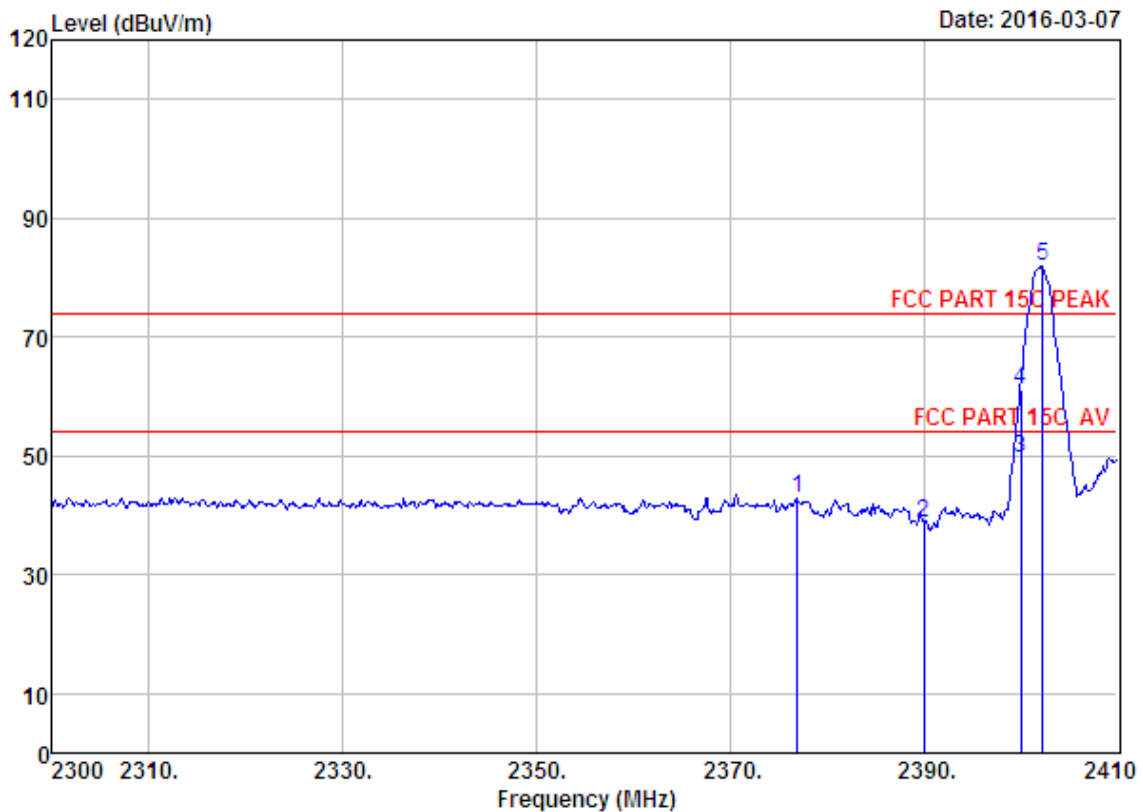

Site no. : 1# 966 chamber Data no. : 98
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2377.00	27.64	6.60	34.59	43.14	42.79	74.00	31.21	Peak
2	2390.00	27.64	6.62	34.62	39.10	38.74	74.00	35.26	Peak
3	2400.00	27.61	6.62	34.64	50.02	49.61	54.00	4.39	Average
4	2400.00	27.61	6.62	34.64	61.58	61.17	74.00	12.83	Peak
5	2402.30	27.61	6.62	34.64	82.27	81.86	74.00	-7.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

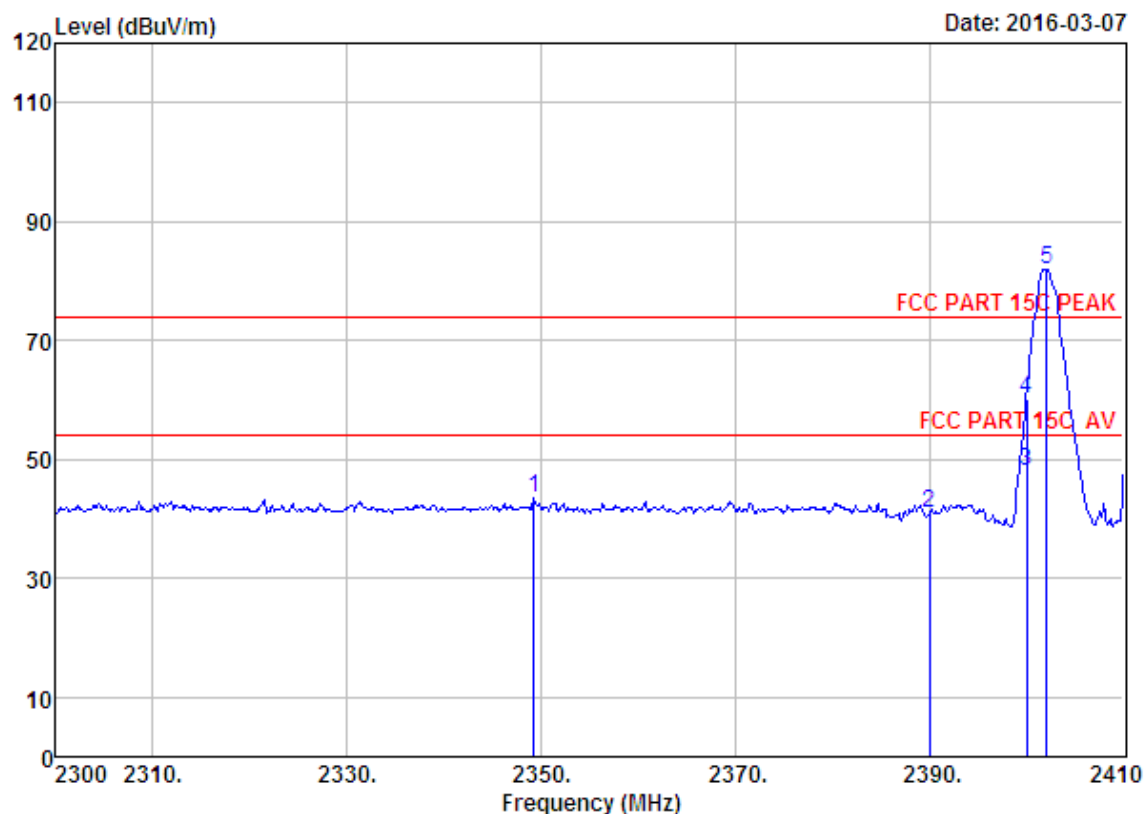

Site no. : 1# 966 chamber Data no. : 99
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2349.28	27.70	6.56	34.57	43.82	43.51	74.00	30.49	Peak
2	2390.00	27.64	6.62	34.62	41.46	41.10	74.00	32.90	Peak
3	2400.00	27.61	6.62	34.64	48.36	47.95	54.00	6.05	Average
4	2400.00	27.61	6.62	34.64	60.65	60.24	74.00	13.76	Peak
5	2402.08	27.61	6.62	34.64	82.48	82.07	74.00	-8.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

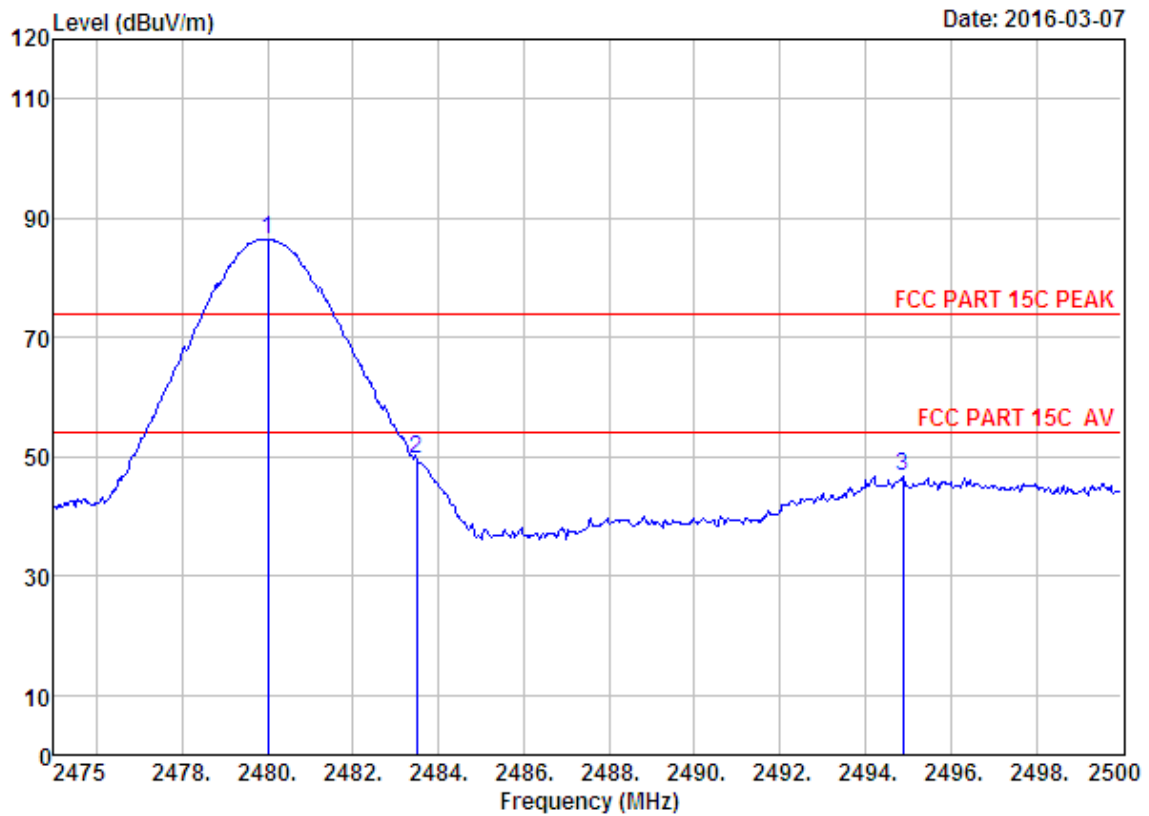

Site no. : 1# 966 chamber Data no. : 104
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	87.30	86.48	74.00	-12.48	Peak
2	2483.50	27.58	6.71	35.11	50.51	49.69	74.00	24.31	Peak
3	2494.88	27.57	6.73	35.24	47.69	46.75	74.00	27.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

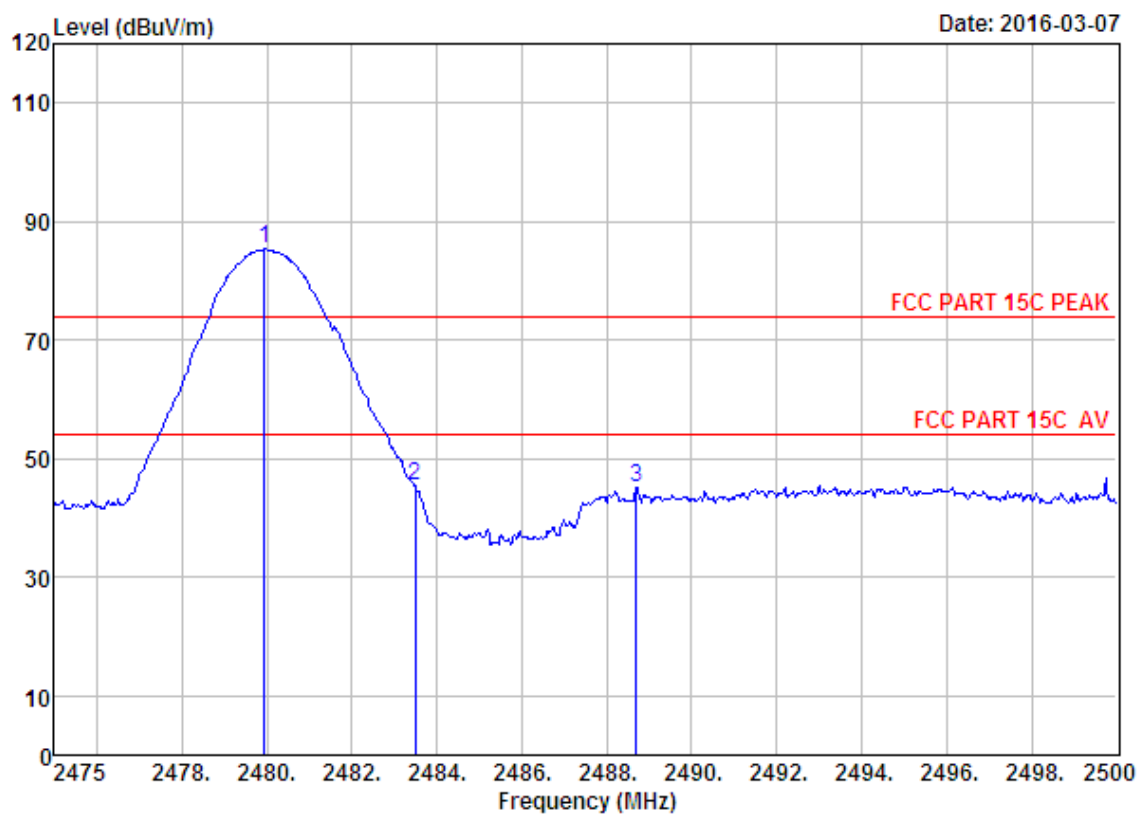

Site no. : 1# 966 chamber Data no. : 105
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.95	27.58	6.71	35.11	86.12	85.30	74.00	-11.30	Peak
2	2483.50	27.58	6.71	35.11	46.16	45.34	74.00	28.66	Peak
3	2488.70	27.58	6.73	35.11	46.04	45.24	74.00	28.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

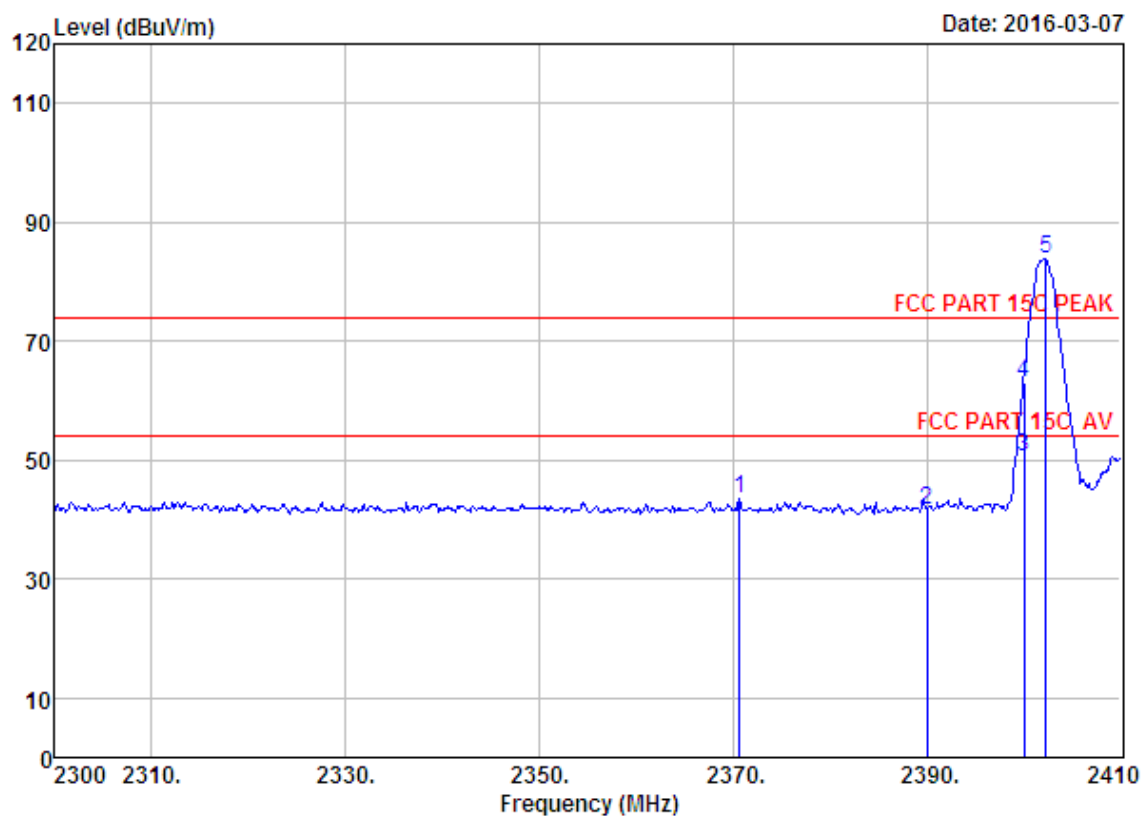

Site no. : 1# 966 chamber Data no. : 44
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2370.62	27.67	6.60	34.59	43.88	43.56	74.00	30.44	Peak
2	2390.00	27.64	6.62	34.62	42.10	41.74	74.00	32.26	Peak
3	2400.00	27.61	6.62	34.64	51.06	50.65	54.00	3.35	Average
4	2400.00	27.61	6.62	34.64	63.58	63.17	74.00	10.83	Peak
5	2402.30	27.61	6.62	34.64	84.27	83.86	74.00	-9.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

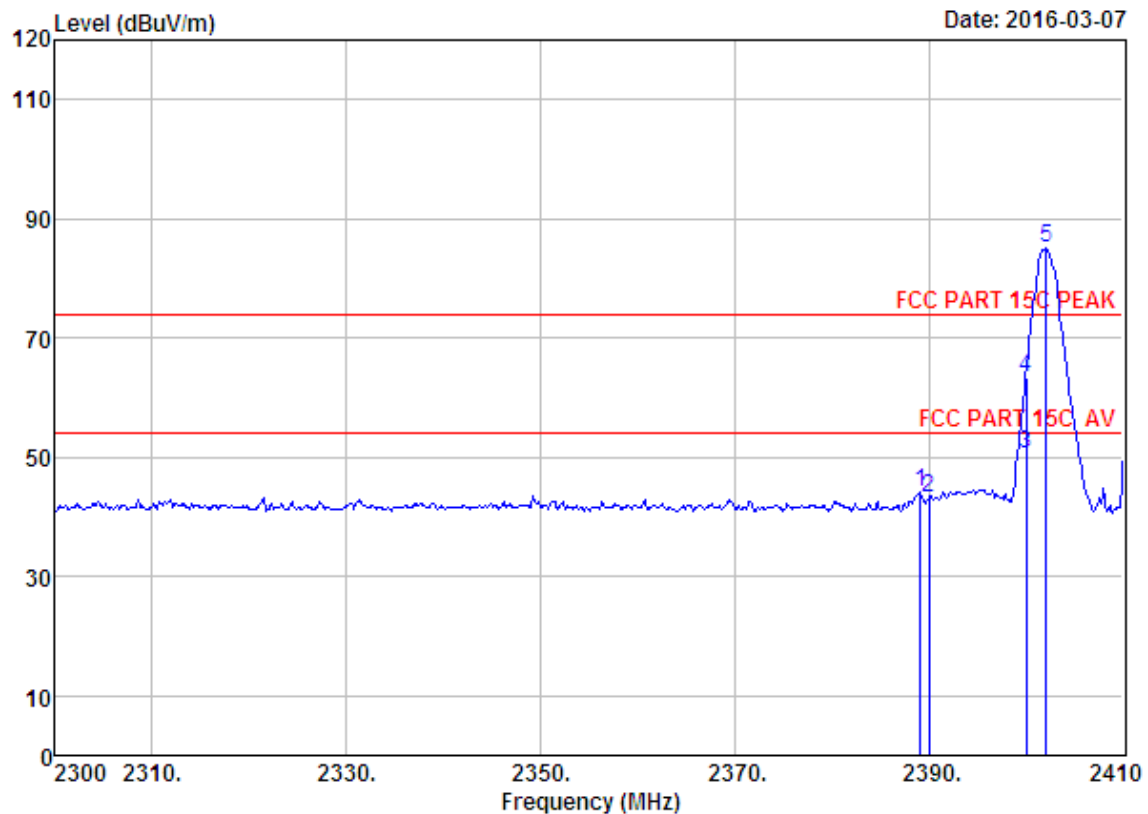

Site no. : 1# 966 chamber Data no. : 45
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.10	27.64	6.62	34.62	44.53	44.17	74.00	29.83	Peak
2	2390.00	27.64	6.62	34.62	43.46	43.10	74.00	30.90	Peak
3	2400.00	27.61	6.62	34.64	51.02	50.61	54.00	3.39	Average
4	2400.00	27.61	6.62	34.64	63.65	63.24	74.00	10.76	Peak
5	2402.08	27.61	6.62	34.64	85.48	85.07	74.00	-11.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

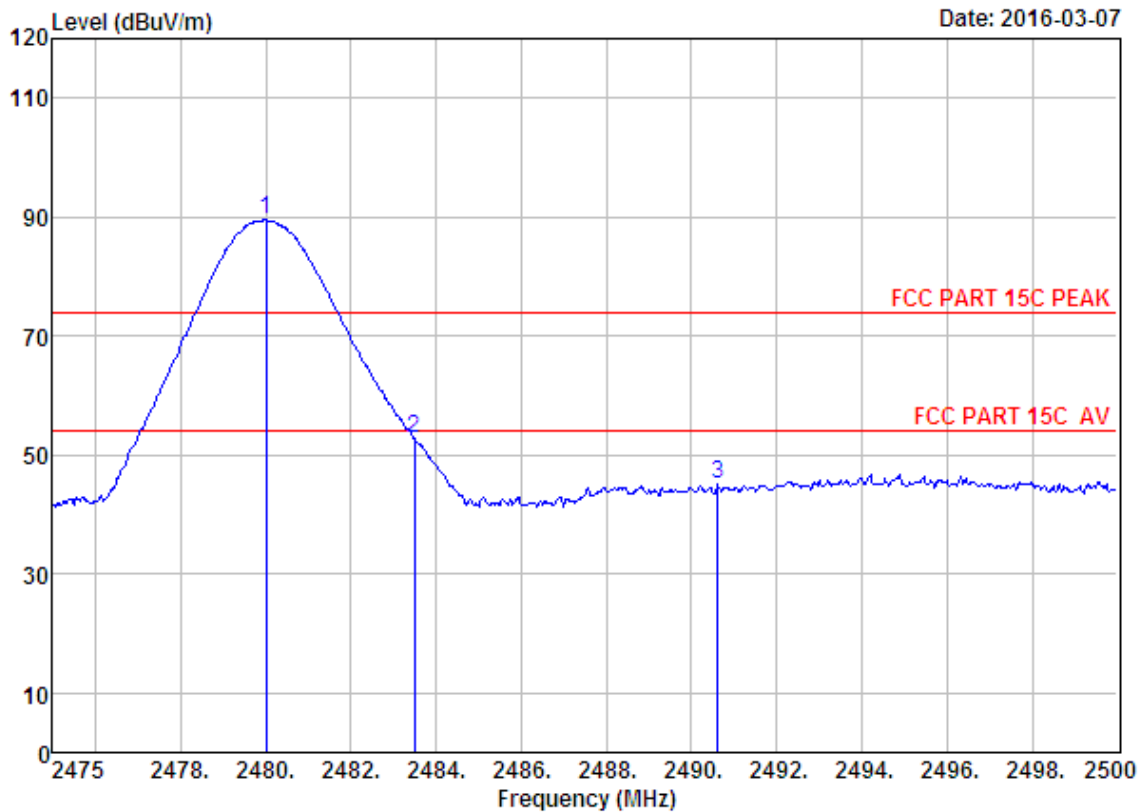

Site no. : 1# 966 chamber Data no. : 50
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	90.30	89.48	74.00	-15.48	Peak
2	2483.50	27.58	6.71	35.11	53.51	52.69	74.00	21.31	Peak
3	2490.63	27.58	6.73	35.24	45.97	45.04	74.00	28.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

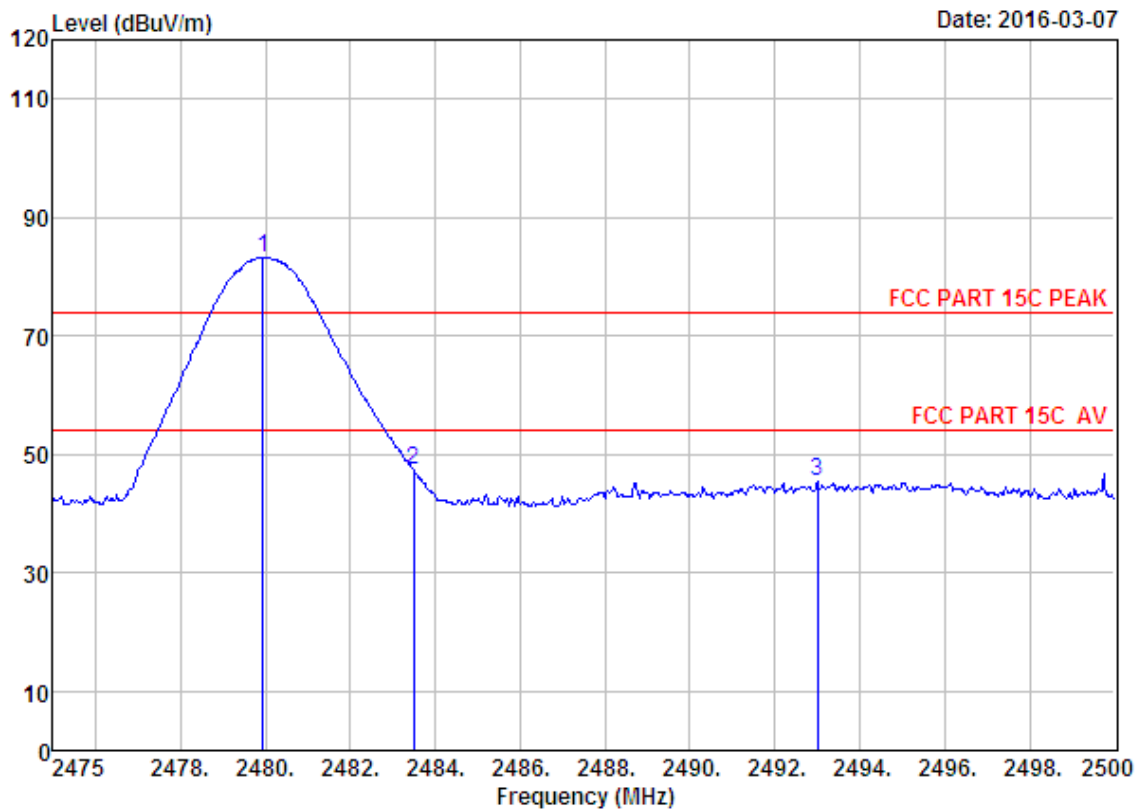

Site no. : 1# 966 chamber Data no. : 51
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.95	27.58	6.71	35.11	84.12	83.30	74.00	-9.30	Peak
2	2483.50	27.58	6.71	35.11	48.16	47.34	74.00	26.66	Peak
3	2493.00	27.58	6.73	35.24	46.41	45.48	74.00	28.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

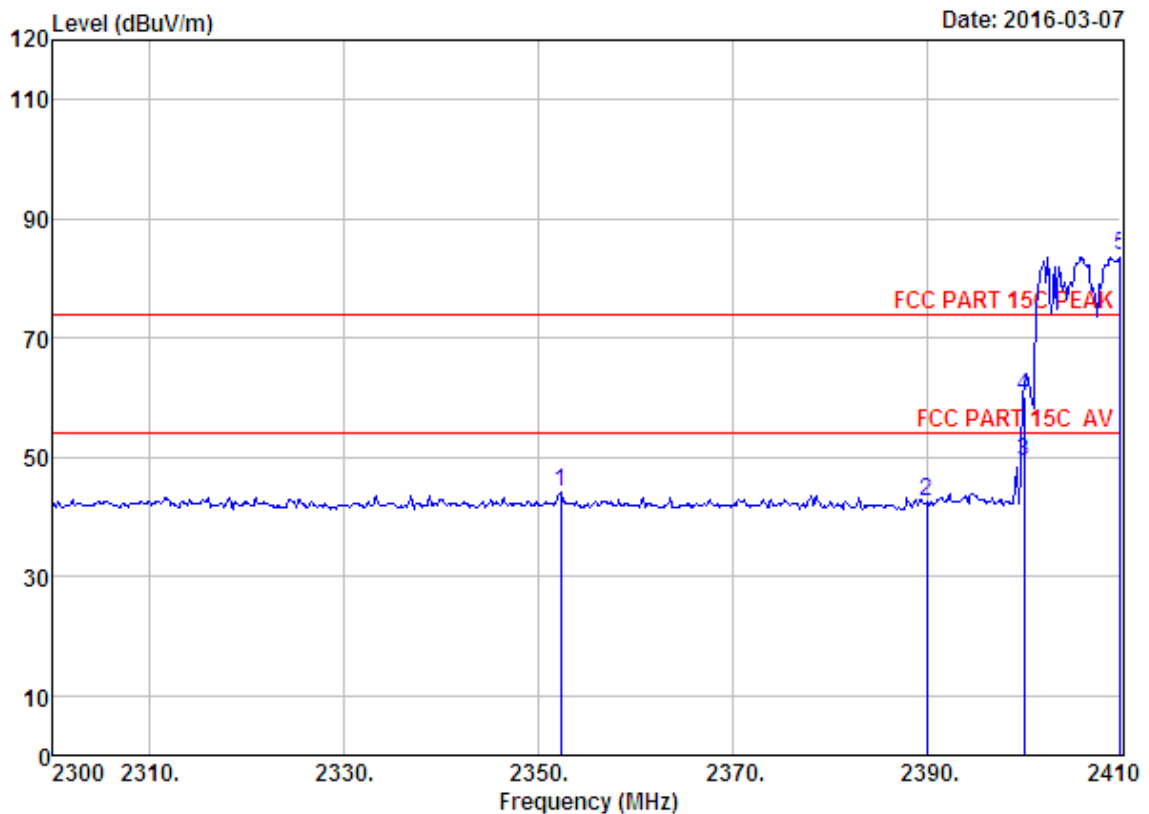

Site no. : 1# 966 chamber Data no. : 52
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2352.25	27.70	6.58	34.57	44.57	44.28	74.00	29.72	Peak
2	2390.00	27.64	6.62	34.62	42.77	42.41	74.00	31.59	Peak
3	2400.00	27.61	6.62	34.64	49.66	49.25	54.00	4.75	Average
4	2400.00	27.61	6.62	34.64	60.53	60.12	74.00	13.88	Peak
5	2410.00	27.60	6.64	34.64	84.25	83.85	74.00	-9.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

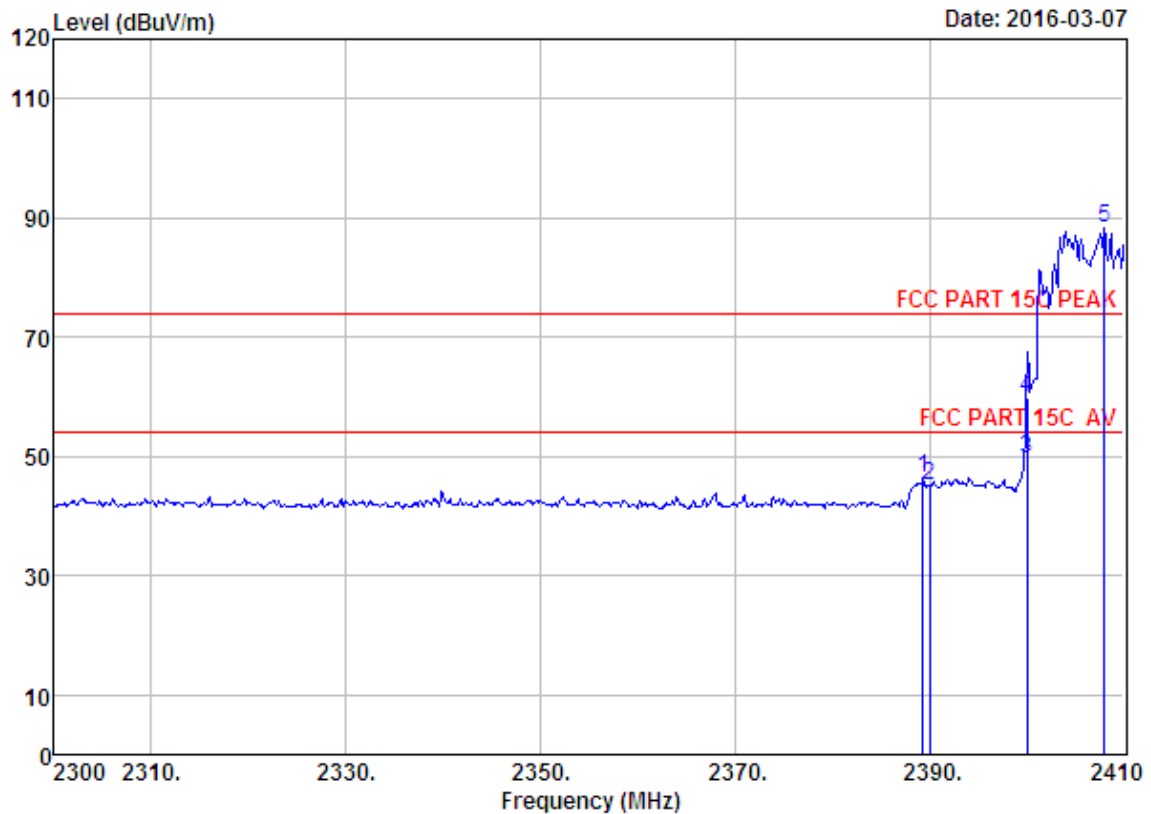

Site no. : 1# 966 chamber Data no. : 53
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.32	27.64	6.62	34.62	46.77	46.41	74.00	27.59	Peak
2	2390.00	27.64	6.62	34.62	45.46	45.10	74.00	28.90	Peak
3	2400.00	27.61	6.62	34.64	50.00	49.59	54.00	4.41	Average
4	2400.00	27.61	6.62	34.64	60.36	59.95	74.00	14.05	Peak
5	2408.02	27.61	6.64	34.64	88.86	88.47	74.00	-14.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

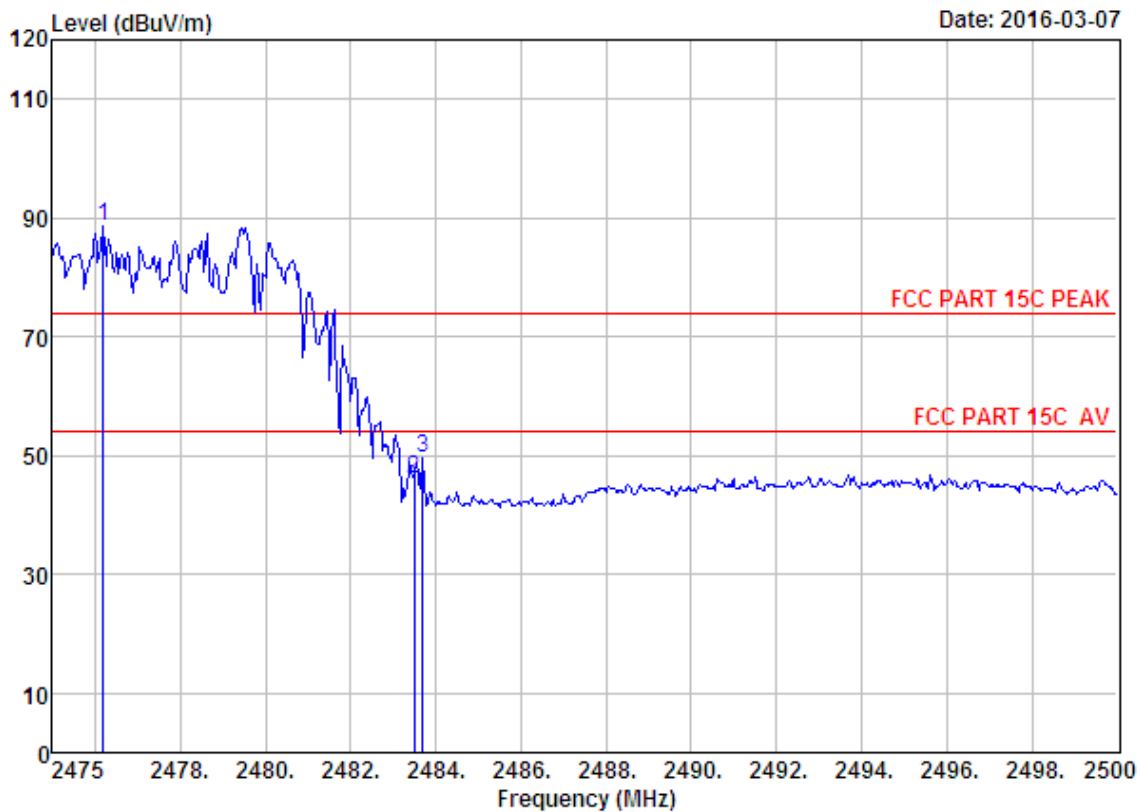

Site no. : 1# 966 chamber Data no. : 54
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.20	27.58	6.71	35.11	89.55	88.73	74.00	-14.73	Peak
2	2483.50	27.58	6.71	35.11	47.01	46.19	74.00	27.81	Peak
3	2483.70	27.58	6.71	35.11	50.52	49.70	74.00	24.30	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

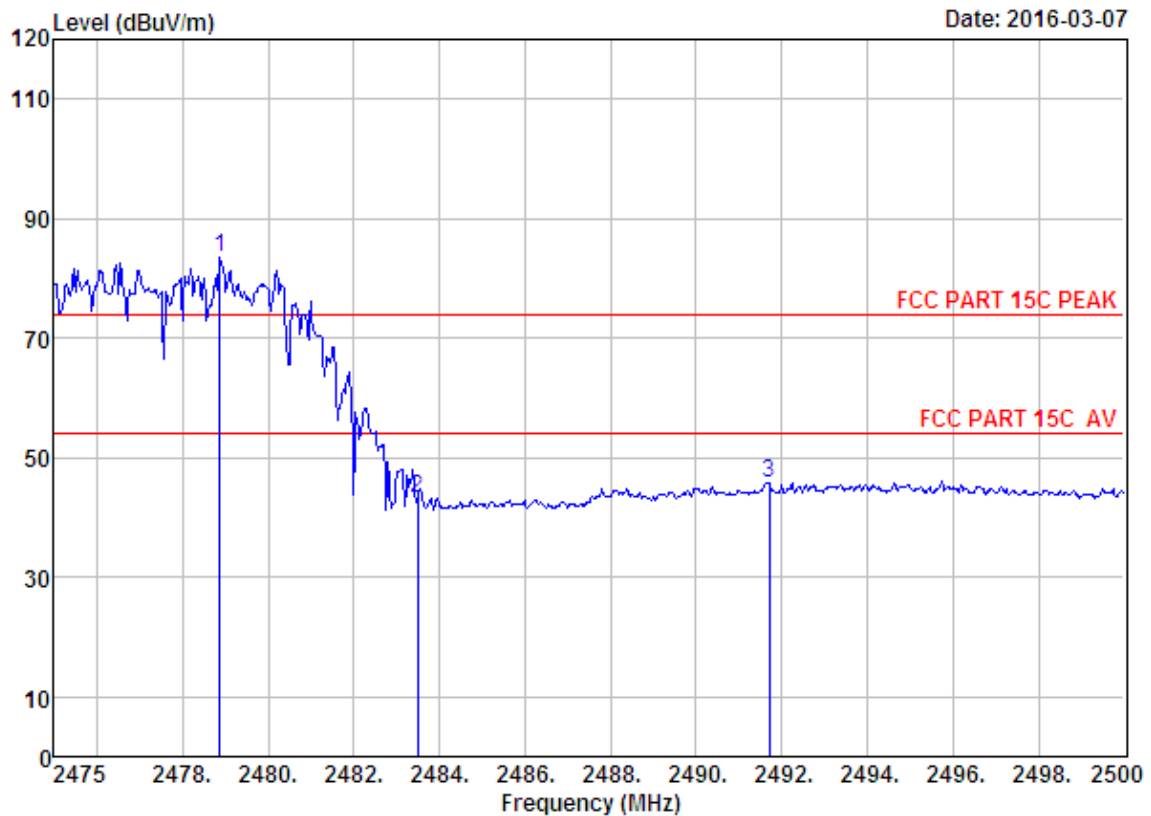

Site no. : 1# 966 chamber Data no. : 55
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.88	27.58	6.71	35.11	84.22	83.40	74.00	-9.40	Peak
2	2483.50	27.58	6.71	35.11	44.09	43.27	74.00	30.73	Peak
3	2491.70	27.58	6.73	35.24	46.75	45.82	74.00	28.18	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

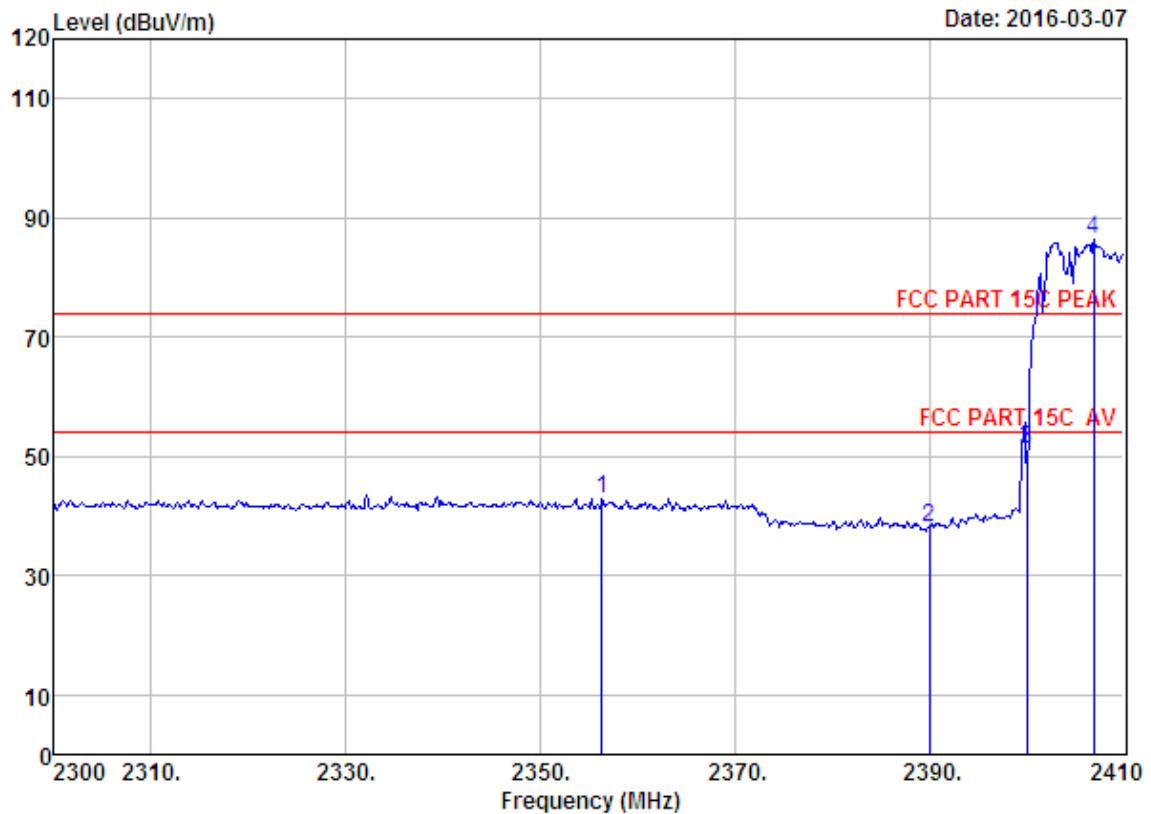

Site no. : 1# 966 chamber Data no. : 106
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2356.32	27.70	6.58	34.57	43.19	42.90	74.00	31.10	Peak
2	2390.00	27.64	6.62	34.62	38.53	38.17	74.00	35.83	Peak
3	2400.00	27.61	6.62	34.64	51.57	51.16	74.00	22.84	Peak
4	2406.92	27.61	6.64	34.64	86.64	86.25	74.00	-12.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

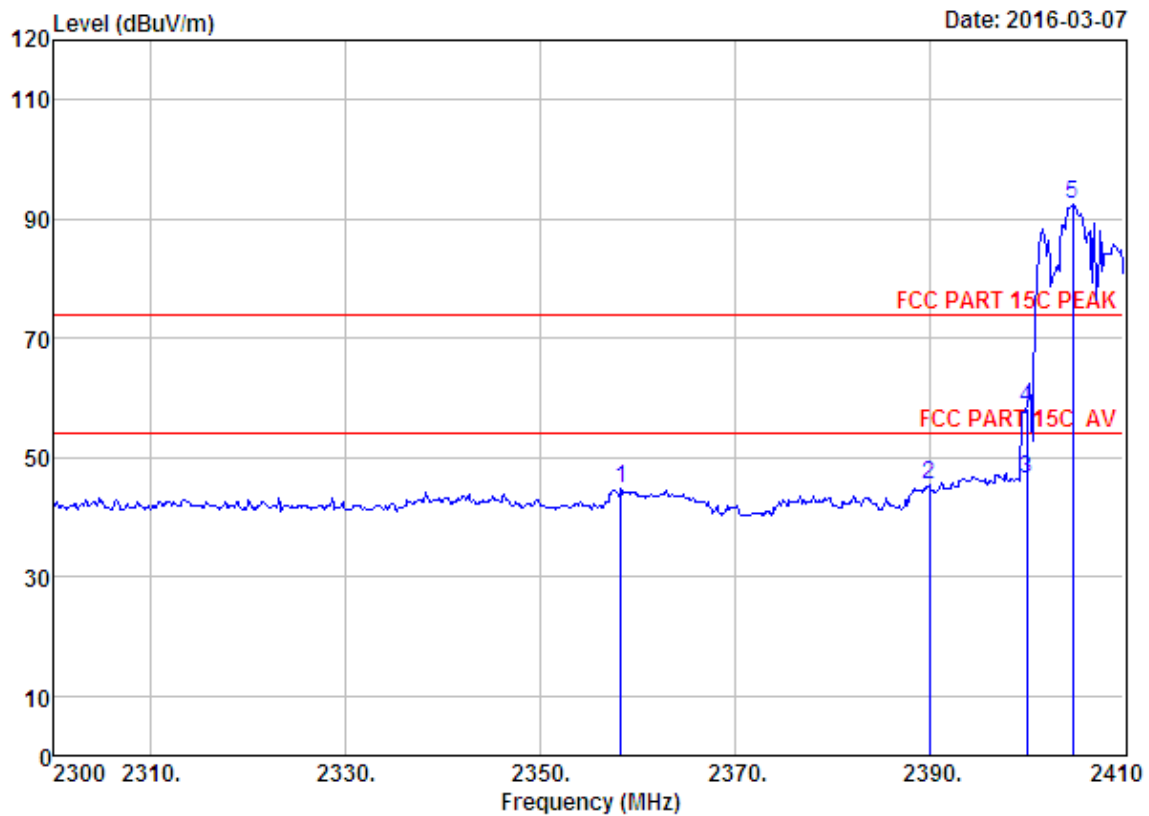

Site no. : 1# 966 chamber Data no. : 107
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2358.30	27.67	6.58	34.57	45.02	44.70	74.00	29.30	Peak
2	2390.00	27.64	6.62	34.62	45.66	45.30	74.00	28.70	Peak
3	2400.00	27.61	6.62	34.64	46.88	46.47	54.00	7.53	Average
4	2400.00	27.61	6.62	34.64	58.50	58.09	74.00	15.91	Peak
5	2404.72	27.61	6.64	34.64	92.81	92.42	74.00	-18.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

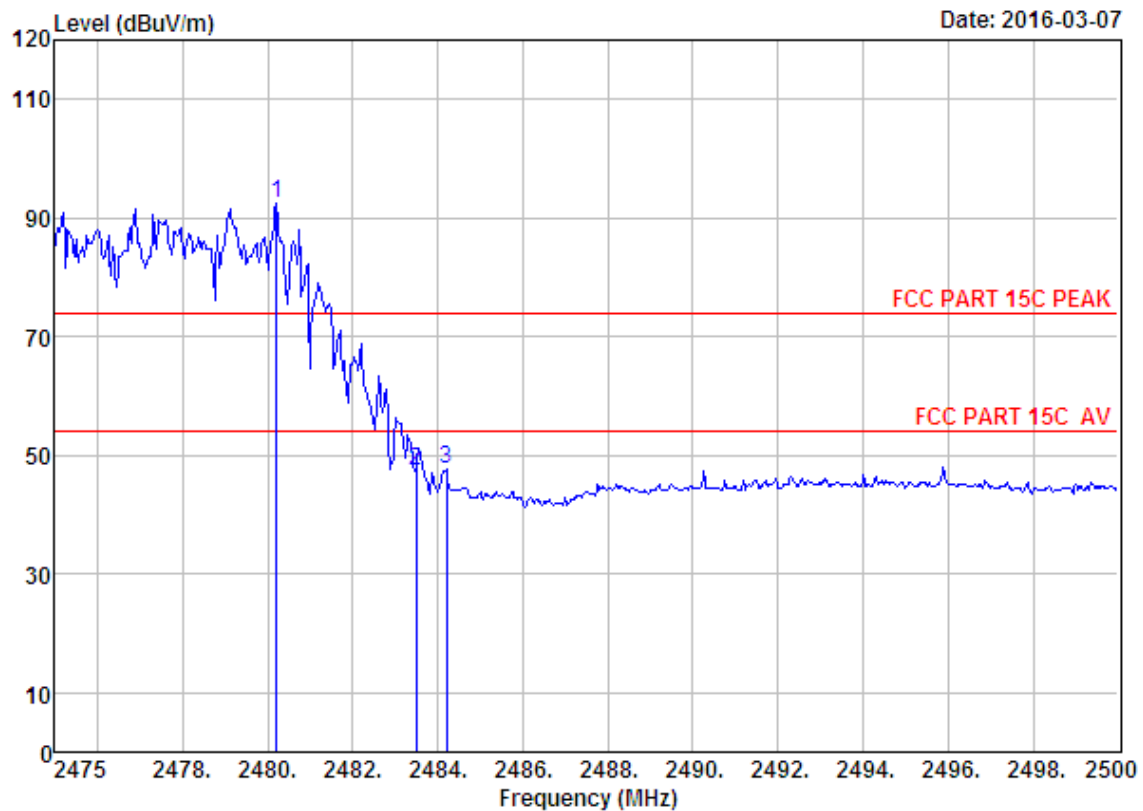

Site no. : 1# 966 chamber Data no. : 108
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (n/4)DQPSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.20	27.58	6.71	35.11	93.45	92.63	74.00	-18.63	Peak
2	2483.50	27.58	6.71	35.11	48.13	47.31	74.00	26.69	Peak
3	2484.20	27.58	6.71	35.11	48.44	47.62	74.00	26.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

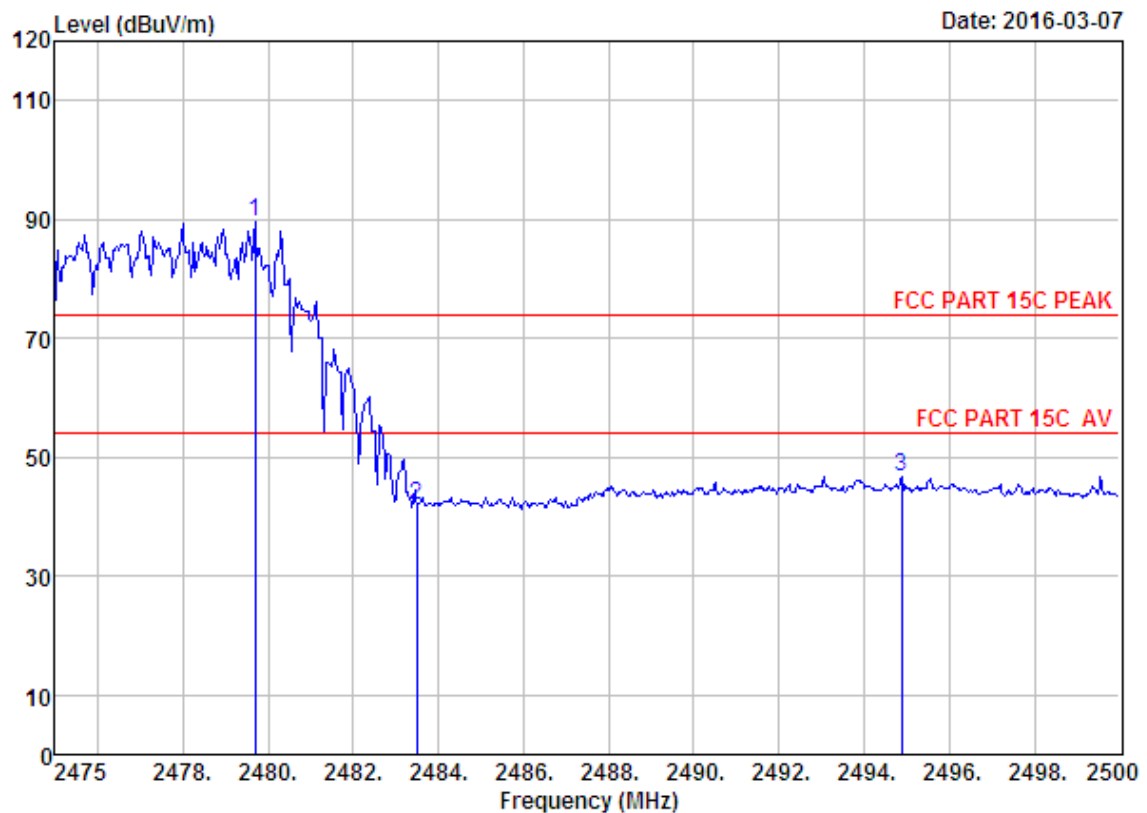

Site no. : 1# 966 chamber Data no. : 109
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : (π/4)DQPSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.70	27.58	6.71	35.11	90.37	89.55	74.00	-15.55	Peak
2	2483.50	27.58	6.71	35.11	42.68	41.86	74.00	32.14	Peak
3	2494.88	27.57	6.73	35.24	47.80	46.86	74.00	27.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

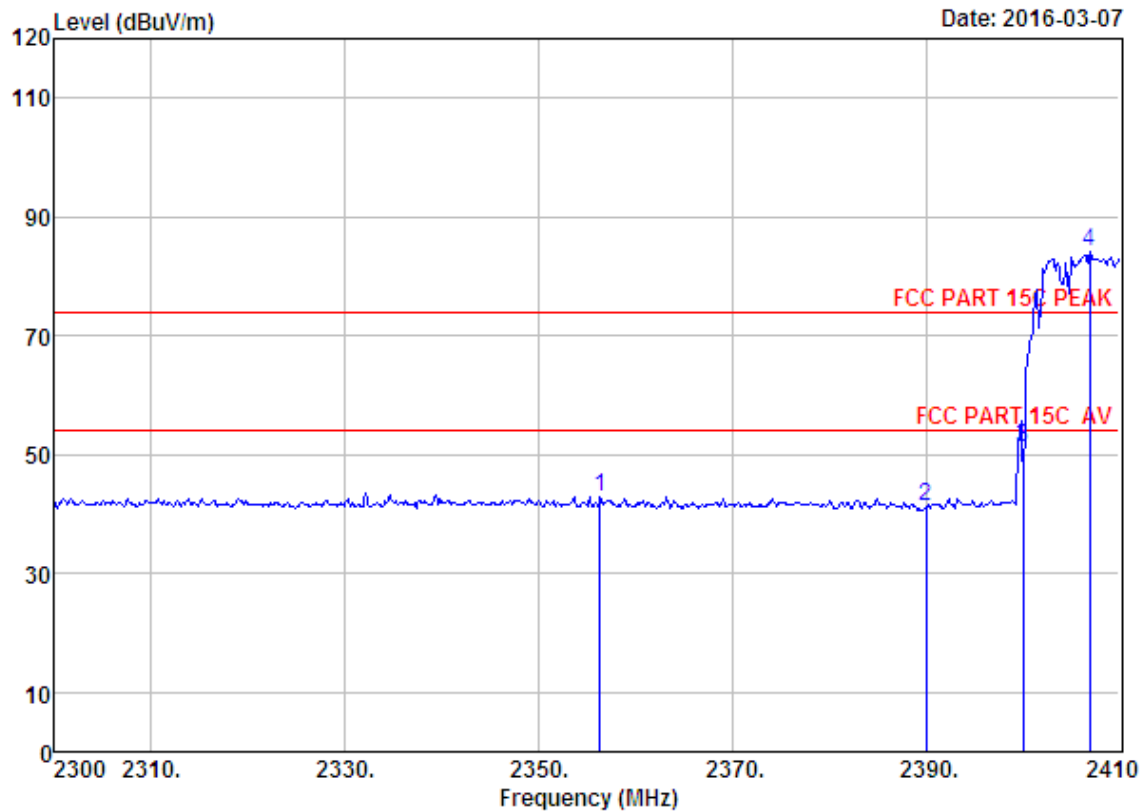

Site no. : 1# 966 chamber Data no. : 56
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2356.32	27.70	6.58	34.57	43.19	42.90	74.00	31.10	Peak
2	2390.00	27.64	6.62	34.62	41.53	41.17	74.00	32.83	Peak
3	2400.00	27.61	6.62	34.64	51.57	51.16	74.00	22.84	Peak
4	2406.92	27.61	6.64	34.64	84.64	84.25	74.00	-10.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

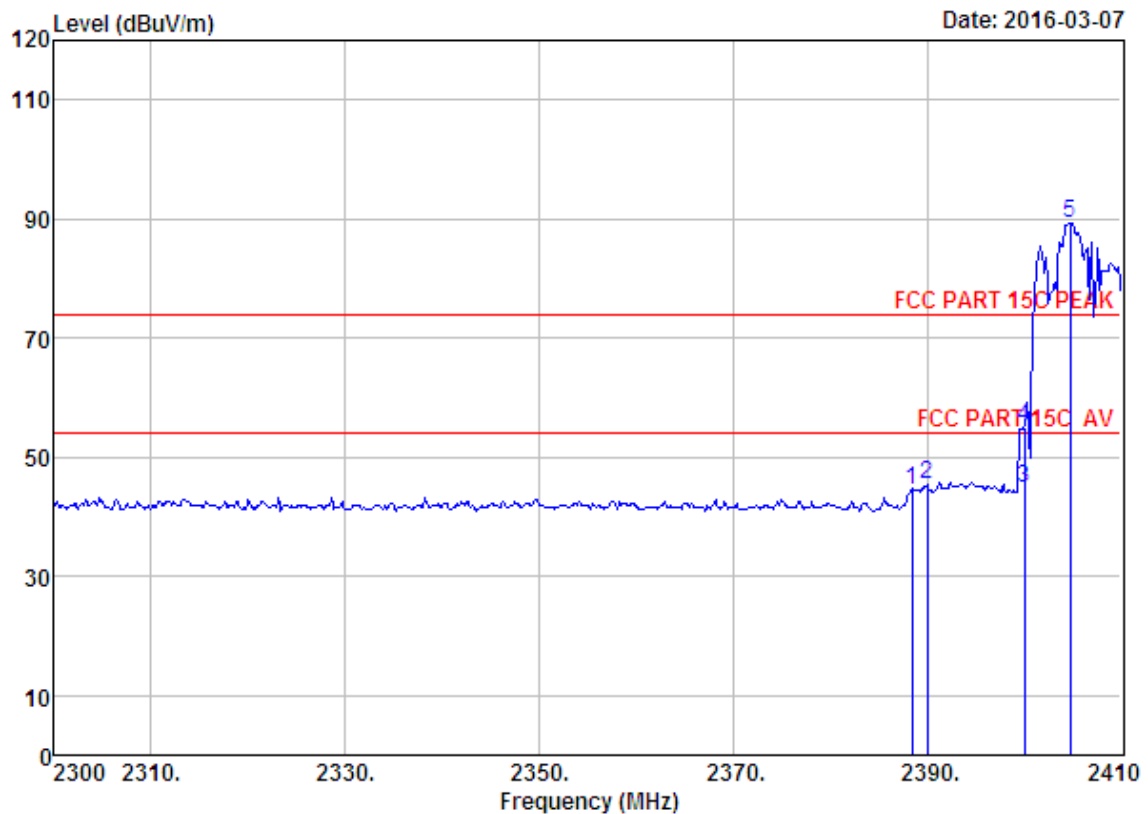

Site no. : 1# 966 chamber Data no. : 57
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.44	27.64	6.62	34.62	44.93	44.57	74.00	29.43	Peak
2	2390.00	27.64	6.62	34.62	45.66	45.30	74.00	28.70	Peak
3	2400.00	27.61	6.62	34.64	45.06	44.65	54.00	9.35	Average
4	2400.00	27.61	6.62	34.64	55.50	55.09	74.00	18.91	Peak
5	2404.72	27.61	6.64	34.64	89.81	89.42	74.00	-15.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

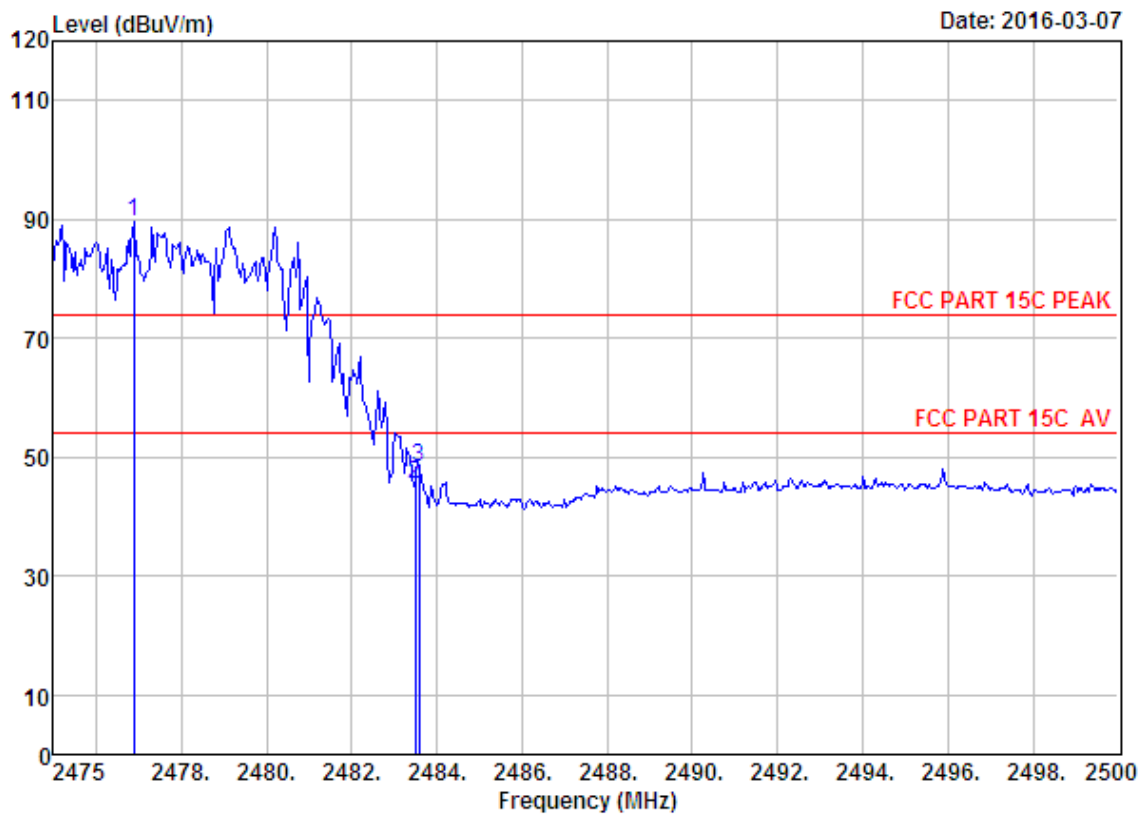

Site no. : 1# 966 chamber Data no. : 58
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2476.88	27.58	6.71	35.11	90.26	89.44	74.00	-15.44	Peak
2	2483.50	27.58	6.71	35.11	46.13	45.31	74.00	28.69	Peak
3	2483.58	27.58	6.71	35.11	49.30	48.48	74.00	25.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

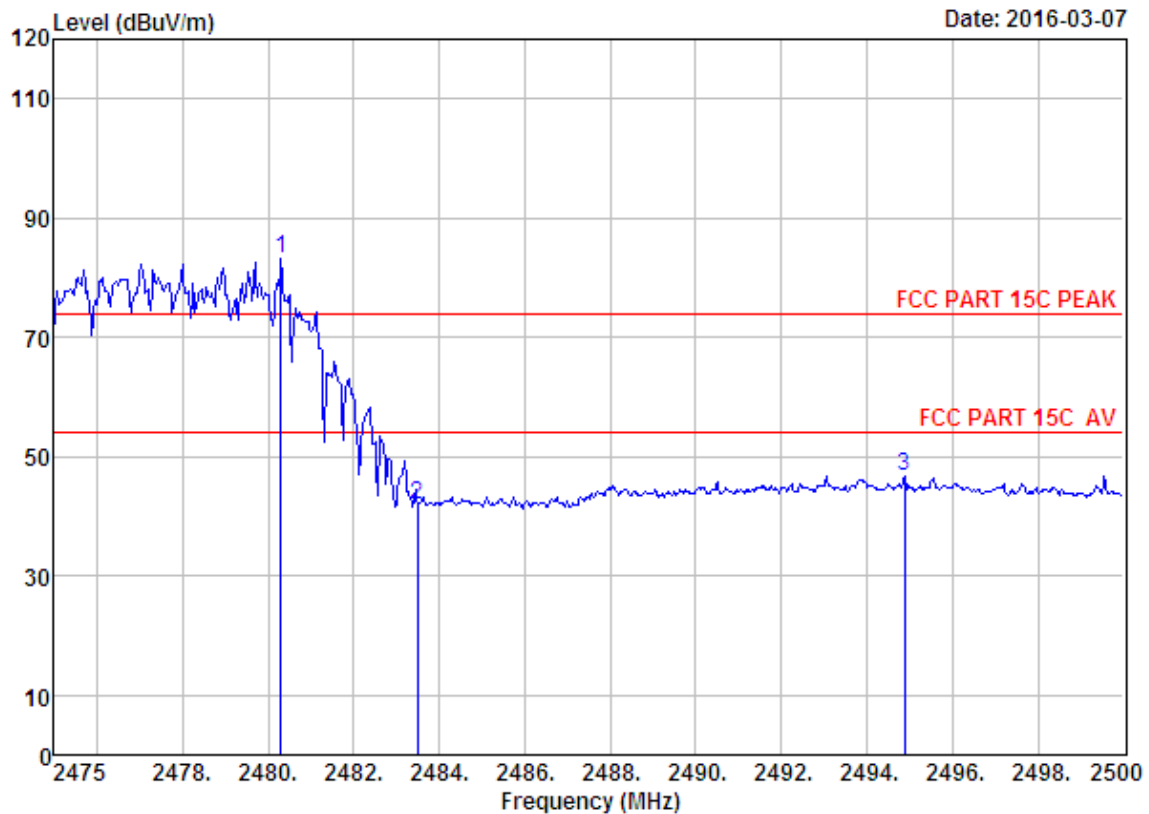

Site no. : 1# 966 chamber Data no. : 59
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Portable Bluetooth Speaker
 Power : DC 3.7V
 M/N : DS1
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.30	27.58	6.71	35.11	83.88	83.06	74.00	-9.06	Peak
2	2483.50	27.58	6.71	35.11	42.68	41.86	74.00	32.14	Peak
3	2494.88	27.57	6.73	35.24	47.80	46.86	74.00	27.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. CONDUCTED SPURIOUS EMISSION

10.1. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

10.2. Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz for frequency range from 30MHz to 1000 MHz; The resolution bandwidth is set to 1 MHz, The video bandwidth is set to 3 MHz for frequency range from 1000MHz to 25000 MHz.



10.3. Test Result

PASS (The testing data was attached in the next pages.)



10.4. Test Data


Test Mode: GFSK 2402MHz

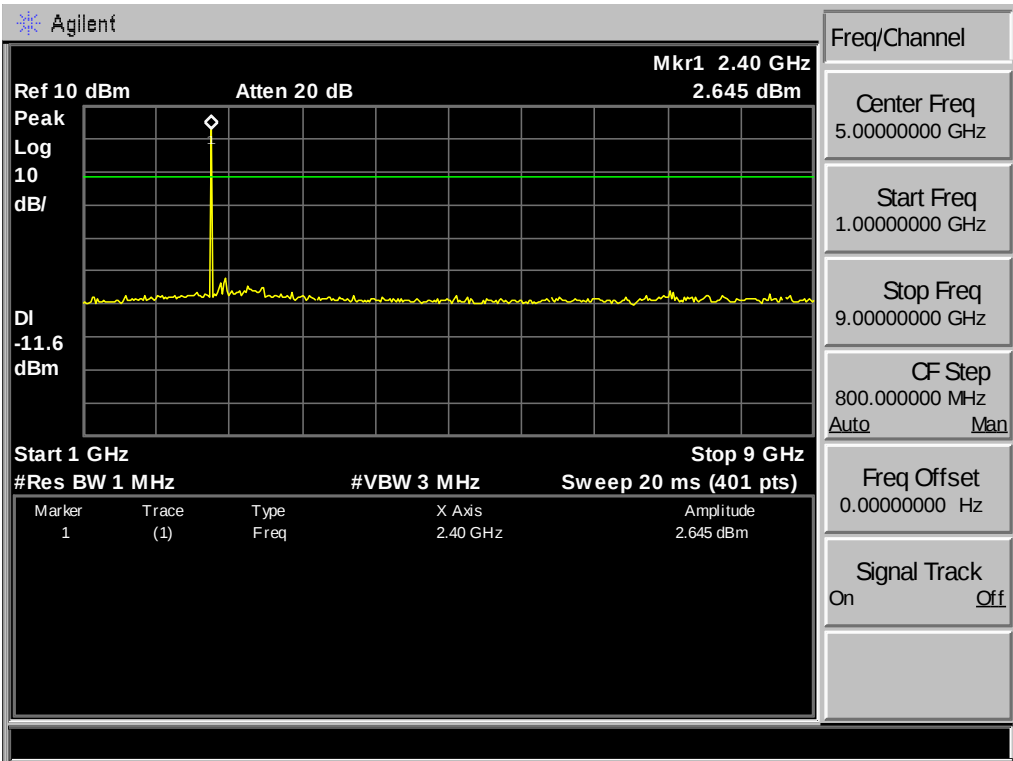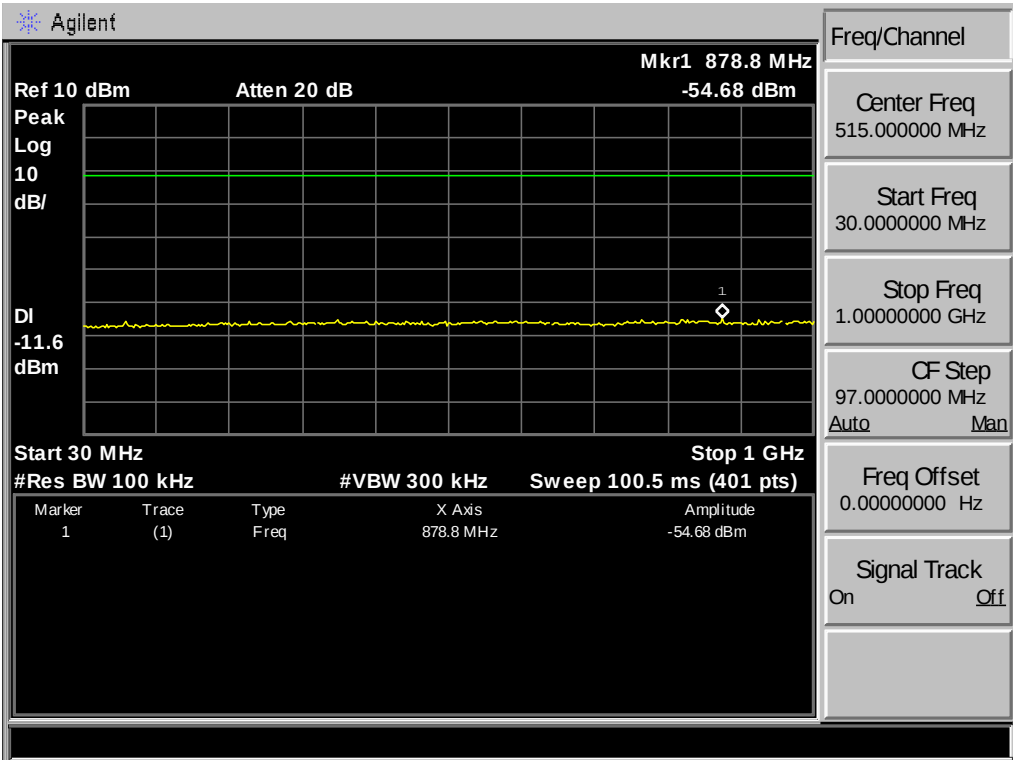

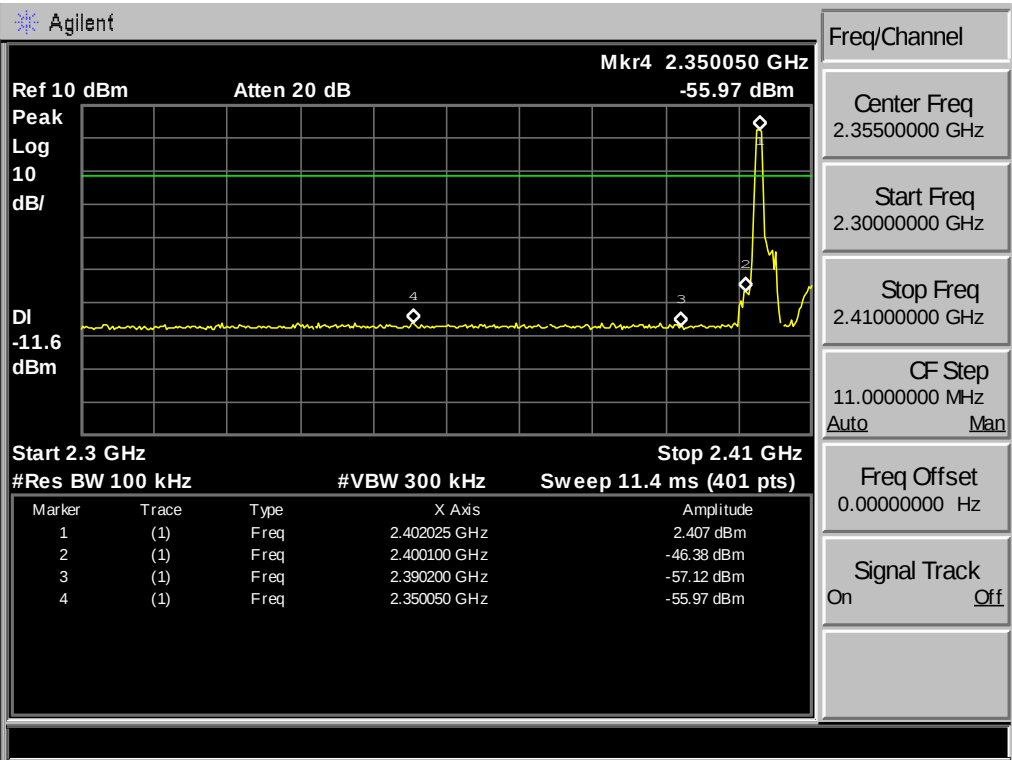
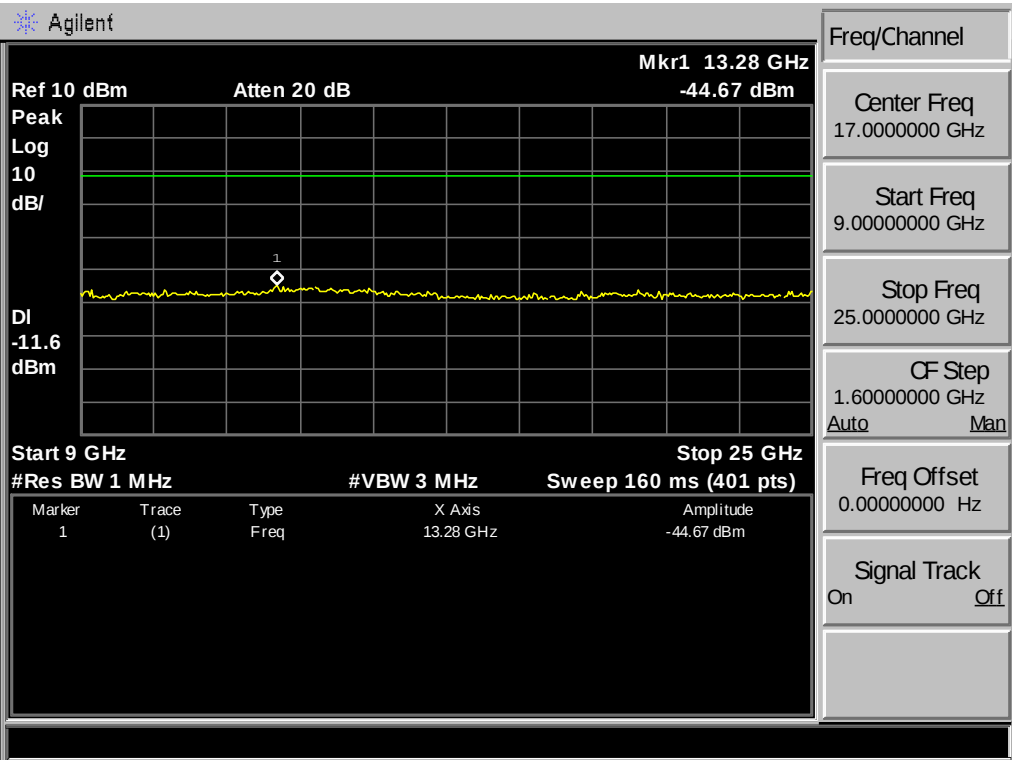




Test Mode: GFSK 2441MHz

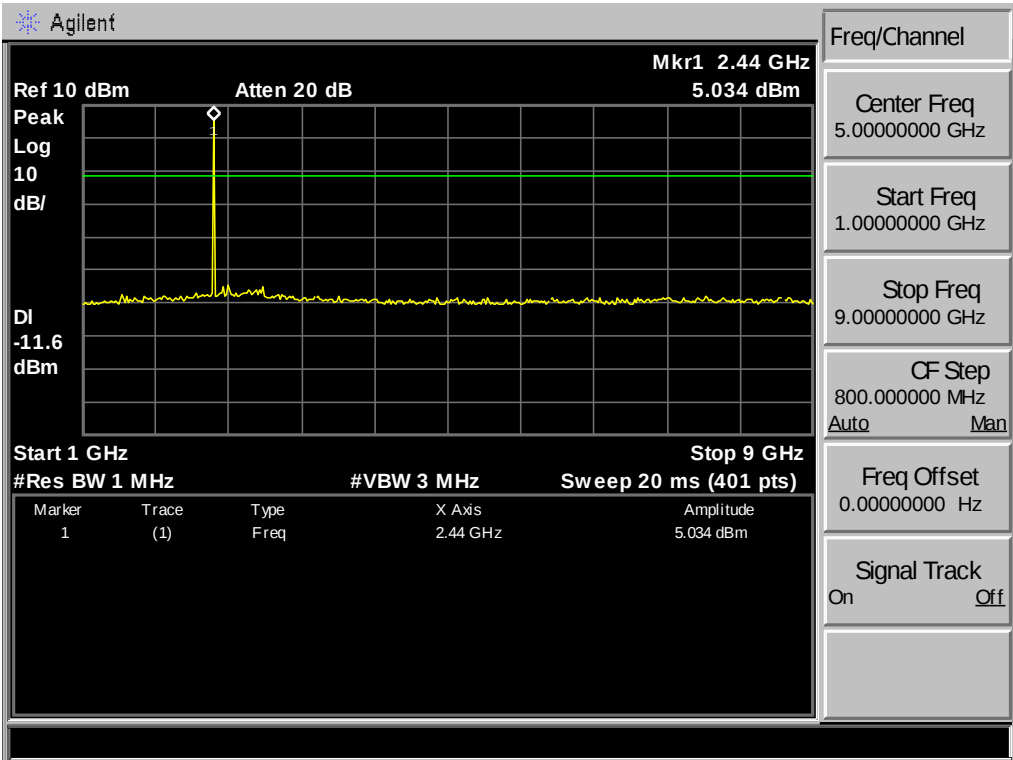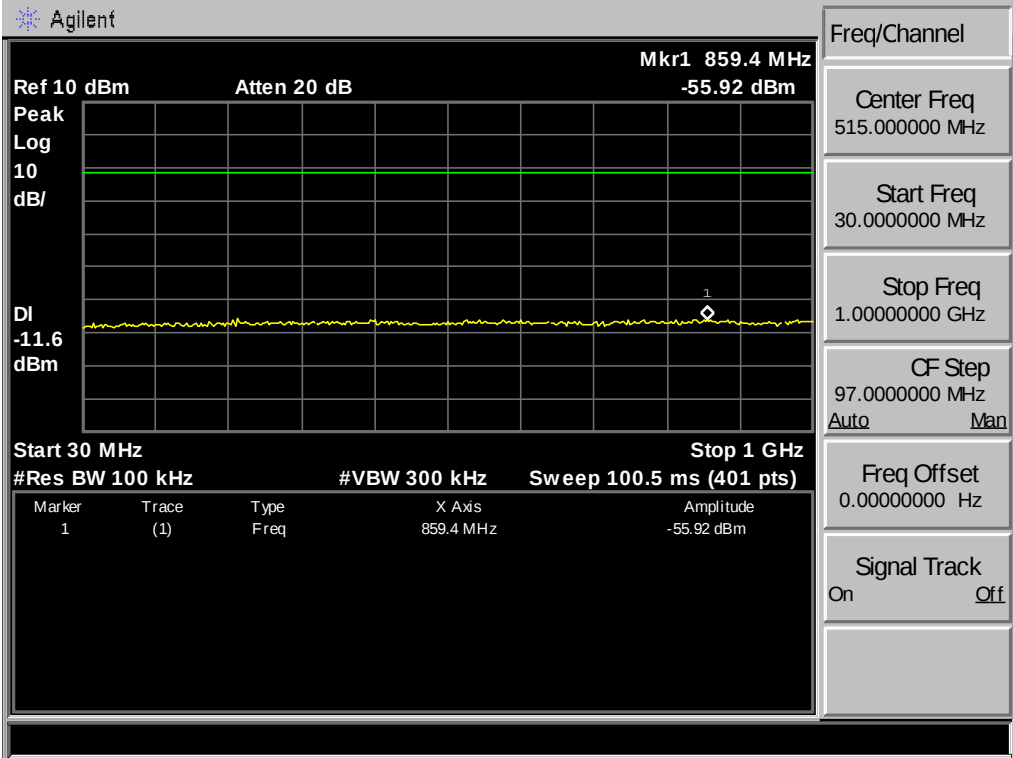


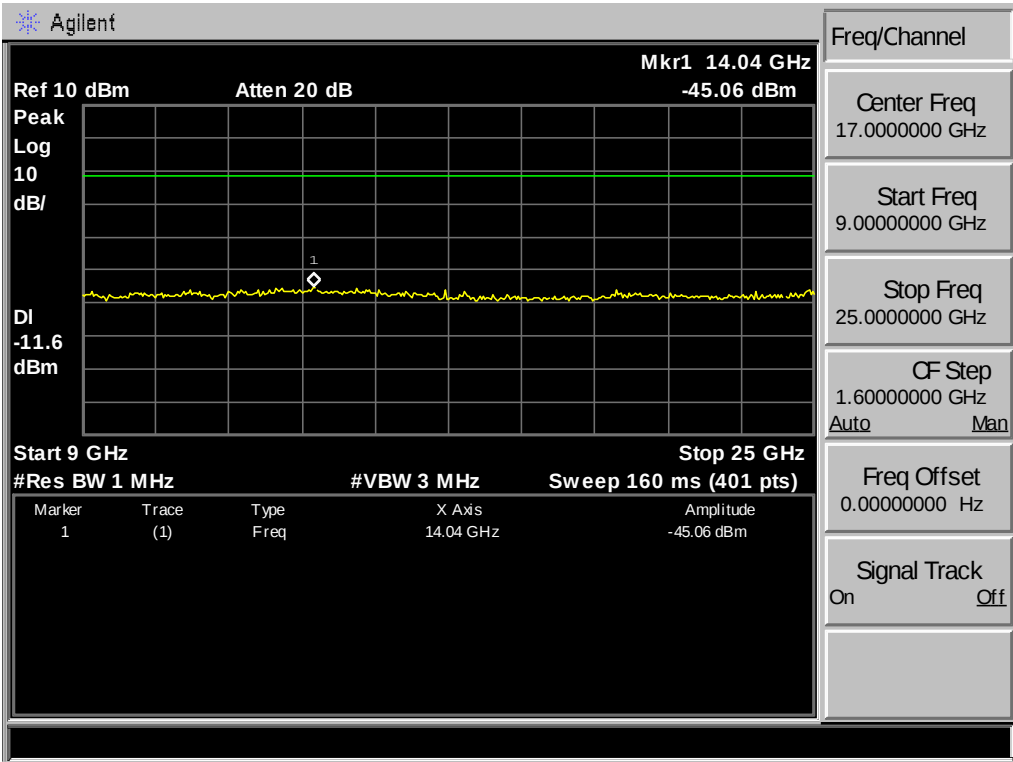




Test Mode: GFSK 2480MHz

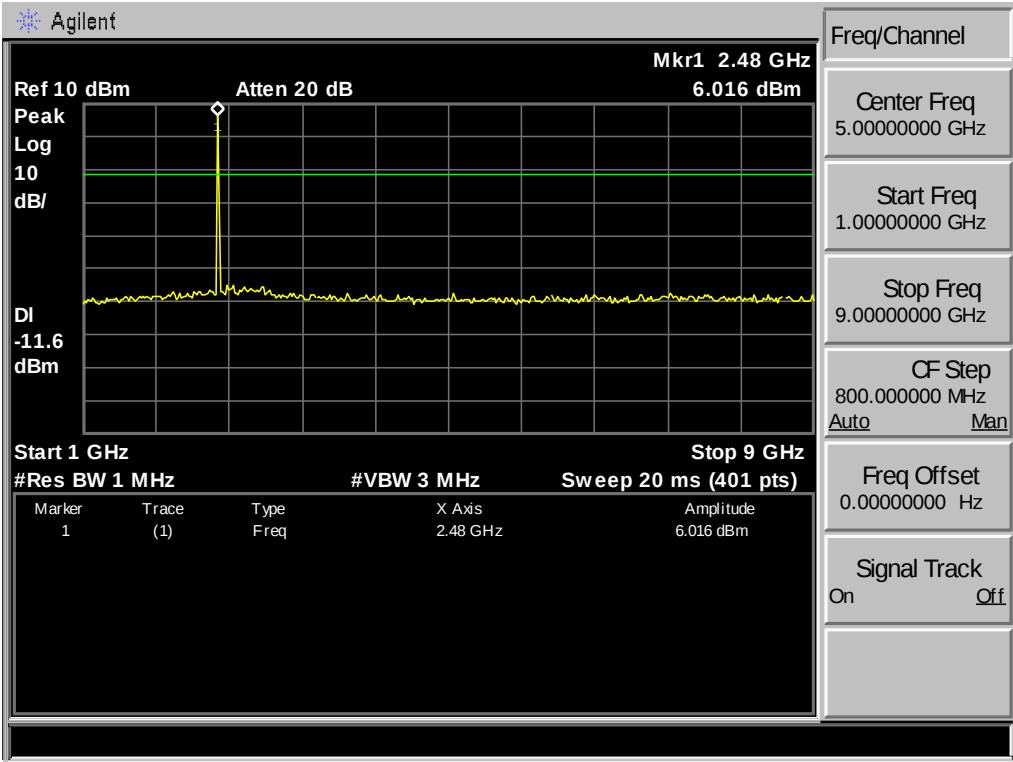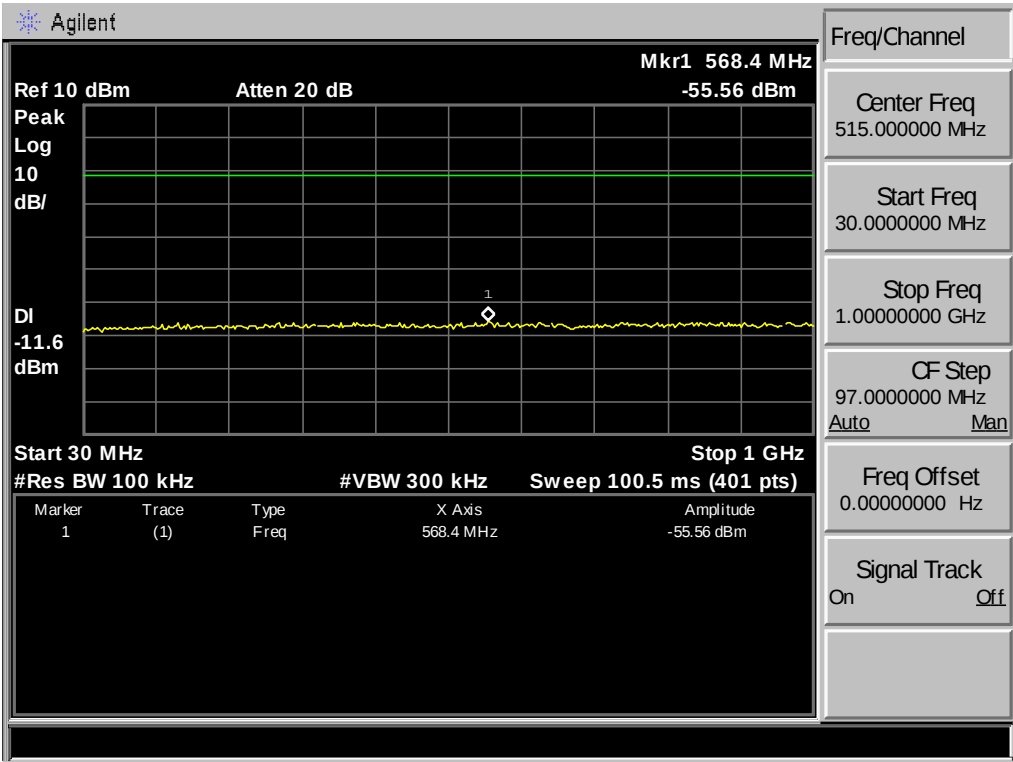

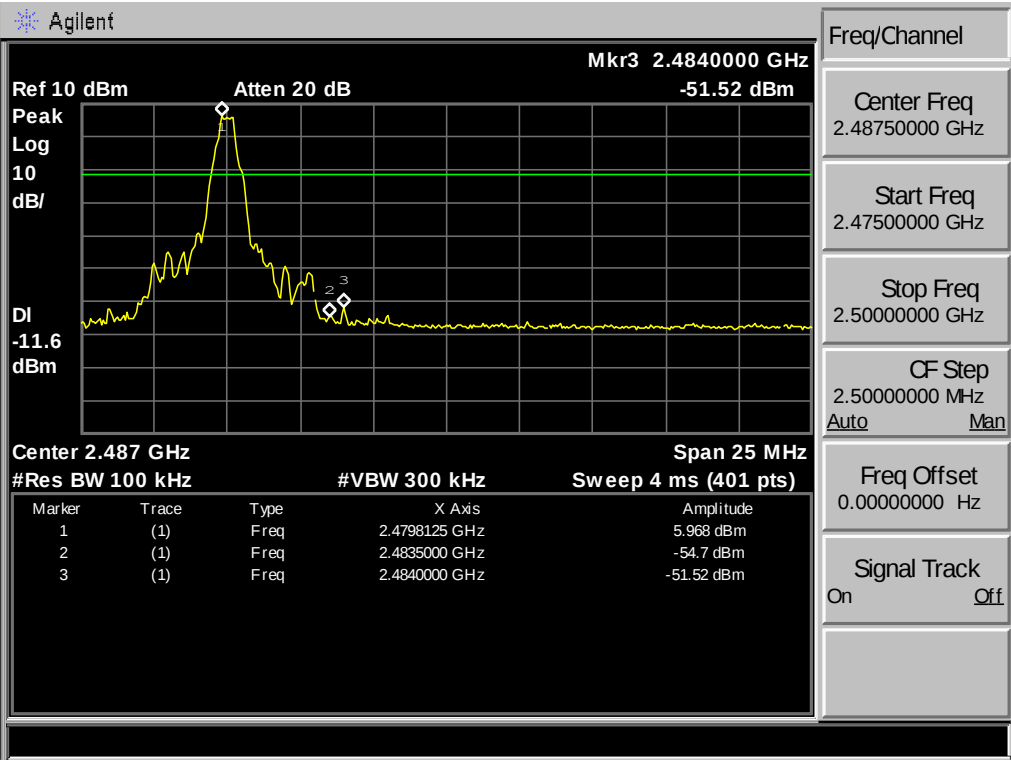
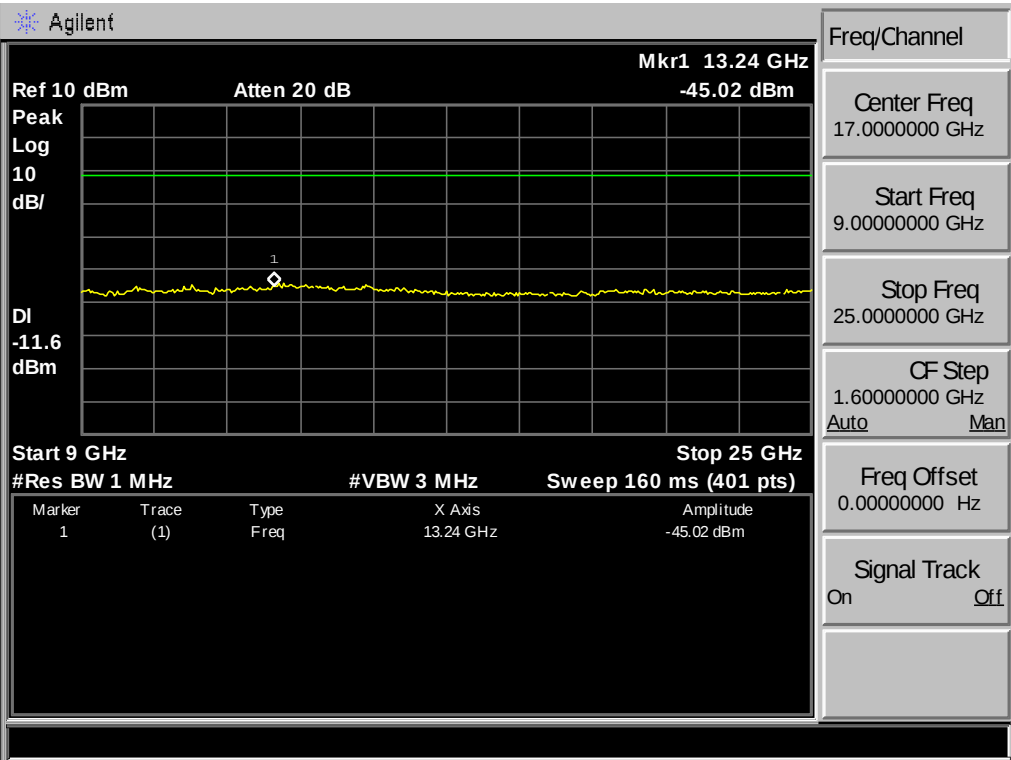



Test Mode: $\pi/4$ -DQPSK 2402MHz

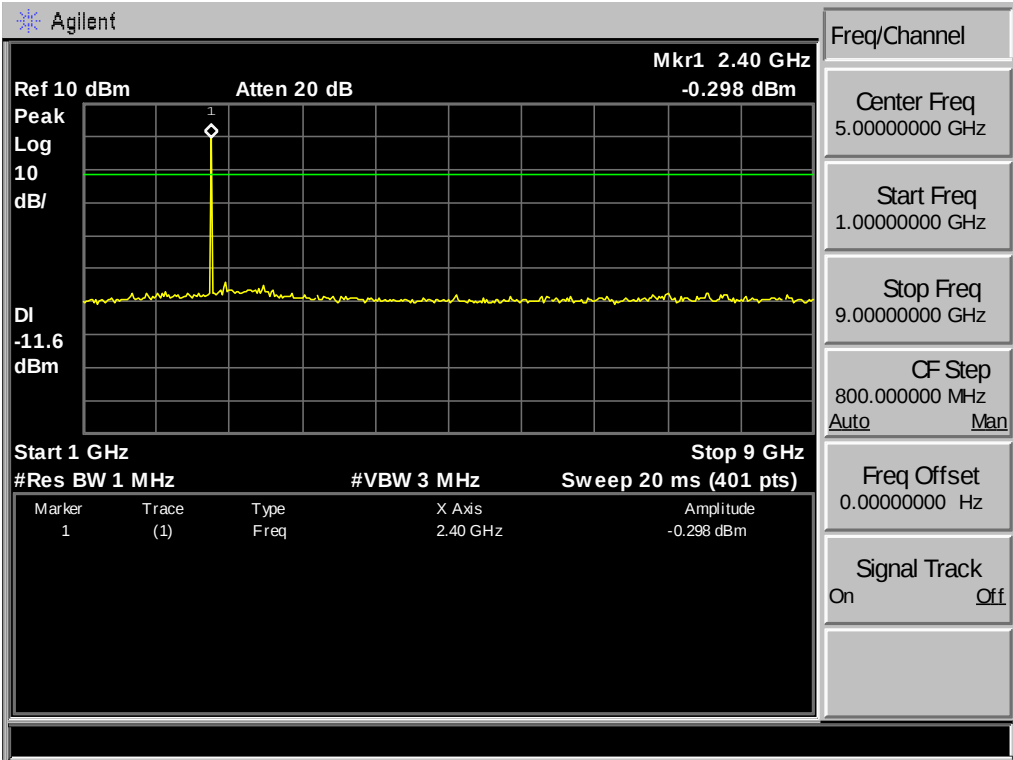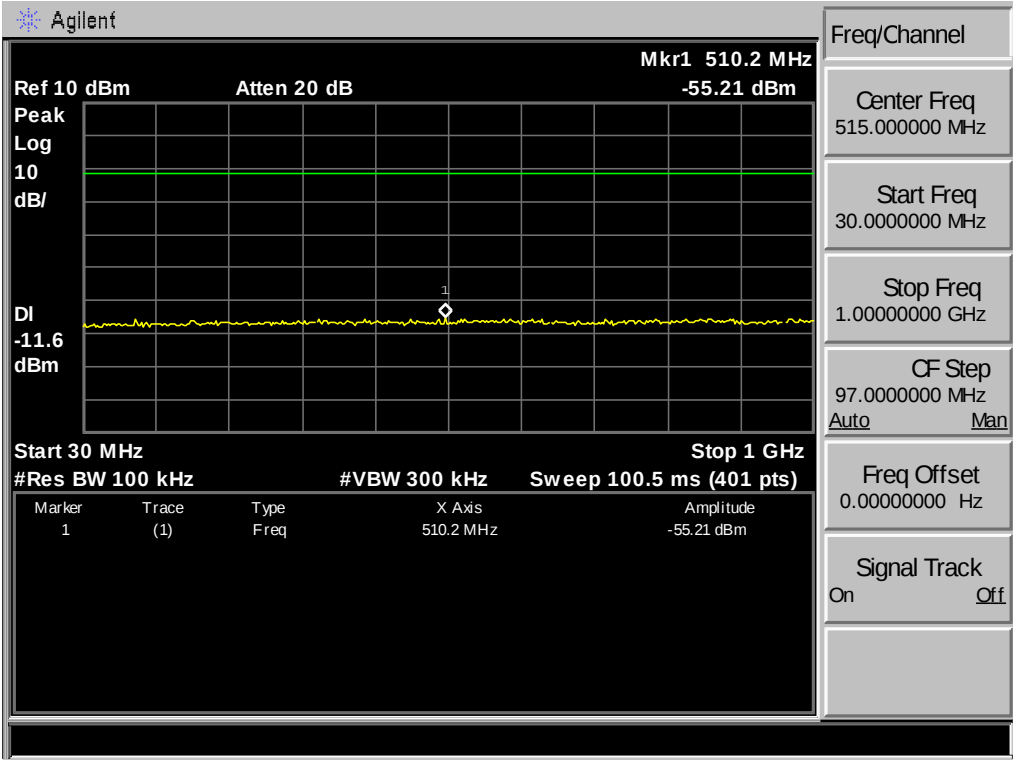

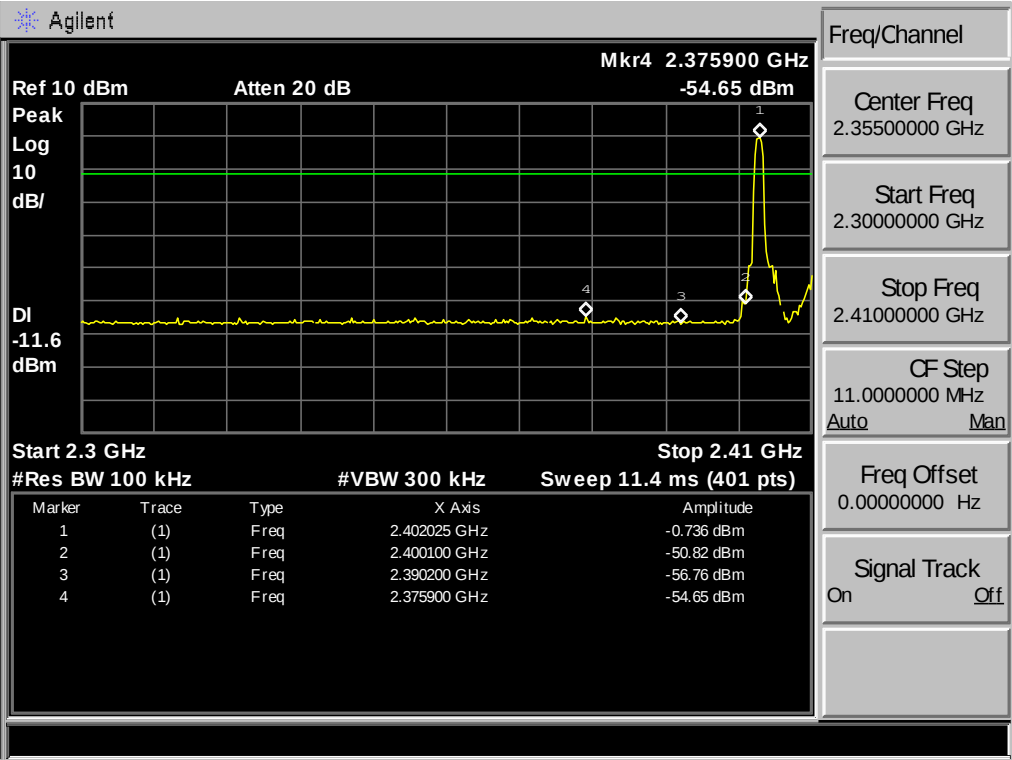
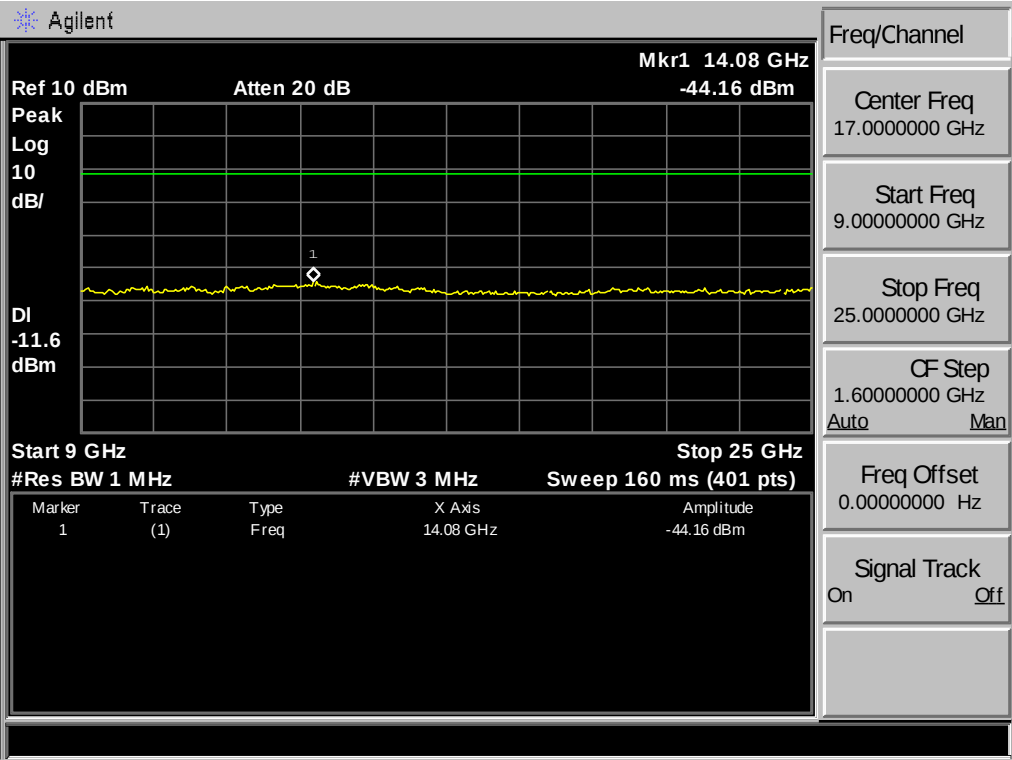




Test Mode: $\pi/4$ -DQPSK 2441MHz

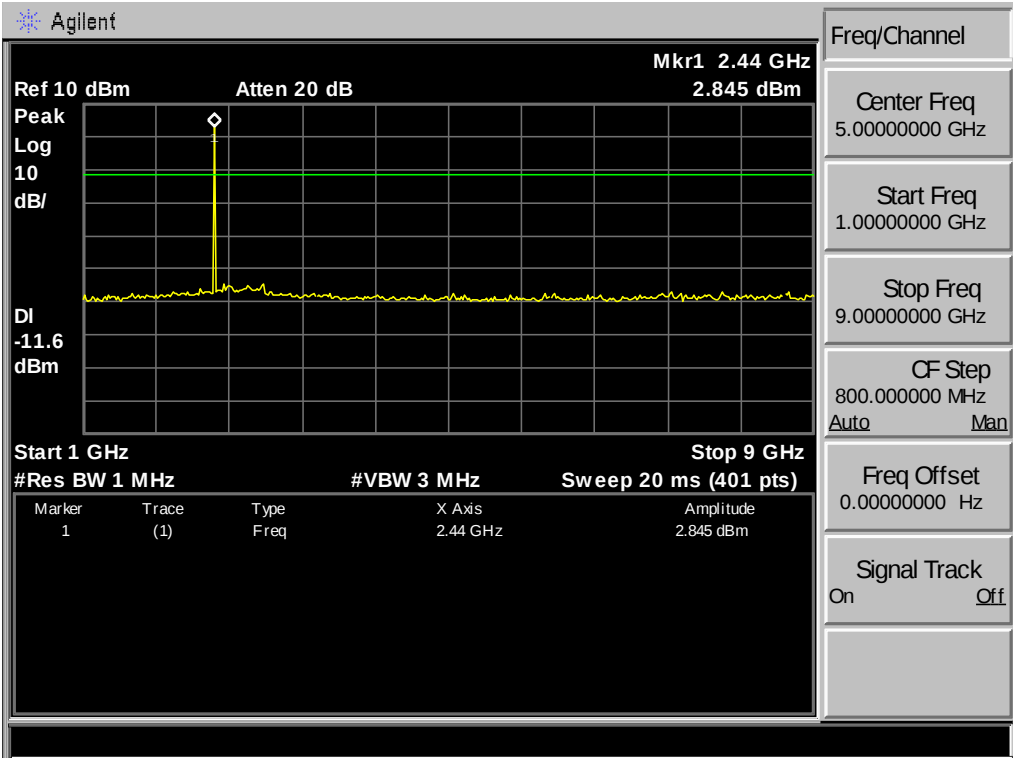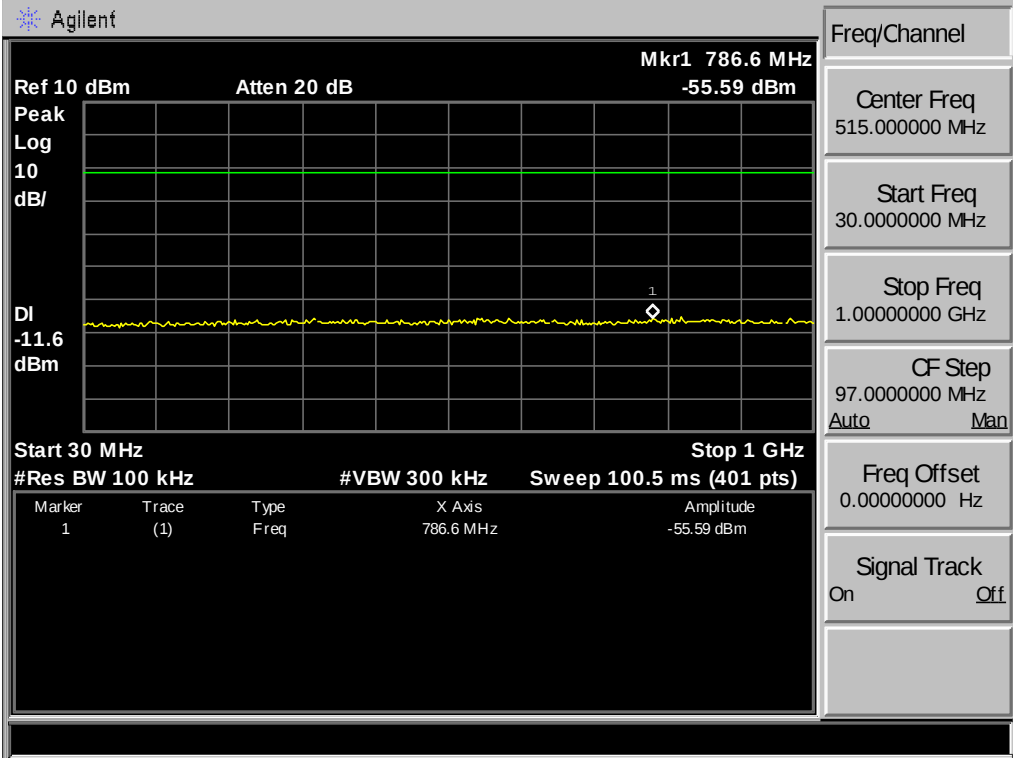


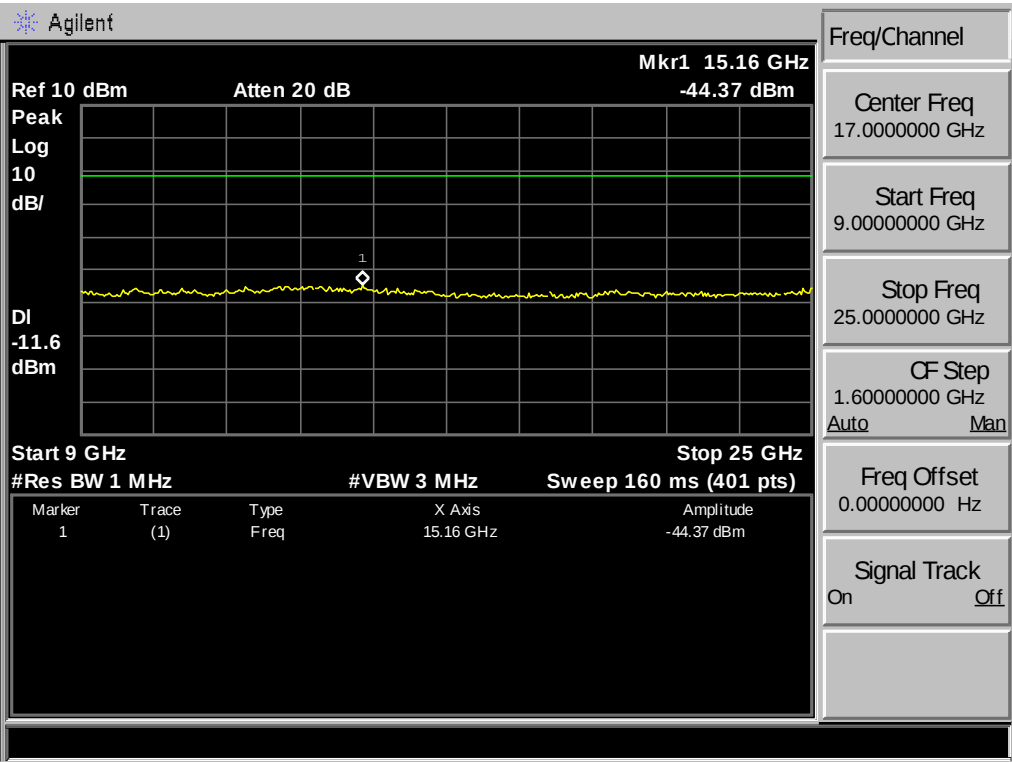




Test Mode: $\pi/4$ -DQPSK 2480MHz

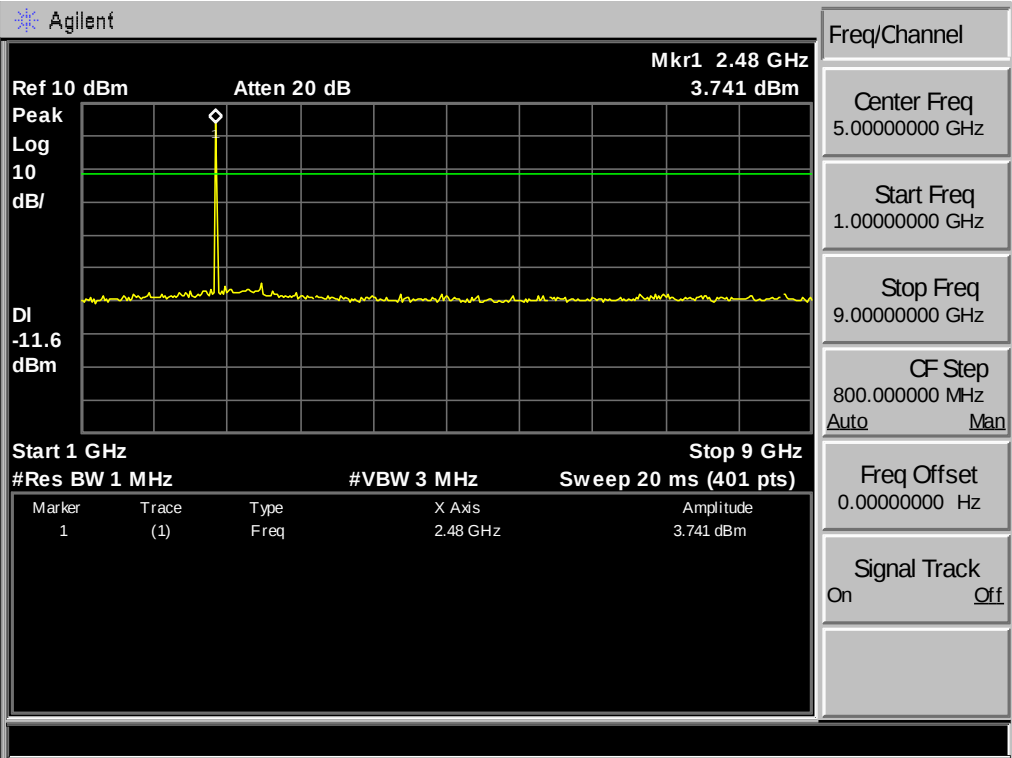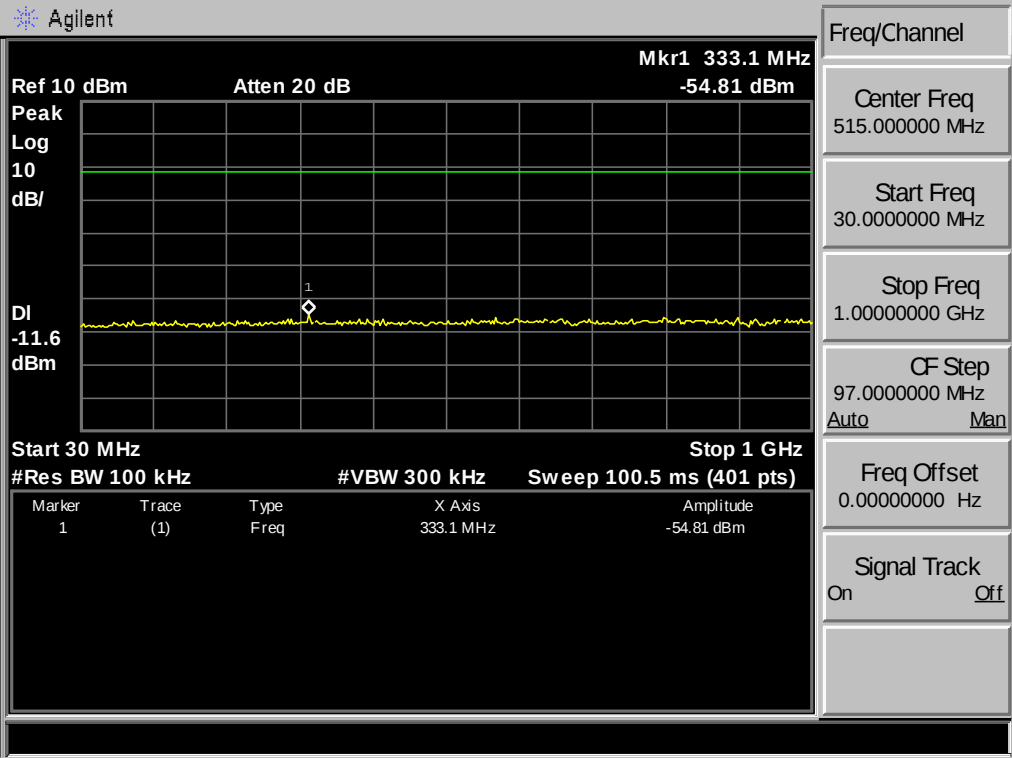

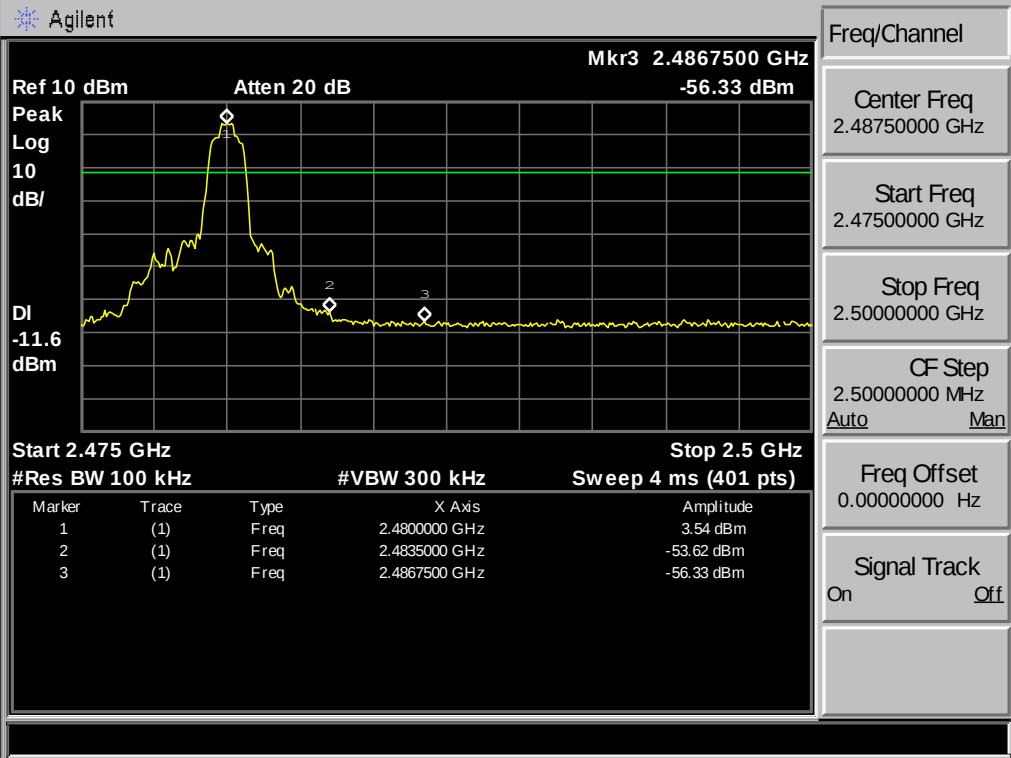
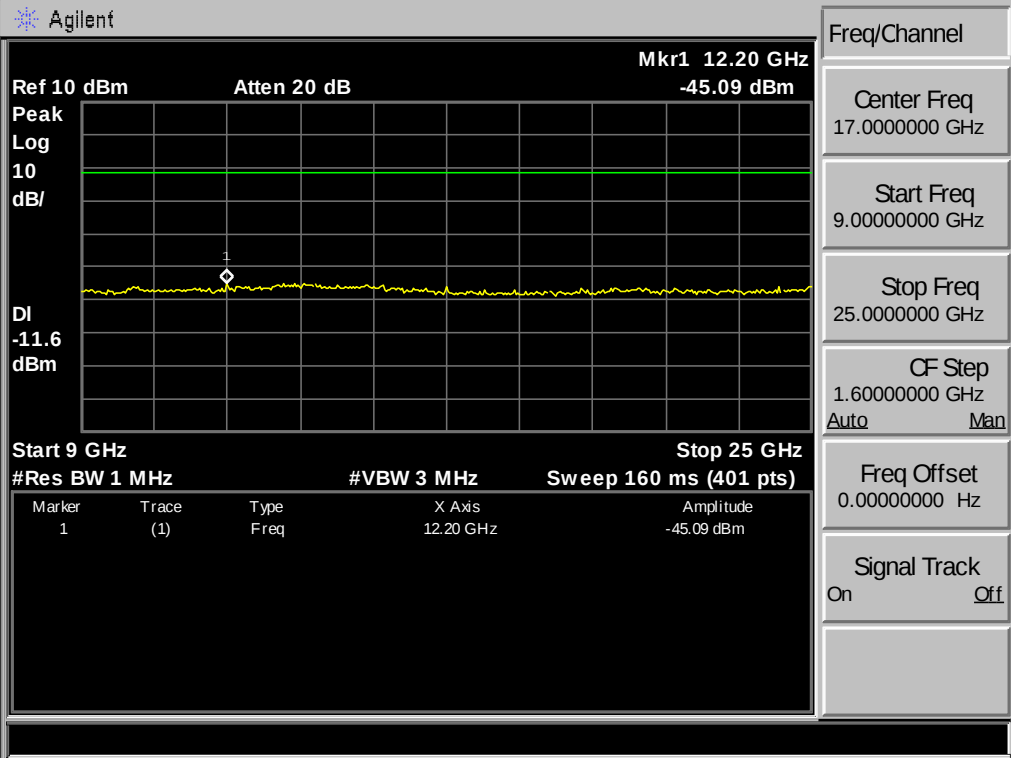



Test Mode: 8-DPSK 2402MHz

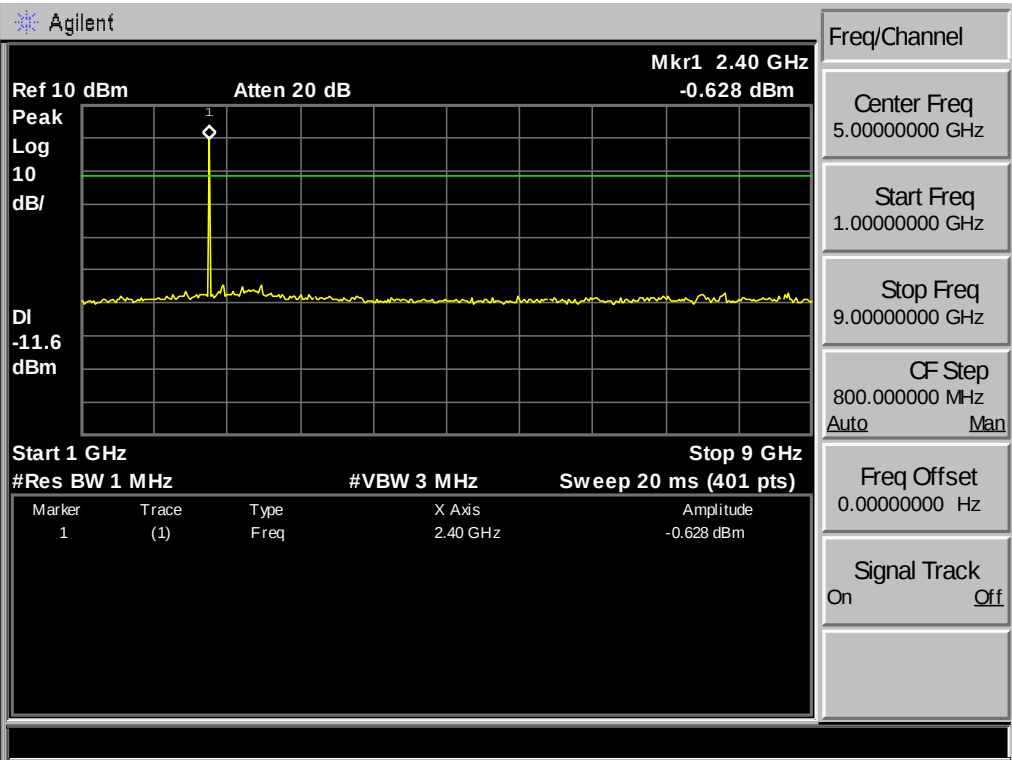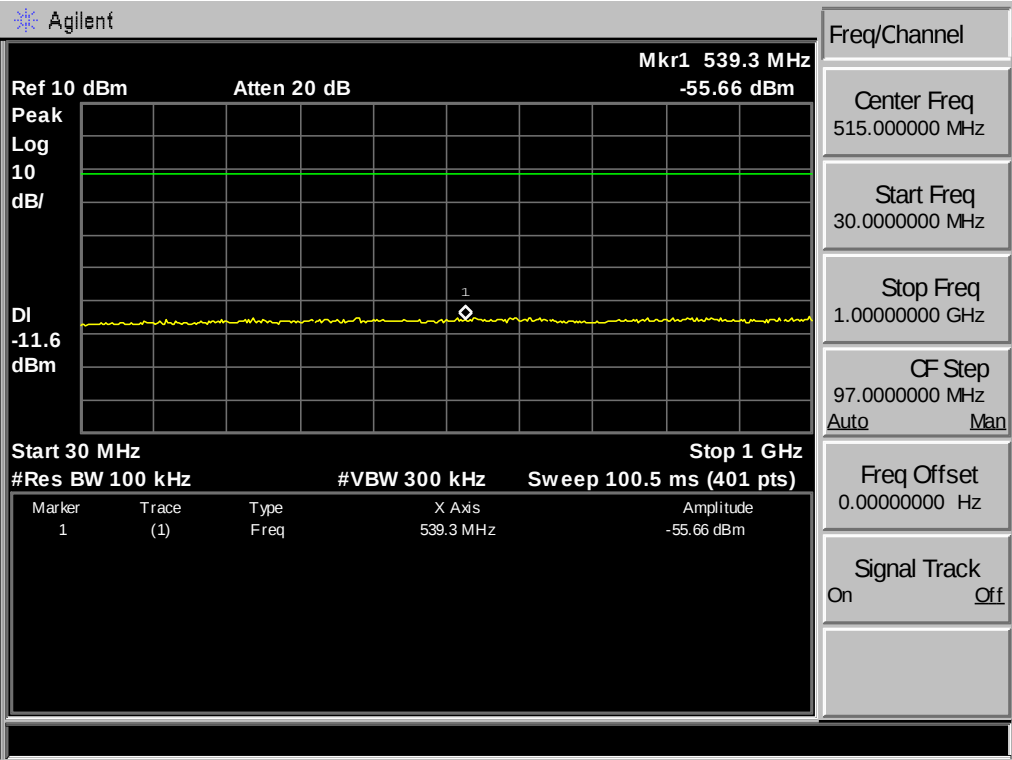

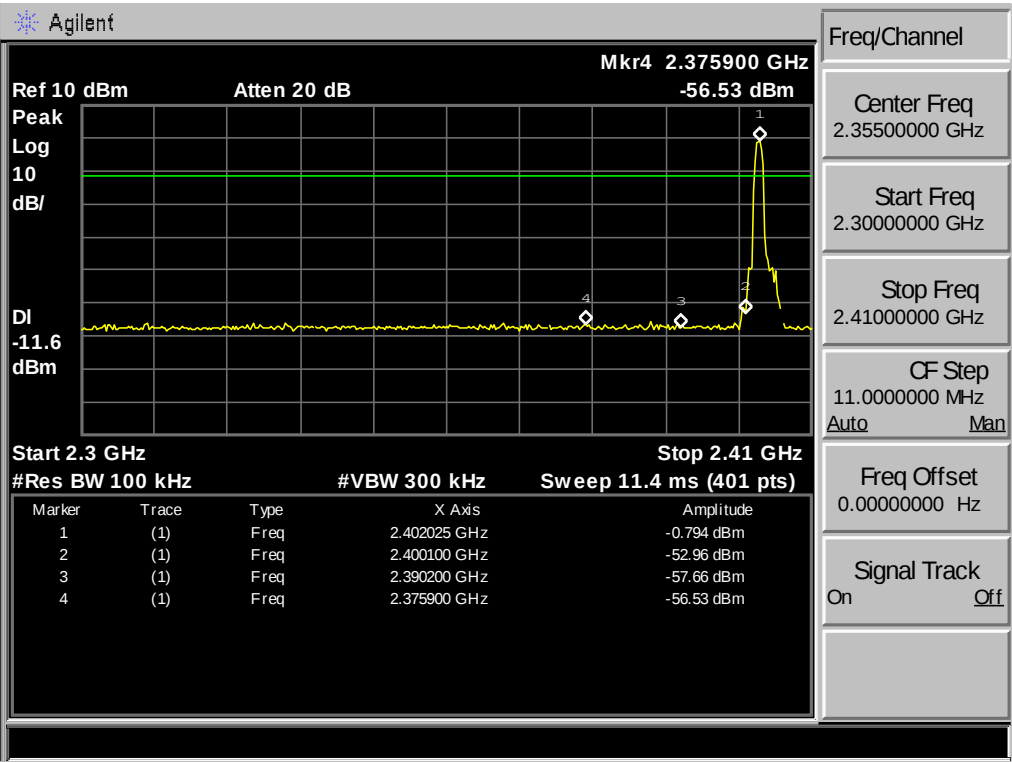
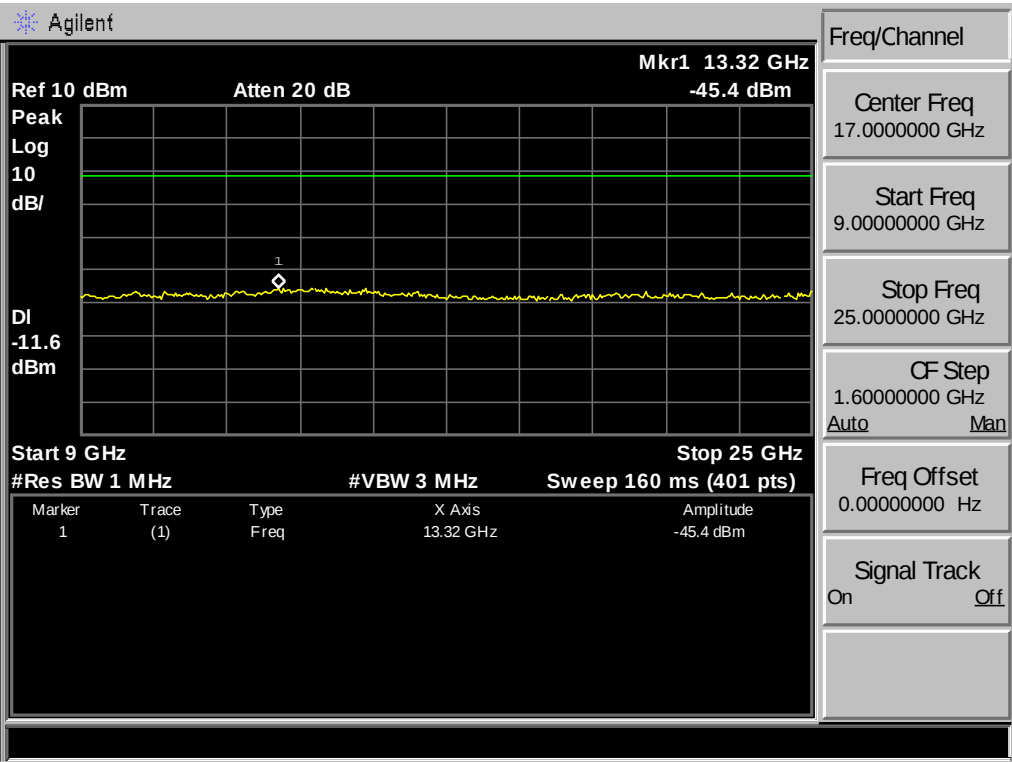




Test Mode: 8-DPSK 2441MHz

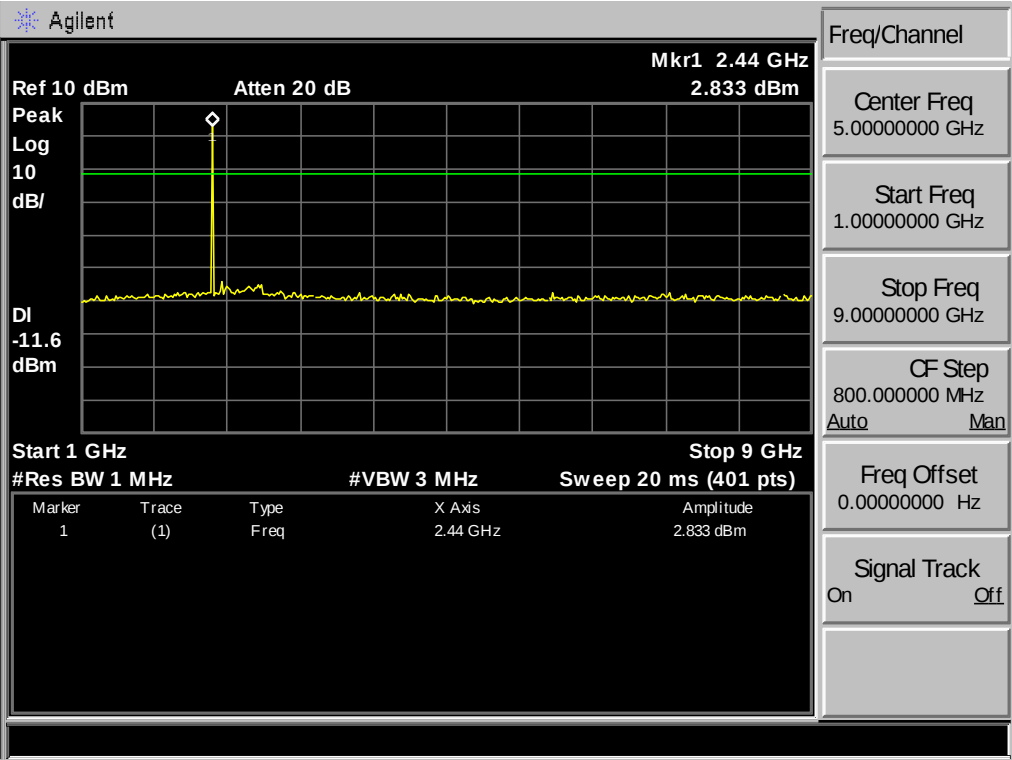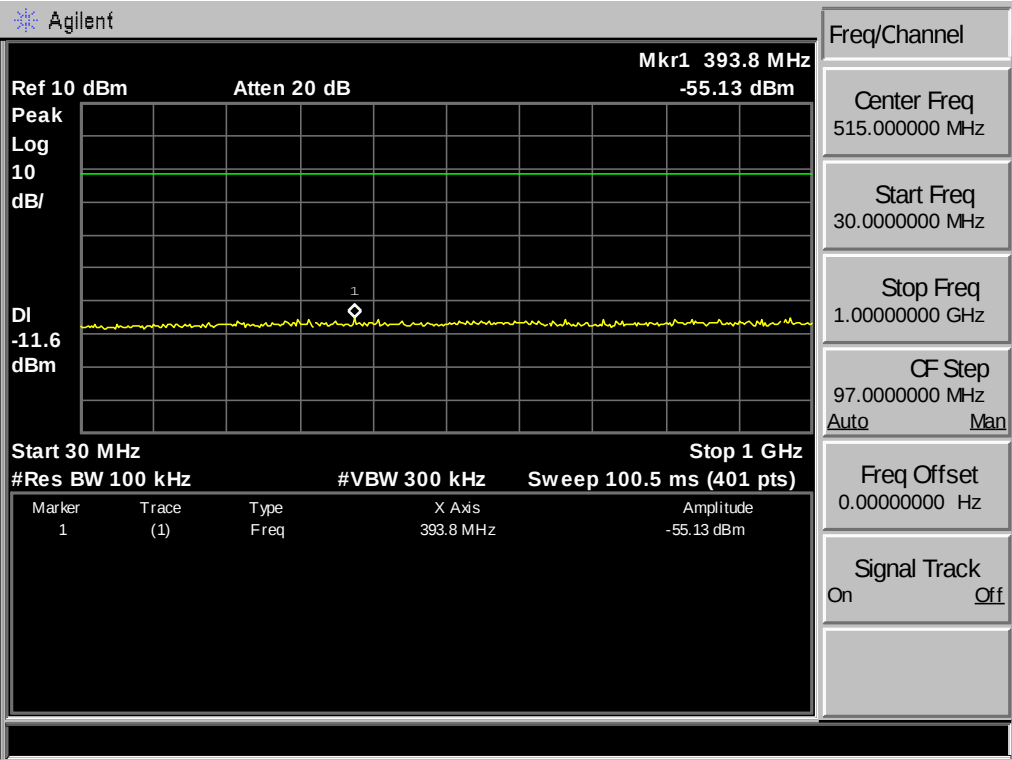

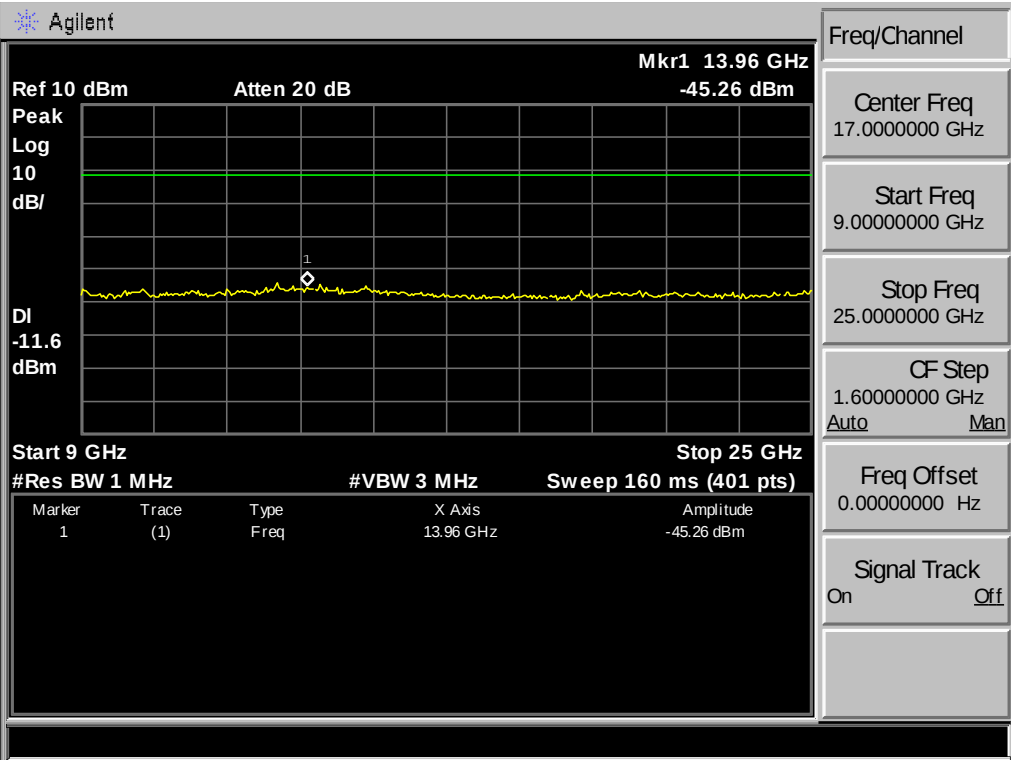

Test Mode: 8-DPSK 2480MHz

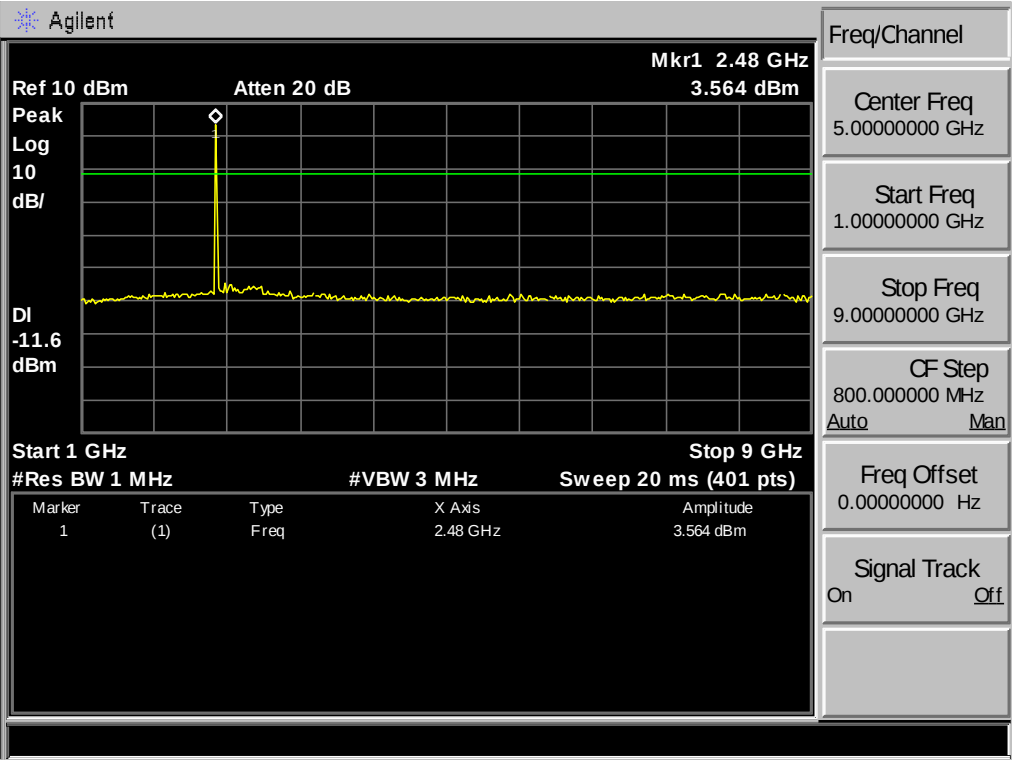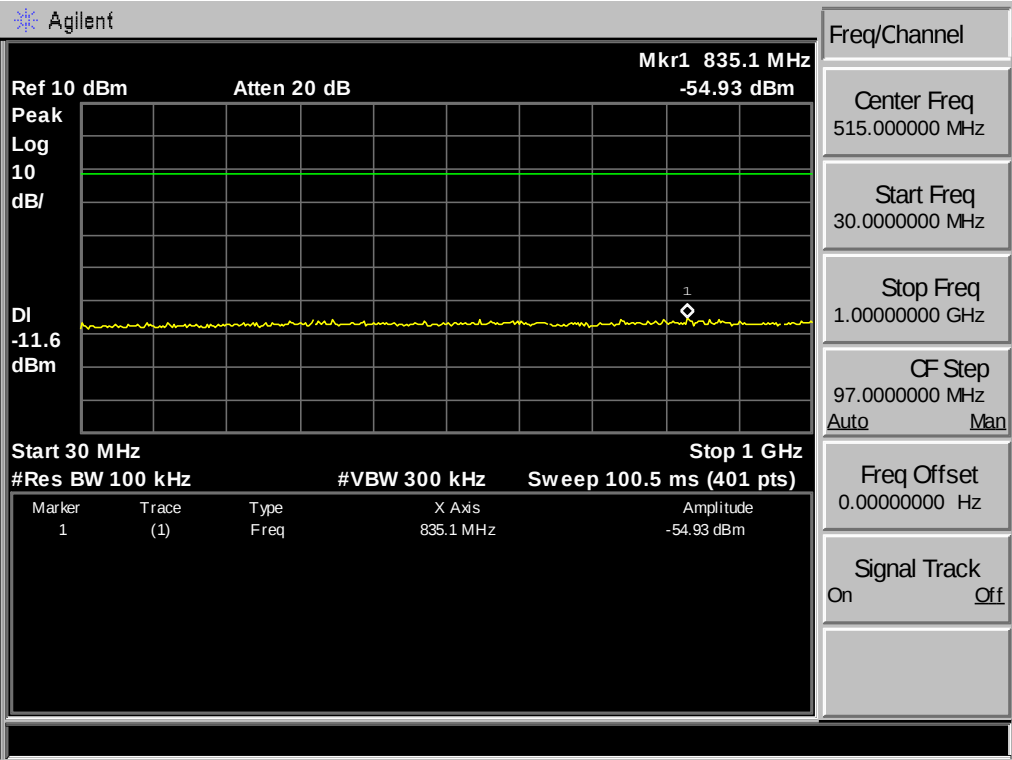

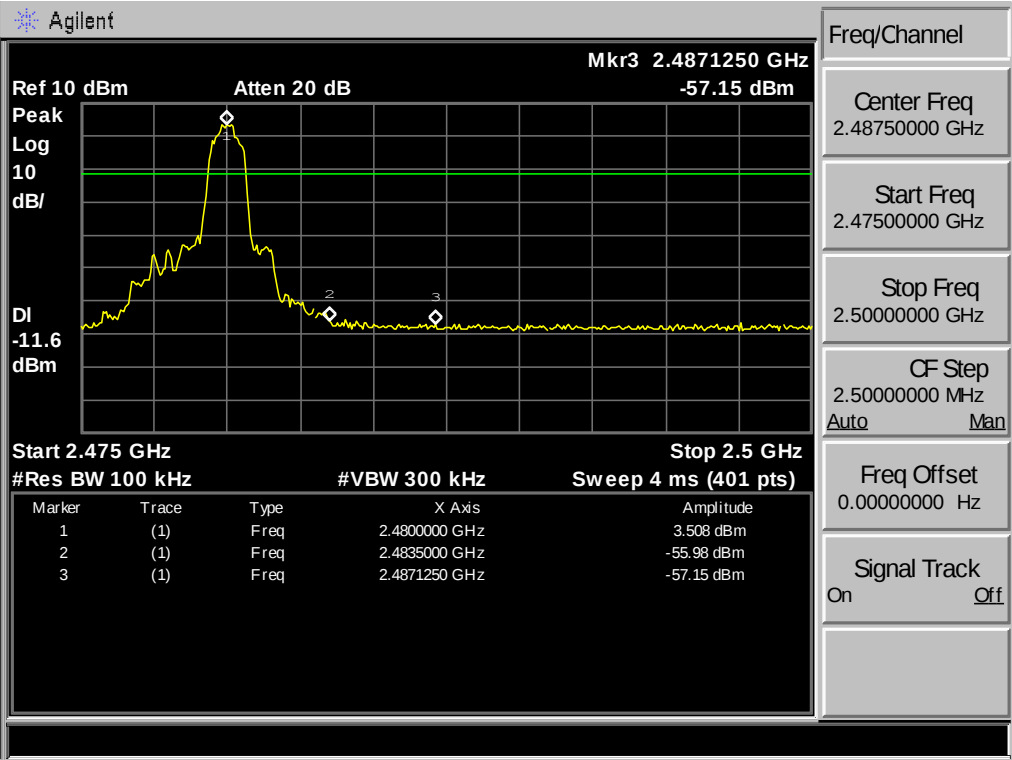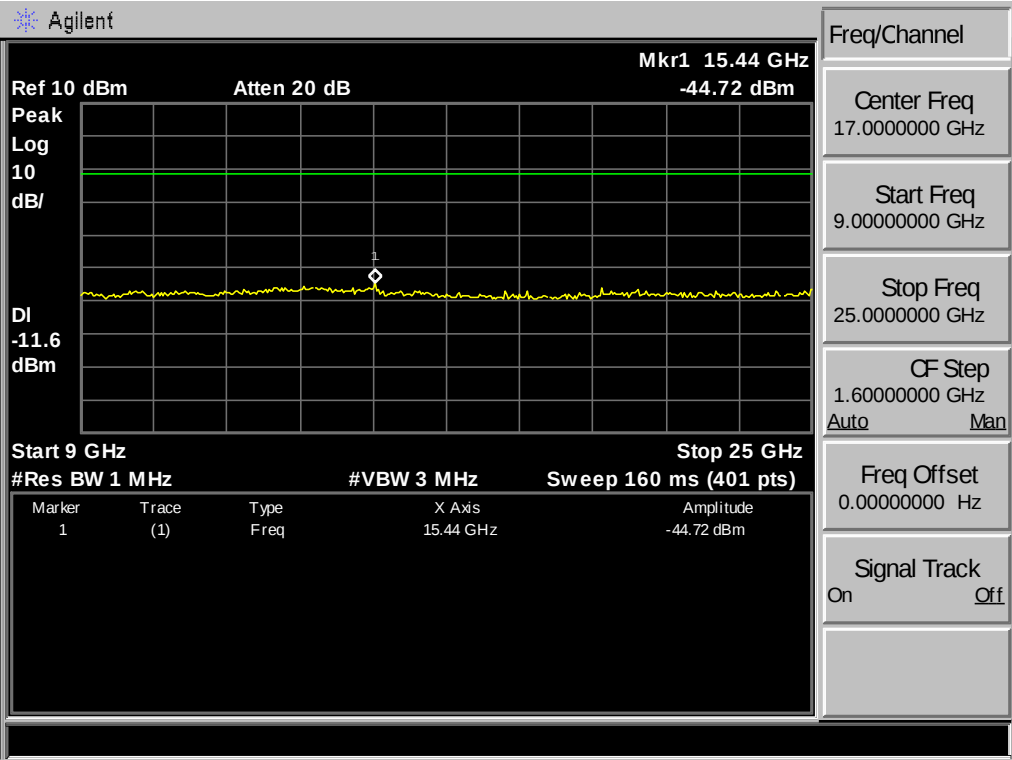

11. POWER LINE CONDUCTED EMISSIONS

11.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

11.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

11.3. Test Result

0.15MHz—30MHz Conducted emission Test result		
EUT: Portable Bluetooth Speaker M/N: DS1		
Power: DC 5V From PC Input AC 120V/60Hz DC 5V From PC Input AC 240V/60Hz		
Test date: 2016-03-21	Test site: 3m Chamber	Tested by: Tony.Tang
Test mode: Tx Mode		
Pass		


11.4. Test data

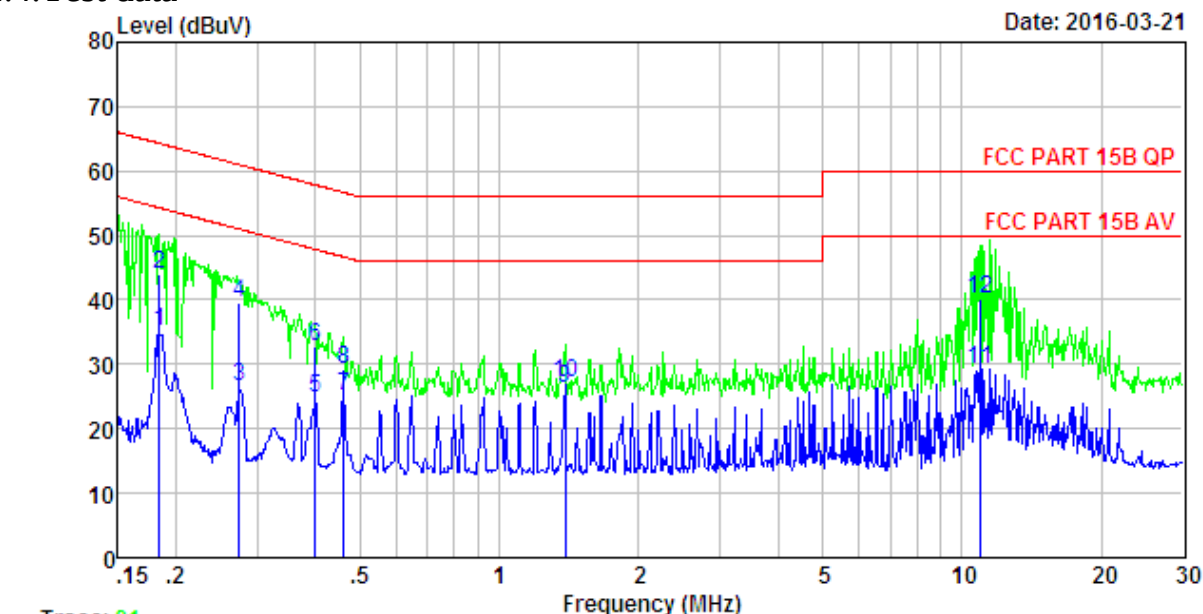

Trace: 81

Site no : 844 Shield Room Data no. : 82
 Env. / Ins. : Temp:25.3°C Humi:58% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : Portable Bluetooth Speaker
 Power : DC 5V From PC Input AC 240V/60Hz
 M/N : DS1
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.184	9.61	9.80	15.67	35.08	54.28	19.20	Average
2	0.184	9.61	9.80	24.67	44.08	64.28	20.20	QP
3	0.274	9.61	9.83	7.09	26.53	50.98	24.45	Average
4	0.274	9.61	9.83	20.09	39.53	60.98	21.45	QP
5	0.400	9.61	9.82	5.31	24.74	47.86	23.12	Average
6	0.400	9.61	9.82	13.31	32.74	57.86	25.12	QP
7	0.461	9.61	9.81	5.80	25.22	46.67	21.45	Average
8	0.461	9.61	9.81	9.80	29.22	56.67	27.45	QP
9	1.388	9.63	9.82	6.70	26.15	46.00	19.85	Average
10	1.388	9.63	9.82	7.70	27.15	56.00	28.85	QP
11	10.963	9.66	9.88	9.60	29.14	50.00	20.86	Average
12	10.963	9.66	9.88	20.60	40.14	60.00	19.86	QP

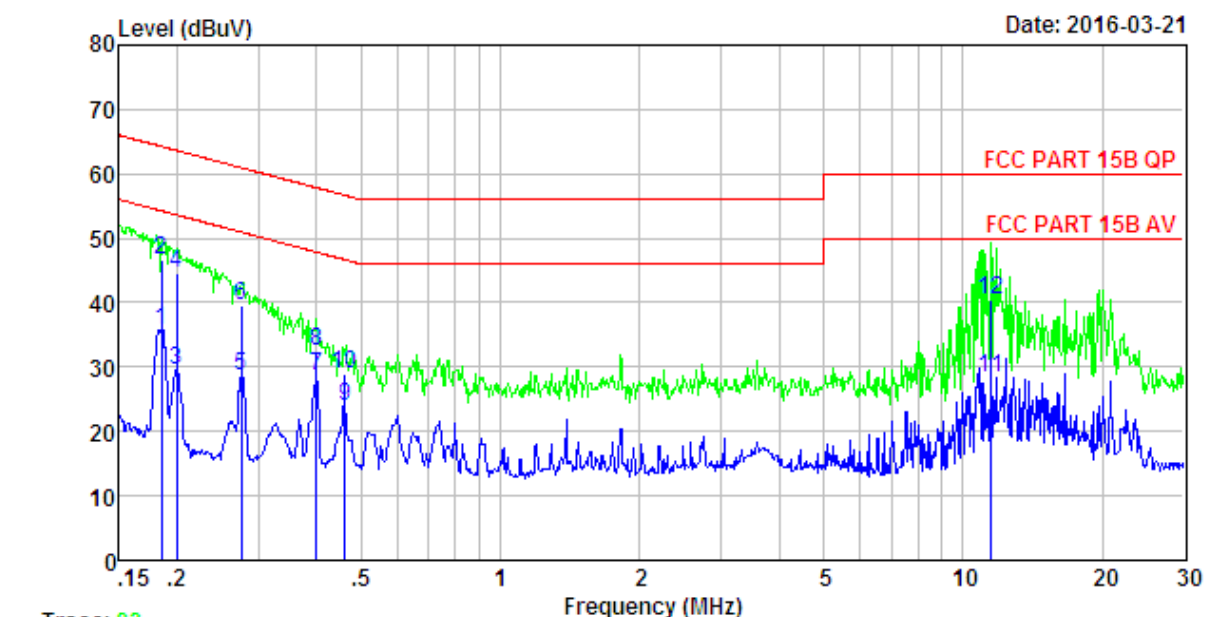

Trace: 83

Site no : 844 Shield Room Data no. : 84
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : Portable Bluetooth Speaker
 Power : DC 5V From PC Input AC 240V/60Hz
 M/N : DS1
 Test Mode : TX Mode


	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.185	9.56	9.80	16.37	35.73	54.24	18.51	Average
2	0.185	9.56	9.80	27.37	46.73	64.24	17.51	QP
3	0.200	9.60	9.80	10.13	29.53	53.62	24.09	Average
4	0.200	9.60	9.80	25.13	44.53	63.62	19.09	QP
5	0.276	9.60	9.83	9.22	28.65	50.94	22.29	Average
6	0.276	9.60	9.83	20.22	39.65	60.94	21.29	QP
7	0.400	9.59	9.82	9.11	28.52	47.86	19.34	Average
8	0.400	9.59	9.82	13.11	32.52	57.86	25.34	QP
9	0.461	9.59	9.81	4.64	24.04	46.67	22.63	Average
10	0.461	9.59	9.81	9.64	29.04	56.67	27.63	QP
11	11.438	9.71	9.89	8.86	28.46	50.00	21.54	Average
12	11.438	9.71	9.89	20.86	40.46	60.00	19.54	QP

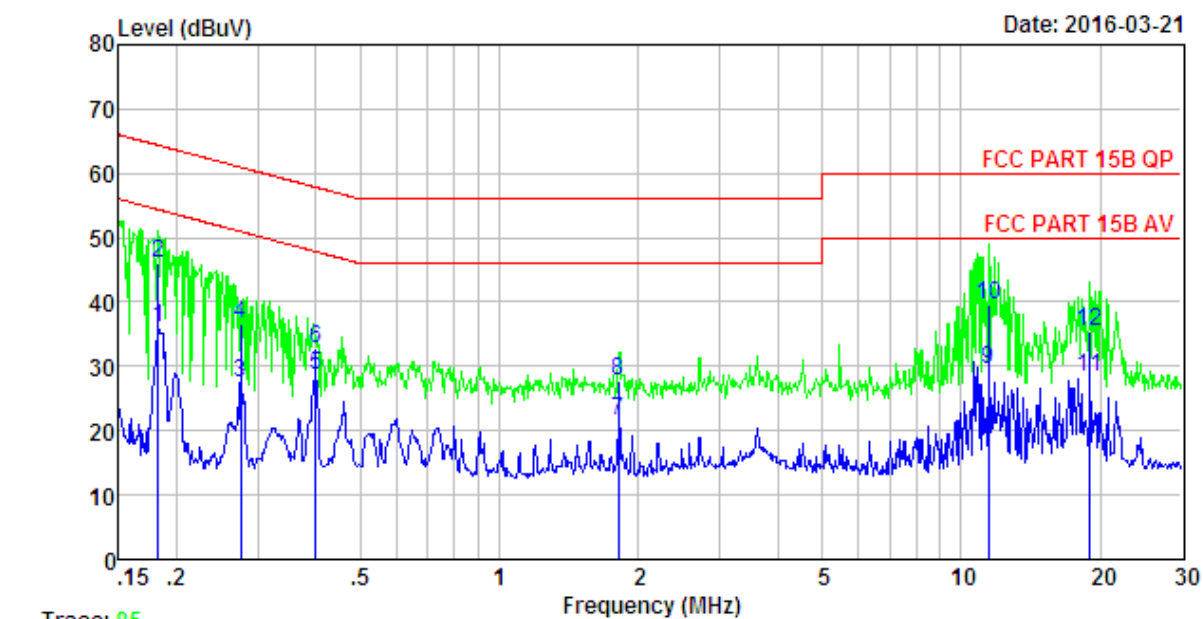

Trace: 85

Site no : 844 Shield Room Data no. : 86
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Tony
 EUT : Portable Bluetooth Speaker
 Power : DC 5V From PC Input AC 120V/60Hz
 M/N : DS1
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.182	9.56	9.80	16.64	36.00	54.37	18.37	Average
2	0.182	9.56	9.80	26.64	46.00	64.37	18.37	QP
3	0.276	9.60	9.83	8.08	27.51	50.94	23.43	Average
4	0.276	9.60	9.83	17.08	36.51	60.94	24.43	QP
5	0.400	9.59	9.82	9.24	28.65	47.86	19.21	Average
6	0.400	9.59	9.82	13.24	32.65	57.86	25.21	QP
7	1.810	9.62	9.82	2.21	21.65	46.00	24.35	Average
8	1.810	9.62	9.82	8.21	27.65	56.00	28.35	QP
9	11.438	9.71	9.89	9.87	29.47	50.00	20.53	Average
10	11.438	9.71	9.89	19.87	39.47	60.00	20.53	QP
11	19.021	9.84	9.98	8.59	28.41	50.00	21.59	Average
12	19.021	9.84	9.98	15.59	35.41	60.00	24.59	QP

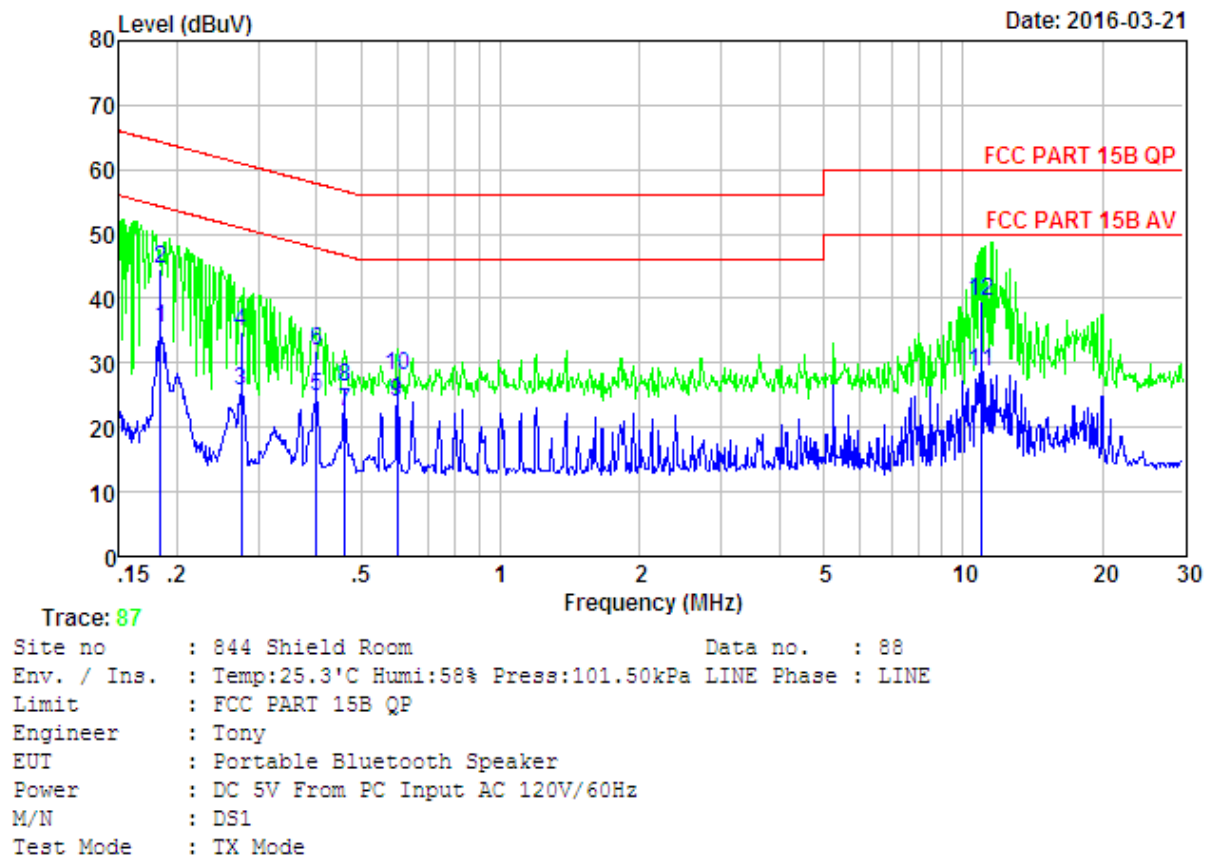

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.184	9.61	9.80	16.02	35.43	54.28	18.85	Average
2	0.184	9.61	9.80	25.02	44.43	64.28	19.85	QP
3	0.276	9.61	9.83	6.34	25.78	50.94	25.16	Average
4	0.276	9.61	9.83	15.34	34.78	60.94	26.16	QP
5	0.400	9.61	9.82	5.40	24.83	47.86	23.03	Average
6	0.400	9.61	9.82	12.40	31.83	57.86	26.03	QP
7	0.461	9.61	9.81	2.88	22.30	46.67	24.37	Average
8	0.461	9.61	9.81	6.88	26.30	56.67	30.37	QP
9	0.598	9.60	9.82	4.52	23.94	46.00	22.06	Average
10	0.598	9.60	9.82	8.52	27.94	56.00	28.06	QP
11	10.963	9.66	9.88	9.02	28.56	50.00	21.44	Average
12	10.963	9.66	9.88	20.02	39.56	60.00	20.44	QP

12. ANTENNA REQUIREMENTS

12.1. Limit



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Result


The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

13. TEST SETUP PHOTO


Conducted Test

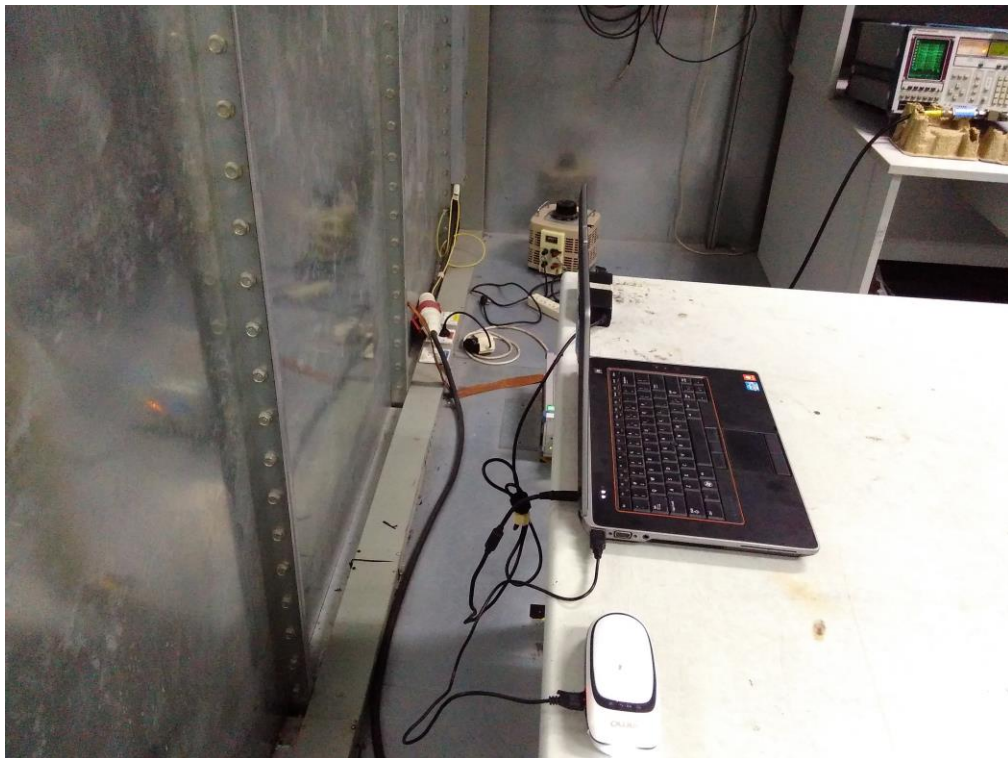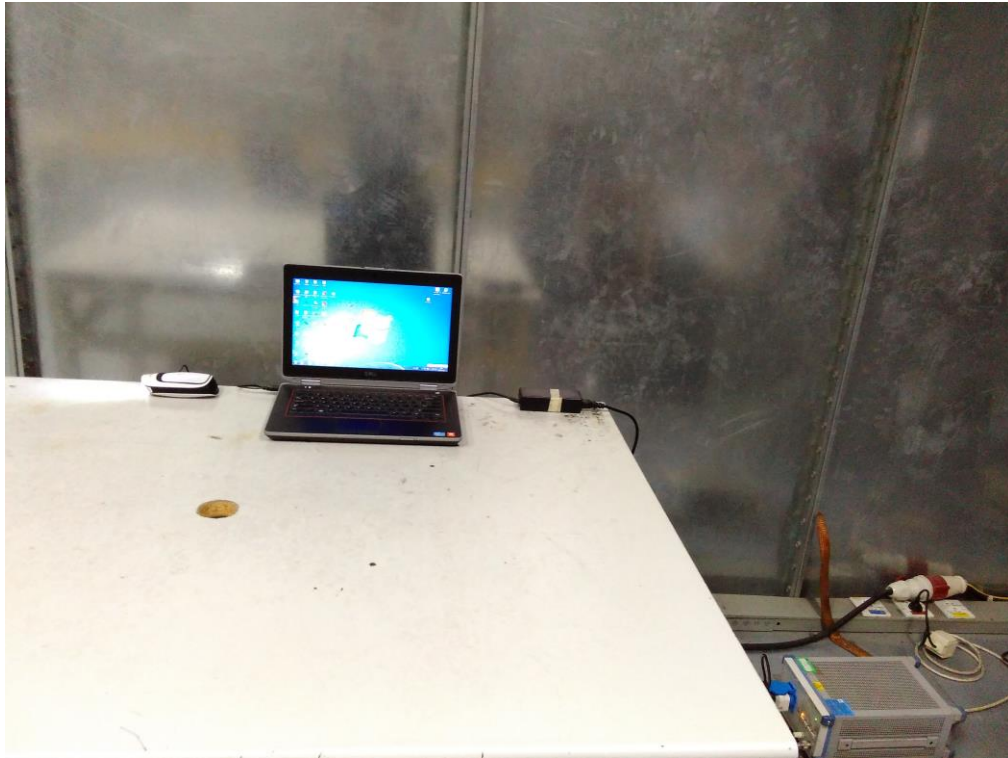

Radiated Test (30-1000 MHz)

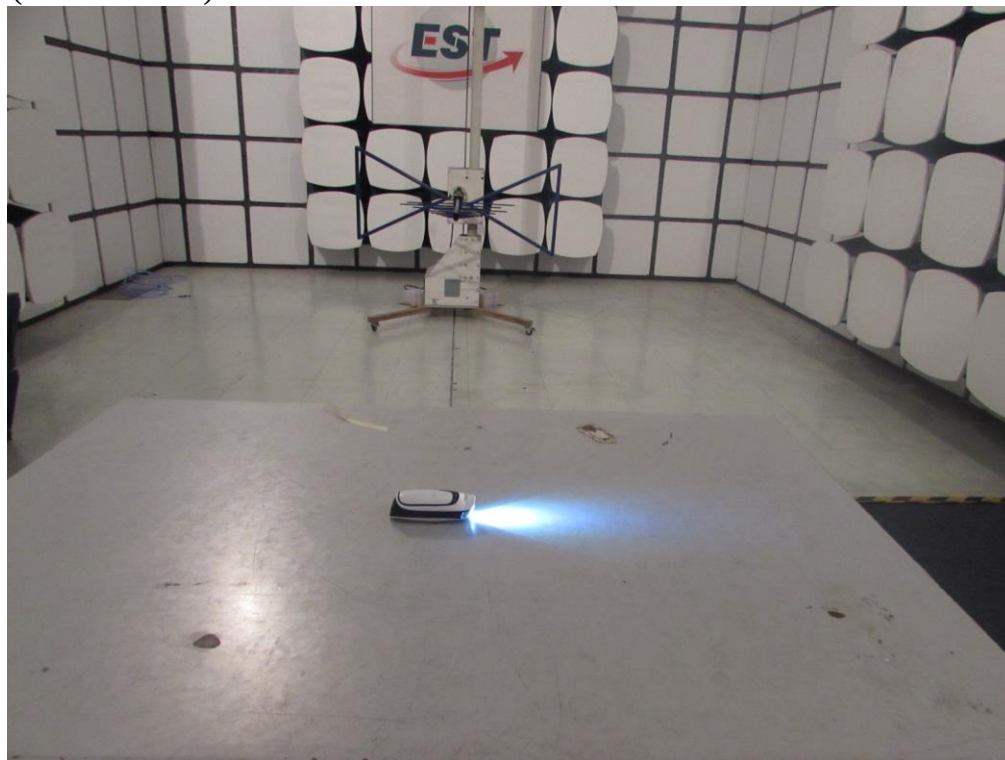

Radiated Test (1000-25000 MHz)

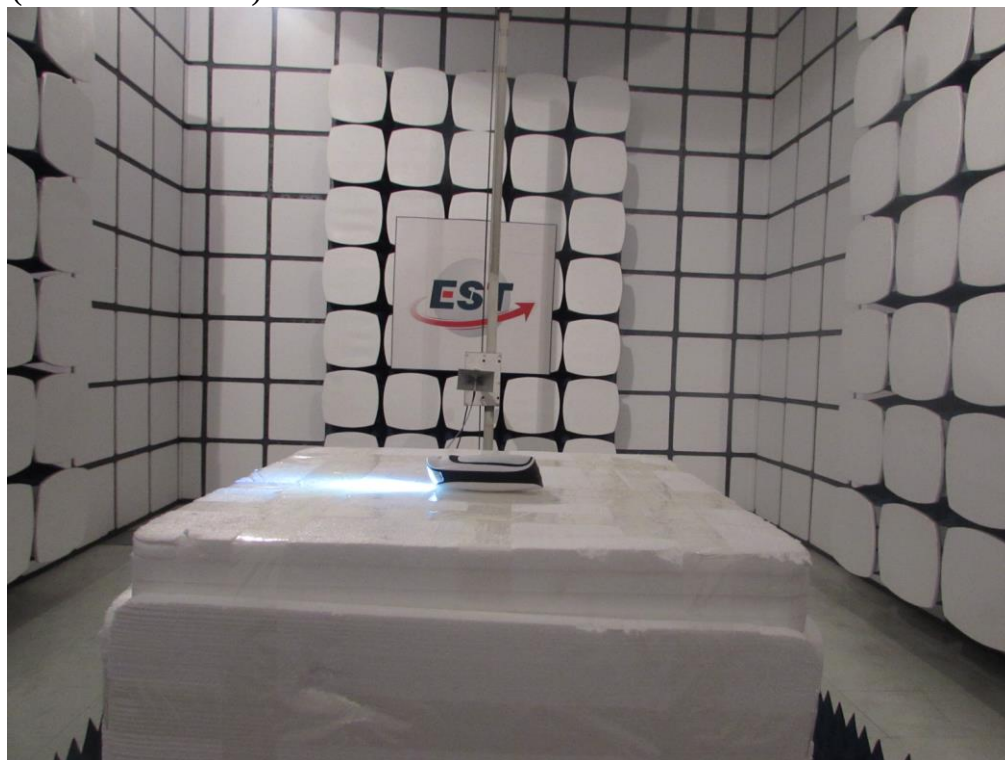

14.PHOTO EUT

External Photos
M/N: DS1



External Photos
M/N: DS1



External Photos
M/N: DS1




External Photos
M/N: DS1





Internal Photos

M/N: DS1


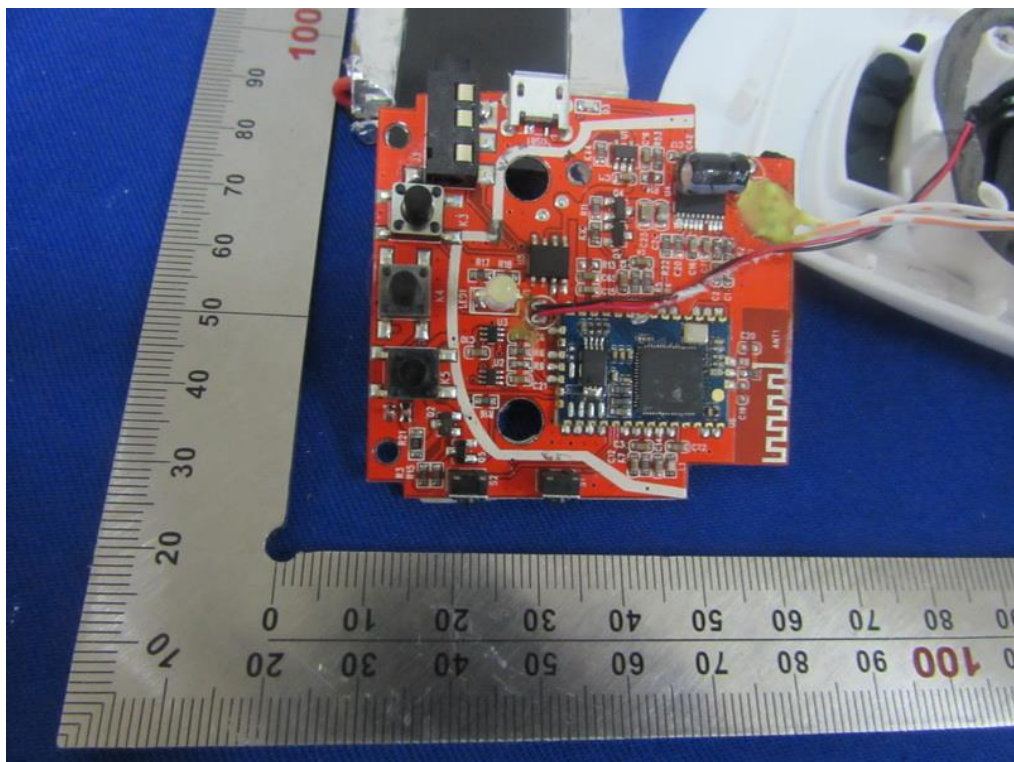


Internal Photos
M/N: DS1

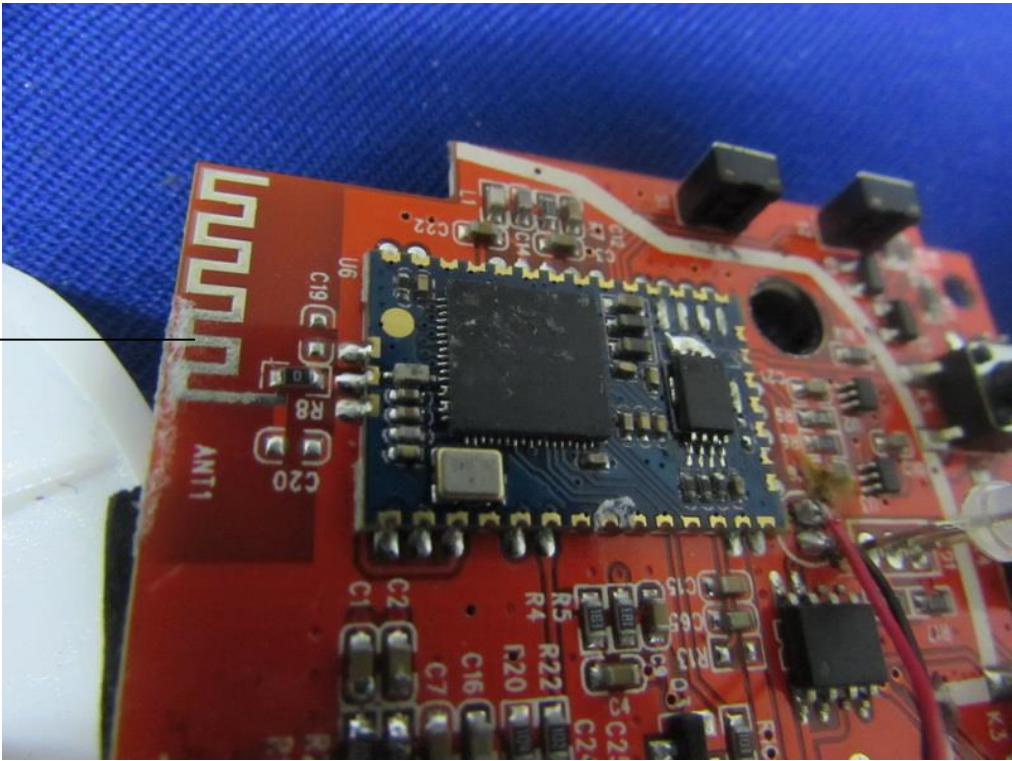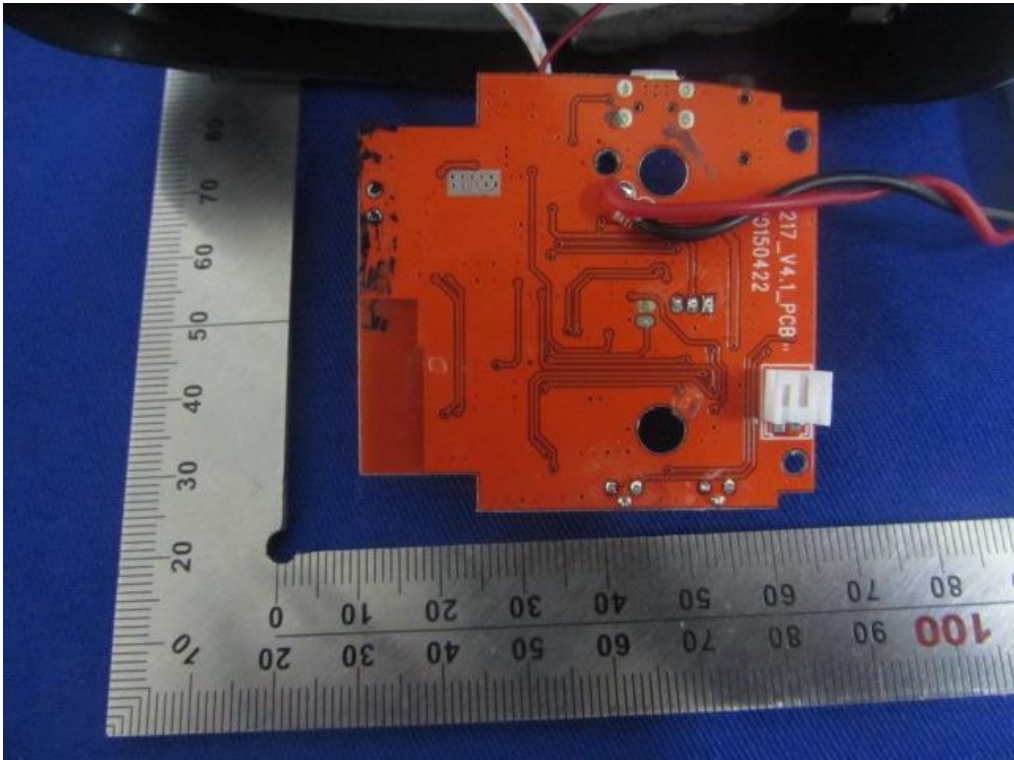

Internal Photos

M/N: DS1

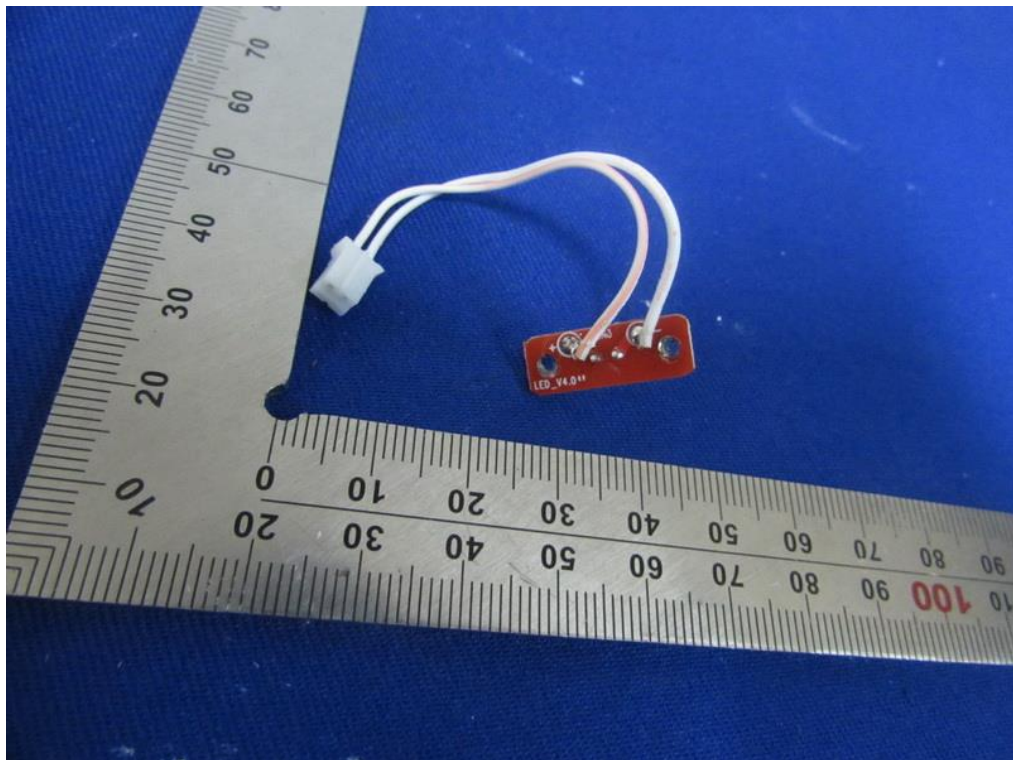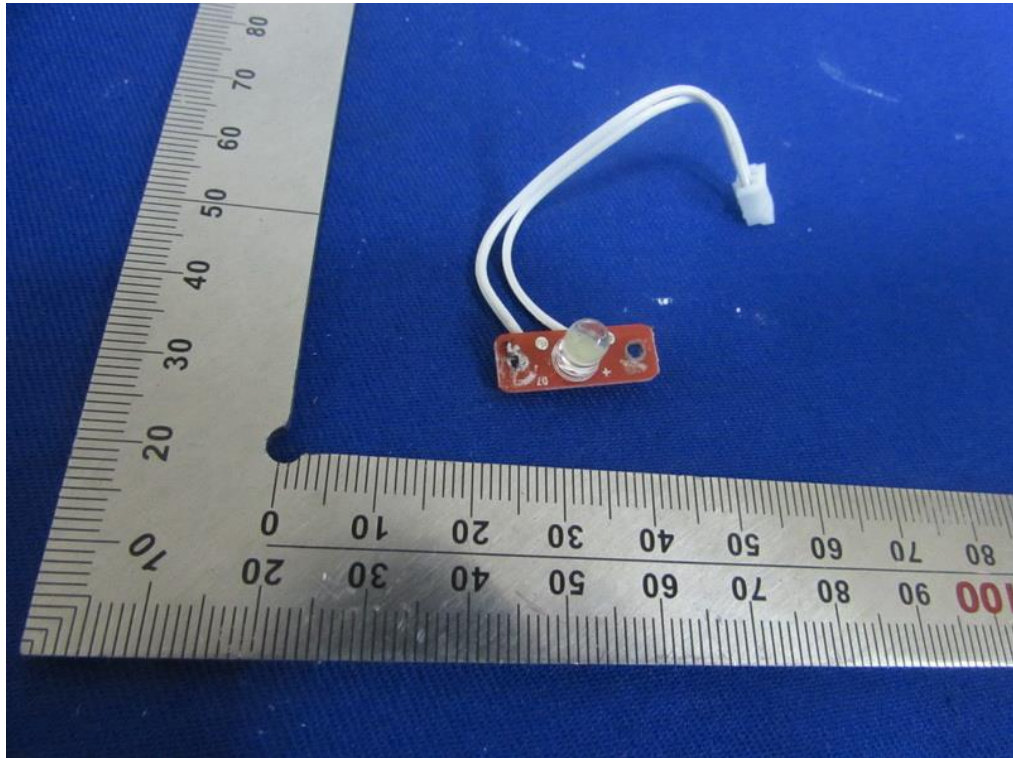

Internal Photos

M/N: DS1

