


### The worst case of Radiated Emission below 1GHz:

|                                                                          |                          |
|--------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                | Time: 2020/01/16 - 17:46 |
| Limit: FCC_Part15.209_RSE(3m)                                            | Engineer: Tyler Yuan     |
| Probe: AC2_VULB9162_0.03-7GHz                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                  | Power: By PoE            |
| <b>Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1362</b> |                          |

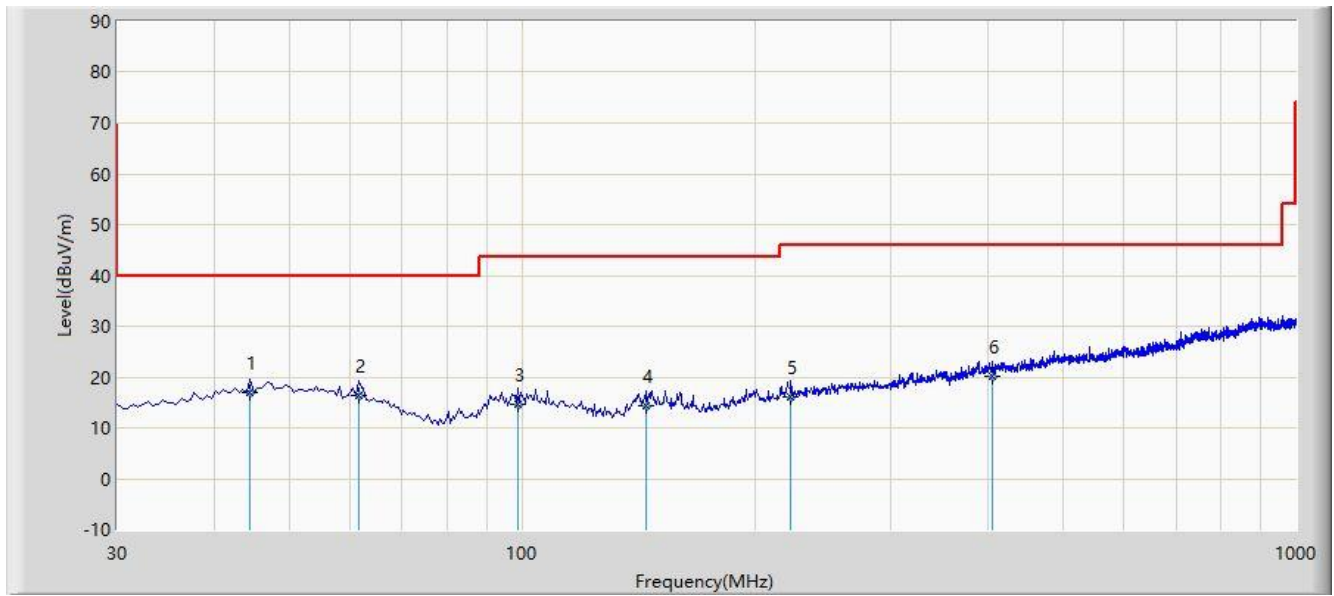


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 44.500          | 16.895                 | 2.400                | -23.105     | 40.000         | 14.495      | QP   |
| 2  |      |      | 61.520          | 16.262                 | 3.280                | -23.738     | 40.000         | 12.982      | QP   |
| 3  |      |      | 98.850          | 14.544                 | 2.180                | -28.956     | 43.500         | 12.364      | QP   |
| 4  |      |      | 144.950         | 14.324                 | 5.210                | -29.176     | 43.500         | 9.114       | QP   |
| 5  |      |      | 222.550         | 16.111                 | 3.210                | -29.889     | 46.000         | 12.901      | QP   |
| 6  |      |      | 405.390         | 20.002                 | 2.510                | -25.998     | 46.000         | 17.492      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

|                                                                          |                          |
|--------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                | Time: 2020/01/16 - 17:47 |
| Limit: FCC_Part15.209_RSE(3m)                                            | Engineer: Tyler Yuan     |
| Probe: AC2_VULB9162_0.03-7GHz                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                  | Power: By PoE            |
| <b>Test Mode: Transmit by 802.11a at Channel 5785MHz with OAW-AP1362</b> |                          |

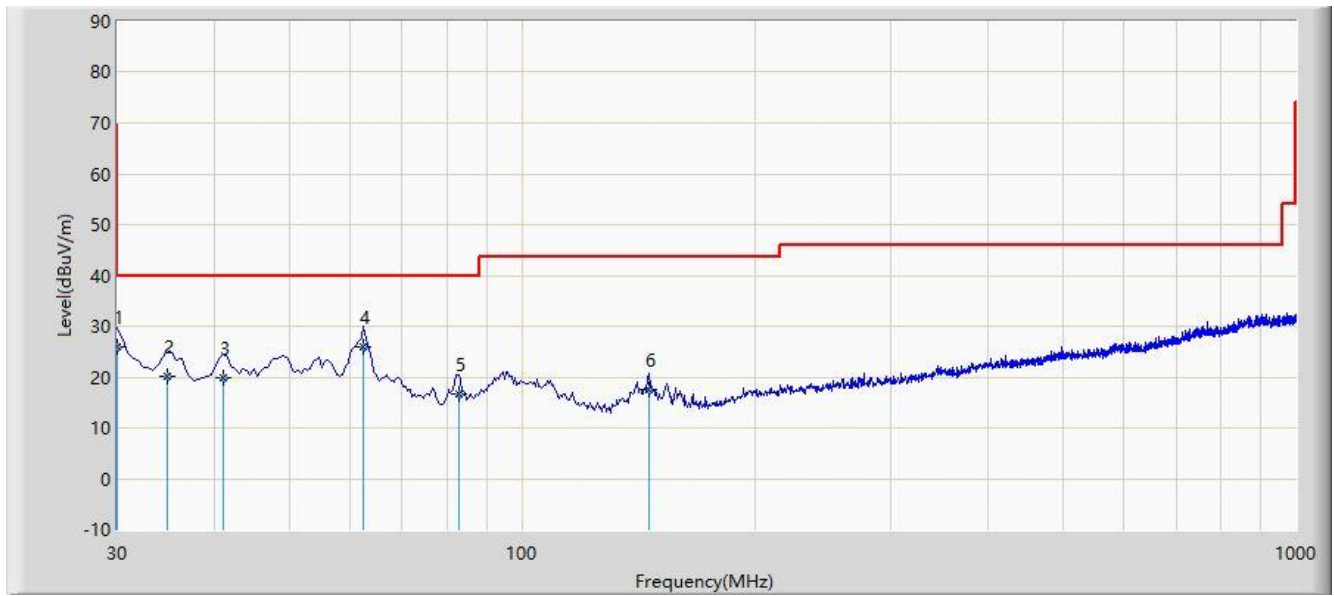

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 30.000          | 25.823                 | 15.200               | -14.177     | 40.000         | 10.623      | QP   |
| 2  |      |      | 34.850          | 20.157                 | 8.340                | -19.843     | 40.000         | 11.817      | QP   |
| 3  |      |      | 41.160          | 19.903                 | 6.290                | -20.097     | 40.000         | 13.613      | QP   |
| 4  |      | *    | 62.500          | 26.052                 | 13.300               | -13.948     | 40.000         | 12.752      | QP   |
| 5  |      |      | 82.860          | 16.750                 | 8.200                | -23.250     | 40.000         | 8.550       | QP   |
| 6  |      |      | 145.920         | 17.529                 | 8.400                | -25.971     | 43.500         | 9.129       | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 40GHz), therefore no data appear in the report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz) | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|--------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42-16.423       | 399.9 - 410        | 4.5-5.15           |
| <sup>1</sup> 0.495 - 0.505 | 16.69475-16.69525  | 608 - 614          | 5.35-5.46          |
| 2.1735-2.1905              | 16.80425-16.80475  | 960 - 1240         | 7.25-7.75          |
| 4.125-4.128                | 25.5 -25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725-4.17775            | 37.5-38.25         | 1435-1626.5        | 9.0-9.2            |
| 4.20725-4.20775            | 73-74.6            | 1645.5-1646.5      | 9.3-9.5            |
| 6.215-6.218                | 74.8-75.2          | 1660 - 1710        | 10.6-12.7          |
| 6.26775-6.26825            | 108-121.94         | 1718.8-1722.2      | 13.25-13.4         |
| 6.31175-6.31225            | 123 - 138          | 2200 - 2300        | 14.47-14.5         |
| 8.291-8.294                | 149.9-150.05       | 2310–2390          | 15.35-16.2         |
| 8.362-8.366                | 156.52475-156.525  | 2483.5 - 2500      | 17.7-21.4          |
| 8.37625-8.38675            | 156.7-156.9        | 2690 - 2900        | 22.01-23.12        |
| 8.41425-8.41475            | 162.0125-167.17    | 3260 - 3267        | 23.6-24.0          |
| 12.29-12.293               | 167.72-173.2       | 3332 - 3339        | 31.2-31.8          |
| 12.51975-12.52025          | 240 - 285          | 3345.8 - 3358      | 36.43-36.5         |
| 12.57675-12.57725          | 322-335.4          | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36-13.41                | --                 | --                 | --                 |

#### For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Refer to KDB 789033 D02v01r04 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27dBm/MHz as

specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27dBm/MHz.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                       |                            |
|----------------------------------------|-----------------------|----------------------------|
| Frequency (MHz]                        | Field Strength (uV/m] | Measured Distance (Meters) |
| 0.009 - 0.490                          | 2400/F (kHz)          | 300                        |
| 0.490 - 1.705                          | 24000/F (kHz)         | 30                         |
| 1.705 - 30                             | 30                    | 30                         |
| 30 - 88                                | 100                   | 3                          |
| 88 - 216                               | 150                   | 3                          |
| 216 - 960                              | 200                   | 3                          |
| Above 960                              | 500                   | 3                          |

#### 7.9.2.Test Procedure Used

KDB 789033 D02v02r01 – Section G


#### 7.9.3.Test Setting

##### **Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Average Measurements above 1GHz (Method AD)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. If duty cycle  $\geq 98\%$ ,  $VBW \leq RBW/100$  but not less than 10Hz; If duty cycle  $< 98\%$ , set  $VBW \geq 1/T$ .
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

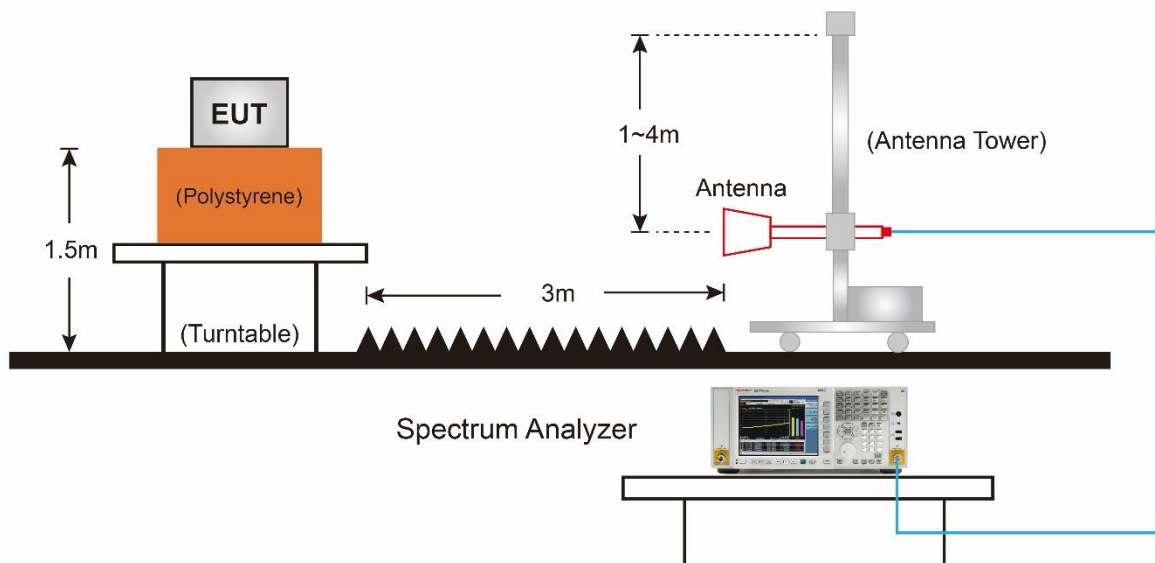**7.9.4. Test Setup**

### 7.9.5.Test Result

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                     | Time: 2019/11/16 - 11:18 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

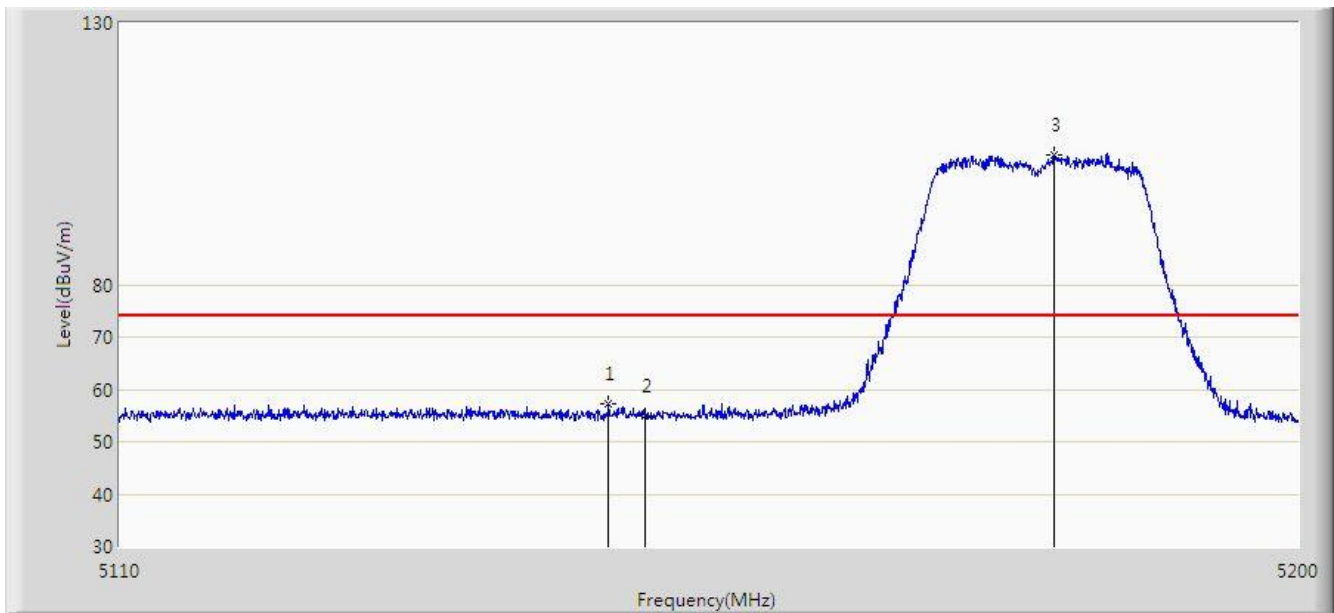


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.170        | 57.128                 | 52.708               | -16.872     | 74.000         | 4.420       | PK   |
| 2  |      |      | 5150.000        | 54.927                 | 50.485               | -19.073     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5181.280        | 104.826                | 100.352              | N/A         | N/A            | 4.474       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                     | Time: 2019/11/16 - 11:42 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

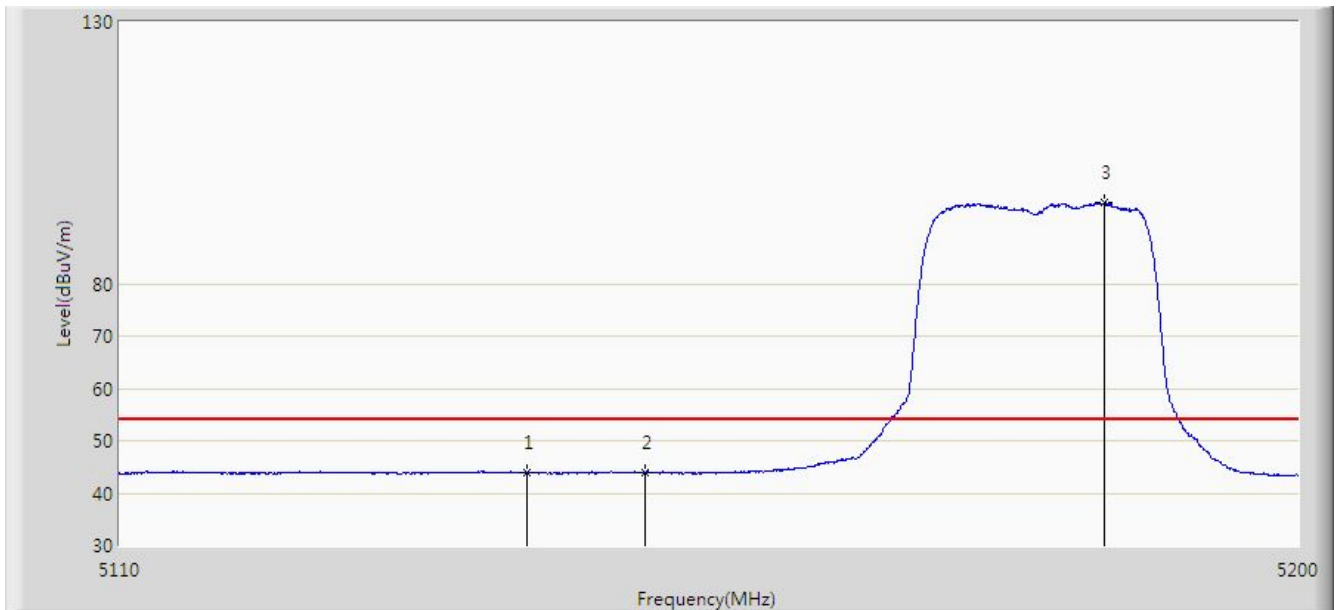


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5141.005        | 43.871                 | 39.450               | -10.129     | 54.000         | 4.420       | AV   |
| 2  |      |      | 5150.000        | 43.844                 | 39.402               | -10.156     | 54.000         | 4.442       | AV   |
| 3  |      | *    | 5185.105        | 95.506                 | 91.075               | N/A         | N/A            | 4.431       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                     | Time: 2019/11/16 - 11:44 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

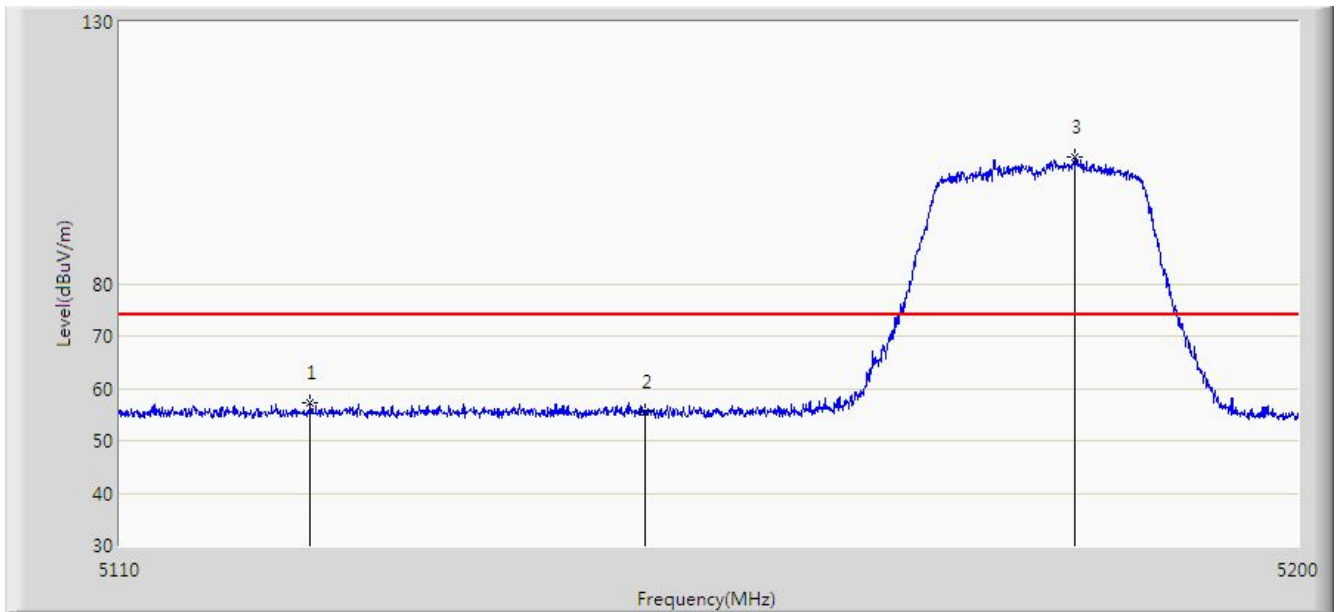


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5124.490        | 57.221                 | 52.759               | -16.779     | 74.000         | 4.461       | PK   |
| 2  |      |      | 5150.000        | 55.501                 | 51.059               | -18.499     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5182.855        | 104.069                | 99.611               | N/A         | N/A            | 4.458       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                     | Time: 2019/11/16 - 11:48 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

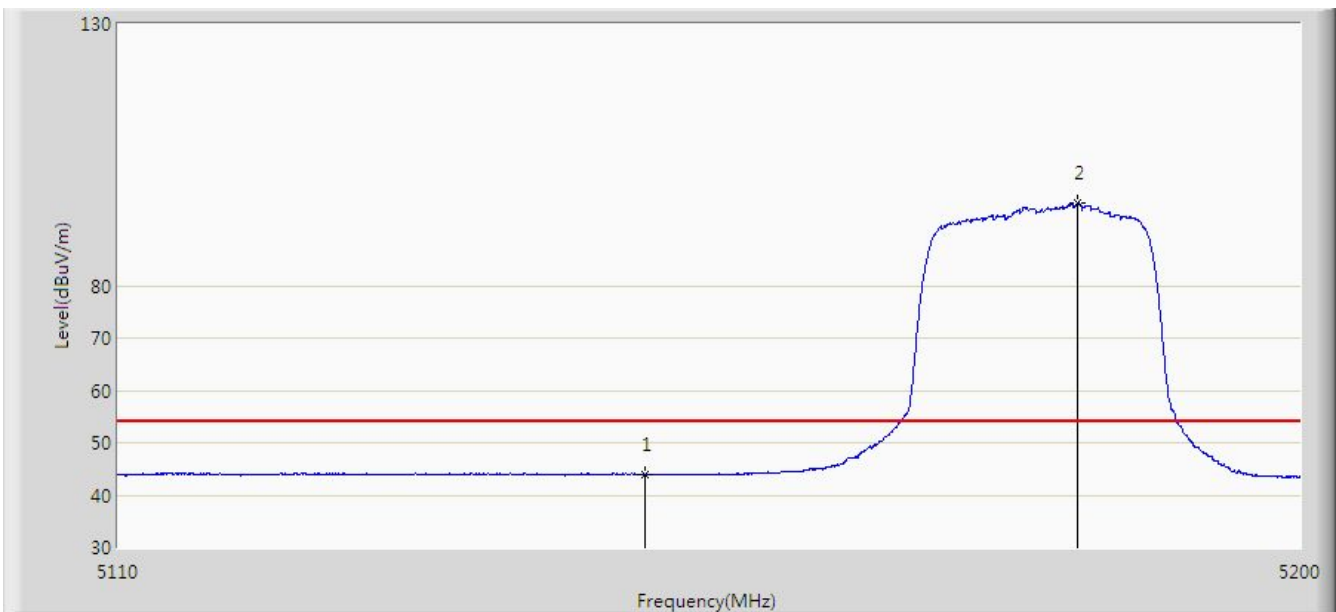


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 43.926                 | 39.484               | -10.074     | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5182.945        | 95.755                 | 91.298               | N/A         | N/A            | 4.456       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                    | Time: 2020/03/07 - 03:19 |
| Limit: FCC_Part15.209_RSE(3m)                                                | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                     | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                      | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

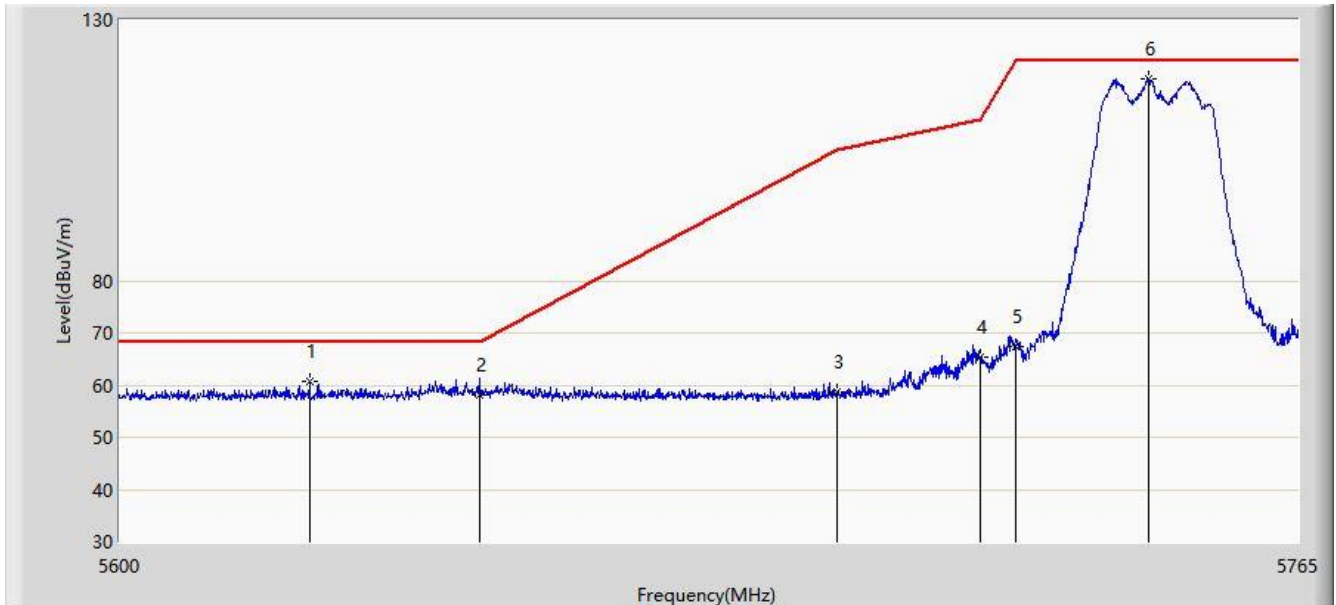


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5626.317        | 60.824                 | 55.628               | -7.376      | 68.200         | 5.197       | PK   |
| 2  |      |      | 5650.000        | 58.255                 | 52.919               | -9.945      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 58.702                 | 53.384               | -46.498     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 65.324                 | 59.850               | -45.476     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 67.513                 | 62.035               | -54.687     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5743.797        | 118.686                | 113.103              | N/A         | N/A            | 5.583       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                    | Time: 2020/03/07 - 03:27 |
| Limit: FCC_Part15.209_RSE(3m)                                                | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                     | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                      | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

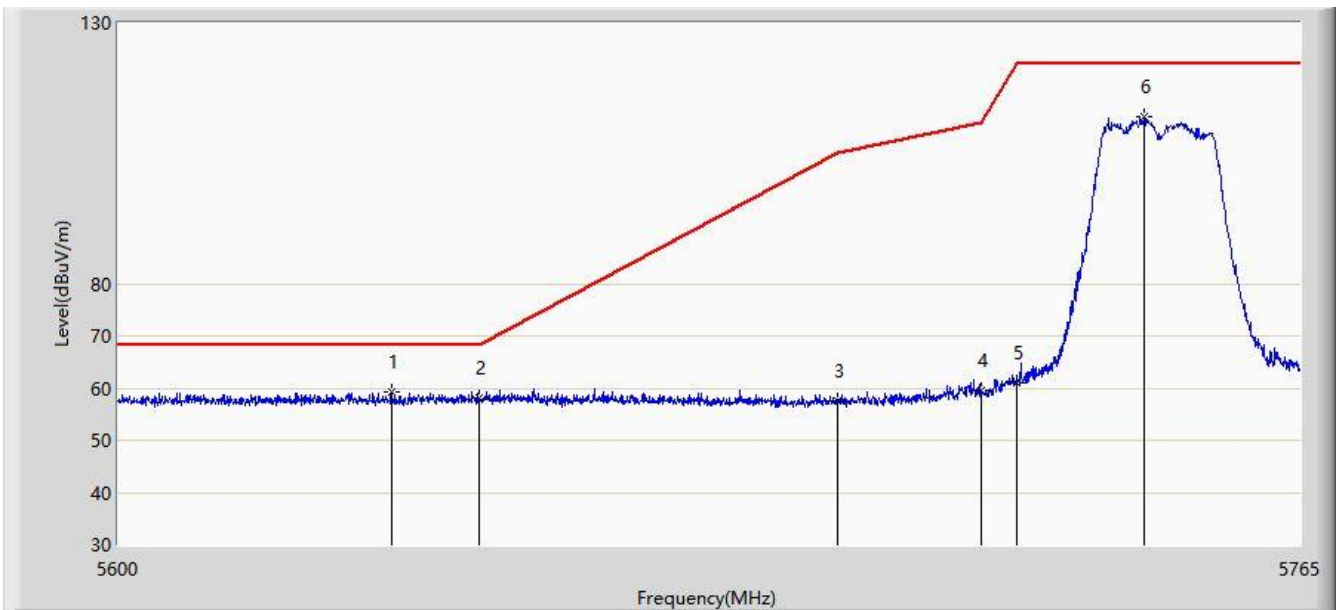


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5637.785        | 59.207                 | 54.016               | -8.993      | 68.200         | 5.191       | PK   |
| 2  |      |      | 5650.000        | 58.063                 | 52.727               | -10.137     | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 57.679                 | 52.361               | -47.521     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 59.593                 | 54.119               | -51.207     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 60.980                 | 55.502               | -61.220     | 122.200        | 5.478       | PK   |
| 6  |      |      | 5742.973        | 112.047                | 106.479              | N/A         | N/A            | 5.568       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                    | Time: 2020/03/07 - 03:28 |
| Limit: FCC_Part15.209_RSE(3m)                                                | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                     | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                      | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

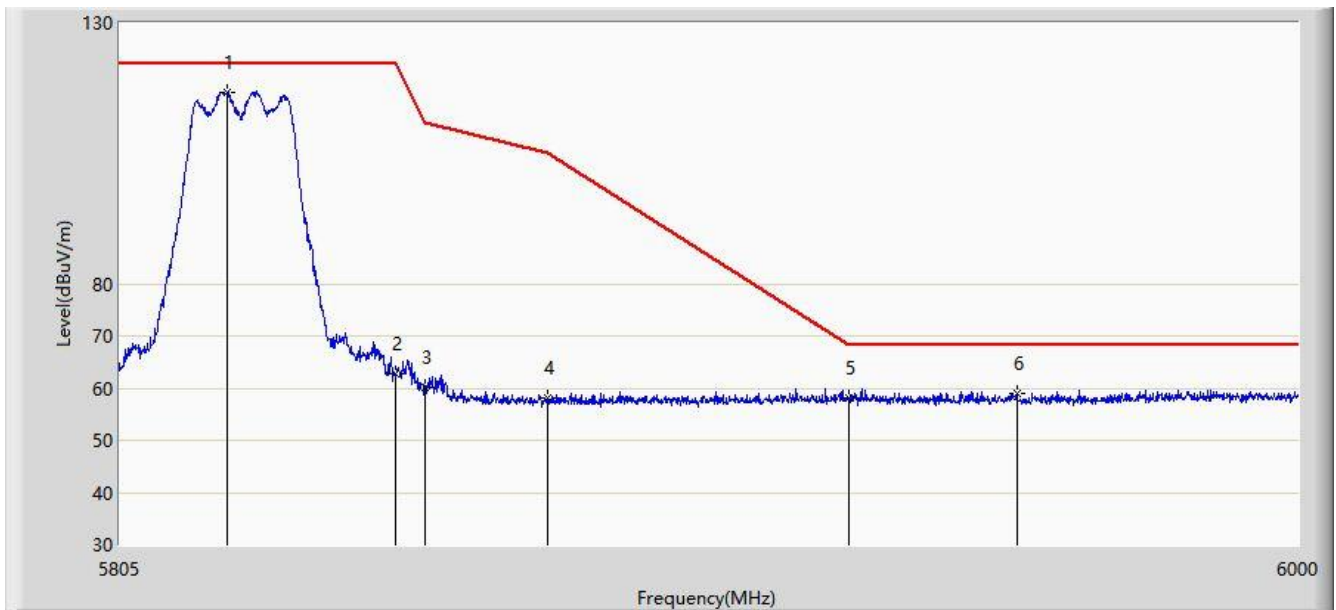


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5822.453        | 116.795                | 111.006              | N/A         | N/A            | 5.789       | PK   |
| 2  |      |      | 5850.000        | 62.825                 | 56.856               | -59.375     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 60.155                 | 54.180               | -50.645     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 58.228                 | 52.215               | -46.972     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 58.095                 | 51.960               | -10.105     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5952.908        | 58.941                 | 52.907               | -9.259      | 68.200         | 6.033       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                    | Time: 2020/03/07 - 03:29 |
| Limit: FCC_Part15.209_RSE(3m)                                                | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                     | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                      | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

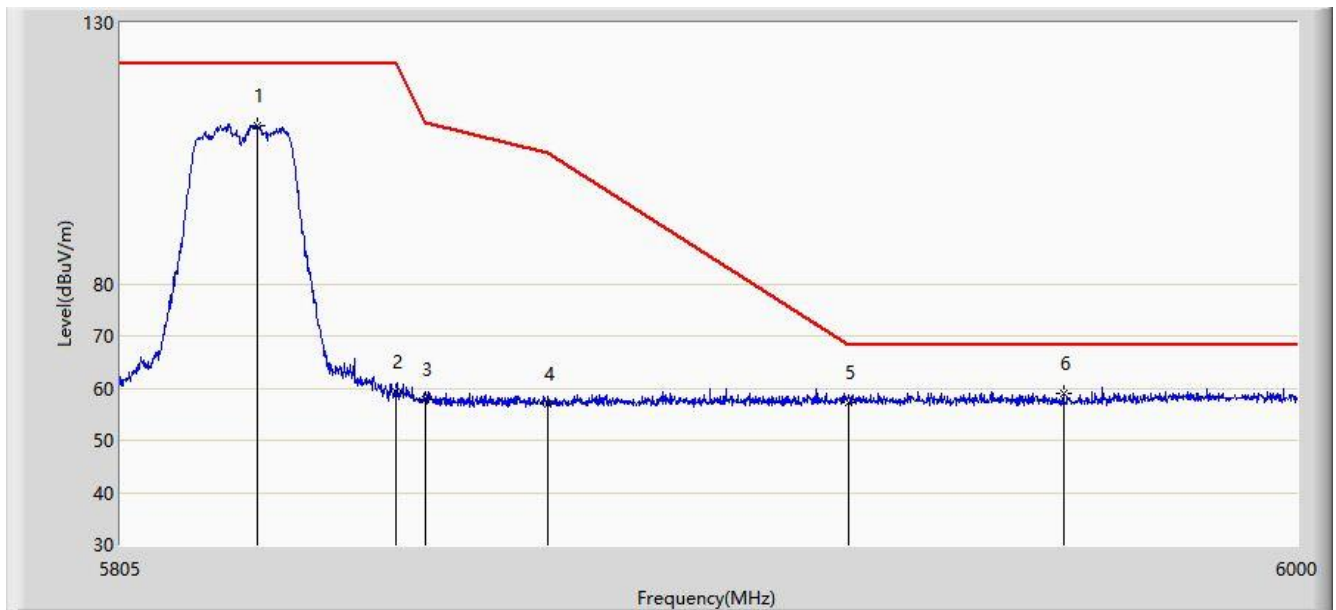


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5827.425        | 110.412                | 104.664              | N/A         | N/A            | 5.748       | PK   |
| 2  |      |      | 5850.000        | 59.264                 | 53.295               | -62.936     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 57.900                 | 51.925               | -52.900     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 56.913                 | 50.900               | -48.287     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 57.218                 | 51.083               | -10.982     | 68.200         | 6.136       | PK   |
| 6  |      | *    | 5960.902        | 58.992                 | 53.002               | -9.208      | 68.200         | 5.990       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2019/11/16 - 12:19 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

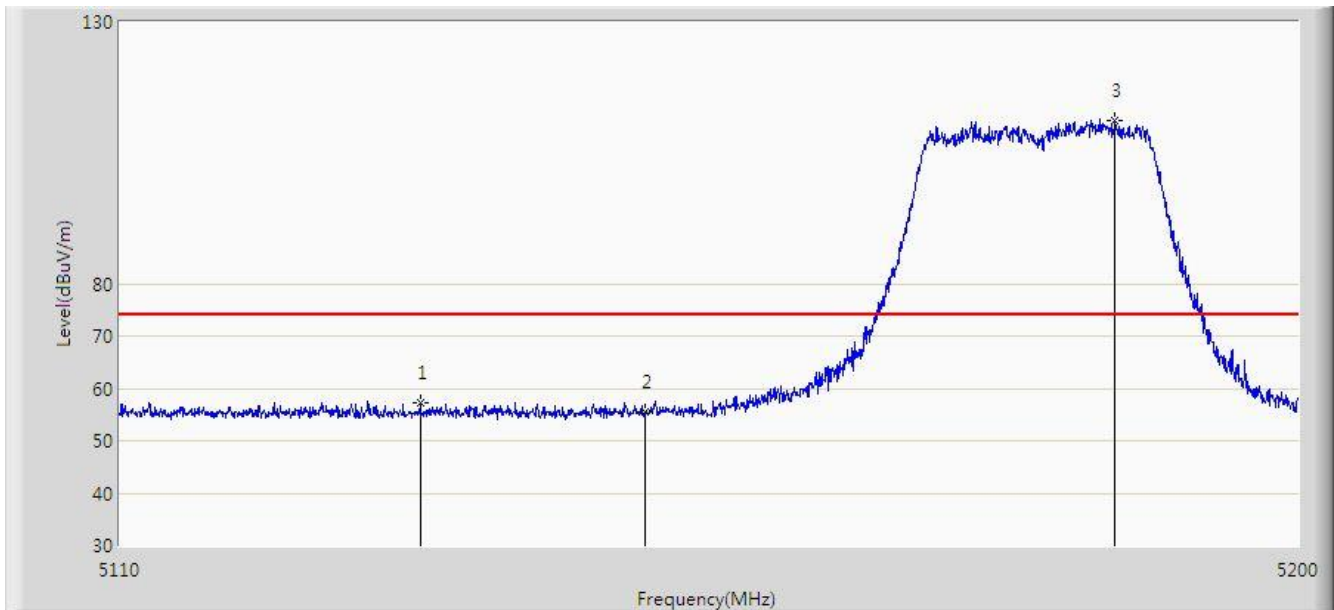


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5132.860        | 57.283                 | 52.861               | -16.717     | 74.000         | 4.422       | PK   |
| 2  |      |      | 5150.000        | 55.492                 | 51.050               | -18.508     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5185.960        | 111.099                | 106.678              | N/A         | N/A            | 4.421       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2019/11/16 - 12:46 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

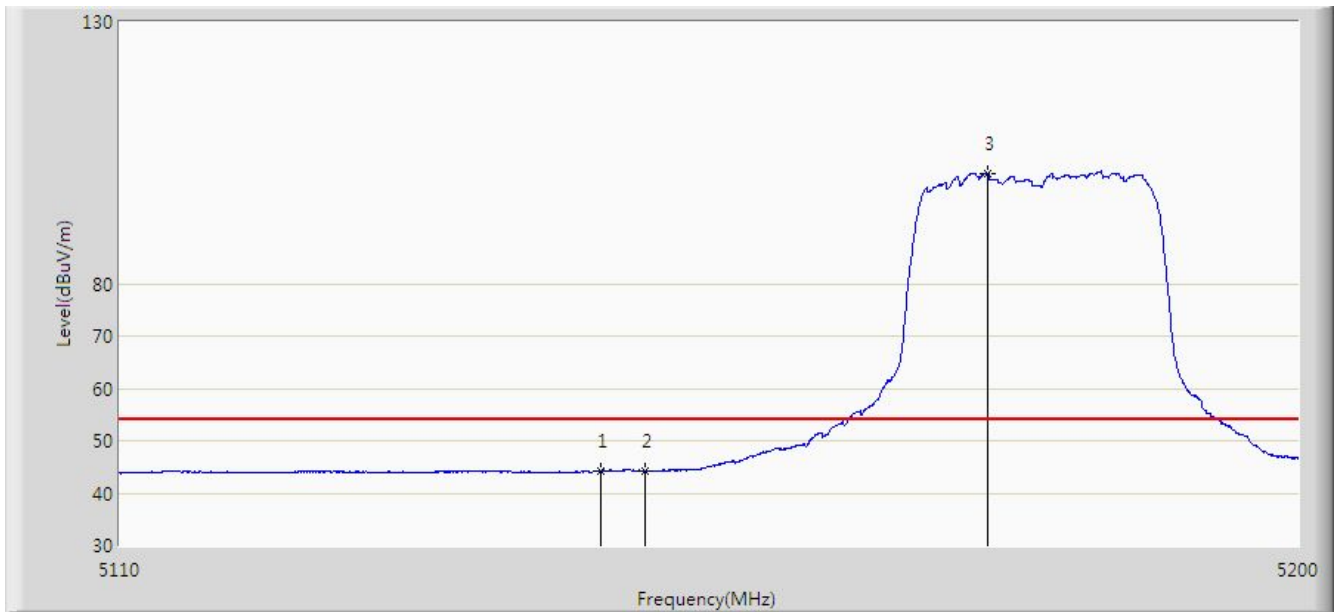


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.585        | 44.324                 | 39.904               | -9.676      | 54.000         | 4.419       | AV   |
| 2  |      |      | 5150.000        | 44.268                 | 39.826               | -9.732      | 54.000         | 4.442       | AV   |
| 3  |      | *    | 5176.150        | 101.015                | 96.497               | N/A         | N/A            | 4.518       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2019/11/16 - 12:50 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

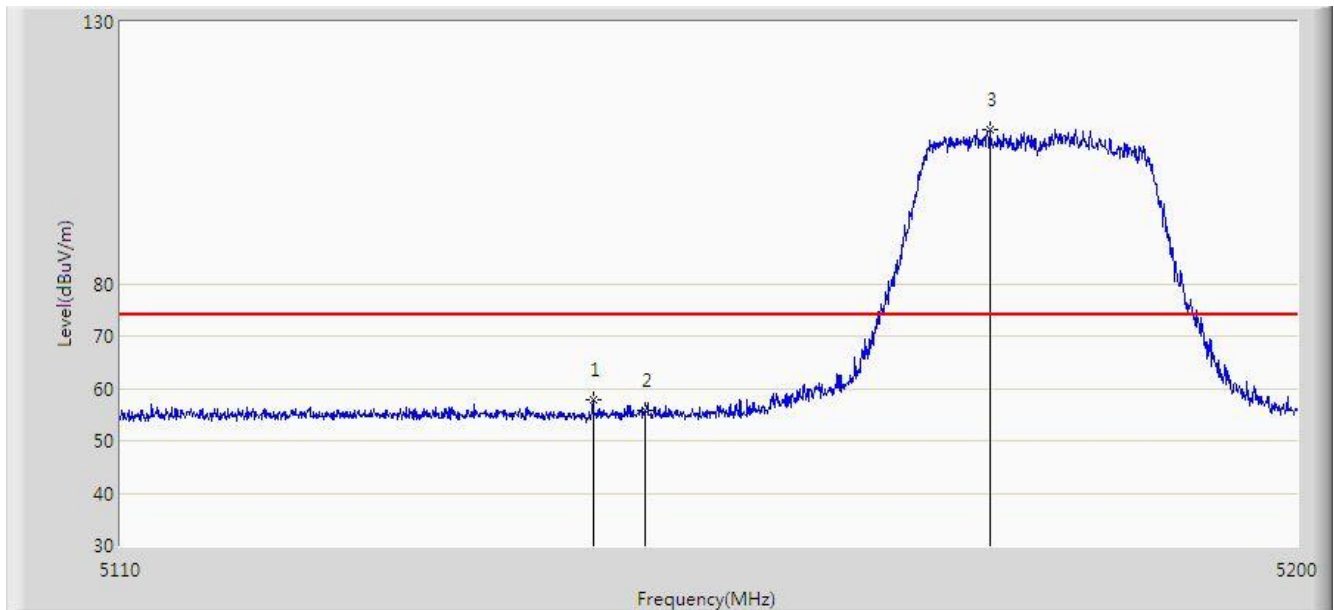


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5146.000        | 57.692                 | 53.272               | -16.308     | 74.000         | 4.420       | PK   |
| 2  |      |      | 5150.000        | 55.735                 | 51.293               | -18.265     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5176.420        | 109.514                | 104.999              | N/A         | N/A            | 4.516       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2019/11/16 - 12:51 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Yeto Yin       |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180 MHz (CDD Mode) with OAW-AP1361 |                          |

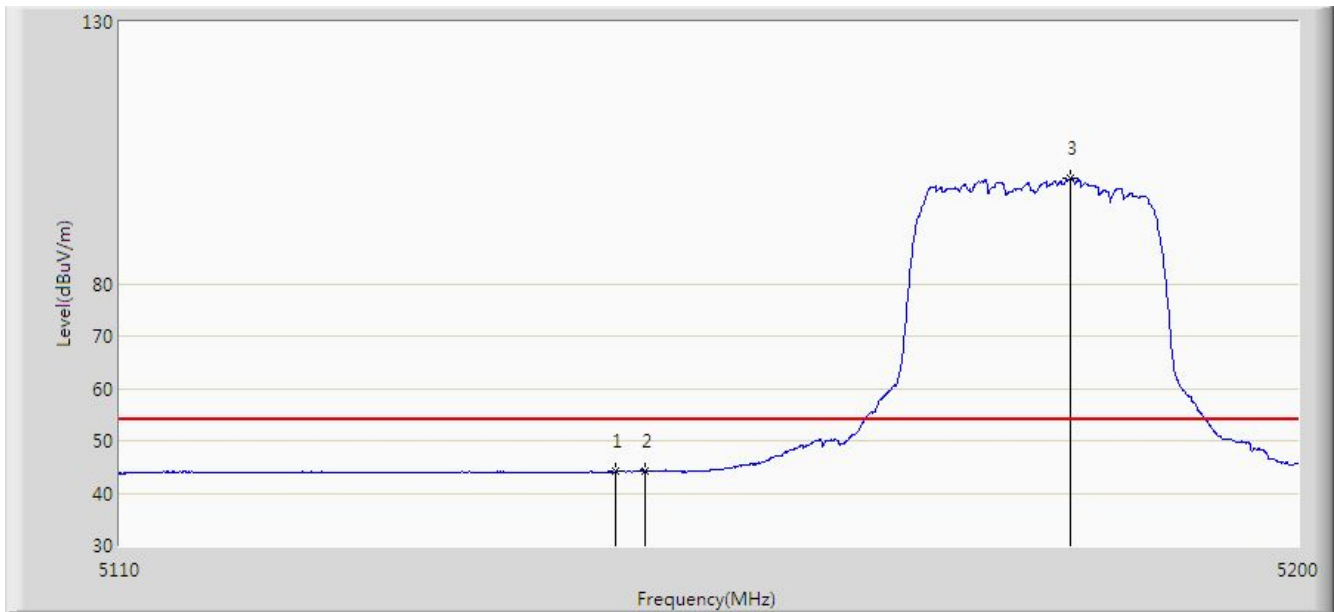


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.755        | 44.131                 | 39.711               | -9.869      | 54.000         | 4.421       | AV   |
| 2  |      |      | 5150.000        | 44.099                 | 39.657               | -9.901      | 54.000         | 4.442       | AV   |
| 3  |      | *    | 5182.495        | 100.033                | 95.571               | N/A         | N/A            | 4.463       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

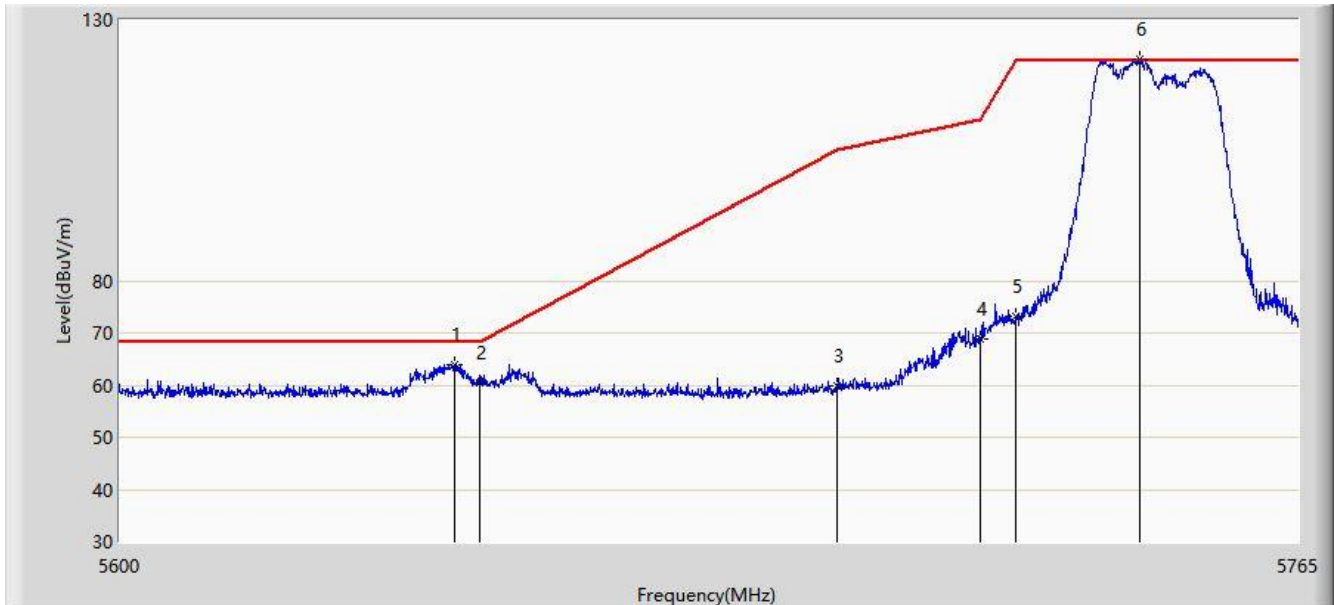


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5646.530        | 64.056                 | 58.777               | -4.144      | 68.200         | 5.280       | PK   |
| 2  |      |      | 5650.000        | 60.466                 | 55.130               | -7.734      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 59.908                 | 54.590               | -45.292     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 68.750                 | 63.276               | -42.050     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 73.223                 | 67.745               | -48.977     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5742.643        | 122.430                | 116.864              | N/A         | N/A            | 5.566       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:32 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

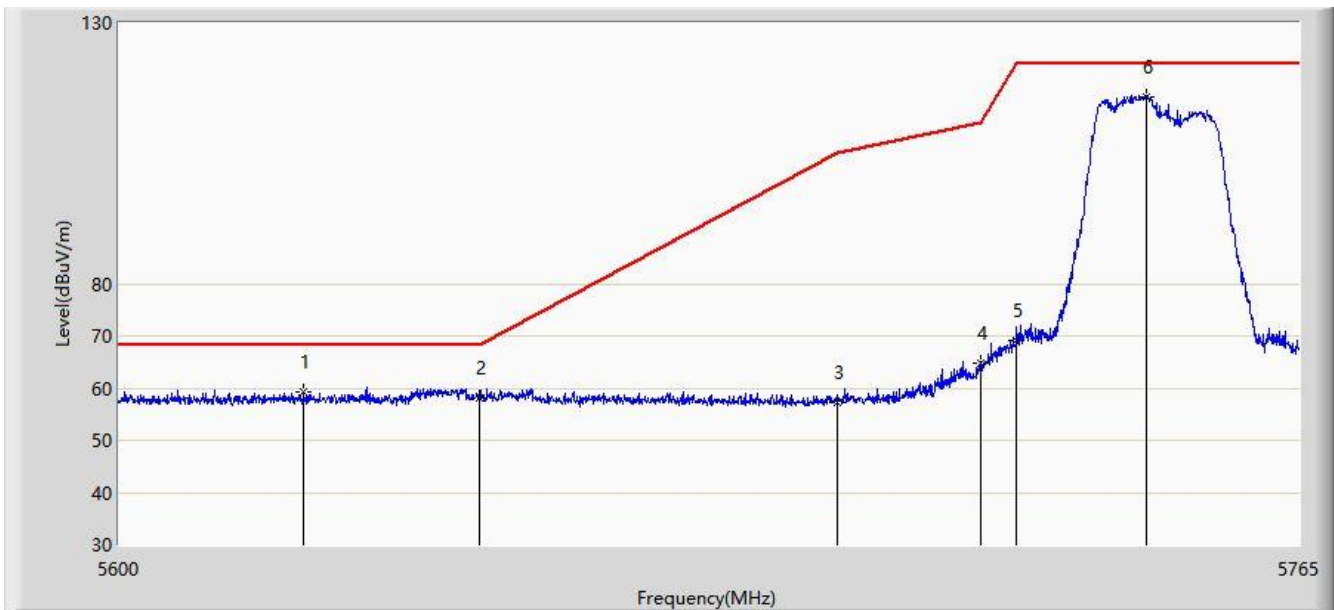


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5625.575        | 59.181                 | 53.984               | -9.019      | 68.200         | 5.197       | PK   |
| 2  |      |      | 5650.000        | 58.179                 | 52.843               | -10.021     | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 57.315                 | 51.997               | -47.885     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 64.715                 | 59.241               | -46.085     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 69.061                 | 63.583               | -53.139     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5743.385        | 115.927                | 110.352              | N/A         | N/A            | 5.576       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:33 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

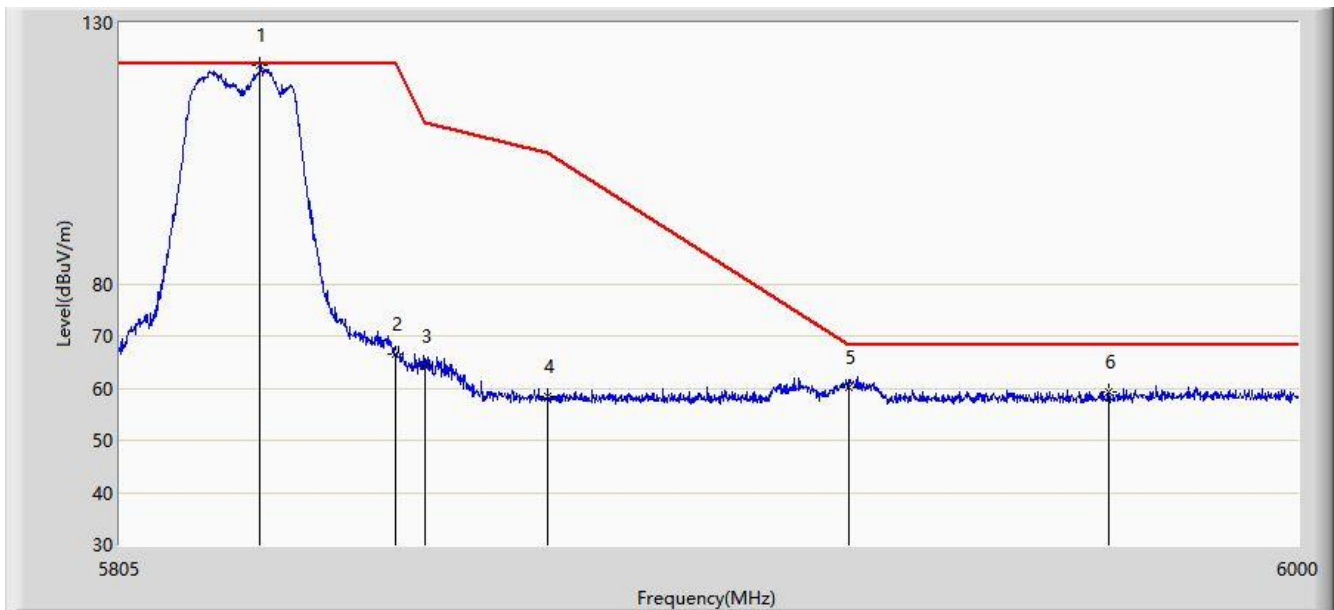


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5827.913        | 121.827                | 116.083              | N/A         | N/A            | 5.744       | PK   |
| 2  |      |      | 5850.000        | 66.505                 | 60.536               | -55.695     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 64.341                 | 58.366               | -46.459     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 58.441                 | 52.428               | -46.759     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 60.138                 | 54.003               | -8.062      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5968.215        | 59.371                 | 53.269               | -8.829      | 68.200         | 6.101       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:34 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

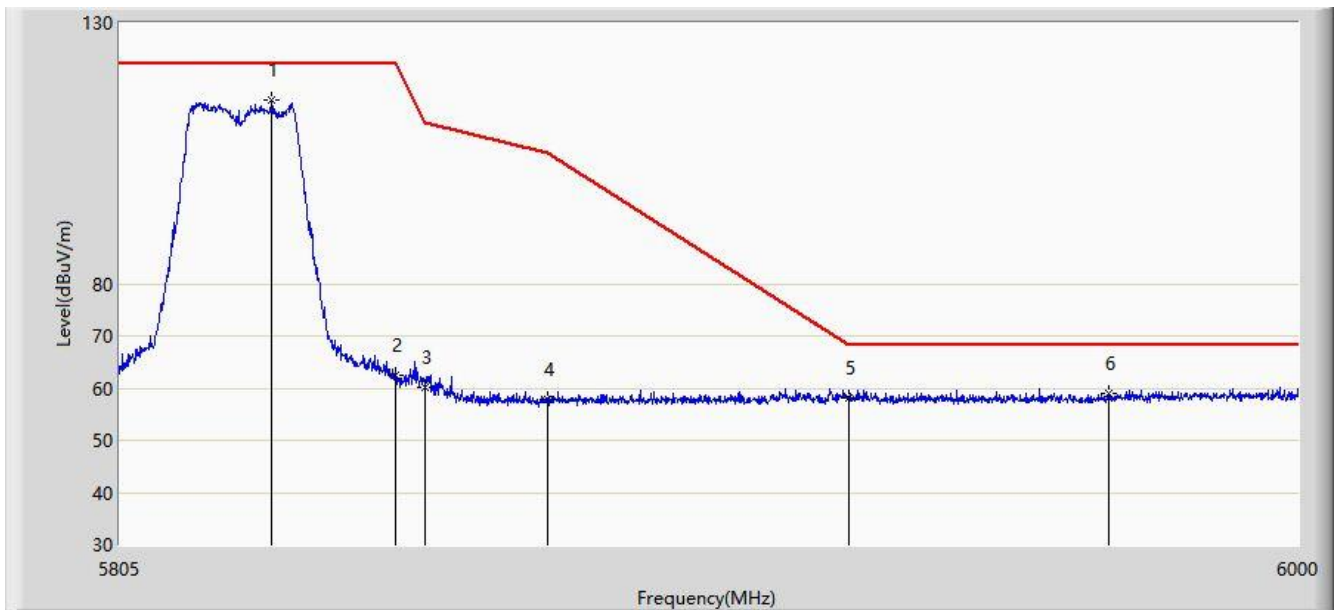


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5829.862        | 115.188                | 109.421              | N/A         | N/A            | 5.768       | PK   |
| 2  |      |      | 5850.000        | 62.328                 | 56.359               | -59.872     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 60.284                 | 54.309               | -50.516     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 57.883                 | 51.870               | -47.317     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 58.212                 | 52.077               | -9.988      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5968.215        | 59.091                 | 52.989               | -9.109      | 68.200         | 6.101       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 02:25 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

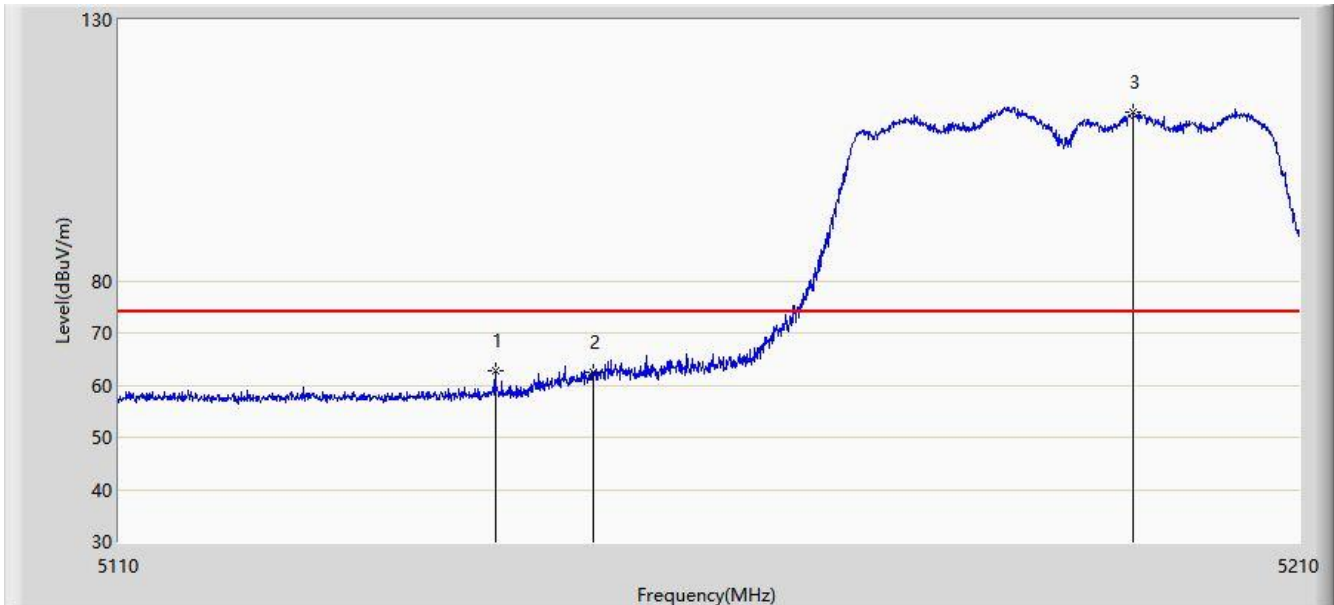


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5141.700        | 62.711                 | 58.290               | -11.289     | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 62.552                 | 58.110               | -11.448     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5195.850        | 112.214                | 107.908              | N/A         | N/A            | 4.306       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 02:30 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

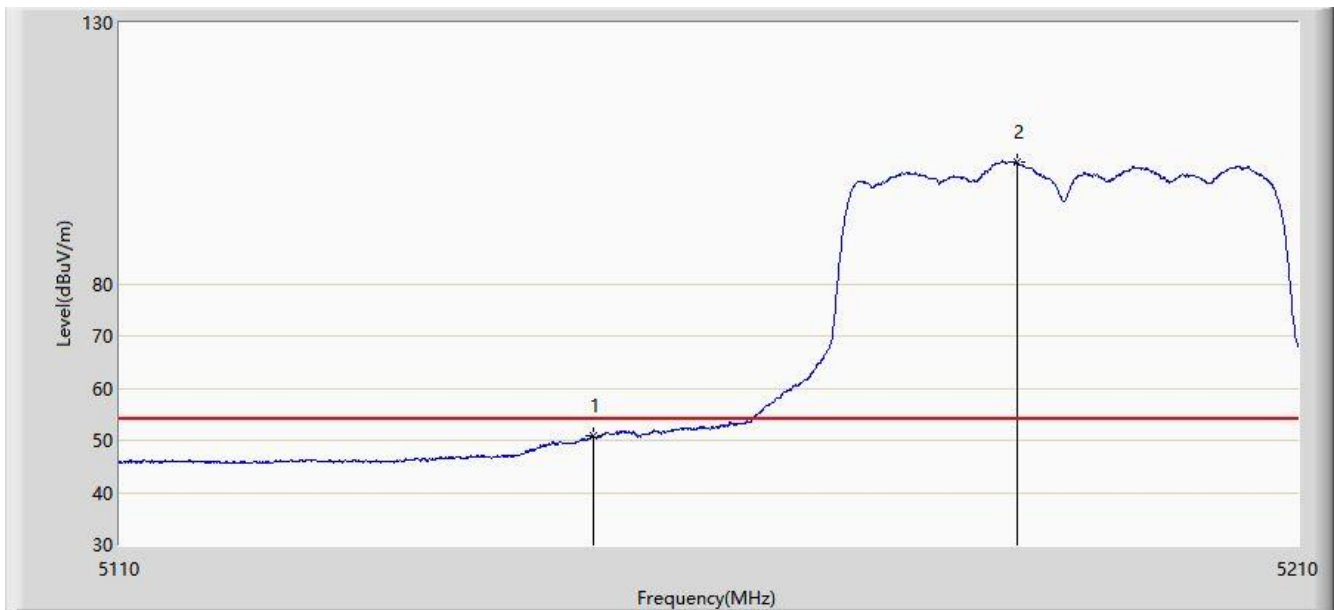


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.961                 | 46.519               | -3.039      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5186.000        | 103.281                | 98.860               | N/A         | N/A            | 4.421       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 02:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

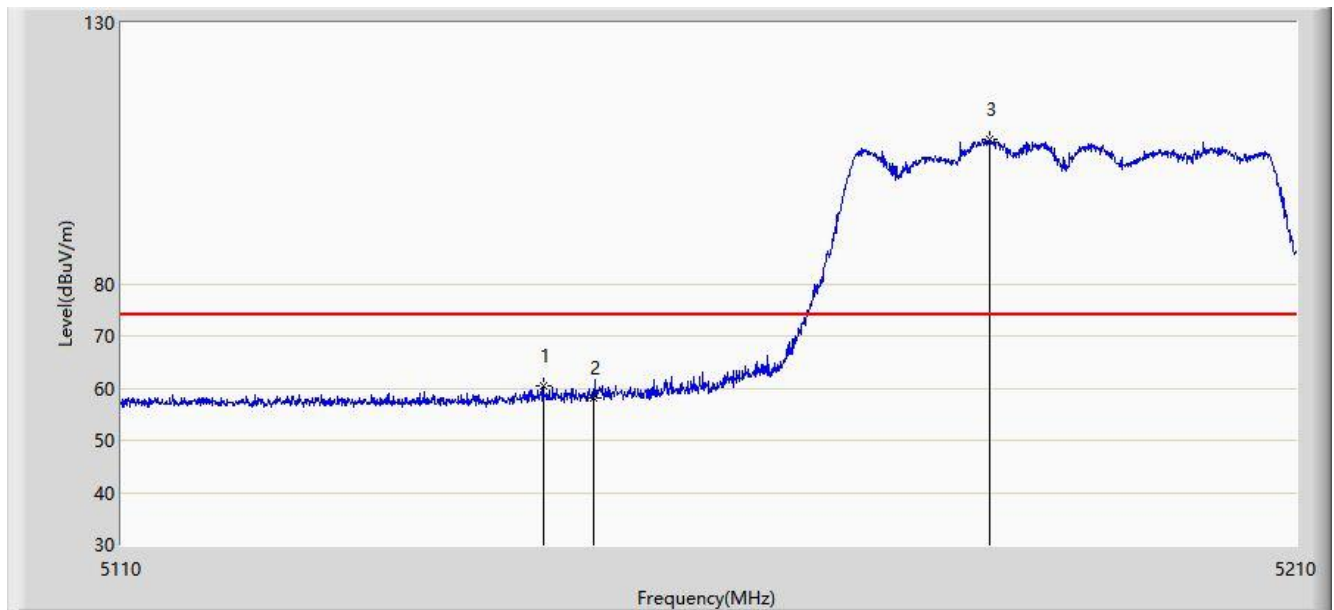


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5145.750        | 60.294                 | 55.874               | -13.706     | 74.000         | 4.420       | PK   |
| 2  |      |      | 5150.000        | 58.162                 | 53.720               | -15.838     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5183.800        | 107.574                | 103.127              | N/A         | N/A            | 4.447       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 02:32 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

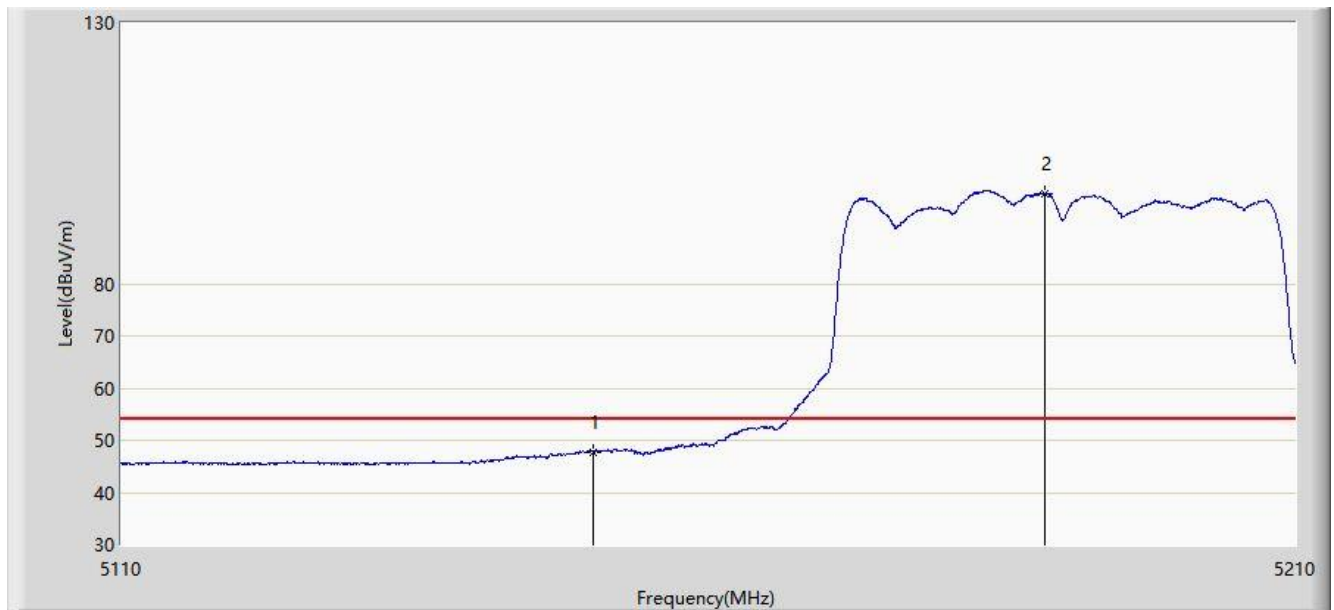


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 47.598                 | 43.156               | -6.402      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5188.500        | 97.380                 | 92.988               | N/A         | N/A            | 4.393       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)


|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:35 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with OAW-AP1361 |                          |

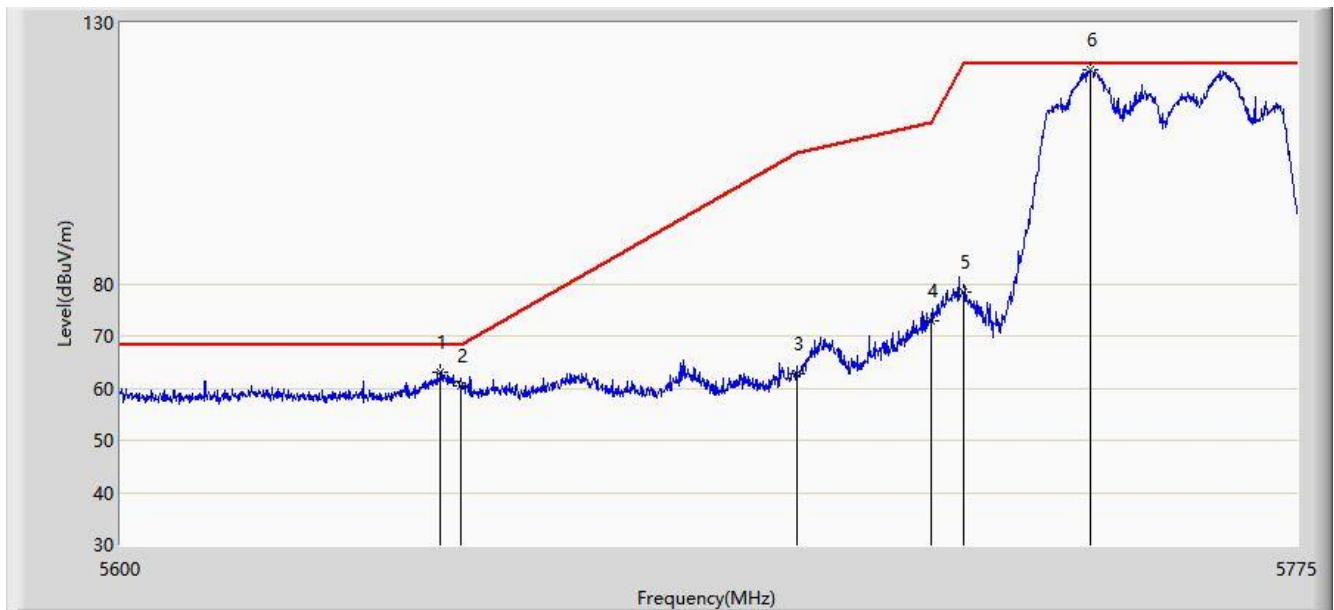

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:36 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with OAW-AP1361 |                          |

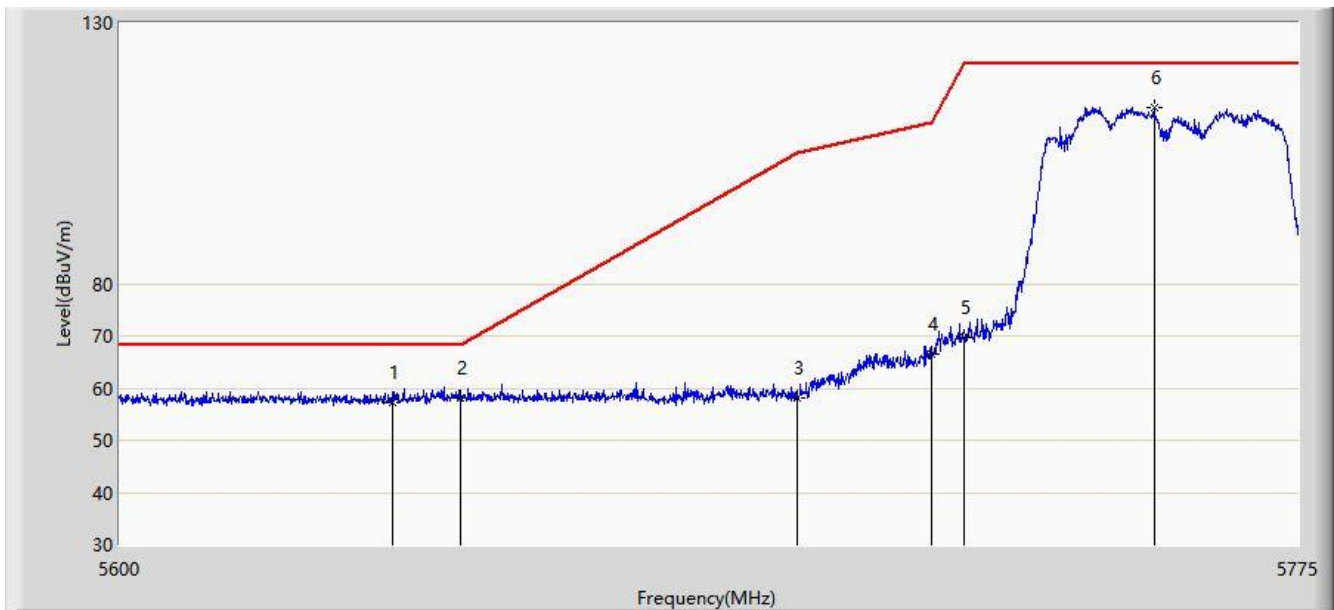


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5640.163        | 57.237                 | 52.047               | -10.963     | 68.200         | 5.190       | PK   |
| 2  |      |      | 5650.000        | 58.176                 | 52.840               | -10.024     | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 58.169                 | 52.851               | -47.031     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 66.592                 | 61.118               | -44.208     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 69.749                 | 64.271               | -52.451     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5753.388        | 113.794                | 108.022              | N/A         | N/A            | 5.772       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:37 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with OAW-AP1361 |                          |

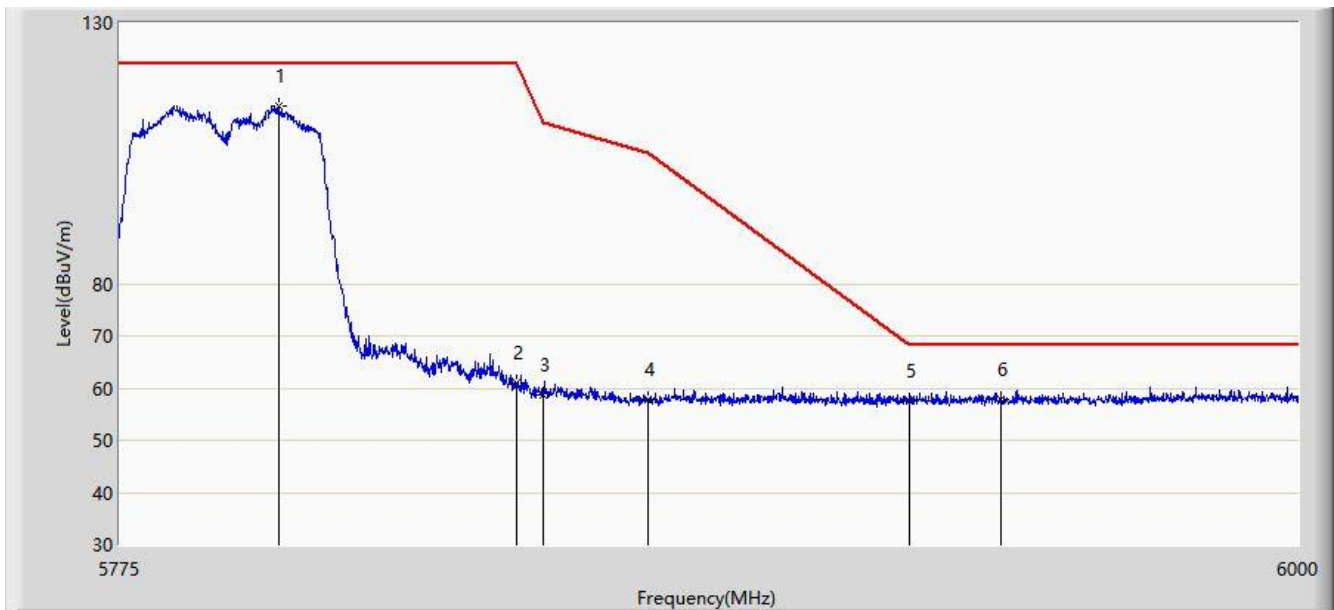


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5805.038        | 114.015                | 108.145              | N/A         | N/A            | 5.870       | PK   |
| 2  |      |      | 5850.000        | 60.882                 | 54.913               | -61.318     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 58.737                 | 52.762               | -52.063     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 57.949                 | 51.936               | -47.251     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 57.656                 | 51.521               | -10.544     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5942.513        | 57.683                 | 51.593               | -10.517     | 68.200         | 6.091       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                         | Time: 2020/03/07 - 03:37 |
| Limit: FCC_Part15.209_RSE(3m)                                                     | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                          | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                           | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with OAW-AP1361 |                          |

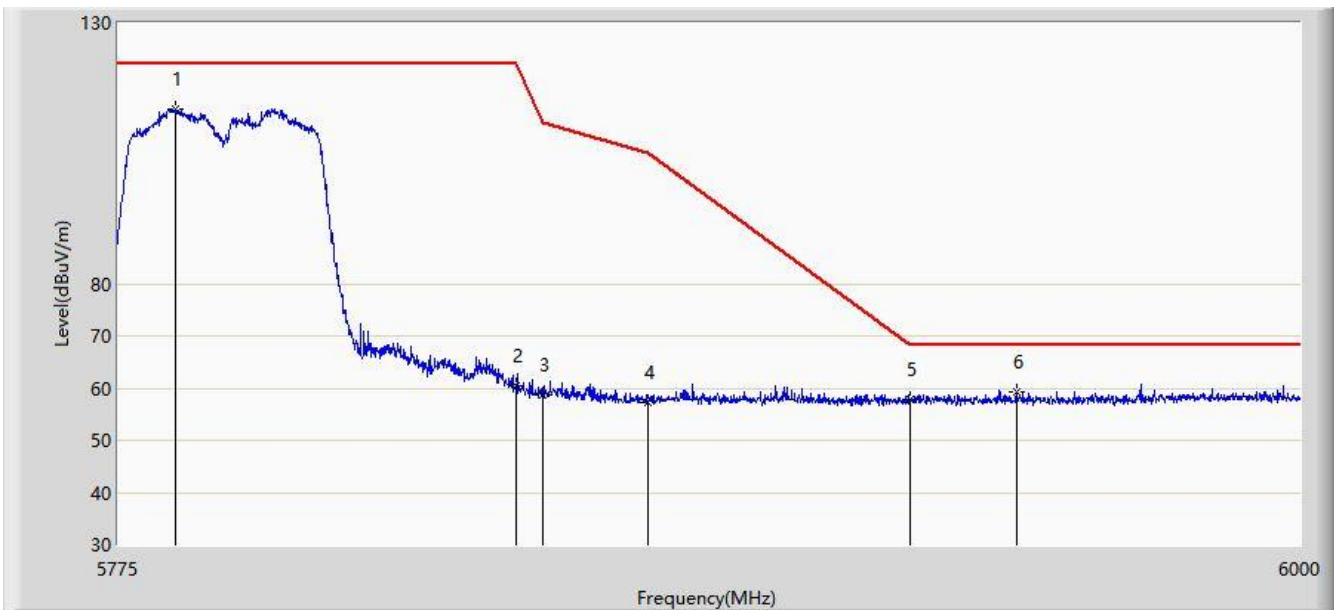


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5785.687        | 113.592                | 107.811              | N/A         | N/A            | 5.780       | PK   |
| 2  |      |      | 5850.000        | 60.508                 | 54.539               | -61.692     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 58.583                 | 52.608               | -52.217     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 57.294                 | 51.281               | -47.906     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 57.830                 | 51.695               | -10.370     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5945.437        | 59.350                 | 53.275               | -8.850      | 68.200         | 6.074       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:57 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361 |                          |

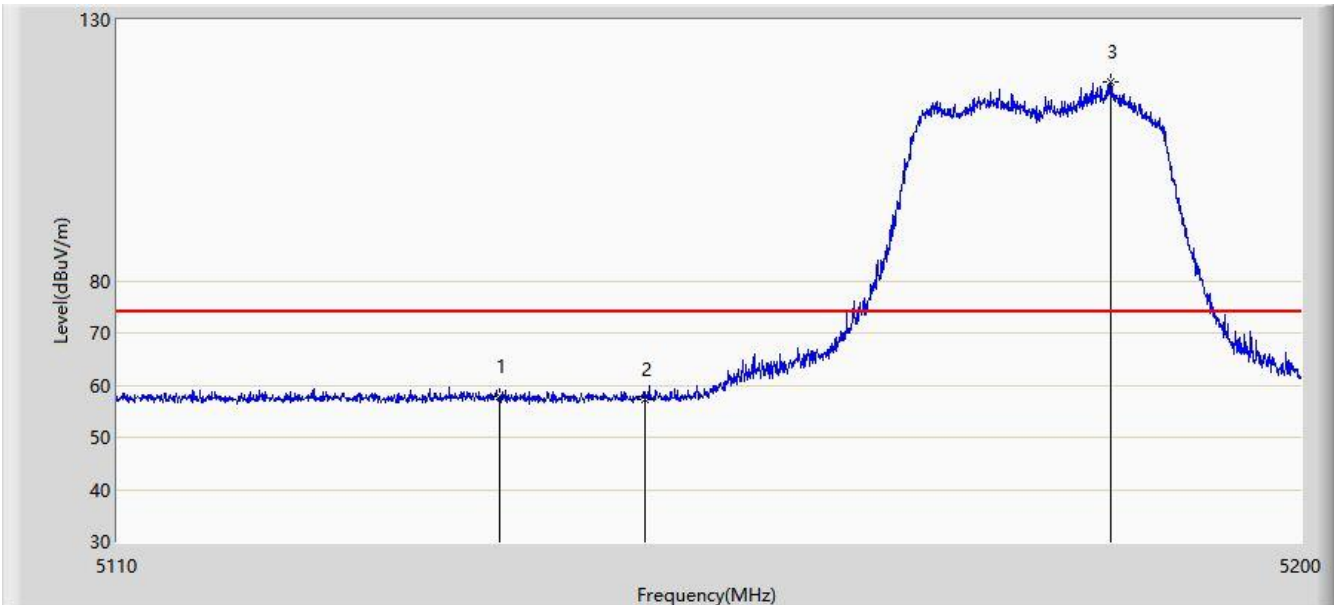


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5138.935        | 57.967                 | 53.546               | -16.033     | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 57.201                 | 52.759               | -16.799     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5185.510        | 118.219                | 113.792              | N/A         | N/A            | 4.426       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:59 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361 |                          |

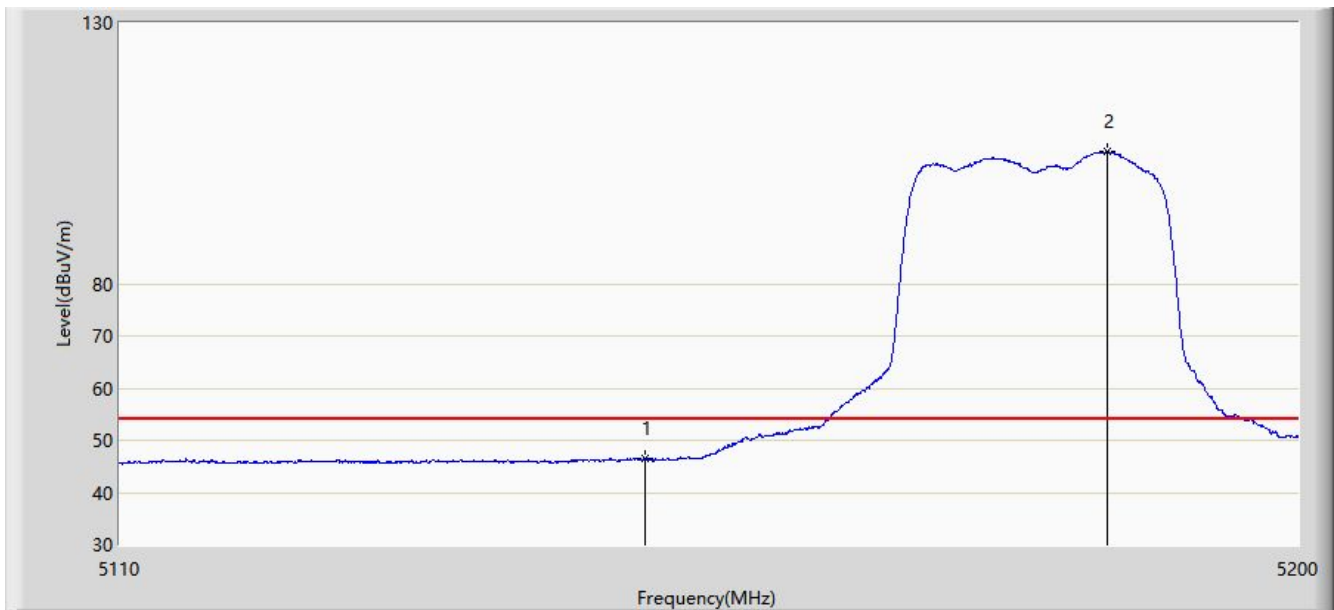


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.429                 | 41.987               | -7.571      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5185.375        | 105.316                | 100.888              | N/A         | N/A            | 4.428       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:00 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361 |                          |

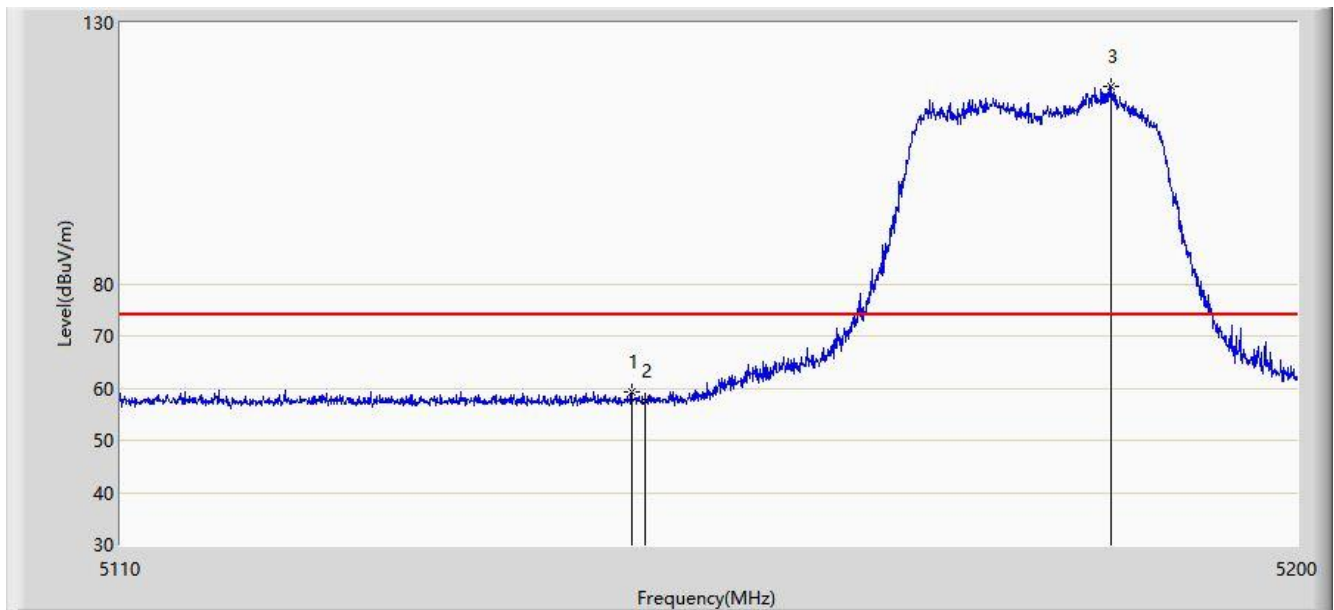


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.925        | 59.294                 | 54.864               | -14.706     | 74.000         | 4.430       | PK   |
| 2  |      |      | 5150.000        | 57.670                 | 53.228               | -16.330     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5185.690        | 117.895                | 113.470              | N/A         | N/A            | 4.426       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:01 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361 |                          |

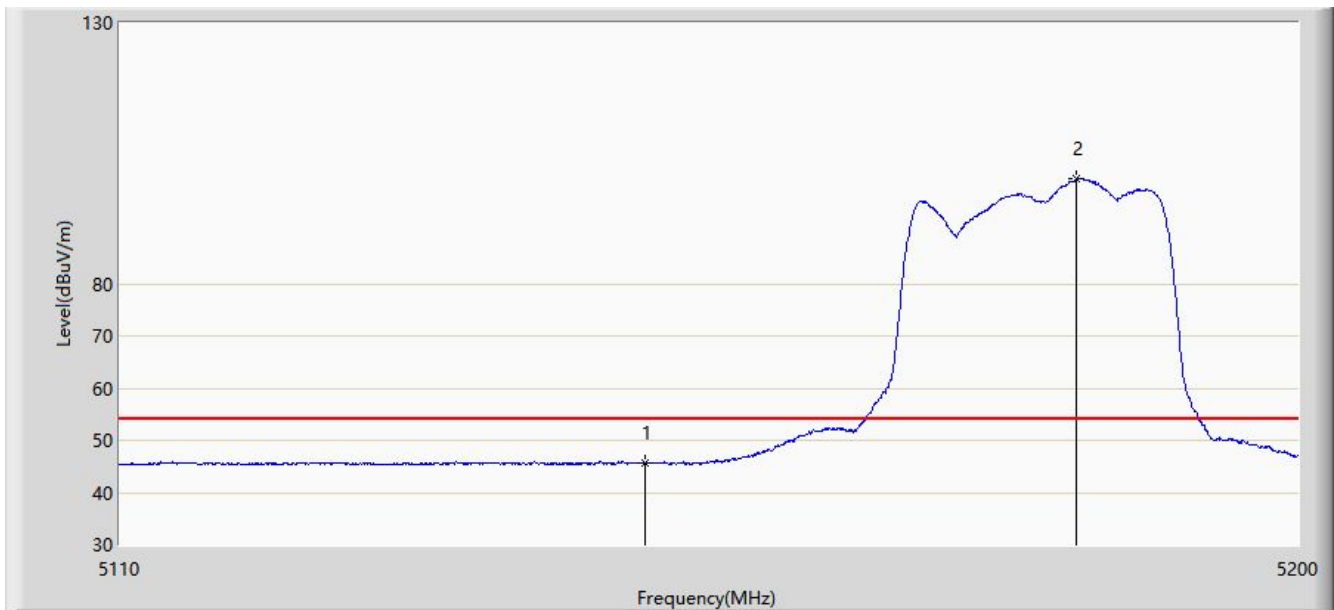


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.599                 | 41.157               | -8.401      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5182.945        | 100.063                | 95.606               | N/A         | N/A            | 4.456       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:12 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

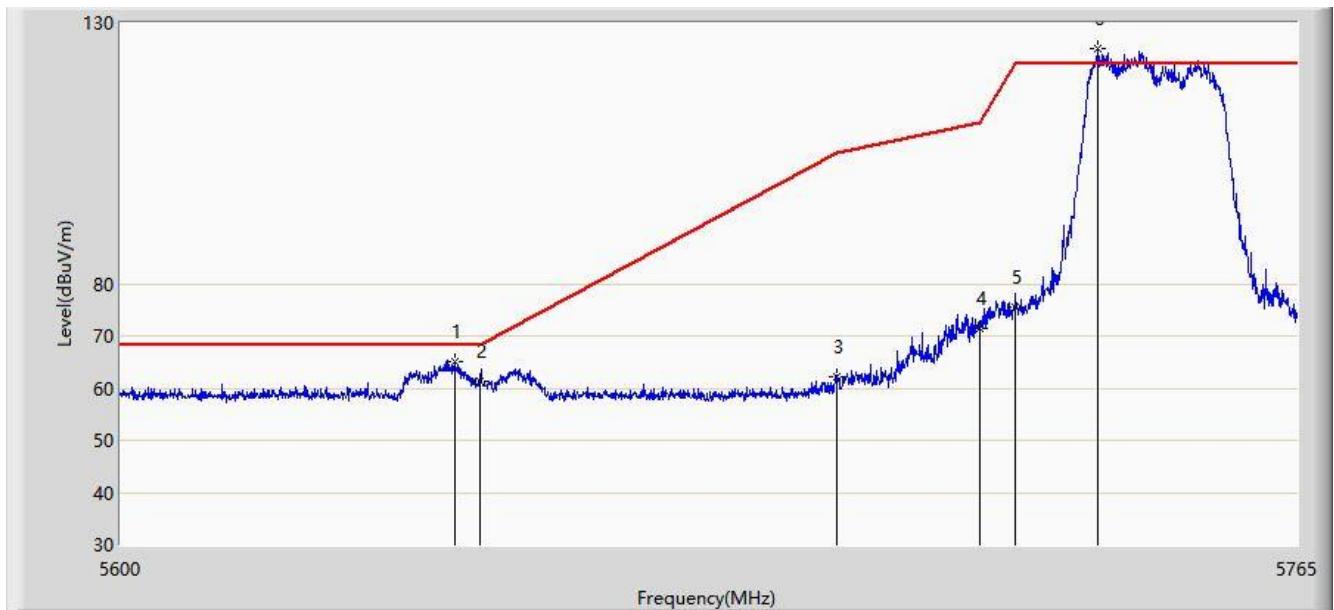


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5646.530        | 65.189                 | 59.910               | -3.011      | 68.200         | 5.280       | PK   |
| 2  |      |      | 5650.000        | 61.206                 | 55.870               | -6.994      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 62.246                 | 56.928               | -42.954     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 71.393                 | 65.919               | -39.407     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 75.368                 | 69.890               | -46.832     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5736.703        | 124.931                | 119.396              | N/A         | N/A            | 5.535       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:14 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with OAW-AP1361 |                          |

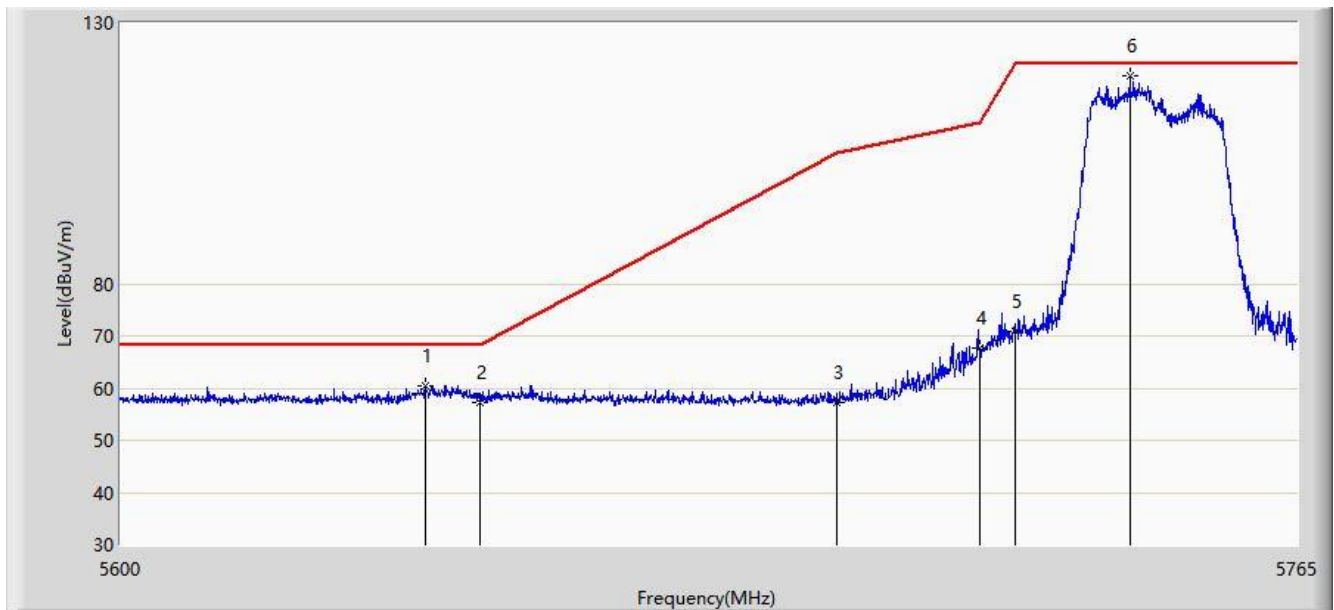


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5642.240        | 60.384                 | 55.175               | -7.816      | 68.200         | 5.210       | PK   |
| 2  |      |      | 5650.000        | 57.215                 | 51.879               | -10.985     | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 57.203                 | 51.885               | -47.997     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 67.563                 | 62.089               | -43.237     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 70.964                 | 65.486               | -51.236     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5741.322        | 119.762                | 114.203              | N/A         | N/A            | 5.560       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:15 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

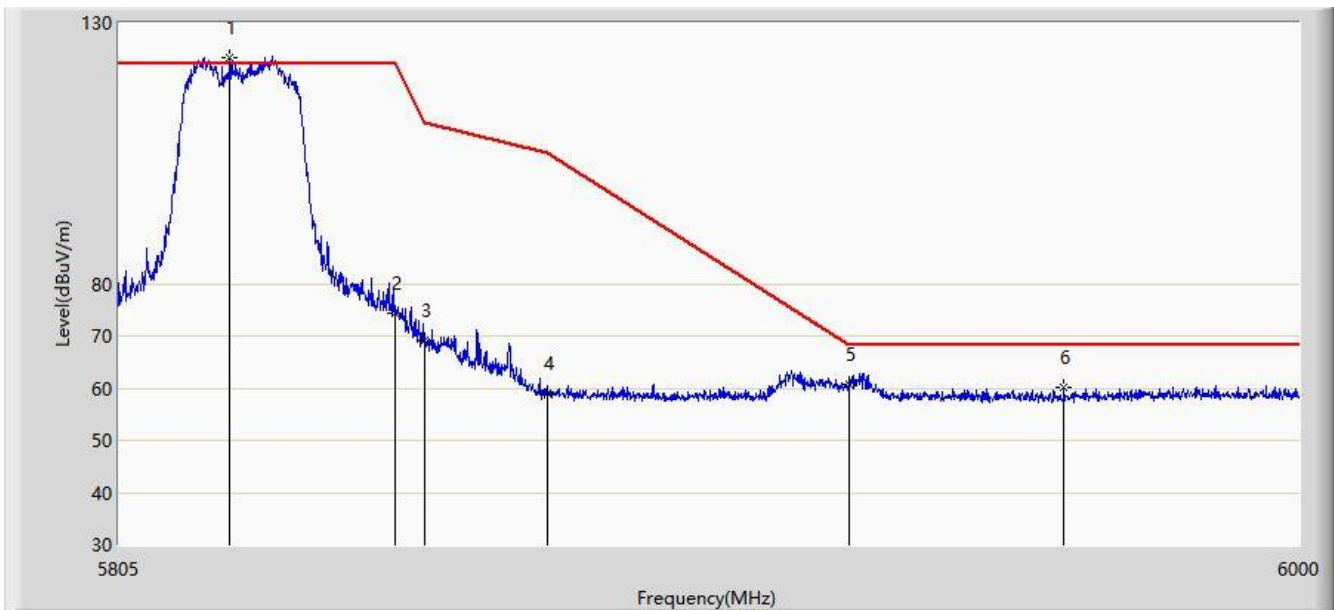


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5823.038        | 123.205                | 117.421              | N/A         | N/A            | 5.784       | PK   |
| 2  |      |      | 5850.000        | 74.435                 | 68.466               | -47.765     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 69.182                 | 63.207               | -41.618     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 59.039                 | 53.026               | -46.161     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 60.664                 | 54.529               | -7.536      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5960.708        | 60.221                 | 54.230               | -7.979      | 68.200         | 5.990       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:17 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with OAW-AP1361 |                          |

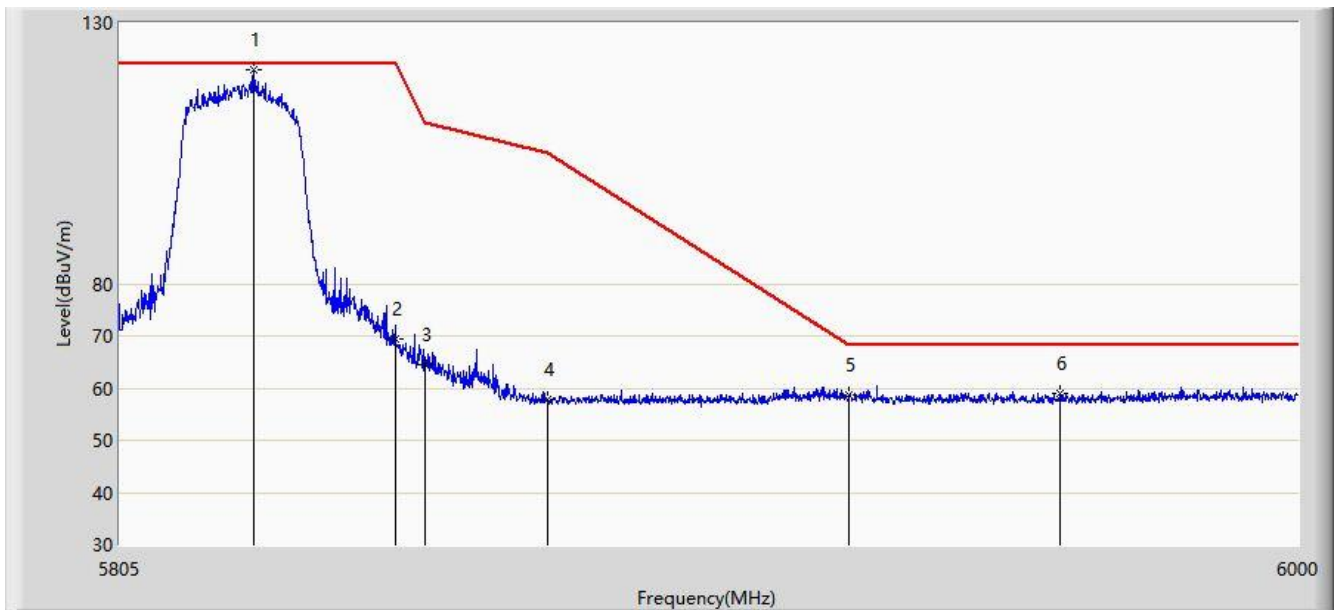


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5826.840        | 120.961                | 115.208              | N/A         | N/A            | 5.753       | PK   |
| 2  |      |      | 5850.000        | 69.303                 | 63.334               | -52.897     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 64.619                 | 58.644               | -46.181     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 57.890                 | 51.877               | -47.310     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 58.570                 | 52.435               | -9.630      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5960.123        | 59.073                 | 53.079               | -9.127      | 68.200         | 5.994       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 02:38 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

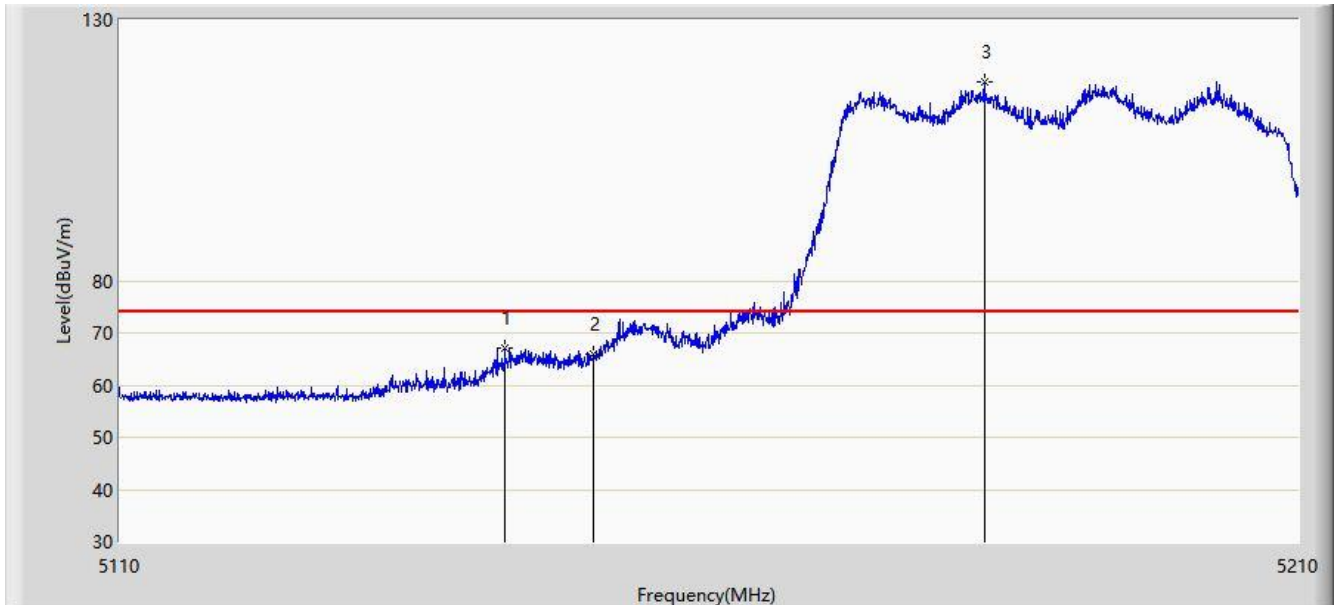


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.500        | 67.207                 | 62.787               | -6.793      | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 65.913                 | 61.471               | -8.087      | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5183.200        | 118.120                | 113.666              | N/A         | N/A            | 4.454       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 02:40 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

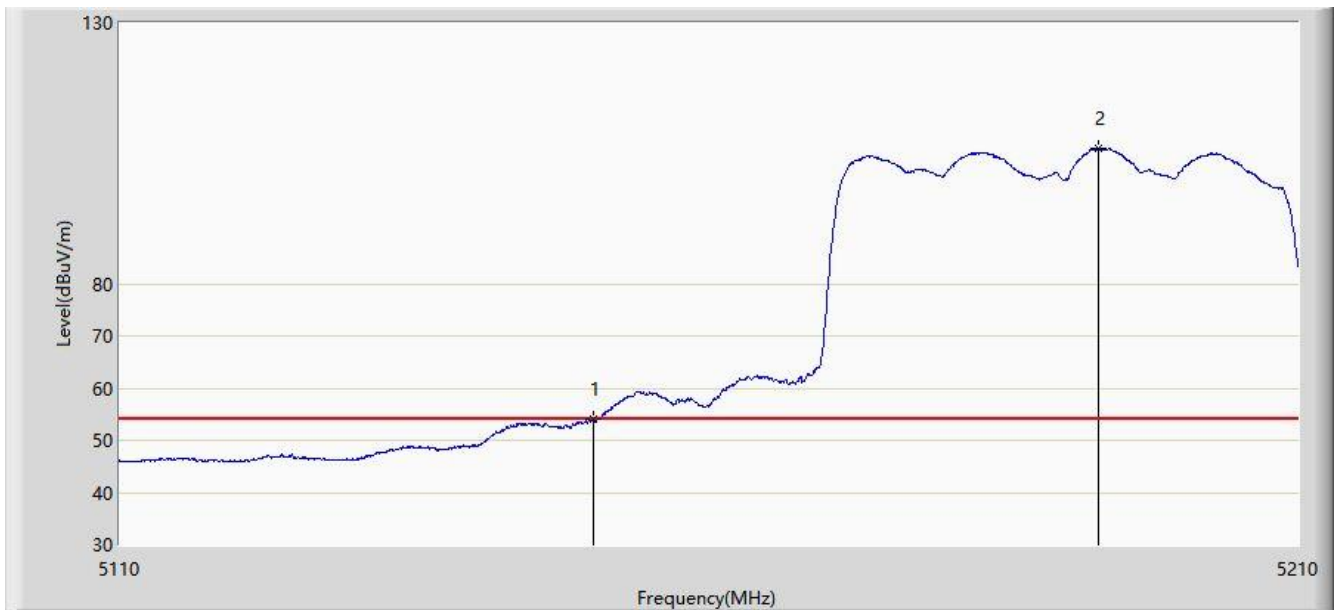


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.930                 | 49.488               | -0.070      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5192.950        | 105.934                | 101.594              | N/A         | N/A            | 4.339       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 02:41 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

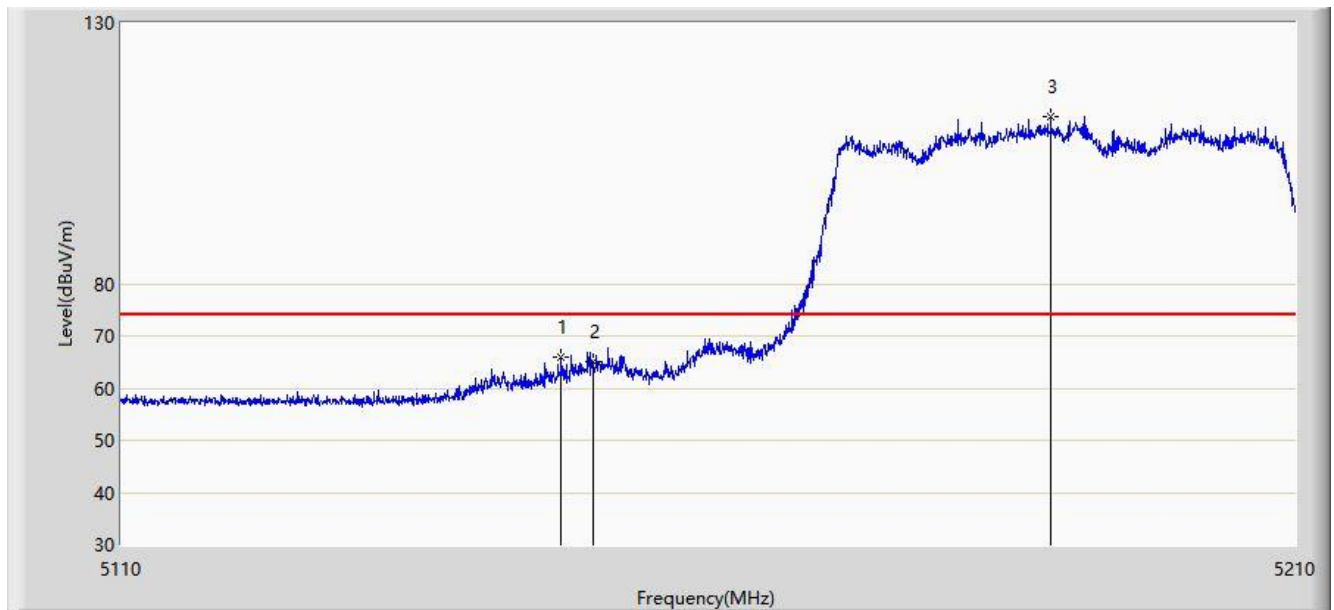


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.300        | 65.896                 | 61.476               | -8.104      | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 64.980                 | 60.538               | -9.020      | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5189.050        | 112.138                | 107.753              | N/A         | N/A            | 4.386       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 02:42 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-VHT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361 |                          |

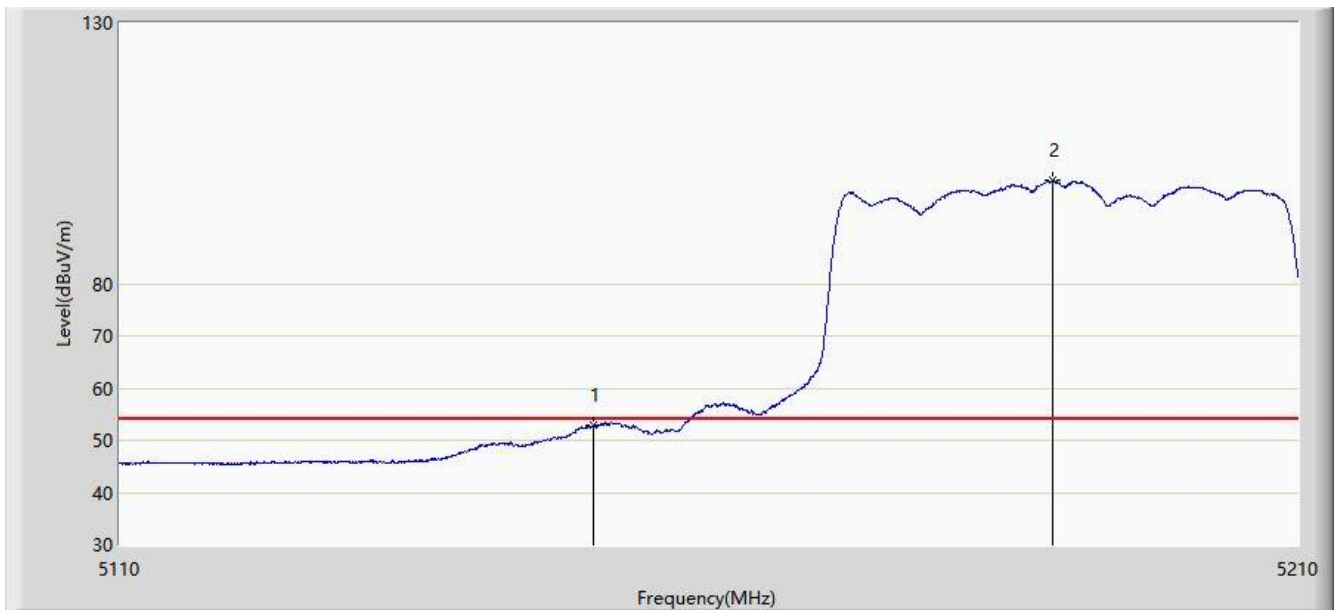


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.791                 | 48.349               | -1.209      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5189.000        | 99.799                 | 95.413               | N/A         | N/A            | 4.386       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:51 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with OAW-AP1361 |                          |

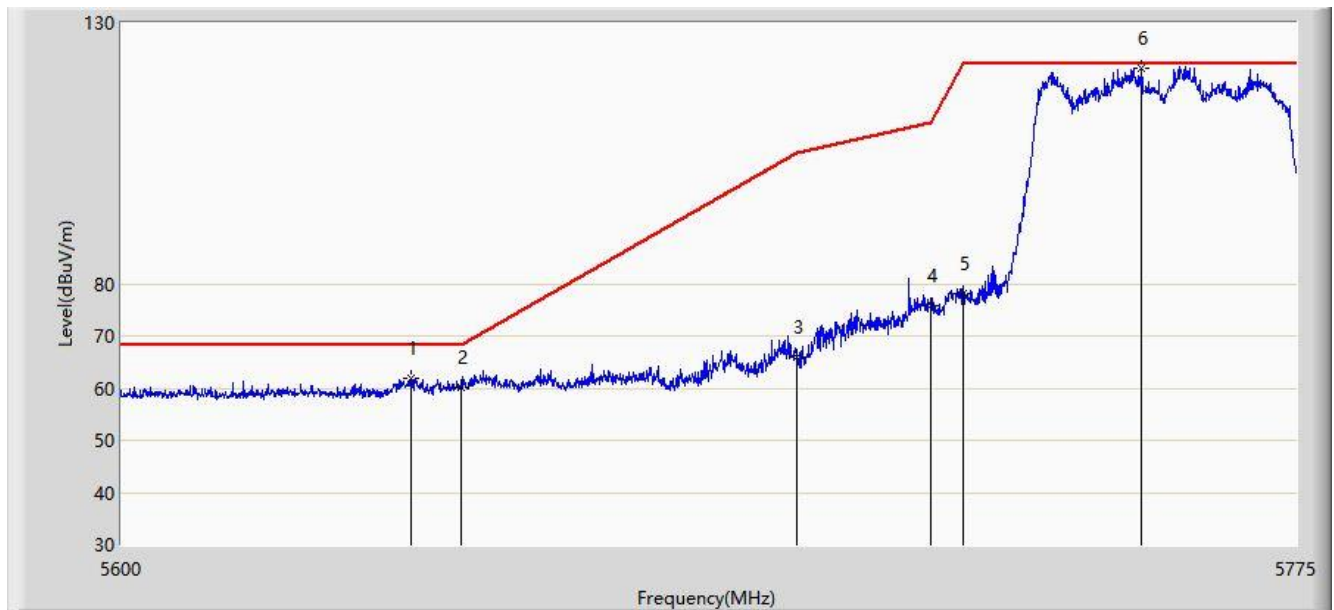


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5642.788        | 61.791                 | 56.573               | -6.409      | 68.200         | 5.219       | PK   |
| 2  |      |      | 5650.000        | 60.103                 | 54.767               | -8.097      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 66.085                 | 60.767               | -39.115     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 75.795                 | 70.321               | -35.005     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 78.177                 | 72.699               | -44.023     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5751.725        | 121.301                | 115.562              | N/A         | N/A            | 5.739       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:53 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with OAW-AP1361 |                          |

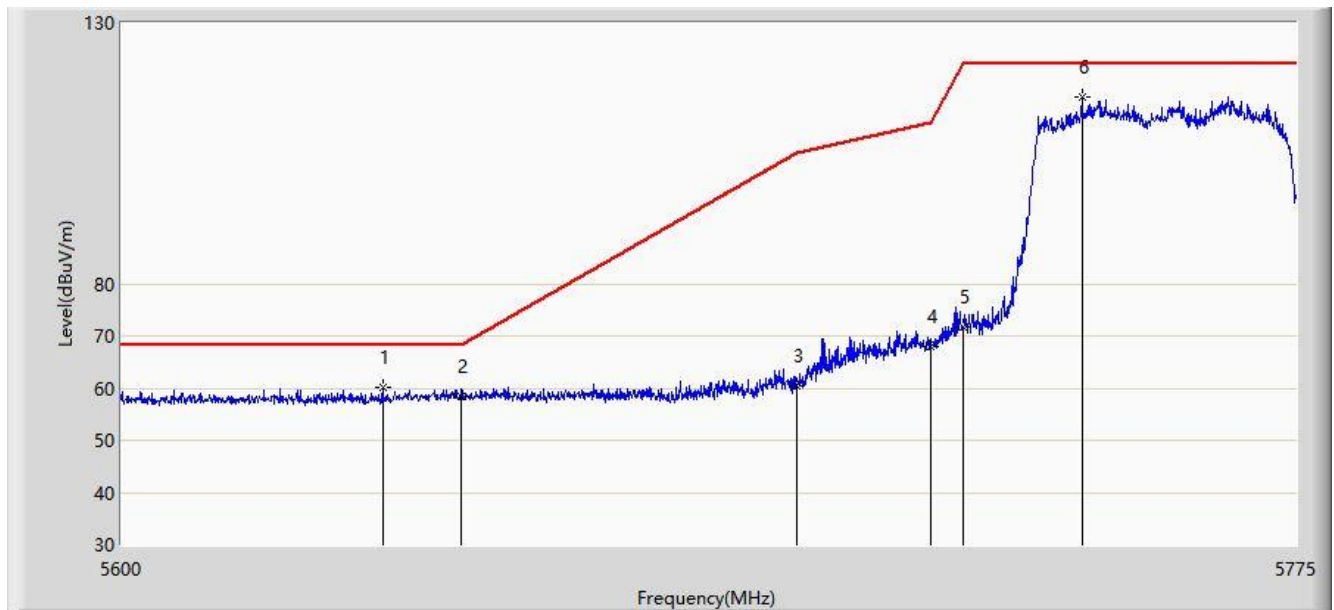


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5638.500        | 60.090                 | 54.900               | -8.110      | 68.200         | 5.190       | PK   |
| 2  |      |      | 5650.000        | 58.289                 | 52.953               | -9.911      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 60.362                 | 55.044               | -44.838     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 67.894                 | 62.420               | -42.906     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 71.771                 | 66.293               | -50.429     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5742.712        | 115.726                | 110.160              | N/A         | N/A            | 5.567       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:54 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with OAW-AP1361 |                          |

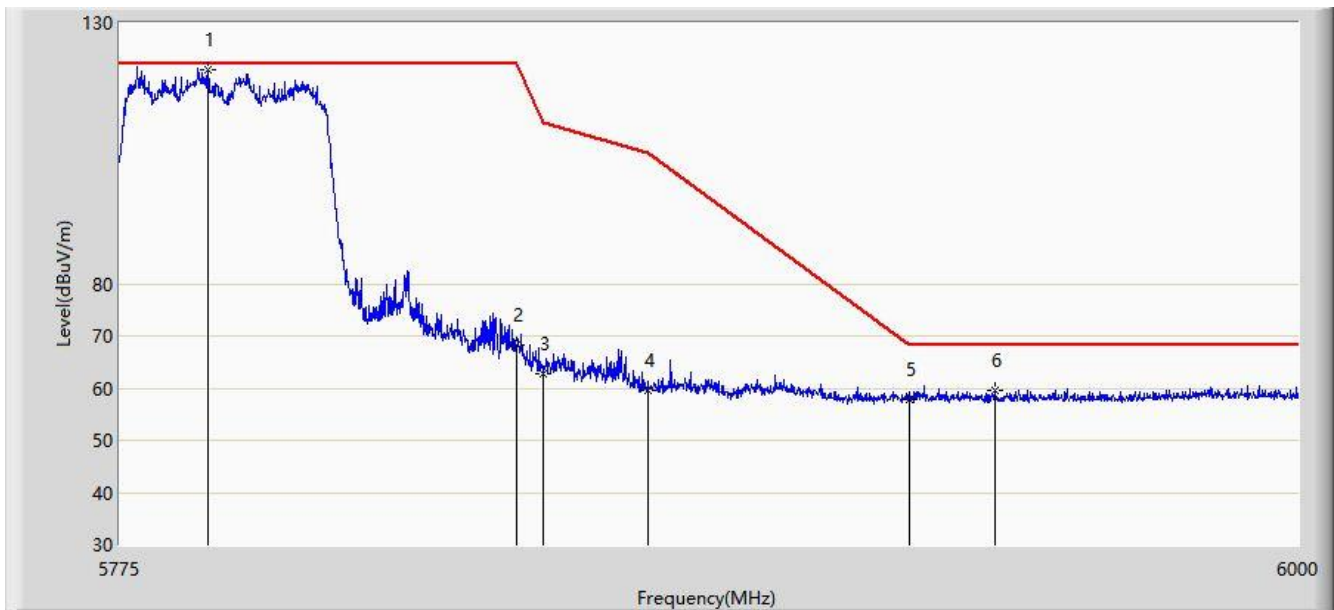


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5791.650        | 121.150                | 115.323              | N/A         | N/A            | 5.827       | PK   |
| 2  |      |      | 5850.000        | 68.370                 | 62.401               | -53.830     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 62.757                 | 56.782               | -48.043     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 59.571                 | 53.558               | -45.629     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 57.886                 | 51.751               | -10.314     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5941.275        | 59.628                 | 53.531               | -8.572      | 68.200         | 6.097       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:55 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with OAW-AP1361 |                          |

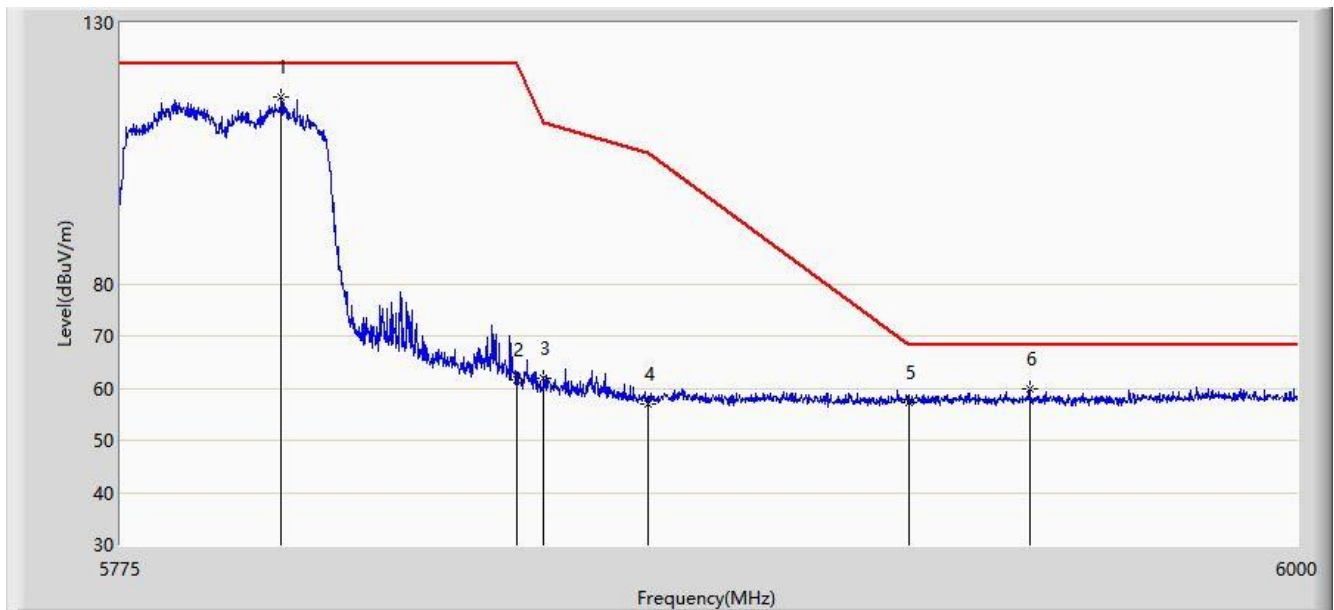


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5805.263        | 115.814                | 109.944              | N/A         | N/A            | 5.871       | PK   |
| 2  |      |      | 5850.000        | 61.686                 | 55.717               | -60.514     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 61.967                 | 55.992               | -48.833     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 56.940                 | 50.927               | -48.260     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 57.306                 | 51.171               | -10.894     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5948.138        | 59.981                 | 53.921               | -8.219      | 68.200         | 6.060       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:52 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361 |                          |

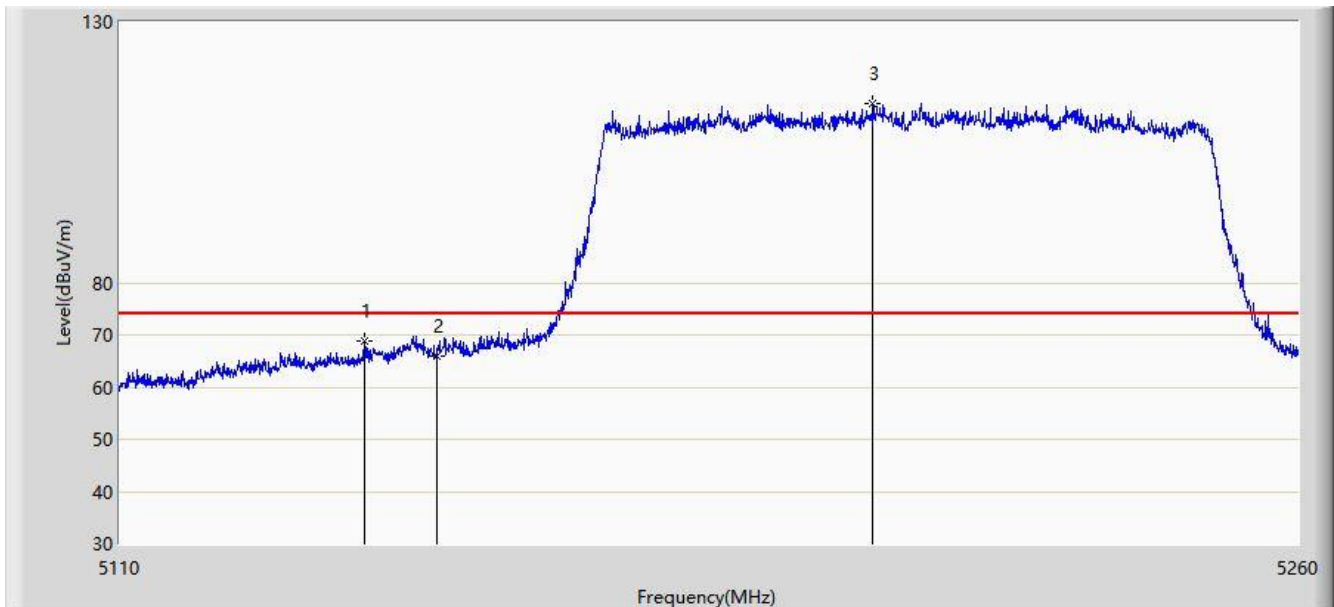


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5140.900        | 68.714                 | 64.293               | -5.286      | 74.000         | 4.420       | PK   |
| 2  |      |      | 5150.000        | 65.886                 | 61.444               | -8.114      | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5205.400        | 114.339                | 110.111              | N/A         | N/A            | 4.228       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:54 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361 |                          |

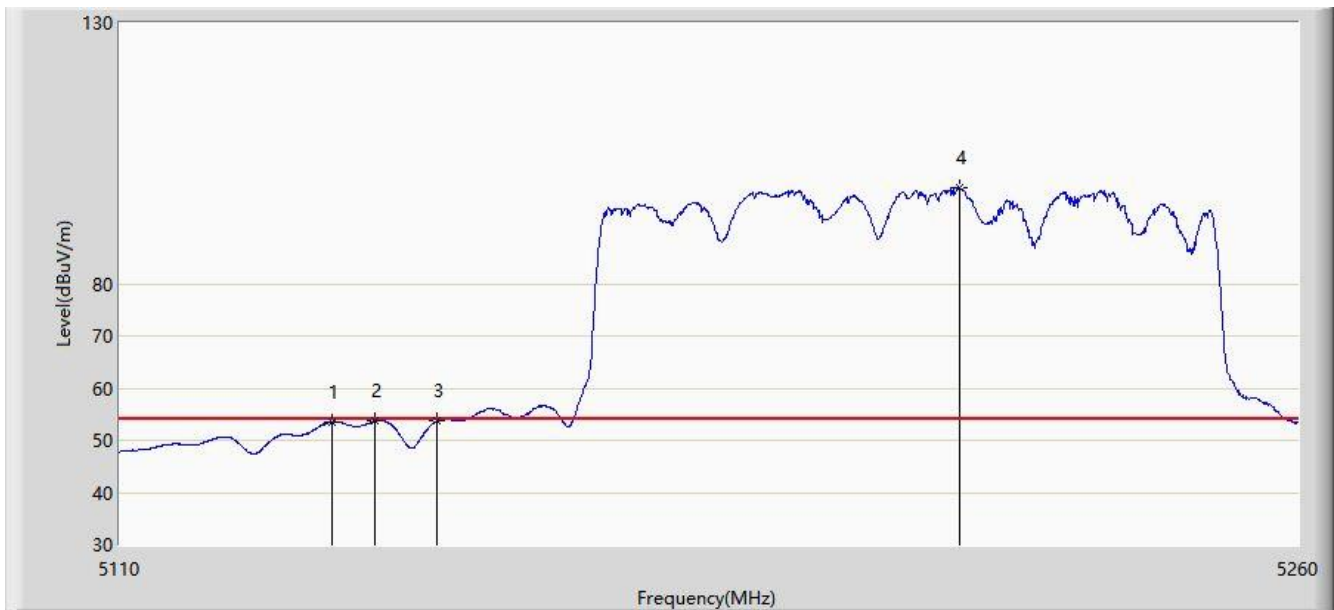


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5136.775        | 53.568                 | 49.147               | -0.432      | 54.000         | 4.420       | AV   |
| 2  |      |      | 5142.100        | 53.769                 | 49.349               | -0.231      | 54.000         | 4.421       | AV   |
| 3  |      |      | 5150.000        | 53.717                 | 49.275               | -0.283      | 54.000         | 4.442       | AV   |
| 4  |      | *    | 5216.500        | 98.402                 | 94.253               | N/A         | N/A            | 4.148       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:55 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361 |                          |

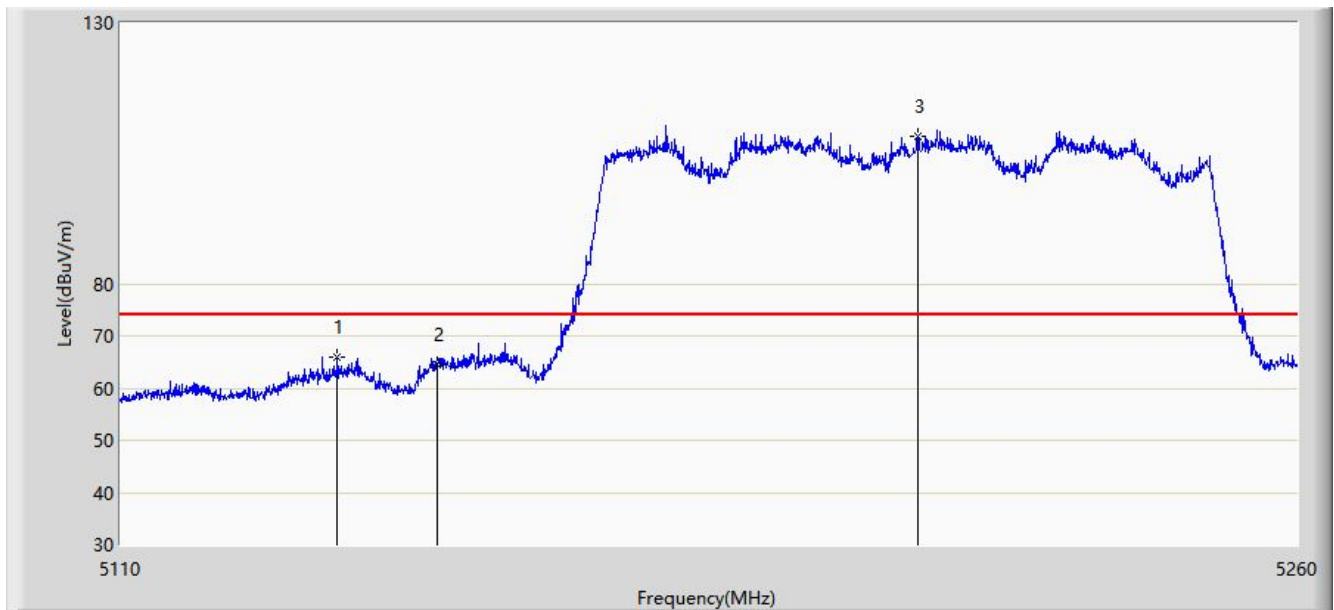


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5137.375        | 66.064                 | 61.643               | -7.936      | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 64.546                 | 60.104               | -9.454      | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5211.250        | 108.150                | 103.959              | N/A         | N/A            | 4.191       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 02:56 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361 |                          |

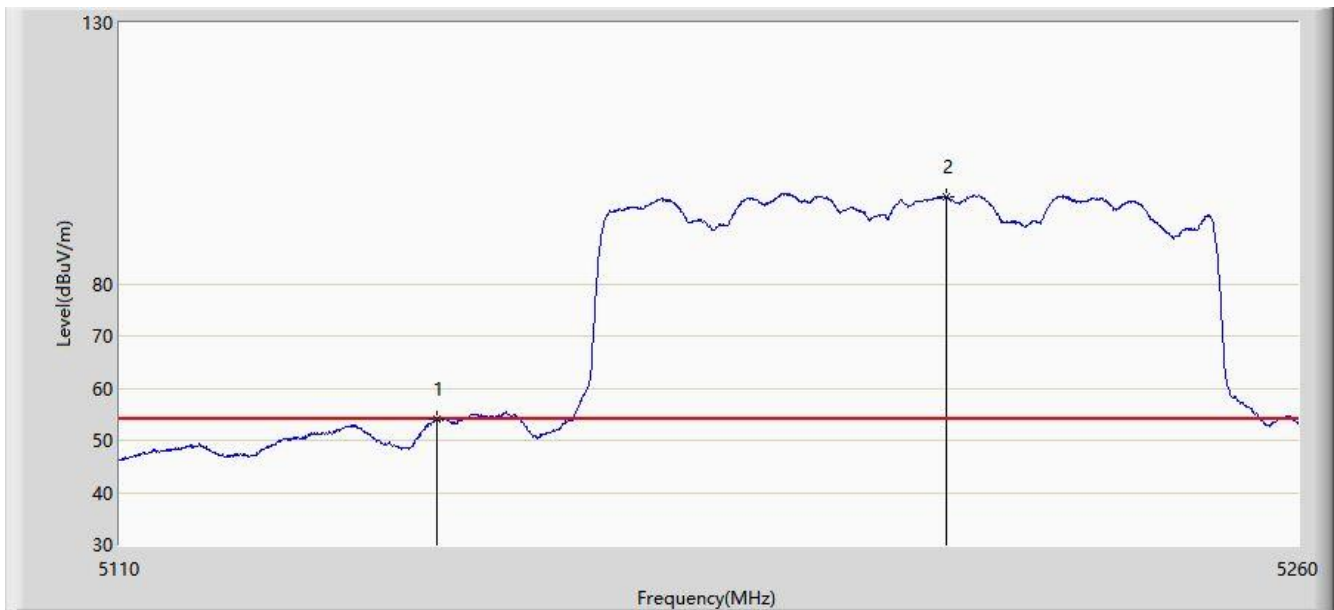


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.914                 | 49.472               | -0.086      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5214.850        | 96.646                 | 92.478               | N/A         | N/A            | 4.168       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:56 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with OAW-AP1361 |                          |

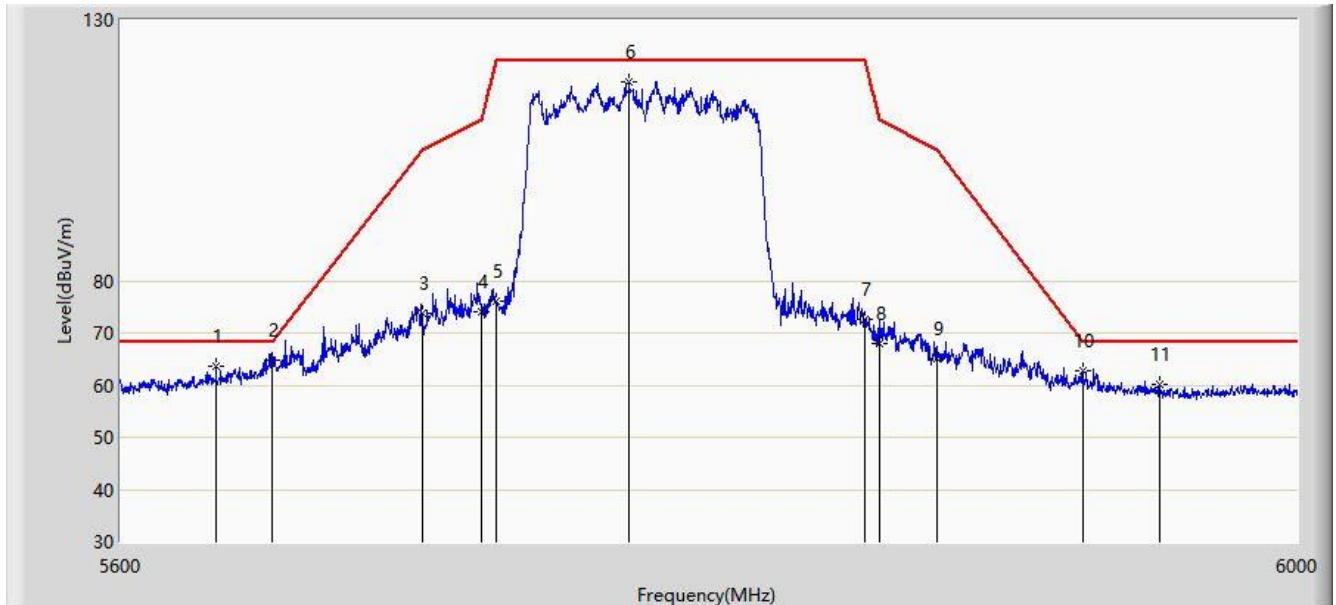


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5631.600        | 63.760                 | 58.566               | -4.440      | 68.200         | 5.194       | PK   |
| 2  |      | *    | 5650.000        | 64.699                 | 59.363               | -3.501      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 73.837                 | 68.519               | -31.363     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 73.923                 | 68.449               | -36.877     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 76.048                 | 70.570               | -46.152     | 122.200        | 5.478       | PK   |
| 6  |      |      | 5769.600        | 118.029                | 112.234              | N/A         | N/A            | 5.795       | PK   |
| 7  |      |      | 5850.000        | 72.527                 | 66.558               | -49.673     | 122.200        | 5.968       | PK   |
| 8  |      |      | 5855.000        | 68.075                 | 62.100               | -42.725     | 110.800        | 5.975       | PK   |
| 9  |      |      | 5875.000        | 64.991                 | 58.978               | -40.209     | 105.200        | 6.013       | PK   |
| 10 |      |      | 5925.000        | 62.642                 | 56.507               | -5.558      | 68.200         | 6.136       | PK   |
| 11 |      |      | 5952.000        | 60.009                 | 53.970               | -8.191      | 68.200         | 6.039       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                          | Time: 2020/03/07 - 03:58 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with OAW-AP1361 |                          |

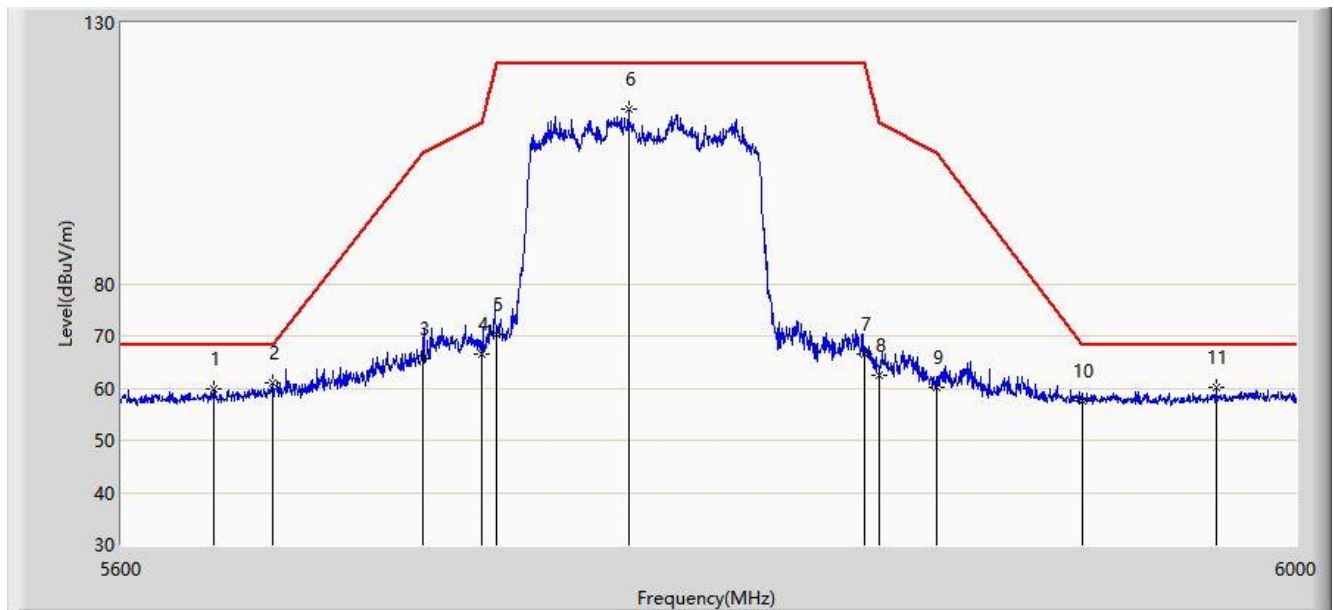


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5630.400        | 59.906                 | 54.712               | -8.294      | 68.200         | 5.194       | PK   |
| 2  |      | *    | 5650.000        | 61.111                 | 55.775               | -7.089      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 65.670                 | 60.352               | -39.530     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 66.535                 | 61.061               | -44.265     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 70.361                 | 64.883               | -51.839     | 122.200        | 5.478       | PK   |
| 6  |      |      | 5769.400        | 113.485                | 107.688              | N/A         | N/A            | 5.797       | PK   |
| 7  |      |      | 5850.000        | 66.394                 | 60.425               | -55.806     | 122.200        | 5.968       | PK   |
| 8  |      |      | 5855.000        | 62.534                 | 56.559               | -48.266     | 110.800        | 5.975       | PK   |
| 9  |      |      | 5875.000        | 60.050                 | 54.037               | -45.150     | 105.200        | 6.013       | PK   |
| 10 |      |      | 5925.000        | 57.561                 | 51.426               | -10.639     | 68.200         | 6.136       | PK   |
| 11 |      |      | 5971.800        | 60.194                 | 53.983               | -8.006      | 68.200         | 6.211       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:01 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 – Scan Antenna |                          |

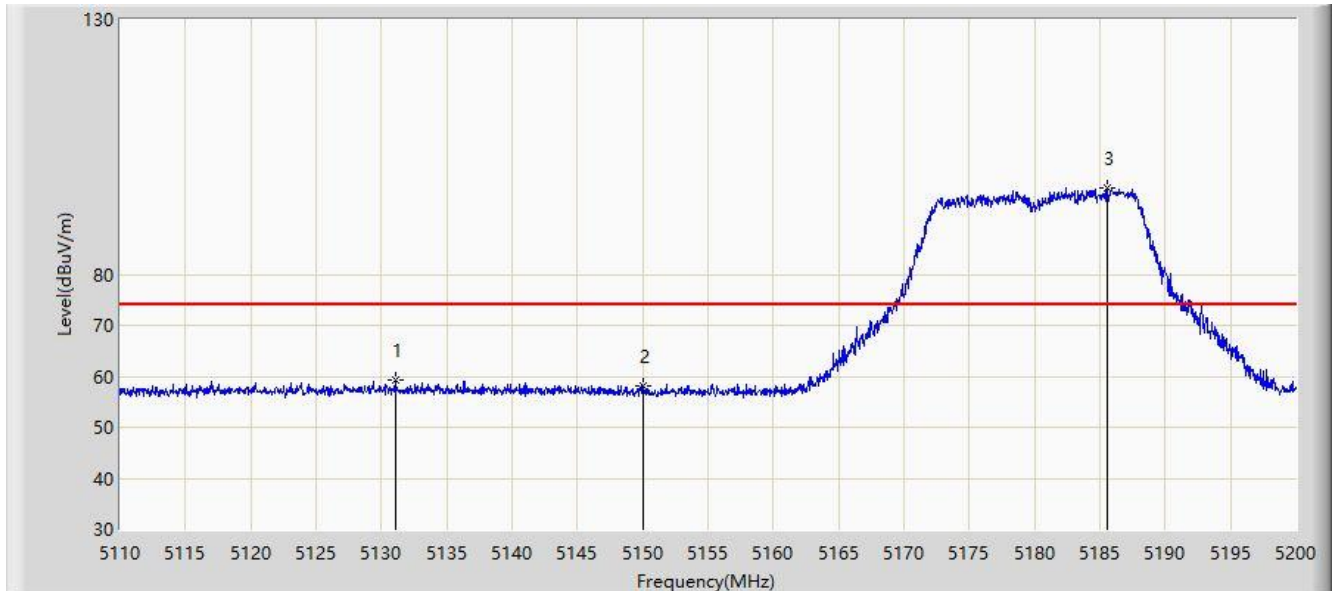


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5131.060        | 59.399                 | 54.977               | -14.601     | 74.000         | 4.422       | PK   |
| 2  |      |      | 5150.000        | 58.027                 | 53.585               | -15.973     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5185.510        | 97.063                 | 92.636               | N/A         | N/A            | 4.426       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:29 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 – Scan Antenna |                          |

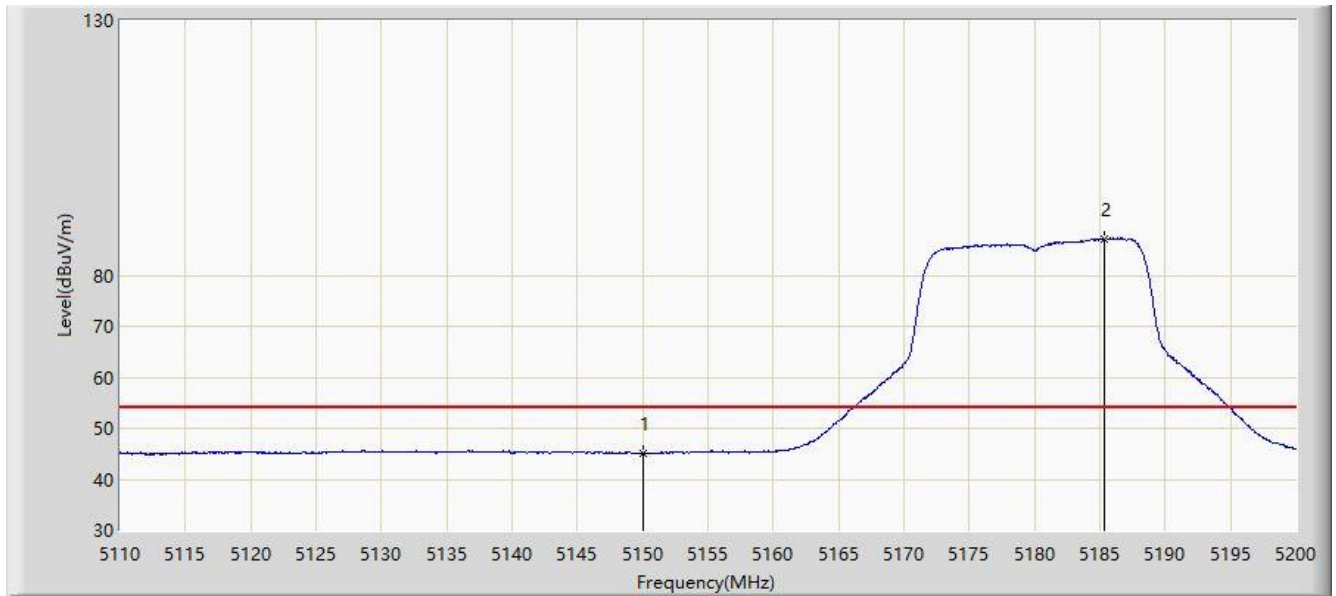


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.082                 | 40.640               | -8.918      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5185.375        | 87.019                 | 82.591               | N/A         | N/A            | 4.428       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:29 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 – Scan Antenna |                          |

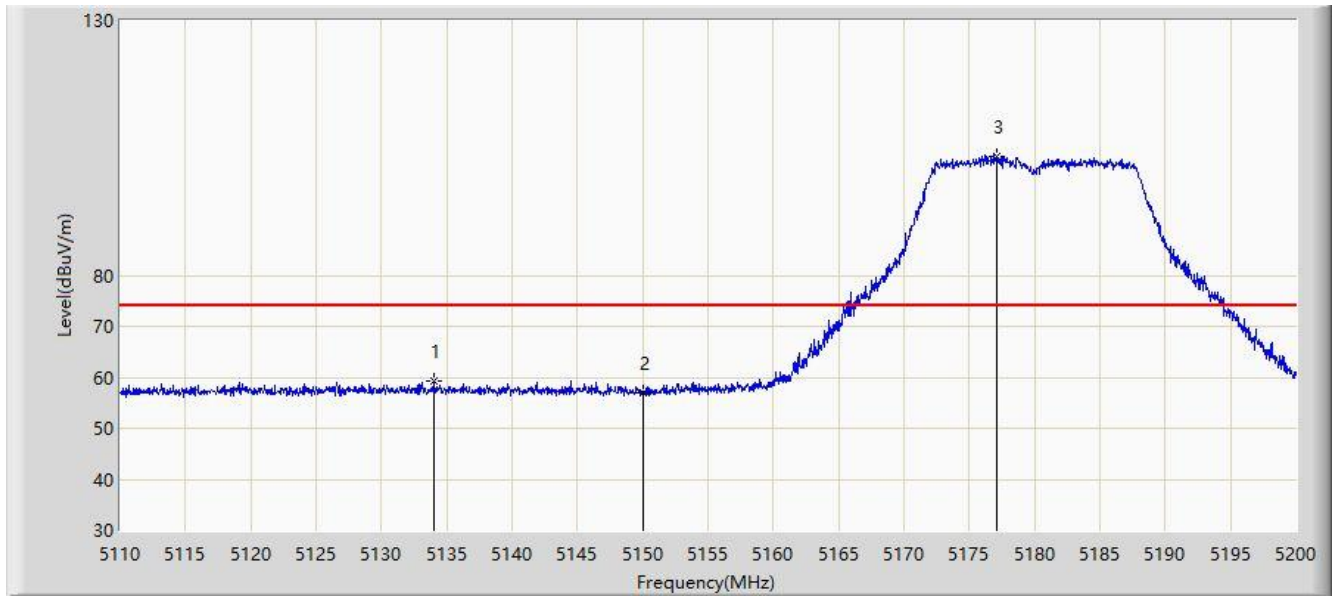


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5134.030        | 59.212                 | 54.790               | -14.788     | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 57.099                 | 52.657               | -16.901     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5177.050        | 103.451                | 98.941               | N/A         | N/A            | 4.510       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:30 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz with OAW-AP1361 – Scan Antenna |                          |

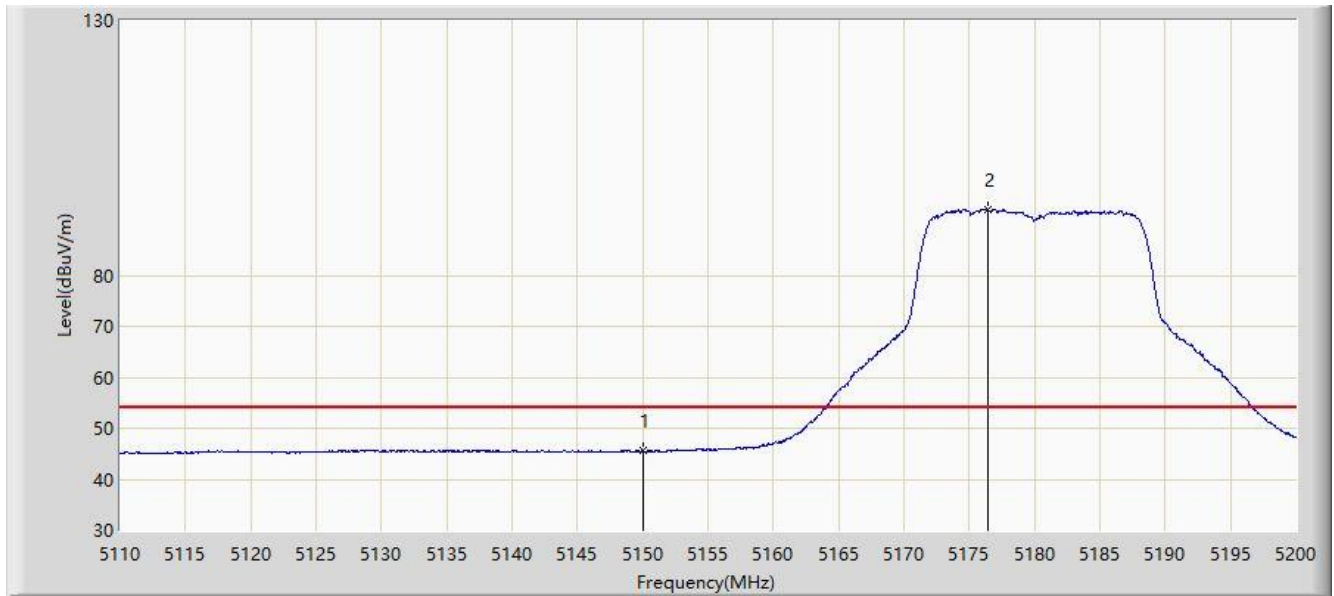


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 45.592                 | 41.150               | -8.408      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5176.420        | 92.895                 | 88.380               | N/A         | N/A            | 4.516       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361 – Scan Antenna |                          |

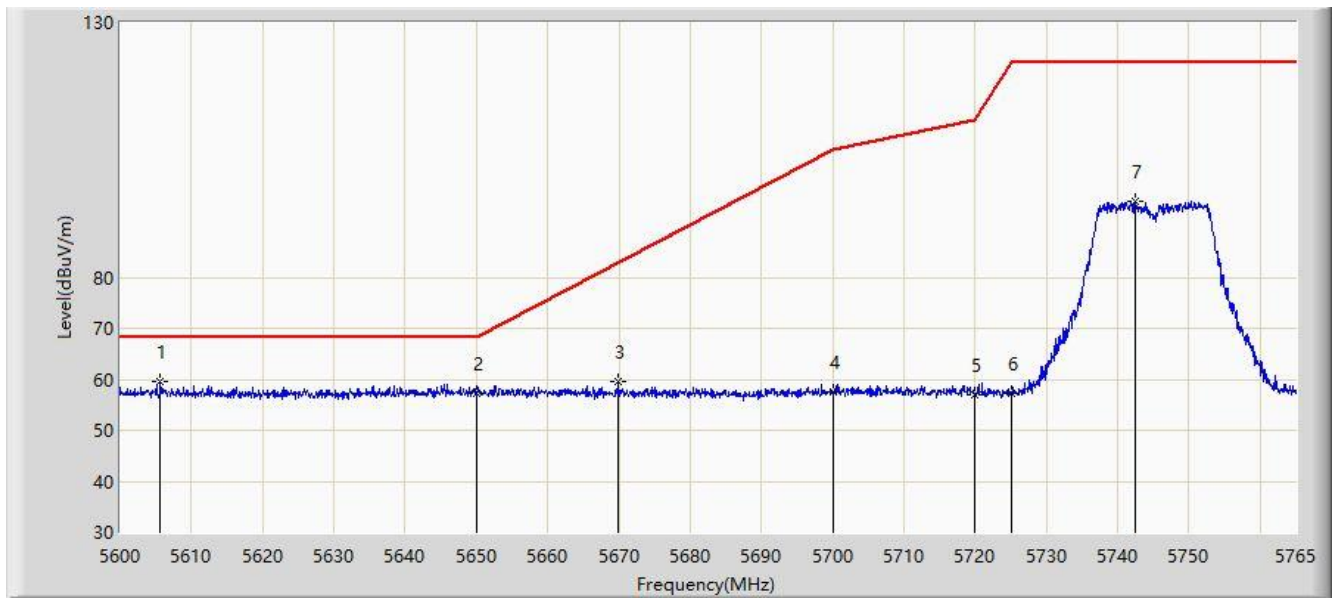


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5605.610        | 59.463                 | 54.545               | -8.737      | 68.200         | 4.917       | PK   |
| 2  |      |      | 5650.000        | 57.362                 | 52.026               | -10.838     | 68.200         | 5.336       | PK   |
| 3  |      |      | 5669.960        | 59.490                 | 54.054               | -23.520     | 83.010         | 5.436       | PK   |
| 4  |      |      | 5700.000        | 57.461                 | 52.143               | -47.739     | 105.200        | 5.318       | PK   |
| 5  |      |      | 5720.000        | 56.886                 | 51.412               | -53.914     | 110.800        | 5.474       | PK   |
| 6  |      |      | 5725.000        | 57.375                 | 51.897               | -64.825     | 122.200        | 5.478       | PK   |
| 7  |      |      | 5742.478        | 94.943                 | 89.378               | N/A         | N/A            | 5.566       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:39 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz with OAW-AP1361 – Scan Antenna |                          |

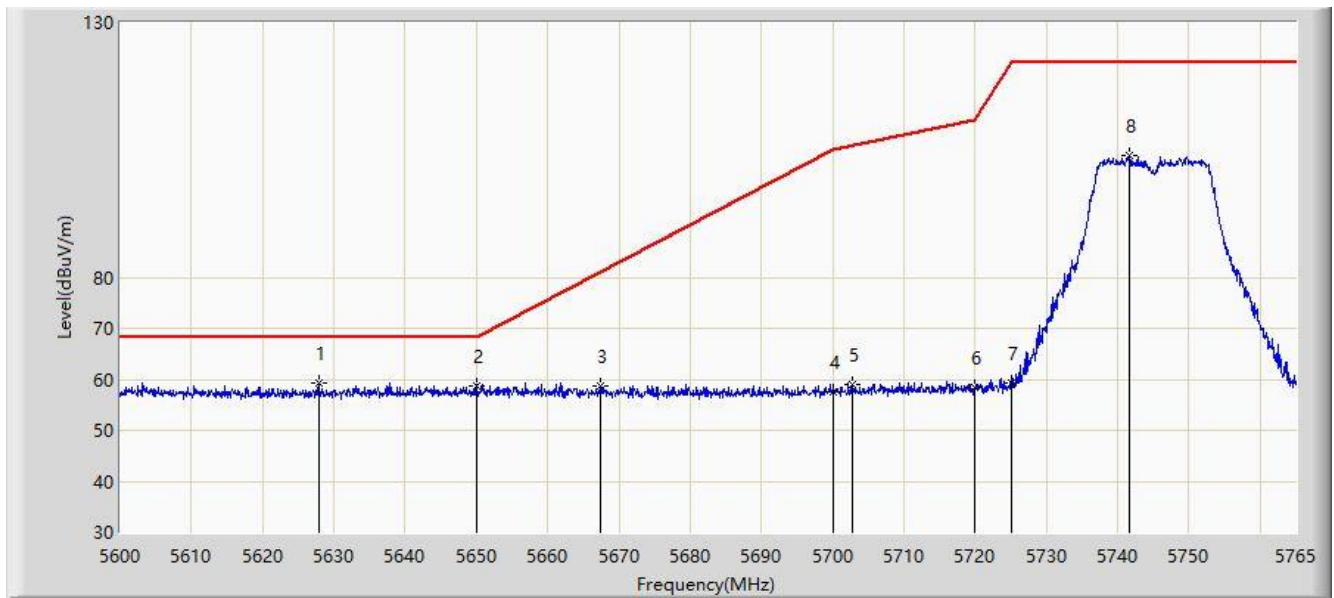


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5627.885        | 59.366                 | 54.170               | -8.834      | 68.200         | 5.195       | PK   |
| 2  |      |      | 5650.000        | 58.777                 | 53.441               | -9.423      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5667.402        | 58.764                 | 53.322               | -22.350     | 81.114         | 5.442       | PK   |
| 4  |      |      | 5700.000        | 57.650                 | 52.332               | -47.550     | 105.200        | 5.318       | PK   |
| 5  |      |      | 5702.712        | 59.120                 | 53.758               | -46.840     | 105.961        | 5.362       | PK   |
| 6  |      |      | 5720.000        | 58.399                 | 52.925               | -52.401     | 110.800        | 5.474       | PK   |
| 7  |      |      | 5725.000        | 59.384                 | 53.906               | -62.816     | 122.200        | 5.478       | PK   |
| 8  |      |      | 5741.570        | 103.872                | 98.312               | N/A         | N/A            | 5.561       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:40 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361 – Scan Antenna |                          |

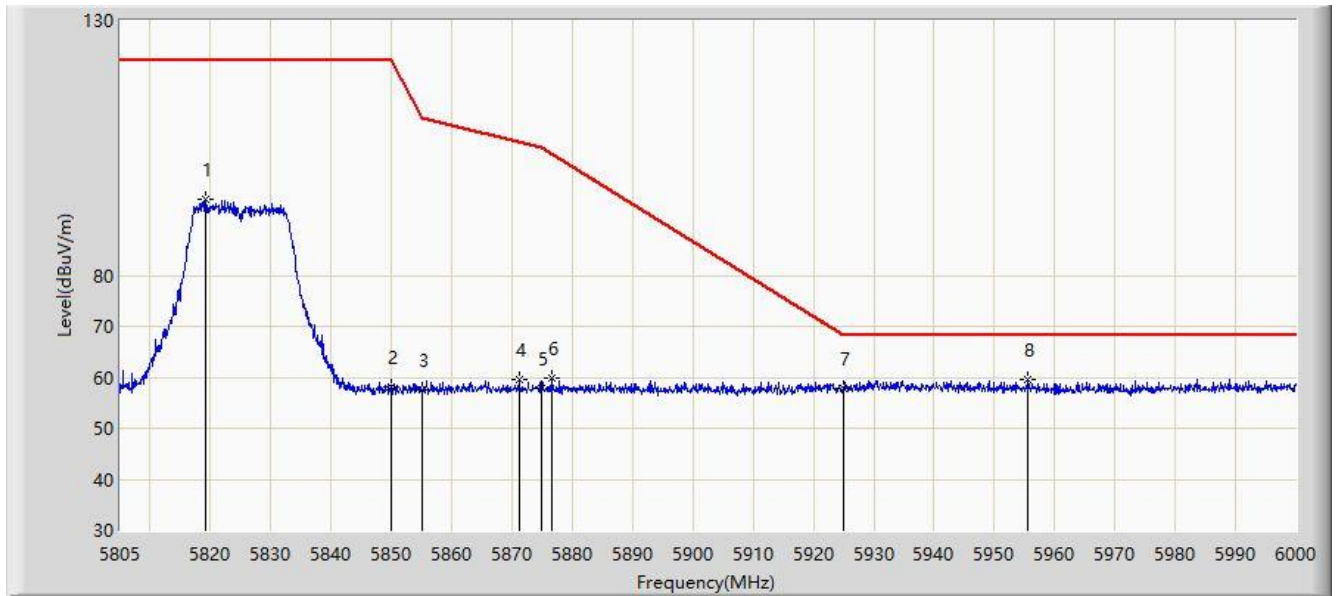


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5819.235        | 94.797                 | 88.982               | N/A         | N/A            | 5.814       | PK   |
| 2  |      |      | 5850.000        | 58.167                 | 52.198               | -64.033     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 57.612                 | 51.637               | -53.188     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5871.105        | 59.427                 | 53.423               | -46.862     | 106.289        | 6.004       | PK   |
| 5  |      |      | 5875.000        | 57.902                 | 51.889               | -47.298     | 105.200        | 6.013       | PK   |
| 6  |      |      | 5876.663        | 59.931                 | 53.914               | -44.033     | 103.964        | 6.017       | PK   |
| 7  |      |      | 5925.000        | 57.948                 | 51.813               | -10.252     | 68.200         | 6.136       | PK   |
| 8  |      | *    | 5955.638        | 59.680                 | 53.661               | -8.520      | 68.200         | 6.018       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                  |                          |
|----------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                        | Time: 2020/01/20 - 11:42 |
| Limit: FCC_Part15.209_RSE(3m)                                                    | Engineer: Tyler Yuan     |
| Probe: BBHA9120D_1-18GHz                                                         | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                          | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz with OAW-AP1361 – Scan Antenna |                          |

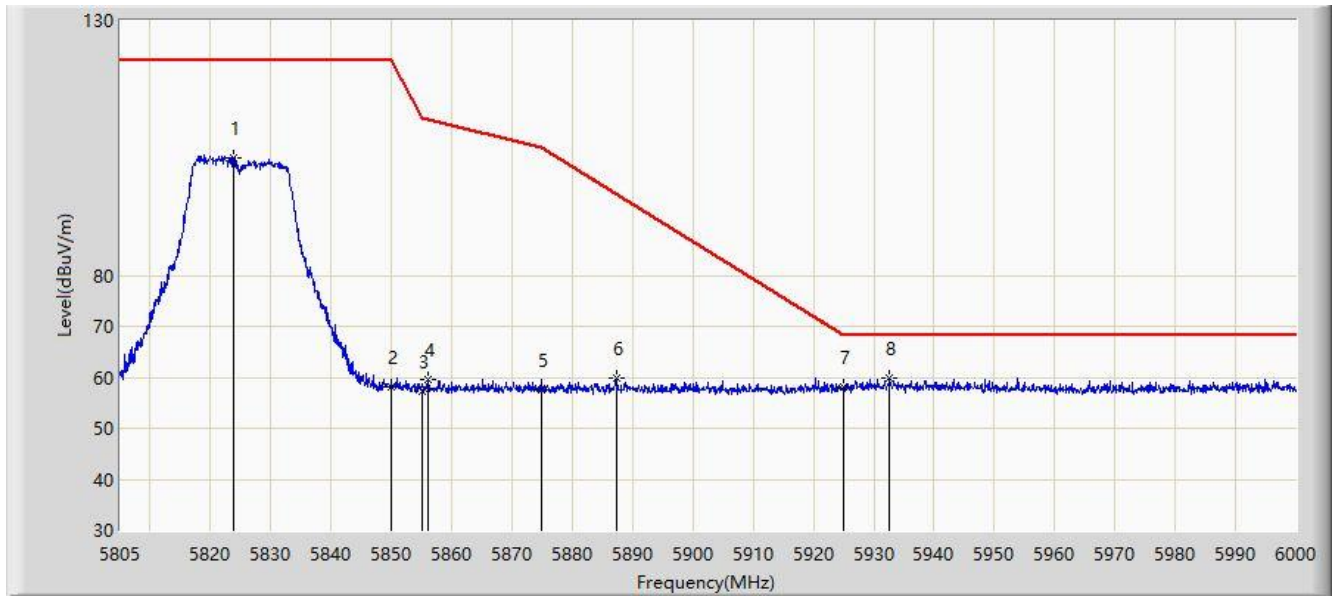


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5823.915        | 103.152                | 97.375               | N/A         | N/A            | 5.777       | PK   |
| 2  |      |      | 5850.000        | 58.132                 | 52.163               | -64.068     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 57.340                 | 51.365               | -53.460     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5856.090        | 59.608                 | 53.632               | -50.886     | 110.494        | 5.977       | PK   |
| 5  |      |      | 5875.000        | 57.402                 | 51.389               | -47.798     | 105.200        | 6.013       | PK   |
| 6  |      |      | 5887.290        | 59.723                 | 53.697               | -36.353     | 96.076         | 6.027       | PK   |
| 7  |      |      | 5925.000        | 58.079                 | 51.944               | -10.121     | 68.200         | 6.136       | PK   |
| 8  |      | *    | 5932.627        | 59.713                 | 53.569               | -8.487      | 68.200         | 6.144       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 07:54 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

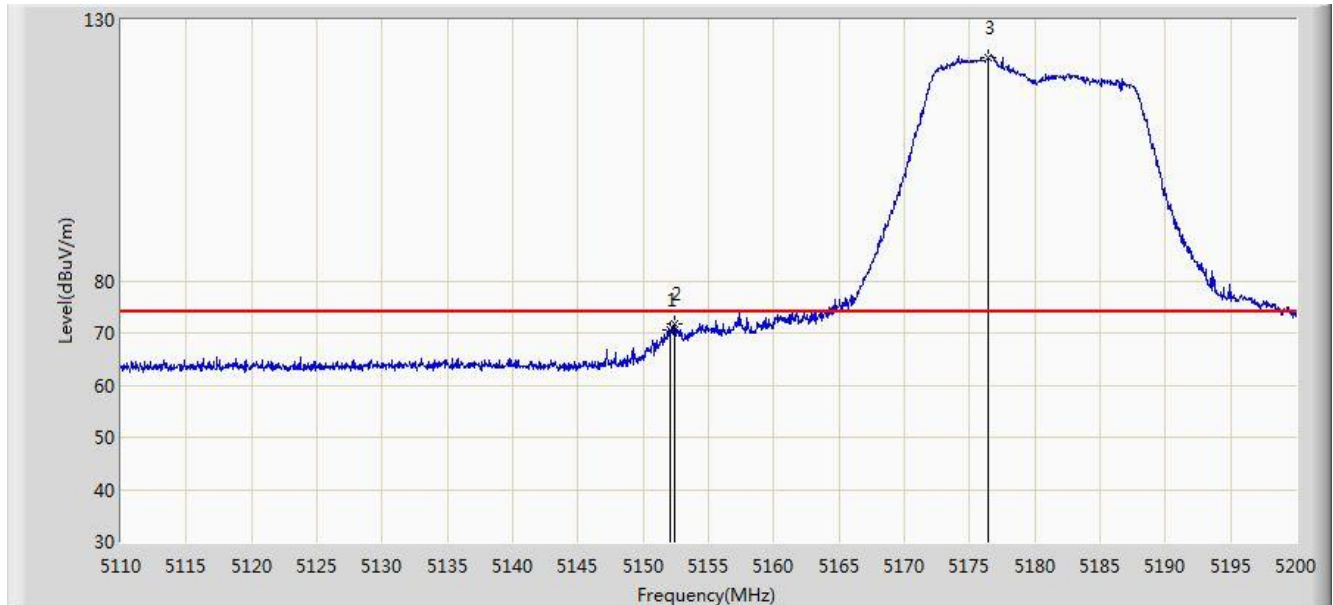


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5152.030        | 70.630                 | 64.226               | -3.370      | 74.000         | 6.404       | PK   |
| 2  |      |      | 5152.435        | 71.665                 | 65.260               | -2.335      | 74.000         | 6.404       | PK   |
| 3  |      | *    | 5176.420        | 122.824                | 116.289              | N/A         | N/A            | 6.535       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 07:53 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

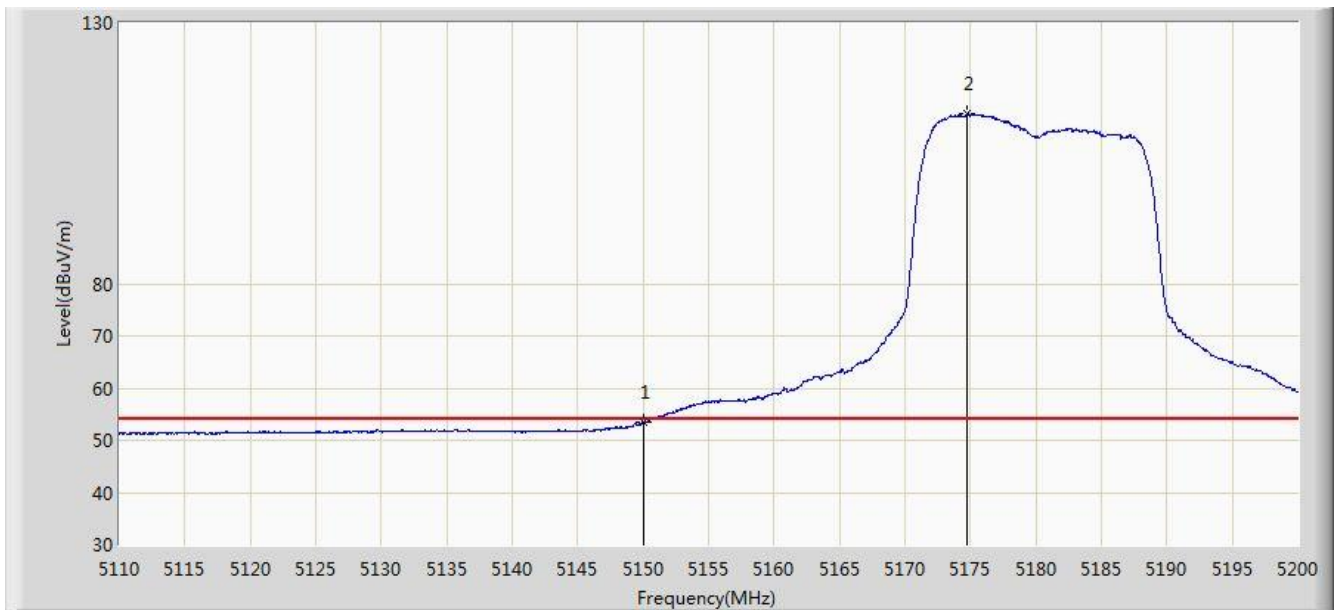


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.373                 | 46.976               | -0.627      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5174.710        | 112.501                | 105.982              | N/A         | N/A            | 6.518       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 07:56 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

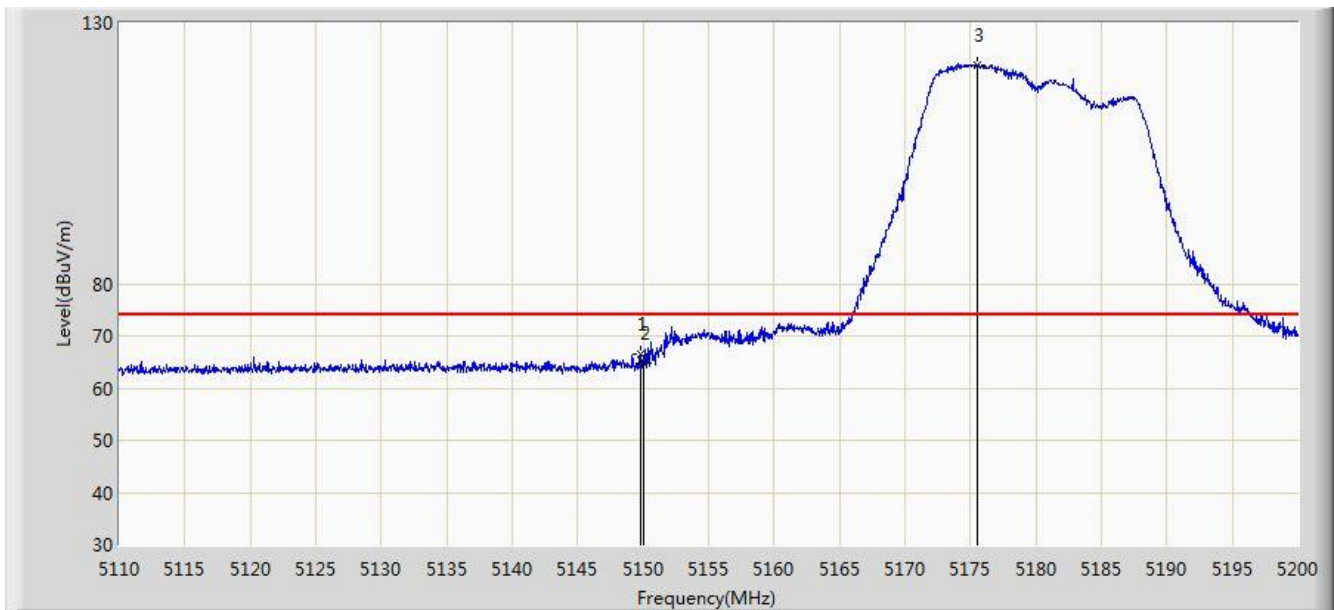


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.780        | 66.520                 | 60.123               | -7.480      | 74.000         | 6.396       | PK   |
| 2  |      |      | 5150.000        | 64.781                 | 58.384               | -9.219      | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5175.565        | 121.829                | 115.302              | N/A         | N/A            | 6.527       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 07:57 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

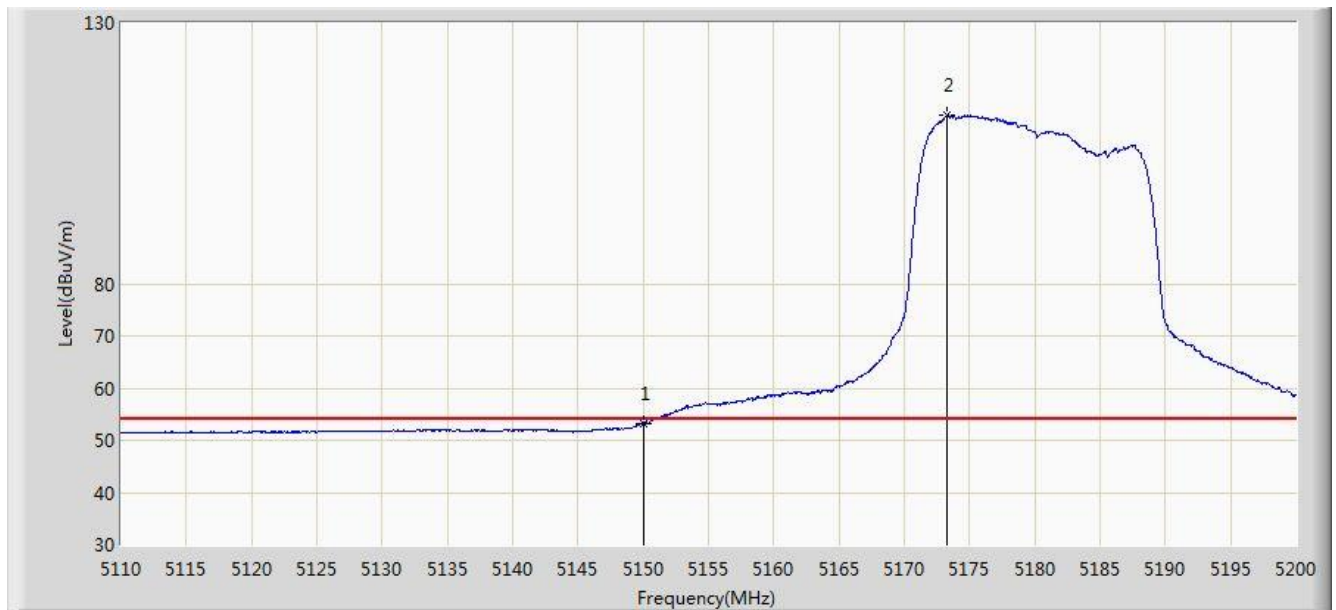


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.333                 | 46.936               | -0.667      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5173.270        | 112.235                | 105.730              | N/A         | N/A            | 6.504       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 08:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

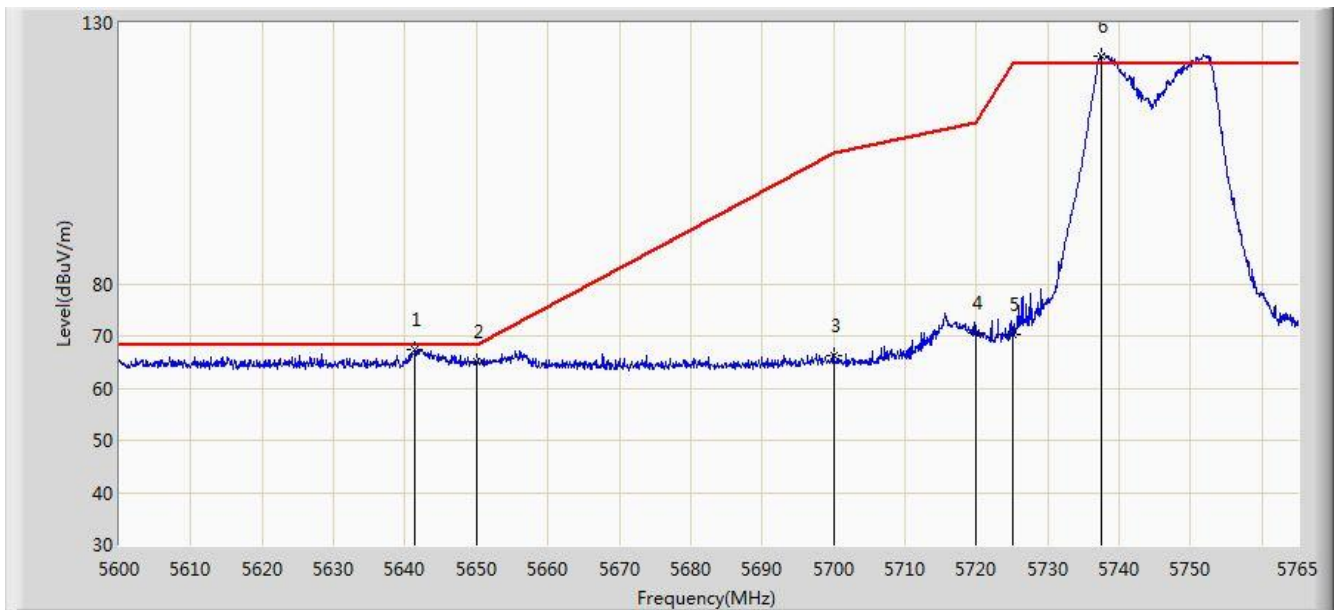


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.333        | 67.441                 | 60.610               | -0.759      | 68.200         | 6.831       | PK   |
| 2  |      |      | 5650.000        | 64.941                 | 58.148               | -3.259      | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 66.289                 | 59.380               | -38.911     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 70.463                 | 63.559               | -40.337     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 70.377                 | 63.510               | -51.823     | 122.200        | 6.867       | PK   |
| 6  |      | *    | 5737.445        | 123.645                | 116.706              | N/A         | N/A            | 6.939       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 08:32 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

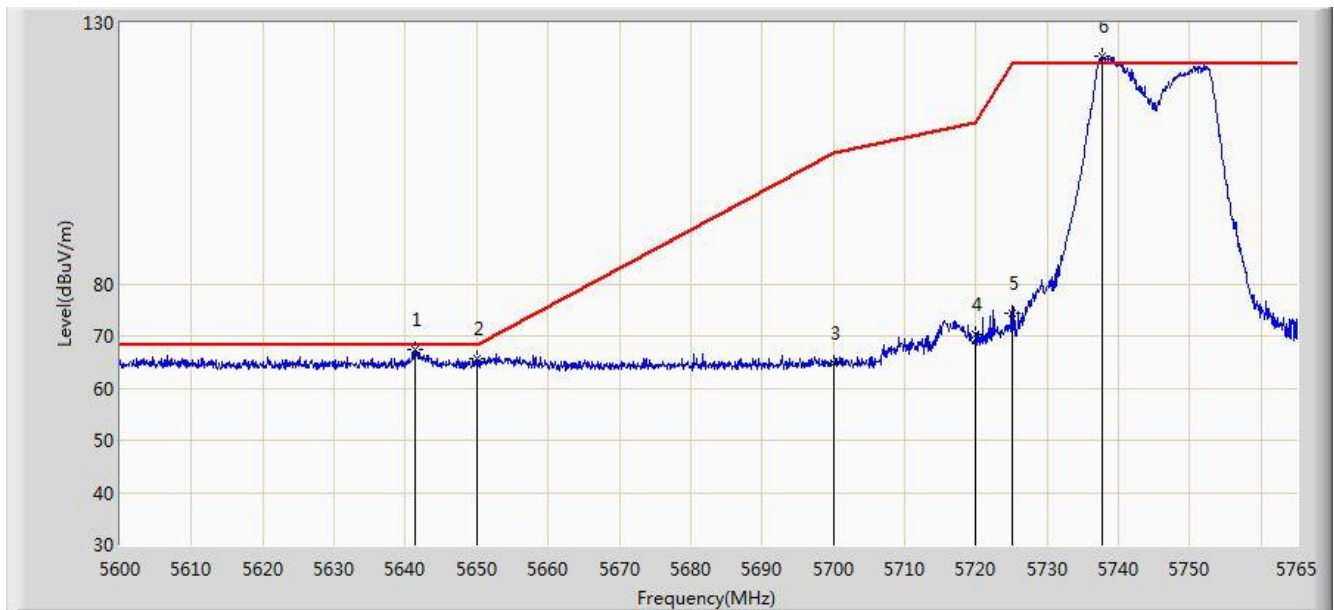


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.250        | 67.497                 | 60.666               | -0.703      | 68.200         | 6.830       | PK   |
| 2  |      |      | 5650.000        | 65.571                 | 58.778               | -2.629      | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 64.850                 | 57.941               | -40.350     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 70.264                 | 63.360               | -40.536     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 74.286                 | 67.419               | -47.914     | 122.200        | 6.867       | PK   |
| 6  |      | *    | 5737.692        | 123.653                | 116.713              | N/A         | N/A            | 6.941       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 08:34 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

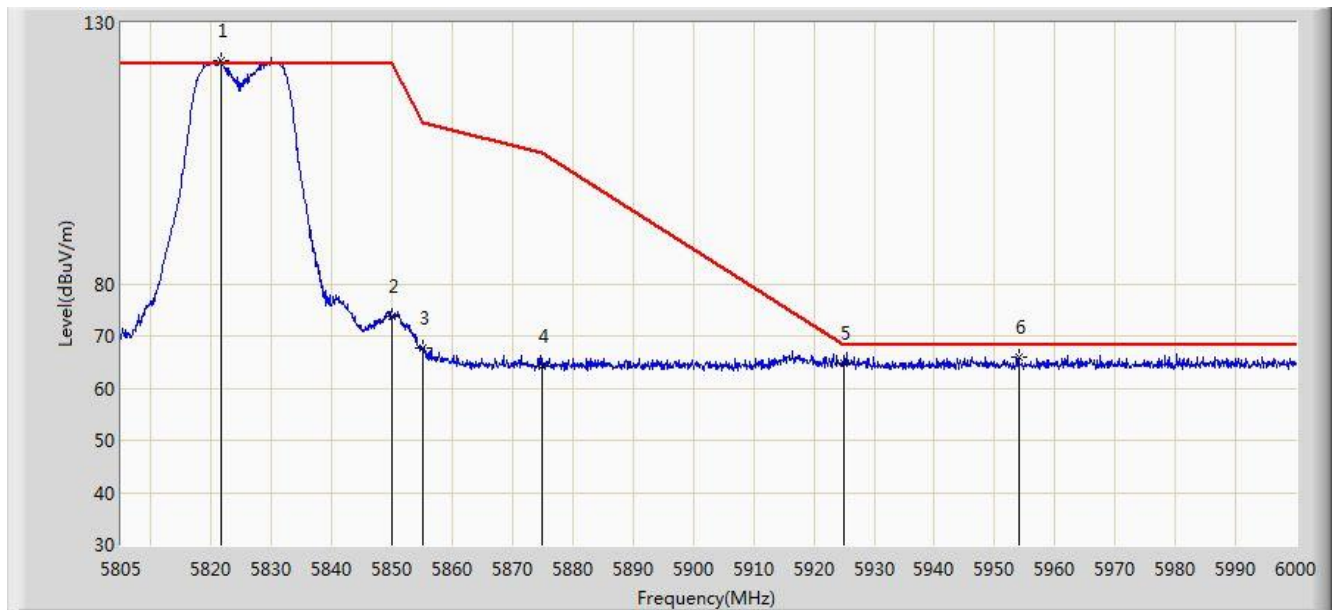


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5821.575        | 122.716                | 115.427              | N/A         | N/A            | 7.289       | PK   |
| 2  |      |      | 5850.000        | 73.653                 | 66.323               | -48.547     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 67.655                 | 60.327               | -43.145     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 64.191                 | 56.777               | -41.009     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 64.826                 | 57.526               | -3.374      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5954.078        | 66.020                 | 58.566               | -2.180      | 68.200         | 7.454       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                               |                          |
|-------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                     | Time: 2019/11/09 - 08:36 |
| Limit: FCC_Part15.209_RSE(3m)                                                 | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                      | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                       | Power: By PoE            |
| Test Mode: Transmit by 802.11a at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

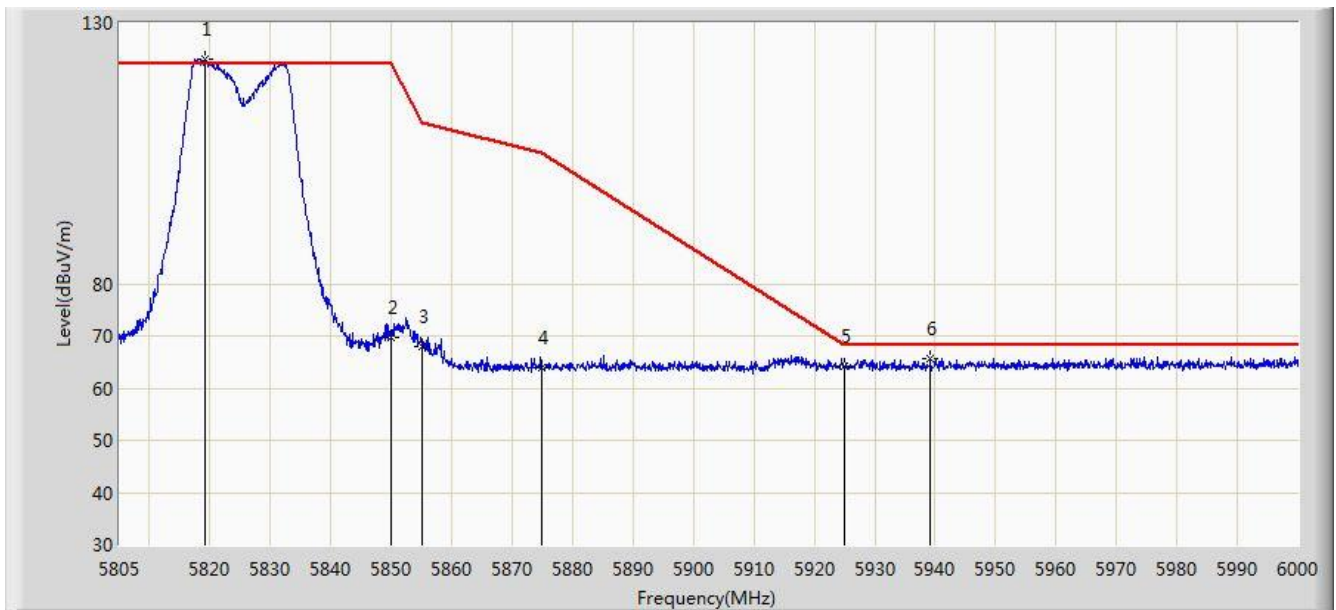


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5819.138        | 123.049                | 115.797              | N/A         | N/A            | 7.252       | PK   |
| 2  |      |      | 5850.000        | 69.687                 | 62.357               | -52.513     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 68.021                 | 60.693               | -42.779     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 63.881                 | 56.467               | -41.319     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 64.076                 | 56.776               | -4.124      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5939.257        | 65.572                 | 58.159               | -2.628      | 68.200         | 7.413       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 11:08 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

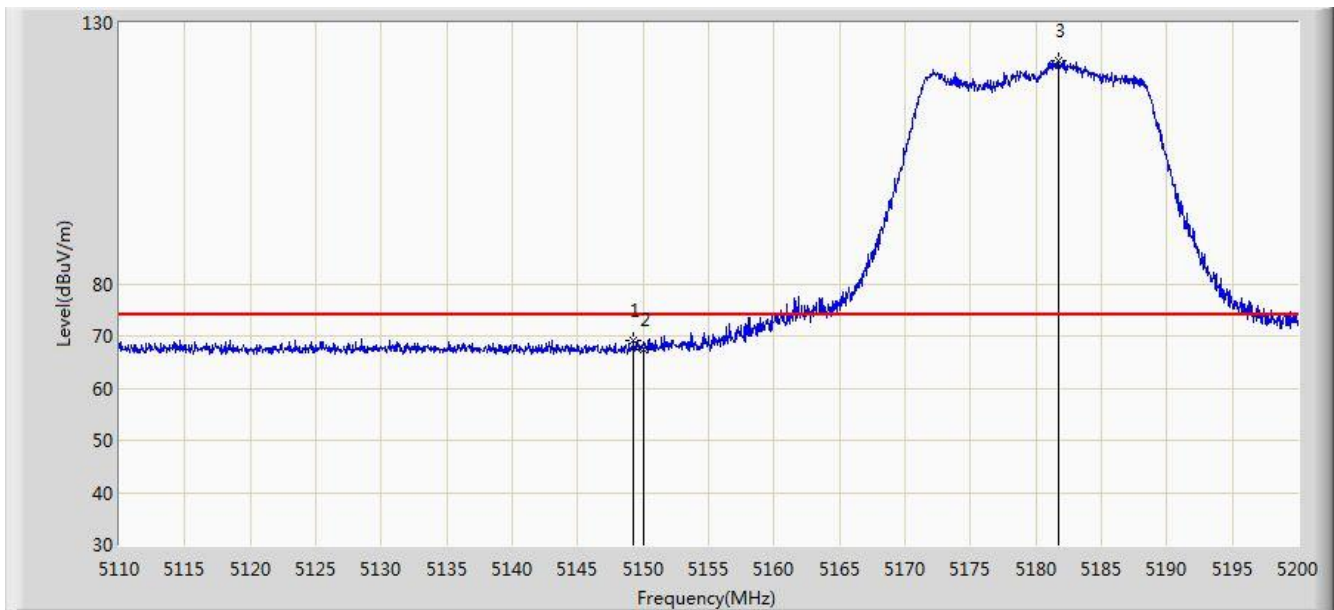


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5149.285        | 69.036                 | 62.641               | -4.964      | 74.000         | 6.395       | PK   |
| 2  |      |      | 5150.000        | 67.290                 | 60.893               | -6.710      | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5181.730        | 122.848                | 116.261              | N/A         | N/A            | 6.586       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 11:29 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

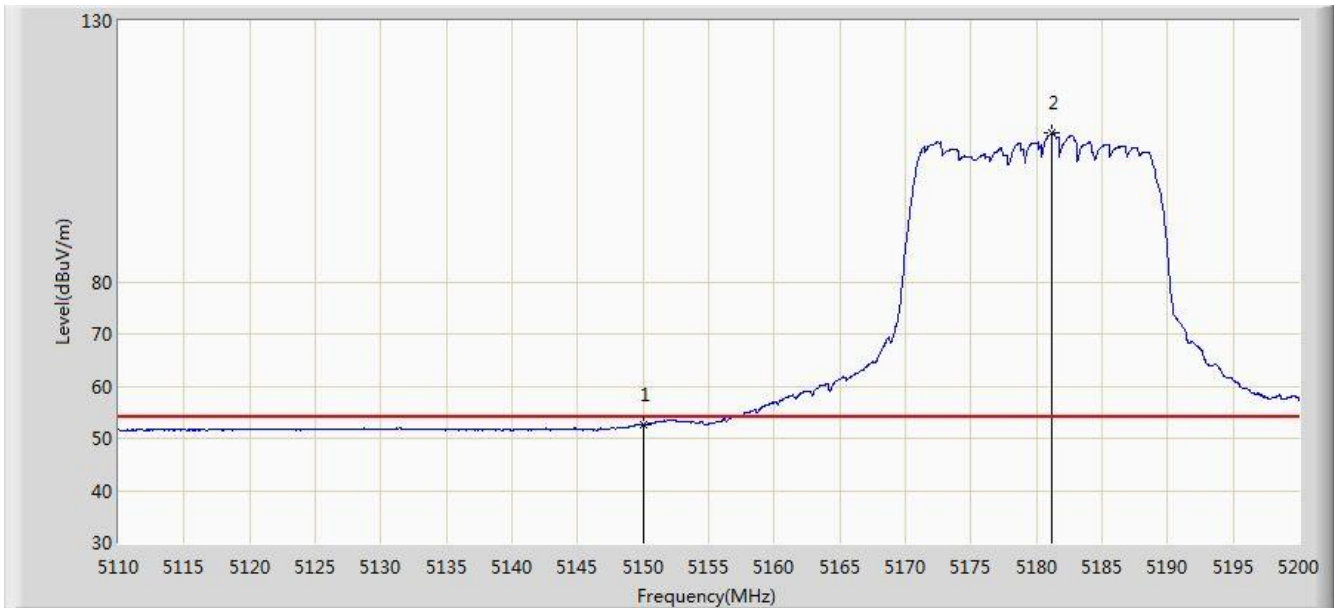


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.625                 | 46.228               | -1.375      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5181.145        | 108.448                | 101.867              | N/A         | N/A            | 6.580       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:07 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

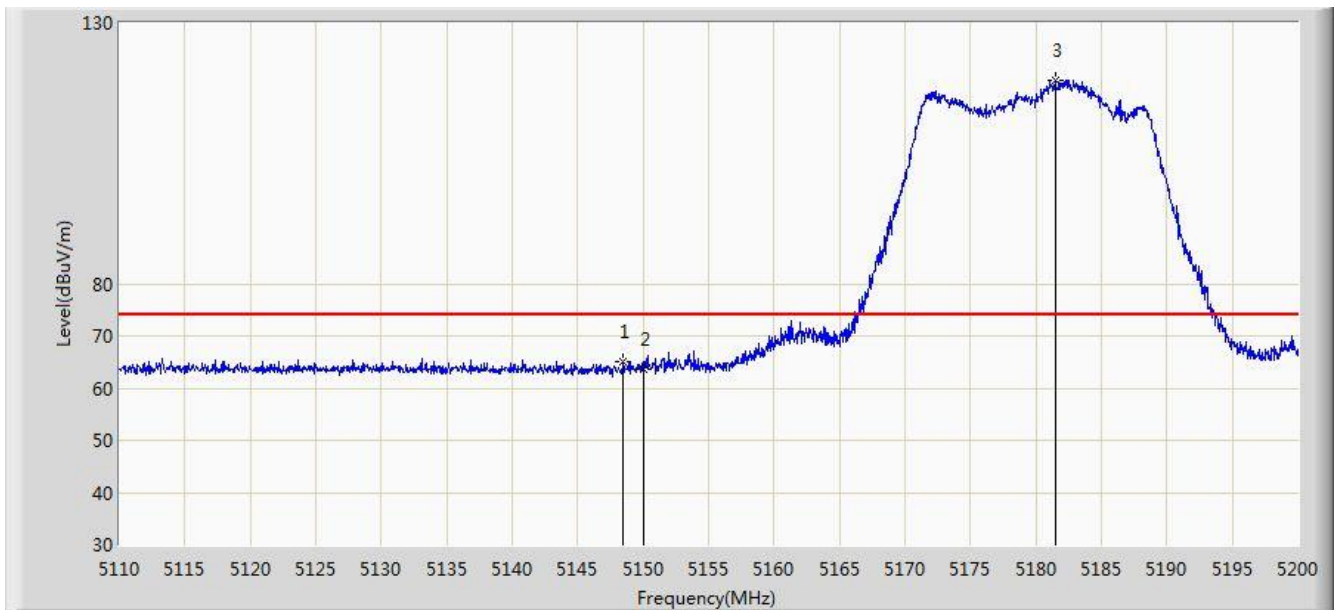


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.475        | 64.973                 | 58.581               | -9.027      | 74.000         | 6.392       | PK   |
| 2  |      |      | 5150.000        | 63.492                 | 57.095               | -10.508     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5181.460        | 118.987                | 112.403              | N/A         | N/A            | 6.583       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:09 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

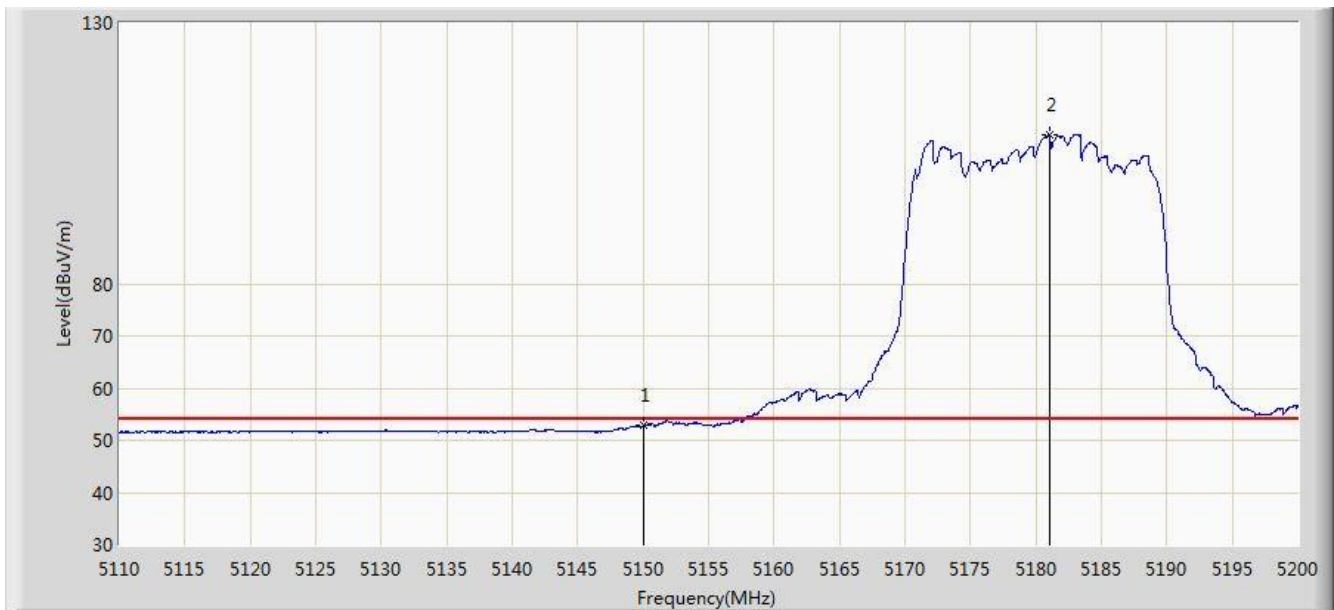


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.792                 | 46.395               | -1.208      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5181.055        | 108.620                | 102.040              | N/A         | N/A            | 6.580       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:42 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

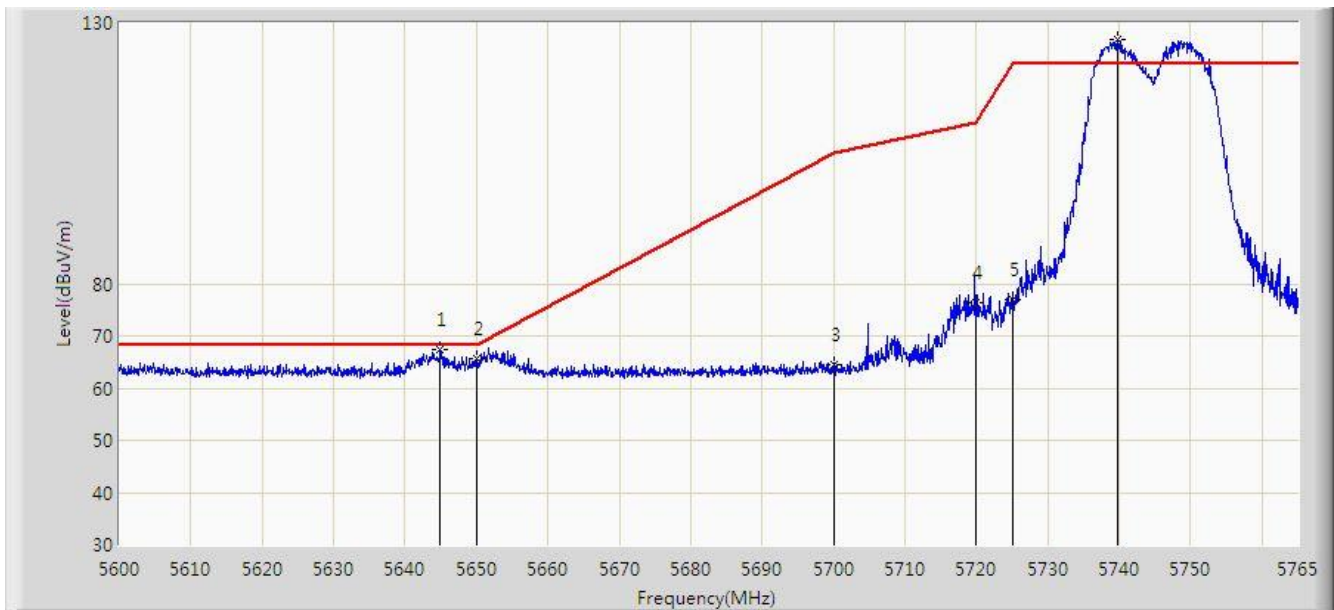


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5644.880        | 67.496                 | 60.681               | -0.704      | 68.200         | 6.815       | PK   |
| 2  |      |      | 5650.000        | 65.581                 | 58.788               | -2.619      | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 64.526                 | 57.617               | -40.674     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 76.397                 | 69.493               | -34.403     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 77.042                 | 70.175               | -45.158     | 122.200        | 6.867       | PK   |
| 6  |      | *    | 5739.672        | 126.774                | 126.774              | N/A         | N/A            | 0.000       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:48 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

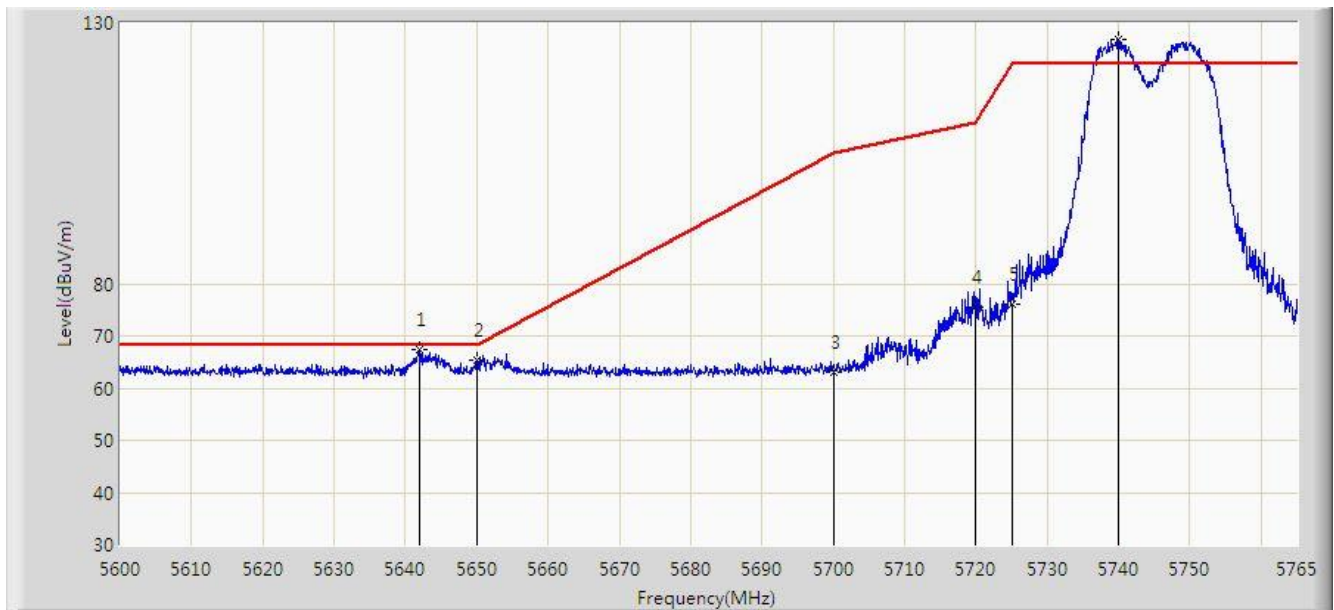


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.910        | 67.312                 | 60.484               | -0.888      | 68.200         | 6.828       | PK   |
| 2  |      |      | 5650.000        | 65.224                 | 58.431               | -2.976      | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 63.156                 | 56.247               | -42.044     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 75.615                 | 68.711               | -35.185     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 76.037                 | 69.170               | -46.163     | 122.200        | 6.867       | PK   |
| 6  |      | *    | 5739.920        | 126.838                | 126.838              | N/A         | N/A            | 0.000       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:50 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

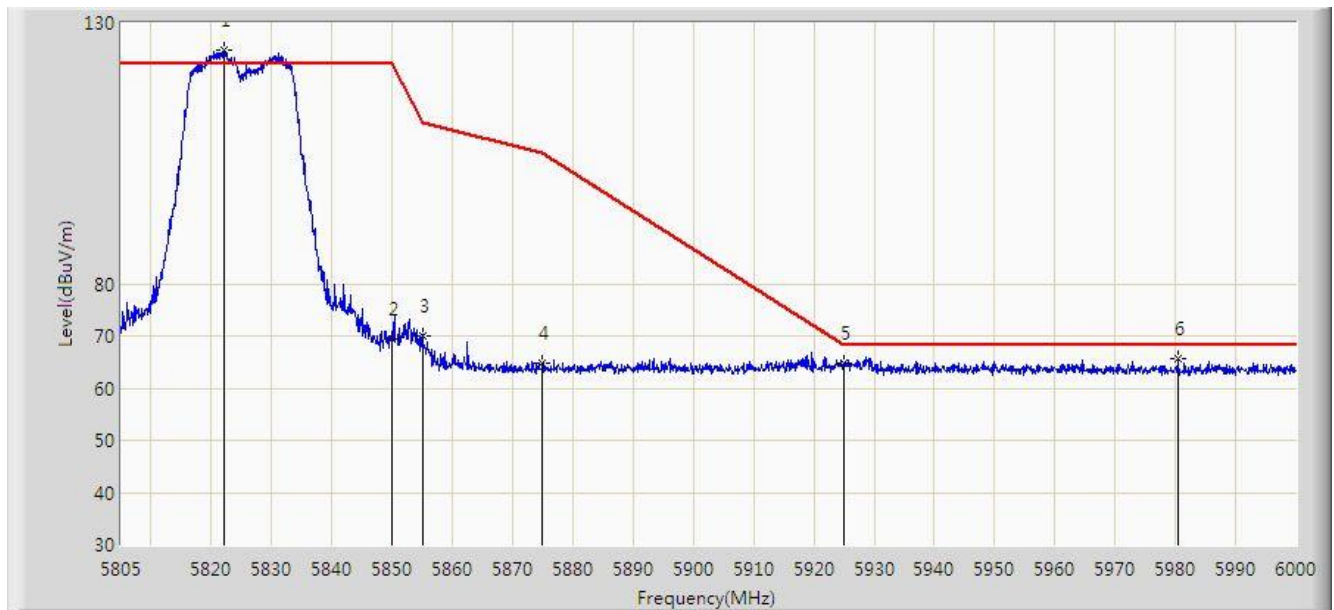


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5822.062        | 124.869                | 117.573              | N/A         | N/A            | 7.296       | PK   |
| 2  |      |      | 5850.000        | 69.409                 | 62.079               | -52.791     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 70.001                 | 62.673               | -40.799     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 64.706                 | 57.292               | -40.494     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 64.645                 | 57.345               | -3.555      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5980.402        | 65.651                 | 65.651               | -2.549      | 68.200         | 0.000       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:51 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

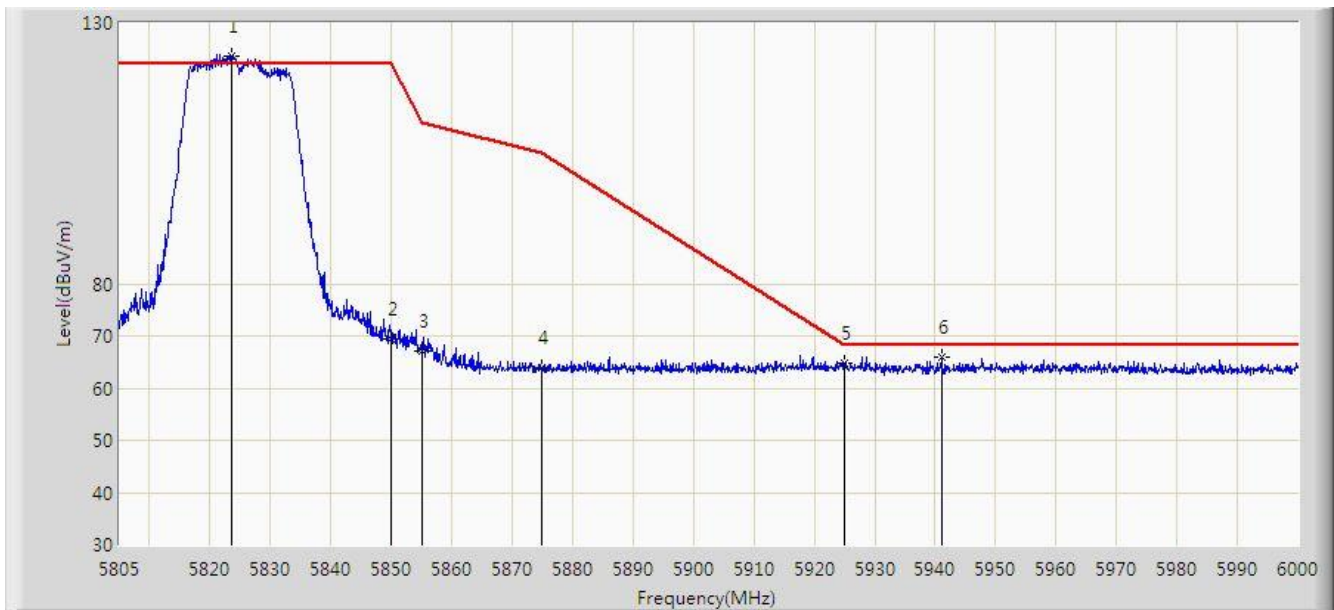


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5823.623        | 123.746                | 116.426              | N/A         | N/A            | 7.320       | PK   |
| 2  |      |      | 5850.000        | 69.339                 | 62.009               | -52.861     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 67.141                 | 59.813               | -43.659     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 63.793                 | 56.379               | -41.407     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 64.723                 | 57.423               | -3.477      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5941.110        | 65.993                 | 65.993               | -2.207      | 68.200         | 0.000       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 13:57 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

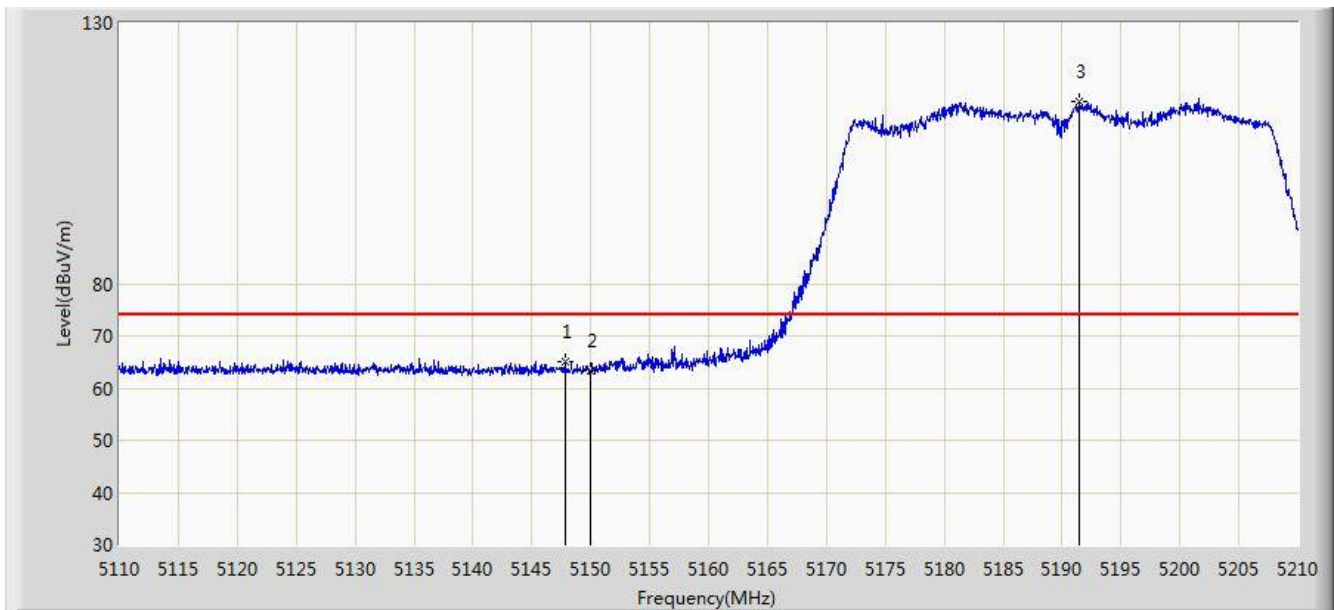


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5147.800        | 65.068                 | 58.674               | -8.932      | 74.000         | 6.394       | PK   |
| 2  |      |      | 5150.000        | 63.275                 | 56.878               | -10.725     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5191.500        | 115.036                | 108.541              | N/A         | N/A            | 6.496       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:05 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

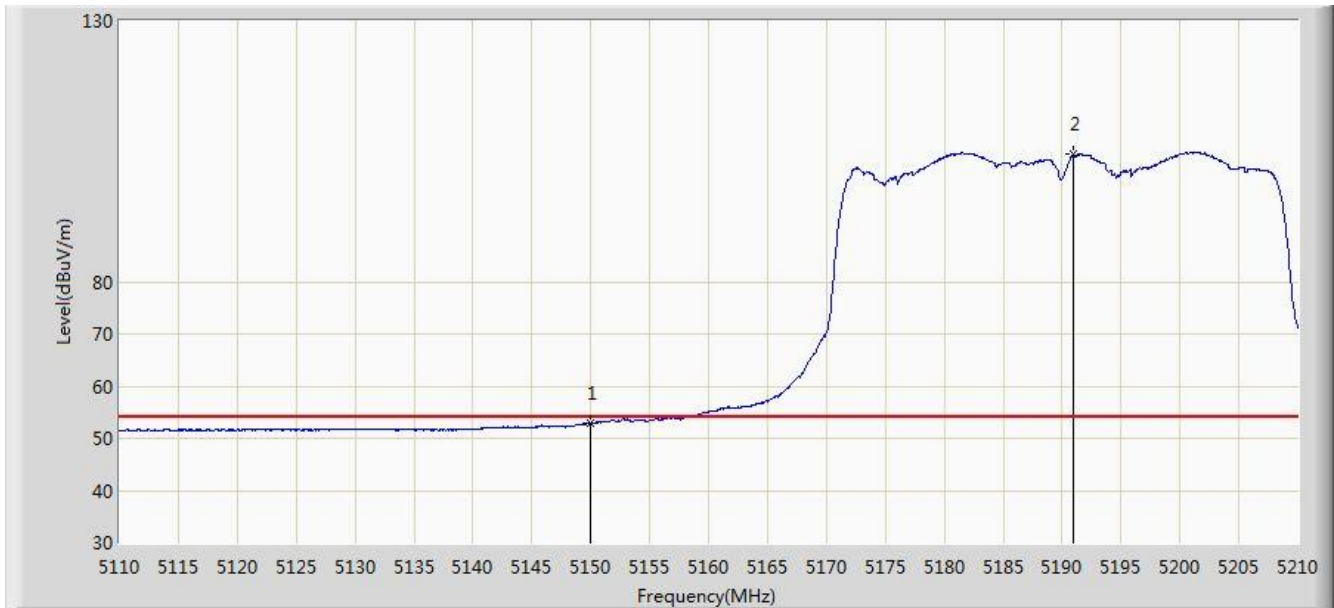


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.859                 | 46.462               | -1.141      | 54.000         | 6.398       | AV   |
| 2  |      | *    | 5190.950        | 104.467                | 97.966               | N/A         | N/A            | 6.501       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:06 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

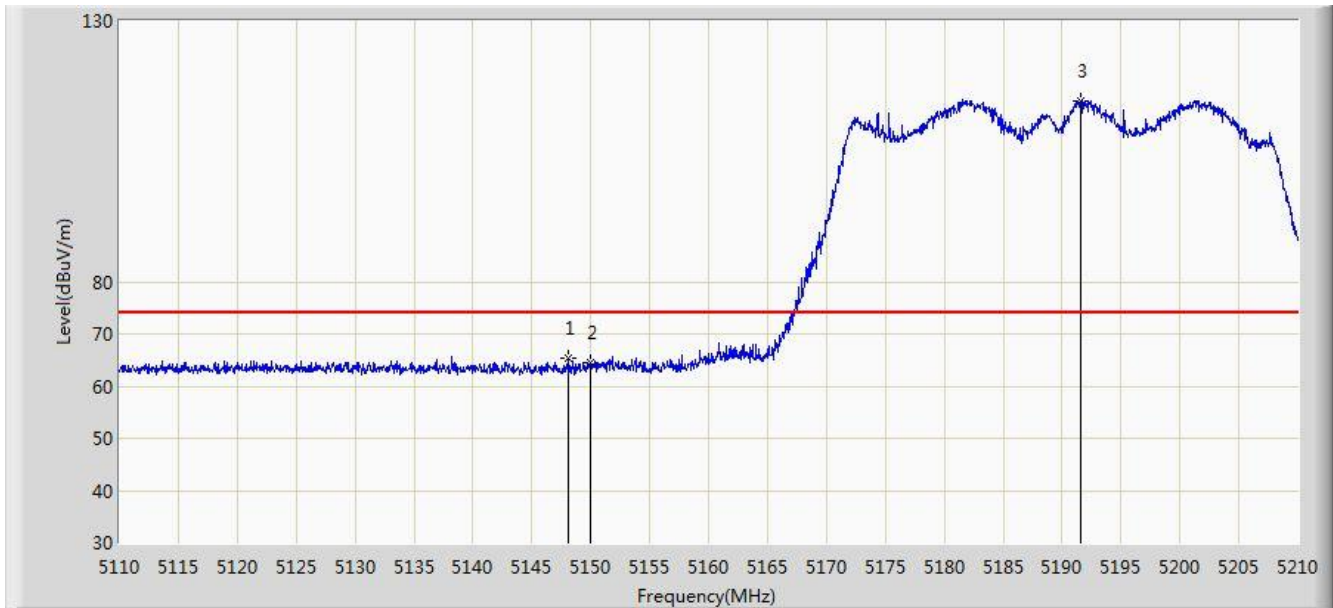


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.150        | 65.291                 | 58.900               | -8.709      | 74.000         | 6.391       | PK   |
| 2  |      |      | 5150.000        | 64.604                 | 58.207               | -9.396      | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5191.550        | 114.734                | 108.239              | N/A         | N/A            | 6.495       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:07 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

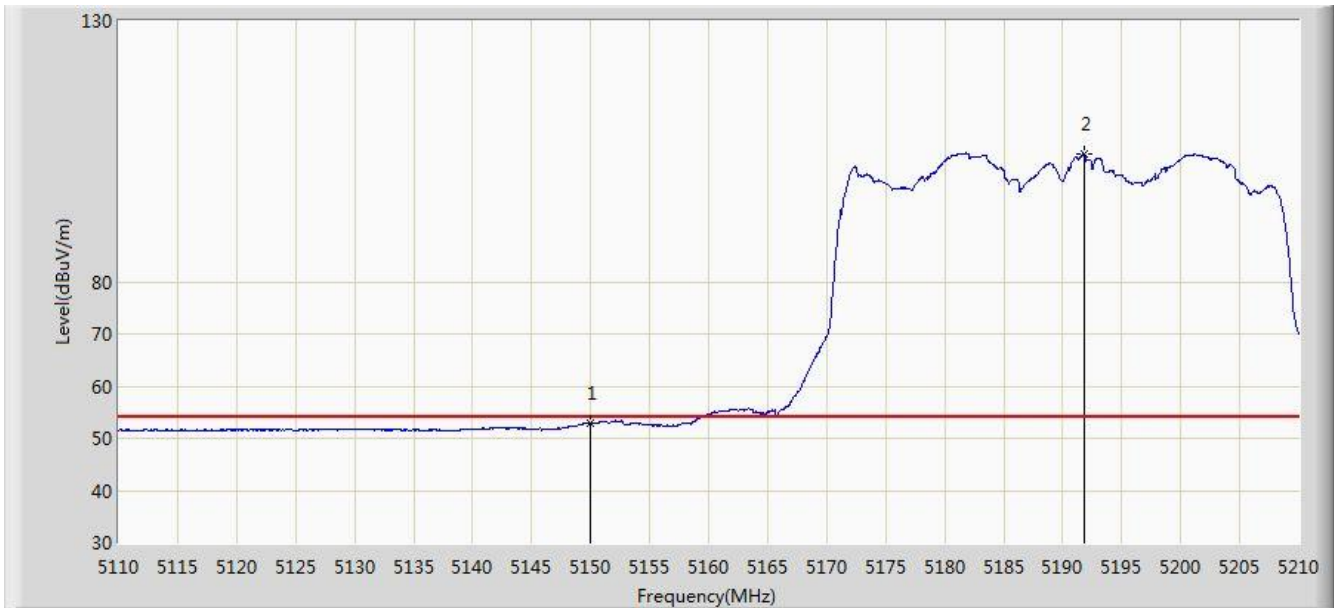


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.840                 | 46.443               | -1.160      | 54.000         | 6.398       | AV   |
| 2  |      | *    | 5191.850        | 104.516                | 98.024               | N/A         | N/A            | 6.492       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:34 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with OAW-AP1361D |                          |

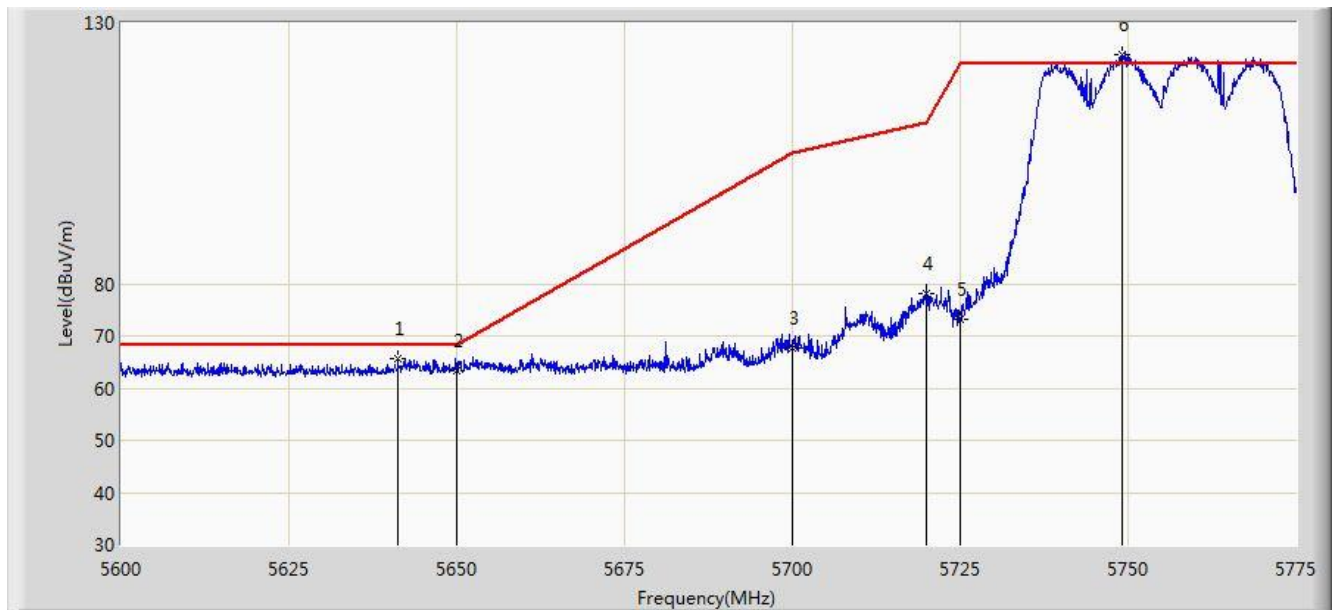


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.212        | 65.564                 | 58.733               | -2.636      | 68.200         | 6.831       | PK   |
| 2  |      |      | 5650.000        | 63.318                 | 56.525               | -4.882      | 68.200         | 6.793       | PK   |
| 3  |      |      | 5700.000        | 67.737                 | 60.828               | -37.463     | 105.200        | 6.909       | PK   |
| 4  |      |      | 5720.000        | 78.220                 | 71.316               | -32.580     | 110.800        | 6.904       | PK   |
| 5  |      |      | 5725.000        | 73.230                 | 66.363               | -48.970     | 122.200        | 6.867       | PK   |
| 6  |      | *    | 5749.100        | 123.955                | 116.905              | N/A         | N/A            | 7.050       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)


|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:37 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (CDD Mode) with OAW-AP1361D |                          |

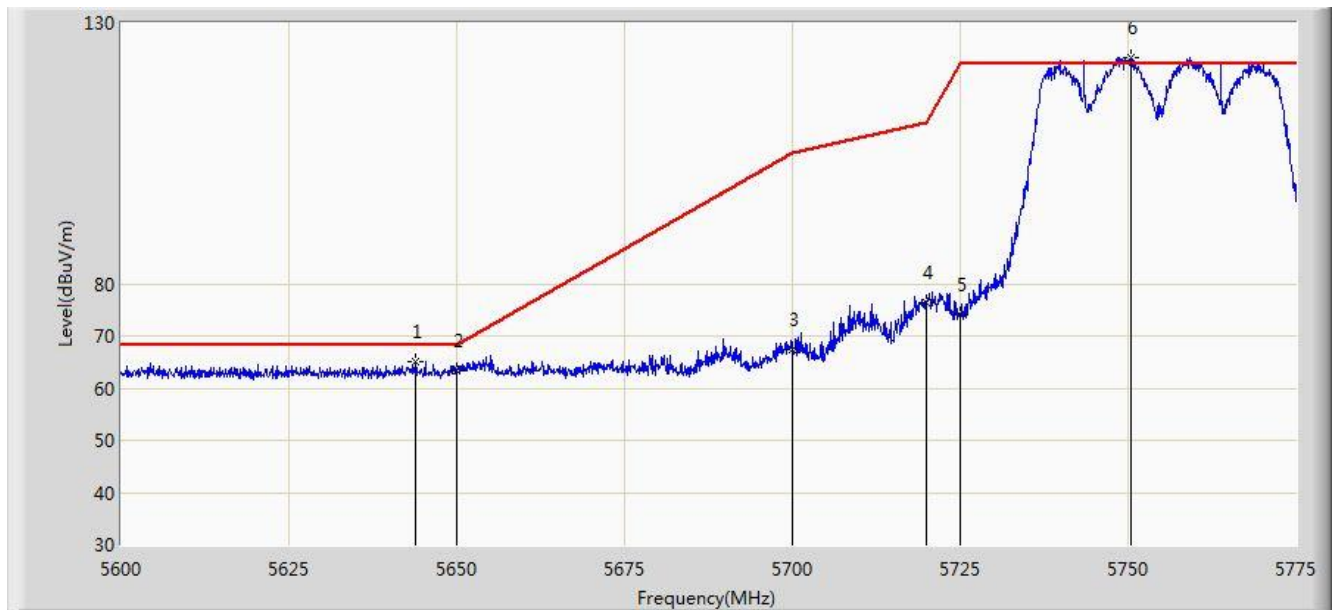

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:38 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with OAW-AP1361D |                          |

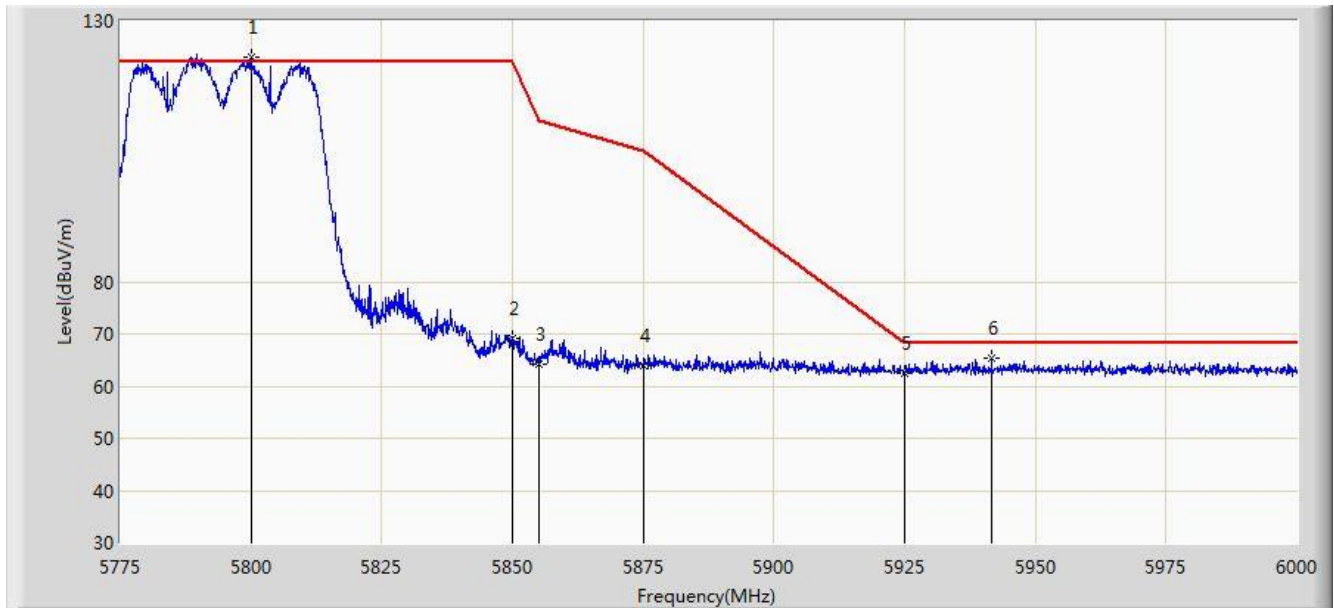


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5799.975        | 122.905                | 115.839              | N/A         | N/A            | 7.066       | PK   |
| 2  |      |      | 5850.000        | 69.000                 | 61.670               | -53.200     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 64.262                 | 56.934               | -46.538     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 63.872                 | 56.458               | -41.328     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 62.460                 | 55.160               | -5.740      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5941.612        | 65.371                 | 57.930               | -2.829      | 68.200         | 7.441       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                    |                          |
|------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                          | Time: 2019/11/10 - 14:40 |
| Limit: FCC_Part15.209_RSE(3m)                                                      | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                           | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                            | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (CDD Mode) with OAW-AP1361D |                          |

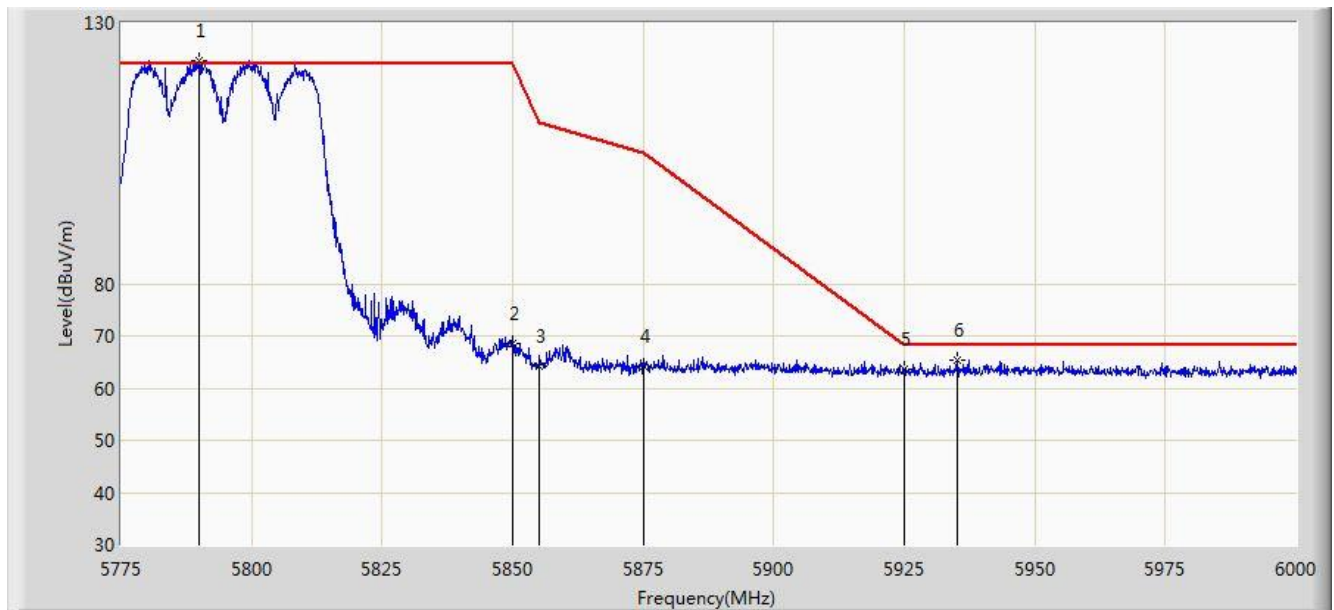


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5789.850        | 122.700                | 115.628              | N/A         | N/A            | 7.072       | PK   |
| 2  |      |      | 5850.000        | 68.495                 | 61.165               | -53.705     | 122.200        | 7.331       | PK   |
| 3  |      |      | 5855.000        | 64.068                 | 56.740               | -46.732     | 110.800        | 7.327       | PK   |
| 4  |      |      | 5875.000        | 64.328                 | 56.914               | -40.872     | 105.200        | 7.414       | PK   |
| 5  |      |      | 5925.000        | 63.575                 | 56.275               | -4.625      | 68.200         | 7.299       | PK   |
| 6  |      |      | 5935.087        | 65.221                 | 57.858               | -2.979      | 68.200         | 7.363       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2019/11/10 - 17:30 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

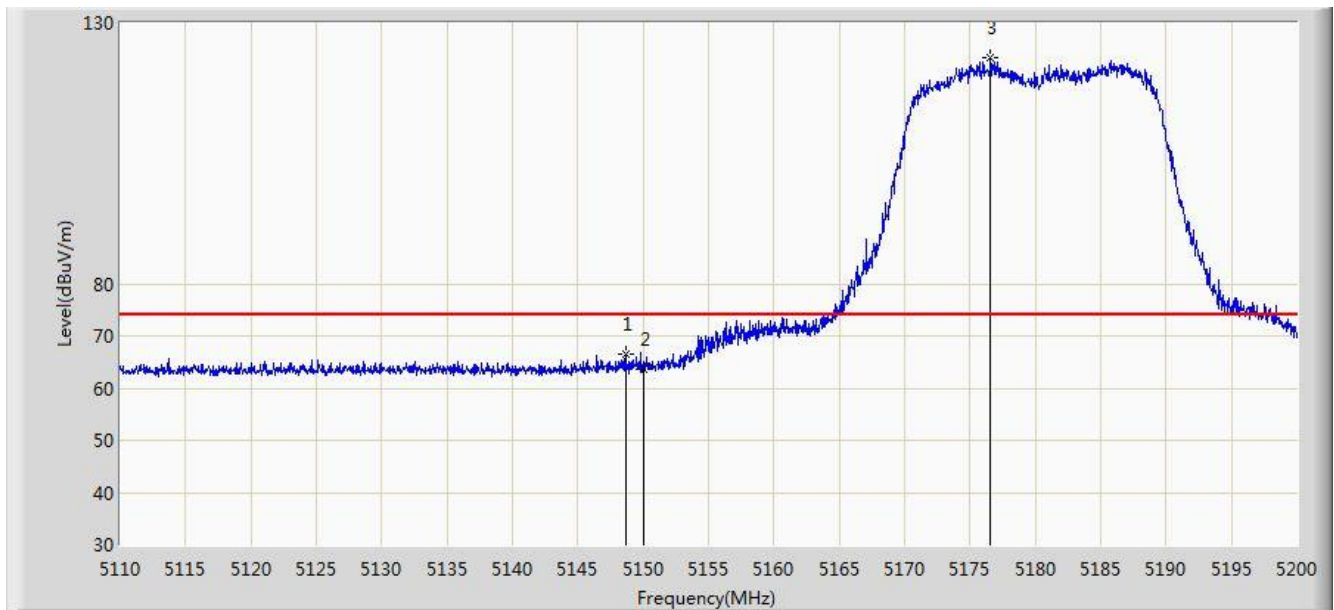


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.655        | 66.506                 | 60.113               | -7.494      | 74.000         | 6.393       | PK   |
| 2  |      |      | 5150.000        | 63.671                 | 57.274               | -10.329     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5176.555        | 123.195                | 116.658              | N/A         | N/A            | 6.536       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2019/11/10 - 17:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

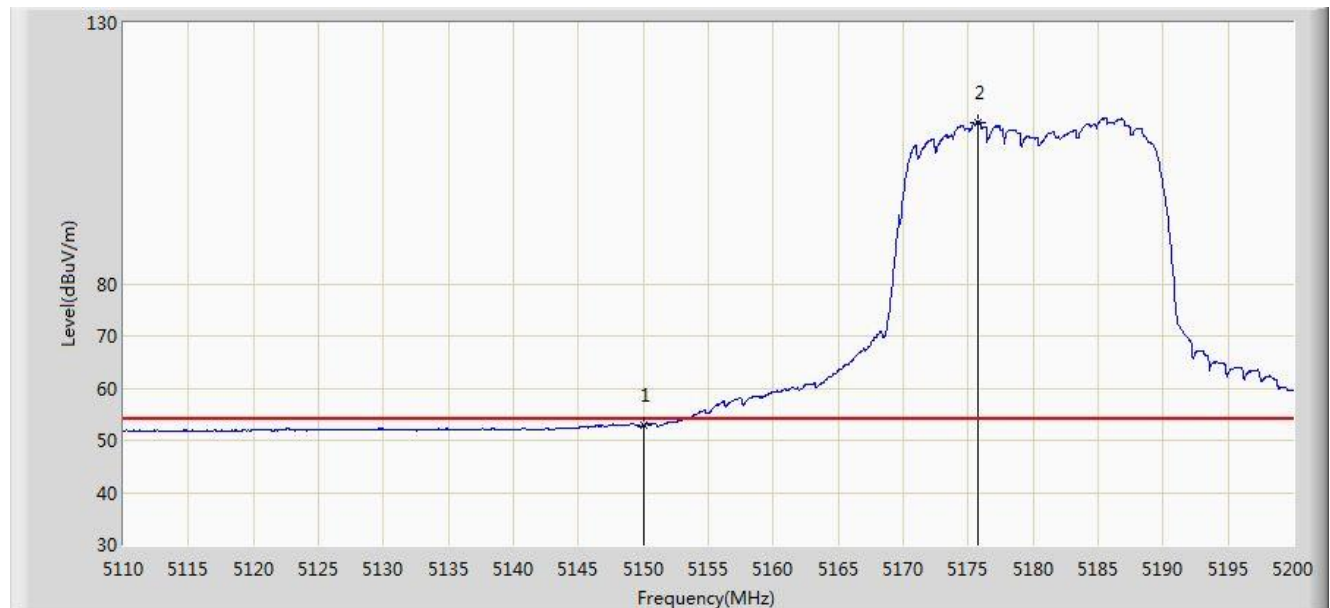


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.979                 | 46.582               | -1.021      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5175.700        | 110.972                | 104.444              | N/A         | N/A            | 6.528       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2019/11/10 - 17:32 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

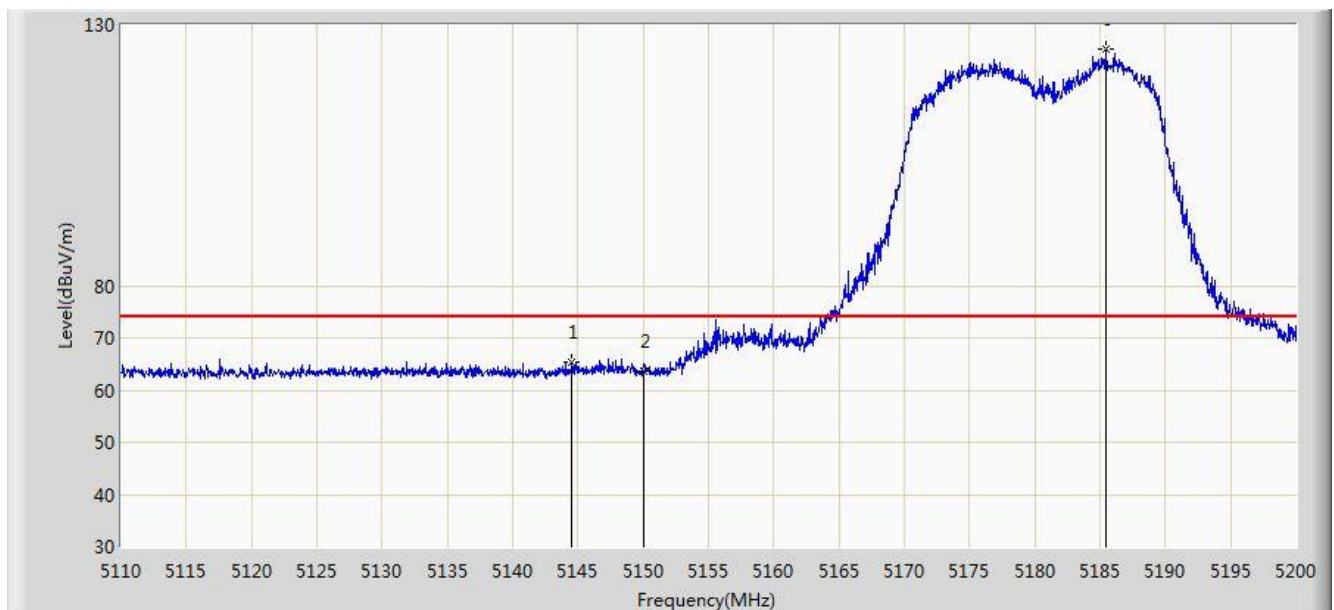


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5144.560        | 65.314                 | 58.871               | -8.686      | 74.000         | 6.443       | PK   |
| 2  |      |      | 5150.000        | 63.696                 | 57.299               | -10.304     | 74.000         | 6.398       | PK   |
| 3  |      | *    | 5185.420        | 125.410                | 118.855              | N/A         | N/A            | 6.555       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                           | Time: 2019/11/10 - 17:33 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz (CDD Mode) with OAW-AP1361D |                          |

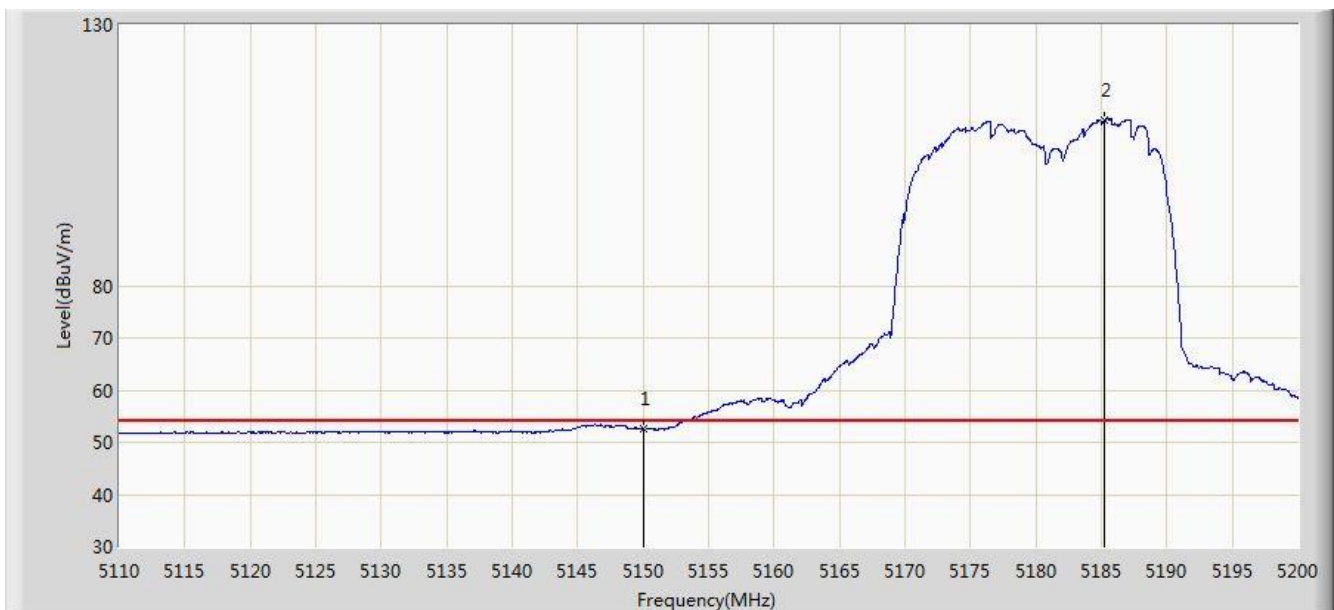


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.546                 | 46.149               | -1.454      | 54.000         | 6.398       | AV   |
| 2  | X    | *    | 5185.240        | 111.856                | 105.299              | N/A         | N/A            | 6.557       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:28 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

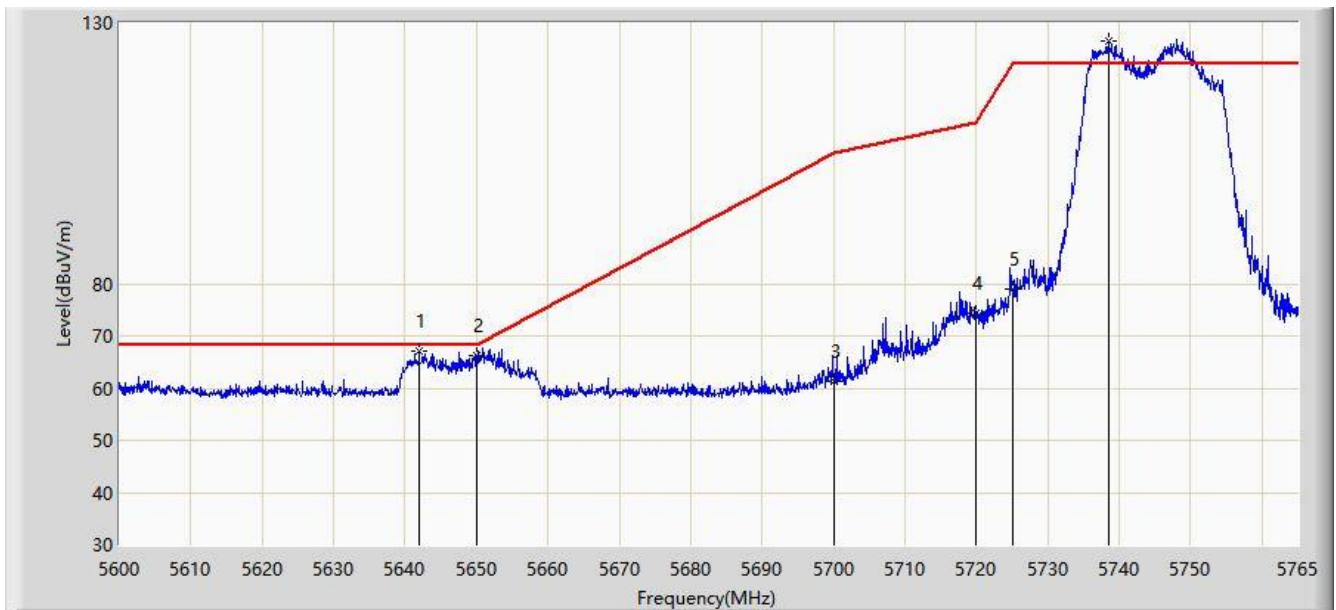


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.993        | 66.981                 | 61.776               | -1.219      | 68.200         | 5.205       | PK   |
| 2  |      |      | 5650.000        | 66.210                 | 60.874               | -1.990      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 61.255                 | 55.937               | -43.945     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 74.457                 | 68.983               | -36.343     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 78.944                 | 73.466               | -43.256     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5738.518        | 126.663                | 121.119              | N/A         | N/A            | 5.544       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:32 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz (CDD Mode) with OAW-AP1361D |                          |

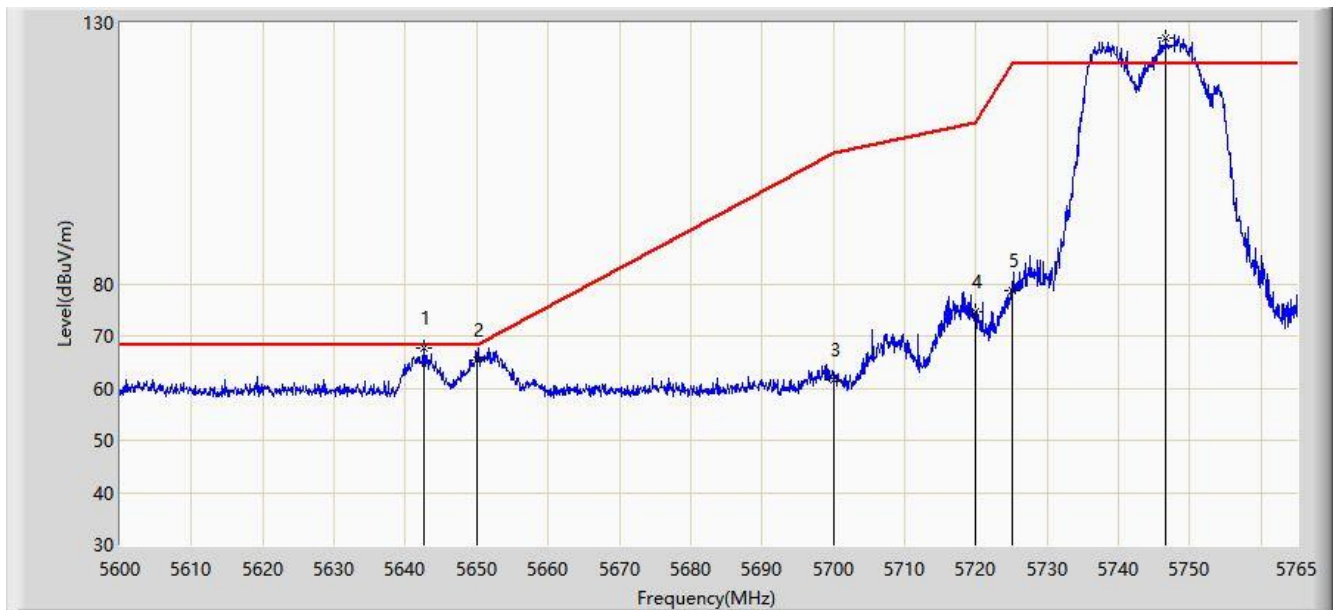


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5642.570        | 67.537                 | 62.322               | -0.663      | 68.200         | 5.215       | PK   |
| 2  |      |      | 5650.000        | 65.308                 | 59.972               | -2.892      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 61.689                 | 56.371               | -43.511     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 74.597                 | 69.123               | -36.203     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 78.752                 | 73.274               | -43.448     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5746.685        | 127.068                | 121.428              | N/A         | N/A            | 5.640       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:33 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

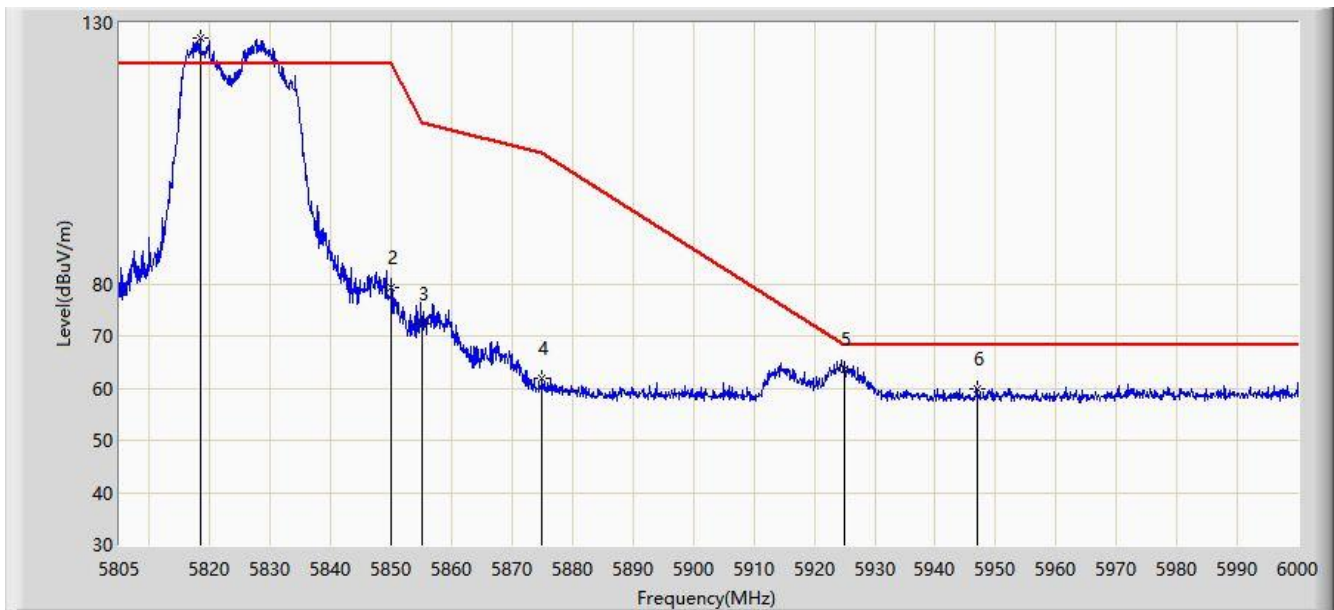


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5818.357        | 126.985                | 121.163              | N/A         | N/A            | 5.823       | PK   |
| 2  |      |      | 5850.000        | 79.398                 | 73.429               | -42.802     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 72.258                 | 66.283               | -38.542     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 61.840                 | 55.827               | -43.360     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 63.712                 | 57.577               | -4.488      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5947.058        | 59.967                 | 53.901               | -8.233      | 68.200         | 6.066       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:35 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz (CDD Mode) with OAW-AP1361D |                          |

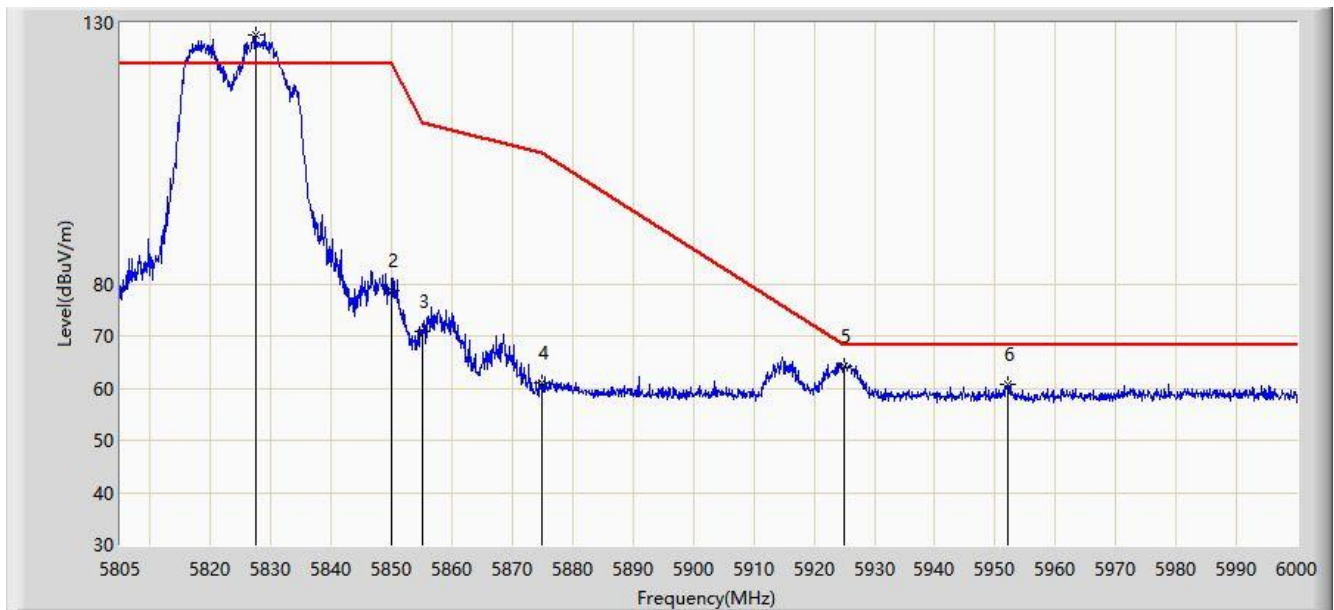


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5827.425        | 127.739                | 121.991              | N/A         | N/A            | 5.748       | PK   |
| 2  |      |      | 5850.000        | 78.821                 | 72.852               | -43.379     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 71.014                 | 65.039               | -39.786     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 60.922                 | 54.909               | -44.278     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 64.320                 | 58.185               | -3.880      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5952.030        | 60.797                 | 54.759               | -7.403      | 68.200         | 6.039       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:36 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

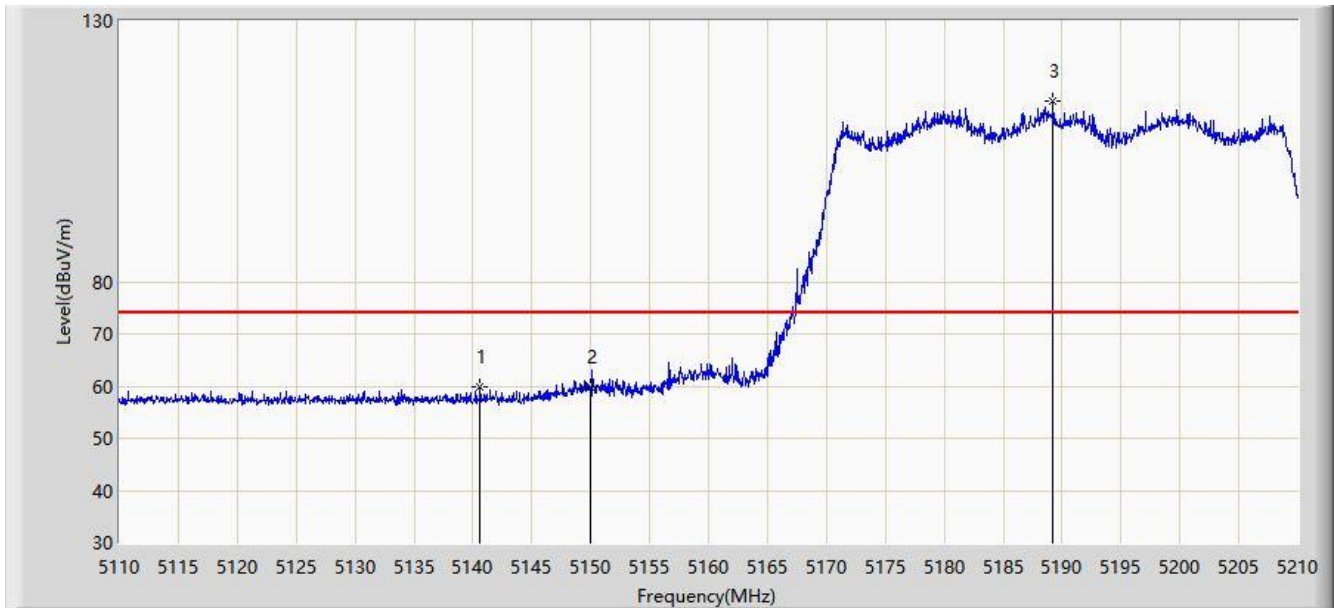


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5140.600        | 59.778                 | 55.357               | -14.222     | 74.000         | 4.420       | PK   |
| 2  |      |      | 5150.000        | 59.718                 | 55.276               | -14.282     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5189.250        | 114.724                | 110.341              | N/A         | N/A            | 4.383       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:38 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

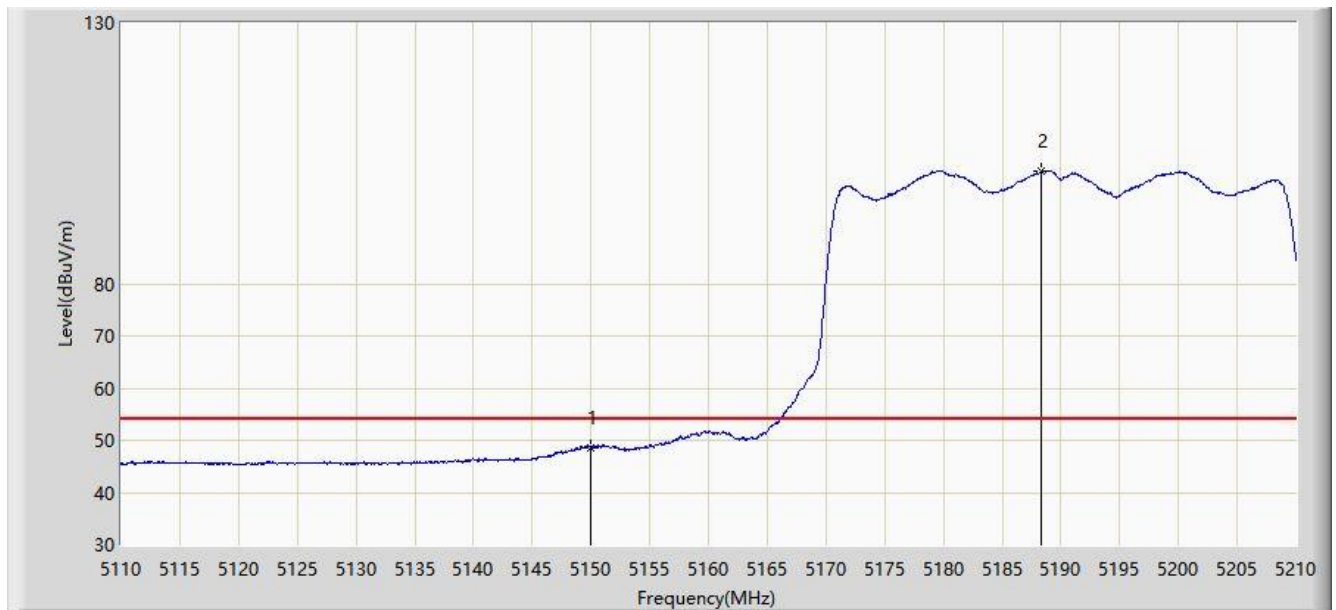


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 48.611                 | 44.169               | -5.389      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5188.350        | 101.598                | 97.205               | N/A         | N/A            | 4.393       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:39 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

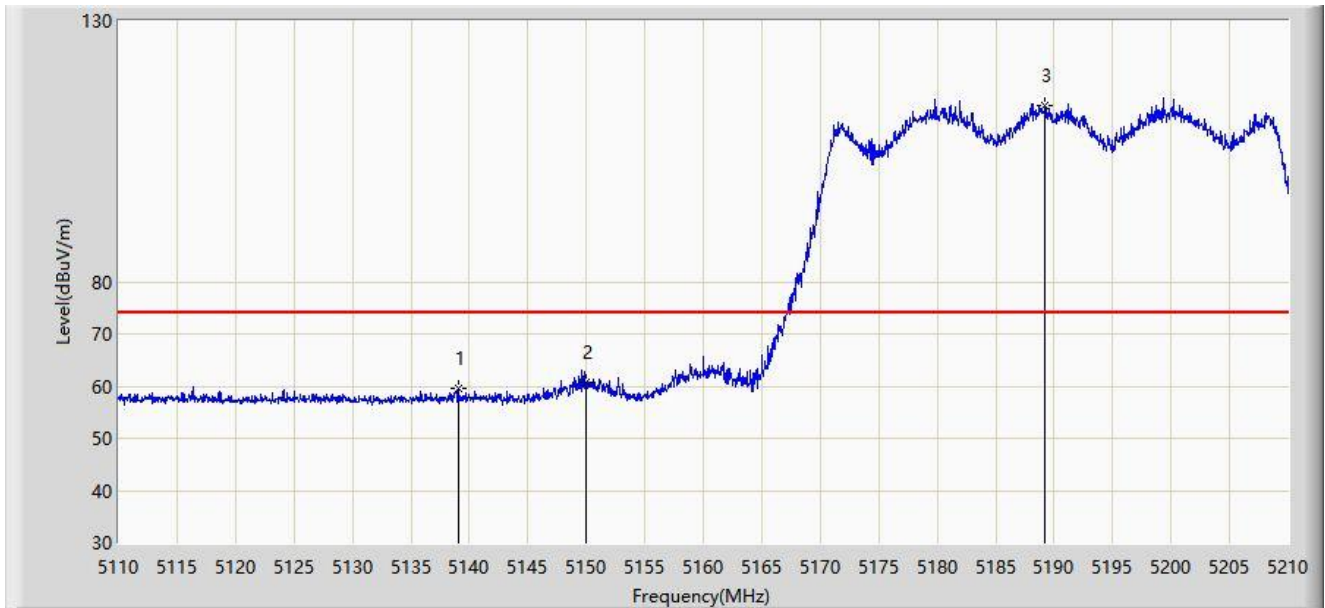


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5139.100        | 59.522                 | 55.101               | -14.478     | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 60.635                 | 56.193               | -13.365     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5189.250        | 113.891                | 109.508              | N/A         | N/A            | 4.383       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:40 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz (CDD Mode) with OAW-AP1361D |                          |

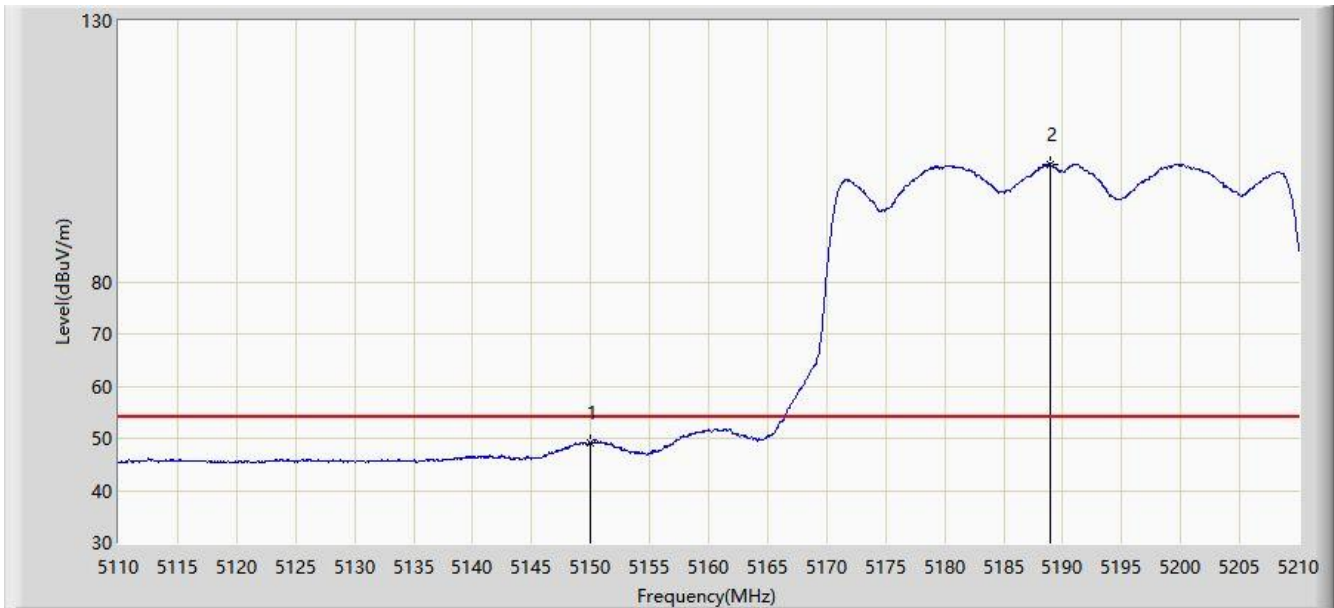


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 49.254                 | 44.812               | -4.746      | 54.000         | 4.442       | AV   |
| 2  |      | *    | 5188.950        | 102.608                | 98.222               | N/A         | N/A            | 4.386       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:54 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with OAW-AP1361D |                          |

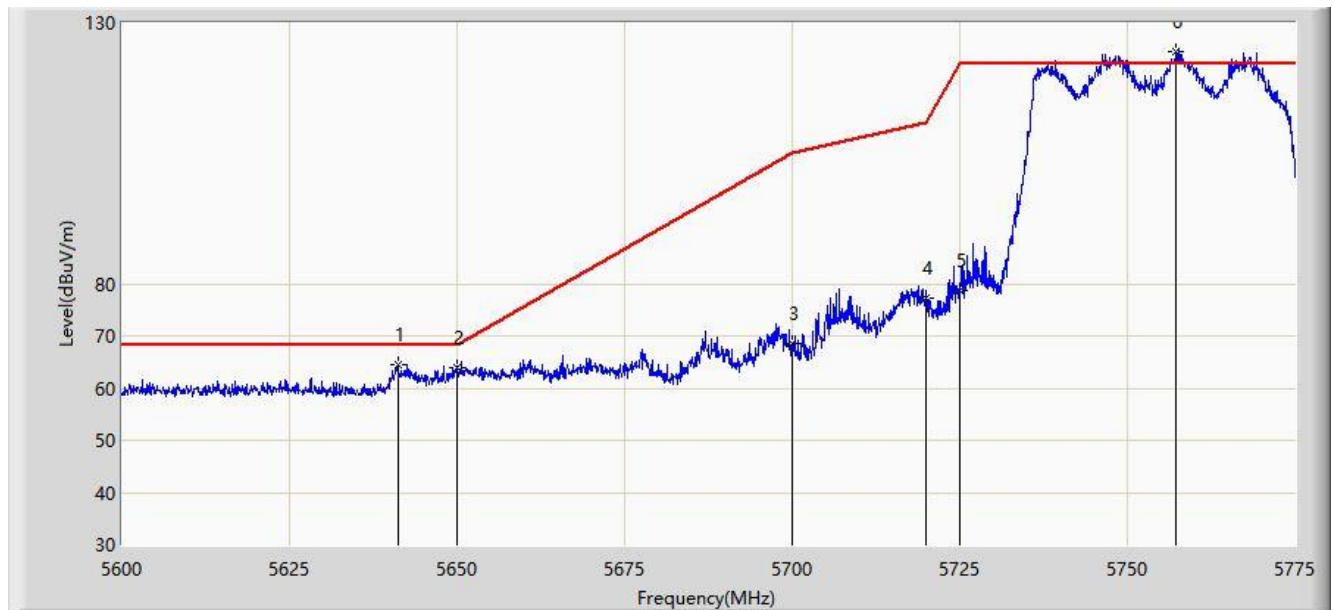


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.125        | 64.433                 | 59.242               | -3.767      | 68.200         | 5.191       | PK   |
| 2  |      |      | 5650.000        | 63.906                 | 58.570               | -4.294      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 68.432                 | 63.114               | -36.768     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 77.207                 | 71.733               | -33.593     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 78.667                 | 73.189               | -43.533     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5757.237        | 124.356                | 118.508              | N/A         | N/A            | 5.848       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:55 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz (CDD Mode) with OAW-AP1361D |                          |

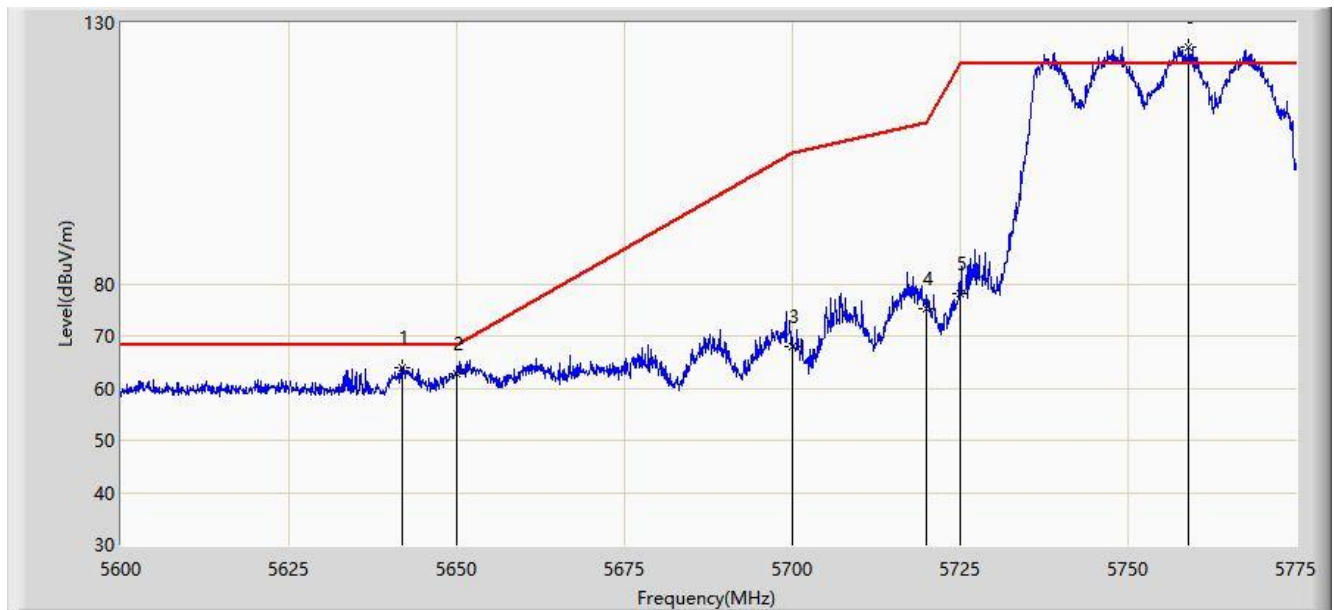


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5641.913        | 64.049                 | 58.845               | -4.151      | 68.200         | 5.205       | PK   |
| 2  |      |      | 5650.000        | 62.850                 | 57.514               | -5.350      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 67.989                 | 62.671               | -37.211     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 75.238                 | 69.764               | -35.562     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 78.050                 | 72.572               | -44.150     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5758.987        | 125.238                | 119.356              | N/A         | N/A            | 5.882       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:56 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with OAW-AP1361D |                          |

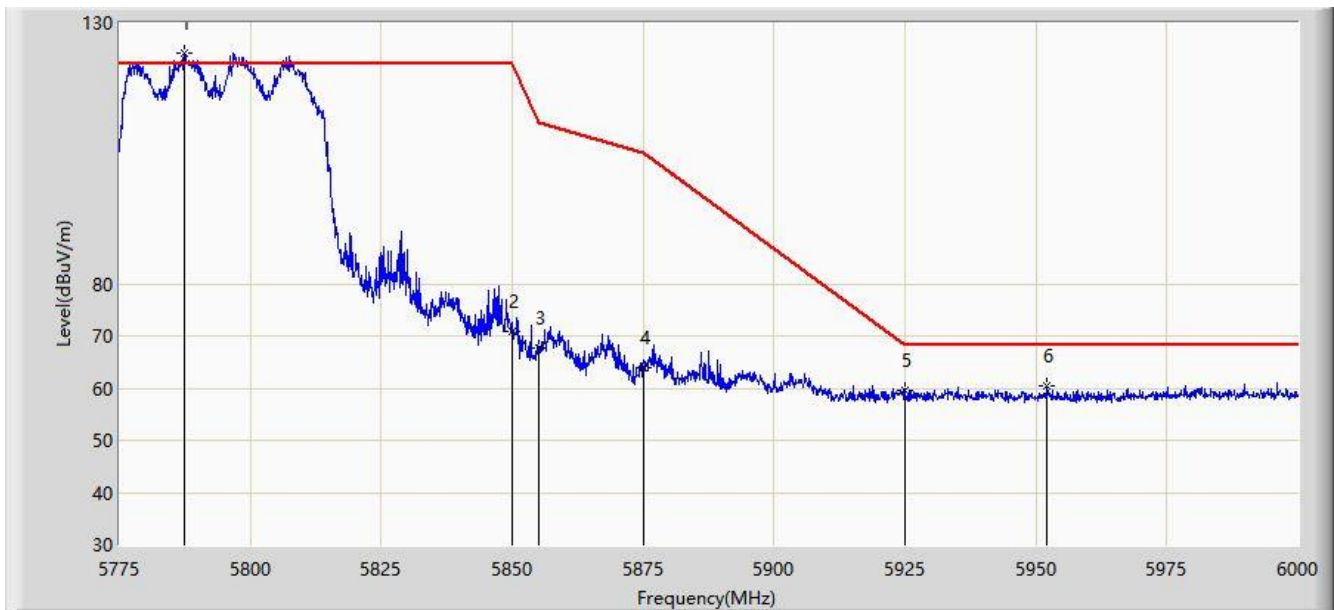


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5787.487        | 124.229                | 118.434              | N/A         | N/A            | 5.795       | PK   |
| 2  |      |      | 5850.000        | 71.011                 | 65.042               | -51.189     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 67.806                 | 61.831               | -42.994     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 63.978                 | 57.965               | -41.222     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 59.488                 | 53.353               | -8.712      | 68.200         | 6.136       | PK   |
| 6  |      |      | 5952.187        | 60.321                 | 54.283               | -7.879      | 68.200         | 6.037       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:58 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz (CDD Mode) with OAW-AP1361D |                          |

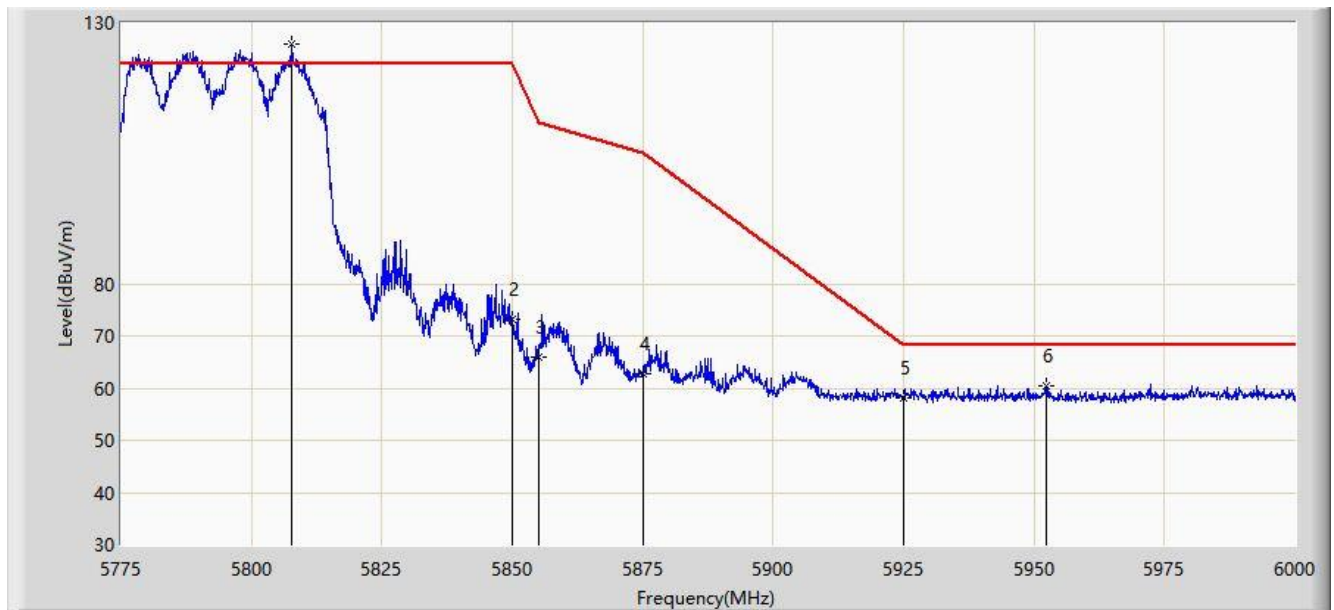


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5807.737        | 125.975                | 120.099              | N/A         | N/A            | 5.876       | PK   |
| 2  |      |      | 5850.000        | 73.133                 | 67.164               | -49.067     | 122.200        | 5.968       | PK   |
| 3  |      |      | 5855.000        | 66.005                 | 60.030               | -44.795     | 110.800        | 5.975       | PK   |
| 4  |      |      | 5875.000        | 62.723                 | 56.710               | -42.477     | 105.200        | 6.013       | PK   |
| 5  |      |      | 5925.000        | 58.130                 | 51.995               | -10.070     | 68.200         | 6.136       | PK   |
| 6  |      |      | 5952.300        | 60.575                 | 54.538               | -7.625      | 68.200         | 6.037       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 00:59 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361D |                          |

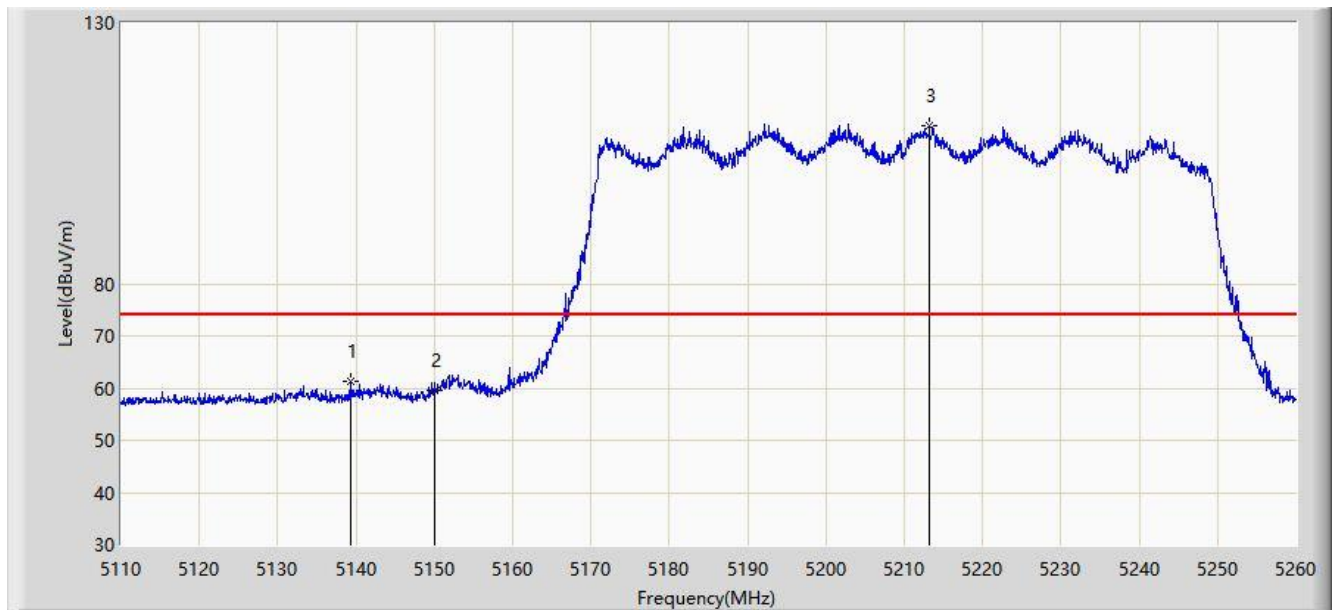


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5139.400        | 61.364                 | 56.943               | -12.636     | 74.000         | 4.421       | PK   |
| 2  |      |      | 5150.000        | 59.591                 | 55.149               | -14.409     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5213.200        | 110.414                | 106.236              | N/A         | N/A            | 4.178       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 01:01 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361D |                          |

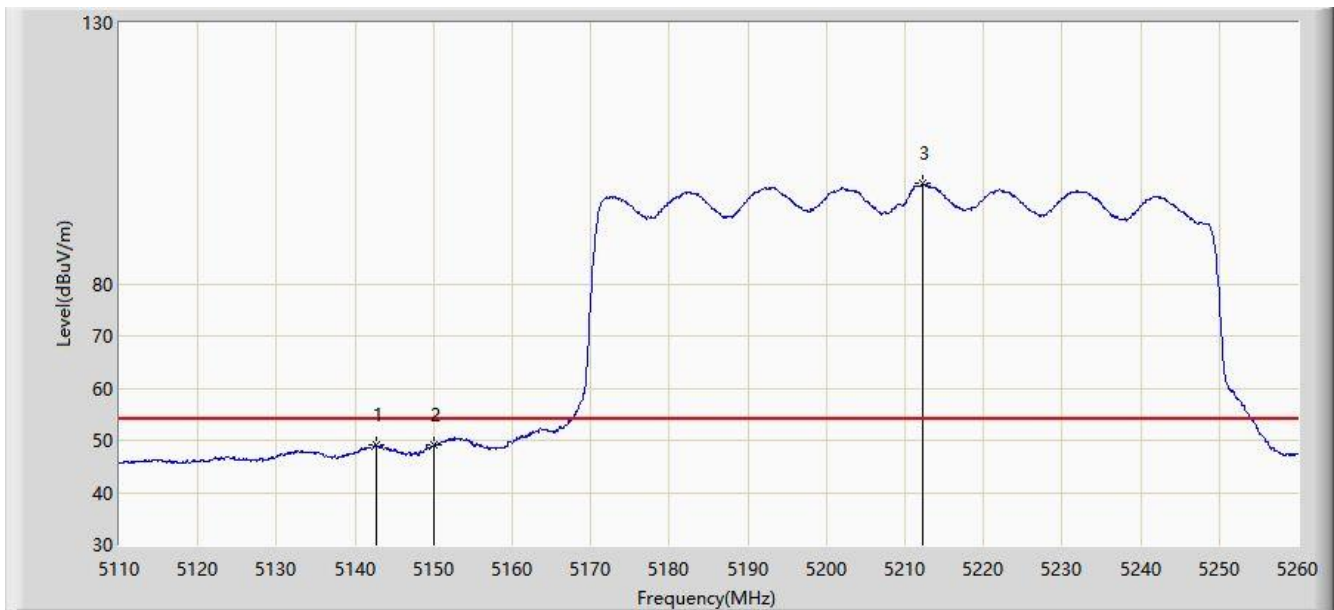


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.625        | 49.072                 | 44.652               | -4.928      | 54.000         | 4.421       | AV   |
| 2  |      |      | 5150.000        | 49.014                 | 44.572               | -4.986      | 54.000         | 4.442       | AV   |
| 3  |      | *    | 5212.300        | 99.151                 | 94.967               | N/A         | N/A            | 4.185       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 01:01 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361D |                          |

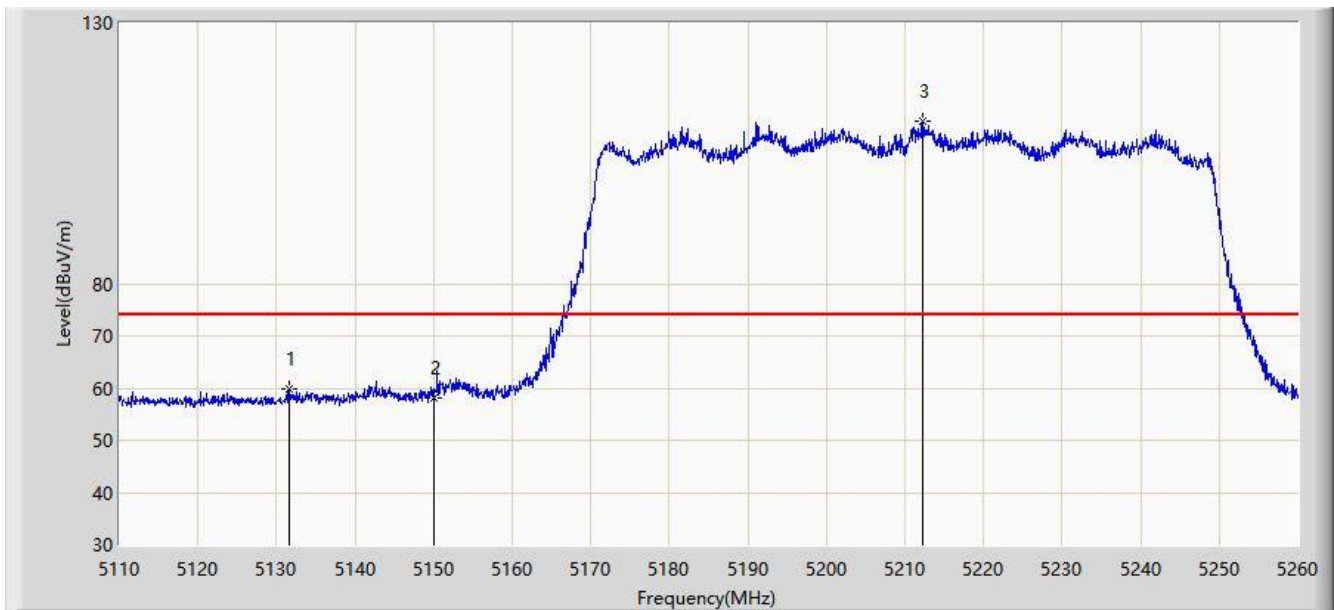


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5131.525        | 59.714                 | 55.292               | -14.286     | 74.000         | 4.422       | PK   |
| 2  |      |      | 5150.000        | 58.237                 | 53.795               | -15.763     | 74.000         | 4.442       | PK   |
| 3  |      | *    | 5212.300        | 111.223                | 107.039              | N/A         | N/A            | 4.185       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 01:02 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz (CDD Mode) with OAW-AP1361D |                          |

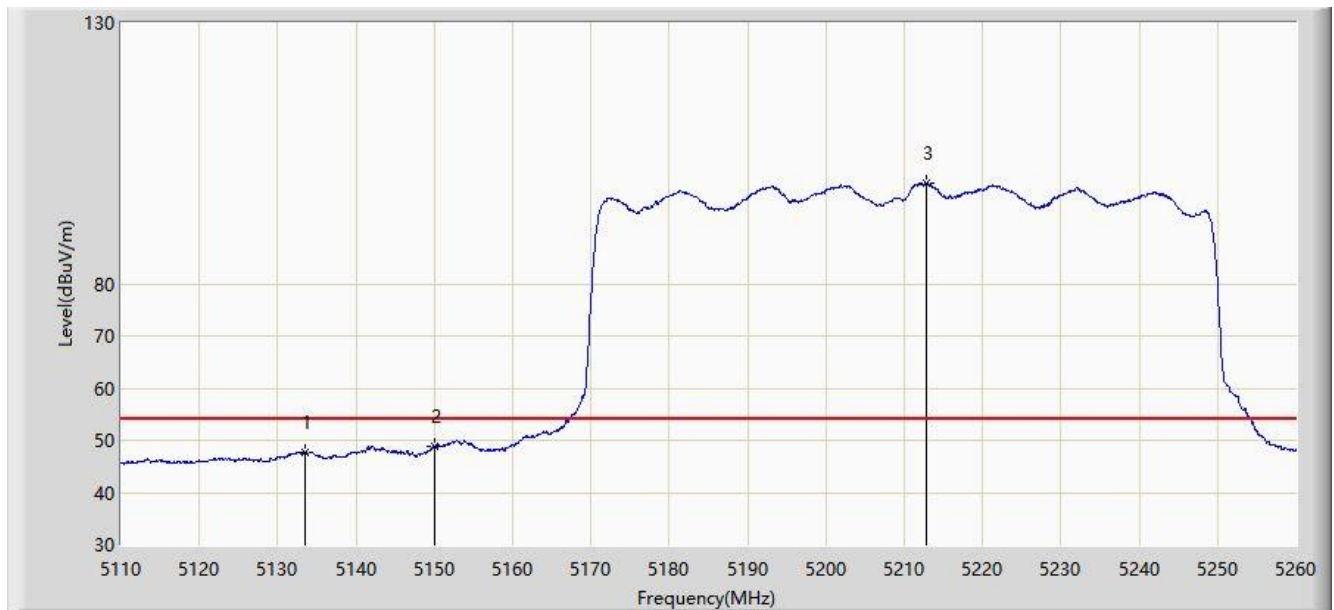


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5133.475        | 47.703                 | 43.281               | -6.297      | 54.000         | 4.422       | AV   |
| 2  |      |      | 5150.000        | 48.801                 | 44.359               | -5.199      | 54.000         | 4.442       | AV   |
| 3  |      | *    | 5212.825        | 99.277                 | 95.096               | N/A         | N/A            | 4.181       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 01:17 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with OAW-AP1361D |                          |

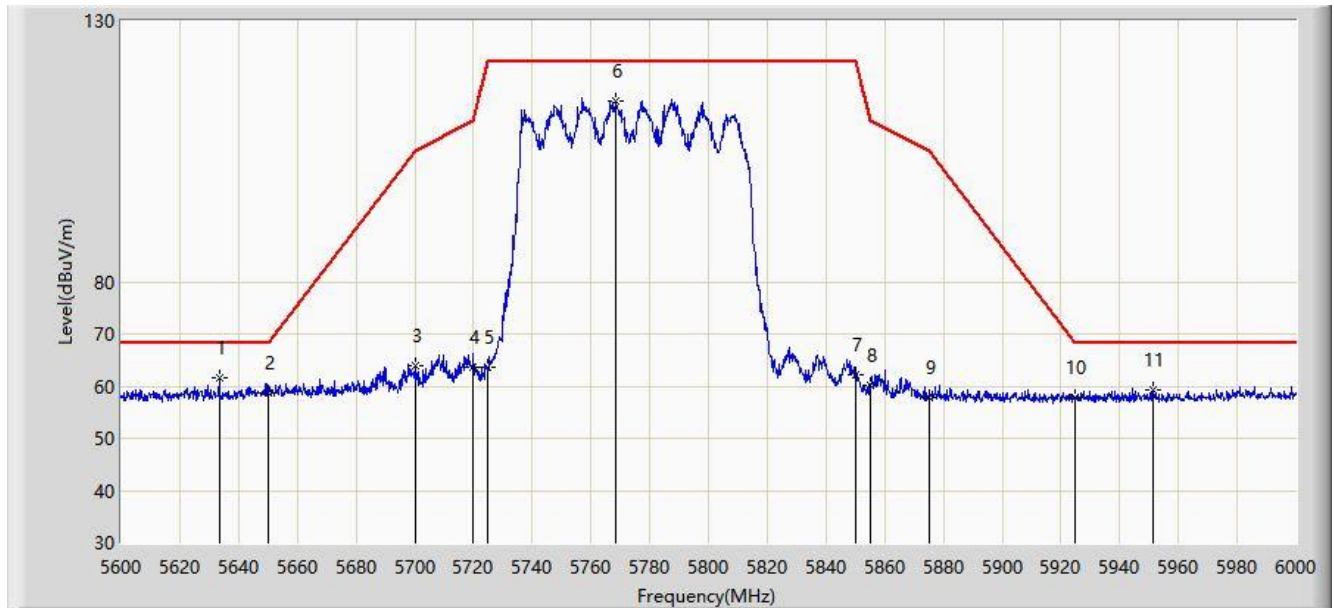


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5633.400        | 61.477                 | 56.284               | -6.723      | 68.200         | 5.193       | PK   |
| 2  |      |      | 5650.000        | 58.791                 | 53.455               | -9.409      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 63.910                 | 58.592               | -41.290     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 63.548                 | 58.074               | -47.252     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 63.546                 | 58.068               | -58.654     | 122.200        | 5.478       | PK   |
| 6  |      |      | 5768.400        | 114.769                | 108.961              | N/A         | N/A            | 5.809       | PK   |
| 7  |      |      | 5850.000        | 62.239                 | 56.270               | -59.961     | 122.200        | 5.968       | PK   |
| 8  |      |      | 5855.000        | 60.001                 | 54.026               | -50.799     | 110.800        | 5.975       | PK   |
| 9  |      |      | 5875.000        | 57.761                 | 51.748               | -47.439     | 105.200        | 6.013       | PK   |
| 10 |      |      | 5925.000        | 57.958                 | 51.823               | -10.242     | 68.200         | 6.136       | PK   |
| 11 |      |      | 5951.400        | 59.349                 | 53.307               | -8.851      | 68.200         | 6.042       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                     |                          |
|-------------------------------------------------------------------------------------|--------------------------|
| Site: AC2                                                                           | Time: 2020/03/07 - 01:18 |
| Limit: FCC_Part15.209_RSE(3m)                                                       | Engineer: Dillon Diao    |
| Probe: BBHA9120D_1-18GHz                                                            | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                             | Power: By PoE            |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz (CDD Mode) with OAW-AP1361D |                          |

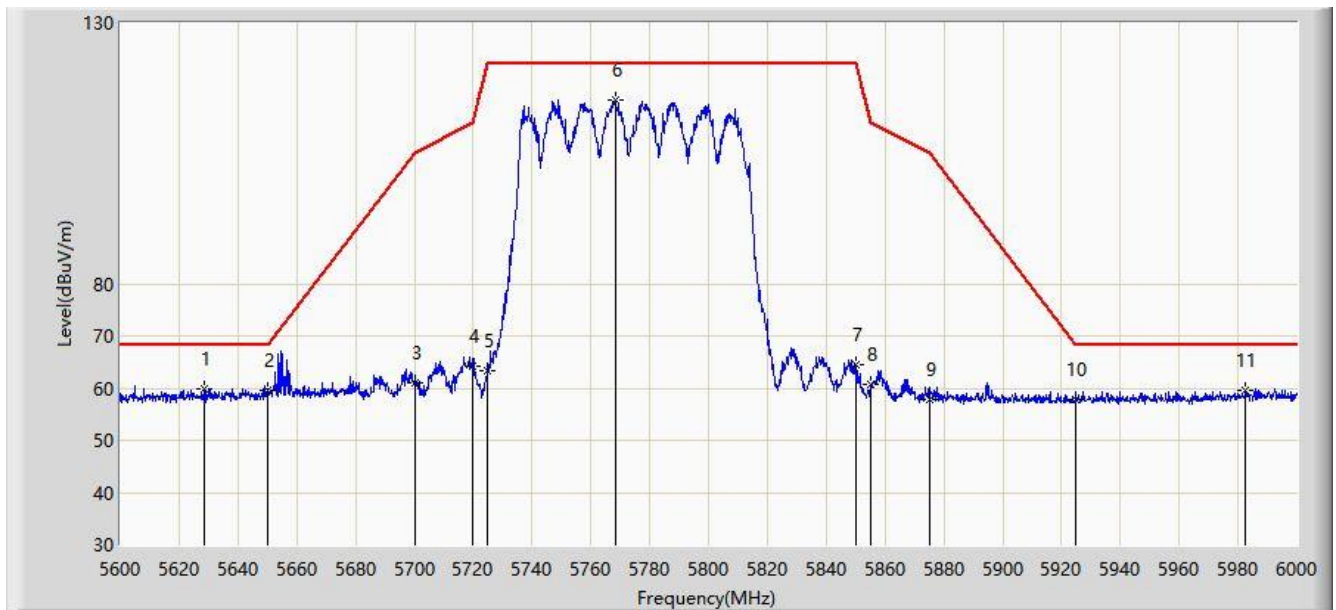


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5628.800        | 59.869                 | 54.674               | -8.331      | 68.200         | 5.195       | PK   |
| 2  |      |      | 5650.000        | 59.454                 | 54.118               | -8.746      | 68.200         | 5.336       | PK   |
| 3  |      |      | 5700.000        | 61.102                 | 55.784               | -44.098     | 105.200        | 5.318       | PK   |
| 4  |      |      | 5720.000        | 64.188                 | 58.714               | -46.612     | 110.800        | 5.474       | PK   |
| 5  |      |      | 5725.000        | 63.277                 | 57.799               | -58.923     | 122.200        | 5.478       | PK   |
| 6  |      | *    | 5768.400        | 115.130                | 109.322              | N/A         | N/A            | 5.809       | PK   |
| 7  |      |      | 5850.000        | 64.517                 | 58.548               | -57.683     | 122.200        | 5.968       | PK   |
| 8  |      |      | 5855.000        | 60.847                 | 54.872               | -49.953     | 110.800        | 5.975       | PK   |
| 9  |      |      | 5875.000        | 57.694                 | 51.681               | -47.506     | 105.200        | 6.013       | PK   |
| 10 |      |      | 5925.000        | 57.852                 | 51.717               | -10.348     | 68.200         | 6.136       | PK   |
| 11 |      |      | 5982.600        | 59.679                 | 53.198               | -8.521      | 68.200         | 6.482       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 01:51 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with OAW-AP1361D |                          |

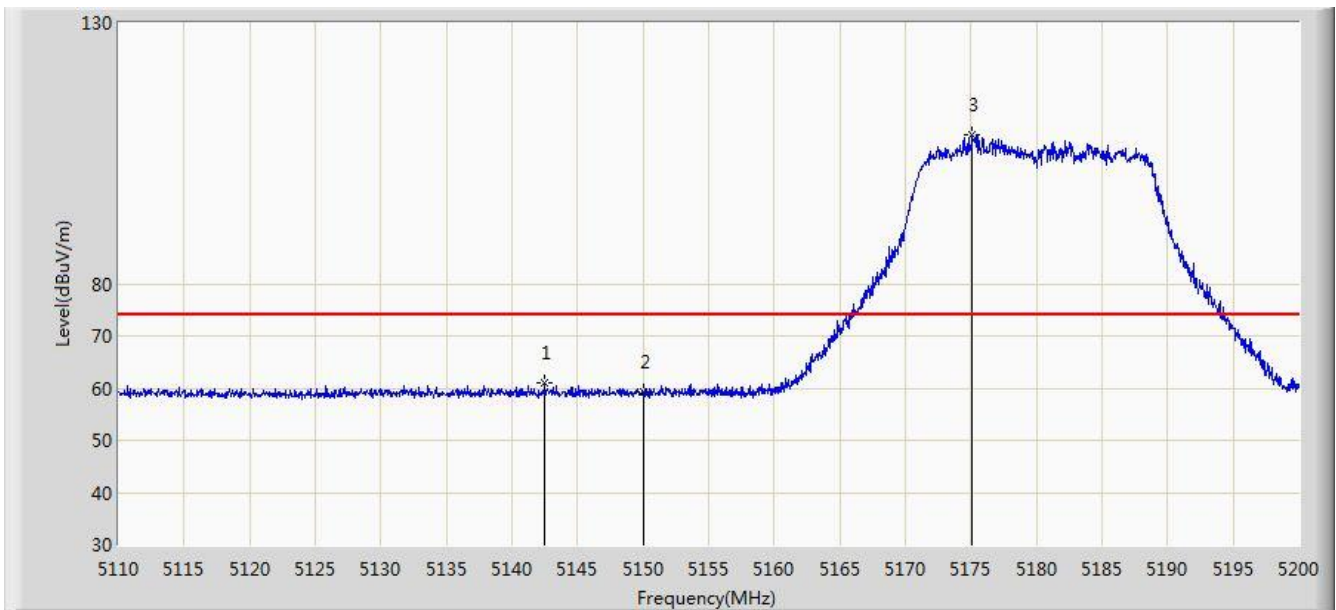


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5142.535        | 60.919                 | 54.106               | -13.081     | 74.000         | 6.813       | PK   |
| 2  |      |      | 5150.000        | 59.310                 | 52.511               | -14.690     | 74.000         | 6.799       | PK   |
| 3  |      | *    | 5175.070        | 108.640                | 101.824              | N/A         | N/A            | 6.816       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 01:58 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with OAW-AP1361D |                          |

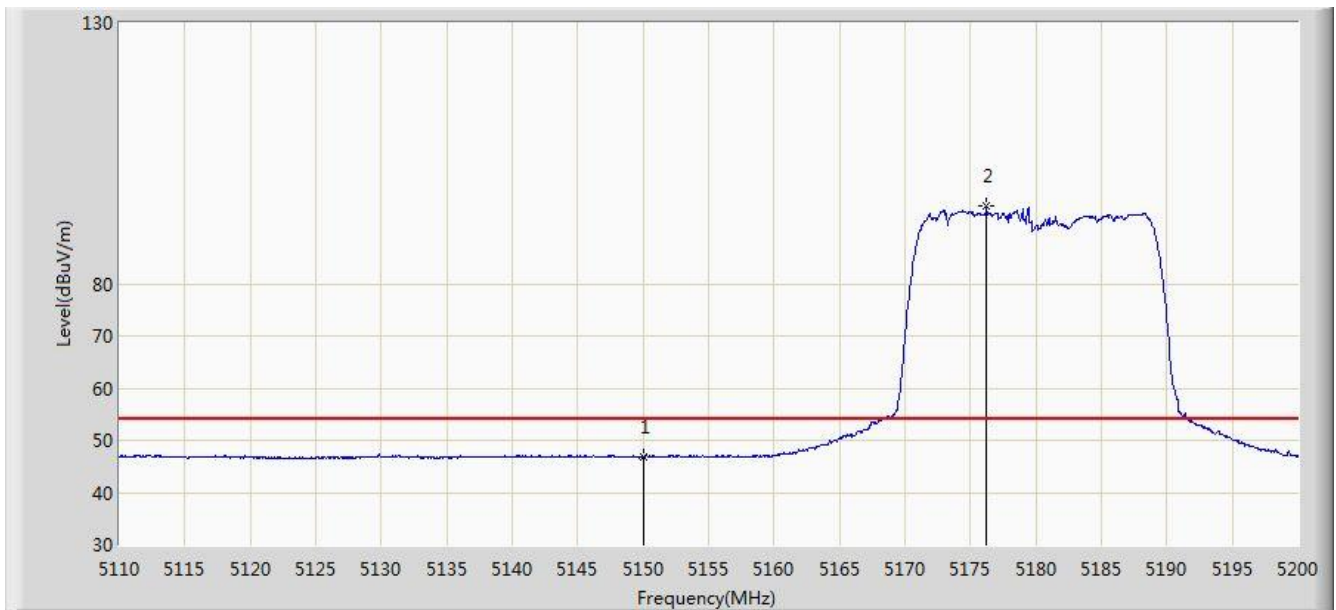


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.810                 | 40.011               | -7.190      | 54.000         | 6.799       | AV   |
| 2  |      | *    | 5176.240        | 94.982                 | 88.171               | N/A         | N/A            | 6.812       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 01:59 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with OAW-AP1361D |                          |

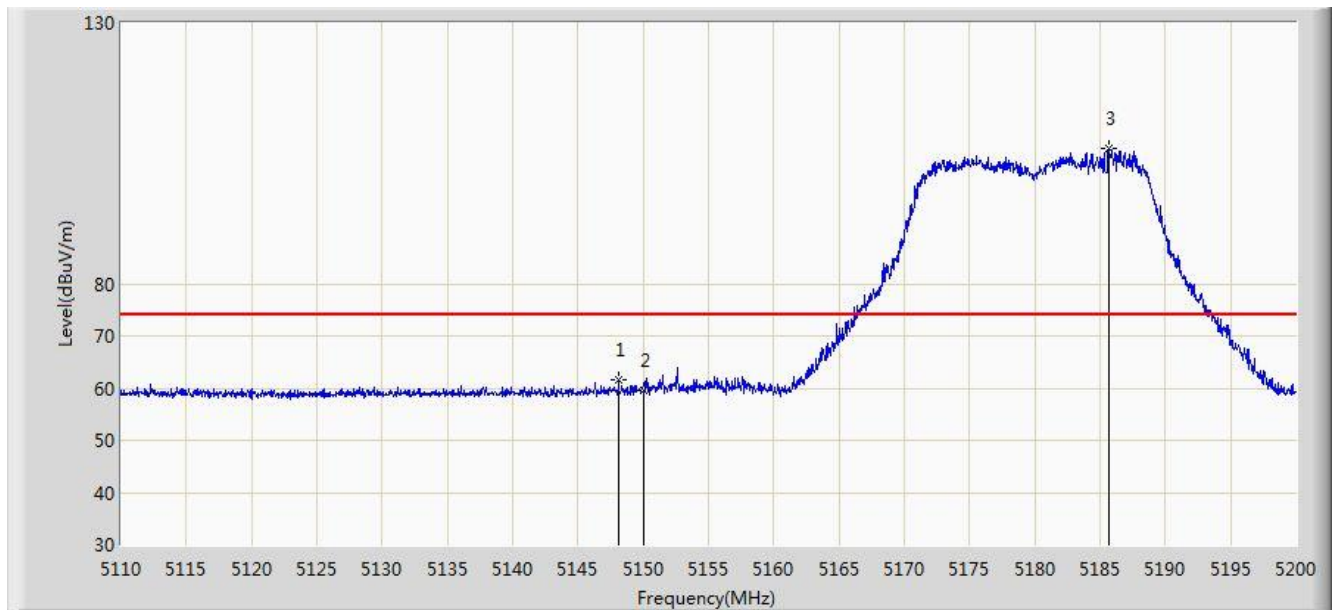


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5148.115        | 61.616                 | 54.824               | -12.384     | 74.000         | 6.793       | PK   |
| 2  |      |      | 5150.000        | 59.699                 | 52.900               | -14.301     | 74.000         | 6.799       | PK   |
| 3  |      | *    | 5185.690        | 106.023                | 99.291               | N/A         | N/A            | 6.733       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:01 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz (Beamforming Mode) with OAW-AP1361D |                          |

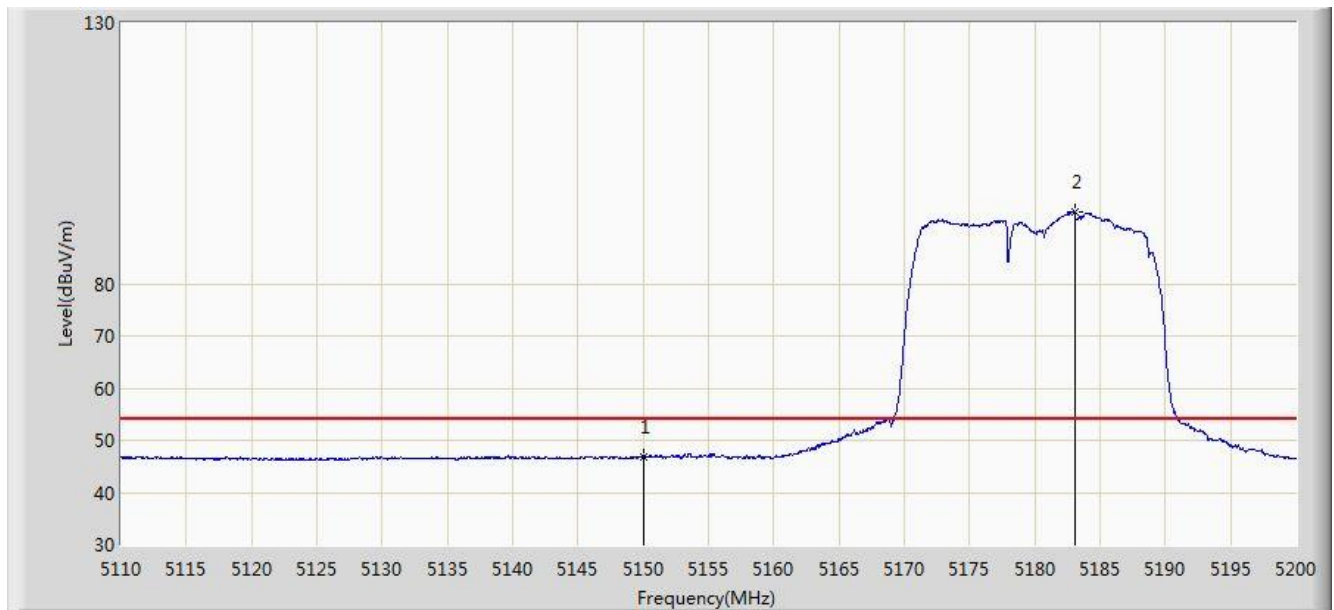


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.834                 | 40.035               | -7.166      | 54.000         | 6.799       | AV   |
| 2  |      | *    | 5183.035        | 93.667                 | 86.894               | N/A         | N/A            | 6.774       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:27 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (Beamforming Mode) with OAW-AP1361D |                          |

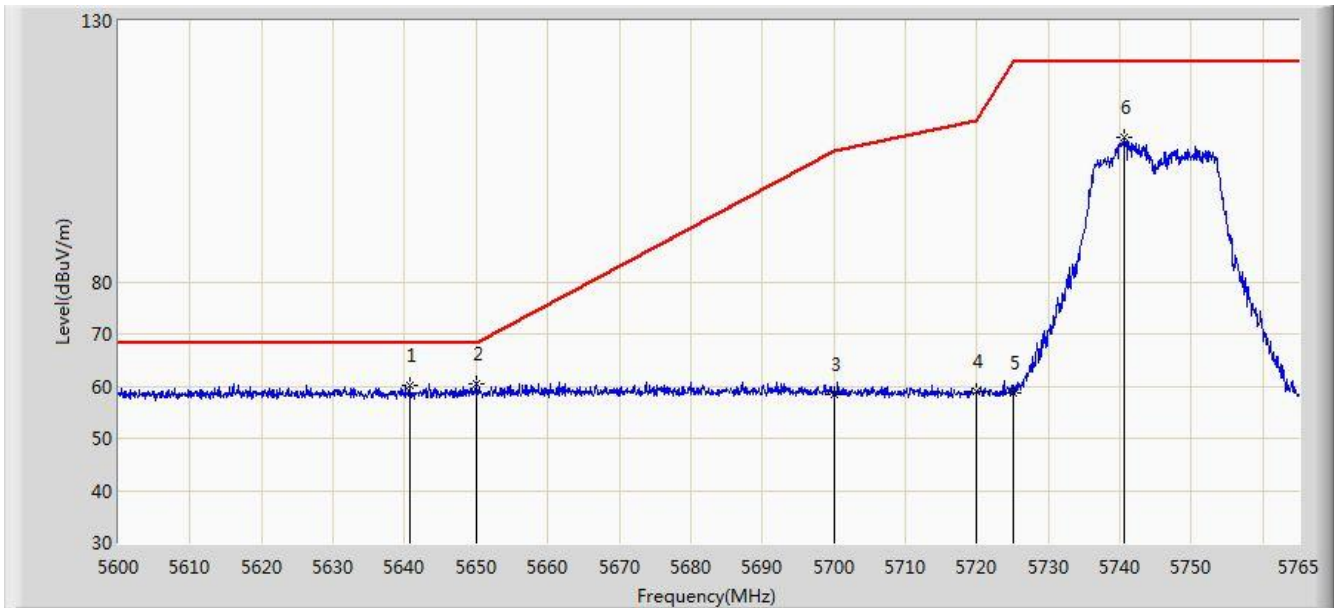


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5640.755        | 60.064                 | 53.115               | -8.136      | 68.200         | 6.949       | PK   |
| 2  |      | *    | 5650.000        | 60.518                 | 53.378               | -7.682      | 68.200         | 7.140       | PK   |
| 3  |      |      | 5700.000        | 58.419                 | 51.204               | -46.781     | 105.200        | 7.215       | PK   |
| 4  |      |      | 5720.000        | 59.021                 | 51.748               | -51.779     | 110.800        | 7.273       | PK   |
| 5  |      |      | 5725.000        | 58.589                 | 51.257               | -63.611     | 122.200        | 7.332       | PK   |
| 6  |      |      | 5740.580        | 107.544                | 100.113              | N/A         | N/A            | 7.431       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:28 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz (Beamforming Mode) with OAW-AP1361D |                          |

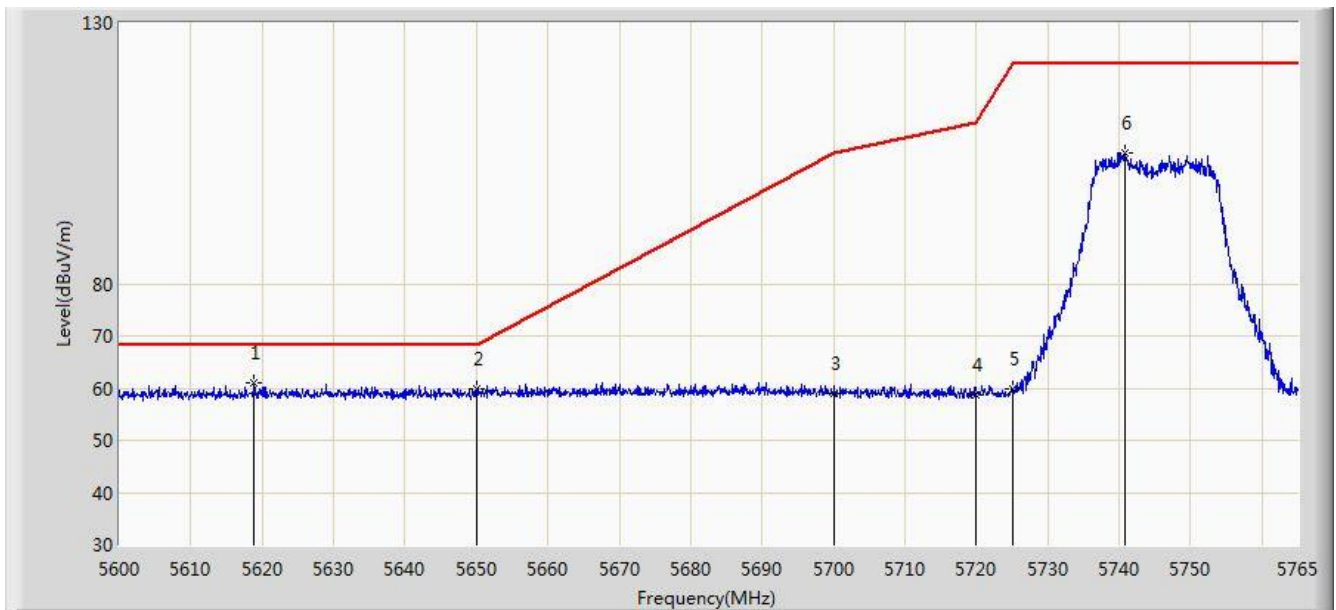


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5618.810        | 60.928                 | 53.884               | -7.272      | 68.200         | 7.045       | PK   |
| 2  |      |      | 5650.000        | 59.911                 | 52.771               | -8.289      | 68.200         | 7.140       | PK   |
| 3  |      |      | 5700.000        | 58.956                 | 51.741               | -46.244     | 105.200        | 7.215       | PK   |
| 4  |      |      | 5720.000        | 58.795                 | 51.522               | -52.005     | 110.800        | 7.273       | PK   |
| 5  |      |      | 5725.000        | 59.848                 | 52.516               | -62.352     | 122.200        | 7.332       | PK   |
| 6  |      |      | 5740.745        | 105.027                | 97.595               | N/A         | N/A            | 7.432       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:28 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (Beamforming Mode) with OAW-AP1361D |                          |

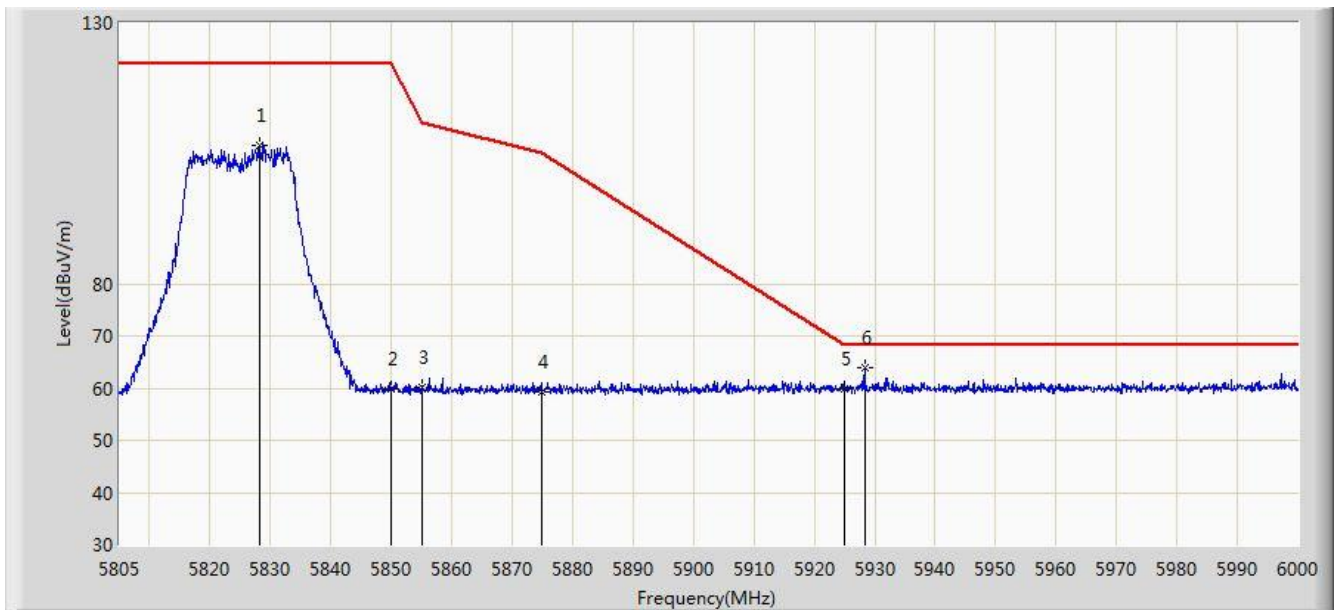


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5828.107        | 106.621                | 98.854               | N/A         | N/A            | 7.767       | PK   |
| 2  |      |      | 5850.000        | 59.962                 | 52.270               | -62.238     | 122.200        | 7.692       | PK   |
| 3  |      |      | 5855.000        | 60.287                 | 52.643               | -50.513     | 110.800        | 7.644       | PK   |
| 4  |      |      | 5875.000        | 59.182                 | 51.580               | -46.018     | 105.200        | 7.602       | PK   |
| 5  |      |      | 5925.000        | 59.860                 | 52.034               | -8.340      | 68.200         | 7.826       | PK   |
| 6  |      | *    | 5928.337        | 63.923                 | 56.113               | -4.277      | 68.200         | 7.810       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:30 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz (Beamforming Mode) with OAW-AP1361D |                          |

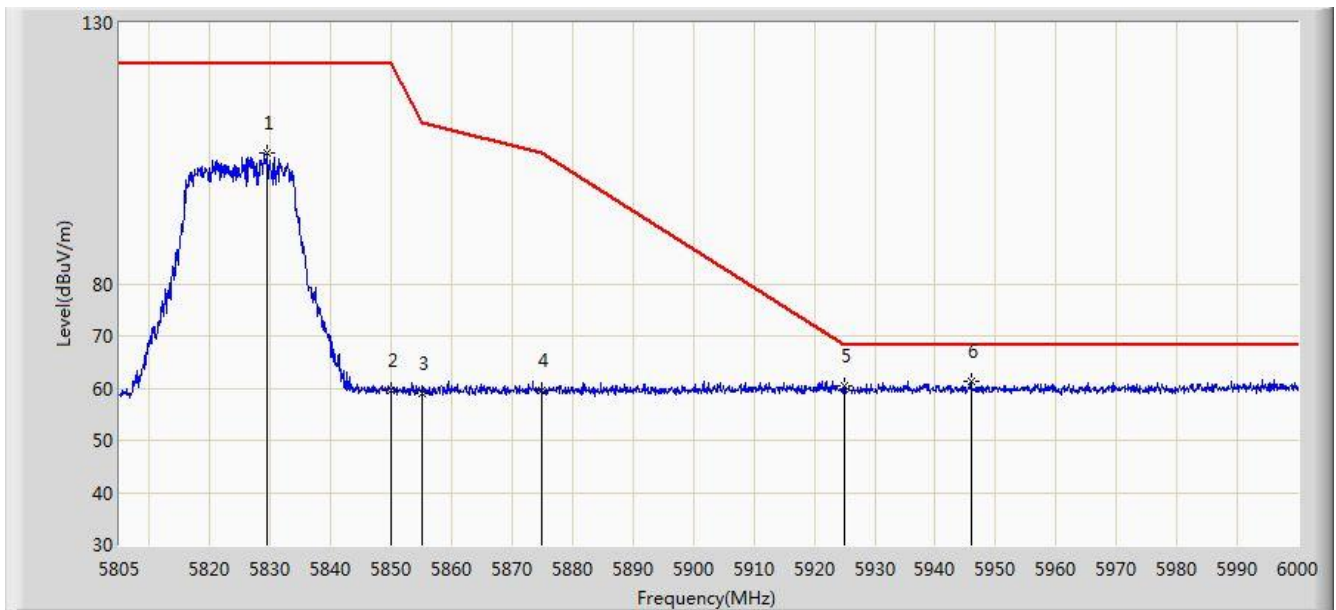


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5829.473        | 105.006                | 97.241               | N/A         | N/A            | 7.764       | PK   |
| 2  |      |      | 5850.000        | 59.582                 | 51.890               | -62.618     | 122.200        | 7.692       | PK   |
| 3  |      |      | 5855.000        | 58.997                 | 51.353               | -51.803     | 110.800        | 7.644       | PK   |
| 4  |      |      | 5875.000        | 59.428                 | 51.826               | -45.772     | 105.200        | 7.602       | PK   |
| 5  |      |      | 5925.000        | 60.379                 | 52.553               | -7.821      | 68.200         | 7.826       | PK   |
| 6  |      | *    | 5945.985        | 61.280                 | 53.591               | -6.920      | 68.200         | 7.689       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:31 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with OAW-AP1361D |                          |

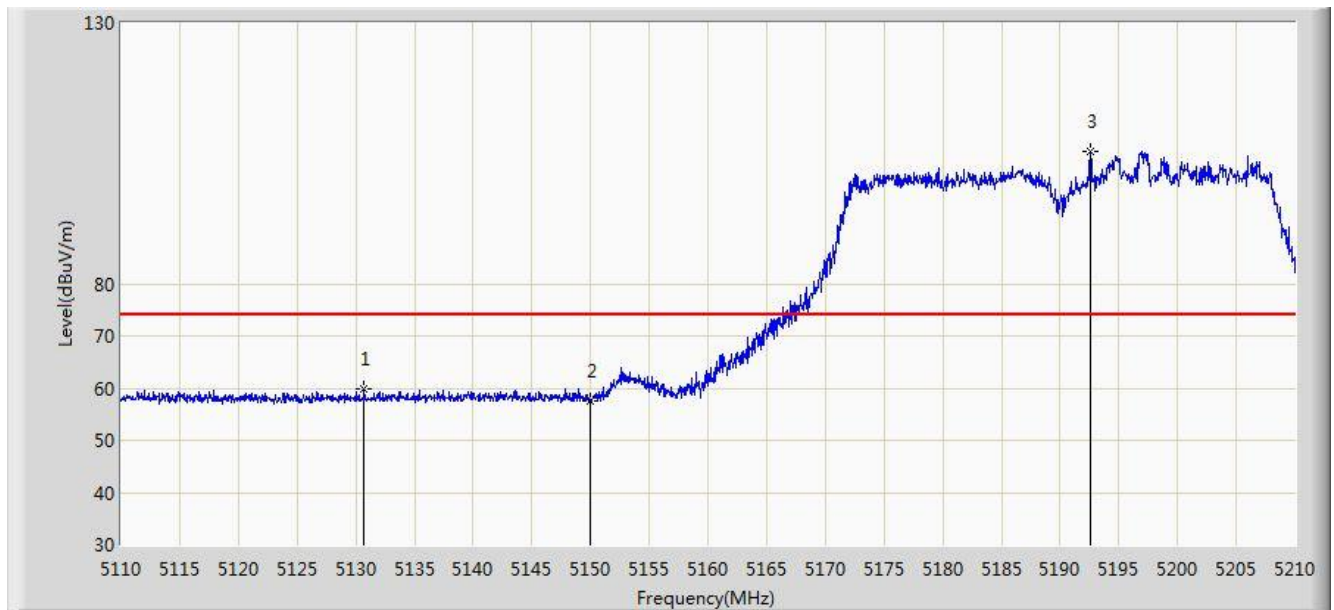


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5130.700        | 59.826                 | 52.972               | -14.174     | 74.000         | 6.854       | PK   |
| 2  |      |      | 5150.000        | 57.544                 | 50.745               | -16.456     | 74.000         | 6.799       | PK   |
| 3  |      | *    | 5192.600        | 105.444                | 98.818               | N/A         | N/A            | 6.626       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:34 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with OAW-AP1361D |                          |

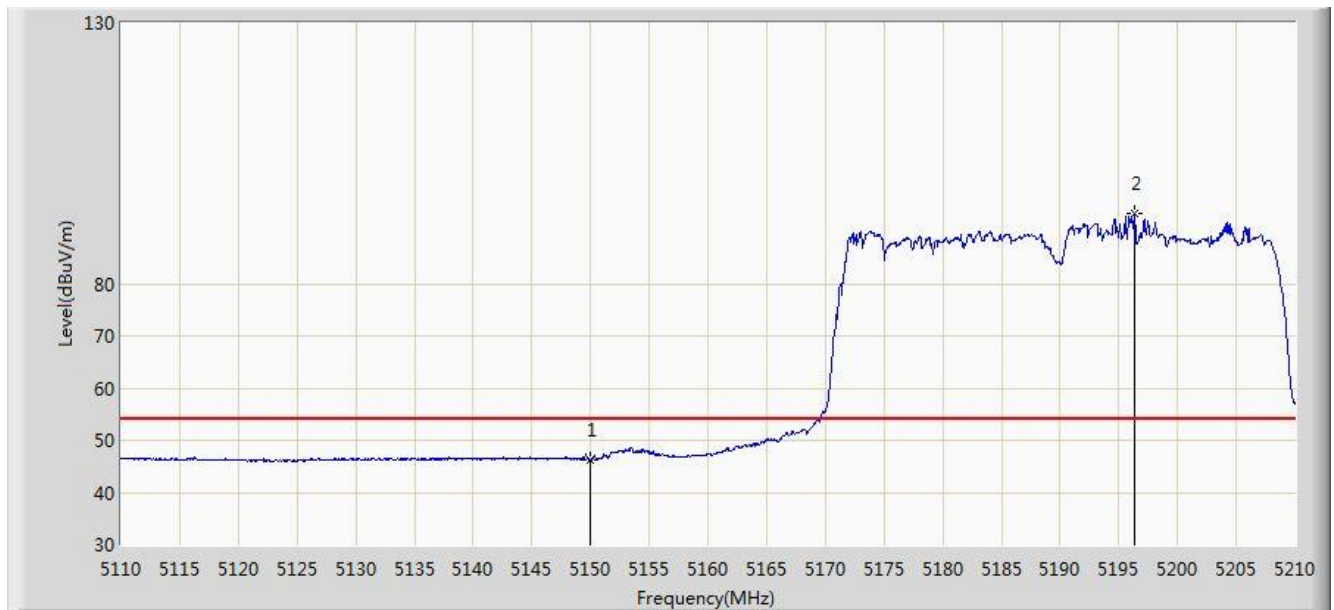


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.278                 | 39.479               | -7.722      | 54.000         | 6.799       | AV   |
| 2  |      | *    | 5196.350        | 93.563                 | 86.995               | N/A         | N/A            | 6.568       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:35 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with OAW-AP1361D |                          |

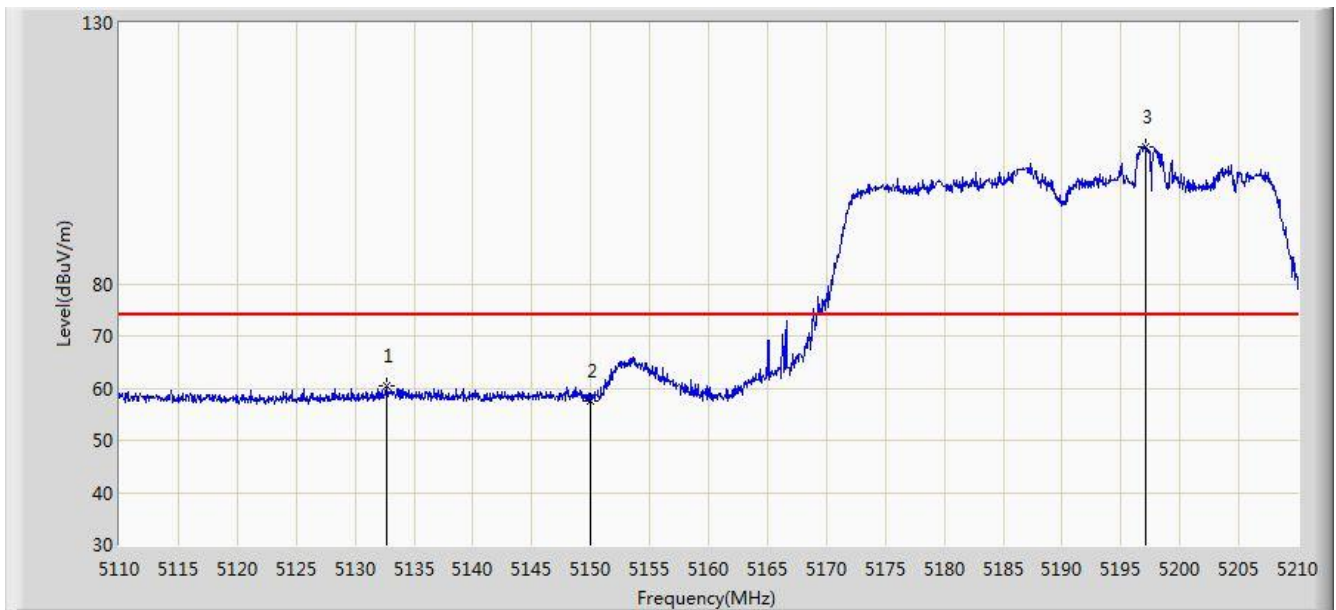


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5132.650        | 60.453                 | 53.601               | -13.547     | 74.000         | 6.852       | PK   |
| 2  |      |      | 5150.000        | 57.563                 | 50.764               | -16.437     | 74.000         | 6.799       | PK   |
| 3  |      | *    | 5197.050        | 106.321                | 99.764               | N/A         | N/A            | 6.557       | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 02:38 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz (Beamforming Mode) with OAW-AP1361D |                          |

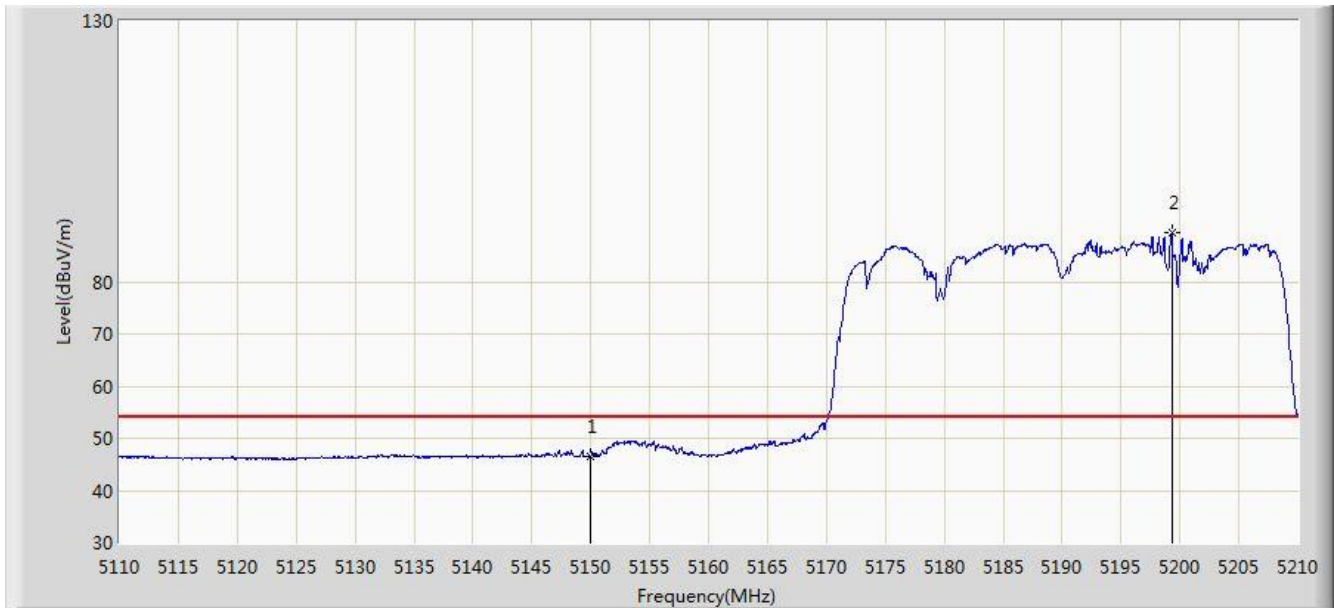


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 46.493                 | 39.694               | -7.507      | 54.000         | 6.799       | AV   |
| 2  |      | *    | 5199.300        | 89.369                 | 82.844               | N/A         | N/A            | 6.525       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 03:03 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (Beamforming Mode) with OAW-AP1361D |                          |

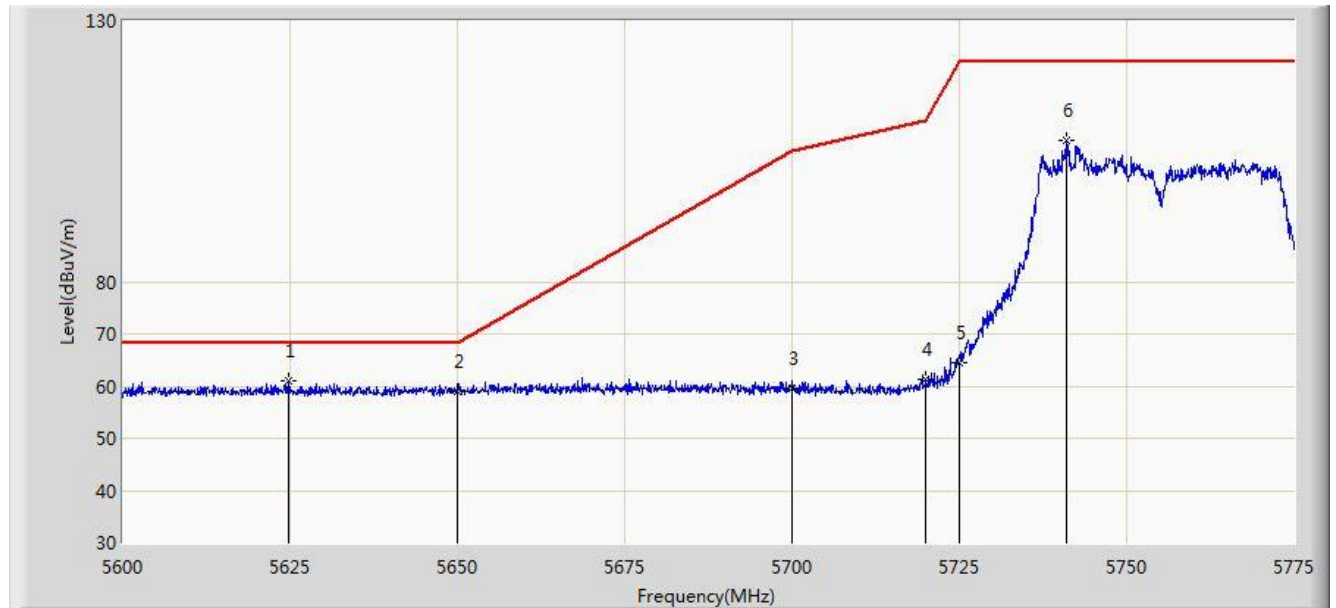


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5624.850        | 61.096                 | 54.069               | -7.104      | 68.200         | 7.027       | PK   |
| 2  |      |      | 5650.000        | 58.998                 | 51.858               | -9.202      | 68.200         | 7.140       | PK   |
| 3  |      |      | 5700.000        | 59.610                 | 52.395               | -45.590     | 105.200        | 7.215       | PK   |
| 4  |      |      | 5720.000        | 61.264                 | 53.991               | -49.536     | 110.800        | 7.273       | PK   |
| 5  |      |      | 5725.000        | 64.467                 | 57.135               | -57.733     | 122.200        | 7.332       | PK   |
| 6  |      |      | 5740.962        | 107.208                | 99.775               | N/A         | N/A            | 7.433       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 03:05 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz (Beamforming Mode) with OAW-AP1361D |                          |

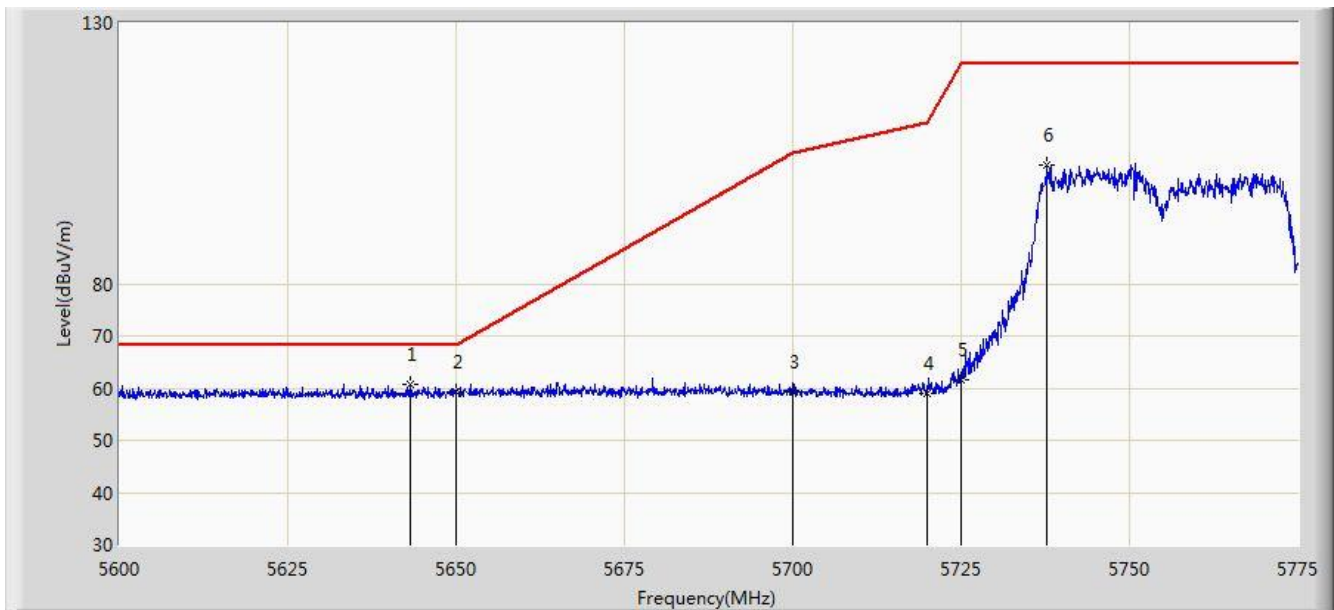


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 5643.225        | 60.737                 | 53.742               | -7.463      | 68.200         | 6.995       | PK   |
| 2  |      |      | 5650.000        | 59.255                 | 52.115               | -8.945      | 68.200         | 7.140       | PK   |
| 3  |      |      | 5700.000        | 59.233                 | 52.018               | -45.967     | 105.200        | 7.215       | PK   |
| 4  |      |      | 5720.000        | 59.091                 | 51.818               | -51.709     | 110.800        | 7.273       | PK   |
| 5  |      |      | 5725.000        | 61.681                 | 54.349               | -60.519     | 122.200        | 7.332       | PK   |
| 6  |      |      | 5737.812        | 102.726                | 95.312               | N/A         | N/A            | 7.414       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 03:06 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Horizontal     |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (Beamforming Mode) with OAW-AP1361D |                          |

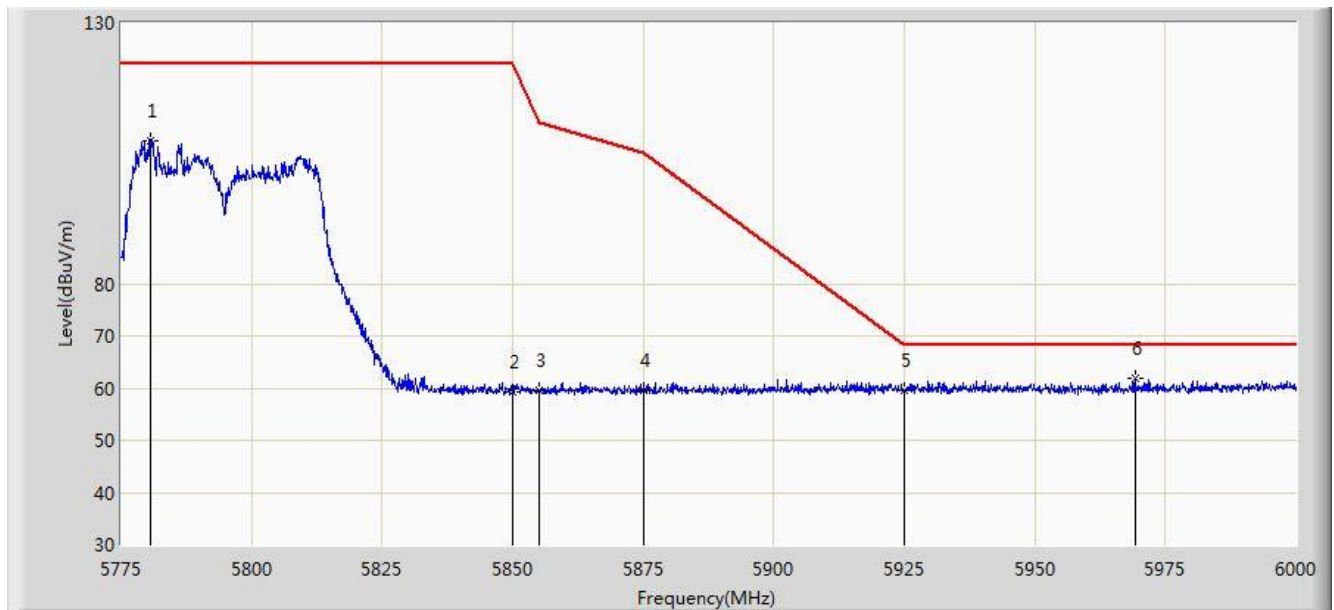


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5780.513        | 107.506                | 99.962               | N/A         | N/A            | 7.544       | PK   |
| 2  |      |      | 5850.000        | 59.213                 | 51.521               | -62.987     | 122.200        | 7.692       | PK   |
| 3  |      |      | 5855.000        | 59.647                 | 52.003               | -51.153     | 110.800        | 7.644       | PK   |
| 4  |      |      | 5875.000        | 59.583                 | 51.981               | -45.617     | 105.200        | 7.602       | PK   |
| 5  |      |      | 5925.000        | 59.427                 | 51.601               | -8.773      | 68.200         | 7.826       | PK   |
| 6  |      | *    | 5969.175        | 61.855                 | 54.212               | -6.345      | 68.200         | 7.643       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                                            |                          |
|--------------------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                                  | Time: 2019/12/28 - 03:08 |
| Limit: FCC_Part15.209_RSE(3m)                                                              | Engineer: Cloud Guo      |
| Probe: BBHA9120D_1-18GHz                                                                   | Polarity: Vertical       |
| EUT: OmniAccess Stellar                                                                    | Power: By PoE            |
| Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz (Beamforming Mode) with OAW-AP1361D |                          |

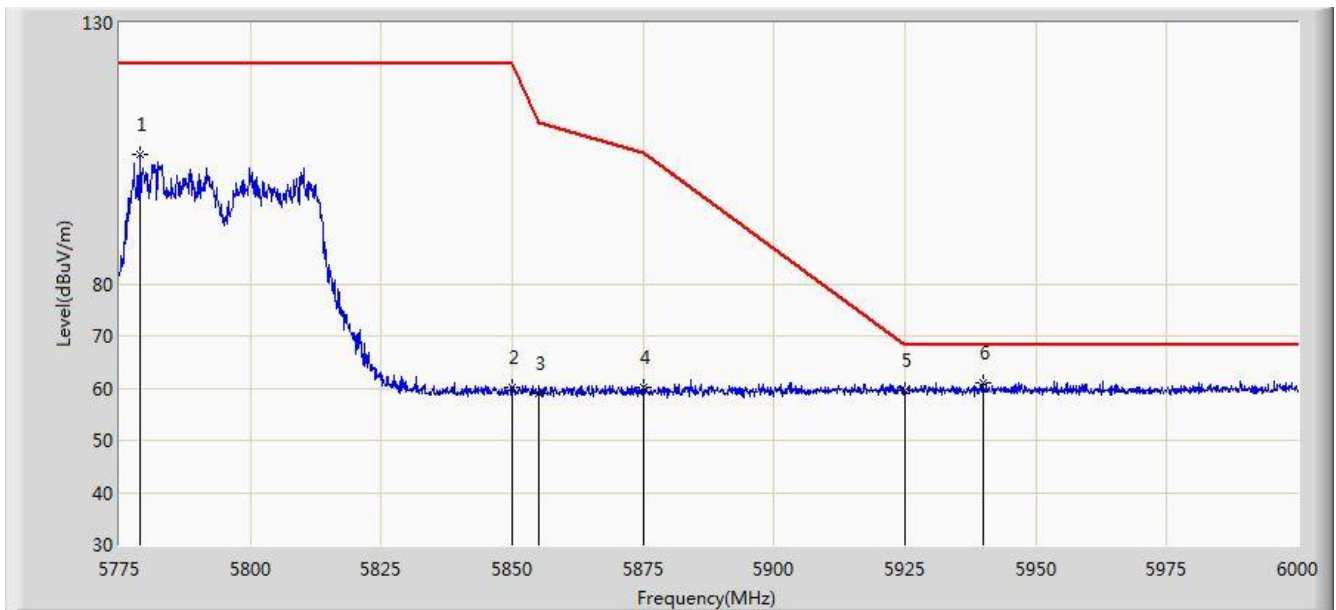

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 5778.937        | 104.715                | 97.165               | N/A         | N/A            | 7.550       | PK   |
| 2  |      |      | 5850.000        | 60.050                 | 52.358               | -62.150     | 122.200        | 7.692       | PK   |
| 3  |      |      | 5855.000        | 59.121                 | 51.477               | -51.679     | 110.800        | 7.644       | PK   |
| 4  |      |      | 5875.000        | 60.263                 | 52.661               | -44.937     | 105.200        | 7.602       | PK   |
| 5  |      |      | 5925.000        | 59.522                 | 51.696               | -8.678      | 68.200         | 7.826       | PK   |
| 6  |      | *    | 5939.925        | 60.921                 | 53.189               | -7.279      | 68.200         | 7.731       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)