

SAR TEST REPORT



The following samples were submitted and identified on behalf of the client as:

Product Name Convertible PC
Brand Name HP
Model No. TPN-C157
Applicant HP Inc.
1501 Page Mill Road, Palo Alto, CA 94304, USA
Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013
FCC ID B94-MT7921W
Date of Receipt Dec. 09, 2021
Date of Test(s) Jan. 07, 2022 ~ Jan. 11, 2022
Date of Issue Jan. 25, 2022

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	PM / Kiki Lin	Approved By / John Yeh

Date: Jan. 25, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
ES/2021/C0024	Rev.00	Initial creation of document	Jan. 25, 2022	Ruby Ou	

Note:

1. The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

0. Guidance applied

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992
IEEE 1528-2013
KDB248227D01v02r02
KDB865664D01v01r04
KDB865664D02v01r02
KDB447498D01v06
KDB616217D04v01r02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Contents

0. Guidance applied	3
1. General Information	5
1.1 Testing Laboratory	5
1.2 Details of Applicant	5
1.3 Description of EUT	6
1.4 Test Environment	35
1.5 Operation Description	35
1.6 Operating modes validation by power measurement	37
1.7 The SAR Measurement System	45
1.8 System Components	47
1.9 SAR System Verification	49
1.10 Tissue Simulant Fluid for the Frequency Band	51
1.11 Evaluation Procedures	53
1.12 Probe Calibration Procedures	54
1.13 Test Standards and Limits	57
2. Summary of Results	59
2.1 Decision rules	59
2.2 Summary of Results	59
2.3 Reporting statements of conformity	60
3. Simultaneous Transmission Analysis	61
3.1 Estimated SAR calculation	62
3.2 SPLSR evaluation and analysis	62
4. Instruments List	65
5. Measurements	66
6. SAR System Performance Verification	112
7. Uncertainty Budget	117
Appendixes	119
ES2021C0024 SAR_Appendix A Photographs	119
ES2021C0024 SAR_Appendix B DAE & Probe Cal. Certificate	119
ES2021C0024 SAR_Appendix C Phantom Description & Dipole Cal. Certificate	119

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. Central RF Lab	
No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	
FCC Designation Number	TW0027
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/

1.2 Details of Applicant

Company Name	HP Inc.
Company Address	1501 Page Mill Road, Palo Alto, CA 94304, USA

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.3 Description of EUT

General Information of Host:

Equipment Under Test	Convertible PC	
Brand Name	HP	
Model No.	TPN-C157	
Integrated Module	Brand Name: MediaTek Model Name: MT7921	
FCC ID	B94-MT7921W	
Mode of Operation	☒ WLAN802.11 ☒ Bluetooth	
Duty Cycle	WLAN802.11	Refer to page 29-32
	Bluetooth	76.8%
TX Frequency Bands (MHz)	WLAN	2412 ~ 2472, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825
	Bluetooth	2402 ~ 2480

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

High-Tek

Summary of Maximum SAR Value	
Mode	Highest SAR1g Body (W/kg)
2.4G WLAN	0.47
5G WLAN	0.65
Bluetooth(GFSK)	0.21

WNC

Summary of Maximum SAR Value	
Mode	Highest SAR1g Body (W/kg)
2.4G WLAN	0.48
5G WLAN	1.14
Bluetooth(GFSK)	0.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Antenna Information

Laptop mode_WLAN

Vendor	High-Tek									
Antenna	TX2					TX1				
Part Number	219HCTN12198					219HCTN12197				
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850
Gain (dBi)	1.03	1.77	2.52	2.62	2.95	2.37	0.88	2.33	2.94	2.92

Tablet mode_WLAN

Vendor	High-Tek									
Antenna	TX2					TX1				
Part Number	219HCTN12198					219HCTN12197				
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850
Gain (dBi)	1.84	2.30	2.52	2.86	2.85	0.8	1.87	2.64	2.68	2.68

Laptop mode_WLAN

Vendor	WNC									
Antenna	TX1					TX2				
Part Number	48EABP02.SGCLOC					48EABP01.SGCLOC				
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850
Gain (dBi)	0.47	1.00	-1.17	2.40	2.84	1.84	0.71	2.17	1.26	1.22

Tablet mode_WLAN

Vendor	WNC									
Antenna	TX1					TX2				
Part Number	48EABP02.SGCLOC					48EABP01.SGCLOC				
Frequency(MHz)	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850	2400~2500	5150~5250	5250~5350	5470~5725	5725~5850
Gain (dBi)	-0.54	0.98	0.98	1.11	1.11	-1.59	1.35	2.37	1.88	2.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

WLAN conducted power table:

Tablet / Book mode

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45 GHz	802.11b	1	2412	1Mbps	16.00	15.86
		6	2437		16.00	15.98
		11	2462		16.00	15.91
	802.11g	1	2412	6Mbps	16.00	NR*
		6	2437		16.00	
		11	2462		16.00	
	802.11n20-HT0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11ac20-VHT0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11ax20-HE0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11n40-HT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ac40-VHT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ax40-HE0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	15.00	NR*
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11n20-HT0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11ac20-VHT0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11ax20-HE0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11n40-HT0	38	5190	MCS0	15.00	14.98
		46	5230		15.00	14.99
	802.11ac40-VHT0	38	5190	MCS0	15.00	NR*
		46	5230		15.00	
	802.11ax40-HE0	38	5190	MCS0	15.00	
		46	5230		15.00	
	802.11ac80-VHT0	42	5210	MCS0	14.00	
	802.11ax80-HE0	42	5210	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	14.50	NR*
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11n20-HT0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11ac20-VHT0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11ax20-HE0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11n40-HT0	54	5270	MCS0	14.50	14.47
		62	5310		14.50	14.48
	802.11ac40-VHT0	54	5270	MCS0	14.50	NR*
		62	5310		14.50	
	802.11ax40-HE0	54	5270	MCS0	14.50	
		62	5310		14.50	
	802.11ac80-VHT0	58	5290	MCS0	14.00	
	802.11ax80-HE0	58	5290	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6 GHz	802.11a	100	5500	6Mbps	14.50	NR*
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11n20-HT0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11ac20-VHT0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11ax20-HE0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11n40-HT0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ac40-VHT0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ax40-HE0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ac80-VHT0	106	5530	MCS0	14.50	14.37
		122	5610		14.50	14.32
		138	5690		14.50	14.48
	802.11ax80-HE0	106	5530	MCS0	14.50	NR*
		122	5610		14.50	
		138	5690		14.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tx1(TX1)						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8 GHz	802.11a	149	5745	6Mbps	15.00	NR*
		157	5785		15.00	
		165	5825		15.00	
	802.11n20-HT0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11ac20-VHT0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11ax20-HE0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11n40-HT0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ac40-VHT0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ax40-HE0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ac80-VHT0	155	5775	MCS0	15.00	14.82
	802.11ax80-HE0	155	5775	MCS0	15.00	NR*

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45 GHz	802.11b	1	2412	1Mbps	16.00	15.81
		6	2437		16.00	15.95
		11	2462		16.00	15.87
	802.11g	1	2412	6Mbps	16.00	NR*
		6	2437		16.00	
		11	2462		16.00	
	802.11n20-HT0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11ac20-VHT0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11ax20-HE0	1	2412	MCS0	16.00	
		6	2437		16.00	
		11	2462		16.00	
	802.11n40-HT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ac40-VHT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ax40-HE0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	15.00	NR*
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11n20-HT0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11ac20-VHT0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11ax20-HE0	36	5180	MCS0	15.00	
		40	5200		15.00	
		44	5220		15.00	
		48	5240		15.00	
	802.11n40-HT0	38	5190	MCS0	15.00	14.97
		46	5230		15.00	14.99
	802.11ac40-VHT0	38	5190	MCS0	15.00	NR*
		46	5230		15.00	
	802.11ax40-HE0	38	5190	MCS0	15.00	
		46	5230		15.00	
	802.11ac80-VHT0	42	5210	MCS0	14.00	
	802.11ax80-HE0	42	5210	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	14.50	NR*
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11n20-HT0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11ac20-VHT0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11ax20-HE0	52	5260	MCS0	14.50	
		56	5280		14.50	
		60	5300		14.50	
		64	5320		14.50	
	802.11n40-HT0	54	5270	MCS0	14.50	14.46
		62	5310		14.50	14.43
	802.11ac40-VHT0	54	5270	MCS0	14.50	NR*
		62	5310		14.50	
	802.11ax40-HE0	54	5270	MCS0	14.50	
		62	5310		14.50	
	802.11ac80-VHT0	58	5290	MCS0	14.00	
	802.11ax80-HE0	58	5290	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6 GHz	802.11a	100	5500	6Mbps	14.50	NR*
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11n20-HT0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11ac20-VHT0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11ax20-HE0	100	5500	MCS0	14.50	
		120	5600		14.50	
		140	5700		14.50	
		144	5720		14.50	
	802.11n40-HT0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ac40-VHT0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ax40-HE0	102	5510	MCS0	14.50	
		118	5590		14.50	
		134	5670		14.50	
		142	5710		14.50	
	802.11ac80-VHT0	106	5530	MCS0	14.50	14.47
		122	5610		14.50	14.37
		138	5690		14.50	14.31
	802.11ax80-HE0	106	5530	MCS0	14.50	NR*
		122	5610		14.50	
		138	5690		14.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tx2(TX0)						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8 GHz	802.11a	149	5745	6Mbps	15.00	NR*
		157	5785		15.00	
		165	5825		15.00	
	802.11n20-HT0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11ac20-VHT0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11ax20-HE0	149	5745	MCS0	15.00	
		157	5785		15.00	
		165	5825		15.00	
	802.11n40-HT0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ac40-VHT0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ax40-HE0	151	5755	MCS0	15.00	
		159	5795		15.00	
	802.11ac80-VHT0	155	5775	MCS0	15.00	14.95
	802.11ax80-HE0	155	5775	MCS0	15.00	NR*

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Notebook mode

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45 GHz	802.11b	1	2412	1Mbps	19.00	18.89
		6	2437		19.00	18.93
		11	2462		19.00	18.97
	802.11g	1	2412	6Mbps	17.00	NR*
		6	2437		18.00	
		11	2462		16.50	
	802.11n20-HT0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11ac20-VHT0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11ax20-HE0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11n40-HT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ac40-VHT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ax40-HE0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	16.00	15.97
		40	5200		17.00	16.89
		44	5220		17.50	17.48
		48	5240		18.00	17.99
	802.11n20-HT0	36	5180	MCS0	16.00	NR*
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11ac20-VHT0	36	5180	MCS0	16.00	
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11ax20-HE0	36	5180	MCS0	16.00	
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11n40-HT0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ac40-VHT0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ax40-HE0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ac80-VHT0	42	5210	MCS0	14.00	
	802.11ax80-HE0	42	5210	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	18.50	18.49
		56	5280		18.00	17.88
		60	5300		18.00	17.89
		64	5320		15.50	15.28
	802.11n20-HT0	52	5260	MCS0	18.50	NR*
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11ac20-VHT0	52	5260	MCS0	18.50	
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11ax20-HE0	52	5260	MCS0	18.50	
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11n40-HT0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ac40-VHT0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ax40-HE0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ac80-VHT0	58	5290	MCS0	14.00	
	802.11ax80-HE0	58	5290	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6 GHz	802.11a	100	5500	6Mbps	16.50	16.24
		120	5600		18.50	18.27
		140	5700		17.50	17.49
		144	5720		18.50	18.31
	802.11n20-HT0	100	5500	MCS0	16.50	NR*
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11ac20-VHT0	100	5500	MCS0	16.50	
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11ax20-HE0	100	5500	MCS0	16.50	
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11n40-HT0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ac40-VHT0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ax40-HE0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ac80-VHT0	106	5530	MCS0	14.50	
		122	5610		16.50	
		138	5690		16.50	
	802.11ax80-HE0	106	5530	MCS0	14.50	
		122	5610		16.50	
		138	5690		16.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx1(TX1)						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8 GHz	802.11a	149	5745	6Mbps	18.50	18.31
		157	5785		18.50	18.42
		165	5825		18.50	18.48
	802.11n20-HT0	149	5745	MCS0	18.50	NR*
		157	5785		18.50	
		165	5825		18.50	
	802.11ac20-VHT0	149	5745	MCS0	18.50	
		157	5785		18.50	
		165	5825		18.50	
	802.11ax20-HE0	149	5745	MCS0	18.50	
		157	5785		18.50	
		165	5825		18.50	
	802.11n40-HT0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ac40-VHT0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ax40-HE0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ac80-VHT0	155	5775	MCS0	16.50	
	802.11ax80-HE0	155	5775	MCS0	16.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
2.45 GHz	802.11b	1	2412	1Mbps	19.00	18.85
		6	2437		19.00	18.87
		11	2462		19.00	18.94
	802.11g	1	2412	6Mbps	17.00	NR*
		6	2437		18.00	
		11	2462		16.50	
	802.11n20-HT0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11ac20-VHT0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11ax20-HE0	1	2412	MCS0	17.00	
		6	2437		18.00	
		11	2462		16.50	
	802.11n40-HT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ac40-VHT0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	
	802.11ax40-HE0	3	2422	MCS0	15.00	
		6	2437		16.00	
		9	2452		15.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.15-5.25 GHz	802.11a	36	5180	6Mbps	16.00	15.78
		40	5200		17.00	16.98
		44	5220		17.50	17.49
		48	5240		18.00	17.99
	802.11n20-HT0	36	5180	MCS0	16.00	NR*
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11ac20-VHT0	36	5180	MCS0	16.00	
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11ax20-HE0	36	5180	MCS0	16.00	
		40	5200		17.00	
		44	5220		17.50	
		48	5240		18.00	
	802.11n40-HT0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ac40-VHT0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ax40-HE0	38	5190	MCS0	15.00	
		46	5230		17.50	
	802.11ac80-VHT0	42	5210	MCS0	14.00	
	802.11ax80-HE0	42	5210	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.25-5.35 GHz	802.11a	52	5260	6Mbps	18.50	18.23
		56	5280		18.00	17.85
		60	5300		18.00	17.83
		64	5320		15.50	15.47
	802.11n20-HT0	52	5260	MCS0	18.50	NR*
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11ac20-VHT0	52	5260	MCS0	18.50	
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11ax20-HE0	52	5260	MCS0	18.50	
		56	5280		18.00	
		60	5300		18.00	
		64	5320		15.50	
	802.11n40-HT0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ac40-VHT0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ax40-HE0	54	5270	MCS0	17.50	
		62	5310		15.00	
	802.11ac80-VHT0	58	5290	MCS0	14.00	
	802.11ax80-HE0	58	5290	MCS0	14.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.6 GHz	802.11a	100	5500	6Mbps	16.50	16.25
		120	5600		18.50	18.41
		140	5700		17.50	17.48
		144	5720		18.50	18.45
	802.11n20-HT0	100	5500	MCS0	16.50	NR*
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11ac20-VHT0	100	5500	MCS0	16.50	
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11ax20-HE0	100	5500	MCS0	16.50	
		120	5600		18.50	
		140	5700		17.50	
		144	5720		18.50	
	802.11n40-HT0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ac40-VHT0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ax40-HE0	102	5510	MCS0	16.50	
		118	5590		17.50	
		134	5670		17.50	
		142	5710		17.50	
	802.11ac80-VHT0	106	5530	MCS0	14.50	
		122	5610		16.50	
		138	5690		16.50	
	802.11ax80-HE0	106	5530	MCS0	14.50	
		122	5610		16.50	
		138	5690		16.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Tx2(TX0)						
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
5.8 GHz	802.11a	149	5745	6Mbps	18.50	18.48
		157	5785		18.50	18.46
		165	5825		18.50	18.49
	802.11n20-HT0	149	5745	MCS0	18.50	NR*
		157	5785		18.50	
		165	5825		18.50	
	802.11ac20-VHT0	149	5745	MCS0	18.50	
		157	5785		18.50	
		165	5825		18.50	
	802.11ax20-HE0	149	5745	MCS0	18.50	
		157	5785		18.50	
		165	5825		18.50	
	802.11n40-HT0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ac40-VHT0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ax40-HE0	151	5755	MCS0	17.50	
		159	5795		17.50	
	802.11ac80-VHT0	155	5775	MCS0	16.50	
	802.11ax80-HE0	155	5775	MCS0	16.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Bluetooth conducted power table:

Mode	Channel	Frequency (MHz)	1Mbps		2Mbps		3Mbps	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
BR/EDR	CH 00	2402	11.50	11.47	8.50	NR*	8.50	NR*
	CH 39	2441		11.45				
	CH 78	2480		11.43				

Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average Output Power (dBm)
BLE_1M	CH 00	2402	11.5	NR*
	CH 19	2440		
	CH 39	2480		

Mode	Channel	Frequency (MHz)	GFSK	
			Max. Rated Avg. Power + Max. Tolerance (dBm)	Average Output Power (dBm)
BLE_2M	CH 00	2402	11.5	NR*
	CH 19	2440		
	CH 39	2480		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

2.4G b duty (8.385/8.76=0.957) Scaling Factor=1.045

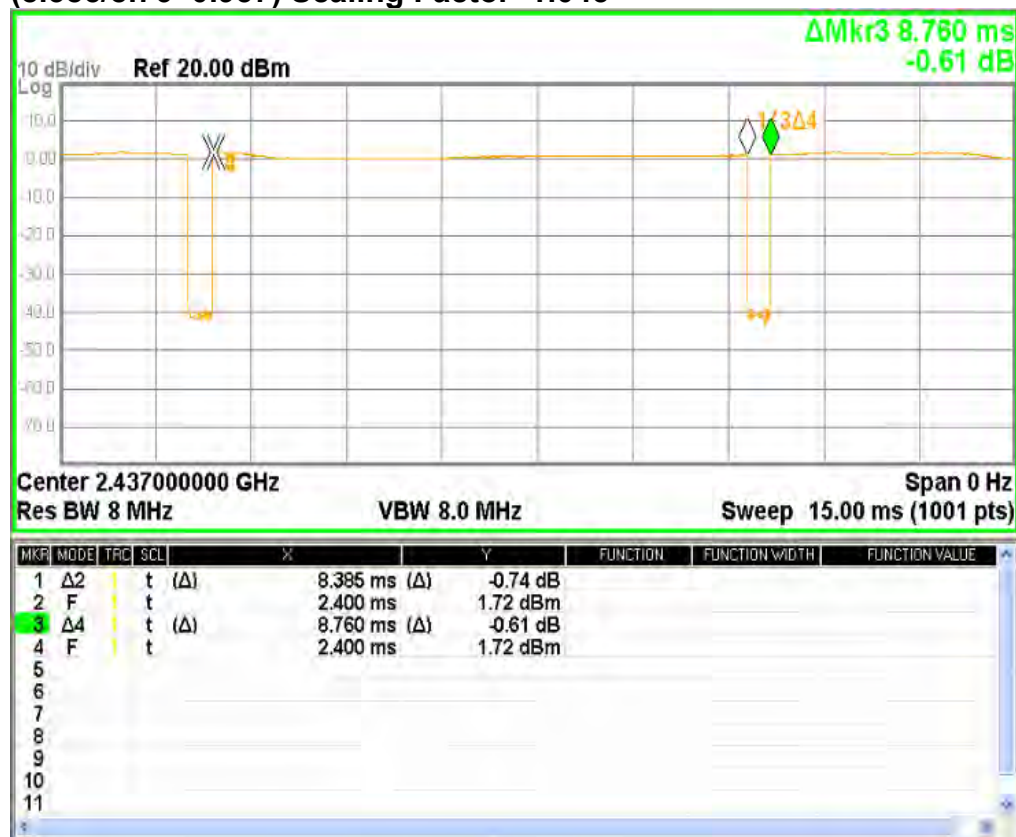


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5G a duty (1.392/1.437=0.969) Scaling Factor=1.032

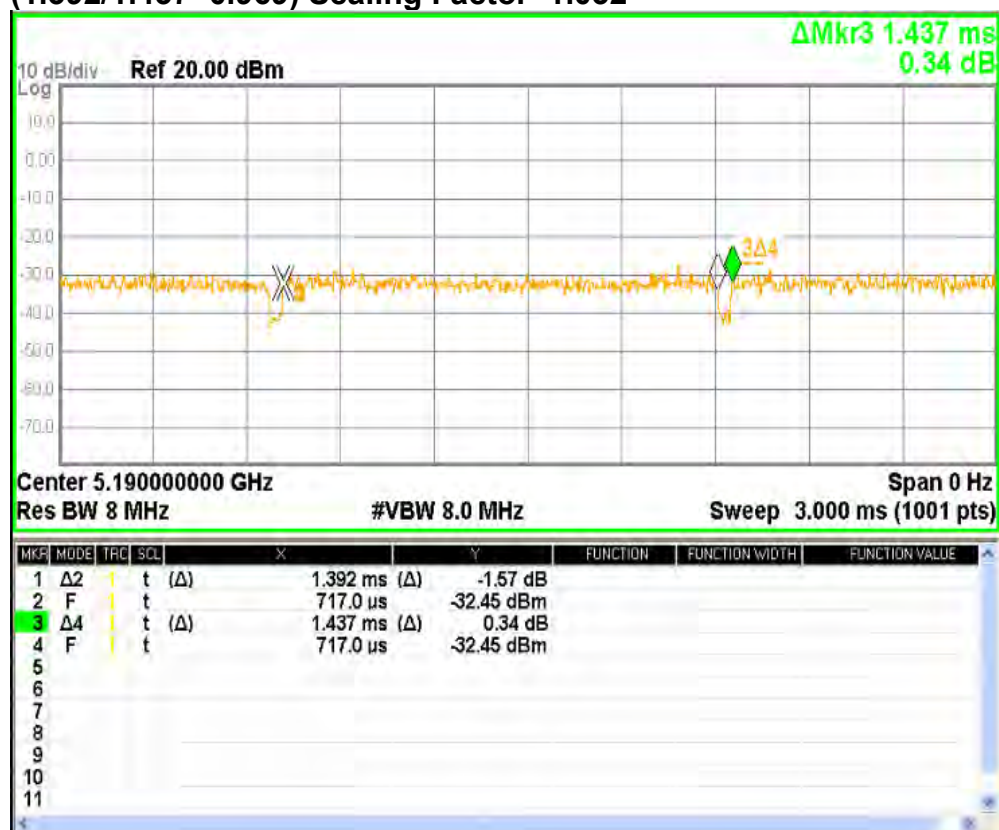

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

**5G ac(80M) duty
(188/232.5=0.809) Scaling Factor=1.236**

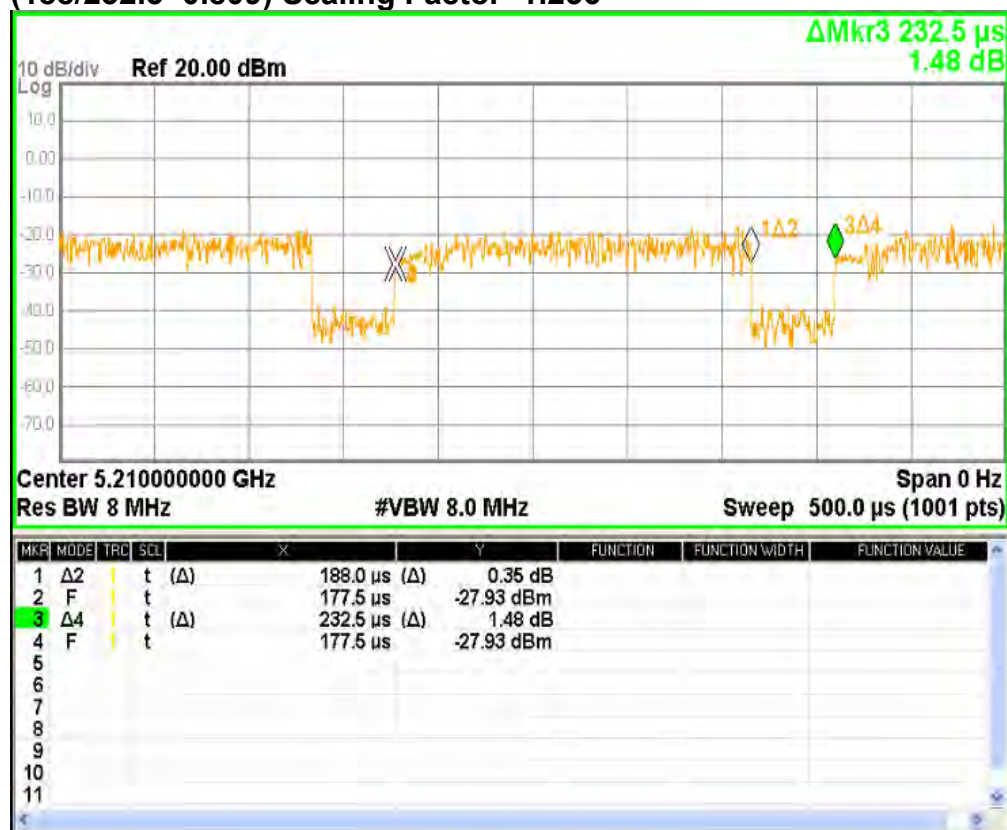

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

5G n(40M) duty
(647.1/691.5=0.936) Scaling Factor=1.068

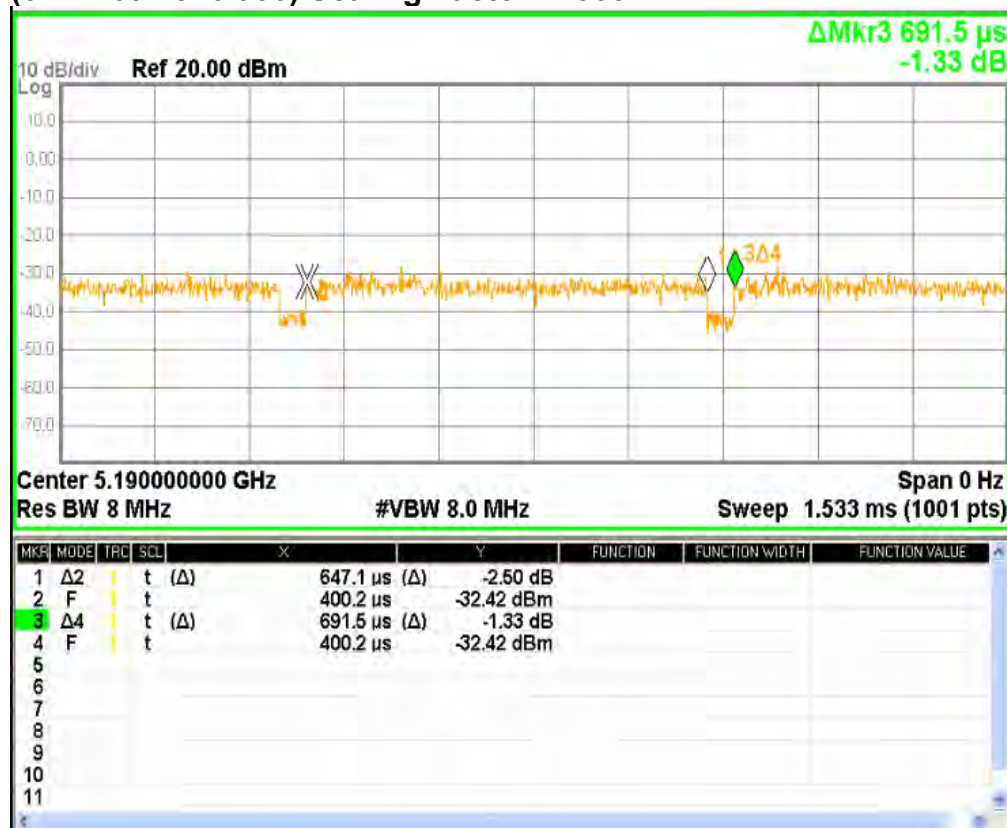

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

BT duty (2.88/3.75=0.768) Scaling Factor=1.302

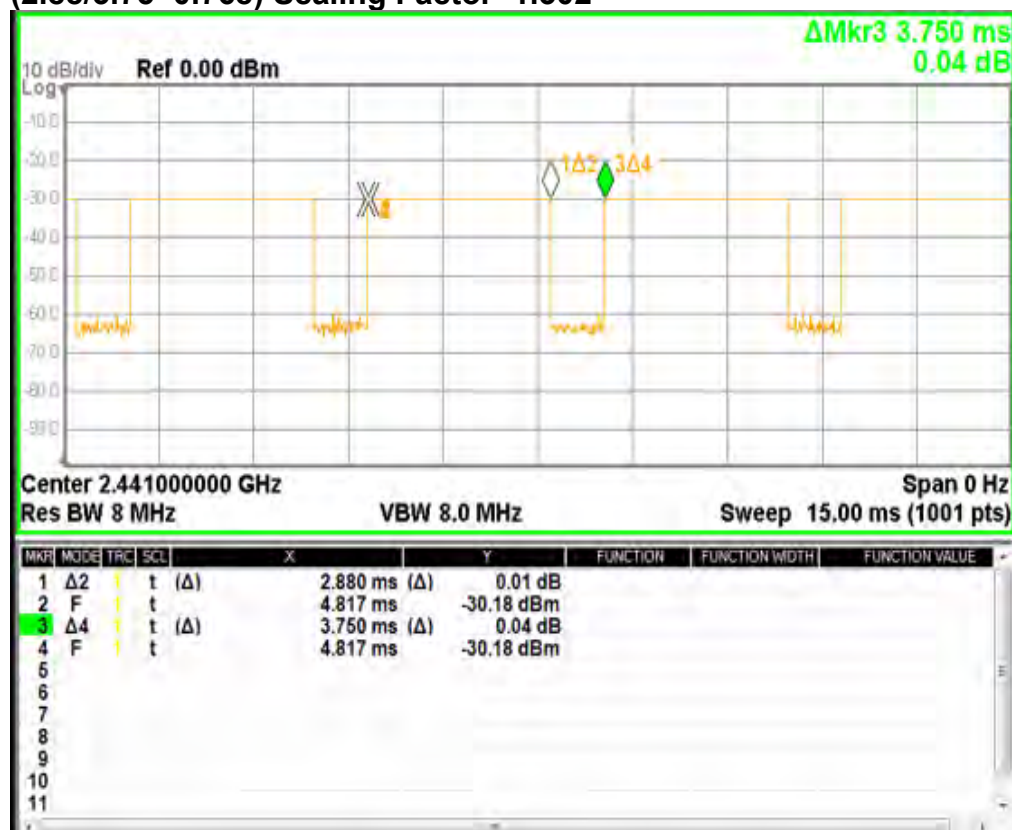

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.4 Test Environment

Ambient Temperature: $22\pm 2^{\circ}\text{C}$

Tissue Simulating Liquid: $22\pm 2^{\circ}\text{C}$

1.5 Operation Description

Use chipset specific software to control the EUT, and makes it transmit in maximum power. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged. The device was tested based on FCC guidance.

Laptop mode

SAR is not required because the distance between antenna and user is larger than 20cm

Tablet mode

SAR is measured with back and edges touch against the flat phantom.

Book mode

SAR is measured with right edge and left edge of panel touch against the flat phantom.

Note:

802.11b DSSS SAR Test Requirements:

1. SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{ W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
2. When the reported SAR is $> 0.8\text{ W/kg}$, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is $> 1.2\text{ W/kg}$, SAR is required for the third channel; i.e., all channels require testing.

802.11g/n OFDM SAR Test Exclusion Requirements:

3. SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

the adjusted SAR is ≤ 1.2 W/kg.

Initial Test Configuration:

4. An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band.
5. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.
7. According to KDB447498 D01, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.
8. According to KDB865664 D01, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.6 Operating modes validation by power measurement

The device is a convertible laptop computer with predefined single fixed power to each device modes.

For the operating modes validation, the measured conducted output power is monitored qualitatively to identify the triggering characteristics and recorded quantitatively.

DUT operating mode	Lid Open Angle description	Mode Reported to OS for WLAN	Display Orientation Support
Lid Close	$0^{\circ} \leq \text{Lid angle} \leq 34^{\circ}$ (Lid Hall Sensor Trigger)	No TX power	N/A
Laptop	$35^{\circ} \leq \text{Lid angle} \leq 129^{\circ}$ (Lid Hall Sensor Release)	Notebook	0°
Flat	$130^{\circ} \leq \text{Lid angle} \leq 200^{\circ}$ (Lid Hall Sensor Release)	Non-notebook	0°
Tablet	$341^{\circ} \leq \text{Lid angle} \leq 360^{\circ}$ (screen orientation is 0°)	Non-notebook	0°, 90°, 180°, 270°
Tent	$201^{\circ} \leq \text{Lid angle} \leq 340^{\circ}$ (screen orientation is 180°)	Non-notebook	180°
Stand	$201^{\circ} \leq \text{Lid angle} \leq 340^{\circ}$ (screen orientation is 0°)	Notebook	0°
Book	$35^{\circ} \leq \text{Lid angle} \leq 200^{\circ}$ (screen orientation is 90° or 270°)	Non-notebook	90° or 270°

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.6.1 Results and conclusion

The measured output power versus lid angle is tabulated in the following table based on the guidance from 2019-11 TCB workshop, and the triggering verification complies with the device mode / power level declared by the manufacturer.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Operating mode validation by power measurement

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G	
Tx1	Lid close	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		40°	19.00	17.89	17.44	18.37	17.48	18.32	16.41	18.33	16.49	
	Laptop	35°	18.92	17.87	17.31	18.31	17.34	18.34	16.38	18.41	16.35	
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
	Lid close	34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	
		35°	18.84	17.82	17.46	18.39	17.36	18.34	16.48	18.42	16.42	
		36°	18.85	17.95	17.33	18.32	17.46	18.45	16.34	18.48	16.31	
		37°	18.81	17.90	17.45	18.41	17.49	18.38	16.38	18.31	16.47	
		38°	18.81	17.88	17.41	18.34	17.48	18.34	16.45	18.41	16.36	
		39°	18.86	17.95	17.46	18.31	17.47	18.39	16.33	18.41	16.39	
		40°	18.94	17.94	17.37	18.33	17.48	18.32	16.48	18.42	16.39	
		50°	18.92	17.88	17.37	18.38	17.32	18.42	16.47	18.45	16.39	
		60°	18.95	17.87	17.46	18.37	17.31	18.34	16.40	18.46	16.35	
		70°	18.90	17.81	17.35	18.40	17.42	18.45	16.35	18.34	16.31	
	Laptop	80°	18.98	17.84	17.47	18.33	17.41	18.40	16.32	18.42	16.40	
		90°	18.88	17.87	17.36	18.36	17.47	18.43	16.48	18.41	16.39	
		100°	18.84	17.81	17.40	18.40	17.45	18.32	16.43	18.44	16.44	
		110°	18.91	17.88	17.31	18.32	17.49	18.48	16.35	18.44	16.31	
		120°	18.91	17.87	17.34	18.43	17.49	18.38	16.42	18.46	16.50	
	Flat	130°	15.97	14.94	14.95	14.31	14.47	14.38	14.37	14.93	14.83	
		125°	18.97	17.97	17.35	18.46	17.39	18.32	16.34	18.49	16.32	
	Laptop	126°	18.83	17.92	17.32	18.35	17.43	18.50	16.44	18.34	16.40	
		127°	18.88	17.81	17.43	18.41	17.43	18.33	16.49	18.45	16.47	
		128°	18.95	17.91	17.42	18.35	17.38	18.44	16.43	18.43	16.43	
		129°	18.94	17.93	17.32	18.40	17.32	18.41	16.46	18.36	16.50	
		130°	15.98	14.93	14.92	14.45	14.37	14.47	14.39	14.92	14.98	
	Flat	131°	16.00	14.97	14.89	14.45	14.33	14.48	14.40	14.84	14.81	
		132°	15.88	14.94	14.90	14.40	14.50	14.46	14.33	14.84	14.81	
		133°	15.82	14.92	14.81	14.31	14.49	14.44	14.42	14.84	14.91	
		134°	15.96	14.93	14.82	14.34	14.39	14.49	14.45	14.98	15.00	
		135°	16.00	14.94	14.84	14.31	14.33	14.38	14.45	14.90	14.92	
		145°	15.95	14.92	14.83	14.31	14.35	14.47	14.50	14.81	14.83	
		155°	15.95	14.87	14.98	14.40	14.39	14.31	14.33	14.82	14.84	
		165°	15.95	14.99	14.87	14.45	14.35	14.46	14.36	14.89	14.92	
		175°	15.99	14.92	14.92	14.39	14.50	14.34	14.49	14.92	14.91	
		185°	15.97	14.94	14.90	14.38	14.42	14.33	14.50	14.90	14.90	
		195°	15.94	14.85	14.93	14.32	14.48	14.37	14.50	14.87	14.88	
		Tent (Not Horizontal)	205°	15.81	14.88	14.86	14.41	14.35	14.44	14.41	14.85	14.94
		Stand mode (Horizontal)	206°	18.95	17.96	17.33	18.33	17.47	18.42	16.41	18.38	16.45
	Flat	200°	15.84	14.88	14.93	14.35	14.38	14.33	14.49	14.96	14.93	
		201°	15.82	14.84	14.82	14.41	14.45	14.44	14.42	15.00	15.00	
	Tent (Not Horizontal)	202°	15.82	14.82	14.93	14.40	14.48	14.35	14.43	14.99	14.84	
		203°	15.99	14.95	14.91	14.32	14.39	14.31	14.49	14.95	14.95	
		204°	15.98	15.00	14.86	14.33	14.42	14.46	14.35	14.99	14.98	
		205°	15.97	14.96	14.84	14.45	14.33	14.38	14.34	14.97	14.87	
		215°	15.98	14.84	14.92	14.39	14.42	14.33	14.50	14.86	14.87	
		225°	15.99	14.89	14.82	14.38	14.45	14.44	14.46	14.97	14.86	
		235°	15.82	14.90	14.96	14.31	14.49	14.32	14.50	15.00	14.98	
		245°	15.89	14.95	14.99	14.46	14.35	14.43	14.46	14.92	15.00	
		255°	16.00	14.99	14.92	14.33	14.32	14.35	14.35	15.00	14.99	
		265°	15.83	14.84	14.81	14.33	14.35	14.31	14.40	14.83	14.97	
		275°	15.94	14.90	14.97	14.50	14.40	14.31	14.35	14.99	14.87	
		285°	15.82	14.96	14.90	14.48	14.31	14.42	14.44	14.90	14.86	
		295°	15.87	14.90	14.89	14.36	14.41	14.33	14.44	14.99	14.85	
		305°	15.82	14.85	14.86	14.36	14.40	14.32	14.50	14.99	14.85	
	Stand mode (Horizontal)	315°	15.90	14.85	14.87	14.37	14.36	14.39	14.50	14.81	14.93	
		325°	15.99	14.95	14.89	14.49	14.45	14.38	14.31	14.99	14.88	
	Tent (Not Horizontal)	335°	15.82	14.86	14.91	14.38	14.44	14.38	14.48	14.97	14.86	
		201°	18.90	17.88	17.41	18.37	17.32	18.34	16.43	18.50	16.41	
		202°	18.96	17.90	17.41	18.33	17.40	18.36	16.35	18.34	16.47	
		203°	18.97	17.95	17.33	18.49	17.34	18.47	16.45	18.37	16.37	
		204°	18.83	17.97	17.49	18.45	17.33	18.45	16.44	18.41	16.33	
		205°	18.95	17.96	17.49	18.39	17.35	18.32	16.34	18.32	16.42	
		215°	18.98	17.90	17.39	18.43	17.32	18.44	16.37	18.33	16.32	
		225°	18.91	17.88	17.48	18.46	17.48	18.47	16.42	18.45	16.45	
		235°	18.99	17.86	17.32	18.34	17.42	18.46	16.42	18.35	16.47	
		245°	18.91	17.88	17.40	18.45	17.34	18.32	16.47	18.36	16.38	
		255°	18.97	18.00	17.31	18.49	17.33	18.40	16.33	18.32	16.43	
		265°	18.89	17.86	17.50	18.36	17.50	18.38	16.32	18.46	16.47	
		275°	18.89	18.00	17.44	18.39	17.35	18.39	16.34	18.38	16.38	
		285°	18.97	17.97	17.42	18.46	17.36	18.38	16.34	18.31	16.38	
		295°	18.98	17.99	17.35	18.39	17.39	18.33	16.37	18.50	16.33	
		305°	18.82	17.85	17.36	18.48	17.34	18.35	16.47	18.46	16.45	
		315°	18.84	17.83	17.37	18.37	17.47	18.43	16.41	18.36	16.43	
	325°	18.97	17.89	17.47	18.33	17.45	18.42	16.45	18.40	16.40		
	335°	18.91	17.87	17.49	18.38	17.45	18.38	16.35	18.44	16.49		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G
Tx1	Tablet	345°	15.99	14.97	14.84	14.34	14.40	14.38	14.49	14.92	14.94
	Tent (Not Horizontal)	340°	15.81	14.97	14.81	14.44	14.43	14.35	14.32	14.94	14.97
	Stand mode (Horizontal)	340°	15.96	17.87	17.44	18.39	17.37	18.34	18.49	18.37	18.31
	Tablet	341°	15.89	14.97	14.92	14.47	14.39	14.44	14.38	14.87	14.96
		342°	15.92	15.00	14.95	14.45	14.41	14.49	14.43	14.87	14.97
		343°	15.96	14.95	14.97	14.47	14.42	14.44	14.35	14.83	14.85
		344°	15.88	14.84	14.82	14.34	14.48	14.33	14.36	14.90	14.87
		345°	15.82	14.94	14.82	14.49	14.50	14.48	14.46	14.99	14.83
		355°	15.97	14.85	14.94	14.43	14.32	14.44	14.31	14.86	14.91
		360°	15.90	14.91	14.87	14.35	14.48	14.41	14.31	14.82	14.93
		350°	15.81	14.95	15.00	14.49	14.38	14.43	14.33	14.95	14.85
	Tent (Not Horizontal)	340°	15.84	14.91	14.96	14.39	14.32	14.48	14.45	14.88	14.97
	Stand mode (Horizontal)	340°	19.00	17.94	17.42	18.38	17.44	18.35	18.42	18.42	18.31
	Tablet	345°	15.96	14.83	14.94	14.47	14.39	14.46	14.35	14.99	14.89
		344°	15.93	14.82	14.81	14.40	14.40	14.43	14.46	14.98	14.97
		343°	15.90	14.83	14.88	14.33	14.46	14.46	14.48	14.95	14.90
		342°	15.91	14.83	14.96	14.37	14.44	14.41	14.50	14.89	14.85
		341°	15.81	14.86	14.97	14.42	14.48	14.38	14.39	14.81	14.97
		340°	15.97	14.94	14.94	14.43	14.47	14.50	14.38	14.88	14.98
		339°	15.85	14.92	14.92	14.49	14.40	14.45	14.41	14.84	14.86
		338°	15.82	14.86	14.88	14.44	14.44	14.44	14.39	14.89	14.96
		337°	15.81	14.88	14.92	14.34	14.43	14.33	14.43	14.88	14.85
		336°	15.81	14.86	14.85	14.31	14.46	14.32	14.48	14.86	14.86
	Tent (Not Horizontal)	335°	15.88	14.94	14.93	14.48	14.33	14.44	14.34	14.86	14.98
		325°	15.81	14.81	14.94	14.50	14.35	14.40	14.34	14.94	14.92
		315°	15.89	14.86	14.86	14.34	14.32	14.47	14.36	14.83	15.00
		305°	15.92	14.94	14.93	14.34	14.43	14.35	14.47	14.99	14.82
		295°	15.99	14.92	14.83	14.40	14.41	14.43	14.38	14.96	15.00
		285°	15.85	14.94	14.90	14.35	14.35	14.48	14.36	14.83	14.89
		275°	15.81	14.83	14.97	14.32	14.46	14.37	14.32	14.93	14.86
		265°	15.85	14.99	15.00	14.38	14.38	14.45	14.47	14.90	14.99
		255°	15.87	14.95	15.00	14.32	14.40	14.45	14.32	14.91	14.84
		245°	15.82	14.82	14.95	14.31	14.35	14.47	14.39	14.88	14.88
		235°	16.00	14.88	14.88	14.44	14.48	14.38	14.38	14.91	14.97
		225°	15.89	14.93	14.92	14.47	14.37	14.34	14.46	14.95	14.98
		215°	15.90	14.86	14.91	14.39	14.46	14.37	14.40	14.89	14.97
		205°	15.88	14.84	14.86	14.41	14.42	14.38	14.44	14.92	14.94
		340°	18.96	17.95	17.41	18.45	17.37	18.35	18.46	18.40	18.38
	Stand mode (Horizontal)	339°	18.88	17.94	17.49	18.38	17.47	18.47	18.42	18.37	18.31
		338°	18.96	17.94	17.48	18.47	17.37	18.33	18.43	18.49	18.50
		337°	18.86	17.86	17.40	18.45	17.49	18.47	18.31	18.48	18.35
		336°	18.88	17.97	17.41	18.32	17.32	18.42	18.34	18.35	18.44
		335°	18.91	17.94	17.35	18.47	17.37	18.34	18.47	18.37	18.33
		325°	19.00	17.92	17.37	18.38	17.47	18.49	18.48	18.47	18.49
		315°	18.88	17.81	17.50	18.31	17.33	18.35	18.41	18.42	18.40
		305°	18.98	17.81	17.34	18.34	17.44	18.39	18.35	18.45	18.33
		295°	18.86	17.87	17.45	18.32	17.35	18.39	18.36	18.48	18.46
		285°	18.98	17.83	17.34	18.37	17.31	18.37	18.37	18.50	18.40
		275°	18.98	17.93	17.47	18.40	17.43	18.40	18.48	18.47	18.37
		265°	18.81	17.93	17.35	18.46	17.45	18.38	18.34	18.40	18.42
		255°	18.86	18.00	17.50	18.42	17.36	18.35	18.42	18.42	18.43
		245°	18.88	17.94	17.50	18.33	17.48	18.39	18.33	18.35	18.44
		235°	18.84	18.00	17.34	18.36	17.37	18.49	18.43	18.48	18.38
		225°	18.97	17.98	17.34	18.44	17.49	18.40	18.38	18.32	18.31
		215°	18.89	17.96	17.46	18.49	17.32	18.38	18.44	18.39	18.40
		205°	18.89	17.92	17.32	18.33	17.39	18.41	18.40	18.44	18.49
	Flat	195°	15.99	14.97	14.92	14.43	14.38	14.48	14.45	14.98	15.00
		200°	15.91	14.91	14.82	14.41	14.34	14.48	14.48	14.89	14.84
		205°	15.94	14.84	14.83	14.38	14.46	14.48	14.44	14.86	14.83
		204°	15.99	14.91	14.91	14.45	14.36	14.37	14.49	14.86	14.93
	Tent (Not Horizontal)	203°	15.83	14.87	14.88	14.37	14.35	14.47	14.45	14.92	14.91
		202°	15.93	14.94	14.83	14.49	14.49	14.36	14.32	14.91	14.89
		201°	15.90	14.92	14.85	14.35	14.39	14.43	14.36	14.85	14.94
		205°	18.84	17.85	17.48	18.40	17.40	18.41	18.49	18.46	18.38
	Stand mode (Horizontal)	204°	18.81	17.99	17.44	18.47	17.41	18.40	18.38	18.35	18.33
		203°	18.95	17.98	17.31	18.45	17.36	18.34	18.37	18.34	18.34
		202°	18.91	17.88	17.46	18.41	17.50	18.33	18.43	18.46	18.42
		201°	18.86	17.83	17.48	18.31	17.49	18.40	18.36	18.38	18.43
	Flat	200°	15.84	14.91	14.98	14.48	14.39	14.50	14.36	14.99	14.99
		199°	15.92	14.92	14.85	14.35	14.50	14.44	14.37	14.92	14.84
		198°	15.94	14.90	14.97	14.31	14.45	14.32	14.44	14.89	14.99
		197°	15.81	14.90	14.87	14.46	14.43	14.36	14.46	14.95	14.92
		196°	15.84	14.99	14.89	14.43	14.36	14.44	14.32	14.96	14.83
		195°	15.88	14.93	14.86	14.46	14.41	14.40	14.42	14.89	14.84
		185°	15.94	14.84	14.90	14.31	14.47	14.42	14.38	14.88	14.99
		175°	15.99	14.83	14.98	14.34	14.37	14.38	14.31	14.91	14.98
		165°	15.87	14.87	14.86	14.49	14.38	14.50	14.34	14.92	14.84
		155°	15.98	14.87	14.92	14.44	14.49	14.39	14.34	14.96	14.98
		145°	15.83	14.94	14.96	14.35	14.37	14.49	14.43	14.92	14.98
		135°	15.85	14.89	15.00	14.46	14.31	14.31	14.49	14.94	14.89
	Laptop	125°	18.97	17.89	17.31	18.43	17.44	18.31	18.48	18.37	18.31
	Flat	130°	15.81	14.95	14.83	14.33	14.32	14.40	14.41	14.83	14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G
Tx1	Laptop	129°	18.88	17.82	17.32	18.38	17.44	18.36	16.34	18.42	16.48
		128°	18.85	17.96	17.38	18.38	17.43	18.49	16.43	18.47	16.46
		127°	18.88	17.82	17.42	18.42	17.40	18.43	16.38	18.49	16.38
		126°	18.98	17.94	17.34	18.42	17.31	18.47	16.33	18.39	16.47
		125°	18.94	17.97	17.32	18.39	17.39	18.32	16.49	18.33	16.32
		115°	18.83	17.90	17.50	18.50	17.46	18.31	16.40	18.39	16.42
		105°	18.00	17.91	17.40	18.35	17.33	18.48	16.45	18.36	16.47
		95°	18.52	17.90	17.47	18.38	17.34	18.38	16.46	18.41	16.36
		85°	18.91	17.96	17.46	18.47	17.48	18.49	16.31	18.32	16.32
		75°	18.84	17.92	17.34	18.33	17.32	18.40	16.40	18.45	16.44
		65°	18.90	17.85	17.38	18.35	17.36	18.40	16.48	18.40	16.48
		55°	18.82	17.86	17.42	18.49	17.43	18.31	16.32	18.48	16.45
		45°	18.99	17.83	17.43	18.35	17.48	18.35	16.33	18.33	16.34
		35°	18.90	17.82	17.50	18.38	17.38	18.39	16.35	18.37	16.44
		25°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Laptop	35°	18.87	17.97	17.34	18.50	17.49	18.47	16.46	18.41	16.48
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		35°	15.91	14.89	14.88	14.50	14.32	14.46	14.46	14.96	14.87
	Book mode	35°	15.91	14.91	14.85	14.48	14.46	14.33	14.44	14.86	14.97
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Book mode	34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		35°	15.93	14.88	14.81	14.36	14.47	14.37	14.83	15.00	14.83
		36°	15.94	14.82	14.82	14.37	14.34	14.36	14.31	14.97	15.00
		37°	15.85	14.86	14.87	14.45	14.45	14.42	14.41	15.00	14.94
		38°	15.99	14.86	14.84	14.43	14.50	14.49	14.34	14.92	14.85
		39°	15.83	14.94	14.98	14.33	14.40	14.40	14.42	14.86	14.89
		40°	15.99	14.87	14.96	14.47	14.33	14.49	14.41	14.90	14.92
		50°	15.94	14.82	14.87	14.43	14.47	14.46	14.35	14.98	14.83
		60°	16.00	14.84	14.81	14.45	14.48	14.34	14.45	15.00	14.83
		70°	15.84	14.89	14.81	14.32	14.35	14.43	14.40	14.93	14.94
		80°	15.97	14.89	14.86	14.34	14.46	14.39	14.38	14.97	14.86
		90°	15.98	14.85	14.91	14.46	14.44	14.39	14.33	14.94	14.89
		100°	16.00	14.91	14.95	14.37	14.37	14.41	14.44	14.83	14.81
		110°	15.94	14.88	14.87	14.38	14.31	14.45	14.44	14.82	14.84
		120°	15.89	14.87	14.97	14.33	14.45	14.40	14.50	15.00	14.98
		130°	16.00	14.89	14.81	14.45	14.34	14.35	14.47	14.91	14.99
		140°	16.00	14.90	14.90	14.42	14.37	14.47	14.47	14.94	14.96
		150°	15.99	14.98	14.83	14.34	14.42	14.35	14.38	14.81	14.82
		160°	15.94	14.90	14.98	14.49	14.46	14.33	14.36	14.99	14.95
		170°	15.83	14.85	14.91	14.46	14.34	14.37	14.49	14.95	14.98
		180°	15.99	14.84	14.96	14.42	14.40	14.48	14.45	14.86	14.95
		190°	15.91	14.89	15.00	14.38	14.42	14.38	14.45	14.85	14.98
		199°	15.92	14.86	14.88	14.46	14.31	14.40	14.42	14.85	14.93
	Book mode	190°	15.86	14.82	14.86	14.34	14.42	14.43	14.49	14.95	14.87
		180°	15.81	14.94	15.00	14.48	14.49	14.40	14.36	14.88	15.00
		170°	15.87	14.83	14.87	14.33	14.44	14.32	14.43	14.84	14.95
		160°	15.96	14.96	14.83	14.42	14.36	14.45	14.36	14.97	14.94
		150°	15.82	14.88	14.81	14.41	14.44	14.32	14.49	14.94	15.00
		140°	15.88	14.92	14.84	14.34	14.45	14.32	14.47	14.98	14.95
		130°	15.98	14.97	14.81	14.34	14.43	14.36	14.37	14.81	14.85
		120°	15.81	14.91	14.94	14.45	14.37	14.49	14.46	14.82	14.98
		110°	15.94	14.97	14.92	14.32	14.47	14.34	14.37	14.81	14.90
		100°	15.89	14.99	14.87	14.39	14.43	14.37	14.43	14.89	14.95
		90°	15.84	14.88	14.97	14.47	14.43	14.46	14.43	14.88	14.85
		80°	15.90	14.81	14.85	14.49	14.41	14.31	14.43	14.98	14.88
		70°	15.87	14.88	14.85	14.47	14.39	14.45	14.45	14.95	14.96
		60°	15.91	14.96	14.91	14.32	14.53	14.50	14.31	14.85	14.84
		50°	15.84	15.00	14.81	14.36	14.36	14.35	15.00	14.84	14.84
		40°	15.94	14.89	14.83	14.49	14.31	14.43	14.34	14.91	14.91
	Lid close	30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Book mode	35°	15.86	14.82	14.86	14.47	14.40	14.49	14.40	14.97	14.81
		34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G
Tx2	Lid close	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		40°	18.85	17.94	17.45	18.43	17.37	18.44	16.40	18.43	16.35
	Laptop	35°	18.94	17.97	17.37	18.37	17.46	18.42	16.43	18.32	16.40
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		35°	18.88	17.85	17.46	18.46	17.35	18.31	16.41	18.39	16.43
		36°	18.94	17.82	17.43	18.35	17.34	18.42	16.34	18.34	16.42
		37°	18.91	17.87	17.37	18.42	17.50	18.33	16.32	18.39	16.47
		38°	18.90	17.96	17.32	18.47	17.35	18.33	16.35	18.34	16.34
	Laptop	39°	18.92	17.97	17.39	18.33	17.49	18.37	16.44	18.31	16.43
		40°	18.94	17.90	17.45	18.45	17.33	18.49	16.43	18.40	16.34
		50°	18.88	17.94	17.50	18.36	17.40	18.40	16.45	18.41	16.50
		60°	18.82	17.89	17.41	18.42	17.44	18.41	16.35	18.42	16.39
		70°	18.97	17.89	17.50	18.43	17.42	18.35	16.44	18.43	16.41
		80°	18.81	17.99	17.39	18.43	17.33	18.40	16.48	18.33	16.38
		90°	18.88	17.92	17.50	18.33	17.40	18.43	16.47	18.46	16.39
		100°	18.82	17.85	17.35	18.35	17.46	18.38	16.50	18.33	16.33
		110°	18.93	17.94	17.42	18.46	17.37	18.35	16.34	18.35	16.41
		120°	18.94	17.96	17.37	18.41	17.47	18.32	16.44	18.33	16.45
	Flat	130°	15.90	14.85	14.87	14.36	14.38	14.38	14.94	14.86	14.96
		125°	18.95	17.89	17.43	18.42	17.35	18.43	16.39	18.33	16.34
		126°	18.88	17.91	17.40	18.38	17.49	18.39	16.47	18.36	16.33
		127°	18.93	17.97	17.35	18.35	17.35	18.37	16.44	18.50	16.31
		128°	18.81	17.99	17.47	18.38	17.46	18.37	16.36	18.33	16.49
	Laptop	129°	18.88	17.96	17.48	18.49	17.35	18.40	16.32	18.41	16.46
		130°	15.88	14.85	14.89	14.40	14.42	14.34	14.85	14.83	14.85
		131°	15.84	14.89	14.92	14.45	14.32	14.41	14.39	14.92	14.97
		132°	15.89	14.97	14.94	14.40	14.50	14.36	14.35	14.93	14.97
		133°	15.88	14.96	14.84	14.47	14.34	14.35	14.33	14.82	14.92
		134°	15.91	14.82	14.87	14.49	14.40	14.41	14.45	14.90	14.99
		135°	15.94	14.89	15.00	14.35	14.50	14.50	14.39	14.87	14.88
		140°	15.86	14.92	14.88	14.43	14.49	14.47	14.44	14.87	14.95
		155°	15.84	14.87	14.87	14.46	14.44	14.41	14.43	14.82	14.84
		165°	15.96	15.00	14.81	14.32	14.39	14.33	14.33	14.95	14.95
		175°	15.97	15.00	14.89	14.37	14.34	14.40	14.43	14.83	14.87
		185°	15.95	14.86	14.82	14.49	14.42	14.48	14.33	14.99	14.88
		195°	15.95	14.86	14.86	14.47	14.31	14.35	14.41	14.94	14.99
		205°	15.95	14.93	14.96	14.46	14.44	14.49	14.39	14.90	14.97
	Tent (Not Horizontal)	205°	18.90	17.91	17.41	18.46	17.33	18.39	16.34	18.44	16.33
		Stand mode (Horizontal)	200°	15.89	14.87	14.97	14.31	14.42	14.47	14.32	15.00
		Flat	200°	15.89	14.87	14.97	14.31	14.42	14.47	14.32	15.00
		201°	15.85	14.90	14.99	14.35	14.50	14.41	14.40	15.00	14.93
		202°	15.92	14.81	14.95	14.33	14.37	14.49	14.48	14.93	14.86
	Tent (Not Horizontal)	203°	15.91	14.93	14.96	14.37	14.34	14.34	14.36	14.99	14.84
		204°	15.84	14.98	14.98	14.41	14.39	14.36	14.34	14.95	14.82
		205°	15.95	14.84	14.92	14.46	14.39	14.40	14.50	14.88	14.95
		215°	15.94	14.95	15.00	14.35	14.39	14.50	14.50	14.87	14.90
		225°	15.83	14.93	14.93	14.41	14.44	14.49	14.41	14.89	14.84
		235°	15.97	15.00	14.98	14.46	14.36	14.48	14.48	14.83	14.89
		245°	15.97	14.91	14.89	14.44	14.31	14.36	14.50	14.94	14.92
		250°	15.98	14.99	14.88	14.35	14.38	14.44	14.47	14.94	14.95
		265°	15.95	14.84	14.83	14.36	14.46	14.32	14.45	14.97	14.91
		275°	15.85	14.85	14.83	14.33	14.34	14.49	14.31	15.00	14.95
		285°	15.93	14.86	15.00	14.41	14.35	14.47	14.48	14.85	14.87
		295°	15.93	14.85	14.86	14.38	14.49	14.44	14.38	14.92	14.96
		305°	15.92	14.85	14.82	14.49	14.39	14.42	14.39	15.00	14.93
		315°	15.84	14.89	14.82	14.32	14.34	14.41	14.48	14.91	14.96
		325°	15.83	14.94	14.84	14.47	14.37	14.41	14.40	14.98	14.99
		335°	15.89	14.95	14.98	14.39	14.50	14.33	14.36	14.88	14.82
	Stand mode (Horizontal)	201°	18.89	17.99	17.37	18.46	17.38	18.42	16.32	18.50	16.50
		202°	18.96	18.00	17.46	18.47	17.34	18.40	16.34	18.45	16.41
		203°	18.83	17.89	17.45	18.42	17.31	18.37	16.37	18.43	16.40
		204°	18.90	17.94	17.50	18.31	17.39	18.50	16.45	18.39	16.31
		205°	18.99	17.84	17.43	18.45	17.36	18.31	16.40	18.46	16.34
		215°	18.88	17.99	17.39	18.41	17.38	18.49	16.34	18.37	16.41
		225°	18.88	17.89	17.42	18.50	17.40	18.48	16.46	18.39	16.37
		235°	18.90	17.81	17.33	18.34	17.41	18.36	16.42	18.45	16.38
		245°	19.00	17.81	17.32	18.31	17.37	18.49	16.46	18.45	16.49
		255°	18.84	17.86	17.35	18.49	17.35	18.34	16.39	18.45	16.44
		265°	18.97	17.90	17.49	18.35	17.39	18.38	16.49	18.33	16.31
		275°	18.96	17.81	17.41	18.40	17.48	18.45	16.36	18.46	16.45
		285°	18.94	17.89	17.48	18.39	17.41	18.44	16.31	18.50	16.39
		295°	18.96	17.81	17.45	18.38	17.34	18.39	16.35	18.37	16.45
		305°	18.84	17.81	17.44	18.36	17.44	18.37	16.43	18.37	16.37
		315°	18.96	18.00	17.41	18.42	17.37	18.31	16.37	18.47	16.40
		325°	18.84	17.99	17.37	18.47	17.32	18.32	16.50	18.32	16.38
		335°	18.96	17.95	17.47	18.36	17.44	18.41	16.39	18.43	16.44

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G
Tx2	Tablet	345°	15.00	14.91	14.87	14.38	14.43	14.35	14.40	14.91	14.90
	Tent (Not Horizontal)	340°	15.89	14.99	14.98	14.47	14.35	14.46	14.35	14.81	15.00
	Stand mode (Horizontal)	340°	15.88	17.81	17.47	18.31	17.34	18.39	18.31	18.42	18.40
	Tablet	341°	15.88	14.83	14.82	14.47	14.39	14.36	14.34	14.84	14.97
		342°	15.94	14.83	14.81	14.33	14.42	14.47	14.40	14.87	14.97
		343°	15.90	14.95	14.86	14.49	14.34	14.38	14.34	14.91	14.96
		344°	16.00	14.88	14.95	14.34	14.37	14.50	14.38	14.81	14.88
		345°	15.95	14.90	14.86	14.37	14.36	14.31	14.35	14.93	14.85
		355°	15.99	14.97	14.85	14.44	14.31	14.32	14.49	14.96	14.90
		389°	15.92	14.89	14.83	14.36	14.35	14.32	14.45	14.94	14.83
		350°	15.98	14.88	14.86	14.49	14.31	14.37	14.38	14.85	14.91
	Tent (Not Horizontal)	340°	15.83	14.94	14.89	14.36	14.35	14.43	14.45	14.88	14.87
	Stand mode (Horizontal)	340°	19.00	17.89	17.36	18.49	17.33	18.37	18.36	18.43	18.47
	Tablet	345°	15.86	14.95	14.90	14.39	14.35	14.46	14.36	14.98	14.83
		344°	15.92	14.98	14.90	14.45	14.35	14.41	14.38	14.91	14.96
		343°	15.96	14.88	14.95	14.42	14.37	14.45	14.35	14.83	14.97
		342°	15.95	14.93	14.95	14.38	14.47	14.38	14.45	14.98	14.97
		341°	15.89	14.98	14.95	14.46	14.38	14.39	14.50	14.85	14.95
		340°	15.95	14.86	14.88	14.48	14.42	14.45	14.40	14.96	14.89
		339°	15.99	14.81	14.93	14.38	14.49	14.38	14.35	14.94	14.82
		338°	15.92	14.85	14.88	14.35	14.44	14.40	14.34	14.89	14.90
		337°	15.89	14.82	15.00	14.42	14.46	14.34	14.34	14.85	14.82
		336°	15.99	14.83	14.88	14.48	14.47	14.44	14.46	14.88	14.86
	Tent (Not Horizontal)	335°	15.83	14.97	14.95	14.44	14.37	14.35	14.36	14.83	14.92
		325°	15.93	14.99	14.86	14.42	14.50	14.49	14.38	14.91	14.85
		315°	15.99	14.89	14.86	14.35	14.47	14.44	14.44	14.92	14.95
		305°	15.93	14.98	14.96	14.46	14.42	14.39	14.33	14.95	14.97
		295°	15.95	14.90	14.89	14.47	14.34	14.33	14.41	14.89	14.91
		285°	15.96	14.96	14.86	14.47	14.31	14.45	14.40	14.91	14.88
		275°	15.95	14.82	14.84	14.45	14.36	14.48	14.39	14.85	14.88
		265°	15.87	14.96	15.00	14.35	14.45	14.47	14.47	14.84	14.91
		255°	16.00	14.92	14.91	14.48	14.50	14.46	14.42	14.89	14.95
		245°	15.87	14.85	14.83	14.35	14.35	14.49	14.39	14.82	14.88
		235°	15.82	14.87	14.89	14.46	14.34	14.47	14.38	14.97	14.81
		225°	15.94	14.98	14.82	14.45	14.45	14.49	14.47	14.92	14.96
		215°	15.88	14.98	14.94	14.47	14.36	14.40	14.33	14.93	14.99
		205°	15.85	14.82	14.84	14.39	14.38	14.35	14.35	14.82	14.86
		340°	18.97	17.91	17.36	18.48	17.37	18.42	18.46	18.39	18.37
	Stand mode (Horizontal)	339°	18.98	17.93	17.50	18.45	17.43	18.40	18.40	18.45	18.38
		338°	18.99	17.85	17.50	18.43	17.38	18.39	18.36	18.45	18.31
		337°	18.96	17.98	17.40	18.37	17.41	18.46	18.45	18.46	18.45
		336°	18.98	17.86	17.39	18.47	17.33	18.37	18.41	18.46	18.31
		335°	18.93	17.95	17.40	18.37	17.42	18.42	18.42	18.50	18.42
		325°	18.88	17.86	17.32	18.46	17.46	18.40	18.40	18.42	18.31
		315°	18.99	17.97	17.32	18.43	17.43	18.31	18.45	18.46	18.42
		305°	18.88	17.96	17.44	18.40	17.49	18.46	18.32	18.46	18.50
		295°	18.92	17.86	17.46	18.44	17.50	18.50	18.44	18.31	18.48
		285°	18.90	17.84	17.31	18.43	17.42	18.32	18.45	18.47	18.44
		275°	19.00	17.81	17.34	18.40	17.33	18.49	18.40	18.43	18.40
		265°	18.89	17.86	17.49	18.43	17.49	18.34	18.39	18.50	18.44
		255°	18.86	17.90	17.37	18.38	17.38	18.45	18.49	18.31	18.39
		245°	18.98	17.81	17.46	18.32	17.43	18.35	18.33	18.45	18.33
		235°	18.87	17.82	17.36	18.50	17.37	18.50	18.40	18.38	18.42
		225°	18.86	17.99	17.50	18.36	17.47	18.46	18.37	18.51	18.41
		215°	18.83	17.83	17.49	18.39	17.35	18.41	18.41	18.39	18.38
		205°	18.88	17.91	17.40	18.39	17.35	18.43	18.35	18.44	18.48
	Flat	195°	15.96	14.86	14.96	14.46	14.50	14.42	14.43	14.82	14.84
		200°	15.81	14.99	14.93	14.33	14.32	14.31	14.50	14.91	14.85
	Tent (Not Horizontal)	205°	15.83	14.88	14.87	14.32	14.35	14.47	14.44	14.96	14.91
		204°	15.81	14.91	14.99	14.39	14.45	14.45	14.35	14.88	14.97
		203°	15.90	14.96	14.95	14.46	14.37	14.32	14.41	14.85	14.85
		202°	15.98	15.00	14.83	14.48	14.44	14.47	14.32	14.84	14.82
	Stand mode (Horizontal)	201°	15.97	14.89	14.98	14.39	14.39	14.41	14.45	14.86	14.87
		205°	18.84	17.86	17.48	18.45	17.44	18.49	18.36	18.47	18.32
		204°	18.88	17.84	17.35	18.48	17.41	18.49	18.32	18.44	18.33
		203°	18.85	17.96	17.40	18.31	17.37	18.39	18.42	18.33	18.49
	Flat	202°	18.82	17.84	17.36	18.39	17.40	18.34	18.48	18.32	18.35
		201°	18.98	17.96	17.50	18.35	17.32	18.32	18.32	18.37	18.44
		200°	15.94	14.98	14.84	14.40	14.48	14.42	14.50	14.85	14.85
		199°	15.91	14.88	14.97	14.49	14.43	14.32	14.45	14.92	14.82
		198°	15.97	14.90	14.89	14.40	14.48	14.36	14.34	14.90	14.89
		197°	15.93	14.83	14.87	14.32	14.50	14.39	14.49	14.98	14.81
		196°	15.95	14.87	14.86	14.36	14.37	14.46	14.33	14.96	14.88
		195°	15.90	14.89	14.86	14.48	14.44	14.43	14.43	14.99	14.86
		185°	15.84	14.87	14.88	14.35	14.45	14.45	14.46	14.93	14.93
		175°	15.85	14.86	14.81	14.39	14.47	14.40	14.36	14.95	14.88
		165°	15.95	14.90	14.94	14.47	14.49	14.33	14.49	14.87	14.94
		155°	15.90	14.83	14.81	14.49	14.36	14.33	14.39	14.95	14.81
		145°	15.97	14.95	14.86	14.35	14.33	14.34	14.38	15.00	14.84
		135°	15.85	14.83	14.94	14.39	14.46	14.47	14.39	14.91	14.95
	Laptop	125°	18.85	17.91	17.37	18.39	17.43	18.43	18.48	18.41	18.44
	Flat	130°	15.81	14.95	14.85	14.42	14.45	14.37	14.34	14.90	14.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Antenna	Operation mode	Lid angle	802.11b	802.11a 5.2G	802.11n(40M) 5.2G	802.11a 5.3G	802.11n(40M) 5.3G	802.11a 5.6G	802.11ac(80M) 5.6G	802.11a 5.8G	802.11ac(80M) 5.8G
Tx2	Laptop	129°	18.94	17.83	17.50	18.48	17.41	18.37	16.50	18.45	16.36
		128°	18.84	17.88	17.38	18.40	17.40	18.41	16.36	18.37	16.34
		127°	18.83	17.96	17.34	18.40	17.32	18.31	16.42	18.38	16.36
		126°	18.86	17.81	17.39	18.49	17.39	18.32	16.49	18.50	16.49
		125°	18.96	18.00	17.34	18.41	17.45	18.37	16.43	18.47	16.47
		115°	18.83	17.86	17.40	18.37	17.35	18.48	16.44	18.46	16.32
		105°	18.84	17.90	17.46	18.40	17.50	18.40	16.49	18.49	16.32
		95°	18.97	17.81	17.41	18.32	17.48	18.43	16.49	18.35	16.44
		85°	18.92	17.98	17.43	18.48	17.41	18.32	16.37	18.32	16.40
		75°	18.99	17.93	17.31	18.48	17.36	18.41	16.38	18.33	16.38
		65°	18.95	17.94	17.35	18.48	17.31	18.36	16.38	18.42	16.46
		55°	18.83	17.85	17.47	18.42	17.36	18.33	16.50	18.45	16.40
		45°	19.00	17.97	17.40	18.31	17.42	18.43	16.40	18.33	16.31
		35°	18.85	17.83	17.32	18.38	17.39	18.37	16.49	18.42	16.32
		25°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		Laptop	35°	18.87	17.98	17.39	18.38	17.48	18.48	16.38	18.33
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Book mode	40°	15.88	14.82	14.95	14.32	14.32	14.42	14.44	14.81	14.81
		35°	15.95	14.90	14.89	14.42	14.50	14.40	14.32	14.93	14.87
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		35°	15.88	14.82	14.97	14.38	14.50	14.37	14.43	14.81	14.91
	Book mode	36°	15.82	14.90	14.81	14.36	14.50	14.32	14.48	15.00	14.95
		37°	15.94	14.86	14.86	14.38	14.33	14.46	14.38	14.93	14.87
		38°	15.85	14.91	14.92	14.46	14.48	14.36	14.31	14.84	14.96
		39°	15.82	14.88	14.98	14.50	14.49	14.31	14.41	14.90	14.95
		40°	15.84	14.93	14.94	14.33	14.49	14.40	14.45	14.93	14.85
		50°	15.92	15.00	14.94	14.34	14.40	14.45	14.32	14.83	14.90
		60°	15.90	14.85	15.00	14.45	14.48	14.34	14.38	14.96	14.88
		70°	15.96	14.94	14.91	14.34	14.35	14.50	14.39	14.98	14.81
		80°	15.90	14.92	14.84	14.40	14.47	14.36	14.33	14.91	14.83
		90°	15.93	14.89	14.85	14.44	14.42	14.46	14.46	14.91	14.84
		100°	15.81	14.90	14.96	14.42	14.47	14.38	14.38	14.84	14.83
		110°	15.98	14.99	14.91	14.47	14.31	14.34	14.37	14.86	14.93
		120°	15.93	14.93	14.82	14.37	14.41	14.38	14.48	14.93	14.92
		130°	15.83	14.92	14.82	14.48	14.48	14.35	14.46	14.97	14.86
		140°	15.90	14.87	14.99	14.32	14.43	14.50	14.36	14.94	14.97
		150°	15.85	14.90	14.91	14.37	14.32	14.31	14.41	14.95	15.00
		160°	15.99	14.93	14.83	14.43	14.33	14.50	14.48	14.99	14.93
		170°	15.85	14.81	14.81	14.44	14.40	14.32	14.46	14.81	14.99
		180°	15.98	14.96	14.91	14.34	14.38	14.35	14.41	15.00	14.85
		190°	15.82	14.95	14.96	14.46	14.43	14.47	14.42	14.94	14.87
		199°	15.94	14.97	14.82	14.34	14.31	14.36	14.39	14.81	15.00
	Book mode	190°	15.96	14.92	14.82	14.48	14.47	14.43	14.40	14.96	14.82
		180°	15.94	14.83	15.00	14.45	14.39	14.33	14.49	14.86	14.93
		170°	15.82	14.88	14.85	14.35	14.39	14.43	14.45	14.93	14.95
		160°	15.96	14.88	14.81	14.32	14.40	14.34	14.38	14.91	14.89
		150°	16.00	14.81	14.99	14.46	14.45	14.46	14.33	14.94	14.83
		140°	15.88	14.90	14.81	14.45	14.44	14.41	14.42	14.91	14.96
		130°	15.90	14.97	14.95	14.46	14.47	14.45	14.48	14.92	14.93
		120°	15.87	14.87	14.99	14.44	14.45	14.34	14.31	14.95	14.85
		110°	15.86	14.88	14.90	14.39	14.50	14.44	14.34	14.89	14.95
		100°	15.93	14.86	14.82	14.36	14.39	14.32	14.39	14.88	14.97
		90°	15.97	14.99	14.91	14.36	14.32	14.49	14.41	14.84	14.94
		80°	16.00	14.90	14.96	14.45	14.31	14.48	14.44	14.91	14.93
		70°	15.99	14.99	14.88	14.33	14.44	14.48	14.42	14.91	14.94
		60°	15.90	14.99	14.89	14.33	14.31	14.46	15.00	14.87	14.87
		50°	15.87	14.99	14.84	14.37	14.32	14.45	14.92	14.92	14.98
		40°	15.82	14.87	14.86	14.40	14.42	14.31	14.41	14.85	14.99
	Lid close	30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Book mode	35°	15.90	14.85	14.86	14.38	14.43	14.43	14.47	15.00	15.00
		34°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	Lid close	33°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		32°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		31°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		30°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		20°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		10°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
		0°	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.7 The SAR Measurement System

A block diagram of the SAR measurement System is given in Fig. a. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY 5 professional system). The model EX3DV4 field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY 5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Staubli RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage intissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

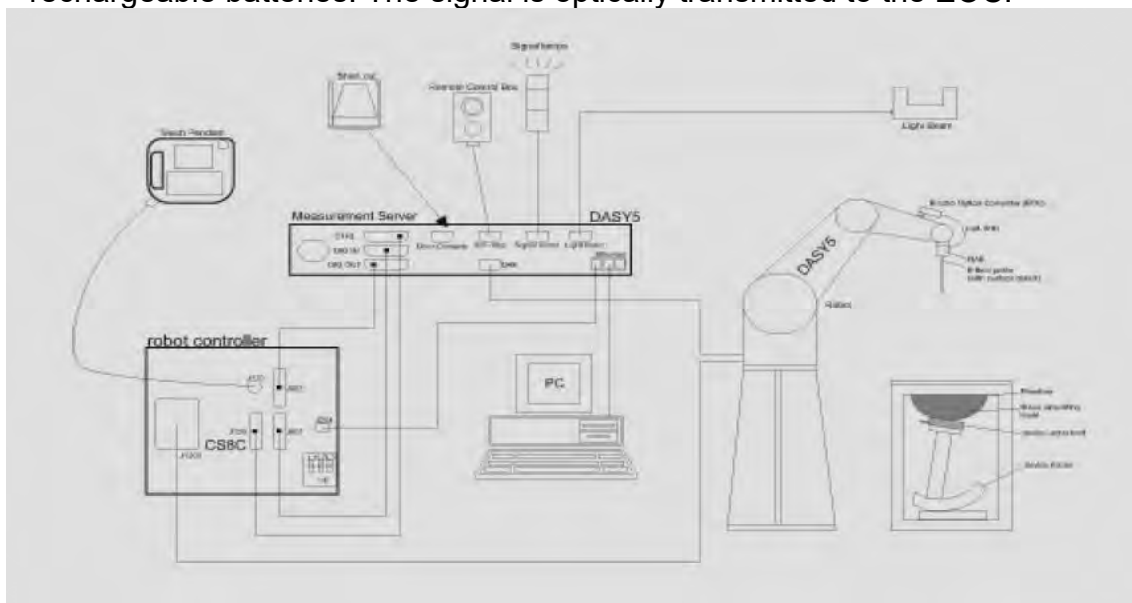


Fig. a The block diagram of SAR system

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 7.
8. DASY 5 software.
9. Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
10. Tissue simulating liquid mixed according to the given recipes.
11. Validation dipole kits allowing to validate the proper functioning of the system.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.8 System Components

EX3DV4 E-Field Probe

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)		
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 2450/5200/5300/5600/5800 MHz Additional CF for other liquids and frequencies upon request		
Frequency	10 MHz to > 6 GHz		
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)		
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)		
Dimensions	Tip diameter: 2.5 mm		
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

PHANTOM

Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell Thickness	2 ± 0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm Minor axis: 400 mm



DEVICE HOLDER

Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin) , which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.
--------------	---



Device Holder

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1.9 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 2450/5200/5300/5600/5800 MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the liquid depth above the ear reference points was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (frequency $\leq 3 \text{ GHz}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (frequency $> 3 \text{ GHz}$) in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

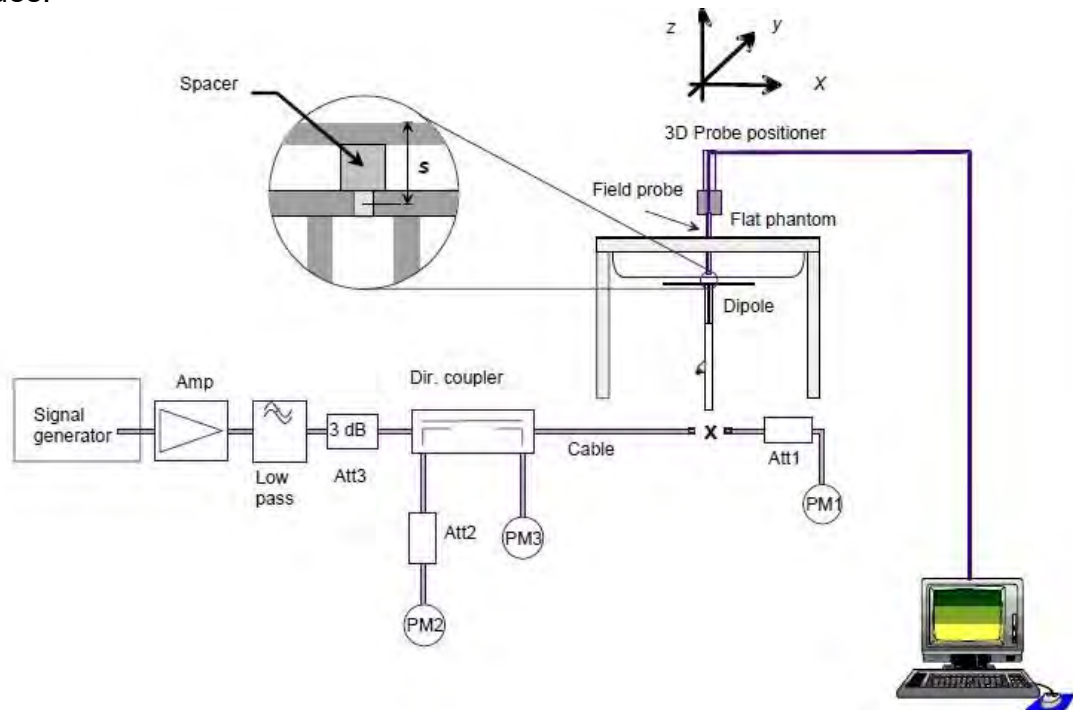


Fig. b The block diagram of system verification

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	pin=250mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D2450V2	727	2450	Head	53.9	13.70	54.8	1.67%	Jan. 07, 2022
Validation Kit	S/N	Frequency (MHz)		1W Target SAR-1g (mW/g)	Pin=100mW Measured SAR-1g (mW/g)	Measured SAR-1g normalized to 1W (mW/g)	Deviation (%)	Measured Date
D5GHzV2	1040	5200	Head	76.9	7.77	77.7	1.04%	Jan. 08, 2022
		5300	Head	78.6	7.75	77.5	-1.40%	Jan. 09, 2022
		5600	Head	80.6	8.13	81.3	0.87%	Jan. 10, 2022
		5800	Head	77.5	7.85	78.5	1.29%	Jan. 11, 2022

Table 1. Results of system validation

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.10 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5).

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within $\pm 5\%$ of the target values.

The depth of the tissue simulant in the flat section of the phantom was $\geq 15 \text{ cm} \pm 5 \text{ mm}$ (Frequency $\leq 3\text{G}$) or $\geq 10 \text{ cm} \pm 5 \text{ mm}$ (Frequency $> 3\text{G}$) during all tests. (Fig. 2)

Tissue Type	Measurement Date	Measured Frequency (MHz)	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	% dev ϵ_r	% dev σ
Head	Jan, 07. 2022	2402	39.285	1.757	38.971	1.739	-0.80%	-1.04%
		2412	39.268	1.766	38.965	1.749	-0.77%	-0.98%
		2417	39.259	1.771	38.941	1.753	-0.81%	-1.00%
		2437	39.223	1.788	38.898	1.771	-0.83%	-0.98%
		2450	39.200	1.800	38.890	1.783	-0.79%	-0.94%
		2457	39.188	1.806	38.870	1.788	-0.81%	-1.01%
		2462	39.185	1.813	38.867	1.795	-0.81%	-1.00%
	Jan, 08. 2022	5200	36.000	4.660	35.694	4.625	-0.85%	-0.75%
		5230	35.951	4.686	35.646	4.647	-0.85%	-0.83%
		5240	35.940	4.696	35.635	4.659	-0.85%	-0.79%
	Jan, 09. 2022	5260	35.917	4.717	35.590	4.681	-0.91%	-0.75%
		5270	35.906	4.727	35.586	4.690	-0.89%	-0.78%
		5300	35.871	4.758	35.556	4.718	-0.88%	-0.83%
		5310	35.860	4.768	35.523	4.732	-0.94%	-0.75%
	Jan, 10. 2022	5530	35.609	4.993	35.299	4.955	-0.87%	-0.77%
		5600	35.500	5.070	35.234	5.030	-0.75%	-0.79%
		5610	35.517	5.075	35.208	5.035	-0.87%	-0.79%
		5690	35.426	5.157	35.118	5.114	-0.87%	-0.84%
	Jan, 11. 2022	5720	35.391	5.188	35.073	5.146	-0.90%	-0.81%
		5745	35.363	5.214	35.052	5.172	-0.88%	-0.80%
		5775	35.329	5.244	35.016	5.200	-0.88%	-0.85%
		5785	35.317	5.255	35.013	5.211	-0.86%	-0.83%
		5800	35.300	5.270	34.968	5.229	-0.94%	-0.78%
		5825	35.271	5.296	34.950	5.254	-0.91%	-0.79%

Table 2. Dielectric Parameters of Tissue Simulant Fluid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

The composition of the tissue simulating liquid:

Frequency (MHz)	Mode	Ingredient						Total amount
		DGMBE	Water	Salt	Preventol D-7	Cellulose	Sugar	
2450M	Head	550ml	450ml	—	—	—	—	1.0L(Kg)

Body Simulating Liquids for 5 GHz, Manufactured by SPEAG:

Ingredients	Water	Esters, Emulsifiers, Inhibitors	Sodium and Salt
(% by weight)	60-80	20-40	0-1.5

Table 3. Recipes for Tissue Simulating Liquid

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.11 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan.
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements.

The measured volume of 30x30x30mm contains about 30g of tissue.

The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

interpolation to get all points within the measured volume. In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.12 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.12.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ($\sim 2\%$ for c ; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.12.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

1. N. Kuster, Q. Balzano, and J.C. Lin, Eds., *Mobile Communications Safety*, Chapman & Hall, London, 1997.
2. K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, "Broadband calibration of E-field probes in lossy media", *IEEE Transactions on Microwave Theory and Techniques*, vol. 44, no. 10, pp. 1954-1962, Oct. 1996.
3. K. Jokela, P. Hyysalo, and L. Puranen, "Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", *IEEE Transactions on Instrumentation and Measurements*, vol. 47, no. 2, pp. 432-438, Apr. 1998.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

1.13 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

- (1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over an 10 grams of tissue (defined as a tissue volume in the shape of a cube).
- (2) Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.
- (3) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section. (Table 4.)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 W/kg	8.00 W/kg
Spatial Average SAR (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 4. RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

2. Summary of Results

2.1 Decision rules

Reported measurement data comply with IEEE 1528-2013:

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.2 Summary of Results

Tablet / Book mode

High-Tek

Tx1(Tool:TX1)

Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
									Measured	Reported	
WLAN 802.11b	Back Surface	0	6	2437	16.00	15.98	1.05	100.46%	0.002	0.002	-
	Top Edge	0	1	2412	16.00	15.86	1.05	103.28%	0.339	0.366	-
	Top Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.434	0.456	66
	Top Edge	0	11	2462	16.00	15.91	1.05	102.09%	0.411	0.438	-
	Right Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.022	0.023	-
	Book Mode Right Edge	0	1	2412	16.00	15.86	1.05	103.28%	0.019	0.021	-
	Book Mode Right Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.023	0.024	67
	Book Mode Right Edge	0	11	2462	16.00	15.91	1.05	102.09%	0.020	0.021	-
Bluetooth (GFSK)	Back Surface	0	0	2402	11.50	11.47	1.30	100.69%	0.001	0.001	-
	Top Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.163	0.214	68
	Right Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.001	0.001	-
	Book Mode Right Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.003	0.004	69
WLAN 802.11n (40M) 5.2G	Back Surface	0	46	5230	15.00	14.99	1.07	100.23%	0.085	0.091	-
	Top Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.343	0.367	70
	Right Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.105	0.112	-
	Book Mode Right Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.036	0.039	72
WLAN 802.11n (40M) 5.3G	Back Surface	0	62	5310	14.50	14.48	1.07	100.46%	0.093	0.100	-
	Top Edge	0	62	5310	14.50	14.48	1.07	100.46%	0.398	0.427	73
	Right Edge	0	62	5310	14.50	14.48	1.07	100.46%	0.123	0.132	-
	Book Mode Right Edge	0	54	5270	14.50	14.47	1.07	100.69%	0.038	0.041	-
WLAN 802.11ac (80M) 5.6G	Back Surface	0	62	5310	14.50	14.48	1.07	100.46%	0.043	0.046	74
	Back Surface	0	138	5690	14.50	14.48	1.24	100.46%	0.133	0.165	-
	Top Edge	0	106	5530	14.50	14.37	1.24	103.04%	0.467	0.595	-
	Top Edge	0	122	5610	14.50	14.32	1.24	104.23%	0.481	0.620	-
WLAN 802.11ac (80M) 5.8G	Back Surface	0	138	5690	14.50	14.48	1.24	100.46%	0.516	0.641	75
	Right Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.167	0.207	-
	Book Mode Right Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.025	0.031	76
	Back Surface	0	155	5775	15.00	14.82	1.24	104.23%	0.099	0.128	-
WLAN 802.11ac (80M) 5.8G	Top Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.414	0.533	77
	Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.121	0.156	-
	Book Mode Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.039	0.050	78

Tx2(Tool:TX0)

Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
									Measured	Reported	
WLAN 802.11b	Back Surface	0	6	2437	16.00	15.95	1.05	101.16%	0.099	0.105	-
	Top Edge	0	1	2412	16.00	15.81	1.05	104.47%	0.398	0.435	-
	Top Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.446	0.471	79
	Top Edge	0	11	2462	16.00	15.87	1.05	103.04%	0.412	0.444	-
	Left Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.014	0.015	-
	Book Mode Left Edge	0	1	2412	16.00	15.81	1.05	104.47%	0.027	0.029	-
	Book Mode Left Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.034	0.036	80
	Book Mode Left Edge	0	11	2462	16.00	15.87	1.05	103.04%	0.025	0.027	-
WLAN 802.11n (40M) 5.2G	Back Surface	0	46	5230	15.00	14.99	1.07	100.23%	0.089	0.095	-
	Top Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.427	0.457	81
	Left Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.035	0.037	-
	Book Mode Left Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.041	0.044	82
WLAN 802.11n (40M) 5.3G	Back Surface	0	54	5270	14.50	14.46	1.07	100.93%	0.081	0.087	-
	Top Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.362	0.390	83
	Left Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.030	0.032	-
	Book Mode Left Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.032	0.034	85
WLAN 802.11ac (80M) 5.6G	Back Surface	0	106	5530	14.50	14.47	1.24	100.69%	0.102	0.127	-
	Top Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.522	0.650	86
	Top Edge	0	122	5610	14.50	14.37	1.24	103.04%	0.470	0.599	-
	Top Edge	0	138	5690	14.50	14.31	1.24	104.47%	0.488	0.630	-
WLAN 802.11ac (80M) 5.8G	Left Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.033	0.041	-
	Book Mode Left Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.040	0.050	87
	Back Surface	0	155	5775	15.00	14.95	1.24	101.16%	0.090	0.113	-
	Top Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.414	0.518	88
WLAN 802.11ac (80M) 5.8G	Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.034	0.043	-
	Book Mode Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.060	0.075	89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

WNC

Tx1(Tool-TX1)

Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
									Measured	Reported	
WLAN 802.11b	Back Surface	0	6	2437	16.00	15.98	1.05	100.46%	0.011	0.012	-
	Top Edge	0	1	2412	16.00	15.86	1.05	103.28%	0.422	0.455	-
	Top Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.456	0.479	90
	Top Edge	0	11	2462	16.00	15.91	1.05	102.09%	0.399	0.426	-
	Right Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.032	0.034	-
	Book Mode Right Edge	0	1	2412	16.00	15.86	1.05	103.28%	0.034	0.037	-
	Book Mode Right Edge	0	6	2437	16.00	15.98	1.05	100.46%	0.037	0.039	91
	Book Mode Right Edge	0	11	2462	16.00	15.91	1.05	102.09%	0.025	0.027	-
Bluetooth (GFSK)	Back Surface	0	0	2402	11.50	11.47	1.30	100.69%	0.001	0.001	-
	Top Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.164	0.215	92
	Right Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.001	0.001	-
	Book Mode Right Edge	0	0	2402	11.50	11.47	1.30	100.69%	0.006	0.008	93
WLAN 802.11n (40M) 5.2G	Back Surface	0	46	5230	15.00	14.99	1.07	100.23%	0.038	0.041	-
	Top Edge	0	38	5190	15.00	14.98	1.07	100.46%	0.702	0.753	-
	Top Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.771	0.825	94
	Right Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.058	0.062	-
	Book Mode Right Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.049	0.052	95
	Book Mode Right Edge	0	62	5310	14.50	14.48	1.07	100.46%	0.041	0.044	-
WLAN 802.11n (40M) 5.3G	Back Surface	0	62	5310	14.50	14.48	1.07	100.46%	0.769	0.825	96
	Top Edge	0	62	5310	14.50	14.48	1.07	100.46%	0.080	0.087	-
	Right Edge	0	62	5310	14.50	14.47	1.07	100.69%	0.067	0.072	-
	Book Mode Right Edge	0	62	5310	14.50	14.48	1.07	100.46%	0.084	0.090	97
	Book Mode Right Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.065	0.081	-
	Top Edge	0	106	5530	14.50	14.37	1.24	103.04%	0.821	1.046	-
WLAN 802.11ac (80M) 5.6G	Top Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.873	1.084	98
	Right Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.055	0.068	-
	Book Mode Right Edge	0	138	5690	14.50	14.48	1.24	100.46%	0.032	0.040	99
	Book Mode Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.071	0.091	-
	Top Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.883	1.138	100
	Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.043	0.055	-
WLAN 802.11ac (80M) 5.8G	Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.022	0.028	101
	Book Mode Right Edge	0	155	5775	15.00	14.82	1.24	104.23%	0.022	0.028	101

Tx2(Tool-TX0)

Mode	Position	Distance (mm)	CH	Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot page
									Measured	Reported	
WLAN 802.11b	Back Surface	0	6	2437	16.00	15.95	1.05	101.16%	0.074	0.078	-
	Top Edge	0	1	2412	16.00	15.81	1.05	104.47%	0.288	0.314	-
	Top Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.312	0.330	102
	Top Edge	0	11	2462	16.00	15.87	1.05	103.04%	0.300	0.323	-
	Left Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.018	0.019	-
	Book Mode Left Edge	0	1	2412	16.00	15.81	1.05	104.47%	0.015	0.016	-
	Book Mode Left Edge	0	6	2437	16.00	15.95	1.05	101.16%	0.022	0.023	103
	Book Mode Left Edge	0	11	2462	16.00	15.87	1.05	103.04%	0.014	0.015	-
WLAN 802.11n (40M) 5.2G	Back Surface	0	46	5230	15.00	14.99	1.07	100.23%	0.051	0.055	-
	Top Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.517	0.553	104
	Left Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.022	0.024	-
	Book Mode Left Edge	0	46	5230	15.00	14.99	1.07	100.23%	0.041	0.044	105
WLAN 802.11n (40M) 5.3G	Back Surface	0	54	5270	14.50	14.46	1.07	100.93%	0.044	0.047	-
	Top Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.367	0.396	106
	Left Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.021	0.023	-
	Book Mode Left Edge	0	54	5270	14.50	14.46	1.07	100.93%	0.025	0.027	107
	Book Mode Left Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.078	0.087	-
	Top Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.888	1.105	108
WLAN 802.11ac (80M) 5.6G	Top Edge	0	122	5610	14.50	14.37	1.24	103.04%	0.738	0.940	-
	Top Edge	0	138	5690	14.50	14.31	1.24	104.47%	0.812	1.049	-
	Left Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.048	0.060	-
	Book Mode Left Edge	0	106	5530	14.50	14.47	1.24	100.69%	0.054	0.067	109
	Book Mode Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.064	0.080	-
	Top Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.599	0.749	110
WLAN 802.11ac (80M) 5.8G	Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.045	0.056	-
	Book Mode Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.056	0.070	111
	Book Mode Left Edge	0	155	5775	15.00	14.95	1.24	101.16%	0.056	0.070	111

Note:

$$\text{Scaling} = \frac{\text{reported SAR}}{\text{measured SAR}} = \frac{P_2(\text{mW})}{P_1(\text{mW})} = 10^{\left(\frac{P_2 - P_1}{10}\right)} (\text{dBm})$$

Reported SAR = measured SAR * (scaling)

Where P2 is maximum specified power, P1 is measured conducted power

2.3 Reporting statements of conformity

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

3. Simultaneous Transmission Analysis

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
2.4GHz WLAN MIMO	Yes
2.4GHz WLAN MIMO + BT Tx1	Yes
5GHz WLAN MIMO	Yes
5GHz WLAN MIMO + BT Tx1	Yes

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

3.1 Estimated SAR calculation

According to KDB447498 D01v06 – When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\text{Estimated SAR} = \frac{\text{Max. tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

3.2 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by $(\text{SAR1} + \text{SAR2})^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

High-Tek

		Reported SAR					Scenario 1	Scenario 2	Scenario 3	Scenario 4
Exposure Position		2	3	4	5	6	2+3	4+5	2+3+6	4+5+6
		2.4GHz WLAN Tx1	2.4GHz WLAN Tx2	5GHz WLAN Tx1	5GHz WLAN Tx2	Bluetooth Tx1	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Back Surface	0	0.002	0.105	0.165	0.127	0.001	0.107	0.292	0.108	0.293
Top Edge	0	0.456	0.471	0.641	0.650	0.214	0.927	1.291	1.141	1.505
Right Edge	0	0.023	-	0.207	-	0.001	0.023	0.207	0.024	0.208
Left Edge	0	-	0.015	-	0.043	-	0.015	0.043	0.015	0.043
Book Mode Right Edge	0	0.024	-	0.050	-	0.004	0.024	0.050	0.028	0.054
Book Mode Left Edge	0	-	0.036	-	0.075	-	0.036	0.075	0.036	0.075

WNC


		Reported SAR					Scenario 1	Scenario 2	Scenario 3	Scenario 4
Exposure Position		2	3	4	5	6	2+3	4+5	2+3+6	4+5+6
		2.4GHz WLAN Tx1	2.4GHz WLAN Tx2	5GHz WLAN Tx1	5GHz WLAN Tx2	Bluetooth Tx1	Summed	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Back Surface	0	0.012	0.078	0.091	0.097	0.001	0.090	0.188	0.091	0.189
Top Edge	0	0.479	0.330	1.138	1.105	0.215	0.809	2.243	1.024	2.458
Right Edge	0	0.034	-	0.097	-	0.001	0.034	0.097	0.035	0.098
Left Edge	0	-	0.019	-	0.060	-	0.019	0.060	0.019	0.060
Book Mode Right Edge	0	0.039	-	0.090	-	0.008	0.039	0.090	0.047	0.098
Book Mode Left Edge	0	-	0.023	-	0.070	-	0.023	0.070	0.023	0.070

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Scenario 1:									
Position	Conditions	SAR Value (W/kg)	Coordinates (mm)			Σ SAR (W/kg)	Peak Location Separation Distance (mm)	SPLSR	Simultaneous Transmission SAR Test
			x	y	z				
Bottom Surface	WLAN 5G TX2	1.105	-5.80	-117.20	-3.96	-	-	-	-
	WLAN 5G TX1+BT	1.353	-6.60	80.00	-3.80	2.458	197.20	0.020	SPLSR $\leq$ 0.04, Not required

*For peak SAR location of WLAN TX1 + BT, using the peak SAR location with smallest separation distance between WLAN TX2 - WLAN TX1 pair and WLAN TX2 - BT pair to be the worst case condition.

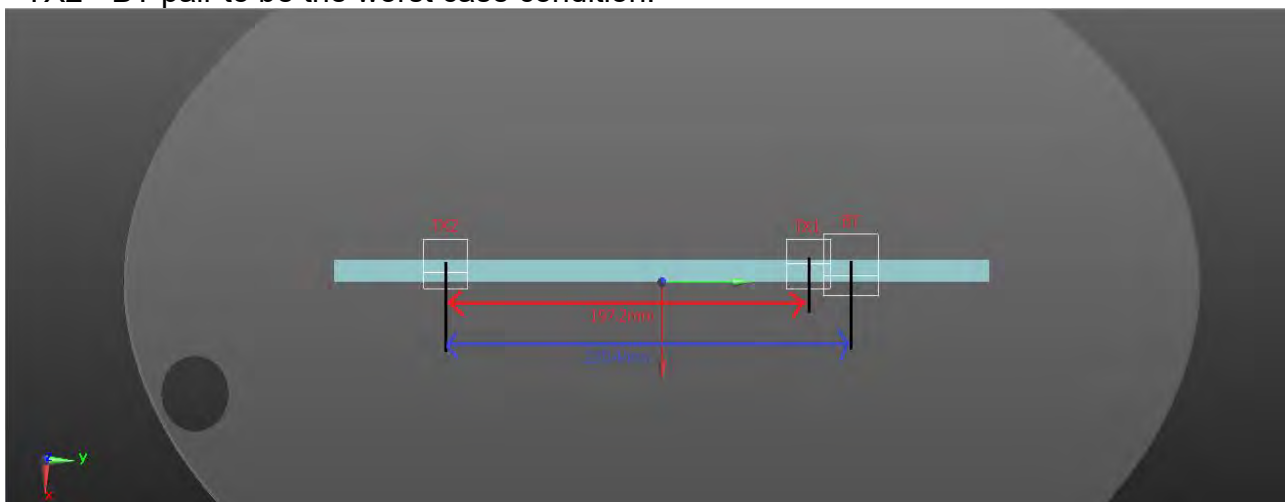

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

4. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration	Date of next calibration
SPEAG	Dosimetric E-Field Probe	EX3DV4	7686	Oct.05,2021	Oct.04,2022
SPEAG	System Validation Dipole	D2450V2	727	Apr.14,2021	Apr.13,2022
		D5GHzV2	1040	Jun.03,2021	Jun.02,2022
SPEAG	Data acquisition Electronics	DAE4	877	Mar.22,2021	Mar.21,2022
SPEAG	Software	DASY 52 52.10.4	N/A	Calibration not required	Calibration not required
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration not required
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb.17,2021	Feb.16,2022
Agilent	Dual-directional coupler	772D	MY46151242	Aug.16.2021	Aug.15.2022
		778D	MY48220468	Aug.16.2021	Aug.15.2022
Agilent	Signal Generator	N5181A	MY50141235	May.30,2021	May.29,2022
Agilent	Power Meter	E4417A	MY51410006	Mar.23,2021	Mar.22,2022
Agilent	Power Sensor	E9301H	MY51470001	Mar.23,2021	Mar.22,2022
			MY51470002	Mar.23,2021	Mar.22,2022
TECPEL	Digital thermometer	DTM-303A	TP130074	Apr.26,2021	Apr.25,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
 除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

5. Measurements

Date: 2022/1/7

Report No. : ES/2021/C0024

WLAN 802.11b_Tablet Mode_Top Edge_CH 6_Tx1_0mm

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.868 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.353 V/m; Power Drift = 0.01 dB



Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.688 W/kg

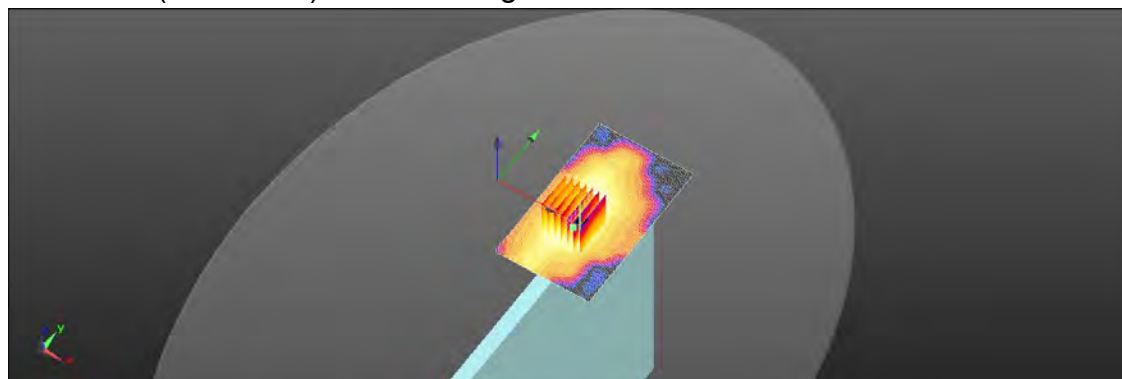

0 dB = 0.688 W/kg = -1.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024**WLAN 802.11b_Book Mode_Right Edge_CH 6_Tx1_0mm**

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0437 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.581 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.0093 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 0.0366 W/kg

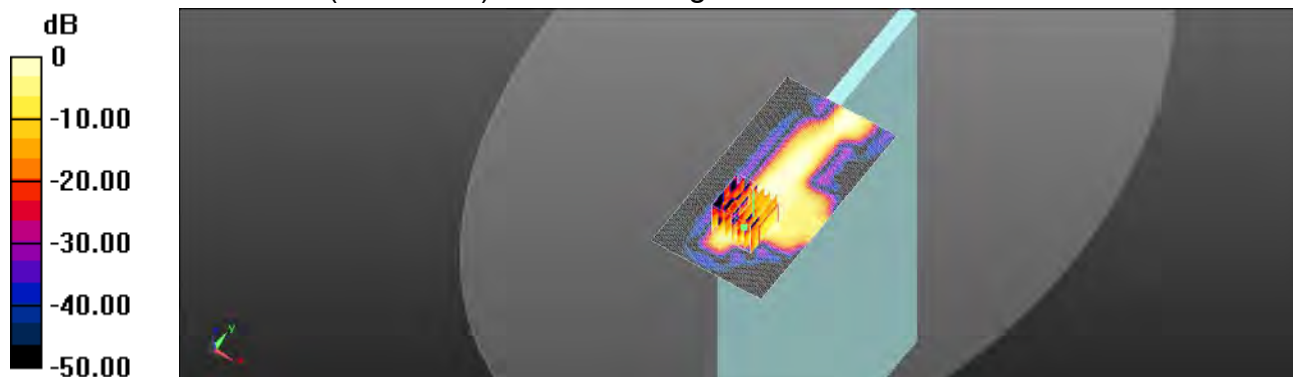

0 dB = 0.0366 W/kg = -14.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. : ES/2021/C0024**Bluetooth(GFSK)_Tablet Mode_Top Edge_CH 0_Tx1_0mm**

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.739$ S/m; $\epsilon_r = 38.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.304 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.135 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.475 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 60%

Maximum value of SAR (measured) = 0.270 W/kg

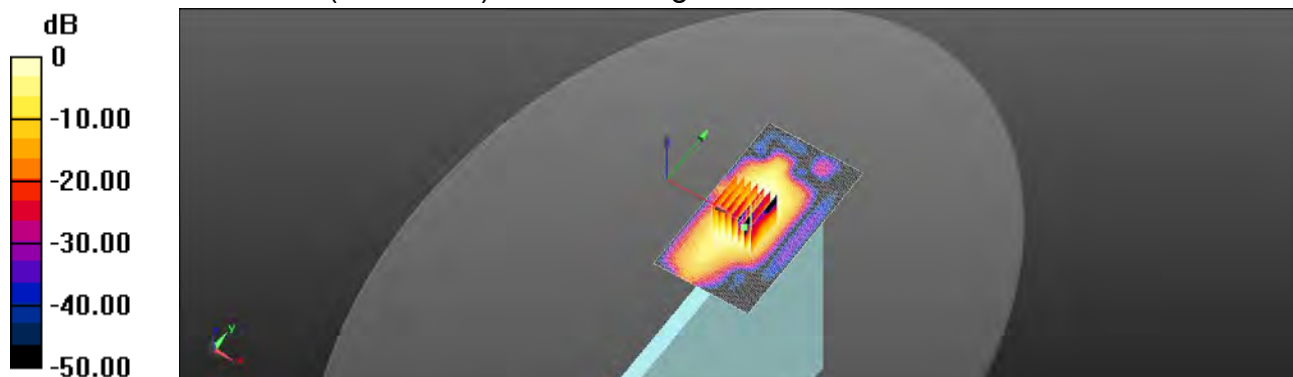

0 dB = 0.270 W/kg = -5.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. : ES/2021/C0024**Bluetooth(GFSK)_Book Mode_Right Edge_CH 0_Tx1_0mm**

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.739$ S/m; $\epsilon_r = 38.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.00612 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.159 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.00328 W/kg; SAR(10 g) = 0.000756 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.00740 W/kg

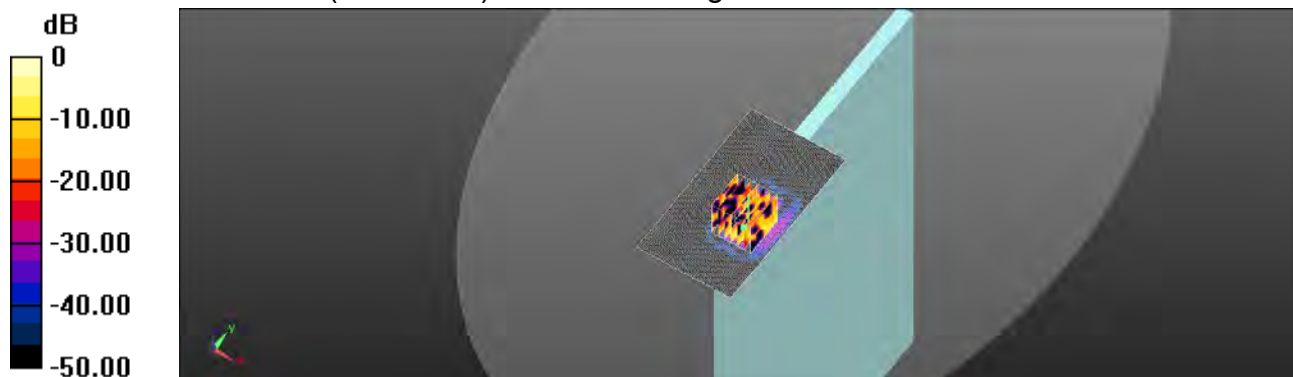

0 dB = 0.00740 W/kg = -21.31 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Tablet Mode_Top Edge_CH 46_Tx1_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 35.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C ; Liquid temperature: 22.6°C **DASY5 Configuration:**



- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (interpolated) = 0.761 W/kg **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.353 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.97 W/kg **SAR(1 g) = 0.343 W/kg ; SAR(10 g) = 0.099 W/kg** Smallest distance from peaks to all points 3 dB below = 5.2 mm Ratio of SAR at M2 to SAR at M1 = 57.2% Maximum value of SAR (measured) = 0.734 W/kg **Zoom Scan (7x7x12)/Cube 1:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.353 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.80 W/kg **SAR(1 g) = 0.239 W/kg ; SAR(10 g) = 0.066 W/kg** Smallest distance from peaks to all points 3 dB below = 5.9 mm Ratio of SAR at M2 to SAR at M1 = 57.1% Maximum value of SAR (measured) = 0.547 W/kg **Zoom Scan (7x7x12)/Cube 2:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 2.353 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.38 W/kg **SAR(1 g) = 0.272 W/kg ; SAR(10 g) = 0.094 W/kg** Smallest distance from peaks to all points 3 dB below = 5.6 mm Ratio of SAR at M2 to SAR at M1 = 50.2% Maximum value of SAR (measured) = 0.621 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

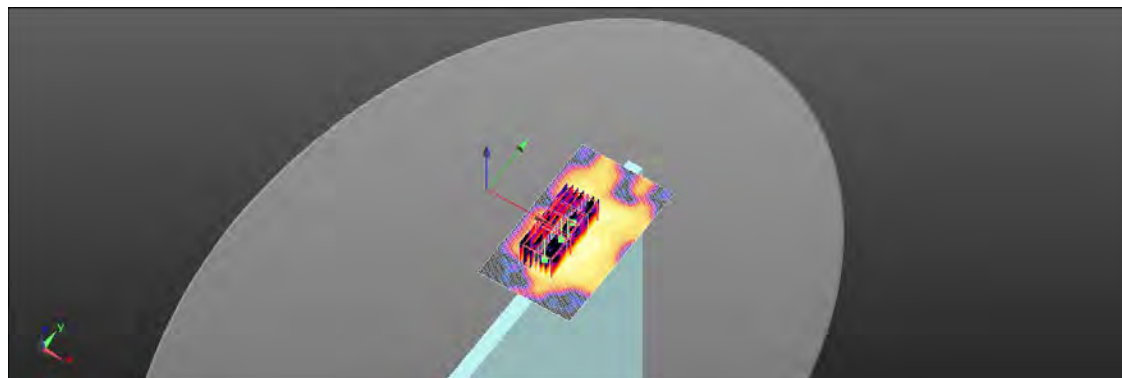

0 dB = 0.734 W/kg = -1.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. :ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Book Mode_Right Edge_CH 46_Tx1_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.107 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.224 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.0749 W/kg

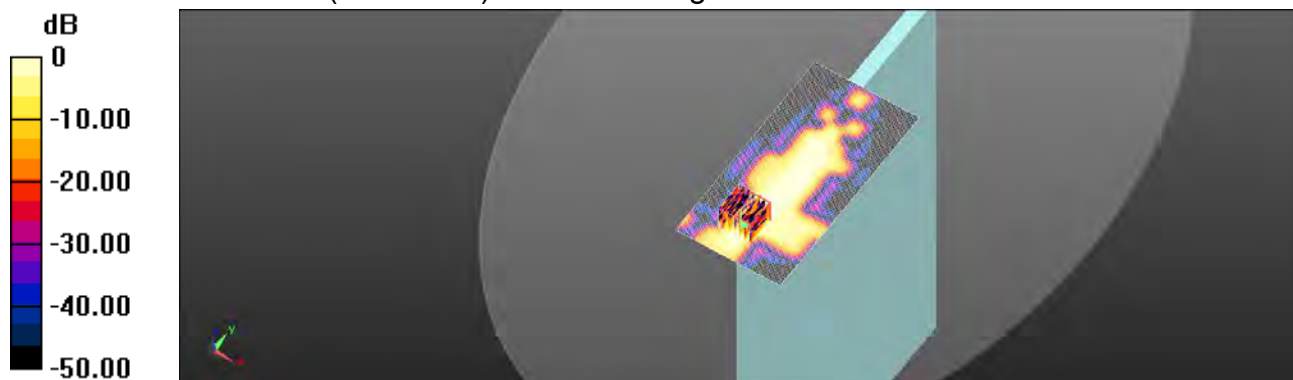

0 dB = 0.0749 W/kg = -11.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Tablet Mode_Top Edge_CH 62_Tx1_0mm**

Communication System: WLAN; Frequency: 5310 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.732$ S/m; $\epsilon_r = 35.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.956 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.245 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5%

Maximum value of SAR (measured) = 0.968 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.245 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.777 W/kg

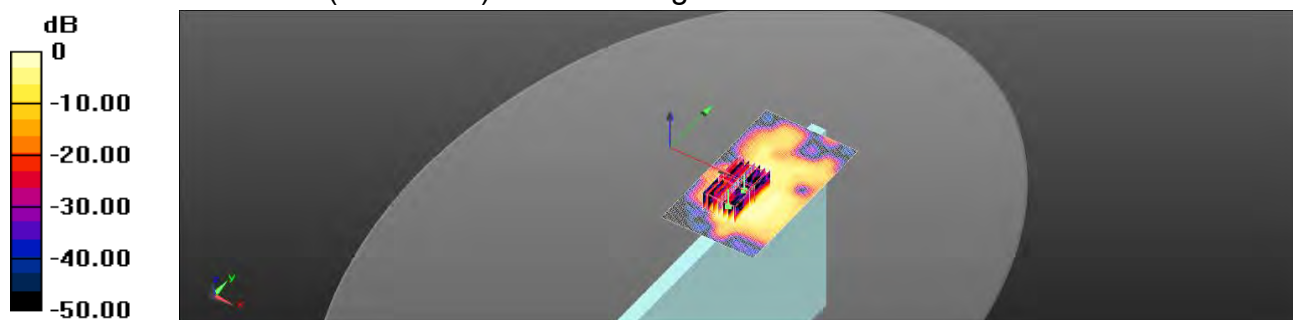

0 dB = 0.968 W/kg = -0.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024

WLAN 802.11n(40M) 5.3G_Book Mode_Right Edge_CH 62_Tx1_0mm

Communication System: WLAN; Frequency: 5310 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.732$ S/m; $\epsilon_r = 35.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.180 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.928 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 40.3%

Maximum value of SAR (measured) = 0.0907 W/kg

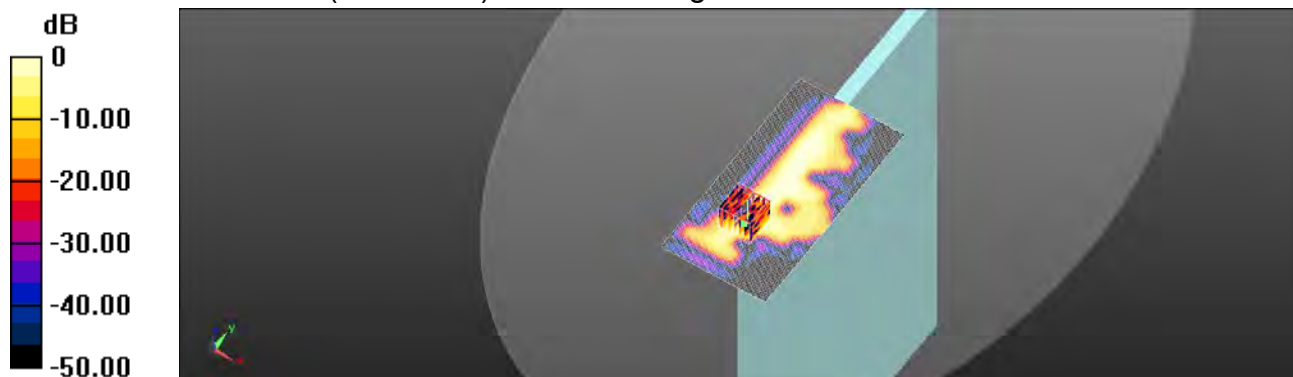

0 dB = 0.0907 W/kg = -10.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Tablet Mode_Top Edge_CH 138_Tx1_0mm**

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 35.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.356 V/m; Power Drift = 0.013 dB


Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.42 W/kg

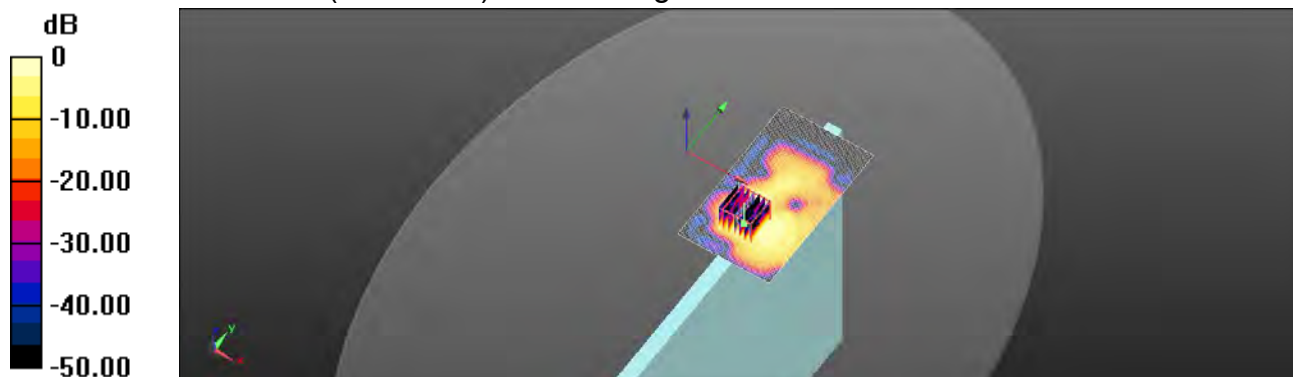

0 dB = 1.42 W/kg = 1.52 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Book Mode_Right Edge_CH 138_Tx1_0mm**

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 35.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0250 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.183 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00371 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 0.0519 W/kg

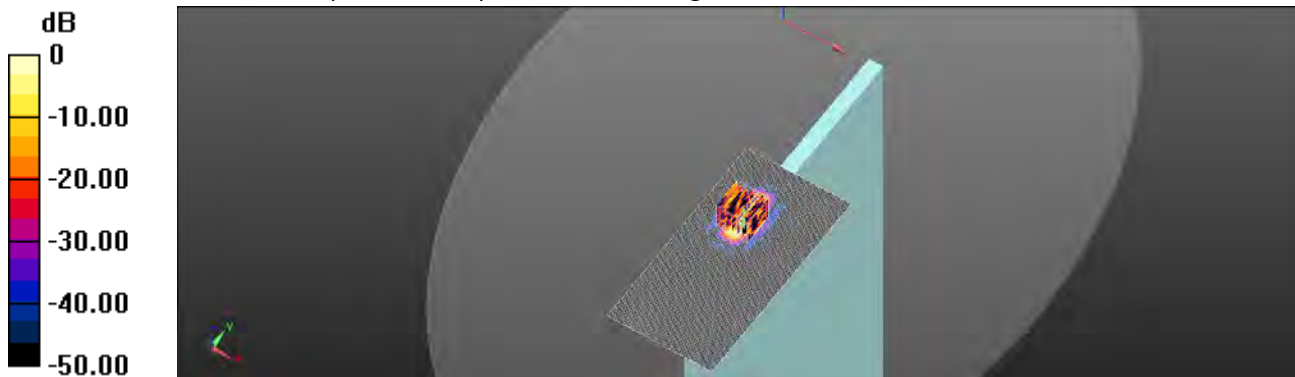

0 dB = 0.0519 W/kg = -12.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Tablet Mode_Top Edge_CH 155_Tx1_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.854 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.099 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 1.10 W/kg

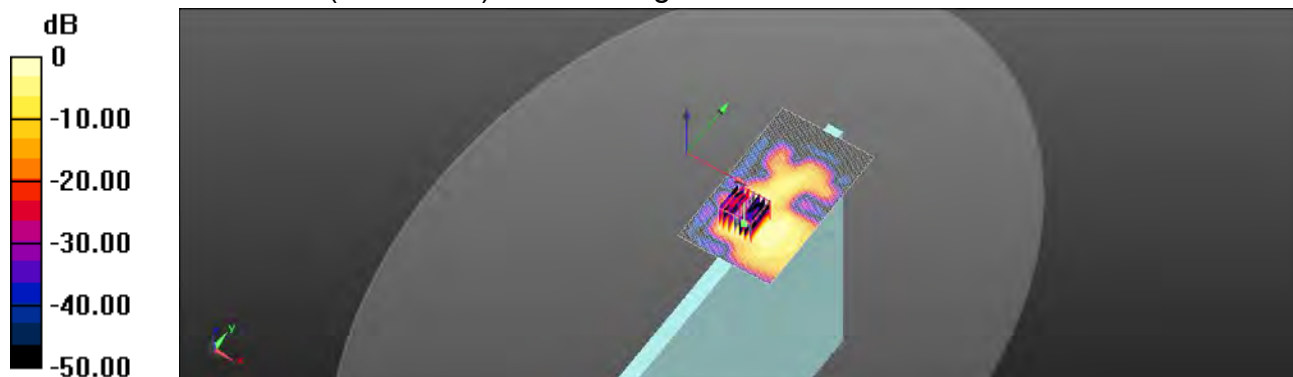

0 dB = 1.10 W/kg = 0.41 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Book Mode_Right Edge_CH 155_Tx1_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0810 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.446 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.327 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.00846 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.0881 W/kg

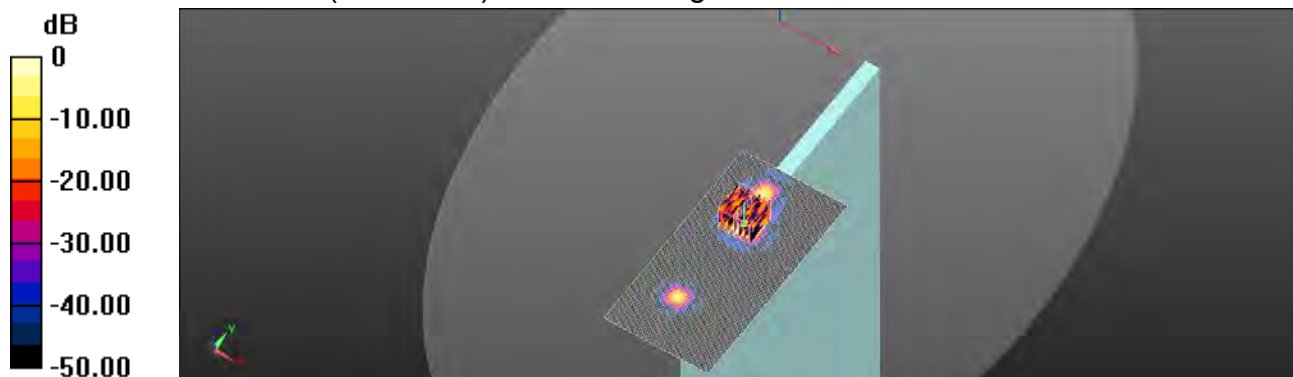

0 dB = 0.0881 W/kg = -10.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. : ES/2021/C0024**WLAN 802.11b_Tablet Mode_Top Edge_CH 6_Tx2_0mm**

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.758 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.351 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.6%

Maximum value of SAR (measured) = 0.719 W/kg

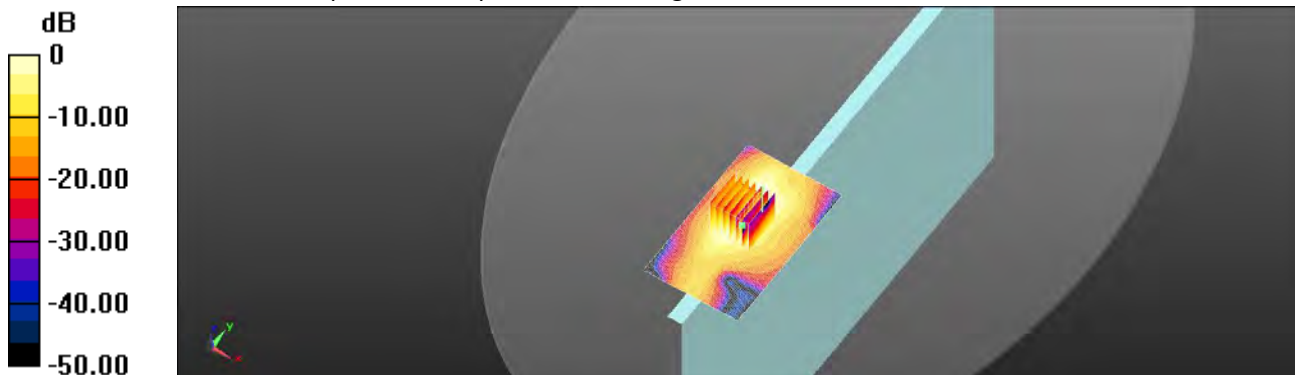

0 dB = 0.719 W/kg = -1.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024**WLAN 802.11b_Book Mode_Left Edge_CH 6_Tx2_0mm**

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0366 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.938 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.012 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.0495 W/kg

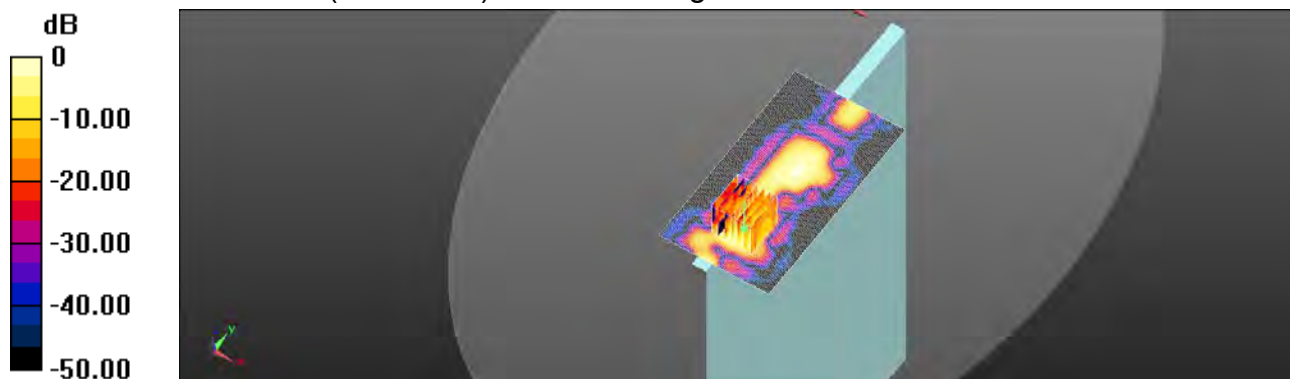

0 dB = 0.0495 W/kg = -13.06 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. :ES/2021/C0024

WLAN 802.11n(40M) 5.2G_Tablet Mode_Top Edge_CH 46_Tx2_0mm

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.840 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.458 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 0.848 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.458 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.882 W/kg

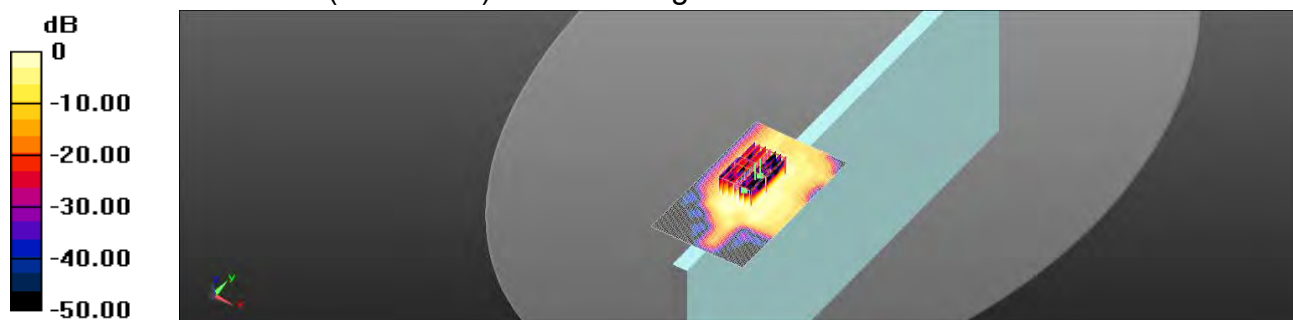

0 dB = 0.848 W/kg = -0.72 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Book Mode_Left Edge_CH 46_Tx2_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0667 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.623 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.010 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.0972 W/kg

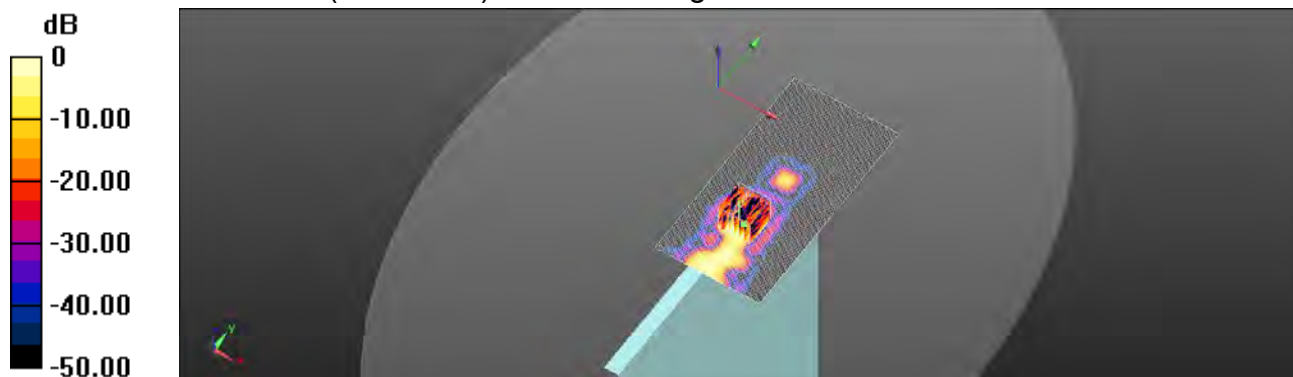

0 dB = 0.0972 W/kg = -10.13 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024

WLAN 802.11n(40M) 5.3G_Tablet Mode_Top Edge_CH 54_Tx2_0mm

Communication System: WLAN; Frequency: 5270 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5270 \text{ MHz}$; $\sigma = 4.69 \text{ S/m}$; $\epsilon_r = 35.586$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.729 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.582 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.362 W/kg ; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 0.720 W/kg

Zoom Scan (7x7x12)/Cube 1: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.582 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.318 W/kg ; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.746 W/kg

Zoom Scan (7x7x12)/Cube 2: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.582 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.261 W/kg ; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm


Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 0.552 W/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

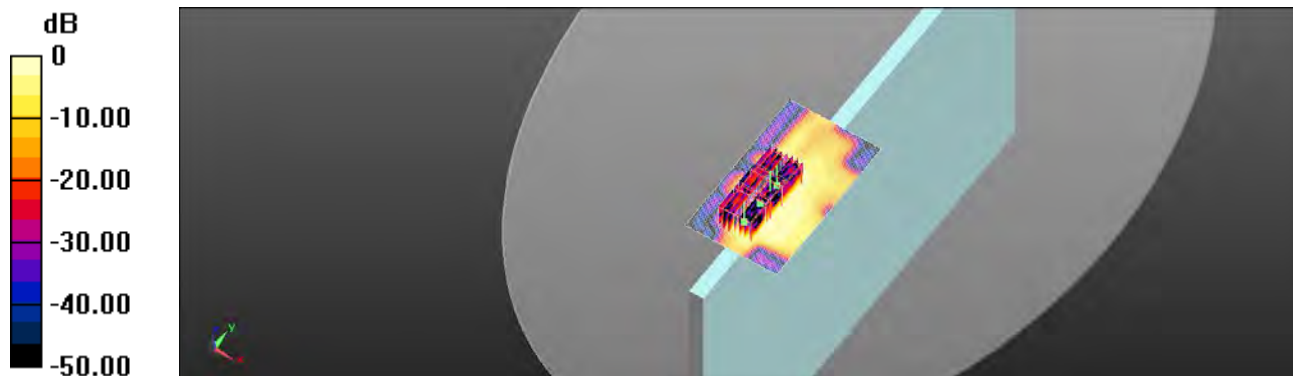

0 dB = 0.720 W/kg = -1.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. :ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Book Mode_Left Edge_CH 54_Tx2_0mm**

Communication System: WLAN; Frequency: 5270 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 35.586$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0489 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.881 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.00621 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.0823 W/kg

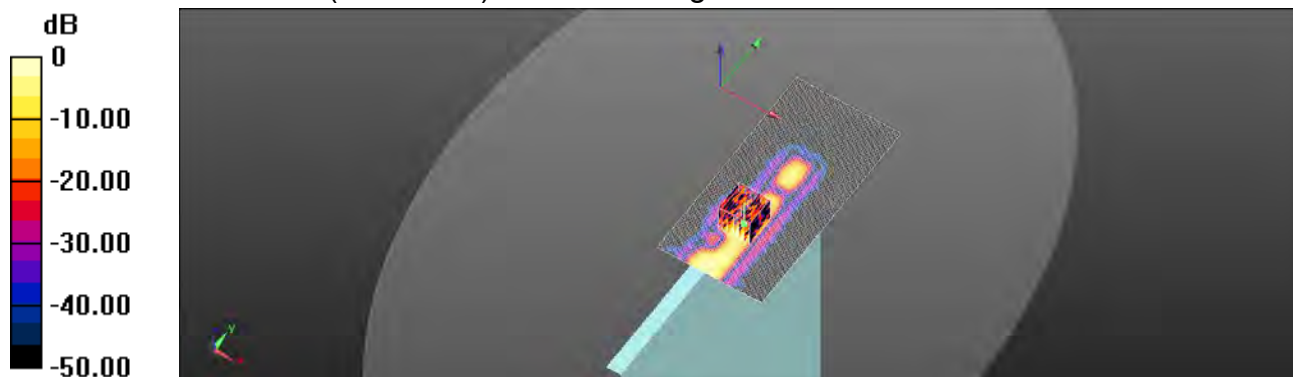

0 dB = 0.0823 W/kg = -10.84 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Tablet Mode_Top Edge_CH 106_Tx2_0mm**

Communication System: WLAN; Frequency: 5530 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.955$ S/m; $\epsilon_r = 35.299$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.585 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 3.39 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.24 W/kg

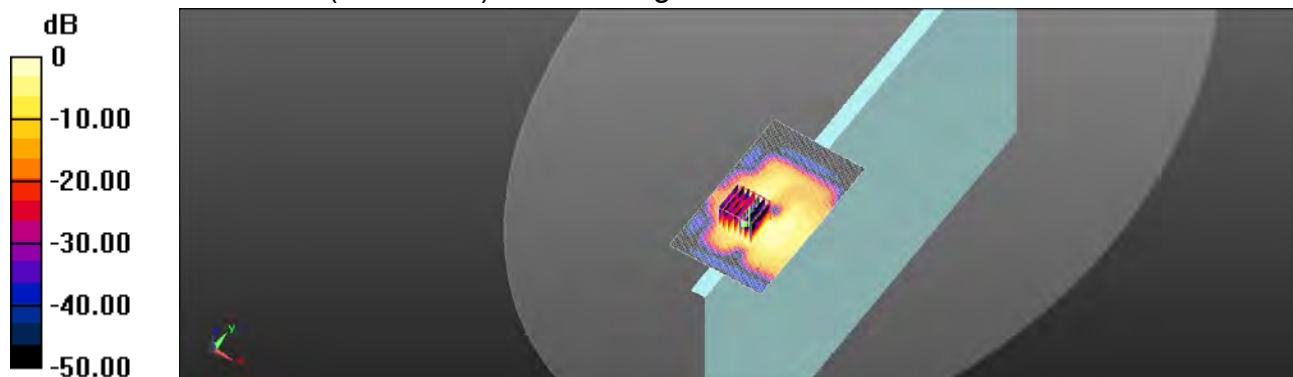

0 dB = 1.24 W/kg = 0.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. :ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Book Mode_Left Edge_CH 106_Tx2_0mm**

Communication System: WLAN; Frequency: 5530 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.955$ S/m; $\epsilon_r = 35.299$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.106 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.895 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.00512 W/kg

Smallest distance from peaks to all points 3 dB below = 5 mm

Ratio of SAR at M2 to SAR at M1 = 39.9%

Maximum value of SAR (measured) = 0.129 W/kg



0 dB = 0.129 W/kg = -9.89 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Tablet Mode_Top Edge_CH 155_Tx2_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.987 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.145 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 1.02 W/kg

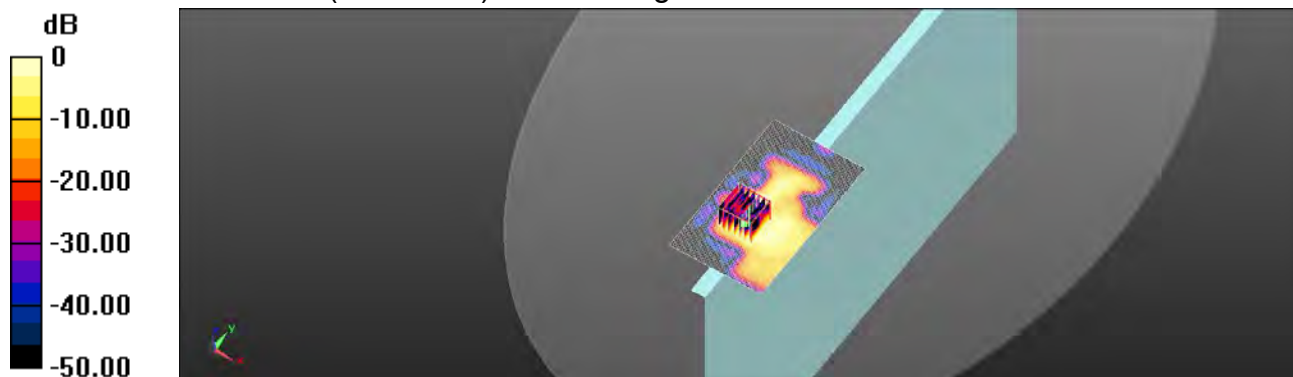

0 dB = 1.02 W/kg = 0.09 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Book Mode_Left Edge_CH 155_Tx2_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.249 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.234 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 0.155 W/kg

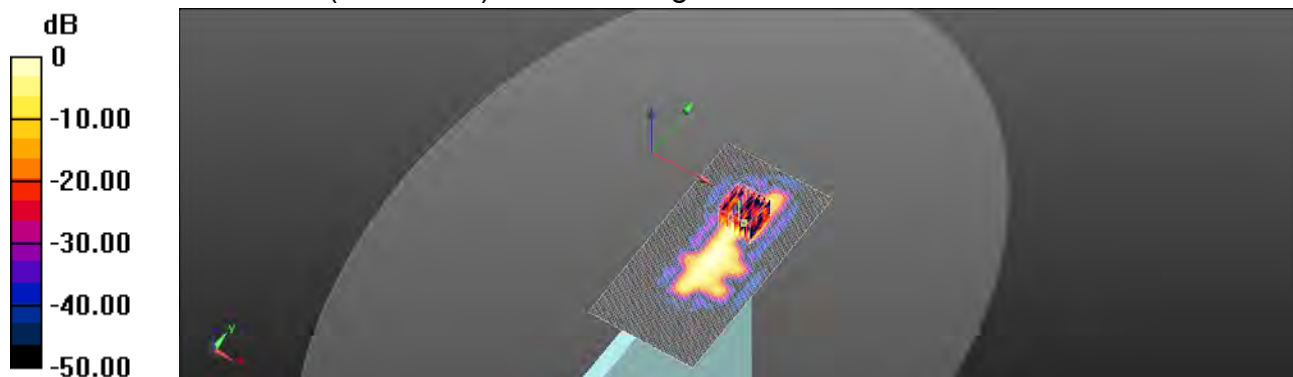

0 dB = 0.155 W/kg = -8.10 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024**WLAN 802.11b_Tablet Mode_Top Edge_CH 6_Tx1_0mm**

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.805 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.325 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.700 W/kg

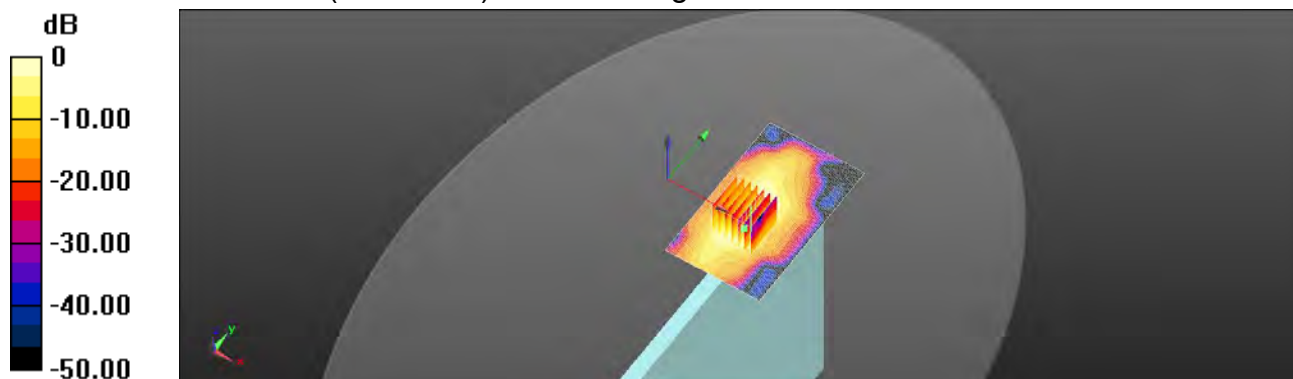

0 dB = 0.700 W/kg = -1.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024**WLAN 802.11b_Book Mode_Right Edge_CH 6_Tx1_0mm**

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.771$ S/m; $\epsilon_r = 38.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0920 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.110 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.016 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 0.0559 W/kg

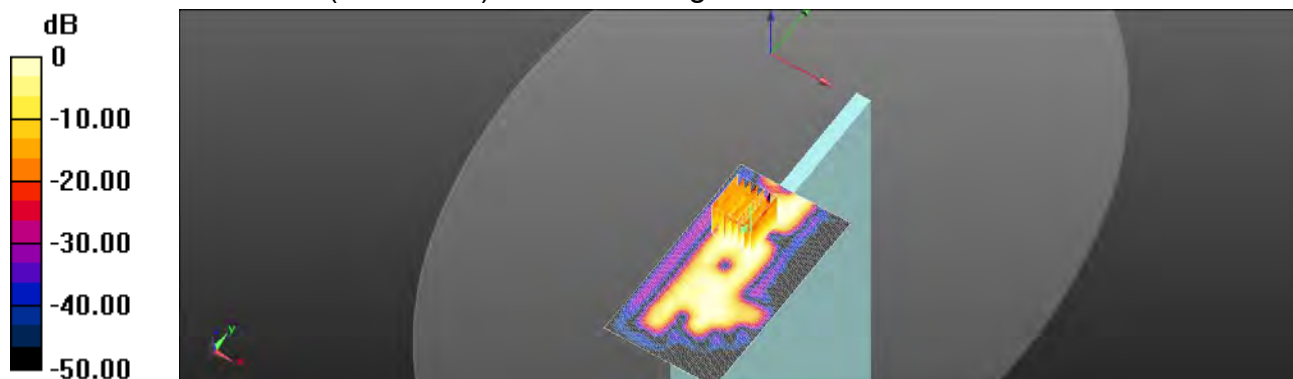

0 dB = 0.0559 W/kg = -12.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024**Bluetooth(GFSK)_Tablet Mode_Top Edge_CH 0_Tx1_0mm**

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.739$ S/m; $\epsilon_r = 38.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.260 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.564 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.266 W/kg

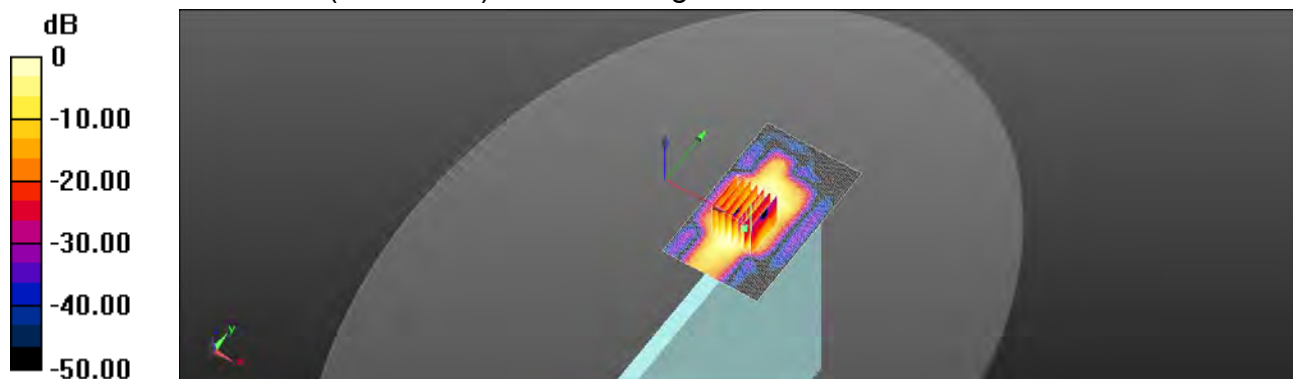

0 dB = 0.266 W/kg = -5.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. : ES/2021/C0024**Bluetooth(GFSK)_Book Mode_Right Edge_CH 0_Tx1_0mm**

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.739$ S/m; $\epsilon_r = 38.971$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0133 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.286 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.00625 W/kg; SAR(10 g) = 0.00192 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.8%

Maximum value of SAR (measured) = 0.0108 W/kg

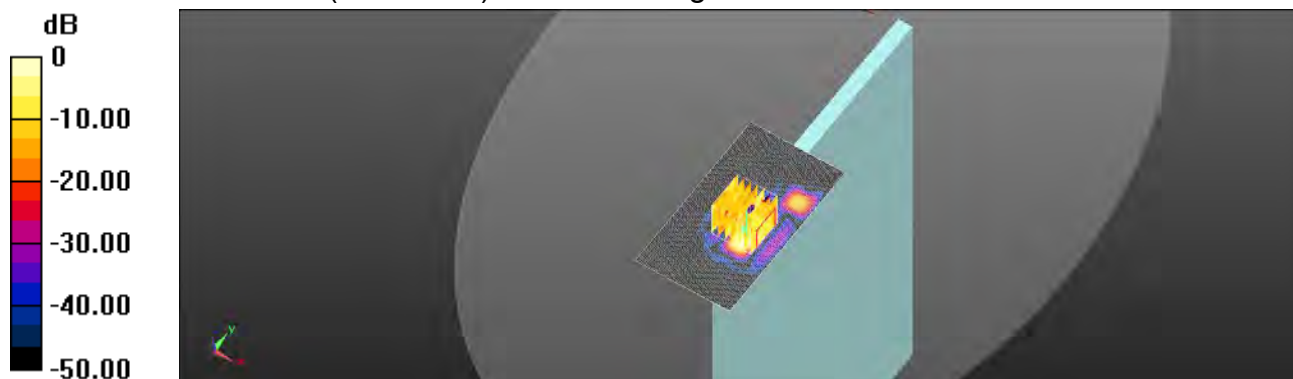

0 dB = 0.0108 W/kg = -19.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Tablet Mode_Top Edge_CH 46_Tx1_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 35.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C ; Liquid temperature: 22.6°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (interpolated) = 1.74 W/kg **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.587 V/m ; Power Drift = 0.15 dB Peak SAR (extrapolated) = 5.12 W/kg **SAR(1 g) = 0.771 W/kg ; SAR(10 g) = 0.182 W/kg** Smallest distance from peaks to all points 3 dB below = 8.4 mm Ratio of SAR at M2 to SAR at M1 = 56.8% Maximum value of SAR (measured) = 1.91 W/kg  $0 \text{ dB} = 1.91 \text{ W/kg} = 2.82 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Book Mode_Right Edge_CH 46_Tx1_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.102 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.445 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.014 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

Maximum value of SAR (measured) = 0.0946 W/kg



0 dB = 0.0946 W/kg = -10.24 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Tablet Mode_Top Edge_CH 62_Tx1_0mm**


Communication System: WLAN; Frequency: 5310 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5310 \text{ MHz}$; $\sigma = 4.732 \text{ S/m}$; $\epsilon_r = 35.523$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 22.6°C **DASY5 Configuration:**

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

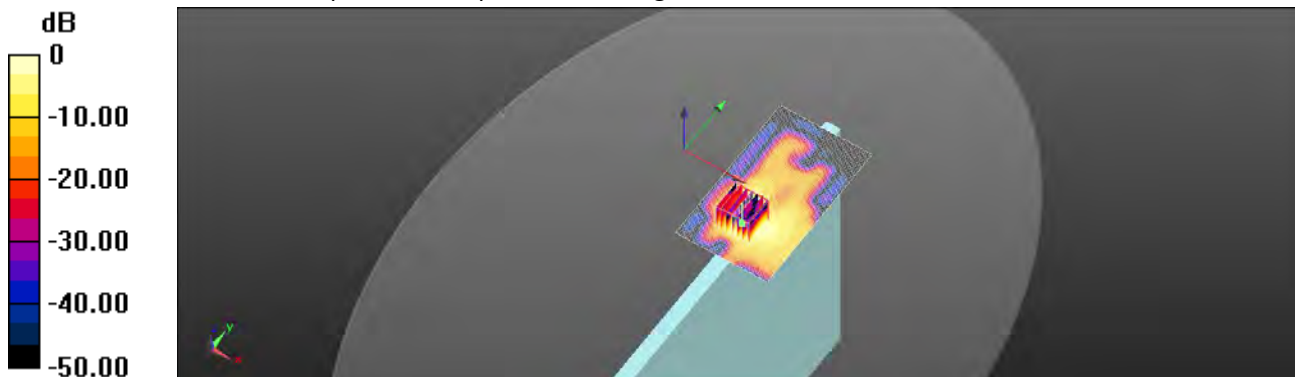Area Scan (71x121x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (interpolated) = 1.79 W/kg **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.935 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 5.00 W/kg **SAR(1 g) = 0.769 W/kg ; SAR(10 g) = 0.189 W/kg** Smallest distance from peaks to all points 3 dB below = 8.4 mm Ratio of SAR at M2 to SAR at M1 = 56% Maximum value of SAR (measured) = 1.90 W/kg  $0 \text{ dB} = 1.90 \text{ W/kg} = 2.80 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Book Mode_Right Edge_CH 62_Tx1_0mm**

Communication System: WLAN; Frequency: 5310 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.732$ S/m; $\epsilon_r = 35.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.127 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.820 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.825 W/kg

SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.7%

Maximum value of SAR (measured) = 0.170 W/kg

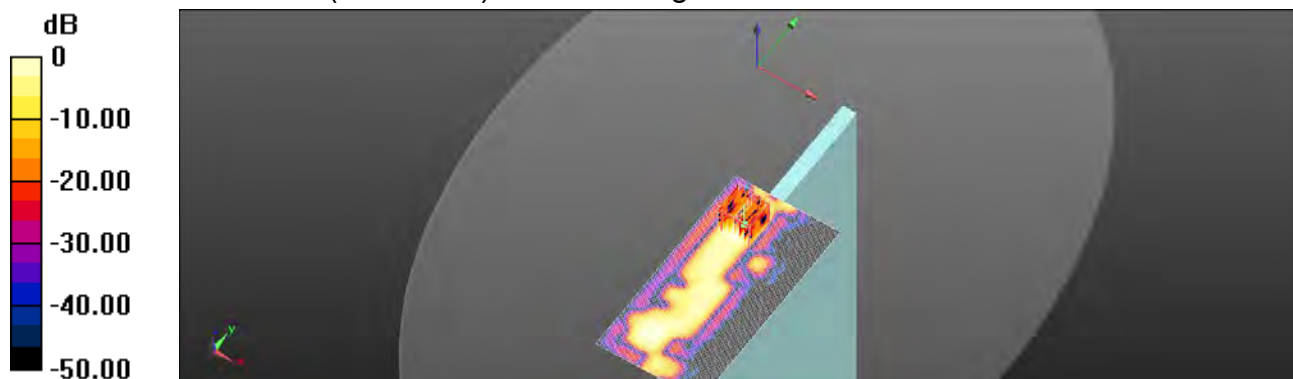

0 dB = 0.170 W/kg = -7.69 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Tablet Mode_Top Edge_CH 138_Tx1_0mm**

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 35.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.98 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.257 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 5.13 W/kg

SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 2.18 W/kg

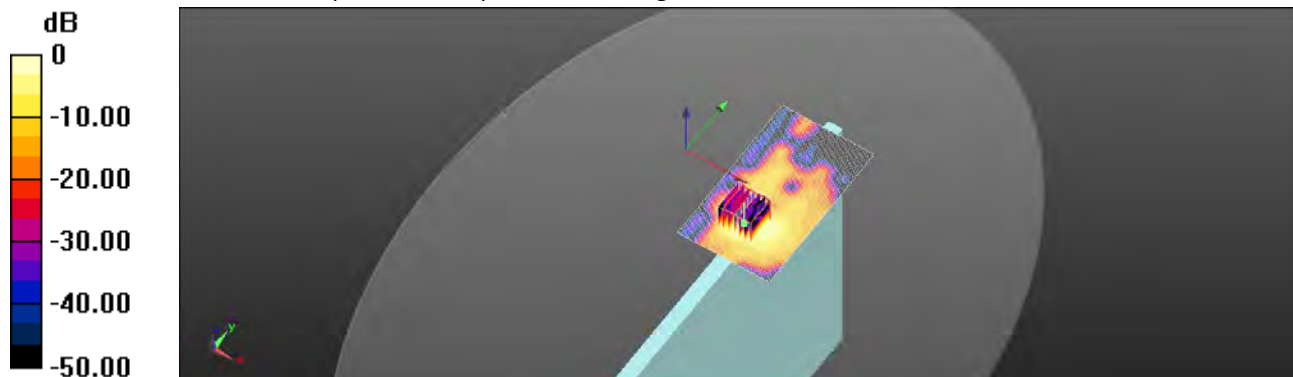

0 dB = 2.18 W/kg = 3.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Book Mode_Right Edge_CH 138_Tx1_0mm**

Communication System: WLAN; Frequency: 5690 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.114$ S/m; $\epsilon_r = 35.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.0627 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.221 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.00695 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 62.4%

Maximum value of SAR (measured) = 0.0634 W/kg

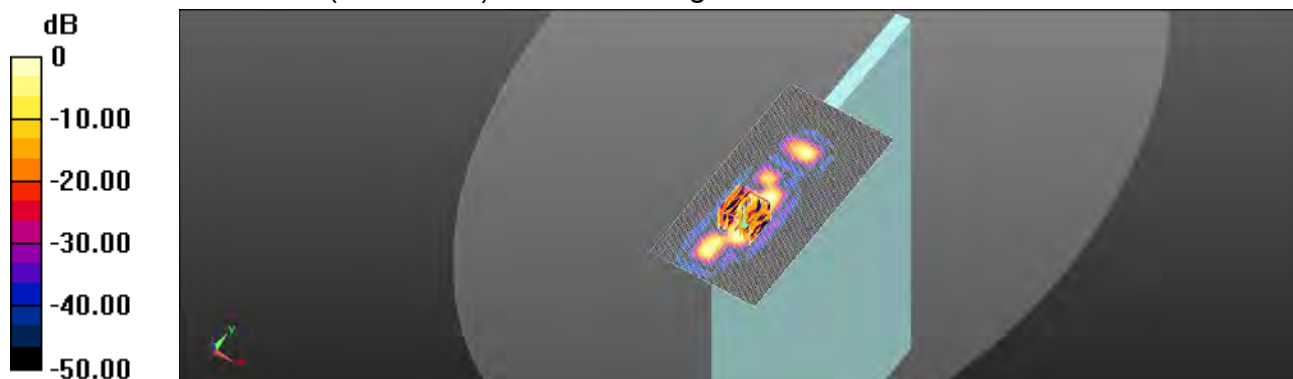

0 dB = 0.0634 W/kg = -11.98 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Tablet Mode_Top Edge_CH 155_Tx1_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.00 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.258 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 6.28 W/kg

SAR(1 g) = 0.883 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 2.18 W/kg

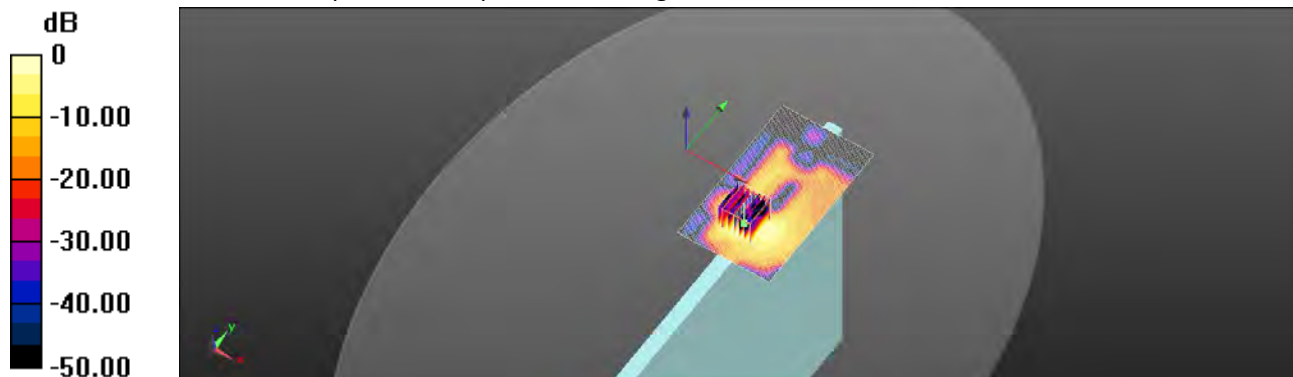

0 dB = 2.18 W/kg = 3.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. :ES/2021/C0024

WLAN 802.11ac(80M) 5.8G_Book Mode_Right Edge_CH 155_Tx1_0mm

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775 \text{ MHz}$; $\sigma = 5.2 \text{ S/m}$; $\epsilon_r = 35.016$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0368 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.275 V/m ; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.022 W/kg ; SAR(10 g) = 0.0041 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 0.0502 W/kg

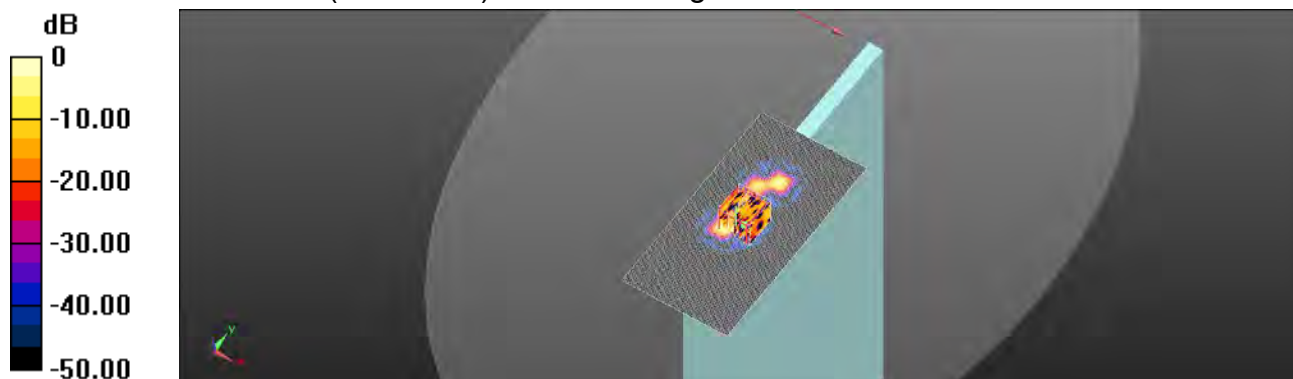

$0 \text{ dB} = 0.0502 \text{ W/kg} = -12.99 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024

WLAN 802.11b_Tablet Mode_Top Edge_CH 6_Tx2_0mm

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.771 \text{ S/m}$; $\epsilon_r = 38.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C ; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x101x1): Interpolated grid: $dx=12 \text{ mm}$, $dy=12 \text{ mm}$

Maximum value of SAR (interpolated) = 0.527 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.416 V/m ; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.867 W/kg

SAR(1 g) = 0.312 W/kg ; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 0.497 W/kg

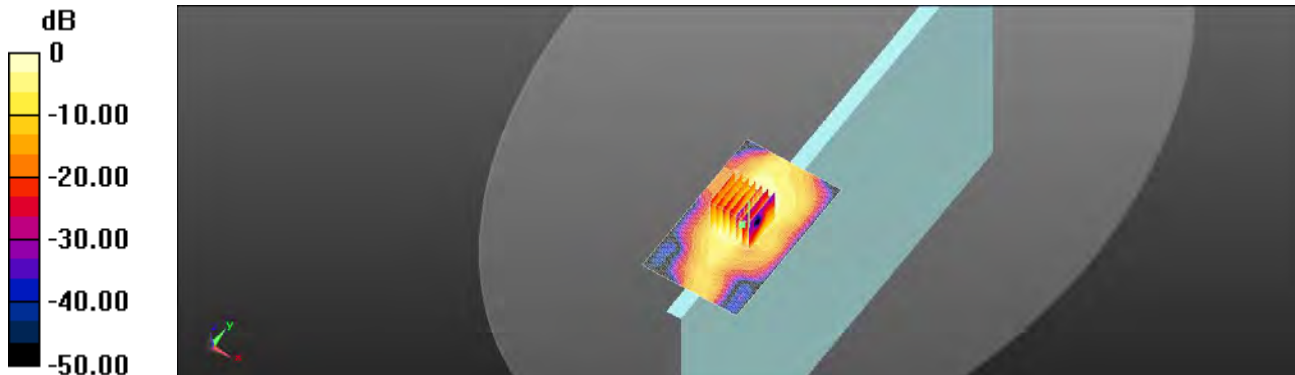

$0 \text{ dB} = 0.497 \text{ W/kg} = -3.04 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/7

Report No. :ES/2021/C0024

WLAN 802.11b_Book Mode_Left Edge_CH 6_Tx2_0mm

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1.045

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.771 \text{ S/m}$; $\epsilon_r = 38.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C ; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: $dx=12 \text{ mm}$, $dy=12 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0418 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.146 V/m ; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.022 W/kg ; SAR(10 g) = 0.008 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.0353 W/kg

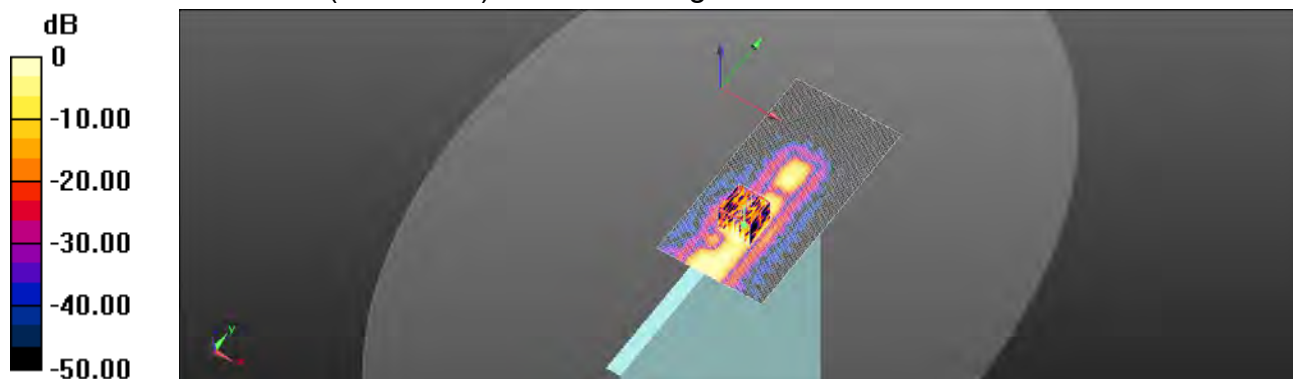

$0 \text{ dB} = 0.0353 \text{ W/kg} = -14.52 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.2G_Tablet Mode_Top Edge_CH 46_Tx2_0mm**

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.647$ S/m; $\epsilon_r = 35.646$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.983 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 1.38 W/kg

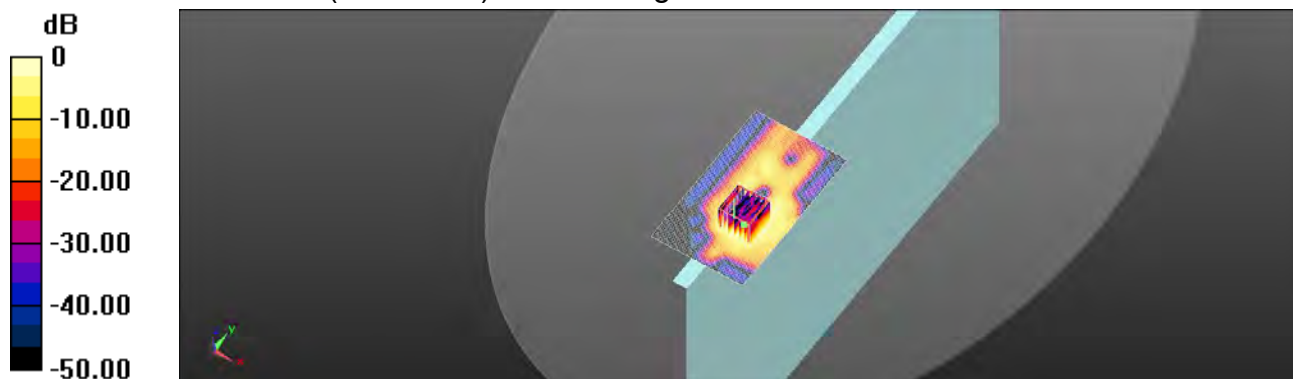

0 dB = 1.38 W/kg = 1.39 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. :ES/2021/C0024

WLAN 802.11n(40M) 5.2G_Book Mode_Left Edge_CH 46_Tx2_0mm

Communication System: WLAN; Frequency: 5230 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5230 \text{ MHz}$; $\sigma = 4.647 \text{ S/m}$; $\epsilon_r = 35.646$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C ; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 0.150 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.747 V/m ; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.041 W/kg ; SAR(10 g) = 0.00948 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.100 W/kg

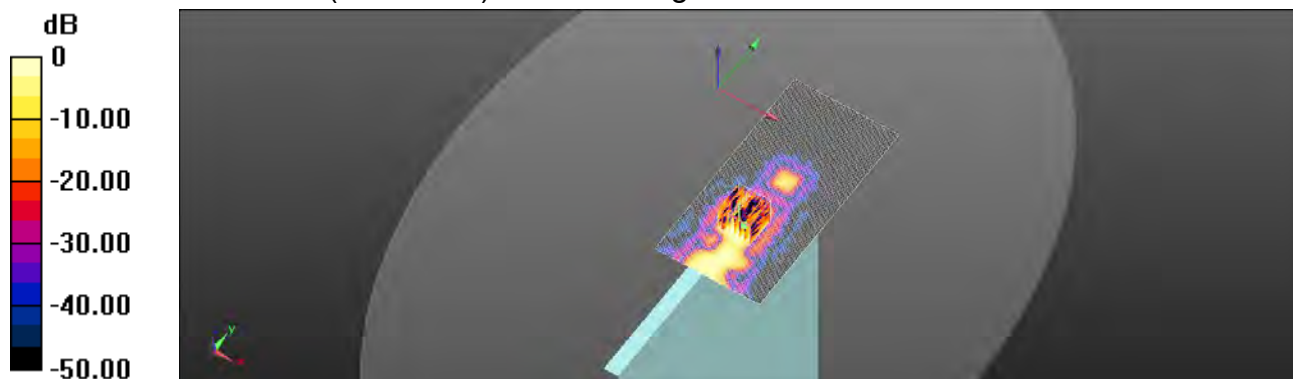

$0 \text{ dB} = 0.100 \text{ W/kg} = -9.98 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Tablet Mode_Top Edge_CH 54_Tx2_0mm**

Communication System: WLAN; Frequency: 5270 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 35.586$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.915 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.574 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.08 W/kg

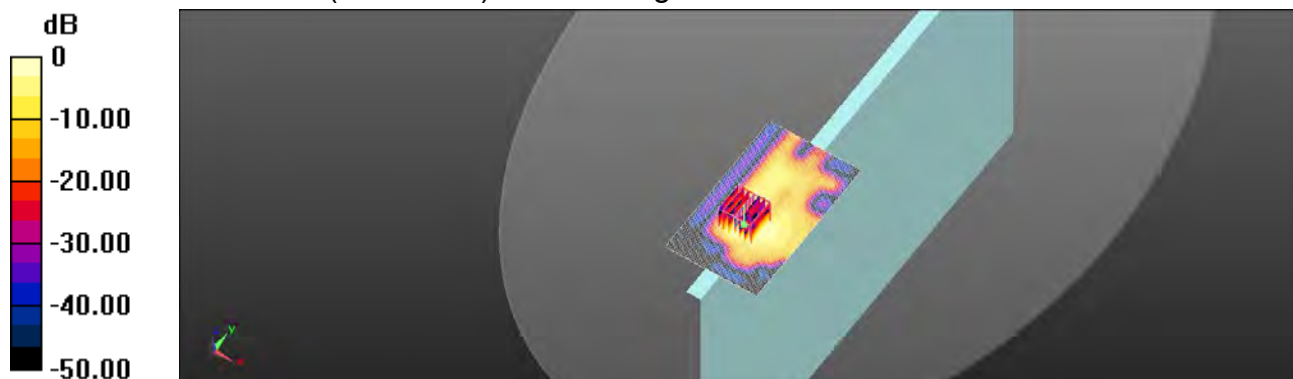

0 dB = 1.08 W/kg = 0.32 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. :ES/2021/C0024**WLAN 802.11n(40M) 5.3G_Book Mode_Left Edge_CH 54_Tx2_0mm**

Communication System: WLAN; Frequency: 5270 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 35.586$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.227 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.678 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.00636 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.0578 W/kg

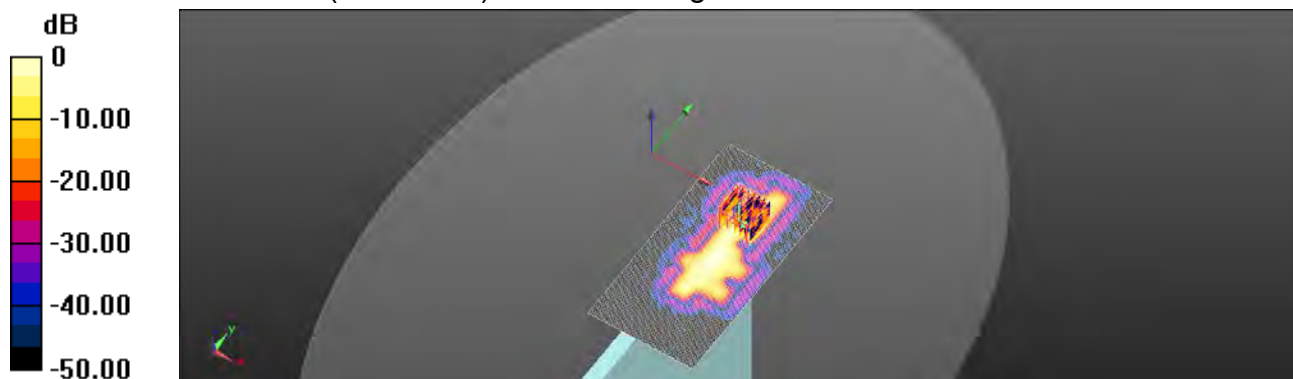

0 dB = 0.0578 W/kg = -12.38 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Tablet Mode_Top Edge_CH 106_Tx2_0mm**

Communication System: WLAN; Frequency: 5530 MHz; Duty Cycle: 1:1.236


Medium parameters used: $f = 5530 \text{ MHz}$; $\sigma = 4.955 \text{ S/m}$; $\epsilon_r = 35.299$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C ; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

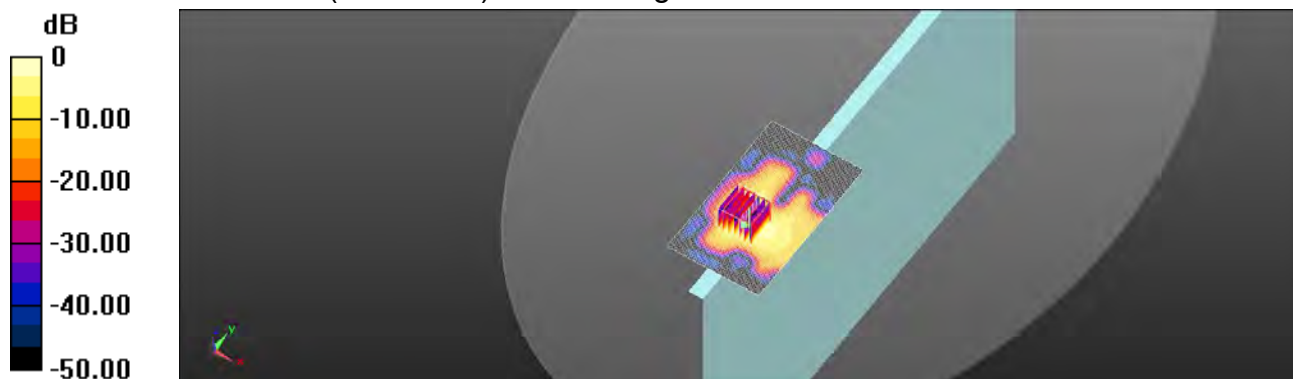Area Scan (71x121x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$ Maximum value of SAR (interpolated) = 1.88 W/kg **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 1.837 V/m ; Power Drift = 0.01 dB Peak SAR (extrapolated) = 6.17 W/kg **SAR(1 g) = 0.888 W/kg ; SAR(10 g) = 0.206 W/kg** Smallest distance from peaks to all points 3 dB below = 7.7 mm Ratio of SAR at M2 to SAR at M1 = 48.7% Maximum value of SAR (measured) = 2.20 W/kg  $0 \text{ dB} = 2.20 \text{ W/kg} = 3.43 \text{ dBW/kg}$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. :ES/2021/C0024**WLAN 802.11ac(80M) 5.6G_Book Mode_Left Edge_CH 106_Tx2_0mm**

Communication System: WLAN; Frequency: 5530 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5530$ MHz; $\sigma = 4.955$ S/m; $\epsilon_r = 35.299$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.123 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.646 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.017 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.141 W/kg

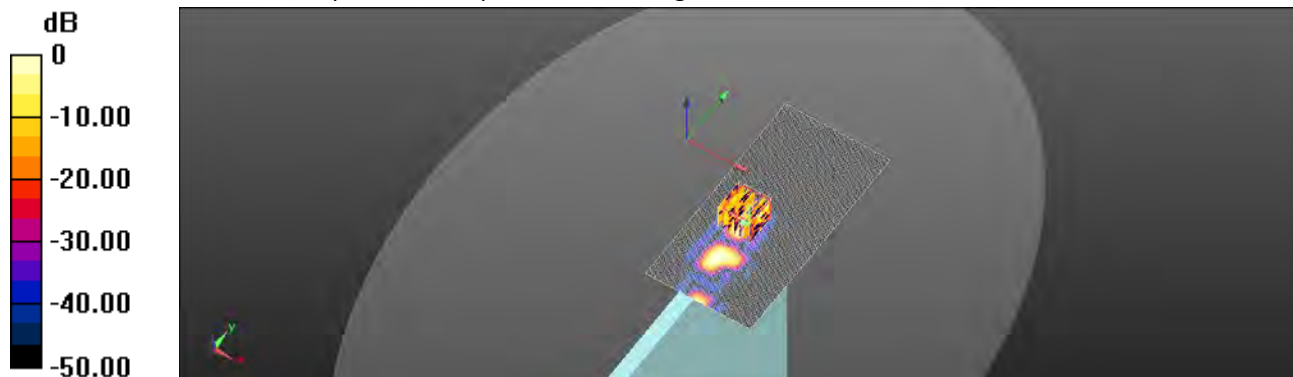

0 dB = 0.141 W/kg = -8.16 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Tablet Mode_Top Edge_CH 155_Tx2_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x121x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.668 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 4.50 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 1.41 W/kg

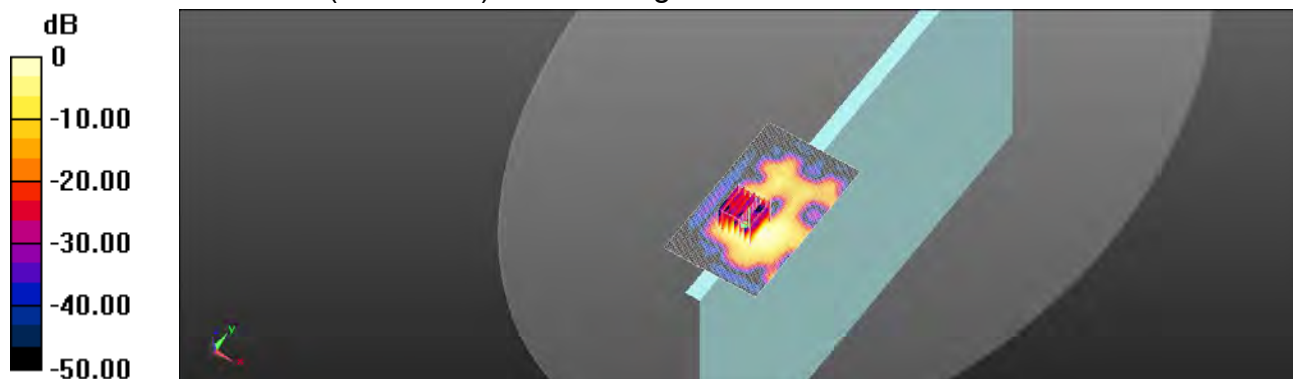

0 dB = 1.41 W/kg = 1.49 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. :ES/2021/C0024**WLAN 802.11ac(80M) 5.8G_Book Mode_Left Edge_CH 155_Tx2_0mm**

Communication System: WLAN; Frequency: 5775 MHz; Duty Cycle: 1:1.236

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.2$ S/m; $\epsilon_r = 35.016$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (81x161x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.142 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.115 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.142 W/kg

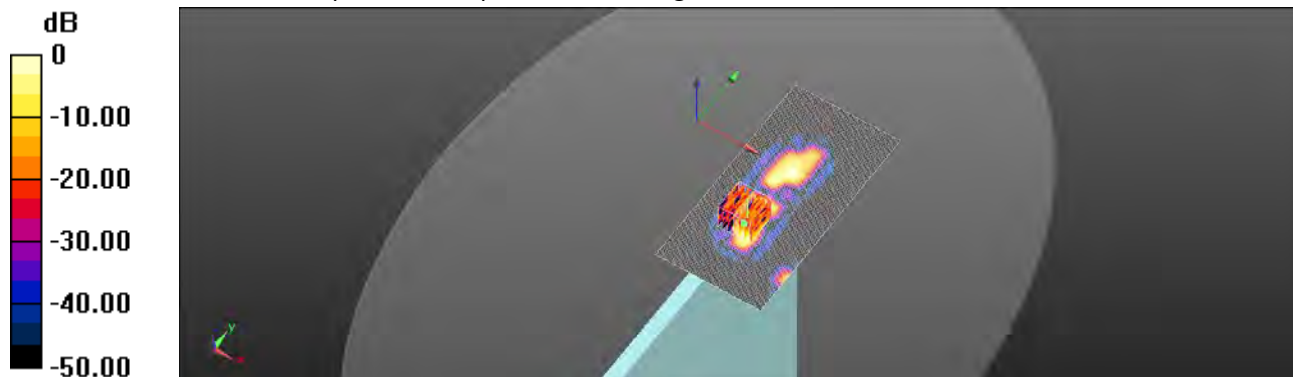

0 dB = 0.142 W/kg = -8.47 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6. SAR System Performance Verification

Date: 2022/1/7

Report No. : ES/2021/C0024

Dipole 2450 MHz_SN:727

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.783$ S/m; $\epsilon_r = 38.89$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 26.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.04 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 20.3 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.36 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 25.0 W/kg

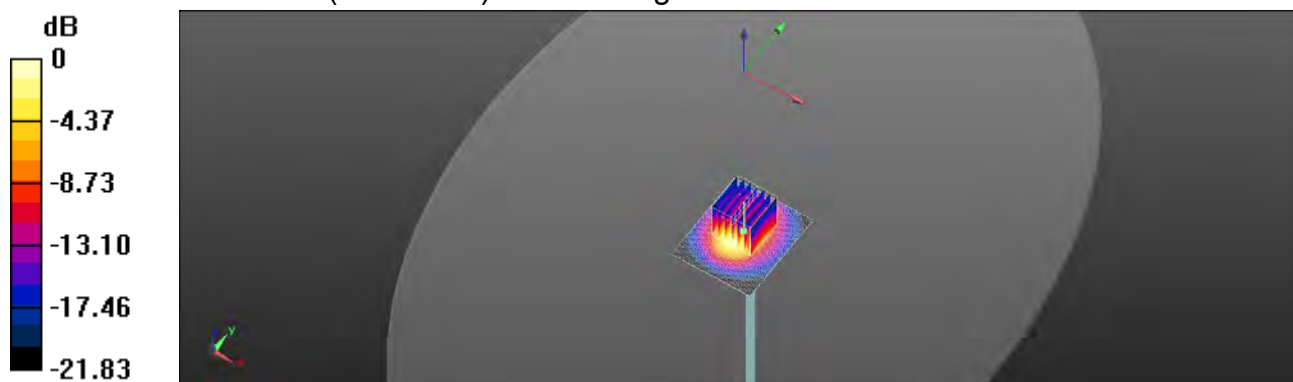

0 dB = 25.0 W/kg = 15.75 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/8

Report No. : ES/2021/C0024**Dipole 5200 MHz_SN:1040_**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.625$ S/m; $\epsilon_r = 35.694$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 14.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 67.41 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 27.7 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 15.4 W/kg

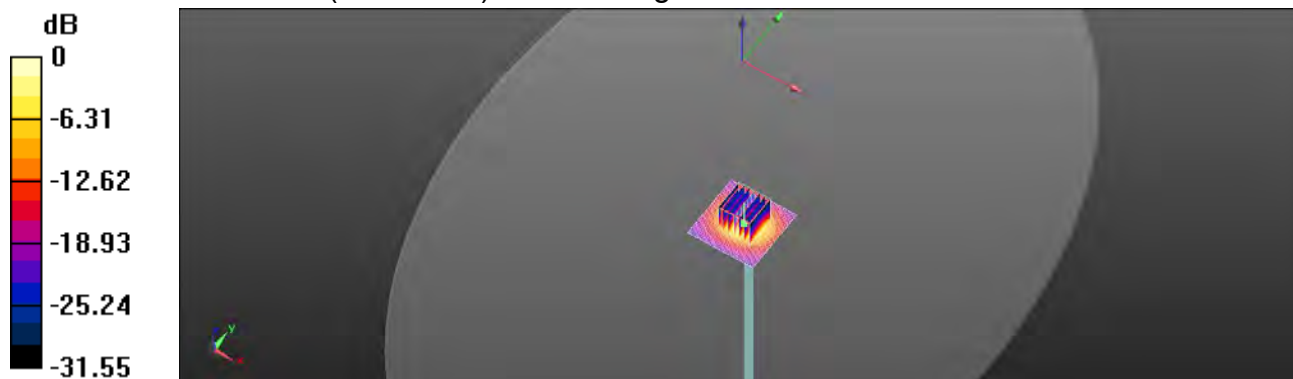

0 dB = 15.4 W/kg = 11.65 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/9

Report No. : ES/2021/C0024

Dipole 5300 MHz_SN:1040

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.718 \text{ S/m}$; $\epsilon_r = 35.556$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C ; Liquid temperature: 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: $dx=10 \text{ mm}$, $dy=10 \text{ mm}$

Maximum value of SAR (interpolated) = 15.8 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 49.92 V/m ; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 7.75 W/kg ; SAR(10 g) = 2.24 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 14.0 W/kg

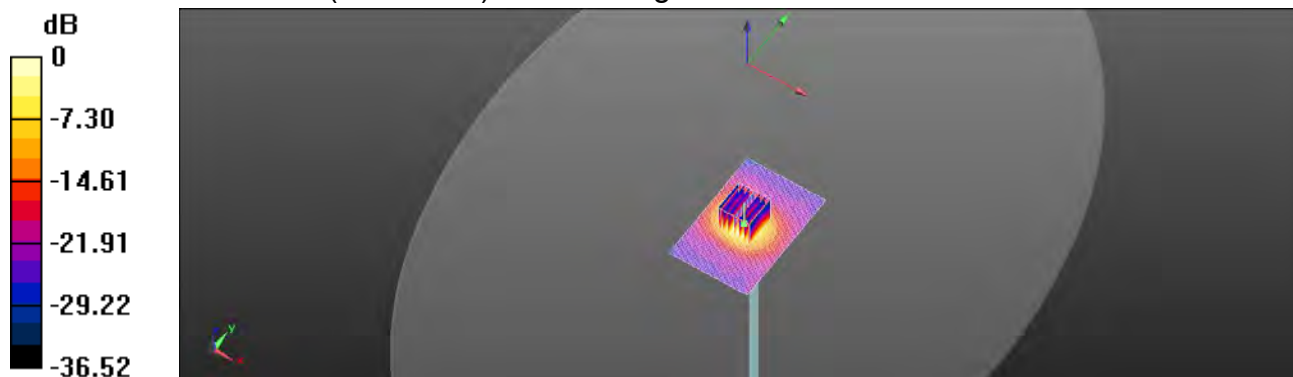

0 dB = 14.0 W/kg = 11.34 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/10

Report No. : ES/2021/C0024

Dipole 5600 MHz_SN:1040

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 35.234$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 19.1 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.25 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 35.9 W/kg

SAR(1 g) = 8.13 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 18.2 W/kg

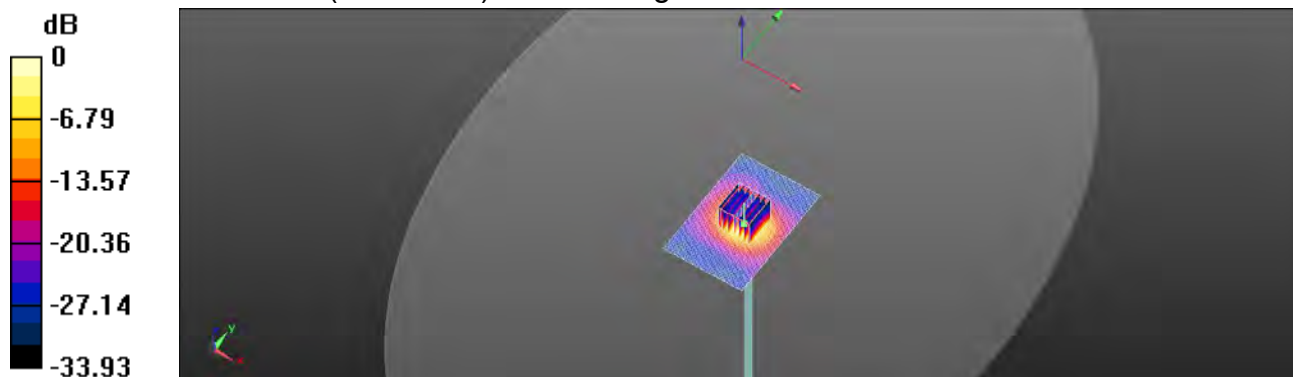

0 dB = 18.2 W/kg = 11.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Date: 2022/1/11

Report No. : ES/2021/C0024**Dipole 5800 MHz_SN:1040**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.229$ S/m; $\epsilon_r = 34.968$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn877; Calibrated: 2021/03/22
- Phantom: ELI
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 60.49 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 34.6 W/kg

SAR(1 g) = 7.85 W/kg; SAR(10 g) = 2.21 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 16.5 W/kg

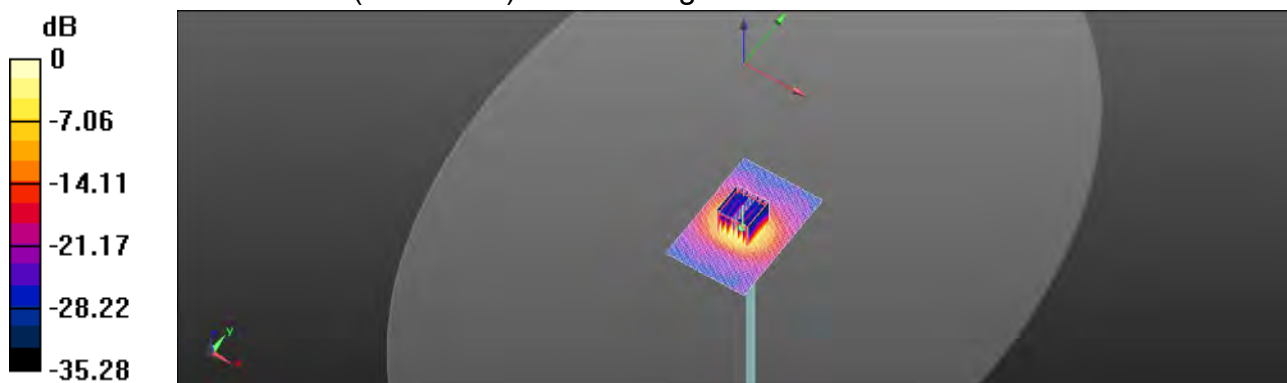

0 dB = 16.5 W/kg = 12.62 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

7. Uncertainty Budget

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	c	D	e		f	g	$h=c * f / e$	$i=c * g / e$	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	∞
<i>Isotropy , Axial</i>	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	$\sqrt{3}$	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	0.94%	N	1	1	0.64	0.43	0.60%	0.40%	M
Liquid Conductivity (mea.)	0.85%	N	1	1	0.6	0.49	0.51%	0.42%	M
Combined standard uncertainty		RSS					11.74%	11.72%	
Expant uncertainty (95% confidence)							23.49%	23.44%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	c	D	e		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probabili ty	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Veff
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
<i>Isotropy , Axial</i>	3.50%	R	$\sqrt{3}$	1.732	1	1	2.02%	2.02%	∞
<i>Isotropy, Hemispherical</i>	9.60%	R	$\sqrt{3}$	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	$\sqrt{3}$	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	$\sqrt{3}$	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	$\sqrt{3}$	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	$\sqrt{3}$	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	$\sqrt{3}$	1.732	1	1	1.01%	1.01%	∞
RF ambient condition - noise	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	$\sqrt{3}$	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	$\sqrt{3}$	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom	2.90%	R	$\sqrt{3}$	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	$\sqrt{3}$	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	$\sqrt{3}$	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup									
Phantom Uncertainty	4.00%	R	$\sqrt{3}$	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	0.83%	N	1	1	0.64	0.43	0.53%	0.36%	M
Liquid Conductivity (mea.)	1.04%	N	1	1	0.6	0.49	0.62%	0.51%	M
Combined standard uncertainty		RSS					11.45%	11.43%	
Expant uncertainty (95% confidence)							22.89%	22.85%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group

Appendixes

Refer to separated files for the following appendixes.

ES2021C0024 SAR_Appendix A Photographs

ES2021C0024 SAR_Appendix B DAE & Probe Cal. Certificate

ES2021C0024 SAR_Appendix C Phantom Description & Dipole Cal. Certificate

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw

Member of SGS Group