

***Specific Absorption Rate (SAR) Test Report***

for

**ZyXEL Communications Corporation**

on the

**802.11g Wireless USB Adapter**

**Model Number: ZyAIR G-220**

Test Report: EME-040444



Date of Report: May 19, 2004

Date of test: May 25, 2004

Total No of Pages Contained in this Report: 100



Accredited for testing to FCC Part 15

Tested by: Kevin Chen	
Reviewed by: Victor Wen	

Review Date: May 26, 2004

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, Taiwan Ltd.

## Table of Contents

1.0 Job Description .....	4
1.1 Client Information .....	4
1.2 Equipment under test (EUT) .....	4
1.3 Test plan reference .....	5
1.4 System test configuration .....	5
1.4.1 System block diagram & Support equipment .....	5
1.4.2 Test Position .....	6
1.4.3 Test Condition .....	6
1.5 Modifications required for compliance .....	7
1.6 Additions, deviations and exclusions from standards .....	7
2.0 SAR Evaluation .....	8
2.1 SAR Limits .....	8
2.2 Configuration Photograph .....	9
2.3 SAR measurement system .....	14
2.4 SAR measurement system validation .....	15
2.4.1 System Validation result .....	16
2.4.2 System Performance Check result .....	18
2.5 Test Result .....	21
3.0 Test Equipment .....	23
3.1 Equipment List .....	23
3.2 Tissue Simulating Liquid .....	24
3.2.1 Body Tissue Simulating Liquid for evaluation test .....	24
3.2.2 Head Tissue Simulating Liquid for System performance Check test .....	24
3.2.3 Body Liquid results .....	26
3.2.4 Head Liquid results .....	28
3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration .....	30
4.0 Measurement Uncertainty .....	31
5.0 Measurement Traceability .....	34
6.0 WARNING LABEL INFORMATION - USA .....	34
7.0 REFERENCES .....	35
8.0 DOCUMENT HISTORY .....	36
APPENDIX A - SAR Evaluation Data .....	37
APPENDIX B - Photographs .....	74
APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration Data .....	76

## STATEMENT OF COMPLIANCE

The ZyXEL sample device, model # ZyAIR G-220 was evaluated in accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01). Testing was performed at the Intertek Testing Services facility in Hsinchu, Taiwan.

For the evaluation, the dosimetric assessment system INDEXSAR SARA2 was used. The phantom employed was the box phantom of 2mm thick in one wall. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be  $\pm 20.6\%$ .

The device was tested at their maximum output power declared by the ZyXEL.

In summary, the maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Position	SAR <sub>1g</sub> , mW/g
2mm thick box phantom wall	802.11g high channel EUT bottom to the phantom, 0 mm separation	0.624 mW/g.

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for body configurations.

## 1.0 Job Description

### 1.1 Client Information

The ZyAIR G-110 has been tested at the request of:

**Company:** ZyXEL Communications Corporation  
No. 6, Innovation Rd II, Science-Based Industrial Park,  
Hsin-Chu, Taiwan

### 1.2 Equipment under test (EUT)

#### Product Descriptions:

<b>Equipment</b>	802.11g Wireless USB Adapter		
<b>Trade Name</b>	ZyXEL	<b>Model No:</b>	ZyAIR G-220
<b>FCC ID</b>	I88G220	<b>S/N No.</b>	Not Labeled
<b>Category</b>	Portable	<b>RF Exposure</b>	Uncontrolled Environment
<b>Frequency Band</b>	2412 – 2462 MHz	<b>System</b>	DSSS, OFDM

EUT Antenna Description			
<b>Type</b>	Ceramic	<b>Configuration</b>	Fixed
<b>Dimensions</b>	4.5 x 2 mm	<b>Gain</b>	0 dBi
<b>Location</b>	Embedded		

**Use of Product :** Wireless Data Communication

**Manufacturer:** ZyXEL

**Production is planned:** [X] Yes, [ ] No

**EUT receive date:** May 4, 2004

**EUT received condition:** Good operating condition prototype

**Test start date:** May 12, 2004

**Test end date:** May 25, 2004

### 1.3 Test plan reference

FCC Rule: Part 2.1093, FCC's OET Bulletin 65 Supplement C (Edition 01-01) and IEEE 1528

### 1.4 System test configuration

#### 1.4.1 System block diagram & Support equipment

Support Equipment				
Item #	Equipment	Brand	Model No.	S/N
1	Notebook	DELL	PP01L	CN-03P83-48643-33O-3930



### 1.4.2 Test Position

See the photographs as section 2.2

### 1.4.3 Test Condition

During tests the worst-case data (max RF coupling) was determined with following conditions:

Usage	Operates with a portable computer	Distance between antenna axis at the joint and the liquid surface:	Laptop is touching the Phantom in bottom position, perpendicular to phantom 0mm and 15mm	
Simulating human Head/ Body/Hand	Body	EUT Battery	Device is powered from host computer through battery.	
802.11b Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	19.56	19.55
	Mid Channel - 6	2437	17.22	17.22
	High Channel- 11	2462	17.95	17.96
802.11g Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	19.47	19.45
	Mid Channel - 6	2437	16.42	16.44
	High Channel- 11	2462	17.88	17.89

The spatial peak SAR values were assessed for lowest, middle and highest operating channels, defined by the manufacturer.

The conducted output power was measured before and after the test using a diode detector, oscilloscope and signal generator.

The EUT was transmitted continuously during the test.

After verifying the maximum output power, we found the maximum output power was occurred at 11Mbps data rate for the 802.11b function and 24Mbps data rate for the 802.11g.

All the test data were performed under the above transmission rate.

### **1.5 Modifications required for compliance**

Intertek Testing Services implemented no modifications.

### **1.6 Additions, deviations and exclusions from standards**

The phantom employed was the box phantom of 2mm thick in vertical wall.

## 2.0 SAR Evaluation

### 2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

<b>EXPOSURE</b> <b>(General Population/Uncontrolled Exposure environment)</b>	<b>SAR</b> <b>(W/kg)</b>
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00



## 2.2 Configuration Photograph

### SAR Measurement Test Setup

#### Test System




**SAR Measurement Test Setup**

**Bottom side of Laptop facing phantom touching**




**Bottom side of Laptop facing phantom touching**

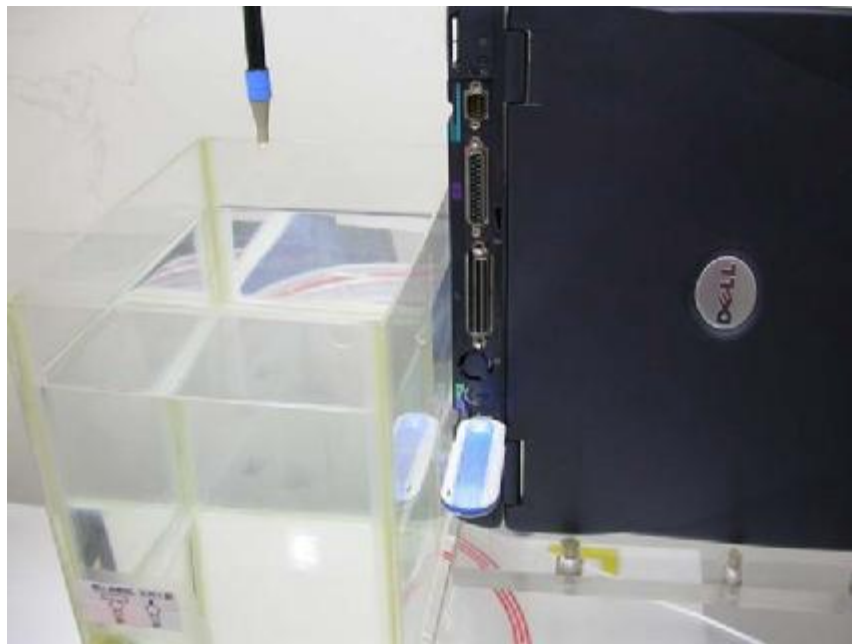

**SAR Measurement Test Setup**

**Bottom side of Laptop facing phantom touching**

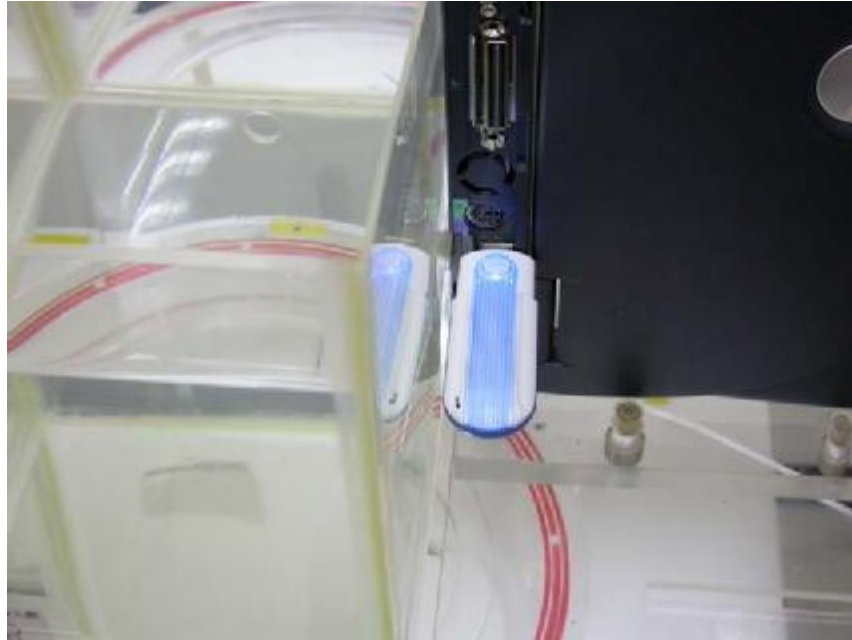


**SAR Measurement Test Setup**

**EUT perpendicular to phantom, 0 mm separation**



**EUT perpendicular to phantom, 0 mm separation**

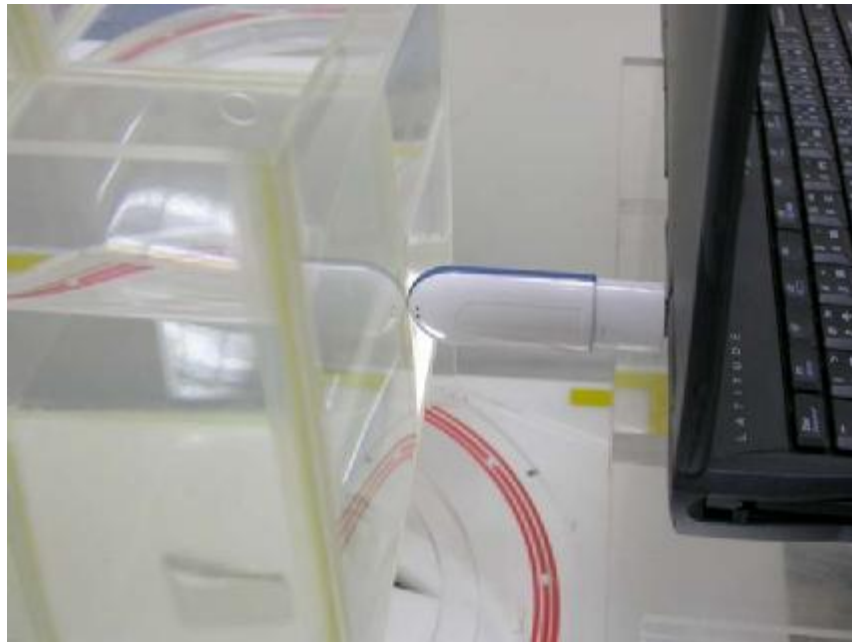


**SAR Measurement Test Setup**

**EUT perpendicular to phantom, 15 mm separation**



**EUT perpendicular to phantom, 15 mm separation**

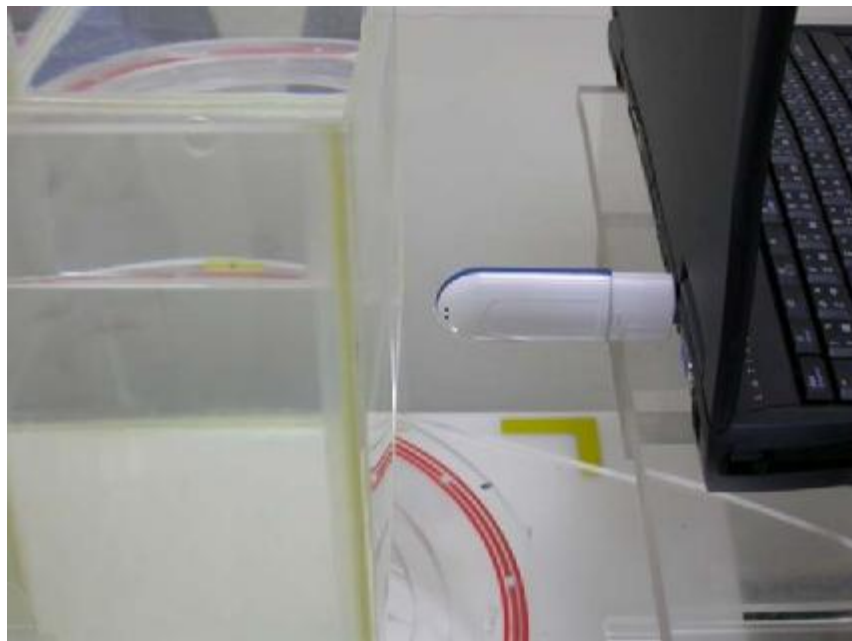

## 2.3 SAR measurement system

### Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

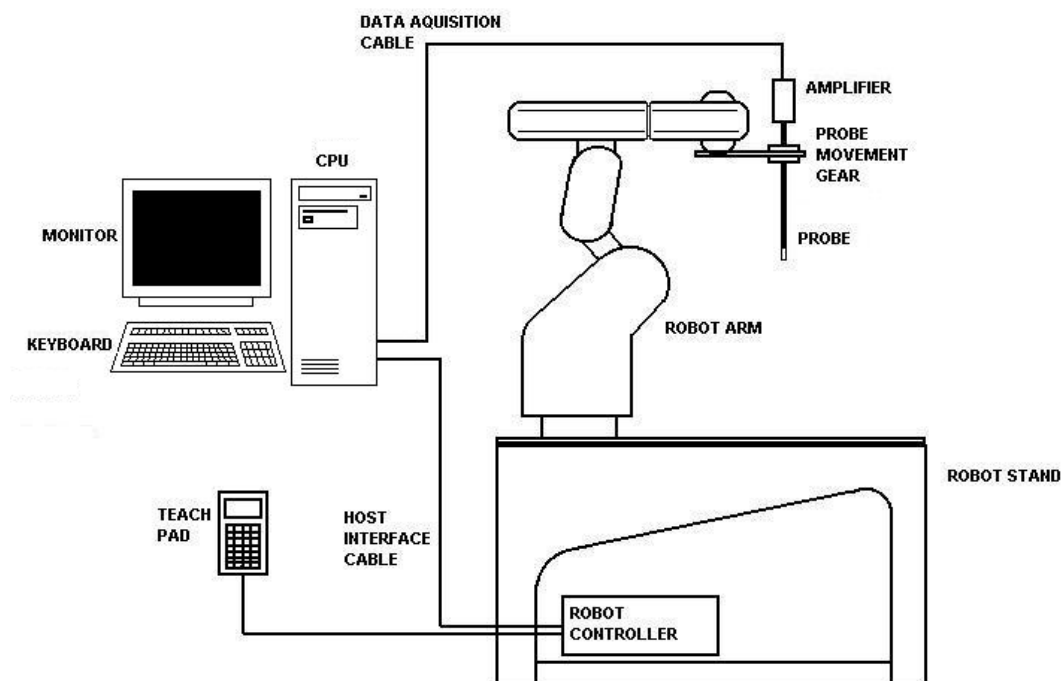


Figure 1: Schematic diagram of the SAR measurement system

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.02mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell. In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

The first 2 measurements points in a direction perpendicular to the surface of the phantom during the zoom scan and closest to the phantom surface, were only 3.5mm and the probe is kept at greater than half a diameter from the surface.

## 2.4 SAR measurement system validation

Prior to the assessment, the system was verified to the  $\pm 10\%$  of the specifications by using the system validation equipments. The validation was performed at 2450 MHz on the bottom side of box phantom.

### Procedures

The SAR evaluation was performed with the following procedures:

- a. The SAR distribution was measured at the exposed side of the bottom of the box phantom and was measured at a distance of 8 mm from the inner surface of the shell. The feed power was 1/5W.
- b. The dimension for this cube is 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
  - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 5 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - ii) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
  - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

The test scan procedure for system validation also apply to the general scan procedure except for the set-up position. For general scan, the EUT was placed at the side of phantom. For validation scan, the dipole antenna was placed at the bottom of phantom

**2.4.1 System Validation result**


System Validation (2450 MHz Head)				
Frequency MHz	Operating Mode	Target SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)	Deviation (±10%)
2450	CW	52.4	54.688	4.37%

Please see the plot below:



<b>Date:</b>	2003/10/15	<b>Position:</b>	Bottom
<b>Filename:</b>	2450val10-15.txt	<b>Phantom:</b>	Box1.csv
<b>Device Tested:</b>	SARA2 system	<b>Head Rotation:</b>	0
<b>Antenna:</b>	2450dipole	<b>Test Frequency:</b>	2450MHz
<b>Shape File:</b>	none.csv	<b>Power Level:</b>	24dBm /CW

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_HEAD	<b>Type:</b>	2450MHz Head
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.80379
		<b>Relative Permittivity:</b>	38.1223
		<b>Liquid Temp (deg C):</b>	23.3
		<b>Ambient Temp (deg C):</b>	24
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	50
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries Replaced:</b>	-	<b>Software Version:</b>	0.421N

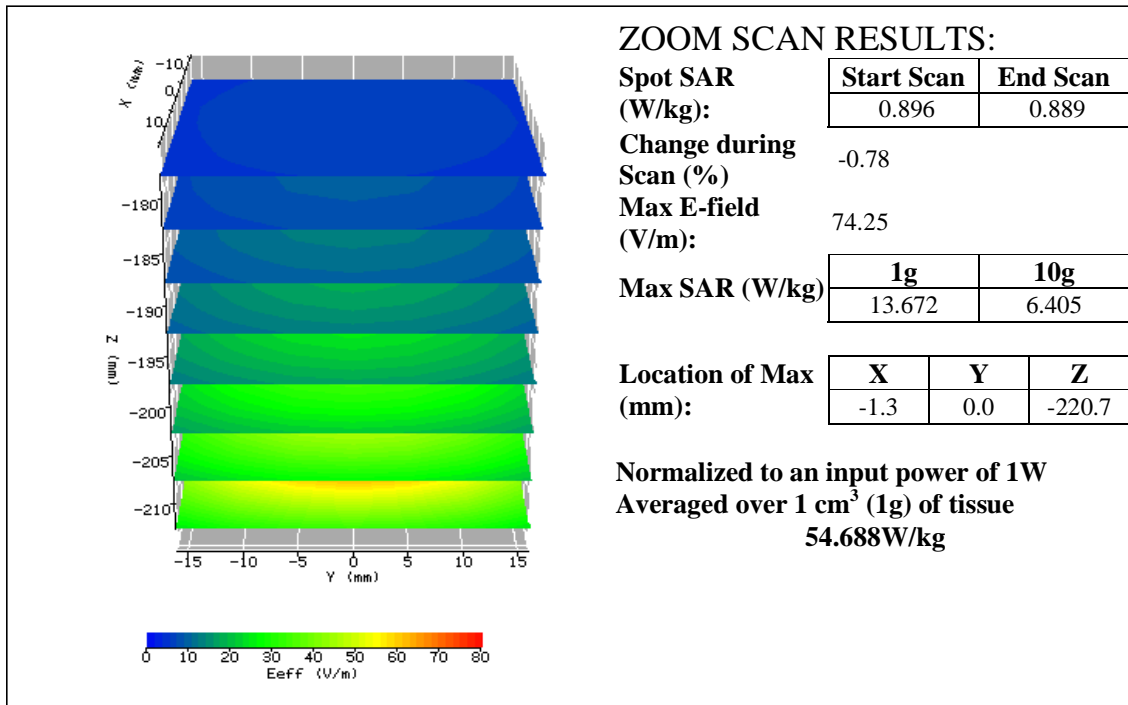

## 2.4.2 System Performance Check result

5/11/2004

System Validation (2450 MHz Head)				
Frequency MHz	Operating Mode	Target SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)	Deviation (±10%)
2450	CW	52.4	51.705	-1.33%

5/24/2004


System Validation (2450 MHz Head)				
Frequency MHz	Operating Mode	Target SAR <sub>1g</sub> (mW/g)	Measured SAR <sub>1g</sub> (mW/g)	Deviation (±10%)
2450	CW	52.4	49.115	-6.27%

Please see the plot below:

<b>Date:</b>	2004/5/11	<b>Position:</b>	bottom of phantom
<b>Filename:</b>	2450 performance check	<b>Phantom:</b>	HeadBox1-val..csv
<b>Device Tested:</b>	2450 performance check	<b>Head Rotation:</b>	0
<b>Antenna:</b>	2450 dipole antenan	<b>Test Frequency:</b>	2450MHz
<b>Shape File:</b>	none.csv	<b>Power Level:</b>	23 dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_HEAD			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.378	.378	.378
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Head
<b>Conductivity:</b>	1.832
<b>Relative Permittivity:</b>	38.196
<b>Liquid Temp (deg C):</b>	23.1
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3 VPM

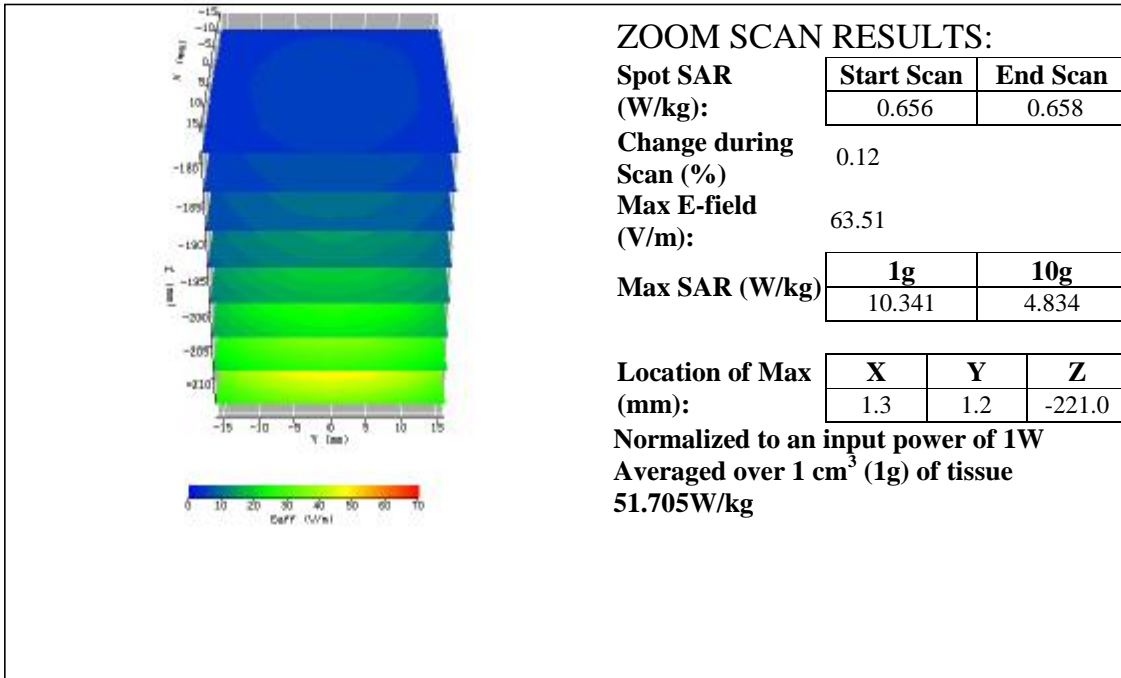

<b>Date / Time:</b>	2004/5/24	<b>Position:</b>	Bottom of phantom
<b>Filename:</b>	2450 performance check	<b>Phantom:</b>	HeadBox1-val..csv
<b>Device Tested:</b>	2450 performance check	<b>Head Rotation:</b>	0
<b>Antenna:</b>	2450 MHz dipole	<b>Test Frequency:</b>	2450MHz
<b>Shape File:</b>	none.csv	<b>Power Level:</b>	23dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_HEAD			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.378	.378	.378
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Head
<b>Conductivity:</b>	1.83561
<b>Relative Permittivity:</b>	38.2207
<b>Liquid Temp (deg C):</b>	23.0
<b>Ambient Temp (deg C):</b>	23.0
<b>Ambient RH (%):</b>	45
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3 VPM

3D surface plot showing the electric field (E-field) distribution in a rectangular volume. The plot is color-coded, with a scale bar at the bottom indicating values from 0 to 70 V/m. The axes are labeled X (mm), Y (mm), and Z (mm). The Z-axis ranges from -210 to -10.7, the Y-axis from -15 to 15, and the X-axis from -15 to 15. The plot shows a high-intensity region (yellow/red) at the bottom center, which tapers off towards the top.

## ZOOM SCAN RESULTS:

**Spot SAR**

(W/kg):

**Start Scan**

0.667

**End Scan**

0.669

**Change during**

0.35

**Scan (%)**

**Max E-field**

63.00

(V/m):

**Max SAR (W/kg)**

**1g**

9.823

**10g**

4.647

**Location of Max**

(mm):

**X**

0.0

**Y**

0.0

**Z**

-222.0

**Normalized to an input power of 1W**

**Averaged over 1 cm<sup>3</sup> (1g) of tissue**

**49.115W/kg**

## 2.5 Test Result

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

### Measurement Results

<b>Trade Name:</b>	ZyXEL	<b>Model No.:</b>	ZyAIR G-220
<b>Serial No.:</b>	Not Labeled	<b>Test Engineer:</b>	Kevin Chen
<b>TEST CONDITIONS</b>			
<b>Ambient Temperature</b>	23 °C	<b>Relative Humidity</b>	48 %
<b>Test Signal Source</b>	Test Mode	<b>Signal Modulation</b>	DSSS
<b>Output Power Before SAR Test</b>	See page 6	<b>Output Power After SAR Test</b>	See page 6
<b>Test Duration</b>	23 min. each scan	<b>Number of Battery Change</b>	1

Test Mode: 802.11b operation mode (DSSS Modulation)

<b>EUT Position</b>						
<b>Channel (MHz)</b>	<b>Operating Mode</b>	<b>Crest Factor</b>	<b>Description</b>	<b>Distance (mm)</b>	<b>Measured SAR<sub>1g</sub> (mW/g)</b>	<b>Plot Number</b>
2412	DSSS	1	Bottom to phantom	0	0.268	1
2412	DSSS	1	Perpendicular to phantom	0	0.181	2
2412	DSSS	1	Perpendicular to phantom	15	0.036	3
2437	DSSS	1	Bottom to phantom	0	0.418	4
2437	DSSS	1	Perpendicular to phantom	0	0.192	5
2437	DSSS	1	Perpendicular to phantom	15	0.036	6
2462	DSSS	1	Bottom to phantom	0	0.362	7
2462	DSSS	1	Perpendicular to phantom	0	0.201	8
2462	DSSS	1	Perpendicular to phantom	15	0.042	9

Note: 1. The distance from bottom of EUT to flat phantom is 3 mm.  
2. Configuration at middle channel with more than -3dB of applicable limit.

Test Mode: 802.11g operation mode (OFDM Modulation)

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR <sub>1g</sub> (mW/g)	Plot Number
2412	DSSS	1	Bottom to phantom	0	0.530	10
2412	DSSS	1	Perpendicular to phantom	0	0.298	11
2412	DSSS	1	Perpendicular to phantom	15	0.059	12
2437	DSSS	1	Bottom to phantom	0	0.585	13
2437	DSSS	1	Perpendicular to phantom	0	0.320	14
2437	DSSS	1	Perpendicular to phantom	15	0.064	15
2462	DSSS	1	Bottom to phantom	0	0.624	16
2462	DSSS	1	Perpendicular to phantom	0	0.330	17
2462	DSSS	1	Perpendicular to phantom	15	0.068	18

Note: 1. The distance from bottom of EUT to flat phantom is 3 mm.  
2. Configuration at middle channel with more than -3dB of applicable limit.

### 3.0 Test Equipment

#### 3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the INDEXSAR SARA2 SYSTEM.

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	LAST CAL. DATE
Balanced Validation dipole	2450MHz	0048	03/26/2003
Controller	Mitsubishi CR-E116	F1008007	N/A
Robot	Mitsubishi RV-E2	EA009002	N/A
	Repeatability: $\pm 0.04$ mm; Number of Axes: 6		
E-Field Probe	IXP-050	0136	09/10/2003
	Frequency Range: Probe outer diameter: 5.2 mm; Length: 350 mm; Distance between the probe tip and the dipole center: 2.7 mm		
Data Acquisition	SARA2	N/A	N/A
	Processor: Pentium 4; Clock speed: 1.5GHz; OS: Windows XP; I/O: two RS232; Software: SARA2 ver. VPM2p3		
Phantom	2mm wall thickness box phantom	N/A	N/A
	Shell Material: clear Perspex; Thickness: $2 \pm 0.1$ mm; Capacity: 152.5 x 215.5 x 200 (W x L x D) mm <sup>3</sup> ; Dielectric constant: less than 2.85 above 500MHz;		
Device holder	Material: clear Perspex; Dielectric constant: less than 2.85 above 500MHz	N/A	N/A
Simulated Tissue	Mixture	N/A	5/11/2004, 5/24/2004
	Please see section 3.2 for details		
RF Power Meter	Boonton 4231A with 51011-EMC power sensor	79401-32482	03/21/2004
	Frequency Range: 0.03 to 8 GHz, <24dBm		
Vector Network Analyzer	HP 8753B HP 85046A	2807J04037 2729A01958	07/04/2003
	300k to 3GHz		
Signal Generator	R&S SMR27	100036	09/19/2003
	10M to 27GHz, <120dBuV		
Crystal Detector	Agilent 8472B	MY42240243	N/A
	10MHz to 18GHz		
Two Channel Digital Storage Oscilloscope	Tektronix TDS1012	C031679	08/16/2003

### 3.2 Tissue Simulating Liquid

#### 3.2.1 Body Tissue Simulating Liquid for evaluation test

Body Ingredients Frequency (2.45 GHz)	
DGBE (Dilethylene Glycol Butyl Ether)	26.7%
Salt	0.04%
Water	73.2%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

5/12/2004

Frequency (MHz)	Temp. (°C)	e <sub>r</sub> / Relative Permittivity			s / Conductivity (mho/m)			r *(kg/m <sup>3</sup> )
2450	22.5	measured	target	△(±5%)	measured	target	△(±5%)	1000
		50.616	52.7	-3.95%	1.975	1.95	1.28%	

\* Worst-case assumption

5/24/2004

Frequency (MHz)	Temp. (°C)	e <sub>r</sub> / Relative Permittivity			s / Conductivity (mho/m)			r *(kg/m <sup>3</sup> )
2450	22.4	measured	target	△(±5%)	measured	target	△(±5%)	1000
		50.524	52.7	-4.13%	1.977	1.95	1.38%	

\* Worst-case assumption

#### 3.2.2 Head Tissue Simulating Liquid for System performance Check test

Head Ingredients Frequency (2.45 GHz)	
DGBE (Dilethylene Glycol Butyl Ether)	53.3%
Water	46.7%

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

5/11/2004

Frequency (MHz)	Temp. (°C)	e <sub>r</sub> / Relative Permittivity			s / Conductivity (mho/m)			r *(kg/m <sup>3</sup> )
2450	23.6	measured	target	△(±5%)	measured	target	△(±5%)	1000
		38.196	39.2	-2.56%	1.832	1.80	1.78%	

\* Worst-case assumption




5/24/2004

Frequency (MHz)	Temp. (°C)	e <sub>r</sub> / Relative Permittivity			s / Conductivity (mho/m)			ρ *(kg/m <sup>3</sup> )
2450	23.6	measured	target	△(±5%)	measured	target	△(±5%)	1000
		38.221	39.2	-2.50%	1.836	1.80	2.00%	


\* Worst-case assumption

### 3.2.3 Body Liquid results

Date: 12 May 2004	Temperature: 22.5 °C	Type: 2450 MHz/ body (FCC)	Tested by: Kevin
2410, 49.8731446414, -2.0097702209		2450, 50.6161744677, -1.9754652073	
2411, 49.9112093915, -2.004877794		2451, 50.6663798111, -1.9764179804	
2412, 49.9286569706, -2.0032895457		2452, 50.6162952412, -1.9838350742	
2413, 49.921316844, -1.9982130714		2453, 50.6779148886, -1.9756196253	
2414, 49.927382284, -1.9956066876		2454, 50.7040448497, -1.9809000179	
2415, 49.8880524043, -1.9944729458		2455, 50.7444712914, -1.9806639593	
2416, 49.8904163695, -1.983220545		2456, 50.7332261859, -1.9880432896	
2417, 49.923487161, -1.9867488351		2457, 50.7802528831, -1.9940196162	
2418, 49.9258528054, -1.982435087		2458, 50.7273680686, -1.9911111707	
2419, 49.9551139712, -1.9782099525		2459, 50.8070368783, -1.9980889919	
2420, 49.917934251, -1.9784514365		2460, 50.8337892833, -2.0045443128	
2421, 49.9698751296, -1.9733770615		2461, 50.8877589717, -2.0064662814	
2422, 49.960099717, -1.9641280452		2462, 50.8714754551, -2.0113893951	
2423, 49.9796048043, -1.9687209839		2463, 50.8658507828, -2.0112423402	
2424, 50.0341630308, -1.9742614973		2464, 50.9123694234, -2.0122454418	
2425, 50.0384182148, -1.964567663		2465, 50.9138911311, -2.0172839375	
2426, 50.031061952, -1.9639539711		2466, 50.9001966111, -2.0310633493	
2427, 50.0526015716, -1.9660443966		2467, 50.955926925, -2.0268962334	
2428, 50.0985955956, -1.9610304384		2468, 50.9853408231, -2.0315984398	
2429, 50.1268020268, -1.958007012		2469, 50.9759241685, -2.0347672535	
2430, 50.1366070239, -1.9609513676		2470, 50.9797019759, -2.0490957478	
2431, 50.1286881689, -1.9587576979		2471, 51.0222079591, -2.0462318785	
2432, 50.1377027048, -1.9565637272		2472, 50.9647351964, -2.0500725617	
2433, 50.2018320486, -1.9537892979		2473, 51.0035102736, -2.0501932978	
2434, 50.2012830915, -1.9585284217		2474, 51.0059270953, -2.0592423645	
2435, 50.2264349572, -1.9564288449		2475, 51.0414754748, -2.0658901649	
2436, 50.2277164646, -1.9573464538		2476, 51.0037455701, -2.0650215526	
2437, 50.288863061, -1.9551762161		2477, 51.0543353387, -2.0750207967	
2438, 50.3171766162, -1.9570084232		2478, 51.0242957864, -2.0787139572	
2439, 50.3759825384, -1.9546137024		2479, 51.0423557204, -2.0840241438	
2440, 50.3999358517, -1.9536160101		2480, 51.0442162143, -2.0868795115	
2441, 50.4131007941, -1.9579992608		2481, 51.046076776, -2.0915639502	
2442, 50.4307422949, -1.9569706517		2482, 51.0753751596, -2.0998890189	
2443, 50.4600185674, -1.959766283		2483, 51.0503472052, -2.1017645944	
2444, 50.4581792997, -1.9614340015		2484, 51.024773553, -2.0970022534	
2445, 50.4965689782, -1.9641112702		2485, 51.0566720485, -2.112876318	
2446, 50.5399616137, -1.966385606		2486, 51.0615725446, -2.1136007118	
2447, 50.5703201147, -1.9629826867		2487, 51.0476522761, -2.1245679821	
2448, 50.6210335047, -1.9676438113		2488, 51.0202202869, -2.130823991	
2449, 50.6204799637, -1.971685263		2489, 51.0577005467, -2.1321836205	
		2490, 50.9613723025, -2.1420860539	

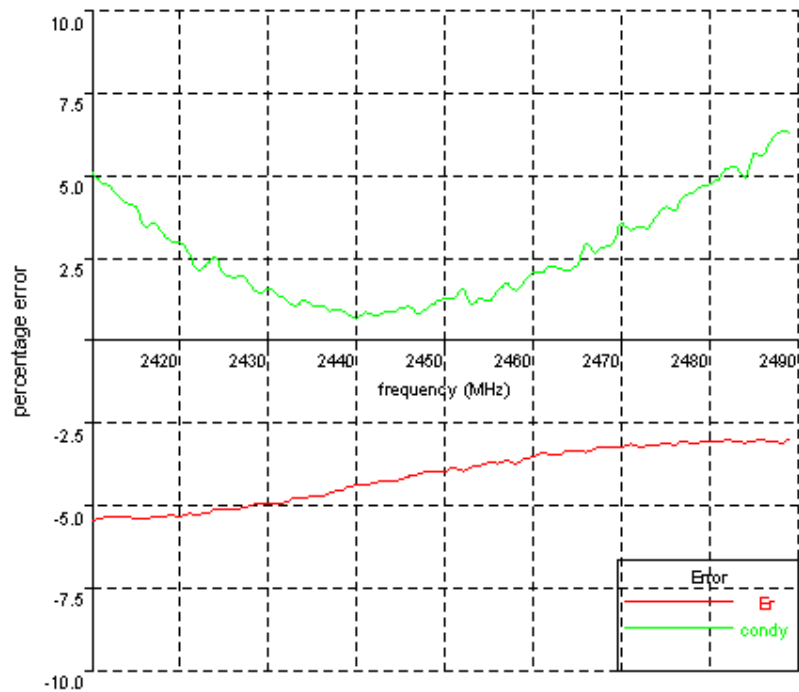


Date: 24 May 2004	Temperature: 22.4 °C	Type: 2450 MHz/ body (FCC)	Tested by: Kevin
2410, 49.7907667869, -2.0148129777 2411, 49.7907667869, -2.0075619632 2412, 49.7797330248, -2.0047516198 2413, 49.7932986339, -2.000453925 2414, 49.7802321303, -2.0055854041 2415, 49.7991224474, -1.9946690604 2416, 49.8132380481, -1.9875612809 2417, 49.8280840931, -1.9891167365 2418, 49.7703680671, -1.9858172295 2419, 49.8234266639, -1.9885872624 2420, 49.8161020074, -1.9786781317 2421, 49.845239481, -1.9793947505 2422, 49.9155016812, -1.9762493591 2423, 49.8664865411, -1.9727654518 2424, 49.8885008378, -1.9710110713 2425, 49.8927436338, -1.9691406993 2426, 49.9503253376, -1.9669825546 2427, 49.9466230016, -1.9701889142 2428, 49.9411005869, -1.9621025812 2429, 50.0048144231, -1.961314387 2430, 50.0186601528, -1.9608143263 2431, 50.0304671956, -1.9598164439 2432, 50.0980083263, -1.9562135396 2433, 50.0848984085, -1.9624899845 2434, 50.1216915661, -1.9574522276 2435, 50.1534713384, -1.9586662923 2436, 50.2010036312, -1.9573022835 2437, 50.1670309151, -1.9589852034 2438, 50.2426912091, -1.958245247 2439, 50.2426912091, -1.9550327413 2440, 50.2858656827, -1.9574436485 2441, 50.2963902456, -1.9640420718 2442, 50.2797461454, -1.9598148513 2443, 50.3915276554, -1.9634812955 2444, 50.3735059422, -1.9632723815 2445, 50.3852129834, -1.9666841743 2446, 50.4192077305, -1.9677928623 2447, 50.4481463167, -1.9697559667 2448, 50.4537240489, -1.9756219468 2449, 50.5093521485, -1.9743202668		<b>2450, 50.5243872854, -1.9765774</b> 2451, 50.5491482778, -1.9768739184 2452, 50.5690677041, -1.9869958192 2453, 50.5969857356, -1.9835769396 2454, 50.5807952632, -1.9888431434 2455, 50.6626971452, -1.9907520354 2456, 50.6850629408, -1.9941279669 2457, 50.7042966179, -1.9919828988 2458, 50.6808055412, -1.9995525789 2459, 50.6927688852, -2.0059690886 2460, 50.7084315632, -2.010114893 2461, 50.7894293527, -2.0122429927 2462, 50.7227123986, -2.0138025291 2463, 50.7657442338, -2.0196583705 2464, 50.7937708459, -2.0223350152 2465, 50.8074275569, -2.026803549 2466, 50.8516433756, -2.0230135497 2467, 50.8409304661, -2.0329411647 2468, 50.8221922906, -2.0431653766 2469, 50.8195987531, -2.0457795032 2470, 50.9069593082, -2.0475339844 2471, 50.8558583522, -2.0489958336 2472, 50.8877050149, -2.0587015337 2473, 50.9325476313, -2.0583975761 2474, 50.9663092189, -2.0650956782 2475, 50.8621983561, -2.0673476329 2476, 50.8921331014, -2.0740439401 2477, 50.9220669957, -2.0788456433 2478, 50.9507370564, -2.0820623201 2479, 50.9215009911, -2.0889118625 2480, 50.9782022819, -2.0934231672 2481, 50.9274009693, -2.1013474205 2482, 50.9985694336, -2.1066838399 2483, 50.9364663102, -2.1019336779 2484, 50.9171361386, -2.1111307269 2485, 50.9492160849, -2.1178165197 2486, 50.8871730611, -2.1333314454 2487, 50.9028958046, -2.1282379629 2488, 50.9734726293, -2.1405124323 2489, 50.9095443468, -2.1412140476 2490, 50.88707108, -2.1430459865	

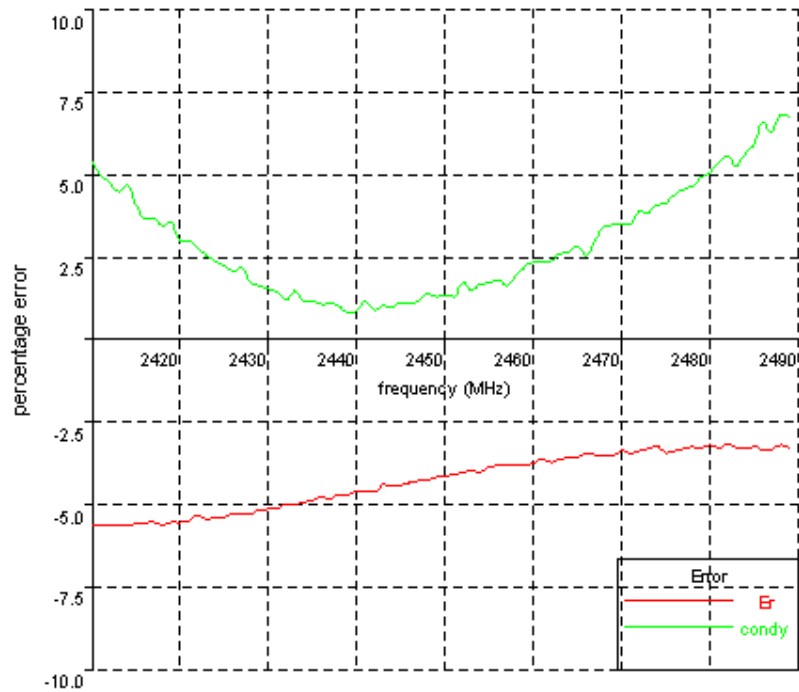


## 3.2.4 Head Liquid results

Date: 11 May 2004	Temperature: 23.6 °C	Type: 2450 MHz/ head (FCC)	Tested by: Kevin
2410, 37.5961239001, -1.8485892442		2450, 38.1961055007, -1.8323509876	
2411, 37.5845045409, -1.8516751681		2451, 38.2190035921, -1.8373431343	
2412, 37.571063052, -1.8492875158		2452, 38.2884712072, -1.8359414331	
2413, 37.58988692, -1.8465638055		2453, 38.29554181, -1.8378384055	
2414, 37.6001306413, -1.8478728951		2454, 38.2837062905, -1.843484389	
2415, 37.6157700182, -1.8432164947		2455, 38.2949765884, -1.8510753465	
2416, 37.6226714487, -1.8407646837		2456, 38.2903237487, -1.8521893608	
2417, 37.61200357, -1.8376554594		2457, 38.2978134848, -1.8533583388	
2418, 37.61200357, -1.8356439248		2458, 38.3869057234, -1.8564104293	
2419, 37.6212933761, -1.8400586417		2459, 38.3538706589, -1.8583693078	
2420, 37.6730433103, -1.832825081		2460, 38.3633436991, -1.8633118417	
2421, 37.6370101214, -1.8315794045		2461, 38.364742043, -1.8634728041	
2422, 37.6874079688, -1.8336820059		2462, 38.3637631513, -1.868705217	
2423, 37.7180061681, -1.8279288578		2463, 38.4069013221, -1.8749748257	
2424, 37.6785876381, -1.8238251195		2464, 38.3885009466, -1.8834343981	
2425, 37.7266572107, -1.830293843		2465, 38.4308264517, -1.8814950675	
2426, 37.7780012959, -1.8247055635		2466, 38.4243362981, -1.8764568562	
2427, 37.7830044757, -1.8239997745		2467, 38.4404585774, -1.8891844933	
2428, 37.7379573557, -1.8269261333		2468, 38.4437277682, -1.8945635345	
2429, 37.8051726634, -1.8172648884		2469, 38.487001695, -1.8956098331	
2430, 37.7749788795, -1.8173231137		2470, 38.4902748441, -1.8964467203	
2431, 37.8624408217, -1.8194608464		2471, 38.4816509376, -1.9039014201	
2432, 37.8680072707, -1.8218819031		2472, 38.4977972652, -1.9050497244	
2433, 37.8642343805, -1.8208213663		2473, 38.4646667695, -1.916274471	
2434, 37.8749670278, -1.8176080697		2474, 38.5537255741, -1.9128800116	
2435, 37.9228724506, -1.8175521414		2475, 38.4769890112, -1.918205108	
2436, 37.959103909, -1.8150621364		2476, 38.5115037898, -1.9211169322	
2437, 37.9455284507, -1.8189286679		2477, 38.4486080951, -1.9246089599	
2438, 37.9405031851, -1.8203036232		2478, 38.4863237834, -1.9294765589	
2439, 37.982750084, -1.8214064657		2479, 38.5065887267, -1.9361590863	
2440, 38.0027498709, -1.8188016569		2480, 38.4517545628, -1.9378399175	
2441, 38.0460821976, -1.825900329		2481, 38.5243597647, -1.9414955339	
2442, 38.0708854465, -1.8255536092		2482, 38.5276360909, -1.9485501575	
2443, 38.0773152824, -1.8200011169		2483, 38.4907855085, -1.9507151424	
2444, 38.0894966391, -1.8279766138		2484, 38.5366604125, -1.9614814816	
2445, 38.1240807146, -1.8240192131		2485, 38.5077529915, -1.9549556351	
2446, 38.1258872394, -1.827006658		2486, 38.4652657327, -1.9630746023	
2447, 38.1590667841, -1.8297421197		2487, 38.4473047346, -1.9700887608	
2448, 38.1837976148, -1.8294195095		2488, 38.543757503, -1.9746872937	
2449, 38.1739445974, -1.8342491462		2489, 38.4497054385, -1.9781695087	
		2490, 38.5498613645, -1.982387855	

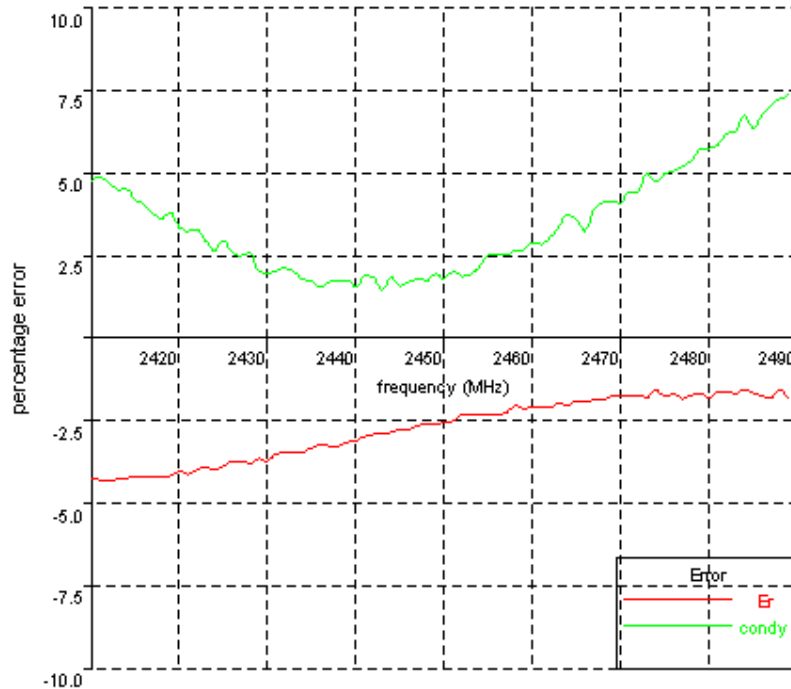

Date: 24 May 2004	Temperature: 23.6 °C	Type: 2450 MHz/ head (FCC)	Tested by: Kevin
2410, 37.6150490746, -1.8618099383 2411, 37.6358154872, -1.8635835929 2412, 37.6759378258, -1.8593832945 2413, 37.6329500369, -1.849875188 2414, 37.6099384212, -1.8504844115 2415, 37.624210425, -1.8454284676 2416, 37.632633576, -1.8518191409 2417, 37.632633576, -1.8440921255 2418, 37.6884282875, -1.8426555481 2419, 37.6777417635, -1.8440297504 2420, 37.6805340474, -1.8395111314 2421, 37.6838622315, -1.8357511659 2422, 37.6681883611, -1.8304441286 2423, 37.7287692182, -1.8341249052 2424, 37.7079447199, -1.8295226068 2425, 37.783053278, -1.8313078402 2426, 37.8057489197, -1.8292518205 2427, 37.7862592415, -1.8223735461 2428, 37.834052464, -1.8266869671 2429, 37.8099292774, -1.8270298639 2430, 37.8438456875, -1.8220997573 2431, 37.8683722239, -1.8215021405 2432, 37.8711786354, -1.8239724528 2433, 37.9069461931, -1.8231521189 2434, 37.9037220395, -1.8202513008 2435, 37.9526321037, -1.8241494484 2436, 37.9696774887, -1.8235128802 2437, 38.0129721049, -1.8228443345 2438, 38.0129721049, -1.8197588915 2439, 38.033403696, -1.824611773 2440, 38.0189701816, -1.8238820701 2441, 38.0478958396, -1.8246295628 2442, 38.1333671352, -1.8202180478 2443, 38.0912929524, -1.8265330323 2444, 38.1319008609, -1.8328696187 2445, 38.1769305622, -1.824493761 2446, 38.1703440722, -1.8303235731 2447, 38.1960636604, -1.8321228268 2448, 38.2119509093, -1.8389444885 2449, 38.2236180493, -1.8354152027		<b>2450, 38.220784901, -1.8356172495</b> 2451, 38.2677328661, -1.8388455757 2452, 38.3024787745, -1.8419225961 2453, 38.303456047, -1.844754709 2454, 38.3349736053, -1.8480655429 2455, 38.3233773372, -1.8491517656 2456, 38.3943406105, -1.8566980752 2457, 38.3617186285, -1.854379972 2458, 38.3526584634, -1.8608088263 2459, 38.4139200813, -1.8577499676 2460, 38.412519894, -1.8653981219 2461, 38.415366632, -1.8660180936 2462, 38.4832274136, -1.8660406899 2463, 38.4704925296, -1.8686502734 2464, 38.4729228534, -1.8836054685 2465, 38.4747459082, -1.8801597246 2466, 38.5024027595, -1.8882313049 2467, 38.5147201065, -1.8887674979 2468, 38.5082157851, -1.8866360588 2469, 38.541306607, -1.8881648953 2470, 38.4787830003, -1.8919951514 2471, 38.5459127986, -1.9043155241 2472, 38.4944370263, -1.9058785905 2473, 38.4930339041, -1.9098343358 2474, 38.491630833, -1.9148264847 2475, 38.5638896338, -1.9201290006 2476, 38.5582202677, -1.9223732869 2477, 38.5345241378, -1.9234324267 2478, 38.5392060825, -1.9301881543 2479, 38.5673910713, -1.9350019392 2480, 38.5025795876, -1.943267869 2481, 38.5298351276, -1.941377439 2482, 38.5003714102, -1.9429465118 2483, 38.5769107834, -1.9472788342 2484, 38.5404345107, -1.9571384523 2485, 38.5252469037, -1.957442528 2486, 38.5234214003, -1.9484842478 2487, 38.5262763572, -1.9688993725 2488, 38.4647585259, -1.9748434044 2489, 38.5438814185, -1.9710793501 2490, 38.529675502, -1.9846077272	

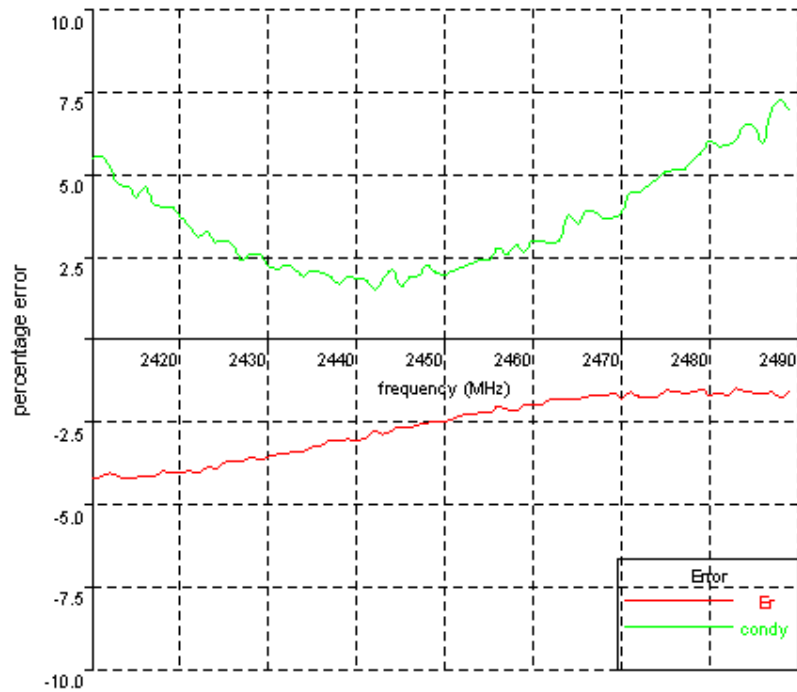

### **3.3 E-Field Probe and 2450 Balanced Dipole Antenna Calibration**

Probe calibration factors and dipole antenna calibration are included in Appendix C.

## 4.0 Measurement Uncertainty

The uncertainty budget has been determined for the INDEXSAR SARA2 measurement system according to IEEE 1528 documents [3] and is given in the following table. The extended uncertainty (95% confidence level) was assessed to be 20.6 % for SAR measurement, and the extended uncertainty (95% confidence level) was assessed to be 20.2 % for system performance check.

Table 1 Exposure Assessment Uncertainty

### Example of measurement uncertainty assessment SAR measurement

(blue entries are site-specific)

a	b			c	d	e		f	g	h	i
Uncertainty Component	Sec.	Tol. (+/-)			Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g
		(dB)		(%)							
Measurement System											
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50
Axial Isotropy	E2.2	0.25	5.93	5.93	R	√3	1.73	0	0	0.00	0.00
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	√3	1.73	1	1	6.30	6.30
Boundary effect	E2.3		4	4.00	R	√3	1.73	1	1	2.31	2.31
Linearity	E2.4	0.04	0.93	0.93	R	√3	1.73	1	1	0.53	0.53
System Detection Limits	E2.5		1	1.00	R	√3	1.73	1	1	0.58	0.58
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00
Response time	E2.7		0	0.00	R	√3	1.73	1	1	0.00	0.00
Integration time	E2.8		1.4	1.40	R	√3	1.73	1	1	0.81	0.81
RF Ambient Conditions	E6.1		3	3.00	R	√3	1.73	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	√3	1.73	1	1	0.35	0.35
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	√3	1.73	1	1	1.73	1.73
SAR Evaluation Algorithms	E5		8	8.00	R	√3	1.73	1	1	4.62	4.62
Test Sample Related											
Test Sample Positioning	E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00
Device Holder Uncertainty	E4.1		2	2.00	N	1	1.00	1	1	2.00	2.00
Output Power Variation	6.6.2		5	5.00	R	√3	1.73	1	1	2.89	2.89
Phantom and Tissue Parameters											
Phantom Uncertainty (shape and thickness)	E3.1		4	4.00	R	√3	1.73	1	1	2.31	2.31
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	√3	1.73	0.64	0.43	1.85	1.24
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	√3	1.73	0.6	0.49	1.73	1.41
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54
Combined standard uncertainty					RSS					10.5	10.3
Expanded uncertainty	(95% Confidence Level)				k=2					20.6	20.3

Table 2 System Check (Verification)

**Example of measurement uncertainty assessment for system performance check**

(blue entries are site-specific)

a	b			c	d	e		f	g	h	i
Uncertainty Component	Sec.	Tol. (+/-)			Prob. Dist.	Divisor (descrip)	Divisor (value)	c1 (1g)	c1 (10g)	Standard Uncertainty (%) 1g	Standard Uncertainty (%) 10g
		(dB)		(%)							
<b>Measurement System</b>											
Probe Calibration	E2.1			2.5	N	1 or k	1	1	1	2.50	2.50
Axial Isotropy	E2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0	0.00	0.00
Hemispherical Isotropy	E2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	1	6.30	6.30
Boundary effect	E2.3		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Linearity	E2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	1	0.53	0.53
System Detection Limits	E2.5		1	1.00	R	$\sqrt{3}$	1.73	1	1	0.58	0.58
Readout Electronics	E2.6		1	1.00	N	1 or k	1.00	1	1	1.00	1.00
Response time	E2.7		0	0.00	R	$\sqrt{3}$	1.73	1	1	0.00	0.00
Integration time	E2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	1	0.81	0.81
RF Ambient Conditions	E6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	E6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	1	0.35	0.35
Probe Position wrt. Phantom Shell	E6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1	1.73	1.73
SAR Evaluation Algorithms	E5		8	8.00	R	$\sqrt{3}$	1.73	1	1	4.62	4.62
<b>Dipole</b>											
Dipole axis to liquid distance	8, E4.2		2	2.00	N	1	1.00	1	1	2.00	2.00
Input power and SAR drift measurement	8, 6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	1	2.89	2.89
<b>Phantom and Tissue Parameters</b>											
Phantom Uncertainty (thickness)	E3.1		4	4.00	R	$\sqrt{3}$	1.73	1	1	2.31	2.31
Liquid conductivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	0.43	1.85	1.24
Liquid conductivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.64	0.43	0.70	0.47
Liquid permittivity (Deviation from target)	E3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	0.49	1.73	1.41
Liquid permittivity (measurement uncert.)	E3.3		1.1	1.10	N	1	1.00	0.6	0.49	0.66	0.54
Combined standard uncertainty					<b>RSS</b>					10.3	10.1
Expanded uncertainty	(95% Confidence Level)				k=2					<b>20.2</b>	<b>19.9</b>



Table 3 Uncertainty assessment for waveguide probe calibration

	a		b		c	
Uncertainty Component	Tol. (+/- %)	Prob. Dist.	Divisor (descrip)	Divisor (value)	c1	Standard Uncertainty (+/- %)
<b>Waveguide calibrations</b>						
Incident or forward power	1	R	$\sqrt{3}$	1.73	1	0.58
Reflected power	1.00	R	$\sqrt{3}$	1.73	1	0.58
Liquid conductivity	2.00	R	$\sqrt{3}$	1.73	1	1.15
Liquid permittivity	2.00	R	$\sqrt{3}$	1.73	1	1.15
Probe positioning	1.00	N	1	1.00	1	1.00
Field homogeneity	1.00	R	$\sqrt{3}$	1.73	1	0.58
Field probe positioning	2.00	R	$\sqrt{3}$	1.73	1	1.15
Field probe linearity	1.00	R	$\sqrt{3}$	1.73	1	0.58
<b>Combined standard uncertainty</b>		<b>RSS</b>				<b>2.5</b>
<b>Expanded uncertainty</b>		<b>k=2</b>				<b>4.9</b>

Table 4 Uncertainty assessment for DiLine dielectric property measurement

	a		b		c	
Uncertainty Component	Tol. (+/- %)	Prob. Dist.	Divisor (descrip)	Divisor (value)	c1	Standard Uncertainty (+/- %)
<b>Permittivity measurement</b>						
Repeatability (n repeats)	1	N	1 or k	1	1	1.00
Temperature measurement	0.30	R	$\sqrt{3}$	1.73	1	0.17
VNA drift, linearity	0.50	R	$\sqrt{3}$	1.73	1	0.29
Test port cable variations	0.50	R	$\sqrt{3}$	1.73	1	0.29
<b>Combined standard uncertainty</b>		<b>RSS</b>				<b>1.1</b>
<b>Expanded uncertainty</b>		<b>k=2</b>				<b>2.1</b>

	a		b		c	
Uncertainty Component	Tol. (+/- %)	Prob. Dist.	Divisor (descrip)	Divisor (value)	c1	Standard Uncertainty (+/- %)
<b>Conductivity measurement</b>						
Repeatability (n repeats)	1	N	1 or k	1	1	1.00
Temperature measurement	0.30	R	$\sqrt{3}$	1.73	1	0.17
VNA drift, linearity	0.50	R	$\sqrt{3}$	1.73	1	0.29
Test port cable variations	0.50	R	$\sqrt{3}$	1.73	1	0.29
<b>Combined standard uncertainty</b>		<b>RSS</b>				<b>1.1</b>
<b>Expanded uncertainty</b>		<b>k=2</b>				<b>2.1</b>

## **5.0 Measurement Traceability**

All measurements described in this report are traceable to Chinese National Laboratory Accreditation (CNLA) standards or appropriate national standards.

## **6.0 WARNING LABEL INFORMATION - USA**

See user manual.

## 7.0 REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1999
- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Supplement C to OET Bulletin 65, Washington, D.C. 20554, 1997
- [3] IEEE Standards Coordinating Committee 34, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", IEEE Std 1528

**8.0 DOCUMENT HISTORY**

Revision/ Job Number	Writer Initials	Date	Change
N/A	S.L.	May 19, 2004	Original document
TC0400521	S.L.	May 26, 2004	Add to 802.11b low, high and 802.11g low, middle, high channel test

**APPENDIX A - SAR Evaluation Data**

**Power drift** is the measurement of power drift of the device over one complete SAR scan.


To assess the drift of the power of the device under test, a SAR measurement was made in the middle of the zoom scan volume at the start of the scan and a measurement at this point was then also made after the measurement scan. The difference between the two measurements should be less than 5%.

Plot #1 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	bottom
<b>Filename:</b>	11b-2412bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2412MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	19.56dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

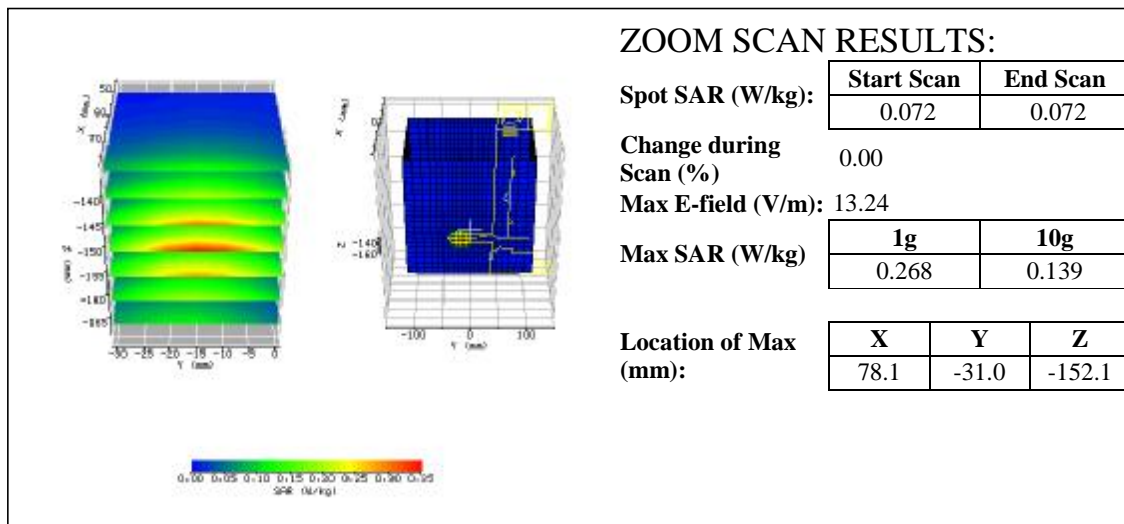


Plot #1 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-180.0	-120.0	6.0

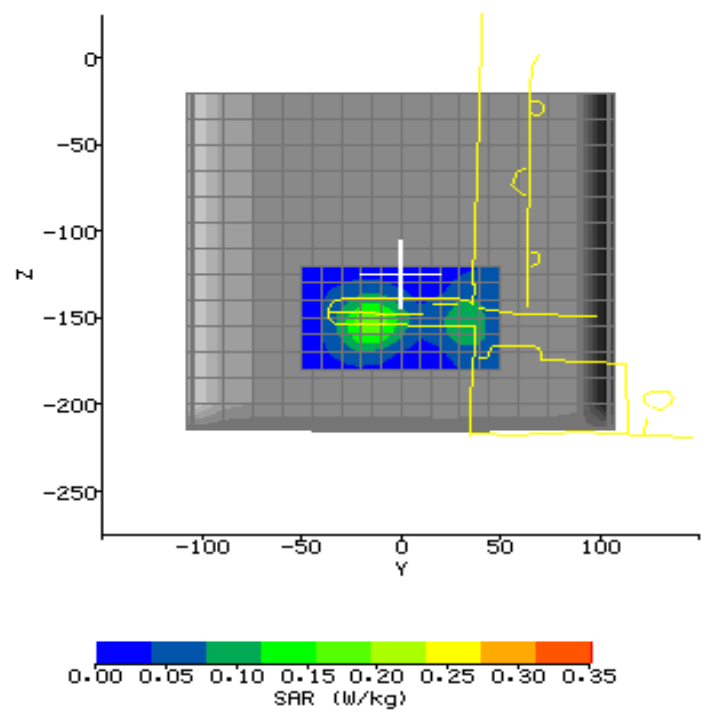

Plot #2 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11b-2412per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2412MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	19.56dBm

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_BODY	<b>Type:</b>	2450MHz Body
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.9766
		<b>Relative Permittivity:</b>	50.524
		<b>Liquid Temp (deg C):</b>	22.0
		<b>Ambient Temp (deg C):</b>	23
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	50
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries Replaced:</b>	-	<b>Software Version:</b>	2.3VPM

The figure displays two 3D surface plots of SAR distribution. The left plot shows a cross-section with the X-axis (mm) ranging from -15 to 10 and the Z-axis (mm) ranging from -160 to 50. The right plot shows a perspective view of a rectangular volume with the X-axis (mm) ranging from -100 to 100 and the Z-axis (mm) ranging from -160 to 50. A color bar at the bottom indicates SAR values from 0.00 to 0.25 W/kg.

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.042	0.041

Change during Scan (%)

-2.06

Max E-field (V/m): 11.09

Max SAR (W/kg)

1g	10g
0.181	0.087

Location of Max (mm):

X	Y	Z
78.1	-19.0	-145.9




Plot #2 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

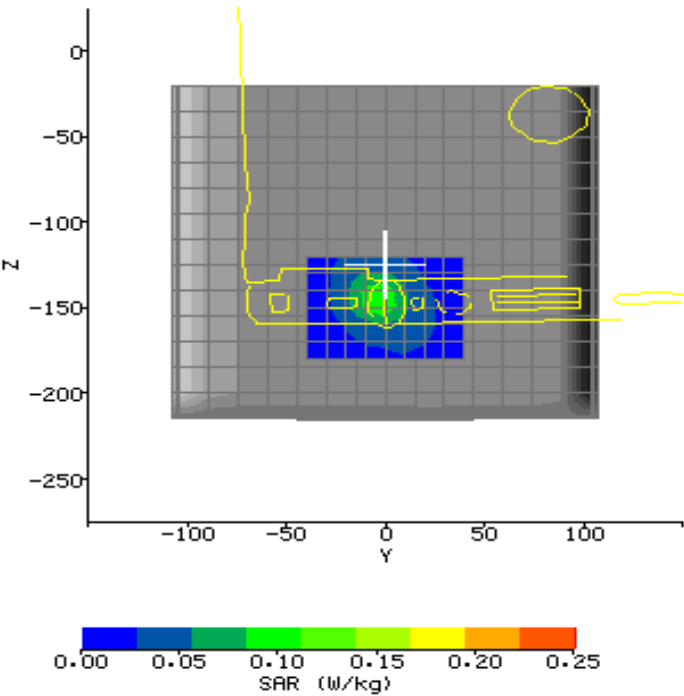


Plot #3 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11b-2412per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2412MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	19.56dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			


<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

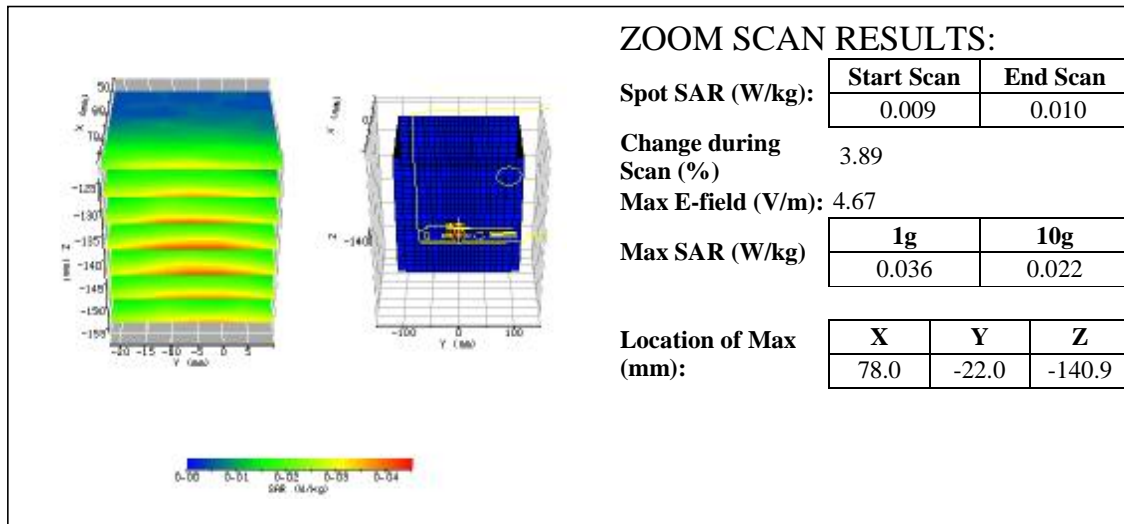

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

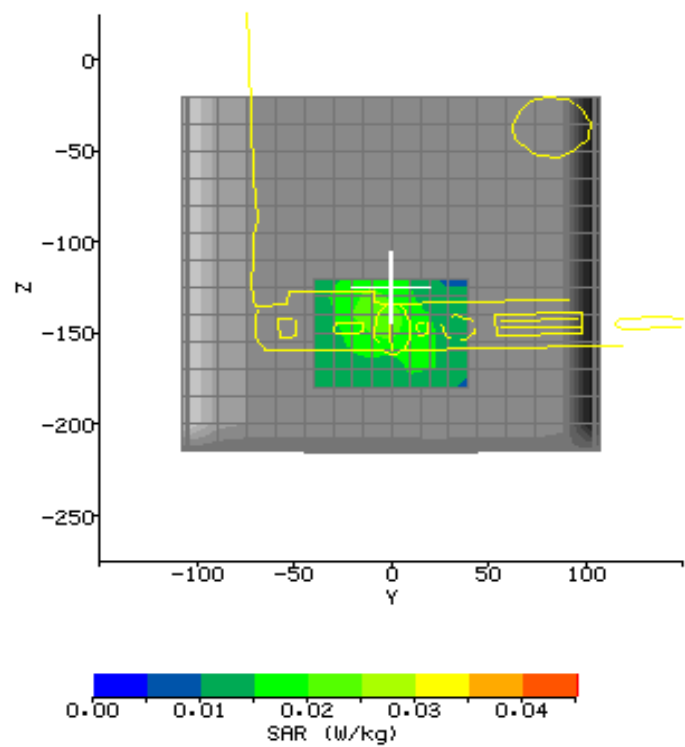


Plot #4 (1/2)

<b>Date / Time:</b>	2004/5/12	<b>Position:</b>	bottom
<b>Filename:</b>	11b-2437bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2437MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	17.22dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.97546
<b>Relative Permittivity:</b>	50.6161
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23.0
<b>Ambient RH (%):</b>	48
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3 VPM

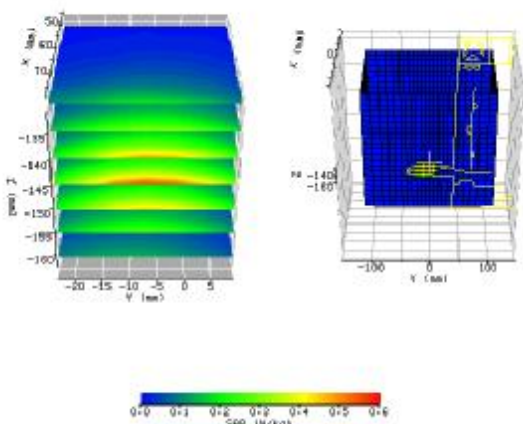
		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>		<b>End Scan</b>
	0.091		0.092
<b>Change during Scan (%):</b>	1.59		
<b>Max E-field (V/m):</b>	16.73		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.418	0.205	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-23.0	-146.1

Plot #4 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-180.0	-120.0	6.0

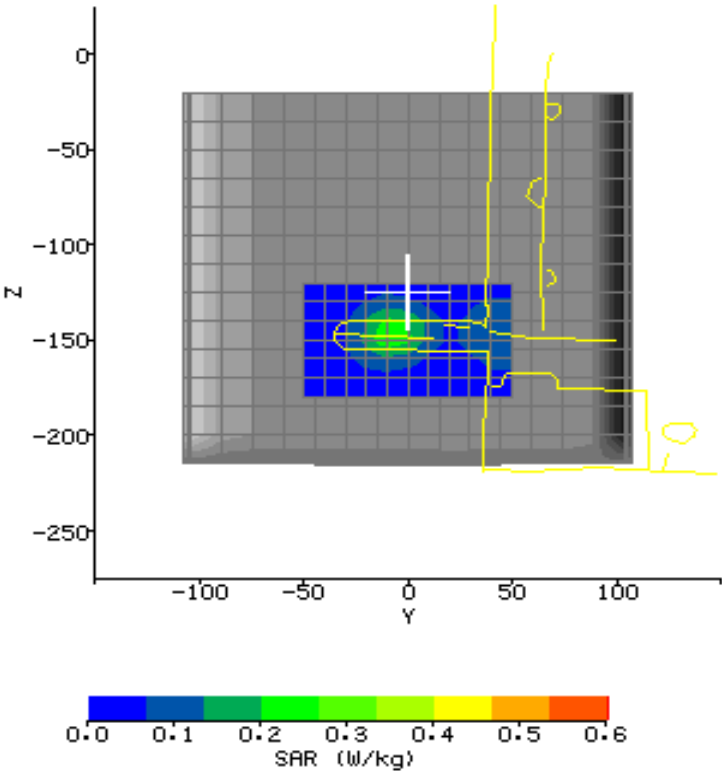

Plot #5 (1/2)

<b>Date / Time:</b>	2004/5/12	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11b-2437per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2437MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.22dBm

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_BODY	<b>Type:</b>	2450MHz Body
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.97546
	<b>Air</b>	<b>Relative Permittivity:</b>	50.6161
	<b>DCP</b>	<b>Liquid Temp (deg C):</b>	22.0
	<b>Lin</b>	<b>Ambient Temp (deg C):</b>	23.0
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	48
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries Replaced:</b>	-	<b>Software Version:</b>	2.3 VPM

The figure displays two 3D SAR scan plots and a color bar. The left plot shows a color-coded SAR distribution on a rectangular object, with axes X (mm) from -15 to 15 and Y (mm) from -100 to 100. The right plot shows a similar distribution on a different object, with axes X (mm) from -100 to 100 and Y (mm) from -100 to 100. A color bar at the bottom indicates SAR values from 0.00 to 0.30 W/kg.

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.040	0.039

Change during Scan (%)

-1.31

Max E-field (V/m): 11.43

Max SAR (W/kg)

1g	10g
0.192	0.091

Location of Max (mm):


X	Y	Z
78.1	-19.0	-148.9

Plot #5 (2/2)

AREA SCAN:

Scan Extent:


	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

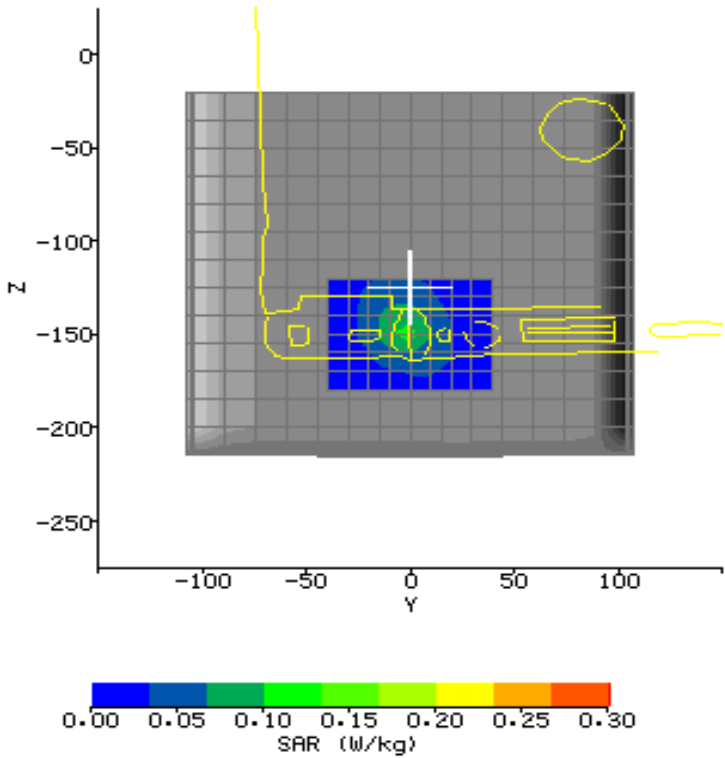

Plot #6 (1/2)

<b>Date / Time:</b>	2004/5/12	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11b-2437per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2437MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.22dBm

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_BODY	<b>Type:</b>	2450MHz Body
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.97546
		<b>Relative Permittivity:</b>	50.6161
		<b>Liquid Temp (deg C):</b>	22.0
		<b>Ambient Temp (deg C):</b>	23.0
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	48
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries Replaced:</b>	-	<b>Software Version:</b>	2.3 VPM

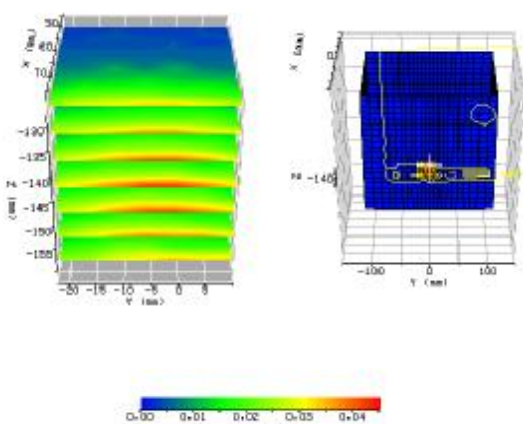		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>		<b>End Scan</b>
	0.008		0.008
<b>Change during Scan (%)</b>	0.27		
<b>Max E-field (V/m):</b>	4.68		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.036	0.021	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.0	-22.0	-144.0




Plot #6 (2/2)

## AREA SCAN:

Scan Extent:

	Min	Max	Steps
<b>Y</b>	-40.0	40.0	8.0
<b>Z</b>	-180.0	-120.0	6.0

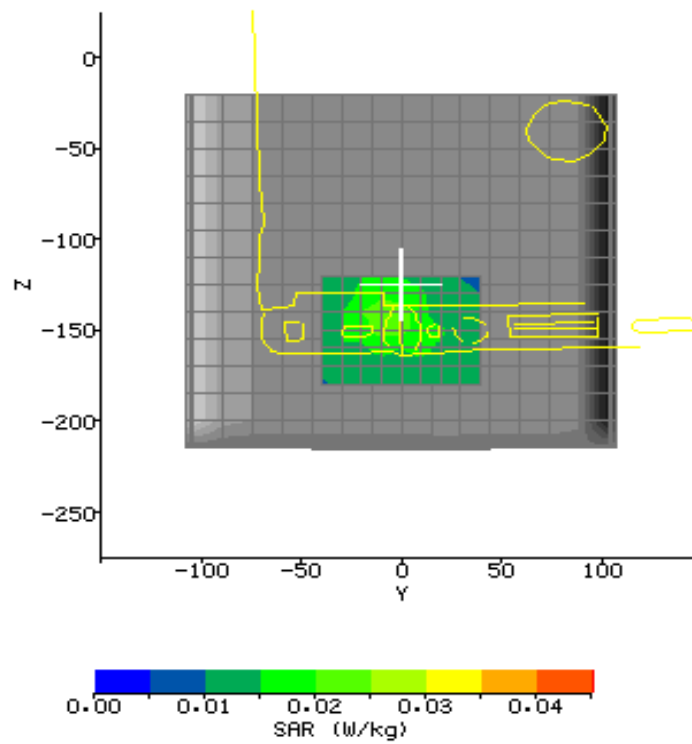

Plot #7 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	bottom
<b>Filename:</b>	11b-2462bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2462MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	17.95dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

The figure displays two 3D SAR scan plots and a color scale. The left plot shows a cross-section of the head with a color scale from 0.0 to 0.5 W/kg. The right plot shows a 3D model of the head with a color scale from 0.0 to 0.5 W/kg. A color bar at the bottom indicates the SAR scale.

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.092	0.092

Change during Scan (%)

0.00

Max E-field (V/m):

15.42

Max SAR (W/kg)

1g	10g
0.362	0.185

Location of Max (mm):


X	Y	Z
78.1	-32.0	-153.0

Plot #7 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
<b>Y</b>	-50.0	50.0	10.0
<b>Z</b>	-180.0	-120.0	6.0

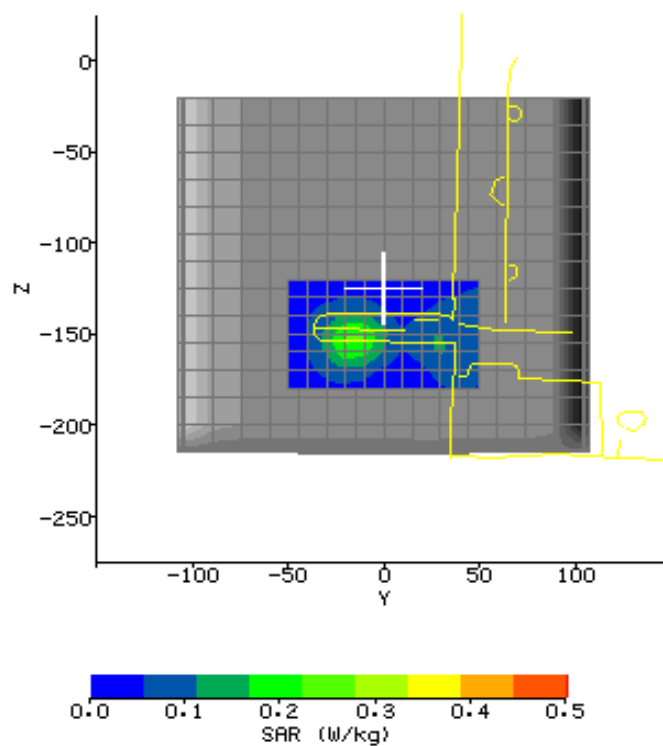

Plot #8 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11b-2462per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2462MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.95dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

The figure displays two 3D SAR scan plots and a color scale. The left plot shows a cross-section of the head with a color scale from 0.00 to 0.50 W/kg. The right plot shows a top-down view of the head with a color scale from 0.00 to 0.50 W/kg. A color bar at the bottom indicates the SAR scale.

Color Scale (W/kg):

0.00	0.05	0.10	0.15	0.20	0.25	0.30
------	------	------	------	------	------	------

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.046	0.046

Change during Scan (%)

0.00

Max E-field (V/m): 11.72

Max SAR (W/kg)

1g	10g
0.201	0.098

Location of Max (mm):


X	Y	Z
78.1	-18.0	-145.9

Plot #8 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

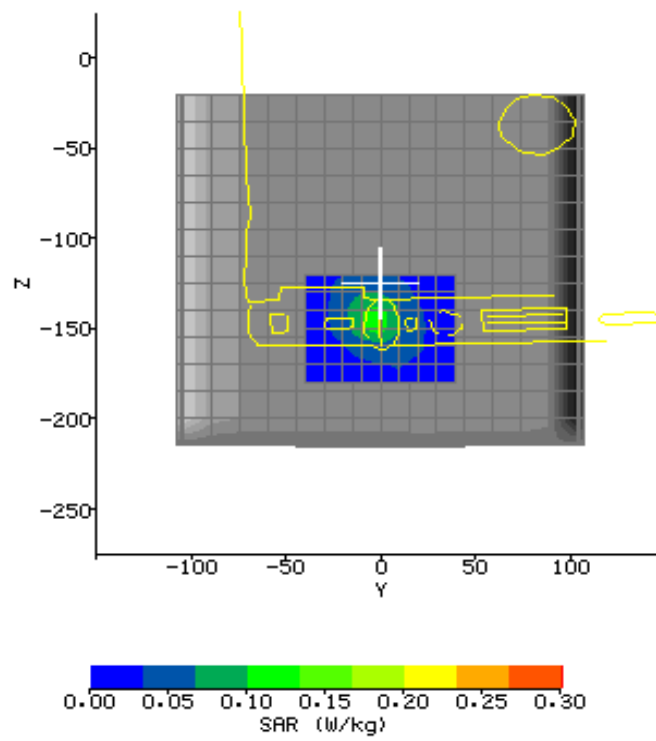


Plot #9 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11b-2462per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11b-2462MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.95dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

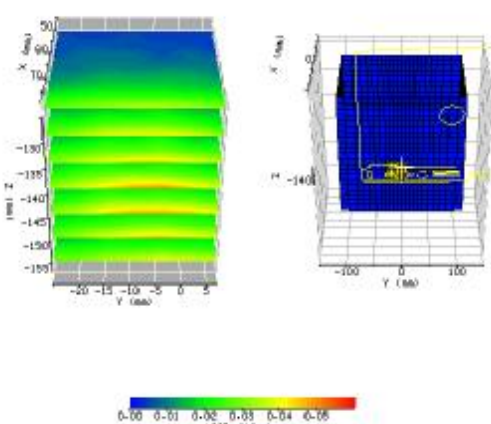
		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>		<b>End Scan</b>
	0.011		0.011
<b>Change during Scan (%)</b>	0.00		
<b>Max E-field (V/m):</b>	5.06		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.042	0.025	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-25.0	-142.8

Plot #9 (2/2)

### AREA SCAN:

Scan Extent:

	Min	Max	Steps
<b>Y</b>	-40.0	40.0	8.0
<b>Z</b>	-180.0	-120.0	6.0

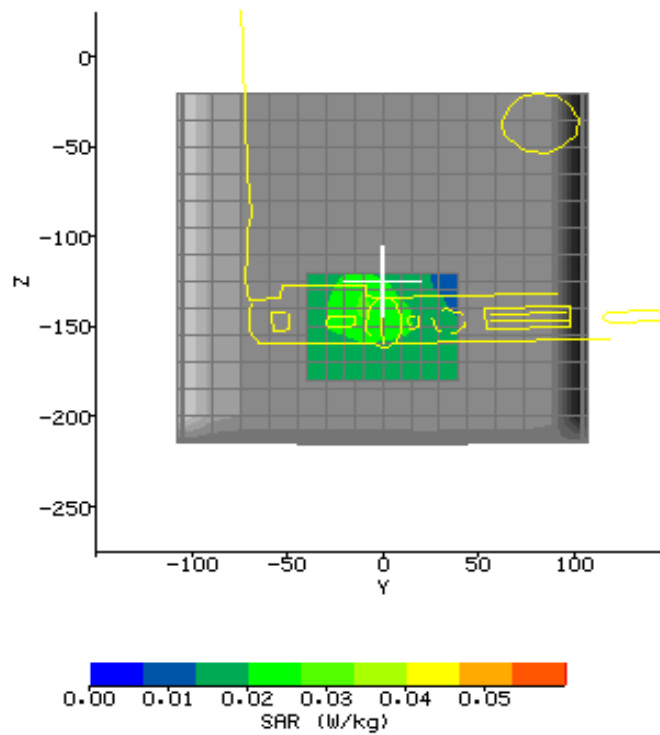


Plot #10 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	bottom
<b>Filename:</b>	11g-2412bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2412MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	19.47dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

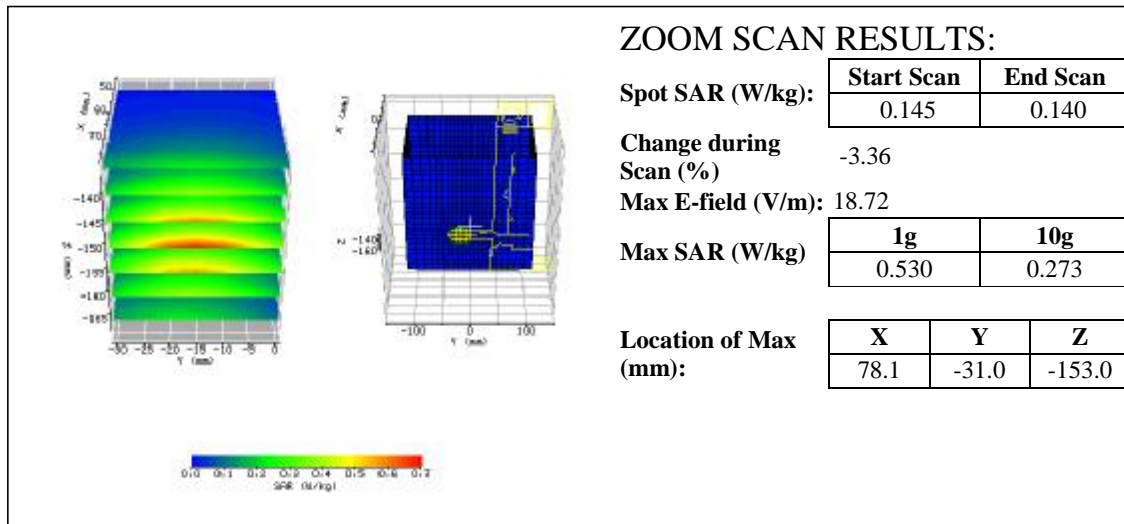




Plot #10 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-180.0	-120.0	6.0

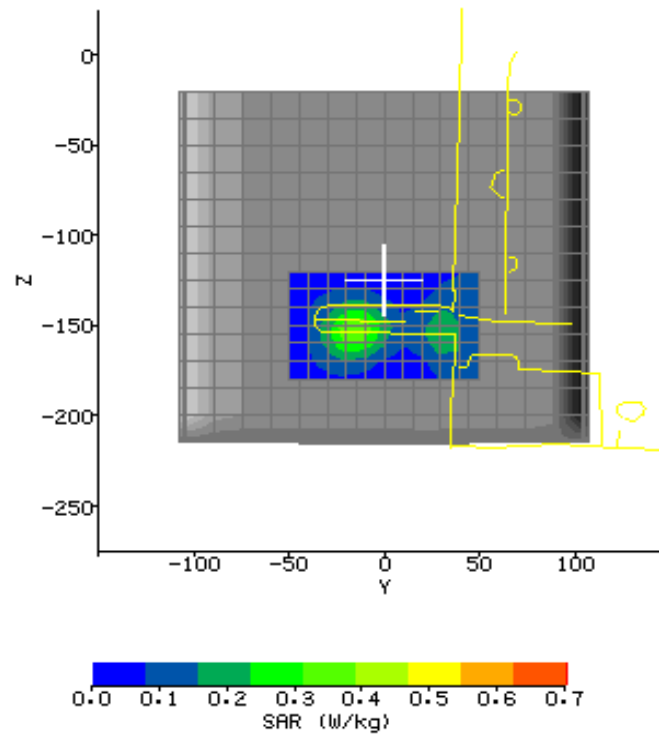

Plot #11 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11g-2412per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2412MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	19.47dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

The figure displays two 3D SAR scan plots and a color scale. The left plot shows a cross-section of the head with a color scale from 0.0 to 0.4 W/kg. The right plot shows a top-down view of the head with a color scale from 0.0 to 0.4 W/kg. A color bar at the bottom indicates the SAR scale.

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.069	0.070

Change during  
Scan (%)

-3.36

Max E-field (V/m): 14.28

Max SAR (W/kg)

1g	10g
0.298	0.146

Location of Max  
(mm):


X	Y	Z
78.1	-18.0	-145.9

Plot #11 (2/2)

AREA SCAN:

Scan Extent:


	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

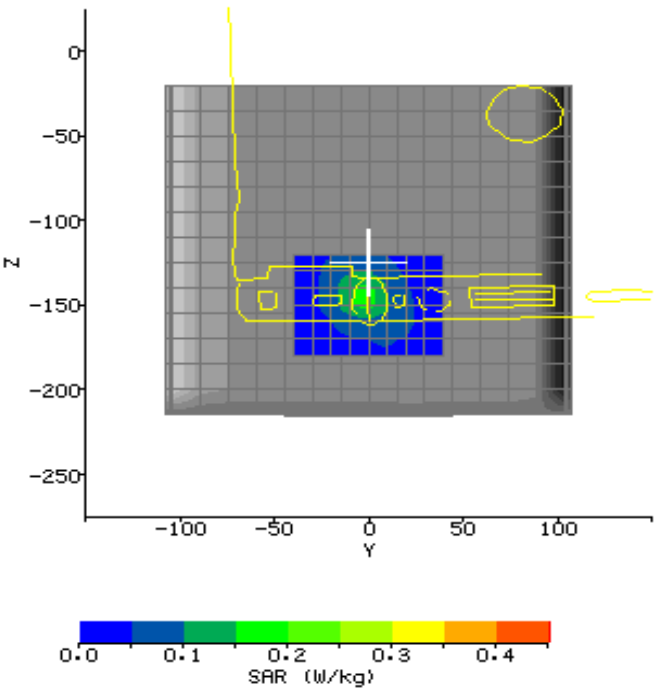

Plot #12 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11g-2412per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2412MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	19.47dBm

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_BODY	<b>Type:</b>	2450MHz Body
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.9766
	<b>Air</b>	<b>Relative Permittivity:</b>	50.524
	<b>DCP</b>	<b>Liquid Temp (deg C):</b>	22.0
	<b>Lin</b>	<b>Ambient Temp (deg C):</b>	23
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	50
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries</b>	-	<b>Software Version:</b>	2.3VPM
<b>Replaced:</b>	-		

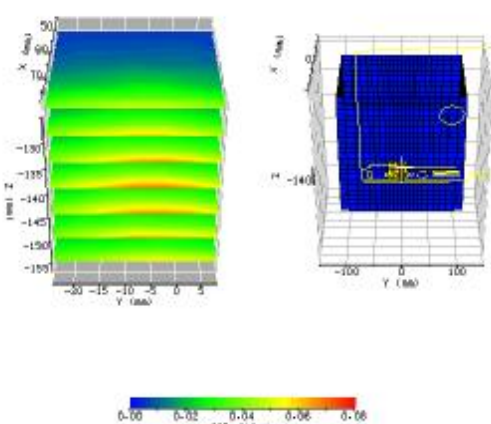
		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>		<b>End Scan</b>
	0.017		0.017
<b>Change during Scan (%)</b>	0.00		
<b>Max E-field (V/m):</b>	5.98		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.059	0.035	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-24.0	-141.0

Plot #12 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

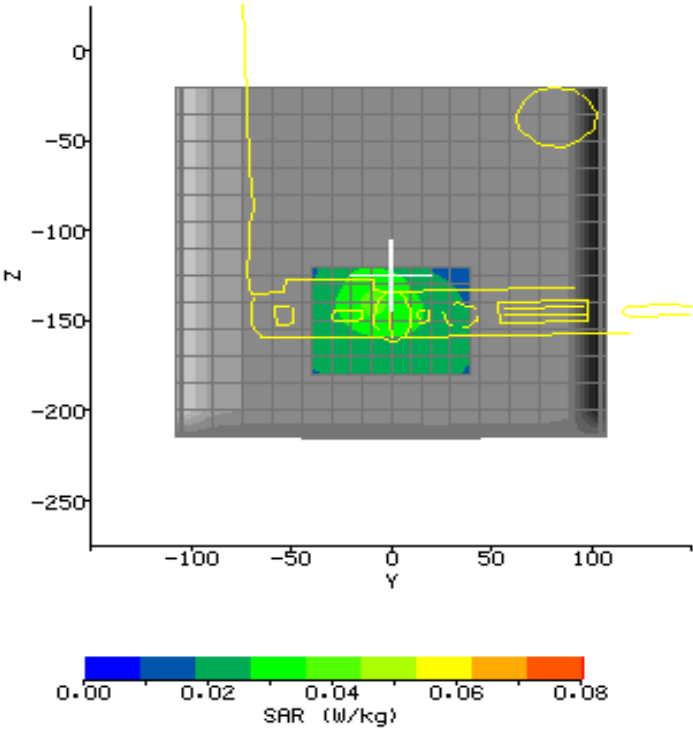


Plot #13 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	bottom
<b>Filename:</b>	11g-2437bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2437MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	16.42dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

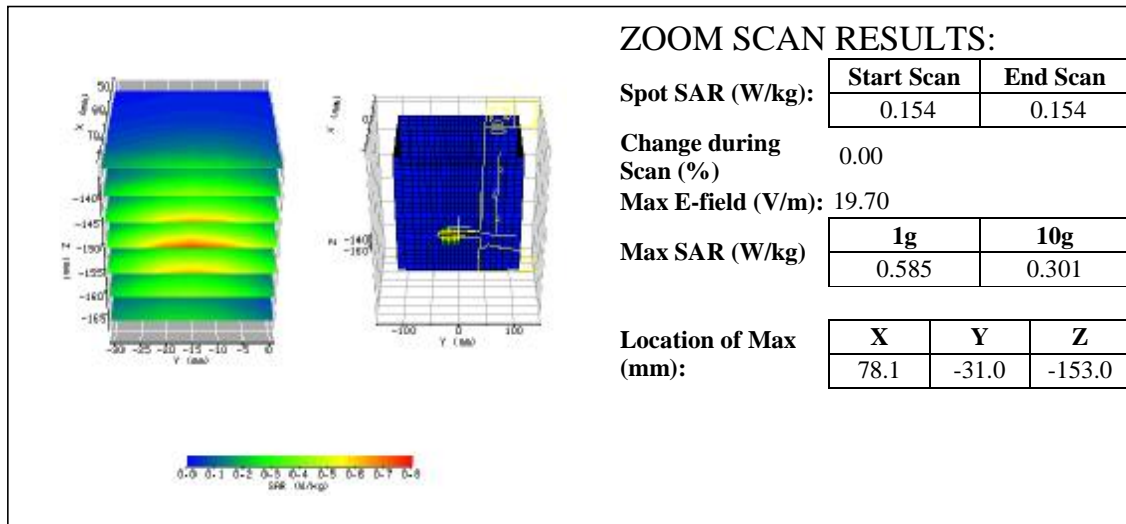


Plot #13 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-180.0	-120.0	6.0

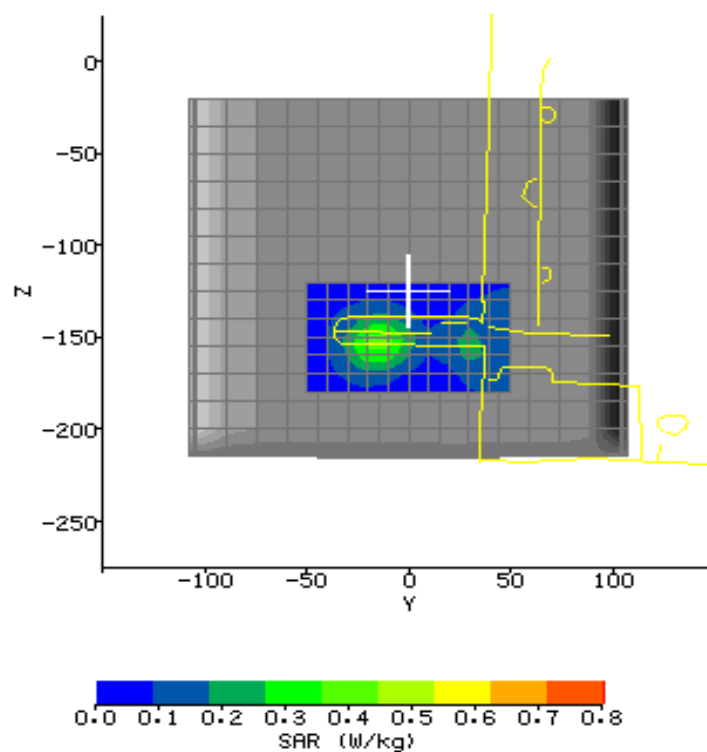

Plot #14 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11g-2437per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2437MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	16.42dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

The figure displays two 3D SAR scan plots and a color scale. The left plot shows a cross-section of a device with a color scale from 0.0 to 0.4 W/kg. The right plot shows a top-down view of the device. The color scale at the bottom indicates SAR (W/kg) values from 0.0 to 0.4.

## ZOOM SCAN RESULTS:

Spot SAR (W/kg):

Start Scan	End Scan
0.072	0.072

Change during  
Scan (%)

0.00

Max E-field (V/m):

15.00

Max SAR (W/kg)

1g	10g
0.320	0.154

Location of Max  
(mm):

X	Y	Z
78.1	-18.0	-146.0




Plot #14 (2/2)

## AREA SCAN:

Scan Extent:


	Min	Max	Steps
<b>Y</b>	-40.0	40.0	8.0
<b>Z</b>	-180.0	-120.0	6.0

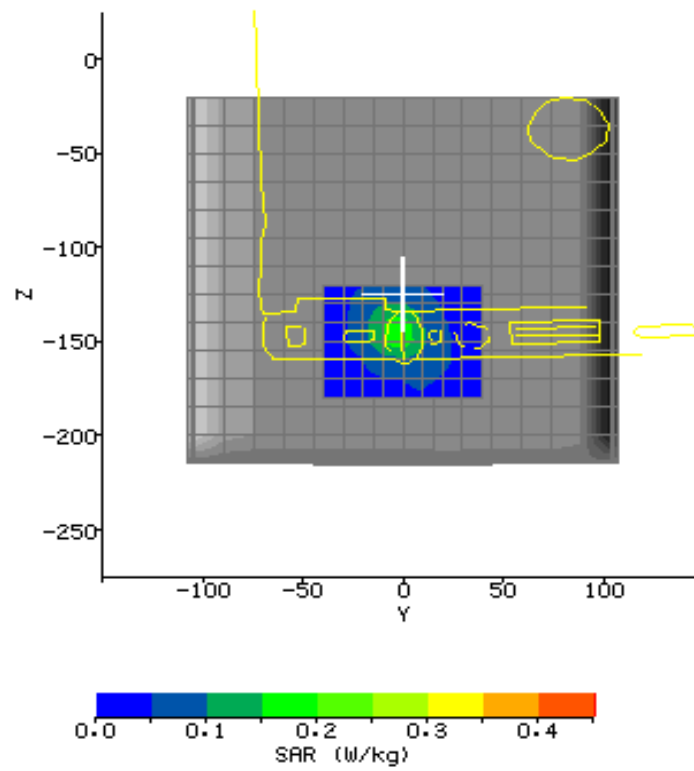

Plot #15 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11g-2437per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2437MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	16.42dBm

<b>Probe:</b>	0136	<b>Liquid:</b>	15.5cm
<b>Cal File:</b>	SN0136_2450_CW_BODY	<b>Type:</b>	2450MHz Body
<b>Cal Factors:</b>		<b>Conductivity:</b>	1.9766
	<b>Air</b>	<b>Relative Permittivity:</b>	50.524
	<b>DCP</b>	<b>Liquid Temp (deg C):</b>	22.0
	<b>Lin</b>	<b>Ambient Temp (deg C):</b>	23
<b>Amp Gain:</b>	2	<b>Ambient RH (%):</b>	50
<b>Averaging:</b>	1	<b>Density (kg/m3):</b>	1000
<b>Batteries Replaced:</b>	-	<b>Software Version:</b>	2.3VPM

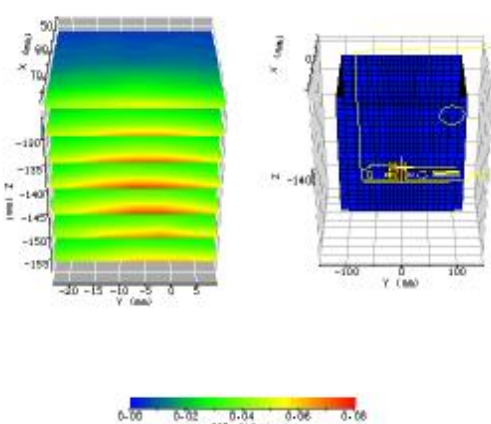
		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>		<b>Start Scan</b>	<b>End Scan</b>
		0.020	0.019
<b>Change during Scan (%)</b>	-2.36		
<b>Max E-field (V/m):</b>	6.29		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.064	0.038	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-23.0	-142.9

Plot #15 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-40.0	40.0	8.0
Z	-180.0	-120.0	6.0

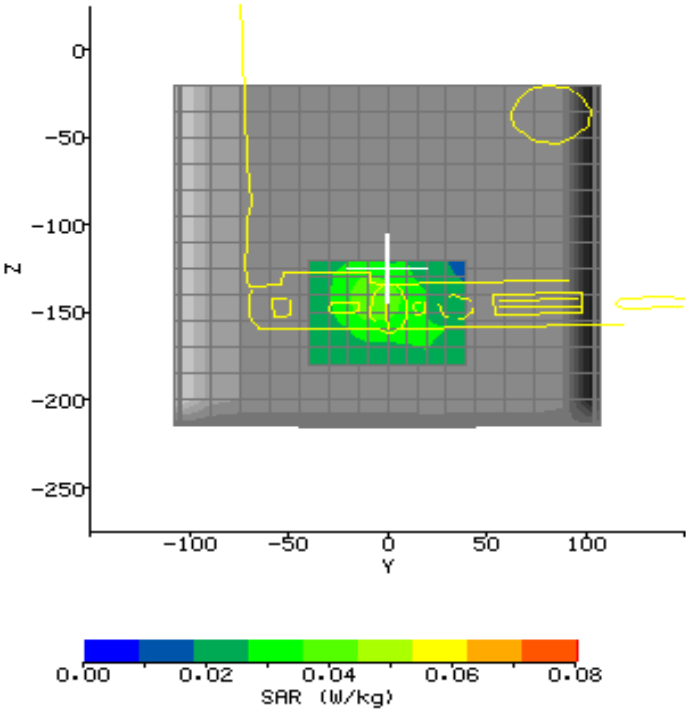

Plot #16 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	bottom
<b>Filename:</b>	11g-2462bot.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2462MHz
<b>Shape File:</b>	ZyAir-G220-bot.csv	<b>Power Level:</b>	17.88dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

The figure displays two 3D surface plots of SAR distribution. The left plot shows a cross-section with the vertical axis labeled 'X (mm)' ranging from 0 to 50 and the horizontal axis labeled 'Y (mm)' ranging from -25 to 0. The right plot shows a 3D view with the vertical axis labeled 'X (mm)' ranging from 0 to 50, the horizontal axis labeled 'Y (mm)' ranging from -100 to 100, and the depth axis labeled 'Z (mm)' ranging from -140 to -180. A color bar at the bottom indicates SAR (W/kg) values from 0.0 to 0.8.

## ZOOM SCAN RESULTS:

**Spot SAR (W/kg):**

Start Scan	End Scan
0.162	0.160

**Change during Scan (%)** -1.50

**Max E-field (V/m):** 20.24

**Max SAR (W/kg)**

1g	10g
0.624	0.320

**Location of Max (mm):**


X	Y	Z
78.1	-30.0	-153.0

Plot #16 (2/2)

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-50.0	50.0	10.0
Z	-180.0	-120.0	6.0

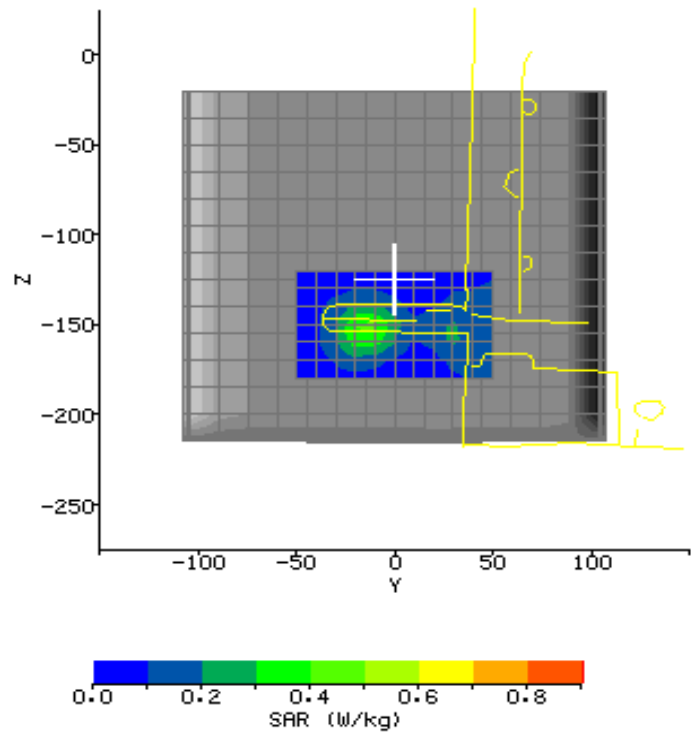


Plot #17 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 0mm
<b>Filename:</b>	11g-2462per0mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2462MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.88dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

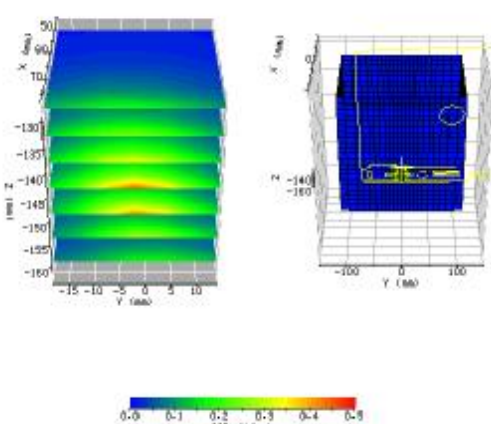
		<b>ZOOM SCAN RESULTS:</b>	
<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>		<b>End Scan</b>
	0.071		0.071
<b>Change during Scan (%):</b>	0.00		
<b>Max E-field (V/m):</b>	15.15		
<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>	
	0.330	0.157	
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-18.0	-145.9

Plot #17 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
<b>Y</b>	-40.0	40.0	8.0
<b>Z</b>	-180.0	-120.0	6.0

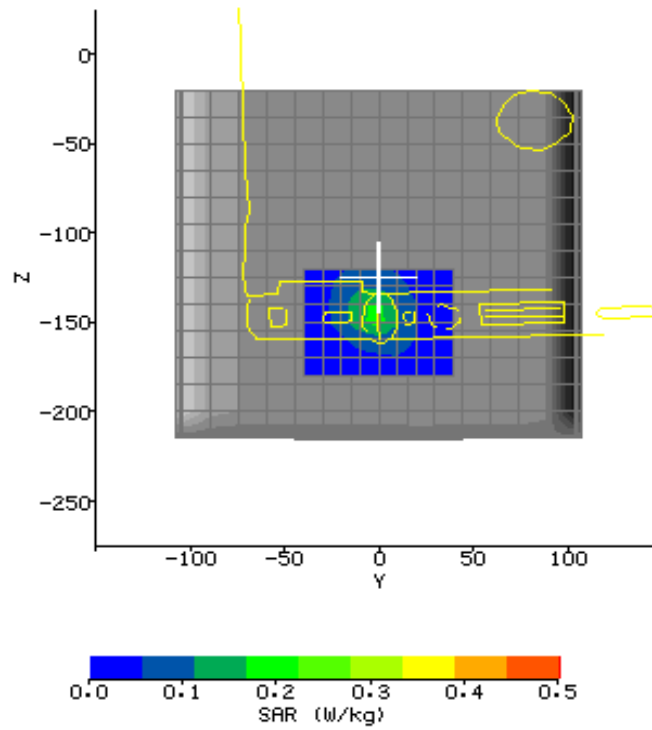


Plot #18 (1/2)

<b>Date / Time:</b>	2004/5/25	<b>Position:</b>	perpendicular 15mm
<b>Filename:</b>	11g-2462per15mm.txt	<b>Phantom:</b>	HeadBox2-test.csv
<b>Device Tested:</b>	ZyAIR G-220	<b>Head Rotation:</b>	0
<b>Antenna:</b>	chip	<b>Test Frequency:</b>	11g-2462MHz
<b>Shape File:</b>	ZyAir-G220-rear.csv	<b>Power Level:</b>	17.88dBm

<b>Probe:</b>	0136			
<b>Cal File:</b>	SN0136_2450_CW_BODY			
<b>Cal Factors:</b>		<b>X</b>	<b>Y</b>	<b>Z</b>
	<b>Air</b>	490	405	405
	<b>DCP</b>	20	20	20
	<b>Lin</b>	.405	.405	.405
<b>Amp Gain:</b>	2			
<b>Averaging:</b>	1			
<b>Batteries Replaced:</b>	-			

<b>Liquid:</b>	15.5cm
<b>Type:</b>	2450MHz Body
<b>Conductivity:</b>	1.9766
<b>Relative Permittivity:</b>	50.524
<b>Liquid Temp (deg C):</b>	22.0
<b>Ambient Temp (deg C):</b>	23
<b>Ambient RH (%):</b>	50
<b>Density (kg/m3):</b>	1000
<b>Software Version:</b>	2.3VPM

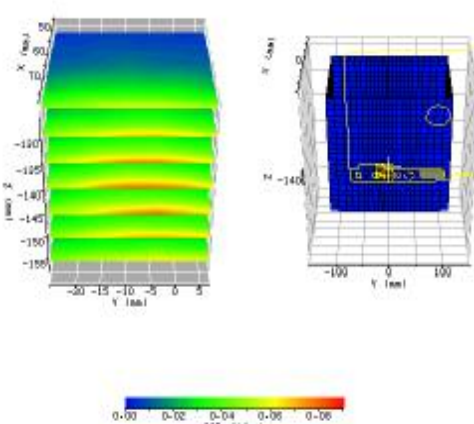	<b>ZOOM SCAN RESULTS:</b>		
	<b>Spot SAR (W/kg):</b>	<b>Start Scan</b>	<b>End Scan</b>
		0.018	0.019
	<b>Change during Scan (%)</b> 3.50		
	<b>Max E-field (V/m):</b> 6.44		
	<b>Max SAR (W/kg)</b>	<b>1g</b>	<b>10g</b>
		0.068	0.040
<b>Location of Max (mm):</b>	<b>X</b>	<b>Y</b>	<b>Z</b>
	78.1	-25.0	-142.9




Plot #18 (2/2)

# AREA SCAN:

Scan Extent:

	Min	Max	Steps
<b>Y</b>	-40.0	40.0	8.0
<b>Z</b>	-180.0	-120.0	6.0

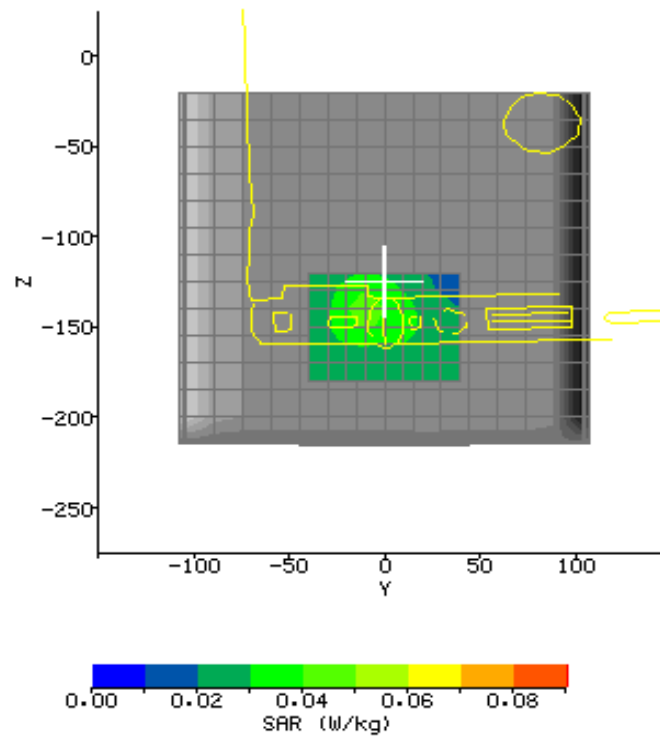

**APPENDIX B - Photographs**





**APPENDIX C - E-Field Probe and 2450MHz Balanced Dipole Antenna Calibration Data**



**IMMERSIBLE SAR PROBE**

**CALIBRATION REPORT**

**Part Number: IXP – 050**

**S/N 0136**

**10<sup>th</sup> September 2003**



**Indexasar Limited  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5DR  
Tel: +44 (0) 1306 631 233  
Fax: +44 (0) 1306 631 834  
e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)**

## INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0136) and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of CENELEC [1] and IEEE [2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

## CALIBRATION PROCEDURE

### 1. Equipment Used

For the first part of the characterisation procedure, the probe is placed in an isotropy measurement jig as pictured in Figure 1. In this position the probe can be rotated about its axis by a non-metallic belt driven by a stepper motor.

The probe is attached via its amplifier and an optical cable to a PC. A schematic representation of the test geometry is illustrated in Figure 2.

A balanced dipole (900 MHz) is inserted horizontally into the bracket attached to a second belt (Figure 1). The dipole can also be rotated about its axis. A cable connects the dipole to a signal generator, via a directional coupler and power meter. The signal generator feeds an RF amplifier at constant power, the output of which is monitored using the power meter. The probe is positioned so that its sensors line up with the rotation center of the source dipole. By recording output voltage measurements of each channel as both the probe and the dipole are rotated, data are obtained from which the spherical isotropy of the probe can be optimised and its magnitude determined.

The calibration process requires E-field measurements to be taken in air, in 900 MHz simulated brain liquid and at other frequencies/liquids as appropriate.

### 2. Linearising probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{o/p}$  is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are V\*200).

### 3. Selecting channel sensitivity factors to optimise isotropic response

The basic measurements obtained using the calibration jig (Fig 1) represent the output from each diode sensor as a function of the presentation angle of the source (probe and dipole rotation angles). The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format as in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

The next stage of the process is to calibrate the Indexsar probe to a W&G EMR300 E-field meter in air. The principal reasons for this are to obtain conversion factors applicable should the probe be used in air and to provide an overall measure of the probe sensitivity.

A multiplier is applied to factors to bring the magnitudes of the average E-field measurements as close as possible to those of the W&G probe.

The following equation is used (where linearised output voltages are in units of V\*200):

$$E_{air}^2 \text{ (V/m)} = U_{linx} * \text{Air Factor}_x + U_{liny} * \text{Air Factor}_y + U_{linz} * \text{Air Factor}_z \quad (2)$$

It should be noted that the air factors are not separately used for normal SAR testing. The IXP-050 probes are optimised for use in tissue-simulating liquids and do not behave isotropically in air.

#### 4. 900 MHz Liquid Calibration

Conversion factors for use when the probes are immersed in tissue-simulant liquids at 900 MHz are determined either using a waveguide or by comparison to a reference probe that has been calibrated by NPL. Waveguide procedures are described later. The summary sheet indicates the method used for the probe S/N 0136.

The conversion factor, referred to as the 'liquid factor' is also applied to the measurements of each channel. The following equation is used (where output voltages are in units of V\*200):

$$E_{liq}^2 \text{ (V/m)} = U_{linx} * \text{Air Factor}_x * \text{Liq Factor}_x + U_{liny} * \text{Air Factor}_y * \text{Liq Factor}_y + U_{linz} * \text{Air Factor}_z * \text{Liq Factor}_z \quad (3)$$

A 3D representation of the spherical isotropy for probe S/N 0136 using these factors is shown in Figure 3.

The rotational isotropy can also be determined from the calibration jig measurements and is reported as the 900MHz isotropy in the summary table. Note that waveguide measurements can also be used to determine rotational isotropy (Fig. 5).

The design of the cells used for determining probe conversion factors are waveguide cells is shown in Figure 4. The cells consist of a coax to waveguide transition and an open-ended section of waveguide containing a dielectric separator. Each waveguide cell stands in the upright position and is filled with liquid within 10 mm of the open end. The separator provides a liquid seal and is designed for a good electrical transition from air filled guide to liquid filled guide. The choice of cell depends on the portion of the frequency band to be examined and the choice of liquid used. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects. The return loss at the coaxial connector of the filled waveguide cell is measured initially using a network analyser and this information is used subsequently in the calibration

procedure. The probe is positioned in the centre of the waveguide and is adjusted vertically or rotated using stepper motor arrangements. The signal generator is connected to the waveguide cell and the power is monitored with a coupler and a power meter. A fuller description of the waveguide method is given below.

The liquid dielectric parameters used for the probe calibrations are listed in the Tables below. The final calibration factors for the probe are listed in the summary chart.

## WAVEGUIDE MEASUREMENT PROCEDURE

*The calibration method is based on setting up a calculable specific absorption rate (SAR) in a vertically-mounted WG8 (R22) waveguide section [1]. The waveguide has an air-filled, launcher section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the liquid interface. A  $TE_{01}$  mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid section is calculated from the forward power and reflection coefficient measured at the input to the waveguide. At the centre of the cross-section of the waveguide, the local spot SAR in the liquid as a function of distance from the window is given by functions set out in IEEE1528 as below:*

Because of the low cutoff frequency, the field inside the liquid nearly propagates as a TEM wave. The depth of the medium (greater than three penetration depths) ensures that reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is determined by measuring the waveguide forward and reflected power. Equation (4) shows the relationship between the SAR at the cross-sectional center of the lossy waveguide and the longitudinal distance ( $z$ ) from the dielectric separator

$$SAR(z) = \frac{4(P_f - P_b)}{rabd} e^{-2z/d} \quad (4)$$

where the density  $r$  is conventionally assumed to be  $1000 \text{ kg/m}^3$ ,  $ab$  is the cross-sectional area of the waveguide,  $P_f$  and  $P_b$  are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $d$ , which is the reciprocal of the waveguide-mode attenuation coefficient, is determined from a scan along the  $z$ -axis and compared with the theoretical value determined from Equation (5) using the measured dielectric properties of the lossy liquid.

$$d = \left[ \text{Re} \left\{ \sqrt{(p/a)^2 + j\omega m_o (s + j\omega e_o e_r)} \right\} \right]^{-1} \quad (5)$$

Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 30 dB at the most important frequencies used for personal wireless communications. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 2500 MHz because of the waveguide size is not severe in the context of compliance testing.

## CALIBRATION FACTORS MEASURED FOR PROBE S/N 0136

The probe was calibrated at 900, 1800, 1900 and 2450MHz MHz in liquid samples representing both brain liquid and body fluid at these frequencies. The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.



The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 m from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software.

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

## **DIELECTRIC PROPERTIES OF LIQUIDS**

The dielectric properties of the brain and body tissue-simulant liquids employed for calibration are listed in the tables below. The measurements were performed prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].

## **AMBIENT CONDITIONS**

Measurements were made in the open laboratory at  $22 \pm 2.0^{\circ}\text{C}$ . The temperature of the liquids in the waveguide used was measured using a mercury thermometer.

## **RESPONSE TO MODULATED SIGNALS**

To measure the response of the probe and amplifier to modulated signals, the probe is held vertically in a liquid-filled waveguide.

An RF amplifier is allowed to warm up and stabilise before use. A spectrum analyser is used to demonstrate that the peak power of the RF amplifier for the CW signals and the pulsed signals are within 0.1dB of each other when the signal generator is switched from CW to modulated output. Subsequently, the power levels recorded are read from a power meter when a CW signal is being transmitted.

The test sequence involves manually stepping the power up in regular (e.g. 2 dB) steps from the lowest power that gives a measurable reading on the SAR probe up to the maximum that the amplifiers can deliver.

At each power level, the individual channel outputs from the SAR probe are recorded at CW and then recorded again with the modulation setting. The results are entered into a spreadsheet. Using the spreadsheets, the modulated power is calculated by applying a factor to the measured CW power (e.g. for GSM, this factor is 9.03dB). This process is repeated 3 times with the response maximised for each channel sensor in turn.

The probe channel output signals are linearised in the manner set out in Section 1 above using equation (1) with the DCPs determined from the linearisation procedure. Calibration factors for the probe are used to determine the E-field values corresponding to the probe readings using equation (3). SAR is determined from the equation

$$\text{SAR (W/kg)} = E_{\text{liq}}^2 \text{ (V/m)} * \sigma \text{ (S/m)} / 1000 \quad (6)$$

Where  $\sigma$  is the conductivity of the simulant liquid employed.


Using the spreadsheet data, the DCP value for linearising each of the individual channels (X, Y and Z) is assessed separately. The corresponding DCP values are listed in the summary page of the calibration factors for each probe.

Figure 7 shows the linearised probe response to GSM signals, Figure 8 the response to GPRS signals (GSM with 2 timeslots) and Figure 9 the response to CDMA IS-95A and W-CDMA signals.

Additional tests have shown that the modulation response is similar at 1800MHz and is not affected by the orientation between the source and the probe.

## SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0136

Spherical isotropy measured at 900 MHz      0.24    (+/-) dB

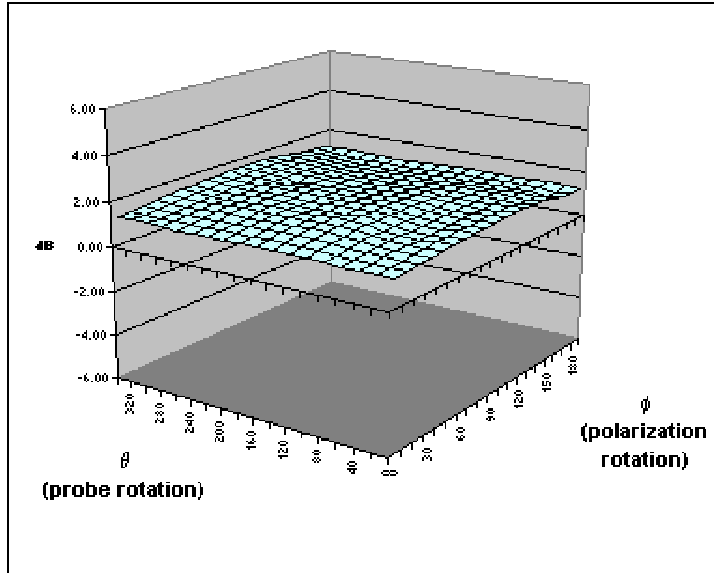

	X	Y	Z	
Air factors	490	405	405	(V*200)
DCPs	20	20	20	(V*200)
DSSS	20	20	20	(V*200)
GSM	8	9.5	11.2	(V*200)
CDMA	20	20	20	(V*200)

f (MHz)	Axial isotropy (+/- dB)		SAR conversion factors (liq/air)		Notes
	BRAIN	BODY	BRAIN	BODY	
450					
835	0.05	0.04	0.257	0.272	1,2,3
900	0.05	0.04	0.261	0.282	1,2,3
1800	0.06	0.06	0.315	0.339	1,2,3
1900	0.06	0.06	0.327	0.351	1,2,3
2450	0.05	0.10	0.378	0.405	1,2,3

Notes				
1)	Calibrations done at 22C +/- 2C			
2)	Waveguide calibration			
3)	Checked using box-phantom validation test			

(the graph shows a simple, spreadsheet representation of surface shown in 3D in Figure 3 below)

## ROBE SPECIFICATIONS

Indexsar probe 0136, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

Dimensions	S/N 0136	CENELEC [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

Dynamic range	S/N 0136	CENELEC [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg)	>35	>100	100
N.B. only measured to 35 W/kg			

Linearity of response	S/N 0136	CENELEC [1]	IEEE [2]
Over range 0.01 – 100 W/kg (+/- dB)	0.125	0.50	0.25

Isotropy (measured at 900MHz)	S/N 0136	CENELEC [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB) at 835, 900, 1800, 1900 and 2450 MHz	Max. 0.10 (see summary table)	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.24	1.0	0.50

Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
Chemical resistance	Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.

## REFERENCES

- [1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.
- [2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.
- [3] Calibration report on SAR probe IXP-050 S/N 0071 from National Physical Laboratory. Test Report EF07/2002/03/IndexSAR. Dated 20 February 2002.

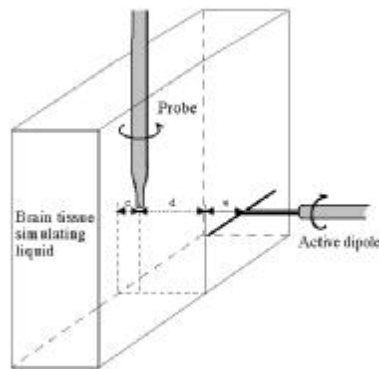
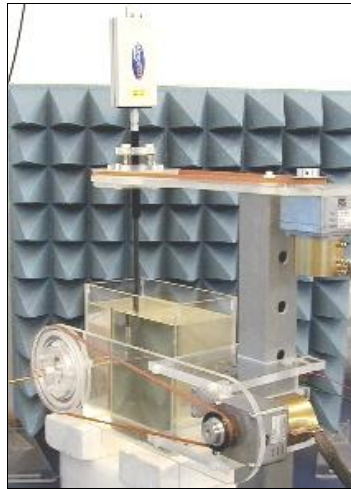


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

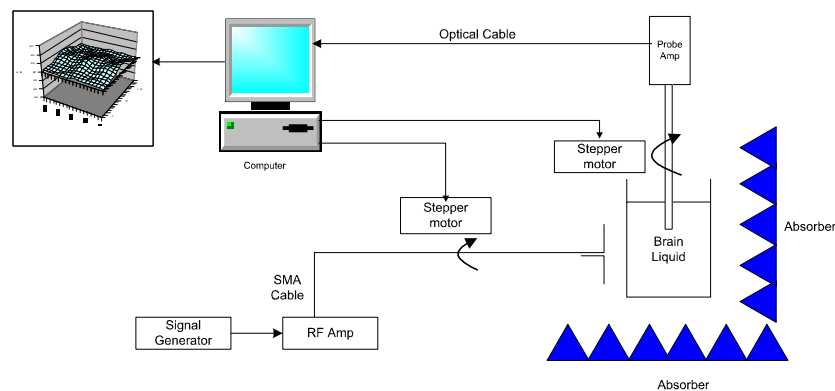


Figure 2. Schematic diagram of the test geometry used for isotropy determination

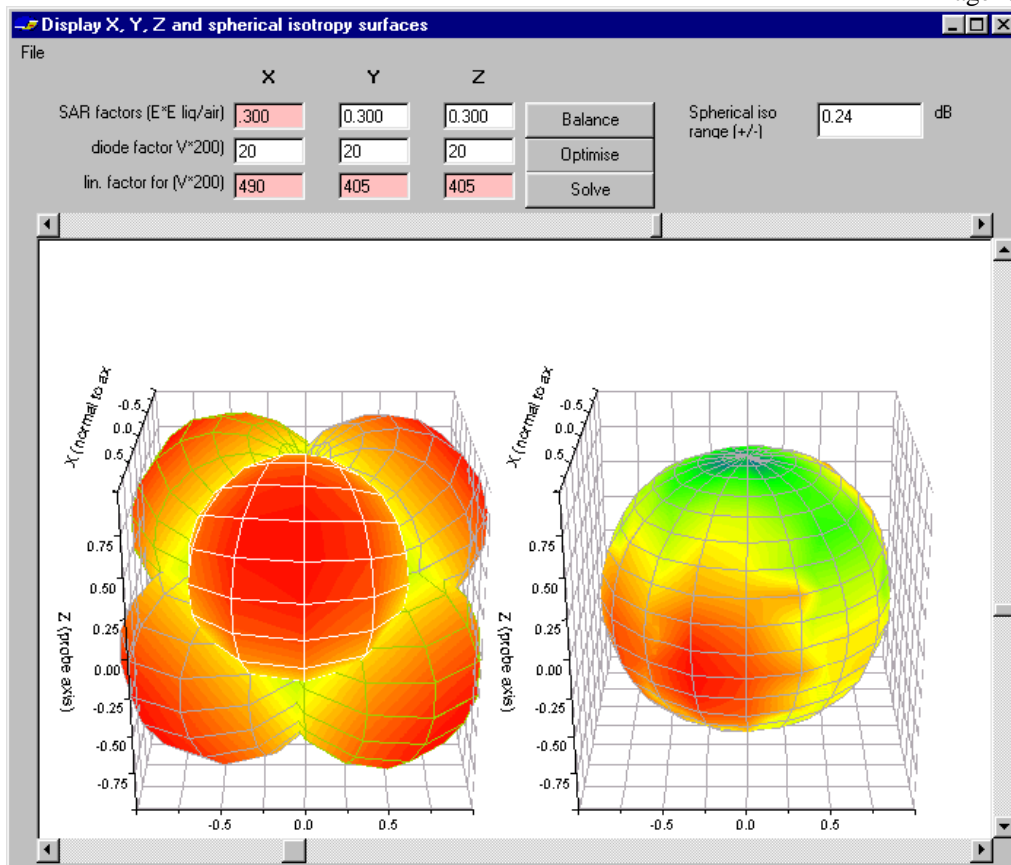


Figure 3. Graphical representation of the probe response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For the probe S/N 0136, this range is (+/-) 0.24 dB. The probe is more sensitive to fields parallel to the axis and less sensitive to fields normal to the probe axis.

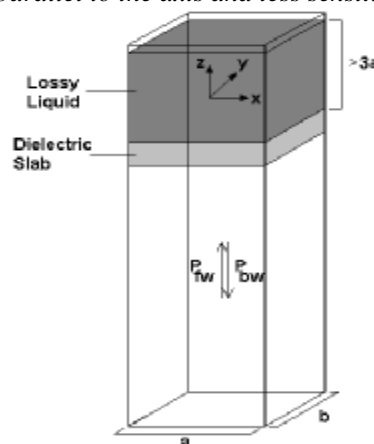


Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

IXP-050 S/N 0136

18-Aug-03

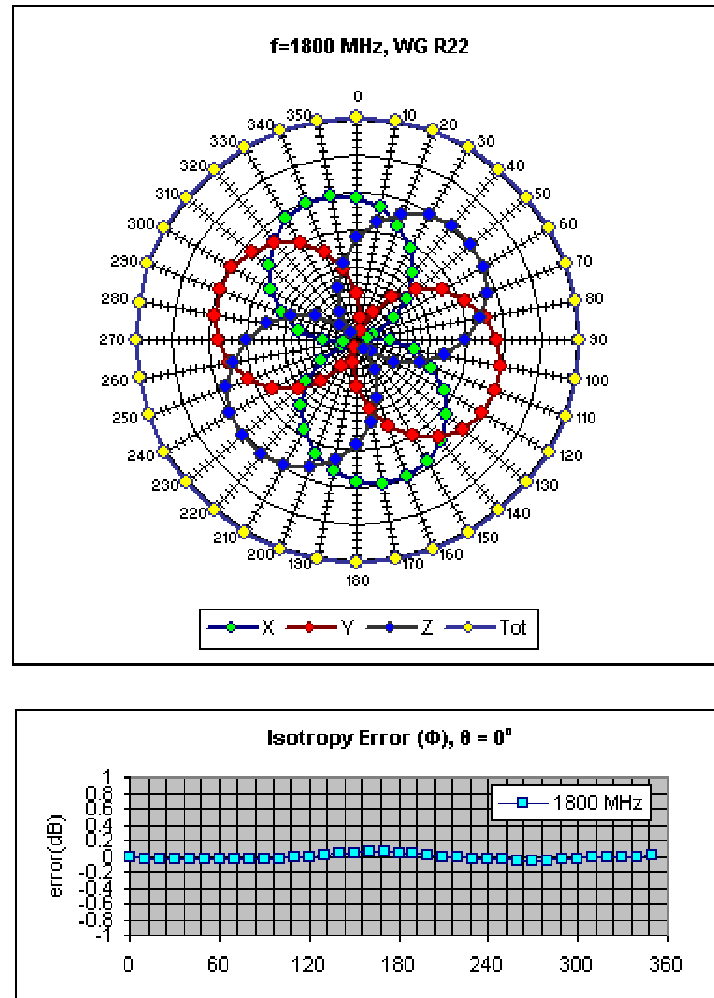


Figure 5. Example of the rotational isotropy of probe S/N 0136 obtained by rotating the probe in a liquid-filled waveguide at 2450 MHz. Similar distributions are obtained at the other test frequencies (1800 and 1900 MHz) both in brain liquids and body fluids (see summary table)



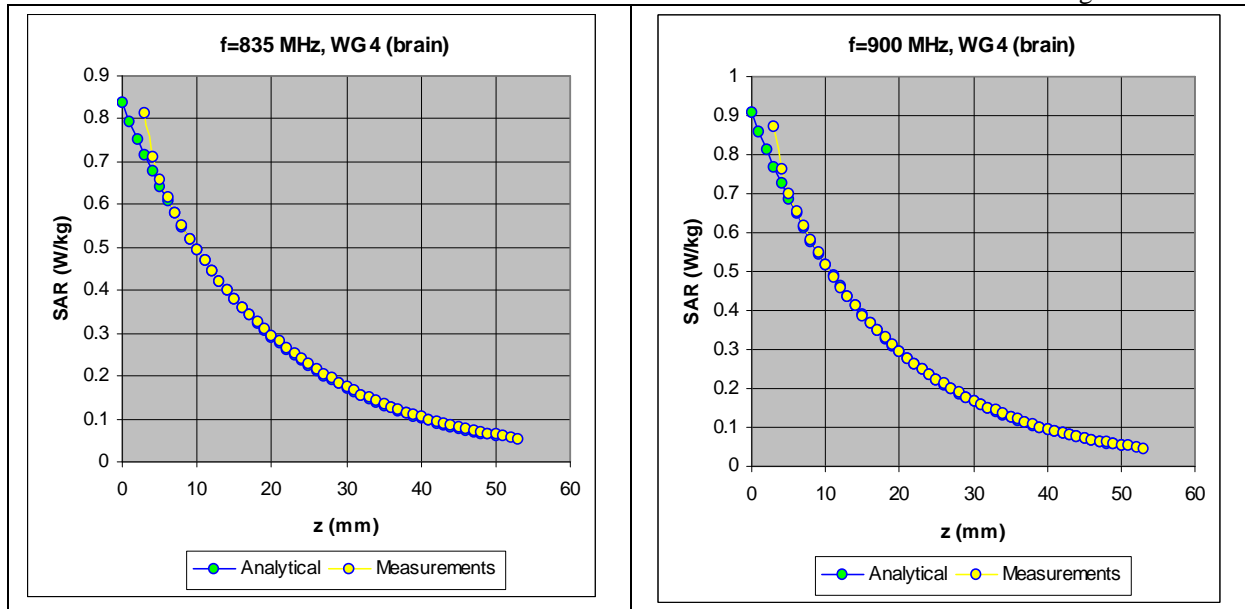


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

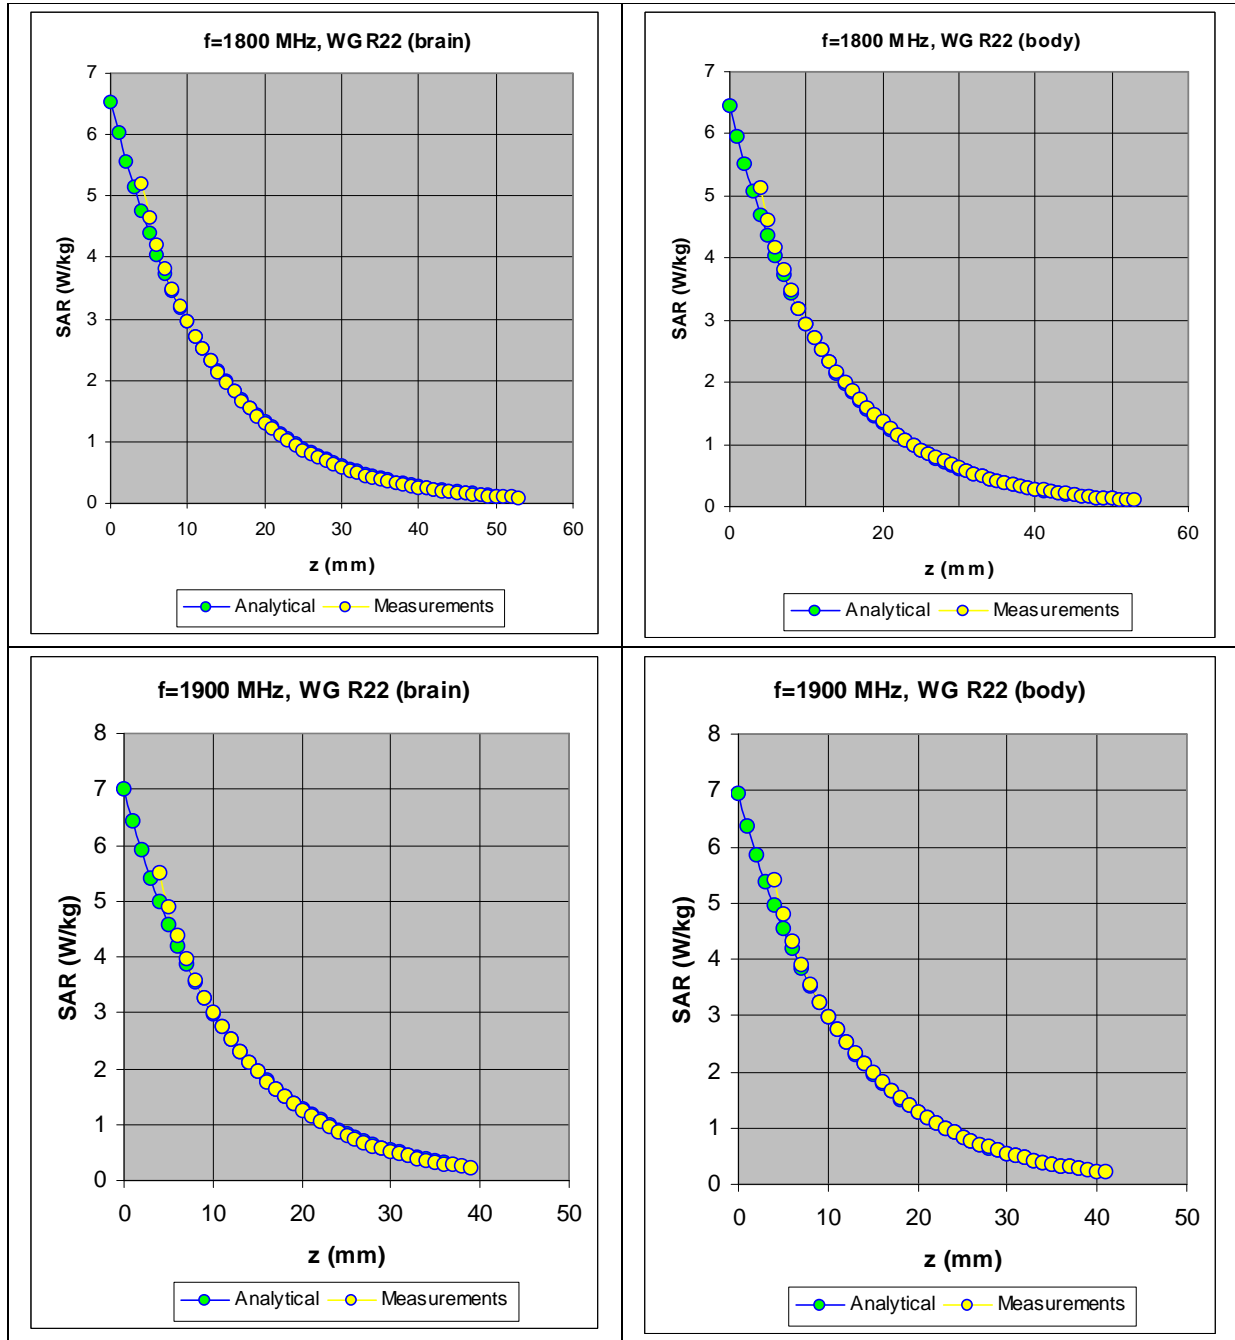


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

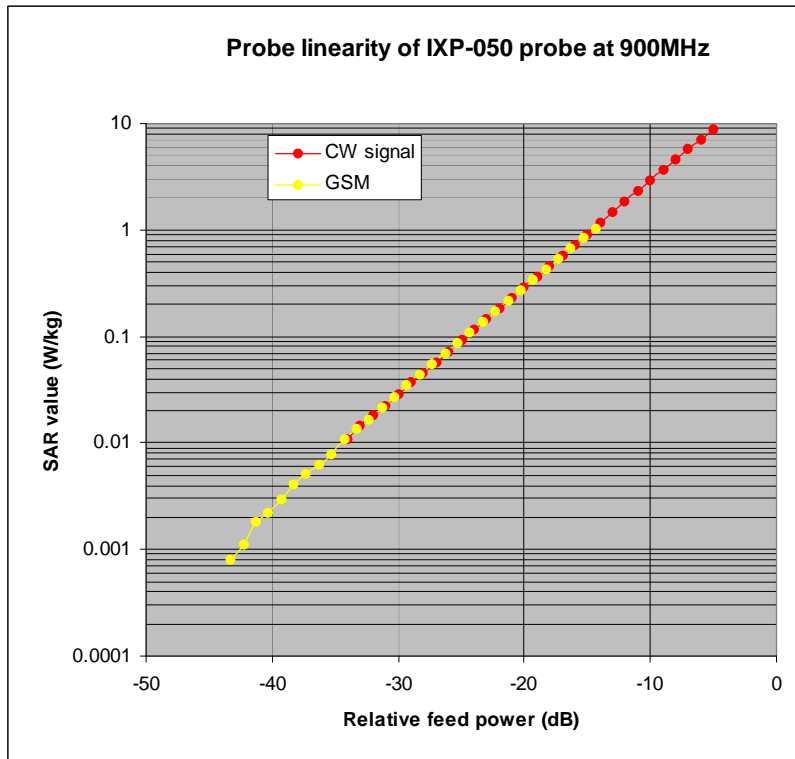


Figure 8. The GSM response of an IXP-050 probe at 900MHz.

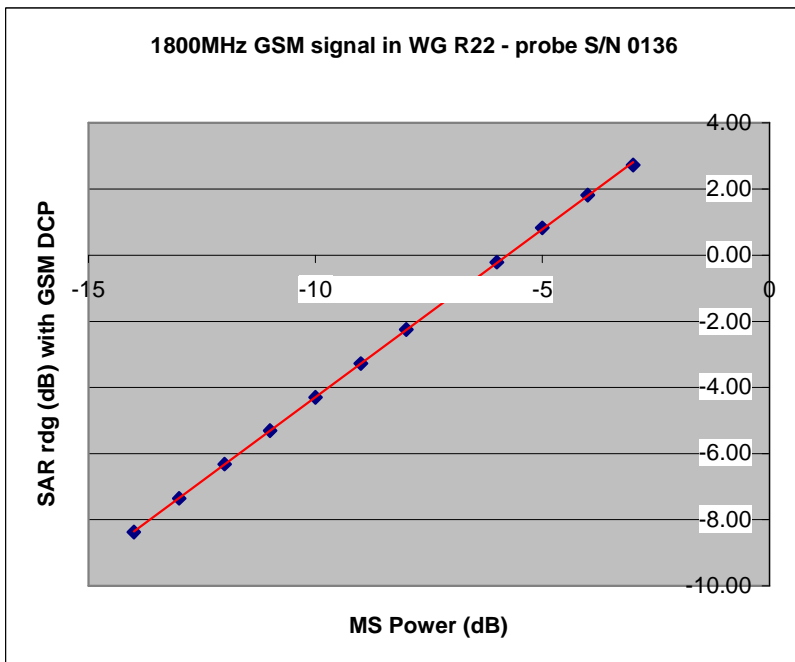


Figure 8a. The actual GSM response of IXP-050 probe S/N 0136 at 1800MHz

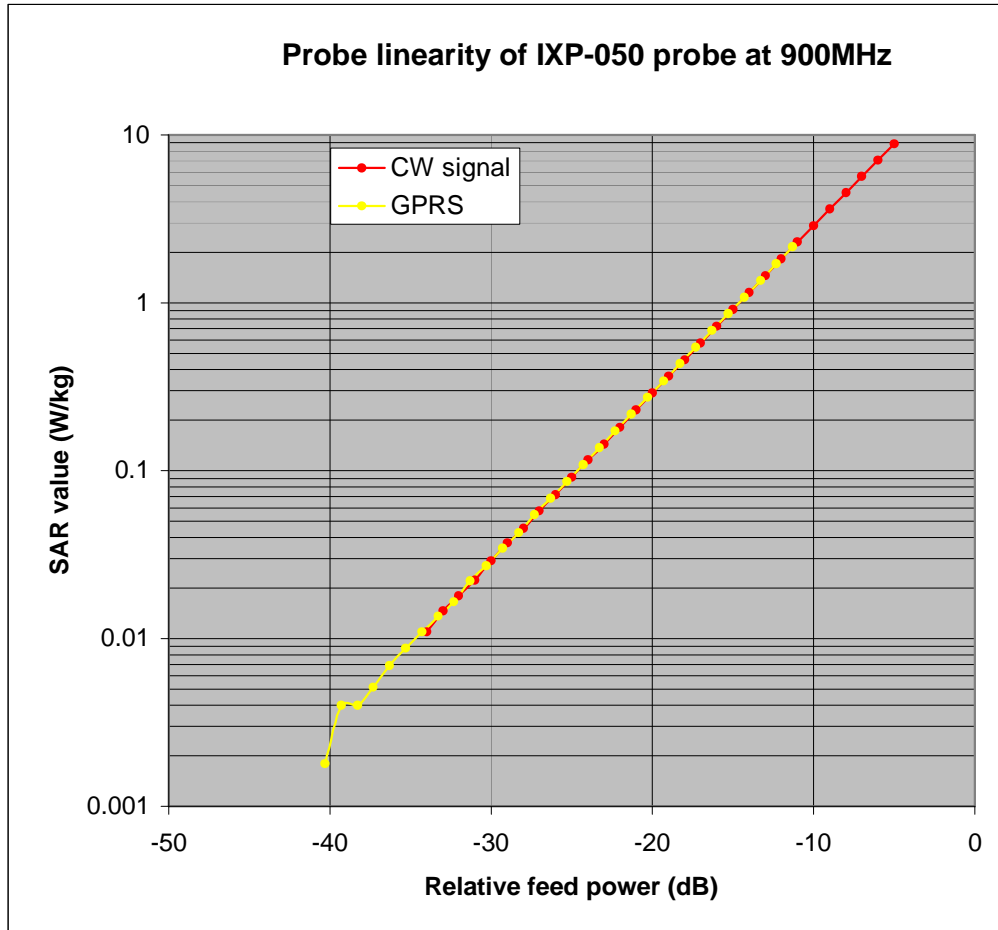


Figure 9. The GPRS response of an IXP-050 probe at 900MHz.

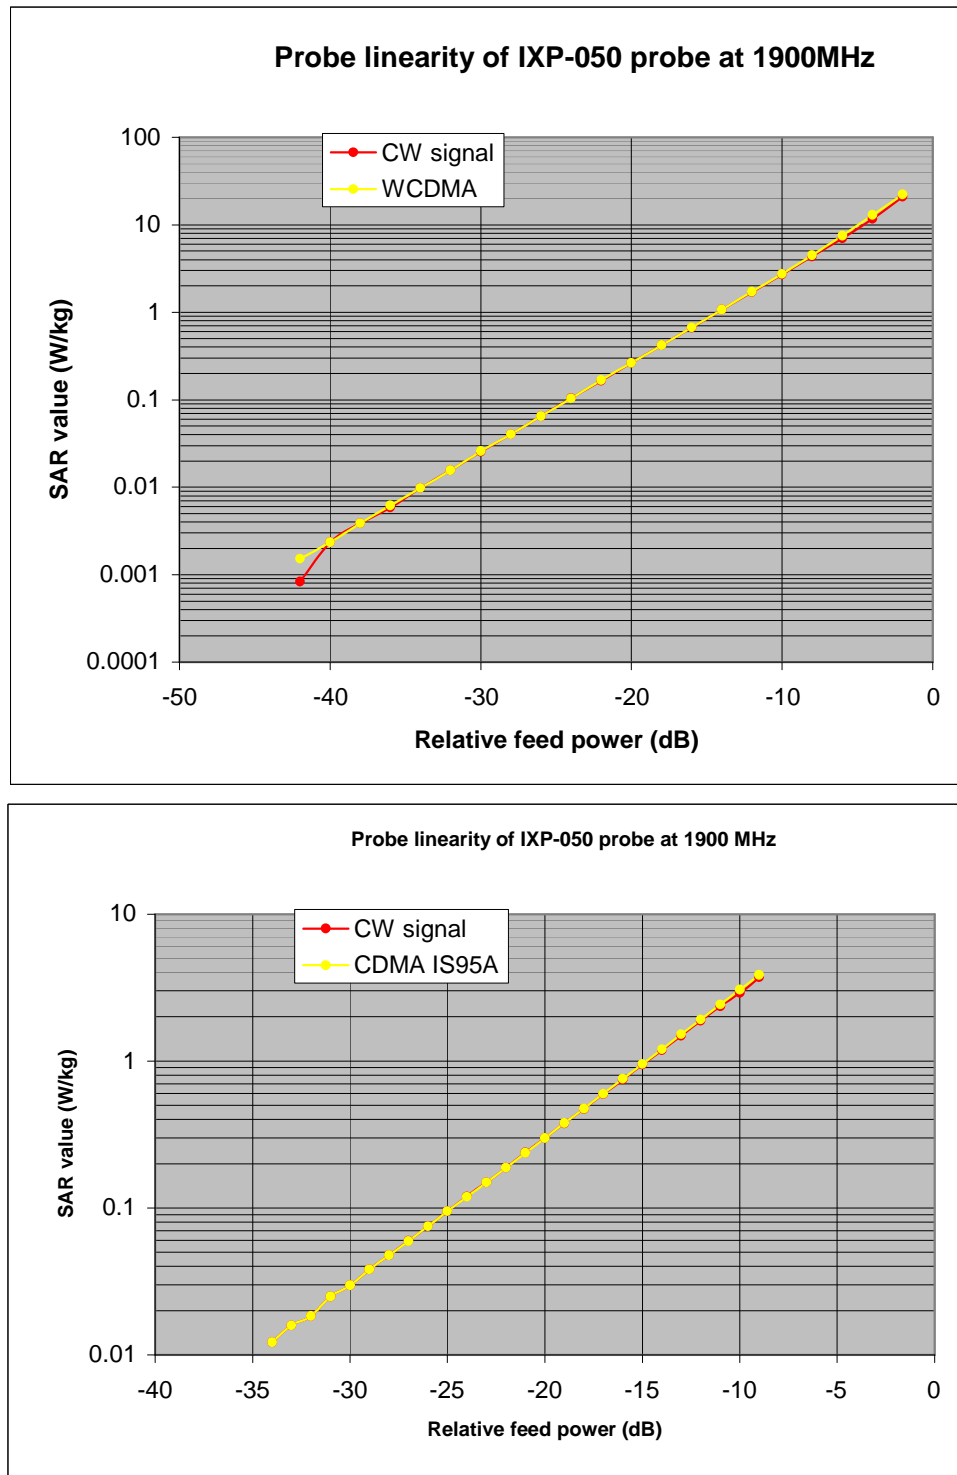


Figure 10. The CDMA response of an IXP-050 probe at 1900MHz.

**Table indicating the dielectric parameters of the liquids used for calibrations at each frequency**

<b>Liquid used</b>	<b>Relative permittivity (measured)</b>	<b>Conductivity (S/m) (measured)</b>
835 MHz BRAIN	43.18	0.935
835 MHz BODY	59.19	0.992
900 MHz BRAIN	42.47	0.998
900 MHz BODY	58.7	1.056
1800 MHz BRAIN	38.72	1.34
1800 MHz BODY	52.5	1.53
1900 MHz BRAIN	38.31	1.43
1900 MHz BODY	52.06	1.64
2450 MHz BRAIN	38.9	1.87
2450 MHz BODY	52.59	2.08




Report No. SN0048\_2450  
26<sup>th</sup> March 2003

**INDEXSAR**  
**2450MHz validation Dipole**  
**Type IXD-245 S/N 0048**

**Performance measurements**

- *MI Manning*

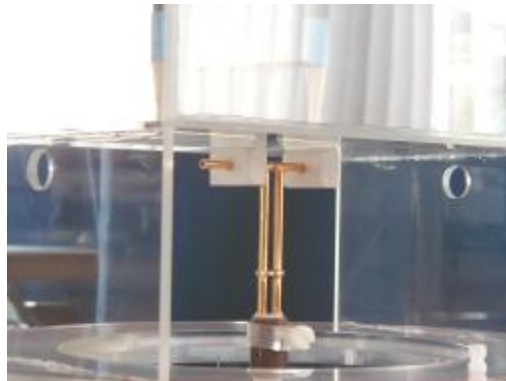

**Indexsar, Oakfield House, Cudworth Lane,  
Newdigate, Surrey RH5 5DR. UK.**  
Tel: +44 (0) 1306 631233 Fax: +44 (0) 1306 631834  
e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)

**Calibration / Conformance statement****Balanced Validation dipole**

Type:	<b>IXD-245 2450MHz</b>
-------	------------------------

Manufacturer:	<b>IndexSAR, UK</b>
---------------	---------------------

Serial Number:	<b>0048</b>
----------------	-------------

Place of Calibration:	<b>IndexSAR, UK</b>
-----------------------	---------------------

IndexSAR Limited hereby declares that the IXD series dipole named above has been checked for conformity to the specifications given in the draft IEEE 1528 and CENELEC En 50361 standards on the date shown below.

Date of Calibration/Check:	<b>26<sup>th</sup> March 2003</b>
----------------------------	-----------------------------------

The dipole named above should be periodically re-checked using the procedures set out in the dipole calibration document. It is important that the cautions regarding handling of the dipoles (given in the calibration document) are adhered to.

Next Calibration Date:	<b>March 2005</b>
------------------------	-------------------

The calibration measurements were carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

 <b>Calibrated By:</b>
--

 <b>Approved By:</b>
--

**1. Tests on Validation Dipole**

Tests have been performed on a balanced dipole made for 2450MHz application according to the



construction guidelines, dimensions and tolerances given in the draft IEEE1528 standard [1]. Measurements have been made of the impedance and return loss when positioned against the liquid-filled phantom and a validation test has been performed according to the procedures set out in IEEE 1528 [1].

## 2. Measurement Conditions

Measurements were performed using a box-shaped phantom made of PMMA with dimensions designed to meet the accuracy criteria for reasonably-sized phantoms that do not have liquid capacities substantially in excess of the volume of liquid required to fill the Indexsar upright SAM phantoms used for SAR testing of handsets against the ear.

An HP 8753B vector network analyser was used for the return loss measurements.

The dipole was placed in a special holder made of low-permittivity, low-loss materials. This holder enables the dipole to be positioned accurately in the centre of the base of the Indexsar box-phantom used for flat-surface testing and validation checks.

The validation dipoles are supplied with special spacers made from a low-permittivity, low-loss foam material. These spacers are fitted to the dipole arms to ensure that, when the dipole is offered up to the phantom surface, the spacing between the dipole and the liquid surface is accurately aligned according to the guidance in the relevant standards documentation. The spacers are rectangular with a central hole equal to the dipole arm diameter and dimensioned so that the longer side can be used to ensure a spacing of 15mm from the liquid in the phantom (for tests at 900MHz and below) and the shorter side can be used for tests at 1800MHz and above to ensure a spacing of 10mm from the liquid in the phantom. The spacers are made on a CNC milling machine with an accuracy of  $1/40^{\text{th}}$  mm but they may suffer wear and tear and need to be replaced periodically. The material used is Rohacell, which has a relative permittivity of approx. 1.05 and a negligible loss tangent.

The apparatus supplied by Indexsar for dipole validation tests thus includes:

Balanced dipoles for each frequency required are dimensioned according to the guidelines given in IEEE 1528 [1]. The dipoles are made from semi-rigid 50 Ohm co-ax, which is joined by soldering and is gold-plated subsequently. The constructed dipoles are easily deformed, if mis-handled, and periodic checks need to be made of their symmetry.

Rohacell foam spacers designed for presenting the dipoles to 2mm thick PMMA box phantoms. These components also suffer wear and tear and should be replaced when the central hole is a loose-fit on the dipole arms or if the edges are too worn to ensure accurate alignment. The standard spacers are dimensioned for use with 2mm wall thickness (additional spacers are available for 4mm wall thickness).

## 3. SAR Validation Measurement


A SAR validation check was performed with the box-phantom located on the SARA2 phantom support base on the SARA2 robot system. Tests were then conducted at a feed power level of approx. 0.25W. The actual power level was recorded and used to normalise the results obtained to the standard input power conditions of 1W (forward power). The ambient temperature was 24°C.

The phantom was filled with a 2450MHz brain liquid using a recipe from [1], which was measured using an Indexsar DiLine kit at 2450MHz. Measurements were taken at 23°C and 30°C and interpolation was used to find the properties at 24°C which were as below:

Relative Permittivity	<b>39.221</b>
Conductivity	<b>1.8714 S/m</b>

The SARA2 software version 0.420N was used with an Indexsar probe previously calibrated using waveguide techniques.

The 3D measurement made using the dipole at the bottom of the phantom box is shown below:

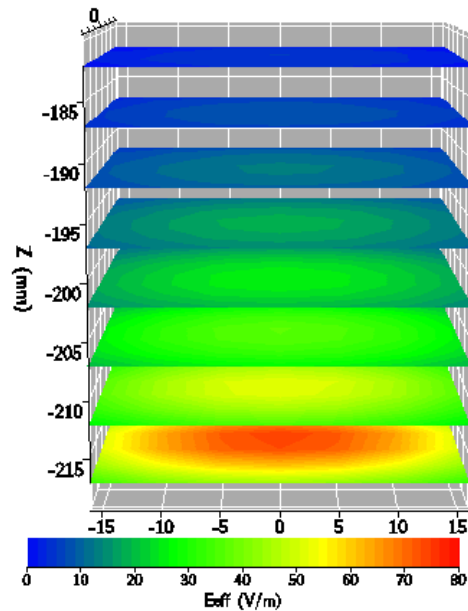

The volume-averaged SAR results, normalised to an input power of 1W (forward power) are:

Averaged over 1 cm <sup>3</sup> (1g) of tissue	<b>51.376 W/kg</b>
Averaged over 10cm <sup>3</sup> (10g) of tissue	<b>23.888 W/kg</b>

These results can be compared with Table 8.1 in [1]. The agreement is within 10%.


#### 4. Dipole impedance and return loss

The dipoles are designed to have low return loss ONLY when presented against a lossy-phantom at the specified distance. A Vector Network Analyser (VNA) was used to perform a return loss measurement on the specific dipole when in the measurement-location against the box phantom. The distance was as specified in the standard i.e. 10mm from the liquid (for 2450MHz). The Indexsar foam spacers (described above) were used to ensure this condition during measurement.

The impedance was measured at the SMA-connector with the network analyser. The following parameters were measured:

Dipole impedance at 2450 MHz  $\text{Re}\{Z\} = 44.814 \Omega$   
 $\text{Im}\{Z\} = -5.3359 \Omega$

Return loss at 2450MHz **-22.122 dB**

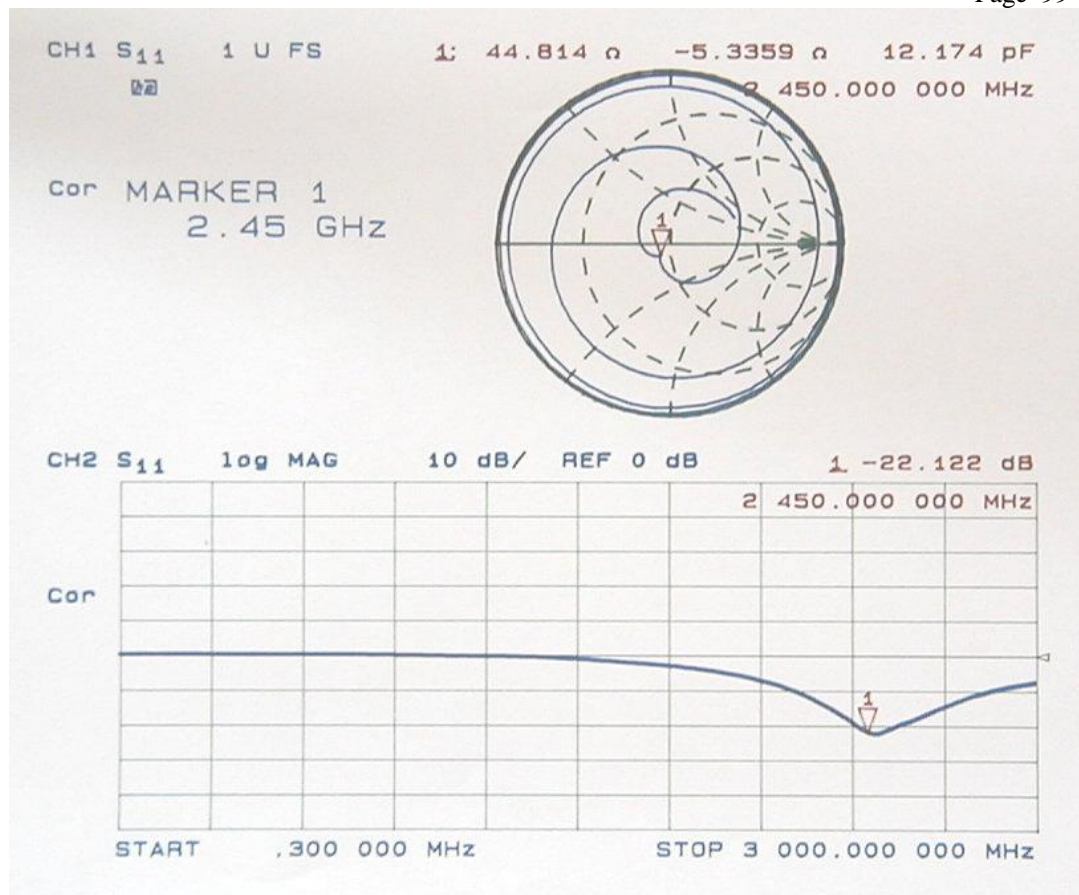

## 5. Dipole handling

The dipoles are made from standard, copper-sheathed coaxial cable. In assembly, the sections are joined using ordinary soft-soldering. This is necessary to avoid excessive heat input in manufacture, which would destroy the polythene dielectric used for the cable. The consequence of the construction material and the assembly technique is that the dipoles are fragile and can be deformed by rough handling. Conversely, they can be straightened quite easily as described in this report.

If a dipole is suspected of being deformed, a normal workshop lathe can be used as an alignment jig to restore the symmetry. To do this, the dipole is first placed in the headstock of the lathe (centred on the plastic or brass spacers) and the headstock is rotated by hand (do NOT use the motor). A marker (lathe tool or similar) is brought up close to the end of one dipole arm and then the headstock is rotated by 0.5 rev. to check the opposing arm. If they are not balanced, judicious deformation of the arms can be used to restore the symmetry.

If a dipole has a failed solder joint, the dipole can be fixed down in such a way that the arms are co-linear and the joint re-soldered with a reasonably-powerful electrical soldering iron. Do not use gas soldering irons. After such a repair, electrical tests must be performed as described below.

Please note that, because of their construction, the dipoles are short-circuited for DC signals.

## **6. Tuning the dipole**

The dipole dimensions are based on calculations that assumed specific liquid dielectric properties. If the liquid dielectric properties are somewhat different, the dipole tuning will also vary. A pragmatic way of accounting for variations in liquid properties is to 'tune' the dipole (by applying minor variations to its effective length). For this purpose, Indexsar can supply short brass tube lengths to extend the length of the dipole and thus 'tune' the dipole. It cannot be made shorter without removing a bit from the arm. An alternative way to tune the dipole is to use copper shielding tape to extend the effective length of the dipole. Do both arms equally.

It should be possible to tune a dipole as described, whilst in place in the measurement position as long as the user has access to a VNA for determining the return loss.

## **7. Reference**

[1] Draft recommended practice for determining the peak spatial-average specific absorption rate (SAR) in the human body due to wireless communications devices: Measurement Techniques. Draft CD1.1 – December 29, 2002.