

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 1 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 9:23:19 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.18
Relative Humidity:	30%	Conductivity:	0.893
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-13.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-102.00 mm
Antenna Configuration:	integral	Max E Field:	24.13 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.398 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.267 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.183 W/kg
Type of Modulation:		SAR End:	0.187 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

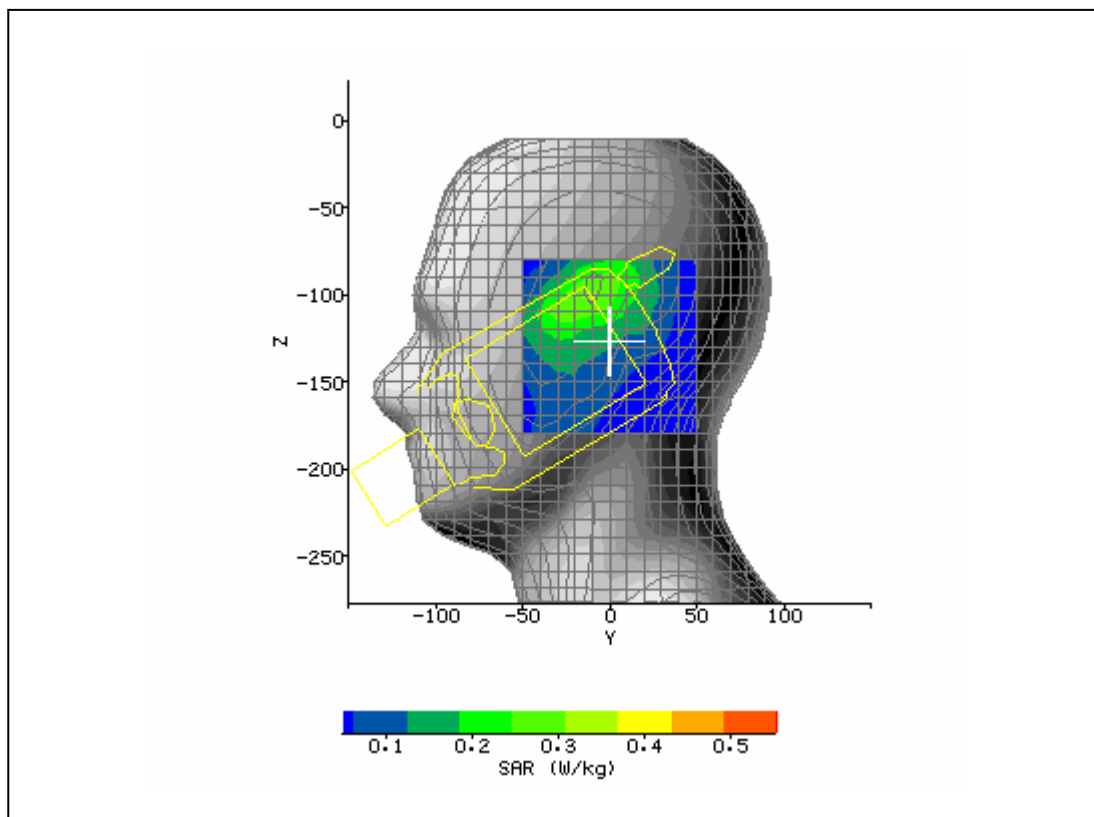

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 2 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 9:45:52 AM	DUT Battery Model/No:	
Filename:	lefttch190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.18
Relative Humidity:	30%	Conductivity:	0.893
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-101.00 mm
Antenna Configuration:	integral	Max E Field:	31.26 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.748 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.477 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.340 W/kg
Type of Modulation:		SAR End:	0.333 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

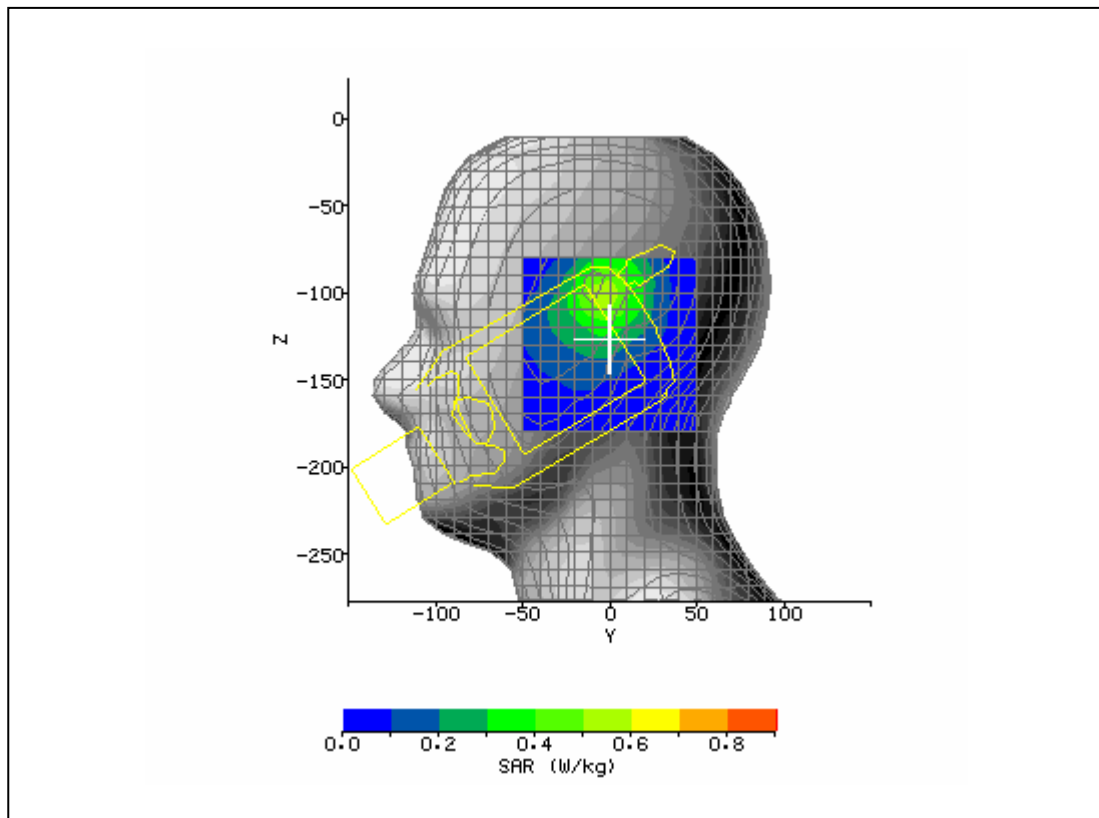

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 3 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 10:45:50 AM	DUT Battery Model/No:	
Filename:	righttch190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.18
Relative Humidity:	30%	Conductivity:	0.893
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	5.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-115.00 mm
Antenna Configuration:	integral	Max E Field:	19.81 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.314 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.220 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.168 W/kg
Type of Modulation:		SAR End:	0.174 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

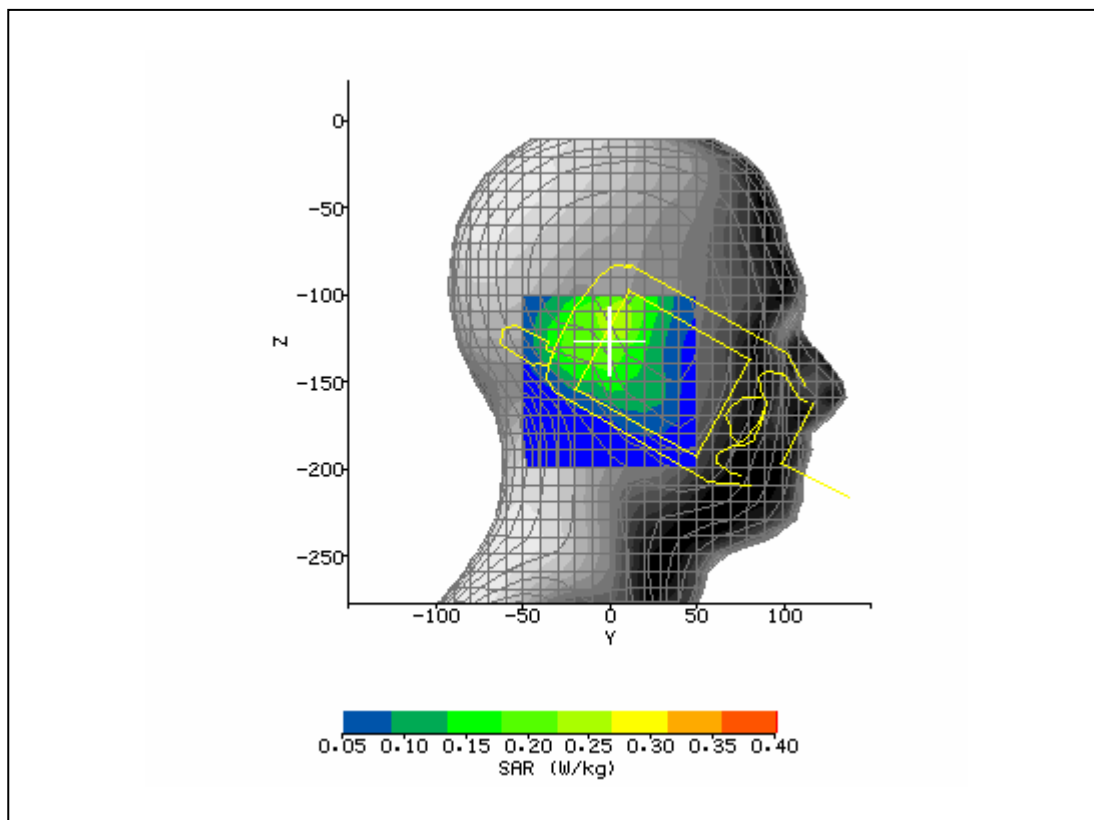

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 4 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 11:20:28 AM	DUT Battery Model/No:	
Filename:	righttlt190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.18
Relative Humidity:	30%	Conductivity:	0.893
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-123.00 mm
Antenna Configuration:	integral	Max E Field:	24.21 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.459 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.330 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.258 W/kg
Type of Modulation:		SAR End:	0.259 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

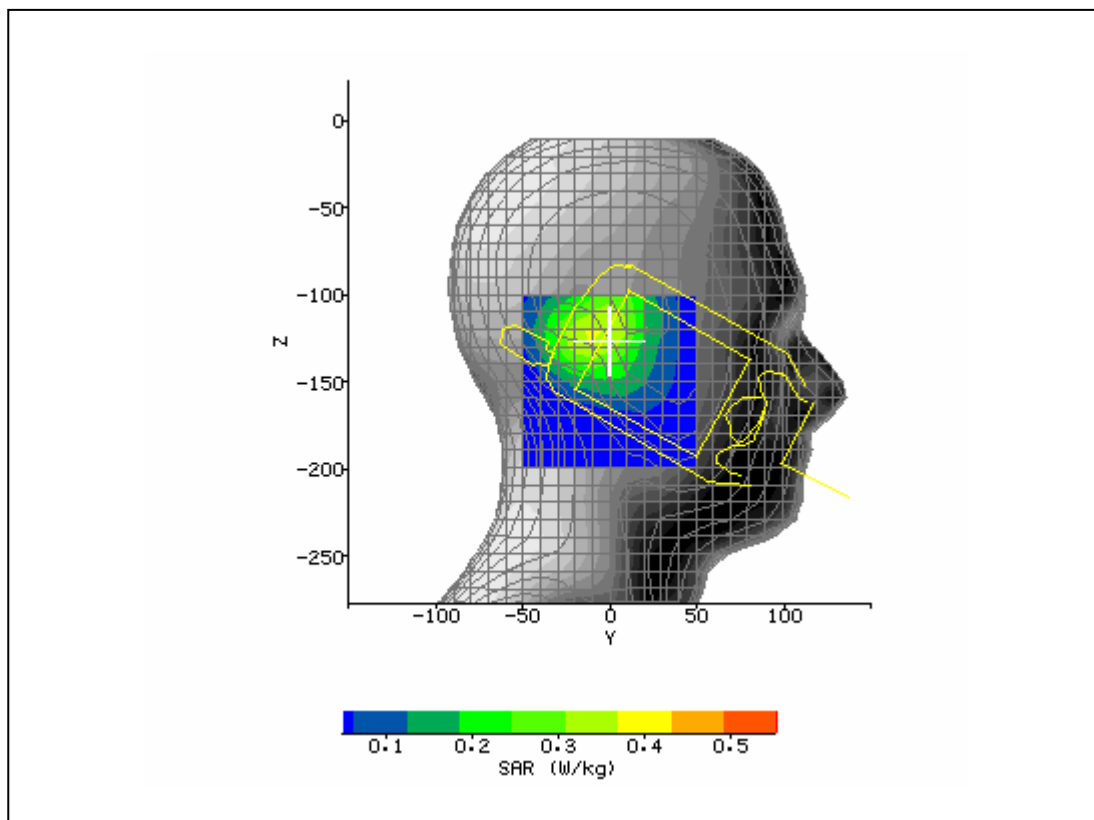

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 5 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 12:13:07 PM	DUT Battery Model/No:	
Filename:	righttlt190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.28
Relative Humidity:	30%	Conductivity:	0.889
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-1.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-102.00 mm
Antenna Configuration:	integral	Max E Field:	27.62 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.587 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.365 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.256 W/kg
Type of Modulation:		SAR End:	0.265 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.80 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

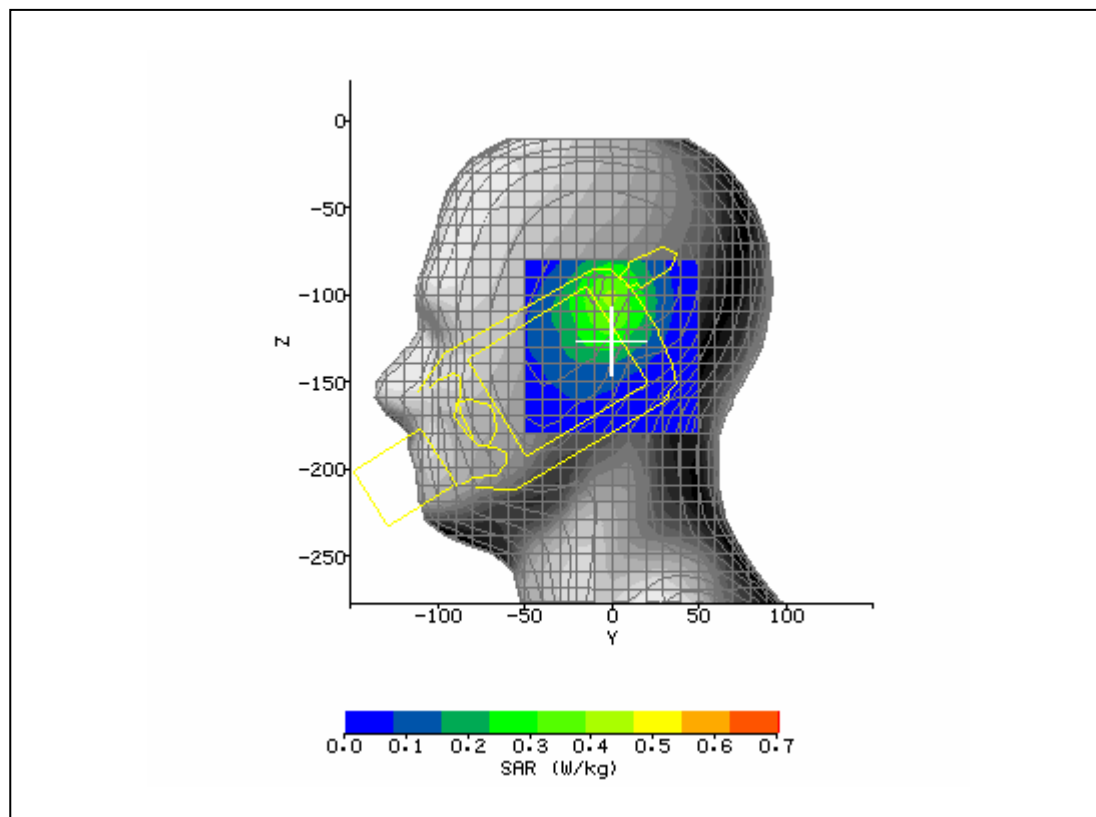

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 6 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/8/2006 12:48:35 PM	DUT Battery Model/No:	
Filename:	lefttl128.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.09
Relative Humidity:	30%	Conductivity:	0.896
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-106.00 mm
Antenna Configuration:	integral	Max E Field:	34.13 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.851 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.539 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.389 W/kg
Type of Modulation:		SAR End:	0.394 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.22 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

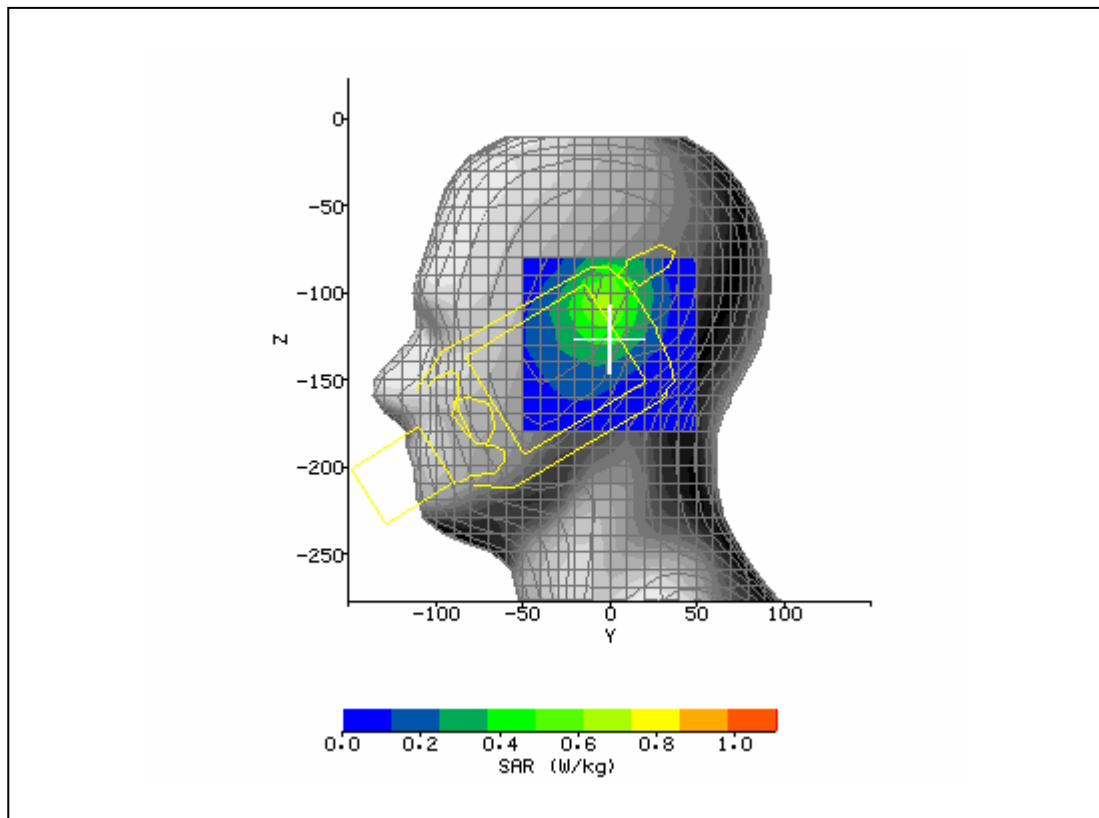

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 7 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 9:10:22 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	56.11
Relative Humidity:	30%	Conductivity:	0.984
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	integral	Max E Field:	28.54 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.951 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.630 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.223 W/kg
Type of Modulation:		SAR End:	0.230 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots	Extrapolation:	poly4

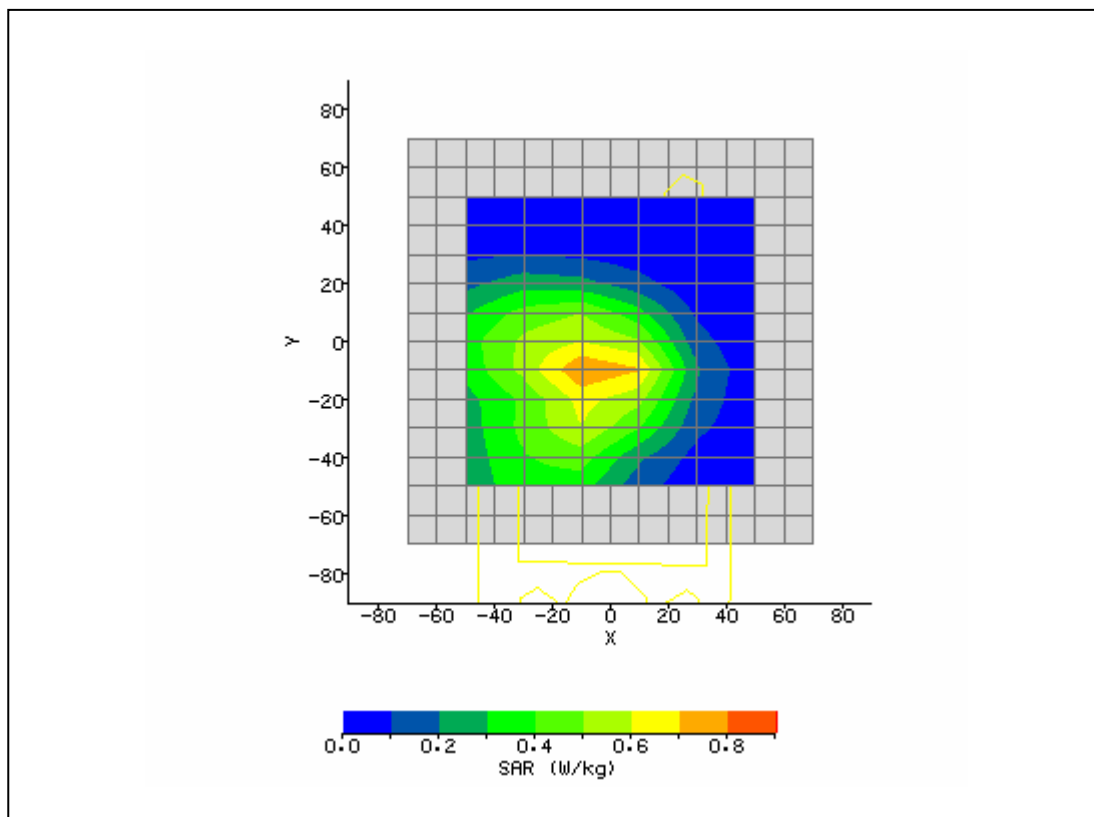

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 8 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 8:49:11 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	56.55
Relative Humidity:	30%	Conductivity:	0.981
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	integral	Max E Field:	28.71 V/m
Test Frequency:	824.2 MHz	SAR 1g:	0.960 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.632 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.229 W/kg
Type of Modulation:		SAR End:	0.230 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots TX	Extrapolation:	poly4

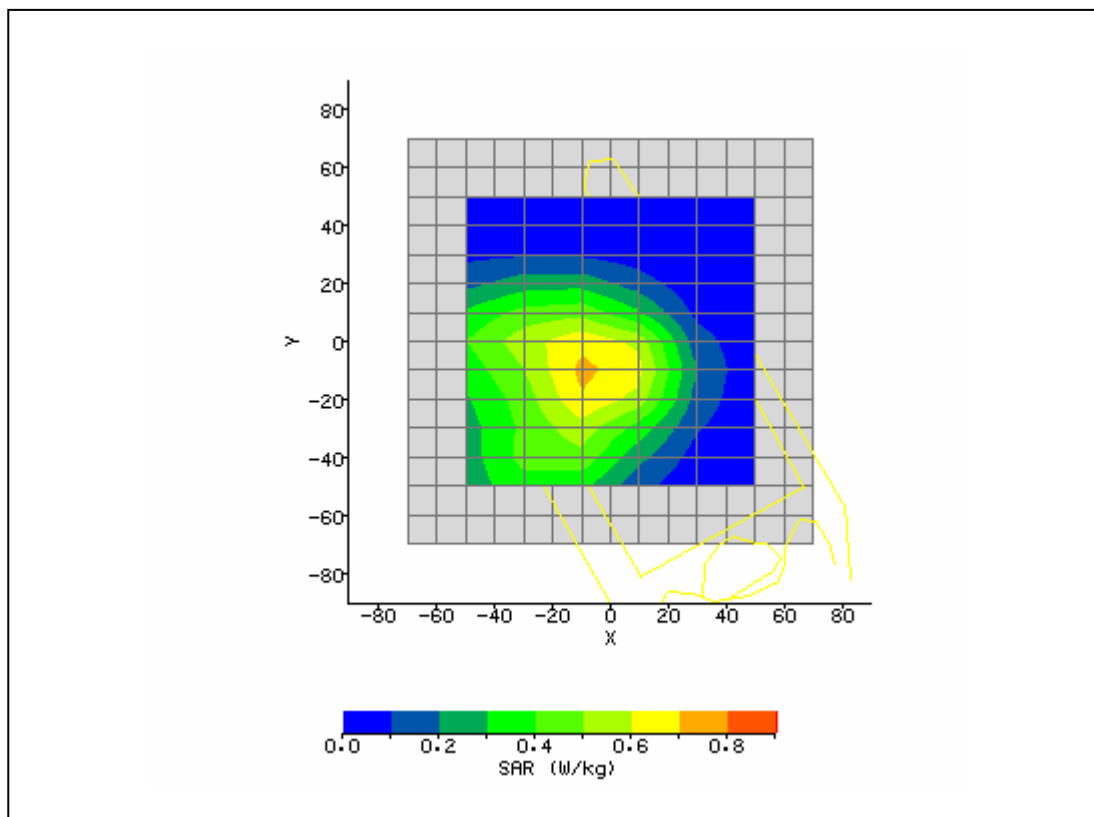

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 9 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 9:28:03 AM	DUT Battery Model/No:	
Filename:	bod190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	55.90
Relative Humidity:	30%	Conductivity:	0.989
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	integral	Max E Field:	29.80 V/m
Test Frequency:	848.8MHz	SAR 1g:	1.083 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.726 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.252 W/kg
Type of Modulation:		SAR End:	0.249 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots	Extrapolation:	poly4

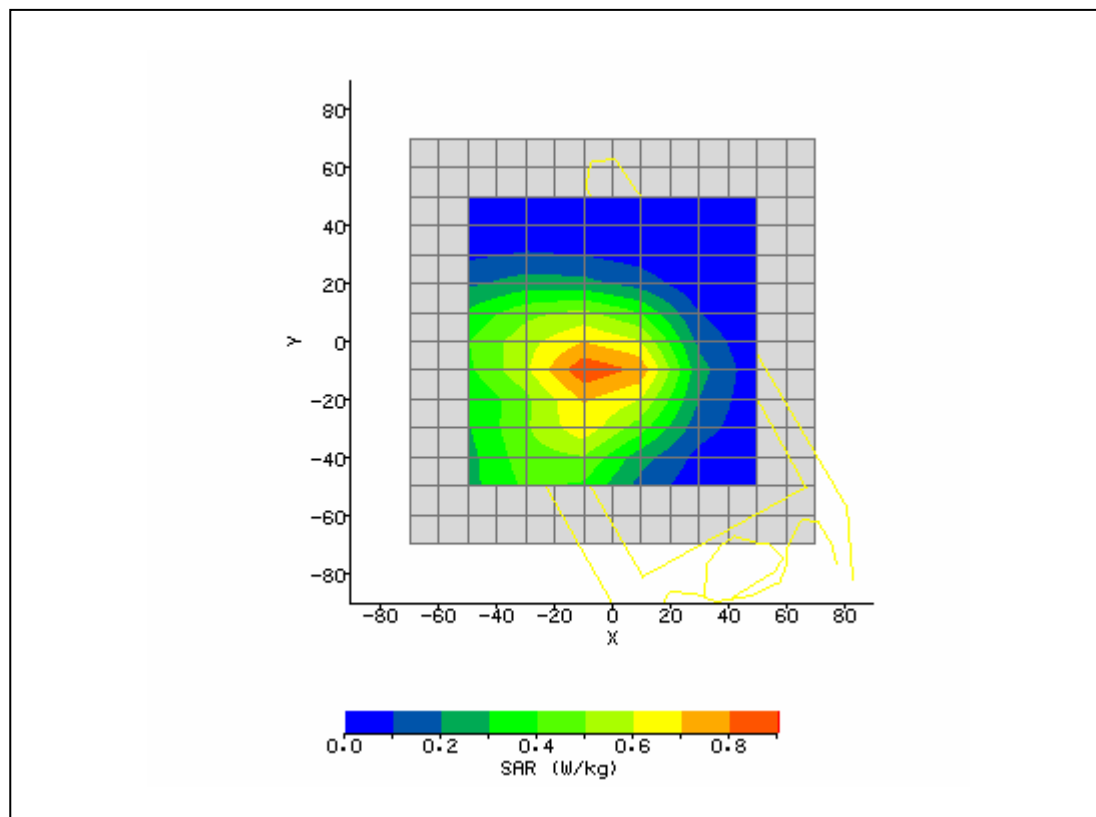

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 10 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 11:23:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.49
Relative Humidity:	30%	Conductivity:	1.398
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-97.90 mm
Antenna Configuration:	integral	Max E Field:	19.23 V/m
Test Frequency:	1880MHz	SAR 1g:	0.415 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.238 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.144 W/kg
Type of Modulation:		SAR End:	0.149 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.40 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

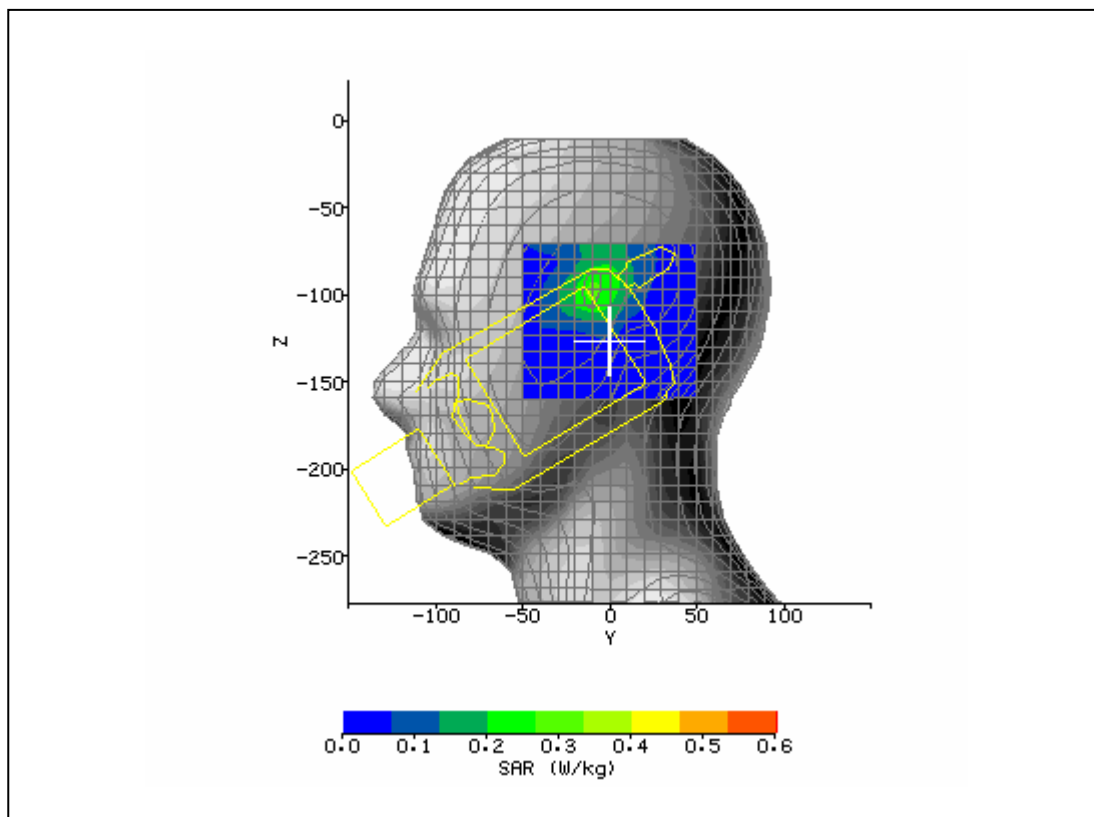

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 11 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 2:11:12 PM	DUT Battery Model/No:	
Filename:	lefttch661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.49
Relative Humidity:	30%	Conductivity:	1.398
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-96.10 mm
Antenna Configuration:	integral	Max E Field:	20.07 V/m
Test Frequency:	1880MHz	SAR 1g:	0.494 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.277 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.181 W/kg
Type of Modulation:		SAR End:	0.187 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

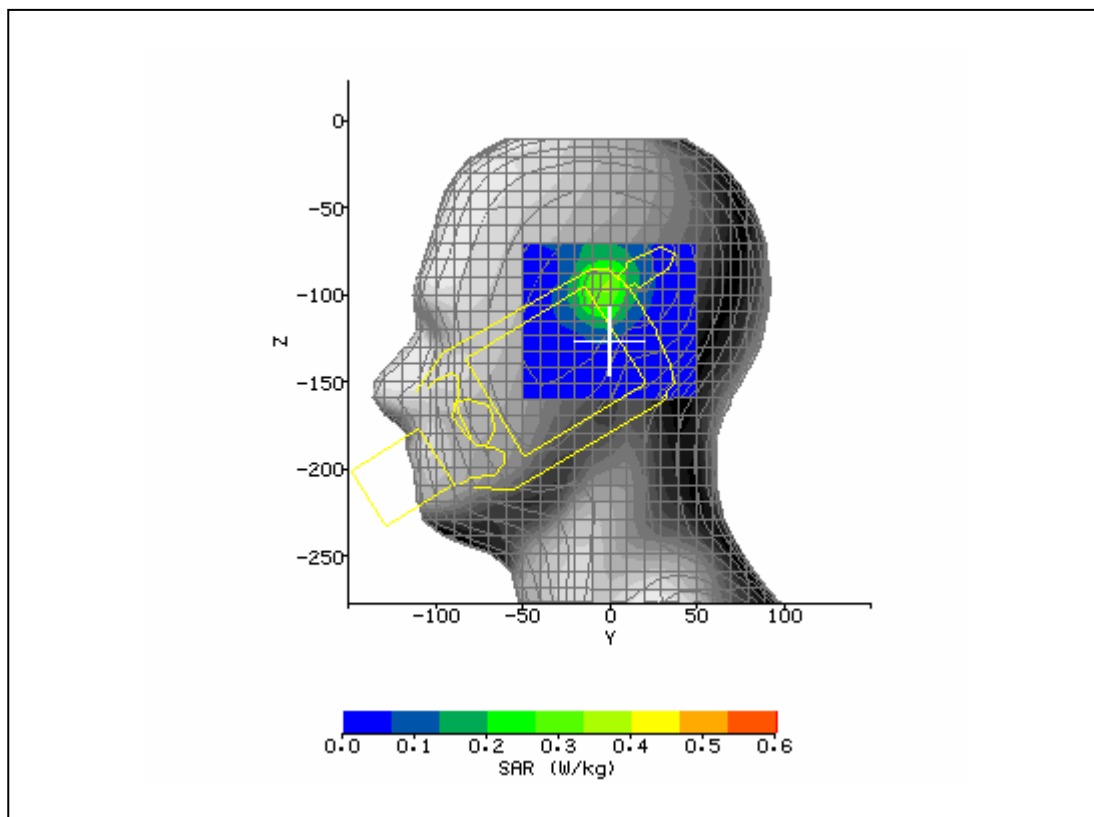

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 12 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 2:49:13 PM	DUT Battery Model/No:	
Filename:	lefttlt661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.49
Relative Humidity:	30%	Conductivity:	1.398
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-129.00 mm
Antenna Configuration:	integral	Max E Field:	10.24 V/m
Test Frequency:	1880MHz	SAR 1g:	0.124 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.081 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.053 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

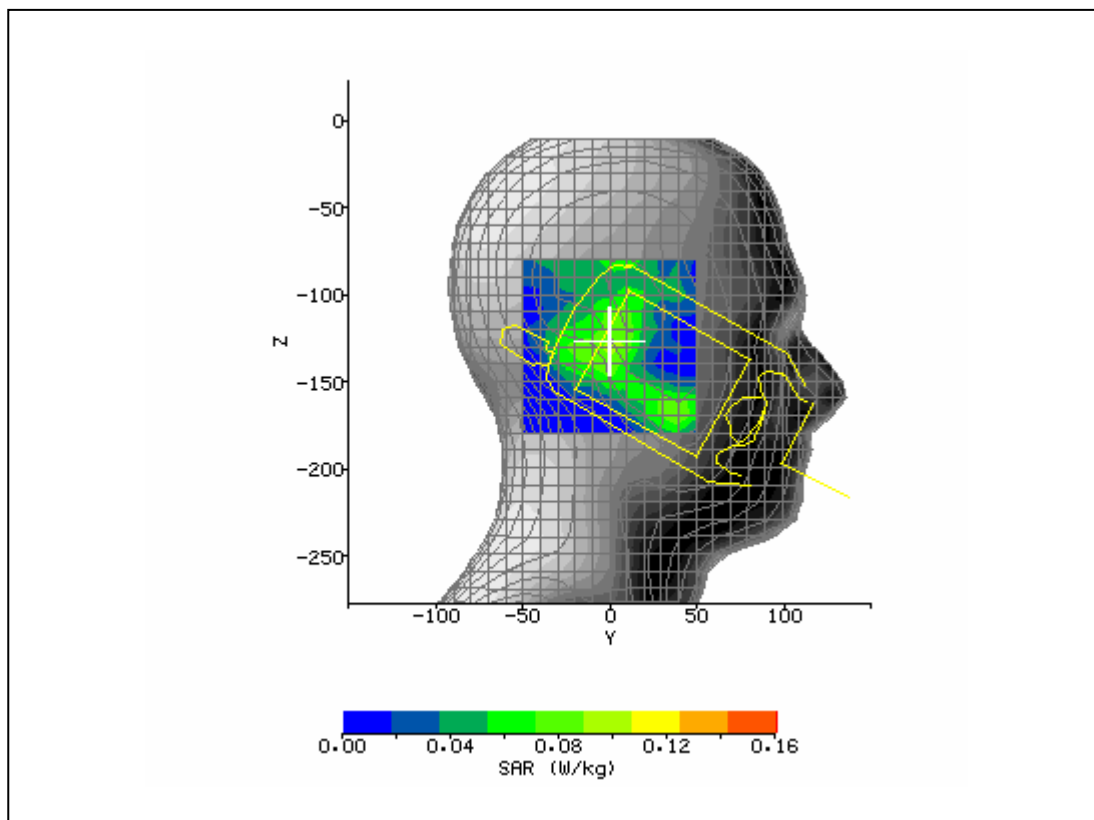

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 13 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 3:09:08 PM	DUT Battery Model/No:	
Filename:	righttch661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.49
Relative Humidity:	30%	Conductivity:	1.398
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-123.00 mm
Antenna Configuration:	integral	Max E Field:	13.87 V/m
Test Frequency:	1880MHz	SAR 1g:	0.231 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.150 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.108 W/kg
Type of Modulation:		SAR End:	0.113 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

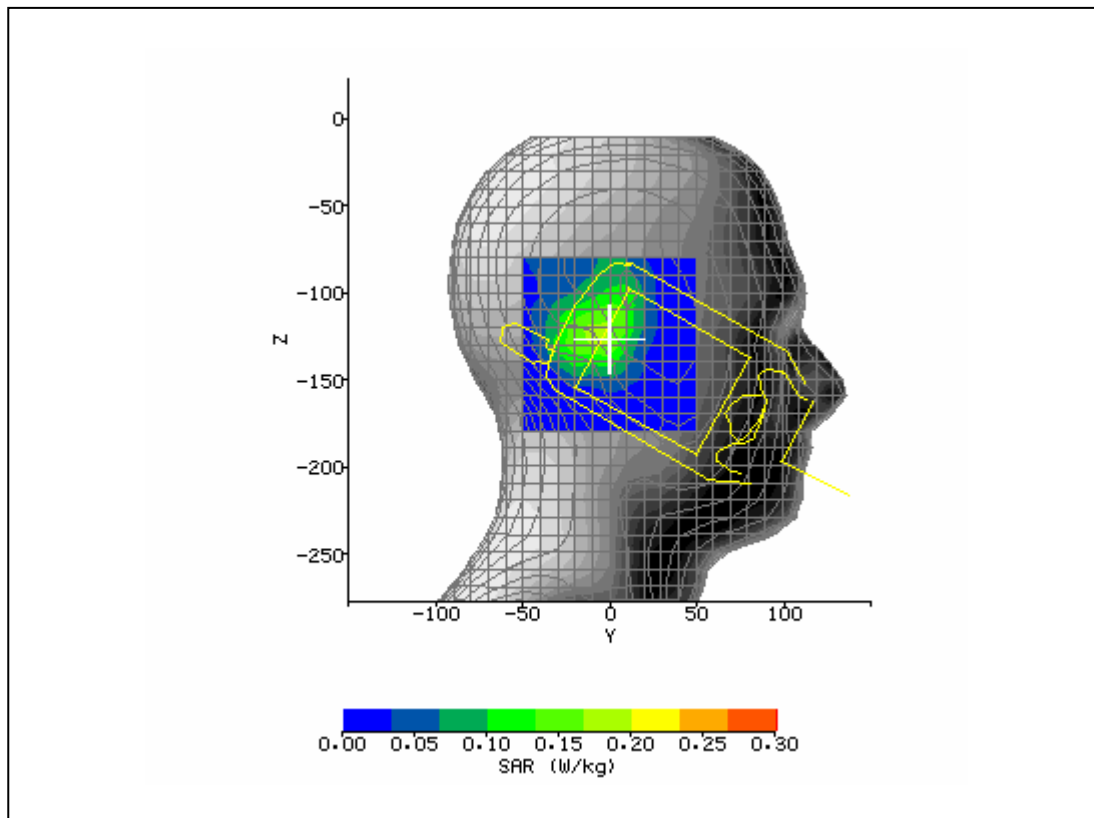

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 14 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 3:44:05 PM	DUT Battery Model/No:	
Filename:	lefttilt512.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.62
Relative Humidity:	30%	Conductivity:	1.389
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.90 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-93.70 mm
Antenna Configuration:	integral	Max E Field:	23.08 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.577 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.324 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.201 W/kg
Type of Modulation:		SAR End:	0.202 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

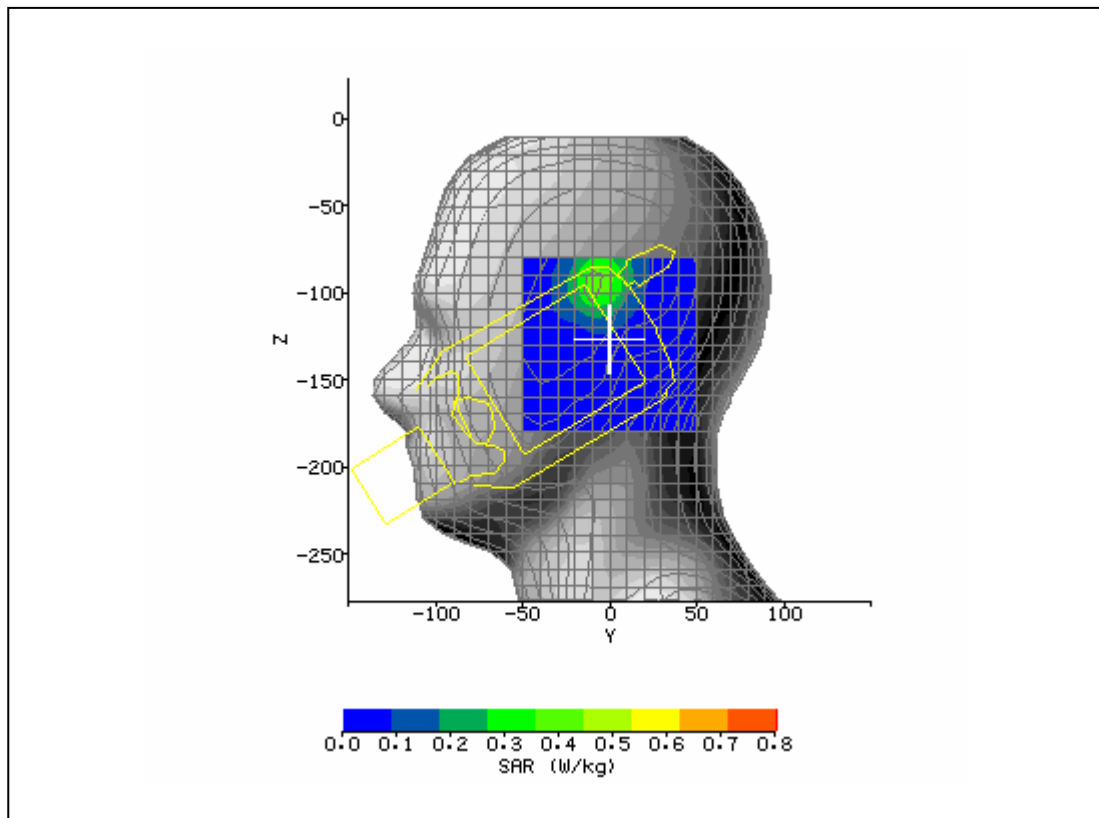

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 15 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 4:05:39 PM	DUT Battery Model/No:	
Filename:	lefttilt512.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.42
Relative Humidity:	30%	Conductivity:	1.423
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-94.00 mm
Antenna Configuration:	integral	Max E Field:	21.68 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.512 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.284 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.173 W/kg
Type of Modulation:		SAR End:	0.176 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

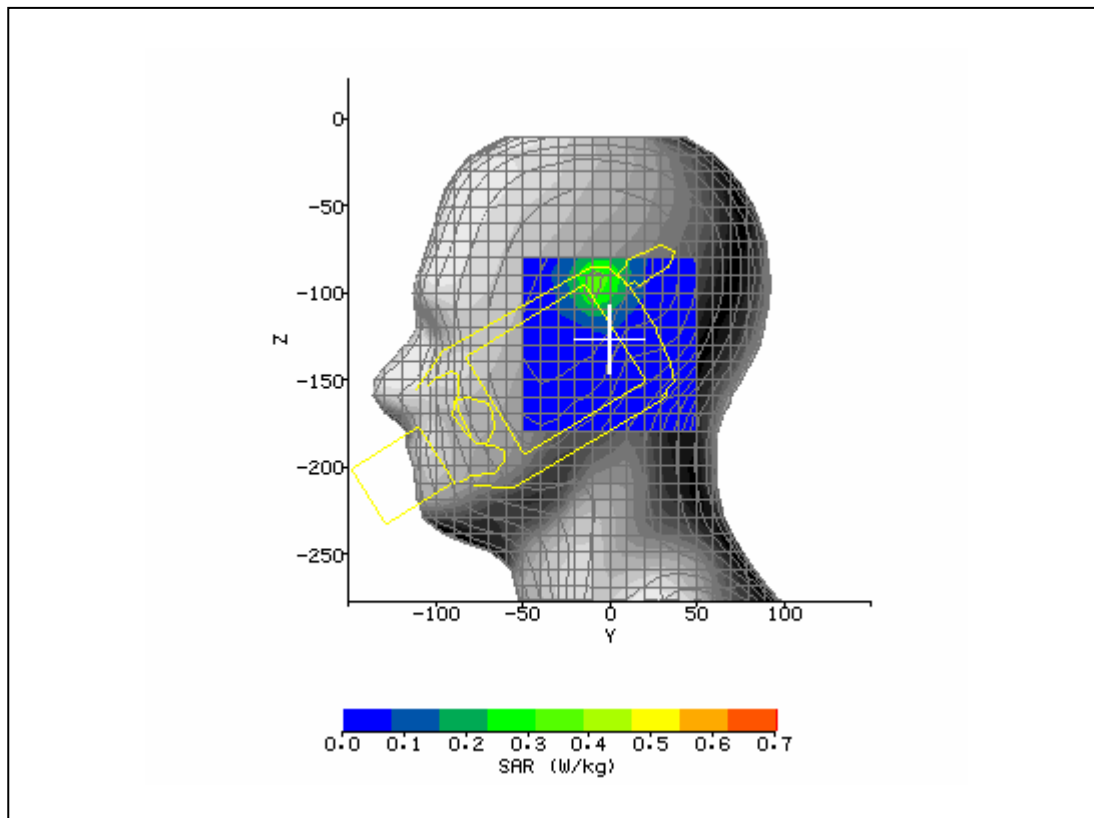

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 16 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 10:09:16 AM	DUT Battery Model/No:	
Filename:	bod251.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.27
Relative Humidity:	30%	Conductivity:	1.562
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	integral	Max E Field:	10.57 V/m
Test Frequency:	1880MHz	SAR 1g:	0.222 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.127 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots TX	Extrapolation:	poly4

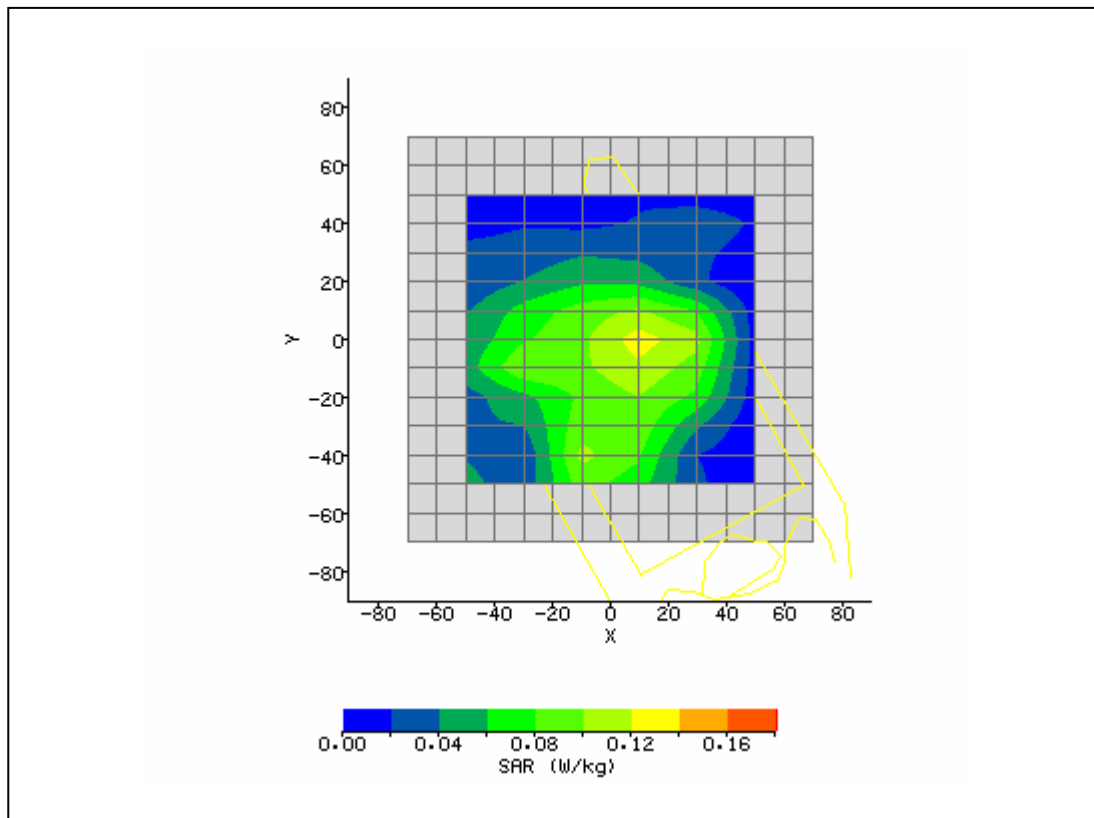

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 17 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 10:29:59 AM	DUT Battery Model/No:	
Filename:	bod661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.46
Relative Humidity:	30%	Conductivity:	1.551
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	integral	Max E Field:	11.07 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.265 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.156 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots TX	Extrapolation:	poly4

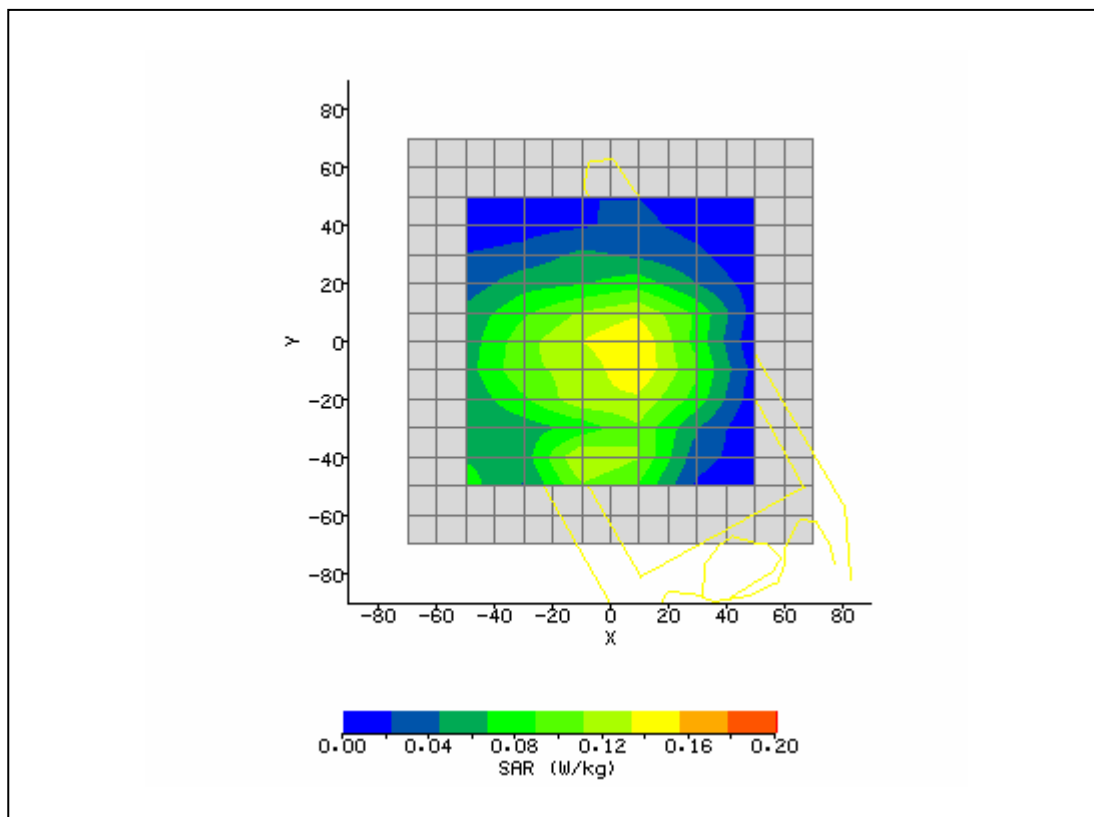

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 18 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 10:47:29 AM	DUT Battery Model/No:	
Filename:	bod512.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.06
Relative Humidity:	30%	Conductivity:	1.566
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	integral	Max E Field:	9.84 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.208 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.107 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots	Extrapolation:	poly4

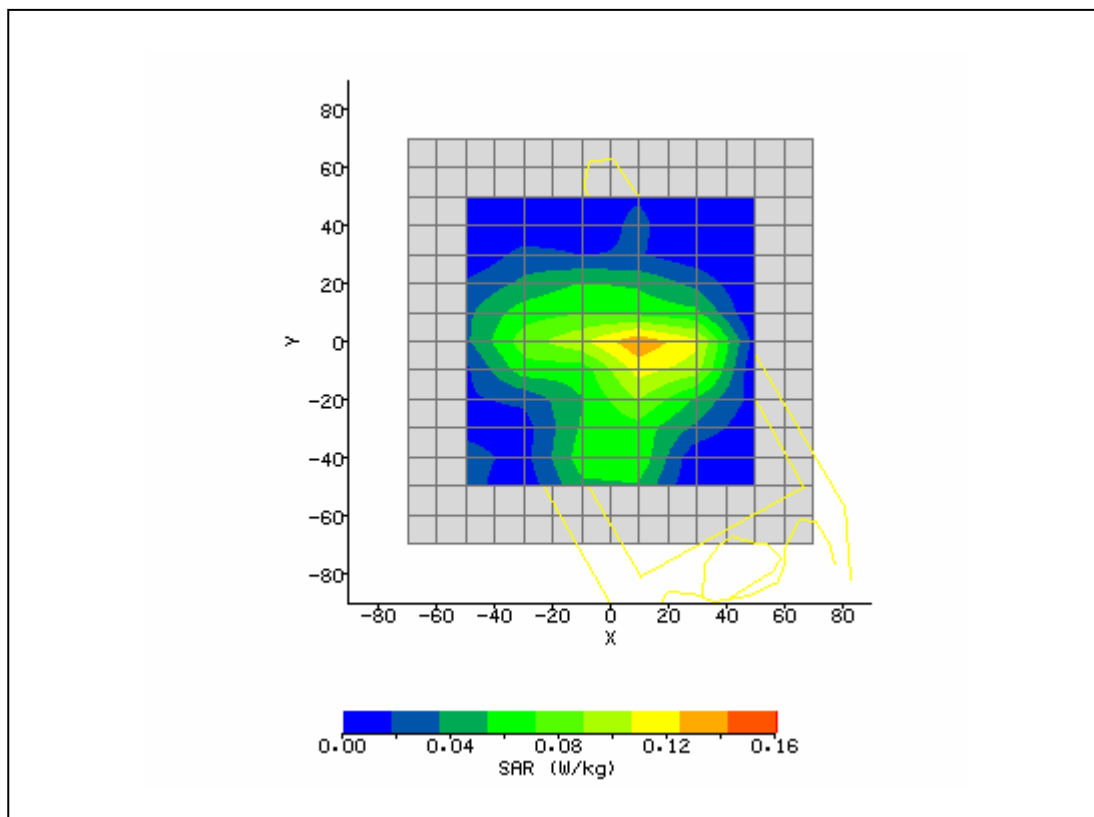

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 19 of 24

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 4:32:17 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.96
Relative Humidity:	50%	Conductivity:	1.863
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-127.00 mm
Antenna Configuration:	Integral	Max E Field:	8.18 V/m
Test Frequency:	2412MHz	SAR 1g:	0.099 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.052 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

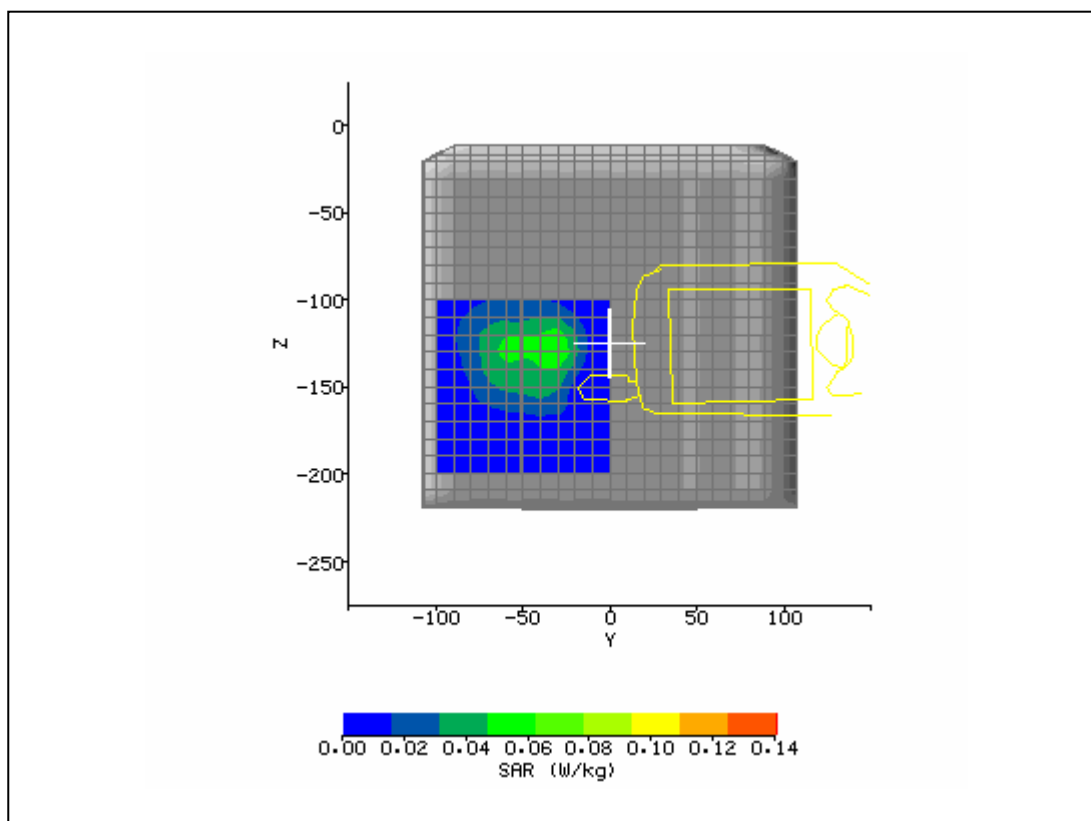

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 20 of 24

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 5:02:37 PM	DUT Battery Model/No:	
Filename:	2412_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.912
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	Integral	Max E Field:	8.33 V/m
Test Frequency:	2437MHz	SAR 1g:	0.104 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.055 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.32 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

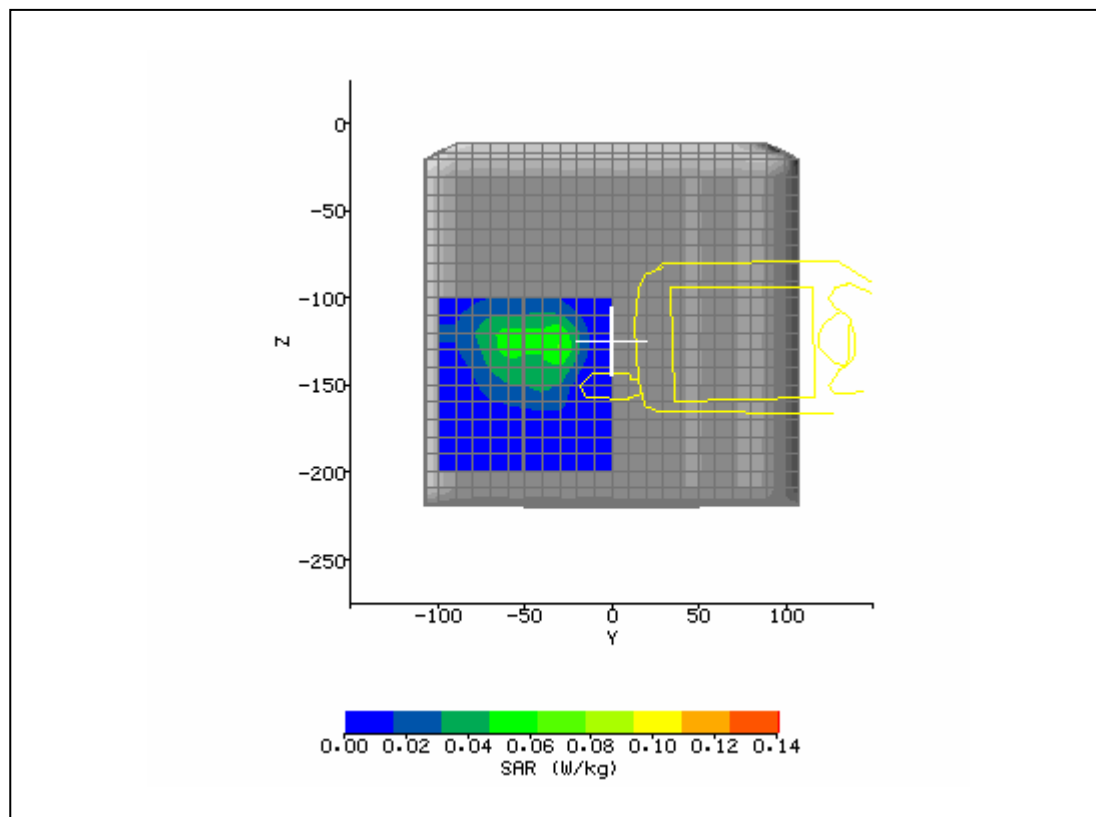

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 21 of 24

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 6:07:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.88
Relative Humidity:	50%	Conductivity:	1.936
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	Integral	Max E Field:	8.41 V/m
Test Frequency:	2462MHz	SAR 1g:	0.107 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.055 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.13 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

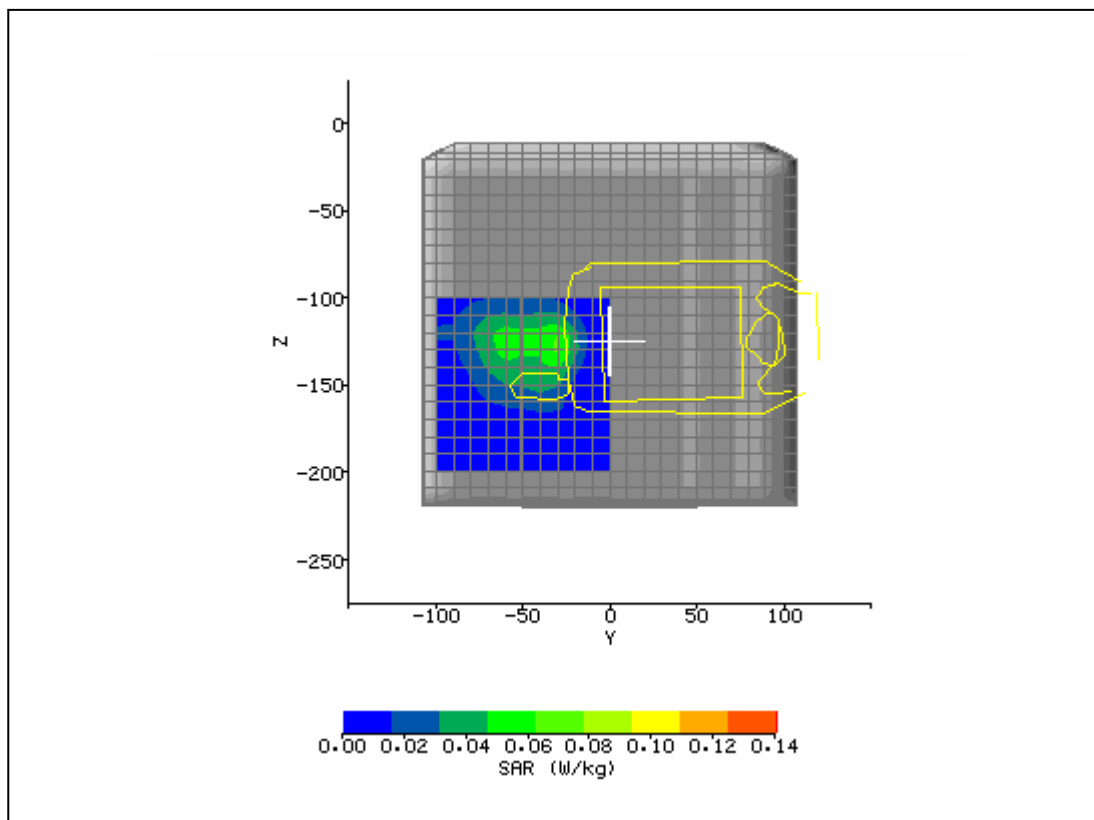

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 22 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/23/2006 9:36:14 AM	DUT Battery Model/No:	
Filename:	bod190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	55.90
Relative Humidity:	30%	Conductivity:	0.989
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	body back against phantom	Max SAR Y-axis Location:	-17.00 mm
Antenna Configuration:	integral	Max E Field:	32.04 V/m
Test Frequency:	848.8MHz & 2402 BT	SAR 1g:	1.141 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.837 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.412 W/kg
Type of Modulation:		SAR End:	0.397 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/14/06
Input Power Level:	2 timeslots TX	Extrapolation:	poly4

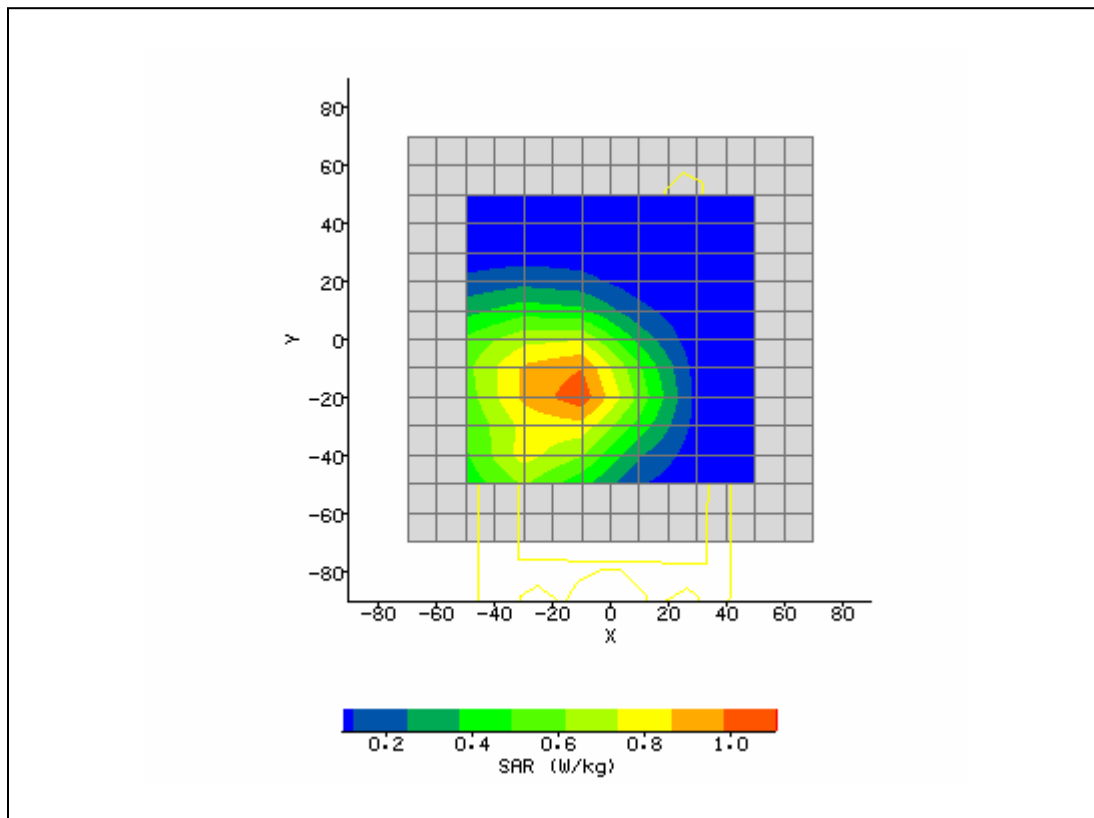

SAR Test Report No.:


SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 23 of 24

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/2/2006 4:44:09 PM	DUT Battery Model/No:	
Filename:	righttlt661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.62
Relative Humidity:	30%	Conductivity:	1.389
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-94.00 mm
Antenna Configuration:	integral	Max E Field:	23.22 V/m
Test Frequency:	1850.2MHz& 2402 BT	SAR 1g:	0.596 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.337 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.230 W/kg
Type of Modulation:		SAR End:	0.233 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/24/2006
Input Power Level:	max	Extrapolation:	poly4

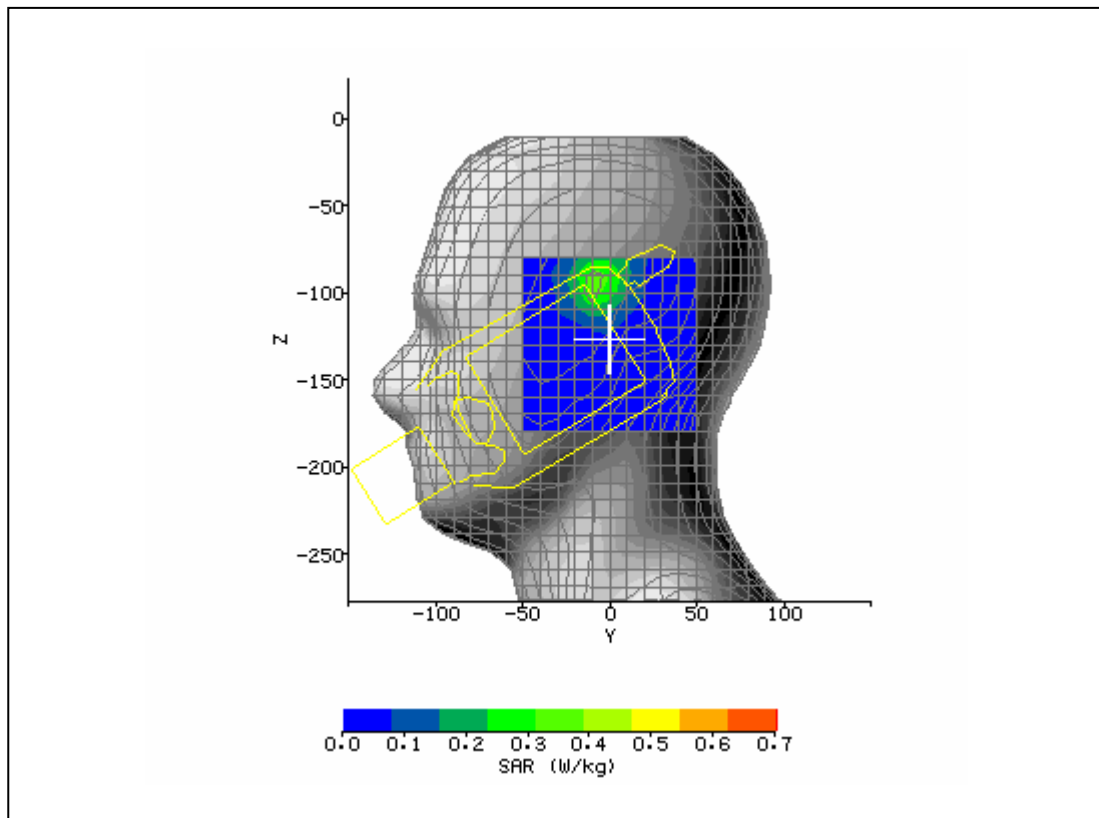

SAR Test Report No.:

SAR_HANDH_014_06002_D9500_850_1900_2400_BT

Date of Report: 6/23/2006

Appendix A Plots

Page 24 of 24

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 6:38:20 PM	DUT Battery Model/No:	
Filename:	2462_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.88
Relative Humidity:	50%	Conductivity:	1.936
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-127.00 mm
Antenna Configuration:	Integral	Max E Field:	8.45 V/m
Test Frequency:	2462 MHz and 2402 MHz BT	SAR 1g:	0.108 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.056 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

