



# **FCC TEST REPORT**

**FCC ID: 2AOAF-240**

On Behalf of

TYLT, inc.

Wireless Charger

Model No.: QITRPVTGY-T

Prepared for : TYLT, inc.  
Address : 685 Cochran St. Suite 200, Simi Valley, California 93065, UnitedStates

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,  
518103, Shenzhen, Guangdong, China

Report Number : A2009114-C01-R01  
Date of Receipt : September 17, 2020  
Date of Test : September 17, 2020  
Date of Report : September 18, 2020  
Version Number : V0

## **TABLE OF CONTENTS**

<b>1. Test Result Summary .....</b>	<b>5</b>
<b>2. EUT Description.....</b>	<b>6</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	6
2.2. ACCESSORIES OF DEVICE (EUT).....	8
2.3. TESTED SUPPORTING SYSTEM DETAILS .....	8
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS .....	8
2.5. DESCRIPTION OF TEST MODES.....	8
2.6. DESCRIPTION OF TEST CHANNEL .....	8
2.7. TEST CONDITIONS .....	9
2.8. TEST FACILITY .....	9
2.9. MEASUREMENT UNCERTAINTY .....	9
<b>3. Test Results and Measurement Data .....</b>	<b>10</b>
3.1. RF EXPOSURE TEST .....	10
<b>4. Photos of test setup .....</b>	<b>13</b>

## TEST REPORT DECLARATION

Applicant : TYLT, inc.  
Address : 685 Cochran St. Suite 200, Simi Valley, California 93065,  
UnitedStates  
Manufacturer : TYLT, inc.  
Address : 685 Cochran St. Suite 200, Simi Valley, California 93065,  
UnitedStates  
EUT Description : Wireless Charger  
(A) Model No. : QITRPVTGY-T  
(B) Trademark : N/A

Measurement Standard Used:

**FCC CFR Title 47 Part 15 Subpart C**

**FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....:

Lucas Pang  
Project Engineer

Approved by (name + signature).....:

Simple Guan  
Project Manager

Date of issue.....

September 18, 2020



**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	September 18, 2020	Initial released Issue	Lucas Pang

## 1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1) & KDB680106	PASS

**Note:**

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

## 2. EUT Description

### 2.1. Description of Device (EUT)

EUT Name	:	Wireless Charger
Model No.	:	QITRPVTGY-T
DIFF.	:	N/A
Trademark	:	N/A
Power supply	:	Input : DC 9V/2A Output 1: 10W (MAX.) Output 2: 5W
Operation frequency	:	115~205KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna
Software version	:	V1.0
Hardware version	:	V1.0

Conditions requirement	Answers
Power transfer frequency is less than 1 MHz.	After measuring the product the transfer frequency is 0.115-0.205MHz
Output power from each primary coil is less than or equal to 15 watts.	After measuring the product output 1 primary coil power is 10 watts, output 2 primary coil power is 5 watts
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	The transfer system includes only single primary.
Client device is placed directly in contact with the transmitter.	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Mobile exposure conditions only.
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	After measuring the product, the Max H-field Strength is 0.7968A/m is less than 50% of the MPE limit.


## 2.2. Accessories of Device (EUT)

Accessories1 : Power Supply  
 Model : R122-0902000UD  
 Ratings : Input: AC 100-240V, 50/60Hz, 0.6A  
 Output: DC 9V/2000mA

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	Load	--	--	--	--
2	Load	--	--	--	--

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Description of Test Modes

Mode No.	Test Mode
1	No Load
2	Output 1 Half Load, Output 2 No Load
3	Output 1 Full Load, Output 2 No Load
4	Output 1 No Load, Output 2 Half Load
5	Output 1 Half Load, Output 2 Half Load
6	Output 1 Full Load, Output 2 Half Load
7	Output 1 No Load, Output 2 Full Load
8	Output 1 Half Load, Output 2 Full Load
9	Output 1 Full Load, Output 2 Full Load

## 2.6. Description of Test Channel

Channel	Frequency (KHz)
1	160



## 2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.8. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
Registration Number: 293961

July 15, 2019 Certificated by IC  
Registration Number: CN0085

## 2.9. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

### 3. Test Results and Measurement Data

#### 3.1. RF EXPOSURE TEST

##### 3.1.1. Test Specification
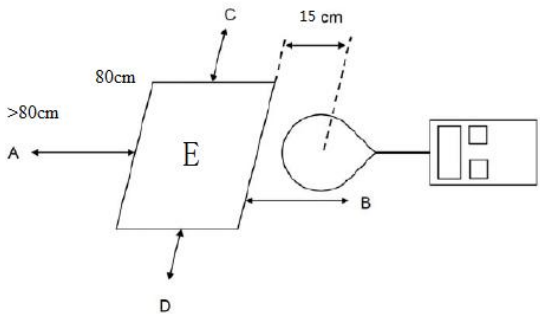
<b>Test Requirement:</b>	<b>FCC Rules and Regulations KDB680106</b>
<b>Test Method:</b>	§1.1307(b)(1) & KDB680106
<b>Limits:</b>	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging.
<b>Test Setup:</b>	 <p>E to position is 20cm.</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The RF exposure test was performed on 360 degree turn table in anechoic chamber.</li> <li>2. The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric centre of probe.</li> <li>3. The turn table was rotated 360d degree to search of highest strength.</li> <li>4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.</li> <li>5. The EUT were measured according to the dictates of KDB 680106D01v03.</li> </ol>
<b>Test Result:</b>	PASS

### 3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Exposure Level Tester	narda	ELT-400	N-0231	2020.09.02	1 Year
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	M0675	2020.09.02	1 Year
3	Isotropic Electric Field Probe	narda	EP-601	511WX60706	2020.09.02	1 Year

Test Software information			
Test Item	Software Name	Manufacturer	Version
E-Field	TS+	Tonsend	V2.5.0.0

### 3.1.3. Test data

All models are tested, this report only list the worst case mode 9(Output 1 Full Load, Output 2 Full Load) data as below:

#### X:

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	6.22	7.21	6.34	6.77	6.96	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.6352	0.7968	0.6145	0.7299	0.7151	0.815	1.63

**Y:**

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	4.32	5.41	4.43	4.66	4.73	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.6135	0.7352	0.6102	0.6987	0.6955	0.815	1.63

**Z:**

E-Field Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (V/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (V/m)	Limits Test (V/m)
0.115-0.205	5.35	5.98	5.21	5.73	5.91	307	614

H-Filed Strength at 15 cm for position A,B,C,D 20cm for position E from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Limit (50%) (A/m)	Limits Test (A/m)
0.115-0.205	0.6145	0.6288	0.6154	0.6137	0.6933	0.815	1.63


Note 1: The unit of test data for H-Field is uT.

Note 2: A/m=uT/1.25

## 4. Photos of test setup

For H-Field Full load mode

X:

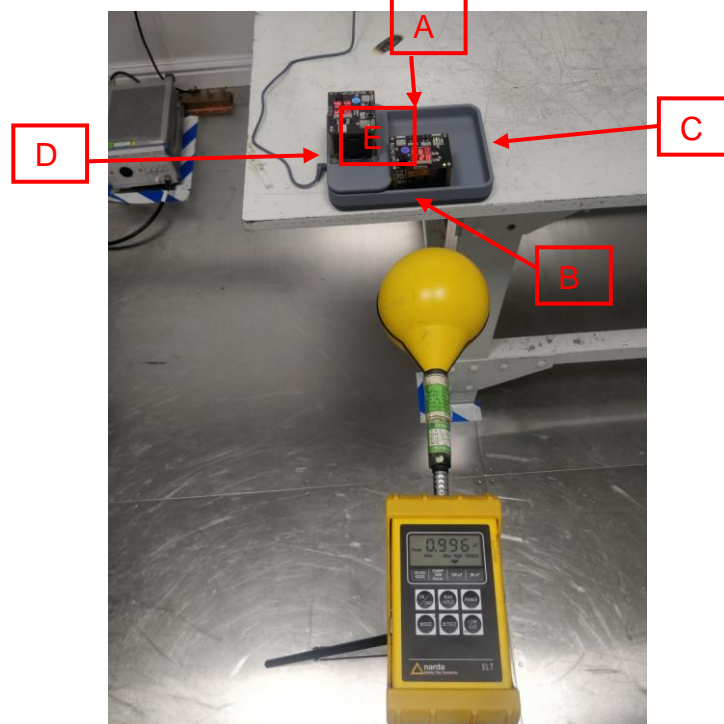

Y:




Z:



For E-Field Full load mode


X:

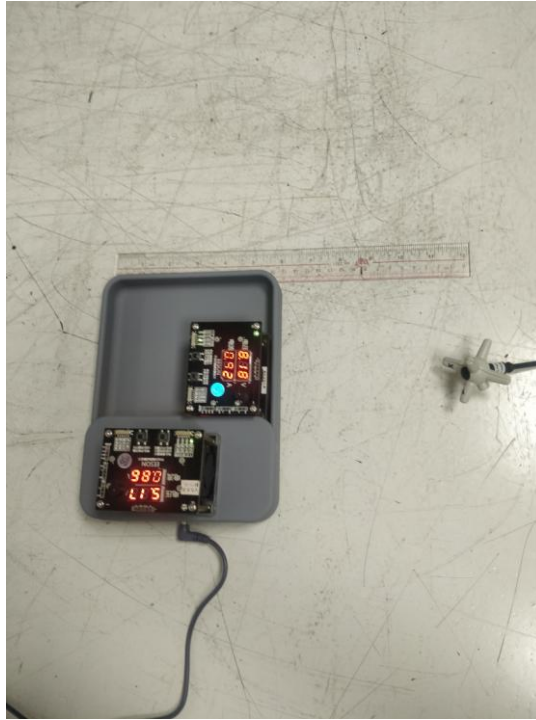

Y:



**Z:**

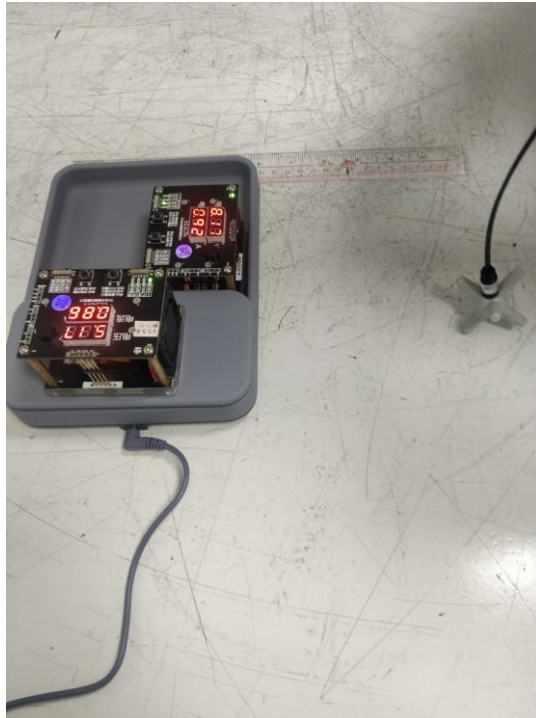

-----End of Report-----