


RFA-02-P33-70B-150

Electrical Specifications

Frequency range	2400 MHz – 2500 MHz
Peak gain	2dBi
Average gain	1dBi
VSWR	2.0 : 1 Max.
Polarization	Linear, vertical
Power handling	1W (cw)
Impedance	50 Ω
Connector	I-PEX
Cable	$\varnothing 1.13\text{mm}$

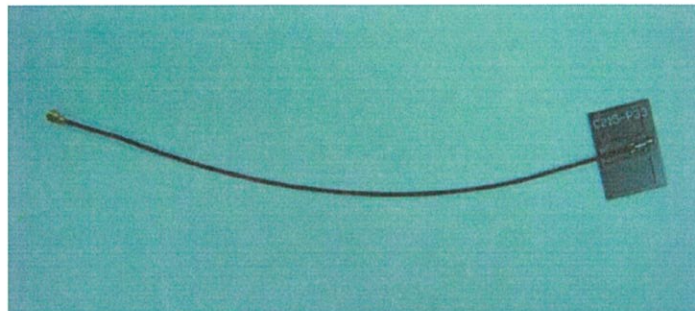

Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 25°C
Wire material	§ 1.13 VW-1

