

Page: 1 of 24

# **FCC Test Report**

Application No.: T31620210010EM

Applicant: MATTEL ASIA PACIFIC SOURCING LIMITED

Address: 13/F., South Tower,

World Finance Centre, Harbour City, Tsimshatsui, Kowloon, Hong Kong.

**Product Information:** 

**Product Description:** BARBIE HOVERBOARD – CONTROLLER (2.4GHz TRANSCEIVER)

Model: DLV45T
Assortment No.: DLV45T
Associated Toy number: DLV45R

Age Grading: 8+

**Product Class:** Low Power Communication Device – Transmitter (2.4 GHz)

FCC ID: PIYDLV45-16A5T

Requirement: CFR 47 FCC PART 15 SUBPART C, 2015

Intentional Radiators (Section 15.249)

**Date of Receipt**: 2016-05-05

**Date of Test**: 2016-05-11 to 2016-05-16

Date of Issue: 2016-05-17

Test Result : PASS\*

In the configuration tested, the EUT complied with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature:

CHEN Jian-feng, Jeffrey

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevants tandards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspxand-for electronic format documents">http://www.sgs.com/en/Terms-and-Conditions.aspxand-for electronic format documents</a>, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documenta.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documenta.aspx.</a> Attention is drawn to the limits of adaptive, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exone rate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: T3162021001001 Page: 2 of 24

## **Test Summary**

| Test  | Test Requirement                | Test Method      | Result |
|---|---------------------------------|------------------|--------|
| Conducted Emission<br>(150KHz to 30MHz)                           | FCC PART 15,<br>SUBPART C: 2015 | ANSI C63.10:2013 | N/A    |
| Radiated Emission<br>(9kMHz to 1GHz)                              | FCC PART 15,<br>SUBPART C: 2015 | ANSI C63.10:2013 | PASS   |
| Radiated Emission above 1 GHz                                     | FCC PART 15,<br>SUBPART C: 2015 | ANSI C63.10:2013 | PASS   |
| Restricted-band band-<br>edge measurements<br>(Radiated Emission) | FCC PART 15,<br>SUBPART C: 2015 | ANSI C63.10:2013 | PASS   |
| 20dB bandwidth  | FCC PART 15,<br>SUBPART C: 2015 | ANSI C63.10:2013 | PASS   |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho tized alteration, to reprove or falsification of the content or appearance of this document is unlawful and o flenders may be prosecuted to the fullest extent of the law.



Report No.: T3162021001001 Page: 3 of 24

## **Contents**

|    |  | Page |
|----|--|------|
| 1  | COVER PAGE   | 1    |
| 2  | TEST SUMMARY   | 2    |
| 3  | CONTENTS   | 3    |
| Ŭ  |  |      |
| 4  | GENERAL INFORMATION  | 4    |
|    | 4.1 GENERAL DESCRIPTION OF EUT                                 | 4    |
|    | 4.2 Details of EUT   |      |
|    | 4.3 CONDITIONS OF EUT  |      |
|    | 4.4 DESCRIPTION OF SUPPORT UNITS                               |      |
|    | 4.5STANDARDS APPLICABLE FOR TESTING                            |      |
|    | 4.6 TEST LOCATION  |      |
|    | 4.7 TEST FACILITY  |      |
|    | 4.8 DEVIATION FROM STANDARDS                                   |      |
|    | 4.10 DECLARATION OF FAMILY GROUPING                            |      |
|    | 4.11 ABBREVIATIONS   |      |
|    |  |      |
| 5  | EQUIPMENTS USED DURING TEST                                    | 6    |
| 6  | TEST RESULTS   | 8    |
|    | 6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz to 30MHz       | 8    |
|    | 6.2 RADIATED EMISSIONS, 9KHZ TO 1GHZ                           |      |
|    | 6.2.1 EUT Operation  |      |
|    | 6.2.2 Test Setup and Procedure                                 | 10   |
|    | 6.2.3 Measurement Data   |      |
|    | 6.3 RADIATED EMISSIONS ABOVE 1 GHZ                             |      |
|    | 6.3.1 EUT Operation  |      |
|    | 6.3.2 Test Setup and Procedure                                 |      |
|    | 6.3.3 Measurement Data   |      |
|    | 6.4 RESTRICTED-BAND BAND-EDGE MEASUREMENTS (RADIATED EMISSION) | 17   |
| 6. | .5 20 DB BANDWIDTH   | 19   |
| 7  | PHOTOGRAPHS  | 21   |
|    | 7.1 RADIATD EMISSION TEST SETUP                                | 21   |
|    | 7.2 EUT CONSTRUCTIONAL DETAILS                                 |      |
|    | 7.3 EUT INTERNAL PHOTO.  |      |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho tized alteration, to reprove or falsification of the content or appearance of this document is unlawful and o flenders may be prosecuted to the fullest extent of the law.



Page: 4 of 24

## 4 General Information

### 4.1 General Description of EUT

Product Description: BARBIE HOVERBOARD – CONTROLLER (2.4GHz TRANSCEIVER)

Model No.: DLV45T


Serial No.: --

## 4.2 Details of EUT

Power Supply: DC 4.5 (AAA battery x 3) for TX

Operating Frequency 2453-2475MHz

Antenna Type: Unreplaceble internal Integral antenna

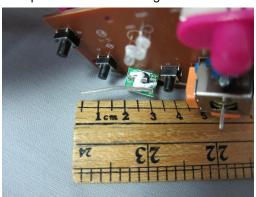

Modulation Type: GFSK

Test frequency tested are the lowest channel: 1 channel (2453MHz), middle channel: 2 channel (2460MHz) and highest channel: 3 channel (2475MHz)

Channel configuration method:

- 1. Press the power switch on to enter test mode
- 2. Press the "star" button to change the channel from low to high frequecny

#### 4.3 Conditions of EUT

The received sample was under good condition.

## 4.4 Description of Support Units

1. All field strength measures in this test report were done by the sample which set the frequency fixed with continuous transmission

#### 4.5Standards Applicable for Testing

CFR 47, FCC Part 15, 2015 ANSI C63.10:2013

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exone ate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to grey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Un less otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

y **.** 



Page: 5 of 24

#### 4.6 Test Location

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

Units 303-305, 3/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel: +852 2305 2570 Fax: +852 2756 4480

## 4.7 Test Facility

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No.: 97774).

The test facility is recognized, certified, or accredited by the following organizations:

FCC - CAB Registration No.: 446297

Measurement facility located at Fanling (Hong Kong), accredited as a Conformity Assessment Body (CAB) and was designated by FCC to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules.

#### 4.8 Deviation from Standards

None.

#### 4.9 Abnormalities from Standard Conditions

None.

## 4.10 Declaration of Family Grouping

None.

#### 4.11 Abbreviations

N/A: Not Applicable

**EUT: Equipment Under Test** 

## 4.12 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                               | Measurement Uncertainty |
|-----|------------------------------------|-------------------------|
| 1   | Radiated disturbance 9 kHz - 30MHz | 4.2                     |
| 2   | Radiated disturbance 30MHz – 1GHz  | 5.5                     |
| 3   | Radiated disturbance 1GHz – 18GHz  | 5.5                     |
| 4   | Conducted Emissions                | 3.1                     |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exone ate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to grey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Un less otherwise stated the results shown in this test report refer only to the sam ple(s) tested and such sam ple(s) are retained for 30 days only.

y.



Page: 6 of 24

# 5 Equipments Used during Test

| Conducted Emission              |                 |                      |            |               |
|---------------------------------|-----------------|----------------------|------------|---------------|
| Equipment                       | Manufacturer    | Model / Serial No.   | Cal. Date  | Cal. Due Date |
| Test Receiver                   | Rohde & Schwarz | ESHS 30 / 839667/002 | 2015/09/29 | 2016/09/28    |
| Artificial Mains Network (LISN) | Schwarzbeck     | NSLK 8127 / 8127312  | 2016/04/20 | 2017/04/19    |
| Impulse Limiter                 | Rohde & Schwarz | ESH-3-Z2 / 357881052 | 2015/02/02 | 2017/02/01    |

| Radiated Emission                      |                 |                        |            |               |
|--|-----------------|------------------------|------------|---------------|
| Equipment                              | Manufacturer    | Model / Serial No.     | Cal. Date  | Cal. Due Date |
| 3m Semi-Anechoic<br>Chamber (pre-test) |                 |                        |            |               |
| 3m / 10m Open Aera Test<br>Site        |                 |                        | 2015/03/11 | 2018/03/10    |
| Test Receiver                          | Rohde & Schwarz | ESCS 30 / 100388       | 2014/10/17 | 2016/09/28    |
| Spectrum Analyzer                      | Rohde & Schwarz | FSP 30 / 101474        | 2015/06/12 | 2016/06/11    |
| Loop antenna                           | Rohde & Schwarz | HFH2-Z2 / 871336/48    | 2016/01/23 | 2019/01/22    |
| Antenna 30-1000MHz                     | Schaffner       | CBL6111C / 2791        | 2014/10/19 | 2016/10/18    |
| Horn Antenna 1-18GHz                   | Schwarzbeck     | BBHA9120D / 9120D-1070 | 2016/01/23 | 2018/01/22    |
| Horn Antenna 15-26.5GHz                | Schwarzbeck     | BBHA9170 / 9170-492    | 2014/11/24 | 2016/11/23    |
| Preamplifier 10MHz –<br>6GHz           | Schwarzbeck     | BBV9743 / 9743-052     | 2016/03/09 | 2017/03/08    |
| Preamplifier 1-18GHz                   | Schwarzbeck     | BBV9718 / 9718-223     | 2016/01/23 | 2017/01/22    |
| Preamplifier 18- 26.5GHz               | Schwarzbeck     | BBV9719 / 9719-019     | 2014/11/19 | 2016/11/18    |
| Coaxial Cable                          |                 | E167                   | 2015/06/24 | 2016/06/23    |
| RF Cable                               | HUBER+SUHNER    | E207                   | 2014/11/17 | 2016/11/16    |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indem nification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exponent parties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unautho itzed at teration, to gery or fall afficiation of the content or appearance of this document is unlawful and offendes may be prosecuted to the fullest extent of the law.



Report No.: T3162021001001 Page: 7 of 24

| Antenna Mast System       | Schwarzbeck | AM9104 / - | <br> |
|---------------------------|-------------|------------|------|
| Turntable with Controller | Drehtisch   | DT312 / -  | <br> |

| General Use Equipment        |              |                    |            |               |  |  |  |
|------------------------------|--------------|--------------------|------------|---------------|--|--|--|
| Equipment                    | Manufacturer | Model / Serial No. | Cal. Date  | Cal. Due Date |  |  |  |
| Digital Multimeter           | Fluke        | 189 / 83640020     | 2016/04/20 | 2017/04/19    |  |  |  |
| Temperature / Humidity meter | -            | E159               | 2015/10/07 | 2016/10/06    |  |  |  |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho tized alteration, to reprove or falsification of the content or appearance of this document is unlawful and o flenders may be prosecuted to the fullest extent of the law.



Page: 8 of 24

## 6 Test Results

## 6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 C
Test Method: ANSI C63.10
Test Date: Not Applicable

Remark:

This test is not applicable as the EUT is battery operated.

This document is issued by the Company subject to its General Conditions of Sewice printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. Tecompany's sole responsibility is to its Client and this document does not exoneate parties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unautho fized alteration, to gery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 9 of 24

#### 6.2 Radiated Emissions, 9kHz to 1GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 and 15.249(d)

Test Method: ANSI C63.10
Test Date: 2016-05-11

Frequency Range: The lowest frequency generated by EUT, 12MHz to 1GHz

Measurement Distance: 3m

Detector: Peak for pre-scan

(200Hz resolution bandwidth and 1kHz video bandwidth for measurement

between 9kHz - 150kHz)

(9kHz resolution bandwidth and 100kHz video bandwidth for

measurement between 150kHz - 30MHz)

120kHz resolution bandwidth and 1MHz video bandwidth for

measurement between 30MHz to 1GHz)

Quasi-Peak if maximised peak within 6dB of limit

#### Limit:

| Frequency range<br>MHz | Quasi-peak limits<br>dB (μV/m) |
|------------------------|--------------------------------|
| 0.009 - 0.490          | -72.4 – 20logF(MHz)            |
| 0.490 - 1.705          | -12.4 – 20logF(MHz)            |
| 1.705 – 30.0           | -10.5                          |
| 30 to 88               | 40                             |
| 88 to 216              | 43.5                           |
| 216 to 960             | 46                             |
| Above 960              | 54                             |

Note: 1) At transitional frequencies the lower limit applies.

2) F is the frequency of the spurious emission measured in MHz.

3) Limit from 0.009 – 30 MHz is converted from measuring distance 300m or 30m to 3m with the formulat provided in FCC Part 15, section 15.31(f)(2)

#### 6.2.1 EUT Operation

Operating Environment:

Temperature: 22 °C Humidity: 59 %

EUT Operation: Pre-test with Peak detector with the following mode(s):

1: Transmission in continuous transmitting mode 2. Test in lowest, middle and high frequency

Final test with Quasi-Peak detector with the following mode(s): 1: Transmission in continous transmitting mode

2. Test in lowest, middle and high frequency

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documentaspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho tized alteration, to agery or talsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Un less o ther wise stated the results shown in this testrep or trefer only to the sample(s) tested and such sample(s) are setained for 30 days only.

y.



Page: 10 of 24

#### 6.2.2 Test Setup and Procedure

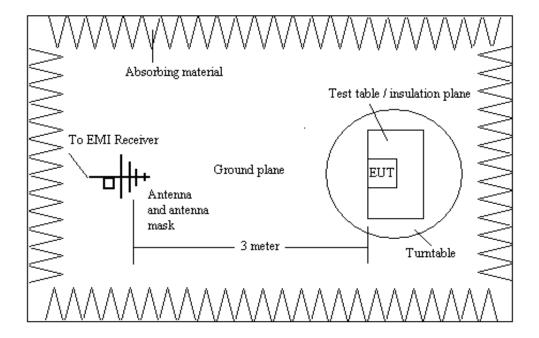

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
- 3. Loop antennat and Bilog antenna was used for the frequency range from the lowest generated frequency to 30MHz and 30MHz to 1GHz respectively
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters for Bilog antenna (Loop antenna is still maintain in 1m hight) in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic form at documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documentaspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be eproduced except in full, without prior written approved of the Company. Any unaut tho ized alteration, to grey or fails flication of the content or appearance of this document is unlawful and of fendes may be prosecuted to the full lest excent of the law.



Page: 11 of 24

#### 6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and frequencies of peak emissions from the EUT were detected within 6dB of the limit line. Final measurement was conducted in the open area test site with data as follows:

#### Test results:

#### (1) Operation Frequency: 2453MHz

| Frequency<br>(MHz) | Antenna<br>Polarization | Correction<br>Factor<br>(dB/m) | Receiver<br>QP Reading<br>(dBµV) | Emission<br>Level<br>(dBµV/m) | Limit<br>(dBμV/m) | Over Limit<br>(dB) |
|--------------------|-------------------------|--------------------------------|----------------------------------|-------------------------------|-------------------|--------------------|
| 31.375             | V                       | 18.9                           | 4.1                              | 23.0                          | 40.0              | -17.0              |
| 54.625             | V                       | 11.1                           | 4.6                              | 15.7                          | 40.0              | -24.3              |
| 119.313            | V                       | 11.5                           | 5.1                              | 16.6                          | 43.5              | -26.9              |
| 161.250            | V                       | 10.8                           | 4.7                              | 15.5                          | 43.5              | -28.0              |
| 266.563            | Н                       | 13.1                           | 5.6                              | 18.7                          | 46.0              | -27.3              |
| 621.500            | Н                       | 19.9                           | 4.8                              | 24.7                          | 46.0              | -21.3              |

#### (2) Operation Frequency: 2460MHz

| Frequency | Antenna      | Correction | Receiver   | Emission | Limit    | Over Limit |
|-----------|--------------|------------|------------|----------|----------|------------|
|           |              | Factor     | QP Reading | Level    | (dBµV/m) |            |
| (MHz)     | Polarization | (dB/m)     | (dBμV)     | (dBµV/m) |          | (dB)       |
| 31.188    | V            | 18.9       | 4.2        | 23.1     | 40.0     | -16.9      |
| 47.063    | V            | 13.0       | 4.5        | 17.5     | 40.0     | -22.5      |
| 86.438    | Н            | 9.4        | 5.2        | 14.6     | 40.0     | -25.4      |
| 134.563   | V            | 11.7       | 4.8        | 16.5     | 43.5     | -27.0      |
| 297.375   | V            | 14.0       | 5.2        | 19.2     | 46.0     | -26.8      |
| 625.313   | V            | 20.0       | 4.8        | 24.8     | 46.0     | -21.2      |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho fized alteration, to no eye or falsification of the content or appearance of this document is unlawful and offendes may be prosecuted to the fullest extent of the law.



Page: 12 of 24

#### (3) Operation Frequency: 2475MHz

| Frequency<br>(MHz) | Antenna<br>Polarization | Correction<br>Factor<br>(dB/m) | Receiver<br>QP Reading<br>(dBµV) | Emission<br>Level<br>(dBµV/m) | Limit<br>(dBμV/m) | Over Limit (dB) |
|--------------------|-------------------------|--------------------------------|----------------------------------|-------------------------------|-------------------|-----------------|
| 32.125             | Н                       | 18.5                           | 4.3                              | 22.8                          | 40.0              | -17.2           |
| 48.875             | Н                       | 12.4                           | 4.7                              | 17.1                          | 40.0              | -22.9           |
| 88.500             | Н                       | 9.5                            | 5.2                              | 14.7                          | 43.5              | -28.8           |
| 148.938            | V                       | 11.4                           | 4.8                              | 16.2                          | 43.5              | -27.3           |
| 338.813            | V                       | 14.2                           | 5.2                              | 19.4                          | 46.0              | -26.6           |
| 635.375            | Н                       | 20.1                           | 4.9                              | 25.0                          | 46.0              | -21.0           |

#### Note:

- 1) All readings are Quasi-Peak values.
- 2) Correction Factor = Antenna Factor + Cable Loss.
- 3) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 4) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.

This document is issued by the Company subject to its General Conditions of Sevice printed overleaf, available on requestor accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/ferms-an



Page: 13 of 24

#### 6.3 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 & 15.249(a) & (d)

Test Method: ANSI C63.10
Test Date: 2016-05-16
Frequency Range: 1GHz – 26GHz

Measurement Distance: 3m

Detector: Peak for pre-scan (1MHz resolution bandwidth, 1MHz video bandwidth)

Average and Peak detector for final test

Limit:

Fundamental Frequency:

| Frequency range MHz | Limits (Peak)<br>dB (μV/m) | Limits (Average)<br>dB (μV/m) |
|---------------------|----------------------------|-------------------------------|
| 2400 to 2483.5      | 114                        | 94                            |

#### Spurious Emission:

| Frequency range | Limits (Peak) | Limits (Average) |  |
|-----------------|---------------|------------------|--|
| MHz             | dB (μV/m)     | dB (μV/m)        |  |
| Over 1000       | 74            | 54               |  |

### 6.3.1 EUT Operation

Operating Environment:

Temperature: 22 °C Humidity: 59 %

EUT Operation: Pre-test with Peak detector with the following mode(s):

1: Transmission in continous transmitting mode

2. Test in lowest, middle and high frequency

Final test with Peak and Avearge detector with the following mode(s):

1: Transmission in continous transmitting mode


2. Test in lowest, middle and high frequency

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documentaspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate paties to a transaction of comments. This document annot be expreduced except in full, without prior written approval of the Company. Any unautho tized alteration, to rejery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 14 of 24

#### 6.3.2 Test Setup and Procedure

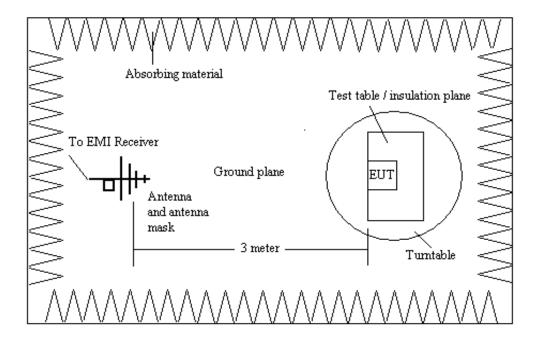

- 1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
- 2. The EUT was connected to AC power source through a mains power outlet which was bonded to the ground reference plane. The EUT was placed upon a non-metallic table 1.5m above the ground reference plane.
- 3. Horn antenna was used for the frequency over 1GHz
- 4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
- 5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic form at documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documentaspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be eproduced except in full, without prior written approved of the Company. Any unaut tho ized alteration, to grey or fails flication of the content or appearance of this document is unlawful and of fendes may be prosecuted to the full lest excent of the law.



Page: 15 of 24

#### 6.3.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured with 2 orthogonal polarities and frequencies of average emissions from the EUT were measured as follows:

#### Test results:

#### (1) Fundmental Frequency

| Frequency | Antenna      | Emission Le | vel (dBμV/m) | Limit (d | BμV/m)  | Remark |
|-----------|--------------|-------------|--------------|----------|---------|--------|
| (MHz)     | Polarization | Peak        | Average      | Peak     | Average | Hemark |
| 2453.0    | Н            | 87.19       |              | 114      | 94      | Pass   |
| 2453.0    | V            | 88.17       |              | 114      | 94      | Pass   |
| 2460.0    | Н            | 87.39       |              | 114      | 94      | Pass   |
| 2460.0    | V            | 89.39       |              | 114      | 94      | Pass   |
| 2475.0    | Н            | 87.90       |              | 114      | 94      | Pass   |
| 2475.0    | V            | 89.73       |              | 114      | 94      | Pass   |

Remark: Since the peak value is lower than average limit, only the peak vaule for fundmental frequency measuring is shown on this report.

### (2) Spurious Emission

Operation Frequency: 2453.0 MHz

| Frequency | Antenna      | Emission Level (dBμV/m) Limit (dBμV/m) |         | Remark |         |       |
|-----------|--------------|--|---------|--------|---------|-------|
| (MHz)     | Polarization | Peak                                   | Average | Peak   | Average | Heman |
| 1748.000  | V            | 35.50                                  | 20.21   | 74     | 54      | Pass  |
| 3069.000  | V            | 38.70                                  | 23.50   | 74     | 54      | Pass  |
| 4906.000  | V            | 53.60                                  | 27.72   | 74     | 54      | Pass  |
| 6689.000  | V            | 45.60                                  | 30.51   | 74     | 54      | Pass  |
| 7359.000  | V            | 54.70                                  | 32.31   | 74     | 54      | Pass  |
| 8856.000  | V            | 49.00                                  | 34.11   | 74     | 54      | Pass  |

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a



Page: 16 of 24

#### Operation Frequency: 2460.0 MHz

| Frequency | Antenna      | Emission Level (dBμV/m) Limit (dBμV/m) |         | Remark |         |        |
|-----------|--------------|--|---------|--------|---------|--------|
| (MHz)     | Polarization | Peak                                   | Average | Peak   | Average | Hemaik |
| 1684.000  | V            | 34.40                                  | 19.66   | 74     | 54      | Pass   |
| 3021.000  | V            | 37.90                                  | 23.19   | 74     | 54      | Pass   |
| 4920.000  | V            | 53.80                                  | 27.37   | 74     | 54      | Pass   |
| 5900.000  | V            | 42.70                                  | 28.33   | 74     | 54      | Pass   |
| 7380.000  | V            | 55.30                                  | 32.44   | 74     | 54      | Pass   |
| 10232.000 | V            | 51.10                                  | 36.41   | 74     | 54      | Pass   |

#### Operation Frequency: 2475.0 MHz

| Frequency | Antenna      | Emission Level (dBμV/m) |         | Limit (dBμV/m) |         | Remark |
|-----------|--------------|-------------------------|---------|----------------|---------|--------|
| (MHz)     | Polarization | Peak                    | Average | Peak           | Average | nemark |
| 1685.000  | Н            | 35.00                   | 19.65   | 74             | 54      | Pass   |
| 3369.000  | V            | 38.80                   | 23.84   | 74             | 54      | Pass   |
| 4950.000  | V            | 54.00                   | 27.21   | 74             | 54      | Pass   |
| 6399.000  | V            | 44.80                   | 30.08   | 74             | 54      | Pass   |
| 7425.000  | V            | 54.90                   | 32.35   | 74             | 54      | Pass   |
| 8400.000  | V            | 49.10                   | 34.38   | 74             | 54      | Pass   |

#### Note:

- The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 2) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.
- 3) There is not any other emission which falls in restricted bands which set out in Section 15.205 Restricted bands can be detected and reported.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a

Un less o ther wise stated the results shown in this testrep or trefer only to the sample(s) tested and such sample(s) are setained for 30 days only.

FCC ID: PIYDLV45-16A5T



Page: 17 of 24

## 6.4 Restricted-band band-edge measurements (Radiated Emission)

Test Requirement: FCC Part15 Subpart C Section 15.215, 15.249(d)

Test Method: ANSI C63.10

Measurement Distance: 3m

Detector: (1MHz resolution bandwidth, 3MHz video bandwidth)

Average and Peak detector

Limit: Emissions radiated outside of the specified frequency bands, except for

harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general field strength limits listed in RSS-Gen,

whichever is less stringent.

| TITIONOTO TO TOOC CUM gonu |                    |                  |
|----------------------------|--------------------|------------------|
| Frequency                  | Limit (dBuV/m @3m) | Remark           |
| 30MHz-88MHz                | 40.0               | Quasi-peak Value |
| 88MHz-216MHz               | 43.5               | Quasi-peak Value |
| 216MHz-960MHz              | 46.0               | Quasi-peak Value |
| 960MHz-1GHz                | 54.0               | Quasi-peak Value |
| Al                         | 54.0               | Average Value    |
| Above 1GHz                 | 74.0               | Peak Value       |

Test Date: 2016-05-16

EUT Operation: 1: Transmission with GFSK

Result: Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documentaspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate paties to a transaction of comments. This document annot be expreduced except in full, without prior written approval of the Company. Any unautho tized alteration, to rejery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 24

Test results: (Worst case: Transmissin with GFSK)

Operation frequency: 2453.0 MHz

| Frequency | Antenna      | Emission Level (dBμV/m) |         | Limit (dBμV/m) |         | Remark  |
|-----------|--------------|-------------------------|---------|----------------|---------|---------|
| (MHz)     | Polarization | Peak                    | Average | Peak           | Average | Tiomant |
| 2400.0    | V            | 38.13                   | 20.88   | 74             | 54      | Pass    |

Operation frequency: 2475.0 MHz

| Frequency | Antenna      | Emission Level (dBμV/m) |         | Limit (dBµV/m) |         | Remark |
|-----------|--------------|-------------------------|---------|----------------|---------|--------|
| (MHz)     | Polarization | Peak                    | Average | Peak           | Average | Homan  |
| 2483.5    | V            | 36.66                   | 20.83   | 74             | 54      | Pass   |

According to above bandedge measurement, emissions radiated outside of the specified frequency bands, (2400-2483.5)MHz except for harmonics, are below general field strength limits under 15.209 It is deemed to comply with section 15.215 and 15.249(d)

This document is issued by the Company subject to its General Conditions of Sevice printed overleaf, available on requestor accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/ferms-an



Page: 19 of 24

## 6.5 20 dB Bandwidth

Test Requirement: FCC Part15 Subpart C Section 15.215

Test Method: ANSI C63.10:2013


Test Date: 2016-05-16

EUT Operation: 1: Transmission with GFSK

Result: Pass

**Test Plot**: (Worst case: Transmission with GFSK)

Operation frequency: 2453.0 MHz

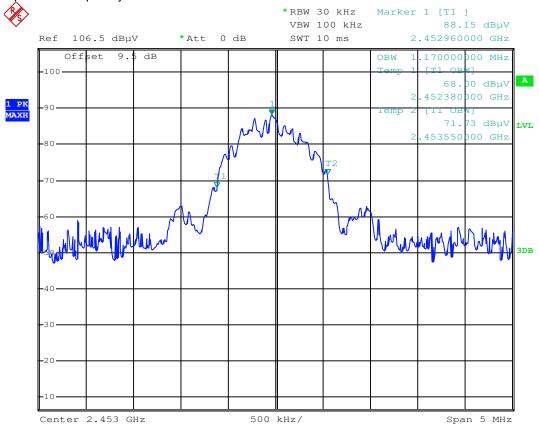

According to above plot, 20dB bandwidth falls in assigned band (2400-2483.5)MHz. It is deemed to comply with section 15.215

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exone ate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to grey or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


Un less o ther wise stated the results shown in this testrep or trefer only to the sample(s) tested and such sample(s) are setained for 30 days only.

y.



Page: 20 of 24

Span 5 MHz

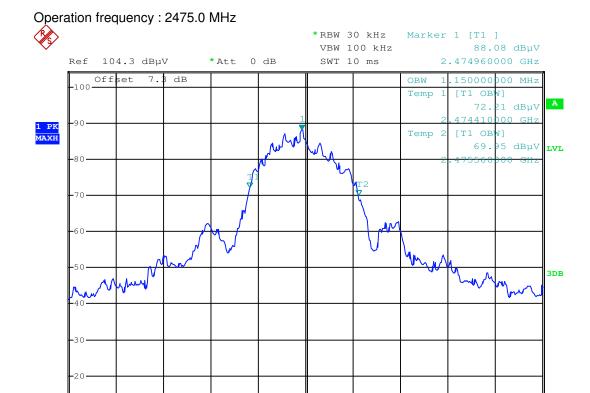

500 kHz/

According to above plot, 20dB bandwidth falls in assigned band (2400-2483.5)MHz. It is deemed to comply with section 15.215

This document is issued by the Company subject to its General Conditions of Sewice printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. Tecompany's sole responsibility is to its Client and this document does not exoneate parties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unautho fized alteration, to gery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Un less o ther wise stated the results shown in this testrep or trefer only to the sample(s) tested and such sample(s) are setained for 30 days only.


Center 2.475 GHz




Page: 21 of 24

# 7 Photographs

## 7.1 Radiatd Emission Test Setup

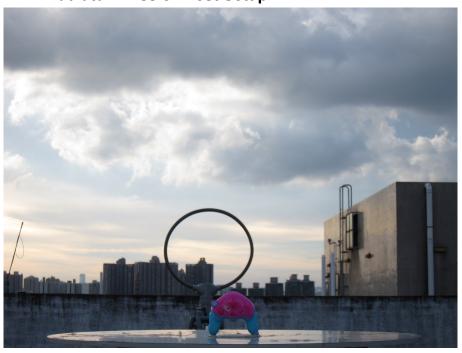

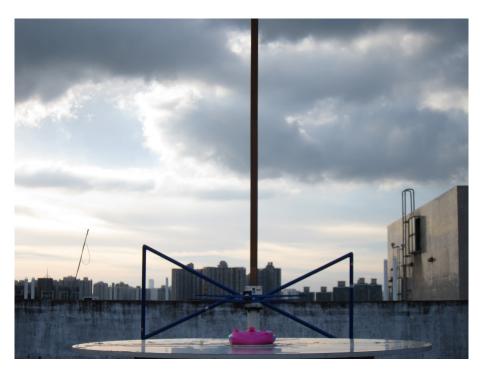

This document is issued by the Company subject to its General Conditions of Sewice printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. Tecompany's sole responsibility is to its Client and this document does not exoneate parties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unautho fized alteration, to gery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T3162021001001 Page: 22 of 24



This document is issued by the Company subject to its General Conditions of Sewice printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to right extent of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T3162021001001 Page: 23 of 24

Page:

## 7.2 EUT Constructional Details







This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its inhervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate parties to a transaction from exercising all their rights and ob ligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, to grey or falsification of the contentor appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 24 of 24

## 7.3 EUT Internal Photo

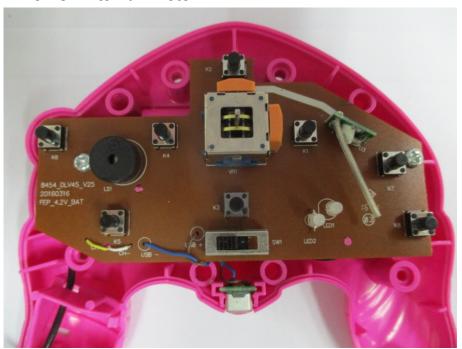

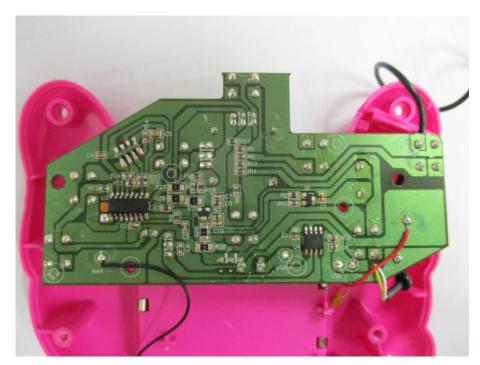

- END OF REPORT --

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on requestor accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any hoter of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoneate paties to a transaction of comments. This document annot be reproduced except in full, without prior written approval of the Company. Any unautho tized alteration, to reprove or falsification of the content or appearance of this document is unlawful and o flenders may be prosecuted to the fullest extent of the law.