


Site: AC1	Time: 2019/08/02 - 20:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz	

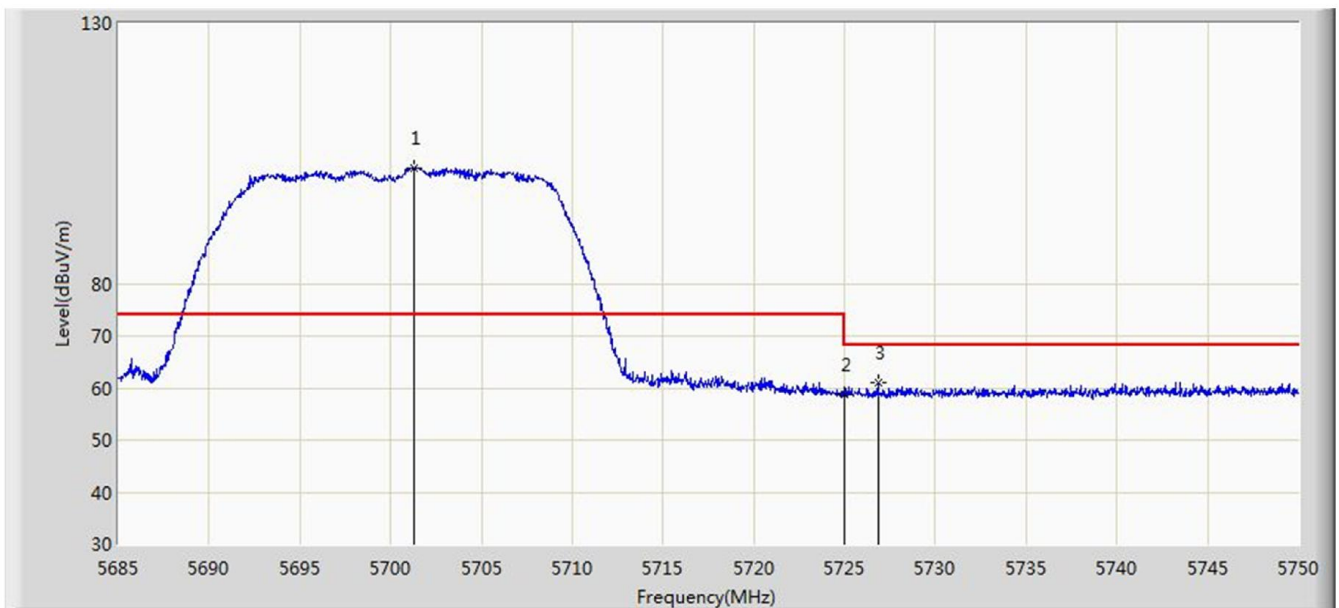


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.315	102.283	95.365	N/A	N/A	6.919	PK
2			5725.000	58.779	51.912	-9.421	68.200	6.867	PK
3			5726.828	60.977	54.112	-7.223	68.200	6.866	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:10
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

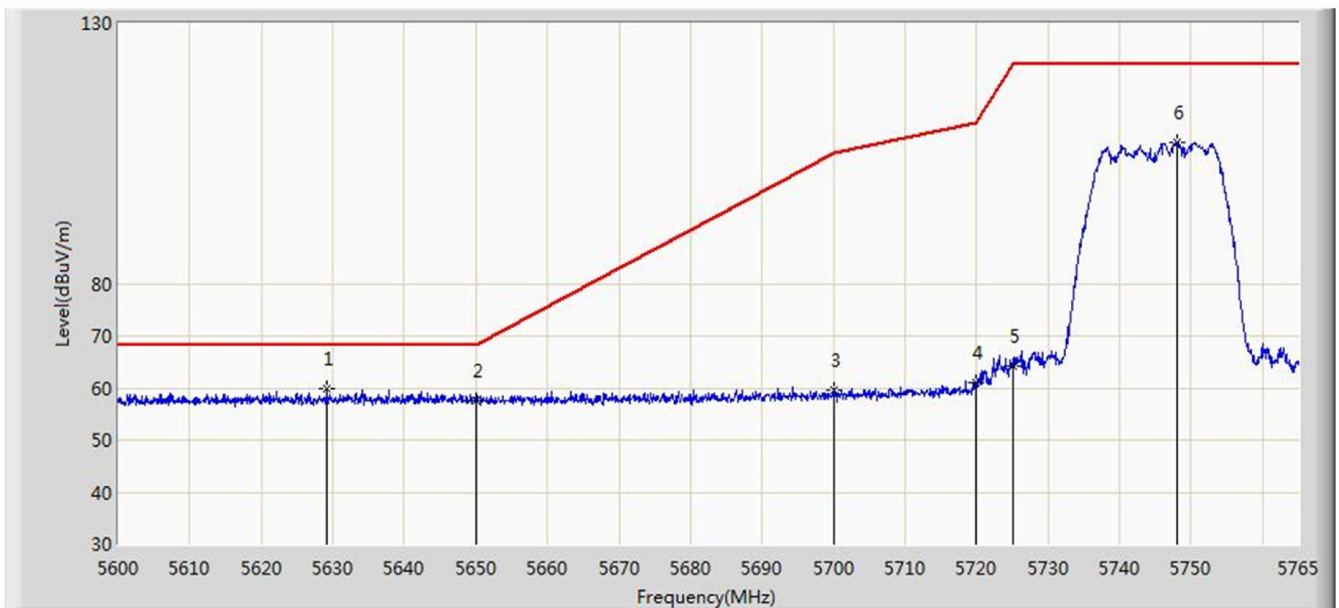


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5629.205	59.891	53.135	-8.309	68.200	6.755	PK
2			5650.000	57.572	50.779	-10.628	68.200	6.793	PK
3			5700.000	59.577	52.668	-45.623	105.200	6.909	PK
4			5720.000	60.981	54.077	-49.819	110.800	6.904	PK
5			5725.000	64.177	57.310	-58.023	122.200	6.867	PK
6			5748.005	107.220	100.183	N/A	N/A	7.036	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:11
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz	

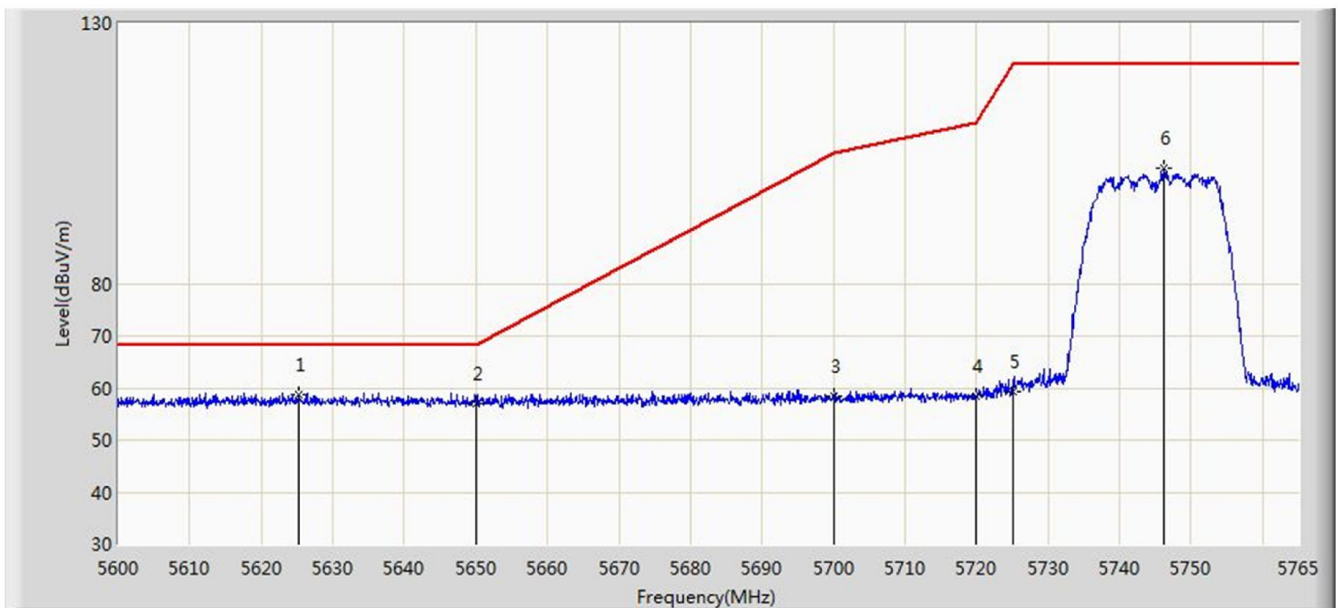


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.245	58.731	52.001	-9.469	68.200	6.730	PK
2			5650.000	56.916	50.123	-11.284	68.200	6.793	PK
3			5700.000	58.483	51.574	-46.717	105.200	6.909	PK
4			5720.000	58.342	51.438	-52.458	110.800	6.904	PK
5			5725.000	59.409	52.542	-62.791	122.200	6.867	PK
6			5746.273	102.231	95.216	N/A	N/A	7.015	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:13
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

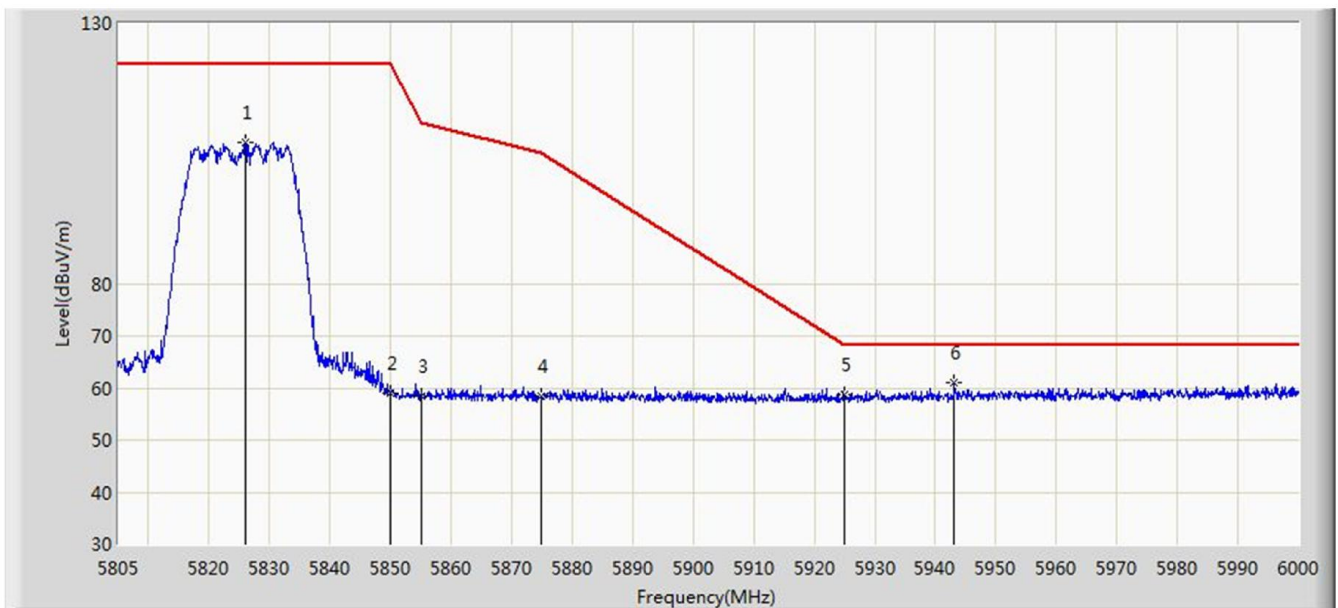


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5825.962	106.991	99.636	N/A	N/A	7.354	PK
2			5850.000	59.014	51.684	-63.186	122.200	7.331	PK
3			5855.000	58.353	51.025	-52.447	110.800	7.327	PK
4			5875.000	58.365	50.951	-46.835	105.200	7.414	PK
5			5925.000	58.752	51.452	-9.448	68.200	7.299	PK
6		*	5943.158	61.031	53.571	-7.169	68.200	7.460	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:14
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz	

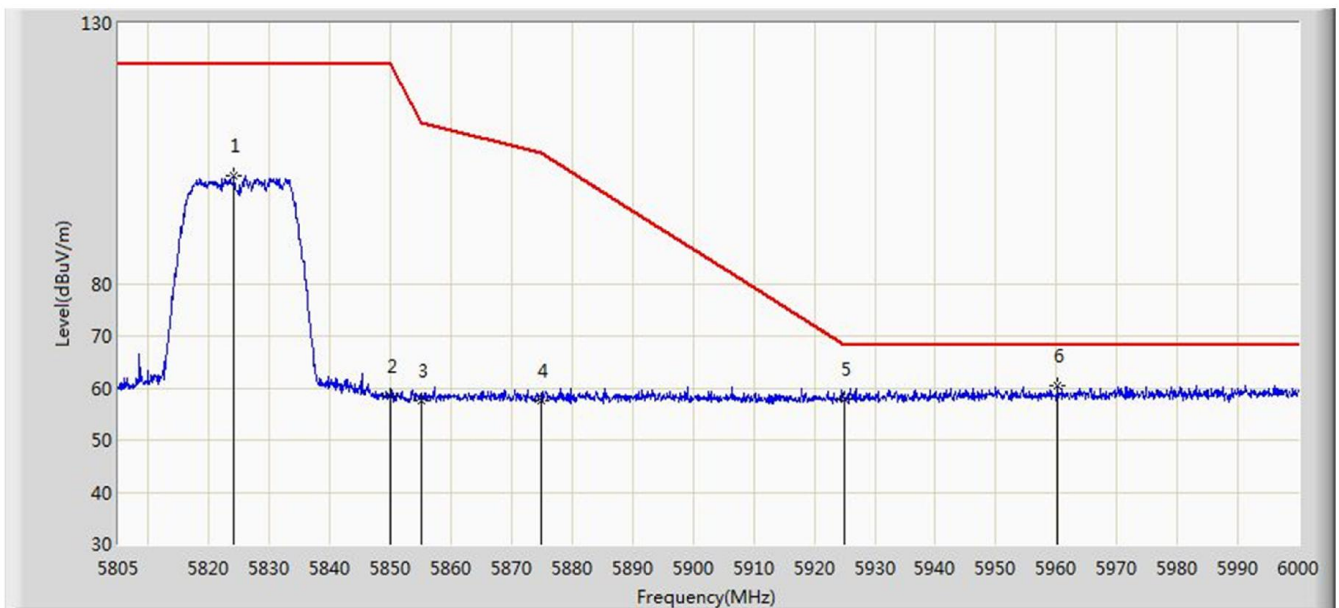


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.110	100.756	93.429	N/A	N/A	7.327	PK
2			5850.000	58.430	51.100	-63.770	122.200	7.331	PK
3			5855.000	57.651	50.323	-53.149	110.800	7.327	PK
4			5875.000	57.657	50.243	-47.543	105.200	7.414	PK
5			5925.000	57.761	50.461	-10.439	68.200	7.299	PK
6		*	5960.220	60.379	52.964	-7.821	68.200	7.415	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

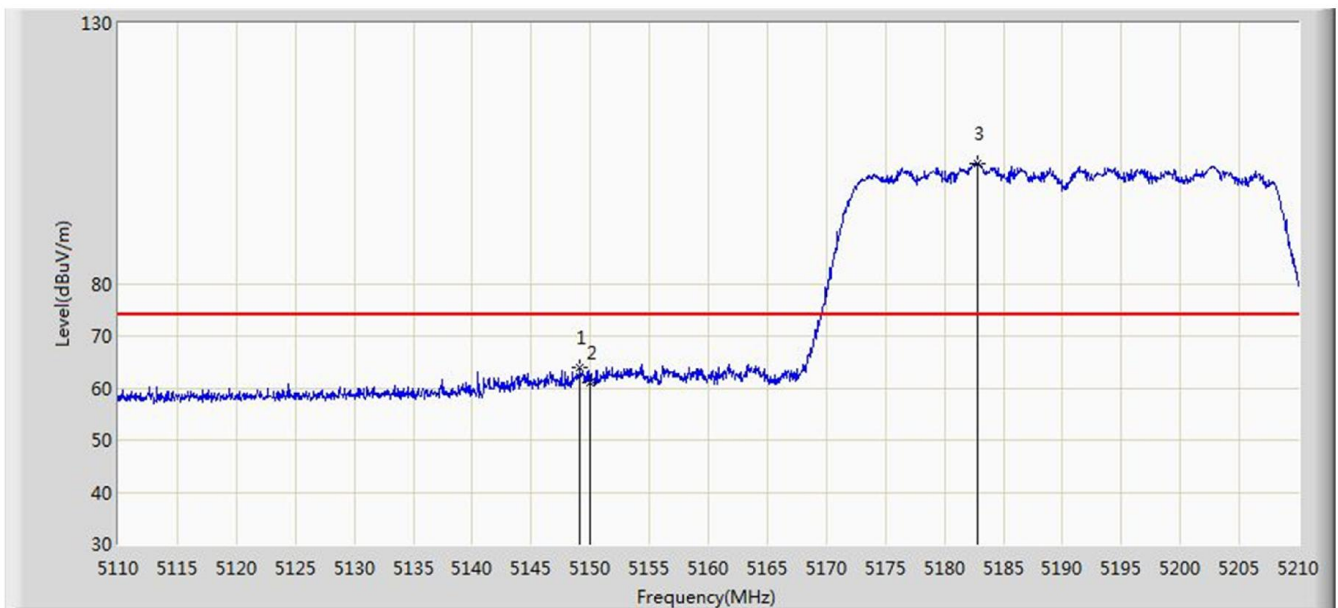


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.100	63.874	57.480	-10.126	74.000	6.394	PK
2			5150.000	60.881	54.484	-13.119	74.000	6.398	PK
3		*	5182.800	103.141	96.560	N/A	N/A	6.581	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

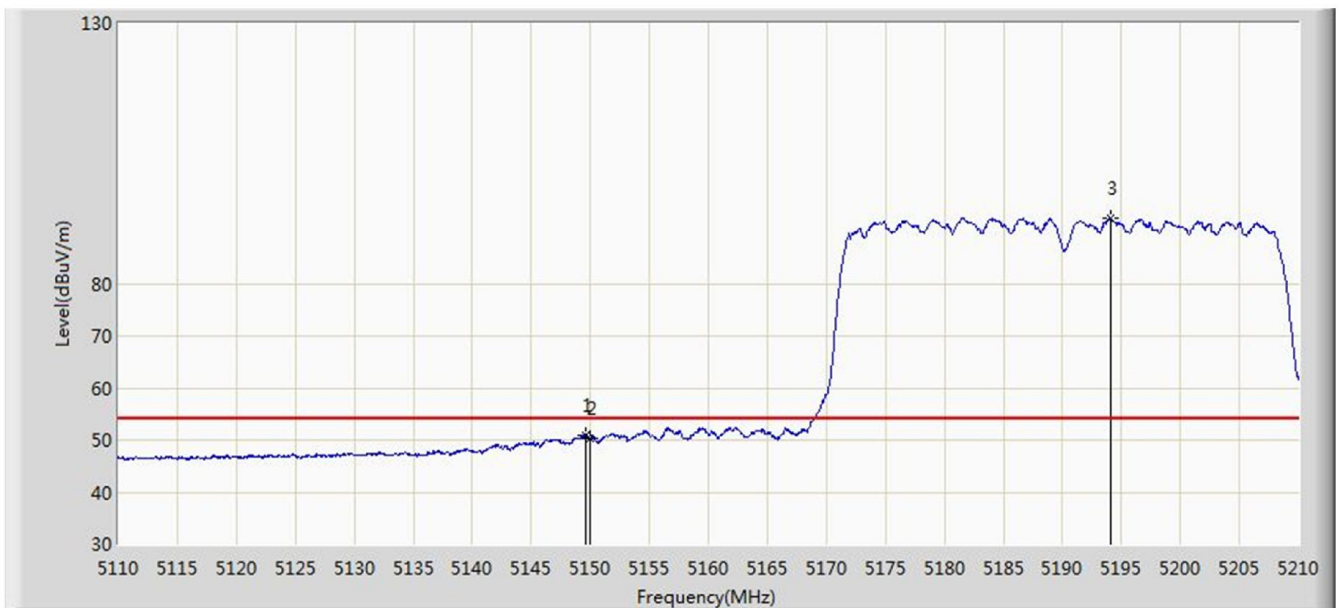


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5149.550	50.991	44.595	-3.009	54.000	6.396	AV
2			5150.000	50.263	43.866	-3.737	54.000	6.398	AV
3		*	5194.050	92.623	86.152	N/A	N/A	6.472	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

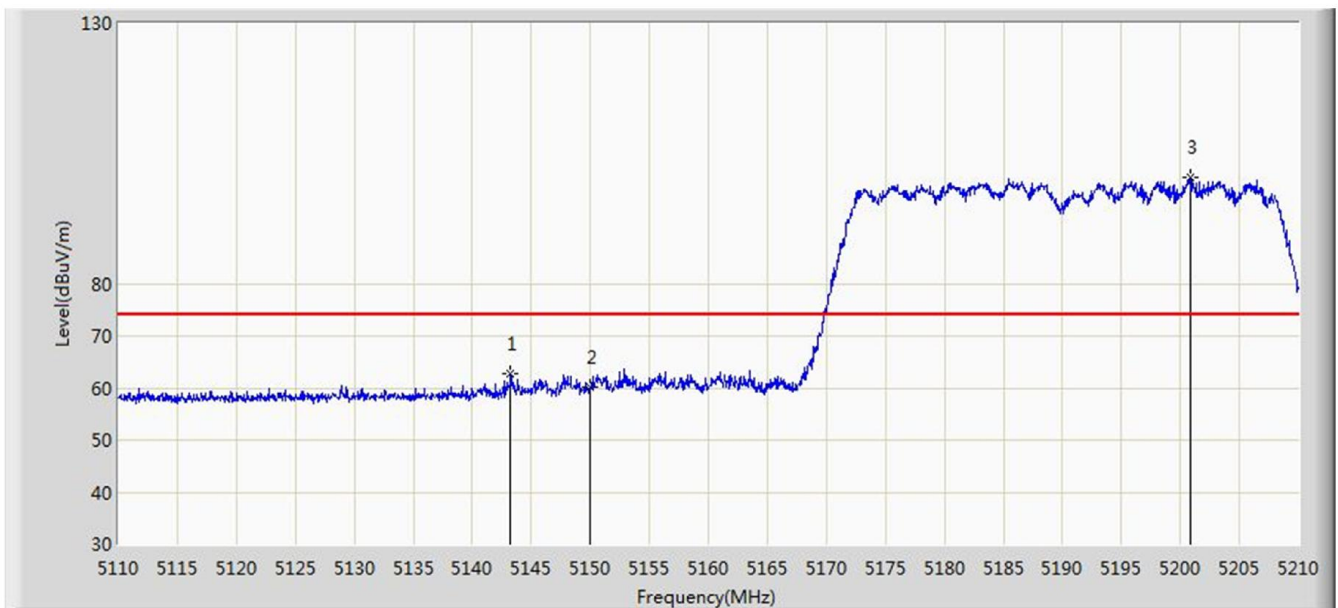


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5143.200	62.717	56.254	-11.283	74.000	6.463	PK
2			5150.000	60.118	53.721	-13.882	74.000	6.398	PK
3		*	5200.850	100.520	94.124	N/A	N/A	6.397	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz	

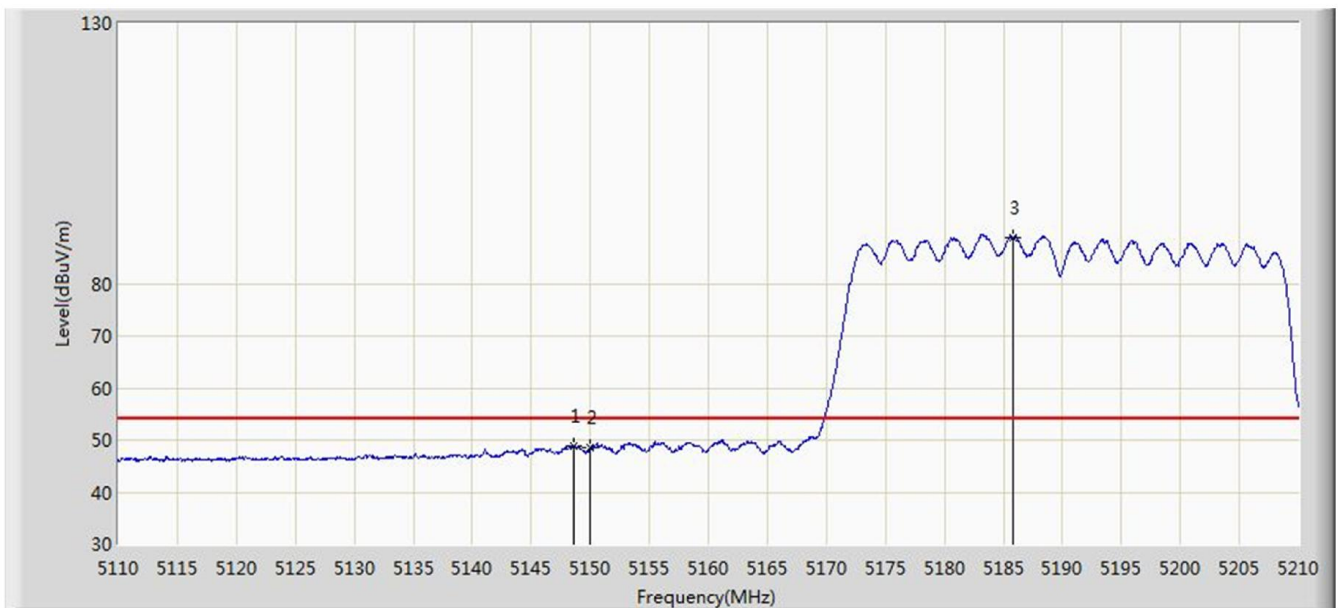


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.650	48.927	42.534	-5.073	54.000	6.393	AV
2			5150.000	48.625	42.228	-5.375	54.000	6.398	AV
3		*	5185.800	88.890	82.338	N/A	N/A	6.551	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

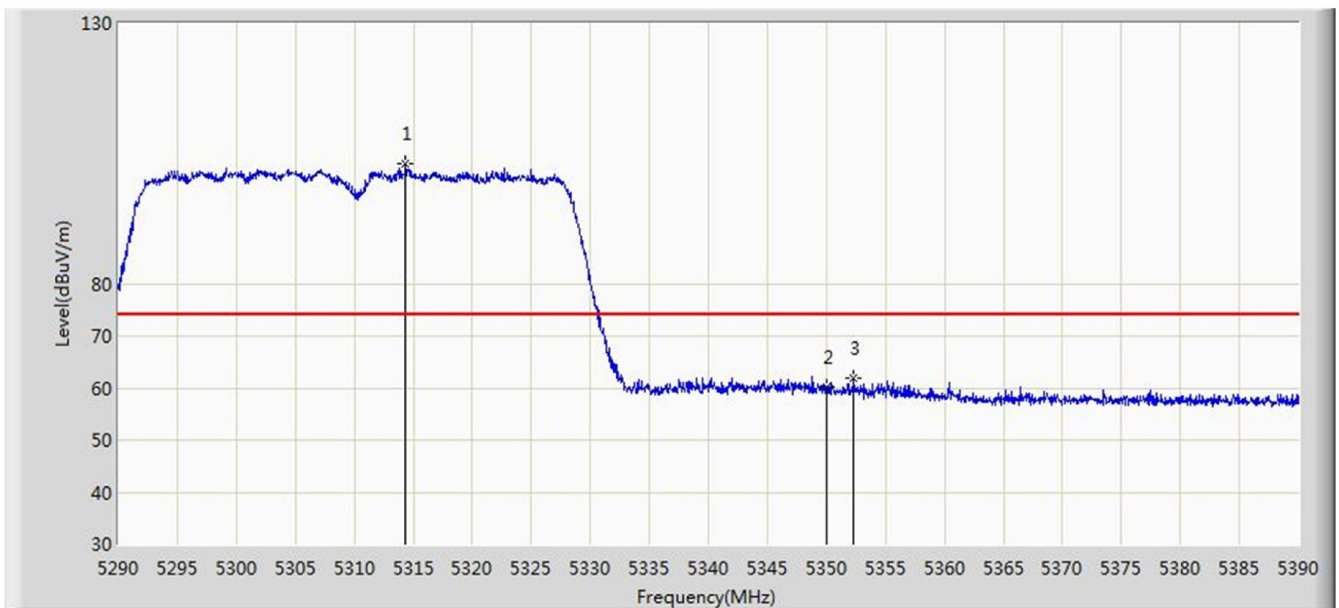


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.350	103.016	96.682	N/A	N/A	6.335	PK
2			5350.000	60.159	53.832	-13.841	74.000	6.327	PK
3			5352.300	62.028	55.699	-11.972	74.000	6.329	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

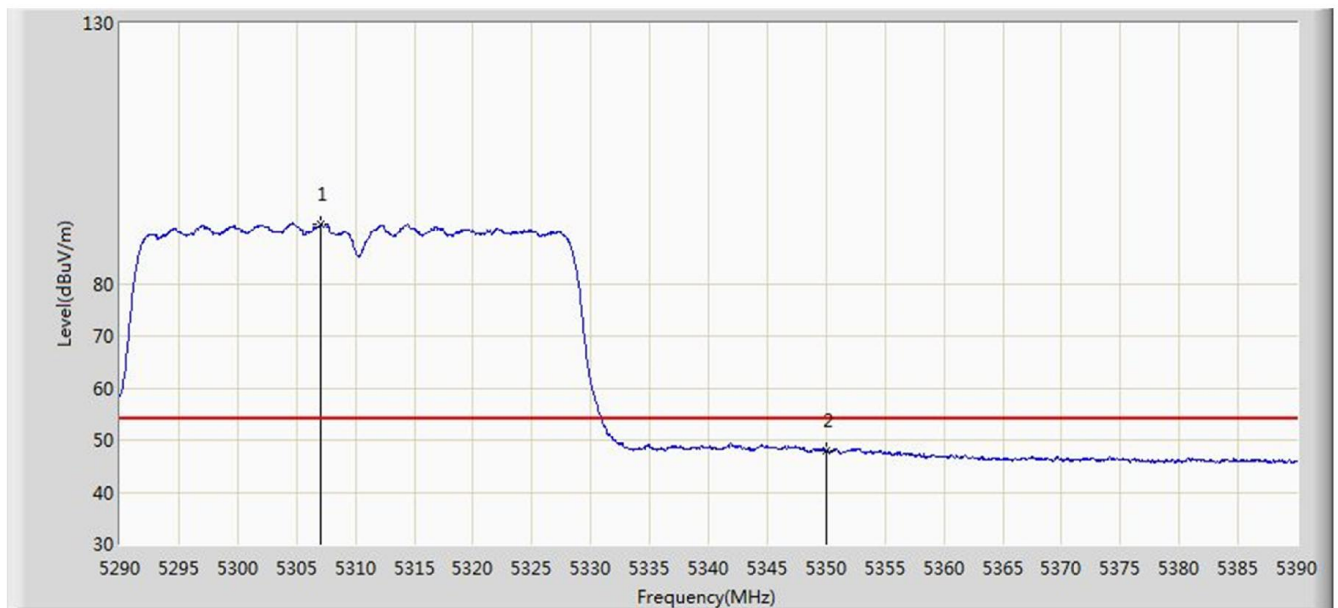


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.100	91.454	85.145	N/A	N/A	6.309	AV
2			5350.000	47.881	41.554	-6.119	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

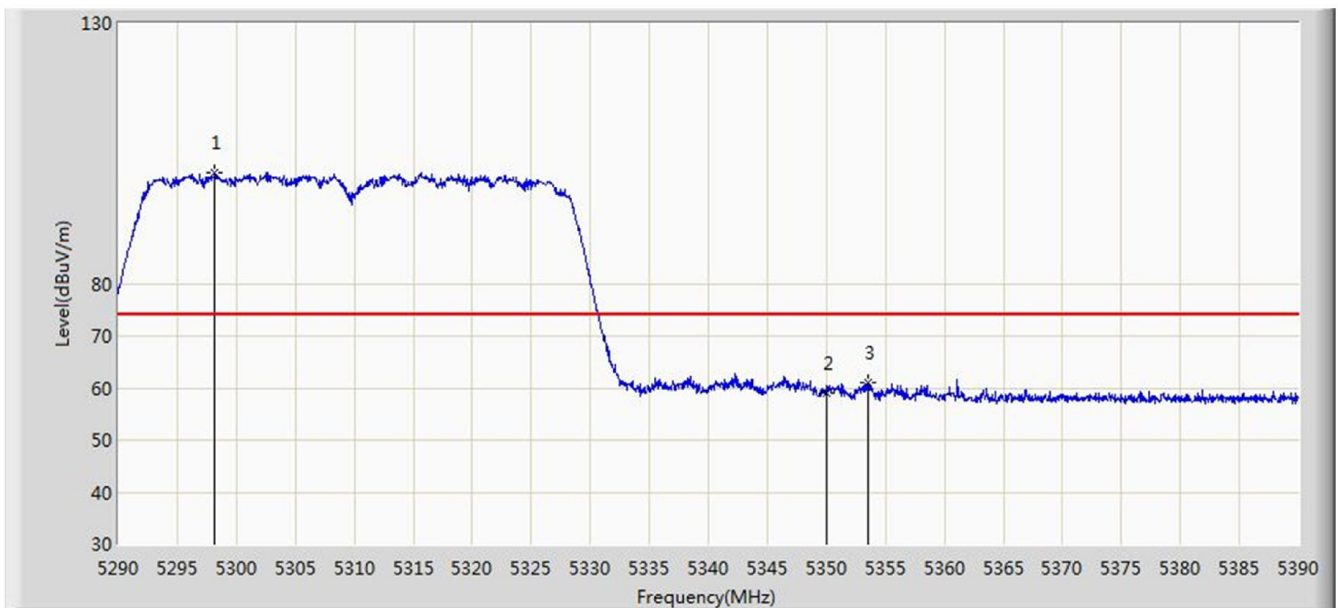


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.150	101.312	95.038	N/A	N/A	6.275	PK
2			5350.000	59.032	52.705	-14.968	74.000	6.327	PK
3			5353.550	61.057	54.719	-12.943	74.000	6.338	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz	

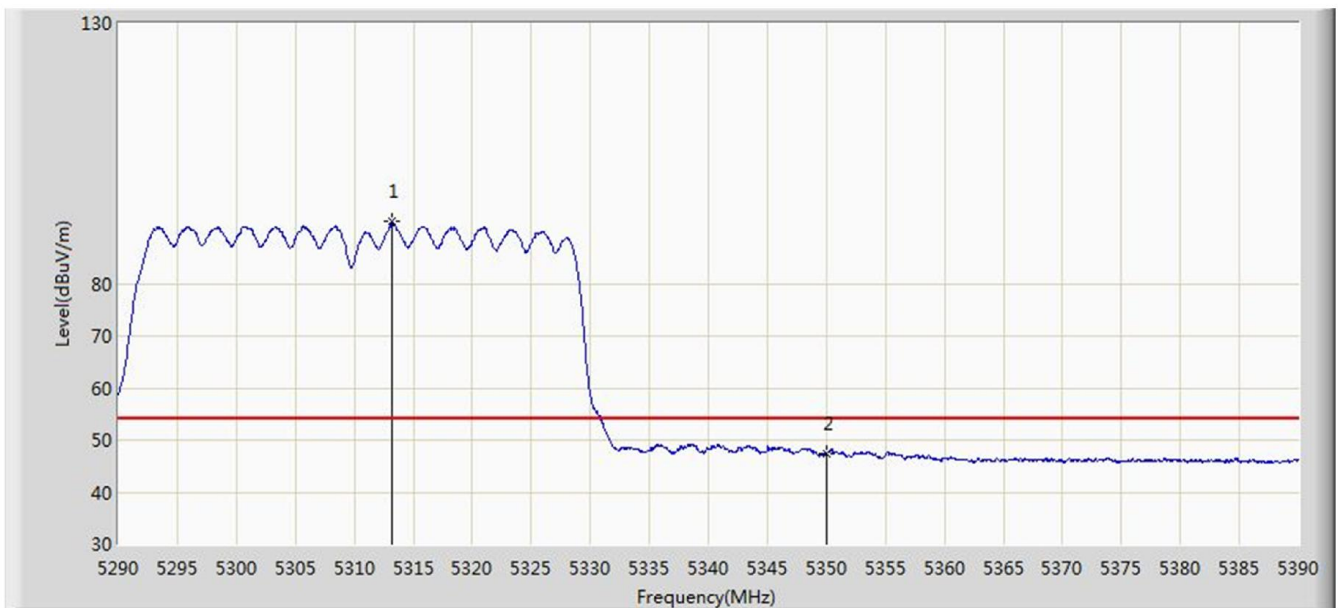


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5313.200	91.917	85.587	N/A	N/A	6.330	AV
2			5350.000	47.456	41.129	-6.544	54.000	6.327	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

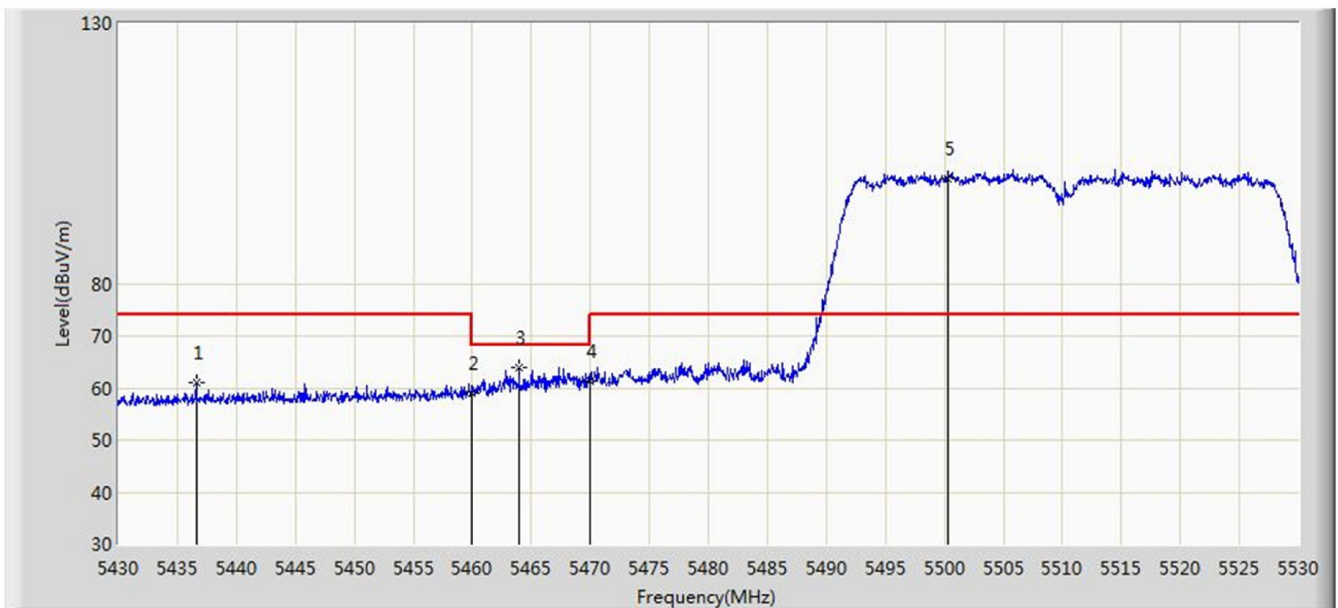


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5436.600	60.959	54.393	-13.041	74.000	6.566	PK
2			5460.000	58.852	52.240	-15.148	74.000	6.612	PK
3			5463.950	64.046	57.452	-4.154	68.200	6.594	PK
4			5470.000	61.190	54.623	-7.010	68.200	6.567	PK
5		*	5500.350	100.191	93.481	N/A	N/A	6.710	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

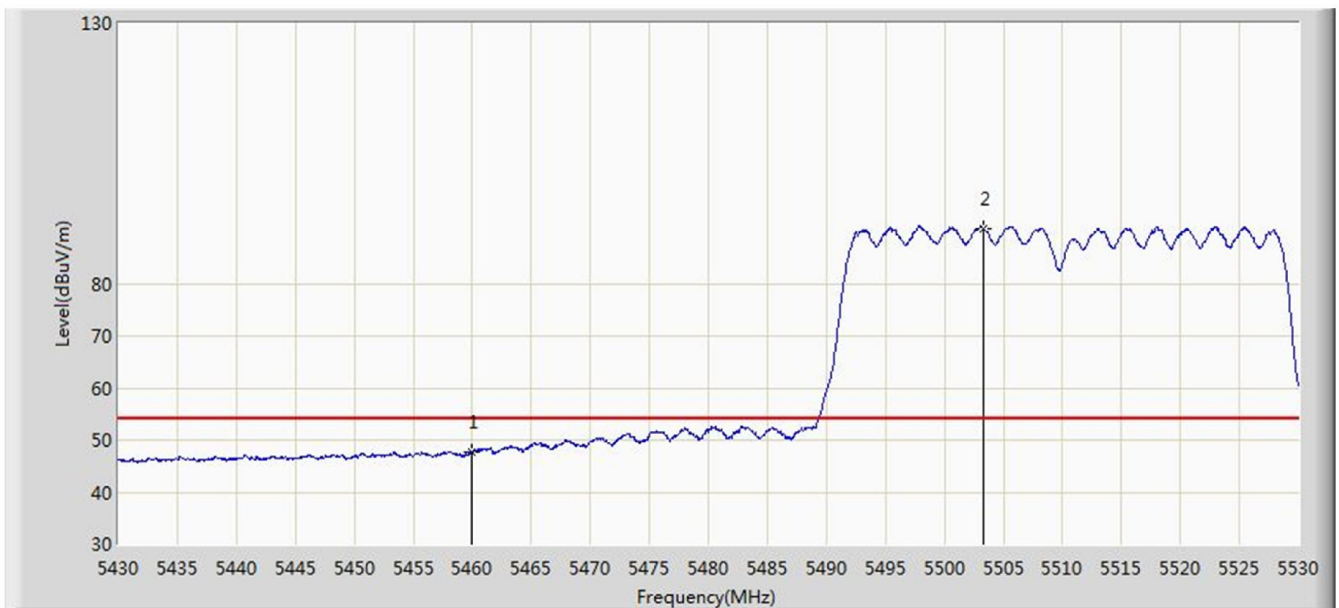


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.648	41.036	-6.352	54.000	6.612	AV
2		*	5503.250	90.666	83.935	N/A	N/A	6.731	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

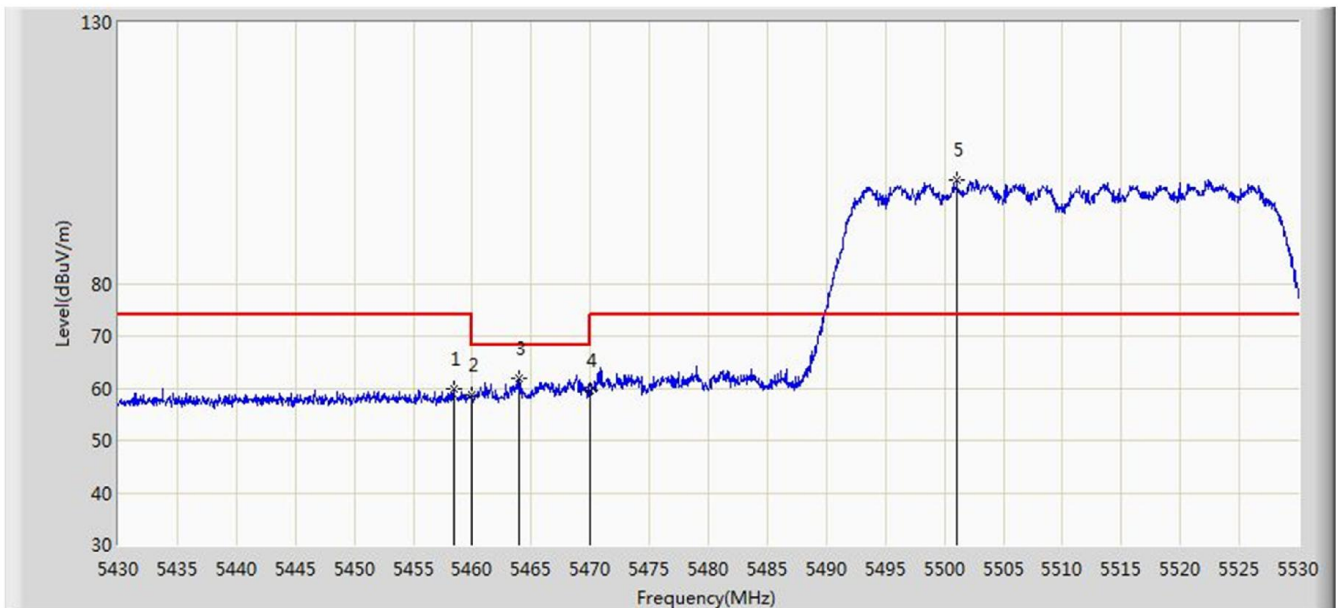


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.400	59.776	53.156	-14.224	74.000	6.619	PK
2			5460.000	58.733	52.121	-15.267	74.000	6.612	PK
3			5463.900	61.746	55.151	-6.454	68.200	6.594	PK
4		*	5470.000	59.427	52.860	-8.773	68.200	6.567	PK
5			5501.050	99.859	93.144	N/A	N/A	6.716	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz	

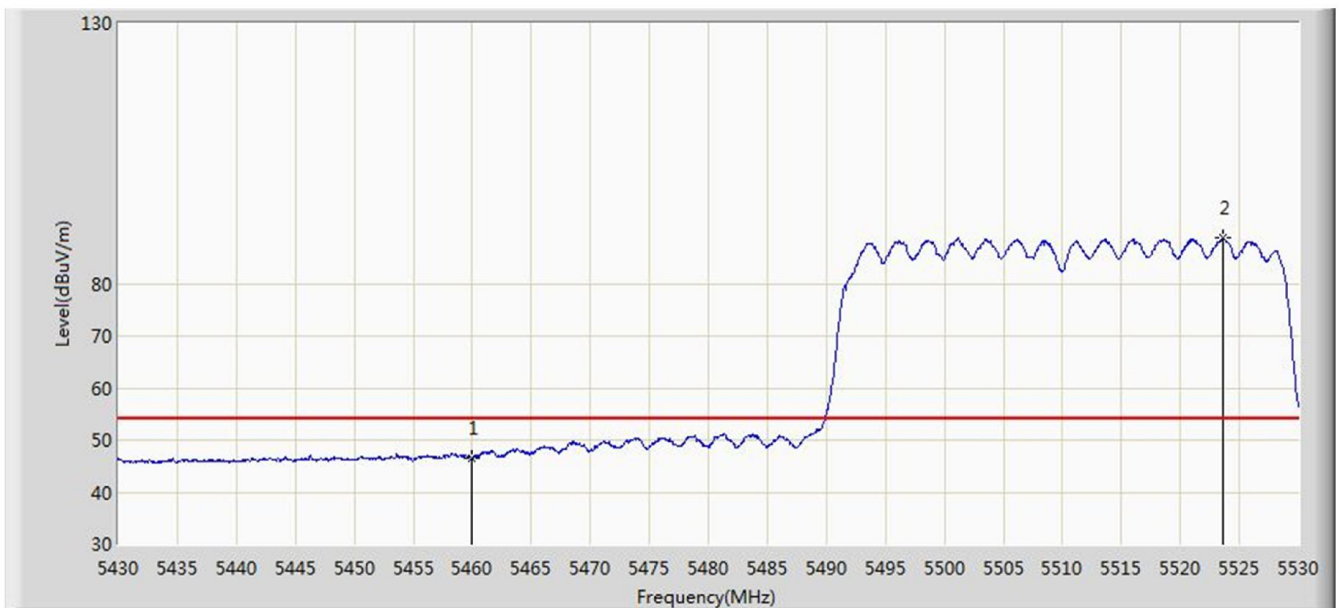


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.582	39.970	-7.418	54.000	6.612	AV
2		*	5523.550	88.804	82.113	N/A	N/A	6.691	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

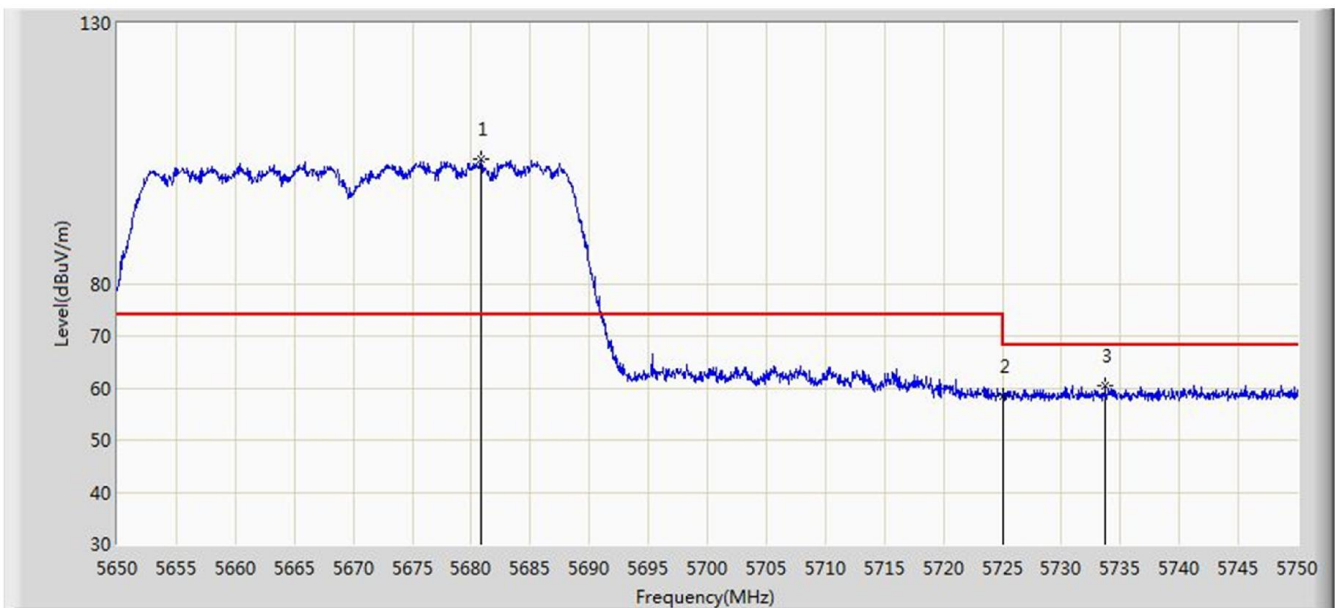


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5680.850	103.863	97.104	N/A	N/A	6.759	PK
2			5725.000	58.432	51.565	-9.768	68.200	6.867	PK
3			5733.700	60.337	53.424	-7.863	68.200	6.912	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz	

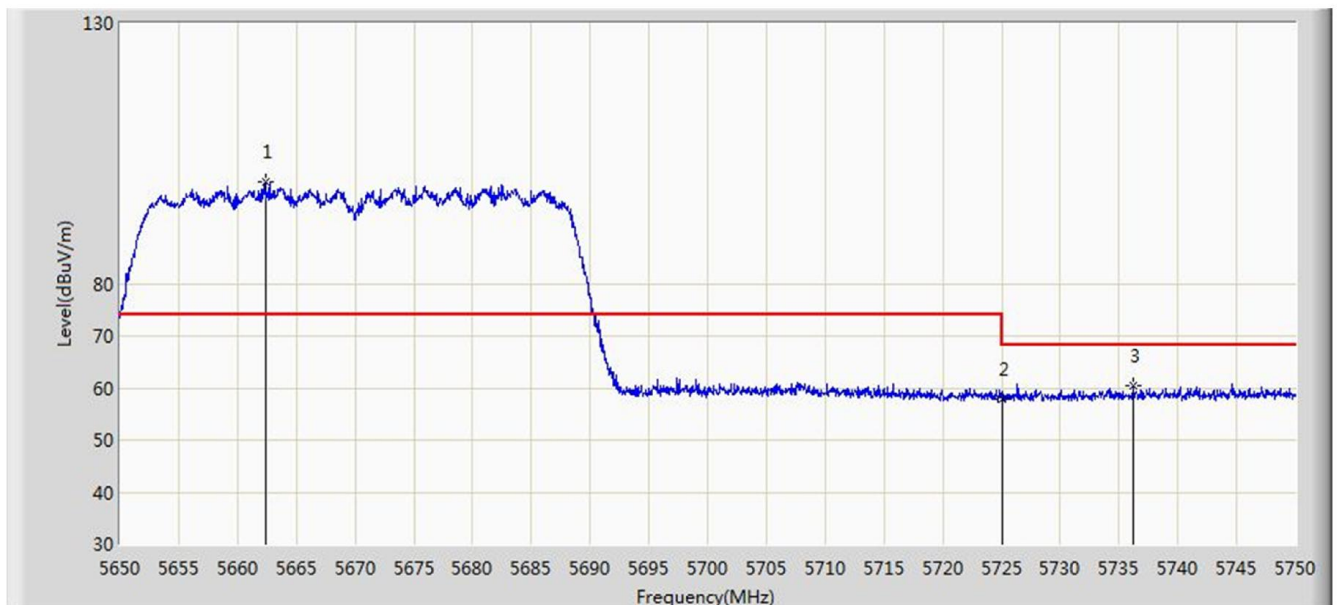


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5662.400	99.528	92.778	N/A	N/A	6.750	PK
2			5725.000	57.952	51.085	-10.248	68.200	6.867	PK
3			5736.200	60.451	53.521	-7.749	68.200	6.930	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:30
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

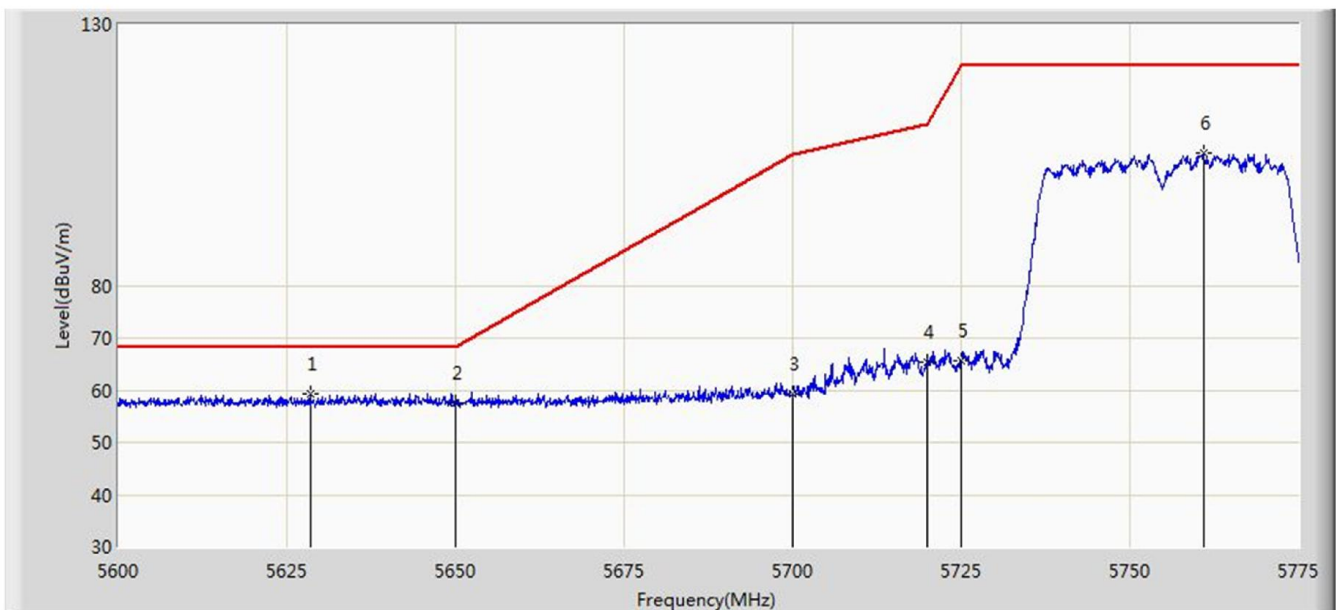


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5628.437	59.196	52.445	-9.004	68.200	6.750	PK
2			5650.000	57.542	50.749	-10.658	68.200	6.793	PK
3			5700.000	59.329	52.420	-45.871	105.200	6.909	PK
4			5720.000	65.392	58.488	-45.408	110.800	6.904	PK
5			5725.000	65.545	58.678	-56.655	122.200	6.867	PK
6			5760.913	105.403	98.221	N/A	N/A	7.182	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC1	Time: 2019/08/02 - 20:33
Limit: FCC_Part15.407_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WIFI+BT Combo Module	Power: AC120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz	

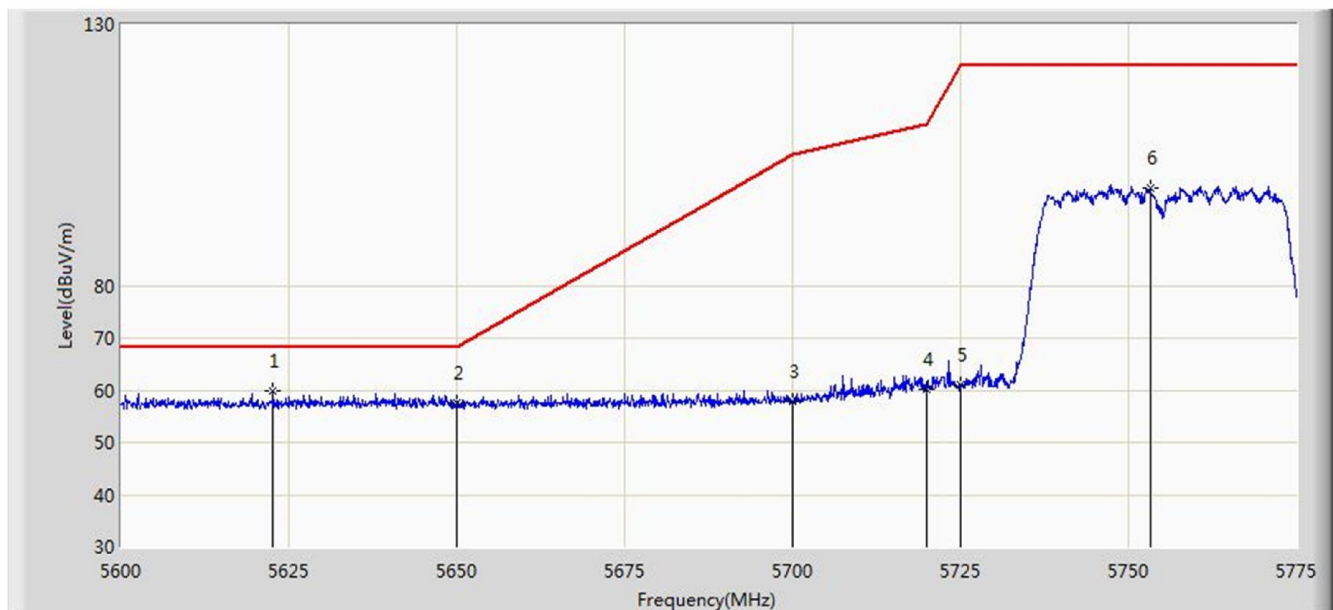

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.663	59.864	53.147	-8.336	68.200	6.717	PK
2			5650.000	57.661	50.868	-10.539	68.200	6.793	PK
3			5700.000	57.948	51.039	-47.252	105.200	6.909	PK
4			5720.000	60.256	53.352	-50.544	110.800	6.904	PK
5			5725.000	60.944	54.077	-61.256	122.200	6.867	PK
6			5753.212	98.634	91.534	N/A	N/A	7.100	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)